



802.11ax-HE160

Channel 111 (6505MHz)

The Reference Level

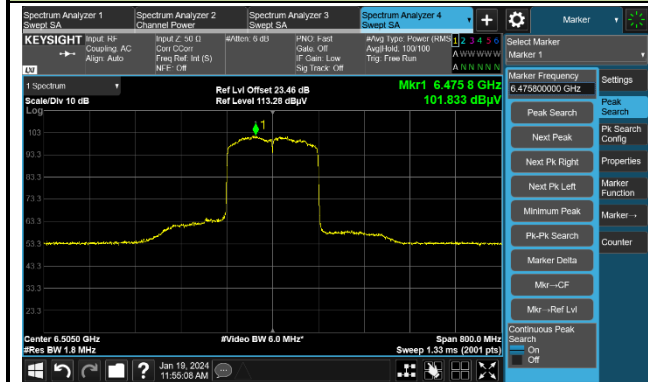


The Mask Data

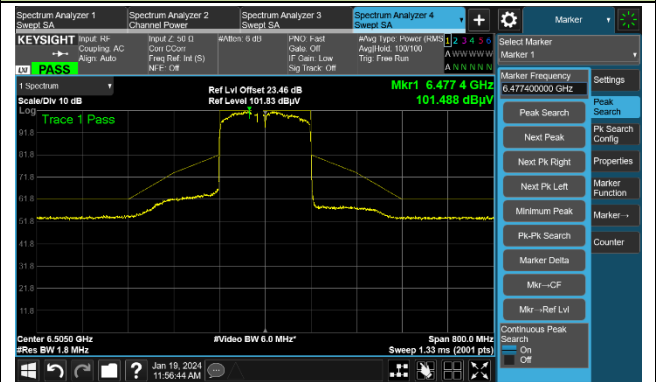


Channel 143 (6665MHz)

The Reference Level

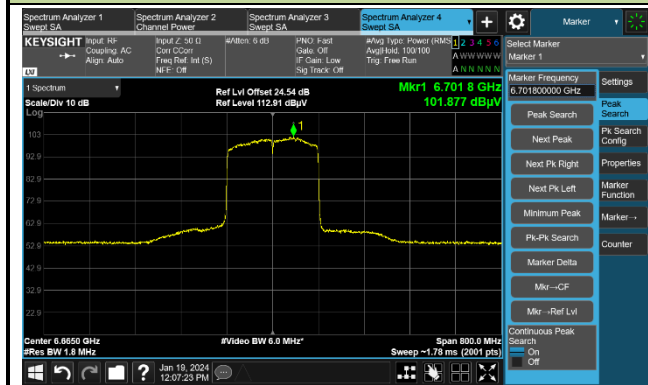


The Mask Data

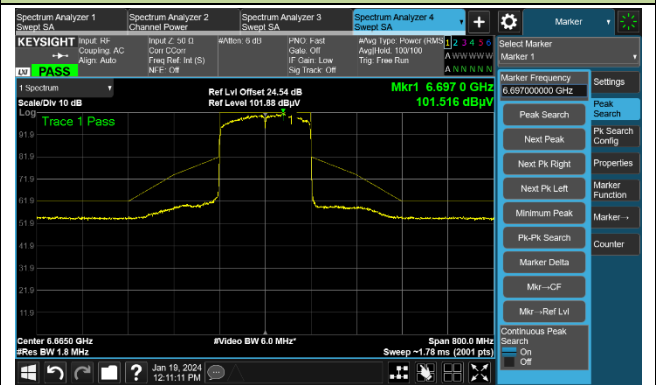


Channel 175 (6825MHz)

The Reference Level

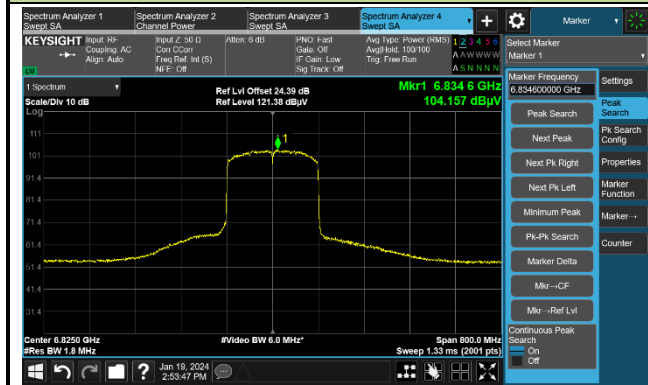


The Mask Data

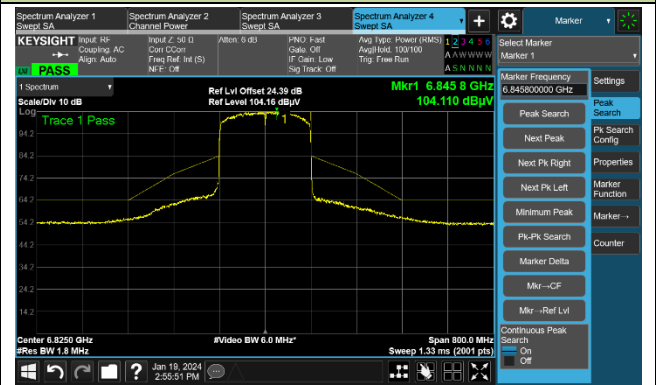


802.11ax-HE160

Channel 207 (6985MHz)

The Reference Level

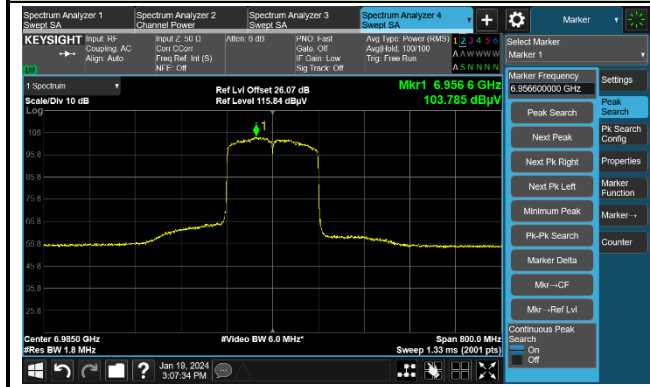

The Mask Data

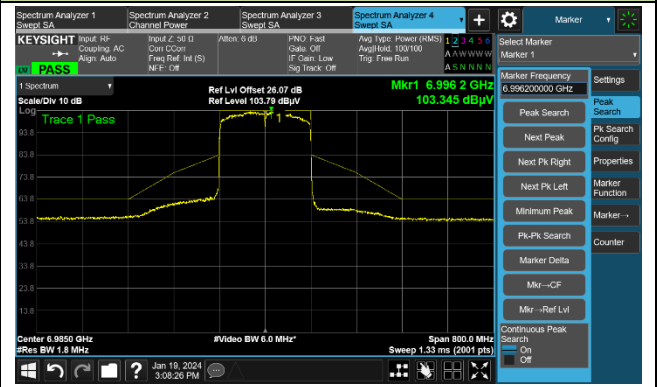

A.6 Frequency Stability Test Result

Test Site	WZ-TR3	Test Engineer	Jeff Yang
Test Date	2024-01-24		
Test Mode	6115MHz (Carrier Mode)		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	120	- 30	9.07	9.21	9.26	9.31
		- 20	11.83	11.95	11.96	11.72
		- 10	11.33	11.44	11.58	11.61
		0	6.90	7.26	9.76	9.76
		+ 10	5.42	5.62	5.84	5.98
		+ 20	2.54	2.53	2.56	2.57
		+ 30	-2.07	-1.83	-1.64	-1.54
		+ 40	-4.94	-4.90	-4.67	-4.41
		+ 50	-4.73	-4.81	-4.88	-4.93
115	138	+ 20	1.49	1.57	1.80	2.04
85	102	+ 20	166.84	167.01	-0.63	-0.19

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} *10⁶.

A.7 Contention Based Protocol Test Result

Test Site	WZ-SR4	Test Engineer	Jeff Yang
Test Date	2024-01-30		

Test Channel	Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	AWGN Power (dBm)	Ant. Gain (dBi)	Adjust Power (dBm)	Detection Limit (dBm)	Detected Number	Detection Probability (%)	Limit (%)	Test Result
Operation Band: U-NII 5											
33	20	6115	6115	-74	5.35	-79.35	≤ -62.0	10	100	90	Pass
47	160	6185	6110	-72	5.35	-77.35	≤ -62.0	10	100	90	Pass
47	160	6185	6185	-67	5.35	-72.35	≤ -62.0	10	100	90	Pass
47	160	6185	6260	-69	5.35	-74.35	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 6											
97	20	6435	6435	-75	5.35	-80.35	≤ -62.0	10	100	90	Pass
103	160	6505	6430	-75	5.35	-80.35	≤ -62.0	10	100	90	Pass
103	160	6505	6505	-68	5.35	-73.35	≤ -62.0	10	100	90	Pass
103	160	6505	6580	-71	5.35	-76.35	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 7											
153	20	6715	6715	-75	5.35	-80.35	≤ -62.0	10	100	90	Pass
143	160	6665	6590	-74	5.35	-79.35	≤ -62.0	10	100	90	Pass
143	160	6665	6665	-67	5.35	-72.35	≤ -62.0	10	100	90	Pass
143	160	6665	6740	-71	5.35	-76.35	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 8											
213	20	7015	7015	-75	5.35	-80.35	≤ -62.0	10	100	90	Pass
207	160	6985	6910	-75	5.35	-80.35	≤ -62.0	10	100	90	Pass
207	160	6985	6985	-68	5.35	-73.35	≤ -62.0	10	100	90	Pass
207	160	6985	7060	-72	5.35	-77.35	≤ -62.0	10	100	90	Pass

Note 1: Adjust Power (dBm) = AWGN Power (dBm) – Antenna Gain (dBi).

Note 2: Conducted measurements are used.


Test Site	WZ-SR4	Test Engineer	Jeff Yang
Test Date	2024-01-27 ~ 2024-01-30		

Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	Adjust Power (dBm)	EUT Tx Status
Operation Band: U-NII 5				
20	6115	6115	-82.35	ON
			-81.35	Minimal
			-79.35	OFF
160	6185	6110	-79.35	ON
			-78.35	Minimal
			-77.35	OFF
160	6185	6185	-74.35	ON
			-73.35	Minimal
			-72.35	OFF
160	6185	6260	-77.35	ON
			-76.35	Minimal
			-74.35	OFF
Operation Band: U-NII 6				
20	6435	6435	-83.35	ON
			-82.35	Minimal
			-80.35	OFF
160	6505	6430	-83.35	ON
			-82.35	Minimal
			-80.35	OFF
160	6505	6505	-76.35	ON
			-75.35	Minimal
			-73.35	OFF
160	6505	6580	-79.35	ON
			-78.35	Minimal
			-76.35	OFF


Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	Adjust Power (dBm)	EUT Status
Operation Band: U-NII 7				
20	6715	6715	-83.35	ON
			-82.35	Minimal
			-80.35	OFF
160	6665	6590	-81.35	ON
			-80.35	Minimal
			-79.35	OFF
160	6665	6665	-76.35	ON
			-75.35	Minimal
			-72.35	OFF
160	6665	6740	-78.35	ON
			-77.35	Minimal
			-76.35	OFF
Operation Band: U-NII 8				
20	7015	7015	-83.35	ON
			-82.35	Minimal
			-80.35	OFF
160	6985	6910	-82.35	ON
			-81.35	Minimal
			-80.35	OFF
160	6985	6985	-77.35	ON
			-76.35	Minimal
			-73.35	OFF
160	6985	7060	-79.35	ON
			-78.35	Minimal
			-77.35	OFF
Note: OFF: AWGN level at which no transmission is detected, consistently for a minimum period of 10 seconds Minimal: AWGN level at which the system begins to trigger the transmission switch-off, albeit not being kept off consistently ON: AWGN level at which no impact on the transmission is detected, consistently for a minimum period of 10 seconds				

EUT Tx Waveform


802.11ax-HE20 / CH33

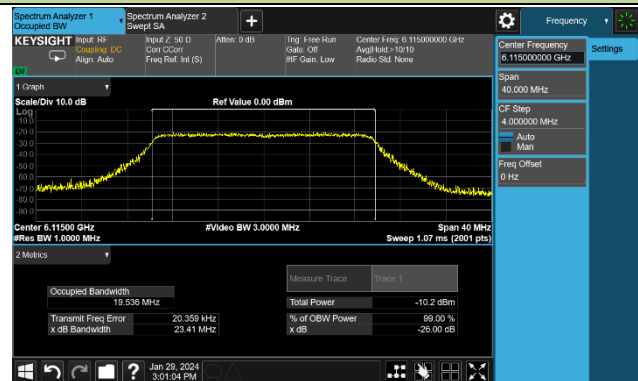


802.11ax-HE160 / CH47

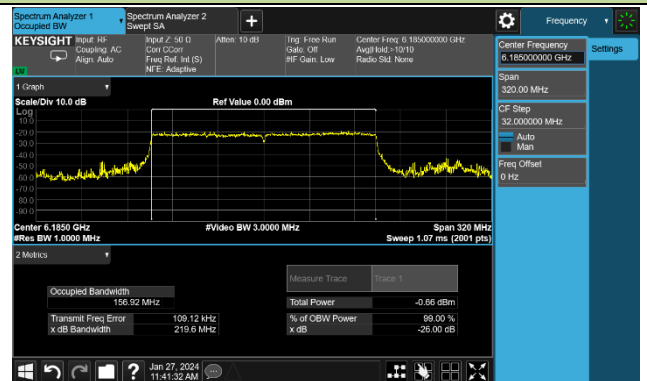


802.11ax-HE20 / CH97

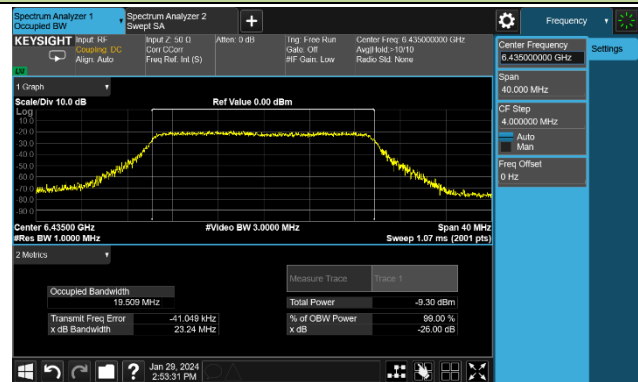


802.11ax-HE80 / CH103

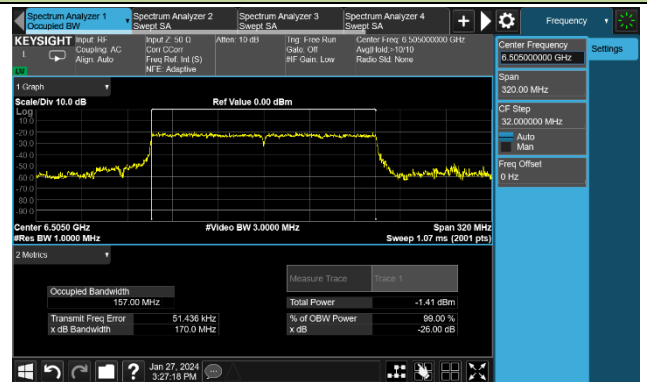


802.11ax-HE20 / CH153

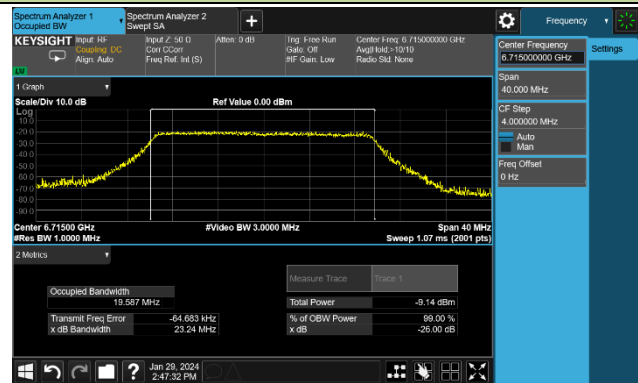


802.11ax-HE160 / CH143

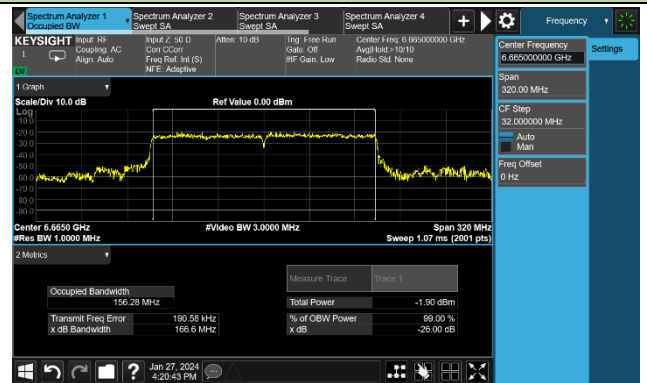

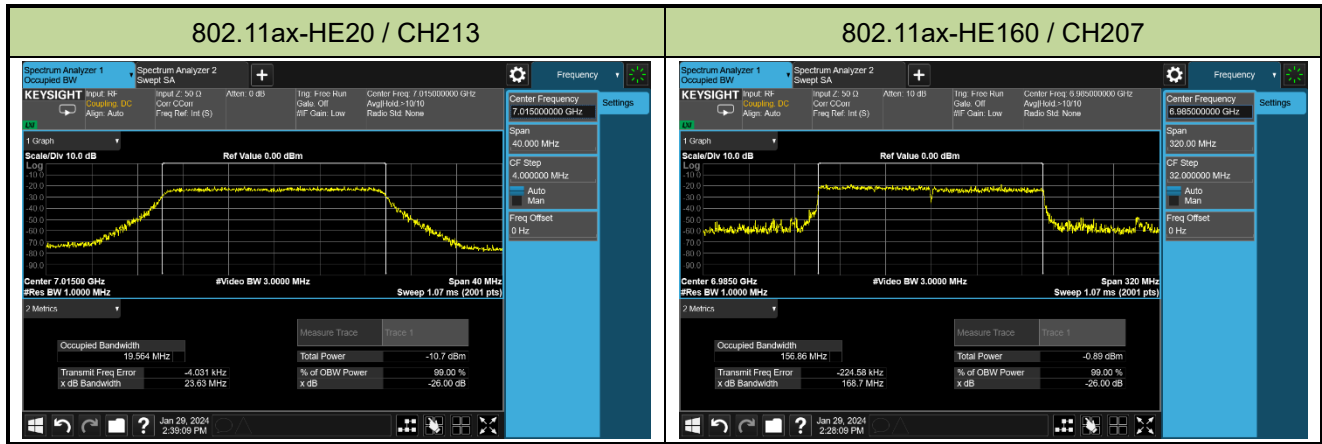


Incumbent Signal Calibration Plots (NII-5 Band)


802.11ax-HE20 / CH33

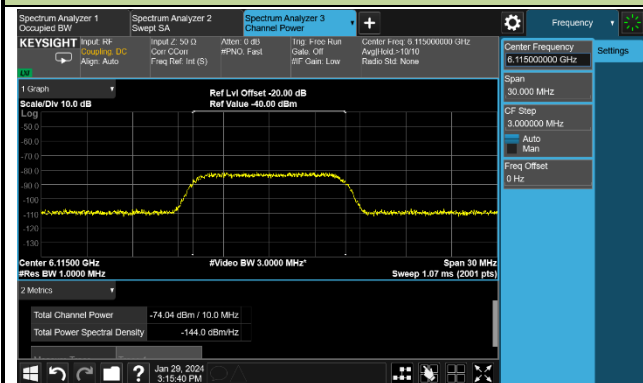


802.11ax-HE160 / CH47 (Low Edge)

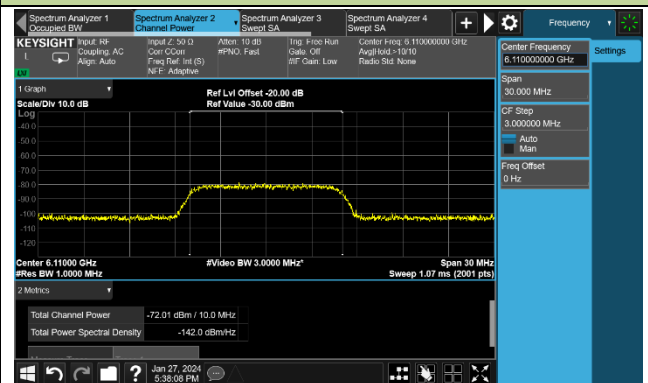

802.11ax-HE160 / CH47 (Middle)

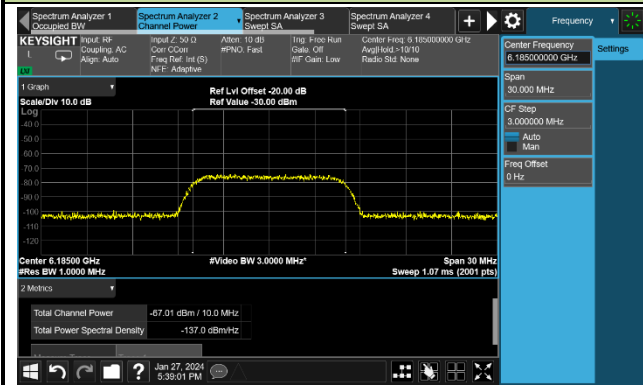


802.11ax-HE160 / CH47 (High Edge)

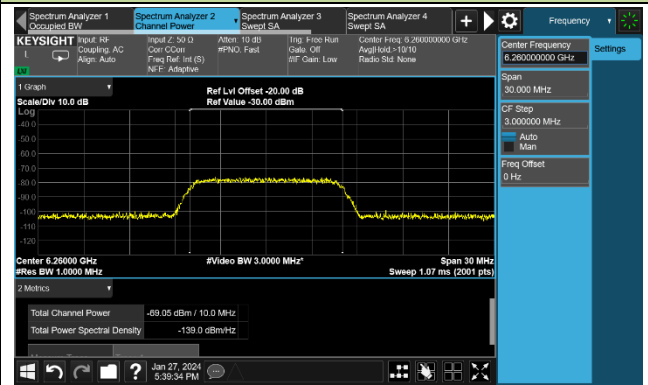


Incumbent Signal Calibration Plots (NII-6 Band)


802.11ax-HE20 / CH97

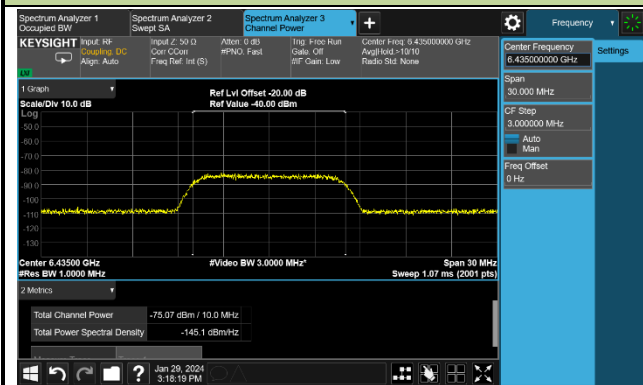


802.11ax-HE80 / CH103 (Low Edge)

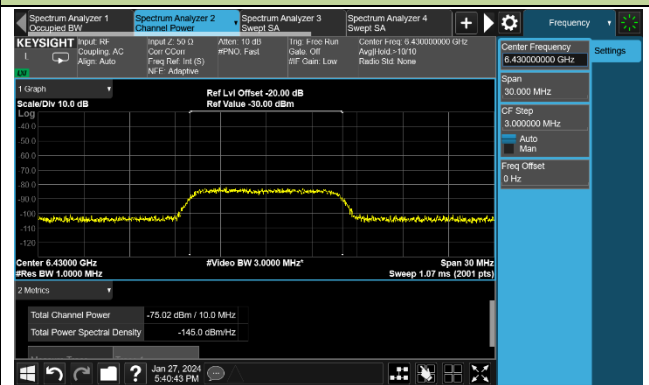

802.11ax-HE80 / CH103 (Middle)

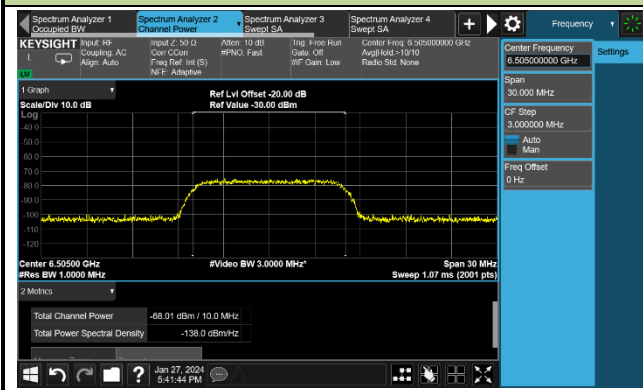


802.11ax-HE80 / CH103 (High Edge)

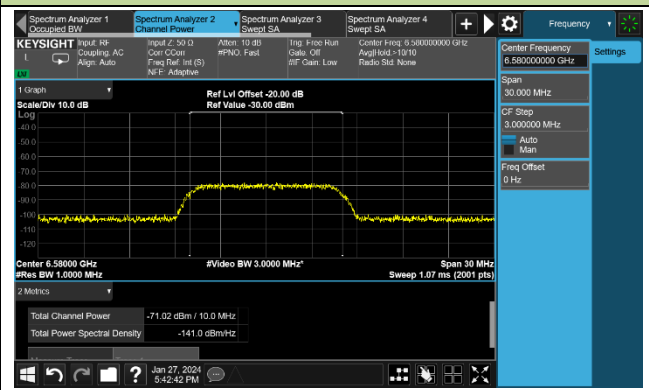


Incumbent Signal Calibration Plots (NII-7 Band)


802.11ax-HE20 / CH153

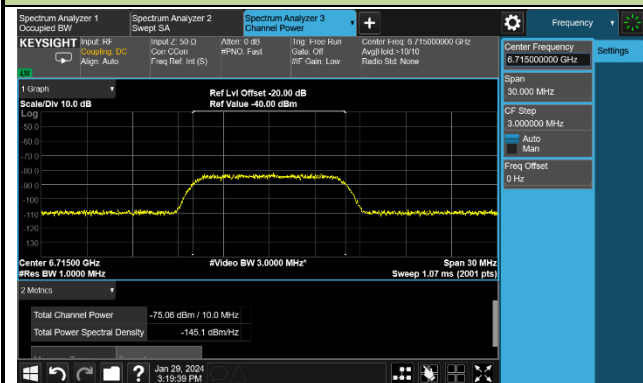


802.11ax-HE160 / CH143 (Low Edge)

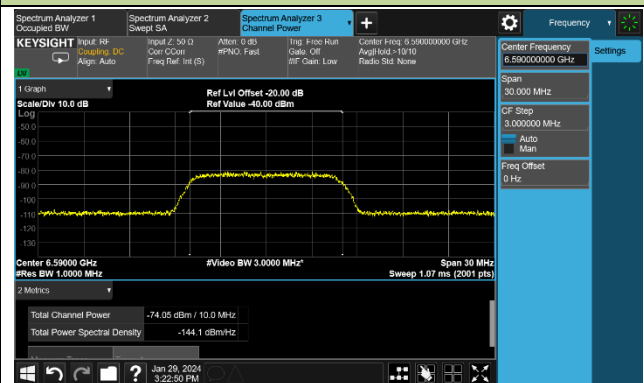

802.11ax-HE160 / CH143 (Middle)

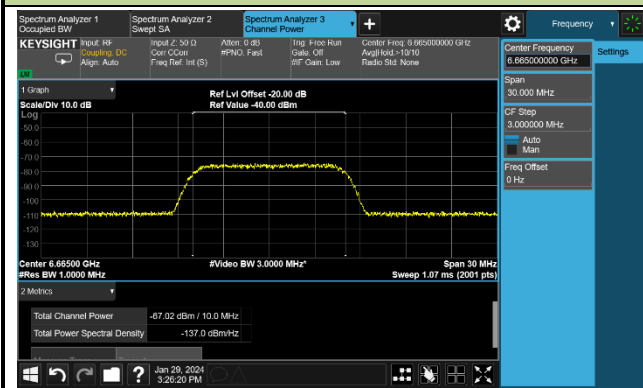


802.11ax-HE160 / CH143 (High Edge)

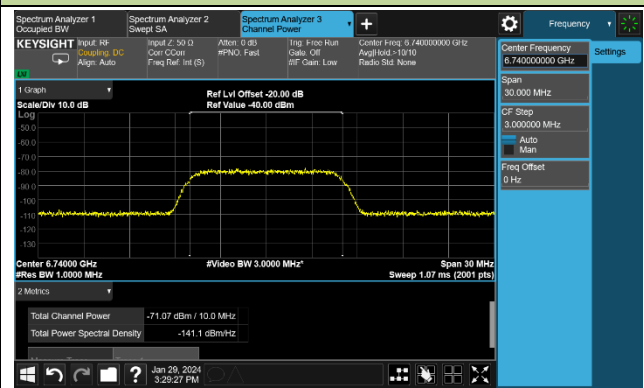


Incumbent Signal Calibration Plots (NII-8 Band)


802.11ax-HE20 / CH213

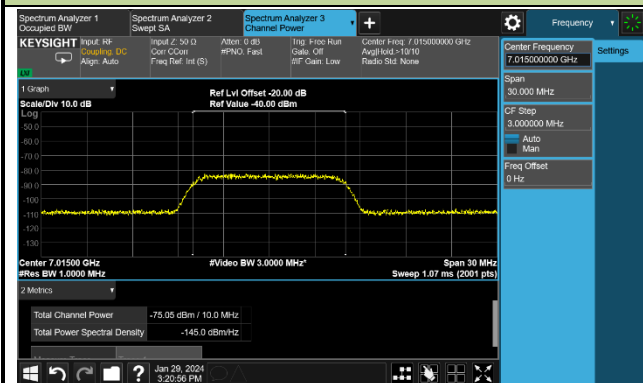


802.11ax-HE160 / CH207 (Low Edge)

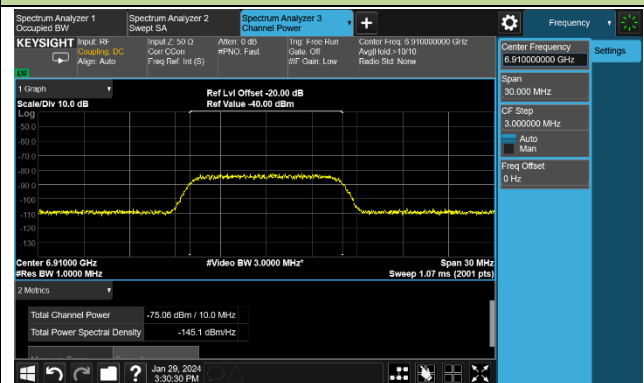

802.11ax-HE160 / CH207 (Middle)

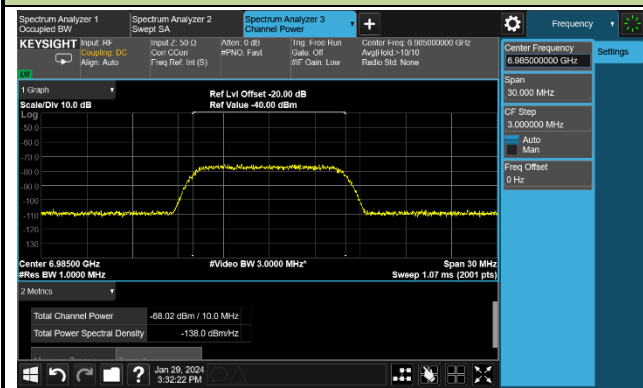


802.11ax-HE160 / CH207 (High Edge)

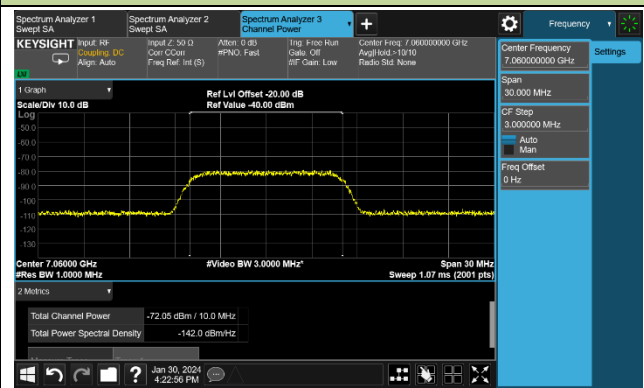


Test Result of EUT ceased transmission (NII-5 Band)


802.11ax-HE20 / CH33

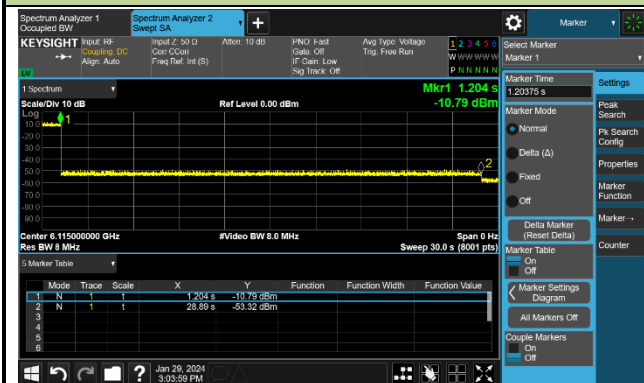


802.11ax-HE160 / CH47 (Low Edge)

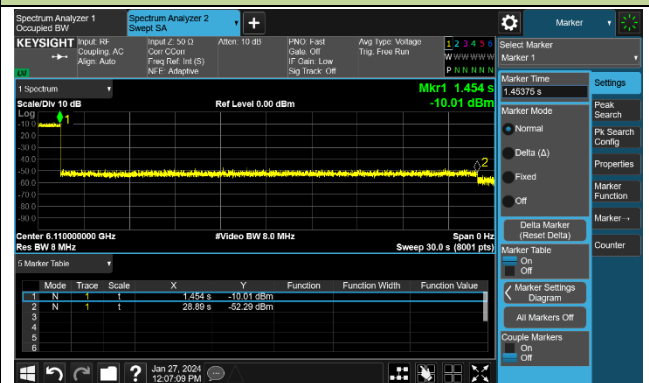

802.11ax-HE160 / CH47 (Middle)

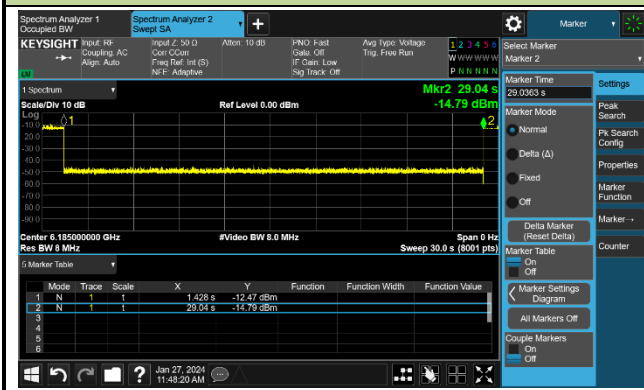


802.11ax-HE160 / CH47 (High Edge)

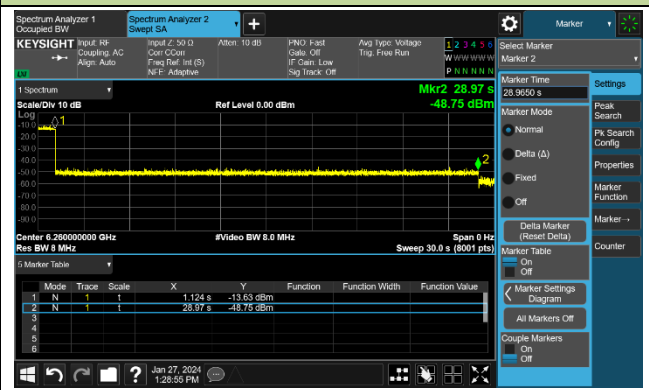


Test Result of EUT ceased transmission (NII-6 Band)


802.11ax-HE20 / CH97

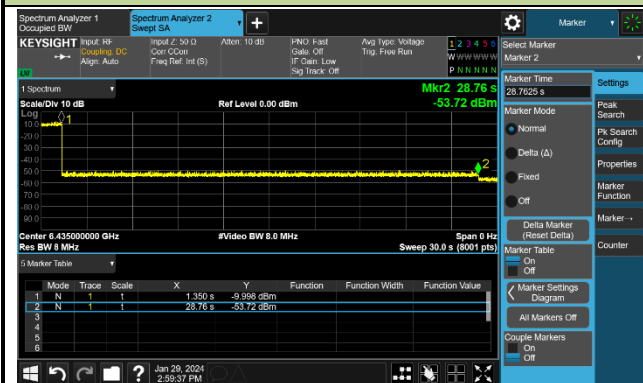


802.11ax-HE80 / CH103 (Low Edge)

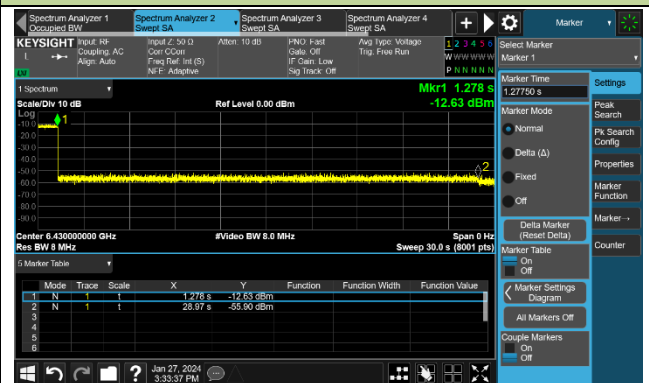

802.11ax-HE80 / CH103 (Middle)

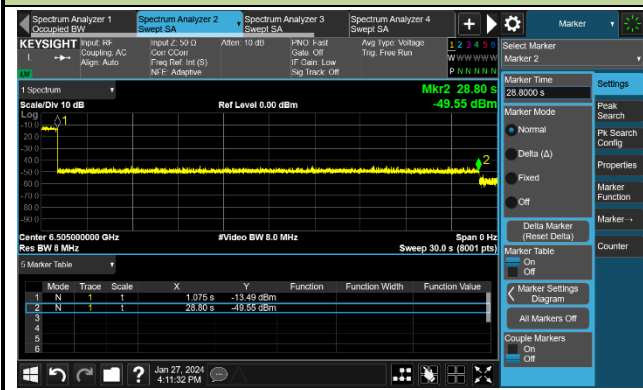


802.11ax-HE80 / CH103 (High Edge)

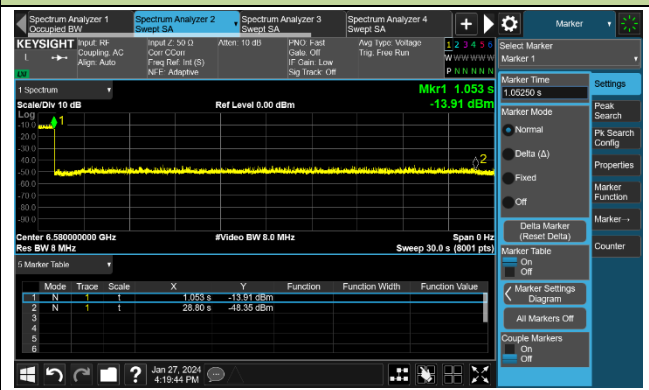


Test Result of EUT ceased transmission (NII-7 Band)


802.11ax-HE20 / CH153

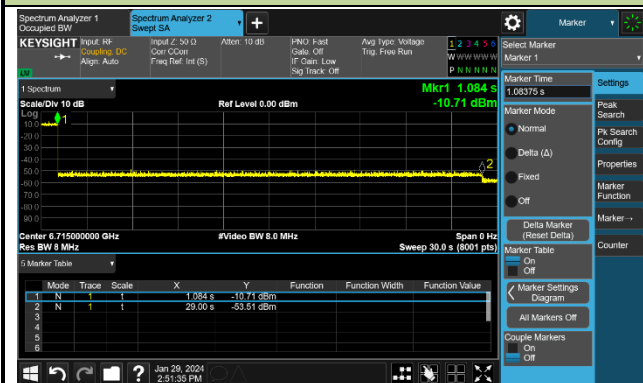


802.11ax-HE160 / CH143 (Low Edge)

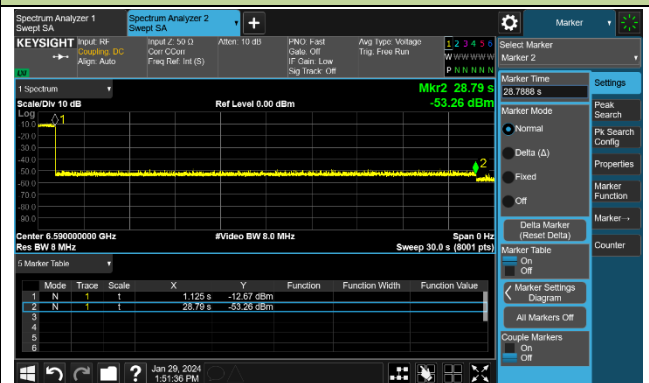

802.11ax-HE160 / CH143 (Middle)

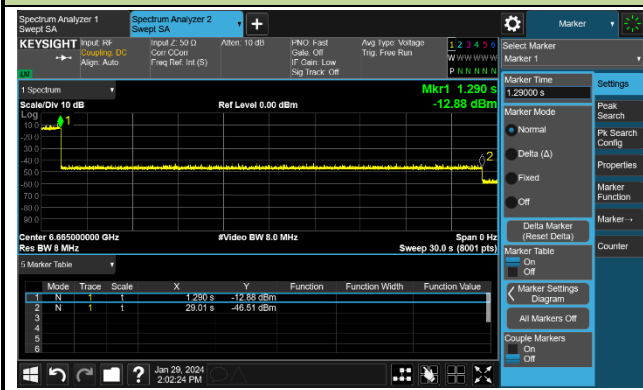


802.11ax-HE160 / CH143 (High Edge)

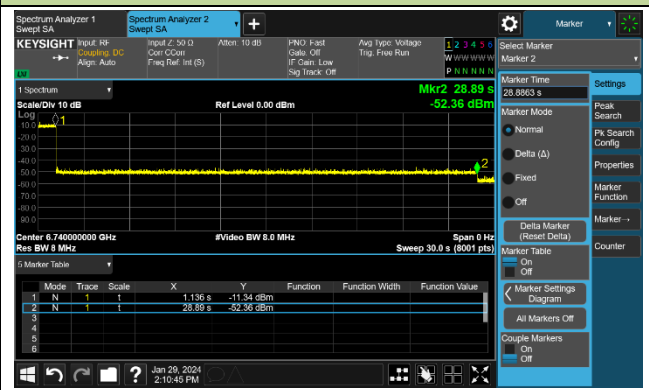


Test Result of EUT ceased transmission (NII-8 Band)


802.11ax-HE20 / CH213

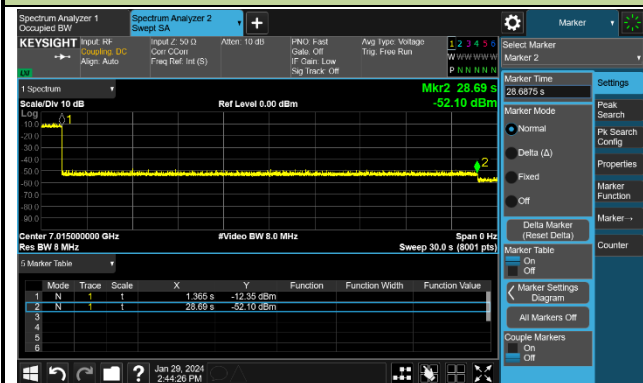


802.11ax-HE160 / CH207 (Low Edge)

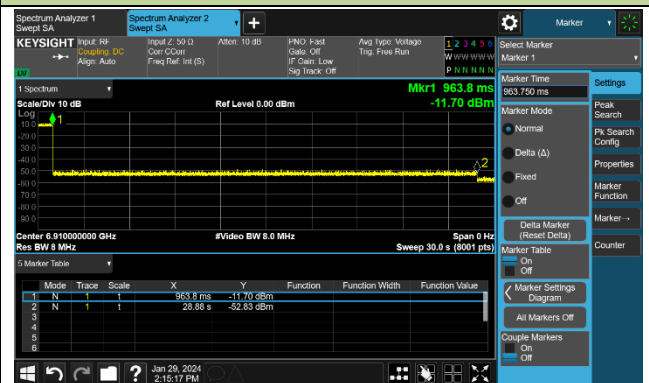

802.11ax-HE160 / CH207 (Middle)

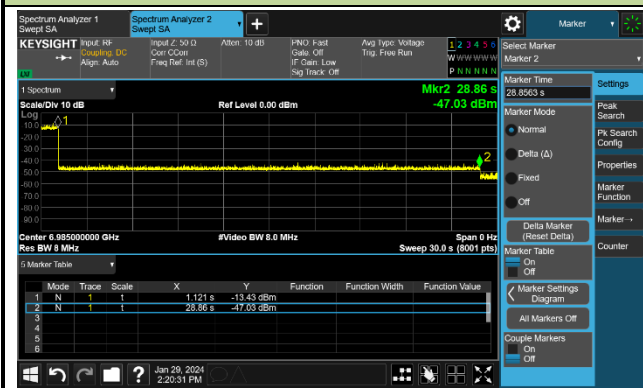

802.11ax-HE160 / CH207 (High Edge)

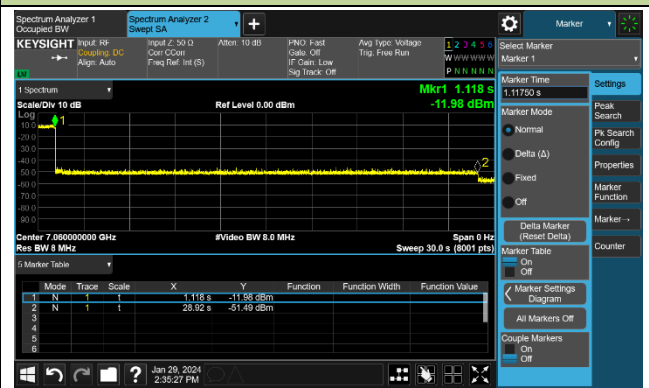

A.8 Radiated Spurious Emission Test Result

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11a	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11778.000	31.9	17.4	49.3	74.0	-24.7	Peak	Horizontal
	12126.500	30.4	17.2	47.6	74.0	-26.4	Peak	Horizontal
*	14064.500	30.8	19.8	50.6	88.2	-37.6	Peak	Horizontal
*	15246.000	32.2	18.3	50.5	88.2	-37.7	Peak	Horizontal
	10809.000	30.9	16.5	47.4	74.0	-26.6	Peak	Vertical
	11557.000	31.7	17.9	49.6	74.0	-24.4	Peak	Vertical
*	13937.000	30.2	19.6	49.8	88.2	-38.4	Peak	Vertical
*	14965.500	31.9	18.9	50.8	88.2	-37.4	Peak	Vertical

Note 1: "*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11a	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11557.000	30.2	17.9	48.1	74.0	-25.9	Peak	Horizontal
	12305.000	30.8	17.6	48.4	74.0	-25.6	Peak	Horizontal
*	13699.000	31.1	18.9	50.0	88.2	-38.2	Peak	Horizontal
*	15025.000	31.4	19.1	50.5	88.2	-37.7	Peak	Horizontal
	11625.000	31.3	17.6	48.9	74.0	-25.1	Peak	Vertical
	12152.000	31.0	17.2	48.2	74.0	-25.8	Peak	Vertical
*	14047.500	30.2	20.0	50.2	88.2	-38.0	Peak	Vertical
*	14880.500	29.7	19.1	48.8	88.2	-39.4	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11a	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11310.500	31.7	17.3	49.0	74.0	-25.0	Peak	Horizontal
	12118.000	31.2	17.1	48.3	74.0	-25.7	Peak	Horizontal
*	14268.500	31.2	19.8	51.0	88.2	-37.2	Peak	Horizontal
*	14685.000	30.1	19.7	49.8	88.2	-38.4	Peak	Horizontal
	11548.500	31.3	17.7	49.0	74.0	-25.0	Peak	Vertical
	12118.000	30.9	17.1	48.0	74.0	-26.0	Peak	Vertical
*	14013.500	30.6	19.3	49.9	88.2	-38.3	Peak	Vertical
*	14855.000	32.3	19.6	51.9	88.2	-36.3	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11a	Test Channel	97
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11183.000	30.3	17.0	47.3	74.0	-26.7	Peak	Horizontal
	11557.000	31.4	17.9	49.3	74.0	-24.7	Peak	Horizontal
*	13733.000	30.1	18.9	49.0	88.2	-39.2	Peak	Horizontal
*	15033.500	32.7	18.6	51.3	88.2	-36.9	Peak	Horizontal
	11548.500	31.1	17.7	48.8	74.0	-25.2	Peak	Vertical
	12186.000	30.3	17.7	48.0	74.0	-26.0	Peak	Vertical
*	13852.000	30.8	19.0	49.8	88.2	-38.4	Peak	Vertical
*	14957.000	31.5	19.1	50.6	88.2	-37.6	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11a	Test Channel	105
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11497.500	30.3	17.6	47.9	74.0	-26.1	Peak	Horizontal
	12126.500	30.8	17.2	48.0	74.0	-26.0	Peak	Horizontal
*	14056.000	30.9	20.0	50.9	88.2	-37.3	Peak	Horizontal
*	14838.000	31.3	19.8	51.1	88.2	-37.1	Peak	Horizontal
	11480.500	30.7	17.6	48.3	74.0	-25.7	Peak	Vertical
	12033.000	31.6	17.0	48.6	74.0	-25.4	Peak	Vertical
*	13775.500	31.1	19.0	50.1	88.2	-38.1	Peak	Vertical
*	15016.500	31.1	19.4	50.5	88.2	-37.7	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11a	Test Channel	113
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11506.000	30.9	17.4	48.3	74.0	-25.7	Peak	Horizontal
	12228.500	31.0	17.5	48.5	74.0	-25.5	Peak	Horizontal
*	13928.500	30.1	19.1	49.2	88.2	-39.0	Peak	Horizontal
*	14821.000	30.9	19.6	50.5	88.2	-37.7	Peak	Horizontal
	11531.500	30.6	17.3	47.9	74.0	-26.1	Peak	Vertical
	12279.500	30.5	17.4	47.9	74.0	-26.1	Peak	Vertical
*	14030.500	31.5	19.8	51.3	88.2	-36.9	Peak	Vertical
*	15025.000	31.8	19.1	50.9	88.2	-37.3	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11a	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11319.000	30.7	17.4	48.1	74.0	-25.9	Peak	Horizontal
	12118.000	31.0	17.1	48.1	74.0	-25.9	Peak	Horizontal
*	14056.000	30.7	20.0	50.7	88.2	-37.5	Peak	Horizontal
*	15008.000	31.6	19.4	51.0	88.2	-37.2	Peak	Horizontal
	11327.500	30.9	17.4	48.3	74.0	-25.7	Peak	Vertical
	11667.500	30.5	17.5	48.0	74.0	-26.0	Peak	Vertical
*	13775.500	30.9	19.0	49.9	88.2	-38.3	Peak	Vertical
*	15016.500	31.4	19.4	50.8	88.2	-37.4	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11a	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10307.500	31.7	14.9	46.6	88.2	-41.6	Peak	Horizontal
	10809.000	31.6	16.5	48.1	74.0	-25.9	Peak	Horizontal
	11786.500	29.1	17.6	46.7	74.0	-27.3	Peak	Horizontal
*	12891.500	29.0	17.4	46.4	88.2	-41.8	Peak	Horizontal
*	9899.500	31.7	13.6	45.3	88.2	-42.9	Peak	Vertical
*	10035.500	32.7	13.9	46.6	88.2	-41.6	Peak	Vertical
	11531.500	29.7	17.3	47.0	74.0	-27.0	Peak	Vertical
	11948.000	29.8	16.9	46.7	74.0	-27.3	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11a	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	10919.500	31.0	16.7	47.7	74.0	-26.3	Peak	Horizontal
	11659.000	31.2	17.7	48.9	74.0	-25.1	Peak	Horizontal
*	13962.500	30.1	19.5	49.6	88.2	-38.6	Peak	Horizontal
*	14838.000	31.0	19.8	50.8	88.2	-37.4	Peak	Horizontal
	11548.500	30.9	17.7	48.6	74.0	-25.4	Peak	Vertical
	12228.500	30.5	17.5	48.0	74.0	-26.0	Peak	Vertical
*	13886.000	30.8	19.4	50.2	88.2	-38.0	Peak	Vertical
*	14940.000	30.7	19.8	50.5	88.2	-37.7	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11a	Test Channel	185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11115.000	30.8	16.5	47.3	74.0	-26.7	Peak	Horizontal
	11982.000	31.2	17.3	48.5	74.0	-25.5	Peak	Horizontal
*	13894.500	30.6	19.0	49.6	88.2	-38.6	Peak	Horizontal
*	14812.500	30.7	19.4	50.1	88.2	-38.1	Peak	Horizontal
	11336.000	30.2	17.4	47.6	74.0	-26.4	Peak	Vertical
	11990.500	31.0	17.1	48.1	74.0	-25.9	Peak	Vertical
*	13937.000	30.4	19.6	50.0	88.2	-38.2	Peak	Vertical
*	14906.000	31.9	19.3	51.2	88.2	-37.0	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11a	Test Channel	189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	10962.000	32.0	16.2	48.2	74.0	-25.8	Peak	Horizontal
	11633.500	31.1	17.7	48.8	74.0	-25.2	Peak	Horizontal
*	14022.000	31.0	19.6	50.6	88.2	-37.6	Peak	Horizontal
*	14948.500	31.8	19.4	51.2	88.2	-37.0	Peak	Horizontal
	11531.500	31.1	17.3	48.4	74.0	-25.6	Peak	Vertical
	12135.000	30.9	17.3	48.2	74.0	-25.8	Peak	Vertical
*	13801.000	31.0	18.7	49.7	88.2	-38.5	Peak	Vertical
*	15016.500	32.3	19.4	51.7	88.2	-36.5	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11a	Test Channel	213
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11480.500	31.4	17.6	49.0	74.0	-25.0	Peak	Horizontal
	12237.000	30.0	17.5	47.5	74.0	-26.5	Peak	Horizontal
*	13792.500	29.9	18.8	48.7	88.2	-39.5	Peak	Horizontal
*	14880.500	30.2	19.1	49.3	88.2	-38.9	Peak	Horizontal
	11395.500	30.6	17.5	48.1	74.0	-25.9	Peak	Vertical
	11914.000	30.1	17.3	47.4	74.0	-26.6	Peak	Vertical
*	13945.500	29.5	19.6	49.1	88.2	-39.1	Peak	Vertical
*	14999.500	32.1	19.2	51.3	88.2	-36.9	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11a	Test Channel	229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11098.000	31.0	16.8	47.8	74.0	-26.2	Peak	Horizontal
	11565.500	30.6	17.8	48.4	74.0	-25.6	Peak	Horizontal
*	13673.500	31.3	18.5	49.8	88.2	-38.4	Peak	Horizontal
*	14821.000	31.2	19.6	50.8	88.2	-37.4	Peak	Horizontal
	11089.500	31.3	16.8	48.1	74.0	-25.9	Peak	Vertical
	11973.500	30.7	17.3	48.0	74.0	-26.0	Peak	Vertical
*	14064.500	31.6	19.8	51.4	88.2	-36.8	Peak	Vertical
*	14812.500	31.7	19.4	51.1	88.2	-37.1	Peak	Vertical

Note 1: "*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11412.500	30.8	17.5	48.3	74.0	-25.7	Peak	Horizontal
	11990.500	30.5	17.1	47.6	74.0	-26.4	Peak	Horizontal
*	13860.500	30.5	19.0	49.5	88.2	-38.7	Peak	Horizontal
*	14940.000	31.1	19.8	50.9	88.2	-37.3	Peak	Horizontal
	11166.000	31.4	17.0	48.4	74.0	-25.6	Peak	Vertical
	12143.500	30.9	17.3	48.2	74.0	-25.8	Peak	Vertical
*	13937.000	29.8	19.6	49.4	88.2	-38.8	Peak	Vertical
*	15016.500	31.3	19.4	50.7	88.2	-37.5	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11191.500	31.3	16.9	48.2	74.0	-25.8	Peak	Horizontal
	11939.500	30.6	16.9	47.5	74.0	-26.5	Peak	Horizontal
*	14115.500	31.0	19.9	50.9	88.2	-37.3	Peak	Horizontal
*	14787.000	31.9	19.2	51.1	88.2	-37.1	Peak	Horizontal
	11089.500	30.9	16.8	47.7	74.0	-26.3	Peak	Vertical
	11557.000	30.3	17.9	48.2	74.0	-25.8	Peak	Vertical
*	13801.000	30.3	18.7	49.0	88.2	-39.2	Peak	Vertical
*	14991.000	31.8	18.9	50.7	88.2	-37.5	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	10945.000	32.0	16.4	48.4	74.0	-25.6	Peak	Horizontal
	11659.000	30.6	17.7	48.3	74.0	-25.7	Peak	Horizontal
*	14073.000	31.3	19.6	50.9	88.2	-37.3	Peak	Horizontal
*	14821.000	31.7	19.6	51.3	88.2	-36.9	Peak	Horizontal
	11217.000	31.3	16.8	48.1	74.0	-25.9	Peak	Vertical
	11718.500	30.0	17.8	47.8	74.0	-26.2	Peak	Vertical
*	14081.500	31.3	19.5	50.8	88.2	-37.4	Peak	Vertical
*	14804.000	31.9	19.2	51.1	88.2	-37.1	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE20	Test Channel	97
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11115.000	31.5	16.5	48.0	74.0	-26.0	Peak	Horizontal
	11710.000	30.5	17.8	48.3	74.0	-25.7	Peak	Horizontal
*	14056.000	30.1	20.0	50.1	88.2	-38.1	Peak	Horizontal
*	14838.000	31.8	19.8	51.6	88.2	-36.6	Peak	Horizontal
	11310.500	30.4	17.3	47.7	74.0	-26.3	Peak	Vertical
	11905.500	31.2	17.4	48.6	74.0	-25.4	Peak	Vertical
*	14217.500	31.3	19.9	51.2	88.2	-37.0	Peak	Vertical
*	14931.500	31.5	19.7	51.2	88.2	-37.0	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE20	Test Channel	105
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11183.000	30.9	17.0	47.9	74.0	-26.1	Peak	Horizontal
	11642.000	30.7	17.9	48.6	74.0	-25.4	Peak	Horizontal
*	14047.500	30.2	20.0	50.2	88.2	-38.0	Peak	Horizontal
*	14906.000	31.9	19.3	51.2	88.2	-37.0	Peak	Horizontal
	11574.000	31.0	17.7	48.7	74.0	-25.3	Peak	Vertical
	12126.500	30.5	17.2	47.7	74.0	-26.3	Peak	Vertical
*	13835.000	30.6	18.9	49.5	88.2	-38.7	Peak	Vertical
*	14999.500	31.8	19.2	51.0	88.2	-37.2	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE20	Test Channel	113
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11574.000	31.1	17.7	48.8	74.0	-25.2	Peak	Horizontal
	12177.500	30.5	17.7	48.2	74.0	-25.8	Peak	Horizontal
*	13894.500	29.8	19.0	48.8	88.2	-39.4	Peak	Horizontal
*	14753.000	31.0	19.5	50.5	88.2	-37.7	Peak	Horizontal
	11650.500	31.5	17.8	49.3	74.0	-24.7	Peak	Vertical
	12177.500	30.6	17.7	48.3	74.0	-25.7	Peak	Vertical
*	14115.500	30.8	19.9	50.7	88.2	-37.5	Peak	Vertical
*	15008.000	31.2	19.4	50.6	88.2	-37.6	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11506.000	31.5	17.4	48.9	74.0	-25.1	Peak	Horizontal
	11973.500	31.4	17.3	48.7	74.0	-25.3	Peak	Horizontal
*	14022.000	30.7	19.6	50.3	88.2	-37.9	Peak	Horizontal
*	15025.000	32.4	19.1	51.5	88.2	-36.7	Peak	Horizontal
	11582.500	30.8	17.5	48.3	74.0	-25.7	Peak	Vertical
	12288.000	30.4	17.6	48.0	74.0	-26.0	Peak	Vertical
*	14098.500	30.9	19.8	50.7	88.2	-37.5	Peak	Vertical
*	14753.000	31.3	19.5	50.8	88.2	-37.4	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE20	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11540.000	31.2	17.6	48.8	74.0	-25.2	Peak	Horizontal
	12169.000	30.6	17.4	48.0	74.0	-26.0	Peak	Horizontal
*	14030.500	30.7	19.8	50.5	88.2	-37.7	Peak	Horizontal
*	14957.000	31.8	19.1	50.9	88.2	-37.3	Peak	Horizontal
	11344.500	30.9	17.3	48.2	74.0	-25.8	Peak	Vertical
	12075.500	31.4	16.9	48.3	74.0	-25.7	Peak	Vertical
*	14149.500	31.2	19.9	51.1	88.2	-37.1	Peak	Vertical
*	15033.500	33.1	18.6	51.7	88.2	-36.5	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11251.000	31.1	17.2	48.3	74.0	-25.7	Peak	Horizontal
	12075.500	31.1	16.9	48.0	74.0	-26.0	Peak	Horizontal
*	14047.500	30.4	20.0	50.4	88.2	-37.8	Peak	Horizontal
*	14846.500	31.6	19.7	51.3	88.2	-36.9	Peak	Horizontal
*	9967.500	32.7	13.9	46.6	88.2	-41.6	Peak	Vertical
*	10435.000	31.7	15.5	47.2	88.2	-41.0	Peak	Vertical
	11378.500	29.7	17.3	47.0	74.0	-27.0	Peak	Vertical
	12177.500	29.8	17.7	47.5	74.0	-26.5	Peak	Vertical

Note 1: "*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE20	Test Channel	185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	10919.500	31.6	16.7	48.3	74.0	-25.7	Peak	Horizontal
	11922.500	30.6	17.1	47.7	74.0	-26.3	Peak	Horizontal
*	13869.000	31.1	19.1	50.2	88.2	-38.0	Peak	Horizontal
*	14931.500	31.8	19.7	51.5	88.2	-36.7	Peak	Horizontal
	11327.500	29.9	17.4	47.3	74.0	-26.7	Peak	Vertical
	12288.000	30.9	17.6	48.5	74.0	-25.5	Peak	Vertical
*	14056.000	30.6	20.0	50.6	88.2	-37.6	Peak	Vertical
*	14931.500	31.6	19.7	51.3	88.2	-36.9	Peak	Vertical

Note 1: "*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE20	Test Channel	189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11047.000	32.2	16.2	48.4	74.0	-25.6	Peak	Horizontal
	11914.000	31.9	17.3	49.2	74.0	-24.8	Peak	Horizontal
*	14056.000	30.6	20.0	50.6	88.2	-37.6	Peak	Horizontal
*	14863.500	32.0	19.5	51.5	88.2	-36.7	Peak	Horizontal
	11429.500	30.9	17.3	48.2	74.0	-25.8	Peak	Vertical
	11956.500	30.8	17.1	47.9	74.0	-26.1	Peak	Vertical
*	13894.500	31.5	19.0	50.5	88.2	-37.7	Peak	Vertical
*	14855.000	30.9	19.6	50.5	88.2	-37.7	Peak	Vertical

Note 1: "*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE20	Test Channel	213
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11327.500	30.0	17.4	47.4	74.0	-26.6	Peak	Horizontal
	11744.000	30.4	17.6	48.0	74.0	-26.0	Peak	Horizontal
*	14209.000	30.9	19.8	50.7	88.2	-37.5	Peak	Horizontal
*	14923.000	31.4	19.7	51.1	88.2	-37.1	Peak	Horizontal
	11489.000	30.6	17.7	48.3	74.0	-25.7	Peak	Vertical
	12203.000	30.6	17.7	48.3	74.0	-25.7	Peak	Vertical
*	14013.500	30.5	19.3	49.8	88.2	-38.4	Peak	Vertical
*	15016.500	31.6	19.4	51.0	88.2	-37.2	Peak	Vertical

Note 1: "*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE20	Test Channel	229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11225.500	30.4	16.9	47.3	74.0	-26.7	Peak	Horizontal
	11871.500	30.1	17.3	47.4	74.0	-26.6	Peak	Horizontal
*	13988.000	30.1	19.0	49.1	88.2	-39.1	Peak	Horizontal
*	14812.500	30.9	19.4	50.3	88.2	-37.9	Peak	Horizontal
	11557.000	30.4	17.9	48.3	74.0	-25.7	Peak	Vertical
	12262.500	30.3	17.4	47.7	74.0	-26.3	Peak	Vertical
*	14022.000	29.9	19.6	49.5	88.2	-38.7	Peak	Vertical
*	14914.500	31.0	19.5	50.5	88.2	-37.7	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11514.500	30.6	17.3	47.9	74.0	-26.1	Peak	Horizontal
	11897.000	30.9	17.4	48.3	74.0	-25.7	Peak	Horizontal
*	14056.000	30.1	20.0	50.1	88.2	-38.1	Peak	Horizontal
*	14982.500	31.6	18.9	50.5	88.2	-37.7	Peak	Horizontal
	11429.500	29.6	17.3	46.9	74.0	-27.1	Peak	Vertical
	11820.500	30.0	17.5	47.5	74.0	-26.5	Peak	Vertical
*	14141.000	30.4	20.0	50.4	88.2	-37.8	Peak	Vertical
*	14812.500	31.0	19.4	50.4	88.2	-37.8	Peak	Vertical

Note 1: "*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10078.000	32.2	13.7	45.9	88.2	-42.3	Peak	Horizontal
*	10443.500	31.4	15.5	46.9	88.2	-41.3	Peak	Horizontal
	11285.000	30.1	16.9	47.0	74.0	-27.0	Peak	Horizontal
	11990.500	30.5	17.1	47.6	74.0	-26.4	Peak	Horizontal
	11497.500	30.9	17.6	48.5	74.0	-25.5	Peak	Vertical
	11973.500	29.9	17.3	47.2	74.0	-26.8	Peak	Vertical
*	13945.500	30.8	19.6	50.4	88.2	-37.8	Peak	Vertical
*	14923.000	30.8	19.7	50.5	88.2	-37.7	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11327.500	28.5	17.4	45.9	74.0	-28.1	Peak	Horizontal
	12016.000	30.3	16.9	47.2	74.0	-26.8	Peak	Horizontal
*	14090.000	30.3	19.6	49.9	88.2	-38.3	Peak	Horizontal
*	14821.000	31.8	19.6	51.4	88.2	-36.8	Peak	Horizontal
	11480.500	31.3	17.6	48.9	74.0	-25.1	Peak	Vertical
	12024.500	30.4	17.0	47.4	74.0	-26.6	Peak	Vertical
*	13792.500	29.4	18.8	48.2	88.2	-40.0	Peak	Vertical
*	14880.500	28.9	19.1	48.0	88.2	-40.2	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04
Test Mode	802.11ax-HE40	Test Channel	99
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11565.500	30.9	17.8	48.7	74.0	-25.3	Peak	Horizontal
	12033.000	31.2	17.0	48.2	74.0	-25.8	Peak	Horizontal
*	13937.000	29.8	19.6	49.4	88.2	-38.8	Peak	Horizontal
*	15016.500	31.5	19.4	50.9	88.2	-37.3	Peak	Horizontal
	11319.000	31.2	17.4	48.6	74.0	-25.4	Peak	Vertical
	12016.000	31.4	16.9	48.3	74.0	-25.7	Peak	Vertical
*	13954.000	29.9	19.6	49.5	88.2	-38.7	Peak	Vertical
*	15008.000	31.8	19.4	51.2	88.2	-37.0	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE40	Test Channel	107
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11242.500	30.9	17.1	48.0	74.0	-26.0	Peak	Horizontal
	11965.000	30.6	17.2	47.8	74.0	-26.2	Peak	Horizontal
*	13665.000	30.9	18.6	49.5	88.2	-38.7	Peak	Horizontal
*	15016.500	30.9	19.4	50.3	88.2	-37.9	Peak	Horizontal
	11166.000	30.7	17.0	47.7	74.0	-26.3	Peak	Vertical
	11897.000	30.4	17.4	47.8	74.0	-26.2	Peak	Vertical
*	14030.500	29.8	19.8	49.6	88.2	-38.6	Peak	Vertical
*	14838.000	30.5	19.8	50.3	88.2	-37.9	Peak	Vertical

Note 1: "*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE40	Test Channel	115
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11208.500	31.5	16.9	48.4	74.0	-25.6	Peak	Horizontal
	11701.500	30.6	17.5	48.1	74.0	-25.9	Peak	Horizontal
*	13724.500	30.7	19.2	49.9	88.2	-38.3	Peak	Horizontal
*	14787.000	31.3	19.2	50.5	88.2	-37.7	Peak	Horizontal
	11565.500	30.1	17.8	47.9	74.0	-26.1	Peak	Vertical
	12305.000	30.7	17.6	48.3	74.0	-25.7	Peak	Vertical
*	14022.000	30.2	19.6	49.8	88.2	-38.4	Peak	Vertical
*	15016.500	31.5	19.4	50.9	88.2	-37.3	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11259.500	31.4	17.1	48.5	74.0	-25.5	Peak	Horizontal
	12169.000	30.6	17.4	48.0	74.0	-26.0	Peak	Horizontal
*	14064.500	31.1	19.8	50.9	88.2	-37.3	Peak	Horizontal
*	14923.000	31.7	19.7	51.4	88.2	-36.8	Peak	Horizontal
	11489.000	30.2	17.7	47.9	74.0	-26.1	Peak	Vertical
	12135.000	30.1	17.3	47.4	74.0	-26.6	Peak	Vertical
*	13733.000	29.1	18.9	48.0	88.2	-40.2	Peak	Vertical
*	14948.500	29.6	19.4	49.0	88.2	-39.2	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	10970.500	31.6	16.2	47.8	74.0	-26.2	Peak	Horizontal
	11642.000	30.2	17.9	48.1	74.0	-25.9	Peak	Horizontal
*	14013.500	30.8	19.3	50.1	88.2	-38.1	Peak	Horizontal
*	14829.500	31.9	19.7	51.6	88.2	-36.6	Peak	Horizontal
	11268.000	31.0	17.0	48.0	74.0	-26.0	Peak	Vertical
	11616.500	30.9	17.4	48.3	74.0	-25.7	Peak	Vertical
*	14251.500	30.9	19.9	50.8	88.2	-37.4	Peak	Vertical
*	14923.000	31.1	19.7	50.8	88.2	-37.4	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11387.000	30.5	17.4	47.9	74.0	-26.1	Peak	Horizontal
	11837.500	30.7	17.2	47.9	74.0	-26.1	Peak	Horizontal
*	13886.000	29.3	19.4	48.7	88.2	-39.5	Peak	Horizontal
*	14999.500	31.0	19.2	50.2	88.2	-38.0	Peak	Horizontal
	11497.500	31.0	17.6	48.6	74.0	-25.4	Peak	Vertical
	12092.500	30.4	16.9	47.3	74.0	-26.7	Peak	Vertical
*	13809.500	30.2	18.7	48.9	88.2	-39.3	Peak	Vertical
*	14872.000	32.1	19.3	51.4	88.2	-36.8	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE40	Test Channel	187
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11191.500	30.6	16.9	47.5	74.0	-26.5	Peak	Horizontal
	11888.500	31.2	17.3	48.5	74.0	-25.5	Peak	Horizontal
*	14226.000	30.5	20.0	50.5	88.2	-37.7	Peak	Horizontal
*	14880.500	31.6	19.1	50.7	88.2	-37.5	Peak	Horizontal
	11429.500	30.8	17.3	48.1	74.0	-25.9	Peak	Vertical
	11897.000	30.5	17.4	47.9	74.0	-26.1	Peak	Vertical
*	14030.500	30.3	19.8	50.1	88.2	-38.1	Peak	Vertical
*	15042.000	33.1	18.3	51.4	88.2	-36.8	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE40	Test Channel	195
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11540.000	30.7	17.6	48.3	74.0	-25.7	Peak	Horizontal
	12194.500	30.5	17.8	48.3	74.0	-25.7	Peak	Horizontal
*	14030.500	30.5	19.8	50.3	88.2	-37.9	Peak	Horizontal
*	14872.000	33.0	19.3	52.3	88.2	-35.9	Peak	Horizontal
	11489.000	30.7	17.7	48.4	74.0	-25.6	Peak	Vertical
	12228.500	30.8	17.5	48.3	74.0	-25.7	Peak	Vertical
*	13996.500	30.0	19.1	49.1	88.2	-39.1	Peak	Vertical
*	15008.000	30.2	19.4	49.6	88.2	-38.6	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE40	Test Channel	211
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11574.000	30.0	17.7	47.7	74.0	-26.3	Peak	Horizontal
	12033.000	31.6	17.0	48.6	74.0	-25.4	Peak	Horizontal
*	14107.000	30.2	19.9	50.1	88.2	-38.1	Peak	Horizontal
*	15008.000	31.3	19.4	50.7	88.2	-37.5	Peak	Horizontal
	11642.000	31.4	17.9	49.3	74.0	-24.7	Peak	Vertical
	12313.500	29.6	17.4	47.0	74.0	-27.0	Peak	Vertical
*	14175.000	29.4	19.8	49.2	88.2	-39.0	Peak	Vertical
*	14770.000	31.0	19.4	50.4	88.2	-37.8	Peak	Vertical

Note 1: "*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE40	Test Channel	227
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11548.500	31.2	17.7	48.9	74.0	-25.1	Peak	Horizontal
	12109.500	31.7	17.0	48.7	74.0	-25.3	Peak	Horizontal
*	14141.000	30.2	20.0	50.2	88.2	-38.0	Peak	Horizontal
*	14931.500	31.2	19.7	50.9	88.2	-37.3	Peak	Horizontal
	11514.500	31.3	17.3	48.6	74.0	-25.4	Peak	Vertical
	12177.500	30.4	17.7	48.1	74.0	-25.9	Peak	Vertical
*	13852.000	30.1	19.0	49.1	88.2	-39.1	Peak	Vertical
*	14710.500	30.2	19.7	49.9	88.2	-38.3	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11565.500	31.7	17.8	49.5	74.0	-24.5	Peak	Horizontal
	12177.500	30.7	17.7	48.4	74.0	-25.6	Peak	Horizontal
*	14064.500	32.2	19.8	52.0	88.2	-36.2	Peak	Horizontal
*	14838.000	31.2	19.8	51.0	88.2	-37.2	Peak	Horizontal
	11574.000	31.0	17.7	48.7	74.0	-25.3	Peak	Vertical
	12058.500	31.1	17.0	48.1	74.0	-25.9	Peak	Vertical
*	14090.000	30.9	19.6	50.5	88.2	-37.7	Peak	Vertical
*	15016.500	31.8	19.4	51.2	88.2	-37.0	Peak	Vertical

Note 1: "*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	10936.500	30.9	16.6	47.5	74.0	-26.5	Peak	Horizontal
	11633.500	31.3	17.7	49.0	74.0	-25.0	Peak	Horizontal
*	14047.500	30.2	20.0	50.2	88.2	-38.0	Peak	Horizontal
*	14948.500	31.0	19.4	50.4	88.2	-37.8	Peak	Horizontal
	11081.000	30.3	16.7	47.0	74.0	-27.0	Peak	Vertical
	11786.500	30.3	17.6	47.9	74.0	-26.1	Peak	Vertical
*	14277.000	30.4	19.8	50.2	88.2	-38.0	Peak	Vertical
*	14778.500	30.6	19.2	49.8	88.2	-38.4	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11361.500	30.5	17.2	47.7	74.0	-26.3	Peak	Horizontal
	12041.500	30.9	17.0	47.9	74.0	-26.1	Peak	Horizontal
*	14115.500	30.5	19.9	50.4	88.2	-37.8	Peak	Horizontal
*	15025.000	31.1	19.1	50.2	88.2	-38.0	Peak	Horizontal
	11548.500	30.6	17.7	48.3	74.0	-25.7	Peak	Vertical
	12254.000	30.9	17.5	48.4	74.0	-25.6	Peak	Vertical
*	14039.000	30.3	19.9	50.2	88.2	-38.0	Peak	Vertical
*	14829.500	30.8	19.7	50.5	88.2	-37.7	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE80	Test Channel	103
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11242.500	30.4	17.1	47.5	74.0	-26.5	Peak	Horizontal
	11701.500	29.9	17.5	47.4	74.0	-26.6	Peak	Horizontal
*	13937.000	30.4	19.6	50.0	88.2	-38.2	Peak	Horizontal
*	14736.000	30.6	19.6	50.2	88.2	-38.0	Peak	Horizontal
	11395.500	30.2	17.5	47.7	74.0	-26.3	Peak	Vertical
	12084.000	31.0	16.9	47.9	74.0	-26.1	Peak	Vertical
*	14183.500	30.8	19.9	50.7	88.2	-37.5	Peak	Vertical
*	14999.500	32.3	19.2	51.5	88.2	-36.7	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE80	Test Channel	119
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	10868.500	31.1	16.3	47.4	74.0	-26.6	Peak	Horizontal
	11778.000	30.4	17.4	47.8	74.0	-26.2	Peak	Horizontal
*	13809.500	30.8	18.7	49.5	88.2	-38.7	Peak	Horizontal
*	14999.500	31.8	19.2	51.0	88.2	-37.2	Peak	Horizontal
	11565.500	29.8	17.8	47.6	74.0	-26.4	Peak	Vertical
	11905.500	29.8	17.4	47.2	74.0	-26.8	Peak	Vertical
*	14115.500	30.7	19.9	50.6	88.2	-37.6	Peak	Vertical
*	15025.000	31.4	19.1	50.5	88.2	-37.7	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11412.500	29.9	17.5	47.4	74.0	-26.6	Peak	Horizontal
	12007.500	30.4	17.0	47.4	74.0	-26.6	Peak	Horizontal
*	13733.000	30.6	18.9	49.5	88.2	-38.7	Peak	Horizontal
*	14931.500	31.7	19.7	51.4	88.2	-36.8	Peak	Horizontal
	11021.500	29.8	16.4	46.2	74.0	-27.8	Peak	Vertical
	11531.500	29.4	17.3	46.7	74.0	-27.3	Peak	Vertical
*	14056.000	29.7	20.0	49.7	88.2	-38.5	Peak	Vertical
*	14778.500	31.5	19.2	50.7	88.2	-37.5	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11463.500	30.5	17.5	48.0	74.0	-26.0	Peak	Horizontal
	12288.000	30.5	17.6	48.1	74.0	-25.9	Peak	Horizontal
*	13877.500	30.6	19.3	49.9	88.2	-38.3	Peak	Horizontal
*	15025.000	32.1	19.1	51.2	88.2	-37.0	Peak	Horizontal
	11234.000	29.7	17.0	46.7	74.0	-27.3	Peak	Vertical
	11982.000	30.6	17.3	47.9	74.0	-26.1	Peak	Vertical
*	13937.000	29.5	19.6	49.1	88.2	-39.1	Peak	Vertical
*	14931.500	30.9	19.7	50.6	88.2	-37.6	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE80	Test Channel	183
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11293.500	31.0	17.1	48.1	74.0	-25.9	Peak	Horizontal
	11973.500	31.8	17.3	49.1	74.0	-24.9	Peak	Horizontal
*	14098.500	30.3	19.8	50.1	88.2	-38.1	Peak	Horizontal
*	14812.500	30.7	19.4	50.1	88.2	-38.1	Peak	Horizontal
	10936.500	31.0	16.6	47.6	74.0	-26.4	Peak	Vertical
	12152.000	30.9	17.2	48.1	74.0	-25.9	Peak	Vertical
*	14090.000	30.5	19.6	50.1	88.2	-38.1	Peak	Vertical
*	14897.500	31.6	19.1	50.7	88.2	-37.5	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE80	Test Channel	199
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11089.500	30.7	16.8	47.5	74.0	-26.5	Peak	Horizontal
	11727.000	29.8	17.9	47.7	74.0	-26.3	Peak	Horizontal
*	13826.500	31.5	18.8	50.3	88.2	-37.9	Peak	Horizontal
*	14812.500	31.8	19.4	51.2	88.2	-37.0	Peak	Horizontal
	11251.000	30.5	17.2	47.7	74.0	-26.3	Peak	Vertical
	11897.000	30.0	17.4	47.4	74.0	-26.6	Peak	Vertical
*	14022.000	29.5	19.6	49.1	88.2	-39.1	Peak	Vertical
*	14889.000	31.2	18.9	50.1	88.2	-38.1	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE80	Test Channel	215
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11021.500	30.0	16.4	46.4	74.0	-27.6	Peak	Horizontal
	12152.000	31.6	17.2	48.8	74.0	-25.2	Peak	Horizontal
*	14149.500	31.9	19.9	51.8	88.2	-36.4	Peak	Horizontal
*	14685.000	30.9	19.7	50.6	88.2	-37.6	Peak	Horizontal
	11421.000	30.6	17.4	48.0	74.0	-26.0	Peak	Vertical
	12084.000	30.7	16.9	47.6	74.0	-26.4	Peak	Vertical
*	13724.500	30.3	19.2	49.5	88.2	-38.7	Peak	Vertical
*	14991.000	31.7	18.9	50.6	88.2	-37.6	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11506.000	31.8	17.4	49.2	74.0	-24.8	Peak	Horizontal
	12194.500	31.4	17.8	49.2	74.0	-24.8	Peak	Horizontal
*	14047.500	30.9	20.0	50.9	88.2	-37.3	Peak	Horizontal
*	14940.000	32.1	19.8	51.9	88.2	-36.3	Peak	Horizontal
	11548.500	31.3	17.7	49.0	74.0	-25.0	Peak	Vertical
	12058.500	29.4	17.0	46.4	74.0	-27.6	Peak	Vertical
*	13707.500	30.5	19.1	49.6	88.2	-38.6	Peak	Vertical
*	14914.500	31.9	19.5	51.4	88.2	-36.8	Peak	Vertical

Note 1: "*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11242.500	30.4	17.1	47.5	74.0	-26.5	Peak	Horizontal
	12041.500	30.5	17.0	47.5	74.0	-26.5	Peak	Horizontal
*	13937.000	30.0	19.6	49.6	88.2	-38.6	Peak	Horizontal
*	14821.000	30.8	19.6	50.4	88.2	-37.8	Peak	Horizontal
	11514.500	30.6	17.3	47.9	74.0	-26.1	Peak	Vertical
	11897.000	29.7	17.4	47.1	74.0	-26.9	Peak	Vertical
*	13886.000	28.2	19.4	47.6	88.2	-40.6	Peak	Vertical
*	14812.500	29.9	19.4	49.3	88.2	-38.9	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11650.500	31.9	17.8	49.7	74.0	-24.3	Peak	Horizontal
	12177.500	30.4	17.7	48.1	74.0	-25.9	Peak	Horizontal
*	14039.000	28.7	19.9	48.6	88.2	-39.6	Peak	Horizontal
*	14821.000	30.8	19.6	50.4	88.2	-37.8	Peak	Horizontal
	11574.000	30.8	17.7	48.5	74.0	-25.5	Peak	Vertical
	12245.500	30.4	17.6	48.0	74.0	-26.0	Peak	Vertical
*	13733.000	28.3	18.9	47.2	88.2	-41.0	Peak	Vertical
*	14753.000	31.0	19.5	50.5	88.2	-37.7	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE160	Test Channel	111
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11557.000	31.4	17.9	49.3	74.0	-24.7	Peak	Horizontal
	12220.000	30.5	17.5	48.0	74.0	-26.0	Peak	Horizontal
*	13775.500	30.1	19.0	49.1	88.2	-39.1	Peak	Horizontal
*	14957.000	31.3	19.1	50.4	88.2	-37.8	Peak	Horizontal
	11387.000	29.1	17.4	46.5	74.0	-27.5	Peak	Vertical
	12118.000	30.5	17.1	47.6	74.0	-26.4	Peak	Vertical
*	13928.500	29.8	19.1	48.9	88.2	-39.3	Peak	Vertical
*	14906.000	30.7	19.3	50.0	88.2	-38.2	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11149.000	31.1	16.6	47.7	74.0	-26.3	Peak	Horizontal
	11795.000	29.9	17.7	47.6	74.0	-26.4	Peak	Horizontal
*	13869.000	30.1	19.1	49.2	88.2	-39.0	Peak	Horizontal
*	14897.500	31.1	19.1	50.2	88.2	-38.0	Peak	Horizontal
	11174.500	29.2	17.0	46.2	74.0	-27.8	Peak	Vertical
	11905.500	30.2	17.4	47.6	74.0	-26.4	Peak	Vertical
*	14132.500	30.9	20.0	50.9	88.2	-37.3	Peak	Vertical
*	14838.000	31.1	19.8	50.9	88.2	-37.3	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE160	Test Channel	175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11514.500	31.0	17.3	48.3	74.0	-25.7	Peak	Horizontal
	12033.000	31.4	17.0	48.4	74.0	-25.6	Peak	Horizontal
*	13962.500	30.7	19.5	50.2	88.2	-38.0	Peak	Horizontal
*	14948.500	32.4	19.4	51.8	88.2	-36.4	Peak	Horizontal
	11242.500	30.7	17.1	47.8	74.0	-26.2	Peak	Vertical
	11795.000	30.1	17.7	47.8	74.0	-26.2	Peak	Vertical
*	13707.500	29.8	19.1	48.9	88.2	-39.3	Peak	Vertical
*	14821.000	31.0	19.6	50.6	88.2	-37.6	Peak	Vertical
Note 1: "*" is not in restricted band.								
Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Tri-band Wi-Fi 6E Wireless AP	Test Engineer	Karl Gao
Test Site	WZ-AC2	Test Date	2024-02-04 ~ 2024-02-05
Test Mode	802.11ax-HE160	Test Channel	207
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	11531.500	31.3	17.3	48.6	74.0	-25.4	Peak	Horizontal
	12126.500	31.0	17.2	48.2	74.0	-25.8	Peak	Horizontal
*	14030.500	30.1	19.8	49.9	88.2	-38.3	Peak	Horizontal
*	14829.500	30.4	19.7	50.1	88.2	-38.1	Peak	Horizontal
	11480.500	31.6	17.6	49.2	74.0	-24.8	Peak	Vertical
	12296.500	30.9	17.6	48.5	74.0	-25.5	Peak	Vertical
*	13937.000	30.6	19.6	50.2	88.2	-38.0	Peak	Vertical
*	15016.500	31.6	19.4	51.0	88.2	-37.2	Peak	Vertical
Note 1: "*" is not in restricted band. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

The Result of Radiated Emission below 1GHz:

Site: WZ-AC2	Test Date: 2024-02-05 - 11:42
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bob Zhang
Probe: VULB9162_30-7000MHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE160 at 6505MHz	

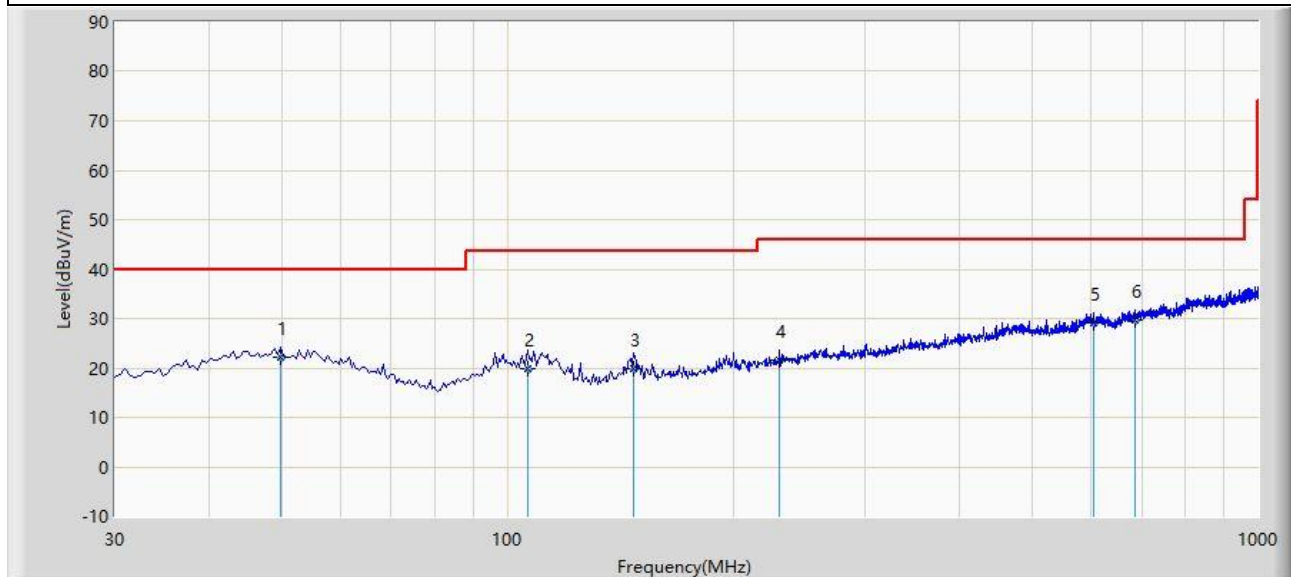

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		49.885	22.233	1.700	-17.767	40.000	20.534	QP
2		106.630	19.749	1.300	-23.751	43.500	18.449	QP
3		147.370	19.901	4.800	-23.599	43.500	15.101	QP
4		230.300	21.512	2.100	-24.488	46.000	19.412	QP
5		603.200	29.004	1.500	-16.996	46.000	27.504	QP
6	*	685.235	29.771	1.100	-16.229	46.000	28.671	QP

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC2	Test Date: 2024-02-05 - 11:50
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bob Zhang
Probe: VULB9162_30-7000MHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE160 at 6505MHz	

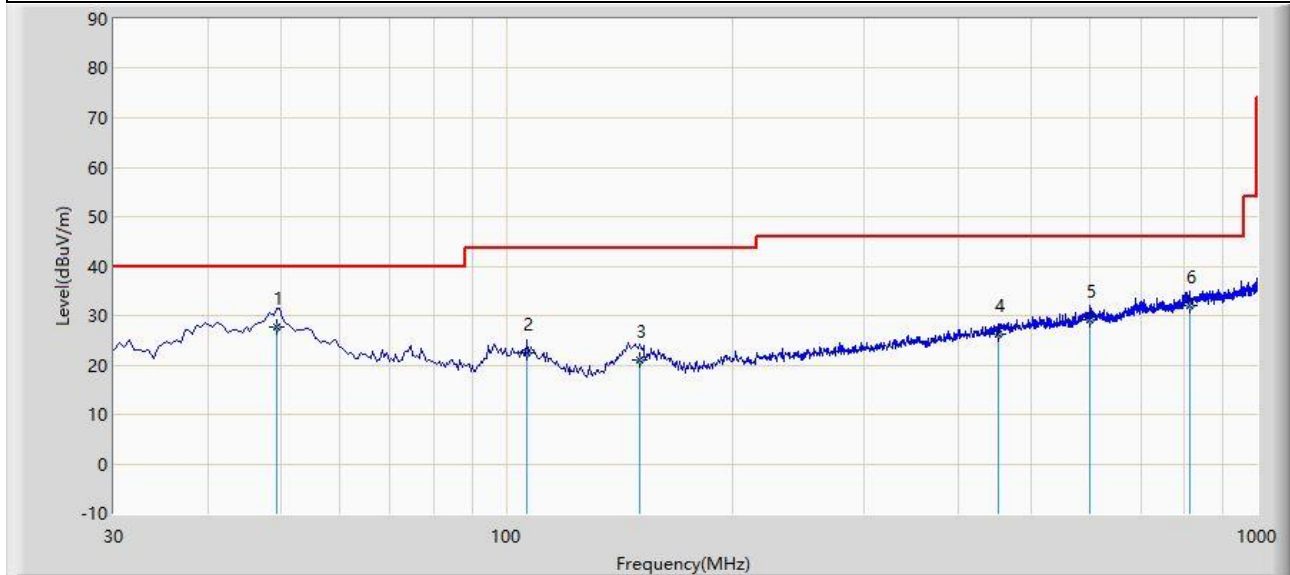

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	49.440	27.664	7.100	-12.336	40.000	20.564	QP
2		106.630	22.409	3.960	-21.091	43.500	18.449	QP
3		150.765	21.121	5.900	-22.379	43.500	15.221	QP
4		451.600	26.128	1.900	-19.872	46.000	24.227	QP
5		599.800	29.060	1.500	-16.940	46.000	27.560	QP
6		814.730	31.923	1.300	-14.077	46.000	30.623	QP

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

A.9 Radiated Restricted Band Edge Test Result

Site: WZ-AC2	Test Date: 2024-02-04 - 18:53
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5955MHz	

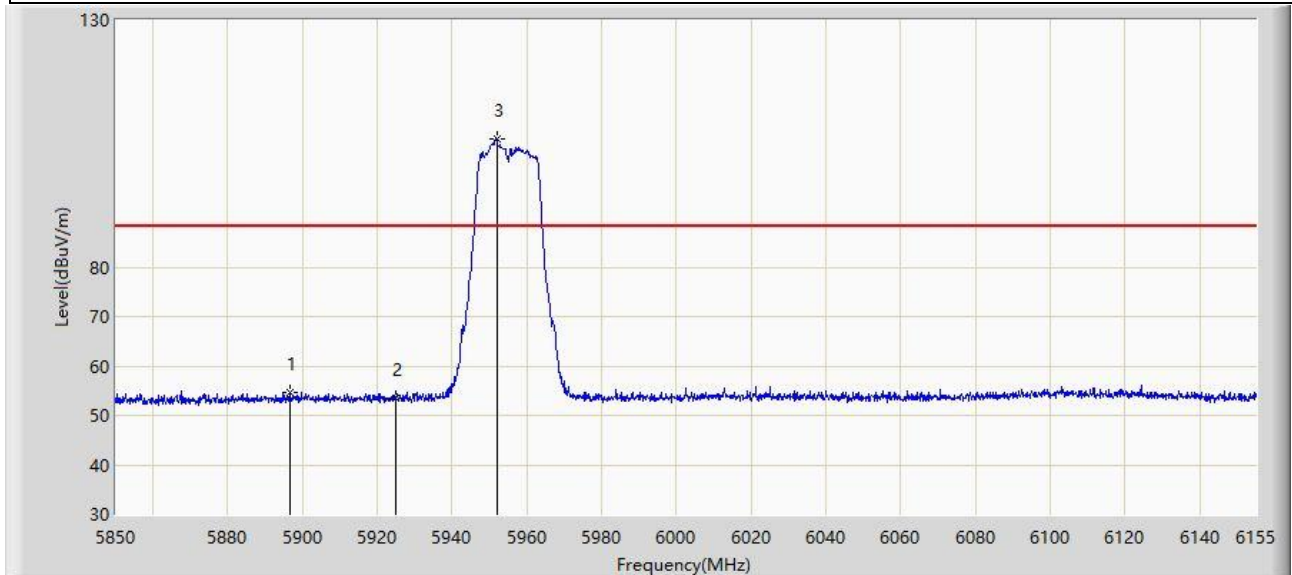


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5896.513	54.607	49.497	-33.593	88.200	5.109	PK
2		5925.000	53.492	48.257	-34.708	88.200	5.236	PK
3		5951.870	106.034	100.670	N/A	N/A	5.364	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 20:18
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5955MHz	

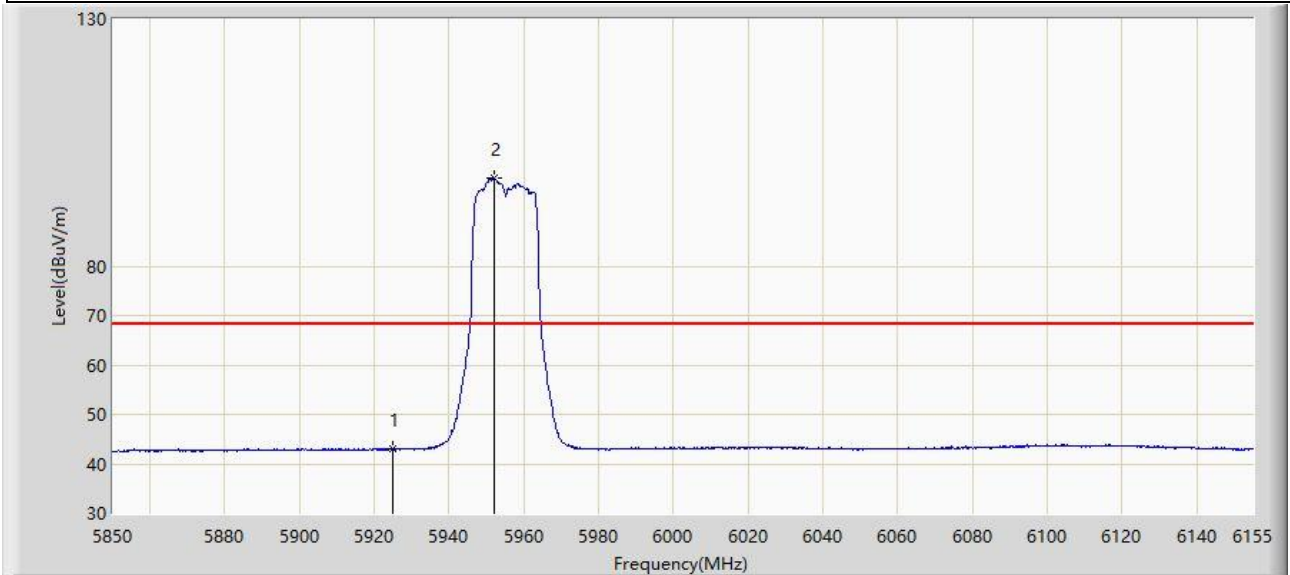


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	42.964	37.729	-25.236	68.200	5.236	AV
2		5951.870	97.964	92.600	N/A	N/A	5.364	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 20:20
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5955MHz	

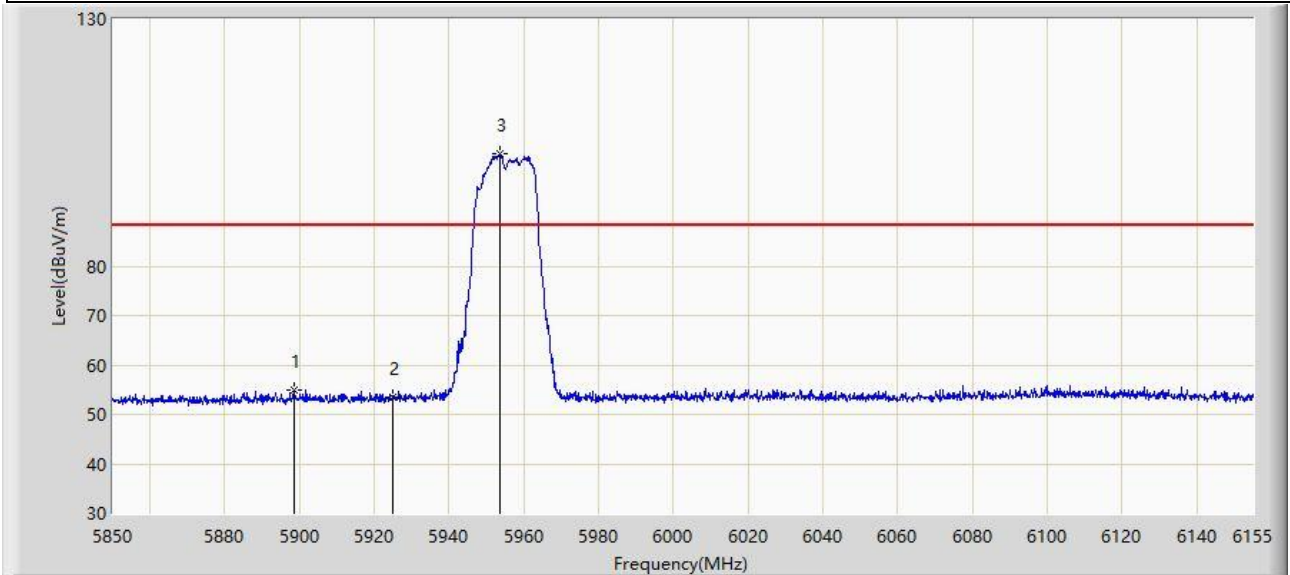


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5898.495	54.858	49.744	-33.342	88.200	5.114	PK
2		5925.000	53.535	48.300	-34.665	88.200	5.236	PK
3		5953.547	102.716	97.346	N/A	N/A	5.370	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 20:21
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5955MHz	

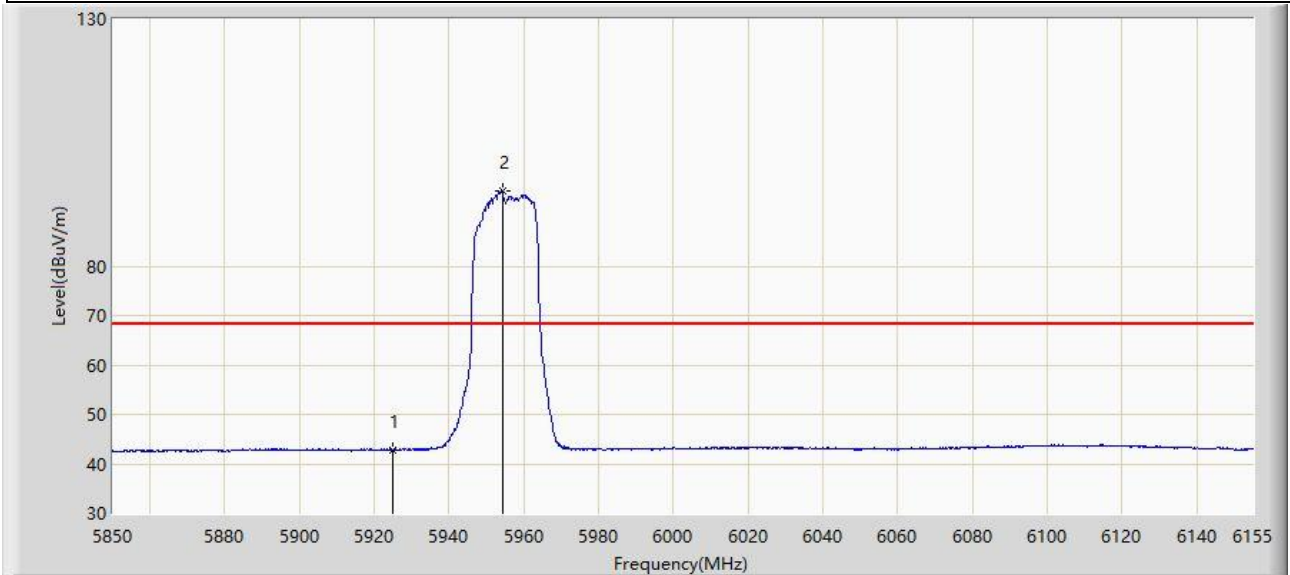


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	42.827	37.592	-25.373	68.200	5.236	AV
2		5954.158	95.159	89.787	N/A	N/A	5.372	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 20:33
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 7095MHz	

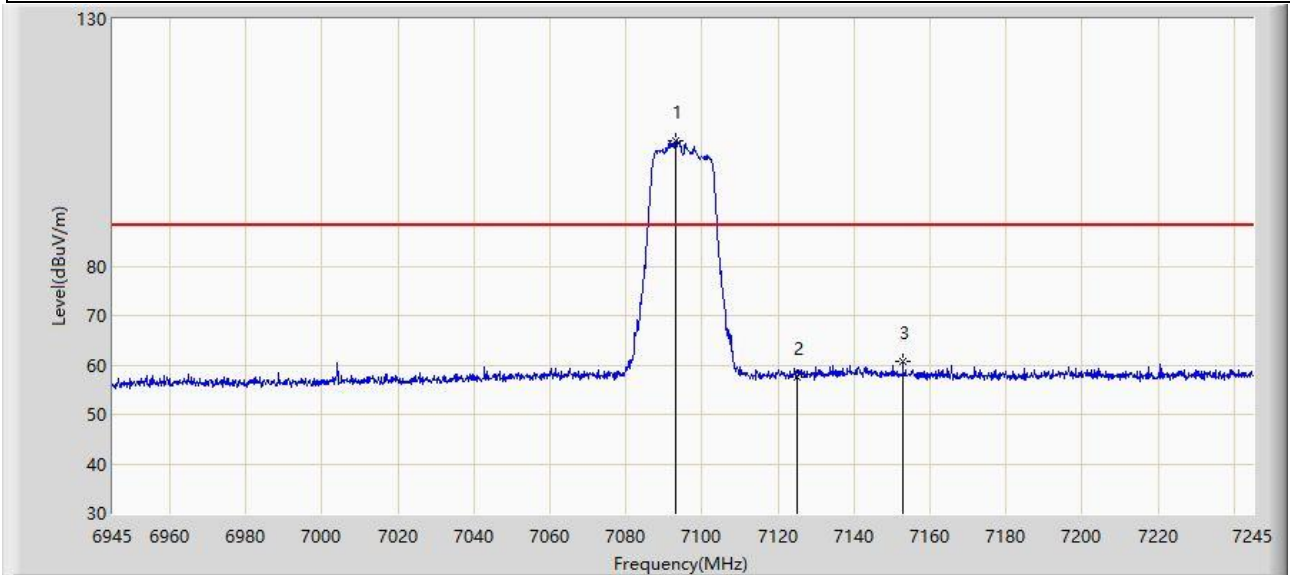


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7093.050	105.459	94.476	N/A	N/A	10.984	PK
2		7125.000	57.462	46.248	-30.738	88.200	11.214	PK
3	*	7152.900	60.639	48.922	-27.561	88.200	11.717	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 20:38
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 7095MHz	

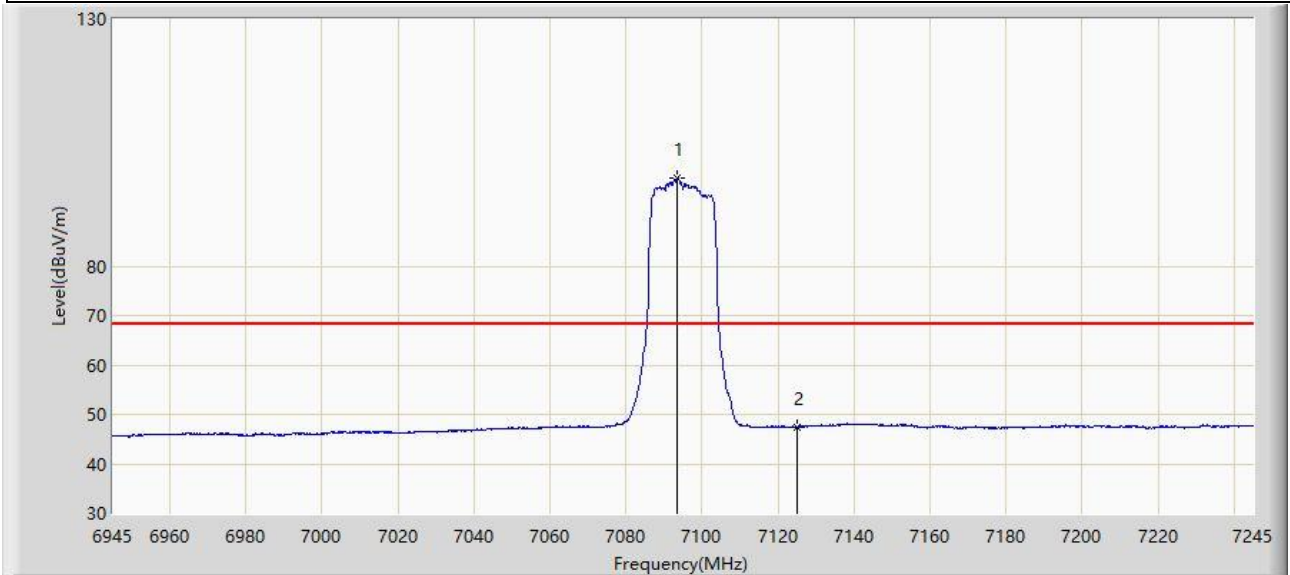


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7093.650	97.794	86.813	N/A	N/A	10.981	AV
2	*	7125.000	47.467	36.253	-20.733	68.200	11.214	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 20:39
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 7095MHz	

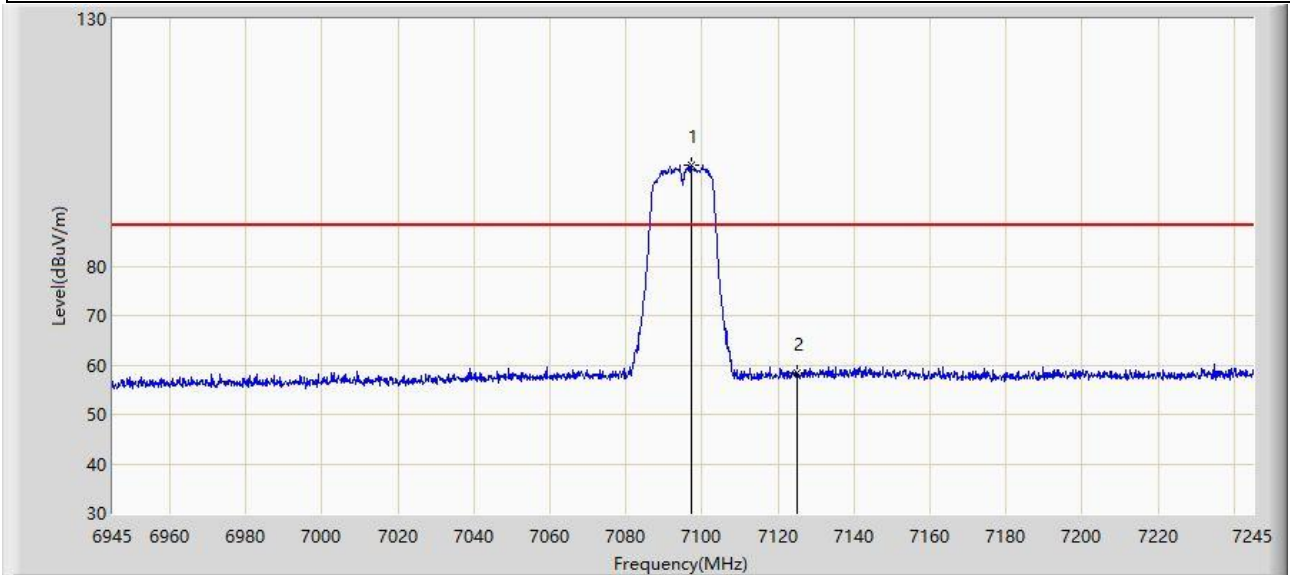


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7097.100	100.349	89.379	N/A	N/A	10.970	PK
2	*	7125.000	58.325	47.111	-29.875	88.200	11.214	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 20:40
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 7095MHz	

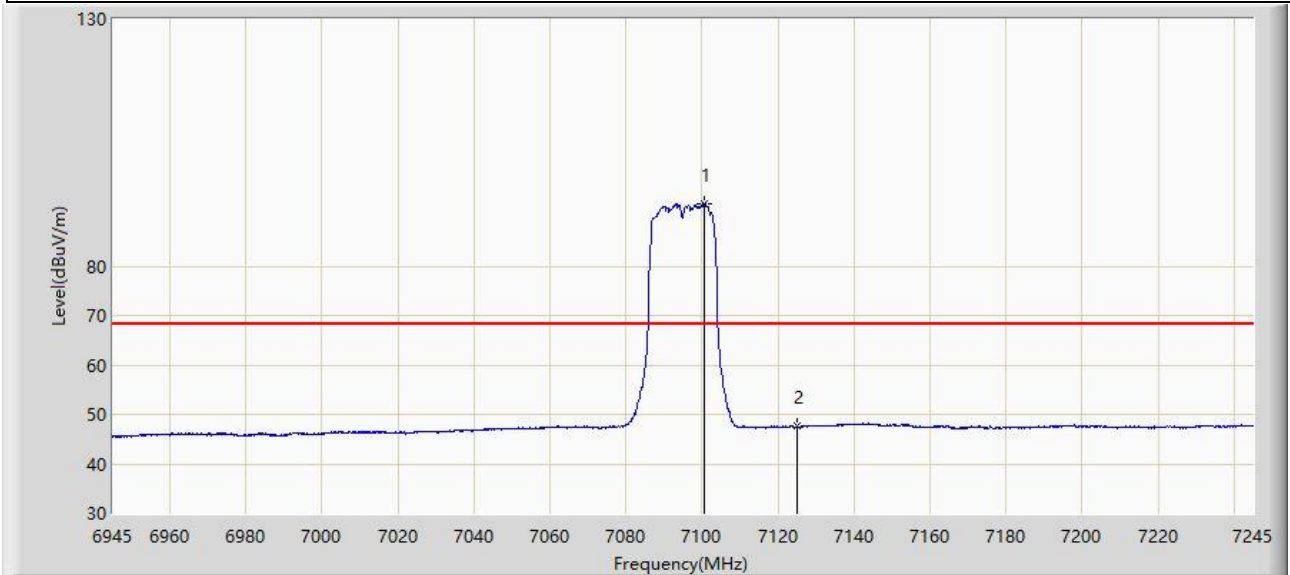


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7100.700	92.559	81.601	N/A	N/A	10.959	AV
2	*	7125.000	47.571	36.357	-20.629	68.200	11.214	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 20:42
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-20 at 5955MHz	

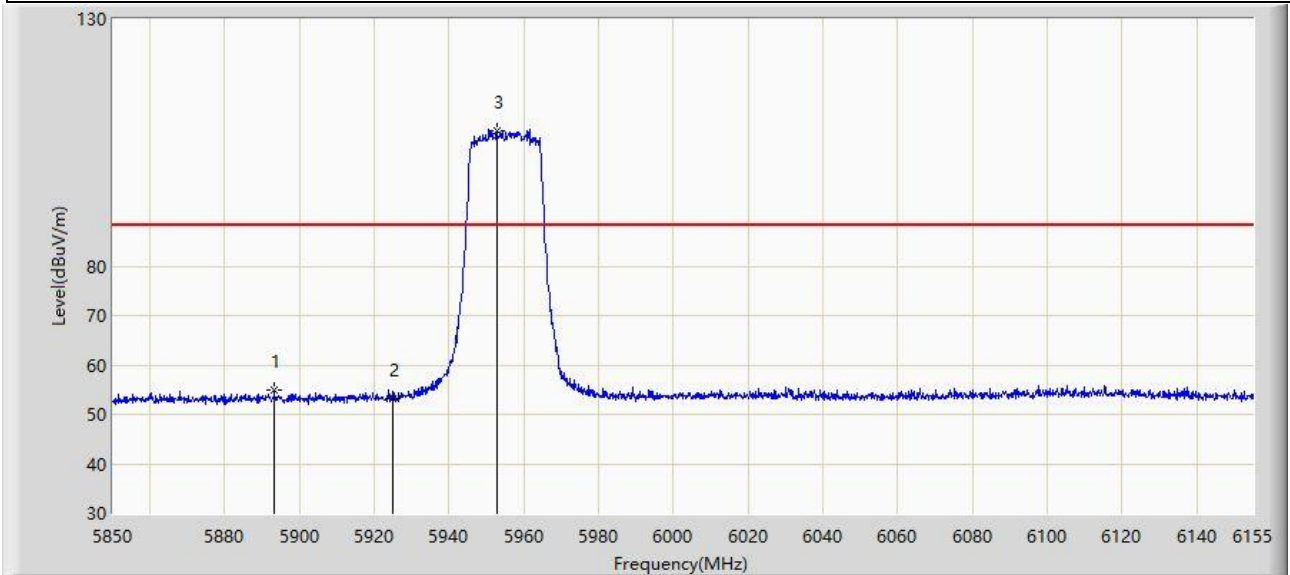


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5893.158	54.822	49.695	-33.378	88.200	5.127	PK
2		5925.000	53.316	48.081	-34.884	88.200	5.236	PK
3		5952.632	107.508	102.142	N/A	N/A	5.366	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 20:45
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-20 at 5955MHz	

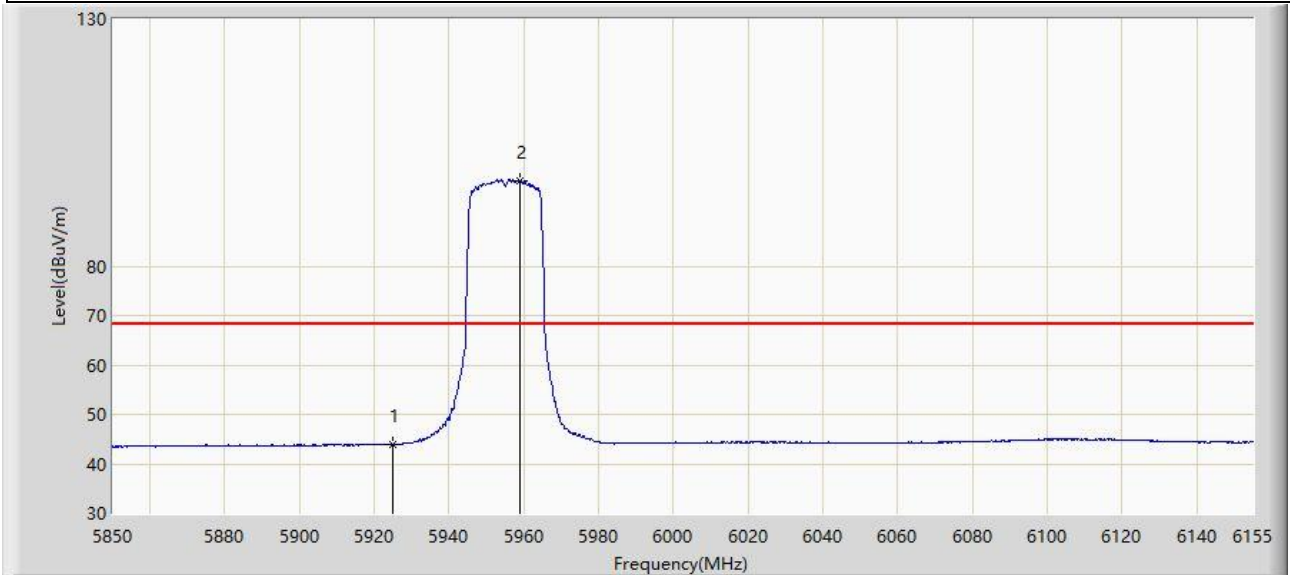


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	44.000	38.765	-24.200	68.200	5.236	AV
2		5958.885	97.292	91.902	N/A	N/A	5.390	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 20:47
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-20 at 5955MHz	

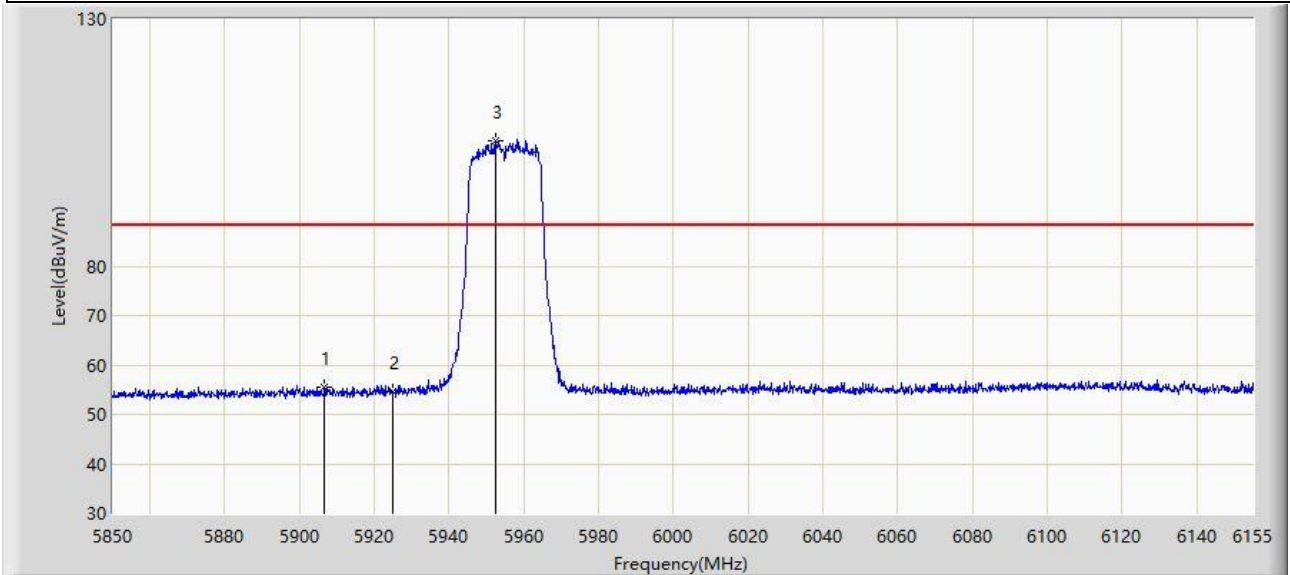


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5906.730	55.450	50.320	-32.750	88.200	5.130	PK
2		5925.000	54.572	49.337	-33.628	88.200	5.236	PK
3		5952.328	105.323	99.958	N/A	N/A	5.365	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 20:48
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-20 at 5955MHz	

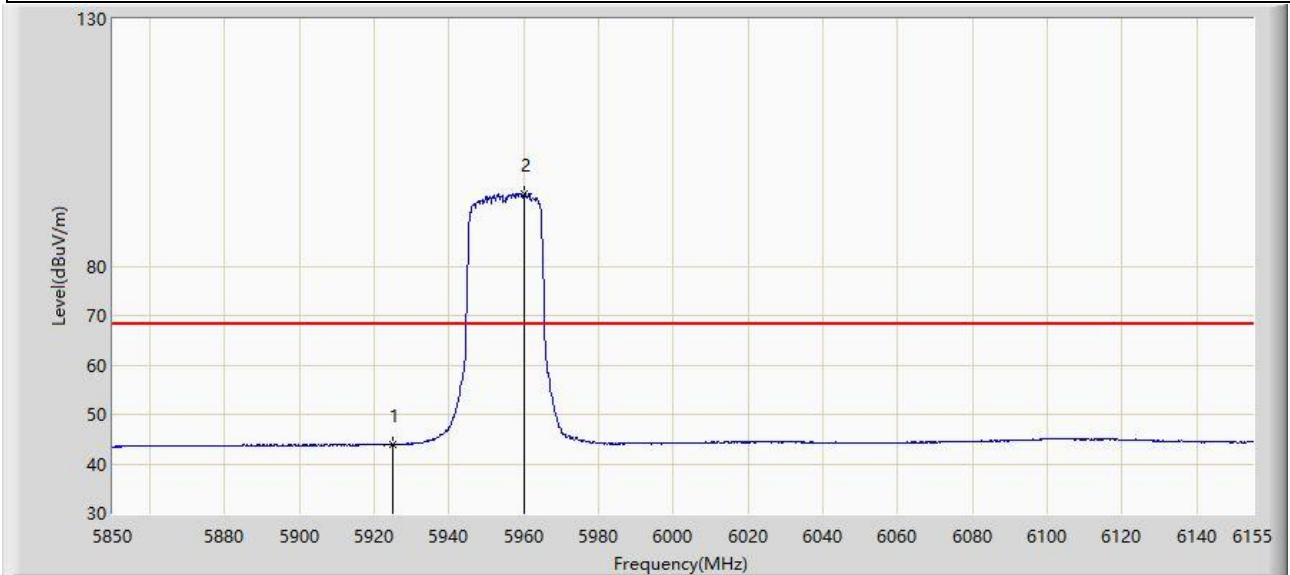


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	43.931	38.696	-24.269	68.200	5.236	AV
2		5960.257	94.498	89.105	N/A	N/A	5.393	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 20:50
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-20 at 7095MHz	

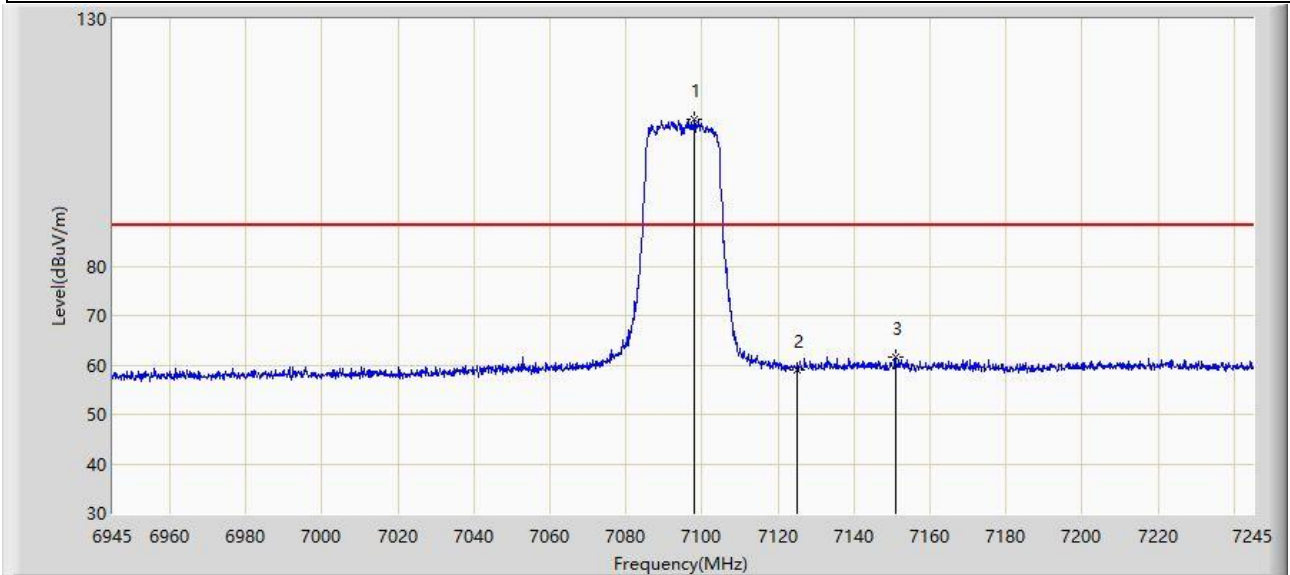


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7098.000	109.658	98.691	N/A	N/A	10.967	PK
2		7125.000	58.897	47.683	-29.303	88.200	11.214	PK
3	*	7150.950	61.683	49.951	-26.517	88.200	11.732	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 20:52
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-20 at 7095MHz	

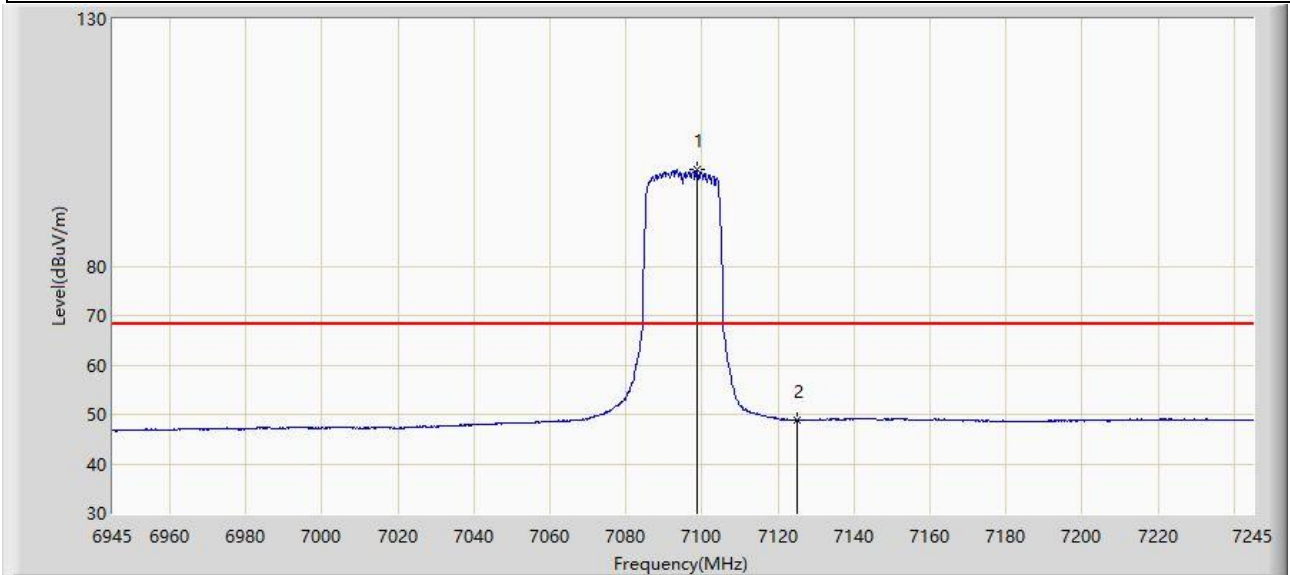


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7098.750	99.431	88.466	N/A	N/A	10.965	AV
2	*	7125.000	48.780	37.566	-19.420	68.200	11.214	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 20:53
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-20 at 7095MHz	

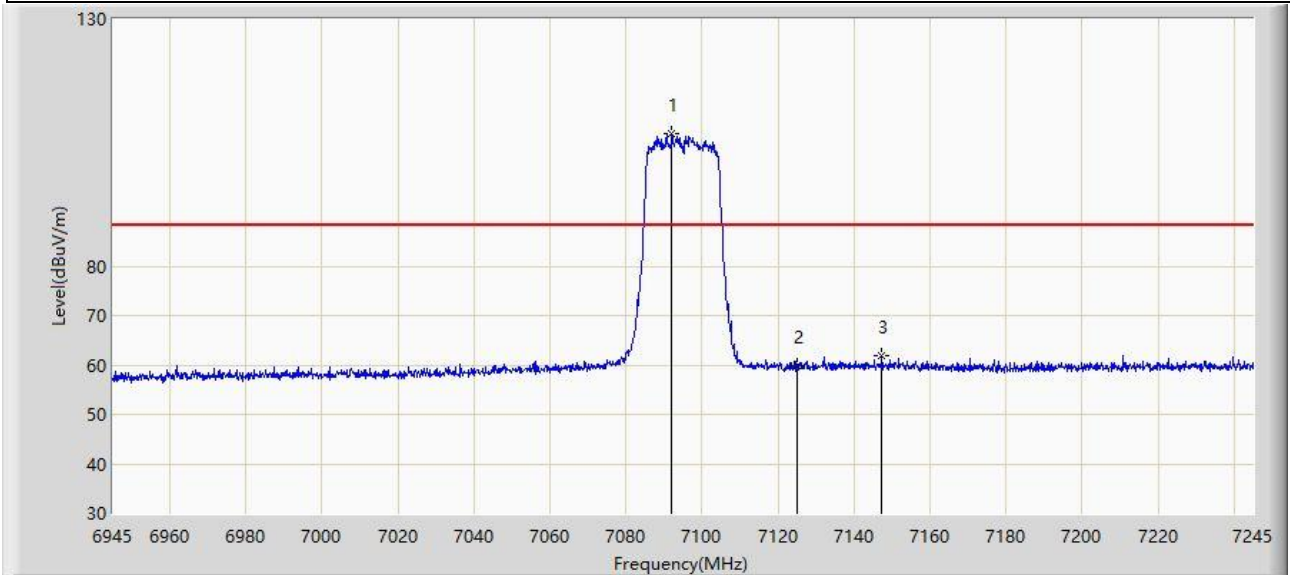


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7092.000	106.791	95.805	N/A	N/A	10.987	PK
2		7125.000	59.776	48.562	-28.424	88.200	11.214	PK
3	*	7147.350	61.999	50.241	-26.201	88.200	11.759	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 20:54
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-20 at 7095MHz	

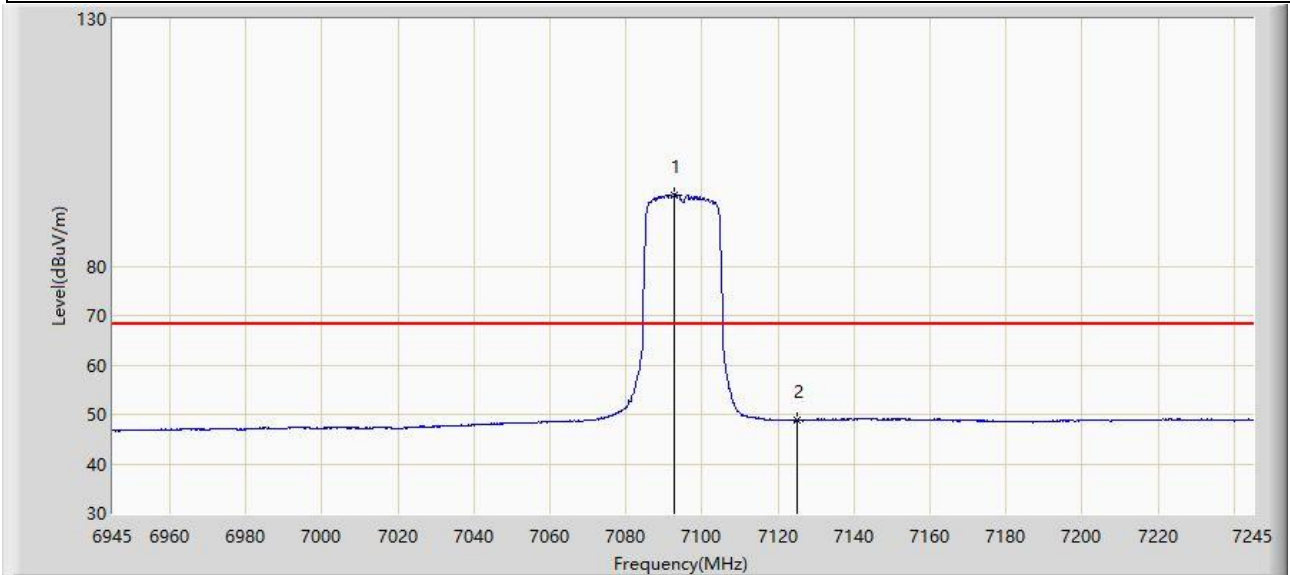


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7092.750	94.458	83.474	N/A	N/A	10.983	AV
2	*	7125.000	48.798	37.584	-19.402	68.200	11.214	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 20:56
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-40 at 5965MHz	

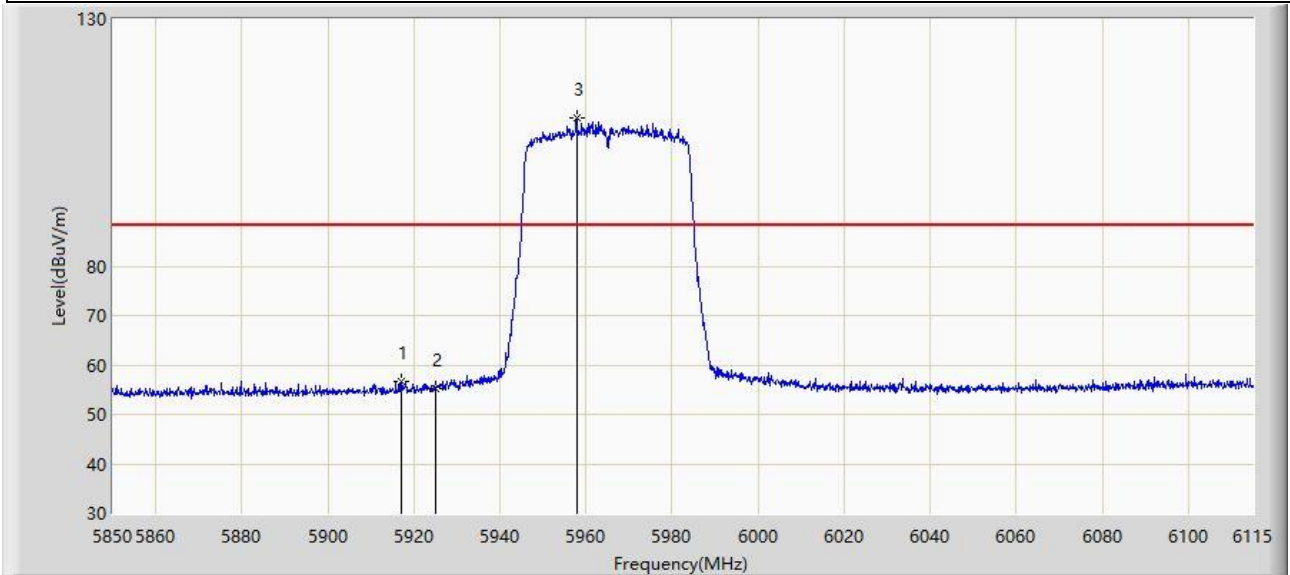


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5917.045	56.655	51.478	-31.545	88.200	5.176	PK
2		5925.000	55.339	50.104	-32.861	88.200	5.236	PK
3		5957.855	109.974	104.588	N/A	N/A	5.386	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 20:58
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-40 at 5965MHz	

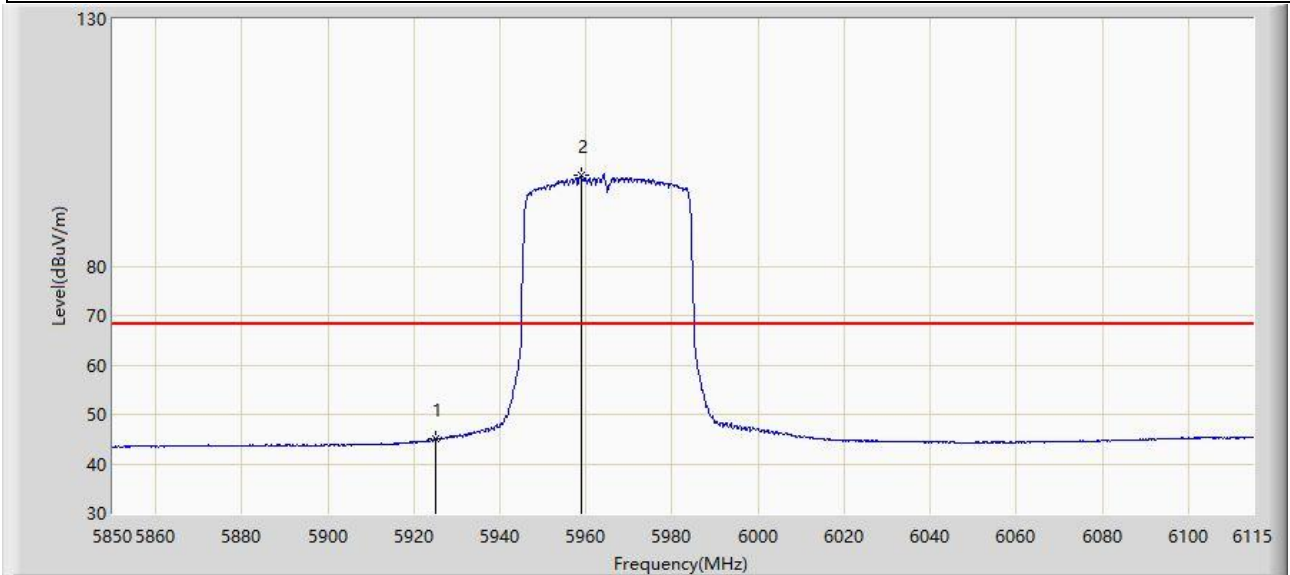


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	45.010	39.775	-23.190	68.200	5.236	AV
2		5958.783	98.487	93.098	N/A	N/A	5.388	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:00
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-40 at 5965MHz	

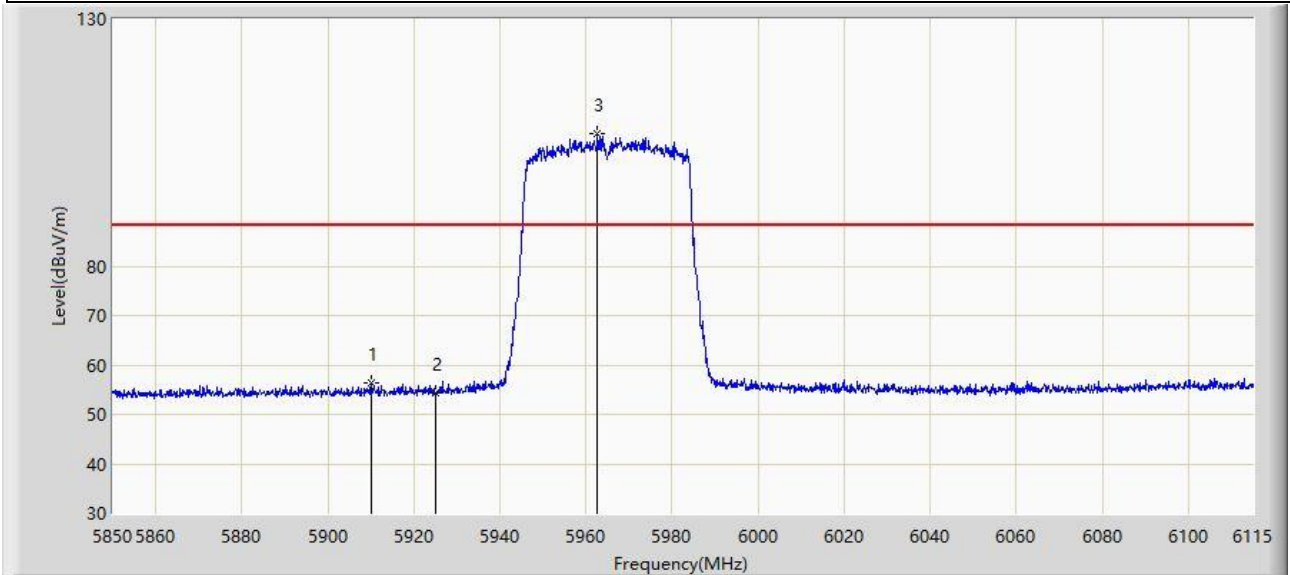


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5910.022	56.450	51.312	-31.750	88.200	5.139	PK
2		5925.000	54.472	49.237	-33.728	88.200	5.236	PK
3		5962.625	106.819	101.448	N/A	N/A	5.371	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:01
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-40 at 5965MHz	

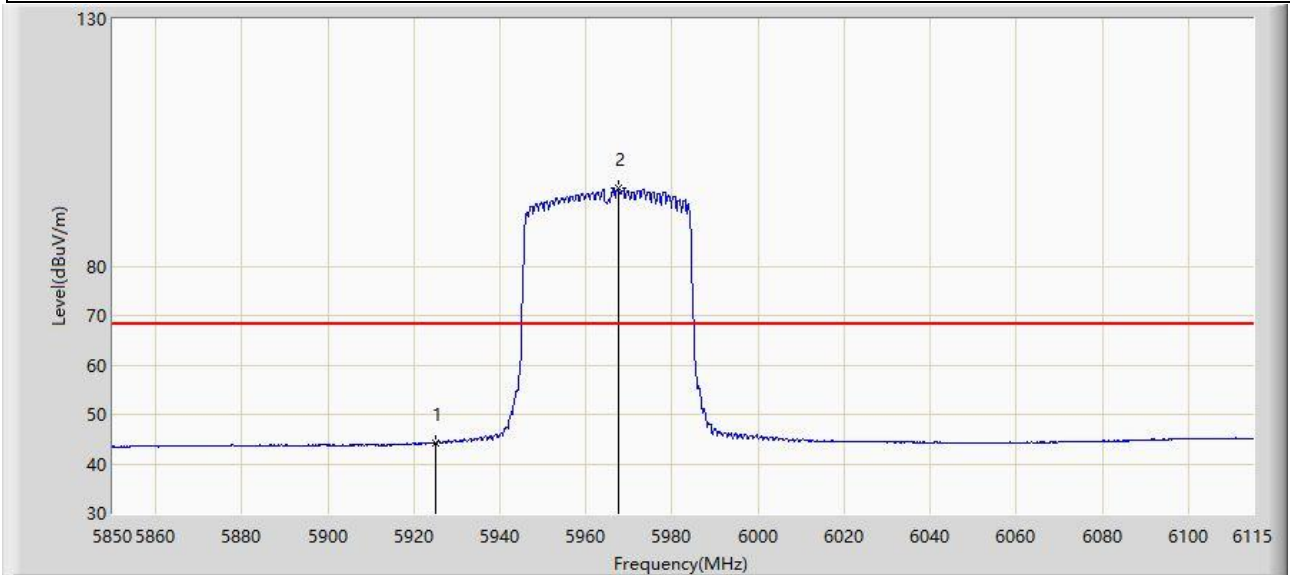


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	44.220	38.985	-23.980	68.200	5.236	AV
2		5967.527	95.767	90.439	N/A	N/A	5.328	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:03
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-40 at 7085MHz	

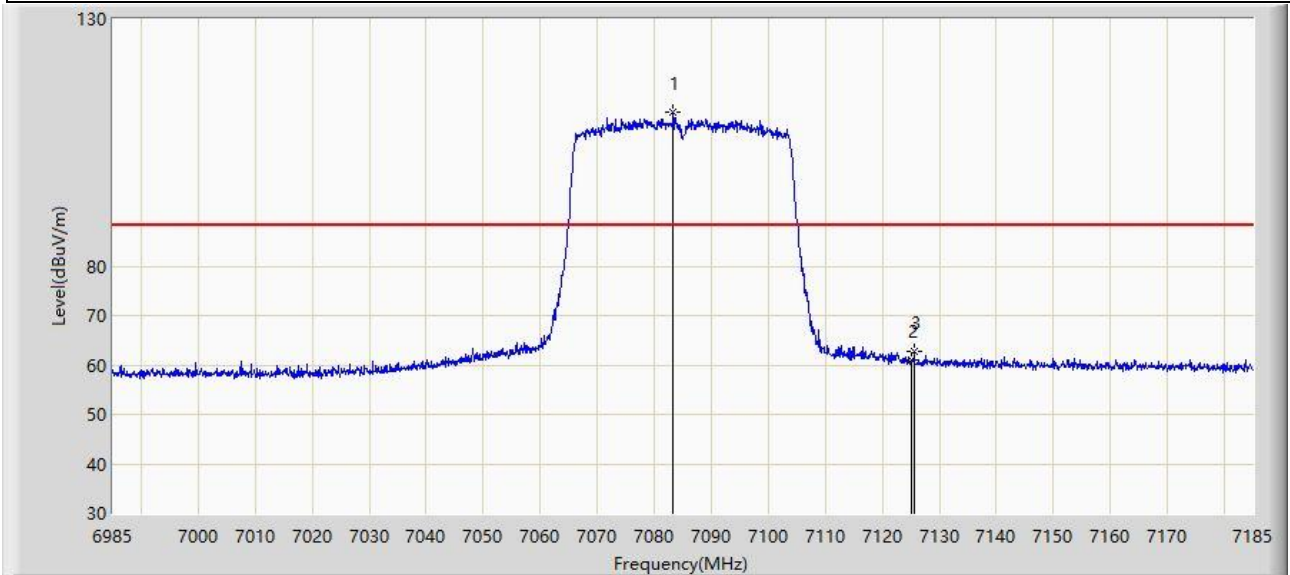


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7083.300	111.093	100.069	N/A	N/A	11.023	PK
2		7125.000	60.890	49.676	-27.310	88.200	11.214	PK
3	*	7125.600	62.634	51.408	-25.566	88.200	11.226	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:04
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-40 at 7085MHz	

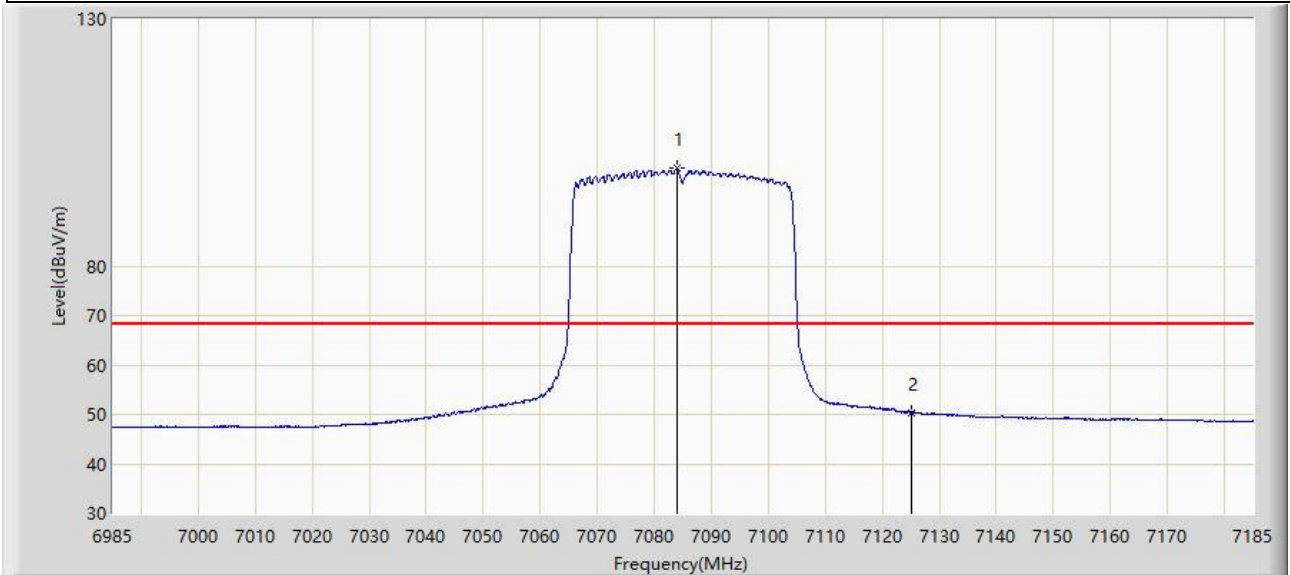


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7084.100	99.759	88.739	N/A	N/A	11.020	AV
2	*	7125.000	50.431	39.217	-17.769	68.200	11.214	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:06
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-40 at 7085MHz	

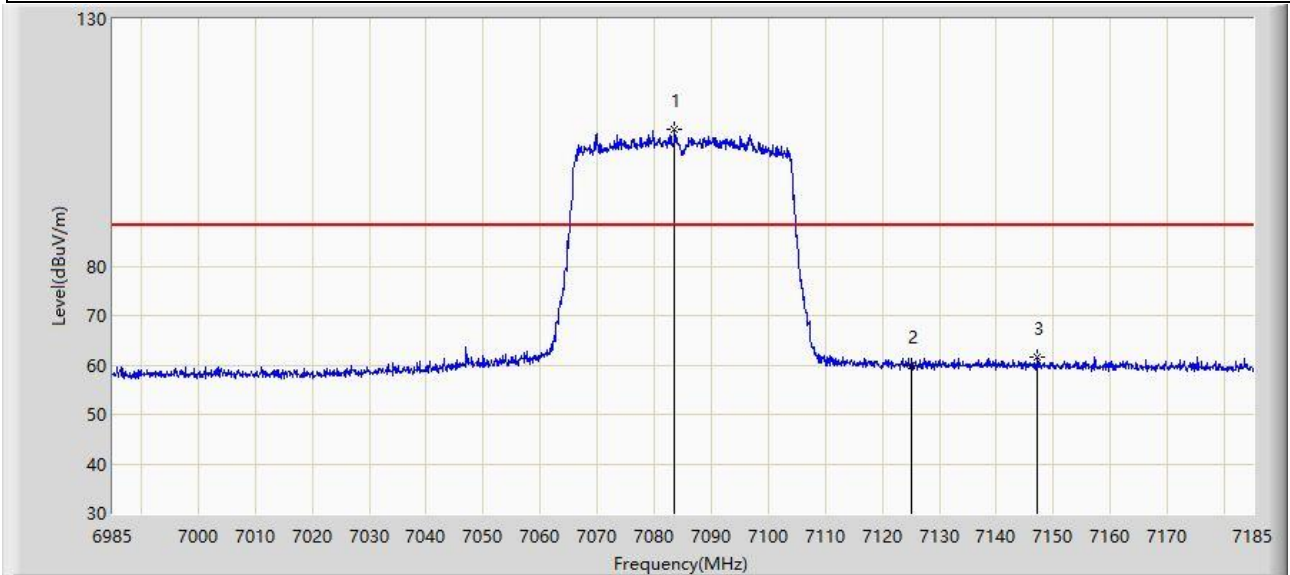


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7083.600	107.537	96.515	N/A	N/A	11.022	PK
2		7125.000	59.951	48.737	-28.249	88.200	11.214	PK
3	*	7147.200	61.533	49.773	-26.667	88.200	11.759	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:07
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-40 at 7085MHz	

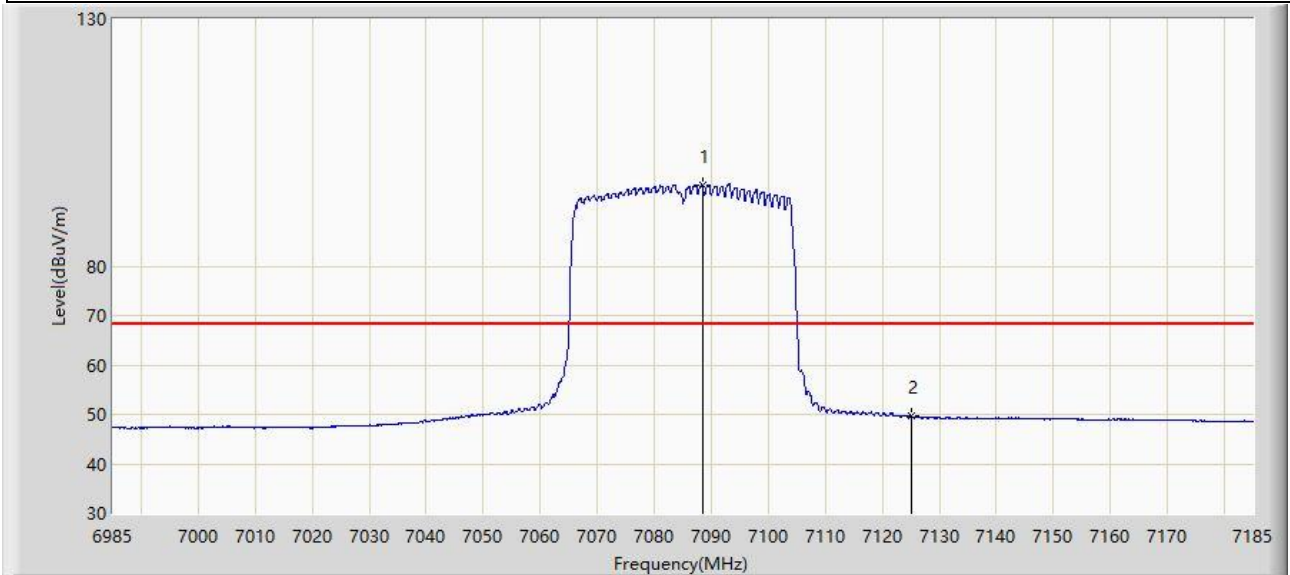


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7088.400	96.367	85.366	N/A	N/A	11.000	AV
2	*	7125.000	49.635	38.421	-18.565	68.200	11.214	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:09
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-80 at 5985MHz	

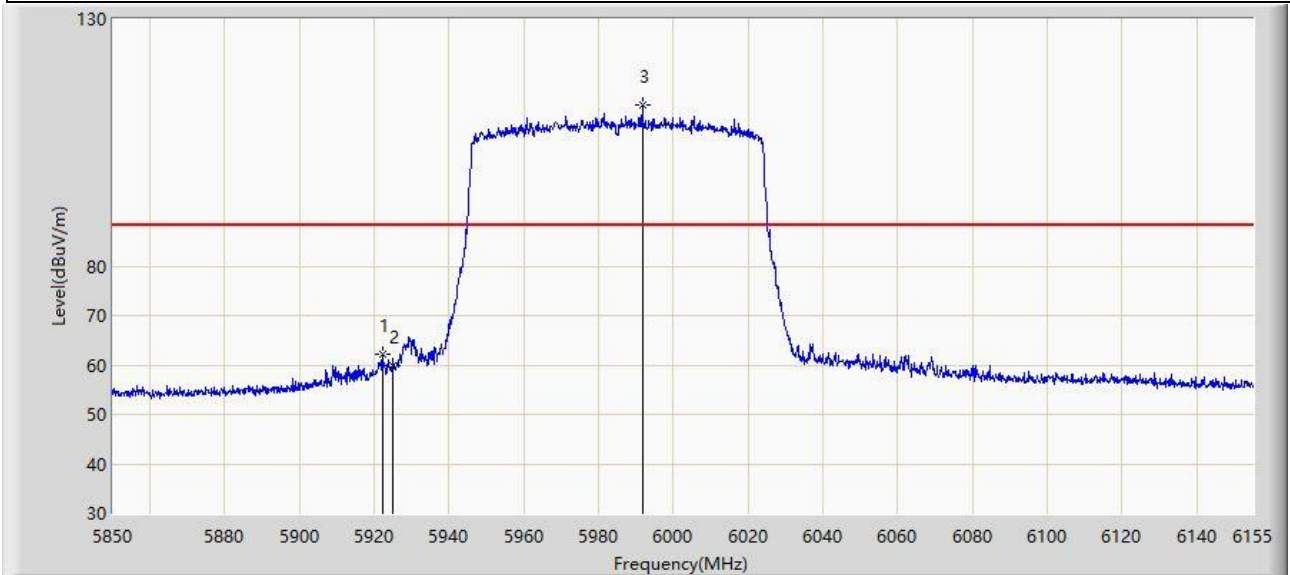


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5922.132	62.072	56.857	-26.128	88.200	5.215	PK
2		5925.000	59.927	54.692	-28.273	88.200	5.236	PK
3		5991.672	112.493	107.159	N/A	N/A	5.334	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:11
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-80 at 5985MHz	

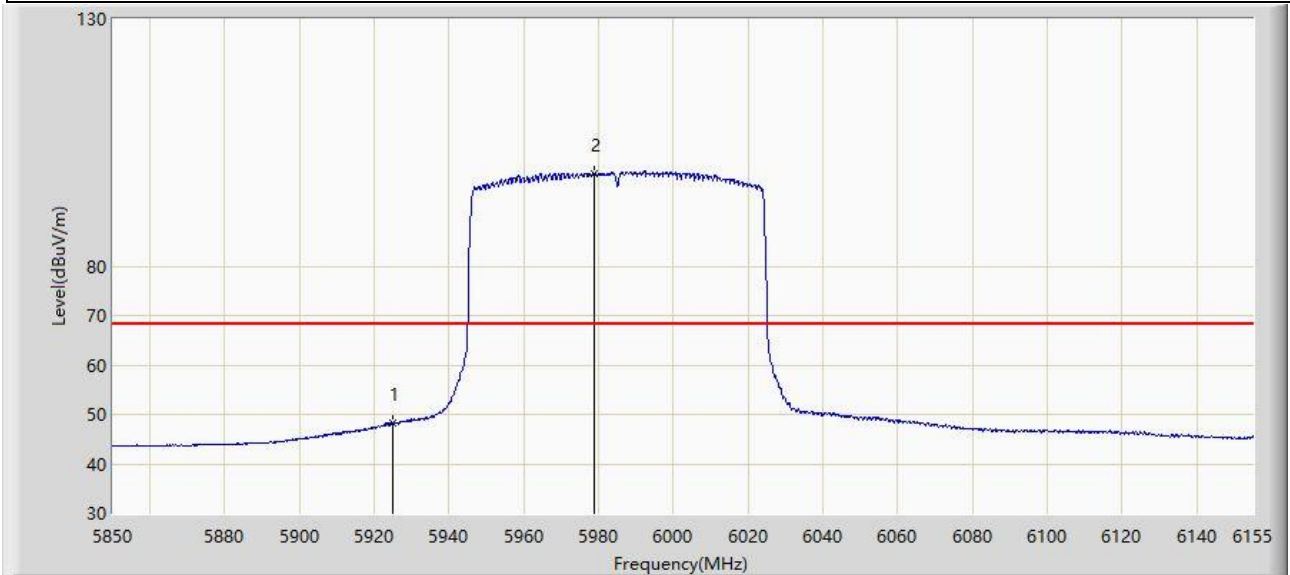


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	48.169	42.934	-20.031	68.200	5.236	AV
2		5985.710	98.801	93.565	N/A	N/A	5.237	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:12
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-80 at 5985MHz	

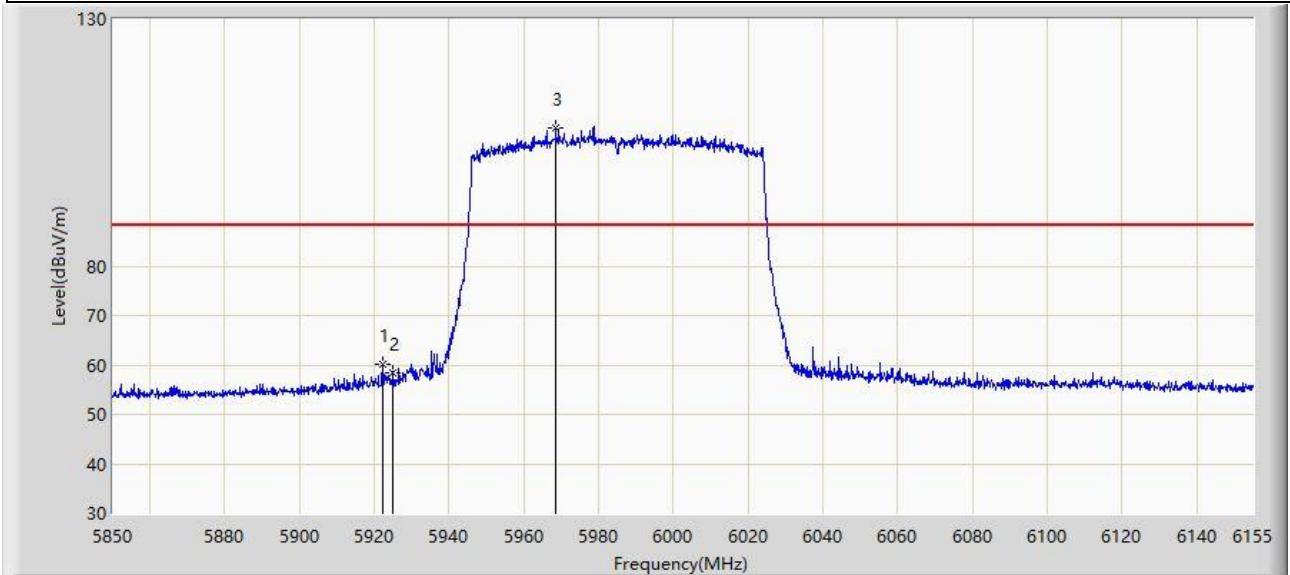


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5922.285	60.012	54.796	-28.188	88.200	5.216	PK
2		5925.000	58.405	53.170	-29.795	88.200	5.236	PK
3		5968.493	107.946	102.626	N/A	N/A	5.319	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:13
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-80 at 5985MHz	

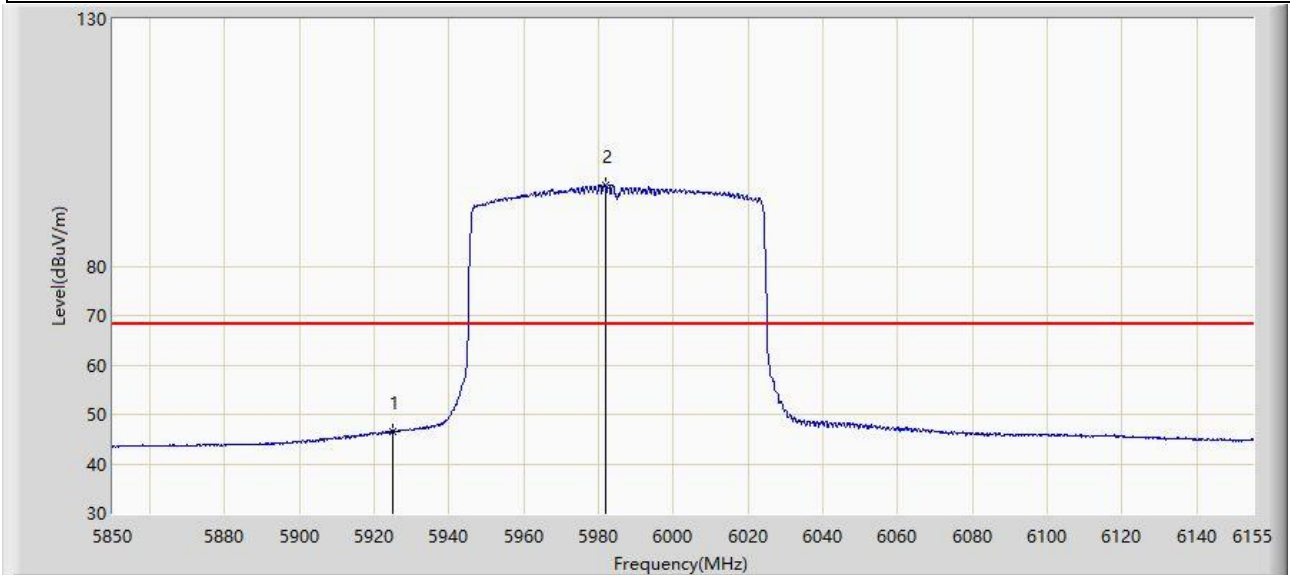


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	46.570	41.335	-21.630	68.200	5.236	AV
2		5981.760	96.444	91.205	N/A	N/A	5.239	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:15
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-80 at 7025MHz	

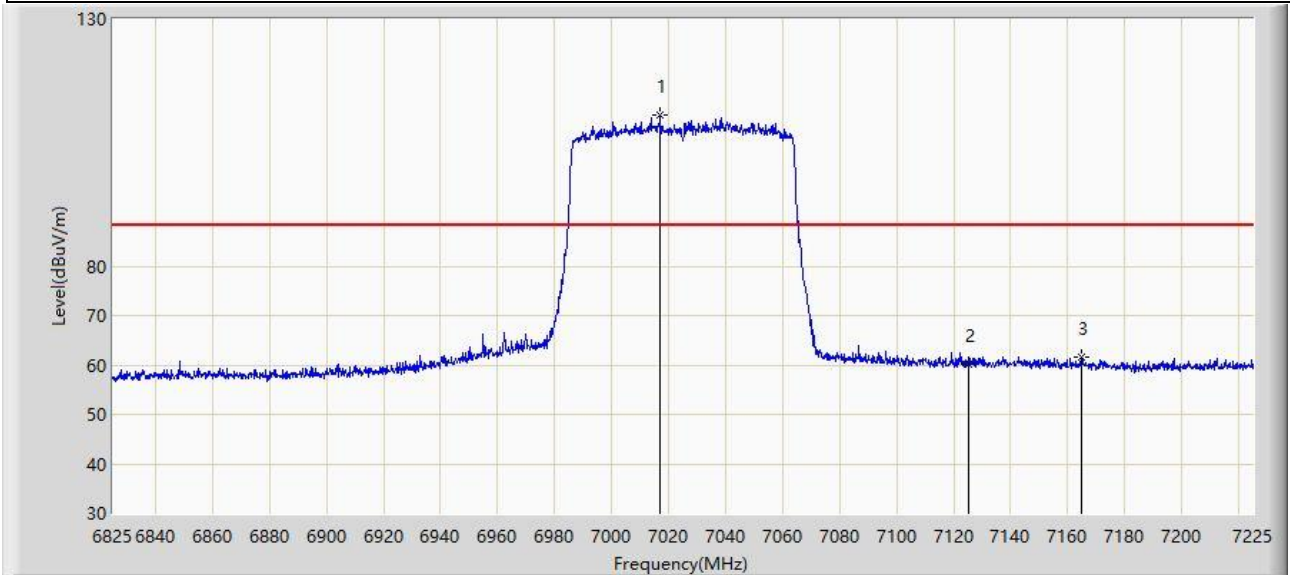


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7017.000	110.655	100.527	N/A	N/A	10.128	PK
2		7125.000	60.229	49.015	-27.971	88.200	11.214	PK
3	*	7165.000	61.557	50.087	-26.643	88.200	11.471	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:16
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-80 at 7025MHz	

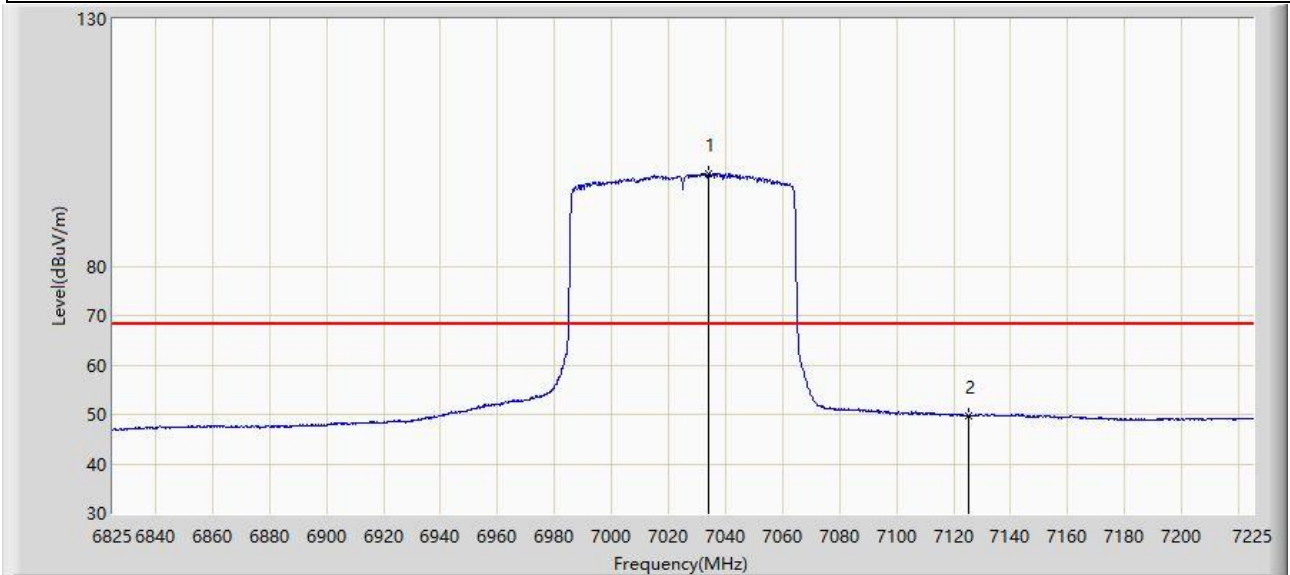


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7033.800	98.609	88.188	N/A	N/A	10.421	AV
2	*	7125.000	49.778	38.564	-18.422	68.200	11.214	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:17
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-80 at 7025MHz	

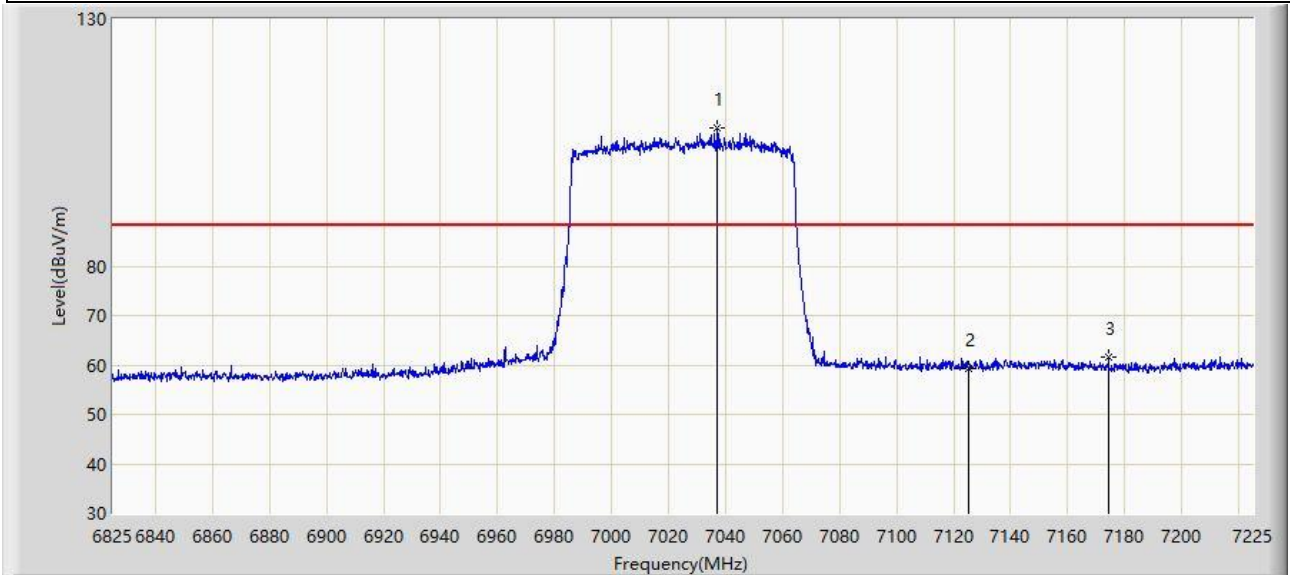


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7037.200	107.846	97.324	N/A	N/A	10.523	PK
2		7125.000	59.222	48.008	-28.978	88.200	11.214	PK
3	*	7174.400	61.693	50.452	-26.507	88.200	11.241	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:18
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-80 at 7025MHz	

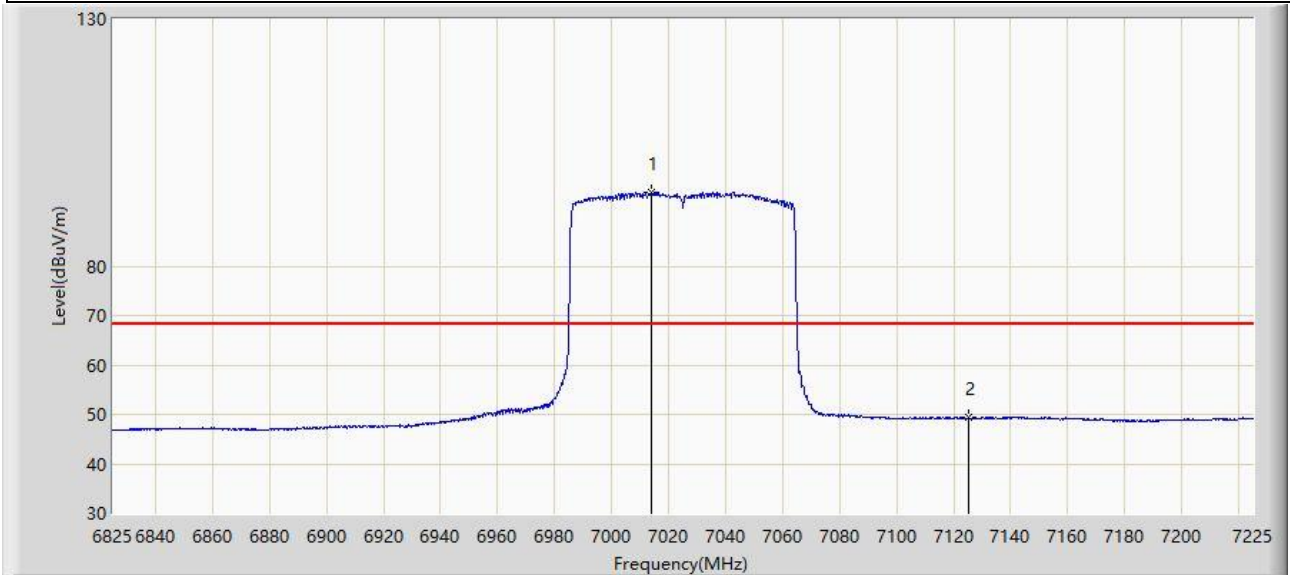


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7014.000	94.838	84.700	N/A	N/A	10.138	AV
2	*	7125.000	49.306	38.092	-18.894	68.200	11.214	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:20
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-160 at 6025MHz	

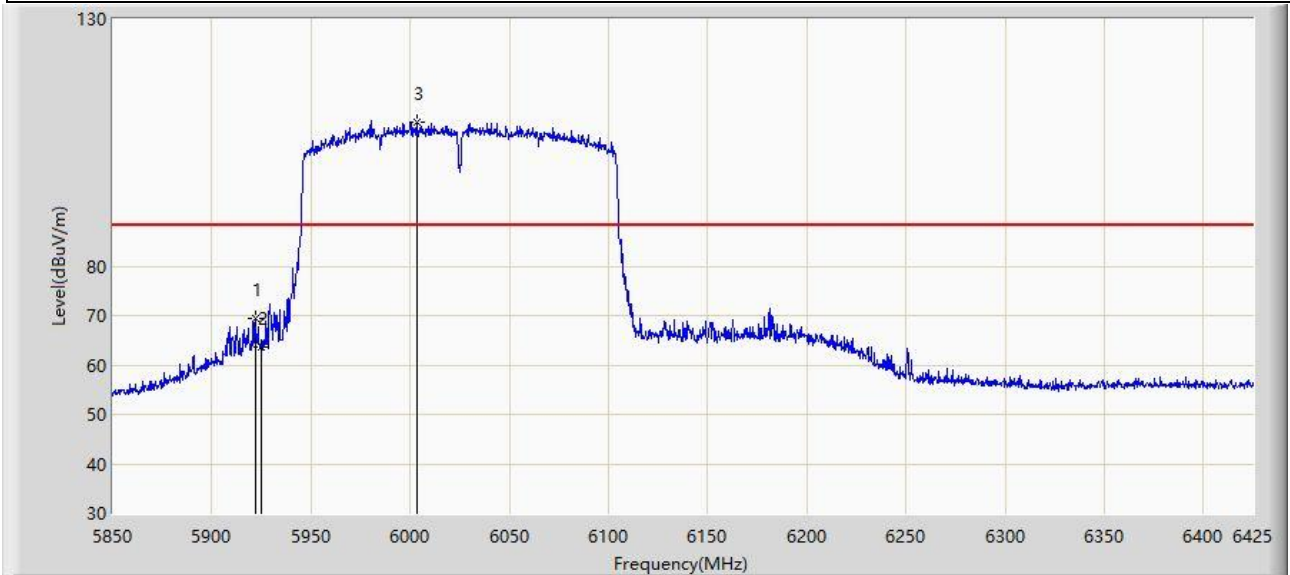


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5921.875	69.322	64.109	-18.878	88.200	5.213	PK
2		5925.000	63.685	58.450	-24.515	88.200	5.236	PK
3		6003.237	109.168	103.716	N/A	N/A	5.452	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:22
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-160 at 6025MHz	

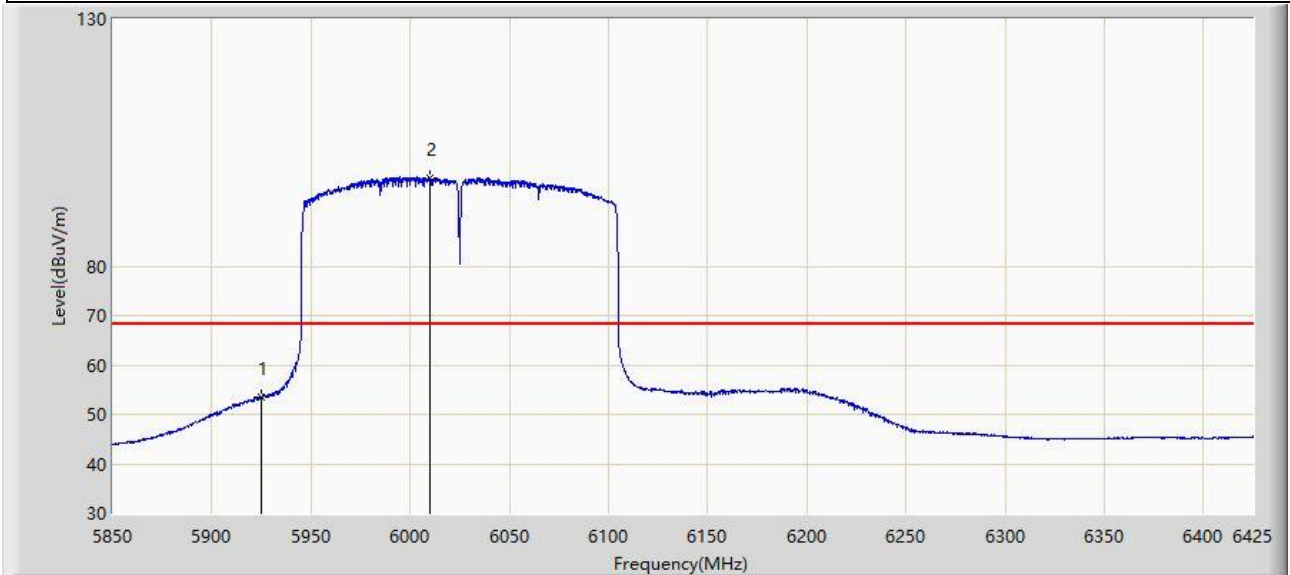


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	53.442	48.207	-14.758	68.200	5.236	AV
2		6009.850	97.872	92.342	N/A	N/A	5.530	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:24
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-160 at 6025MHz	

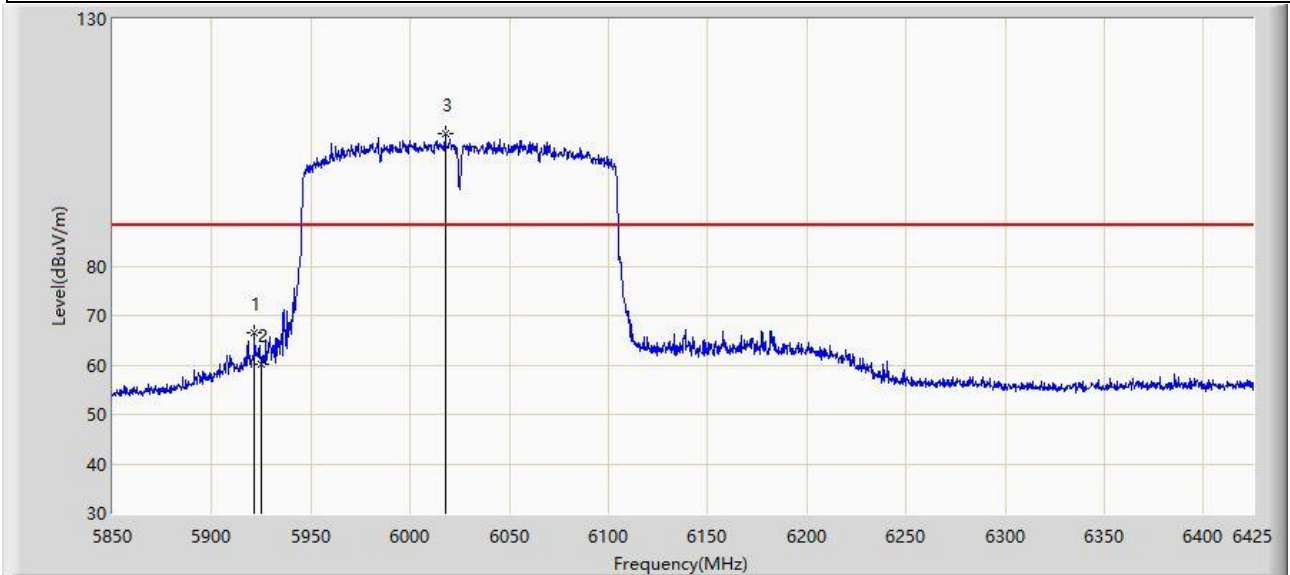


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5921.587	66.579	61.368	-21.621	88.200	5.211	PK
2		5925.000	60.062	54.827	-28.138	88.200	5.236	PK
3		6017.900	106.681	101.080	N/A	N/A	5.601	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:25
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-160 at 6025MHz	

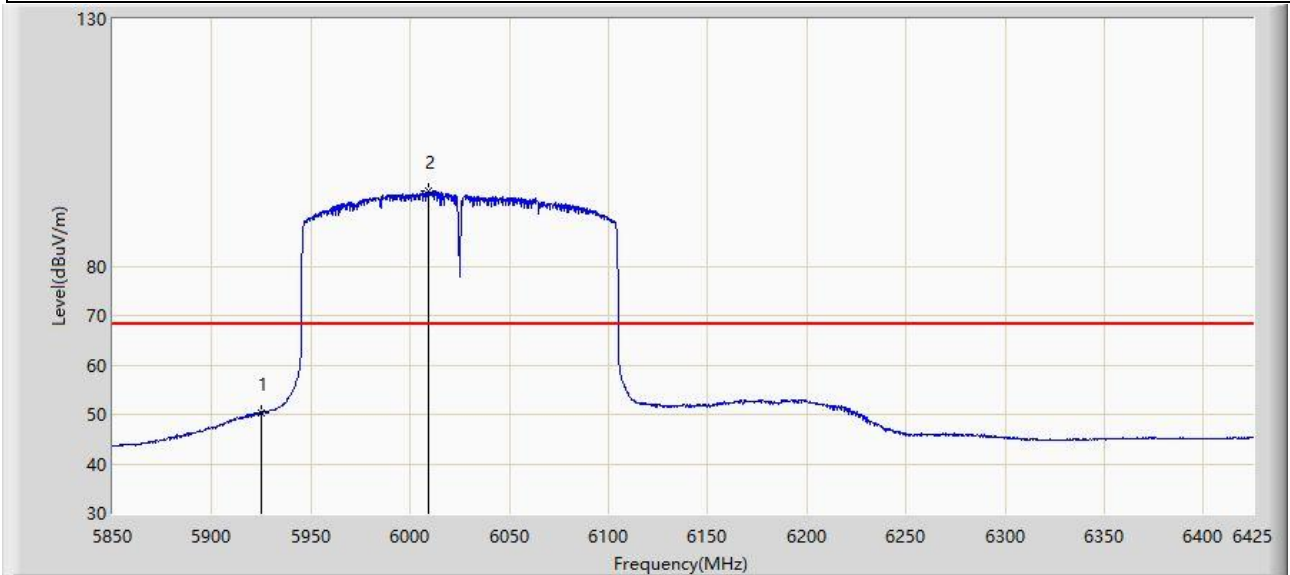


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	50.402	45.167	-17.798	68.200	5.236	AV
2		6009.562	95.092	89.565	N/A	N/A	5.527	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:27
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-160 at 6985MHz	

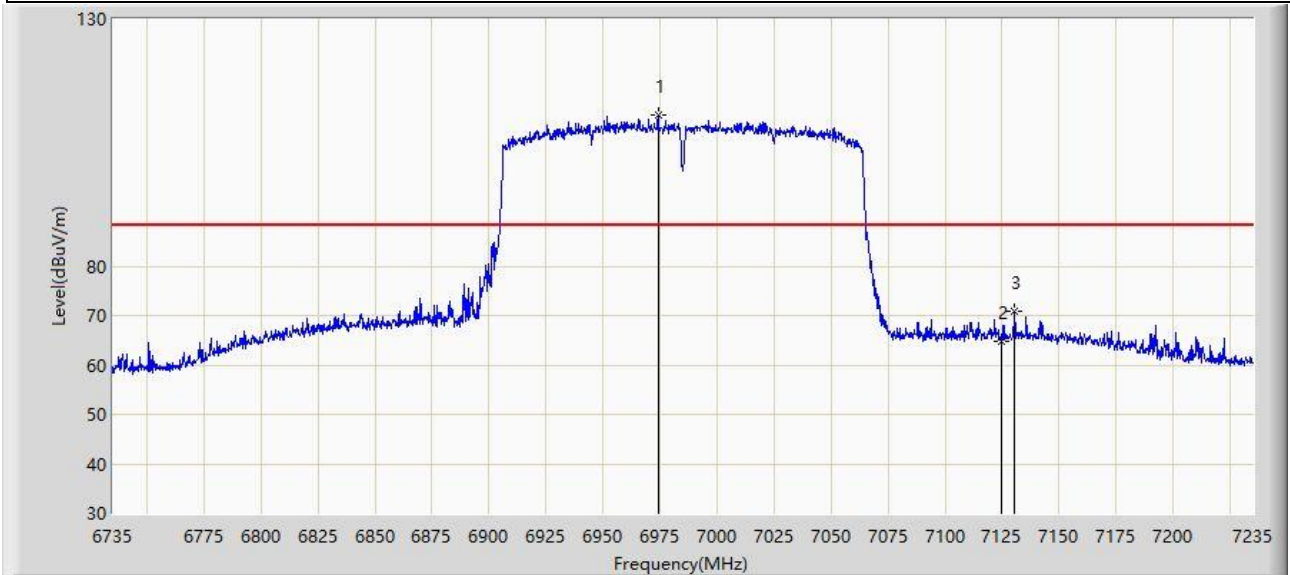


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6974.250	110.491	100.572	N/A	N/A	9.920	PK
2		7125.000	64.867	53.653	-23.333	88.200	11.214	PK
3	*	7130.500	70.808	59.449	-17.392	88.200	11.359	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:28
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-160 at 6985MHz	

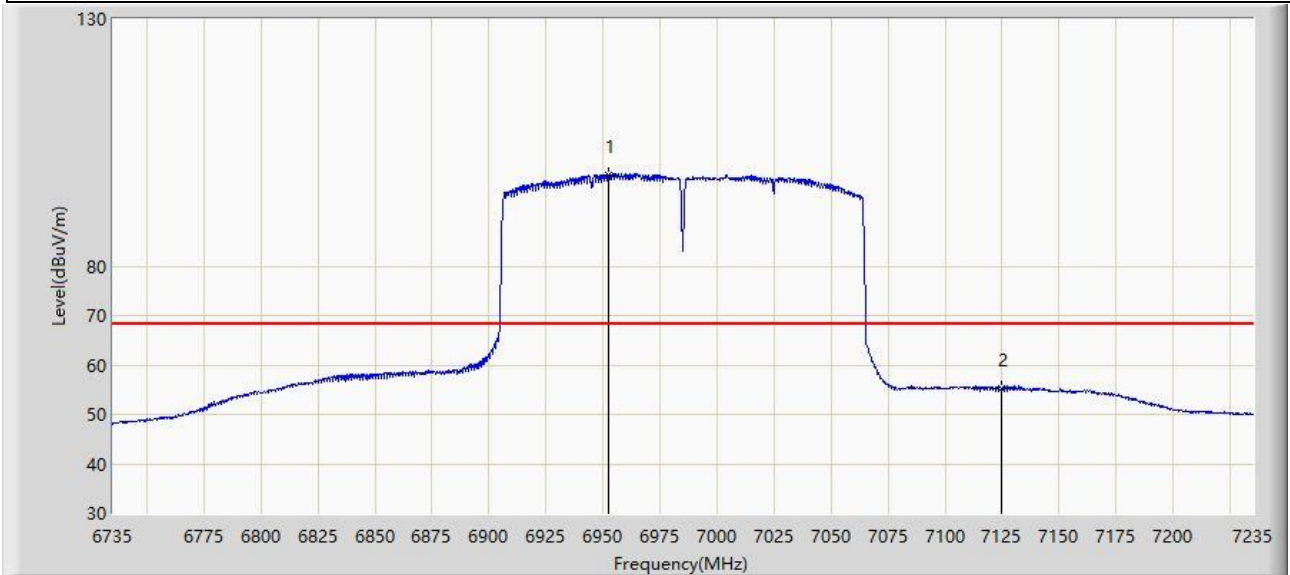


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		6952.250	98.545	89.086	N/A	N/A	9.458	AV
2	*	7125.000	55.295	44.081	-12.905	68.200	11.214	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-02-04 - 21:30
Limit: FCC_6G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-160 at 6985MHz	

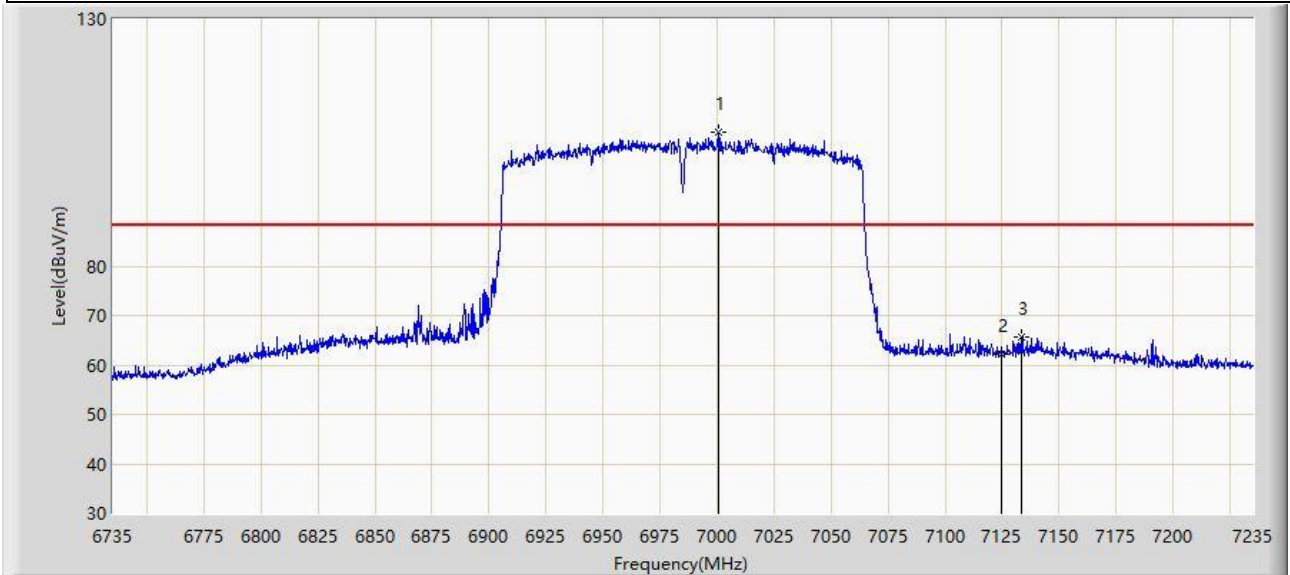

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		7000.750	107.242	97.065	N/A	N/A	10.178	PK
2		7125.000	62.165	50.951	-26.035	88.200	11.214	PK
3	*	7133.750	65.770	54.299	-22.430	88.200	11.471	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).