



Elliott Laboratories Inc.
www.elliottlabs.com

684 West Maude Avenue
Sunnyvale, CA 94086-3518

408-245-7800 Phone
408-245-3499 Fax

*Electromagnetic Emissions Test Report
and
Application for Grant of Equipment Authorization
pursuant to
FCC Part 15, Subpart E (UNII Devices) and
Industry Canada RSS 210 Issue 4 (LELAN Devices)
on the ActionTec Electronics, Inc.
Model: 802CA*

FCC ID: LNQ802CA

GRANTEE: ActionTec Electronics, Inc.
1269 Innsbruck Drive
Sunnyvale, CA 94089

TEST SITE: Elliott Laboratories, Inc.
684 W. Maude Avenue
Sunnyvale, CA 94086

REPORT DATE: October 29, 2001

FINAL TEST DATE: October 12, October 15 and October 16, 2001

AUTHORIZED SIGNATORY:

Mark Briggs
Director of Engineering

This report shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories, Inc.

DECLARATIONS OF COMPLIANCE

Equipment Name and Model:
802CA

Manufacturer:
ActionTec Electronics, Inc.
1269 Innsbruck Drive
Sunnyvale, CA 94089

Tested to applicable standards:
RSS-210, Issue 4, December 2000 (Low Power License-Exempt Radiocommunication
Devices)
FCC Part 15 Subpart E (UNII Devices)

Measurement Facility Description Filed With Department of Industry:

Departmental Acknowledgement Number: IC2845 **SV3** Dated July 30, 2001
Departmental Acknowledgement Number: IC2845 **SV4** Dated July 19, 2001

I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above mentioned departmental standards (through the use of ANSI C63.4 as detailed in section 5.3 of RSS-210, Issue 4); and that the equipment performed in accordance with the data submitted in this report.

Signature _____
Name Mark Briggs
Title Director of Engineering
Company Elliott Laboratories Inc.
Address 684 W. Maude Ave
Sunnyvale, CA 94086
USA

Date: October 29, 2001

Maintenance of compliance with the above standards is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

TABLE OF CONTENTS

COVER PAGE	1
DECLARATIONS OF COMPLIANCE	2
TABLE OF CONTENTS	3
SCOPE	5
OBJECTIVE	5
SUMMARY OF RESULTS	6
MEASUREMENT UNCERTAINTIES	7
EQUIPMENT UNDER TEST (EUT) DETAILS	8
GENERAL.....	8
ENCLOSURE	8
MODIFICATIONS.....	8
SUPPORT EQUIPMENT.....	8
INTERFACE PORTS	9
TEST SOFTWARE.....	9
ANTENNA REQUIREMENTS.....	9
TEST SITE	10
GENERAL INFORMATION.....	10
CONDUCTED EMISSIONS CONSIDERATIONS.....	10
RADIATED EMISSIONS CONSIDERATIONS	10
MEASUREMENT INSTRUMENTATION	11
RECEIVER SYSTEM.....	11
INSTRUMENT CONTROL COMPUTER.....	11
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	11
POWER METER	12
FILTERS/ATTENUATORS.....	12
ANTENNAS.....	12
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	12
INSTRUMENT CALIBRATION.....	12
TEST PROCEDURES	13
EUT AND CABLE PLACEMENT	13
CONDUCTED EMISSIONS.....	13
RADIATED EMISSIONS	13
CONDUCTED EMISSIONS FROM ANTENNA PORT	14

TABLE OF CONTENTS (Continued)

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS	15
FCC 15.407 (A) OUTPUT POWER LIMITS	16
RS-210 6.2.2(Q1) OUTPUT POWER LIMITS.....	16
SPURIOUS RADIATED EMISSIONS LIMITS	17
AC POWER PORT CONDUCTED EMISSIONS LIMITS	17
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS.....	18
SAMPLE CALCULATIONS - RADIATED EMISSIONS	19
<i>EXHIBIT 1: Test Equipment Calibration Data</i>	<i>1</i>
<i>EXHIBIT 2: Test Data Log Sheets</i>	<i>2</i>

SCOPE

An electromagnetic emissions test has been performed on the ActionTec Electronics, Inc. model 802CA pursuant to Subpart E of Part 15 of FCC Rules for Unlicensed National Information Infrastructure (UNII) devices and RSS-210 Issue 4 for licence-exempt local area network (LELAN) devices. Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in ANSI C63.4-1992 as outlined in Elliott Laboratories test procedures.

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The test results recorded herein are based on a single type test of the ActionTec Electronics, Inc. model 802CA and therefore apply only to the tested sample. The sample was selected and prepared by Angela Yao of ActionTec Electronics, Inc.

OBJECTIVE

The primary objective of the manufacturer is compliance with Subpart E of Part 15 of FCC Rules for the radiated and conducted emissions of intentional radiators. Certification of these devices is required as a prerequisite to marketing as defined in Part 2 the FCC Rules.

Certification is a procedure where the manufacturer or a contracted laboratory makes measurements and submits the test data and technical information to the FCC. The FCC issues a grant of equipment authorization upon successful completion of their review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units which are subsequently manufactured.

SUMMARY OF RESULTS

FCC Part 15 Section	RSS 210 Section	Description	Comments	Result
Operation in the 5.15 – 5.25 GHz Band				
15.407 (d)		Maximum Antenna Gain /Integral Antenna	Integral Antenna, Gain of 1.2dBi	COMPLIES
15.407(e)		Indoor operation only	Refer to page 38 of the user's manual in Exhibit 6 for statement regarding indoor use only	COMPLIES
15.407(a) (1)		26dB Bandwidth	>25 MHz normal mode; >43 MHz Turbo mode	N/A
	6.2.2 q1 (i)	20dB Bandwidth	>17 MHz normal mode; >33 MHz Turbo mode	N/A
15.407(a) (1)	6.2.2 q1 (i)	Output Power	12.5dBm normal mode; 12.9dBm Turbo mode	COMPLIES
15.407(a) (1))	6.2.2 q1 (i)	Power Spectral Density	-4.3dBm/MHz normal mode; -4.6dBm/MHz Turbo mode	COMPLIES
15.407(b) (5) / 15.209	6.2.2 q1 (ii)	Spurious Emissions below 1GHz	-4.7dB @ 260.909 MHz	COMPLIES
15.407(b) (2)	6.2.2 q1 (ii)	Spurious Emissions above 1GHz	-2.0dB @ 10,360 MHz	COMPLIES
Operation in the 5.25 – 5.35 GHz Band				
		Maximum Antenna Gain	Integral Antenna, Gain of 1.2dBi	COMPLIES
15.407(a) (2)		26dB Bandwidth	>25 MHz normal mode; >43 MHz Turbo mode	N/A
	6.2.2 q1 (ii)	20dB Bandwidth	>17 MHz normal mode; >33 MHz Turbo mode	N/A
15.407(a) (2)	6.2.2 q1 (ii)	Output Power	15.0dBm normal mode; 15.6dBm Turbo mode	COMPLIES
15.407(a) (2))	6.2.2 q1 (ii)	Power Spectral Density	1.2dBm/MHz normal mode; -1.7dBm/MHz Turbo mode	COMPLIES
15.407(b) (5) / 15.209	6.2.2 q1 (ii)	Spurious Emissions below 1GHz	-4.7dB @ 260.909MHz	COMPLIES
15.407(b) (2)	6.2.2 q1 (ii)	Spurious Emissions above 1GHz	-1.26dB @ 4,168MHz	COMPLIES

General requirements for all bands				
15.407(a)(6)	6.2.2 q(iv)(a)	Digital modulation	Digital modulation is used	COMPLIES
		Peak Excursion Ratio	< 13dB	COMPLIES
	6.2.2 q(iv)(b)	Peak Power Spectral Density	10dBm/MHz (Turbo Mode)	COMPLIES
	6.2.2 q(iv)(c)	Channel Selection	The channels selected represented the lowest channel available in the 5.15 GHz band, the lowest channel available in the 5.25GHz band and the highest channel available in the 5.25 GHz band.	N/A
15.407 (c)	6.2.2 q(iv)(d)	Automatic Discontinuation of Operation in the absence of information to transmit	Operation is discontinued in the absence of information to transmit, refer to page 4 of the "Theory of Operations" in exhibit 9 for a detailed explanation.	COMPLIES
15.407 (g)	6.2.2 q(iv)(e)	Frequency Stability	Frequency stability is 20 ppm, refer to page 2 of the "Theory of Operations" in exhibit 9 for a detailed analysis.	N/A
	6.2.2 q(iv)(g)	User Manual information	All relevant statements have been included in the user's manuals. Refer to Exhibit 6 for details	COMPLIES
15.407 (f)	6.2.2 q(iv)(g)	RF Exposure Requirements	Refer to MPE calculations in Exhibit 11 based on the device being a mobile device with separation of more than 20cm from persons during operation	COMPLIES
15.407(b) / 15.207	6.6	AC Conducted Emissions	-11.2dB @ 8.418MHz	COMPLIES

MEASUREMENT UNCERTAINTIES

ISO Guide 25 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with NAMAS document NIS 81.

Measurement Type	Frequency Range (MHz)	Calculated Uncertainty (dB)
Conducted Emissions	0.15 to 30	± 2.4
Radiated Emissions	30 to 1000	± 3.2

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The ActionTec Electronics, Inc. model 802CA is a wireless LAN Card designed for installation in a notebook PC. It provides an 802.11a wireless interface with data rates up to 54 Mb/s. It can also provide higher data rates of up to 72Mb/s.

Normally, the host laptop would be placed on a tabletop during operation. The laptop was, therefore, treated as tabletop equipment during testing to simulate the end user environment. The electrical rating of the EUT is 5 V dc.

The sample was received on October 12, 2001 and tested on October 12, October 15 and October 16, 2001. The EUT consisted of the following component(s):

Manufacturer	Model	Description	Serial Number	FCC ID
ActionTec Electronics	802AC	wireless LAN card	-	-

ENCLOSURE

The EUT does not have an enclosure as it is designed to be installed within the enclosure of a host computer.

MODIFICATIONS

The unit did not require any modifications during testing in order to comply with the specifications.

SUPPORT EQUIPMENT

The following equipment was used as local support equipment for emissions testing:

Manufacturer	Model	Description	Serial Number	FCC ID
IBM	1171-7WU	Notebook PC	AA-GAWM5 01/02	DoC
IBM	19308801-09	External Floppy Drive	3210675	-
Hewlett Packard	2225C	Printer	2714S40166	-
IBM	02K6555	Adaptor	11S02K6543Z1ZORN 1477JU	-

The printer and floppy drives were not connected when measuring the radiated emissions from the radio above 1GHz.

INTERFACE PORTS

The I/O cabling configuration during emissions testing was as follows:

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length (m)
USB	External Floppy Drive	USB Cable	Shielded	0.5
Parallel	Printer	Parallel Cable	Shielded	2.0
DC Power	Adaptor	2 wire	Unshielded	2.5

TEST SOFTWARE

The EUT was operating on the selected channel (refer to test data) and operating at a data rate of 6Mb/s in the normal mode (802.11a) and 12Mb/s in Turbo mode. These data rates produce the highest output power spectral density in the respective modes.

ANTENNA REQUIREMENTS

As the device is intended to operate in the 15.15 – 15.25 GHz band an integral antenna as detailed in 15.407 (d) and RSS-210 6.2.2(q1) (i) is required. The antenna for the device is an integral antenna with a gain of 1.2dBi.

TEST SITE**GENERAL INFORMATION**

Final test measurements were taken on October 12, October 15 and October 16, 2001 at the Elliott Laboratories Open Area Test Site #3 & 4 located at 684 West Maude Avenue, Sunnyvale, California. The test site contains separate areas for radiated and conducted emissions testing. Pursuant to section 2.948 of the Rules, construction, calibration, and equipment data has been filed with the Federal Communications Commission. In accordance with Industry Canada rules detailed in RSS 210 Issue 4 and RSS-212, construction, calibration, and equipment data for the test sites have been filed with the Federal Communications Commission.

The FCC recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement with the exception of predictable local TV, radio, and mobile communications traffic. The test site contains separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent FCC requirements.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.4-1992. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment. The test site is maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines.

MEASUREMENT INSTRUMENTATION**RECEIVER SYSTEM**

An EMI receiver as specified in CISPR 16-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde and Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

POWER METER

Either a spectrum analyzer or a power meter and thermister mount are used for all direct output power measurements from transmitters.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A biconical antenna is used to cover the range from 30 MHz to 300 MHz and a log periodic antenna is utilized from 300 MHz to 1000 MHz. Narrowband tuned dipole antennas are used over the entire 30 to 1000 MHz range for precision measurements of field strength. Above 1000 MHz, a horn antenna is used. The antenna calibration factors are included in site factors programmed into the test receivers.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height.

ANSI C63.4 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES**EUT AND CABLE PLACEMENT**

The FCC requires that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4, and the worst case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

RADIATED EMISSIONS

Radiated emissions measurements are performed in two phases as well. A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed from 30 MHz up to the frequency required by the regulation specified on page 1. One or more of these is with the antenna polarized vertically while the one or more of these is with the antenna polarized horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit.

A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth which results in the highest emission is then maintained while varying the antenna height from one to four meters. The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain. Emissions which have values close to the specification limit may also be measured with a tuned dipole antenna to determine compliance.

CONDUCTED EMISSIONS FROM ANTENNA PORT

Direct measurements are performed with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

Measurement bandwidths (video and resolution) are set in accordance with FCC procedures for the type of radio being tested.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions from the AC power port are given in units of microvolts, the limits for radiated electric field emissions are given in units of microvolts per meter at a specified test distance and the output power limits are given in terms of Watts, milliwatts or dBm. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp) the following formula is used to determine the field strength limit in terms of microvolts per meter at a distance of 3m from the equipment under test:

$$E = \frac{1000000 \sqrt{30} P}{3} \text{ microvolts per meter}$$

where P is the eirp (Watts)

For reference, converting the voltage and electric field strength specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. Conversion of power specification limits from linear units (in milliwatts) to decibel form (in dBm) is accomplished by taking the base ten logarithm, then multiplying by 10.

FCC 15.407 (a) OUTPUT POWER LIMITS

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
5150 - 5250	50mW (17 dBm)	4 dBm/MHz
5250 - 5350	250 mW (24 dBm)	11 dBm/MHz
5725 – 5825	1 Watts (30 dBm)	17 dBm/MHz

For system using antennas with gains exceeding 6dBi, the output power and power spectral density limits are reduced by 1dB for every dB the antenna gain exceeds 6dBi.

Fixed point-to-point applications using the 5725 – 5825 MHz band may use antennas with gains of up to 23dBi without this limitation. If the gain exceeds 23dBi then the output power limit of 1 Watt is reduced by 1dB for every dB the gain exceeds 23dBi.

RS-210 6.2.2(q1) OUTPUT POWER LIMITS

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
5150 - 5250	200mW (23 dBm)	10 dBm/MHz
5250 - 5350	250 mW (24 dBm)	11 dBm/MHz
5725 – 5825	1 Watts (30 dBm)	17 dBm/MHz

For system using antennas with gains exceeding 6dBi, the output power and power spectral density limits are reduced by 1dB for every dB the antenna gain exceeds 6dBi.

Fixed point-to-point applications using the 5725 – 5825 MHz band may use antennas with gains of up to 23dBi without this limitation. If the gain exceeds 23dBi then the output power limit of 1 Watt is reduced by 1dB for every dB the gain exceeds 23dBi.

SPURIOUS RADIATED EMISSIONS LIMITS

The table below shows the limits for unwanted (spurious) emissions falling in the restricted bands detailed in Part 15.205 and Industry Canada RSS-210 Table 2.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

The table below shows the limits for unwanted (spurious) emissions outside of the restricted band.

Operating Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength At 3m (dBuV/m)
5150 - 5250	-27 dBm	68.3 dBuV/m
5250 - 5350	-27 dBm	68.3 dBuV/m
5725 – 5825	-27 dBm (note 1) -17 dBm (note 2)	68.3 dBuV/m 78.3 dBuV/m

Note 1: Applies to spurious signals separated by more than 10 MHz from the allocated band.

Note 2: Applies to spurious signals within 10 MHz of the allocated band.

AC POWER PORT CONDUCTED EMISSIONS LIMITS

The table below shows the limits for emissions on the AC power line as detailed in FCC Part 15.205 and Industry Canada RSS-210 section 6.6.

Frequency Range (MHz)	Limit (uV)	Limit (dBuV)
0.450 to 30.000	250	48

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - B = C$$

and

$$C - S = M$$

where:

R_r = Receiver Reading in dBuV

B = Broadband Correction Factor*

C = Corrected Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

* Broadband Level - Per ANSI C63.4, 13 dB may be subtracted from the quasi-peak level if it is determined that the emission is broadband in nature. If the signal level in the average mode is six dB or more below the signal level in the peak mode, the emission is classified as broadband.

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. A distance factor, when used for electric field measurements, is calculated by using the following formula:

$$F_d = 20 \cdot \text{LOG10} (D_m/D_s)$$

where:

F_d = Distance Factor in dB

D_m = Measurement Distance in meters

D_s = Specification Distance in meters

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

R_r = Receiver Reading in dBuV/m

F_d = Distance Factor in dB

R_c = Corrected Reading in dBuV/m

L_s = Specification Limit in dBuV/m

M = Margin in dB Relative to Spec

EXHIBIT 1: Test Equipment Calibration Data

Radiated Emissions, 30 - 1000 MHz, 12-Oct-01 04:42 PM**Engineer: mfaustino**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
EMCO	Biconical Antenna, 30-300 MHz	3110B	801	12	10/12/2000	10/12/2001
EMCO	Log Periodic Antenna, 0.2-2 GHz	3148	1321	12	4/10/2001	4/10/2002
Rohde & Schwarz	Test Receiver, 20-1300MHz	ESVP	273	12	10/5/2000	11/5/2001

Radiated Emissions, 1 - 6.5 GHz, 12-Oct-01 09:45 PM**Engineer: Vishal**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
EMCO	Horn Antenna, D. Ridge 1-18GHz	3115	487	12	3/31/2001	3/31/2002
Filtek	High Pass Filter, 1GHz	HP12/1000-5BA	956	12	3/22/2001	3/22/2002
Hewlett Packard	Spectrum Analyzer, 9KHz - 22GHz	8593EM	1319	12	5/31/2001	5/31/2002

Antenna Conducted Emissions, 18-Oct-01 01:21 PM**Engineer: jmartinez**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Hewlett Packard	Microwave EMI test system (SA40, 30Hz - 40GHz)	84125C	1149	12	2/5/2001	2/5/2002

Radiated Emissions, 1000- 40,000 MHz, 18-Oct-01 01:22 PM**Engineer: jmartinez**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
EMCO	Horn Antenna, D. Ridge 1-18GHz	3115	487	12	3/31/2001	3/31/2002
Hewlett Packard	High Pass filter, 8.2GHz	P/N 84300-80039	1156	12	3/27/2001	3/27/2002
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	12	1/25/2001	1/25/2002
Hewlett Packard	Spectrum Analyzer 9KHz - 26GHz	8563E	284	12	2/22/2001	2/22/2002

Conducted Emissions, 02-Nov-01 11:32 AM**Engineer: jgonzalez**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Rohde& Schwarz	Pulse Limiter	ESH3 Z2	812	12	1/23/2001	1/23/2002
Rohde & Schwarz	Test Receiver, 0.009-30 MHz	ESH3	1316	12	5/9/2001	5/9/2002
Solar Electronics	LISN	8012-50-R-24-BNC	305	12	7/30/2001	7/30/2002
Solar Electronics Co	LISN	8028-50-TS-24-BNC	904	12	5/18/2001	5/18/2002

EXHIBIT 2: Test Data Log Sheets

ELECTROMAGNETIC EMISSIONS

TEST LOG SHEETS

AND

MEASUREMENT DATA

T 45022 54 Pages



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Emissions Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B
Immunity Spec:	-	Environment:	-

EMC Test Data

For The

ActionTec Electronics

Model

802CA



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Emissions Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B
Immunity Spec:	-	Environment:	-

EUT INFORMATION

General Description

The ActionTec Electronics, Inc. model 802CA is a wireless LAN Card designed for installation in a notebook PC. It provides an 802.11a wireless interface with data rates up to 54 Mb/s. It can also provide higher data rates of up to 72Mb/s.

Normally, the host laptop would be placed on a tabletop during operation. The laptop was, therefore, treated as tabletop equipment during testing to simulate the end user environment. The electrical rating of the EUT is 5 V dc.

Equipment Under Test

Manufacturer	Model	Description	Serial Number	FCC ID
ActionTec Electronics	802AC	wireless LAN card		LNQ802CA

EUT Enclosure

The EUT does not have an enclosure as it is designed to be installed within the enclosure of a host computer.

Modification History

Mod. #	Test	Date	Modification
1	-	-	None



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Emissions Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B
Immunity Spec:	-	Environment:	-

Test Configuration #1

Local Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
IBM	1171-7WU	Notebook PC	AA-GAWM5 01/02	DoC
IBM	19308801-09	External Floppy Drive	3210675	DoC
Hewlett Packard	2225C	Printer	2714S40166	DS16XU2225C
IBM	02K6555	Adaptor	11S02K6543Z1ZORN14	N/A

Remote Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
None				

Interface Ports

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
USB	External Floppy Drive	USB Cable	Shielded	0.5
Parallel	Printer	Parallel Cable	Shielded	2
DC Power	Adaptor	2 wire	Unshielded	2.5

EUT Operation During Emissions

The EUT was transmitting on the center channel during radiated spurious emissions tests below 1GHz.



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Emissions Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B
Immunity Spec:	-	Environment:	-

Test Configuration #2

Local Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
IBM	1171-7WU	Notebook PC	AA-GAWM5 01/02	DoC

Remote Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
None				

Interface Ports

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
None				

EUT Operation During Emissions Testing (Radio)

The radio was transmitting at full power on the specified channels a data rate of 6 Mb/s (Normal mode) or 12Mb/s (Turbo mode). The channels were selected since they are at the top, center and bottom of the allocated bands.



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Conducted Emissions - Power Ports

Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 11/2/2001 Config. Used: 1
Test Engineer: jgonzalez Config Change: None
Test Location: SVOATS #2 EUT Voltage: 120V/60Hz

General Test Configuration

For tabletop equipment, the EUT was located on a wooden table, 40 cm from a vertical coupling plane and 80cm from the LISN. A second LISN was used for all local support equipment.

Ambient Conditions: Temperature: 18°C
Rel. Humidity: 65%

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power 120V/60Hz	FCC B	Pass	-11.2dB @ 8.418MHz

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

Frequency	Level	AC	FCC B		Detector	Comments			
			MHz	dB μ V	Line	Limit	Margin	QP/Ave	
8.4183	36.8	Line 1	48.0	-11.2	QP				
8.4183	33.5	Neutral	48.0	-14.5	QP				
4.1012	32.9	Neutral	48.0	-15.1	QP				
3.6082	32.3	Neutral	48.0	-15.7	QP				
4.3083	28.9	Line 1	48.0	-19.1	QP				
1.1697	26.8	Line 1	48.0	-21.2	QP				




SVOATS# 2: ActionTec Electronics 802CA Run 1

Spec:

FCC-B

Mains Lead

Neutral

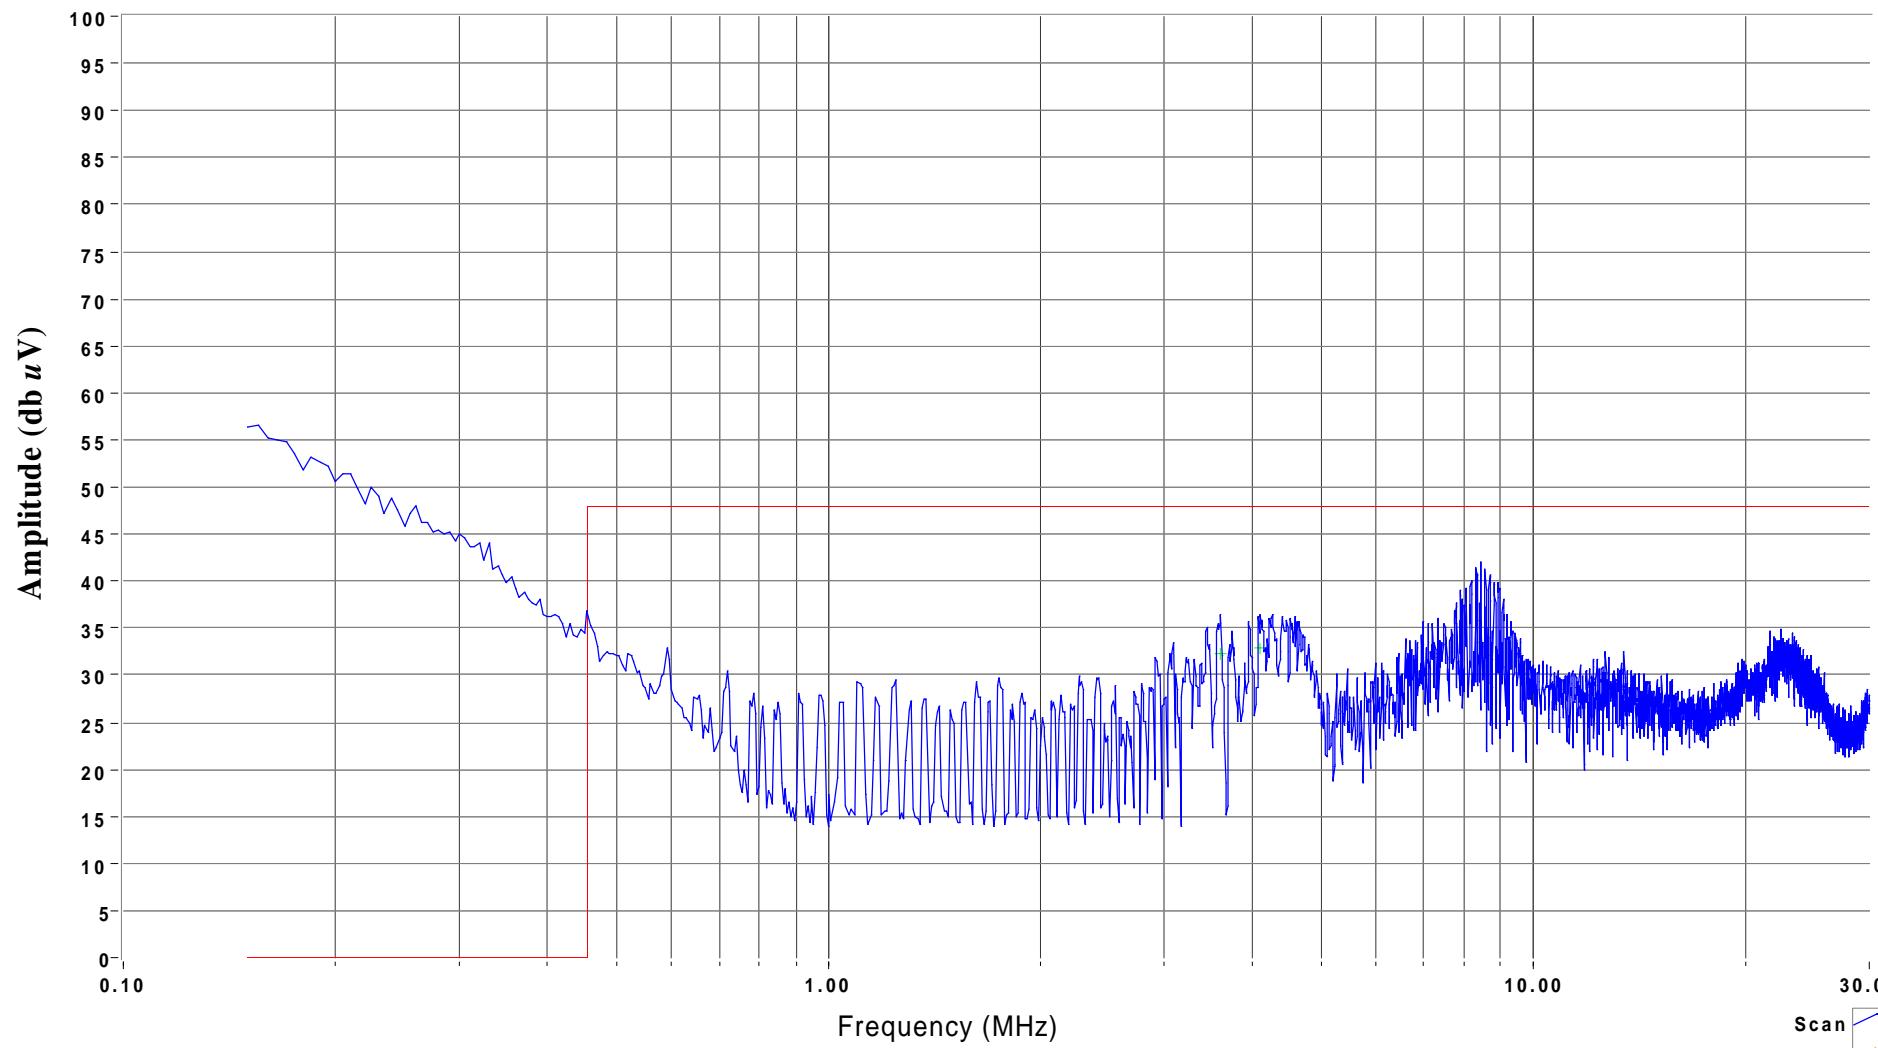

120V/60Hz Neutral

Scan
Peak
Quasi-peak
Average
QuasiPeak Limit
QuasiPeak Limit

11/6/01

Juan Gonzalez




SVOATS# 2: ActionTec Electronics 802CA Run 1

Spec:

FCC-B

Mains Lead

Line 1

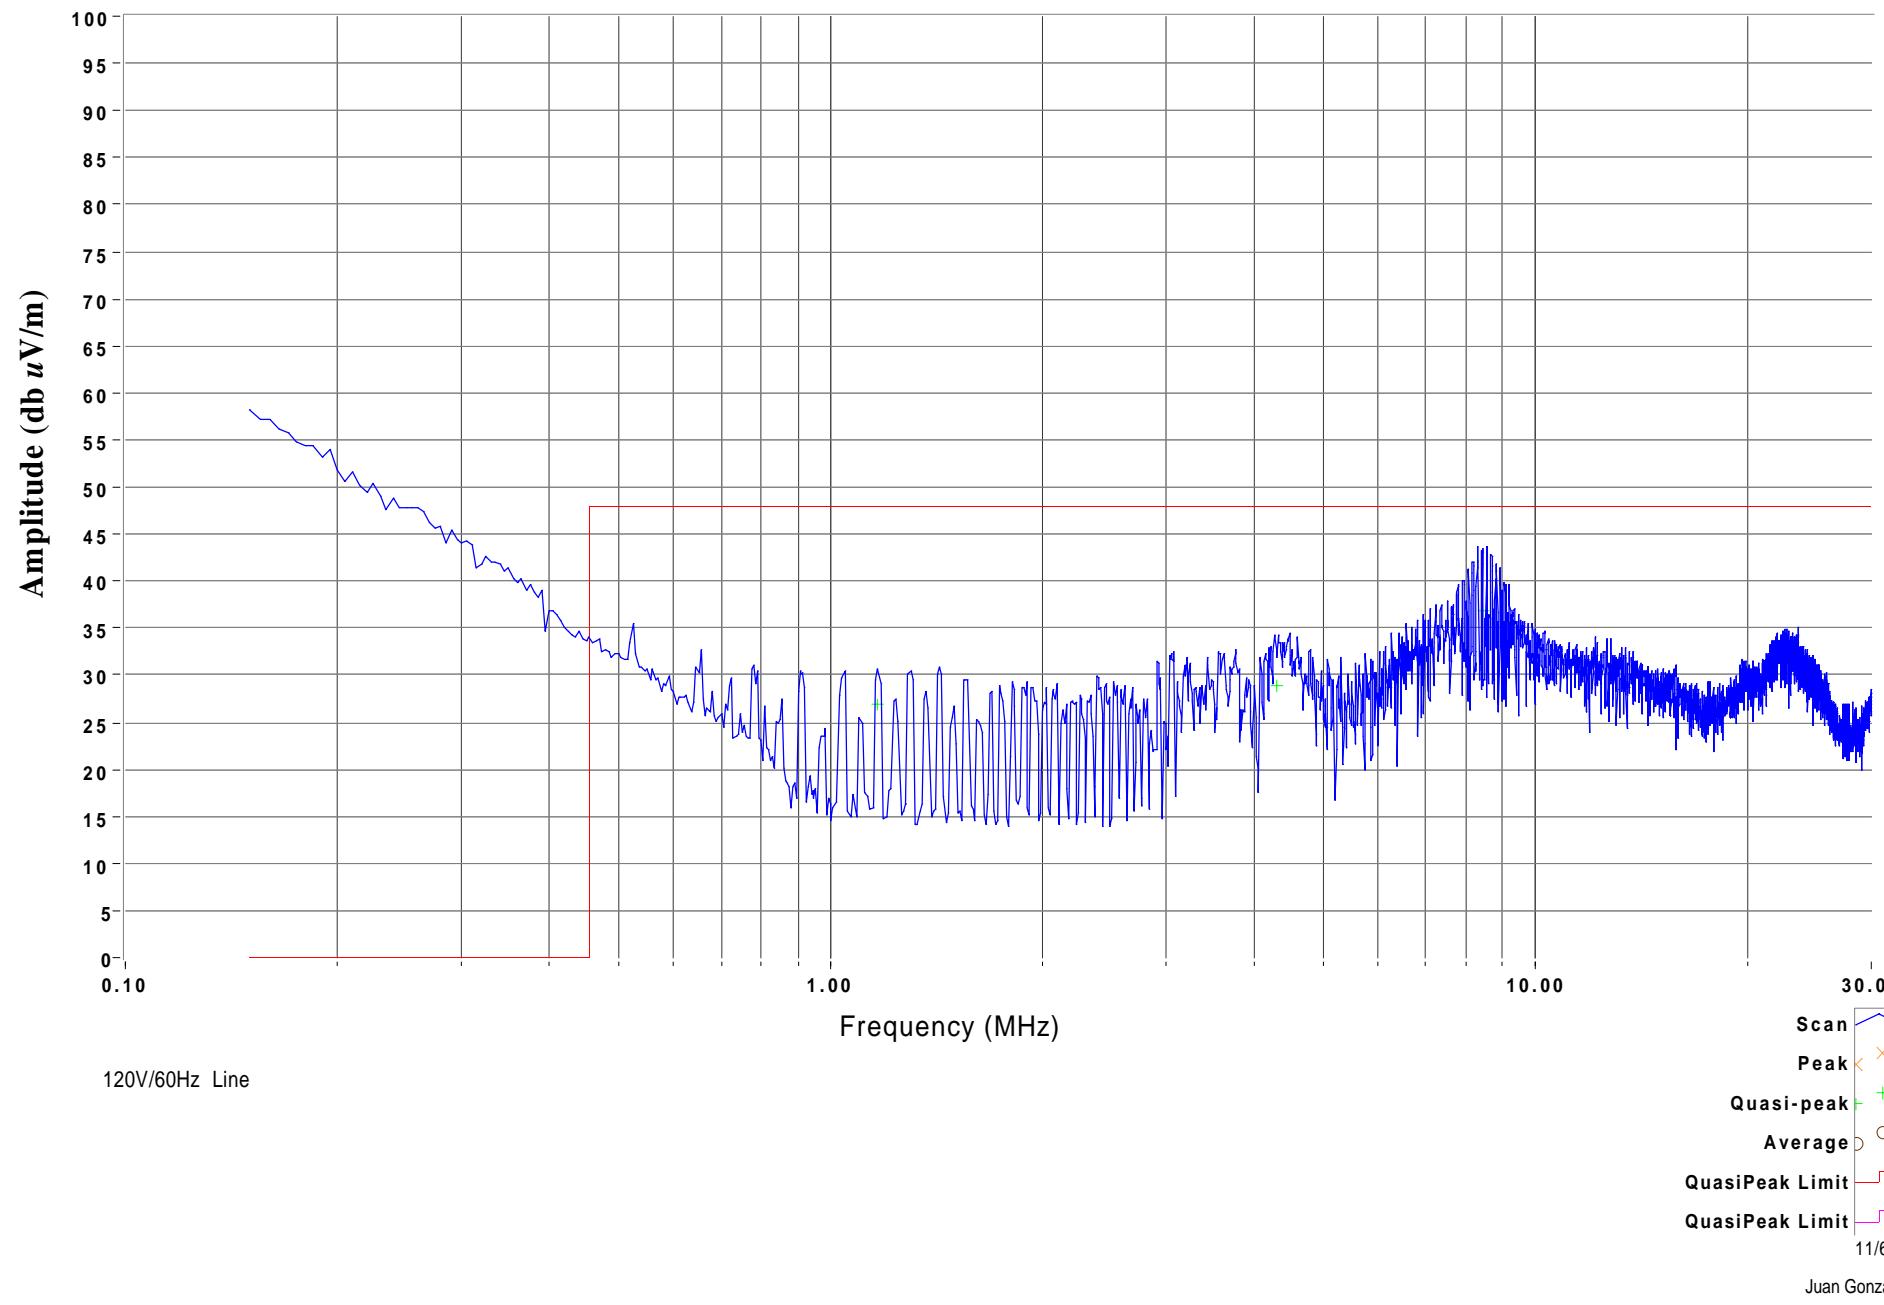



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

FCC Part 15 Subpart E Tests

Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test:	10/15/2001 & 10/16/2001	Config. Used:	# 2
Test Engineer:	Jmartinez	Config Change:	None
Test Location:	SVOATS# 4		Host Unit Voltage 120Vac, 60Hz

General Test Configuration

The EUT was located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT unless stated otherwise. When measuring the conducted emissions from the EUT's antenna port, the antenna port of the EUT was connected to the spectrum analyzer or power meter via a suitable attenuator to prevent overloading the measurement system. All measurements are corrected to allow for the external attenuators and cables used.

Ambient Conditions: Temperature: 18°C
Rel. Humidity: 75%

Summary of Results

Run #	Test Performed	Limit	Result	Comments
1	Output Power	15.407(a) (1), (2)	Pass	12.5 / 15.0 dBm
2	Power Spectral Density (PSD)	15.407(a) (1), (2)	Pass	-4.3 / 1.2 dBm/MHz
3	26dB Bandwidth	15.407	Pass	>25MHz
3	20 dB Bandwidth	RSS 210	Pass	>17 MHz
4	Peak Excursion Envelope	15.407(a) (6)	Pass	Peak to average excursion < 13dB; Peak PSD 7.5dBm/MHz
5	Antenna Conducted - Out of Band Spurious	15.407(b)	Pass	All emissions below the 27dBm/MHz limit
6	RE, 1000 - 40000 MHz - Spurious Emissions	15.407(b)(6)	Pass	-2.02dB @ 10360MHz



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Run #1: Output Power

Antenna Gain: 1.2 dBi

Channel	Frequency (MHz)	26-dB BW (MHz)	Output Power (dBm)	FCC Limit (dBm) (note 3)	Comments
Low	5180	24.83	10.4	17.0	Note 2
	5180	24.83	12.5	17.0	Note 1
Midd	5260	24.58	12.5	24.0	Note 2
	5260	24.6	14.0	24.0	Note 1
High	5320	25.75	12.8	24.0	Note 2
	5320	25.8	15.0	24.0	Note 1

Note 1:	Measured using spectrum analyzer's power measurement function (RBW = 1MHz, VBW = 30kHz). Used Max hold function.
Note 2:	Measured using a Rohde & Schwarz Power Meter with a average power sensor.
Note 3:	RSS 210 limit is 23dBm in the 5.15 to 5.25 GHz band, 6dB higher than the FCC limit. This limit is based on the emission bandwidth and operating frequency.
Note 3:	RSS 210 limit is 24dBm in the 5.15 to 5.25 GHz band, same as FCC limit. This limit is based on the emission bandwidth and operating frequency.



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Run #2: Power Spectral Density


Antenna Gain: 1.2 dBi

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	FCC Limit (dBm) note 2	Graph Reference	
	5180	-4.3	4.0	T45022/201	Note 1
	5260	0.5	11.0	T45022/202	Note 1
	5320	1.2	11.0	T45022/203	Note 1

Note 1: The above measurements were made using RBW = 1MHz, VBW = 3MHz, video averaging on. To demonstrate compliance with RSS 210, the peak PSD was also measured using RBW= VBW=1MHz, video averaging off during the peak excursion measurements (run #4). The peak PSD of **7.5dBm** did not exceed the maximum permitted average PSD of 10dBm (5.15 to 5.25 GHz band) or 11dBm (5.25-5.35GHz band) so no restriction is placed on the output power or average PSD with respect to RSS 210.

Note 2: RSS 210 limit is 10dBm/MHz in the 5.15 to 5.25 GHz band, 6dB higher than the FCC limit.

Plots Showing Power Spectral Density (RBW = 1MHz, VBW = 3 MHz, video averaging ON)

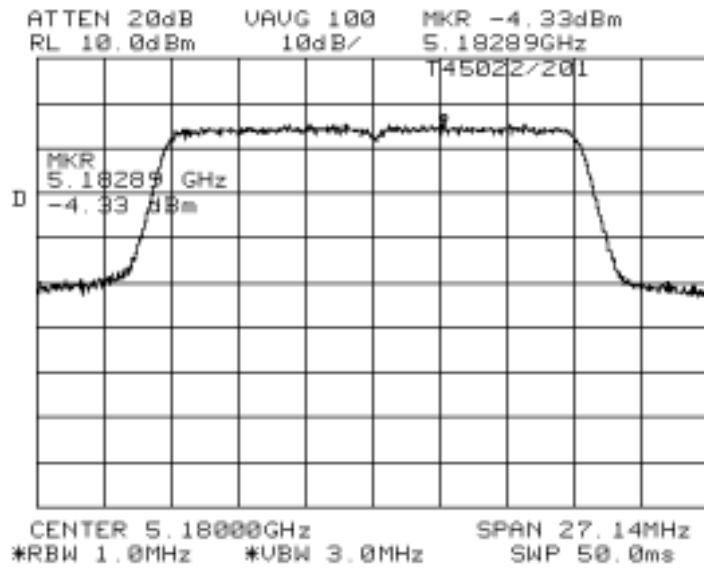



EMC Test Data

Client: ActionTec Electronics

Job Number: J44996

Model: 802CA



T-Log Number: T45022

Contact: Angela Yao

Proj Eng: Mark Hill

Spec: FCC 15 Sub. B & E, RSS-210

Class: B

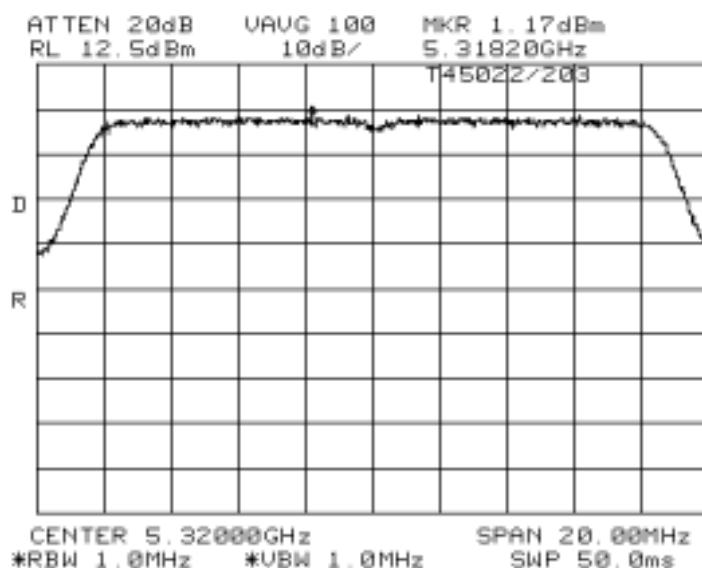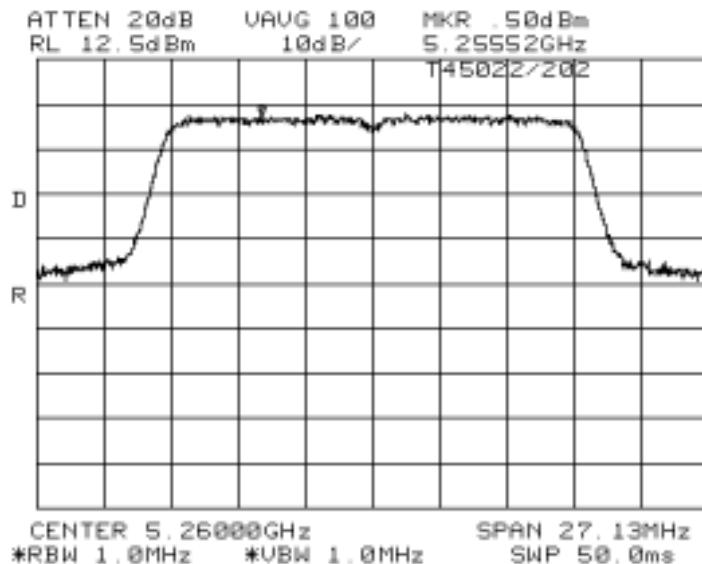




EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Run #3: Signal Bandwidth

Channel	Frequency (MHz)	Resolution Bandwidth	26 dB Signal Bandwidth (MHz)	20 dB Signal Bandwidth (MHz)	Graph reference #
Low	5180	300 kHz	25.08	17.25	T45022/301
Midd	5260	300 kHz	25.75	17.2	T45022/302
High	5320	300 kHz	28.8	17.3	T45022/303



Plots Showing Signal Bandwidth

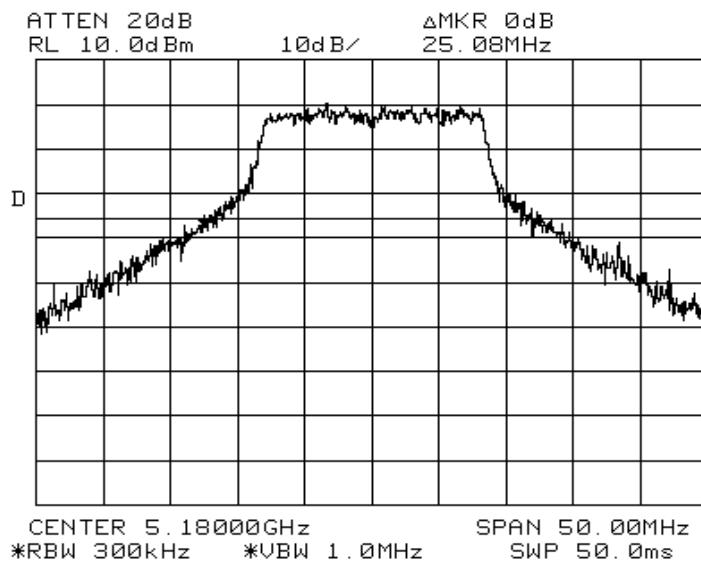



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
Contact:	Angela Yao	Proj Eng:	Mark Hill
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

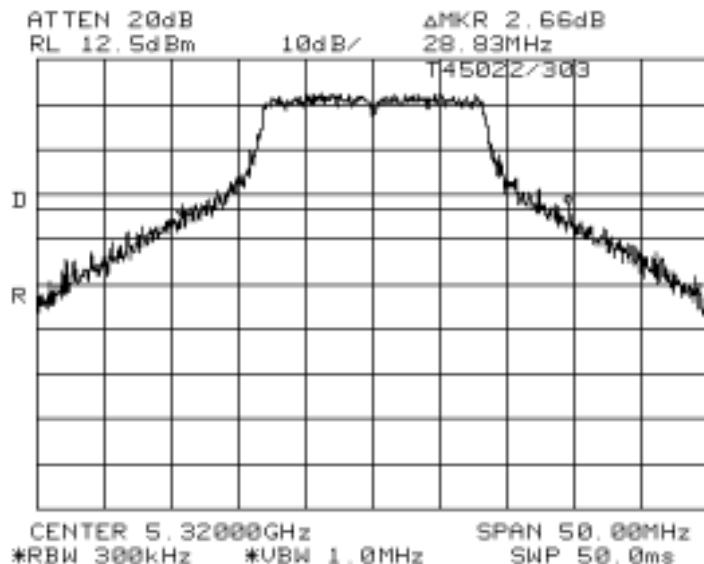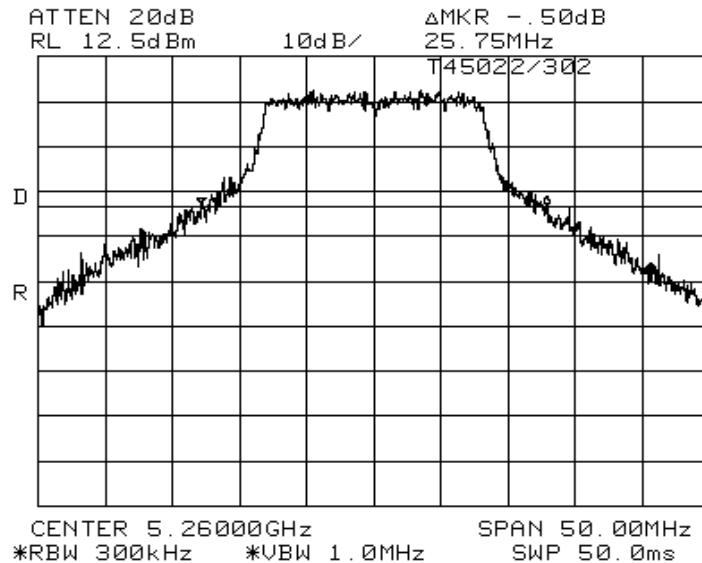



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B


Run #4: Peak Excursion Measurement

Plots Showing Peak Excursion

Trace A: RBW = VBW = 1MHz

Trace B: RBW = 1 MHz, VBW = 30kHz

Low Channel Peak Excursion = 7.5 dB. Peak power spectral density (RSS210 only) = 5.4 dBm.

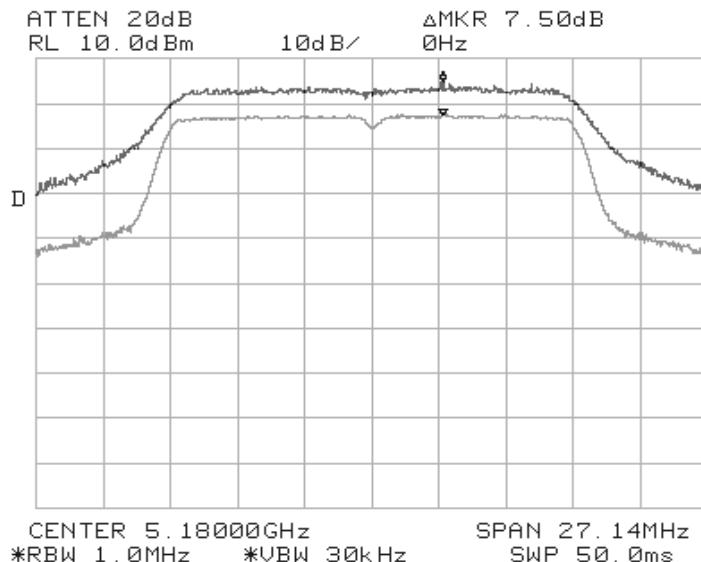





EMC Test Data

Client: ActionTec Electronics	Job Number: J44996
Model: 802CA	T-Log Number: T45022
	Proj Eng: Mark Hill
Contact: Angela Yao	
Spec: FCC 15 Sub. B & E, RSS-210	Class: B

Mid Channel Peak Excursion = 7.5 dB. Peak power spectral density (RSS210 only) = 6 dBm.

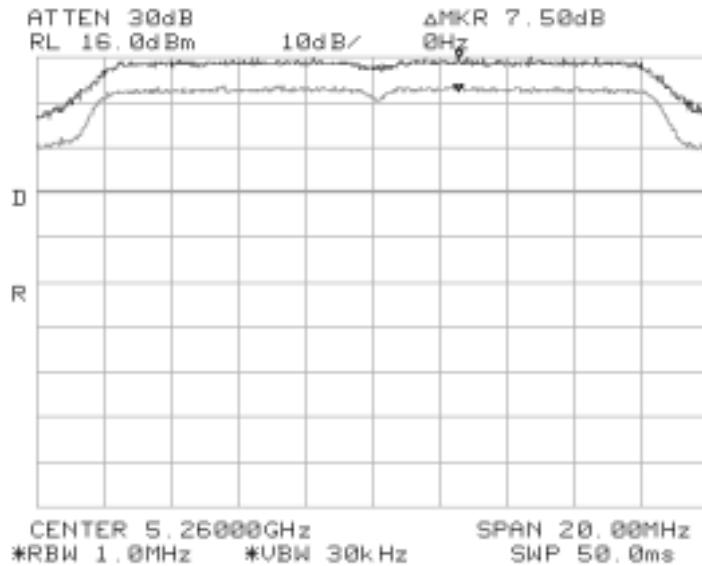

High Channel Peak Excursion = 7.83 dB. Peak power spectral density (RSS210 only) = 7.5 dBm.

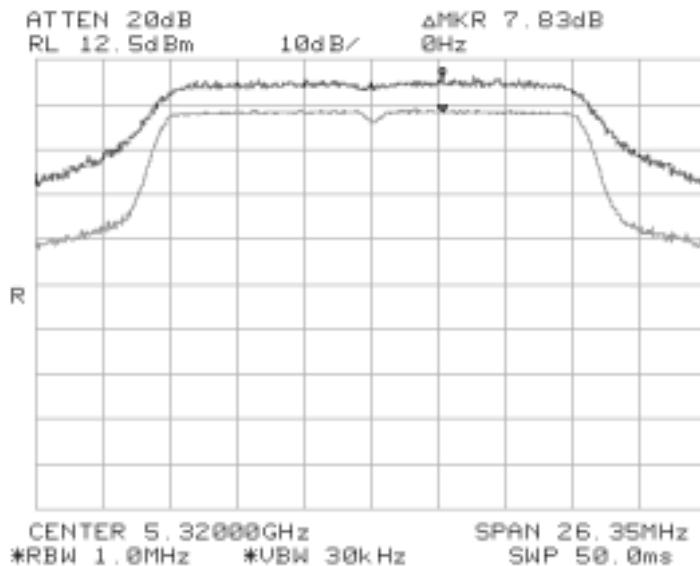



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Run #5: Out Of Band Spurious Emissions - Antenna Conducted

The antenna gain of the radios integral antenna is 1.2dBi. The EIRP limit is -27dBm/MHz for all out of band signals that do not fall in restricted bands. A limit of -28.5 dBm was, therefore, used for signals not in restricted bands and close to the intentional band with the assumption that the antenna gain was equal to 1.2 within 100 MHz of the upper and lower band edges. For signals removed from the band edge by more than 100MHz, radiated measurements were made (refer to run #6) if the signal amplitude exceeded -37dBm.

Channel	Frequency (MHz)	Frequency Range	Highest Spurious Signal	Graph reference #
5180	5180	30 - 1000 MHz	Note 4	T45022/501
		1 to 5.15 GHz	3109.6 (Note 2)	T45022/502
		5.25 to 10 GHz	6216.6 (Note 3)	T45022/503
		10 GHz to 20 GHz	10360 (Note 3)	T45022/504
		20 GHz to 40 GHz	None	T45022/505
5260	5260	30 - 1000 MHz	Note 4	T45022/506
		1 to 5.25 GHz	3153.3 (Note 2)	T45022/507
		5.35 to 10 GHz	6312.1 (Note 3)	T45022/508
		10 GHz to 20 GHz	10520 (Note 3)	T45022/509
		20 GHz to 40 GHz	None	T45022/510
5320	5320	30 - 1000 MHz	Note 4	T45022/511
		1 to 5.725 GHz	4256 (Note 1)	T45022/512
		5.825 to 10 GHz	6384.17 (Note 3)	T45022/513
		10 GHz to 20 GHz	10640 (Note 1)	T45022/514
		20 GHz to 40 GHz	None	T45022/515

Note 1:	Signal is in a restricted band. Refer to run #6 for field strength measurements.
Note 2:	Signal is not in restricted band. Limit is -27dBm eirp. As the signal strength is significantly lower than -27dBm no field strength measurements required.
Note 3:	Signal is not in restricted band. Limit is -27dBm eirp. Although the signal strength is significantly lower than -27dBm field strength measurements were made (refer to run #6)
Note 4:	All spurious signals in this frequency band measured during digital device radiated emissions test.




EMC Test Data


Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Plots Showing Out-Of-Band Emissions (RBW=VBW=1MHz)

0 - 40,000 MHz (10 dBm @ 5.18 GHz)

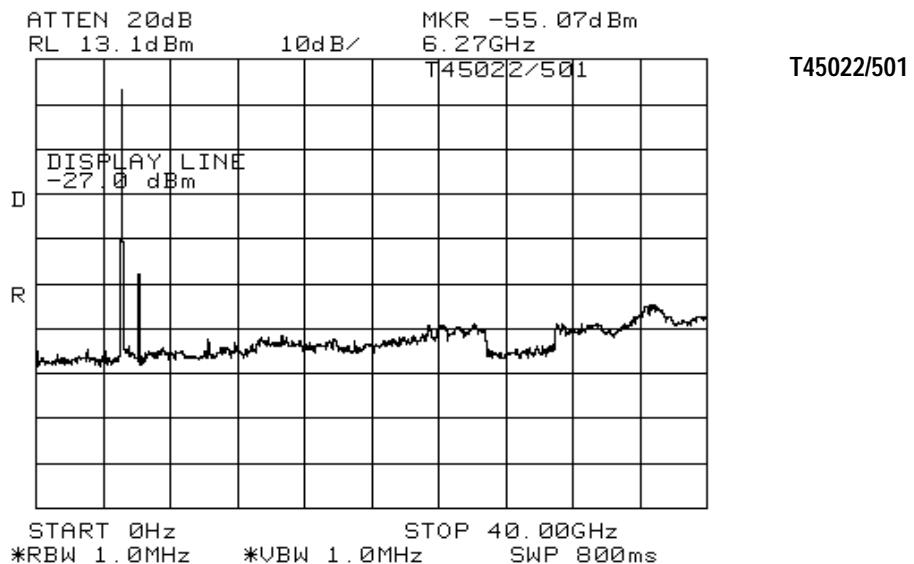

T45022/502

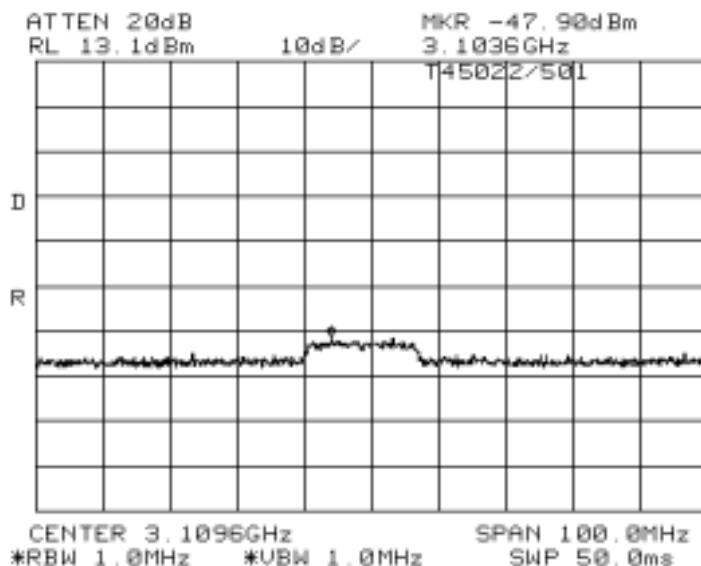





EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
Contact:	Angela Yao	Proj Eng:	Mark Hill
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

T45022/503

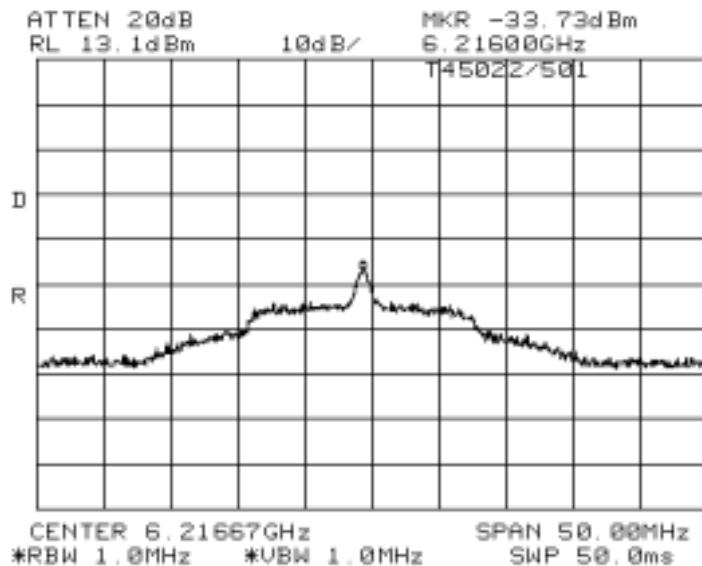

T45022/504

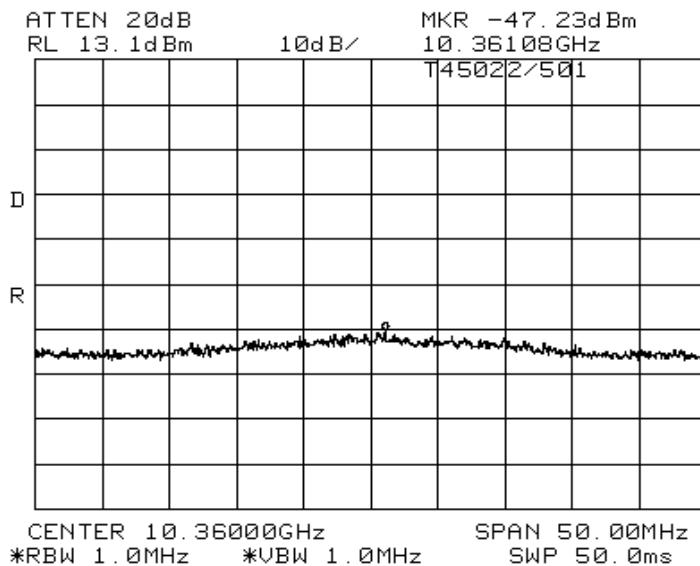



EMC Test Data

Client: ActionTec Electronics

Job Number: J44996

Model: 802CA

T-Log Number: T45022


Contact: Angela Yao

Proj Eng: Mark Hill


Spec: FCC 15 Sub. B & E, RSS-210

Class: B

0 - 40,000 MHz (13 dBm @ 5.26 GHz)

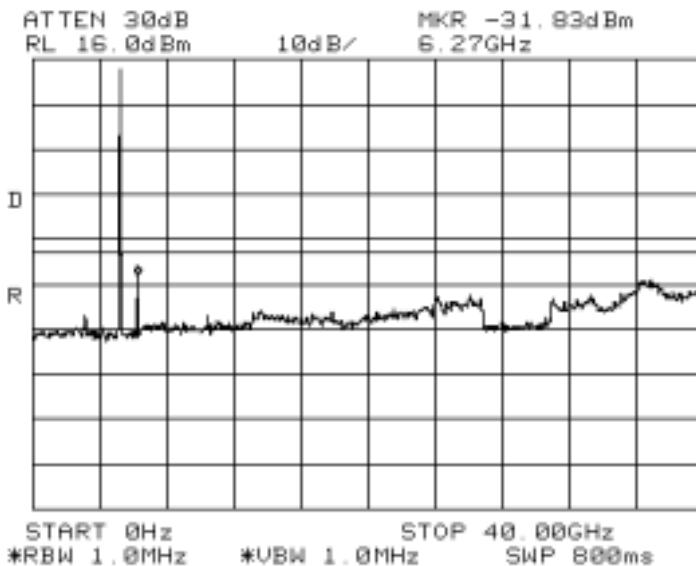

T45022/506

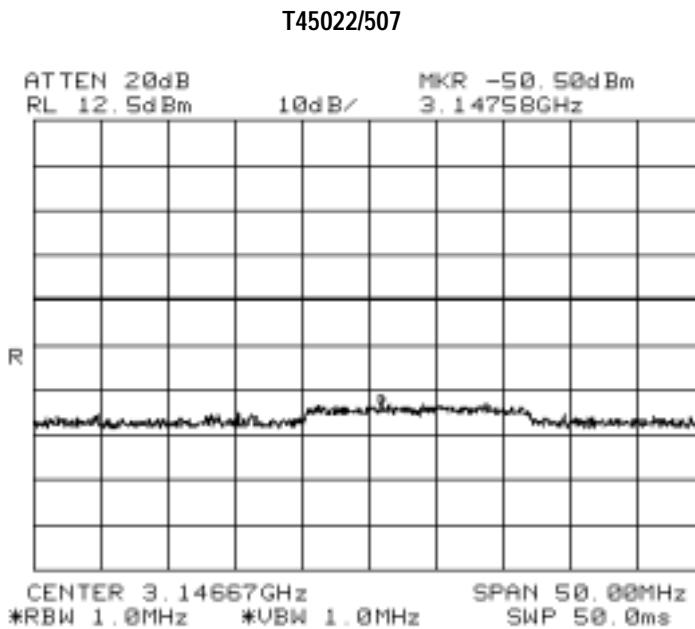





EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

T45022/508

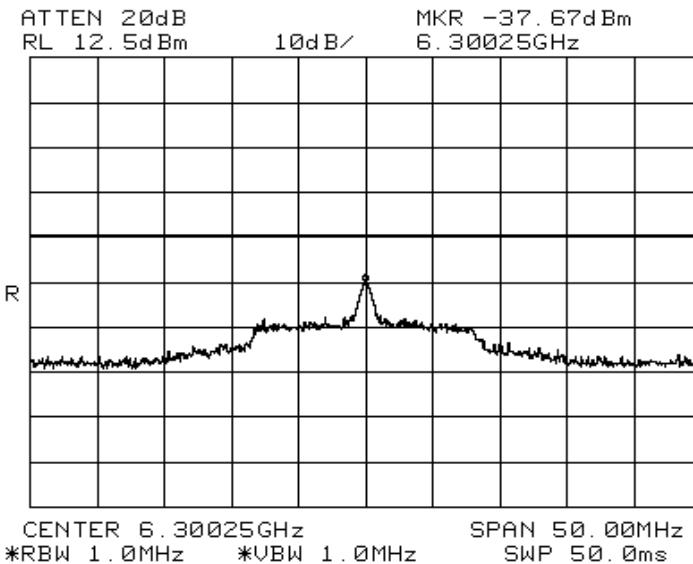

T45022/509

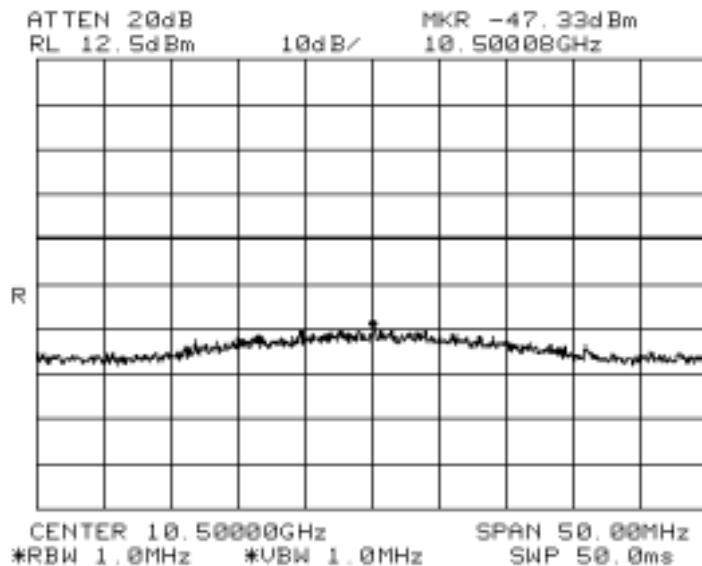




EMC Test Data


Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

0 - 40,000 MHz (13 dBm @ 5.32 GHz)

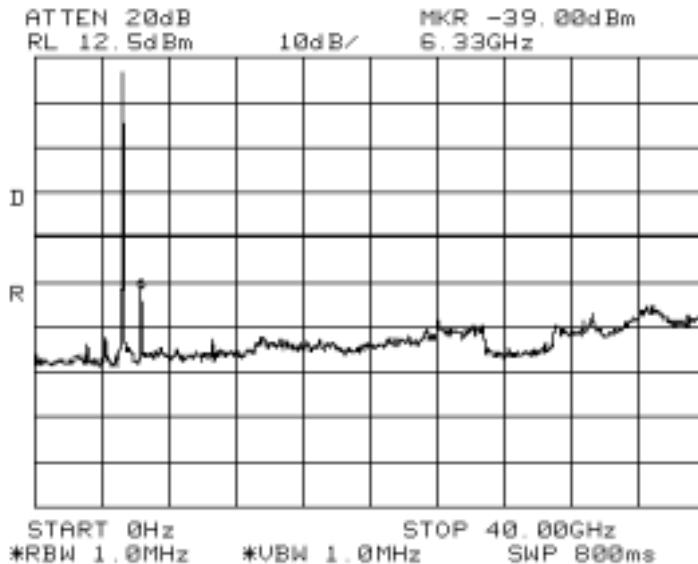

T45022/511

T45022/512

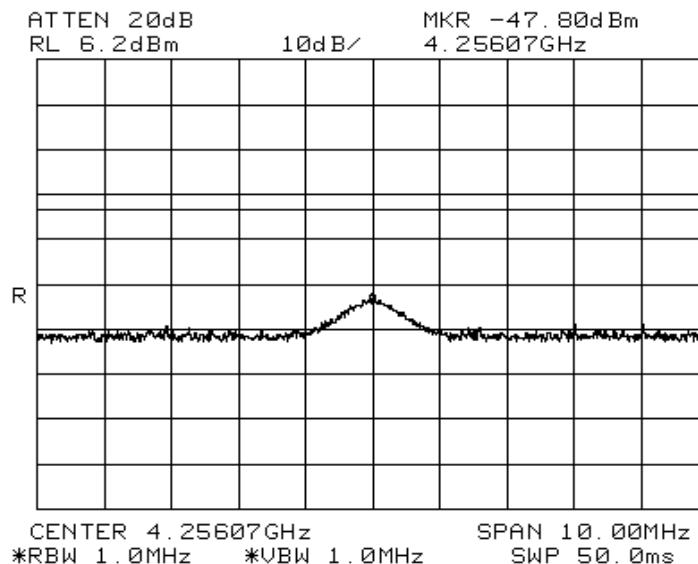





EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
Contact:	Angela Yao	Proj Eng:	Mark Hill
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

T45022/513

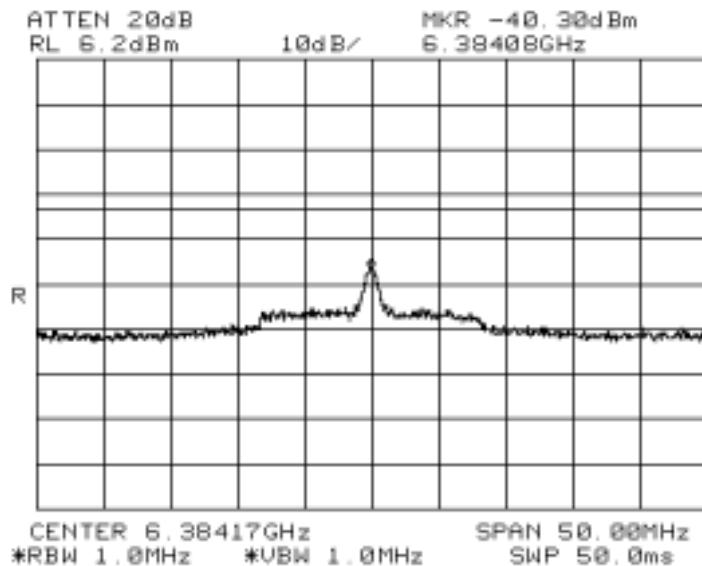

T45022/514

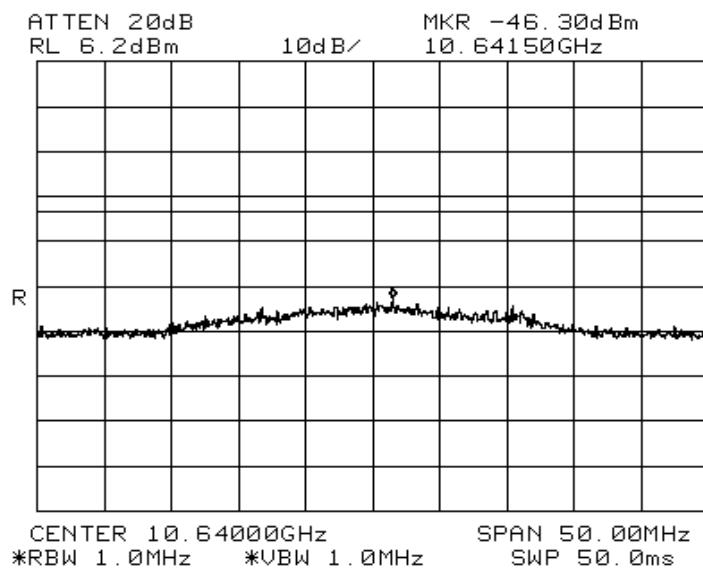



EMC Test Data

Client: ActionTec Electronics	Job Number: J44996
Model: 802CA	T-Log Number: T45022
	Proj Eng: Mark Hill
Contact: Angela Yao	
Spec: FCC 15 Sub. B & E, RSS-210	Class: B

Band Edge Measurements:


For signals in the restricted bands immediately above and below the 5.15 to 5.35 GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was then applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

5.15 GHz band edge, EUT operating on the lowest channel

The highest signal within 50 MHz of the 5.15 GHz band was -47.33 dBc (Peak) / -56.16 dBc (Average)

Peak bandedge

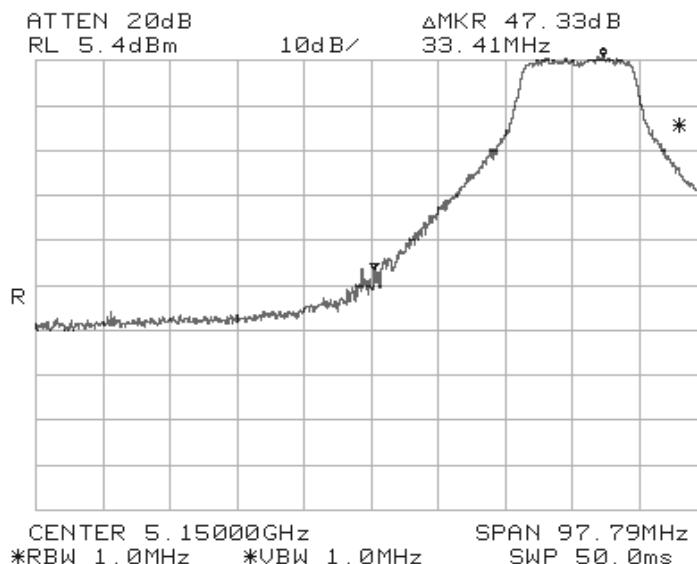




EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
Contact:	Angela Yao	Proj Eng:	Mark Hill
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Average Bandedge

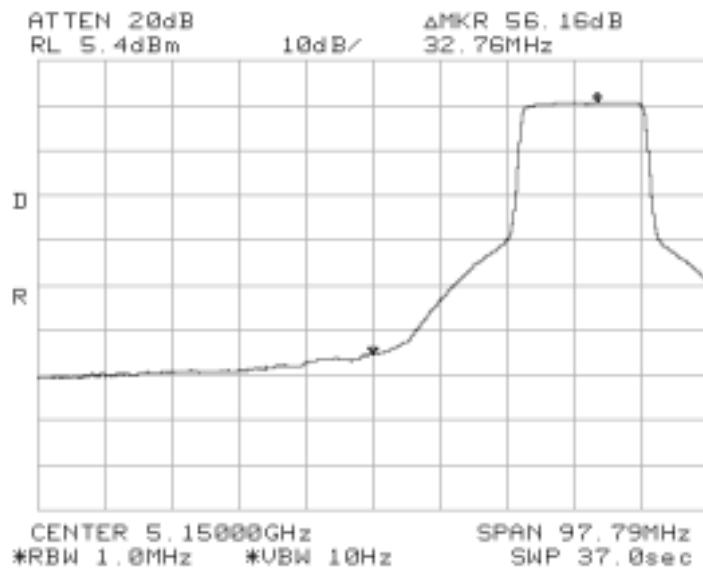




EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B


5.35 GHz band edge EUT operating on channel 17 (highest channel):

The highest signal in the 5.35 to 5.46 GHz band was -45 dBc (Peak) / -55.16 dBc (Average)

Peak bandedge

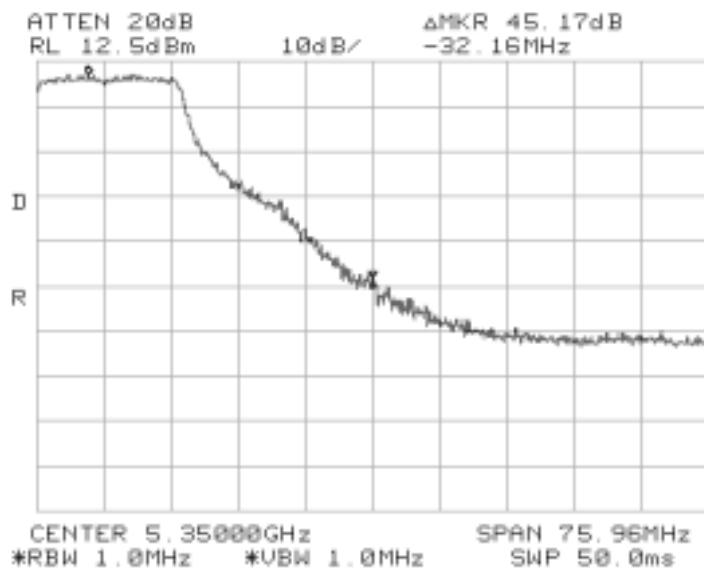

Average Bandedge

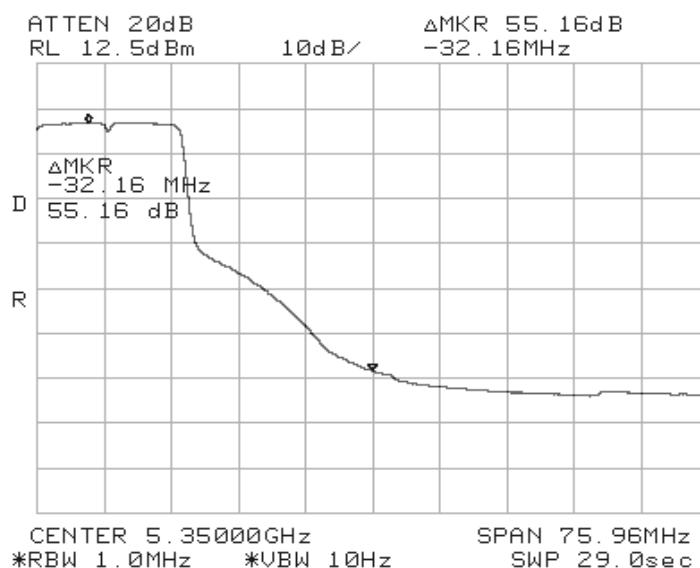



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Run #6a: Radiated Spurious Emissions, 1000 - 40000 MHz

Spurious emissions from 30 - 1000 MHz were measured while performing emissions measurements of the digital device. Refer to run #1 performed on 10-12-2001

Limit for emissions in restricted bands:	54dB _u V/m (Average)	74dB _u V/m (Peak)
Limit for emissions outside of restricted bands:	EIRP < -27dBm/MHz	(68dB _u V/m)

Fundamental signal measurements (to calculate the band edge field strengths): Power= 13 dBm @ 5180 MHz, 13 dBm @ 5320 MHz.

Frequency	Level	Pol	15.209 / 15.407		Detector	Azimuth	Height	Comments
MHz	dB _u V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5180.0	107.9	v	-	-	Pk	112	1.4	RBW = VBW = 1 MHz
5180.0	98.0	v	-	-	Avg	112	1.4	RBW = 1MHz, VBW = 10Hz
5180.0	103.0	h	-	-	Pk	78	1.4	RBW = VBW = 1 MHz
5180.0	92.7	h	-	-	Avg	78	1.4	RBW = 1MHz, VBW = 10Hz
5320.0	105.9	v	-	-	Pk	224	1.4	RBW = VBW = 1 MHz
5320.0	96.1	v	-	-	Avg	225	1.4	RBW = 1MHz, VBW = 10Hz
5320.0	101.4	h	-	-	Pk	280	1.3	RBW = VBW = 1 MHz
5320.0	91.9	h	-	-	Avg	280	1.3	RBW = 1MHz, VBW = 10Hz

Band Edge Field Strength Calculations

Frequency	Level	Pol	15.209 / 15.407		Detector	Azimuth	Height	Comments
MHz	dB _u V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5150.0	60.6	v	74.0	-13.4	Pk			Note 1
5150.0	41.8	v	54.0	-12.2	Avg			Note 1
5150.0	55.7	h	74.0	-18.3	Pk			Note 1
5150.0	36.5	h	54.0	-17.5	Avg			Note 1
5350.0	60.9	v	74.0	-13.1	Pk			Note 2
5350.0	41.1	v	54.0	-12.9	Avg			Note 2
5350.0	56.4	h	74.0	-17.6	Pk			Note 2
5350.0	36.9	h	54.0	-17.1	Avg			Note 2

Note 1:	EUT operating on the lowest channel available in the 5.15 - 5.25 MHz band. Signal level calculated using the relative measurements in run #5 (-47.3dBc for peak and -56.2dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.
Note 2:	EUT operating on highest channel available in the 5.25 - 5.35 MHz band. Signal level calculated using the relative measurements in run #5 (-45 dBc for peak and -55 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Run #6b: Radiated Spurious Emissions, 1000 - 40000 MHz**EUT On Lowest Channel Available (5.18 GHz); Power = 10 dBm (PCDAC = 05)**

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
10360.0	66.3	v	68.3	-2.0	Note 3	270	1.6
15540.0	48.3	v	54.0	-5.7	Avg	225	1.3
15540.0	47.8	h	54.0	-6.2	Avg	280	1.5
6216.0	60.9	v	68.3	-7.5	Note 3	315	1.6
10360.0	57.0	h	68.3	-11.3	Note 3	280	1.5
15540.0	62.0	v	74.0	-12.0	Pk	225	1.3
15540.0	60.2	h	74.0	-13.8	Pk	280	1.5
6216.0	50.1	h	68.3	-18.2	Note 3	315	1.5

EUT On Center Channel (5.26 GHz) Power= 13 dBm (PCDAC= 08)

15780.0	51.9	h	54.0	-2.1	Avg	270	1.5	Note 2
10520.0	64.1	v	68.3	-4.2	Note 3	270	1.6	Note 4
15780.0	49.8	v	54.0	-4.2	Avg	315	1.3	Note 2
15780.0	66.1	h	74.0	-7.9	Pk	270	1.5	Note 2
15780.0	62.8	v	74.0	-11.2	Pk	315	1.3	Note 2
10520.0	56.9	h	68.3	-11.4	Note 3	115	1.6	Note 4
6312.0	52.8	v	68.3	-15.5	Note 3	225	1.6	Note 4 & 5
6312.0	43.2	h	68.3	-25.2	Note 3	180	1.2	Note 4 & 5

EUT On Highest Channel Available (5.32 GHz); Power = 13 dBm (PCDAC= 08)

10640.0	49.8	v	54.0	-4.2	Avg	225	1.3	Note 2
15960.0	48.9	v	54.0	-5.1	Avg	270	1.7	Note 2
15960.0	48.1	h	54.0	-5.9	Avg	225	1.2	Note 2
4256.0	46.3	v	54.0	-7.7	Pk	0	1.3	Note 2: Noise Floor Measurement
6384.0	59.7	v	68.3	-8.6	Note 3	318	1.2	Note 4 & 5
10640.0	63.8	v	74.0	-10.2	Pk	225	1.3	Note 2
4256.0	43.5	h	54.0	-10.5	Pk	0	1.3	Note 2: Noise Floor Measurement
15960.0	61.4	v	74.0	-12.6	Pk	270	1.7	Note 2
15960.0	60.4	h	74.0	-13.6	Pk	225	1.2	Note 2
10640.0	35.0	h	54.0	-19.0	Avg	225	1.5	Note 2
6384.0	48.5	h	68.3	-19.8	Note 3	285	1.2	Note 4 & 5
10640.0	51.2	h	74.0	-22.8	Pk	225	1.5	Note 2

See following page for test notes...




EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

...test notes for run 6b

Note 1:	For emissions falling in the restricted bands detailed in 15.205 the general limits of 15.209 apply. For all other emissions the limit is EIRP < -27dBm (equivalent to a field strength at 3m of 68dB μ V/m)
Note 2:	Signal is in a restricted band
Note 3:	Restricted Band Peak Measurements: Resolution and Video BW: 1 MHz, Restricted Band Average Measurements: Resolution Bw: 1MHz and Video Bw: 10 Hz. All other measurements, RBW = 1MHz and VBW = 3MHz, video averaging on (100 samples).
Note 4:	Signal does not fall in a restricted band.
Note 5:	This measurement was made using a resolution bandwidth of 3 kHz. The instrumentation noise floor was too high to allow measurements with RBW = 1MHz because a preamplifier could not be used (with the EUT operating the intentional signal would overload the amplifier and there is no low pass filter with sufficient shape factor to reject the intentionally transmitted signal but pass the spurious signal). The signal was a narrowband signal (as verified during the conducted antenna measurements) and so the amplitude (peak/average) in a 3kHz bandwidth would be the same as that in a 1MHz bandwidth (please refer to the plot below). The peak reading has been compared with the average limit.

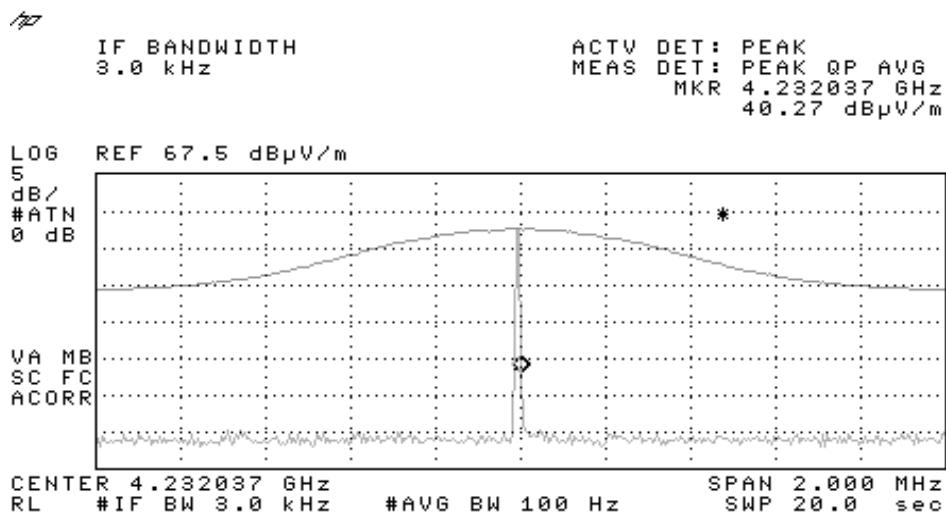

Plot showing LO signal at 4GHz measured using RBW = 1MHz and RBW = 3kHz. Amplitude of the signal does not change with resolution bandwidth.



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

FCC Part 15 Subpart E Tests

Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test:	10/15/2001 & 10/16/2001	Config. Used:	#2
Test Engineer:	Jmartinez	Config Change:	None
Test Location:	SVOATS# 4		Host Unit Voltage 120Vac, 60Hz

General Test Configuration

The EUT was located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT unless stated otherwise. When measuring the conducted emissions from the EUT's antenna port, the antenna port of the EUT was connected to the spectrum analyzer or power meter via a suitable attenuator to prevent overloading the measurement system. All measurements are corrected to allow for the external attenuators and cables used.

Ambient Conditions: Temperature: 18°C
Rel. Humidity: 75%

Summary of Results

Run #	Test Performed	Limit	Result	Comments
1	Output Power	15.407(a) (1), (2)	Pass	12.9 / 15.6 dBm
2	Power Spectral Density (PSD)	15.407(a) (1), (2)	Pass	-4.6 / -1.7dBm/MHz
3	26dB Bandwidth	15.407	Pass	>43 MHz
3	20 dB Bandwidth	RSS 210		>33 MHz
4	Peak Excursion Envelope	15.407(a) (6)	Pass	Peak to average excursion < 13dB, Peak PSD 10dBm/MHz
5	Antenna Conducted - Out of Band Spurious	15.407(b)	Pass	All emissions below the 27dBm/MHz limit
6	RE, 1000 - 40000 MHz - Spurious Emissions	15.407(b)(6)	Pass	-1.26dB @ 4168MHz



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Run #1b: Output Power

Antenna Gain: 1.2 dBi

Channel	Frequency (MHz)	26-dB BW (MHz)	Output Power (dBm)	FCC Limit (dBm) (note 3)	Comments
Low	5210	43.8	10.4	17.0	Note 2
	5210	43.8	12.9	17.0	Note 1
Midd	5250	46.2	13.0	17.0	Note 2
	5250	46.2	15.6	17.0	Note 1
High	5290	45.2	12.5	24.0	Note 2
	5290	45.2	14.7	24.0	Note 1

Note 1:	Measured using spectrum analyzer's power measurement function (RBW = 1MHz, VBW = 30kHz). Used Max hold function.
Note 2:	Measured using a Rohde & Schwarz Power Meter with a average power sensor.
Note 3:	RSS 210 limit is 23dBm in the 5.15 to 5.25 GHz band, 6dB higher than the FCC limit. This limit is based on the emission bandwidth and operating frequency.
Note 3:	RSS 210 limit is 24dBm in the 5.15 to 5.25 GHz band, same as FCC limit. This limit is based on the emission bandwidth and operating frequency.



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Run #2: Power Spectral Density


Antenna Gain: 1.2 dBi

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	FCC Limit (dBm) note 2	Graph Reference	
Low	5210	-4.6	4.0	T45022/301	Note 1
Midd	5250	-2.0	4.0	T45022/302	Note 1
High	5290	-1.7	11.0	T45022/303	Note 1

Note 1: The above measurements were made using RBW = 1MHz, VBW = 1MHz, video averaging on. To demonstrate compliance with RSS 210, the peak PSD was also measured using RBW= VBW=1MHz, video averaging off during the peak excursion measurements (run #4). The peak PSD of 7.5 dBm did not exceed the maximum permitted average PSD of 10dBm (5.15 to 5.25 GHz band) or 11dBm (5.25-5.35GHz band) so no restriction is placed on the output power or average PSD with respect to RSS 210.

Note 2: RSS 210 limit is 10dBm/MHz in the 5.15 to 5.25 GHz band, 6dB higher than the FCC limit.



Plots Showing Power Spectral Density (RBW = 1MHz, VBW = 1 MHz, video averaging ON)

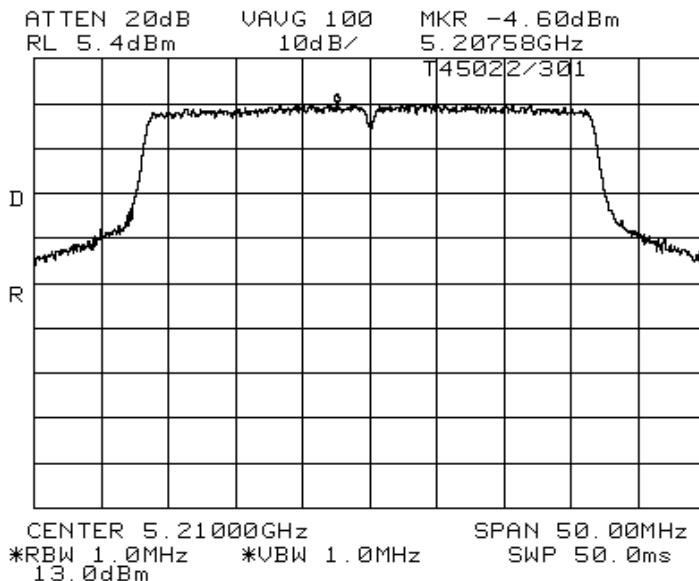



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
Contact:	Angela Yao	Proj Eng:	Mark Hill
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

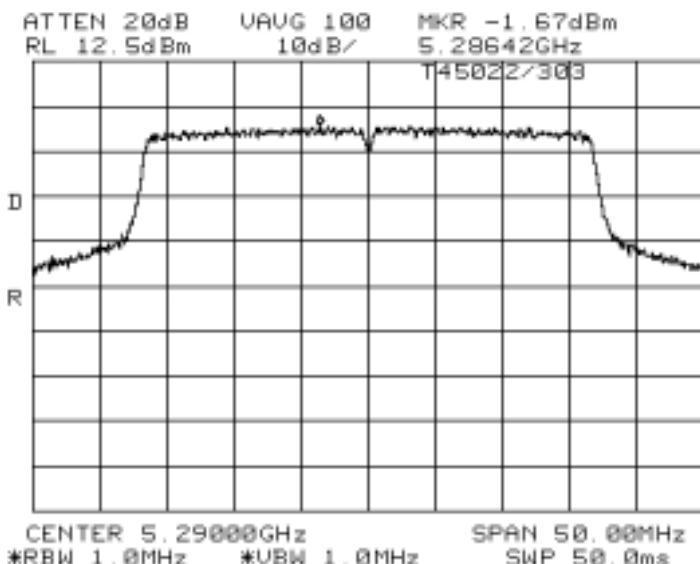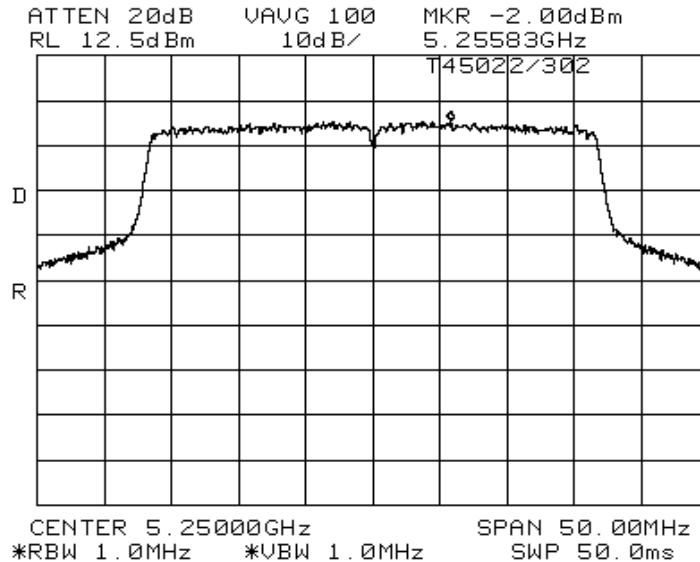




EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Run #3: Signal Bandwidth

Channel	Frequency (MHz)	Resolution Bandwidth	26 dB Signal Bandwidth (MHz)	20 dB Signal Bandwidth (MHz)	Graph reference #
Low	5210	300 kHz	43.8	33.17	T45022/401
Midd	5250	300 kHz	46.2	33.33	T45022/402
High	5290	300 kHz	45.2	33.33	T45022/403



Plots Showing Signal Bandwidth

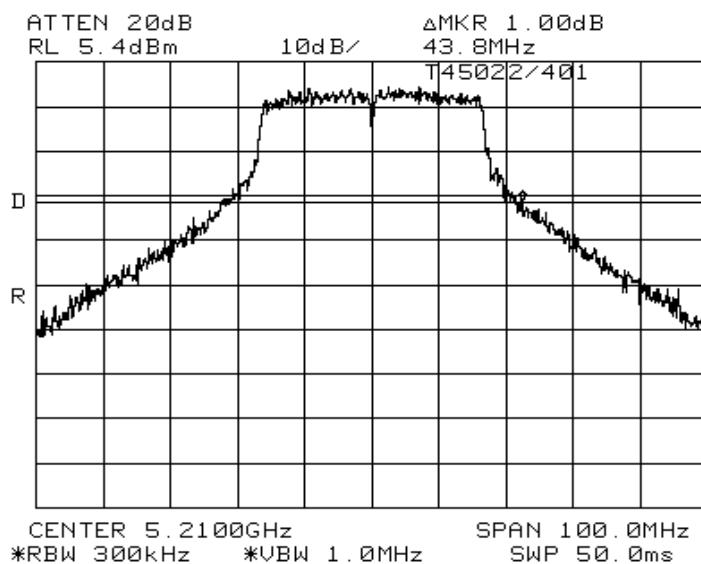



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
Contact:	Angela Yao	Proj Eng:	Mark Hill
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

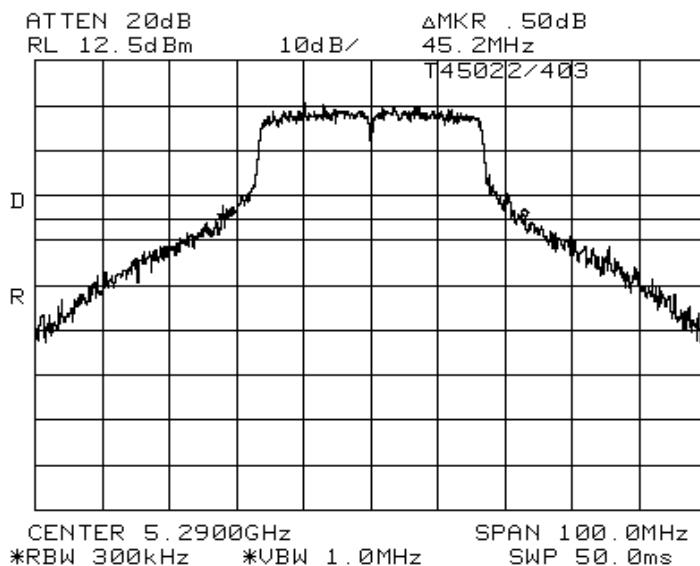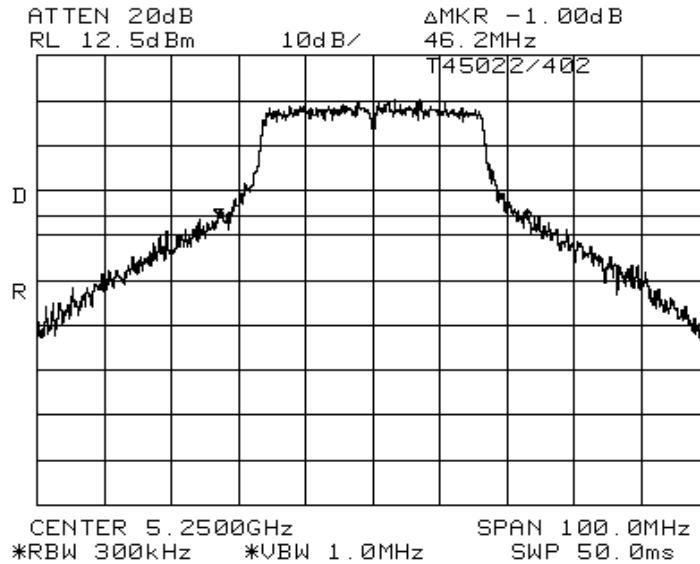



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Run #4: Peak Excursion Measurement


Plots Showing Peak Excursion

Trace A: RBW = VBW = 1MHz

Trace B: RBW = 1 MHz, VBW = 30kHz

Low Channel Peak Excursion = 7.83 dB. Peak power spectral density (RSS210 only) = 5 dBm.

5.21 GHz @ 10 dBm (PCDAC = 05)

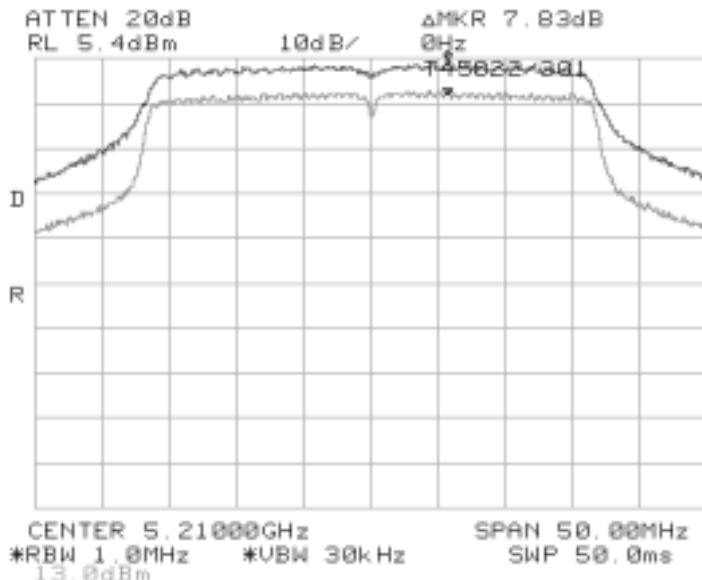





EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Mid Channel Peak Excursion = 7.17 dB. Peak power spectral density (RSS210 only) = 9.67 dBm.
5.25 GHz @ 13 dBm (PCDAC = 08)

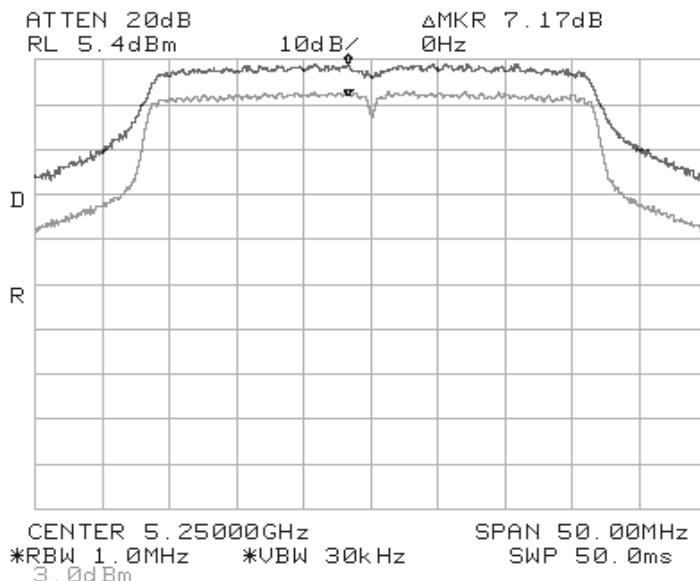

High Channel Peak Excursion = 7.5 dB. Peak power spectral density (RSS210 only) = 10 dBm.
5.29 GHz @ 13 dBm (PCDAC = 08)

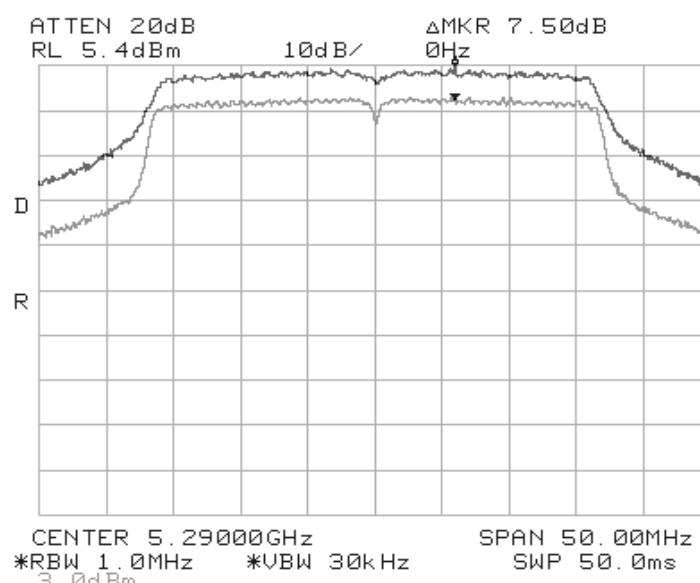



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Run #5: Out Of Band Spurious Emissions - Antenna Conducted

The antenna gain of the radios integral antenna is 1.2dBi. The EIRP limit is -27dBm/MHz for all out of band signals that do not fall in restricted bands. A limit of -28.2 dBm was, therefore, used for signals not in restricted bands and close to the intentional band with the assumption that the antenna gain was equal to 1.2 within 100 MHz of the upper and lower band edges. For signals removed from the band edge by more than 100MHz, radiated measurements were made (refer to run #6) if the signal amplitude exceeded -37dBm.

Channel	Frequency (MHz)	Frequency Range	Highest Spurious Signal	Graph reference #
Low	5210	30 - 1000 MHz	Note 4	T45022/601
		1 to 5.15 GHz	4167.97 (Note 1)	T45022/602
		5.25 to 10 GHz	6253.3 (Note 1)	T45022/603
		10 GHz to 20 GHz	10420 (Note 3)	T45022/604
		20 GHz to 40 GHz	None	
Midd	5252	30 - 1000 MHz	Note 4	T45022/607
		1 to 5.25 GHz	4200 (Note 1)	T45022/608
		5.35 to 10 GHz	6300 (Note 1)	T45022/609
		10 GHz to 20 GHz	10500 (Note 3)	T45022/610
		20 GHz to 40 GHz	None	
High	5290	30 - 1000 MHz	Note 4	T45022/611
		1 to 5.725 GHz	4232.07 (Note)	T45022/612
		5.825 to 10 GHz	6348.3 (Note 1)	T45022/613
		10 GHz to 20 GHz	10580 (Note 3)	T45022/614
		20 GHz to 40 GHz	None	

Note 1: Signal is in a restricted band. Refer to run #6 for field strength measurements.

Note 2: Signal is not in restricted band. Limit is -27dBm eirp. As the signal strength is significantly lower than -27dBm no field strength measurements required.

Note 3: Signal is not in restricted band. Limit is -27dBm eirp. Although the signal strength is significantly lower than -27dBm field strength measurements were made (refer to run #6)

Note 4: All spurious signals in this frequency band measured during digital device radiated emissions test.

Note 5: Signal is wihtin 10Mhz of the 5.725 or 5.825 Band edge. Limit is -17dBm EIRP




EMC Test Data


Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Plots Showing Out-Of-Band Emissions (RBW=VBW=1MHz)

0 to 40,000 MHz scan plot @ 5.21 GHz

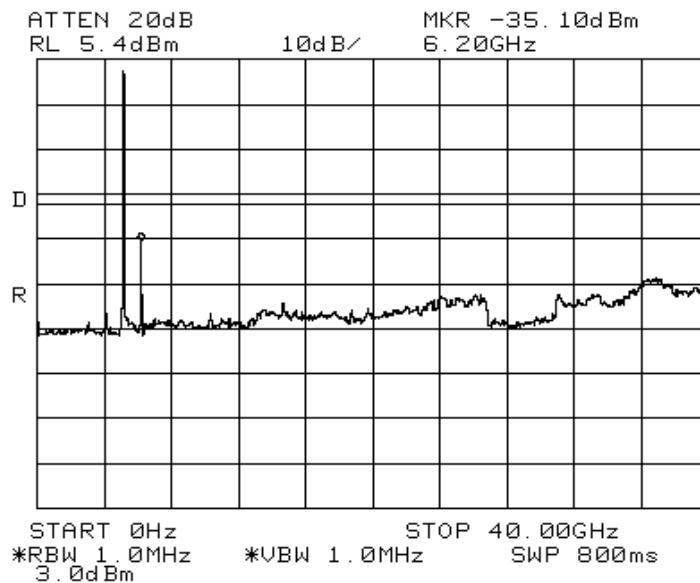

T45022/602


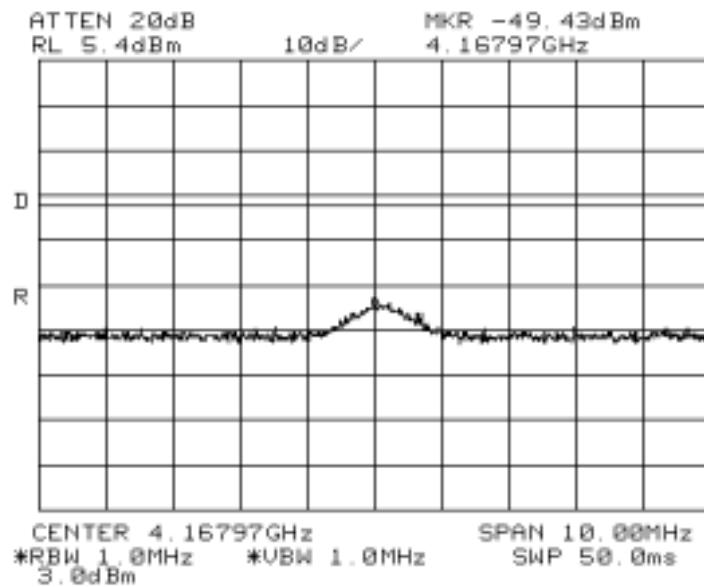




EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
Contact:	Angela Yao	Proj Eng:	Mark Hill
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

T45022/603

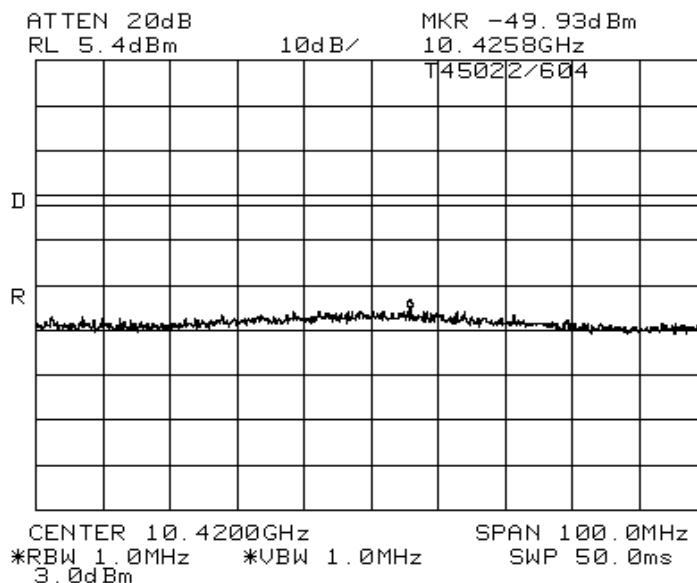
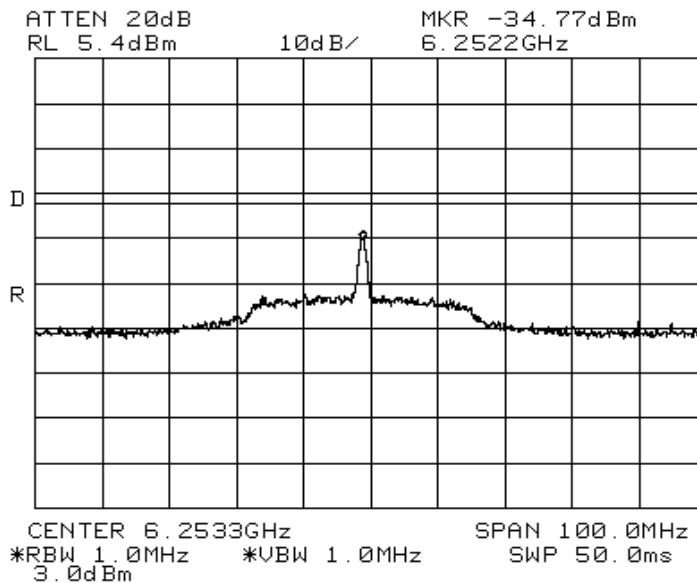




EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B



0 to 40,000 MHz scan plot @ 5.25 GHz

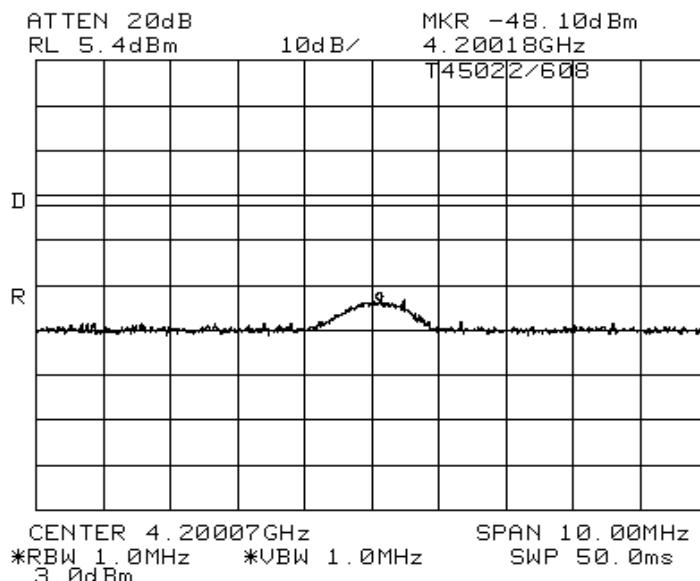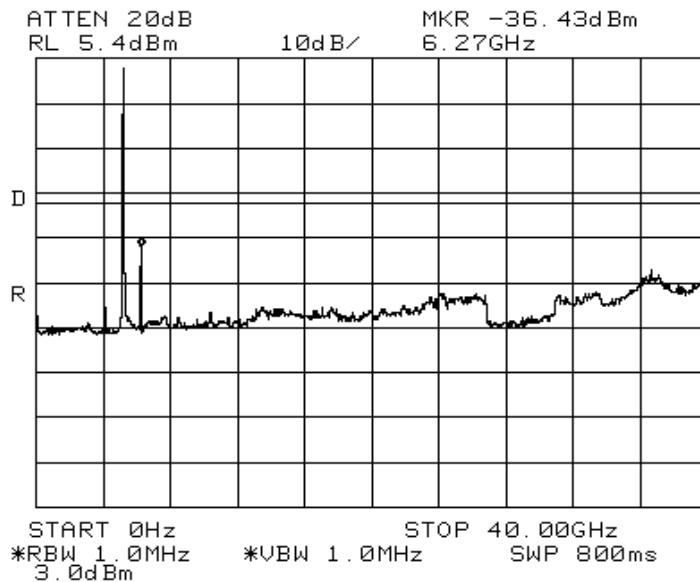



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

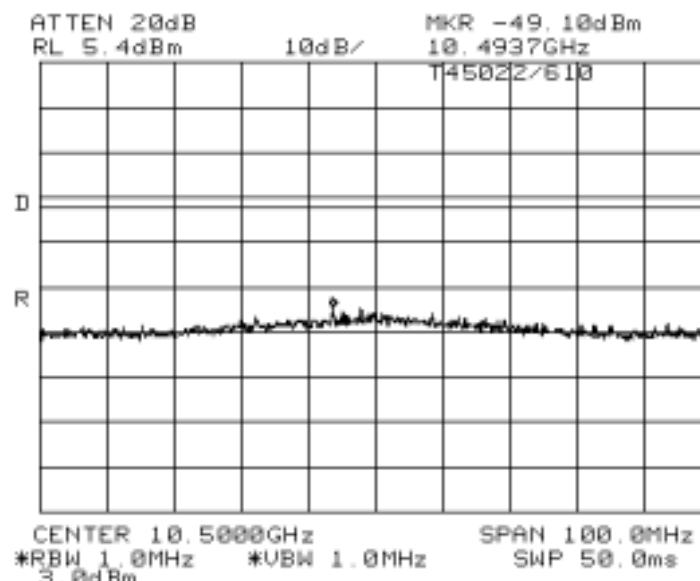
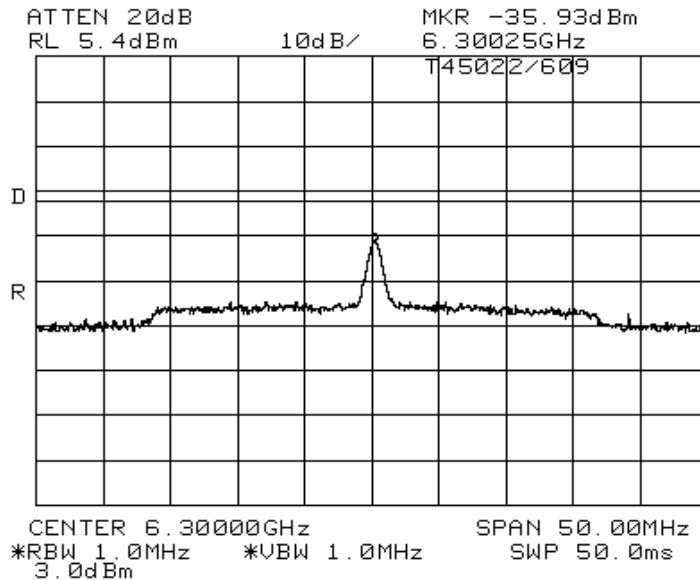




EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
Contact:	Angela Yao	Proj Eng:	Mark Hill
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B



0 to 40,000 MHz scan plot @ 5.29 GHz

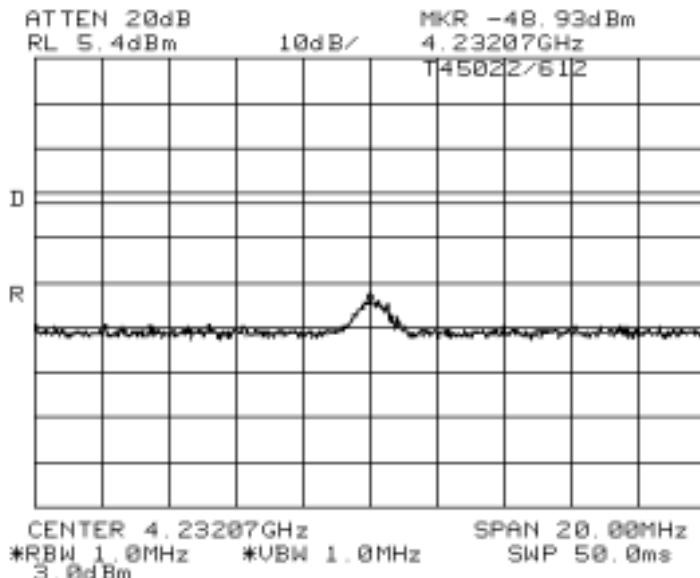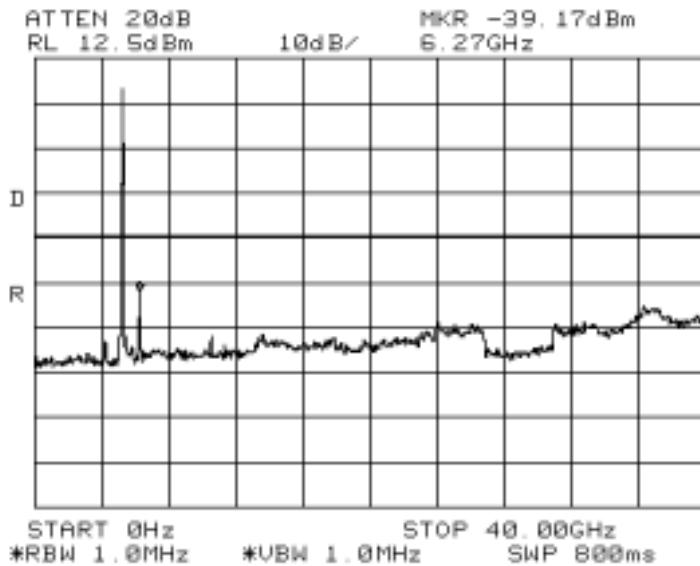



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

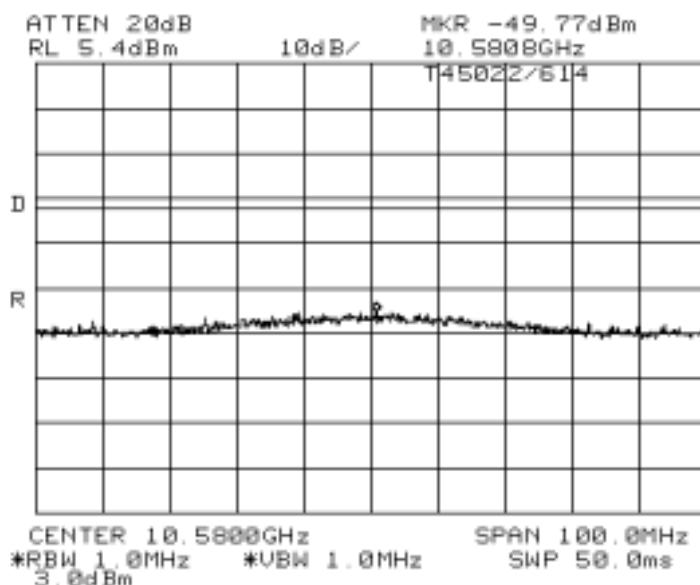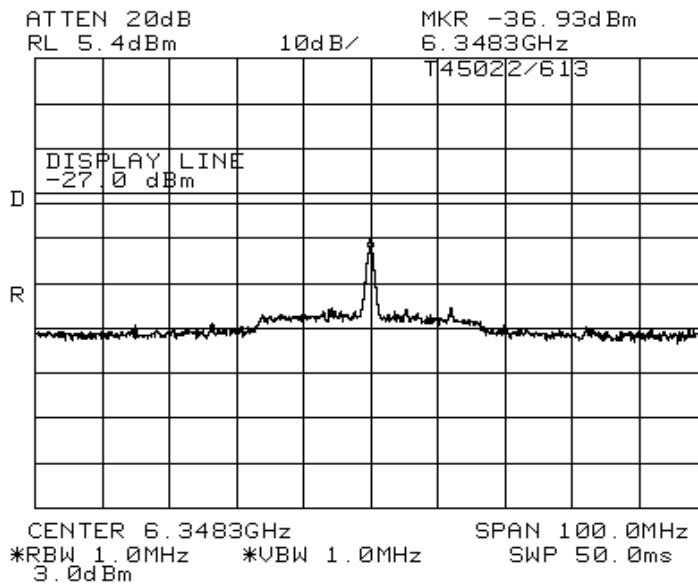



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Band Edge Measurements:


For signals in the restricted bands immediately above and below the 5.15 to 5.35 GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was then applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

5.15 GHz band edge, EUT operating on the lowest channel

The highest signal within 50 MHz of the 5.15 GHz band was -56.17 dBc (Peak) / -58.33 dBc (Average)

Peak Bandedge

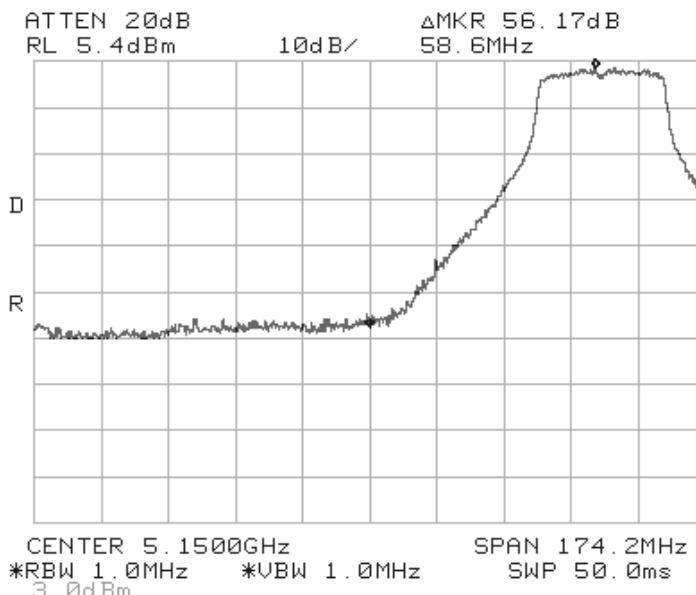




EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
Contact:	Angela Yao	Proj Eng:	Mark Hill
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Average Bandedge

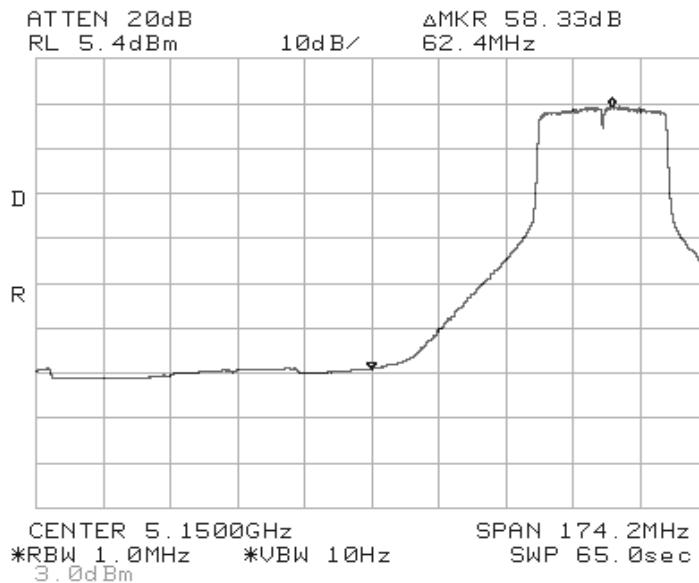




EMC Test Data

Client: ActionTec Electronics	Job Number: J44996
Model: 802CA	T-Log Number: T45022
	Proj Eng: Mark Hill
Contact: Angela Yao	
Spec: FCC 15 Sub. B & E, RSS-210	Class: B


5.35 GHz band edge EUT operating on the highest channel:

The highest signal in the 5.35 to 5.46 GHz band was -52 dBc (Peak) / -56 dBc (Average)

Peak Bandedge

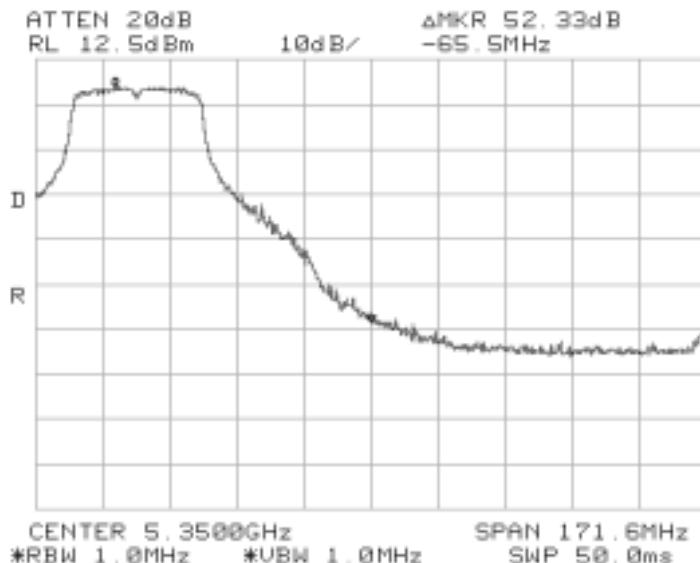

Average Bandedge

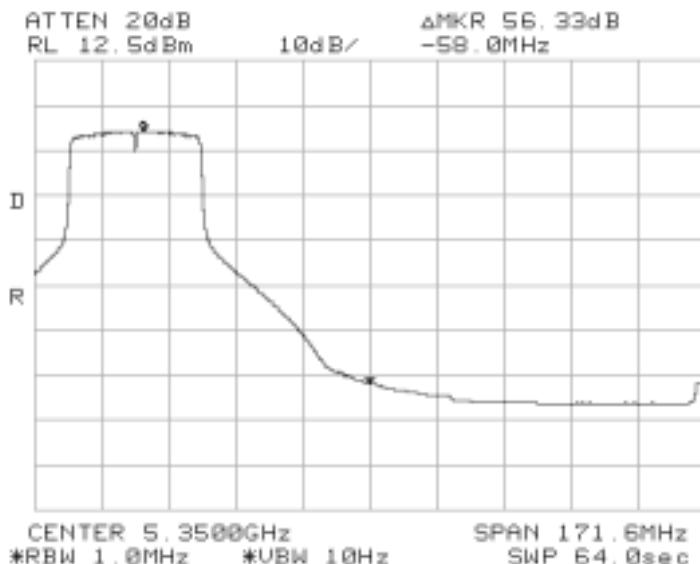



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Run #6a: Radiated Spurious Emissions, 1000 - 40000 MHz

Spurious emissions from 30 - 1000 MHz were measured while performing emissions measurements of the digital device. Refer to run #1 performed on 10-12-2001

Limit for emissions in restricted bands:	54dBuV/m (Average)	74dBuV/m (Peak)
Limit for emissions outside of restricted bands:	EIRP < -27dBm/MHz	(68dBuV/m)

Fundamental signal measurements (to calculate the band edge field strengths):

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
5210.0	104.8	v	-	-	Pk		
5210.0	94.8	v	-	-	Avg		
5210.0	97.3	h	-	-	Pk		
5210.0	87.4	h	-	-	Avg		
5290.0	105.7	v	-	-	Pk		
5290.0	95.6	v	-	-	Avg		
5290.0	99.5	h	-	-	Pk		
5290.0	88.9	h	-	-	Avg		

Band Edge Field Strength Calculations

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
5150.0	48.8	v	74.0	-25.2	Pk		
5150.0	36.8	v	54.0	-17.2	Avg		
5150.0	41.3	h	74.0	-32.7	Pk		
5150.0	29.4	h	54.0	-24.6	Avg		
5350.0	53.7	v	74.0	-20.4	Pk		
5350.0	39.6	v	54.0	-14.4	Avg		
5350.0	47.5	h	74.0	-26.5	Pk		
5350.0	32.9	h	54.0	-21.1	Avg		

Note 1: EUT operating on the lowest channel available in the 5.15 - 5.25 MHz band. Signal level calculated using the relative measurements in run #5 (-56 dBc for peak and -58 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.

Note 2: EUT operating on highest channel available in the 5.25 - 5.35 MHz band. Signal level calculated using the relative measurements in run #5 (-52 dBc for peak and -56 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210		Class: B

EUT On Lowest Channel Available (5.21 GHz); Power = 10 dBm (PCDAC = 05)

Frequency	Level	Pol	15.209 / 15.407	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
4168.00	52.7	v	54.0	-1.3	Avg	23	1.8
4168.00	50.2	h	54.0	-3.8	Avg	345	2.0
10420.0	63.2	v	68.3	-5.1	Note 3	225	1.5
15628.0	47.5	v	54.0	-6.5	Avg	222	1.4
15628.0	47.3	h	54.0	-6.7	Avg	199	1.1
6252.0	60.6	v	68.3	-7.7	Note 3	148	1.4
10420.0	55.9	h	68.3	-12.4	Note 3	320	1.4
15628.0	60.5	h	74.0	-13.5	Pk	199	1.1
15628.0	60.1	v	74.0	-13.9	Pk	222	1.4
4168.00	55.4	v	74.0	-18.6	Pk	23	1.8
4168.00	54.4	h	74.0	-19.6	Pk	345	2.0
6252.0	48.5	h	68.3	-19.8	Note 3	145	1.4

EUT On Center Channel (5.25 GHz) Power= 13 dBm (PCDAC= 08)

4200.00	51.0	v	54.0	-3.0	Avg	29	2.0	Note 2,4
4200.00	50.4	h	54.0	-3.7	Avg	360	2.0	Note 2; Note 4
15750.0	48.9	v	54.0	-5.1	Avg	180	1.3	Note 2
15750.0	47.2	h	54.0	-6.8	Avg	225	1.3	Note 2
10500.0	58.5	v	68.3	-9.8	Note 3	265	1.7	Note 4
6300.0	57.9	v	68.3	-10.5	Note 3	315	1.5	Note 4 & 5
15750.0	60.5	h	74.0	-13.5	Pk	225	1.3	Note 2
15750.0	60.0	v	74.0	-14.0	Pk	180	1.3	Note 2
10500.0	53.0	h	68.3	-15.3	Note 3	290	1.6	Note 4
4200.00	54.8	v	74.0	-19.2	Pk	29	2.0	Note 2,4
6300.0	48.6	h	68.3	-19.7	Note 3	311	1.5	Note 4 & 5
4200.00	53.7	h	74.0	-20.3	Pk	360	2.0	Note 2; Note 4



EMC Test Data


Client:	ActionTec Electronics					Job Number:	J44996	
Model:	802CA					T-Log Number:	T45022	
						Proj Eng:	Mark Hill	
Contact:	Angela Yao							
Spec:	FCC 15 Sub. B & E, RSS-210					Class:	B	

EUT On Highest Channel Available (5.29 GHz); Power = 13 dBm (PCDAC= 08)

4232.00	52.1	h	54.0	-1.9	Avg	347	2.0	Note 2,4
4232.00	50.0	v	54.0	-4.0	Avg	9	1.7	Note 2,4
15870.0	48.2	v	54.0	-5.8	Avg	1270	1.4	Note 2
15870.0	47.3	h	54.0	-6.7	Avg	224	1.5	Note 2
6348.0	60.5	v	68.3	-7.8	Note 3	280	1.3	Note 4 & 5
10580.0	59.2	v	68.3	-9.1	Note 3	270	1.5	Note 4
15870.0	61.2	h	74.0	-12.8	Pk	224	1.5	Note 2
15870.0	60.2	v	74.0	-13.8	Pk	270	1.4	Note 2
10580.0	51.0	h	68.3	-17.3	Note 3	224	1.5	Note 4
4232.00	54.9	h	74.0	-19.1	Pk	347	2.0	Note 2,4
6348.0	48.5	h	68.3	-19.8	Note 3	240	1.4	Note 4 & 5
4232.00	54.0	v	74.0	-20.0	Pk	9	1.7	Note 2,4

Note 1:	For emissions falling in the restricted bands detailed in 15.205 the general limits of 15.209 apply. For all other emissions the limit is EIRP < -27dBm (equivalent to a field strength at 3m of 68dBuV/m)
Note 2:	Signal is in a restricted band
Note 3:	Restricted Band Peak Measurements: Resolution and Video BW: 1 MHz, Restricted Band Average Measurements: Resolution Bw: 1MHz and Video Bw: 10 Hz. All other measurements, RBW = 1MHz and VBW = 3MHz, video averaging on (100 samples).
Note 4:	Signal does not fall in a restricted band.
Note 5:	This measurement was made using a resolution bandwidth of 3 kHz. The instrumentation noise floor was too high to allow measurements with RBW = 1MHz because a preamplifier could not be used (with the EUT operating the intentional signal would overload the amplifier and there is no low pass filter with sufficient shape factor to reject the intentionally transmitted signal but pass the spurious signal). The signal was a narrowband signal (as verified during the conducted antenna measurements) and so the amplitude (peak/average) in a 3kHz bandwidth would be the same as that in a 1MHz bandwidth (please refer to the plot below). The peak reading has been compared with the average limit.

Client: ActionTec Electronics	Job Number: J44996
Model: 802CA	T-Log Number: T45022
	Proj Eng: Mark Hill
Contact: Angela Yao	
Spec: FCC 15 Sub. B & E, RSS-210	Class: B

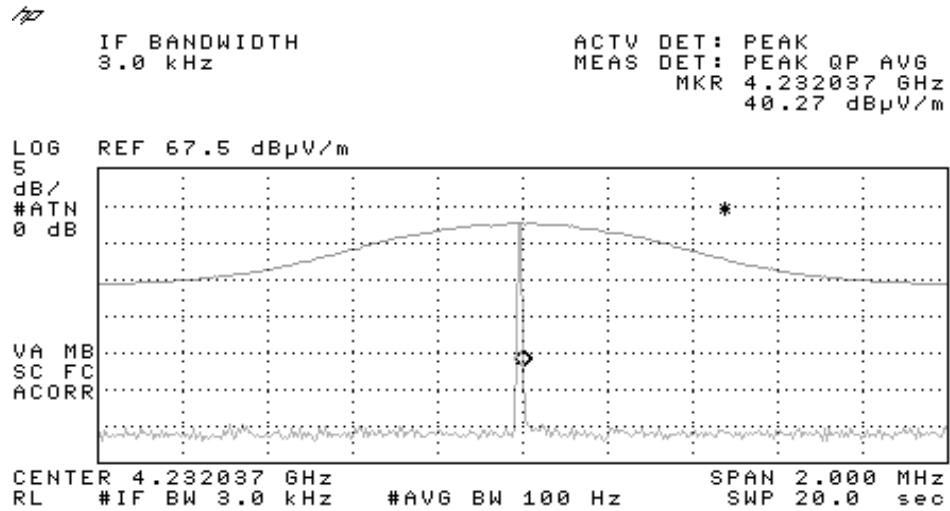

Plot showing LO signal at 4GHz measured using RBW = 1MHz and RBW = 3kHz. Amplitude of the signal does not change with resolution bandwidth.



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Radiated Emissions

Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 10/12/2001 Config. Used: 1
Test Engineer: Marissa Faustino/Vishal Config Change: None
Test Location: SVOATS #3 Host Unit Voltage: 120V/60Hz

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated emissions testing.

On the OATS, the measurement antenna was located 3 meters from the EUT for the measurement range 30 - 1000 MHz and 3m from the EUT for the frequency range 1 - 10 GHz.

Note, **preliminary** testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. **Maximized** testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

Note, for testing above 1 GHz, the FCC specifies the limit as an average measurement. In addition, the FCC states that the peak reading of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.

Ambient Conditions: Temperature: 30°C
Rel. Humidity: 17%

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	RE, Preliminary Scan 30 - 1000 MHz	FCC B	Pass	-5.9dB @ 260.909MHz
2	RE, 30 - 1000MHz - Maximized Emissions	FCC B	Pass	-4.7dB @ 260.909MHz
3	RE, 1000 - 6500 MHz Maximized Emissions	FCC B	Pass	-11.6dB @ 1397MHz

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Run #1: Preliminary Radiated Emissions, 30-1000 MHz

Frequency	Level	Pol	FCC B		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
260.909	40.1	H	46.0	-5.9	QP	238	1.0	
167.700	35.5	H	43.5	-8.0	QP	240	1.0	
432.074	37.6	H	46.0	-8.4	QP	107	1.0	
332.820	36.3	H	46.0	-9.7	QP	358	1.0	
192.032	33.1	H	43.5	-10.4	QP	99	1.0	
260.909	35.6	V	46.0	-10.4	QP	318	1.0	
456.533	34.9	V	46.0	-11.1	QP	45	1.0	
157.007	32.3	V	43.5	-11.2	QP	213	1.0	
896.560	34.7	H	46.0	-11.3	QP	305	1.0	
172.400	32.1	V	43.5	-11.4	QP	180	1.0	
32.700	27.7	V	40.0	-12.3	QP	208	1.0	
167.700	31.1	V	43.5	-12.4	QP	229	1.0	
432.074	33.6	V	46.0	-12.4	QP	332	1.0	
587.045	33.4	V	46.0	-12.6	QP	35	1.0	
466.663	33.0	H	46.0	-13.0	QP	117	1.0	
160.890	30.4	V	43.5	-13.1	QP	247	1.0	
466.663	32.7	V	46.0	-13.3	QP	289	1.0	
391.360	32.6	H	46.0	-13.4	QP	350	1.0	
456.533	32.1	H	46.0	-13.9	QP	0	1.0	
192.032	29.3	V	43.5	-14.2	QP	160	1.0	
157.007	28.6	H	43.5	-14.9	QP	66	1.0	
896.560	30.8	V	46.0	-15.2	QP	146	1.0	
587.045	30.6	H	46.0	-15.4	QP	58	1.0	
160.890	27.4	H	43.5	-16.1	QP	268	1.0	
196.646	27.3	V	43.5	-16.2	QP	247	1.0	
391.360	29.4	V	46.0	-16.6	QP	164	1.0	
196.646	25.0	H	43.5	-18.5	QP	247	1.0	
332.820	25.3	V	46.0	-20.7	QP	0	1.0	



EMC Test Data

Client:	ActionTec Electronics	Job Number:	J44996
Model:	802CA	T-Log Number:	T45022
		Proj Eng:	Mark Hill
Contact:	Angela Yao		
Spec:	FCC 15 Sub. B & E, RSS-210	Class:	B

Run #2: Maximized Readings from Run #1

Frequency	Level	Pol	FCC B		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
260.909	41.3	H	46.0	-4.7	QP	238	1.0	
332.820	39.6	H	46.0	-6.4	QP	358	1.0	
167.700	35.5	H	43.5	-8.0	QP	260	1.0	
432.074	37.6	H	46.0	-8.4	QP	107	1.0	
192.032	34.5	H	43.5	-9.0	QP	99	1.0	
260.909	35.8	V	46.0	-10.2	QP	318	1.0	

Run #3: Maximized readings, 1000 - 6500 MHz

Measurements made at 3m per FCC requirements.

Frequency	Level	Pol	FCC B	FCC B	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1397.000	42.4	V	54.0	-11.6	Avg	350	1.0	
2337.500	42.3	H	54.0	-11.7	Avg	320	1.4	
1397.000	58.1	V	74.0	-15.9	Pk	350	1.0	
1098.000	38.0	V	54.0	-16.0	Avg	150	1.0	
1300.000	36.9	H	54.0	-17.1	Avg	0	1.0	
2337.500	55.0	H	74.0	-19.0	Pk	320	1.4	
1100.000	34.4	H	54.0	-19.6	Avg	290	1.1	
1098.000	52.0	V	74.0	-22.0	Pk	150	1.0	
1300.000	51.6	H	74.0	-22.4	Pk	0	1.0	
1100.000	48.7	H	74.0	-25.3	Pk	290	1.1	