

11Mbps CHANNEL 6 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	G_p	$(S/N)_o$	$M_j = J/S$	L_{sys}	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2428.50	28.8	16.4	10.4	2.0	-49.5	≤ 8.0
2428.55	28.1	16.4	9.7	2.0	-50.2	≤ 8.0
2428.60	27.6	16.4	9.2	2.0	-50.7	≤ 8.0
2428.65	27.1	16.4	8.7	2.0	-51.2	≤ 8.0
2428.70	27.0	16.4	8.6	2.0	-51.3	≤ 8.0
2428.75	27.1	16.4	8.7	2.0	-51.2	≤ 8.0
2428.80	27.2	16.4	8.8	2.0	-51.1	≤ 8.0
2428.85	27.2	16.4	8.8	2.0	-51.1	≤ 8.0
2428.90	27.0	16.4	8.6	2.0	-51.3	≤ 8.0
2428.95	26.8	16.4	8.4	2.0	-51.5	≤ 8.0
2429.00	26.5	16.4	8.1	2.0	-51.8	≤ 8.0
2429.05	26.1	16.4	7.7	2.0	-52.2	≤ 8.0
2429.10	25.8	16.4	7.4	2.0	-52.5	≤ 8.0
2429.15	25.8	16.4	7.4	2.0	-52.5	≤ 8.0
2429.20	25.8	16.4	7.4	2.0	-52.5	≤ 8.0
2429.25	25.9	16.4	7.5	2.0	-52.4	≤ 8.0
2429.30	25.9	16.4	7.5	2.0	-52.4	≤ 8.0
2429.35	25.4	16.4	7.0	2.0	-52.9	≤ 8.0
2429.40	24.9	16.4	6.5	2.0	-53.4	≤ 8.0
2429.45	24.5	16.4	6.1	2.0	-53.8	≤ 8.0
2429.50	24.1	16.4	5.7	2.0	-54.2	≤ 8.0
2429.55	23.9	16.4	5.5	2.0	-54.4	≤ 8.0
2429.60	23.5	16.4	5.1	2.0	-54.8	≤ 8.0
2429.65	23.3	16.4	4.9	2.0	-55.0	≤ 8.0
2429.70	22.9	16.4	4.5	2.0	-55.4	≤ 8.0
2429.75	22.4	16.4	4.0	2.0	-55.9	≤ 8.0
2429.80	22.2	16.4	3.8	2.0	-56.1	≤ 8.0
2429.85	21.8	16.4	3.4	2.0	-56.5	≤ 8.0
2429.90	21.8	16.4	3.4	2.0	-56.5	≤ 8.0
2429.95	21.6	16.4	3.2	2.0	-56.7	≤ 8.0
2430.00	21.3	16.4	2.9	2.0	-57.0	≤ 8.0
2430.05	20.9	16.4	2.5	2.0	-57.4	≤ 8.0
2430.10	20.4	16.4	2.0	2.0	-57.9	≤ 8.0
2430.15	20.2	16.4	1.8	2.0	-58.1	≤ 8.0
2430.20	20.0	16.4	1.6	2.0	-58.3	≤ 8.0
2430.25	19.8	16.4	1.4	2.0	-58.5	≤ 8.0
2430.30	19.4	16.4	1.0	2.0	-58.9	≤ 8.0
2430.35	19.0	16.4	0.6	2.0	-59.3	≤ 8.0
2430.40	19.0	16.4	0.6	2.0	-59.3	≤ 8.0
2430.45	18.9	16.4	0.5	2.0	-59.4	≤ 8.0
2430.50	18.8	16.4	0.4	2.0	-59.5	≤ 8.0
2430.55	18.5	16.4	0.1	2.0	-59.8	≤ 8.0
2430.60	18.5	16.4	0.1	2.0	-59.8	≤ 8.0
2430.65	18.2	16.4	-0.2	2.0	-60.1	≤ 8.0
2430.70	18.1	16.4	-0.3	2.0	-60.2	≤ 8.0
2430.75	17.8	16.4	-0.6	2.0	-60.5	≤ 8.0
2430.80	17.6	16.4	-0.8	2.0	-60.7	≤ 8.0
2430.85	17.4	16.4	-1.0	2.0	-60.9	≤ 8.0

11Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2430.90	17.0	16.4	-1.4	2.0	-61.3	<=8.0
2430.95	17.1	16.4	-1.3	2.0	-61.2	<=8.0
2431.00	16.9	16.4	-1.5	2.0	-61.4	<=8.0
2431.05	16.8	16.4	-1.6	2.0	-61.5	<=8.0
2431.10	16.6	16.4	-1.8	2.0	-61.7	<=8.0
2431.15	16.4	16.4	-2.0	2.0	-61.9	<=8.0
2431.20	16.3	16.4	-2.1	2.0	-62.0	<=8.0
2431.25	16.1	16.4	-2.3	2.0	-62.2	<=8.0
2431.30	15.9	16.4	-2.5	2.0	-62.4	<=8.0
2431.35	15.8	16.4	-2.6	2.0	-62.5	<=8.0
2431.40	15.7	16.4	-2.7	2.0	-62.6	<=8.0
2431.45	15.6	16.4	-2.8	2.0	-62.7	<=8.0
2431.50	15.5	16.4	-2.9	2.0	-62.8	<=8.0
2431.55	15.4	16.4	-3.0	2.0	-62.9	<=8.0
2431.60	15.2	16.4	-3.2	2.0	-63.1	<=8.0
2431.65	14.9	16.4	-3.5	2.0	-63.4	<=8.0
2431.70	14.8	16.4	-3.6	2.0	-63.5	<=8.0
2431.75	14.9	16.4	-3.5	2.0	-63.4	<=8.0
2431.80	14.7	16.4	-3.7	2.0	-63.6	<=8.0
2431.85	14.5	16.4	-3.9	2.0	-63.8	<=8.0
2431.90	14.7	16.4	-3.7	2.0	-63.6	<=8.0
2431.95	14.5	16.4	-3.9	2.0	-63.8	<=8.0
2432.00	14.4	16.4	-4.0	2.0	-63.9	<=8.0
2432.05	14.5	16.4	-3.9	2.0	-63.8	<=8.0
2432.10	14.4	16.4	-4.0	2.0	-63.9	<=8.0
2432.15	14.4	16.4	-4.0	2.0	-63.9	<=8.0
2432.20	14.3	16.4	-4.1	2.0	-64.0	<=8.0
2432.25	14.4	16.4	-4.0	2.0	-63.9	<=8.0
2432.30	14.5	16.4	-3.9	2.0	-63.8	<=8.0
2432.35	14.4	16.4	-4.0	2.0	-63.9	<=8.0
2432.40	14.2	16.4	-4.2	2.0	-64.1	<=8.0
2432.45	14.1	16.4	-4.3	2.0	-64.2	<=8.0
2432.50	14.0	16.4	-4.4	2.0	-64.3	<=8.0
2432.55	14.1	16.4	-4.3	2.0	-64.2	<=8.0
2432.60	14.2	16.4	-4.2	2.0	-64.1	<=8.0
2432.65	14.0	16.4	-4.4	2.0	-64.3	<=8.0
2432.70	14.1	16.4	-4.3	2.0	-64.2	<=8.0
2432.75	14.0	16.4	-4.4	2.0	-64.3	<=8.0
2432.80	13.9	16.4	-4.5	2.0	-64.4	<=8.0
2432.85	13.7	16.4	-4.7	2.0	-64.6	<=8.0
2432.90	13.8	16.4	-4.6	2.0	-64.5	<=8.0
2432.95	13.6	16.4	-4.8	2.0	-64.7	<=8.0
2433.00	13.4	16.4	-5.0	2.0	-64.9	<=8.0
2433.05	13.2	16.4	-5.2	2.0	-65.1	<=8.0
2433.10	13.3	16.4	-5.1	2.0	-65.0	<=8.0
2433.15	13.2	16.4	-5.2	2.0	-65.1	<=8.0
2433.20	13.3	16.4	-5.1	2.0	-65.0	<=8.0
2433.25	13.1	16.4	-5.3	2.0	-65.2	<=8.0

11Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2433.30	13.0	16.4	-5.4	2.0	-65.3	<=8.0
2433.35	13.0	16.4	-5.4	2.0	-65.3	<=8.0
2433.40	12.9	16.4	-5.5	2.0	-65.4	<=8.0
2433.45	12.8	16.4	-5.6	2.0	-65.5	<=8.0
2433.50	12.7	16.4	-5.7	2.0	-65.6	<=8.0
2433.55	12.8	16.4	-5.6	2.0	-65.5	<=8.0
2433.60	12.9	16.4	-5.5	2.0	-65.4	<=8.0
2433.65	12.7	16.4	-5.7	2.0	-65.6	<=8.0
2433.70	12.7	16.4	-5.7	2.0	-65.6	<=8.0
2433.75	12.5	16.4	-5.9	2.0	-65.8	<=8.0
2433.80	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2433.85	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2433.90	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2433.95	12.3	16.4	-6.1	2.0	-66.0	<=8.0
2434.00	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2434.05	12.1	16.4	-6.3	2.0	-66.2	<=8.0
2434.10	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2434.15	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2434.20	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2434.25	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2434.30	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2434.35	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2434.40	11.4	16.4	-7.0	2.0	-66.9	<=8.0
2434.45	11.4	16.4	-7.0	2.0	-66.9	<=8.0
2434.50	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2434.55	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2434.60	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2434.65	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2434.70	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2434.75	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2434.80	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2434.85	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2434.90	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2434.95	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2435.00	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2435.05	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2435.10	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2435.15	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2435.20	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2435.25	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2435.30	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2435.35	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2435.40	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2435.45	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2435.50	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2435.55	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2435.60	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2435.65	12.0	16.4	-6.4	2.0	-66.3	<=8.0

11Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2435.70	12.1	16.4	-6.3	2.0	-66.2	<=8.0
2435.75	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2435.80	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2435.85	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2435.90	12.1	16.4	-6.3	2.0	-66.2	<=8.0
2435.95	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2436.00	12.3	16.4	-6.1	2.0	-66.0	<=8.0
2436.05	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2436.10	12.1	16.4	-6.3	2.0	-66.2	<=8.0
2436.15	12.1	16.4	-6.3	2.0	-66.2	<=8.0
2436.20	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2436.25	10.9	16.4	-7.5	2.0	-67.4	<=8.0
2436.30	9.9	16.4	-8.5	2.0	-68.4	<=8.0
2436.35	5.5	16.4	-12.9	2.0	-72.8	<=8.0
2436.40	5.6	16.4	-12.8	2.0	-72.7	<=8.0
2436.45	8.0	16.4	-10.4	2.0	-70.3	<=8.0
2436.50	7.9	16.4	-10.5	2.0	-70.4	<=8.0
2436.55	7.6	16.4	-10.8	2.0	-70.7	<=8.0
2436.60	11.2	16.4	-7.2	2.0	-67.1	<=8.0
2436.65	9.7	16.4	-8.7	2.0	-68.6	<=8.0
2436.70	5.4	16.4	-13.0	2.0	-72.9	<=8.0
2436.75	7.4	16.4	-11.0	2.0	-70.9	<=8.0
2436.80	9.4	16.4	-9.0	2.0	-68.9	<=8.0
2436.85	7.5	16.4	-10.9	2.0	-70.8	<=8.0
2436.90	7.7	16.4	-10.7	2.0	-70.6	<=8.0
2436.95	7.9	16.4	-10.5	2.0	-70.4	<=8.0
2437.00	8.5	16.4	-9.9	2.0	-69.8	<=8.0
2437.05	9.4	16.4	-9.0	2.0	-68.9	<=8.0
2437.10	6.6	16.4	-11.8	2.0	-71.7	<=8.0
2437.15	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2437.20	7.2	16.4	-11.2	2.0	-71.1	<=8.0
2437.25	10.0	16.4	-8.4	2.0	-68.3	<=8.0
2437.30	9.4	16.4	-9.0	2.0	-68.9	<=8.0
2437.35	9.4	16.4	-9.0	2.0	-68.9	<=8.0
2437.40	9.6	16.4	-8.8	2.0	-68.7	<=8.0
2437.45	8.8	16.4	-9.6	2.0	-69.5	<=8.0
2437.50	8.6	16.4	-9.8	2.0	-69.7	<=8.0
2437.55	8.4	16.4	-10.0	2.0	-69.9	<=8.0
2437.60	8.3	16.4	-10.1	2.0	-70.0	<=8.0
2437.65	10.5	16.4	-7.9	2.0	-67.8	<=8.0
2437.70	10.6	16.4	-7.8	2.0	-67.7	<=8.0
2437.75	10.2	16.4	-8.2	2.0	-68.1	<=8.0
2437.80	11.0	16.4	-7.4	2.0	-67.3	<=8.0
2437.85	10.8	16.4	-7.6	2.0	-67.5	<=8.0
2437.90	7.2	16.4	-11.2	2.0	-71.1	<=8.0
2437.95	4.9	16.4	-13.5	2.0	-73.4	<=8.0
2438.00	9.3	16.4	-9.1	2.0	-69.0	<=8.0
2438.05	10.6	16.4	-7.8	2.0	-67.7	<=8.0

11Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2438.10	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2438.15	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2438.20	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2438.25	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2438.30	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2438.35	11.4	16.4	-7.0	2.0	-66.9	<=8.0
2438.40	11.4	16.4	-7.0	2.0	-66.9	<=8.0
2438.45	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2438.50	11.4	16.4	-7.0	2.0	-66.9	<=8.0
2438.55	11.3	16.4	-7.1	2.0	-67.0	<=8.0
2438.60	11.3	16.4	-7.1	2.0	-67.0	<=8.0
2438.65	11.2	16.4	-7.2	2.0	-67.1	<=8.0
2438.70	11.4	16.4	-7.0	2.0	-66.9	<=8.0
2438.75	11.4	16.4	-7.0	2.0	-66.9	<=8.0
2438.80	11.4	16.4	-7.0	2.0	-66.9	<=8.0
2438.85	11.2	16.4	-7.2	2.0	-67.1	<=8.0
2438.90	11.3	16.4	-7.1	2.0	-67.0	<=8.0
2438.95	11.2	16.4	-7.2	2.0	-67.1	<=8.0
2439.00	11.1	16.4	-7.3	2.0	-67.2	<=8.0
2439.05	11.0	16.4	-7.4	2.0	-67.3	<=8.0
2439.10	11.1	16.4	-7.3	2.0	-67.2	<=8.0
2439.15	11.0	16.4	-7.4	2.0	-67.3	<=8.0
2439.20	11.0	16.4	-7.4	2.0	-67.3	<=8.0
2439.25	11.0	16.4	-7.4	2.0	-67.3	<=8.0
2439.30	11.1	16.4	-7.3	2.0	-67.2	<=8.0
2439.35	11.1	16.4	-7.3	2.0	-67.2	<=8.0
2439.40	11.0	16.4	-7.4	2.0	-67.3	<=8.0
2439.45	11.0	16.4	-7.4	2.0	-67.3	<=8.0
2439.50	11.1	16.4	-7.3	2.0	-67.2	<=8.0
2439.55	11.0	16.4	-7.4	2.0	-67.3	<=8.0
2439.60	11.1	16.4	-7.3	2.0	-67.2	<=8.0
2439.65	10.9	16.4	-7.5	2.0	-67.4	<=8.0
2439.70	10.8	16.4	-7.6	2.0	-67.5	<=8.0
2439.75	10.9	16.4	-7.5	2.0	-67.4	<=8.0
2439.80	10.7	16.4	-7.7	2.0	-67.6	<=8.0
2439.85	10.8	16.4	-7.6	2.0	-67.5	<=8.0
2439.90	10.9	16.4	-7.5	2.0	-67.4	<=8.0
2439.95	10.9	16.4	-7.5	2.0	-67.4	<=8.0
2440.00	11.0	16.4	-7.4	2.0	-67.3	<=8.0
2440.05	11.1	16.4	-7.3	2.0	-67.2	<=8.0
2440.10	11.3	16.4	-7.1	2.0	-67.0	<=8.0
2440.15	11.2	16.4	-7.2	2.0	-67.1	<=8.0
2440.20	11.3	16.4	-7.1	2.0	-67.0	<=8.0
2440.25	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2440.30	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2440.35	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2440.40	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2440.45	11.9	16.4	-6.5	2.0	-66.4	<=8.0

11Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2440.50	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2440.55	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2440.60	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2440.65	12.1	16.4	-6.3	2.0	-66.2	<=8.0
2440.70	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2440.75	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2440.80	12.5	16.4	-5.9	2.0	-65.8	<=8.0
2440.85	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2440.90	12.5	16.4	-5.9	2.0	-65.8	<=8.0
2440.95	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2441.00	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2441.05	12.5	16.4	-5.9	2.0	-65.8	<=8.0
2441.10	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2441.15	12.5	16.4	-5.9	2.0	-65.8	<=8.0
2441.20	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2441.25	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2441.30	12.5	16.4	-5.9	2.0	-65.8	<=8.0
2441.35	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2441.40	12.7	16.4	-5.7	2.0	-65.6	<=8.0
2441.45	12.8	16.4	-5.6	2.0	-65.5	<=8.0
2441.50	13.0	16.4	-5.4	2.0	-65.3	<=8.0
2441.55	13.1	16.4	-5.3	2.0	-65.2	<=8.0
2441.60	13.2	16.4	-5.2	2.0	-65.1	<=8.0
2441.65	13.3	16.4	-5.1	2.0	-65.0	<=8.0
2441.70	13.3	16.4	-5.1	2.0	-65.0	<=8.0
2441.75	13.2	16.4	-5.2	2.0	-65.1	<=8.0
2441.80	13.3	16.4	-5.1	2.0	-65.0	<=8.0
2441.85	13.2	16.4	-5.2	2.0	-65.1	<=8.0
2441.90	13.2	16.4	-5.2	2.0	-65.1	<=8.0
2441.95	13.2	16.4	-5.2	2.0	-65.1	<=8.0
2442.00	13.3	16.4	-5.1	2.0	-65.0	<=8.0
2442.05	13.4	16.4	-5.0	2.0	-64.9	<=8.0
2442.10	13.5	16.4	-4.9	2.0	-64.8	<=8.0
2442.15	13.6	16.4	-4.8	2.0	-64.7	<=8.0
2442.20	13.7	16.4	-4.7	2.0	-64.6	<=8.0
2442.25	13.5	16.4	-4.9	2.0	-64.8	<=8.0
2442.30	13.4	16.4	-5.0	2.0	-64.9	<=8.0
2442.35	13.6	16.4	-4.8	2.0	-64.7	<=8.0
2442.40	13.8	16.4	-4.6	2.0	-64.5	<=8.0
2442.45	13.8	16.4	-4.6	2.0	-64.5	<=8.0
2442.50	13.9	16.4	-4.5	2.0	-64.4	<=8.0
2442.55	14.0	16.4	-4.4	2.0	-64.3	<=8.0
2442.60	14.1	16.4	-4.3	2.0	-64.2	<=8.0
2442.65	14.0	16.4	-4.4	2.0	-64.3	<=8.0
2442.70	14.1	16.4	-4.3	2.0	-64.2	<=8.0
2442.75	14.2	16.4	-4.2	2.0	-64.1	<=8.0
2442.80	14.4	16.4	-4.0	2.0	-63.9	<=8.0
2442.85	14.7	16.4	-3.7	2.0	-63.6	<=8.0

11Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2442.90	14.9	16.4	-3.5	2.0	-63.4	<=8.0
2442.95	15.1	16.4	-3.3	2.0	-63.2	<=8.0
2443.00	15.3	16.4	-3.1	2.0	-63.0	<=8.0
2443.05	15.4	16.4	-3.0	2.0	-62.9	<=8.0
2443.10	15.2	16.4	-3.2	2.0	-63.1	<=8.0
2443.15	15.7	16.4	-2.7	2.0	-62.6	<=8.0
2443.20	15.8	16.4	-2.6	2.0	-62.5	<=8.0
2443.25	15.9	16.4	-2.5	2.0	-62.4	<=8.0
2443.30	16.0	16.4	-2.4	2.0	-62.3	<=8.0
2443.35	16.1	16.4	-2.3	2.0	-62.2	<=8.0
2443.40	16.2	16.4	-2.2	2.0	-62.1	<=8.0
2443.45	16.5	16.4	-1.9	2.0	-61.8	<=8.0
2443.50	16.8	16.4	-1.6	2.0	-61.5	<=8.0
2443.55	17.0	16.4	-1.4	2.0	-61.3	<=8.0
2443.60	17.3	16.4	-1.1	2.0	-61.0	<=8.0
2443.65	17.4	16.4	-1.0	2.0	-60.9	<=8.0
2443.70	17.5	16.4	-0.9	2.0	-60.8	<=8.0
2443.75	17.6	16.4	-0.8	2.0	-60.7	<=8.0
2443.80	17.8	16.4	-0.6	2.0	-60.5	<=8.0
2443.85	17.9	16.4	-0.5	2.0	-60.4	<=8.0
2443.90	18.0	16.4	-0.4	2.0	-60.3	<=8.0
2443.95	18.4	16.4	0.0	2.0	-59.9	<=8.0
2444.00	18.5	16.4	0.1	2.0	-59.8	<=8.0
2444.05	18.6	16.4	0.2	2.0	-59.7	<=8.0
2444.10	18.9	16.4	0.5	2.0	-59.4	<=8.0
2444.15	19.2	16.4	0.8	2.0	-59.1	<=8.0
2444.20	19.6	16.4	1.2	2.0	-58.7	<=8.0
2444.25	19.9	16.4	1.5	2.0	-58.4	<=8.0
2444.30	20.1	16.4	1.7	2.0	-58.2	<=8.0
2444.35	20.4	16.4	2.0	2.0	-57.9	<=8.0
2444.40	20.7	16.4	2.3	2.0	-57.6	<=8.0
2444.45	20.8	16.4	2.4	2.0	-57.5	<=8.0
2444.50	21.1	16.4	2.7	2.0	-57.2	<=8.0
2444.55	21.6	16.4	3.2	2.0	-56.7	<=8.0
2444.60	22.1	16.4	3.7	2.0	-56.2	<=8.0
2444.65	22.4	16.4	4.0	2.0	-55.9	<=8.0
2444.70	22.6	16.4	4.2	2.0	-55.7	<=8.0
2444.75	22.8	16.4	4.4	2.0	-55.5	<=8.0
2444.80	23.0	16.4	4.6	2.0	-55.3	<=8.0
2444.85	23.4	16.4	5.0	2.0	-54.9	<=8.0
2444.90	24.0	16.4	5.6	2.0	-54.3	<=8.0
2444.95	24.4	16.4	6.0	2.0	-53.9	<=8.0
2445.00	24.8	16.4	6.4	2.0	-53.5	<=8.0
2445.05	24.6	16.4	6.2	2.0	-53.7	<=8.0
2445.10	24.7	16.4	6.3	2.0	-53.6	<=8.0
2445.15	24.9	16.4	6.5	2.0	-53.4	<=8.0
2445.20	25.0	16.4	6.6	2.0	-53.3	<=8.0
2445.25	25.4	16.4	7.0	2.0	-52.9	<=8.0

11Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2445.30	25.8	16.4	7.4	2.0	-52.5	<=8.0
2445.35	25.9	16.4	7.5	2.0	-52.4	<=8.0
2445.40	26.2	16.4	7.8	2.0	-52.1	<=8.0
2445.45	26.3	16.4	7.9	2.0	-52.0	<=8.0
2445.50	26.1	16.4	7.7	2.0	-52.2	<=8.0

Processing Gain (dB)= **11.4**

ActionTec CONFIDENTIAL

CH6 Processing Gain
11 MB Data Rate

Processing Gain (dB)	XMIT level	-59.9
	S/N+Ls	18.4
	0dB J/S	0.0
PG	offset	Signal Generator Delta
28.8	-8500	10.4
28.1	-8450	9.7
27.6	-8400	9.2
27.1	-8350	8.7
27.0	-8300	8.6
27.1	-8250	8.7
27.2	-8200	8.8
27.2	-8150	8.8
27.0	-8100	8.6
26.8	-8050	8.4
26.5	-8000	8.1
26.1	-7950	7.7
25.8	-7900	7.4
25.8	-7850	7.4
25.8	-7800	7.4
25.9	-7750	7.5
25.9	-7700	7.5
25.4	-7650	7.0
24.9	-7600	6.5
24.5	-7550	6.1
24.1	-7500	5.7
23.9	-7450	5.5
23.5	-7400	5.1
23.3	-7350	4.9
22.9	-7300	4.5
22.4	-7250	4.0
22.2	-7200	3.8
21.8	-7150	3.4
21.8	-7100	3.4
21.6	-7050	3.2
21.3	-7000	2.9
20.9	-6950	2.5
20.4	-6900	2.0
20.2	-6850	1.8
20.0	-6800	1.6
19.8	-6750	1.4
19.4	-6700	1.0
19.0	-6650	0.6
19.0	-6600	0.6
18.9	-6550	0.5
18.8	-6500	0.4
18.5	-6450	0.1
18.5	-6400	0.1
18.2	-6350	-0.2
18.1	-6300	-0.3
17.8	-6250	-0.6
17.6	-6200	-0.8

CH6 Processing Gain
11 MB Data Rate

17.4	-6150	-1.0
17.0	-6100	-1.4
17.1	-6050	-1.3
16.9	-6000	-1.5
16.8	-5950	-1.6
16.6	-5900	-1.8
16.4	-5850	-2.0
16.3	-5800	-2.1
16.1	-5750	-2.3
15.9	-5700	-2.5
15.8	-5650	-2.6
15.7	-5600	-2.7
15.6	-5550	-2.8
15.5	-5500	-2.9
15.4	-5450	-3.0
15.2	-5400	-3.2
14.9	-5350	-3.5
14.8	-5300	-3.6
14.9	-5250	-3.5
14.7	-5200	-3.7
14.5	-5150	-3.9
14.7	-5100	-3.7
14.5	-5050	-3.9
14.4	-5000	-4.0
14.5	-4950	-3.9
14.4	-4900	-4.0
14.4	-4850	-4.0
14.3	-4800	-4.1
14.4	-4750	-4.0
14.5	-4700	-3.9
14.4	-4650	-4.0
14.2	-4600	-4.2
14.1	-4550	-4.3
14.0	-4500	-4.4
14.1	-4450	-4.3
14.2	-4400	-4.2
14.0	-4350	-4.4
14.1	-4300	-4.3
14.0	-4250	-4.4
13.9	-4200	-4.5
13.7	-4150	-4.7
13.8	-4100	-4.6
13.6	-4050	-4.8
13.4	-4000	-5.0
13.2	-3950	-5.2
13.3	-3900	-5.1
13.2	-3850	-5.2
13.3	-3800	-5.1
13.1	-3750	-5.3
13.0	-3700	-5.4
13.0	-3650	-5.4
12.9	-3600	-5.5

CH6 Processing Gain
11 MB Data Rate

12.8	-3550	-5.6
12.7	-3500	-5.7
12.8	-3450	-5.6
12.9	-3400	-5.5
12.7	-3350	-5.7
12.7	-3300	-5.7
12.5	-3250	-5.9
12.4	-3200	-6.0
12.2	-3150	-6.2
12.4	-3100	-6.0
12.3	-3050	-6.1
12.4	-3000	-6.0
12.1	-2950	-6.3
11.9	-2900	-6.5
12.0	-2850	-6.4
11.8	-2800	-6.6
11.7	-2750	-6.7
11.6	-2700	-6.8
11.5	-2650	-6.9
11.4	-2600	-7.0
11.4	-2550	-7.0
11.5	-2500	-6.9
11.6	-2450	-6.8
11.6	-2400	-6.8
11.5	-2350	-6.9
11.6	-2300	-6.8
11.6	-2250	-6.8
11.7	-2200	-6.7
11.8	-2150	-6.6
11.7	-2100	-6.7
11.6	-2050	-6.8
11.5	-2000	-6.9
11.6	-1950	-6.8
11.6	-1900	-6.8
11.7	-1850	-6.7
11.5	-1800	-6.9
11.7	-1750	-6.7
11.8	-1700	-6.6
11.8	-1650	-6.6
11.9	-1600	-6.5
11.8	-1550	-6.6
11.9	-1500	-6.5
11.8	-1450	-6.6
11.8	-1400	-6.6
12.0	-1350	-6.4
12.1	-1300	-6.3
11.8	-1250	-6.6
11.6	-1200	-6.8
12.0	-1150	-6.4
12.1	-1100	-6.3
12.2	-1050	-6.2
12.3	-1000	-6.1

CH6 Processing Gain
11 MB Data Rate

12.0	-950	-6.4
12.1	-900	-6.3
12.1	-850	-6.3
11.9	-800	-6.5
10.9	-750	-7.5
9.9	-700	-8.5
5.5	-650	-12.9
5.6	-600	-12.8
8.0	-550	-10.4
7.9	-500	-10.5
7.6	-450	-10.8
11.2	-400	-7.2
9.7	-350	-8.7
5.4	-300	-13.0
7.4	-250	-11.0
9.4	-200	-9.0
7.5	-150	-10.9
7.7	-100	-10.7
7.9	-50	-10.5
8.5	0	-9.9
9.4	50	-9.0
6.6	100	-11.8
12.4	150	-6.0
7.2	200	-11.2
10.0	250	-8.4
9.4	300	-9.0
9.4	350	-9.0
9.6	400	-8.8
8.8	450	-9.6
8.6	500	-9.8
8.4	550	-10.0
8.3	600	-10.1
10.5	650	-7.9
10.6	700	-7.8
10.2	750	-8.2
11.0	800	-7.4
10.8	850	-7.6
7.2	900	-11.2
4.9	950	-13.5
9.3	1000	-9.1
10.6	1050	-7.8
11.5	1100	-6.9
11.5	1150	-6.9
11.6	1200	-6.8
11.6	1250	-6.8
11.5	1300	-6.9
11.4	1350	-7.0
11.4	1400	-7.0
11.5	1450	-6.9
11.4	1500	-7.0
11.3	1550	-7.1
11.3	1600	-7.1

CH6 Processing Gain

11 MB Data Rate

11.2	1650	-7.2
11.4	1700	-7.0
11.4	1750	-7.0
11.4	1800	-7.0
11.2	1850	-7.2
11.3	1900	-7.1
11.2	1950	-7.2
11.1	2000	-7.3
11.0	2050	-7.4
11.1	2100	-7.3
11.0	2150	-7.4
11.0	2200	-7.4
11.0	2250	-7.4
11.1	2300	-7.3
11.1	2350	-7.3
11.0	2400	-7.4
11.0	2450	-7.4
11.1	2500	-7.3
11.0	2550	-7.4
11.1	2600	-7.3
10.9	2650	-7.5
10.8	2700	-7.6
10.9	2750	-7.5
10.7	2800	-7.7
10.8	2850	-7.6
10.9	2900	-7.5
10.9	2950	-7.5
11.0	3000	-7.4
11.1	3050	-7.3
11.3	3100	-7.1
11.2	3150	-7.2
11.3	3200	-7.1
11.6	3250	-6.8
11.9	3300	-6.5
11.8	3350	-6.6
11.8	3400	-6.6
11.9	3450	-6.5
11.9	3500	-6.5
11.9	3550	-6.5
12.0	3600	-6.4
12.1	3650	-6.3
12.2	3700	-6.2
12.4	3750	-6.0
12.5	3800	-5.9
12.6	3850	-5.8
12.5	3900	-5.9
12.4	3950	-6.0
12.6	4000	-5.8
12.5	4050	-5.9
12.6	4100	-5.8
12.5	4150	-5.9
12.6	4200	-5.8


CH6 Processing Gain
11 MB Data Rate

12.6	4250	-5.8
12.5	4300	-5.9
12.6	4350	-5.8
12.7	4400	-5.7
12.8	4450	-5.6
13.0	4500	-5.4
13.1	4550	-5.3
13.2	4600	-5.2
13.3	4650	-5.1
13.3	4700	-5.1
13.2	4750	-5.2
13.3	4800	-5.1
13.2	4850	-5.2
13.2	4900	-5.2
13.2	4950	-5.2
13.3	5000	-5.1
13.4	5050	-5.0
13.5	5100	-4.9
13.6	5150	-4.8
13.7	5200	-4.7
13.5	5250	-4.9
13.4	5300	-5.0
13.6	5350	-4.8
13.8	5400	-4.6
13.8	5450	-4.6
13.9	5500	-4.5
14.0	5550	-4.4
14.1	5600	-4.3
14.0	5650	-4.4
14.1	5700	-4.3
14.2	5750	-4.2
14.4	5800	-4.0
14.7	5850	-3.7
14.9	5900	-3.5
15.1	5950	-3.3
15.3	6000	-3.1
15.4	6050	-3.0
15.2	6100	-3.2
15.7	6150	-2.7
15.8	6200	-2.6
15.9	6250	-2.5
16.0	6300	-2.4
16.1	6350	-2.3
16.2	6400	-2.2
16.5	6450	-1.9
16.8	6500	-1.6
17.0	6550	-1.4
17.3	6600	-1.1
17.4	6650	-1.0
17.5	6700	-0.9
17.6	6750	-0.8
17.8	6800	-0.6

CH6 Processing Gain
11 MB Data Rate

17.9	6850	-0.5
18.0	6900	-0.4
18.4	6950	0.0
18.5	7000	0.1
18.6	7050	0.2
18.9	7100	0.5
19.2	7150	0.8
19.6	7200	1.2
19.9	7250	1.5
20.1	7300	1.7
20.4	7350	2.0
20.7	7400	2.3
20.8	7450	2.4
21.1	7500	2.7
21.6	7550	3.2
22.1	7600	3.7
22.4	7650	4.0
22.6	7700	4.2
22.8	7750	4.4
23.0	7800	4.6
23.4	7850	5.0
24.0	7900	5.6
24.4	7950	6.0
24.8	8000	6.4
24.6	8050	6.2
24.7	8100	6.3
24.9	8150	6.5
25.0	8200	6.6
25.4	8250	7.0
25.8	8300	7.4
25.9	8350	7.5
26.2	8400	7.8
26.3	8450	7.9
26.1	8500	7.7
Processing Gain (dB) @ 80th Percentile =		11.4

Processing Gain
Channel 6 (fc=2437MHz) @ 11Mbps

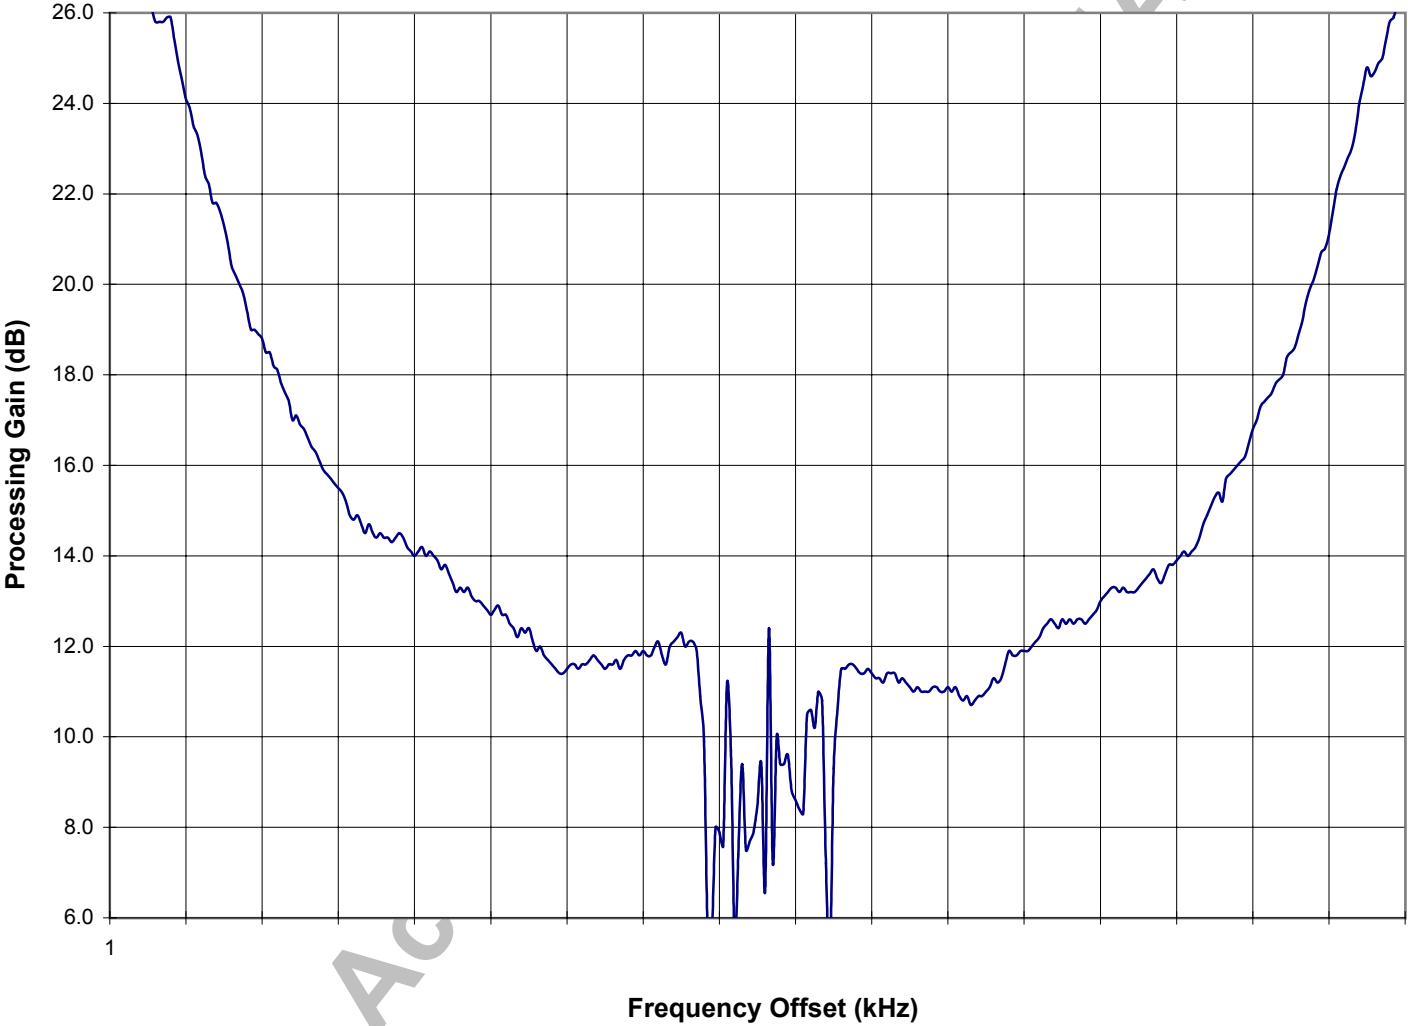

11Mbps CHANNEL 11 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2453.50	28.7	16.4	10.3	2.0	-49.6	<=8.0
2453.55	28.0	16.4	9.6	2.0	-50.3	<=8.0
2453.60	27.5	16.4	9.1	2.0	-50.8	<=8.0
2453.65	27.2	16.4	8.8	2.0	-51.1	<=8.0
2453.70	26.9	16.4	8.5	2.0	-51.4	<=8.0
2453.75	27.1	16.4	8.7	2.0	-51.2	<=8.0
2453.80	27.0	16.4	8.6	2.0	-51.3	<=8.0
2453.85	27.1	16.4	8.7	2.0	-51.2	<=8.0
2453.90	26.9	16.4	8.5	2.0	-51.4	<=8.0
2453.95	26.6	16.4	8.2	2.0	-51.7	<=8.0
2454.00	26.3	16.4	7.9	2.0	-52.0	<=8.0
2454.05	26.0	16.4	7.6	2.0	-52.3	<=8.0
2454.10	25.7	16.4	7.3	2.0	-52.6	<=8.0
2454.15	25.6	16.4	7.2	2.0	-52.7	<=8.0
2454.20	25.5	16.4	7.1	2.0	-52.8	<=8.0
2454.25	25.6	16.4	7.2	2.0	-52.7	<=8.0
2454.30	25.7	16.4	7.3	2.0	-52.6	<=8.0
2454.35	25.3	16.4	6.9	2.0	-53.0	<=8.0
2454.40	24.8	16.4	6.4	2.0	-53.5	<=8.0
2454.45	24.4	16.4	6.0	2.0	-53.9	<=8.0
2454.50	24.0	16.4	5.6	2.0	-54.3	<=8.0
2454.55	23.6	16.4	5.2	2.0	-54.7	<=8.0
2454.60	23.3	16.4	4.9	2.0	-55.0	<=8.0
2454.65	23.0	16.4	4.6	2.0	-55.3	<=8.0
2454.70	22.8	16.4	4.4	2.0	-55.5	<=8.0
2454.75	22.6	16.4	4.2	2.0	-55.7	<=8.0
2454.80	22.3	16.4	3.9	2.0	-56.0	<=8.0
2454.85	22.0	16.4	3.6	2.0	-56.3	<=8.0
2454.90	21.7	16.4	3.3	2.0	-56.6	<=8.0
2454.95	21.4	16.4	3.0	2.0	-56.9	<=8.0
2455.00	21.1	16.4	2.7	2.0	-57.2	<=8.0
2455.05	20.8	16.4	2.4	2.0	-57.5	<=8.0
2455.10	20.4	16.4	2.0	2.0	-57.9	<=8.0
2455.15	20.2	16.4	1.8	2.0	-58.1	<=8.0
2455.20	19.9	16.4	1.5	2.0	-58.4	<=8.0
2455.25	19.7	16.4	1.3	2.0	-58.6	<=8.0
2455.30	19.3	16.4	0.9	2.0	-59.0	<=8.0
2455.35	19.0	16.4	0.6	2.0	-59.3	<=8.0
2455.40	18.9	16.4	0.5	2.0	-59.4	<=8.0
2455.45	18.8	16.4	0.4	2.0	-59.5	<=8.0
2455.50	18.6	16.4	0.2	2.0	-59.7	<=8.0
2455.55	18.4	16.4	0.0	2.0	-59.9	<=8.0
2455.60	18.4	16.4	0.0	2.0	-59.9	<=8.0
2455.65	18.2	16.4	-0.2	2.0	-60.1	<=8.0
2455.70	17.9	16.4	-0.5	2.0	-60.4	<=8.0
2455.75	17.7	16.4	-0.7	2.0	-60.6	<=8.0
2455.80	17.5	16.4	-0.9	2.0	-60.8	<=8.0
2455.85	17.2	16.4	-1.2	2.0	-61.1	<=8.0

11Mbps CHANNEL 11 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2455.90	17.0	16.4	-1.4	2.0	-61.3	<=8.0
2455.95	16.7	16.4	-1.7	2.0	-61.6	<=8.0
2456.00	16.5	16.4	-1.9	2.0	-61.8	<=8.0
2456.05	16.7	16.4	-1.7	2.0	-61.6	<=8.0
2456.10	16.5	16.4	-1.9	2.0	-61.8	<=8.0
2456.15	16.6	16.4	-1.8	2.0	-61.7	<=8.0
2456.20	16.4	16.4	-2.0	2.0	-61.9	<=8.0
2456.25	16.1	16.4	-2.3	2.0	-62.2	<=8.0
2456.30	15.8	16.4	-2.6	2.0	-62.5	<=8.0
2456.35	15.4	16.4	-3.0	2.0	-62.9	<=8.0
2456.40	15.6	16.4	-2.8	2.0	-62.7	<=8.0
2456.45	15.5	16.4	-2.9	2.0	-62.8	<=8.0
2456.50	15.4	16.4	-3.0	2.0	-62.9	<=8.0
2456.55	15.1	16.4	-3.3	2.0	-63.2	<=8.0
2456.60	15.1	16.4	-3.3	2.0	-63.2	<=8.0
2456.65	15.0	16.4	-3.4	2.0	-63.3	<=8.0
2456.70	15.1	16.4	-3.3	2.0	-63.2	<=8.0
2456.75	14.9	16.4	-3.5	2.0	-63.4	<=8.0
2456.80	14.8	16.4	-3.6	2.0	-63.5	<=8.0
2456.85	14.7	16.4	-3.7	2.0	-63.6	<=8.0
2456.90	14.8	16.4	-3.6	2.0	-63.5	<=8.0
2456.95	14.8	16.4	-3.6	2.0	-63.5	<=8.0
2457.00	14.4	16.4	-4.0	2.0	-63.9	<=8.0
2457.05	14.1	16.4	-4.3	2.0	-64.2	<=8.0
2457.10	14.4	16.4	-4.0	2.0	-63.9	<=8.0
2457.15	14.6	16.4	-3.8	2.0	-63.7	<=8.0
2457.20	14.3	16.4	-4.1	2.0	-64.0	<=8.0
2457.25	14.4	16.4	-4.0	2.0	-63.9	<=8.0
2457.30	14.2	16.4	-4.2	2.0	-64.1	<=8.0
2457.35	13.9	16.4	-4.5	2.0	-64.4	<=8.0
2457.40	14.2	16.4	-4.2	2.0	-64.1	<=8.0
2457.45	14.2	16.4	-4.2	2.0	-64.1	<=8.0
2457.50	14.2	16.4	-4.2	2.0	-64.1	<=8.0
2457.55	14.1	16.4	-4.3	2.0	-64.2	<=8.0
2457.60	14.0	16.4	-4.4	2.0	-64.3	<=8.0
2457.65	13.9	16.4	-4.5	2.0	-64.4	<=8.0
2457.70	14.0	16.4	-4.4	2.0	-64.3	<=8.0
2457.75	13.8	16.4	-4.6	2.0	-64.5	<=8.0
2457.80	13.7	16.4	-4.7	2.0	-64.6	<=8.0
2457.85	13.5	16.4	-4.9	2.0	-64.8	<=8.0
2457.90	13.4	16.4	-5.0	2.0	-64.9	<=8.0
2457.95	13.5	16.4	-4.9	2.0	-64.8	<=8.0
2458.00	13.4	16.4	-5.0	2.0	-64.9	<=8.0
2458.05	13.5	16.4	-4.9	2.0	-64.8	<=8.0
2458.10	13.4	16.4	-5.0	2.0	-64.9	<=8.0
2458.15	13.4	16.4	-5.0	2.0	-64.9	<=8.0
2458.20	13.4	16.4	-5.0	2.0	-64.9	<=8.0
2458.25	13.3	16.4	-5.1	2.0	-65.0	<=8.0

11Mbps CHANNEL 11 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2458.30	13.2	16.4	-5.2	2.0	-65.1	<=8.0
2458.35	13.4	16.4	-5.0	2.0	-64.9	<=8.0
2458.40	13.2	16.4	-5.2	2.0	-65.1	<=8.0
2458.45	13.1	16.4	-5.3	2.0	-65.2	<=8.0
2458.50	13.2	16.4	-5.2	2.0	-65.1	<=8.0
2458.55	13.0	16.4	-5.4	2.0	-65.3	<=8.0
2458.60	12.9	16.4	-5.5	2.0	-65.4	<=8.0
2458.65	12.9	16.4	-5.5	2.0	-65.4	<=8.0
2458.70	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2458.75	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2458.80	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2458.85	12.5	16.4	-5.9	2.0	-65.8	<=8.0
2458.90	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2458.95	12.5	16.4	-5.9	2.0	-65.8	<=8.0
2459.00	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2459.05	12.3	16.4	-6.1	2.0	-66.0	<=8.0
2459.10	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2459.15	12.1	16.4	-6.3	2.0	-66.2	<=8.0
2459.20	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2459.25	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2459.30	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2459.35	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2459.40	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2459.45	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2459.50	11.4	16.4	-7.0	2.0	-66.9	<=8.0
2459.55	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2459.60	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2459.65	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2459.70	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2459.75	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2459.80	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2459.85	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2459.90	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2459.95	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2460.00	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2460.05	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2460.10	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2460.15	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2460.20	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2460.25	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2460.30	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2460.35	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2460.40	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2460.45	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2460.50	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2460.55	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2460.60	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2460.65	12.1	16.4	-6.3	2.0	-66.2	<=8.0

11Mbps CHANNEL 11 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2460.70	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2460.75	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2460.80	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2460.85	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2460.90	12.1	16.4	-6.3	2.0	-66.2	<=8.0
2460.95	12.5	16.4	-5.9	2.0	-65.8	<=8.0
2461.00	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2461.05	12.3	16.4	-6.1	2.0	-66.0	<=8.0
2461.10	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2461.15	12.3	16.4	-6.1	2.0	-66.0	<=8.0
2461.20	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2461.25	11.1	16.4	-7.3	2.0	-67.2	<=8.0
2461.30	10.2	16.4	-8.2	2.0	-68.1	<=8.0
2461.35	8.9	16.4	-9.5	2.0	-69.4	<=8.0
2461.40	10.0	16.4	-8.4	2.0	-68.3	<=8.0
2461.45	11.3	16.4	-7.1	2.0	-67.0	<=8.0
2461.50	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2461.55	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2461.60	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2461.65	11.2	16.4	-7.2	2.0	-67.1	<=8.0
2461.70	10.3	16.4	-8.1	2.0	-68.0	<=8.0
2461.75	10.4	16.4	-8.0	2.0	-67.9	<=8.0
2461.80	10.4	16.4	-8.0	2.0	-67.9	<=8.0
2461.85	10.2	16.4	-8.2	2.0	-68.1	<=8.0
2461.90	10.1	16.4	-8.3	2.0	-68.2	<=8.0
2461.95	10.1	16.4	-8.3	2.0	-68.2	<=8.0
2462.00	10.2	16.4	-8.2	2.0	-68.1	<=8.0
2462.05	10.3	16.4	-8.1	2.0	-68.0	<=8.0
2462.10	6.9	16.4	-11.5	2.0	-71.4	<=8.0
2462.15	7.4	16.4	-11.0	2.0	-70.9	<=8.0
2462.20	7.3	16.4	-11.1	2.0	-71.0	<=8.0
2462.25	8.8	16.4	-9.6	2.0	-69.5	<=8.0
2462.30	10.2	16.4	-8.2	2.0	-68.1	<=8.0
2462.35	10.1	16.4	-8.3	2.0	-68.2	<=8.0
2462.40	10.2	16.4	-8.2	2.0	-68.1	<=8.0
2462.45	10.4	16.4	-8.0	2.0	-67.9	<=8.0
2462.50	10.1	16.4	-8.3	2.0	-68.2	<=8.0
2462.55	11.2	16.4	-7.2	2.0	-67.1	<=8.0
2462.60	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2462.65	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2462.70	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2462.75	11.4	16.4	-7.0	2.0	-66.9	<=8.0
2462.80	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2462.85	9.4	16.4	-9.0	2.0	-68.9	<=8.0
2462.90	5.3	16.4	-13.1	2.0	-73.0	<=8.0
2462.95	8.2	16.4	-10.2	2.0	-70.1	<=8.0
2463.00	10.3	16.4	-8.1	2.0	-68.0	<=8.0
2463.05	11.8	16.4	-6.6	2.0	-66.5	<=8.0

11Mbps CHANNEL 11 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2463.10	12.8	16.4	-5.6	2.0	-65.5	<=8.0
2463.15	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2463.20	12.7	16.4	-5.7	2.0	-65.6	<=8.0
2463.25	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2463.30	12.7	16.4	-5.7	2.0	-65.6	<=8.0
2463.35	12.7	16.4	-5.7	2.0	-65.6	<=8.0
2463.40	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2463.45	12.8	16.4	-5.6	2.0	-65.5	<=8.0
2463.50	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2463.55	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2463.60	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2463.65	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2463.70	12.5	16.4	-5.9	2.0	-65.8	<=8.0
2463.75	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2463.80	12.7	16.4	-5.7	2.0	-65.6	<=8.0
2463.85	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2463.90	12.5	16.4	-5.9	2.0	-65.8	<=8.0
2463.95	12.3	16.4	-6.1	2.0	-66.0	<=8.0
2464.00	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2464.05	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2464.10	12.3	16.4	-6.1	2.0	-66.0	<=8.0
2464.15	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2464.20	12.3	16.4	-6.1	2.0	-66.0	<=8.0
2464.25	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2464.30	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2464.35	12.1	16.4	-6.3	2.0	-66.2	<=8.0
2464.40	12.3	16.4	-6.1	2.0	-66.0	<=8.0
2464.45	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2464.50	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2464.55	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2464.60	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2464.65	12.1	16.4	-6.3	2.0	-66.2	<=8.0
2464.70	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2464.75	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2464.80	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2464.85	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2464.90	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2464.95	12.1	16.4	-6.3	2.0	-66.2	<=8.0
2465.00	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2465.05	12.3	16.4	-6.1	2.0	-66.0	<=8.0
2465.10	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2465.15	12.3	16.4	-6.1	2.0	-66.0	<=8.0
2465.20	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2465.25	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2465.30	12.8	16.4	-5.6	2.0	-65.5	<=8.0
2465.35	12.7	16.4	-5.7	2.0	-65.6	<=8.0
2465.40	12.8	16.4	-5.6	2.0	-65.5	<=8.0
2465.45	12.7	16.4	-5.7	2.0	-65.6	<=8.0

11Mbps CHANNEL 11 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2465.50	12.9	16.4	-5.5	2.0	-65.4	<=8.0
2465.55	12.8	16.4	-5.6	2.0	-65.5	<=8.0
2465.60	13.0	16.4	-5.4	2.0	-65.3	<=8.0
2465.65	13.1	16.4	-5.3	2.0	-65.2	<=8.0
2465.70	13.2	16.4	-5.2	2.0	-65.1	<=8.0
2465.75	13.3	16.4	-5.1	2.0	-65.0	<=8.0
2465.80	13.4	16.4	-5.0	2.0	-64.9	<=8.0
2465.85	13.5	16.4	-4.9	2.0	-64.8	<=8.0
2465.90	13.6	16.4	-4.8	2.0	-64.7	<=8.0
2465.95	13.5	16.4	-4.9	2.0	-64.8	<=8.0
2466.00	13.6	16.4	-4.8	2.0	-64.7	<=8.0
2466.05	13.6	16.4	-4.8	2.0	-64.7	<=8.0
2466.10	13.5	16.4	-4.9	2.0	-64.8	<=8.0
2466.15	13.6	16.4	-4.8	2.0	-64.7	<=8.0
2466.20	13.6	16.4	-4.8	2.0	-64.7	<=8.0
2466.25	13.7	16.4	-4.7	2.0	-64.6	<=8.0
2466.30	13.6	16.4	-4.8	2.0	-64.7	<=8.0
2466.35	13.8	16.4	-4.6	2.0	-64.5	<=8.0
2466.40	13.7	16.4	-4.7	2.0	-64.6	<=8.0
2466.45	13.9	16.4	-4.5	2.0	-64.4	<=8.0
2466.50	13.9	16.4	-4.5	2.0	-64.4	<=8.0
2466.55	13.9	16.4	-4.5	2.0	-64.4	<=8.0
2466.60	14.0	16.4	-4.4	2.0	-64.3	<=8.0
2466.65	13.9	16.4	-4.5	2.0	-64.4	<=8.0
2466.70	14.1	16.4	-4.3	2.0	-64.2	<=8.0
2466.75	14.2	16.4	-4.2	2.0	-64.1	<=8.0
2466.80	14.2	16.4	-4.2	2.0	-64.1	<=8.0
2466.85	14.2	16.4	-4.2	2.0	-64.1	<=8.0
2466.90	14.1	16.4	-4.3	2.0	-64.2	<=8.0
2466.95	14.2	16.4	-4.2	2.0	-64.1	<=8.0
2467.00	14.3	16.4	-4.1	2.0	-64.0	<=8.0
2467.05	14.4	16.4	-4.0	2.0	-63.9	<=8.0
2467.10	14.6	16.4	-3.8	2.0	-63.7	<=8.0
2467.15	14.5	16.4	-3.9	2.0	-63.8	<=8.0
2467.20	14.4	16.4	-4.0	2.0	-63.9	<=8.0
2467.25	14.3	16.4	-4.1	2.0	-64.0	<=8.0
2467.30	14.4	16.4	-4.0	2.0	-63.9	<=8.0
2467.35	14.7	16.4	-3.7	2.0	-63.6	<=8.0
2467.40	14.8	16.4	-3.6	2.0	-63.5	<=8.0
2467.45	15.0	16.4	-3.4	2.0	-63.3	<=8.0
2467.50	15.0	16.4	-3.4	2.0	-63.3	<=8.0
2467.55	15.0	16.4	-3.4	2.0	-63.3	<=8.0
2467.60	15.1	16.4	-3.3	2.0	-63.2	<=8.0
2467.65	15.0	16.4	-3.4	2.0	-63.3	<=8.0
2467.70	15.1	16.4	-3.3	2.0	-63.2	<=8.0
2467.75	15.3	16.4	-3.1	2.0	-63.0	<=8.0
2467.80	15.4	16.4	-3.0	2.0	-62.9	<=8.0
2467.85	15.6	16.4	-2.8	2.0	-62.7	<=8.0

11Mbps CHANNEL 11 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2467.90	15.8	16.4	-2.6	2.0	-62.5	<=8.0
2467.95	15.7	16.4	-2.7	2.0	-62.6	<=8.0
2468.00	15.9	16.4	-2.5	2.0	-62.4	<=8.0
2468.05	16.1	16.4	-2.3	2.0	-62.2	<=8.0
2468.10	16.0	16.4	-2.4	2.0	-62.3	<=8.0
2468.15	16.4	16.4	-2.0	2.0	-61.9	<=8.0
2468.20	16.6	16.4	-1.8	2.0	-61.7	<=8.0
2468.25	16.7	16.4	-1.7	2.0	-61.6	<=8.0
2468.30	16.8	16.4	-1.6	2.0	-61.5	<=8.0
2468.35	17.0	16.4	-1.4	2.0	-61.3	<=8.0
2468.40	17.1	16.4	-1.3	2.0	-61.2	<=8.0
2468.45	17.4	16.4	-1.0	2.0	-60.9	<=8.0
2468.50	17.7	16.4	-0.7	2.0	-60.6	<=8.0
2468.55	17.8	16.4	-0.6	2.0	-60.5	<=8.0
2468.60	18.1	16.4	-0.3	2.0	-60.2	<=8.0
2468.65	18.3	16.4	-0.1	2.0	-60.0	<=8.0
2468.70	18.4	16.4	0.0	2.0	-59.9	<=8.0
2468.75	18.6	16.4	0.2	2.0	-59.7	<=8.0
2468.80	18.7	16.4	0.3	2.0	-59.6	<=8.0
2468.85	18.9	16.4	0.5	2.0	-59.4	<=8.0
2468.90	18.8	16.4	0.4	2.0	-59.5	<=8.0
2468.95	19.1	16.4	0.7	2.0	-59.2	<=8.0
2469.00	19.5	16.4	1.1	2.0	-58.8	<=8.0
2469.05	19.6	16.4	1.2	2.0	-58.7	<=8.0
2469.10	19.9	16.4	1.5	2.0	-58.4	<=8.0
2469.15	20.1	16.4	1.7	2.0	-58.2	<=8.0
2469.20	20.5	16.4	2.1	2.0	-57.8	<=8.0
2469.25	20.9	16.4	2.5	2.0	-57.4	<=8.0
2469.30	21.4	16.4	3.0	2.0	-56.9	<=8.0
2469.35	21.5	16.4	3.1	2.0	-56.8	<=8.0
2469.40	21.6	16.4	3.2	2.0	-56.7	<=8.0
2469.45	21.8	16.4	3.4	2.0	-56.5	<=8.0
2469.50	22.4	16.4	4.0	2.0	-55.9	<=8.0
2469.55	22.6	16.4	4.2	2.0	-55.7	<=8.0
2469.60	22.9	16.4	4.5	2.0	-55.4	<=8.0
2469.65	23.1	16.4	4.7	2.0	-55.2	<=8.0
2469.70	23.5	16.4	5.1	2.0	-54.8	<=8.0
2469.75	23.8	16.4	5.4	2.0	-54.5	<=8.0
2469.80	24.0	16.4	5.6	2.0	-54.3	<=8.0
2469.85	24.4	16.4	6.0	2.0	-53.9	<=8.0
2469.90	25.0	16.4	6.6	2.0	-53.3	<=8.0
2469.95	25.2	16.4	6.8	2.0	-53.1	<=8.0
2470.00	25.5	16.4	7.1	2.0	-52.8	<=8.0
2470.05	25.4	16.4	7.0	2.0	-52.9	<=8.0
2470.10	25.4	16.4	7.0	2.0	-52.9	<=8.0
2470.15	25.5	16.4	7.1	2.0	-52.8	<=8.0
2470.20	25.7	16.4	7.3	2.0	-52.6	<=8.0
2470.25	26.0	16.4	7.6	2.0	-52.3	<=8.0

11Mbps CHANNEL 11 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq. (MHz)	G_p (dB)	$(S/N)_o$ (dB)	$M_j = J/S$ (dB)	L_{sys} (dB)	Jammer (dBm)	PER (%)
2470.30	26.4	16.4	8.0	2.0	-51.9	≤ 8.0
2470.35	26.6	16.4	8.2	2.0	-51.7	≤ 8.0
2470.40	26.8	16.4	8.4	2.0	-51.5	≤ 8.0
2470.45	26.9	16.4	8.5	2.0	-51.4	≤ 8.0
2470.50	27.0	16.4	8.6	2.0	-51.3	≤ 8.0

Processing Gain (dB) = **12.0**

CH11 Processing Gain

11 MB Data Rate

Processing Gain (dB)	XMIT level	-59.9
	S/N+Ls	18.4
	0dB J/S	0.0
PG	offset	Signal Generator Delta
28.7	-8500	10.3
28.0	-8450	9.6
27.5	-8400	9.1
27.2	-8350	8.8
26.9	-8300	8.5
27.1	-8250	8.7
27.0	-8200	8.6
27.1	-8150	8.7
26.9	-8100	8.5
26.6	-8050	8.2
26.3	-8000	7.9
26.0	-7950	7.6
25.7	-7900	7.3
25.6	-7850	7.2
25.5	-7800	7.1
25.6	-7750	7.2
25.7	-7700	7.3
25.3	-7650	6.9
24.8	-7600	6.4
24.4	-7550	6.0
24.0	-7500	5.6
23.6	-7450	5.2
23.3	-7400	4.9
23.0	-7350	4.6
22.8	-7300	4.4
22.6	-7250	4.2
22.3	-7200	3.9
22.0	-7150	3.6
21.7	-7100	3.3
21.4	-7050	3.0
21.1	-7000	2.7
20.8	-6950	2.4
20.4	-6900	2.0
20.2	-6850	1.8
19.9	-6800	1.5
19.7	-6750	1.3
19.3	-6700	0.9
19.0	-6650	0.6
18.9	-6600	0.5
18.8	-6550	0.4
18.6	-6500	0.2
18.4	-6450	0.0
18.4	-6400	0.0
18.2	-6350	-0.2
17.9	-6300	-0.5
17.7	-6250	-0.7
17.5	-6200	-0.9

CH11 Processing Gain

11 MB Data Rate

17.2	-6150	-1.2	
17.0	-6100	-1.4	
16.7	-6050	-1.7	
16.5	-6000	-1.9	
16.7	-5950	-1.7	
16.5	-5900	-1.9	
16.6	-5850	-1.8	
16.4	-5800	-2.0	
16.1	-5750	-2.3	
15.8	-5700	-2.6	
15.4	-5650	-3.0	
15.6	-5600	-2.8	
15.5	-5550	-2.9	
15.4	-5500	-3.0	
15.1	-5450	-3.3	
15.1	-5400	-3.3	
15.0	-5350	-3.4	
15.1	-5300	-3.3	
14.9	-5250	-3.5	
14.8	-5200	-3.6	
14.7	-5150	-3.7	
14.8	-5100	-3.6	
14.8	-5050	-3.6	
14.4	-5000	-4.0	
14.1	-4950	-4.3	
14.4	-4900	-4.0	
14.6	-4850	-3.8	
14.3	-4800	-4.1	
14.4	-4750	-4.0	
14.2	-4700	-4.2	
13.9	-4650	-4.5	
14.2	-4600	-4.2	
14.2	-4550	-4.2	
14.2	-4500	-4.2	
14.1	-4450	-4.3	
14.0	-4400	-4.4	
13.9	-4350	-4.5	
14.0	-4300	-4.4	
13.8	-4250	-4.6	
13.7	-4200	-4.7	
13.5	-4150	-4.9	
13.4	-4100	-5.0	
13.5	-4050	-4.9	
13.4	-4000	-5.0	
13.5	-3950	-4.9	
13.4	-3900	-5.0	
13.4	-3850	-5.0	
13.4	-3800	-5.0	
13.3	-3750	-5.1	
13.2	-3700	-5.2	
13.4	-3650	-5.0	
13.2	-3600	-5.2	

CH11 Processing Gain

11 MB Data Rate

13.1	-3550	-5.3	
13.2	-3500	-5.2	
13.0	-3450	-5.4	
12.9	-3400	-5.5	
12.9	-3350	-5.5	
12.4	-3300	-6.0	
12.0	-3250	-6.4	
12.4	-3200	-6.0	
12.5	-3150	-5.9	
12.4	-3100	-6.0	
12.5	-3050	-5.9	
12.4	-3000	-6.0	
12.3	-2950	-6.1	
12.4	-2900	-6.0	
12.1	-2850	-6.3	
12.2	-2800	-6.2	
11.9	-2750	-6.5	
11.8	-2700	-6.6	
11.6	-2650	-6.8	
11.5	-2600	-6.9	
11.6	-2550	-6.8	
11.4	-2500	-7.0	
11.5	-2450	-6.9	
11.6	-2400	-6.8	
11.7	-2350	-6.7	
11.9	-2300	-6.5	
11.8	-2250	-6.6	
11.7	-2200	-6.7	
11.6	-2150	-6.8	
11.5	-2100	-6.9	
11.6	-2050	-6.8	
11.7	-2000	-6.7	
11.8	-1950	-6.6	
11.6	-1900	-6.8	
11.5	-1850	-6.9	
11.8	-1800	-6.6	
11.7	-1750	-6.7	
11.8	-1700	-6.6	
12.0	-1650	-6.4	
11.9	-1600	-6.5	
12.0	-1550	-6.4	
11.9	-1500	-6.5	
11.7	-1450	-6.7	
12.0	-1400	-6.4	
12.1	-1350	-6.3	
12.0	-1300	-6.4	
11.9	-1250	-6.5	
11.7	-1200	-6.7	
11.8	-1150	-6.6	
12.1	-1100	-6.3	
12.5	-1050	-5.9	
12.4	-1000	-6.0	

CH11 Processing Gain

11 MB Data Rate

12.3	-950	-6.1	
12.4	-900	-6.0	
12.3	-850	-6.1	
11.8	-800	-6.6	
11.1	-750	-7.3	
10.2	-700	-8.2	
8.9	-650	-9.5	
10.0	-600	-8.4	
11.3	-550	-7.1	
11.7	-500	-6.7	
11.5	-450	-6.9	
11.6	-400	-6.8	
11.2	-350	-7.2	
10.3	-300	-8.1	
10.4	-250	-8.0	
10.4	-200	-8.0	
10.2	-150	-8.2	
10.1	-100	-8.3	
10.1	-50	-8.3	
10.2	0	-8.2	
10.3	50	-8.1	
6.9	100	-11.5	
7.4	150	-11.0	
7.3	200	-11.1	
8.8	250	-9.6	
10.2	300	-8.2	
10.1	350	-8.3	
10.2	400	-8.2	
10.4	450	-8.0	
10.1	500	-8.3	
11.2	550	-7.2	
11.6	600	-6.8	
11.5	650	-6.9	
11.5	700	-6.9	
11.4	750	-7.0	
11.9	800	-6.5	
9.4	850	-9.0	
5.3	900	-13.1	
8.2	950	-10.2	
10.3	1000	-8.1	
11.8	1050	-6.6	
12.8	1100	-5.6	
12.6	1150	-5.8	
12.7	1200	-5.7	
12.6	1250	-5.8	
12.7	1300	-5.7	
12.7	1350	-5.7	
12.6	1400	-5.8	
12.8	1450	-5.6	
12.6	1500	-5.8	
12.4	1550	-6.0	
12.6	1600	-5.8	

CH11 Processing Gain

11 MB Data Rate

12.6	1650	-5.8	
12.5	1700	-5.9	
12.6	1750	-5.8	
12.7	1800	-5.7	
12.6	1850	-5.8	
12.5	1900	-5.9	
12.3	1950	-6.1	
12.4	2000	-6.0	
12.4	2050	-6.0	
12.3	2100	-6.1	
12.2	2150	-6.2	
12.3	2200	-6.1	
12.2	2250	-6.2	
12.2	2300	-6.2	
12.1	2350	-6.3	
12.3	2400	-6.1	
12.4	2450	-6.0	
12.2	2500	-6.2	
12.2	2550	-6.2	
12.2	2600	-6.2	
12.1	2650	-6.3	
12.0	2700	-6.4	
11.9	2750	-6.5	
12.0	2800	-6.4	
12.2	2850	-6.2	
12.0	2900	-6.4	
12.1	2950	-6.3	
12.2	3000	-6.2	
12.3	3050	-6.1	
12.4	3100	-6.0	
12.3	3150	-6.1	
12.4	3200	-6.0	
12.6	3250	-5.8	
12.8	3300	-5.6	
12.7	3350	-5.7	
12.8	3400	-5.6	
12.7	3450	-5.7	
12.9	3500	-5.5	
12.8	3550	-5.6	
13.0	3600	-5.4	
13.1	3650	-5.3	
13.2	3700	-5.2	
13.3	3750	-5.1	
13.4	3800	-5.0	
13.5	3850	-4.9	
13.6	3900	-4.8	
13.5	3950	-4.9	
13.6	4000	-4.8	
13.6	4050	-4.8	
13.5	4100	-4.9	
13.6	4150	-4.8	
13.6	4200	-4.8	

CH11 Processing Gain

11 MB Data Rate


13.7	4250	-4.7	
13.6	4300	-4.8	
13.8	4350	-4.6	
13.7	4400	-4.7	
13.9	4450	-4.5	
13.9	4500	-4.5	
13.9	4550	-4.5	
14.0	4600	-4.4	
13.9	4650	-4.5	
14.1	4700	-4.3	
14.2	4750	-4.2	
14.2	4800	-4.2	
14.2	4850	-4.2	
14.1	4900	-4.3	
14.2	4950	-4.2	
14.3	5000	-4.1	
14.4	5050	-4.0	
14.6	5100	-3.8	
14.5	5150	-3.9	
14.4	5200	-4.0	
14.3	5250	-4.1	
14.4	5300	-4.0	
14.7	5350	-3.7	
14.8	5400	-3.6	
15.0	5450	-3.4	
15.0	5500	-3.4	
15.0	5550	-3.4	
15.1	5600	-3.3	
15.0	5650	-3.4	
15.1	5700	-3.3	
15.3	5750	-3.1	
15.4	5800	-3.0	
15.6	5850	-2.8	
15.8	5900	-2.6	
15.7	5950	-2.7	
15.9	6000	-2.5	
16.1	6050	-2.3	
16.0	6100	-2.4	
16.4	6150	-2.0	
16.6	6200	-1.8	
16.7	6250	-1.7	
16.8	6300	-1.6	
17.0	6350	-1.4	
17.1	6400	-1.3	
17.4	6450	-1.0	
17.7	6500	-0.7	
17.8	6550	-0.6	
18.1	6600	-0.3	
18.3	6650	-0.1	
18.4	6700	0.0	
18.6	6750	0.2	
18.7	6800	0.3	

CH11 Processing Gain

11 MB Data Rate

18.9	6850	0.5	
18.8	6900	0.4	
19.1	6950	0.7	
19.5	7000	1.1	
19.6	7050	1.2	
19.9	7100	1.5	
20.1	7150	1.7	
20.5	7200	2.1	
20.9	7250	2.5	
21.4	7300	3.0	
21.5	7350	3.1	
21.6	7400	3.2	
21.8	7450	3.4	
22.4	7500	4.0	
22.6	7550	4.2	
22.9	7600	4.5	
23.1	7650	4.7	
23.5	7700	5.1	
23.8	7750	5.4	
24.0	7800	5.6	
24.4	7850	6.0	
25.0	7900	6.6	
25.2	7950	6.8	
25.5	8000	7.1	
25.4	8050	7.0	
25.4	8100	7.0	
25.5	8150	7.1	
25.7	8200	7.3	
26.0	8250	7.6	
26.4	8300	8.0	
26.6	8350	8.2	
26.8	8400	8.4	
26.9	8450	8.5	
27.0	8500	8.6	
12.0	Processing Gain (dB) @ 80th Percentile =		

Processing Gain Channel 11 (fc=2462MHz) @ 11Mbps

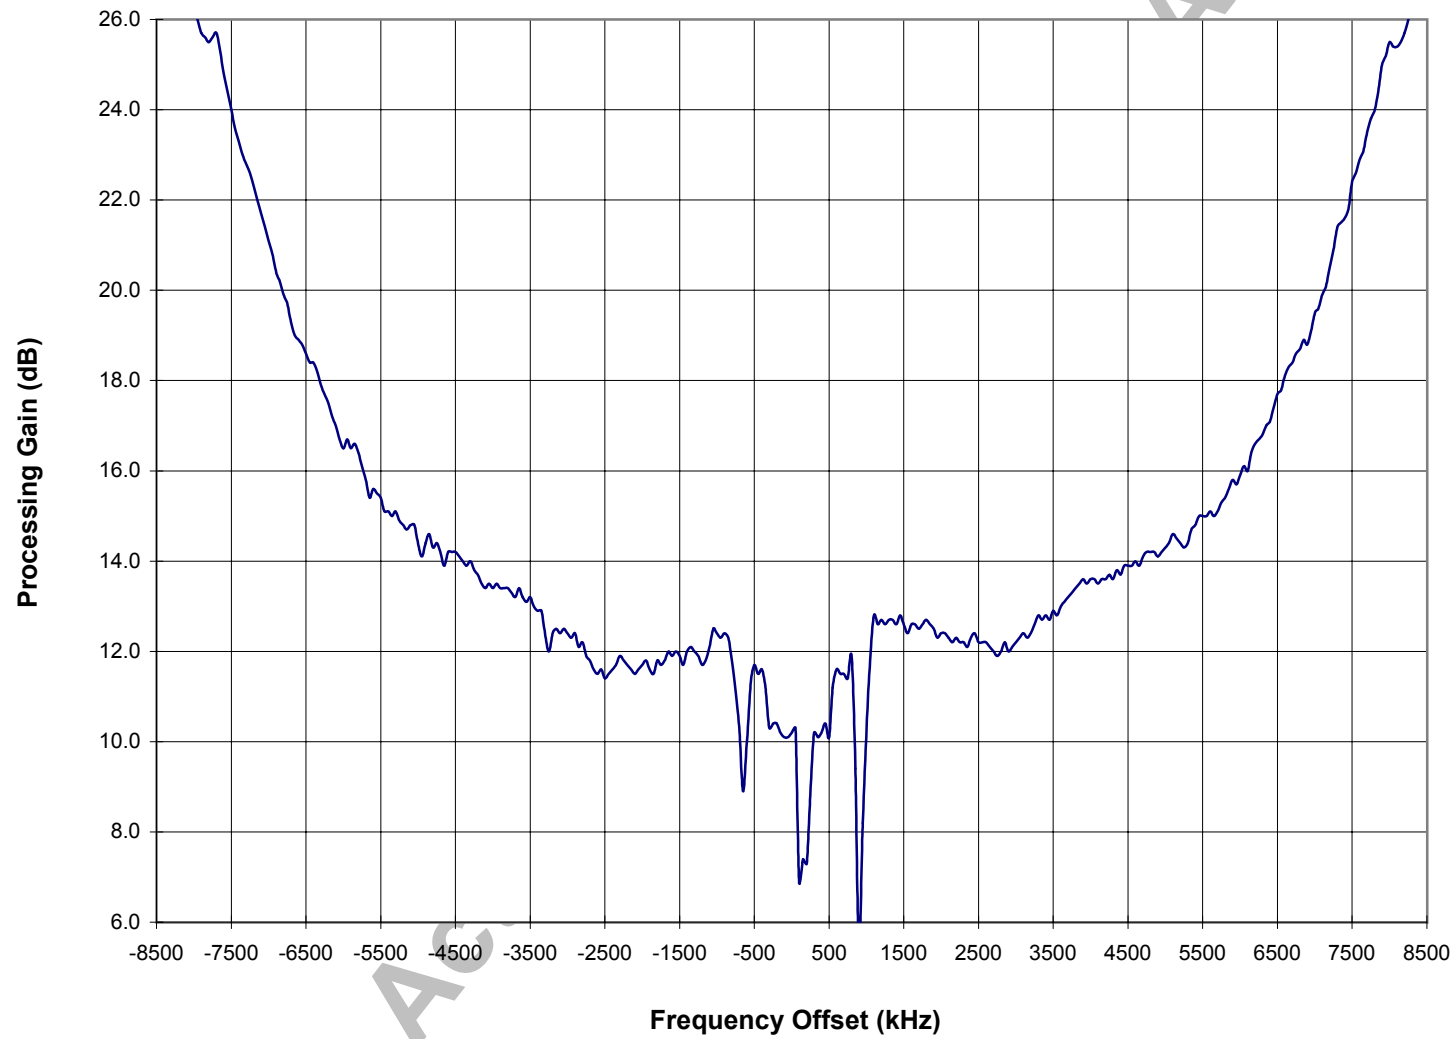

11Mbps CHANNEL 1 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2403.50	28.7	16.4	10.3	2.0	-49.6	<=8.0
2403.55	27.6	16.4	9.2	2.0	-50.7	<=8.0
2403.60	27.3	16.4	8.9	2.0	-51.0	<=8.0
2403.65	27.1	16.4	8.7	2.0	-51.2	<=8.0
2403.70	26.9	16.4	8.5	2.0	-51.4	<=8.0
2403.75	27.0	16.4	8.6	2.0	-51.3	<=8.0
2403.80	27.1	16.4	8.7	2.0	-51.2	<=8.0
2403.85	27.0	16.4	8.6	2.0	-51.3	<=8.0
2403.90	26.9	16.4	8.5	2.0	-51.4	<=8.0
2403.95	26.7	16.4	8.3	2.0	-51.6	<=8.0
2404.00	26.3	16.4	7.9	2.0	-52.0	<=8.0
2404.05	25.9	16.4	7.5	2.0	-52.4	<=8.0
2404.10	25.7	16.4	7.3	2.0	-52.6	<=8.0
2404.15	25.8	16.4	7.4	2.0	-52.5	<=8.0
2404.20	25.6	16.4	7.2	2.0	-52.7	<=8.0
2404.25	25.8	16.4	7.4	2.0	-52.5	<=8.0
2404.30	25.8	16.4	7.4	2.0	-52.5	<=8.0
2404.35	25.4	16.4	7.0	2.0	-52.9	<=8.0
2404.40	25.0	16.4	6.6	2.0	-53.3	<=8.0
2404.45	24.4	16.4	6.0	2.0	-53.9	<=8.0
2404.50	23.9	16.4	5.5	2.0	-54.4	<=8.0
2404.55	23.6	16.4	5.2	2.0	-54.7	<=8.0
2404.60	23.4	16.4	5.0	2.0	-54.9	<=8.0
2404.65	23.0	16.4	4.6	2.0	-55.3	<=8.0
2404.70	22.8	16.4	4.4	2.0	-55.5	<=8.0
2404.75	22.4	16.4	4.0	2.0	-55.9	<=8.0
2404.80	22.2	16.4	3.8	2.0	-56.1	<=8.0
2404.85	22.1	16.4	3.7	2.0	-56.2	<=8.0
2404.90	21.6	16.4	3.2	2.0	-56.7	<=8.0
2404.95	21.4	16.4	3.0	2.0	-56.9	<=8.0
2405.00	21.1	16.4	2.7	2.0	-57.2	<=8.0
2405.05	20.8	16.4	2.4	2.0	-57.5	<=8.0
2405.10	20.4	16.4	2.0	2.0	-57.9	<=8.0
2405.15	20.1	16.4	1.7	2.0	-58.2	<=8.0
2405.20	19.9	16.4	1.5	2.0	-58.4	<=8.0
2405.25	19.6	16.4	1.2	2.0	-58.7	<=8.0
2405.30	19.4	16.4	1.0	2.0	-58.9	<=8.0
2405.35	19.1	16.4	0.7	2.0	-59.2	<=8.0
2405.40	19.0	16.4	0.6	2.0	-59.3	<=8.0
2405.45	18.9	16.4	0.5	2.0	-59.4	<=8.0
2405.50	18.8	16.4	0.4	2.0	-59.5	<=8.0
2405.55	18.4	16.4	0.0	2.0	-59.9	<=8.0
2405.60	18.5	16.4	0.1	2.0	-59.8	<=8.0
2405.65	18.4	16.4	0.0	2.0	-59.9	<=8.0
2405.70	18.0	16.4	-0.4	2.0	-60.3	<=8.0
2405.75	17.9	16.4	-0.5	2.0	-60.4	<=8.0
2405.80	17.5	16.4	-0.9	2.0	-60.8	<=8.0
2405.85	17.6	16.4	-0.8	2.0	-60.7	<=8.0

11Mbps CHANNEL 1 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj=J/S (dB)	Lsys (dB)	Jammer (dBm)	PER (%)
2405.90	17.0	16.4	-1.4	2.0	-61.3	<=8.0
2405.95	16.9	16.4	-1.5	2.0	-61.4	<=8.0
2406.00	16.8	16.4	-1.6	2.0	-61.5	<=8.0
2406.05	16.6	16.4	-1.8	2.0	-61.7	<=8.0
2406.10	16.5	16.4	-1.9	2.0	-61.8	<=8.0
2406.15	16.6	16.4	-1.8	2.0	-61.7	<=8.0
2406.20	16.4	16.4	-2.0	2.0	-61.9	<=8.0
2406.25	16.3	16.4	-2.1	2.0	-62.0	<=8.0
2406.30	16.1	16.4	-2.3	2.0	-62.2	<=8.0
2406.35	15.9	16.4	-2.5	2.0	-62.4	<=8.0
2406.40	15.8	16.4	-2.6	2.0	-62.5	<=8.0
2406.45	15.6	16.4	-2.8	2.0	-62.7	<=8.0
2406.50	15.4	16.4	-3.0	2.0	-62.9	<=8.0
2406.55	15.2	16.4	-3.2	2.0	-63.1	<=8.0
2406.60	15.2	16.4	-3.2	2.0	-63.1	<=8.0
2406.65	15.0	16.4	-3.4	2.0	-63.3	<=8.0
2406.70	15.1	16.4	-3.3	2.0	-63.2	<=8.0
2406.75	14.9	16.4	-3.5	2.0	-63.4	<=8.0
2406.80	15.0	16.4	-3.4	2.0	-63.3	<=8.0
2406.85	14.8	16.4	-3.6	2.0	-63.5	<=8.0
2406.90	14.7	16.4	-3.7	2.0	-63.6	<=8.0
2406.95	14.8	16.4	-3.6	2.0	-63.5	<=8.0
2407.00	14.7	16.4	-3.7	2.0	-63.6	<=8.0
2407.05	14.7	16.4	-3.7	2.0	-63.6	<=8.0
2407.10	14.4	16.4	-4.0	2.0	-63.9	<=8.0
2407.15	14.4	16.4	-4.0	2.0	-63.9	<=8.0
2407.20	14.5	16.4	-3.9	2.0	-63.8	<=8.0
2407.25	14.4	16.4	-4.0	2.0	-63.9	<=8.0
2407.30	14.3	16.4	-4.1	2.0	-64.0	<=8.0
2407.35	14.2	16.4	-4.2	2.0	-64.1	<=8.0
2407.40	14.2	16.4	-4.2	2.0	-64.1	<=8.0
2407.45	14.1	16.4	-4.3	2.0	-64.2	<=8.0
2407.50	14.2	16.4	-4.2	2.0	-64.1	<=8.0
2407.55	14.1	16.4	-4.3	2.0	-64.2	<=8.0
2407.60	14.2	16.4	-4.2	2.0	-64.1	<=8.0
2407.65	14.0	16.4	-4.4	2.0	-64.3	<=8.0
2407.70	13.9	16.4	-4.5	2.0	-64.4	<=8.0
2407.75	13.8	16.4	-4.6	2.0	-64.5	<=8.0
2407.80	13.8	16.4	-4.6	2.0	-64.5	<=8.0
2407.85	13.7	16.4	-4.7	2.0	-64.6	<=8.0
2407.90	13.6	16.4	-4.8	2.0	-64.7	<=8.0
2407.95	13.7	16.4	-4.7	2.0	-64.6	<=8.0
2408.00	13.6	16.4	-4.8	2.0	-64.7	<=8.0
2408.05	13.5	16.4	-4.9	2.0	-64.8	<=8.0
2408.10	13.4	16.4	-5.0	2.0	-64.9	<=8.0
2408.15	13.3	16.4	-5.1	2.0	-65.0	<=8.0
2408.20	13.4	16.4	-5.0	2.0	-64.9	<=8.0
2408.25	13.4	16.4	-5.0	2.0	-64.9	<=8.0

11Mbps CHANNEL 1 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj=J/S (dB)	Lsys (dB)	Jammer (dBm)	PER (%)
2408.30	13.4	16.4	-5.0	2.0	-64.9	<=8.0
2408.35	13.2	16.4	-5.2	2.0	-65.1	<=8.0
2408.40	13.0	16.4	-5.4	2.0	-65.3	<=8.0
2408.45	12.9	16.4	-5.5	2.0	-65.4	<=8.0
2408.50	12.9	16.4	-5.5	2.0	-65.4	<=8.0
2408.55	12.8	16.4	-5.6	2.0	-65.5	<=8.0
2408.60	12.9	16.4	-5.5	2.0	-65.4	<=8.0
2408.65	12.8	16.4	-5.6	2.0	-65.5	<=8.0
2408.70	12.7	16.4	-5.7	2.0	-65.6	<=8.0
2408.75	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2408.80	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2408.85	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2408.90	12.5	16.4	-5.9	2.0	-65.8	<=8.0
2408.95	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2409.00	12.5	16.4	-5.9	2.0	-65.8	<=8.0
2409.05	12.3	16.4	-6.1	2.0	-66.0	<=8.0
2409.10	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2409.15	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2409.20	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2409.25	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2409.30	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2409.35	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2409.40	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2409.45	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2409.50	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2409.55	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2409.60	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2409.65	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2409.70	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2409.75	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2409.80	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2409.85	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2409.90	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2409.95	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2410.00	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2410.05	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2410.10	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2410.15	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2410.20	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2410.25	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2410.30	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2410.35	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2410.40	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2410.45	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2410.50	12.1	16.4	-6.3	2.0	-66.2	<=8.0
2410.55	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2410.60	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2410.65	12.0	16.4	-6.4	2.0	-66.3	<=8.0

11Mbps CHANNEL 1 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2410.70	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2410.75	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2410.80	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2410.85	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2410.90	12.3	16.4	-6.1	2.0	-66.0	<=8.0
2410.95	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2411.00	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2411.05	12.1	16.4	-6.3	2.0	-66.2	<=8.0
2411.10	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2411.15	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2411.20	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2411.25	11.1	16.4	-7.3	2.0	-67.2	<=8.0
2411.30	8.1	16.4	-10.3	2.0	-70.2	<=8.0
2411.35	5.5	16.4	-12.9	2.0	-72.8	<=8.0
2411.40	5.6	16.4	-12.8	2.0	-72.7	<=8.0
2411.45	7.8	16.4	-10.6	2.0	-70.5	<=8.0
2411.50	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2411.55	9.9	16.4	-8.5	2.0	-68.4	<=8.0
2411.60	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2411.65	9.9	16.4	-8.5	2.0	-68.4	<=8.0
2411.70	8.1	16.4	-10.3	2.0	-70.2	<=8.0
2411.75	7.6	16.4	-10.8	2.0	-70.7	<=8.0
2411.80	8.8	16.4	-9.6	2.0	-69.5	<=8.0
2411.85	6.3	16.4	-12.1	2.0	-72.0	<=8.0
2411.90	6.9	16.4	-11.5	2.0	-71.4	<=8.0
2411.95	7.5	16.4	-10.9	2.0	-70.8	<=8.0
2412.00	8.9	16.4	-9.5	2.0	-69.4	<=8.0
2412.05	9.6	16.4	-8.8	2.0	-68.7	<=8.0
2412.10	6.9	16.4	-11.5	2.0	-71.4	<=8.0
2412.15	7.1	16.4	-11.3	2.0	-71.2	<=8.0
2412.20	7.5	16.4	-10.9	2.0	-70.8	<=8.0
2412.25	9.4	16.4	-9.0	2.0	-68.9	<=8.0
2412.30	10.1	16.4	-8.3	2.0	-68.2	<=8.0
2412.35	10.7	16.4	-7.7	2.0	-67.6	<=8.0
2412.40	11.0	16.4	-7.4	2.0	-67.3	<=8.0
2412.45	11.1	16.4	-7.3	2.0	-67.2	<=8.0
2412.50	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2412.55	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2412.60	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2412.65	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2412.70	11.4	16.4	-7.0	2.0	-66.9	<=8.0
2412.75	11.5	16.4	-6.9	2.0	-66.8	<=8.0
2412.80	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2412.85	8.0	16.4	-10.4	2.0	-70.3	<=8.0
2412.90	5.1	16.4	-13.3	2.0	-73.2	<=8.0
2412.95	7.7	16.4	-10.7	2.0	-70.6	<=8.0
2413.00	10.3	16.4	-8.1	2.0	-68.0	<=8.0
2413.05	11.4	16.4	-7.0	2.0	-66.9	<=8.0

11Mbps CHANNEL 1 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2413.10	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2413.15	12.3	16.4	-6.1	2.0	-66.0	<=8.0
2413.20	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2413.25	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2413.30	12.5	16.4	-5.9	2.0	-65.8	<=8.0
2413.35	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2413.40	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2413.45	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2413.50	12.3	16.4	-6.1	2.0	-66.0	<=8.0
2413.55	12.1	16.4	-6.3	2.0	-66.2	<=8.0
2413.60	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2413.65	12.1	16.4	-6.3	2.0	-66.2	<=8.0
2413.70	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2413.75	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2413.80	12.3	16.4	-6.1	2.0	-66.0	<=8.0
2413.85	12.1	16.4	-6.3	2.0	-66.2	<=8.0
2413.90	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2413.95	12.1	16.4	-6.3	2.0	-66.2	<=8.0
2414.00	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2414.05	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2414.10	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2414.15	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2414.20	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2414.25	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2414.30	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2414.35	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2414.40	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2414.45	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2414.50	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2414.55	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2414.60	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2414.65	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2414.70	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2414.75	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2414.80	11.7	16.4	-6.7	2.0	-66.6	<=8.0
2414.85	11.8	16.4	-6.6	2.0	-66.5	<=8.0
2414.90	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2414.95	11.6	16.4	-6.8	2.0	-66.7	<=8.0
2415.00	11.9	16.4	-6.5	2.0	-66.4	<=8.0
2415.05	12.0	16.4	-6.4	2.0	-66.3	<=8.0
2415.10	12.2	16.4	-6.2	2.0	-66.1	<=8.0
2415.15	12.1	16.4	-6.3	2.0	-66.2	<=8.0
2415.20	12.3	16.4	-6.1	2.0	-66.0	<=8.0
2415.25	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2415.30	12.4	16.4	-6.0	2.0	-65.9	<=8.0
2415.35	12.6	16.4	-5.8	2.0	-65.7	<=8.0
2415.40	12.5	16.4	-5.9	2.0	-65.8	<=8.0
2415.45	12.6	16.4	-5.8	2.0	-65.7	<=8.0

11Mbps CHANNEL 1 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2415.50	12.7	16.4	-5.7	2.0	-65.6	<=8.0
2415.55	12.8	16.4	-5.6	2.0	-65.5	<=8.0
2415.60	12.7	16.4	-5.7	2.0	-65.6	<=8.0
2415.65	12.9	16.4	-5.5	2.0	-65.4	<=8.0
2415.70	13.0	16.4	-5.4	2.0	-65.3	<=8.0
2415.75	12.9	16.4	-5.5	2.0	-65.4	<=8.0
2415.80	13.0	16.4	-5.4	2.0	-65.3	<=8.0
2415.85	13.1	16.4	-5.3	2.0	-65.2	<=8.0
2415.90	13.3	16.4	-5.1	2.0	-65.0	<=8.0
2415.95	13.4	16.4	-5.0	2.0	-64.9	<=8.0
2416.00	13.5	16.4	-4.9	2.0	-64.8	<=8.0
2416.05	13.6	16.4	-4.8	2.0	-64.7	<=8.0
2416.10	13.7	16.4	-4.7	2.0	-64.6	<=8.0
2416.15	13.5	16.4	-4.9	2.0	-64.8	<=8.0
2416.20	13.4	16.4	-5.0	2.0	-64.9	<=8.0
2416.25	13.4	16.4	-5.0	2.0	-64.9	<=8.0
2416.30	13.5	16.4	-4.9	2.0	-64.8	<=8.0
2416.35	13.6	16.4	-4.8	2.0	-64.7	<=8.0
2416.40	13.6	16.4	-4.8	2.0	-64.7	<=8.0
2416.45	13.7	16.4	-4.7	2.0	-64.6	<=8.0
2416.50	13.7	16.4	-4.7	2.0	-64.6	<=8.0
2416.55	13.8	16.4	-4.6	2.0	-64.5	<=8.0
2416.60	14.1	16.4	-4.3	2.0	-64.2	<=8.0
2416.65	14.0	16.4	-4.4	2.0	-64.3	<=8.0
2416.70	13.9	16.4	-4.5	2.0	-64.4	<=8.0
2416.75	14.0	16.4	-4.4	2.0	-64.3	<=8.0
2416.80	13.9	16.4	-4.5	2.0	-64.4	<=8.0
2416.85	14.1	16.4	-4.3	2.0	-64.2	<=8.0
2416.90	14.0	16.4	-4.4	2.0	-64.3	<=8.0
2416.95	14.1	16.4	-4.3	2.0	-64.2	<=8.0
2417.00	14.2	16.4	-4.2	2.0	-64.1	<=8.0
2417.05	14.2	16.4	-4.2	2.0	-64.1	<=8.0
2417.10	14.4	16.4	-4.0	2.0	-63.9	<=8.0
2417.15	14.3	16.4	-4.1	2.0	-64.0	<=8.0
2417.20	14.4	16.4	-4.0	2.0	-63.9	<=8.0
2417.25	14.5	16.4	-3.9	2.0	-63.8	<=8.0
2417.30	14.3	16.4	-4.1	2.0	-64.0	<=8.0
2417.35	14.4	16.4	-4.0	2.0	-63.9	<=8.0
2417.40	14.6	16.4	-3.8	2.0	-63.7	<=8.0
2417.45	14.7	16.4	-3.7	2.0	-63.6	<=8.0
2417.50	14.8	16.4	-3.6	2.0	-63.5	<=8.0
2417.55	14.7	16.4	-3.7	2.0	-63.6	<=8.0
2417.60	14.9	16.4	-3.5	2.0	-63.4	<=8.0
2417.65	14.8	16.4	-3.6	2.0	-63.5	<=8.0
2417.70	14.9	16.4	-3.5	2.0	-63.4	<=8.0
2417.75	15.0	16.4	-3.4	2.0	-63.3	<=8.0
2417.80	15.2	16.4	-3.2	2.0	-63.1	<=8.0
2417.85	15.4	16.4	-3.0	2.0	-62.9	<=8.0

11Mbps CHANNEL 1 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2417.90	15.7	16.4	-2.7	2.0	-62.6	<=8.0
2417.95	15.9	16.4	-2.5	2.0	-62.4	<=8.0
2418.00	16.0	16.4	-2.4	2.0	-62.3	<=8.0
2418.05	16.1	16.4	-2.3	2.0	-62.2	<=8.0
2418.10	15.9	16.4	-2.5	2.0	-62.4	<=8.0
2418.15	16.2	16.4	-2.2	2.0	-62.1	<=8.0
2418.20	16.5	16.4	-1.9	2.0	-61.8	<=8.0
2418.25	16.6	16.4	-1.8	2.0	-61.7	<=8.0
2418.30	16.7	16.4	-1.7	2.0	-61.6	<=8.0
2418.35	16.9	16.4	-1.5	2.0	-61.4	<=8.0
2418.40	17.0	16.4	-1.4	2.0	-61.3	<=8.0
2418.45	17.4	16.4	-1.0	2.0	-60.9	<=8.0
2418.50	17.5	16.4	-0.9	2.0	-60.8	<=8.0
2418.55	17.8	16.4	-0.6	2.0	-60.5	<=8.0
2418.60	18.0	16.4	-0.4	2.0	-60.3	<=8.0
2418.65	18.2	16.4	-0.2	2.0	-60.1	<=8.0
2418.70	18.3	16.4	-0.1	2.0	-60.0	<=8.0
2418.75	18.4	16.4	0.0	2.0	-59.9	<=8.0
2418.80	18.6	16.4	0.2	2.0	-59.7	<=8.0
2418.85	18.7	16.4	0.3	2.0	-59.6	<=8.0
2418.90	18.8	16.4	0.4	2.0	-59.5	<=8.0
2418.95	19.0	16.4	0.6	2.0	-59.3	<=8.0
2419.00	19.4	16.4	1.0	2.0	-58.9	<=8.0
2419.05	19.6	16.4	1.2	2.0	-58.7	<=8.0
2419.10	20.0	16.4	1.6	2.0	-58.3	<=8.0
2419.15	20.1	16.4	1.7	2.0	-58.2	<=8.0
2419.20	20.2	16.4	1.8	2.0	-58.1	<=8.0
2419.25	20.4	16.4	2.0	2.0	-57.9	<=8.0
2419.30	20.9	16.4	2.5	2.0	-57.4	<=8.0
2419.35	21.0	16.4	2.6	2.0	-57.3	<=8.0
2419.40	21.6	16.4	3.2	2.0	-56.7	<=8.0
2419.45	21.7	16.4	3.3	2.0	-56.6	<=8.0
2419.50	22.4	16.4	4.0	2.0	-55.9	<=8.0
2419.55	22.5	16.4	4.1	2.0	-55.8	<=8.0
2419.60	22.6	16.4	4.2	2.0	-55.7	<=8.0
2419.65	22.8	16.4	4.4	2.0	-55.5	<=8.0
2419.70	22.9	16.4	4.5	2.0	-55.4	<=8.0
2419.75	23.0	16.4	4.6	2.0	-55.3	<=8.0
2419.80	23.4	16.4	5.0	2.0	-54.9	<=8.0
2419.85	24.1	16.4	5.7	2.0	-54.2	<=8.0
2419.90	24.8	16.4	6.4	2.0	-53.5	<=8.0
2419.95	25.0	16.4	6.6	2.0	-53.3	<=8.0
2420.00	25.4	16.4	7.0	2.0	-52.9	<=8.0
2420.05	25.5	16.4	7.1	2.0	-52.8	<=8.0
2420.10	25.6	16.4	7.2	2.0	-52.7	<=8.0
2420.15	25.9	16.4	7.5	2.0	-52.4	<=8.0
2420.20	25.7	16.4	7.3	2.0	-52.6	<=8.0
2420.25	26.0	16.4	7.6	2.0	-52.3	<=8.0

11Mbps CHANNEL 1 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj=J/S (dB)	Lsys (dB)	Jammer (dBm)	PER (%)
2420.30	26.4	16.4	8.0	2.0	-51.9	<=8.0
2420.35	26.7	16.4	8.3	2.0	-51.6	<=8.0
2420.40	26.7	16.4	8.3	2.0	-51.6	<=8.0
2420.45	26.9	16.4	8.5	2.0	-51.4	<=8.0
2420.50	26.8	16.4	8.4	2.0	-51.5	<=8.0

Processing Gain (dB)= **11.9**

CH1 Processing Gain
11 MB Data Rate

Processing Gain (dB)	XMIT level	-59.9
	S/N+Ls	18.4
	Conversion	0.0
PG	offset	Signal Generator Delta
28.7	-8500	10.3
27.6	-8450	9.2
27.3	-8400	8.9
27.1	-8350	8.7
26.9	-8300	8.5
27.0	-8250	8.6
27.1	-8200	8.7
27.0	-8150	8.6
26.9	-8100	8.5
26.7	-8050	8.3
26.3	-8000	7.9
25.9	-7950	7.5
25.7	-7900	7.3
25.8	-7850	7.4
25.6	-7800	7.2
25.8	-7750	7.4
25.8	-7700	7.4
25.4	-7650	7.0
25.0	-7600	6.6
24.4	-7550	6.0
23.9	-7500	5.5
23.6	-7450	5.2
23.4	-7400	5.0
23.0	-7350	4.6
22.8	-7300	4.4
22.4	-7250	4.0
22.2	-7200	3.8
22.1	-7150	3.7
21.6	-7100	3.2
21.4	-7050	3.0
21.1	-7000	2.7
20.8	-6950	2.4
20.4	-6900	2.0
20.1	-6850	1.7
19.9	-6800	1.5
19.6	-6750	1.2
19.4	-6700	1.0
19.1	-6650	0.7
19.0	-6600	0.6
18.9	-6550	0.5
18.8	-6500	0.4
18.4	-6450	0.0
18.5	-6400	0.1
18.4	-6350	0.0
18.0	-6300	-0.4
17.9	-6250	-0.5
17.5	-6200	-0.9

CH1 Processing Gain
11 MB Data Rate

17.6	-6150	-0.8
17.0	-6100	-1.4
16.9	-6050	-1.5
16.8	-6000	-1.6
16.6	-5950	-1.8
16.5	-5900	-1.9
16.6	-5850	-1.8
16.4	-5800	-2.0
16.3	-5750	-2.1
16.1	-5700	-2.3
15.9	-5650	-2.5
15.8	-5600	-2.6
15.6	-5550	-2.8
15.4	-5500	-3.0
15.2	-5450	-3.2
15.2	-5400	-3.2
15.0	-5350	-3.4
15.1	-5300	-3.3
14.9	-5250	-3.5
15.0	-5200	-3.4
14.8	-5150	-3.6
14.7	-5100	-3.7
14.8	-5050	-3.6
14.7	-5000	-3.7
14.7	-4950	-3.7
14.4	-4900	-4.0
14.4	-4850	-4.0
14.5	-4800	-3.9
14.4	-4750	-4.0
14.3	-4700	-4.1
14.2	-4650	-4.2
14.2	-4600	-4.2
14.1	-4550	-4.3
14.2	-4500	-4.2
14.1	-4450	-4.3
14.2	-4400	-4.2
14.0	-4350	-4.4
13.9	-4300	-4.5
13.8	-4250	-4.6
13.8	-4200	-4.6
13.7	-4150	-4.7
13.6	-4100	-4.8
13.7	-4050	-4.7
13.6	-4000	-4.8
13.5	-3950	-4.9
13.4	-3900	-5.0
13.3	-3850	-5.1
13.4	-3800	-5.0
13.4	-3750	-5.0
13.4	-3700	-5.0
13.2	-3650	-5.2
13.0	-3600	-5.4

CH1 Processing Gain
11 MB Data Rate

12.9	-3550	-5.5
12.9	-3500	-5.5
12.8	-3450	-5.6
12.9	-3400	-5.5
12.8	-3350	-5.6
12.7	-3300	-5.7
12.6	-3250	-5.8
12.6	-3200	-5.8
12.6	-3150	-5.8
12.5	-3100	-5.9
12.4	-3050	-6.0
12.5	-3000	-5.9
12.3	-2950	-6.1
12.0	-2900	-6.4
11.9	-2850	-6.5
12.0	-2800	-6.4
11.8	-2750	-6.6
11.7	-2700	-6.7
11.5	-2650	-6.9
11.5	-2600	-6.9
11.7	-2550	-6.7
11.6	-2500	-6.8
11.8	-2450	-6.6
11.7	-2400	-6.7
11.8	-2350	-6.6
11.7	-2300	-6.7
11.7	-2250	-6.7
11.9	-2200	-6.5
11.8	-2150	-6.6
11.9	-2100	-6.5
11.7	-2050	-6.7
11.6	-2000	-6.8
11.7	-1950	-6.7
11.8	-1900	-6.6
11.5	-1850	-6.9
11.6	-1800	-6.8
11.8	-1750	-6.6
11.9	-1700	-6.5
11.9	-1650	-6.5
12.0	-1600	-6.4
12.0	-1550	-6.4
12.1	-1500	-6.3
11.8	-1450	-6.6
11.9	-1400	-6.5
12.0	-1350	-6.4
12.2	-1300	-6.2
11.9	-1250	-6.5
11.8	-1200	-6.6
12.4	-1150	-6.0
12.3	-1100	-6.1
12.4	-1050	-6.0
12.4	-1000	-6.0

CH1 Processing Gain
11 MB Data Rate

12.1	-950	-6.3
12.0	-900	-6.4
12.2	-850	-6.2
11.7	-800	-6.7
11.1	-750	-7.3
8.1	-700	-10.3
5.5	-650	-12.9
5.6	-600	-12.8
7.8	-550	-10.6
11.5	-500	-6.9
9.9	-450	-8.5
11.6	-400	-6.8
9.9	-350	-8.5
8.1	-300	-10.3
7.6	-250	-10.8
8.8	-200	-9.6
6.3	-150	-12.1
6.9	-100	-11.5
7.5	-50	-10.9
8.9	0	-9.5
9.6	50	-8.8
6.9	100	-11.5
7.1	150	-11.3
7.5	200	-10.9
9.4	250	-9.0
10.1	300	-8.3
10.7	350	-7.7
11.0	400	-7.4
11.1	450	-7.3
11.5	500	-6.9
11.6	550	-6.8
11.8	600	-6.6
11.6	650	-6.8
11.4	700	-7.0
11.5	750	-6.9
11.8	800	-6.6
8.0	850	-10.4
5.1	900	-13.3
7.7	950	-10.7
10.3	1000	-8.1
11.4	1050	-7.0
12.4	1100	-6.0
12.3	1150	-6.1
12.2	1200	-6.2
12.4	1250	-6.0
12.5	1300	-5.9
12.4	1350	-6.0
12.6	1400	-5.8
12.4	1450	-6.0
12.3	1500	-6.1
12.1	1550	-6.3
12.2	1600	-6.2

CH1 Processing Gain
11 MB Data Rate

12.1	1650	-6.3
12.2	1700	-6.2
12.4	1750	-6.0
12.3	1800	-6.1
12.1	1850	-6.3
12.2	1900	-6.2
12.1	1950	-6.3
11.9	2000	-6.5
12.0	2050	-6.4
11.9	2100	-6.5
11.8	2150	-6.6
11.9	2200	-6.5
11.9	2250	-6.5
11.8	2300	-6.6
11.9	2350	-6.5
12.0	2400	-6.4
11.9	2450	-6.5
11.9	2500	-6.5
11.8	2550	-6.6
11.9	2600	-6.5
11.8	2650	-6.6
11.9	2700	-6.5
11.6	2750	-6.8
11.7	2800	-6.7
11.8	2850	-6.6
11.9	2900	-6.5
11.6	2950	-6.8
11.9	3000	-6.5
12.0	3050	-6.4
12.2	3100	-6.2
12.1	3150	-6.3
12.3	3200	-6.1
12.4	3250	-6.0
12.4	3300	-6.0
12.6	3350	-5.8
12.5	3400	-5.9
12.6	3450	-5.8
12.7	3500	-5.7
12.8	3550	-5.6
12.7	3600	-5.7
12.9	3650	-5.5
13.0	3700	-5.4
12.9	3750	-5.5
13.0	3800	-5.4
13.1	3850	-5.3
13.3	3900	-5.1
13.4	3950	-5.0
13.5	4000	-4.9
13.6	4050	-4.8
13.7	4100	-4.7
13.5	4150	-4.9
13.4	4200	-5.0


CH1 Processing Gain
11 MB Data Rate

13.4	4250	-5.0
13.5	4300	-4.9
13.6	4350	-4.8
13.6	4400	-4.8
13.7	4450	-4.7
13.7	4500	-4.7
13.8	4550	-4.6
14.1	4600	-4.3
14.0	4650	-4.4
13.9	4700	-4.5
14.0	4750	-4.4
13.9	4800	-4.5
14.1	4850	-4.3
14.0	4900	-4.4
14.1	4950	-4.3
14.2	5000	-4.2
14.2	5050	-4.2
14.4	5100	-4.0
14.3	5150	-4.1
14.4	5200	-4.0
14.5	5250	-3.9
14.3	5300	-4.1
14.4	5350	-4.0
14.6	5400	-3.8
14.7	5450	-3.7
14.8	5500	-3.6
14.7	5550	-3.7
14.9	5600	-3.5
14.8	5650	-3.6
14.9	5700	-3.5
15.0	5750	-3.4
15.2	5800	-3.2
15.4	5850	-3.0
15.7	5900	-2.7
15.9	5950	-2.5
16.0	6000	-2.4
16.1	6050	-2.3
15.9	6100	-2.5
16.2	6150	-2.2
16.5	6200	-1.9
16.6	6250	-1.8
16.7	6300	-1.7
16.9	6350	-1.5
17.0	6400	-1.4
17.4	6450	-1.0
17.5	6500	-0.9
17.8	6550	-0.6
18.0	6600	-0.4
18.2	6650	-0.2
18.3	6700	-0.1
18.4	6750	0.0
18.6	6800	0.2

CH1 Processing Gain
11 MB Data Rate

18.7	6850	0.3
18.8	6900	0.4
19.0	6950	0.6
19.4	7000	1.0
19.6	7050	1.2
20.0	7100	1.6
20.1	7150	1.7
20.2	7200	1.8
20.4	7250	2.0
20.9	7300	2.5
21.0	7350	2.6
21.6	7400	3.2
21.7	7450	3.3
22.4	7500	4.0
22.5	7550	4.1
22.6	7600	4.2
22.8	7650	4.4
22.9	7700	4.5
23.0	7750	4.6
23.4	7800	5.0
24.1	7850	5.7
24.8	7900	6.4
25.0	7950	6.6
25.4	8000	7.0
25.5	8050	7.1
25.6	8100	7.2
25.9	8150	7.5
25.7	8200	7.3
26.0	8250	7.6
26.4	8300	8.0
26.7	8350	8.3
26.7	8400	8.3
26.9	8450	8.5
26.8	8500	8.4
11.9	Processing Gain (dB) @ 80th Percentile =	

Processing Gain Channel 1 (fc=2412Mhz) @ 11Mbps

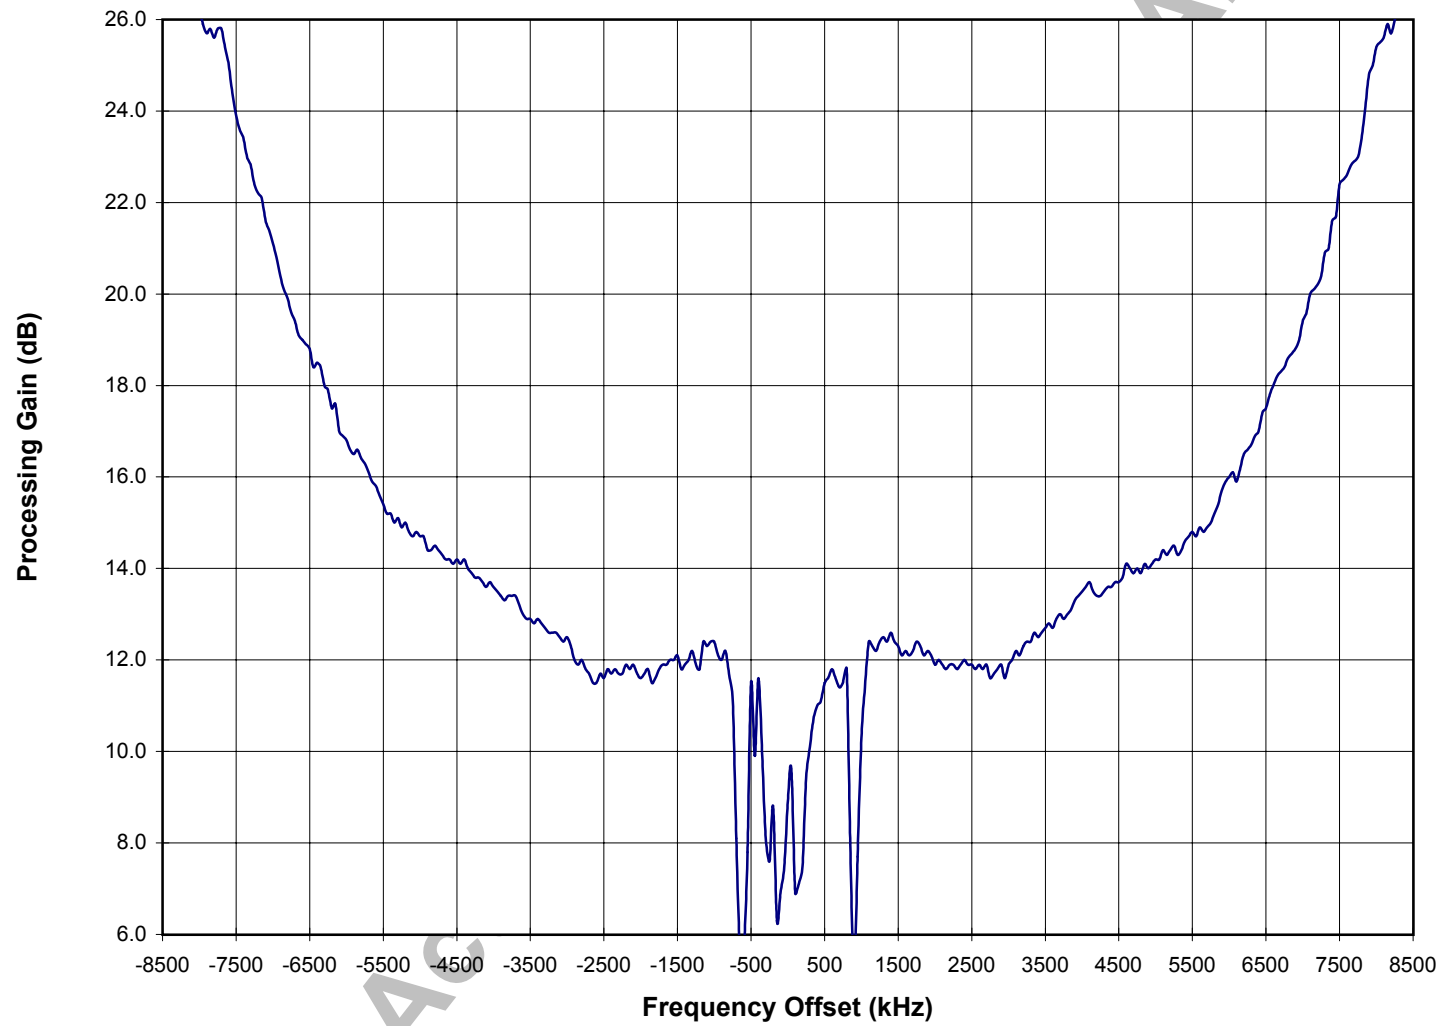

5.5Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2428.50	25.6	13.4	10.2	2.0	-49.7	<=8.0
2428.55	24.9	13.4	9.5	2.0	-50.4	<=8.0
2428.60	24.4	13.4	9.0	2.0	-50.9	<=8.0
2428.65	24.0	13.4	8.6	2.0	-51.3	<=8.0
2428.70	23.7	13.4	8.3	2.0	-51.6	<=8.0
2428.75	23.8	13.4	8.4	2.0	-51.5	<=8.0
2428.80	23.9	13.4	8.5	2.0	-51.4	<=8.0
2428.85	23.9	13.4	8.5	2.0	-51.4	<=8.0
2428.90	23.7	13.4	8.3	2.0	-51.6	<=8.0
2428.95	23.5	13.4	8.1	2.0	-51.8	<=8.0
2429.00	23.2	13.4	7.8	2.0	-52.1	<=8.0
2429.05	22.7	13.4	7.3	2.0	-52.6	<=8.0
2429.10	22.4	13.4	7.0	2.0	-52.9	<=8.0
2429.15	22.4	13.4	7.0	2.0	-52.9	<=8.0
2429.20	22.5	13.4	7.1	2.0	-52.8	<=8.0
2429.25	22.6	13.4	7.2	2.0	-52.7	<=8.0
2429.30	22.7	13.4	7.3	2.0	-52.6	<=8.0
2429.35	22.7	13.4	7.3	2.0	-52.6	<=8.0
2429.40	22.6	13.4	7.2	2.0	-52.7	<=8.0
2429.45	22.2	13.4	6.8	2.0	-53.1	<=8.0
2429.50	21.9	13.4	6.5	2.0	-53.4	<=8.0
2429.55	21.4	13.4	6.0	2.0	-53.9	<=8.0
2429.60	20.9	13.4	5.5	2.0	-54.4	<=8.0
2429.65	20.7	13.4	5.3	2.0	-54.6	<=8.0
2429.70	20.5	13.4	5.1	2.0	-54.8	<=8.0
2429.75	20.6	13.4	5.2	2.0	-54.7	<=8.0
2429.80	20.8	13.4	5.4	2.0	-54.5	<=8.0
2429.85	20.6	13.4	5.2	2.0	-54.7	<=8.0
2429.90	20.7	13.4	5.3	2.0	-54.6	<=8.0
2429.95	20.5	13.4	5.1	2.0	-54.8	<=8.0
2430.00	20.4	13.4	5.0	2.0	-54.9	<=8.0
2430.05	20.1	13.4	4.7	2.0	-55.2	<=8.0
2430.10	19.8	13.4	4.4	2.0	-55.5	<=8.0
2430.15	19.9	13.4	4.5	2.0	-55.4	<=8.0
2430.20	20.0	13.4	4.6	2.0	-55.3	<=8.0
2430.25	19.9	13.4	4.5	2.0	-55.4	<=8.0
2430.30	19.9	13.4	4.5	2.0	-55.4	<=8.0
2430.35	19.7	13.4	4.3	2.0	-55.6	<=8.0
2430.40	19.8	13.4	4.4	2.0	-55.5	<=8.0
2430.45	19.6	13.4	4.2	2.0	-55.7	<=8.0
2430.50	19.4	13.4	4.0	2.0	-55.9	<=8.0
2430.55	19.5	13.4	4.1	2.0	-55.8	<=8.0
2430.60	19.2	13.4	3.8	2.0	-56.1	<=8.0
2430.65	18.7	13.4	3.3	2.0	-56.6	<=8.0
2430.70	18.3	13.4	2.9	2.0	-57.0	<=8.0
2430.75	18.6	13.4	3.2	2.0	-56.7	<=8.0
2430.80	18.9	13.4	3.5	2.0	-56.4	<=8.0
2430.85	18.6	13.4	3.2	2.0	-56.7	<=8.0

5.5Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2430.90	18.3	13.4	2.9	2.0	-57.0	<=8.0
2430.95	18.1	13.4	2.7	2.0	-57.2	<=8.0
2431.00	18.1	13.4	2.7	2.0	-57.2	<=8.0
2431.05	17.9	13.4	2.5	2.0	-57.4	<=8.0
2431.10	17.6	13.4	2.2	2.0	-57.7	<=8.0
2431.15	17.5	13.4	2.1	2.0	-57.8	<=8.0
2431.20	17.4	13.4	2.0	2.0	-57.9	<=8.0
2431.25	17.5	13.4	2.1	2.0	-57.8	<=8.0
2431.30	17.4	13.4	2.0	2.0	-57.9	<=8.0
2431.35	17.3	13.4	1.9	2.0	-58.0	<=8.0
2431.40	17.4	13.4	2.0	2.0	-57.9	<=8.0
2431.45	17.6	13.4	2.2	2.0	-57.7	<=8.0
2431.50	17.7	13.4	2.3	2.0	-57.6	<=8.0
2431.55	17.8	13.4	2.4	2.0	-57.5	<=8.0
2431.60	17.9	13.4	2.5	2.0	-57.4	<=8.0
2431.65	17.7	13.4	2.3	2.0	-57.6	<=8.0
2431.70	17.6	13.4	2.2	2.0	-57.7	<=8.0
2431.75	17.2	13.4	1.8	2.0	-58.1	<=8.0
2431.80	16.9	13.4	1.5	2.0	-58.4	<=8.0
2431.85	16.5	13.4	1.1	2.0	-58.8	<=8.0
2431.90	16.2	13.4	0.8	2.0	-59.1	<=8.0
2431.95	16.0	13.4	0.6	2.0	-59.3	<=8.0
2432.00	15.9	13.4	0.5	2.0	-59.4	<=8.0
2432.05	15.8	13.4	0.4	2.0	-59.5	<=8.0
2432.10	15.7	13.4	0.3	2.0	-59.6	<=8.0
2432.15	15.7	13.4	0.3	2.0	-59.6	<=8.0
2432.20	15.6	13.4	0.2	2.0	-59.7	<=8.0
2432.25	15.7	13.4	0.3	2.0	-59.6	<=8.0
2432.30	15.6	13.4	0.2	2.0	-59.7	<=8.0
2432.35	15.8	13.4	0.4	2.0	-59.5	<=8.0
2432.40	16.0	13.4	0.6	2.0	-59.3	<=8.0
2432.45	16.2	13.4	0.8	2.0	-59.1	<=8.0
2432.50	15.9	13.4	0.5	2.0	-59.4	<=8.0
2432.55	15.4	13.4	0.0	2.0	-59.9	<=8.0
2432.60	15.8	13.4	0.4	2.0	-59.5	<=8.0
2432.65	16.4	13.4	1.0	2.0	-58.9	<=8.0
2432.70	16.4	13.4	1.0	2.0	-58.9	<=8.0
2432.75	15.4	13.4	0.0	2.0	-59.9	<=8.0
2432.80	15.1	13.4	-0.3	2.0	-60.2	<=8.0
2432.85	15.0	13.4	-0.4	2.0	-60.3	<=8.0
2432.90	14.8	13.4	-0.6	2.0	-60.5	<=8.0
2432.95	14.6	13.4	-0.8	2.0	-60.7	<=8.0
2433.00	14.7	13.4	-0.7	2.0	-60.6	<=8.0
2433.05	14.4	13.4	-1.0	2.0	-60.9	<=8.0
2433.10	14.3	13.4	-1.1	2.0	-61.0	<=8.0
2433.15	14.4	13.4	-1.0	2.0	-60.9	<=8.0
2433.20	14.6	13.4	-0.8	2.0	-60.7	<=8.0
2433.25	14.5	13.4	-0.9	2.0	-60.8	<=8.0

5.5Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2433.30	14.4	13.4	-1.0	2.0	-60.9	<=8.0
2433.35	14.5	13.4	-0.9	2.0	-60.8	<=8.0
2433.40	14.6	13.4	-0.8	2.0	-60.7	<=8.0
2433.45	14.4	13.4	-1.0	2.0	-60.9	<=8.0
2433.50	14.1	13.4	-1.3	2.0	-61.2	<=8.0
2433.55	14.8	13.4	-0.6	2.0	-60.5	<=8.0
2433.60	15.1	13.4	-0.3	2.0	-60.2	<=8.0
2433.65	14.9	13.4	-0.5	2.0	-60.4	<=8.0
2433.70	14.6	13.4	-0.8	2.0	-60.7	<=8.0
2433.75	14.2	13.4	-1.2	2.0	-61.1	<=8.0
2433.80	13.7	13.4	-1.7	2.0	-61.6	<=8.0
2433.85	13.9	13.4	-1.5	2.0	-61.4	<=8.0
2433.90	13.8	13.4	-1.6	2.0	-61.5	<=8.0
2433.95	13.6	13.4	-1.8	2.0	-61.7	<=8.0
2434.00	13.4	13.4	-2.0	2.0	-61.9	<=8.0
2434.05	13.2	13.4	-2.2	2.0	-62.1	<=8.0
2434.10	13.1	13.4	-2.3	2.0	-62.2	<=8.0
2434.15	13.2	13.4	-2.2	2.0	-62.1	<=8.0
2434.20	12.9	13.4	-2.5	2.0	-62.4	<=8.0
2434.25	12.8	13.4	-2.6	2.0	-62.5	<=8.0
2434.30	12.6	13.4	-2.8	2.0	-62.7	<=8.0
2434.35	12.7	13.4	-2.7	2.0	-62.6	<=8.0
2434.40	12.5	13.4	-2.9	2.0	-62.8	<=8.0
2434.45	12.4	13.4	-3.0	2.0	-62.9	<=8.0
2434.50	11.9	13.4	-3.5	2.0	-63.4	<=8.0
2434.55	12.2	13.4	-3.2	2.0	-63.1	<=8.0
2434.60	12.6	13.4	-2.8	2.0	-62.7	<=8.0
2434.65	12.4	13.4	-3.0	2.0	-62.9	<=8.0
2434.70	12.5	13.4	-2.9	2.0	-62.8	<=8.0
2434.75	12.6	13.4	-2.8	2.0	-62.7	<=8.0
2434.80	12.7	13.4	-2.7	2.0	-62.6	<=8.0
2434.85	12.8	13.4	-2.6	2.0	-62.5	<=8.0
2434.90	12.9	13.4	-2.5	2.0	-62.4	<=8.0
2434.95	13.1	13.4	-2.3	2.0	-62.2	<=8.0
2435.00	13.1	13.4	-2.3	2.0	-62.2	<=8.0
2435.05	13.3	13.4	-2.1	2.0	-62.0	<=8.0
2435.10	13.5	13.4	-1.9	2.0	-61.8	<=8.0
2435.15	13.6	13.4	-1.8	2.0	-61.7	<=8.0
2435.20	13.7	13.4	-1.7	2.0	-61.6	<=8.0
2435.25	13.5	13.4	-1.9	2.0	-61.8	<=8.0
2435.30	13.4	13.4	-2.0	2.0	-61.9	<=8.0
2435.35	13.2	13.4	-2.2	2.0	-62.1	<=8.0
2435.40	13.0	13.4	-2.4	2.0	-62.3	<=8.0
2435.45	12.9	13.4	-2.5	2.0	-62.4	<=8.0
2435.50	12.7	13.4	-2.7	2.0	-62.6	<=8.0
2435.55	12.5	13.4	-2.9	2.0	-62.8	<=8.0
2435.60	12.4	13.4	-3.0	2.0	-62.9	<=8.0
2435.65	11.8	13.4	-3.6	2.0	-63.5	<=8.0

5.5Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2435.70	11.3	13.4	-4.1	2.0	-64.0	<=8.0
2435.75	11.8	13.4	-3.6	2.0	-63.5	<=8.0
2435.80	12.3	13.4	-3.1	2.0	-63.0	<=8.0
2435.85	12.4	13.4	-3.0	2.0	-62.9	<=8.0
2435.90	12.6	13.4	-2.8	2.0	-62.7	<=8.0
2435.95	12.5	13.4	-2.9	2.0	-62.8	<=8.0
2436.00	12.7	13.4	-2.7	2.0	-62.6	<=8.0
2436.05	12.9	13.4	-2.5	2.0	-62.4	<=8.0
2436.10	13.0	13.4	-2.4	2.0	-62.3	<=8.0
2436.15	13.2	13.4	-2.2	2.0	-62.1	<=8.0
2436.20	13.4	13.4	-2.0	2.0	-61.9	<=8.0
2436.25	13.3	13.4	-2.1	2.0	-62.0	<=8.0
2436.30	13.0	13.4	-2.4	2.0	-62.3	<=8.0
2436.35	12.9	13.4	-2.5	2.0	-62.4	<=8.0
2436.40	12.5	13.4	-2.9	2.0	-62.8	<=8.0
2436.45	12.2	13.4	-3.2	2.0	-63.1	<=8.0
2436.50	12.1	13.4	-3.3	2.0	-63.2	<=8.0
2436.55	12.1	13.4	-3.3	2.0	-63.2	<=8.0
2436.60	11.9	13.4	-3.5	2.0	-63.4	<=8.0
2436.65	7.8	13.4	-7.6	2.0	-67.5	<=8.0
2436.70	6.5	13.4	-8.9	2.0	-68.8	<=8.0
2436.75	4.6	13.4	-10.8	2.0	-70.7	<=8.0
2436.80	6.9	13.4	-8.5	2.0	-68.4	<=8.0
2436.85	6.3	13.4	-9.1	2.0	-69.0	<=8.0
2436.90	6.1	13.4	-9.3	2.0	-69.2	<=8.0
2436.95	6.1	13.4	-9.3	2.0	-69.2	<=8.0
2437.00	7.3	13.4	-8.1	2.0	-68.0	<=8.0
2437.05	8.0	13.4	-7.4	2.0	-67.3	<=8.0
2437.10	9.3	13.4	-6.1	2.0	-66.0	<=8.0
2437.15	14.1	13.4	-1.3	2.0	-61.2	<=8.0
2437.20	9.6	13.4	-5.8	2.0	-65.7	<=8.0
2437.25	7.7	13.4	-7.7	2.0	-67.6	<=8.0
2437.30	7.3	13.4	-8.1	2.0	-68.0	<=8.0
2437.35	5.1	13.4	-10.3	2.0	-70.2	<=8.0
2437.40	5.0	13.4	-10.4	2.0	-70.3	<=8.0
2437.45	4.8	13.4	-10.6	2.0	-70.5	<=8.0
2437.50	4.9	13.4	-10.5	2.0	-70.4	<=8.0
2437.55	6.3	13.4	-9.1	2.0	-69.0	<=8.0
2437.60	7.5	13.4	-7.9	2.0	-67.8	<=8.0
2437.65	11.7	13.4	-3.7	2.0	-63.6	<=8.0
2437.70	11.8	13.4	-3.6	2.0	-63.5	<=8.0
2437.75	11.8	13.4	-3.6	2.0	-63.5	<=8.0
2437.80	12.0	13.4	-3.4	2.0	-63.3	<=8.0
2437.85	12.2	13.4	-3.2	2.0	-63.1	<=8.0
2437.90	12.4	13.4	-3.0	2.0	-62.9	<=8.0
2437.95	12.5	13.4	-2.9	2.0	-62.8	<=8.0
2438.00	12.7	13.4	-2.7	2.0	-62.6	<=8.0
2438.05	13.1	13.4	-2.3	2.0	-62.2	<=8.0

5.5Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2438.10	13.0	13.4	-2.4	2.0	-62.3	<=8.0
2438.15	13.1	13.4	-2.3	2.0	-62.2	<=8.0
2438.20	12.8	13.4	-2.6	2.0	-62.5	<=8.0
2438.25	12.6	13.4	-2.8	2.0	-62.7	<=8.0
2438.30	12.4	13.4	-3.0	2.0	-62.9	<=8.0
2438.35	12.2	13.4	-3.2	2.0	-63.1	<=8.0
2438.40	12.1	13.4	-3.3	2.0	-63.2	<=8.0
2438.45	12.1	13.4	-3.3	2.0	-63.2	<=8.0
2438.50	11.8	13.4	-3.6	2.0	-63.5	<=8.0
2438.55	11.4	13.4	-4.0	2.0	-63.9	<=8.0
2438.60	11.9	13.4	-3.5	2.0	-63.4	<=8.0
2438.65	12.3	13.4	-3.1	2.0	-63.0	<=8.0
2438.70	12.4	13.4	-3.0	2.0	-62.9	<=8.0
2438.75	12.3	13.4	-3.1	2.0	-63.0	<=8.0
2438.80	12.6	13.4	-2.8	2.0	-62.7	<=8.0
2438.85	12.8	13.4	-2.6	2.0	-62.5	<=8.0
2438.90	13.2	13.4	-2.2	2.0	-62.1	<=8.0
2438.95	13.0	13.4	-2.4	2.0	-62.3	<=8.0
2439.00	13.4	13.4	-2.0	2.0	-61.9	<=8.0
2439.05	13.5	13.4	-1.9	2.0	-61.8	<=8.0
2439.10	13.4	13.4	-2.0	2.0	-61.9	<=8.0
2439.15	13.4	13.4	-2.0	2.0	-61.9	<=8.0
2439.20	13.2	13.4	-2.2	2.0	-62.1	<=8.0
2439.25	13.1	13.4	-2.3	2.0	-62.2	<=8.0
2439.30	12.9	13.4	-2.5	2.0	-62.4	<=8.0
2439.35	12.8	13.4	-2.6	2.0	-62.5	<=8.0
2439.40	12.7	13.4	-2.7	2.0	-62.6	<=8.0
2439.45	12.4	13.4	-3.0	2.0	-62.9	<=8.0
2439.50	12.1	13.4	-3.3	2.0	-63.2	<=8.0
2439.55	12.4	13.4	-3.0	2.0	-62.9	<=8.0
2439.60	12.5	13.4	-2.9	2.0	-62.8	<=8.0
2439.65	12.4	13.4	-3.0	2.0	-62.9	<=8.0
2439.70	12.3	13.4	-3.1	2.0	-63.0	<=8.0
2439.75	12.4	13.4	-3.0	2.0	-62.9	<=8.0
2439.80	12.3	13.4	-3.1	2.0	-63.0	<=8.0
2439.85	12.4	13.4	-3.0	2.0	-62.9	<=8.0
2439.90	12.4	13.4	-3.0	2.0	-62.9	<=8.0
2439.95	12.4	13.4	-3.0	2.0	-62.9	<=8.0
2440.00	12.5	13.4	-2.9	2.0	-62.8	<=8.0
2440.05	12.6	13.4	-2.8	2.0	-62.7	<=8.0
2440.10	12.7	13.4	-2.7	2.0	-62.6	<=8.0
2440.15	12.8	13.4	-2.6	2.0	-62.5	<=8.0
2440.20	12.9	13.4	-2.5	2.0	-62.4	<=8.0
2440.25	13.1	13.4	-2.3	2.0	-62.2	<=8.0
2440.30	13.2	13.4	-2.2	2.0	-62.1	<=8.0
2440.35	13.4	13.4	-2.0	2.0	-61.9	<=8.0
2440.40	13.5	13.4	-1.9	2.0	-61.8	<=8.0
2440.45	13.7	13.4	-1.7	2.0	-61.6	<=8.0

5.5Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2440.50	13.8	13.4	-1.6	2.0	-61.5	<=8.0
2440.55	14.1	13.4	-1.3	2.0	-61.2	<=8.0
2440.60	14.3	13.4	-1.1	2.0	-61.0	<=8.0
2440.65	13.8	13.4	-1.6	2.0	-61.5	<=8.0
2440.70	13.2	13.4	-2.2	2.0	-62.1	<=8.0
2440.75	13.8	13.4	-1.6	2.0	-61.5	<=8.0
2440.80	14.1	13.4	-1.3	2.0	-61.2	<=8.0
2440.85	14.0	13.4	-1.4	2.0	-61.3	<=8.0
2440.90	13.8	13.4	-1.6	2.0	-61.5	<=8.0
2440.95	13.9	13.4	-1.5	2.0	-61.4	<=8.0
2441.00	13.9	13.4	-1.5	2.0	-61.4	<=8.0
2441.05	13.9	13.4	-1.5	2.0	-61.4	<=8.0
2441.10	13.8	13.4	-1.6	2.0	-61.5	<=8.0
2441.15	13.9	13.4	-1.5	2.0	-61.4	<=8.0
2441.20	13.7	13.4	-1.7	2.0	-61.6	<=8.0
2441.25	13.5	13.4	-1.9	2.0	-61.8	<=8.0
2441.30	13.7	13.4	-1.7	2.0	-61.6	<=8.0
2441.35	14.0	13.4	-1.4	2.0	-61.3	<=8.0
2441.40	14.3	13.4	-1.1	2.0	-61.0	<=8.0
2441.45	14.4	13.4	-1.0	2.0	-60.9	<=8.0
2441.50	14.5	13.4	-0.9	2.0	-60.8	<=8.0
2441.55	15.4	13.4	0.0	2.0	-59.9	<=8.0
2441.60	15.6	13.4	0.2	2.0	-59.7	<=8.0
2441.65	15.2	13.4	-0.2	2.0	-60.1	<=8.0
2441.70	14.3	13.4	-1.1	2.0	-61.0	<=8.0
2441.75	14.8	13.4	-0.6	2.0	-60.5	<=8.0
2441.80	15.6	13.4	0.2	2.0	-59.7	<=8.0
2441.85	15.1	13.4	-0.3	2.0	-60.2	<=8.0
2441.90	15.3	13.4	-0.1	2.0	-60.0	<=8.0
2441.95	15.1	13.4	-0.3	2.0	-60.2	<=8.0
2442.00	15.2	13.4	-0.2	2.0	-60.1	<=8.0
2442.05	15.1	13.4	-0.3	2.0	-60.2	<=8.0
2442.10	15.2	13.4	-0.2	2.0	-60.1	<=8.0
2442.15	15.4	13.4	0.0	2.0	-59.9	<=8.0
2442.20	15.4	13.4	0.0	2.0	-59.9	<=8.0
2442.25	15.7	13.4	0.3	2.0	-59.6	<=8.0
2442.30	15.8	13.4	0.4	2.0	-59.5	<=8.0
2442.35	16.0	13.4	0.6	2.0	-59.3	<=8.0
2442.40	16.1	13.4	0.7	2.0	-59.2	<=8.0
2442.45	16.5	13.4	1.1	2.0	-58.8	<=8.0
2442.50	16.9	13.4	1.5	2.0	-58.4	<=8.0
2442.55	17.2	13.4	1.8	2.0	-58.1	<=8.0
2442.60	17.4	13.4	2.0	2.0	-57.9	<=8.0
2442.65	17.7	13.4	2.3	2.0	-57.6	<=8.0
2442.70	17.6	13.4	2.2	2.0	-57.7	<=8.0
2442.75	17.4	13.4	2.0	2.0	-57.9	<=8.0
2442.80	17.3	13.4	1.9	2.0	-58.0	<=8.0
2442.85	17.1	13.4	1.7	2.0	-58.2	<=8.0

5.5Mbps CHANNEL 6 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	G_p	$(S/N)_o$	$M_j = J/S$	L_{sys}	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2442.90	16.9	13.4	1.5	2.0	-58.4	≤ 8.0
2442.95	16.7	13.4	1.3	2.0	-58.6	≤ 8.0
2443.00	16.9	13.4	1.5	2.0	-58.4	≤ 8.0
2443.05	17.0	13.4	1.6	2.0	-58.3	≤ 8.0
2443.10	17.1	13.4	1.7	2.0	-58.2	≤ 8.0
2443.15	17.3	13.4	1.9	2.0	-58.0	≤ 8.0
2443.20	17.4	13.4	2.0	2.0	-57.9	≤ 8.0
2443.25	17.6	13.4	2.2	2.0	-57.7	≤ 8.0
2443.30	17.9	13.4	2.5	2.0	-57.4	≤ 8.0
2443.35	18.0	13.4	2.6	2.0	-57.3	≤ 8.0
2443.40	18.3	13.4	2.9	2.0	-57.0	≤ 8.0
2443.45	18.4	13.4	3.0	2.0	-56.9	≤ 8.0
2443.50	18.3	13.4	2.9	2.0	-57.0	≤ 8.0
2443.55	18.4	13.4	3.0	2.0	-56.9	≤ 8.0
2443.60	18.4	13.4	3.0	2.0	-56.9	≤ 8.0
2443.65	18.6	13.4	3.2	2.0	-56.7	≤ 8.0
2443.70	18.7	13.4	3.3	2.0	-56.6	≤ 8.0
2443.75	19.1	13.4	3.7	2.0	-56.2	≤ 8.0
2443.80	19.7	13.4	4.3	2.0	-55.6	≤ 8.0
2443.85	19.6	13.4	4.2	2.0	-55.7	≤ 8.0
2443.90	19.5	13.4	4.1	2.0	-55.8	≤ 8.0
2443.95	19.7	13.4	4.3	2.0	-55.6	≤ 8.0
2444.00	20.0	13.4	4.6	2.0	-55.3	≤ 8.0
2444.05	19.8	13.4	4.4	2.0	-55.5	≤ 8.0
2444.10	19.6	13.4	4.2	2.0	-55.7	≤ 8.0
2444.15	19.8	13.4	4.4	2.0	-55.5	≤ 8.0
2444.20	19.7	13.4	4.3	2.0	-55.6	≤ 8.0
2444.25	19.8	13.4	4.4	2.0	-55.5	≤ 8.0
2444.30	20.3	13.4	4.9	2.0	-55.0	≤ 8.0
2444.35	20.4	13.4	5.0	2.0	-54.9	≤ 8.0
2444.40	20.5	13.4	5.1	2.0	-54.8	≤ 8.0
2444.45	20.4	13.4	5.0	2.0	-54.9	≤ 8.0
2444.50	20.3	13.4	4.9	2.0	-55.0	≤ 8.0
2444.55	20.2	13.4	4.8	2.0	-55.1	≤ 8.0
2444.60	20.1	13.4	4.7	2.0	-55.2	≤ 8.0
2444.65	20.4	13.4	5.0	2.0	-54.9	≤ 8.0
2444.70	20.7	13.4	5.3	2.0	-54.6	≤ 8.0
2444.75	21.4	13.4	6.0	2.0	-53.9	≤ 8.0
2444.80	21.8	13.4	6.4	2.0	-53.5	≤ 8.0
2444.85	22.0	13.4	6.6	2.0	-53.3	≤ 8.0
2444.90	22.4	13.4	7.0	2.0	-52.9	≤ 8.0
2444.95	22.5	13.4	7.1	2.0	-52.8	≤ 8.0
2445.00	22.4	13.4	7.0	2.0	-52.9	≤ 8.0
2445.05	22.2	13.4	6.8	2.0	-53.1	≤ 8.0
2445.10	22.0	13.4	6.6	2.0	-53.3	≤ 8.0
2445.15	22.1	13.4	6.7	2.0	-53.2	≤ 8.0
2445.20	22.2	13.4	6.8	2.0	-53.1	≤ 8.0
2445.25	22.7	13.4	7.3	2.0	-52.6	≤ 8.0

5.5Mbps CHANNEL 6 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq. (MHz)	G_p (dB)	$(S/N)_o$ (dB)	$M_j = J/S$ (dB)	L_{sys} (dB)	Jammer (dBm)	PER (%)
2445.30	23.0	13.4	7.6	2.0	-52.3	≤ 8.0
2445.35	23.2	13.4	7.8	2.0	-52.1	≤ 8.0
2445.40	23.5	13.4	8.1	2.0	-51.8	≤ 8.0
2445.45	23.4	13.4	8.0	2.0	-51.9	≤ 8.0
2445.50	23.5	13.4	8.1	2.0	-51.8	≤ 8.0

Processing Gain (dB) = **12.6**

ActionTec CONFIDENTIAL

CH6 Processing Gain

5.5 MB Data Rate

Processing Gain (dB)	XMIT level	-59.9	
	S/N+Ls	15.4	
	0dB J/S	0.0	
PG	Offset	Signal Generator Delta	
25.6	-8500	10.2	
24.9	-8450	9.5	
24.4	-8400	9.0	
24.0	-8350	8.6	
23.7	-8300	8.3	
23.8	-8250	8.4	
23.9	-8200	8.5	
23.9	-8150	8.5	
23.7	-8100	8.3	
23.5	-8050	8.1	
23.2	-8000	7.8	
22.7	-7950	7.3	
22.4	-7900	7.0	
22.4	-7850	7.0	
22.5	-7800	7.1	
22.6	-7750	7.2	
22.7	-7700	7.3	
22.7	-7650	7.3	
22.6	-7600	7.2	
22.2	-7550	6.8	
21.9	-7500	6.5	
21.4	-7450	6.0	
20.9	-7400	5.5	
20.7	-7350	5.3	
20.5	-7300	5.1	
20.6	-7250	5.2	
20.8	-7200	5.4	
20.6	-7150	5.2	
20.7	-7100	5.3	
20.5	-7050	5.1	
20.4	-7000	5.0	
20.1	-6950	4.7	
19.8	-6900	4.4	
19.9	-6850	4.5	
20.0	-6800	4.6	
19.9	-6750	4.5	
19.9	-6700	4.5	
19.7	-6650	4.3	
19.8	-6600	4.4	
19.6	-6550	4.2	
19.4	-6500	4.0	
19.5	-6450	4.1	
19.2	-6400	3.8	
18.7	-6350	3.3	
18.3	-6300	2.9	
18.6	-6250	3.2	
18.9	-6200	3.5	

CH6 Processing Gain

5.5 MB Data Rate

18.6	-6150	3.2	
18.3	-6100	2.9	
18.1	-6050	2.7	
18.1	-6000	2.7	
17.9	-5950	2.5	
17.6	-5900	2.2	
17.5	-5850	2.1	
17.4	-5800	2.0	
17.5	-5750	2.1	
17.4	-5700	2.0	
17.3	-5650	1.9	
17.4	-5600	2.0	
17.6	-5550	2.2	
17.7	-5500	2.3	
17.8	-5450	2.4	
17.9	-5400	2.5	
17.7	-5350	2.3	
17.6	-5300	2.2	
17.2	-5250	1.8	
16.9	-5200	1.5	
16.5	-5150	1.1	
16.2	-5100	0.8	
16.0	-5050	0.6	
15.9	-5000	0.5	
15.8	-4950	0.4	
15.7	-4900	0.3	
15.7	-4850	0.3	
15.6	-4800	0.2	
15.7	-4750	0.3	
15.6	-4700	0.2	
15.8	-4650	0.4	
16.0	-4600	0.6	
16.2	-4550	0.8	
15.9	-4500	0.5	
15.4	-4450	0.0	
15.8	-4400	0.4	
16.4	-4350	1.0	
16.4	-4300	1.0	
15.4	-4250	0.0	
15.1	-4200	-0.3	
15.0	-4150	-0.4	
14.8	-4100	-0.6	
14.6	-4050	-0.8	
14.7	-4000	-0.7	
14.4	-3950	-1.0	
14.3	-3900	-1.1	
14.4	-3850	-1.0	
14.6	-3800	-0.8	
14.5	-3750	-0.9	
14.4	-3700	-1.0	
14.5	-3650	-0.9	
14.6	-3600	-0.8	

CH6 Processing Gain

5.5 MB Data Rate

14.4	-3550	-1.0	
14.1	-3500	-1.3	
14.8	-3450	-0.6	
15.1	-3400	-0.3	
14.9	-3350	-0.5	
14.6	-3300	-0.8	
14.2	-3250	-1.2	
13.7	-3200	-1.7	
13.9	-3150	-1.5	
13.8	-3100	-1.6	
13.6	-3050	-1.8	
13.4	-3000	-2.0	
13.2	-2950	-2.2	
13.1	-2900	-2.3	
13.2	-2850	-2.2	
12.9	-2800	-2.5	
12.8	-2750	-2.6	
12.6	-2700	-2.8	
12.7	-2650	-2.7	
12.5	-2600	-2.9	
12.4	-2550	-3.0	
11.9	-2500	-3.5	
12.2	-2450	-3.2	
12.6	-2400	-2.8	
12.4	-2350	-3.0	
12.5	-2300	-2.9	
12.6	-2250	-2.8	
12.7	-2200	-2.7	
12.8	-2150	-2.6	
12.9	-2100	-2.5	
13.1	-2050	-2.3	
13.1	-2000	-2.3	
13.3	-1950	-2.1	
13.5	-1900	-1.9	
13.6	-1850	-1.8	
13.7	-1800	-1.7	
13.5	-1750	-1.9	
13.4	-1700	-2.0	
13.2	-1650	-2.2	
13.0	-1600	-2.4	
12.9	-1550	-2.5	
12.7	-1500	-2.7	
12.5	-1450	-2.9	
12.4	-1400	-3.0	
11.8	-1350	-3.6	
11.3	-1300	-4.1	
11.8	-1250	-3.6	
12.3	-1200	-3.1	
12.4	-1150	-3.0	
12.6	-1100	-2.8	
12.5	-1050	-2.9	
12.7	-1000	-2.7	

CH6 Processing Gain

5.5 MB Data Rate

12.9	-950	-2.5	
13.0	-900	-2.4	
13.2	-850	-2.2	
13.4	-800	-2.0	
13.3	-750	-2.1	
13.0	-700	-2.4	
12.9	-650	-2.5	
12.5	-600	-2.9	
12.2	-550	-3.2	
12.1	-500	-3.3	
12.1	-450	-3.3	
11.9	-400	-3.5	
7.8	-350	-7.6	
6.5	-300	-8.9	
4.6	-250	-10.8	
6.9	-200	-8.5	
6.3	-150	-9.1	
6.1	-100	-9.3	
6.1	-50	-9.3	
7.3	0	-8.1	
8.0	50	-7.4	
9.3	100	-6.1	
14.1	150	-1.3	
9.6	200	-5.8	
7.7	250	-7.7	
7.3	300	-8.1	
5.1	350	-10.3	
5.0	400	-10.4	
4.8	450	-10.6	
4.9	500	-10.5	
6.3	550	-9.1	
7.5	600	-7.9	
11.7	650	-3.7	
11.8	700	-3.6	
11.8	750	-3.6	
12.0	800	-3.4	
12.2	850	-3.2	
12.4	900	-3.0	
12.5	950	-2.9	
12.7	1000	-2.7	
13.1	1050	-2.3	
13.0	1100	-2.4	
13.1	1150	-2.3	
12.8	1200	-2.6	
12.6	1250	-2.8	
12.4	1300	-3.0	
12.2	1350	-3.2	
12.1	1400	-3.3	
12.1	1450	-3.3	
11.8	1500	-3.6	
11.4	1550	-4.0	
11.9	1600	-3.5	

CH6 Processing Gain

5.5 MB Data Rate

12.3	1650	-3.1	
12.4	1700	-3.0	
12.3	1750	-3.1	
12.6	1800	-2.8	
12.8	1850	-2.6	
13.2	1900	-2.2	
13.0	1950	-2.4	
13.4	2000	-2.0	
13.5	2050	-1.9	
13.4	2100	-2.0	
13.4	2150	-2.0	
13.2	2200	-2.2	
13.1	2250	-2.3	
12.9	2300	-2.5	
12.8	2350	-2.6	
12.7	2400	-2.7	
12.4	2450	-3.0	
12.1	2500	-3.3	
12.4	2550	-3.0	
12.5	2600	-2.9	
12.4	2650	-3.0	
12.3	2700	-3.1	
12.4	2750	-3.0	
12.3	2800	-3.1	
12.4	2850	-3.0	
12.4	2900	-3.0	
12.4	2950	-3.0	
12.5	3000	-2.9	
12.6	3050	-2.8	
12.7	3100	-2.7	
12.8	3150	-2.6	
12.9	3200	-2.5	
13.1	3250	-2.3	
13.2	3300	-2.2	
13.4	3350	-2.0	
13.5	3400	-1.9	
13.7	3450	-1.7	
13.8	3500	-1.6	
14.1	3550	-1.3	
14.3	3600	-1.1	
13.8	3650	-1.6	
13.2	3700	-2.2	
13.8	3750	-1.6	
14.1	3800	-1.3	
14.0	3850	-1.4	
13.8	3900	-1.6	
13.9	3950	-1.5	
13.9	4000	-1.5	
13.9	4050	-1.5	
13.8	4100	-1.6	
13.9	4150	-1.5	
13.7	4200	-1.7	

CH6 Processing Gain

5.5 MB Data Rate


13.5	4250	-1.9	
13.7	4300	-1.7	
14.0	4350	-1.4	
14.3	4400	-1.1	
14.4	4450	-1.0	
14.5	4500	-0.9	
15.4	4550	0.0	
15.6	4600	0.2	
15.2	4650	-0.2	
14.3	4700	-1.1	
14.8	4750	-0.6	
15.6	4800	0.2	
15.1	4850	-0.3	
15.3	4900	-0.1	
15.1	4950	-0.3	
15.2	5000	-0.2	
15.1	5050	-0.3	
15.2	5100	-0.2	
15.4	5150	0.0	
15.4	5200	0.0	
15.7	5250	0.3	
15.8	5300	0.4	
16.0	5350	0.6	
16.1	5400	0.7	
16.5	5450	1.1	
16.9	5500	1.5	
17.2	5550	1.8	
17.4	5600	2.0	
17.7	5650	2.3	
17.6	5700	2.2	
17.4	5750	2.0	
17.3	5800	1.9	
17.1	5850	1.7	
16.9	5900	1.5	
16.7	5950	1.3	
16.9	6000	1.5	
17.0	6050	1.6	
17.1	6100	1.7	
17.3	6150	1.9	
17.4	6200	2.0	
17.6	6250	2.2	
17.9	6300	2.5	
18.0	6350	2.6	
18.3	6400	2.9	
18.4	6450	3.0	
18.3	6500	2.9	
18.4	6550	3.0	
18.4	6600	3.0	
18.6	6650	3.2	
18.7	6700	3.3	
19.1	6750	3.7	
19.7	6800	4.3	

CH6 Processing Gain

5.5 MB Data Rate

19.6	6850	4.2	
19.5	6900	4.1	
19.7	6950	4.3	
20.0	7000	4.6	
19.8	7050	4.4	
19.6	7100	4.2	
19.8	7150	4.4	
19.7	7200	4.3	
19.8	7250	4.4	
20.3	7300	4.9	
20.4	7350	5.0	
20.5	7400	5.1	
20.4	7450	5.0	
20.3	7500	4.9	
20.2	7550	4.8	
20.1	7600	4.7	
20.4	7650	5.0	
20.7	7700	5.3	
21.4	7750	6.0	
21.8	7800	6.4	
22.0	7850	6.6	
22.4	7900	7.0	
22.5	7950	7.1	
22.4	8000	7.0	
22.2	8050	6.8	
22.0	8100	6.6	
22.1	8150	6.7	
22.2	8200	6.8	
22.7	8250	7.3	
23.0	8300	7.6	
23.2	8350	7.8	
23.5	8400	8.1	
23.4	8450	8.0	
23.5	8500	8.1	
12.6	Processing Gain (dB) @ 80th Percentile =		

Processing Gain Channel 6 (fc=2437MHz) @ 5.5Mbps

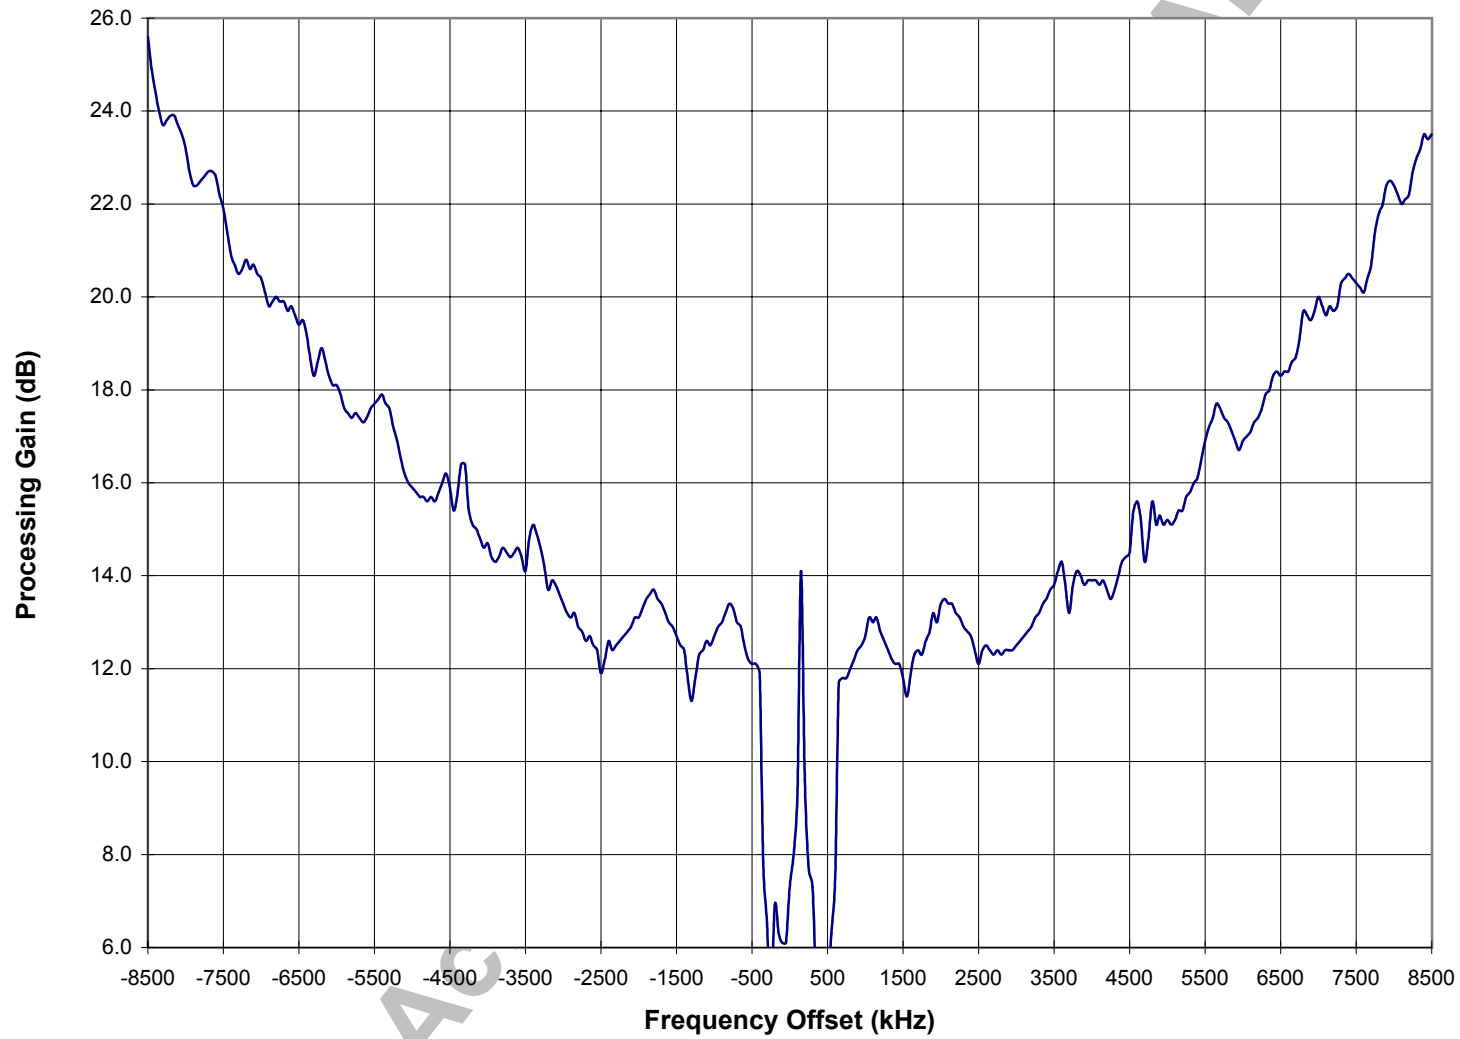

2Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2428.50	25.5	13.3	10.2	2.0	-49.7	<=8.0
2428.55	24.9	13.3	9.6	2.0	-50.3	<=8.0
2428.60	24.4	13.3	9.1	2.0	-50.8	<=8.0
2428.65	24.2	13.3	8.9	2.0	-51.0	<=8.0
2428.70	24.0	13.3	8.7	2.0	-51.2	<=8.0
2428.75	24.0	13.3	8.7	2.0	-51.2	<=8.0
2428.80	24.1	13.3	8.8	2.0	-51.1	<=8.0
2428.85	24.1	13.3	8.8	2.0	-51.1	<=8.0
2428.90	23.9	13.3	8.6	2.0	-51.3	<=8.0
2428.95	23.7	13.3	8.4	2.0	-51.5	<=8.0
2429.00	23.3	13.3	8.0	2.0	-51.9	<=8.0
2429.05	22.9	13.3	7.6	2.0	-52.3	<=8.0
2429.10	22.6	13.3	7.3	2.0	-52.6	<=8.0
2429.15	22.7	13.3	7.4	2.0	-52.5	<=8.0
2429.20	22.6	13.3	7.3	2.0	-52.6	<=8.0
2429.25	22.8	13.3	7.5	2.0	-52.4	<=8.0
2429.30	22.9	13.3	7.6	2.0	-52.3	<=8.0
2429.35	22.9	13.3	7.6	2.0	-52.3	<=8.0
2429.40	22.8	13.3	7.5	2.0	-52.4	<=8.0
2429.45	22.3	13.3	7.0	2.0	-52.9	<=8.0
2429.50	22.0	13.3	6.7	2.0	-53.2	<=8.0
2429.55	21.5	13.3	6.2	2.0	-53.7	<=8.0
2429.60	21.1	13.3	5.8	2.0	-54.1	<=8.0
2429.65	20.9	13.3	5.6	2.0	-54.3	<=8.0
2429.70	20.7	13.3	5.4	2.0	-54.5	<=8.0
2429.75	20.7	13.3	5.4	2.0	-54.5	<=8.0
2429.80	20.7	13.3	5.4	2.0	-54.5	<=8.0
2429.85	20.0	13.3	4.7	2.0	-55.2	<=8.0
2429.90	19.9	13.3	4.6	2.0	-55.3	<=8.0
2429.95	20.0	13.3	4.7	2.0	-55.2	<=8.0
2430.00	20.0	13.3	4.7	2.0	-55.2	<=8.0
2430.05	19.8	13.3	4.5	2.0	-55.4	<=8.0
2430.10	19.7	13.3	4.4	2.0	-55.5	<=8.0
2430.15	19.5	13.3	4.2	2.0	-55.7	<=8.0
2430.20	19.4	13.3	4.1	2.0	-55.8	<=8.0
2430.25	19.7	13.3	4.4	2.0	-55.5	<=8.0
2430.30	19.3	13.3	4.0	2.0	-55.9	<=8.0
2430.35	18.5	13.3	3.2	2.0	-56.7	<=8.0
2430.40	18.8	13.3	3.5	2.0	-56.4	<=8.0
2430.45	18.5	13.3	3.2	2.0	-56.7	<=8.0
2430.50	18.3	13.3	3.0	2.0	-56.9	<=8.0
2430.55	18.2	13.3	2.9	2.0	-57.0	<=8.0
2430.60	18.3	13.3	3.0	2.0	-56.9	<=8.0
2430.65	18.0	13.3	2.7	2.0	-57.2	<=8.0
2430.70	17.8	13.3	2.5	2.0	-57.4	<=8.0
2430.75	17.1	13.3	1.8	2.0	-58.1	<=8.0
2430.80	16.4	13.3	1.1	2.0	-58.8	<=8.0
2430.85	15.9	13.3	0.6	2.0	-59.3	<=8.0

2Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2430.90	15.3	13.3	0.0	2.0	-59.9	<=8.0
2430.95	15.7	13.3	0.4	2.0	-59.5	<=8.0
2431.00	15.9	13.3	0.6	2.0	-59.3	<=8.0
2431.05	15.9	13.3	0.6	2.0	-59.3	<=8.0
2431.10	16.0	13.3	0.7	2.0	-59.2	<=8.0
2431.15	16.3	13.3	1.0	2.0	-58.9	<=8.0
2431.20	16.8	13.3	1.5	2.0	-58.4	<=8.0
2431.25	18.4	13.3	3.1	2.0	-56.8	<=8.0
2431.30	18.2	13.3	2.9	2.0	-57.0	<=8.0
2431.35	18.7	13.3	3.4	2.0	-56.5	<=8.0
2431.40	19.4	13.3	4.1	2.0	-55.8	<=8.0
2431.45	21.0	13.3	5.7	2.0	-54.2	<=8.0
2431.50	22.1	13.3	6.8	2.0	-53.1	<=8.0
2431.55	23.1	13.3	7.8	2.0	-52.1	<=8.0
2431.60	25.5	13.3	10.2	2.0	-49.7	<=8.0
2431.65	24.7	13.3	9.4	2.0	-50.5	<=8.0
2431.70	24.5	13.3	9.2	2.0	-50.7	<=8.0
2431.75	22.9	13.3	7.6	2.0	-52.3	<=8.0
2431.80	21.2	13.3	5.9	2.0	-54.0	<=8.0
2431.85	19.1	13.3	3.8	2.0	-56.1	<=8.0
2431.90	17.8	13.3	2.5	2.0	-57.4	<=8.0
2431.95	17.5	13.3	2.2	2.0	-57.7	<=8.0
2432.00	17.3	13.3	2.0	2.0	-57.9	<=8.0
2432.05	16.6	13.3	1.3	2.0	-58.6	<=8.0
2432.10	15.9	13.3	0.6	2.0	-59.3	<=8.0
2432.15	15.5	13.3	0.2	2.0	-59.7	<=8.0
2432.20	15.2	13.3	-0.1	2.0	-60.0	<=8.0
2432.25	15.1	13.3	-0.2	2.0	-60.1	<=8.0
2432.30	15.0	13.3	-0.3	2.0	-60.2	<=8.0
2432.35	13.8	13.3	-1.5	2.0	-61.4	<=8.0
2432.40	12.7	13.3	-2.6	2.0	-62.5	<=8.0
2432.45	13.0	13.3	-2.3	2.0	-62.2	<=8.0
2432.50	13.3	13.3	-2.0	2.0	-61.9	<=8.0
2432.55	13.7	13.3	-1.6	2.0	-61.5	<=8.0
2432.60	14.4	13.3	-0.9	2.0	-60.8	<=8.0
2432.65	15.3	13.3	0.0	2.0	-59.9	<=8.0
2432.70	15.2	13.3	-0.1	2.0	-60.0	<=8.0
2432.75	15.1	13.3	-0.2	2.0	-60.1	<=8.0
2432.80	14.9	13.3	-0.4	2.0	-60.3	<=8.0
2432.85	14.7	13.3	-0.6	2.0	-60.5	<=8.0
2432.90	15.1	13.3	-0.2	2.0	-60.1	<=8.0
2432.95	13.7	13.3	-1.6	2.0	-61.5	<=8.0
2433.00	14.2	13.3	-1.1	2.0	-61.0	<=8.0
2433.05	14.6	13.3	-0.7	2.0	-60.6	<=8.0
2433.10	14.4	13.3	-0.9	2.0	-60.8	<=8.0
2433.15	14.2	13.3	-1.1	2.0	-61.0	<=8.0
2433.20	14.5	13.3	-0.8	2.0	-60.7	<=8.0
2433.25	14.4	13.3	-0.9	2.0	-60.8	<=8.0

2Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2433.30	13.3	13.3	-2.0	2.0	-61.9	<=8.0
2433.35	12.2	13.3	-3.1	2.0	-63.0	<=8.0
2433.40	12.6	13.3	-2.7	2.0	-62.6	<=8.0
2433.45	13.1	13.3	-2.2	2.0	-62.1	<=8.0
2433.50	13.6	13.3	-1.7	2.0	-61.6	<=8.0
2433.55	14.1	13.3	-1.2	2.0	-61.1	<=8.0
2433.60	14.5	13.3	-0.8	2.0	-60.7	<=8.0
2433.65	14.8	13.3	-0.5	2.0	-60.4	<=8.0
2433.70	14.7	13.3	-0.6	2.0	-60.5	<=8.0
2433.75	14.6	13.3	-0.7	2.0	-60.6	<=8.0
2433.80	14.7	13.3	-0.6	2.0	-60.5	<=8.0
2433.85	14.8	13.3	-0.5	2.0	-60.4	<=8.0
2433.90	12.5	13.3	-2.8	2.0	-62.7	<=8.0
2433.95	12.8	13.3	-2.5	2.0	-62.4	<=8.0
2434.00	13.7	13.3	-1.6	2.0	-61.5	<=8.0
2434.05	15.2	13.3	-0.1	2.0	-60.0	<=8.0
2434.10	14.8	13.3	-0.5	2.0	-60.4	<=8.0
2434.15	14.3	13.3	-1.0	2.0	-60.9	<=8.0
2434.20	14.6	13.3	-0.7	2.0	-60.6	<=8.0
2434.25	15.0	13.3	-0.3	2.0	-60.2	<=8.0
2434.30	15.0	13.3	-0.3	2.0	-60.2	<=8.0
2434.35	11.9	13.3	-3.4	2.0	-63.3	<=8.0
2434.40	12.3	13.3	-3.0	2.0	-62.9	<=8.0
2434.45	14.0	13.3	-1.3	2.0	-61.2	<=8.0
2434.50	13.9	13.3	-1.4	2.0	-61.3	<=8.0
2434.55	13.2	13.3	-2.1	2.0	-62.0	<=8.0
2434.60	12.9	13.3	-2.4	2.0	-62.3	<=8.0
2434.65	14.2	13.3	-1.1	2.0	-61.0	<=8.0
2434.70	13.9	13.3	-1.4	2.0	-61.3	<=8.0
2434.75	15.1	13.3	-0.2	2.0	-60.1	<=8.0
2434.80	15.1	13.3	-0.2	2.0	-60.1	<=8.0
2434.85	13.8	13.3	-1.5	2.0	-61.4	<=8.0
2434.90	13.8	13.3	-1.5	2.0	-61.4	<=8.0
2434.95	13.3	13.3	-2.0	2.0	-61.9	<=8.0
2435.00	15.2	13.3	-0.1	2.0	-60.0	<=8.0
2435.05	15.0	13.3	-0.3	2.0	-60.2	<=8.0
2435.10	14.5	13.3	-0.8	2.0	-60.7	<=8.0
2435.15	14.5	13.3	-0.8	2.0	-60.7	<=8.0
2435.20	14.5	13.3	-0.8	2.0	-60.7	<=8.0
2435.25	14.4	13.3	-0.9	2.0	-60.8	<=8.0
2435.30	14.6	13.3	-0.7	2.0	-60.6	<=8.0
2435.35	13.4	13.3	-1.9	2.0	-61.8	<=8.0
2435.40	13.1	13.3	-2.2	2.0	-62.1	<=8.0
2435.45	13.8	13.3	-1.5	2.0	-61.4	<=8.0
2435.50	14.0	13.3	-1.3	2.0	-61.2	<=8.0
2435.55	12.8	13.3	-2.5	2.0	-62.4	<=8.0
2435.60	12.8	13.3	-2.5	2.0	-62.4	<=8.0
2435.65	13.9	13.3	-1.4	2.0	-61.3	<=8.0

2Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2435.70	13.6	13.3	-1.7	2.0	-61.6	<=8.0
2435.75	14.9	13.3	-0.4	2.0	-60.3	<=8.0
2435.80	15.1	13.3	-0.2	2.0	-60.1	<=8.0
2435.85	14.6	13.3	-0.7	2.0	-60.6	<=8.0
2435.90	14.9	13.3	-0.4	2.0	-60.3	<=8.0
2435.95	14.0	13.3	-1.3	2.0	-61.2	<=8.0
2436.00	15.2	13.3	-0.1	2.0	-60.0	<=8.0
2436.05	15.0	13.3	-0.3	2.0	-60.2	<=8.0
2436.10	14.3	13.3	-1.0	2.0	-60.9	<=8.0
2436.15	14.3	13.3	-1.0	2.0	-60.9	<=8.0
2436.20	14.2	13.3	-1.1	2.0	-61.0	<=8.0
2436.25	14.1	13.3	-1.2	2.0	-61.1	<=8.0
2436.30	13.6	13.3	-1.7	2.0	-61.6	<=8.0
2436.35	13.6	13.3	-1.7	2.0	-61.6	<=8.0
2436.40	12.8	13.3	-2.5	2.0	-62.4	<=8.0
2436.45	13.7	13.3	-1.6	2.0	-61.5	<=8.0
2436.50	13.7	13.3	-1.6	2.0	-61.5	<=8.0
2436.55	12.7	13.3	-2.6	2.0	-62.5	<=8.0
2436.60	12.4	13.3	-2.9	2.0	-62.8	<=8.0
2436.65	13.6	13.3	-1.7	2.0	-61.6	<=8.0
2436.70	13.7	13.3	-1.6	2.0	-61.5	<=8.0
2436.75	13.5	13.3	-1.8	2.0	-61.7	<=8.0
2436.80	12.7	13.3	-2.6	2.0	-62.5	<=8.0
2436.85	13.2	13.3	-2.1	2.0	-62.0	<=8.0
2436.90	13.4	13.3	-1.9	2.0	-61.8	<=8.0
2436.95	14.2	13.3	-1.1	2.0	-61.0	<=8.0
2437.00	15.7	13.3	0.4	2.0	-59.5	<=8.0
2437.05	18.1	13.3	2.8	2.0	-57.1	<=8.0
2437.10	16.8	13.3	1.5	2.0	-58.4	<=8.0
2437.15	28.7	13.3	13.4	2.0	-46.5	<=8.0
2437.20	17.6	13.3	2.3	2.0	-57.6	<=8.0
2437.25	17.7	13.3	2.4	2.0	-57.5	<=8.0
2437.30	14.9	13.3	-0.4	2.0	-60.3	<=8.0
2437.35	13.9	13.3	-1.4	2.0	-61.3	<=8.0
2437.40	13.0	13.3	-2.3	2.0	-62.2	<=8.0
2437.45	12.9	13.3	-2.4	2.0	-62.3	<=8.0
2437.50	13.3	13.3	-2.0	2.0	-61.9	<=8.0
2437.55	13.5	13.3	-1.8	2.0	-61.7	<=8.0
2437.60	12.5	13.3	-2.8	2.0	-62.7	<=8.0
2437.65	13.3	13.3	-2.0	2.0	-61.9	<=8.0
2437.70	13.2	13.3	-2.1	2.0	-62.0	<=8.0
2437.75	12.9	13.3	-2.4	2.0	-62.3	<=8.0
2437.80	13.7	13.3	-1.6	2.0	-61.5	<=8.0
2437.85	13.2	13.3	-2.1	2.0	-62.0	<=8.0
2437.90	13.6	13.3	-1.7	2.0	-61.6	<=8.0
2437.95	12.9	13.3	-2.4	2.0	-62.3	<=8.0
2438.00	13.8	13.3	-1.5	2.0	-61.4	<=8.0
2438.05	13.8	13.3	-1.5	2.0	-61.4	<=8.0

2Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2438.10	13.9	13.3	-1.4	2.0	-61.3	<=8.0
2438.15	14.4	13.3	-0.9	2.0	-60.8	<=8.0
2438.20	14.6	13.3	-0.7	2.0	-60.6	<=8.0
2438.25	14.8	13.3	-0.5	2.0	-60.4	<=8.0
2438.30	14.9	13.3	-0.4	2.0	-60.3	<=8.0
2438.35	14.9	13.3	-0.4	2.0	-60.3	<=8.0
2438.40	15.0	13.3	-0.3	2.0	-60.2	<=8.0
2438.45	15.0	13.3	-0.3	2.0	-60.2	<=8.0
2438.50	14.7	13.3	-0.6	2.0	-60.5	<=8.0
2438.55	13.3	13.3	-2.0	2.0	-61.9	<=8.0
2438.60	12.7	13.3	-2.6	2.0	-62.5	<=8.0
2438.65	13.8	13.3	-1.5	2.0	-61.4	<=8.0
2438.70	13.5	13.3	-1.8	2.0	-61.7	<=8.0
2438.75	14.2	13.3	-1.1	2.0	-61.0	<=8.0
2438.80	14.3	13.3	-1.0	2.0	-60.9	<=8.0
2438.85	13.8	13.3	-1.5	2.0	-61.4	<=8.0
2438.90	13.8	13.3	-1.5	2.0	-61.4	<=8.0
2438.95	13.1	13.3	-2.2	2.0	-62.1	<=8.0
2439.00	14.3	13.3	-1.0	2.0	-60.9	<=8.0
2439.05	14.6	13.3	-0.7	2.0	-60.6	<=8.0
2439.10	14.3	13.3	-1.0	2.0	-60.9	<=8.0
2439.15	14.7	13.3	-0.6	2.0	-60.5	<=8.0
2439.20	14.9	13.3	-0.4	2.0	-60.3	<=8.0
2439.25	15.1	13.3	-0.2	2.0	-60.1	<=8.0
2439.30	15.2	13.3	-0.1	2.0	-60.0	<=8.0
2439.35	14.8	13.3	-0.5	2.0	-60.4	<=8.0
2439.40	13.4	13.3	-1.9	2.0	-61.8	<=8.0
2439.45	14.2	13.3	-1.1	2.0	-61.0	<=8.0
2439.50	14.9	13.3	-0.4	2.0	-60.3	<=8.0
2439.55	13.6	13.3	-1.7	2.0	-61.6	<=8.0
2439.60	13.3	13.3	-2.0	2.0	-61.9	<=8.0
2439.65	14.0	13.3	-1.3	2.0	-61.2	<=8.0
2439.70	13.9	13.3	-1.4	2.0	-61.3	<=8.0
2439.75	14.4	13.3	-0.9	2.0	-60.8	<=8.0
2439.80	14.1	13.3	-1.2	2.0	-61.1	<=8.0
2439.85	13.6	13.3	-1.7	2.0	-61.6	<=8.0
2439.90	11.6	13.3	-3.7	2.0	-63.6	<=8.0
2439.95	11.7	13.3	-3.6	2.0	-63.5	<=8.0
2440.00	12.5	13.3	-2.8	2.0	-62.7	<=8.0
2440.05	15.4	13.3	0.1	2.0	-59.8	<=8.0
2440.10	14.8	13.3	-0.5	2.0	-60.4	<=8.0
2440.15	14.7	13.3	-0.6	2.0	-60.5	<=8.0
2440.20	14.9	13.3	-0.4	2.0	-60.3	<=8.0
2440.25	15.7	13.3	0.4	2.0	-59.5	<=8.0
2440.30	15.5	13.3	0.2	2.0	-59.7	<=8.0
2440.35	15.2	13.3	-0.1	2.0	-60.0	<=8.0
2440.40	12.8	13.3	-2.5	2.0	-62.4	<=8.0
2440.45	13.0	13.3	-2.3	2.0	-62.2	<=8.0

2Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2440.50	14.5	13.3	-0.8	2.0	-60.7	<=8.0
2440.55	14.5	13.3	-0.8	2.0	-60.7	<=8.0
2440.60	14.1	13.3	-1.2	2.0	-61.1	<=8.0
2440.65	14.2	13.3	-1.1	2.0	-61.0	<=8.0
2440.70	14.3	13.3	-1.0	2.0	-60.9	<=8.0
2440.75	14.6	13.3	-0.7	2.0	-60.6	<=8.0
2440.80	13.9	13.3	-1.4	2.0	-61.3	<=8.0
2440.85	13.0	13.3	-2.3	2.0	-62.2	<=8.0
2440.90	12.3	13.3	-3.0	2.0	-62.9	<=8.0
2440.95	12.0	13.3	-3.3	2.0	-63.2	<=8.0
2441.00	13.8	13.3	-1.5	2.0	-61.4	<=8.0
2441.05	13.9	13.3	-1.4	2.0	-61.3	<=8.0
2441.10	14.1	13.3	-1.2	2.0	-61.1	<=8.0
2441.15	14.1	13.3	-1.2	2.0	-61.1	<=8.0
2441.20	14.0	13.3	-1.3	2.0	-61.2	<=8.0
2441.25	14.0	13.3	-1.3	2.0	-61.2	<=8.0
2441.30	14.1	13.3	-1.2	2.0	-61.1	<=8.0
2441.35	14.0	13.3	-1.3	2.0	-61.2	<=8.0
2441.40	13.9	13.3	-1.4	2.0	-61.3	<=8.0
2441.45	14.3	13.3	-1.0	2.0	-60.9	<=8.0
2441.50	14.5	13.3	-0.8	2.0	-60.7	<=8.0
2441.55	14.5	13.3	-0.8	2.0	-60.7	<=8.0
2441.60	14.6	13.3	-0.7	2.0	-60.6	<=8.0
2441.65	14.5	13.3	-0.8	2.0	-60.7	<=8.0
2441.70	14.3	13.3	-1.0	2.0	-60.9	<=8.0
2441.75	13.8	13.3	-1.5	2.0	-61.4	<=8.0
2441.80	13.3	13.3	-2.0	2.0	-61.9	<=8.0
2441.85	13.0	13.3	-2.3	2.0	-62.2	<=8.0
2441.90	12.6	13.3	-2.7	2.0	-62.6	<=8.0
2441.95	13.3	13.3	-2.0	2.0	-61.9	<=8.0
2442.00	13.5	13.3	-1.8	2.0	-61.7	<=8.0
2442.05	13.9	13.3	-1.4	2.0	-61.3	<=8.0
2442.10	14.3	13.3	-1.0	2.0	-60.9	<=8.0
2442.15	14.8	13.3	-0.5	2.0	-60.4	<=8.0
2442.20	15.3	13.3	0.0	2.0	-59.9	<=8.0
2442.25	16.3	13.3	1.0	2.0	-58.9	<=8.0
2442.30	17.3	13.3	2.0	2.0	-57.9	<=8.0
2442.35	18.1	13.3	2.8	2.0	-57.1	<=8.0
2442.40	18.8	13.3	3.5	2.0	-56.4	<=8.0
2442.45	20.3	13.3	5.0	2.0	-54.9	<=8.0
2442.50	22.2	13.3	6.9	2.0	-53.0	<=8.0
2442.55	23.1	13.3	7.8	2.0	-52.1	<=8.0
2442.60	25.7	13.3	10.4	2.0	-49.5	<=8.0
2442.65	25.9	13.3	10.6	2.0	-49.3	<=8.0
2442.70	24.9	13.3	9.6	2.0	-50.3	<=8.0
2442.75	23.3	13.3	8.0	2.0	-51.9	<=8.0
2442.80	21.5	13.3	6.2	2.0	-53.7	<=8.0
2442.85	19.9	13.3	4.6	2.0	-55.3	<=8.0

2Mbps CHANNEL 6 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	G_p	$(S/N)_o$	$M_j = J/S$	L_{sys}	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2442.90	18.3	13.3	3.0	2.0	-56.9	≤ 8.0
2442.95	18.1	13.3	2.8	2.0	-57.1	≤ 8.0
2443.00	17.8	13.3	2.5	2.0	-57.4	≤ 8.0
2443.05	17.3	13.3	2.0	2.0	-57.9	≤ 8.0
2443.10	16.7	13.3	1.4	2.0	-58.5	≤ 8.0
2443.15	16.3	13.3	1.0	2.0	-58.9	≤ 8.0
2443.20	16.1	13.3	0.8	2.0	-59.1	≤ 8.0
2443.25	16.0	13.3	0.7	2.0	-59.2	≤ 8.0
2443.30	15.8	13.3	0.5	2.0	-59.4	≤ 8.0
2443.35	15.9	13.3	0.6	2.0	-59.3	≤ 8.0
2443.40	15.7	13.3	0.4	2.0	-59.5	≤ 8.0
2443.45	16.3	13.3	1.0	2.0	-58.9	≤ 8.0
2443.50	16.9	13.3	1.6	2.0	-58.3	≤ 8.0
2443.55	17.3	13.3	2.0	2.0	-57.9	≤ 8.0
2443.60	18.0	13.3	2.7	2.0	-57.2	≤ 8.0
2443.65	18.3	13.3	3.0	2.0	-56.9	≤ 8.0
2443.70	18.6	13.3	3.3	2.0	-56.6	≤ 8.0
2443.75	18.6	13.3	3.3	2.0	-56.6	≤ 8.0
2443.80	18.5	13.3	3.2	2.0	-56.7	≤ 8.0
2443.85	18.6	13.3	3.3	2.0	-56.6	≤ 8.0
2443.90	18.9	13.3	3.6	2.0	-56.3	≤ 8.0
2443.95	19.3	13.3	4.0	2.0	-55.9	≤ 8.0
2444.00	19.6	13.3	4.3	2.0	-55.6	≤ 8.0
2444.05	19.1	13.3	3.8	2.0	-56.1	≤ 8.0
2444.10	19.2	13.3	3.9	2.0	-56.0	≤ 8.0
2444.15	19.1	13.3	3.8	2.0	-56.1	≤ 8.0
2444.20	19.6	13.3	4.3	2.0	-55.6	≤ 8.0
2444.25	20.1	13.3	4.8	2.0	-55.1	≤ 8.0
2444.30	19.9	13.3	4.6	2.0	-55.3	≤ 8.0
2444.35	19.6	13.3	4.3	2.0	-55.6	≤ 8.0
2444.40	20.1	13.3	4.8	2.0	-55.1	≤ 8.0
2444.45	20.6	13.3	5.3	2.0	-54.6	≤ 8.0
2444.50	20.7	13.3	5.4	2.0	-54.5	≤ 8.0
2444.55	20.7	13.3	5.4	2.0	-54.5	≤ 8.0
2444.60	20.9	13.3	5.6	2.0	-54.3	≤ 8.0
2444.65	21.0	13.3	5.7	2.0	-54.2	≤ 8.0
2444.70	21.3	13.3	6.0	2.0	-53.9	≤ 8.0
2444.75	21.9	13.3	6.6	2.0	-53.3	≤ 8.0
2444.80	22.3	13.3	7.0	2.0	-52.9	≤ 8.0
2444.85	22.5	13.3	7.2	2.0	-52.7	≤ 8.0
2444.90	22.9	13.3	7.6	2.0	-52.3	≤ 8.0
2444.95	22.8	13.3	7.5	2.0	-52.4	≤ 8.0
2445.00	22.9	13.3	7.6	2.0	-52.3	≤ 8.0
2445.05	22.7	13.3	7.4	2.0	-52.5	≤ 8.0
2445.10	22.6	13.3	7.3	2.0	-52.6	≤ 8.0
2445.15	22.5	13.3	7.2	2.0	-52.7	≤ 8.0
2445.20	22.8	13.3	7.5	2.0	-52.4	≤ 8.0
2445.25	23.2	13.3	7.9	2.0	-52.0	≤ 8.0

2Mbps CHANNEL 6 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq. (MHz)	G_p (dB)	$(S/N)_o$ (dB)	$M_j = J/S$ (dB)	L_{sys} (dB)	Jammer (dBm)	PER (%)
2445.30	23.6	13.3	8.3	2.0	-51.6	≤ 8.0
2445.35	23.8	13.3	8.5	2.0	-51.4	≤ 8.0
2445.40	24.0	13.3	8.7	2.0	-51.2	≤ 8.0
2445.45	24.2	13.3	8.9	2.0	-51.0	≤ 8.0
2445.50	24.1	13.3	8.8	2.0	-51.1	≤ 8.0

Processing Gain (dB) = **13.7**

ActionTec CONFIDENTIAL

CH6 Processing Gain

2 MB Data Rate

Processing Gain (dB)	XMIT level	-59.9
	S/N+Ls	15.3
	0dB J/S	0.0
PG	Offset	Signal Generator Delta
25.5	-8500	10.2
24.9	-8450	9.6
24.4	-8400	9.1
24.2	-8350	8.9
24.0	-8300	8.7
24.0	-8250	8.7
24.1	-8200	8.8
24.1	-8150	8.8
23.9	-8100	8.6
23.7	-8050	8.4
23.3	-8000	8.0
22.9	-7950	7.6
22.6	-7900	7.3
22.7	-7850	7.4
22.6	-7800	7.3
22.8	-7750	7.5
22.9	-7700	7.6
22.9	-7650	7.6
22.8	-7600	7.5
22.3	-7550	7.0
22.0	-7500	6.7
21.5	-7450	6.2
21.1	-7400	5.8
20.9	-7350	5.6
20.7	-7300	5.4
20.7	-7250	5.4
20.7	-7200	5.4
20.0	-7150	4.7
19.9	-7100	4.6
20.0	-7050	4.7
20.0	-7000	4.7
19.8	-6950	4.5
19.7	-6900	4.4
19.5	-6850	4.2
19.4	-6800	4.1
19.7	-6750	4.4
19.3	-6700	4.0
18.5	-6650	3.2
18.8	-6600	3.5
18.5	-6550	3.2
18.3	-6500	3.0
18.2	-6450	2.9
18.3	-6400	3.0
18.0	-6350	2.7
17.8	-6300	2.5
17.1	-6250	1.8
16.4	-6200	1.1

CH6 Processing Gain

2 MB Data Rate

15.9	-6150	0.6	
15.3	-6100	0.0	
15.7	-6050	0.4	
15.9	-6000	0.6	
15.9	-5950	0.6	
16.0	-5900	0.7	
16.3	-5850	1.0	
16.8	-5800	1.5	
18.4	-5750	3.1	
18.2	-5700	2.9	
18.7	-5650	3.4	
19.4	-5600	4.1	
21.0	-5550	5.7	
22.1	-5500	6.8	
23.1	-5450	7.8	
25.5	-5400	10.2	
24.7	-5350	9.4	
24.5	-5300	9.2	
22.9	-5250	7.6	
21.2	-5200	5.9	
19.1	-5150	3.8	
17.8	-5100	2.5	
17.5	-5050	2.2	
17.3	-5000	2.0	
16.6	-4950	1.3	
15.9	-4900	0.6	
15.5	-4850	0.2	
15.2	-4800	-0.1	
15.1	-4750	-0.2	
15.0	-4700	-0.3	
13.8	-4650	-1.5	
12.7	-4600	-2.6	
13.0	-4550	-2.3	
13.3	-4500	-2.0	
13.7	-4450	-1.6	
14.4	-4400	-0.9	
15.3	-4350	0.0	
15.2	-4300	-0.1	
15.1	-4250	-0.2	
14.9	-4200	-0.4	
14.7	-4150	-0.6	
15.1	-4100	-0.2	
13.7	-4050	-1.6	
14.2	-4000	-1.1	
14.6	-3950	-0.7	
14.4	-3900	-0.9	
14.2	-3850	-1.1	
14.5	-3800	-0.8	
14.4	-3750	-0.9	
13.3	-3700	-2.0	
12.2	-3650	-3.1	
12.6	-3600	-2.7	

CH6 Processing Gain

2 MB Data Rate

13.1	-3550	-2.2	
13.6	-3500	-1.7	
14.1	-3450	-1.2	
14.5	-3400	-0.8	
14.8	-3350	-0.5	
14.7	-3300	-0.6	
14.6	-3250	-0.7	
14.7	-3200	-0.6	
14.8	-3150	-0.5	
12.5	-3100	-2.8	
12.8	-3050	-2.5	
13.7	-3000	-1.6	
15.2	-2950	-0.1	
14.8	-2900	-0.5	
14.3	-2850	-1.0	
14.6	-2800	-0.7	
15.0	-2750	-0.3	
15.0	-2700	-0.3	
11.9	-2650	-3.4	
12.3	-2600	-3.0	
14.0	-2550	-1.3	
13.9	-2500	-1.4	
13.2	-2450	-2.1	
12.9	-2400	-2.4	
14.2	-2350	-1.1	
13.9	-2300	-1.4	
15.1	-2250	-0.2	
15.1	-2200	-0.2	
13.8	-2150	-1.5	
13.8	-2100	-1.5	
13.3	-2050	-2.0	
15.2	-2000	-0.1	
15.0	-1950	-0.3	
14.5	-1900	-0.8	
14.5	-1850	-0.8	
14.5	-1800	-0.8	
14.4	-1750	-0.9	
14.6	-1700	-0.7	
13.4	-1650	-1.9	
13.1	-1600	-2.2	
13.8	-1550	-1.5	
14.0	-1500	-1.3	
12.8	-1450	-2.5	
12.8	-1400	-2.5	
13.9	-1350	-1.4	
13.6	-1300	-1.7	
14.9	-1250	-0.4	
15.1	-1200	-0.2	
14.6	-1150	-0.7	
14.9	-1100	-0.4	
14.0	-1050	-1.3	
15.2	-1000	-0.1	

CH6 Processing Gain

2 MB Data Rate

15.0	-950	-0.3	
14.3	-900	-1.0	
14.3	-850	-1.0	
14.2	-800	-1.1	
14.1	-750	-1.2	
13.6	-700	-1.7	
13.6	-650	-1.7	
12.8	-600	-2.5	
13.7	-550	-1.6	
13.7	-500	-1.6	
12.7	-450	-2.6	
12.4	-400	-2.9	
13.6	-350	-1.7	
13.7	-300	-1.6	
13.5	-250	-1.8	
12.7	-200	-2.6	
13.2	-150	-2.1	
13.4	-100	-1.9	
14.2	-50	-1.1	
15.7	0	0.4	
18.1	50	2.8	
16.8	100	1.5	
28.7	150	13.4	
17.6	200	2.3	
17.7	250	2.4	
14.9	300	-0.4	
13.9	350	-1.4	
13.0	400	-2.3	
12.9	450	-2.4	
13.3	500	-2.0	
13.5	550	-1.8	
12.5	600	-2.8	
13.3	650	-2.0	
13.2	700	-2.1	
12.9	750	-2.4	
13.7	800	-1.6	
13.2	850	-2.1	
13.6	900	-1.7	
12.9	950	-2.4	
13.8	1000	-1.5	
13.8	1050	-1.5	
13.9	1100	-1.4	
14.4	1150	-0.9	
14.6	1200	-0.7	
14.8	1250	-0.5	
14.9	1300	-0.4	
14.9	1350	-0.4	
15.0	1400	-0.3	
15.0	1450	-0.3	
14.7	1500	-0.6	
13.3	1550	-2.0	
12.7	1600	-2.6	

CH6 Processing Gain

2 MB Data Rate

13.8	1650	-1.5	
13.5	1700	-1.8	
14.2	1750	-1.1	
14.3	1800	-1.0	
13.8	1850	-1.5	
13.8	1900	-1.5	
13.1	1950	-2.2	
14.3	2000	-1.0	
14.6	2050	-0.7	
14.3	2100	-1.0	
14.7	2150	-0.6	
14.9	2200	-0.4	
15.1	2250	-0.2	
15.2	2300	-0.1	
14.8	2350	-0.5	
13.4	2400	-1.9	
14.2	2450	-1.1	
14.9	2500	-0.4	
13.6	2550	-1.7	
13.3	2600	-2.0	
14.0	2650	-1.3	
13.9	2700	-1.4	
14.4	2750	-0.9	
14.1	2800	-1.2	
13.6	2850	-1.7	
11.6	2900	-3.7	
11.7	2950	-3.6	
12.5	3000	-2.8	
15.4	3050	0.1	
14.8	3100	-0.5	
14.7	3150	-0.6	
14.9	3200	-0.4	
15.7	3250	0.4	
15.5	3300	0.2	
15.2	3350	-0.1	
12.8	3400	-2.5	
13.0	3450	-2.3	
14.5	3500	-0.8	
14.5	3550	-0.8	
14.1	3600	-1.2	
14.2	3650	-1.1	
14.3	3700	-1.0	
14.6	3750	-0.7	
13.9	3800	-1.4	
13.0	3850	-2.3	
12.3	3900	-3.0	
12.0	3950	-3.3	
13.8	4000	-1.5	
13.9	4050	-1.4	
14.1	4100	-1.2	
14.1	4150	-1.2	
14.0	4200	-1.3	

CH6 Processing Gain

2 MB Data Rate


14.0	4250	-1.3	
14.1	4300	-1.2	
14.0	4350	-1.3	
13.9	4400	-1.4	
14.3	4450	-1.0	
14.5	4500	-0.8	
14.5	4550	-0.8	
14.6	4600	-0.7	
14.5	4650	-0.8	
14.3	4700	-1.0	
13.8	4750	-1.5	
13.3	4800	-2.0	
13.0	4850	-2.3	
12.6	4900	-2.7	
13.3	4950	-2.0	
13.5	5000	-1.8	
13.9	5050	-1.4	
14.3	5100	-1.0	
14.8	5150	-0.5	
15.3	5200	0.0	
16.3	5250	1.0	
17.3	5300	2.0	
18.1	5350	2.8	
18.8	5400	3.5	
20.3	5450	5.0	
22.2	5500	6.9	
23.1	5550	7.8	
25.7	5600	10.4	
25.9	5650	10.6	
24.9	5700	9.6	
23.3	5750	8.0	
21.5	5800	6.2	
19.9	5850	4.6	
18.3	5900	3.0	
18.1	5950	2.8	
17.8	6000	2.5	
17.3	6050	2.0	
16.7	6100	1.4	
16.3	6150	1.0	
16.1	6200	0.8	
16.0	6250	0.7	
15.8	6300	0.5	
15.9	6350	0.6	
15.7	6400	0.4	
16.3	6450	1.0	
16.9	6500	1.6	
17.3	6550	2.0	
18.0	6600	2.7	
18.3	6650	3.0	
18.6	6700	3.3	
18.6	6750	3.3	
18.5	6800	3.2	

CH6 Processing Gain

2 MB Data Rate

18.6	6850	3.3	
18.9	6900	3.6	
19.3	6950	4.0	
19.6	7000	4.3	
19.1	7050	3.8	
19.2	7100	3.9	
19.1	7150	3.8	
19.6	7200	4.3	
20.1	7250	4.8	
19.9	7300	4.6	
19.6	7350	4.3	
20.1	7400	4.8	
20.6	7450	5.3	
20.7	7500	5.4	
20.7	7550	5.4	
20.9	7600	5.6	
21.0	7650	5.7	
21.3	7700	6.0	
21.9	7750	6.6	
22.3	7800	7.0	
22.5	7850	7.2	
22.9	7900	7.6	
22.8	7950	7.5	
22.9	8000	7.6	
22.7	8050	7.4	
22.6	8100	7.3	
22.5	8150	7.2	
22.8	8200	7.5	
23.2	8250	7.9	
23.6	8300	8.3	
23.8	8350	8.5	
24.0	8400	8.7	
24.2	8450	8.9	
24.1	8500	8.8	
13.7	Processing Gain (dB) @ 80th Percentile =		

Processing Gain
Channel 6 (fc=2437MHz) @ 2Mbps

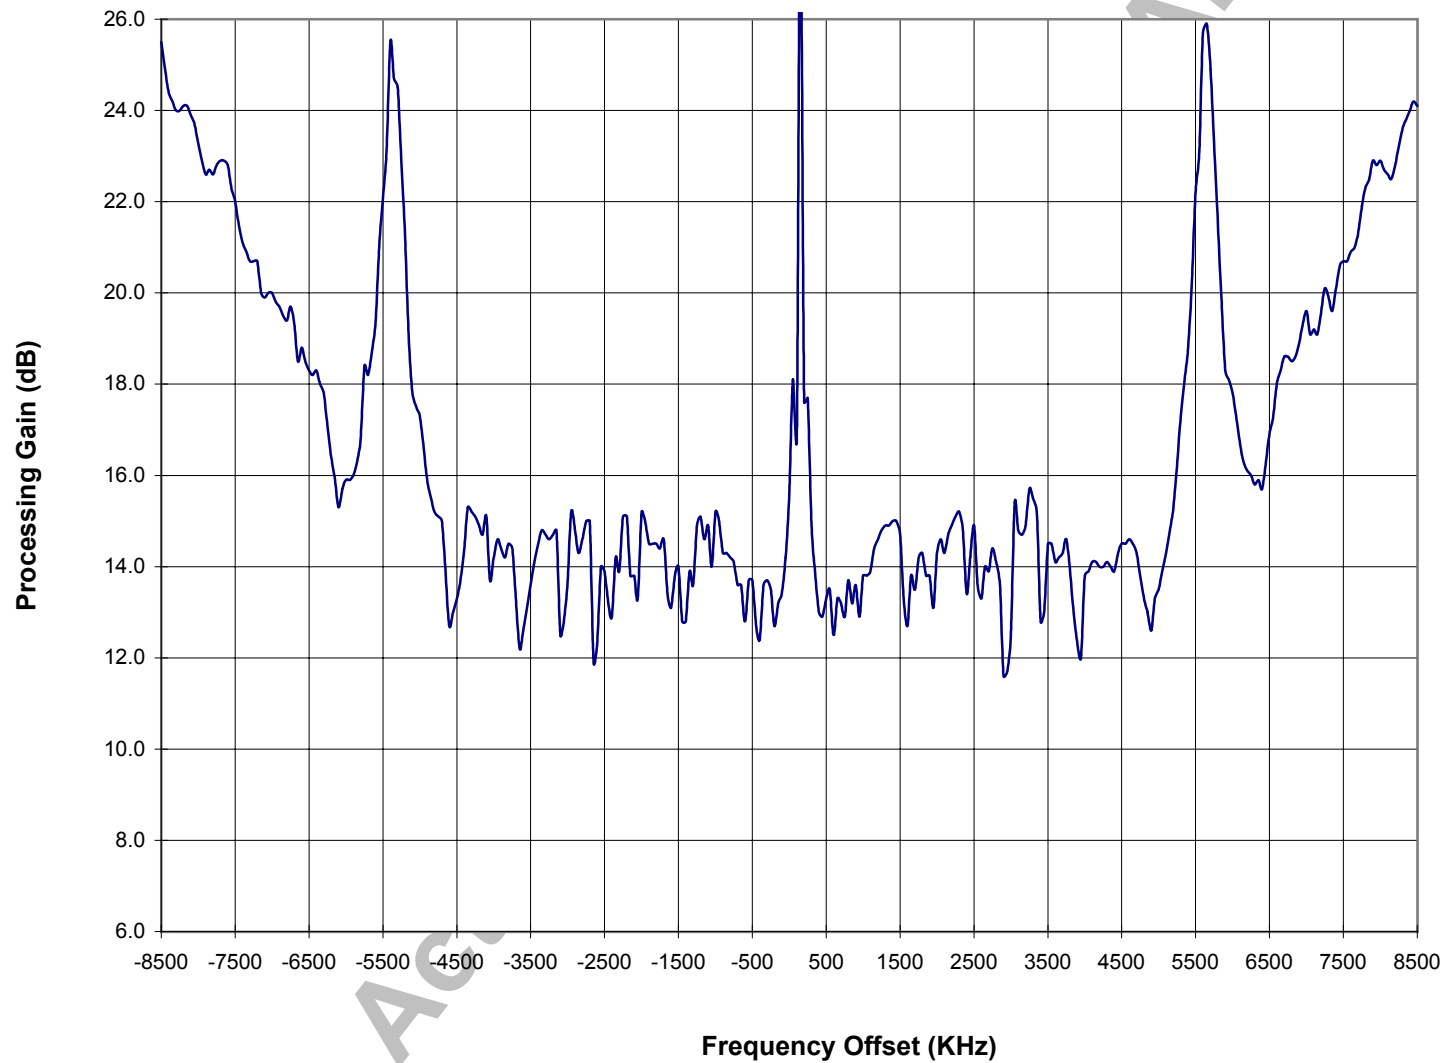

1Mbps CHANNEL 6 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	G_p	$(S/N)_o$	$M_j = J/S$	L_{sys}	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2428.50	22.6	10.3	10.3	2.0	-49.6	≤ 8.0
2428.55	21.9	10.3	9.6	2.0	-50.3	≤ 8.0
2428.60	21.4	10.3	9.1	2.0	-50.8	≤ 8.0
2428.65	21.2	10.3	8.9	2.0	-51.0	≤ 8.0
2428.70	21.0	10.3	8.7	2.0	-51.2	≤ 8.0
2428.75	20.9	10.3	8.6	2.0	-51.3	≤ 8.0
2428.80	21.0	10.3	8.7	2.0	-51.2	≤ 8.0
2428.85	21.1	10.3	8.8	2.0	-51.1	≤ 8.0
2428.90	20.9	10.3	8.6	2.0	-51.3	≤ 8.0
2428.95	20.6	10.3	8.3	2.0	-51.6	≤ 8.0
2429.00	20.3	10.3	8.0	2.0	-51.9	≤ 8.0
2429.05	19.8	10.3	7.5	2.0	-52.4	≤ 8.0
2429.10	19.7	10.3	7.4	2.0	-52.5	≤ 8.0
2429.15	19.6	10.3	7.3	2.0	-52.6	≤ 8.0
2429.20	19.5	10.3	7.2	2.0	-52.7	≤ 8.0
2429.25	19.7	10.3	7.4	2.0	-52.5	≤ 8.0
2429.30	19.9	10.3	7.6	2.0	-52.3	≤ 8.0
2429.35	19.9	10.3	7.6	2.0	-52.3	≤ 8.0
2429.40	19.8	10.3	7.5	2.0	-52.4	≤ 8.0
2429.45	19.3	10.3	7.0	2.0	-52.9	≤ 8.0
2429.50	19.0	10.3	6.7	2.0	-53.2	≤ 8.0
2429.55	18.3	10.3	6.0	2.0	-53.9	≤ 8.0
2429.60	18.0	10.3	5.7	2.0	-54.2	≤ 8.0
2429.65	17.8	10.3	5.5	2.0	-54.4	≤ 8.0
2429.70	17.7	10.3	5.4	2.0	-54.5	≤ 8.0
2429.75	17.8	10.3	5.5	2.0	-54.4	≤ 8.0
2429.80	17.9	10.3	5.6	2.0	-54.3	≤ 8.0
2429.85	18.0	10.3	5.7	2.0	-54.2	≤ 8.0
2429.90	17.8	10.3	5.5	2.0	-54.4	≤ 8.0
2429.95	17.7	10.3	5.4	2.0	-54.5	≤ 8.0
2430.00	17.6	10.3	5.3	2.0	-54.6	≤ 8.0
2430.05	17.3	10.3	5.0	2.0	-54.9	≤ 8.0
2430.10	17.0	10.3	4.7	2.0	-55.2	≤ 8.0
2430.15	17.1	10.3	4.8	2.0	-55.1	≤ 8.0
2430.20	17.3	10.3	5.0	2.0	-54.9	≤ 8.0
2430.25	17.7	10.3	5.4	2.0	-54.5	≤ 8.0
2430.30	18.0	10.3	5.7	2.0	-54.2	≤ 8.0
2430.35	17.9	10.3	5.6	2.0	-54.3	≤ 8.0
2430.40	17.9	10.3	5.6	2.0	-54.3	≤ 8.0
2430.45	17.6	10.3	5.3	2.0	-54.6	≤ 8.0
2430.50	17.4	10.3	5.1	2.0	-54.8	≤ 8.0
2430.55	16.9	10.3	4.6	2.0	-55.3	≤ 8.0
2430.60	16.5	10.3	4.2	2.0	-55.7	≤ 8.0
2430.65	16.3	10.3	4.0	2.0	-55.9	≤ 8.0
2430.70	15.9	10.3	3.6	2.0	-56.3	≤ 8.0
2430.75	16.0	10.3	3.7	2.0	-56.2	≤ 8.0
2430.80	16.2	10.3	3.9	2.0	-56.0	≤ 8.0
2430.85	16.0	10.3	3.7	2.0	-56.2	≤ 8.0

1Mbps CHANNEL 6 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	G_p	$(S/N)_o$	$M_j = J/S$	L_{sys}	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2430.90	16.1	10.3	3.8	2.0	-56.1	≤ 8.0
2430.95	16.0	10.3	3.7	2.0	-56.2	≤ 8.0
2431.00	15.9	10.3	3.6	2.0	-56.3	≤ 8.0
2431.05	15.9	10.3	3.6	2.0	-56.3	≤ 8.0
2431.10	15.8	10.3	3.5	2.0	-56.4	≤ 8.0
2431.15	16.2	10.3	3.9	2.0	-56.0	≤ 8.0
2431.20	16.5	10.3	4.2	2.0	-55.7	≤ 8.0
2431.25	17.3	10.3	5.0	2.0	-54.9	≤ 8.0
2431.30	18.1	10.3	5.8	2.0	-54.1	≤ 8.0
2431.35	18.7	10.3	6.4	2.0	-53.5	≤ 8.0
2431.40	20.2	10.3	7.9	2.0	-52.0	≤ 8.0
2431.45	21.3	10.3	9.0	2.0	-50.9	≤ 8.0
2431.50	22.2	10.3	9.9	2.0	-50.0	≤ 8.0
2431.55	22.8	10.3	10.5	2.0	-49.4	≤ 8.0
2431.60	24.6	10.3	12.3	2.0	-47.6	≤ 8.0
2431.65	24.8	10.3	12.5	2.0	-47.4	≤ 8.0
2431.70	24.6	10.3	12.3	2.0	-47.6	≤ 8.0
2431.75	22.3	10.3	10.0	2.0	-49.9	≤ 8.0
2431.80	21.5	10.3	9.2	2.0	-50.7	≤ 8.0
2431.85	20.3	10.3	8.0	2.0	-51.9	≤ 8.0
2431.90	19.5	10.3	7.2	2.0	-52.7	≤ 8.0
2431.95	18.3	10.3	6.0	2.0	-53.9	≤ 8.0
2432.00	17.4	10.3	5.1	2.0	-54.8	≤ 8.0
2432.05	16.5	10.3	4.2	2.0	-55.7	≤ 8.0
2432.10	15.8	10.3	3.5	2.0	-56.4	≤ 8.0
2432.15	15.5	10.3	3.2	2.0	-56.7	≤ 8.0
2432.20	15.2	10.3	2.9	2.0	-57.0	≤ 8.0
2432.25	15.3	10.3	3.0	2.0	-56.9	≤ 8.0
2432.30	15.4	10.3	3.1	2.0	-56.8	≤ 8.0
2432.35	15.3	10.3	3.0	2.0	-56.9	≤ 8.0
2432.40	15.2	10.3	2.9	2.0	-57.0	≤ 8.0
2432.45	15.0	10.3	2.7	2.0	-57.2	≤ 8.0
2432.50	14.9	10.3	2.6	2.0	-57.3	≤ 8.0
2432.55	15.0	10.3	2.7	2.0	-57.2	≤ 8.0
2432.60	14.8	10.3	2.5	2.0	-57.4	≤ 8.0
2432.65	14.9	10.3	2.6	2.0	-57.3	≤ 8.0
2432.70	15.1	10.3	2.8	2.0	-57.1	≤ 8.0
2432.75	15.4	10.3	3.1	2.0	-56.8	≤ 8.0
2432.80	15.9	10.3	3.6	2.0	-56.3	≤ 8.0
2432.85	16.0	10.3	3.7	2.0	-56.2	≤ 8.0
2432.90	16.1	10.3	3.8	2.0	-56.1	≤ 8.0
2432.95	15.9	10.3	3.6	2.0	-56.3	≤ 8.0
2433.00	15.8	10.3	3.5	2.0	-56.4	≤ 8.0
2433.05	15.3	10.3	3.0	2.0	-56.9	≤ 8.0
2433.10	14.9	10.3	2.6	2.0	-57.3	≤ 8.0
2433.15	15.0	10.3	2.7	2.0	-57.2	≤ 8.0
2433.20	14.8	10.3	2.5	2.0	-57.4	≤ 8.0
2433.25	14.9	10.3	2.6	2.0	-57.3	≤ 8.0

1Mbps CHANNEL 6 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	G_p	$(S/N)_o$	$M_j = J/S$	L_{sys}	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2433.30	15.0	10.3	2.7	2.0	-57.2	≤ 8.0
2433.35	14.9	10.3	2.6	2.0	-57.3	≤ 8.0
2433.40	14.8	10.3	2.5	2.0	-57.4	≤ 8.0
2433.45	14.7	10.3	2.4	2.0	-57.5	≤ 8.0
2433.50	14.5	10.3	2.2	2.0	-57.7	≤ 8.0
2433.55	14.3	10.3	2.0	2.0	-57.9	≤ 8.0
2433.60	14.4	10.3	2.1	2.0	-57.8	≤ 8.0
2433.65	14.5	10.3	2.2	2.0	-57.7	≤ 8.0
2433.70	14.7	10.3	2.4	2.0	-57.5	≤ 8.0
2433.75	14.9	10.3	2.6	2.0	-57.3	≤ 8.0
2433.80	15.1	10.3	2.8	2.0	-57.1	≤ 8.0
2433.85	15.0	10.3	2.7	2.0	-57.2	≤ 8.0
2433.90	14.9	10.3	2.6	2.0	-57.3	≤ 8.0
2433.95	15.0	10.3	2.7	2.0	-57.2	≤ 8.0
2434.00	14.9	10.3	2.6	2.0	-57.3	≤ 8.0
2434.05	14.5	10.3	2.2	2.0	-57.7	≤ 8.0
2434.10	14.2	10.3	1.9	2.0	-58.0	≤ 8.0
2434.15	14.3	10.3	2.0	2.0	-57.9	≤ 8.0
2434.20	14.2	10.3	1.9	2.0	-58.0	≤ 8.0
2434.25	14.3	10.3	2.0	2.0	-57.9	≤ 8.0
2434.30	14.3	10.3	2.0	2.0	-57.9	≤ 8.0
2434.35	14.1	10.3	1.8	2.0	-58.1	≤ 8.0
2434.40	14.0	10.3	1.7	2.0	-58.2	≤ 8.0
2434.45	14.1	10.3	1.8	2.0	-58.1	≤ 8.0
2434.50	14.0	10.3	1.7	2.0	-58.2	≤ 8.0
2434.55	14.0	10.3	1.7	2.0	-58.2	≤ 8.0
2434.60	13.9	10.3	1.6	2.0	-58.3	≤ 8.0
2434.65	14.0	10.3	1.7	2.0	-58.2	≤ 8.0
2434.70	14.1	10.3	1.8	2.0	-58.1	≤ 8.0
2434.75	14.4	10.3	2.1	2.0	-57.8	≤ 8.0
2434.80	14.6	10.3	2.3	2.0	-57.6	≤ 8.0
2434.85	14.7	10.3	2.4	2.0	-57.5	≤ 8.0
2434.90	14.3	10.3	2.0	2.0	-57.9	≤ 8.0
2434.95	14.4	10.3	2.1	2.0	-57.8	≤ 8.0
2435.00	14.2	10.3	1.9	2.0	-58.0	≤ 8.0
2435.05	14.0	10.3	1.7	2.0	-58.2	≤ 8.0
2435.10	13.8	10.3	1.5	2.0	-58.4	≤ 8.0
2435.15	13.9	10.3	1.6	2.0	-58.3	≤ 8.0
2435.20	13.9	10.3	1.6	2.0	-58.3	≤ 8.0
2435.25	13.8	10.3	1.5	2.0	-58.4	≤ 8.0
2435.30	13.7	10.3	1.4	2.0	-58.5	≤ 8.0
2435.35	13.6	10.3	1.3	2.0	-58.6	≤ 8.0
2435.40	13.5	10.3	1.2	2.0	-58.7	≤ 8.0
2435.45	13.6	10.3	1.3	2.0	-58.6	≤ 8.0
2435.50	13.6	10.3	1.3	2.0	-58.6	≤ 8.0
2435.55	13.7	10.3	1.4	2.0	-58.5	≤ 8.0
2435.60	13.7	10.3	1.4	2.0	-58.5	≤ 8.0
2435.65	13.8	10.3	1.5	2.0	-58.4	≤ 8.0

1Mbps CHANNEL 6 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	G_p	$(S/N)_o$	$M_j = J/S$	L_{sys}	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2435.70	13.8	10.3	1.5	2.0	-58.4	≤ 8.0
2435.75	14.2	10.3	1.9	2.0	-58.0	≤ 8.0
2435.80	14.6	10.3	2.3	2.0	-57.6	≤ 8.0
2435.85	14.5	10.3	2.2	2.0	-57.7	≤ 8.0
2435.90	14.5	10.3	2.2	2.0	-57.7	≤ 8.0
2435.95	14.7	10.3	2.4	2.0	-57.5	≤ 8.0
2436.00	14.4	10.3	2.1	2.0	-57.8	≤ 8.0
2436.05	14.5	10.3	2.2	2.0	-57.7	≤ 8.0
2436.10	12.2	10.3	-0.1	2.0	-60.0	≤ 8.0
2436.15	11.7	10.3	-0.6	2.0	-60.5	≤ 8.0
2436.20	11.6	10.3	-0.7	2.0	-60.6	≤ 8.0
2436.25	11.7	10.3	-0.6	2.0	-60.5	≤ 8.0
2436.30	11.7	10.3	-0.6	2.0	-60.5	≤ 8.0
2436.35	13.4	10.3	1.1	2.0	-58.8	≤ 8.0
2436.40	13.2	10.3	0.9	2.0	-59.0	≤ 8.0
2436.45	13.5	10.3	1.2	2.0	-58.7	≤ 8.0
2436.50	13.3	10.3	1.0	2.0	-58.9	≤ 8.0
2436.55	11.0	10.3	-1.3	2.0	-61.2	≤ 8.0
2436.60	10.9	10.3	-1.4	2.0	-61.3	≤ 8.0
2436.65	11.0	10.3	-1.3	2.0	-61.2	≤ 8.0
2436.70	10.7	10.3	-1.6	2.0	-61.5	≤ 8.0
2436.75	10.4	10.3	-1.9	2.0	-61.8	≤ 8.0
2436.80	9.6	10.3	-2.7	2.0	-62.6	≤ 8.0
2436.85	9.9	10.3	-2.4	2.0	-62.3	≤ 8.0
2436.90	10.5	10.3	-1.8	2.0	-61.7	≤ 8.0
2436.95	11.0	10.3	-1.3	2.0	-61.2	≤ 8.0
2437.00	12.5	10.3	0.2	2.0	-59.7	≤ 8.0
2437.05	15.0	10.3	2.7	2.0	-57.2	≤ 8.0
2437.10	16.2	10.3	3.9	2.0	-56.0	≤ 8.0
2437.15	22.7	10.3	10.4	2.0	-49.5	≤ 8.0
2437.20	16.5	10.3	4.2	2.0	-55.7	≤ 8.0
2437.25	14.1	10.3	1.8	2.0	-58.1	≤ 8.0
2437.30	11.6	10.3	-0.7	2.0	-60.6	≤ 8.0
2437.35	10.6	10.3	-1.7	2.0	-61.6	≤ 8.0
2437.40	9.9	10.3	-2.4	2.0	-62.3	≤ 8.0
2437.45	9.5	10.3	-2.8	2.0	-62.7	≤ 8.0
2437.50	10.0	10.3	-2.3	2.0	-62.2	≤ 8.0
2437.55	10.4	10.3	-1.9	2.0	-61.8	≤ 8.0
2437.60	10.8	10.3	-1.5	2.0	-61.4	≤ 8.0
2437.65	11.4	10.3	-0.9	2.0	-60.8	≤ 8.0
2437.70	11.6	10.3	-0.7	2.0	-60.6	≤ 8.0
2437.75	10.9	10.3	-1.4	2.0	-61.3	≤ 8.0
2437.80	13.5	10.3	1.2	2.0	-58.7	≤ 8.0
2437.85	13.3	10.3	1.0	2.0	-58.9	≤ 8.0
2437.90	13.6	10.3	1.3	2.0	-58.6	≤ 8.0
2437.95	12.7	10.3	0.4	2.0	-59.5	≤ 8.0
2438.00	12.2	10.3	-0.1	2.0	-60.0	≤ 8.0
2438.05	12.1	10.3	-0.2	2.0	-60.1	≤ 8.0

1Mbps CHANNEL 6 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	G_p	$(S/N)_o$	$M_j = J/S$	L_{sys}	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2438.10	12.0	10.3	-0.3	2.0	-60.2	≤ 8.0
2438.15	12.0	10.3	-0.3	2.0	-60.2	≤ 8.0
2438.20	14.2	10.3	1.9	2.0	-58.0	≤ 8.0
2438.25	14.4	10.3	2.1	2.0	-57.8	≤ 8.0
2438.30	14.6	10.3	2.3	2.0	-57.6	≤ 8.0
2438.35	14.6	10.3	2.3	2.0	-57.6	≤ 8.0
2438.40	14.4	10.3	2.1	2.0	-57.8	≤ 8.0
2438.45	14.7	10.3	2.4	2.0	-57.5	≤ 8.0
2438.50	14.2	10.3	1.9	2.0	-58.0	≤ 8.0
2438.55	14.1	10.3	1.8	2.0	-58.1	≤ 8.0
2438.60	13.9	10.3	1.6	2.0	-58.3	≤ 8.0
2438.65	13.8	10.3	1.5	2.0	-58.4	≤ 8.0
2438.70	13.6	10.3	1.3	2.0	-58.6	≤ 8.0
2438.75	13.7	10.3	1.4	2.0	-58.5	≤ 8.0
2438.80	13.8	10.3	1.5	2.0	-58.4	≤ 8.0
2438.85	13.8	10.3	1.5	2.0	-58.4	≤ 8.0
2438.90	13.7	10.3	1.4	2.0	-58.5	≤ 8.0
2438.95	13.6	10.3	1.3	2.0	-58.6	≤ 8.0
2439.00	13.7	10.3	1.4	2.0	-58.5	≤ 8.0
2439.05	13.8	10.3	1.5	2.0	-58.4	≤ 8.0
2439.10	13.9	10.3	1.6	2.0	-58.3	≤ 8.0
2439.15	14.0	10.3	1.7	2.0	-58.2	≤ 8.0
2439.20	13.9	10.3	1.6	2.0	-58.3	≤ 8.0
2439.25	14.2	10.3	1.9	2.0	-58.0	≤ 8.0
2439.30	14.3	10.3	2.0	2.0	-57.9	≤ 8.0
2439.35	14.3	10.3	2.0	2.0	-57.9	≤ 8.0
2439.40	14.4	10.3	2.1	2.0	-57.8	≤ 8.0
2439.45	14.5	10.3	2.2	2.0	-57.7	≤ 8.0
2439.50	14.3	10.3	2.0	2.0	-57.9	≤ 8.0
2439.55	14.2	10.3	1.9	2.0	-58.0	≤ 8.0
2439.60	14.0	10.3	1.7	2.0	-58.2	≤ 8.0
2439.65	13.9	10.3	1.6	2.0	-58.3	≤ 8.0
2439.70	13.8	10.3	1.5	2.0	-58.4	≤ 8.0
2439.75	13.9	10.3	1.6	2.0	-58.3	≤ 8.0
2439.80	14.0	10.3	1.7	2.0	-58.2	≤ 8.0
2439.85	13.8	10.3	1.5	2.0	-58.4	≤ 8.0
2439.90	14.0	10.3	1.7	2.0	-58.2	≤ 8.0
2439.95	14.1	10.3	1.8	2.0	-58.1	≤ 8.0
2440.00	14.0	10.3	1.7	2.0	-58.2	≤ 8.0
2440.05	13.9	10.3	1.6	2.0	-58.3	≤ 8.0
2440.10	14.0	10.3	1.7	2.0	-58.2	≤ 8.0
2440.15	14.1	10.3	1.8	2.0	-58.1	≤ 8.0
2440.20	14.4	10.3	2.1	2.0	-57.8	≤ 8.0
2440.25	14.5	10.3	2.2	2.0	-57.7	≤ 8.0
2440.30	14.8	10.3	2.5	2.0	-57.4	≤ 8.0
2440.35	14.7	10.3	2.4	2.0	-57.5	≤ 8.0
2440.40	15.0	10.3	2.7	2.0	-57.2	≤ 8.0
2440.45	14.8	10.3	2.5	2.0	-57.4	≤ 8.0

1Mbps CHANNEL 6 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	G_p	$(S/N)_o$	$M_j = J/S$	L_{sys}	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2440.50	14.6	10.3	2.3	2.0	-57.6	≤ 8.0
2440.55	14.5	10.3	2.2	2.0	-57.7	≤ 8.0
2440.60	14.4	10.3	2.1	2.0	-57.8	≤ 8.0
2440.65	14.3	10.3	2.0	2.0	-57.9	≤ 8.0
2440.70	14.3	10.3	2.0	2.0	-57.9	≤ 8.0
2440.75	14.5	10.3	2.2	2.0	-57.7	≤ 8.0
2440.80	14.7	10.3	2.4	2.0	-57.5	≤ 8.0
2440.85	14.7	10.3	2.4	2.0	-57.5	≤ 8.0
2440.90	14.6	10.3	2.3	2.0	-57.6	≤ 8.0
2440.95	14.7	10.3	2.4	2.0	-57.5	≤ 8.0
2441.00	14.8	10.3	2.5	2.0	-57.4	≤ 8.0
2441.05	14.7	10.3	2.4	2.0	-57.5	≤ 8.0
2441.10	14.5	10.3	2.2	2.0	-57.7	≤ 8.0
2441.15	14.9	10.3	2.6	2.0	-57.3	≤ 8.0
2441.20	15.2	10.3	2.9	2.0	-57.0	≤ 8.0
2441.25	15.3	10.3	3.0	2.0	-56.9	≤ 8.0
2441.30	15.6	10.3	3.3	2.0	-56.6	≤ 8.0
2441.35	15.7	10.3	3.4	2.0	-56.5	≤ 8.0
2441.40	15.9	10.3	3.6	2.0	-56.3	≤ 8.0
2441.45	15.6	10.3	3.3	2.0	-56.6	≤ 8.0
2441.50	15.4	10.3	3.1	2.0	-56.8	≤ 8.0
2441.55	15.1	10.3	2.8	2.0	-57.1	≤ 8.0
2441.60	15.0	10.3	2.7	2.0	-57.2	≤ 8.0
2441.65	14.8	10.3	2.5	2.0	-57.4	≤ 8.0
2441.70	14.7	10.3	2.4	2.0	-57.5	≤ 8.0
2441.75	14.8	10.3	2.5	2.0	-57.4	≤ 8.0
2441.80	15.1	10.3	2.8	2.0	-57.1	≤ 8.0
2441.85	15.2	10.3	2.9	2.0	-57.0	≤ 8.0
2441.90	15.0	10.3	2.7	2.0	-57.2	≤ 8.0
2441.95	15.2	10.3	2.9	2.0	-57.0	≤ 8.0
2442.00	15.1	10.3	2.8	2.0	-57.1	≤ 8.0
2442.05	15.2	10.3	2.9	2.0	-57.0	≤ 8.0
2442.10	15.0	10.3	2.7	2.0	-57.2	≤ 8.0
2442.15	15.4	10.3	3.1	2.0	-56.8	≤ 8.0
2442.20	16.0	10.3	3.7	2.0	-56.2	≤ 8.0
2442.25	16.8	10.3	4.5	2.0	-55.4	≤ 8.0
2442.30	17.7	10.3	5.4	2.0	-54.5	≤ 8.0
2442.35	18.3	10.3	6.0	2.0	-53.9	≤ 8.0
2442.40	19.8	10.3	7.5	2.0	-52.4	≤ 8.0
2442.45	21.1	10.3	8.8	2.0	-51.1	≤ 8.0
2442.50	21.9	10.3	9.6	2.0	-50.3	≤ 8.0
2442.55	23.3	10.3	11.0	2.0	-48.9	≤ 8.0
2442.60	24.5	10.3	12.2	2.0	-47.7	≤ 8.0
2442.65	24.4	10.3	12.1	2.0	-47.8	≤ 8.0
2442.70	24.7	10.3	12.4	2.0	-47.5	≤ 8.0
2442.75	23.1	10.3	10.8	2.0	-49.1	≤ 8.0
2442.80	21.8	10.3	9.5	2.0	-50.4	≤ 8.0
2442.85	20.3	10.3	8.0	2.0	-51.9	≤ 8.0

1Mbps CHANNEL 6 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	G_p	$(S/N)_o$	$M_j = J/S$	L_{sys}	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2442.90	19.8	10.3	7.5	2.0	-52.4	≤ 8.0
2442.95	18.3	10.3	6.0	2.0	-53.9	≤ 8.0
2443.00	17.8	10.3	5.5	2.0	-54.4	≤ 8.0
2443.05	17.1	10.3	4.8	2.0	-55.1	≤ 8.0
2443.10	16.4	10.3	4.1	2.0	-55.8	≤ 8.0
2443.15	16.1	10.3	3.8	2.0	-56.1	≤ 8.0
2443.20	15.9	10.3	3.6	2.0	-56.3	≤ 8.0
2443.25	16.0	10.3	3.7	2.0	-56.2	≤ 8.0
2443.30	16.2	10.3	3.9	2.0	-56.0	≤ 8.0
2443.35	16.3	10.3	4.0	2.0	-55.9	≤ 8.0
2443.40	16.2	10.3	3.9	2.0	-56.0	≤ 8.0
2443.45	16.2	10.3	3.9	2.0	-56.0	≤ 8.0
2443.50	16.1	10.3	3.8	2.0	-56.1	≤ 8.0
2443.55	16.2	10.3	3.9	2.0	-56.0	≤ 8.0
2443.60	16.0	10.3	3.7	2.0	-56.2	≤ 8.0
2443.65	16.1	10.3	3.8	2.0	-56.1	≤ 8.0
2443.70	17.7	10.3	5.4	2.0	-54.5	≤ 8.0
2443.75	17.7	10.3	5.4	2.0	-54.5	≤ 8.0
2443.80	17.6	10.3	5.3	2.0	-54.6	≤ 8.0
2443.85	17.9	10.3	5.6	2.0	-54.3	≤ 8.0
2443.90	18.1	10.3	5.8	2.0	-54.1	≤ 8.0
2443.95	17.8	10.3	5.5	2.0	-54.4	≤ 8.0
2444.00	17.9	10.3	5.6	2.0	-54.3	≤ 8.0
2444.05	17.3	10.3	5.0	2.0	-54.9	≤ 8.0
2444.10	17.1	10.3	4.8	2.0	-55.1	≤ 8.0
2444.15	17.0	10.3	4.7	2.0	-55.2	≤ 8.0
2444.20	17.2	10.3	4.9	2.0	-55.0	≤ 8.0
2444.25	17.5	10.3	5.2	2.0	-54.7	≤ 8.0
2444.30	17.8	10.3	5.5	2.0	-54.4	≤ 8.0
2444.35	17.9	10.3	5.6	2.0	-54.3	≤ 8.0
2444.40	18.0	10.3	5.7	2.0	-54.2	≤ 8.0
2444.45	17.8	10.3	5.5	2.0	-54.4	≤ 8.0
2444.50	17.9	10.3	5.6	2.0	-54.3	≤ 8.0
2444.55	17.7	10.3	5.4	2.0	-54.5	≤ 8.0
2444.60	17.6	10.3	5.3	2.0	-54.6	≤ 8.0
2444.65	17.8	10.3	5.5	2.0	-54.4	≤ 8.0
2444.70	18.2	10.3	5.9	2.0	-54.0	≤ 8.0
2444.75	18.6	10.3	6.3	2.0	-53.6	≤ 8.0
2444.80	19.3	10.3	7.0	2.0	-52.9	≤ 8.0
2444.85	19.6	10.3	7.3	2.0	-52.6	≤ 8.0
2444.90	19.9	10.3	7.6	2.0	-52.3	≤ 8.0
2444.95	19.8	10.3	7.5	2.0	-52.4	≤ 8.0
2445.00	19.9	10.3	7.6	2.0	-52.3	≤ 8.0
2445.05	19.7	10.3	7.4	2.0	-52.5	≤ 8.0
2445.10	19.5	10.3	7.2	2.0	-52.7	≤ 8.0
2445.15	19.6	10.3	7.3	2.0	-52.6	≤ 8.0
2445.20	19.7	10.3	7.4	2.0	-52.5	≤ 8.0
2445.25	20.1	10.3	7.8	2.0	-52.1	≤ 8.0

1Mbps CHANNEL 6 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq. (MHz)	G_p (dB)	$(S/N)_o$ (dB)	$M_j = J/S$ (dB)	L_{sys} (dB)	Jammer (dBm)	PER (%)
2445.30	20.5	10.3	8.2	2.0	-51.7	≤ 8.0
2445.35	20.4	10.3	8.1	2.0	-51.8	≤ 8.0
2445.40	20.8	10.3	8.5	2.0	-51.4	≤ 8.0
2445.45	20.9	10.3	8.6	2.0	-51.3	≤ 8.0
2445.50	20.9	10.3	8.6	2.0	-51.3	≤ 8.0

Processing Gain (dB) = **14.0**

CH6 Processing Gain
1 MB Data Rate

Processing Gain (dB)	XMIT level	-59.9
	S/N+Ls	12.3
	0dB J/S	0.0
PG	Offset	Signal Generator Delta
22.6	-8500	10.3
21.9	-8450	9.6
21.4	-8400	9.1
21.2	-8350	8.9
21.0	-8300	8.7
20.9	-8250	8.6
21.0	-8200	8.7
21.1	-8150	8.8
20.9	-8100	8.6
20.6	-8050	8.3
20.3	-8000	8.0
19.8	-7950	7.5
19.7	-7900	7.4
19.6	-7850	7.3
19.5	-7800	7.2
19.7	-7750	7.4
19.9	-7700	7.6
19.9	-7650	7.6
19.8	-7600	7.5
19.3	-7550	7.0
19.0	-7500	6.7
18.3	-7450	6.0
18.0	-7400	5.7
17.8	-7350	5.5
17.7	-7300	5.4
17.8	-7250	5.5
17.9	-7200	5.6
18.0	-7150	5.7
17.8	-7100	5.5
17.7	-7050	5.4
17.6	-7000	5.3
17.3	-6950	5.0
17.0	-6900	4.7
17.1	-6850	4.8
17.3	-6800	5.0
17.7	-6750	5.4
18.0	-6700	5.7
17.9	-6650	5.6
17.9	-6600	5.6
17.6	-6550	5.3
17.4	-6500	5.1
16.9	-6450	4.6
16.5	-6400	4.2
16.3	-6350	4.0
15.9	-6300	3.6
16.0	-6250	3.7
16.2	-6200	3.9

CH6 Processing Gain
1 MB Data Rate

16.0	-6150	3.7
16.1	-6100	3.8
16.0	-6050	3.7
15.9	-6000	3.6
15.9	-5950	3.6
15.8	-5900	3.5
16.2	-5850	3.9
16.5	-5800	4.2
17.3	-5750	5.0
18.1	-5700	5.8
18.7	-5650	6.4
20.2	-5600	7.9
21.3	-5550	9.0
22.2	-5500	9.9
22.8	-5450	10.5
24.6	-5400	12.3
24.8	-5350	12.5
24.6	-5300	12.3
22.3	-5250	10.0
21.5	-5200	9.2
20.3	-5150	8.0
19.5	-5100	7.2
18.3	-5050	6.0
17.4	-5000	5.1
16.5	-4950	4.2
15.8	-4900	3.5
15.5	-4850	3.2
15.2	-4800	2.9
15.3	-4750	3.0
15.4	-4700	3.1
15.3	-4650	3.0
15.2	-4600	2.9
15.0	-4550	2.7
14.9	-4500	2.6
15.0	-4450	2.7
14.8	-4400	2.5
14.9	-4350	2.6
15.1	-4300	2.8
15.4	-4250	3.1
15.9	-4200	3.6
16.0	-4150	3.7
16.1	-4100	3.8
15.9	-4050	3.6
15.8	-4000	3.5
15.3	-3950	3.0
14.9	-3900	2.6
15.0	-3850	2.7
14.8	-3800	2.5
14.9	-3750	2.6
15.0	-3700	2.7
14.9	-3650	2.6
14.8	-3600	2.5

CH6 Processing Gain
1 MB Data Rate

14.7	-3550	2.4
14.5	-3500	2.2
14.3	-3450	2.0
14.4	-3400	2.1
14.5	-3350	2.2
14.7	-3300	2.4
14.9	-3250	2.6
15.1	-3200	2.8
15.0	-3150	2.7
14.9	-3100	2.6
15.0	-3050	2.7
14.9	-3000	2.6
14.5	-2950	2.2
14.2	-2900	1.9
14.3	-2850	2.0
14.2	-2800	1.9
14.3	-2750	2.0
14.3	-2700	2.0
14.1	-2650	1.8
14.0	-2600	1.7
14.1	-2550	1.8
14.0	-2500	1.7
14.0	-2450	1.7
13.9	-2400	1.6
14.0	-2350	1.7
14.1	-2300	1.8
14.4	-2250	2.1
14.6	-2200	2.3
14.7	-2150	2.4
14.3	-2100	2.0
14.4	-2050	2.1
14.2	-2000	1.9
14.0	-1950	1.7
13.8	-1900	1.5
13.9	-1850	1.6
13.9	-1800	1.6
13.8	-1750	1.5
13.7	-1700	1.4
13.6	-1650	1.3
13.5	-1600	1.2
13.6	-1550	1.3
13.6	-1500	1.3
13.7	-1450	1.4
13.7	-1400	1.4
13.8	-1350	1.5
13.8	-1300	1.5
14.2	-1250	1.9
14.6	-1200	2.3
14.5	-1150	2.2
14.5	-1100	2.2
14.7	-1050	2.4
14.4	-1000	2.1

CH6 Processing Gain
1 MB Data Rate

14.5	-950	2.2
12.2	-900	-0.1
11.7	-850	-0.6
11.6	-800	-0.7
11.7	-750	-0.6
11.7	-700	-0.6
13.4	-650	1.1
13.2	-600	0.9
13.5	-550	1.2
13.3	-500	1.0
11.0	-450	-1.3
10.9	-400	-1.4
11.0	-350	-1.3
10.7	-300	-1.6
10.4	-250	-1.9
9.6	-200	-2.7
9.9	-150	-2.4
10.5	-100	-1.8
11.0	-50	-1.3
12.5	0	0.2
15.0	50	2.7
16.2	100	3.9
22.7	150	10.4
16.5	200	4.2
14.1	250	1.8
11.6	300	-0.7
10.6	350	-1.7
9.9	400	-2.4
9.5	450	-2.8
10.0	500	-2.3
10.4	550	-1.9
10.8	600	-1.5
11.4	650	-0.9
11.6	700	-0.7
10.9	750	-1.4
13.5	800	1.2
13.3	850	1.0
13.6	900	1.3
12.7	950	0.4
12.2	1000	-0.1
12.1	1050	-0.2
12.0	1100	-0.3
12.0	1150	-0.3
14.2	1200	1.9
14.4	1250	2.1
14.6	1300	2.3
14.6	1350	2.3
14.4	1400	2.1
14.7	1450	2.4
14.2	1500	1.9
14.1	1550	1.8
13.9	1600	1.6

CH6 Processing Gain
1 MB Data Rate

13.8	1650	1.5
13.6	1700	1.3
13.7	1750	1.4
13.8	1800	1.5
13.8	1850	1.5
13.7	1900	1.4
13.6	1950	1.3
13.7	2000	1.4
13.8	2050	1.5
13.9	2100	1.6
14.0	2150	1.7
13.9	2200	1.6
14.2	2250	1.9
14.3	2300	2.0
14.3	2350	2.0
14.4	2400	2.1
14.5	2450	2.2
14.3	2500	2.0
14.2	2550	1.9
14.0	2600	1.7
13.9	2650	1.6
13.8	2700	1.5
13.9	2750	1.6
14.0	2800	1.7
13.8	2850	1.5
14.0	2900	1.7
14.1	2950	1.8
14.0	3000	1.7
13.9	3050	1.6
14.0	3100	1.7
14.1	3150	1.8
14.4	3200	2.1
14.5	3250	2.2
14.8	3300	2.5
14.7	3350	2.4
15.0	3400	2.7
14.8	3450	2.5
14.6	3500	2.3
14.5	3550	2.2
14.4	3600	2.1
14.3	3650	2.0
14.3	3700	2.0
14.5	3750	2.2
14.7	3800	2.4
14.7	3850	2.4
14.6	3900	2.3
14.7	3950	2.4
14.8	4000	2.5
14.7	4050	2.4
14.5	4100	2.2
14.9	4150	2.6
15.2	4200	2.9

CH6 Processing Gain
1 MB Data Rate

15.3	4250	3.0
15.6	4300	3.3
15.7	4350	3.4
15.9	4400	3.6
15.6	4450	3.3
15.4	4500	3.1
15.1	4550	2.8
15.0	4600	2.7
14.8	4650	2.5
14.7	4700	2.4
14.8	4750	2.5
15.1	4800	2.8
15.2	4850	2.9
15.0	4900	2.7
15.2	4950	2.9
15.1	5000	2.8
15.2	5050	2.9
15.0	5100	2.7
15.4	5150	3.1
16.0	5200	3.7
16.8	5250	4.5
17.7	5300	5.4
18.3	5350	6.0
19.8	5400	7.5
21.1	5450	8.8
21.9	5500	9.6
23.3	5550	11.0
24.5	5600	12.2
24.4	5650	12.1
24.7	5700	12.4
23.1	5750	10.8
21.8	5800	9.5
20.3	5850	8.0
19.8	5900	7.5
18.3	5950	6.0
17.8	6000	5.5
17.1	6050	4.8
16.4	6100	4.1
16.1	6150	3.8
15.9	6200	3.6
16.0	6250	3.7
16.2	6300	3.9
16.3	6350	4.0
16.2	6400	3.9
16.2	6450	3.9
16.1	6500	3.8
16.2	6550	3.9
16.0	6600	3.7
16.1	6650	3.8
17.7	6700	5.4
17.7	6750	5.4
17.6	6800	5.3

CH6 Processing Gain
1 MB Data Rate

17.9	6850	5.6
18.1	6900	5.8
17.8	6950	5.5
17.9	7000	5.6
17.3	7050	5.0
17.1	7100	4.8
17.0	7150	4.7
17.2	7200	4.9
17.5	7250	5.2
17.8	7300	5.5
17.9	7350	5.6
18.0	7400	5.7
17.8	7450	5.5
17.9	7500	5.6
17.7	7550	5.4
17.6	7600	5.3
17.8	7650	5.5
18.2	7700	5.9
18.6	7750	6.3
19.3	7800	7.0
19.6	7850	7.3
19.9	7900	7.6
19.8	7950	7.5
19.9	8000	7.6
19.7	8050	7.4
19.5	8100	7.2
19.6	8150	7.3
19.7	8200	7.4
20.1	8250	7.8
20.5	8300	8.2
20.4	8350	8.1
20.8	8400	8.5
20.9	8450	8.6
20.9	8500	8.6
Processing Gain (dB) @ 80th Percentile =		14.0

Processing Gain Channel 6 (fc=2437MHz) @ 1Mbps

