

Company: Actiontec Electronics Inc.

Test of: M6240V
To: FCC CFR 47 Part 15 Subpart E 15.407

Report No.: ATEC06-U8b Rev A

RADIATED TEST REPORT



RADIATED TEST REPORT

FROM



Test of: Actiontec Electronics Inc. M6240V
to

To: FCC CFR 47 Part 15 Subpart E 15.407

Test Report Serial No.: ATEC06-U8b Rev A

Note: this report is one of a set of three reports that together address the requirements for FCC 15.407

Report Number	Test Report Type
ATEC06-U8a	Conducted Test Report
ATEC06-U8b	Radiated Test Report

This report supersedes: NONE

Applicant: Actiontec Electronics Inc.
760 N Mary Avenue
Sunnyvale, 94085
USA

Product Function: Gigabit Wireless Router

Issue Date: 28th July 2015

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

Table of Contents

1. ACCREDITATION, LISTINGS & RECOGNITION.....	4
1.1. TESTING ACCREDITATION.....	4
1.2. RECOGNITION	5
1.3. PRODUCT CERTIFICATION	6
2. DOCUMENT HISTORY	7
3. TEST RESULT CERTIFICATE.....	8
4. REFERENCES AND MEASUREMENT UNCERTAINTY	9
4.1. Normative References	9
4.2. Test and Uncertainty Procedure.....	10
5. PRODUCT DETAILS AND TEST CONFIGURATIONS.....	11
5.1. Technical Details	11
5.2. Scope Of Test Program	12
5.3. Equipment Model(s) and Serial Number(s)	14
5.4. Antenna Details	14
5.5. Cabling and I/O Ports	14
5.6. Test Configurations.....	15
5.7. Equipment Modifications	15
5.8. Deviations from the Test Standard	15
6. TEST SUMMARY	16
7. TEST EQUIPMENT CONFIGURATION(S)	17
8. MEASUREMENT AND PRESENTATION OF TEST DATA	20
9. TEST RESULTS	21
9.1. Radiated	21
9.1.1. Radiated Spurious Emissions	21
9.1.2. Restricted Band-Edge Emissions	29
9.1.3. Digital Emissions.....	37
A. APPENDIX - GRAPHICAL IMAGES	39
A.1. Radiated	40
A.1.1. Restricted Band Emissions.....	40

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



American Association for Laboratory Accreditation

Accredited Laboratory

A2LA has accredited

MICOM LABS

Pleasanton, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Presented this 28th day of February 2014.



President & CEO
For the Accreditation Council
Certificate Number 2381.01
Valid to November 30, 2015



For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC06-U8b Rev A
Issue Date: 28th July 2015
Page: 5 of 46

1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)

Industry Canada – Certification Body, CAB Identifier – US0159

Europe – Notified Body (NB), NB Identifier – 2280

Japan – Recognized Certification Body (RCB), RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC06-U8b Rev A
Issue Date: 28th July 2015
Page: 7 of 46

2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	28 th July 2015	Initial release.
.		
.		
.		
.		
.		

In the above table the latest report revision will replace all earlier versions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC06-U8b Rev A
Issue Date: 28th July 2015
Page: 8 of 46

3. TEST RESULT CERTIFICATE

Manufacturer: Actiontec Electronics Inc.
760 N Mary Avenue
Sunnyvale
94085 USA

Model: M6240V

Type Of Equipment: Gigabit Wireless Router

S/N's: SB32522060009

Test Date(s): 19 - 22 June 2015

Tested By: MiCOM Labs, Inc.
575 Boulder Court
Pleasanton
California 94566 USA

Telephone: +1 925 462 0304
Fax: +1 925 462 0306

Website: www.micomlabs.com

STANDARD(S)

FCC CFR 47 Part 15 Subpart E 15.407
Radiated RF Requirements

TEST RESULTS

EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:


1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



TESTING CERT #2381.01


Graeme Grieve
Quality Manager MiCOM Labs, Inc.

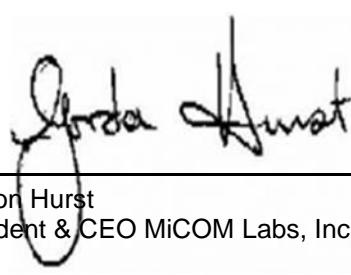
Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 662911	Oct 31 2013	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band
II	KDB 905462 D07 v01	10 th June 2015	Test guidance to demonstrate compliance for U-NII devices subject to DFS requirements.
III	KDB 926956 D01 v01r02	June 3,2014	U-NII Device Transition Plan
IV	KDB 443999 V01r3	17 th October 2014	Approval of DFS UNII The current interim procedures to approve UNII devices operating in the 5470 - 5725 MHz band with radar detection and DFS capabilities
V	KDB 789033 D02 v01	6 th June 2014	General UNII Test Procedures New Rules V01
VI	A2LA	June 2015	R105 - Requirement's When Making Reference to A2LA Accreditation Status
VII	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
VIII	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
IX	CISPR 22	2008	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement
X	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
XI	FCC 06-96	Jun 3 2006	Memorandum Opinion and Order
XII	FCC 47 CFR Part 15.407	2014	Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices
XIII	ICES-003	Issue 5 2012	Spectrum Management and Telecommunications; Interference-Causing Equipment Standard. Information Technology Equipment (ITE) – Limits and methods of measurement.
XIV	M 3003	Edition 3 Nov. 2012	Expression of Uncertainty and Confidence in Measurements
XV	RSS-Gen Issue 4	November 2014	General Requirements and Information for the Certification of Radiocommunication Equipment
XVI	KDB 644545 D03 v01	August 14th 2014	Guidance for IEEE 802.11ac New Rules v01
XVII	FCC 47 CFR Part 2.1033	2014	FCC requirements and rules regarding photographs and test setup diagrams.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

Details	Description
Purpose:	Test of the Actiontec Electronics Inc. M6420V to FCC CFR 47 Part 15 Subpart E 15.407. Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices
Applicant:	Actiontec Electronics Inc. 760 N Mary Avenue Sunnyvale 94085 USA
Manufacturer:	As Applicant
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	ATEC06-U8b Rev A
Date EUT received:	15 th June 2015
Standard(s) applied:	FCC CFR 47 Part 15 Subpart E 15.407
Dates of test (from - to):	19 - 22 June 2015
No of Units Tested:	2
Type of Equipment:	Gigabit Wireless Router
Product Family Name:	GbE 11ac Fiber Gateway
Model(s):	M6240V (device tested) M6240 M6240
Location for use:	Indoor
Declared Frequency Range(s):	5150 - 5250 MHz; 5725 - 5850 MHz;
Primary function of equipment:	Gigabit Wireless Router
Secondary function of equipment:	Residential Gateway
Type of Modulation:	OFDM
EUT Modes of Operation:	802.11a; 802.11ac-80; 802.11n HT-20; 802.11n HT-40;
Transmit/Receive Operation:	Transceiver - Half Duplex
Rated Input Voltage and Current:	AC/ DC adaptor (adaptor sold with unit) 12 V DC/3.5A
Operating Temperature Range:	Declared Range 0°C to 40°C
ITU Emission Designator:	802.11a: 16M4D1D 802.11ac-80: 75M9D1D 802.11n HT-20: 17M7D1D 802.11n HT-40: 36M2D1D
Equipment Dimensions:	11.0 x 1.5 x 7 inches
Weight:	1.6 lbs
Hardware Rev:	AM3
Software Rev:	62.0.10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

5.2. Scope Of Test Program

Actiontec Electronics Inc. M6240V

The scope of the test program was to test the Actiontec Electronics Inc. M6240V, configurations in the frequency ranges 5150 - 5250 MHz; 5725 - 5850 MHz; for compliance against the following specification:

FCC CFR 47 Part 15 Subpart E 15.407

Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices

Manufacturers Declaration of Similarity

Re: FCC ID: LNQM6240V

Actiontec Models: M6240V, M6240, M6240L

To whom it may concern:

We, Actiontec Electronics, Inc., hereby declare the above mentioned 3 models have electrically identical Wireless circuitry with the same electromagnetic emissions and electromagnetic compatibility characteristics.

The differences among these 3 models are as follows –

M6240V – GbE 11ac Fiber Gateway with MoCA LAN/WAN and VoIP

M6240 – GbE 11ac Fiber Gateway with MoCA LAN, without MoCA WAN/VoIP

M6240L – GbE 11ac Fiber Gateway with MoCA LAN/VoIP, without MoCA WAN

Actiontec Electronics Inc. M6240V



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	Wireless Router	Actiontec	M6240V	SB32522060009
EUT	Power Adapter 100 - 240Vac 50/60Hz 1.0A 12 Vdc 3.5 A	Actiontec	NBS40C120350VU	1512
Support	Laptop PC	IBM	Thinkpad	None

5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	Galtronics	Custom PCB	Dipole	3.0	2.9	360	-	5150 - 5250
integral	Galtronics	Custom PCB	Dipole	3.0	2.0	360	-	5725 - 5850

BF Gain - Beamforming Gain
 Dir BW - Directional BeamWidth
 X-Pol - Cross Polarization

5.5. Cabling and I/O Ports

Port Type	Max Cable Length	# Of Ports	Screened	Conn Type	Data Type
Ethernet	100m	4	N	RJ45	Packet Data
Ethernet	100m	1	N	RJ45	Packet Data
USB	15m	2	N	USB 3.0	Digital
Optical	SFP	1	N		Digital

5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s) (802.11a/b/g/n/ac)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
5150 - 5250 MHz				
802.11a	6	5,180.00	5,200.00	5,240.00
802.11ac-80	29.3	5,210.00	--	5,210.00
802.11n HT-20	6.5	5,180.00	--	--
802.11n HT-40	13.5	5,190.00	--	--
5725 - 5850 MHz				
802.11a	6	5,745.00	5,785.00	5,825.00

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC06-U8b Rev A
Issue Date: 28th July 2015
Page: 16 of 46

6. TEST SUMMARY


List of Measurements

Test Header	Result	Data Link
(b)(2) Radiated	Complies	-
i).. Restricted Band Emissions	Complies	View Data
ii).. Restricted Band-Edge Emissions	Complies	View Data
iii).. 5.8 GHz Band-Edge Emissions	Complies	-
iv).. Digital Emissions	Complies	-

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

7. TEST EQUIPMENT CONFIGURATION(S)

Radiated Emissions testing was performed using the set-up shown in the diagram below.

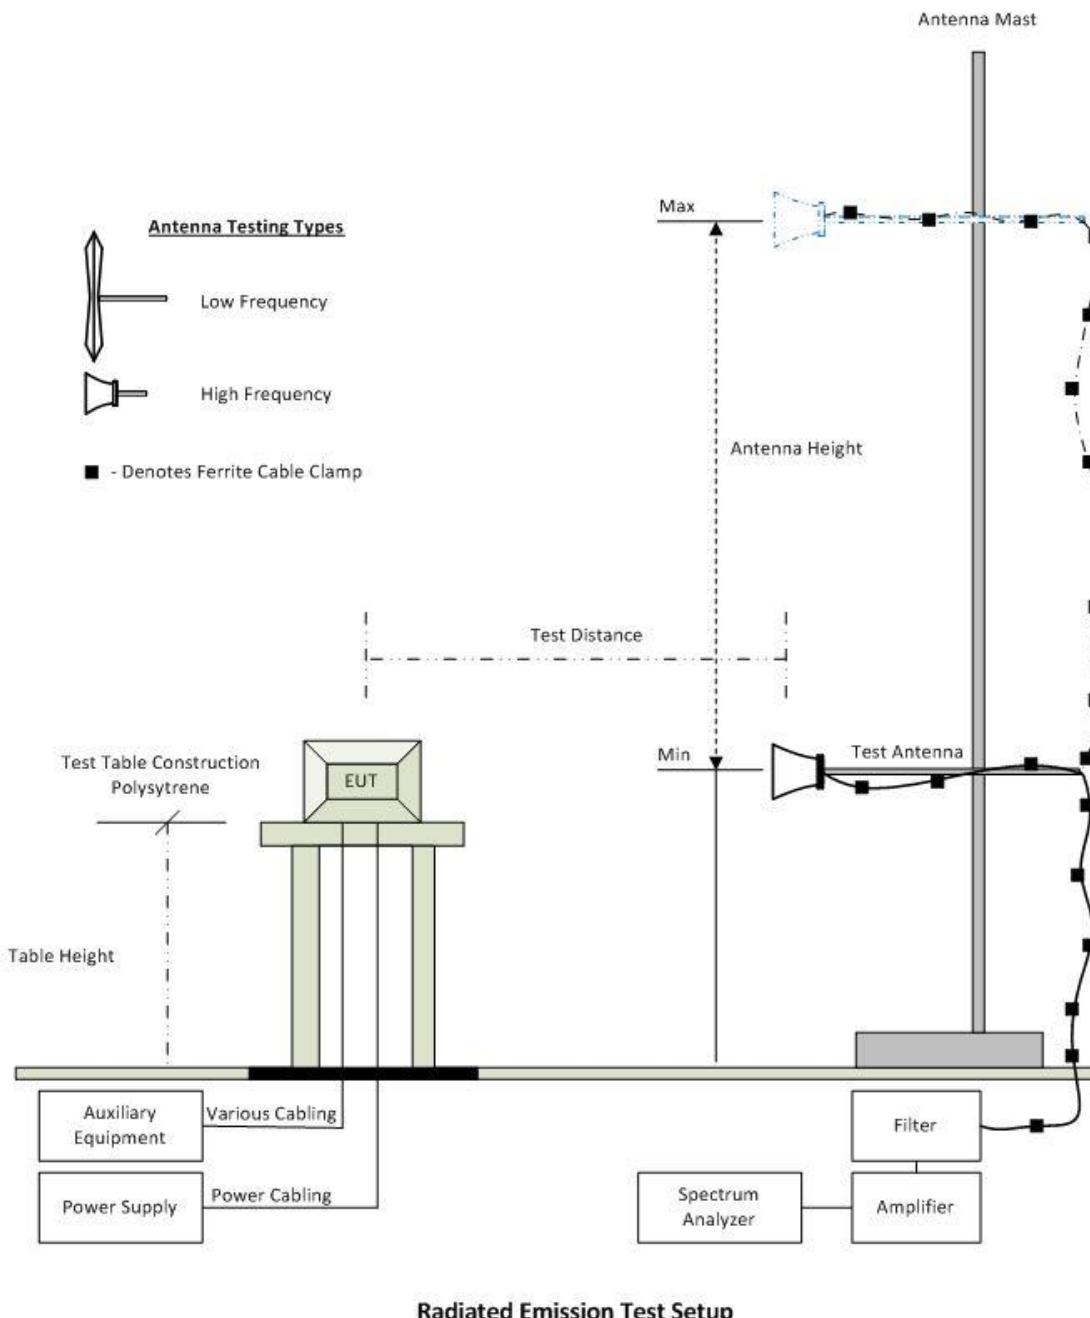

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC06-U8b Rev A
Issue Date: 28th July 2015
Page: 18 of 46

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	04 Dec 2015
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CY101	04R08507	Not Required
193	Receiver 20 Hz to 7 GHz	Rhode & Schwarz	ESI 7	838496/007	14 Jan 2016
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	31 Jul 2015
301	5470 to 5725 MHz Notch Filter	Microtronics	RBC50704	001	08 Oct 2015
302	5150 to 5350 MHz Notch Filter	Microtronics	BRC50703	002	08 Oct 2015
303	5725 to 5875 MHz Notch filter	Microtronics	BRC50705	003	08 Oct 2015
310	SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001	30 Oct 2015
330	Variac 0-280 Vac	Staco Energy Co	3PN1020B	0546	Cal when used
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	14 Aug 2015
341	900MHz Notch Filter	EWT	EWT-14-0199	H1	08 Oct 2015
342	2.4 GHz Notch Filter	EWT	EWT-14-0203	H1	08 Oct 2015
343	5.15 GHz Notch Filter	EWT	EWT-14-0200	H1	08 Oct 2015
344	5.35 GHz Notch Filter	EWT	EWT-14-0201	H1	08 Oct 2015
345	5.46 GHz Notch Filter	EWT	EWT-14-0202	H1	08 Oct 2015
346	1.6 TO 10GHz High Pass Filter	EWT	EWT-57-0112	H1	07 Oct 2015
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	08 Oct 2015
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	17 Jul 2015
393	DC - 1050 MHz Low Pass Filter	Microcircuits	VLFX-1050	N/A	08 Oct 2015
396	2.4 GHz Notch Filter	Microtronics	BRM50701	001	07 Oct 2015
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	23 Oct 2015
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	10 Oct 2015
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	28 May 2016
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	25 Aug 2015
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	25 Aug 2015
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	25 Aug 2015
465	Low Pass Filter DC-1000 MHz	Mini-Circuits	NLP-1200+	VUU01901402	25 Aug 2015
466	Low Pass Filter DC-1500 MHz	Mini-Circuits	NLP-1750+	VUU10401438	25 Aug 2015
467	2495 to 2650 MHz notch filter	MicroTronics	BRM50709	011	05 Sep 2015
468	Low pass filter	Mini Circuits	SLP-550	None	30 Sep 2015
469	Low pass filter	Mini Circuit	SLP-1000	None	30 Sep 2015
470	High Pass filter	Mini Circuits	SHP-700	None	30 Sep 2015
502	Test Software for Radiated Emissions	EMISoft	Vasona	Version 5 Build 59	Not Required
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
CC05	Confidence Check	MiCOM	CC05	None	01 Aug 2015
VLF-1700	Low pass filter DC-1700 MHz	Mini Circuits	VLF-1700	None	30 Sep 2015

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "MiTest" Automated Test System" (Patent Pending)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

9. TEST RESULTS

9.1. Radiated

9.1.1. Radiated Spurious Emissions

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Radiated Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (b), 15.205, 15.209	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Spurious and Band-Edge Emissions

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Undesirable Measurement were per the Radiated Test Set-up specified in this document.

15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Limits for Restricted Bands (15.205, 15.209)

Peak emission: 74 dBuV/m

Average emission: 54 dBuV/m

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

Example:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dB μ V/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz equates to 68.23 dBuV/m

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

Level (dBmV/m) = 20 * Log (level (mV/m))

40 dBmV/m = 100 mV/m

48 dBmV/m = 250 mV/m

Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

608-614 MHz but are subject to compliance within the other restricted bands.

- (6) Transmitters operating under the provisions of subparts D or F of this part.
- (7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC06-U8b Rev A
Issue Date: 28th July 2015
Page: 25 of 46

Equipment Configuration for Radiated Spurious - Restricted Band Emissions

Variant:	802.11a	Duty Cycle (%):	99
Data Rate:	6 Mbit/s	Antenna Gain (dBi):	5.90
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
Channel Frequency (MHz):	5180.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
#1	6906.58	48.54	7.15	-7.54	48.15	Peak (Scan)	Horizontal	100	0	0.0	--	
#2	6906.58	51.77	7.15	-7.54	51.38	Max Avg	Horizontal	103	331	54.0	-2.6	Pass
#3	6906.58	53.83	7.15	-7.54	53.44	Max Peak	Horizontal	103	331	68.2	-14.8	Pass
#4	10366.21	32.51	9.03	-5.23	36.31	Max Avg	Horizontal	100	287	54.0	-17.7	Pass
#5	10366.21	44.12	9.03	-5.23	47.92	Max Peak	Horizontal	100	287	68.2	-20.3	Pass
#6	10366.21	43.38	9.03	-5.23	47.18	Peak (Scan)	Horizontal	100	0	0.0	--	

Equipment Configuration for Radiated Spurious - Restricted Band Emissions

Variant:	802.11a	Duty Cycle (%):	99
Data Rate:	6 Mbit/s	Antenna Gain (dBi):	5.90
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
Channel Frequency (MHz):	5200.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	6933.35	47.88	7.13	-7.49	47.52	Peak (Scan)	Horizontal	100	0	0.0	--	
2	10406.86	41.15	9.17	-4.99	45.33	Peak (Scan)	Horizontal	100	0	0.0	--	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC06-U8b Rev A
Issue Date: 28th July 2015
Page: 26 of 46

Equipment Configuration for Radiated Spurious - Restricted Band Emissions

Variant:	802.11a	Duty Cycle (%):	99
Data Rate:	6 Mbit/s	Antenna Gain (dBi):	5.90
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
Channel Frequency (MHz):	5240.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	6960.04	47.30	7.33	-7.45	47.18	Peak (Scan)	Horizontal	100	0	0.0	--	
2	10440.20	41.56	9.09	-4.75	45.90	Peak (Scan)	Horizontal	100	0	0.0	--	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC06-U8b Rev A
Issue Date: 28th July 2015
Page: 27 of 46

Equipment Configuration for Radiated Spurious - Restricted Band Emissions

Variant:	802.11a	Duty Cycle (%):	99
Data Rate:	6 Mbit/s	Antenna Gain (dBi):	5.90
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
Channel Frequency (MHz):	5745.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
#1	11494.83	36.53	9.46	-4.83	41.16	Max Avg	Horizontal	100	192	54.0	-12.8	Pass
#2	11494.83	47.99	9.46	-4.83	52.62	Max Peak	Horizontal	100	192	68.2	-15.6	Pass
#3	11494.83	48.54	9.46	-4.83	53.17	Peak (Scan)	Horizontal	151	0	0.0	--	

Equipment Configuration for Radiated Spurious - Restricted Band Emissions

Variant:	802.11a	Duty Cycle (%):	99
Data Rate:	6 Mbit/s	Antenna Gain (dBi):	5.90
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
Channel Frequency (MHz):	5785.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	5777.80	55.00	6.49	-10.48	51.01	Peak (Scan)	Horizontal	200	0	0.0	--	
2	11571.86	41.70	9.59	-4.63	46.66	Max Avg	Horizontal	110	46	54.0	-7.3	Pass
3	11571.86	53.42	9.59	-4.63	58.38	Max Peak	Horizontal	110	46	68.2	-9.9	Pass
4	11571.86	51.87	9.59	-4.63	56.83	Peak (Scan)	Horizontal	100	0	0.0	--	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC06-U8b Rev A
Issue Date: 28th July 2015
Page: 28 of 46

Equipment Configuration for Radiated Spurious - Restricted Band Emissions

Variant:	802.11a	Duty Cycle (%):	99
Data Rate:	6 Mbit/s	Antenna Gain (dBi):	5.90
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
Channel Frequency (MHz):	5825.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	5823.73	46.25	6.53	-10.25	42.53	Max Avg	Horizontal	177	24	54.0	-11.5	Pass
2	5823.73	56.47	6.53	-10.25	52.75	Max Peak	Horizontal	177	24	68.2	-15.5	Pass
3	5823.73	45.20	6.53	-10.25	41.48	Max Avg	Horizontal	100	20	54.0	-12.5	Pass
4	5823.73	55.76	6.53	-10.25	52.04	Max Peak	Horizontal	100	20	68.2	-16.2	Pass
5	5823.73	49.91	6.53	-10.25	46.19	Peak (Scan)	Horizontal	200	0	0.0	--	
6	11654.79	42.16	9.65	-4.46	47.35	Max Avg	Horizontal	135	48	54.0	-6.7	Pass
7	11654.79	52.97	9.65	-4.46	58.16	Max Peak	Horizontal	135	48	68.2	-10.1	Pass
8	11654.79	52.59	9.65	-4.46	57.78	Peak (Scan)	Horizontal	148	0	0.0	--	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

9.1.2. Restricted Band-Edge Emissions

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Radiated Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (b), 15.205, 15.209	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Spurious and Band-Edge Emissions

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Undesirable Measurement were per the Radiated Test Set-up specified in this document.

15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Limits for Restricted Bands (15.205, 15.209)

Peak emission: 74 dBuV/m

Average emission: 54 dBuV/m

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

Example:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dB μ V/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz equates to 68.23 dBuV/m

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

$$\text{Level (dBmV/m)} = 20 * \log (\text{level (mV/m)})$$

$$40 \text{ dBmV/m} = 100 \text{ mV/m}$$

$$48 \text{ dBmV/m} = 250 \text{ mV/m}$$

Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

(4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.

(5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.

(6) Transmitters operating under the provisions of subparts D or F of this part.

(7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.

(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC06-U8b Rev A
Issue Date: 28th July 2015
Page: 33 of 46

Peak Limit 74 dB μ V, Average Limit 54.0 dB μ V

Galtronics Custom PCB		BandEdge Freq	Peak	Average	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB μ V	dB μ V	
802.11a	5180	5150.00	62.61	49.95	23
802.11ac-80	5210	5150.00	67.00	53.13	15
802.11n HT-20	5180	5150.00	61.31	48.79	23
802.11n HT-40	5190	5150.00	64.71	51.47	23

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC06-U8b Rev A
Issue Date: 28th July 2015
Page: 34 of 46

Equipment Configuration for Restricted Lower Band-Edge Emissions

Variant:	802.11a	Duty Cycle (%):	99
Data Rate:	6 Mbit/s	Antenna Gain (dBi):	5.90
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
Channel frequency (MHz):	5180.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
#1	5148.70	55.46	6.08	-11.59	49.95	Max Avg	Vertical	110	87	54.0	-4.1	Pass
#2	5150.00	68.12	6.08	-11.59	62.61	Max Peak	Vertical	110	87	74.0	-11.4	Pass

Equipment Configuration for Restricted Lower Band-Edge Emissions

Variant:	802.11ac-80	Duty Cycle (%):	99
Data Rate:	29.3 Mbit/s	Antenna Gain (dBi):	5.90
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
Channel frequency (MHz):	5210.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
#1	5150.00	58.64	6.08	-11.59	53.13	Max Avg	Vertical	95	-4	54.0	-0.9	Pass
#2	5150.00	72.51	6.08	-11.59	67.00	Max Peak	Vertical	95	-4	74.0	-7.0	Pass

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC06-U8b Rev A
Issue Date: 28th July 2015
Page: 35 of 46

Equipment Configuration for Restricted Lower Band-Edge Emissions

Variant:	802.11n HT-20	Duty Cycle (%):	99
Data Rate:	6.5 Mbit/s	Antenna Gain (dBi):	5.90
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
Channel frequency (MHz):	5180.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
#1	5150.00	54.30	6.08	-11.59	48.79	Max Avg	Vertical	108	88	54.0	-5.2	Pass
#2	5150.00	66.82	6.08	-11.59	61.31	Max Peak	Vertical	108	88	74.0	-12.7	Pass

Equipment Configuration for Restricted Lower Band-Edge Emissions

Variant:	802.11n HT-40	Duty Cycle (%):	99
Data Rate:	13.5 Mbit/s	Antenna Gain (dBi):	5.90
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
Channel frequency (MHz):	5190.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
#1	5148.70	70.22	6.08	-11.59	64.71	Max Peak	Vertical	108	88	74.0	-9.3	Pass
#2	5150.00	56.98	6.08	-11.59	51.47	Max Avg	Vertical	108	88	54.0	-2.5	Pass

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

5.8 GHz Band-Edge Emissions

Emissions for EUT operating in Frequency Band 5725 – 5850 MHz

Limit -27 dBm\MHz

Operational Mode	5725 MHz		5850 MHz	
	Emission level (dBm/MHz)	Power Setting	Emission level (dBm/MHz)	Power Setting
a	-40.00	23	-38.66	23
n HT-20	-40.00	23	-38.66	23
n HT-40	-38.66	23	-38.66	23
ac-80	-40.00	23	-40.00	23

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

9.1.3. Digital Emissions

FCC, Part 15 Subpart C §15.205/ §15.209

Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3dB\mu V/m$$


Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log} (\text{level (}\mu\text{V/m)})$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

Test Freq.	2.4/5GHz	Engineer	SB
Variant	Digital Emissions	Temp (°C)	19.5
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	49
Power Setting	idle	Press. (mBars)	998
Antenna	Integral		
Test Notes 1	S/N:GBEA5190700001:Model:M6240V; Part 15B;		
Test Notes 2	F/W:		

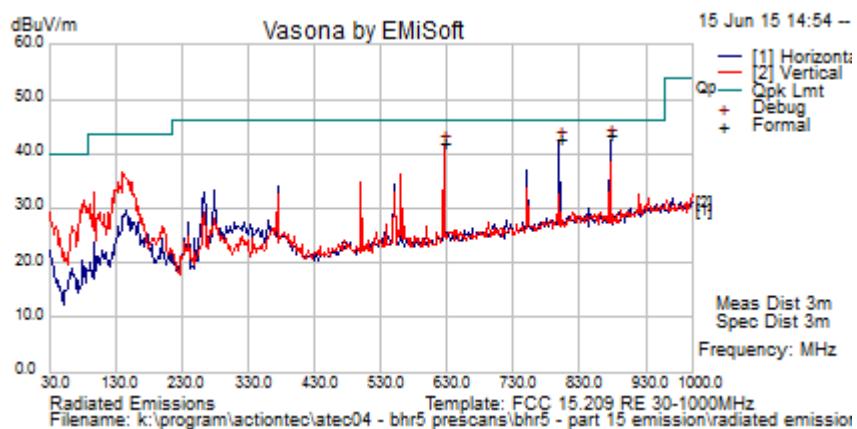

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
874.995	45.1	6.3	-8.0	43.3	Quasi Max	H	99	266	46	-2.7	Pass	
799.204	45.5	6.1	-8.8	42.8	Quasi Max	H	99	320	46	-3.2	Pass	
624.995	47.3	5.7	-10.9	42.0	Quasi Max	V	100	280	46	-4.0	Pass	
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC06-U8b Rev A
Issue Date: 28th July 2015
Page: 39 of 46

A. APPENDIX - GRAPHICAL IMAGES

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

A.1. Radiated

A.1.1. Restricted Band Emissions



RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS


Variant: 802.11a, Test Freq: 5180.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz


VBW: 3 MHz

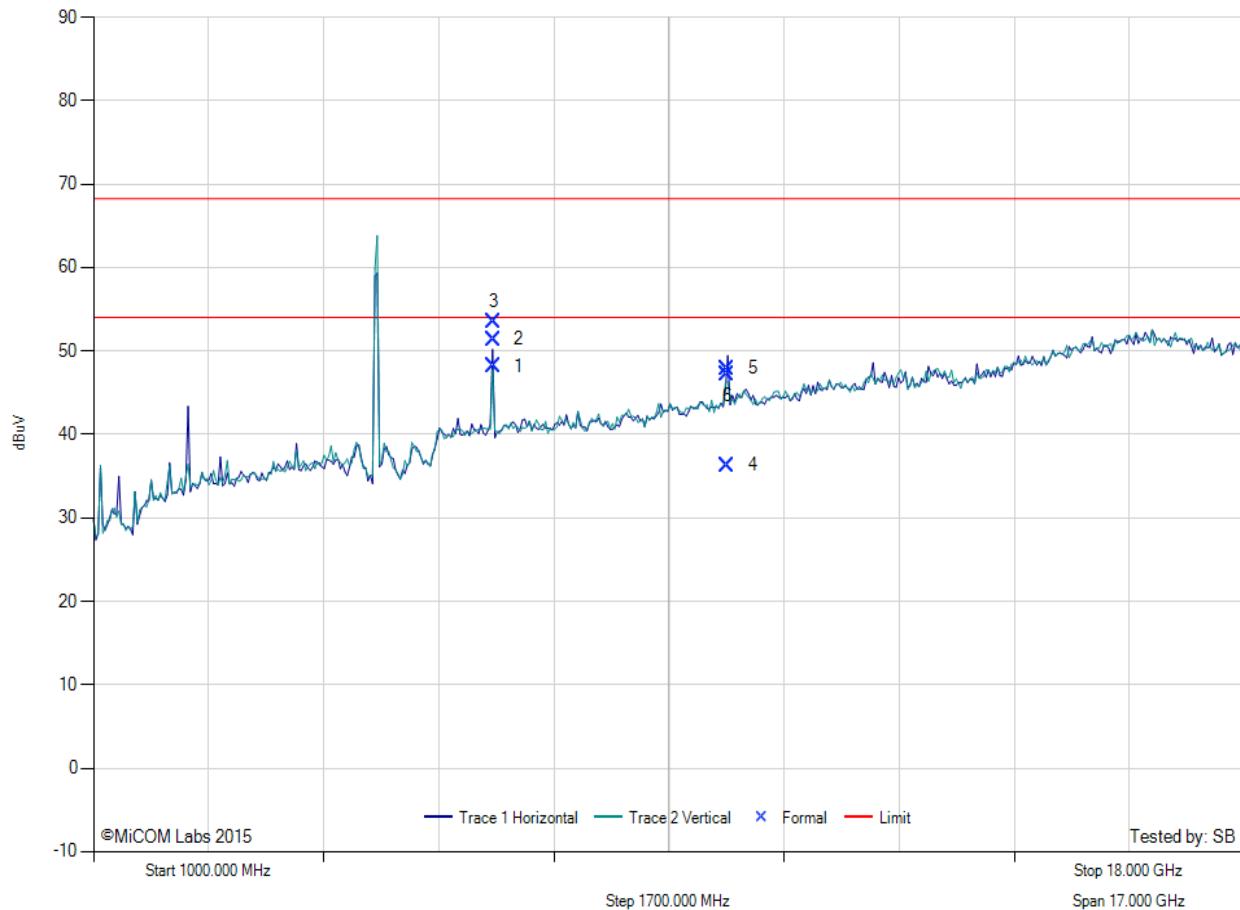

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	6906.58	48.54	7.15	-7.54	48.15	Peak (Scan)	Horizontal	100	0	0.0	--	
2	6906.58	51.77	7.15	-7.54	51.38	Max Avg	Horizontal	103	331	54.0	-2.6	Pass
3	6906.58	53.83	7.15	-7.54	53.44	Max Peak	Horizontal	103	331	68.2	-14.8	Pass
4	10366.21	32.51	9.03	-5.23	36.31	Max Avg	Horizontal	100	287	54.0	-17.7	Pass
5	10366.21	44.12	9.03	-5.23	47.92	Max Peak	Horizontal	100	287	68.2	-20.3	Pass
6	10366.21	43.38	9.03	-5.23	47.18	Peak (Scan)	Horizontal	100	0	0.0	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

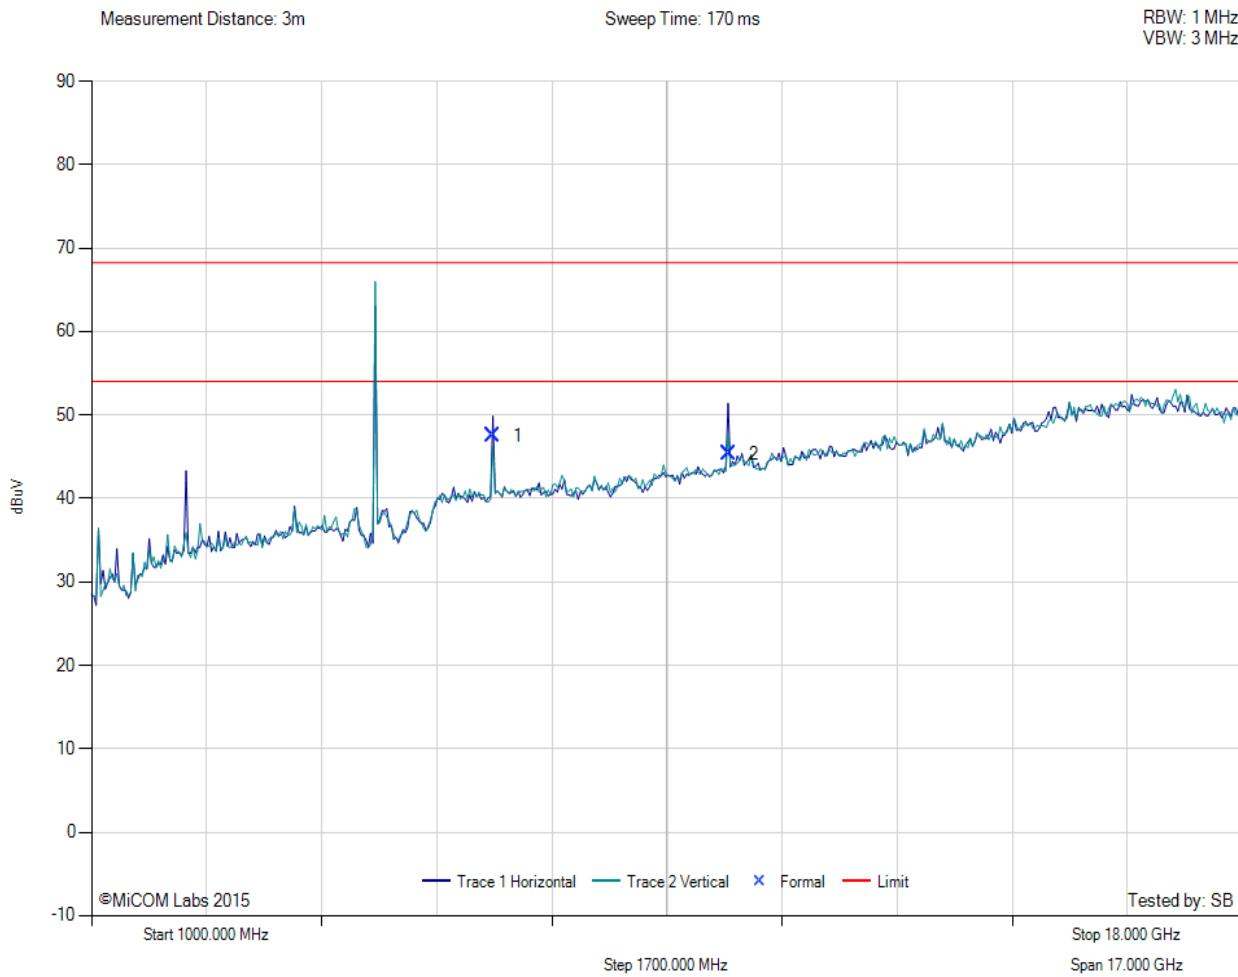

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	6933.35	47.88	7.13	-7.49	47.52	Peak (Scan)	Horizontal	100	0	0.0	--	
2	10406.86	41.15	9.17	-4.99	45.33	Peak (Scan)	Horizontal	100	0	0.0	--	


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Measurement Distance: 3m

Sweep Time: 170 ms


RBW: 1 MHz
 VBW: 3 MHz

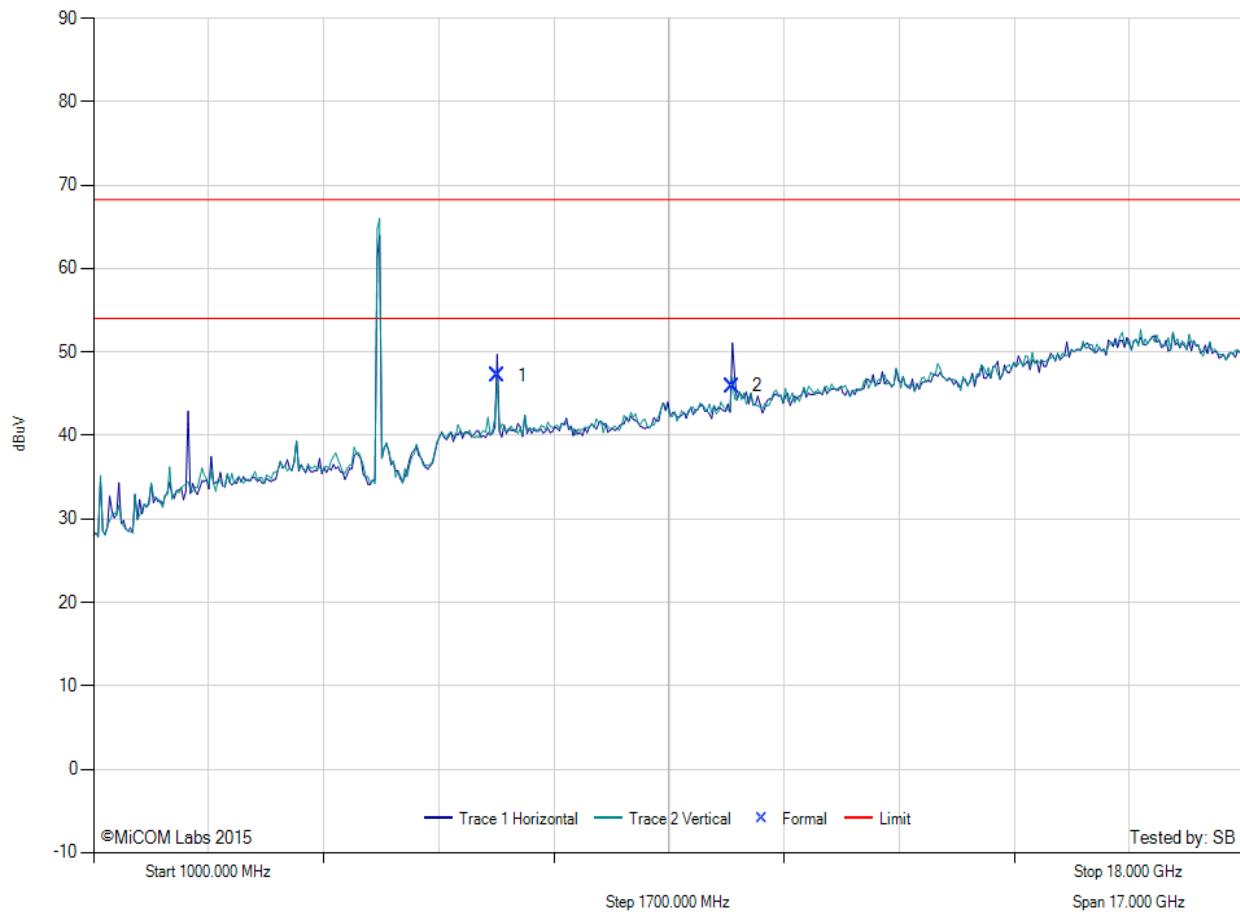

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	6960.04	47.30	7.33	-7.45	47.18	Peak (Scan)	Horizontal	100	0	0.0	--	
2	10440.20	41.56	9.09	-4.75	45.90	Peak (Scan)	Horizontal	100	0	0.0	--	

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

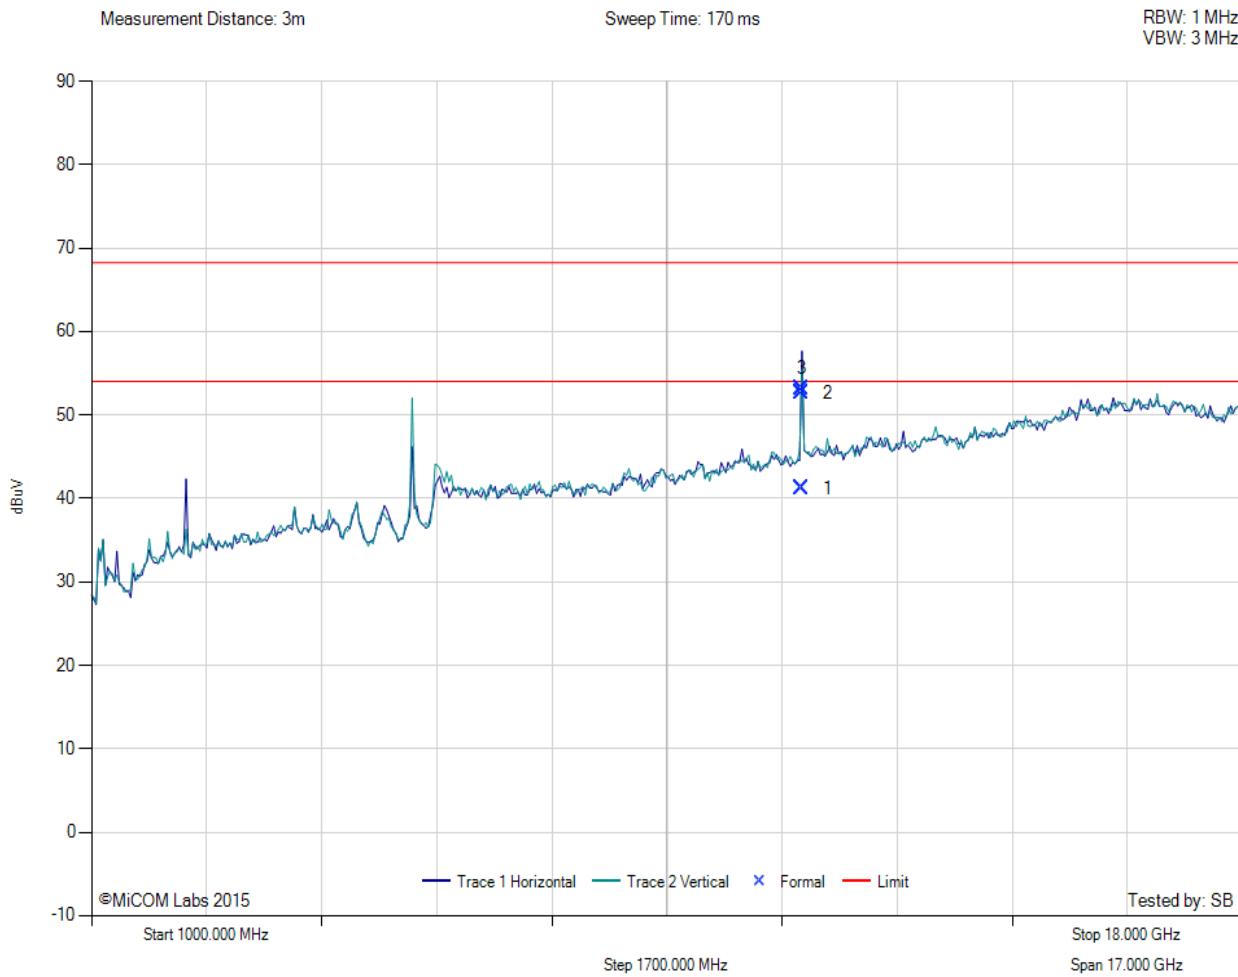

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	11494.83	36.53	9.46	-4.83	41.16	Max Avg	Horizontal	100	192	54.0	-12.8	Pass
2	11494.83	47.99	9.46	-4.83	52.62	Max Peak	Horizontal	100	192	68.2	-15.6	Pass
3	11494.83	48.54	9.46	-4.83	53.17	Peak (Scan)	Horizontal	151	0	0.0	--	

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

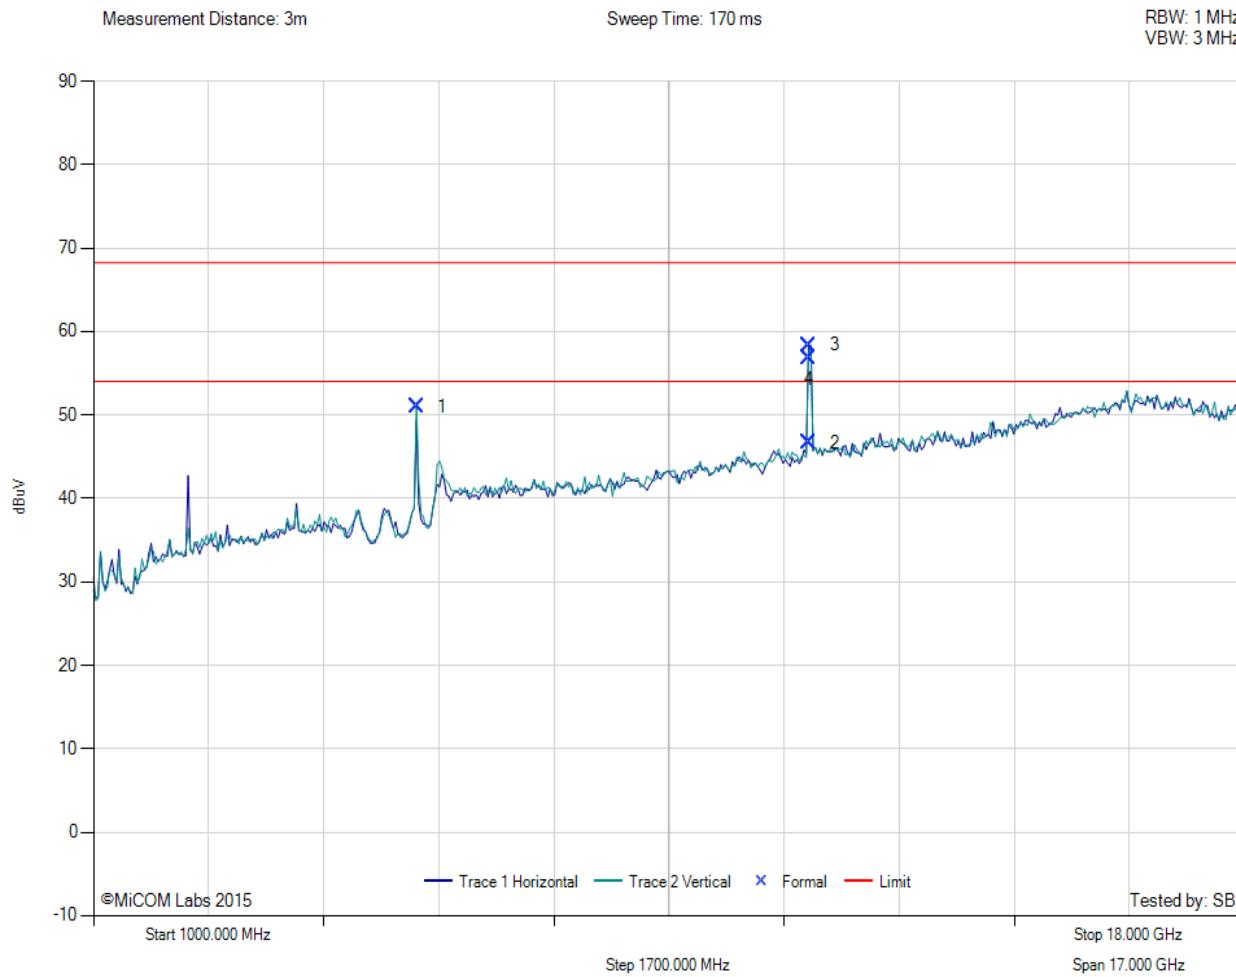

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	5777.80	55.00	6.49	-10.48	51.01	Peak (Scan)	Horizontal	200	0	0.0	--	
2	11571.86	41.70	9.59	-4.63	46.66	Max Avg	Horizontal	110	46	54.0	-7.3	Pass
3	11571.86	53.42	9.59	-4.63	58.38	Max Peak	Horizontal	110	46	68.2	-9.9	Pass
4	11571.86	51.87	9.59	-4.63	56.83	Peak (Scan)	Horizontal	100	0	0.0	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

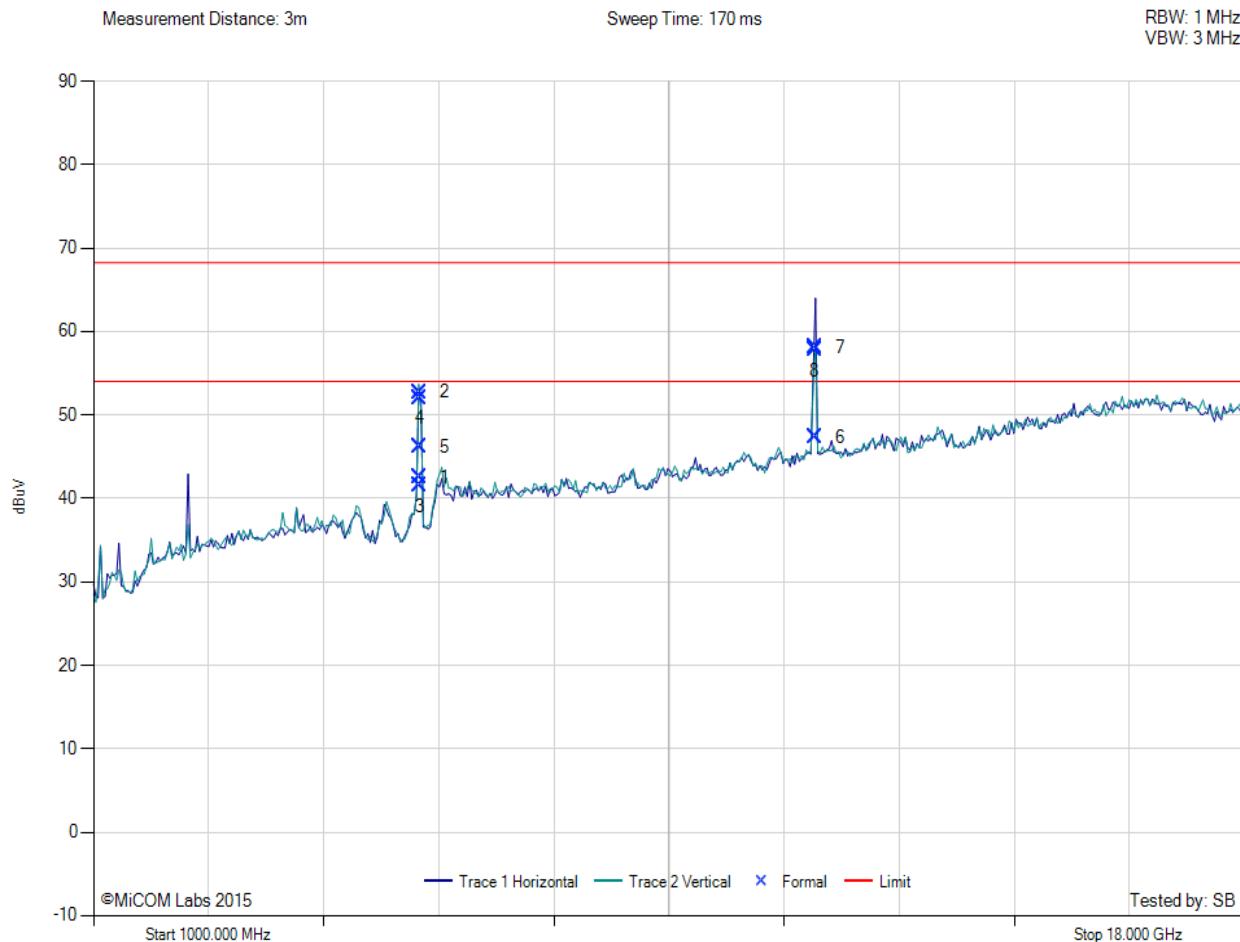

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	5823.73	46.25	6.53	-10.25	42.53	Max Avg	Horizontal	177	24	54.0	-11.5	Pass
2	5823.73	56.47	6.53	-10.25	52.75	Max Peak	Horizontal	177	24	68.2	-15.5	Pass
3	5823.73	45.20	6.53	-10.25	41.48	Max Avg	Horizontal	100	20	54.0	-12.5	Pass
4	5823.73	55.76	6.53	-10.25	52.04	Max Peak	Horizontal	100	20	68.2	-16.2	Pass
5	5823.73	49.91	6.53	-10.25	46.19	Peak (Scan)	Horizontal	200	0	0.0	--	
6	11654.79	42.16	9.65	-4.46	47.35	Max Avg	Horizontal	135	48	54.0	-6.7	Pass
7	11654.79	52.97	9.65	-4.46	58.16	Max Peak	Horizontal	135	48	68.2	-10.1	Pass
8	11654.79	52.59	9.65	-4.46	57.78	Peak (Scan)	Horizontal	148	0	0.0	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com