



FCC RADIO TEST REPORT

FCC ID: LNQSBWD960B

Product: ScreenBeam 960

Trade Mark: Actiontec

Model No.: SBWD960B

Family Model: N/A

Report No.: S19082001504002

Issue Date: 18 Sep. 2019

Prepared for

Actiontec Electronics Inc

3301 Olcott St Santa Clara, CA 95054 United States

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

Tel.: +86-755-6115 6588

Fax.: +86-755-6115 6599

Website: <http://www.ntek.org.cn>

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	SUMMARY OF TEST RESULTS.....	4
3	FACILITIES AND ACCREDITATIONS	5
3.1	FACILITIES.....	5
3.2	LABORATORY ACCREDITATIONS AND LISTINGS	5
3.3	MEASUREMENT UNCERTAINTY	5
4	GENERAL DESCRIPTION OF EUT	6
5	DESCRIPTION OF TEST MODES	8
6	SETUP OF EQUIPMENT UNDER TEST	13
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	13
6.2	SUPPORT EQUIPMENT.....	14
6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS.....	15
7	TEST REQUIREMENTS	17
7.1	CONDUCTED EMISSIONS TEST	17
7.2	RADIATED SPURIOUS EMISSION	22
7.3	6DB BANDWIDTH.....	35
7.4	DUTY CYCLE.....	37
7.5	MAXIMUM OUTPUT POWER.....	39
7.6	POWER SPECTRAL DENSITY	41
7.7	CONDUCTED BAND EDGE MEASUREMENT.....	43
7.8	SPURIOUS RF CONDUCTED EMISSIONS.....	45
7.9	ANTENNA APPLICATION	46
8	TEST RESULTS	47
8.1	DUTY CYCLE.....	47
8.2	MAXIMUM CONDUCTED OUTPUT POWER.....	73
8.3	OCCUPIED CHANNEL BANDWIDTH.....	75
8.4	MAXIMUM POWER SPECTRAL DENSITY LEVEL	125
8.5	BAND EDGE	163
8.6	CONDUCTED RF SPURIOUS EMISSION.....	196

1 TEST RESULT CERTIFICATION

Applicant's name	Actiontec Electronics Inc
Address	3301 Olcott St Santa Clara, CA 95054 United States
Manufacturer's Name1	Actiontec Electronics Inc
Address	3301 Olcott St Santa Clara, CA 95054 United States
Product description	ScreenBeam 960
Product name	ScreenBeam 960
Model and/or type reference	SBWD960B
Family Model	N/A

Measurement Procedure Used:

APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C KDB 174176 D01 Line Conducted FAQ v01r01 FCC KDB 662911 D01 Multiple Transmitter Output v02r01 FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01 ANSI C63.10-2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02	Complied


This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : 23 Aug. 2019 ~ 16 Sep. 2019

Testing Engineer : 
(Eileen Liu)

Technical Manager : 
(Jason Chen)

Authorized Signatory : 
(Sam Chen)

2 SUMMARY OF TEST RESULTS**FCC Part15 (15.247), Subpart C**

Standard Section	Test Item	Verdict	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Maximum Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126
P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR
Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L5516.

IC-Registration The Certificate Registration Number is 9270A.
CAB identifier:CN0074

FCC- Accredited Test Firm Registration Number: 463705.
Designation Number: CN1184

A2LA-Lab. The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized
International Standard ISO/IEC 17025:2005 General requirements for
the competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined
scope and the operation of a laboratory quality management system
(refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang
Street, Bao'an District, Shenzhen 518126 P.R. China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard
uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(>6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^{\circ}\text{C}$
8	Humidity	$\pm 2\%$

4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	ScreenBeam 960
Trade Mark	Actiontec
FCC ID	LNQSBWD960B
Model No.	SBWD960B
Family Model	N/A
Model Difference	N/A
Operating Frequency	2412-2462MHz for 802.11b/g/11n(HT20); 2422-2452 MHz for 802.11n(HT40)
Modulation	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Number of Channels	11 channels for 802.11b/g/11n(HT20); 7 channels for 802.11n(HT40);
Antenna Type	See Table for Filed Antenna
Smart system	☒ SISO for 802.11b/g/n20/n40 ☒ MIMO for 802.11n20/n40
Antenna Gain	See Table for Filed Antenna
Power Rating	☒ DC supply: DC 5V from Adapter.
	☒ Adapter supply: Model: WB-10E05FU Input: 100-240V~50-60Hz 0.4A Max Output: 5V---2A
HW Version	2A
FW Version	9.15.x.0

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

Revision History

[illegible]

5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT40): MCS0) were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report.

Frequency and Channel list for 802.11b/g/n (HT20/HT40):

Channel	Frequency(MHz)
1	2412
2	2417
...	...
5	2432
6	2437
...	...
10	2457
11	2462

Note: $f_c = 2412\text{MHz} + (k-1) \times 5\text{MHz}$ $k=1$ to 11

AC power line Conducted Emission was tested under maximum output power.

The EUT has two modules, module A (8812), module B (8192), four of the same type of antenna, as shown in Figure A shows:

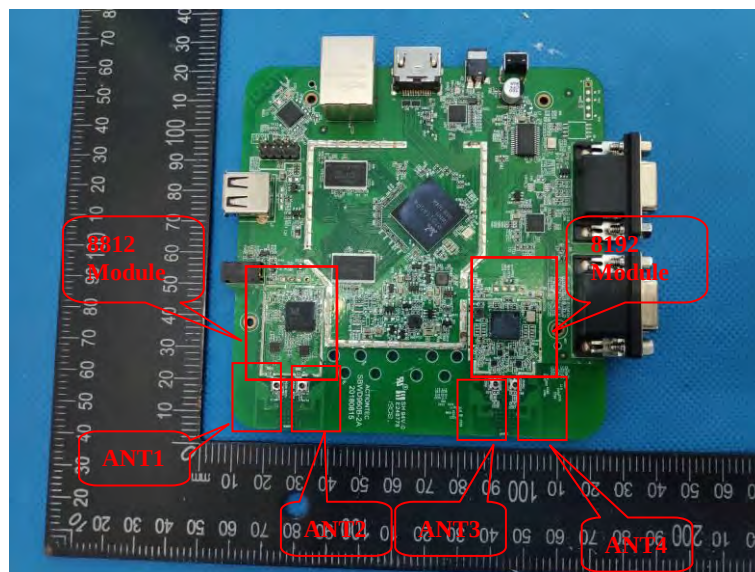


Figure A

Antenna	Antenna Type	Antenna Gain(dBi)
		2.4G
ANT1	PCB	2.80
ANT2	PCB	2.91
ANT3	PCB	3.47
ANT4	PCB	2.52

Mode	Tx/Rx
11b, 11g	1Tx, 1Rx/2Rx
11n(HT20/HT40)	1Tx/2Tx, 2Rx

Modules 8812 For 2.4G Band:

For IEEE 802.11b mode (1TX, 1RX) Only Chain 1 can be used as transmitting/receiving antenna.

For IEEE 802.11g mode (1TX, 2RX) The EUT can support both 1TX and 2TX functions.

For 1TX Only Chain 1 can be used as transmitting antenna. Chain 1 and Chain 2 could receive simultaneously.

For IEEE 802.11n mode (1TX/2TX, 2RX) The EUT can support both 1TX and 2TX functions.

For 1TX Only Chain 1 can be used as transmitting antenna. When MCS 0~7 enable without TX-Beamforming/STBC. Chain 1 and Chain 2 could receive simultaneously.

For 2TX Both Chain 1 and Chain 2 can be used as transmitting/receiving antenna.

When TX-Beamforming/STBC enable/MCS 8~15 enable. Chain 1 and Chain 2 could both transmit/receive simultaneously. Only 2TX function was selected to test and record in the report, the 1TX test results were covered by 2TX test results.

Modules 8192 For 2.4G Band:

For IEEE 802.11b mode (1TX, 1RX)

Only Chain 1 can be used as transmitting/receiving antenna. For IEEE 802.11g mode (1TX, 2RX) The EUT can support both 1TX and 2TX functions.

For 1TX Only Chain 1 can be used as transmitting antenna. Chain 1 and Chain 2 could receive simultaneously.

For IEEE 802.11n mode (1TX/2TX, 2RX)

The EUT can support both 1TX and 2TX functions.

For 1TX Only Chain 1 can be used as transmitting antenna. When MCS 0~7 enable without TX-Beamforming/STBC. Chain 1 and Chain 2 could receive simultaneously.

For 2TX Both Chain 1 and Chain 2 can be used as transmitting/receiving antenna. When TX-Beamforming/STBC enable/MCS 8~15 enable. Chain 1 and Chain 2 could both transmit/receive simultaneously.

Only 2TX function was selected to test and record in the report, the 1TX test results were covered by 2TX test results.

Module 8812 and module 8192 are used for different purposes, where 8812 is responsible for Miracast and 8192 are responsible for wireless communication with CMS. When the 8812 is in a Miracast session, the CMS* can still access the receiver's settings through the 8192 wireless adapter.
*: Central management system.

The Control software(tool_WIFI.exe) can control Modules 8812/8192 antenna 1, 2,3,4 ,
For 2.4GHz mode, antenna 1, 2, 3, 4, are transmitting, antenna 1 and 2 or antenna 3 and 4
May simultaneously transmit.

And the data is recorded for radiated emission and band edge.

Modules 8812 For MIMO mode: Directional gain= $[10\log(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$ dBi =5.87dbi in 2.4GHz
802.11 n 2.4GHz has MIMO mode.

Modules 8192 For MIMO mode: Directional gain= $[10\log(10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$ dBi =6.02dbi in 2.4GHz
802.11/n 2.4GHz has MIMO mode.

Note: G1 means antenna gain for ANT 1 in dBi.

G2 means antenna gain for ANT 2 in dBi.

G3 means antenna gain for ANT 3 in dBi.

G4 means antenna gain for ANT 4 in dBi.

N_{ANT} means the number of Antennas.

Test Mode For 8812:

Test Items	Mode	Data Rate	Channel	Ant
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	For beamforming mode			
	11n HT20	MCS0	1/6/11	1+2 3+4
	11n HT40	MCS0	3/6/9	1+2 3+4
	For non-beamforming mode			
	11b/CCK	1 Mbps	1/6/11	1/2 3/4
	11g/BPSK	6 Mbps	1/6/11	1/2 3/4
Power Spectral Density	For beamforming mode			
	11n HT20	MCS0	1/6/11	1+2 3+4
	11n HT40	MCS0	3/6/9	1+2 3+4
	For non-beamforming mode			
	11b/CCK	1 Mbps	1/6/11	1/2 3/4
	11g/BPSK	6 Mbps	1/6/11	1/2 3/4
6dB Spectrum Bandwidth	For beamforming mode			
	11n HT20	MCS0	1/6/11	1/2 3/4
	11n HT40	MCS0	3/6/9	1/2 3/4
	For non-beamforming mode			
	11b/CCK	1 Mbps	1/6/11	1/2 3/4
	11g/BPSK	6 Mbps	1/6/11	1/2 3/4
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	For beamforming mode			
	11n HT20	MCS0	1/6/11	1+2 3+4
	11n HT40	MCS0	3/6/9	1+2 3+4
	For non-beamforming mode			
	11b/CCK	1 Mbps	1/6/11	1/2 3/4
	11g/BPSK	6 Mbps	1/6/11	1/2 3/4

Band Edge Emissions	For beamforming mode			
	11n HT20	MCS0	1/11	1+2 3+4
	11n HT40	MCS0	3/9	1+2 3+4
	For non-beamforming			
	11b/CCK	1 Mbps	1/11	1/2 3/4
	11g/BPSK	6 Mbps	1/11	1/2 3/4

There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for n/ac, after evaluating, beamforming mode has been evaluated to be the worst case, so it was selected to test and record in this test report.


Test Mode For 8192:

Test Items	Mode	Data Rate	Channel	Ant
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1/2, 3/4
	11g/BPSK	6 Mbps	1/6/11	1/2, 3/4
	11n HT20	MCS0	1/6/11	1/2, 3/4
	11n HT40	MCS0	3/6/9	1/2, 3/4
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1/2, 3/4
	11g/BPSK	6 Mbps	1/6/11	1/2, 3/4
	11n HT20	MCS0	1/6/11	1/2, 3/4
	11n HT40	MCS0	3/6/9	1/2, 3/4
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1/2, 3/4
	11g/BPSK	6 Mbps	1/6/11	1/2, 3/4
	11n HT20	MCS0	1/6/11	1/2, 3/4
	11n HT40	MCS0	3/6/9	1/2, 3/4
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11b/CCK	1 Mbps	1/6/11	1/2, 3/4
	11g/BPSK	6 Mbps	1/6/11	1/2, 3/4
	11n HT20	MCS0	1/6/11	1/2, 3/4
	11n HT40	MCS0	3/6/9	1/2, 3/4
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1/2, 3/4
	11g/BPSK	6 Mbps	1/6/11	1/2, 3/4
	11n HT20	MCS0	1/6/11	1/2, 3/4
	11n HT40	MCS0	3/6/9	1/2, 3/4


6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM


For AC Conducted Emission Mode

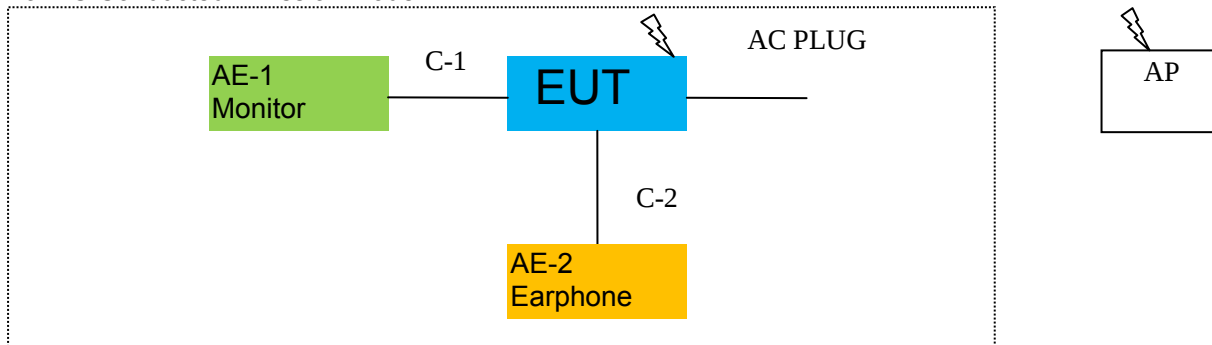

For Radiated Test Cases

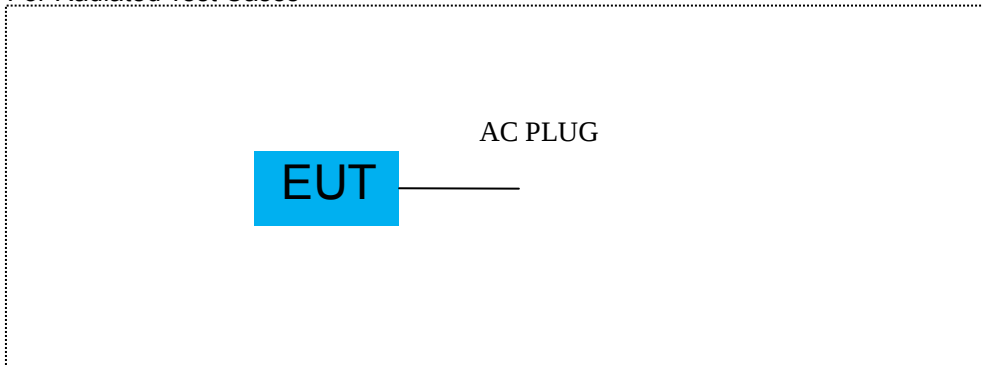

For Conducted Test Cases

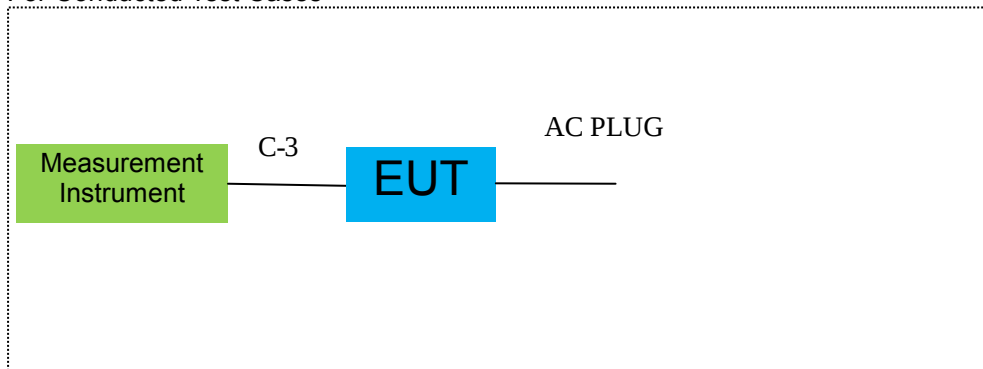

Note: The temporary antenna connector is soldered on the PIFA board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
AE-1	Monitor	SHARP	LCD-32MS46A	09426089241597	Peripherals
AE-2	Earphone	N/A	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	HDMI Cable	YES	NO	0.9m
C-2	Earphone Cable	NO	NO	1.2m
C-3	RF Cable	YES	NO	0.1m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2019.05.13	2020.05.12	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2018.10.08	2019.10.07	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2018.10.08	2019.10.07	1 year
4	Test Receiver	R&S	ESPI7	101318	2019.05.13	2020.05.12	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2019.04.15	2020.04.14	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2018.05.19	2020.05.18	2 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2019.04.15	2020.04.14	1 year
8	Amplifier	EMC	EMC051835SE	980246	2019.08.06	2020.08.05	1 year
9	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2018.12.11	2019.12.10	1 year
10	Power Meter	DARE	RPR3006W	15I00041SN084	2019.08.06	2020.08.05	1 year
11	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2017.04.21	2020.04.20	3 year
12	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2017.04.21	2020.04.20	3 year
13	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2017.04.21	2020.04.20	3 year
14	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2017.04.21	2020.04.20	3 year
15	Filter	TRILTHIC	2400MHz	29	2017.04.19	2020.04.18	3 year
16	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PIFA board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2019.05.13	2020.05.12	1 year
2	LISN	R&S	ENV216	101313	2019.05.13	2020.05.12	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2019.05.13	2020.05.12	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2018.05.19	2020.05.18	2 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2017.04.21	2020.04.20	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2017.04.21	2020.04.20	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2017.04.21	2020.04.20	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable which is scheduled for calibration every 3 years.

7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC Part 15.207(a) and KDB 174176 D01 Line Conducted FAQ v01r01

7.1.2 Conformance Limit


Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
 2. The lower limit shall apply at the transition frequencies
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

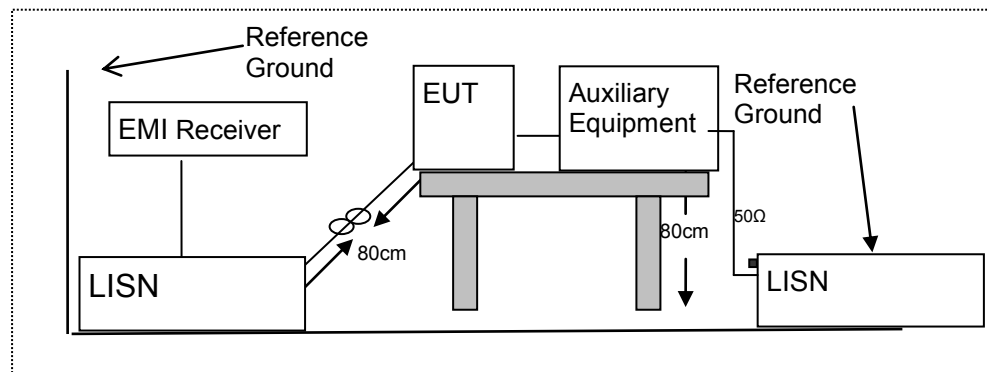

7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item -EUT Test Photos.


7.1.6 Test Results

EUT:	ScreenBeam 960	Model Name :	SBWD960B
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode:	Normal Link

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	51.62	9.75	61.37	65.78	-4.41	QP
0.1539	16.53	9.75	26.28	55.78	-29.50	AVG
0.2540	45.53	9.76	55.29	61.62	-6.33	QP
0.2540	19.27	9.76	29.03	51.62	-22.59	AVG
0.2779	45.35	9.75	55.10	60.88	-5.78	QP
0.2779	18.64	9.75	28.39	50.88	-22.49	AVG
24.0020	40.35	10.62	50.97	60.00	-9.03	QP
24.0020	34.27	10.62	44.89	50.00	-5.11	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

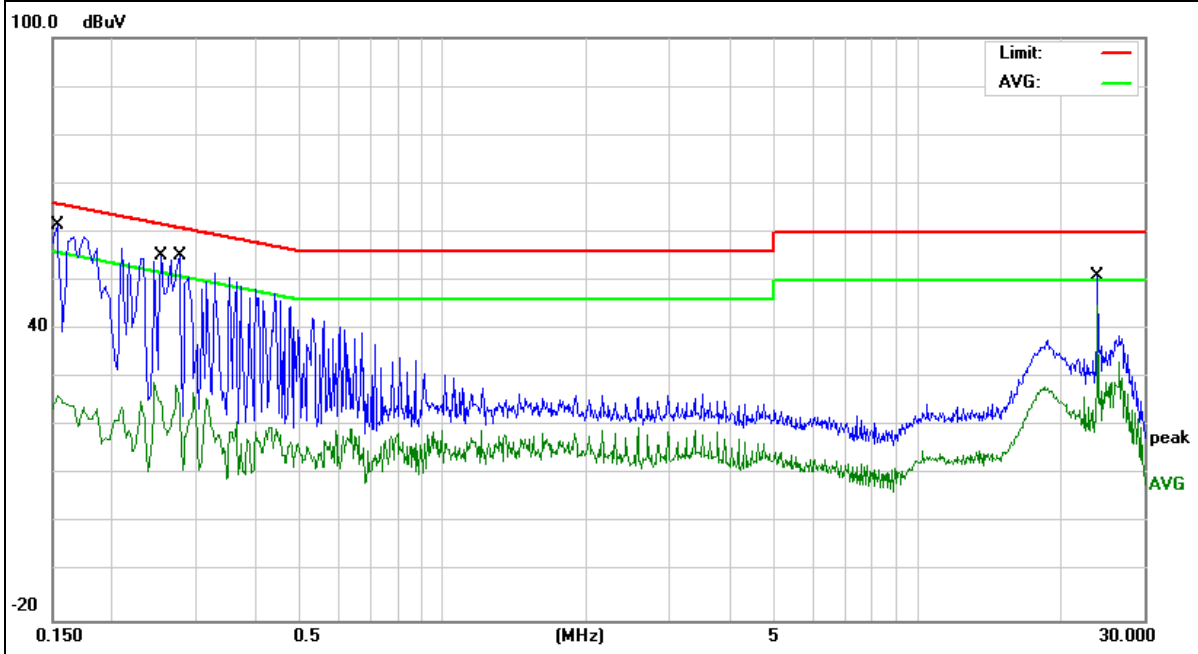


EUT:	ScreenBeam 960	Model Name :	SBWD960B
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode:	Normal Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1660	50.93	9.73	60.66	65.15	-4.49	QP
0.1660	18.33	9.73	28.06	55.15	-27.09	AVG
0.1779	50.20	9.73	59.93	64.58	-4.65	QP
0.1779	14.09	9.73	23.82	54.58	-30.76	AVG
0.2859	44.87	9.74	54.61	60.64	-6.03	QP
0.2859	13.68	9.74	23.42	50.64	-27.22	AVG
24.0019	40.37	10.57	50.94	60.00	-9.06	QP
24.0019	35.41	10.57	45.98	50.00	-4.02	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

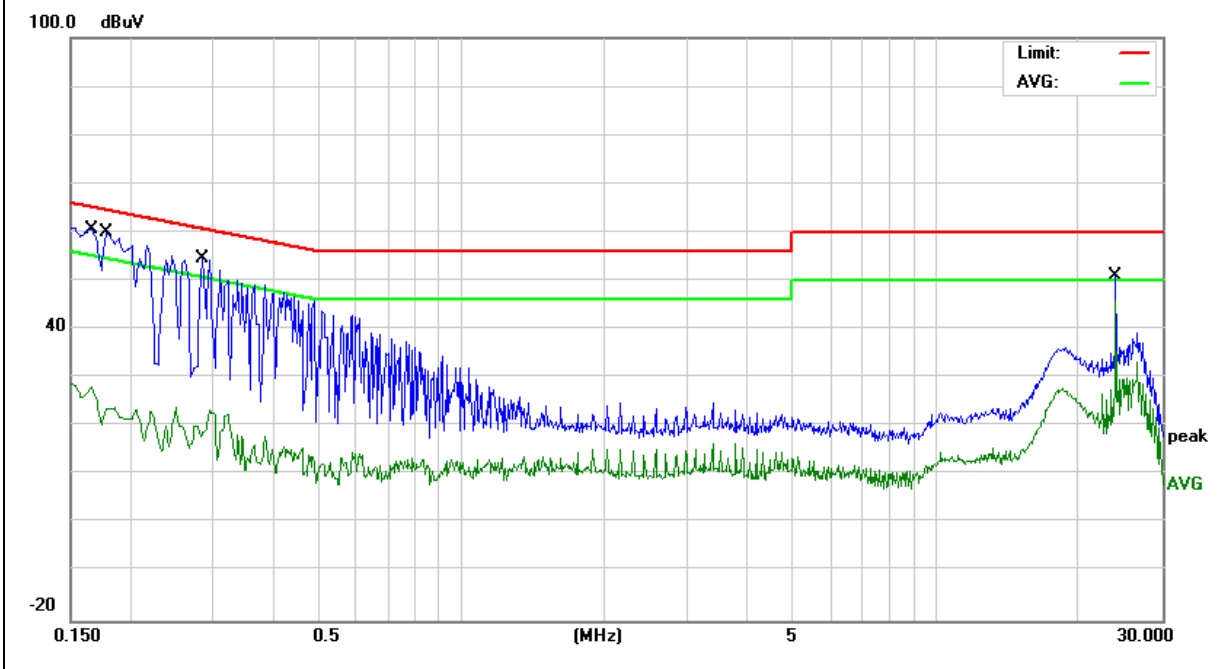


EUT:	ScreenBeam 960	Model Name :	SBWD960B
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 240V/60Hz	Test Mode:	Normal Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1819	29.29	9.76	39.05	64.39	-25.34	QP
0.1819	19.24	9.76	29.00	54.39	-25.39	AVG
0.2899	25.07	9.74	34.81	60.52	-25.71	QP
0.2899	18.82	9.74	28.56	50.52	-21.96	AVG
0.9180	19.05	9.74	28.79	56.00	-27.21	QP
0.9180	16.04	9.74	25.78	46.00	-20.22	AVG
24.0019	40.62	10.62	51.24	60.00	-8.76	QP
24.0019	34.50	10.62	45.12	50.00	-4.88	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

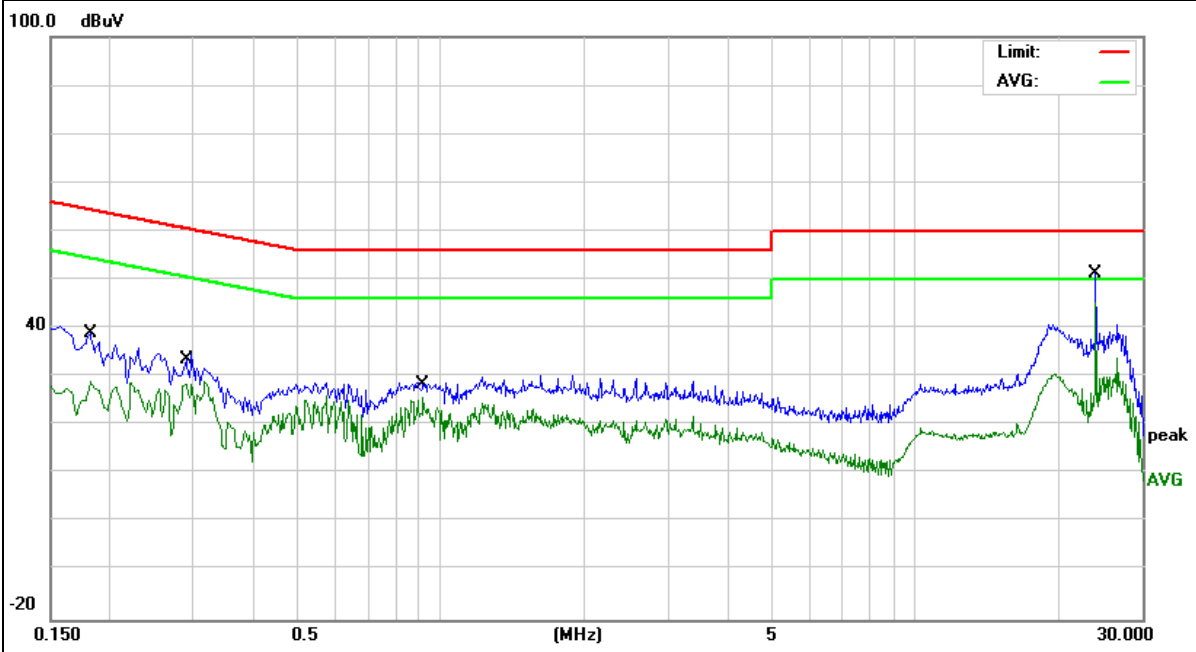


EUT:	ScreenBeam 960	Model Name :	SBWD960B
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 240V/60Hz	Test Mode:	Normal Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1580	29.62	9.74	39.36	65.56	-26.20	QP
0.1580	15.98	9.74	25.72	55.56	-29.84	AVG
0.2020	26.04	9.73	35.77	63.52	-27.75	QP
0.2020	13.55	9.73	23.28	53.52	-30.24	AVG
0.3180	21.62	9.74	31.36	59.76	-28.40	QP
0.3180	13.28	9.74	23.02	49.76	-26.74	AVG
24.0019	40.30	10.57	50.87	60.00	-9.13	QP
24.0019	34.80	10.57	45.37	50.00	-4.63	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

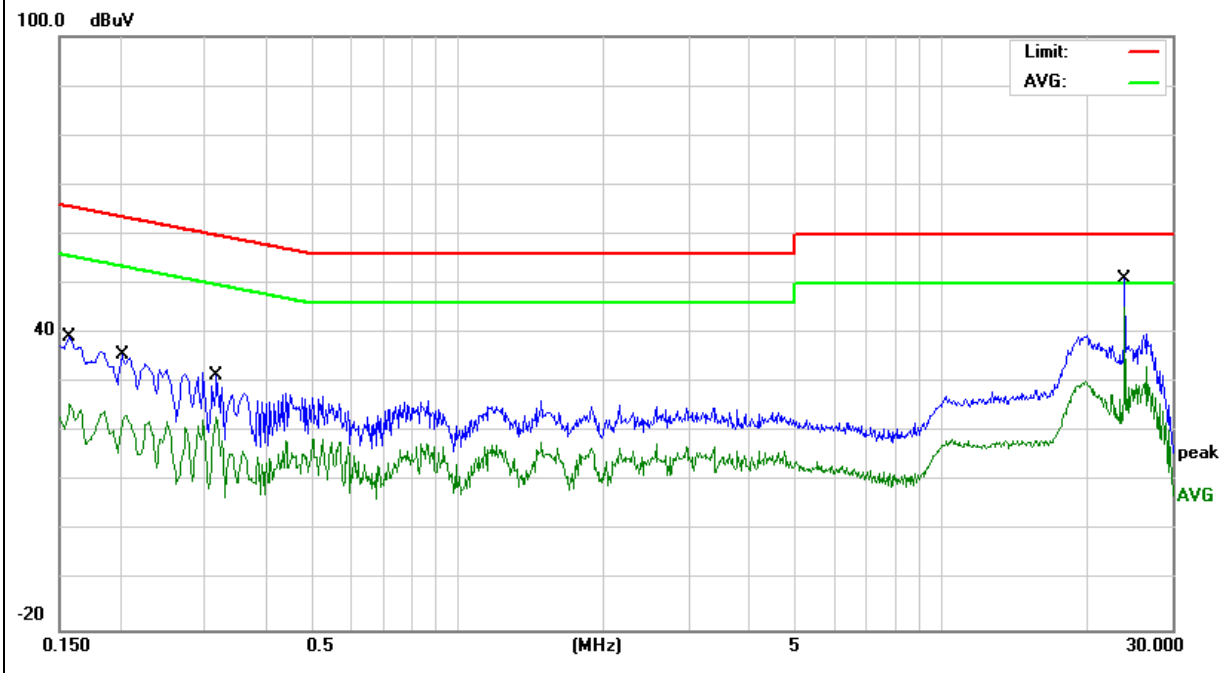

7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54


Remark : 1. Emission level in dBuV/m=20 log (uV/m)
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. For Frequency 9kHz~30MHz:
Distance extrapolation factor =40log(Specific distance/ test distance)(dB);
Limit line=Specific limits(dBuV) + distance extrapolation factor.
For Frequency above 30MHz:
Distance extrapolation factor =20log(Specific distance/ test distance)(dB);
Limit line=Specific limits(dBuV) + distance extrapolation factor.

7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

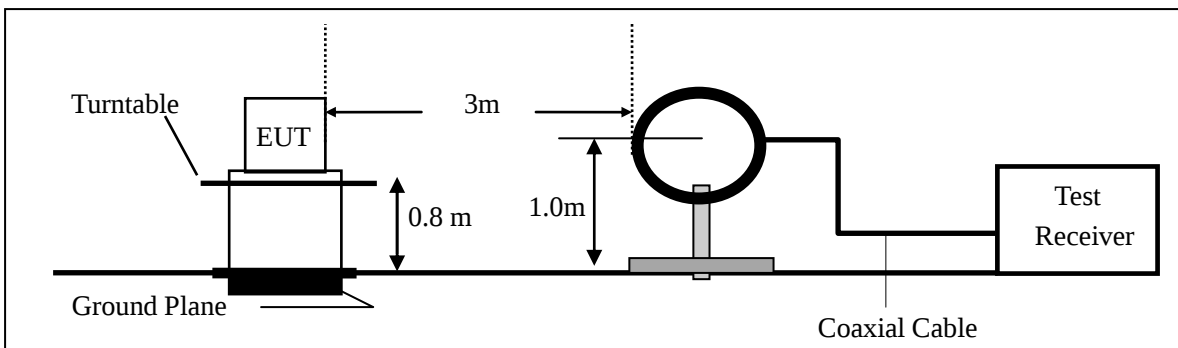

(b) For radiated emissions from 30MHz to 1000MHz

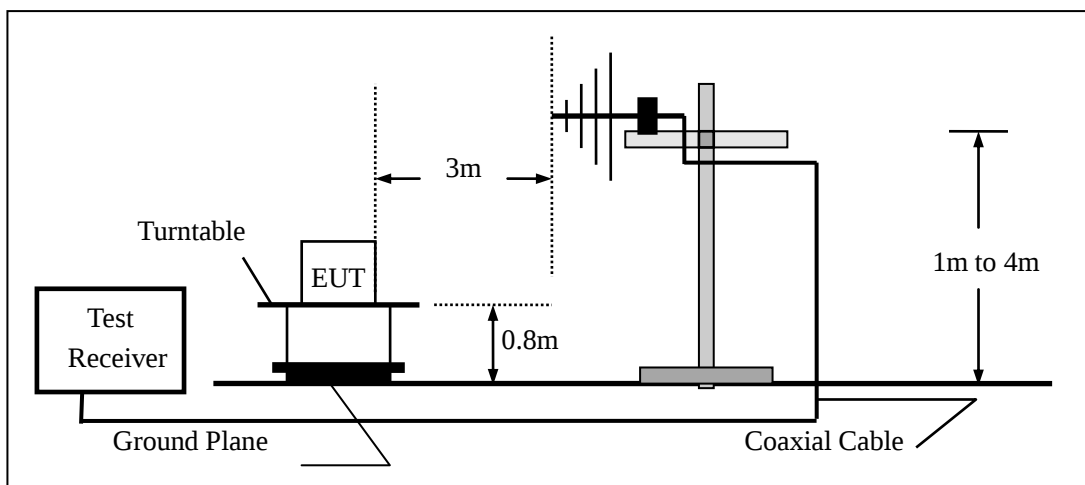

(c) For radiated emissions above 1000MHz

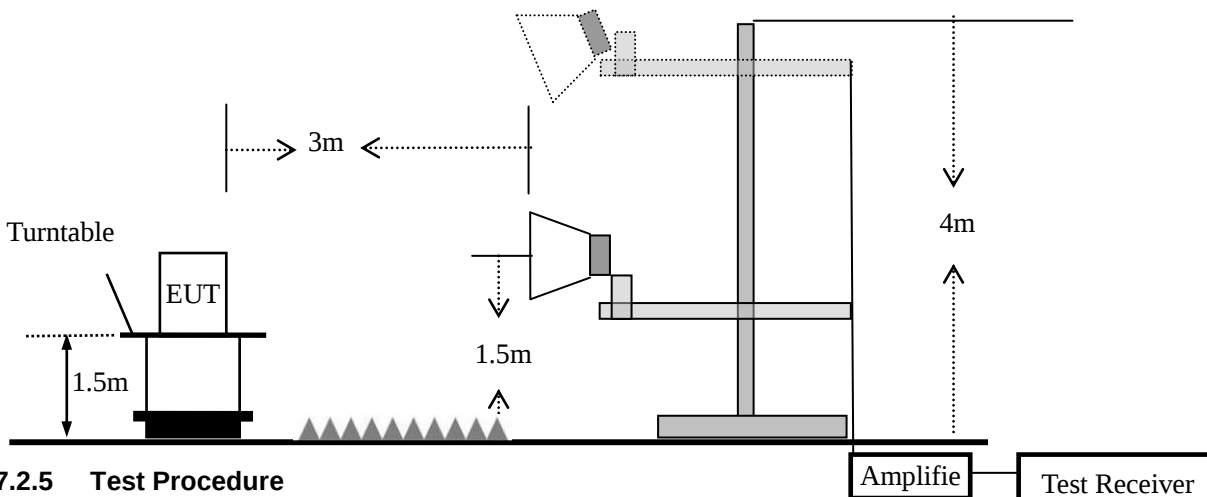

7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz and frequencies above 1GHz,
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

- e. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- f. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

For peak measurement:

Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;

Set RBW = 1 MHz, $VBW = 3$ MHz for $f \geq 1$ GHz

For average measurement:

$VBW = 10$ Hz, when duty cycle is no less than 98 percent.

$VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz]/\text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.2.6 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	ScreenBeam 960	Model No.:	SBWD960B
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4/Mode5	Test By:	Eileen Liu

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


- Spurious Emission below 1GHz (30MHz to 1GHz)
 All the modulation modes have been tested, and the worst result was report as below:

EUT:	ScreenBeam 960	Model Name :	SBWD960B
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010hPa	Test Mode:	Normal Link-8812 module
Test Voltage :	DC 5V from Adapter AC 120V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	47.9939	26.70	11.33	38.03	40.00	-1.97	QP
V	119.8555	21.06	13.18	34.24	43.50	-9.26	QP
V	143.8294	24.05	13.18	37.23	43.50	-6.27	QP
V	400.4318	13.46	19.64	33.10	46.00	-12.90	QP
V	501.1788	13.15	22.16	35.31	46.00	-10.69	QP

Remark:


Absolute Level= Reading Level+ Factor, Margin= Absolute Level - Limit

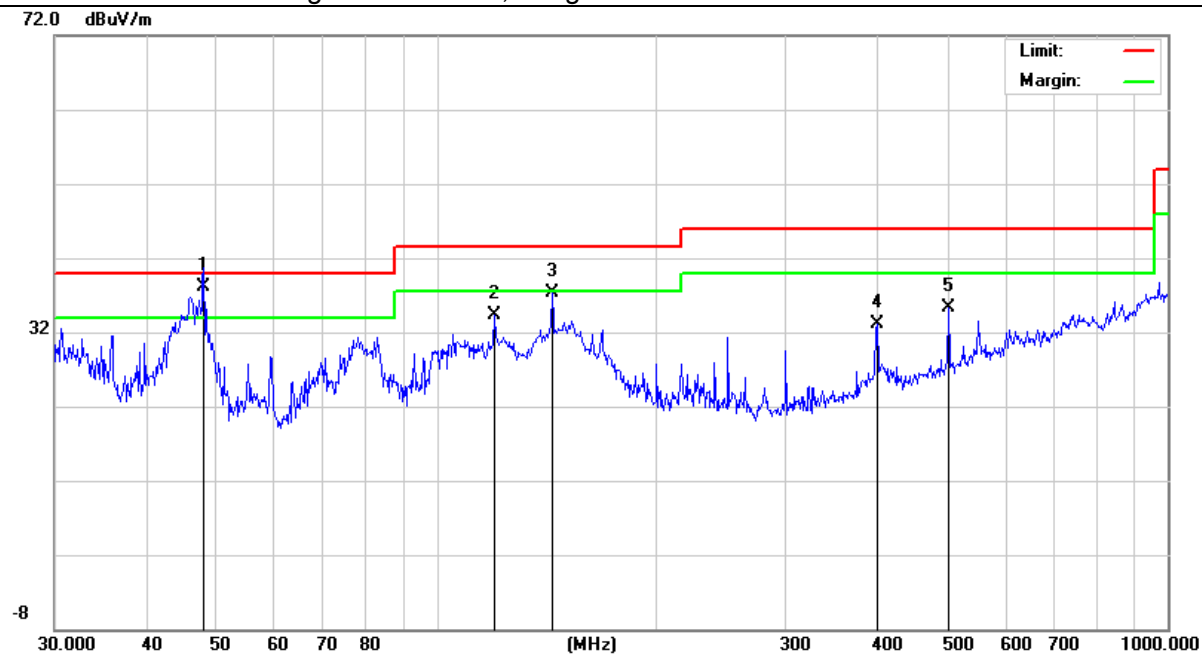

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	143.8294	26.31	13.18	39.49	43.50	-4.01	QP
H	250.3011	25.85	14.95	40.80	46.00	-5.20	QP
H	399.0300	18.09	19.57	37.66	46.00	-8.34	QP
H	501.1789	20.66	22.16	42.82	46.00	-3.18	QP
H	550.9479	12.49	24.56	37.05	46.00	-8.95	QP

Remark:

Absolute Level= Reading Level+ Factor, Margin= Absolute Level - Limit

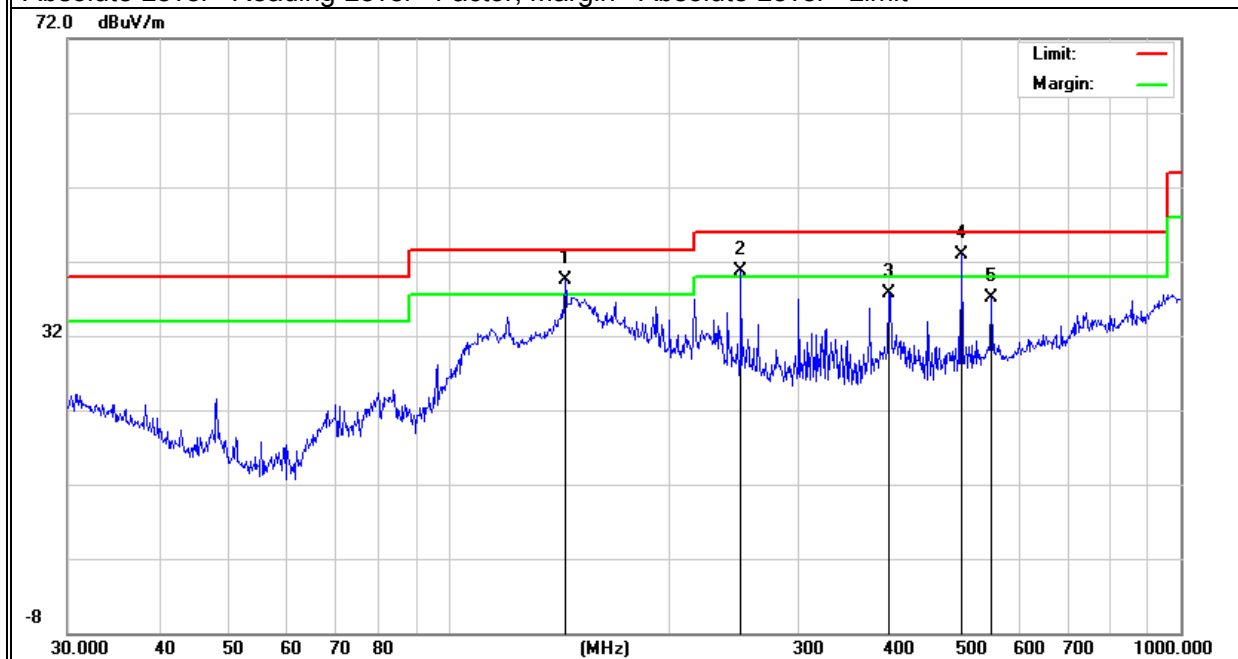


EUT:	ScreenBeam 960	Model Name :	SBWD960B
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010hPa	Test Mode:	Normal Link-8192 module
Test Voltage :	DC 5V from Adapter AC 120V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	36.0007	19.71	16.33	36.04	40.00	-3.96	QP
V	47.9938	26.27	11.33	37.60	40.00	-2.40	QP
V	82.9385	25.17	9.13	34.30	40.00	-5.70	QP
V	143.8291	24.05	13.18	37.23	43.50	-6.27	QP
V	168.4138	28.38	11.38	39.76	43.50	-3.74	QP
V	400.4318	17.46	19.64	37.10	46.00	-8.90	QP

Remark:


Absolute Level= Reading Level+ Factor, Margin= Absolute Level - Limit

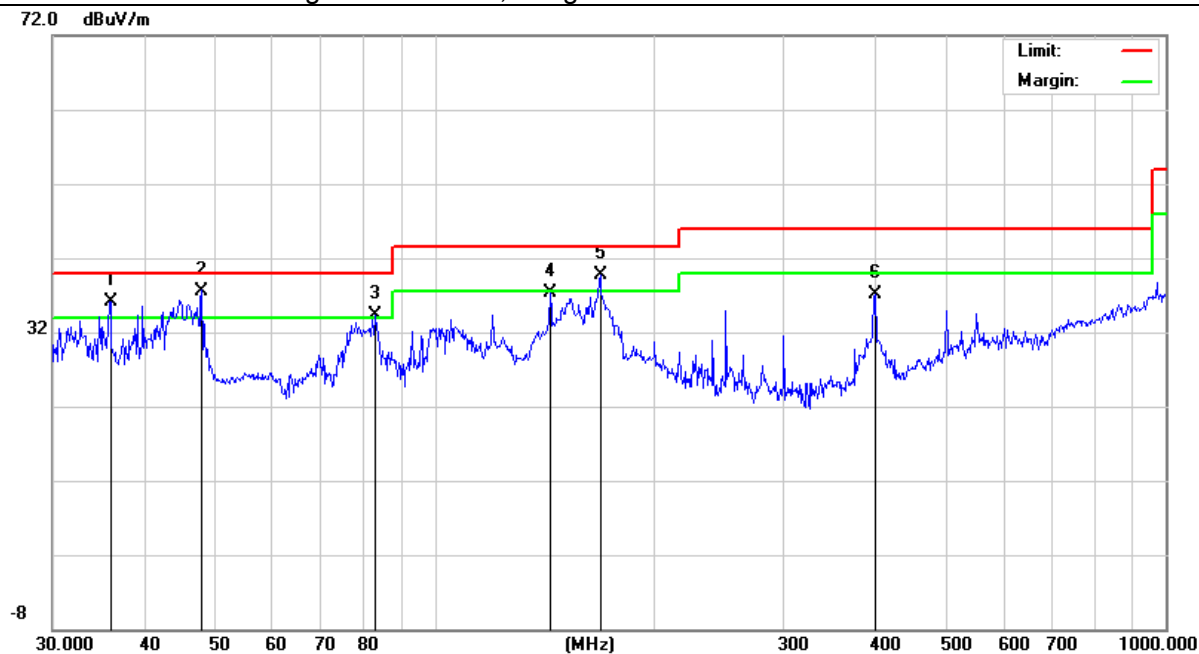

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	119.8555	25.35	13.18	38.53	43.50	-4.97	QP
H	191.7450	29.41	10.07	39.48	43.50	-4.02	QP
H	216.0240	29.28	11.10	40.38	46.00	-5.62	QP
H	250.3009	24.35	14.95	39.30	46.00	-6.70	QP
H	501.1788	16.66	22.16	38.82	46.00	-7.18	QP
H	550.9479	17.49	24.56	42.05	46.00	-3.95	QP

Remark:

Absolute Level= Reading Level+ Factor, Margin= Absolute Level - Limit

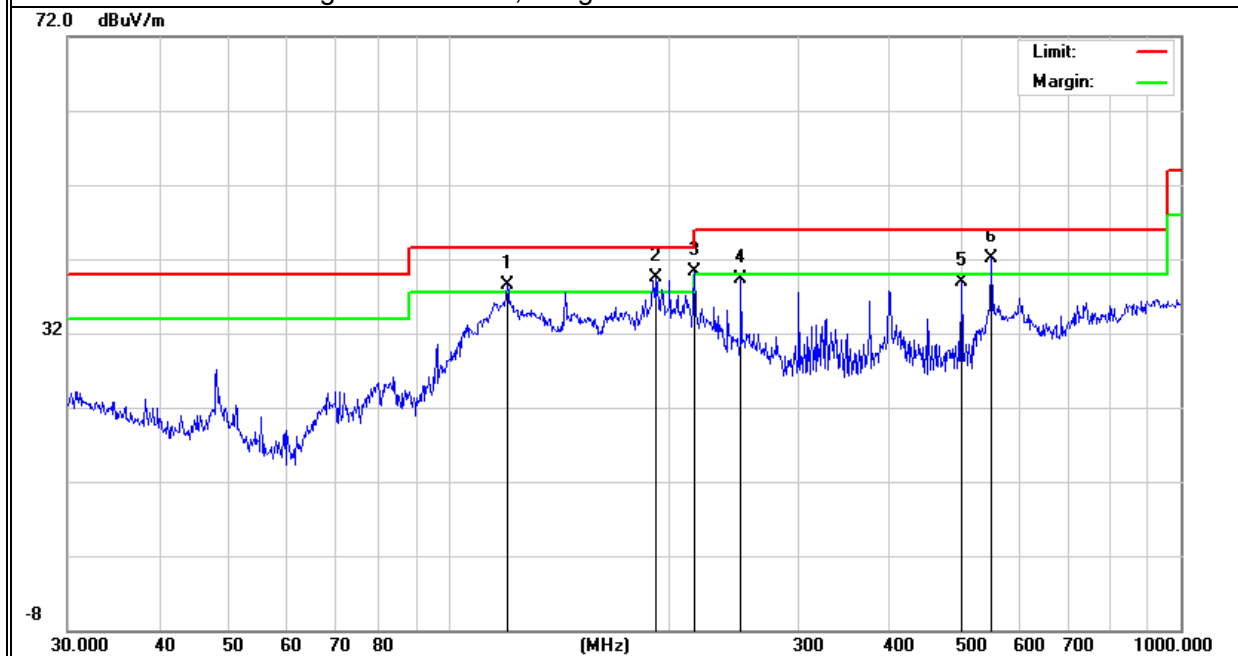

Spurious Emission Above 1GHz (1GHz to 25GHz)

EUT:	ScreenBeam 960	Model No.:	SBWD960B
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40-8812 module	Test By:	Eileen Liu

All the modulation modes have been tested, 8812 module has two antenna 1 and 2, the worst data is Antenna 1, only shown Antenna 1 data below:

Frequency	Read Level	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
Low Channel (2412 MHz)(802.11b)--Above 1G									
4824	61.52	5.21	35.59	44.30	58.02	74.00	-15.98	Pk	Vertical
4824	42.18	5.21	35.59	44.30	38.68	54.00	-15.32	AV	Vertical
7326	59.98	6.48	36.27	44.60	58.13	74.00	-15.87	Pk	Vertical
7326	42.25	6.48	36.27	44.60	40.40	54.00	-13.60	AV	Vertical
4824	63.37	5.21	35.55	44.30	59.83	74.00	-14.17	Pk	Horizontal
4824	43.11	5.21	35.55	44.30	39.57	54.00	-14.43	AV	Horizontal
7326	62.59	6.48	36.27	44.52	60.82	74.00	-13.18	Pk	Horizontal
7326	43.85	6.48	36.27	44.52	42.08	54.00	-11.92	AV	Horizontal
Middle Channel (2437 MHz)(802.11b)--Above 1G									
4874	61.49	5.21	35.66	44.20	58.16	74.00	-15.84	Pk	Vertical
4874	42.54	5.21	35.66	44.20	39.21	54.00	-14.79	AV	Vertical
7311	62.28	7.10	36.50	44.43	61.45	74.00	-12.55	Pk	Vertical
7311	43.33	7.10	36.50	44.43	42.50	54.00	-11.50	AV	Vertical
4874	63.74	5.21	35.66	44.20	60.41	74.00	-13.59	Pk	Horizontal
4874	42.21	5.21	35.66	44.20	38.88	54.00	-15.12	AV	Horizontal
7311	61.29	7.10	36.50	44.43	60.46	74.00	-13.54	Pk	Horizontal
7311	43.02	7.10	36.50	44.43	42.19	54.00	-11.81	AV	Horizontal
High Channel (2462 MHz)(802.11b)--Above 1G									
4924	62.13	5.21	35.52	44.21	58.65	74.00	-15.35	Pk	Vertical
4924	43.52	5.21	35.52	44.21	40.04	54.00	-13.96	AV	Vertical
7386	60.59	7.10	36.53	44.60	59.62	74.00	-14.38	Pk	Vertical
7386	43.41	7.10	36.53	44.60	42.44	54.00	-11.56	AV	Vertical
4924	59.86	5.21	35.52	44.21	56.38	74.00	-17.62	Pk	Horizontal
4924	42.22	5.21	35.52	44.21	38.74	54.00	-15.26	AV	Horizontal
7386	63.32	7.10	36.53	44.60	62.35	74.00	-11.65	Pk	Horizontal
7386	41.27	7.10	36.53	44.60	40.30	54.00	-13.70	AV	Horizontal

- Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor
(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
(3) "802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT:	ScreenBeam 960	Model No.:	SBWD960B
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40-8192 module	Test By:	Eileen Liu

All the modulation modes have been tested, 8912 module has two antenna 3 and 4, the worst data is Antenna 4, only shown Antenna 4 data below:

Frequency	Read Level	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
Low Channel (2412 MHz)(802.11b)--Above 1G									
4824	61.14	5.21	35.59	44.30	57.64	74.00	-16.36	Pk	Vertical
4824	43.52	5.21	35.59	44.30	40.02	54.00	-13.98	AV	Vertical
7326	62.59	6.48	36.27	44.60	60.74	74.00	-13.26	Pk	Vertical
7326	43.47	6.48	36.27	44.60	41.62	54.00	-12.38	AV	Vertical
4824	62.03	5.21	35.55	44.30	58.49	74.00	-15.51	Pk	Horizontal
4824	42.11	5.21	35.55	44.30	38.57	54.00	-15.43	AV	Horizontal
7326	62.39	6.48	36.27	44.52	60.62	74.00	-13.38	Pk	Horizontal
7326	43.00	6.48	36.27	44.52	41.23	54.00	-12.77	AV	Horizontal
Middle Channel (2437 MHz)(802.11b)--Above 1G									
4874	62.39	5.21	35.66	44.20	59.06	74.00	-14.94	Pk	Vertical
4874	42.58	5.21	35.66	44.20	39.25	54.00	-14.75	AV	Vertical
7311	61.44	7.10	36.50	44.43	60.61	74.00	-13.39	Pk	Vertical
7311	43.26	7.10	36.50	44.43	42.43	54.00	-11.57	AV	Vertical
4874	63.03	5.21	35.66	44.20	59.70	74.00	-14.30	Pk	Horizontal
4874	43.52	5.21	35.66	44.20	40.19	54.00	-13.81	AV	Horizontal
7311	62.42	7.10	36.50	44.43	61.59	74.00	-12.41	Pk	Horizontal
7311	43.19	7.10	36.50	44.43	42.36	54.00	-11.64	AV	Horizontal
High Channel (2462 MHz)(802.11b)--Above 1G									
4924	63.54	5.21	35.52	44.21	60.06	74.00	-13.94	Pk	Vertical
4924	45.62	5.21	35.52	44.21	42.14	54.00	-11.86	AV	Vertical
7386	60.52	7.10	36.53	44.60	59.55	74.00	-14.45	Pk	Vertical
7386	42.85	7.10	36.53	44.60	41.88	54.00	-12.12	AV	Vertical
4924	63.29	5.21	35.52	44.21	59.81	74.00	-14.19	Pk	Horizontal
4924	42.33	5.21	35.52	44.21	38.85	54.00	-15.15	AV	Horizontal
7386	63.25	7.10	36.53	44.60	62.28	74.00	-11.72	Pk	Horizontal
7386	42.06	7.10	36.53	44.60	41.09	54.00	-12.91	AV	Horizontal

- Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor
(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
(3) "802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

■ Spurious Emission in Restricted Band 2310MHz -18000MHz

All the modulation modes have been tested, Only record the worst mode data:

8812 module:

Frequency (MHz)	Meter Reading (dBμV)	Cable Loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
802.11b									
2310.00	56.84	2.97	27.80	43.80	43.81	74	-30.19	Pk	Horizontal
2310.00	38.08	2.97	27.80	43.80	25.05	54	-28.95	AV	Horizontal
2310.00	56.41	2.97	27.80	43.80	43.38	74	-30.62	Pk	Vertical
2310.00	37.06	2.97	27.80	43.80	24.03	54	-29.97	AV	Vertical
2390.00	74.71	3.14	27.21	43.80	61.26	74	-12.74	Pk	Vertical
2390.00	63.60	3.14	27.21	43.80	50.15	54	-3.85	AV	Vertical
2390.00	74.85	3.14	27.21	43.80	61.40	74	-12.60	Pk	Horizontal
2390.00	67.15	3.14	27.21	43.80	53.70	54	-0.30	AV	Horizontal
2483.50	69.24	3.58	27.70	44.00	56.52	74	-17.48	Pk	Vertical
2483.50	62.20	3.58	27.70	44.00	49.48	54	-4.52	AV	Vertical
2483.50	69.71	3.58	27.70	44.00	56.99	74	-17.01	Pk	Horizontal
2483.50	65.19	3.58	27.70	44.00	52.47	54	-1.53	AV	Horizontal
802.11g									
2310.00	53.28	2.97	27.80	43.80	40.25	74	-33.75	Pk	Horizontal
2310.00	38.61	2.97	27.80	43.80	25.58	54	-28.42	AV	Horizontal
2310.00	53.62	2.97	27.80	43.80	40.59	74	-33.41	Pk	Vertical
2310.00	38.00	2.97	27.80	43.80	24.97	54	-29.03	AV	Vertical
2390.00	80.31	3.14	27.21	43.80	66.86	74	-7.14	Pk	Vertical
2390.00	65.26	3.14	27.21	43.80	51.81	54	-2.19	AV	Vertical
2390.00	84.43	3.14	27.21	43.80	70.98	74	-3.02	Pk	Horizontal
2390.00	67.25	3.14	27.21	43.80	53.80	54	-0.20	AV	Horizontal
2483.50	80.13	3.58	27.70	44.00	67.41	74	-6.59	Pk	Vertical
2483.50	63.61	3.58	27.70	44.00	50.89	54	-3.11	AV	Vertical
2483.50	82.01	3.58	27.70	44.00	69.29	74	-4.71	Pk	Horizontal
2483.50	64.69	3.58	27.70	44.00	51.97	54	-2.03	AV	Horizontal
802.11n20(MIMO Mode)									
2310.00	56.32	2.97	27.80	43.80	43.29	74	-30.71	Pk	Horizontal
2310.00	39.40	2.97	27.80	43.80	26.37	54	-27.63	AV	Horizontal
2310.00	53.61	2.97	27.80	43.80	40.58	74	-33.42	Pk	Vertical
2310.00	37.35	2.97	27.80	43.80	24.32	54	-29.68	AV	Vertical
2390.00	80.04	3.14	27.21	43.80	66.59	74	-7.41	Pk	Vertical
2390.00	64.78	3.14	27.21	43.80	51.33	54	-2.67	AV	Vertical
2390.00	84.30	3.14	27.21	43.80	70.85	74	-3.15	Pk	Horizontal
2390.00	61.70	3.14	27.21	43.80	48.25	54	-5.75	AV	Horizontal
2483.50	75.49	3.58	27.70	44.00	62.77	74	-11.23	Pk	Vertical
2483.50	59.56	3.58	27.70	44.00	46.84	54	-7.16	AV	Vertical
2483.50	78.43	3.58	27.70	44.00	65.71	74	-8.29	Pk	Horizontal
2483.50	64.89	3.58	27.70	44.00	52.17	54	-1.83	AV	Horizontal
802.11n40(MIMO Mode)									
2310.00	55.70	2.97	27.80	43.80	42.67	74	-31.33	Pk	Horizontal
2310.00	39.10	2.97	27.80	43.80	26.07	54	-27.93	AV	Horizontal
2310.00	54.77	2.97	27.80	43.80	41.74	74	-32.26	Pk	Vertical
2310.00	38.29	2.97	27.80	43.80	25.26	54	-28.74	AV	Vertical
2390.00	76.04	3.14	27.21	43.80	62.59	74	-11.41	Pk	Vertical
2390.00	62.17	3.14	27.21	43.80	48.72	54	-5.28	AV	Vertical
2390.00	80.93	3.14	27.21	43.80	67.48	74	-6.52	Pk	Horizontal
2390.00	66.61	3.14	27.21	43.80	53.16	54	-0.84	AV	Horizontal
2483.50	78.25	3.58	27.70	44.00	65.53	74	-8.47	Pk	Vertical
2483.50	62.13	3.58	27.70	44.00	49.41	54	-4.59	AV	Vertical
2483.50	80.37	3.58	27.70	44.00	67.65	74	-6.35	Pk	Horizontal
2483.50	65.47	3.58	27.70	44.00	52.75	54	-1.25	AV	Horizontal

8192 module:

Frequency (MHz)	Meter Reading (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
802.11b									
2310.00	56.19	2.97	27.80	43.80	43.16	74	-30.84	Pk	Horizontal
2310.00	39.18	2.97	27.80	43.80	26.15	54	-27.85	AV	Horizontal
2310.00	55.87	2.97	27.80	43.80	42.84	74	-31.16	Pk	Vertical
2310.00	39.84	2.97	27.80	43.80	26.81	54	-27.19	AV	Vertical
2390.00	76.04	3.14	27.21	43.80	62.59	74	-11.41	Pk	Vertical
2390.00	59.76	3.14	27.21	43.80	46.31	54	-7.69	AV	Vertical
2390.00	81.28	3.14	27.21	43.80	67.83	74	-6.17	Pk	Horizontal
2390.00	58.68	3.14	27.21	43.80	45.23	54	-8.77	AV	Horizontal
2483.50	75.57	3.58	27.70	44.00	62.85	74	-11.15	Pk	Vertical
2483.50	64.20	3.58	27.70	44.00	51.48	54	-2.52	AV	Vertical
2483.50	72.95	3.58	27.70	44.00	60.23	74	-13.77	Pk	Horizontal
2483.50	66.61	3.58	27.70	44.00	53.89	54	-0.11	AV	Horizontal
802.11g									
2310.00	54.47	2.97	27.80	43.80	41.44	74	-32.56	Pk	Horizontal
2310.00	37.40	2.97	27.80	43.80	24.37	54	-29.63	AV	Horizontal
2310.00	54.56	2.97	27.80	43.80	41.53	74	-32.47	Pk	Vertical
2310.00	38.18	2.97	27.80	43.80	25.15	54	-28.85	AV	Vertical
2390.00	76.31	3.14	27.21	43.80	62.86	74	-11.14	Pk	Vertical
2390.00	60.22	3.14	27.21	43.80	46.77	54	-7.23	AV	Vertical
2390.00	81.34	3.14	27.21	43.80	67.89	74	-6.11	Pk	Horizontal
2390.00	61.01	3.14	27.21	43.80	47.56	54	-6.44	AV	Horizontal
2483.50	79.81	3.58	27.70	44.00	67.09	74	-6.91	Pk	Vertical
2483.50	63.27	3.58	27.70	44.00	50.55	54	-3.45	AV	Vertical
2483.50	82.57	3.58	27.70	44.00	69.85	74	-4.15	Pk	Horizontal
2483.50	65.70	3.58	27.70	44.00	52.98	54	-1.02	AV	Horizontal
802.11n20(MIMO Mode)									
2310.00	57.58	2.97	27.80	43.80	44.55	74	-29.45	Pk	Horizontal
2310.00	40.21	2.97	27.80	43.80	27.18	54	-26.82	AV	Horizontal
2310.00	56.01	2.97	27.80	43.80	42.98	74	-31.02	Pk	Vertical
2310.00	39.07	2.97	27.80	43.80	26.04	54	-27.96	AV	Vertical
2390.00	81.83	3.14	27.21	43.80	68.38	74	-5.62	Pk	Vertical
2390.00	64.01	3.14	27.21	43.80	50.56	54	-3.44	AV	Vertical
2390.00	86.01	3.14	27.21	43.80	72.56	74	-1.44	Pk	Horizontal
2390.00	64.08	3.14	27.21	43.80	50.63	54	-3.37	AV	Horizontal
2483.50	78.74	3.58	27.70	44.00	66.02	74	-7.98	Pk	Vertical
2483.50	62.73	3.58	27.70	44.00	50.01	54	-3.99	AV	Vertical
2483.50	86.32	3.58	27.70	44.00	73.60	74	-0.40	Pk	Horizontal
2483.50	65.47	3.58	27.70	44.00	52.75	54	-1.25	AV	Horizontal
802.11n40(MIMO Mode)									
2310.00	56.11	2.97	27.80	43.80	43.08	74	-30.92	Pk	Horizontal
2310.00	39.40	2.97	27.80	43.80	26.37	54	-27.63	AV	Horizontal
2310.00	55.87	2.97	27.80	43.80	42.84	74	-31.16	Pk	Vertical
2310.00	40.08	2.97	27.80	43.80	27.05	54	-26.95	AV	Vertical
2390.00	74.03	3.14	27.21	43.80	60.58	74	-13.42	Pk	Vertical
2390.00	59.61	3.14	27.21	43.80	46.16	54	-7.84	AV	Vertical
2390.00	82.08	3.14	27.21	43.80	68.63	74	-5.37	Pk	Horizontal
2390.00	67.12	3.14	27.21	43.80	53.67	54	-0.33	AV	Horizontal
2483.50	77.14	3.58	27.70	44.00	64.42	74	-9.58	Pk	Vertical
2483.50	61.09	3.58	27.70	44.00	48.37	54	-5.63	AV	Vertical
2483.50	83.28	3.58	27.70	44.00	70.56	74	-3.44	Pk	Horizontal
2483.50	66.14	3.58	27.70	44.00	53.42	54	-0.58	AV	Horizontal

Spurious Emission in Restricted Bands 3260MHz- 18000MHz

All the modulation modes have been tested, Only record the worst mode data as below:

8812 module:

Frequency	Reading Level	Cable Loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
3260	63.29	4.04	29.57	44.70	52.20	74	-21.80	Pk	Vertical
3260	49.12	4.04	29.57	44.70	38.03	54	-15.97	AV	Vertical
3260	64.52	4.04	29.57	44.70	53.43	74	-20.57	Pk	Horizontal
3260	49.96	4.04	29.57	44.70	38.87	54	-15.13	AV	Horizontal
3332	63.29	4.26	29.87	44.40	53.02	74	-20.98	Pk	Vertical
3332	50.17	4.26	29.87	44.40	39.90	54	-14.10	AV	Vertical
3332	63.52	4.26	29.87	44.40	53.25	74	-20.75	Pk	Horizontal
3332	45.15	4.26	29.87	44.40	34.88	54	-19.12	AV	Horizontal
17797	46.96	10.99	43.95	43.50	58.40	74	-15.60	Pk	Vertical
17797	31.22	10.99	43.95	43.50	42.66	54	-11.34	AV	Vertical
17788	46.85	11.81	43.69	44.60	57.75	74	-16.25	Pk	Horizontal
17788	31.07	11.81	43.69	44.60	41.97	54	-12.03	AV	Horizontal

"802.11 b" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

8192 module:

Frequency	Reading Level	Cable Loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
3260	61.24	4.04	29.57	44.70	50.15	74	-23.85	Pk	Vertical
3260	50.82	4.04	29.57	44.70	39.73	54	-14.27	AV	Vertical
3260	62.34	4.04	29.57	44.70	51.25	74	-22.75	Pk	Horizontal
3260	48.97	4.04	29.57	44.70	37.88	54	-16.12	AV	Horizontal
3332	63.00	4.26	29.87	44.40	52.73	74	-21.27	Pk	Vertical
3332	45.55	4.26	29.87	44.40	35.28	54	-18.72	AV	Vertical
3332	62.71	4.26	29.87	44.40	52.44	74	-21.56	Pk	Horizontal
3332	46.69	4.26	29.87	44.40	36.42	54	-17.58	AV	Horizontal
17797	46.05	10.99	43.95	43.50	57.49	74	-16.51	Pk	Vertical
17797	32.51	10.99	43.95	43.50	43.95	54	-10.05	AV	Vertical
17788	44.78	11.81	43.69	44.60	55.68	74	-18.32	Pk	Horizontal
17788	31.02	11.81	43.69	44.60	41.92	54	-12.08	AV	Horizontal

"802.11 b" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

7.3 6DB BANDWIDTH

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.2.

7.3.2 Conformance Limit

The minimum permissible 6dB bandwidth is 500 kHz.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

The testing follows Subclause 11.8 of ANSI C63.10.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100KHz

VBW $\geq 3 \times$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

7.3.6 Test Results

EUT:	ScreenBeam 960	Model No.:	SBWD960B
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40	Test By:	Eileen Liu

Test data reference attachment.

7.4 DUTY CYCLE

7.4.1 Applicable Standard

According to KDB 558074 D01 15.247 Meas Guidance v05r02 Section 6.

7.4.2 Conformance Limit

No limit requirement.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Zero Span

RBW = 8MHz(the largest available value)

VBW = 8MHz ($\geq$ RBW)

Number of points in Sweep > 100

Detector function = peak

Trace = Clear write

Measure T_{total} and T_{on}

Calculate Duty Cycle = T_{on} / T_{total}

7.4.6 Test Results

EUT:	ScreenBeam 960	Model No.:	SBWD960B
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40	Test By:	Eileen Liu

Test data reference attachment.

7.5 MAXIMUM OUTPUT POWER

7.5.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.3.2.3.

7.5.2 Conformance Limit


The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm). If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

7.5.3 Measuring Instruments

The following table is the setting of the power meter.

Power meter parameter	Setting
Detector	Peak

7.5.4 Test Setup

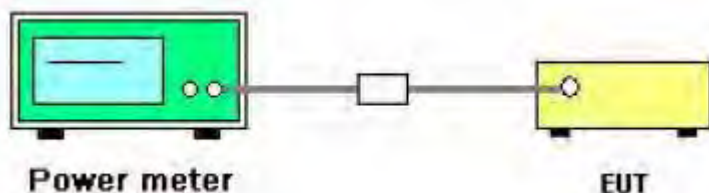

7.5.5 Test Procedure

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the *DTS bandwidth* and shall utilize a fast-responding diode detector.

7.5.6 EUT operation during Test

The EUT was programmed to be in continuously transmitting mode.

7.5.7 Test Results

EUT:	ScreenBeam 960	Model No.:	SBWD960B
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40	Test By:	Eileen Liu

Note: The EUT has two modules, module A (8812), module B (8192), four of the same type of antenna, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
11b, 11g	1Tx, 1Rx/2Rx
11n(HT20/HT40)	1Tx/2Tx, 2Rx

Test data reference attachment.

7.6 POWER SPECTRAL DENSITY

7.6.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.4.

7.6.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows Measurement Procedure Subclause 11.10.2 of ANSI C63.10

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 * \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.6.6 Test Results

EUT:	ScreenBeam 960	Model No.:	SBWD960B
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40	Test By:	Eileen Liu

Note: The EUT has two modules, module A (8812), module B (8192), four of the same type of antenna, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
11b, 11g	1Tx, 1Rx/2Rx
11n(HT20/HT40)	1Tx/2Tx, 2Rx

Test data reference attachment.

7.7 CONDUCTED BAND EDGE MEASUREMENT

7.7.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.7.

7.7.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows FCC KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.7.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

7.7.6 Test Results

EUT:	ScreenBeam 960	Model No.:	SBWD960B
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	802.11b/g/n20/n40	Test By:	Eileen Liu

Test data reference attachment.

7.8 SPURIOUS RF CONDUCTED EMISSIONS

7.8.1 Conformance Limit

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

7.8.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.3 Test Setup

Please refer to Section 6.1 of this test report.

7.8.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measure frequency range from 9KHz to 26.5GHz.

7.8.5 Test Results

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.

Test data reference attachment.

7.9 ANTENNA APPLICATION

7.9.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.9.2 Result

The EUT has two modules, module A (8812), module B (8192), four of the same type of antenna, as shown in Figure A shows:

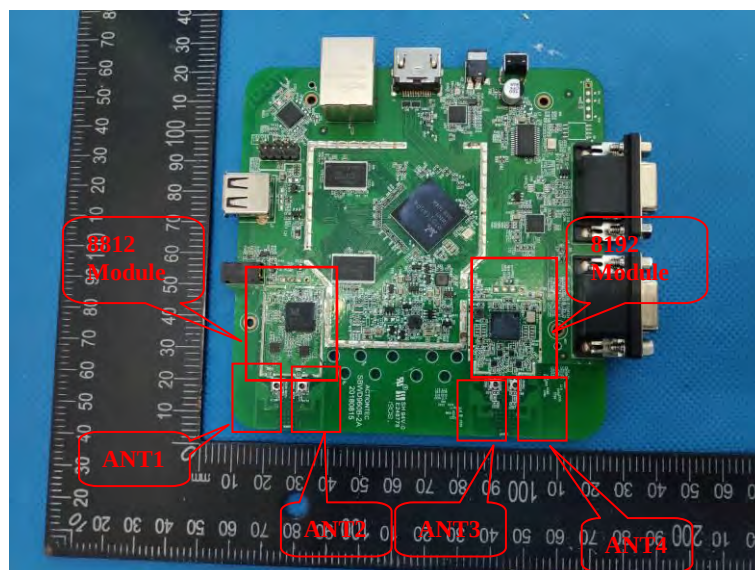


Figure A

Antenna	Antenna Type	Antenna Gain(dBi)
		2.4G
ANT1	PCB	2.80
ANT2	PCB	2.91
ANT3	PCB	3.47
ANT4	PCB	2.52

It comply with the standard requirement.


8 TEST RESULTS

8.1 DUTY CYCLE


Antenna	Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
Ant 1	NVNT	802.11b	2412	100	0
Ant 1	NVNT	802.11b	2437	100	0
Ant 1	NVNT	802.11b	2462	100	0
Ant 2	NVNT	802.11b	2412	100	0
Ant 2	NVNT	802.11b	2437	100	0
Ant 2	NVNT	802.11b	2462	100	0
Ant 1	NVNT	802.11g	2412	100	0
Ant 1	NVNT	802.11g	2437	100	0
Ant 1	NVNT	802.11g	2462	100	0
Ant 2	NVNT	802.11g	2412	100	0
Ant 2	NVNT	802.11g	2437	100	0
Ant 2	NVNT	802.11g	2462	100	0
Ant 1	NVNT	802.11n(HT20)	2412	100	0
Ant 1	NVNT	802.11n(HT20)	2437	100	0
Ant 1	NVNT	802.11n(HT20)	2462	100	0
Ant 2	NVNT	802.11n(HT20)	2412	100	0
Ant 2	NVNT	802.11n(HT20)	2437	100	0
Ant 2	NVNT	802.11n(HT20)	2462	100	0
Ant 1	NVNT	802.11n(HT40)	2422	100	0
Ant 1	NVNT	802.11n(HT40)	2437	100	0
Ant 1	NVNT	802.11n(HT40)	2452	100	0
Ant 2	NVNT	802.11n(HT40)	2422	100	0
Ant 2	NVNT	802.11n(HT40)	2437	100	0
Ant 2	NVNT	802.11n(HT40)	2452	100	0

Antenna	Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
Ant 3	NVNT	802.11b	2412	100	0
Ant 3	NVNT	802.11b	2437	100	0
Ant 3	NVNT	802.11b	2462	100	0
Ant 4	NVNT	802.11b	2412	100	0
Ant 4	NVNT	802.11b	2437	100	0
Ant 4	NVNT	802.11b	2462	100	0
Ant 3	NVNT	802.11g	2412	100	0
Ant 3	NVNT	802.11g	2437	100	0
Ant 3	NVNT	802.11g	2462	100	0
Ant 4	NVNT	802.11g	2412	100	0
Ant 4	NVNT	802.11g	2437	100	0
Ant 4	NVNT	802.11g	2462	100	0
Ant 3	NVNT	802.11n(HT20)	2412	100	0
Ant 3	NVNT	802.11n(HT20)	2437	100	0
Ant 3	NVNT	802.11n(HT20)	2462	100	0
Ant 4	NVNT	802.11n(HT20)	2412	100	0
Ant 4	NVNT	802.11n(HT20)	2437	100	0
Ant 4	NVNT	802.11n(HT20)	2462	100	0
Ant 3	NVNT	802.11n(HT40)	2422	100	0
Ant 3	NVNT	802.11n(HT40)	2437	100	0
Ant 3	NVNT	802.11n(HT40)	2452	100	0
Ant 4	NVNT	802.11n(HT40)	2422	100	0
Ant 4	NVNT	802.11n(HT40)	2437	100	0
Ant 4	NVNT	802.11n(HT40)	2452	100	0


Duty Cycle NVNT 802.11b 2412MHz Ant 1

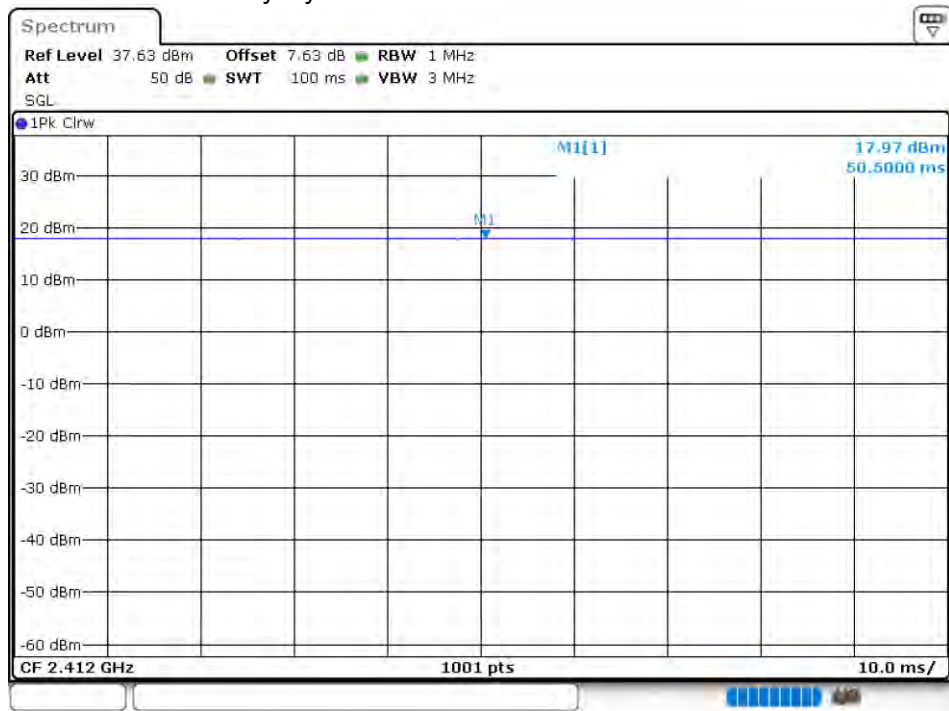


Duty Cycle NVNT 802.11b 2437MHz Ant 1

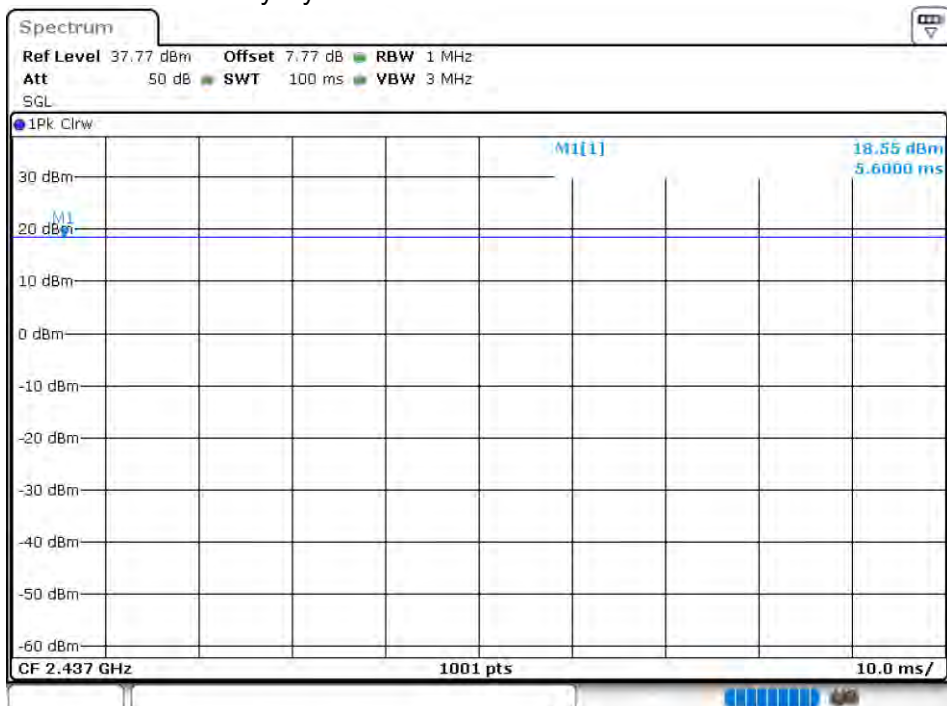


Duty Cycle NVNT 802.11b 2462MHz Ant 1

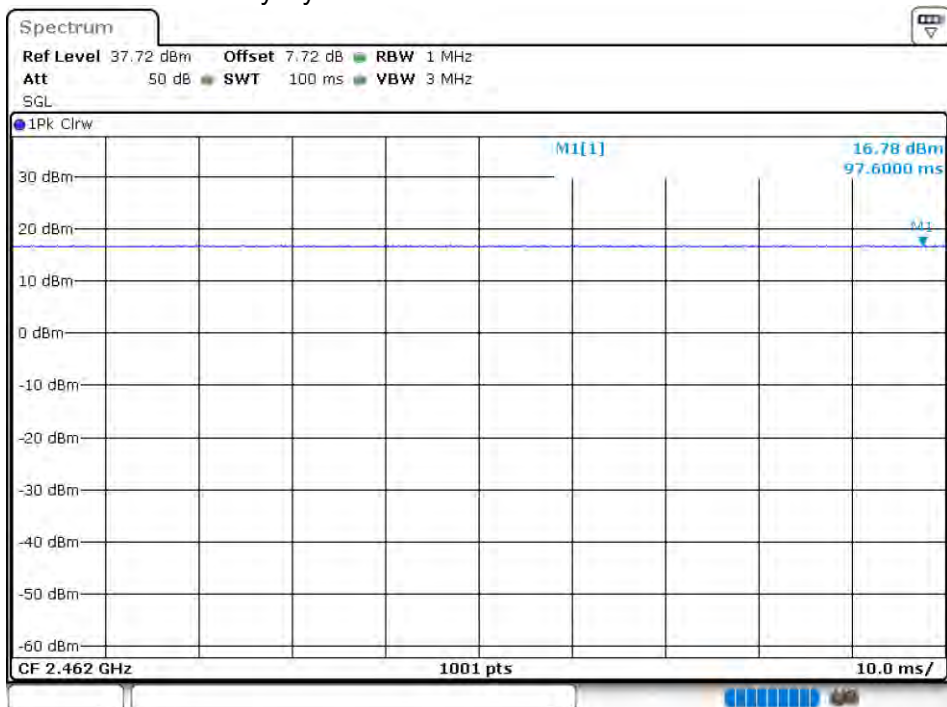


Duty Cycle NVNT 802.11b 2412MHz Ant 2

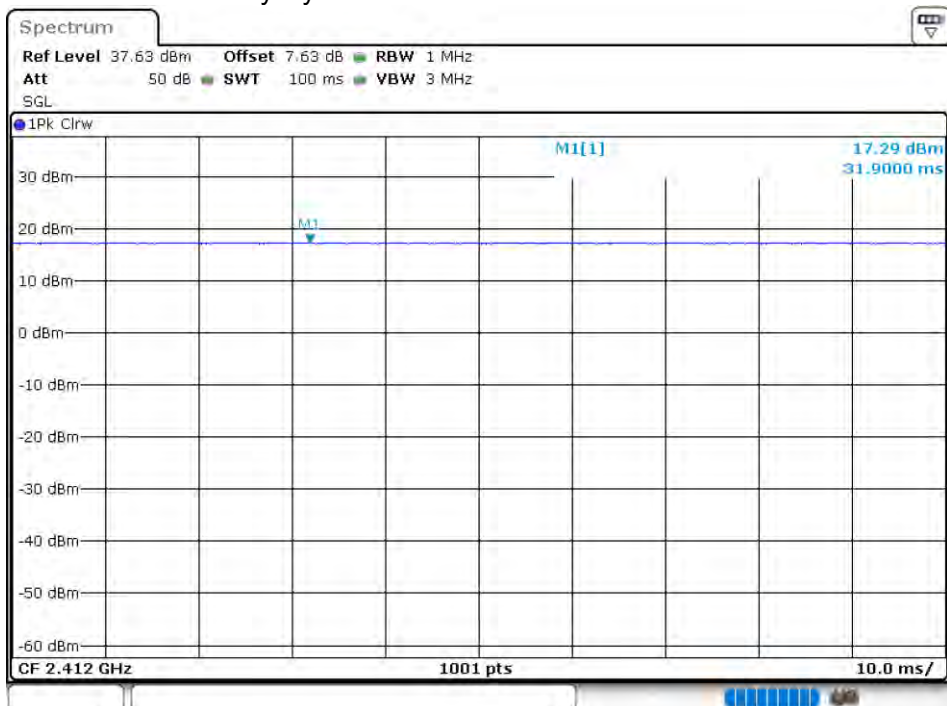


Duty Cycle NVNT 802.11b 2437MHz Ant 2

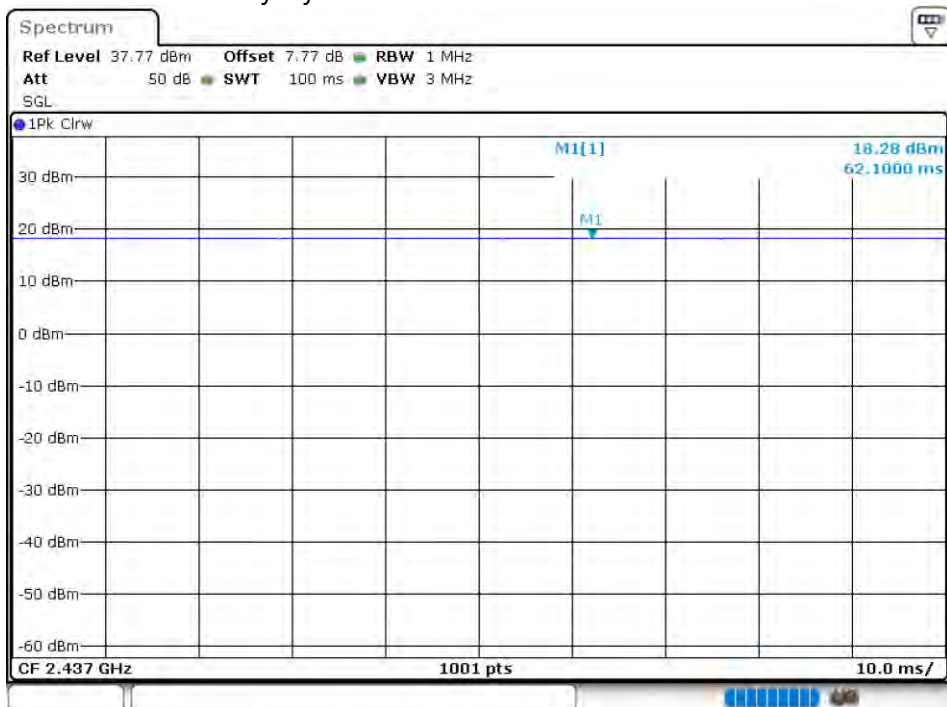


Duty Cycle NVNT 802.11b 2462MHz Ant 2

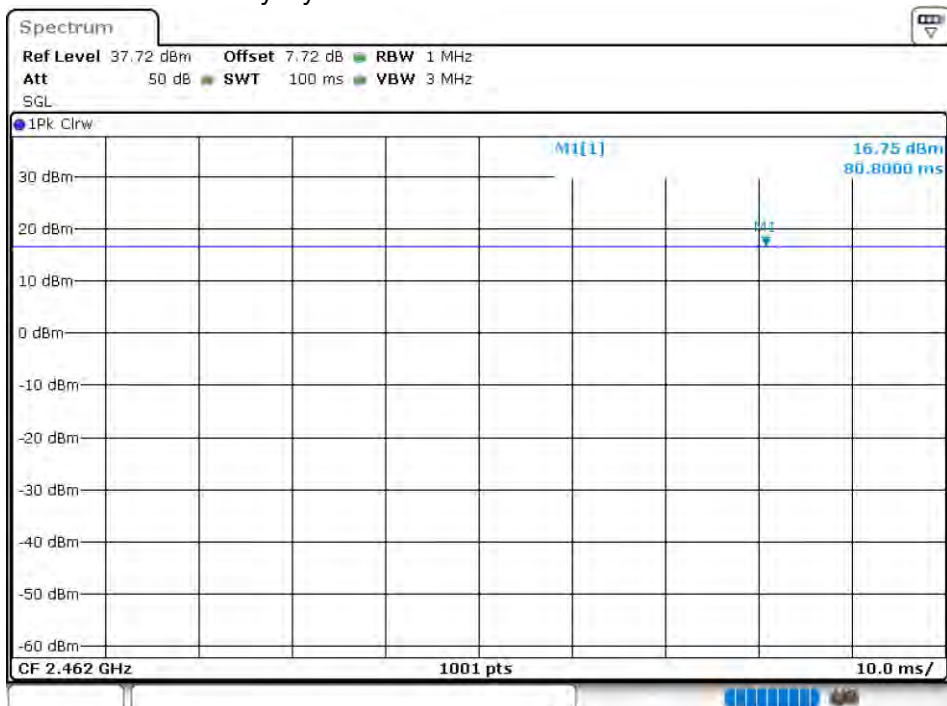


Duty Cycle NVNT 802.11g 2412MHz Ant 1

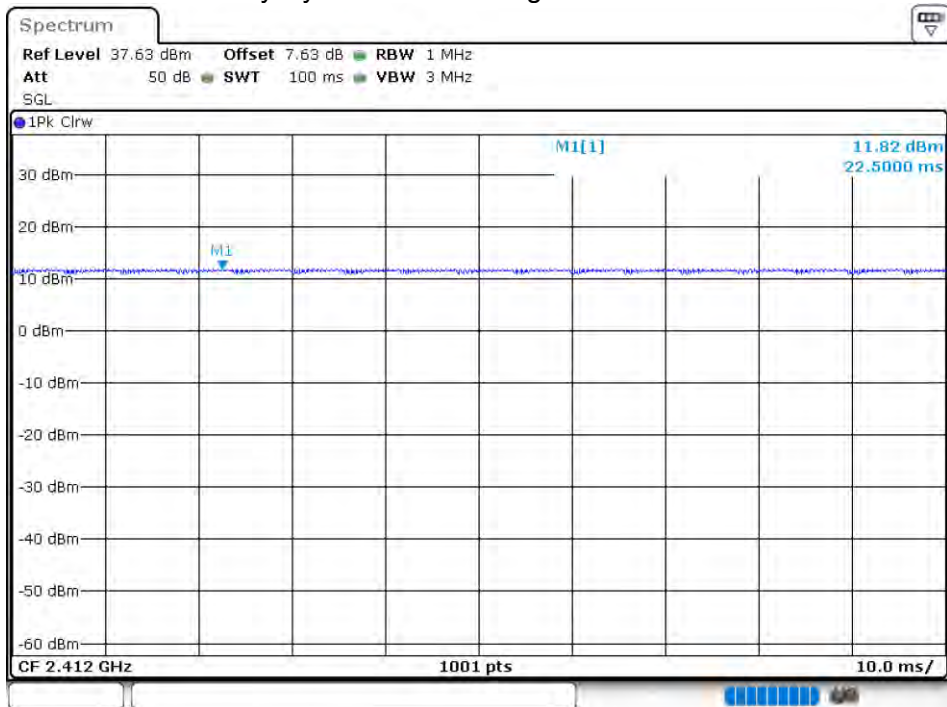


Duty Cycle NVNT 802.11g 2437MHz Ant 1

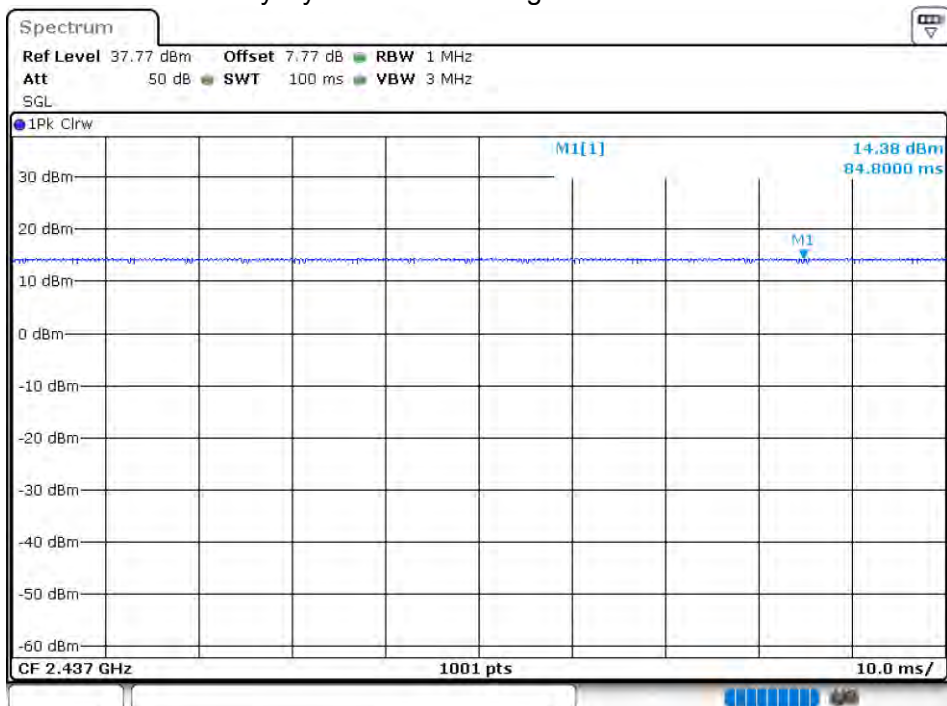


Duty Cycle NVNT 802.11g 2462MHz Ant 1

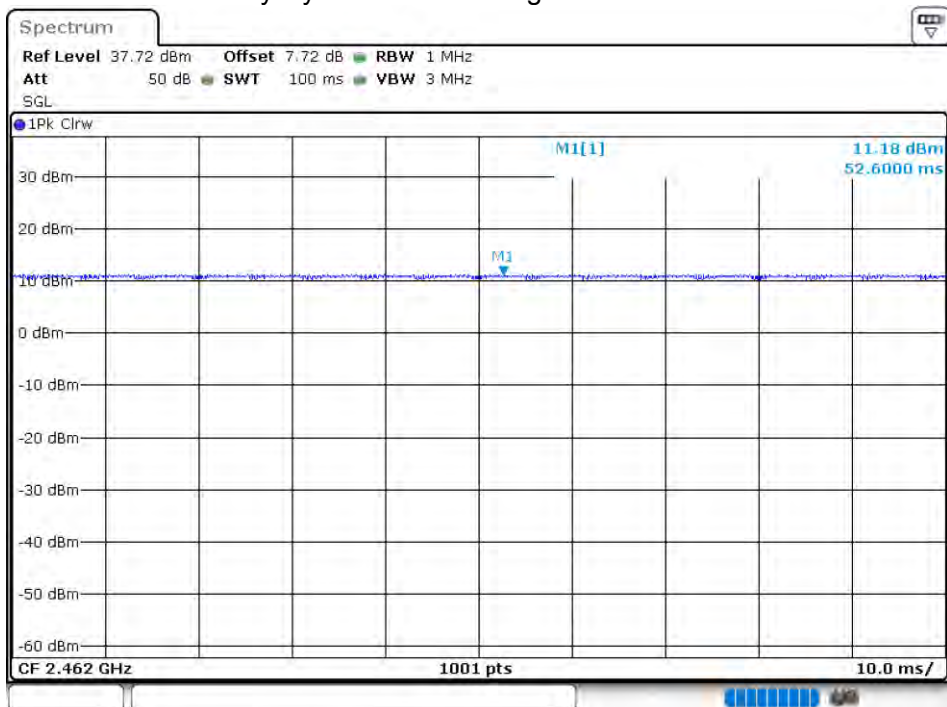


Duty Cycle NVNT 802.11g 2412MHz Ant 2

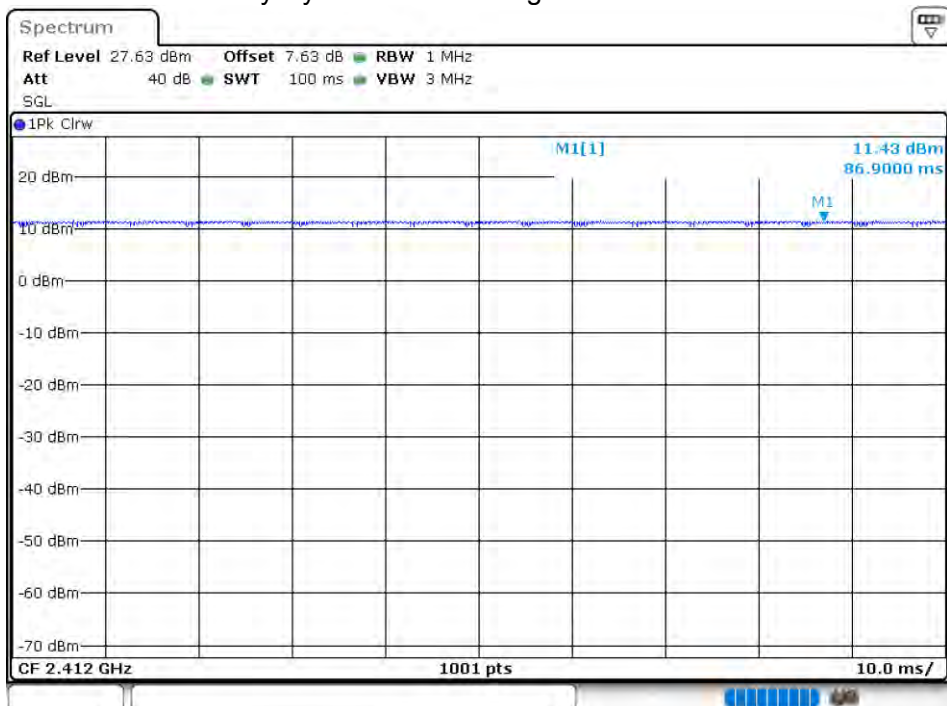


Duty Cycle NVNT 802.11g 2437MHz Ant 2

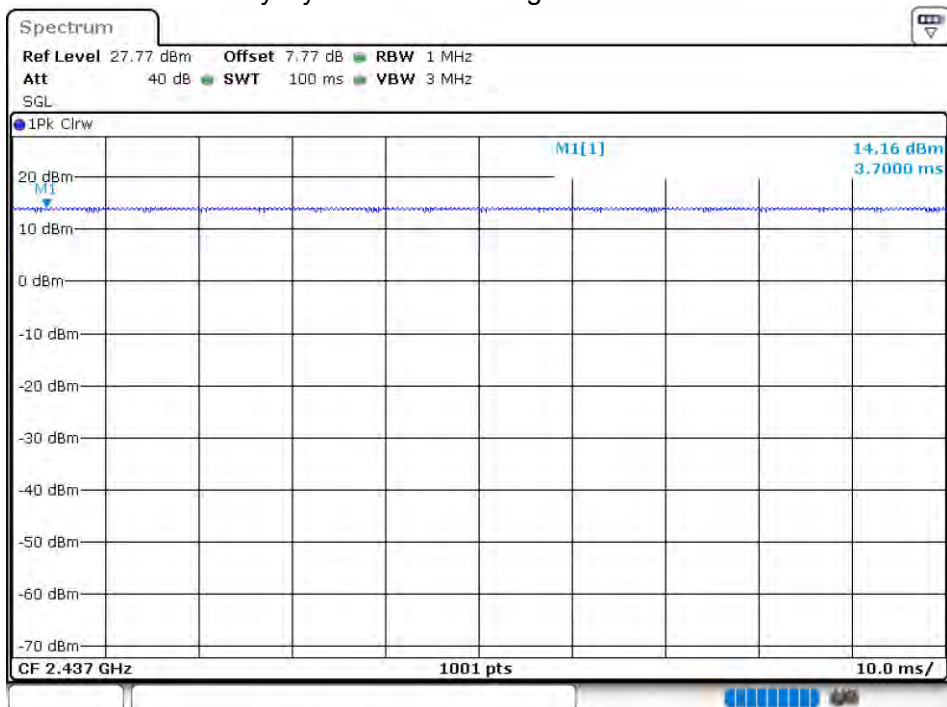


Duty Cycle NVNT 802.11g 2462MHz Ant 2

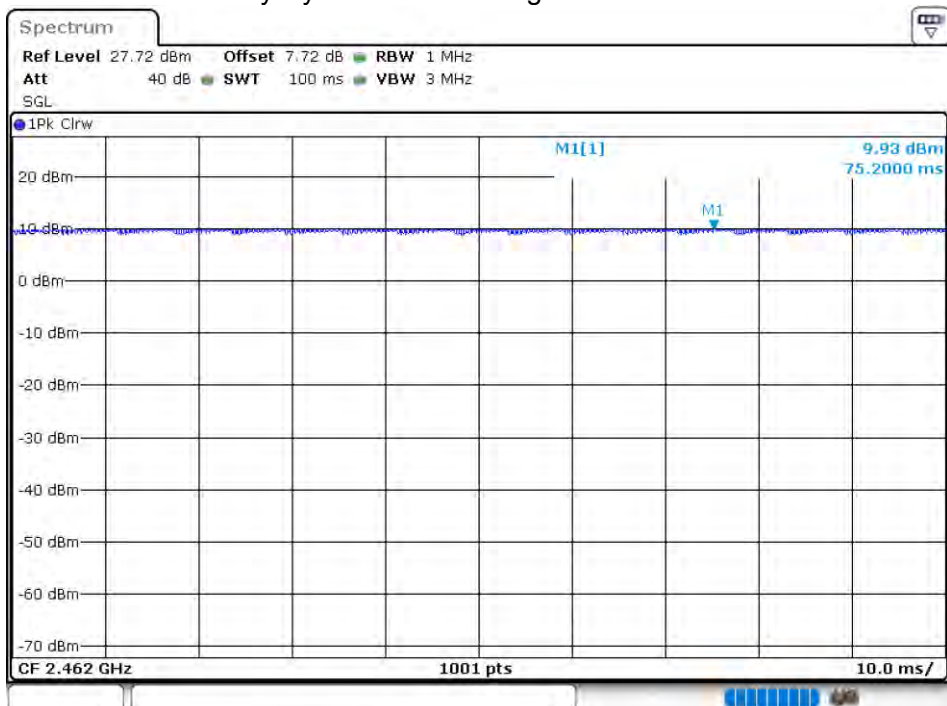


Duty Cycle NVNT 802.11n(HT20) 2412MHz Ant 1

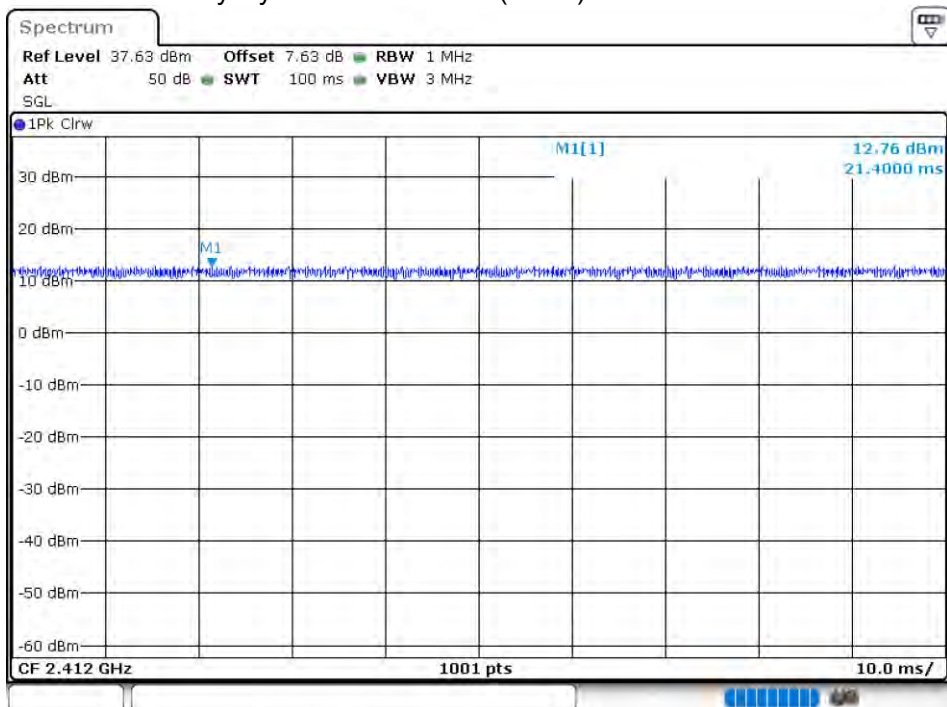


Duty Cycle NVNT 802.11n(HT20) 2437MHz Ant 1

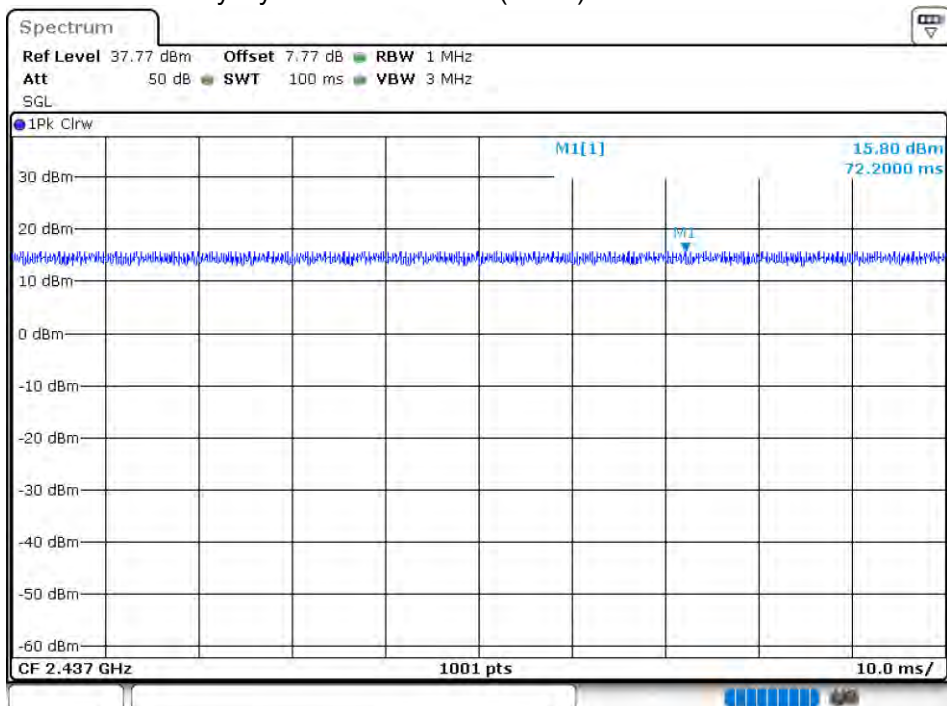


Duty Cycle NVNT 802.11n(HT20) 2462MHz Ant 1

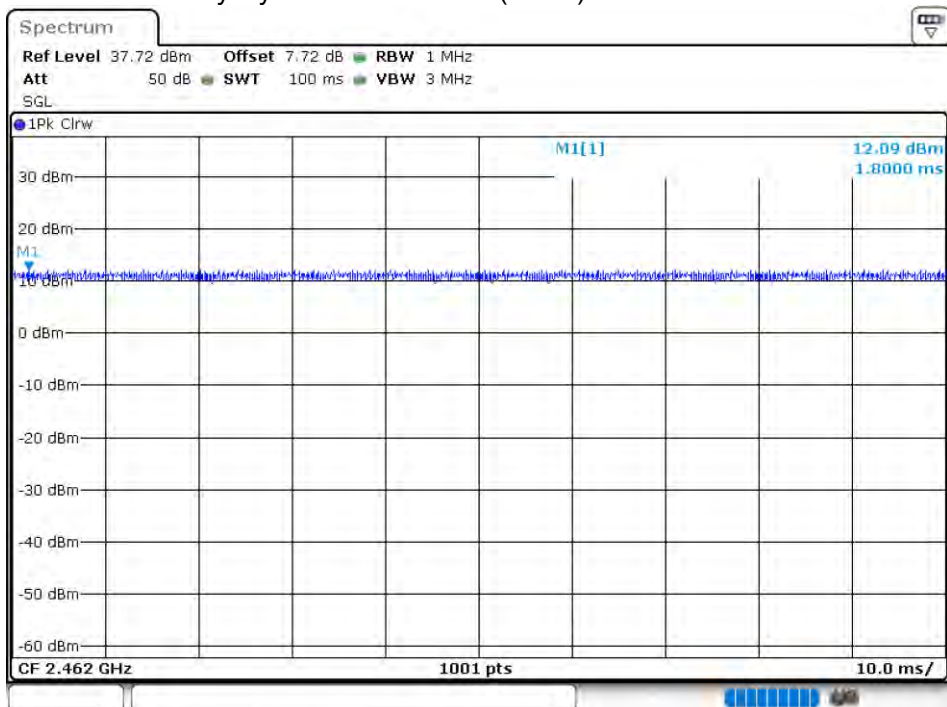


Duty Cycle NVNT 802.11n(HT20) 2412MHz Ant 2

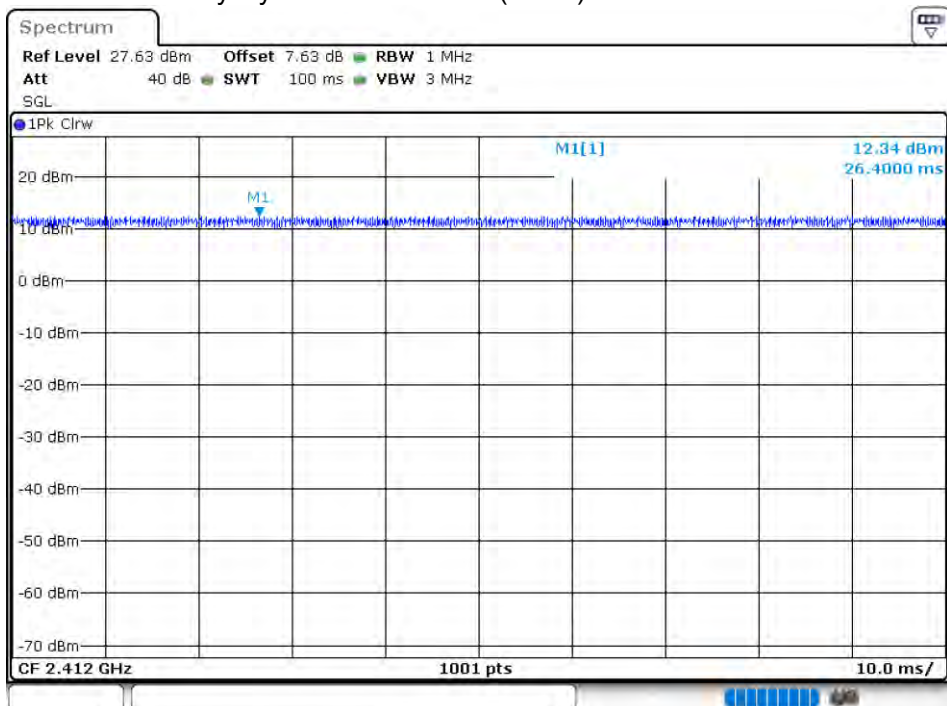


Duty Cycle NVNT 802.11n(HT20) 2437MHz Ant 2

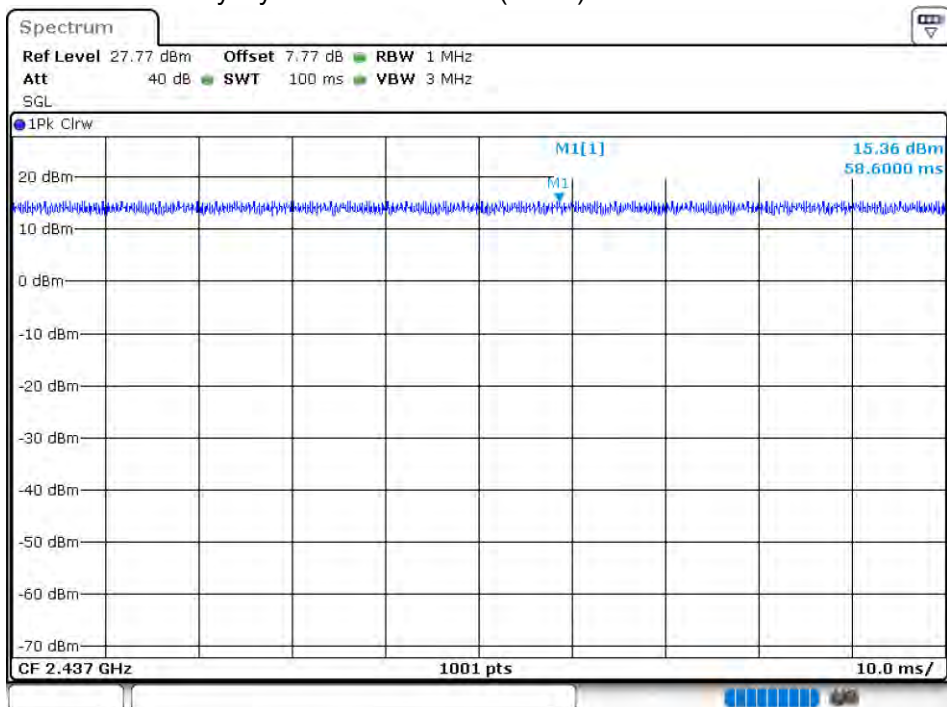


Duty Cycle NVNT 802.11n(HT20) 2462MHz Ant 2

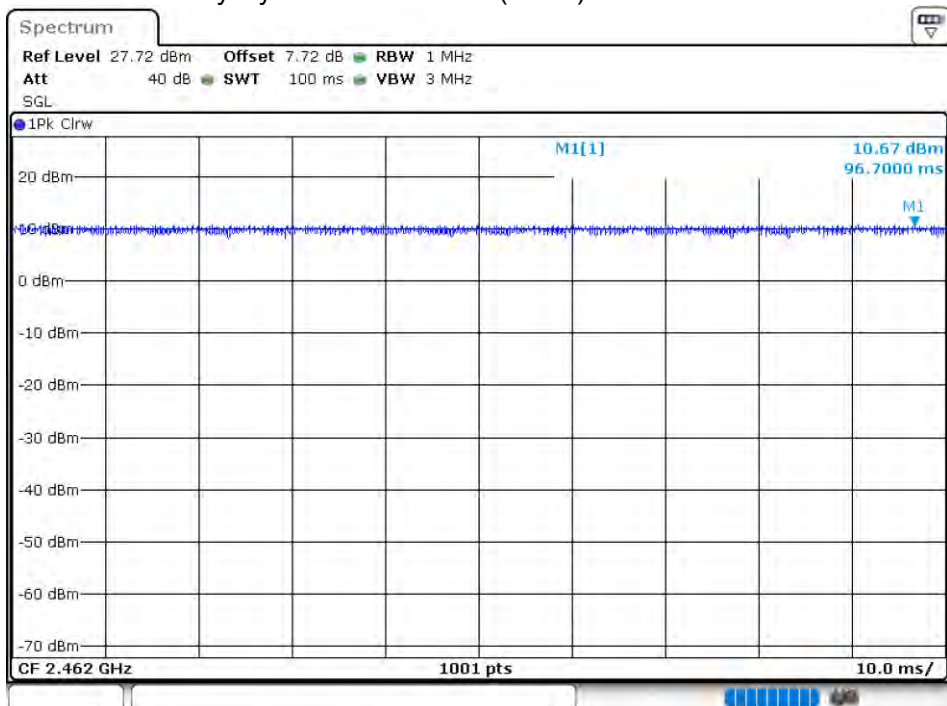


Duty Cycle NVNT 802.11n(HT40) 2422MHz Ant 1

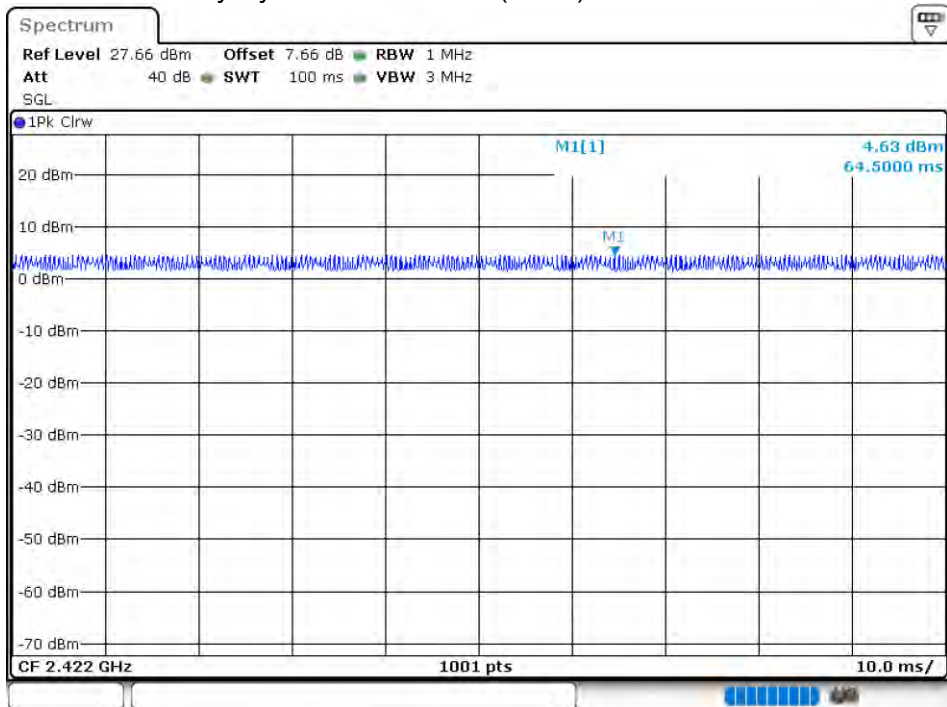


Duty Cycle NVNT 802.11n(HT40) 2437MHz Ant 1

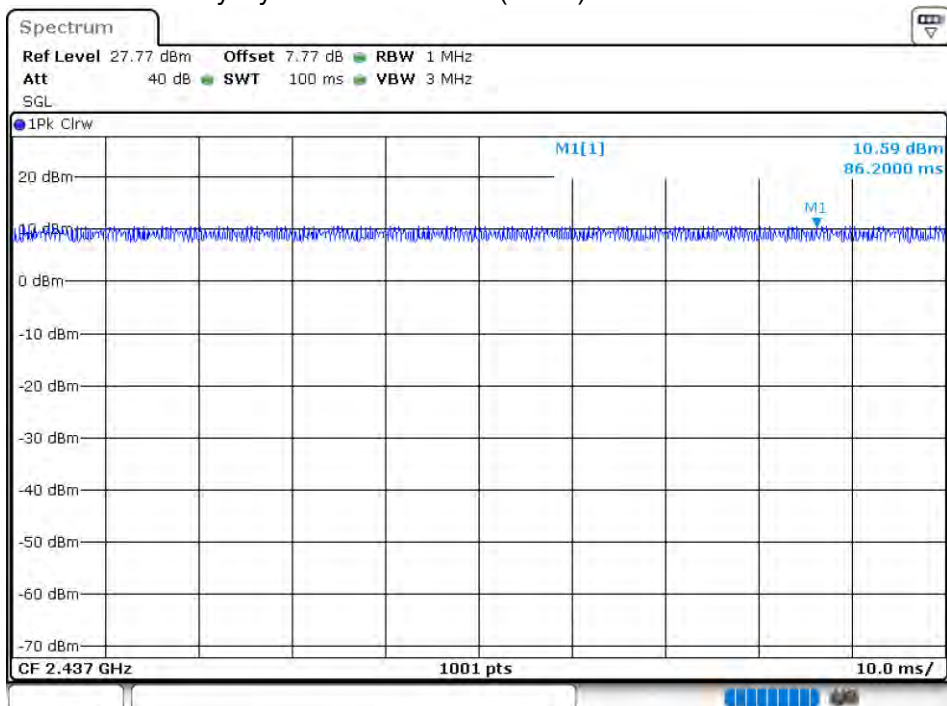


Duty Cycle NVNT 802.11n(HT40) 2452MHz Ant 1

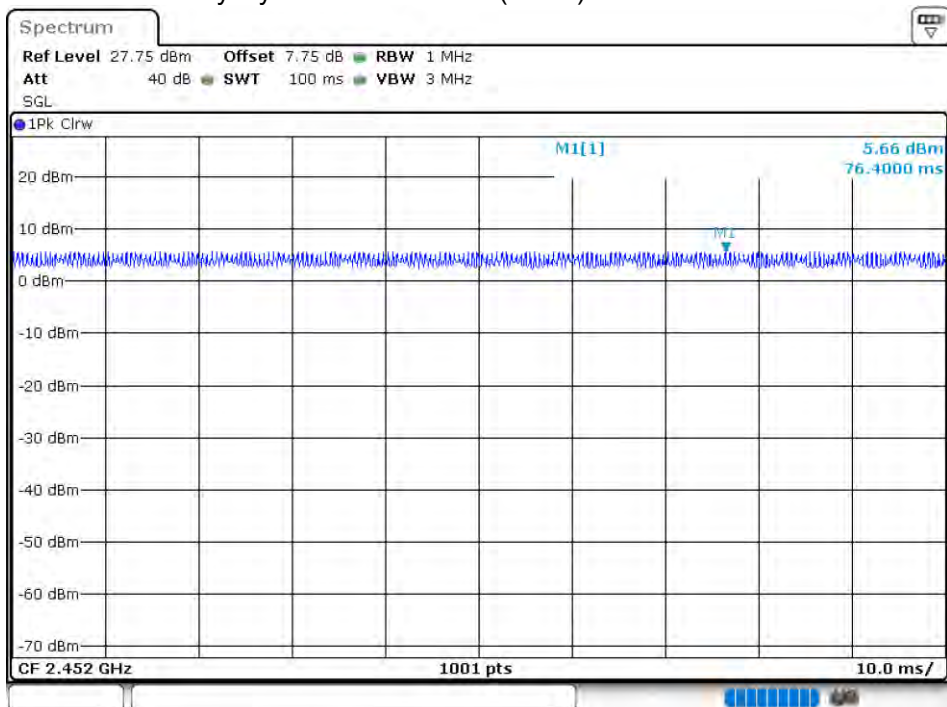


Duty Cycle NVNT 802.11n(HT40) 2422MHz Ant 2

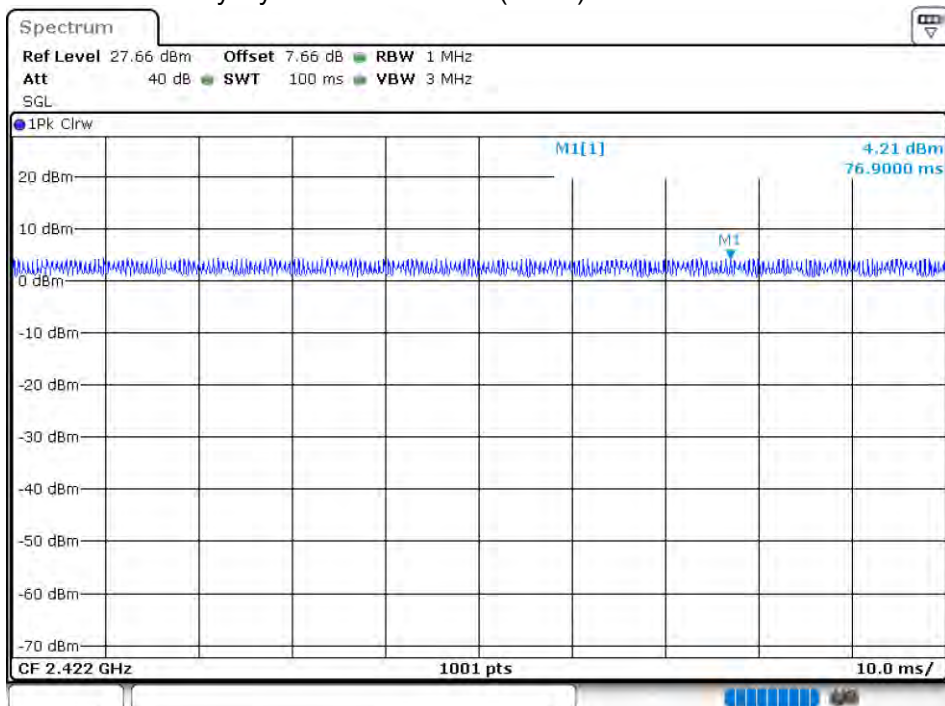


Duty Cycle NVNT 802.11n(HT40) 2437MHz Ant 2

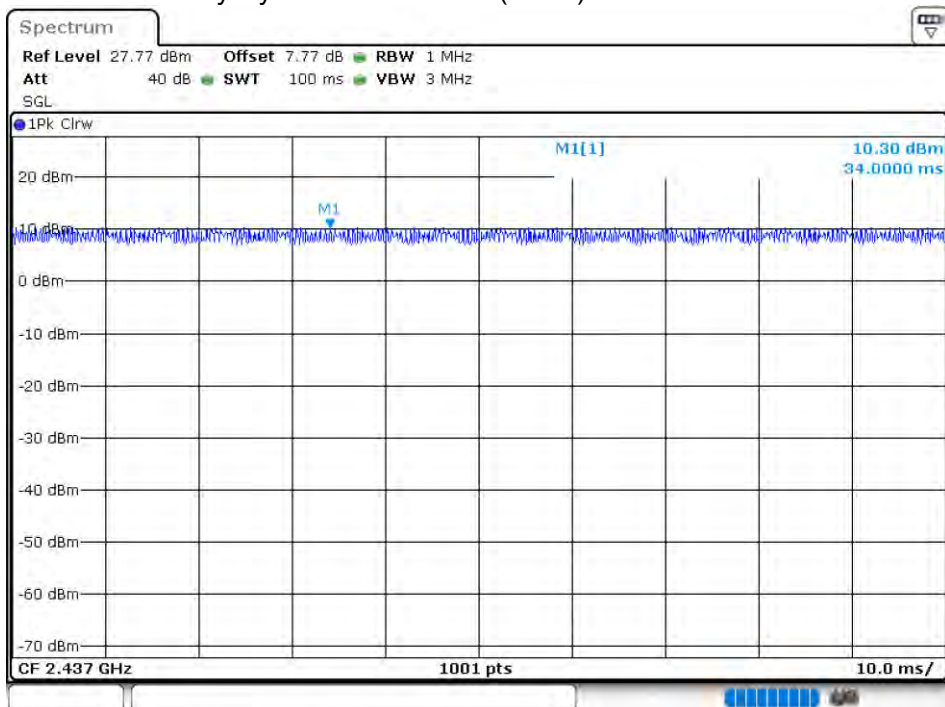


Duty Cycle NVNT 802.11n(HT40) 2452MHz Ant 2

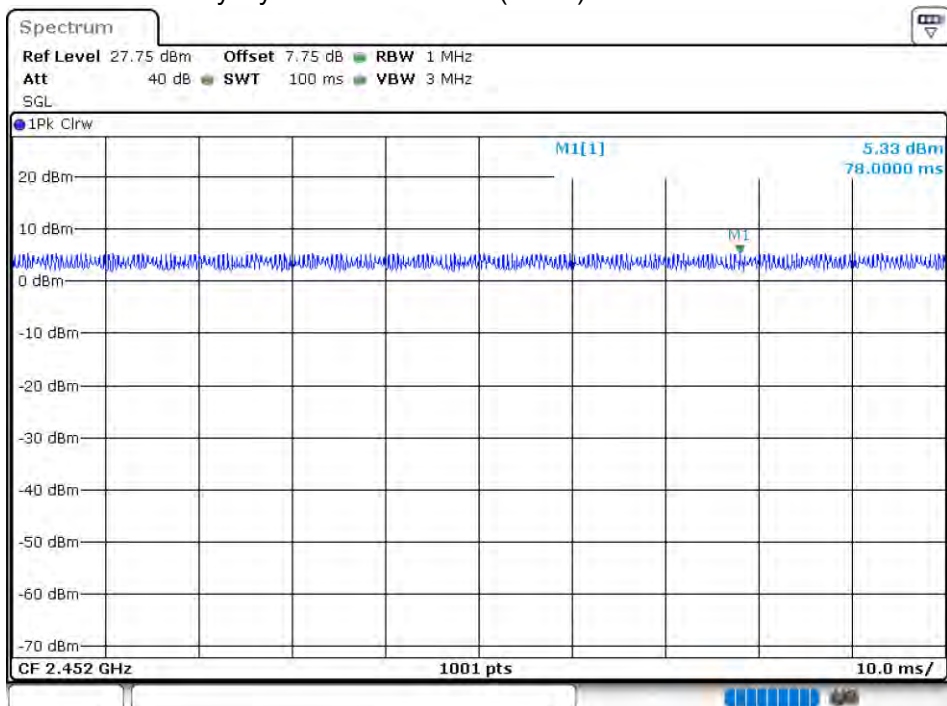


Duty Cycle NVNT 802.11b 2412MHz Ant 3

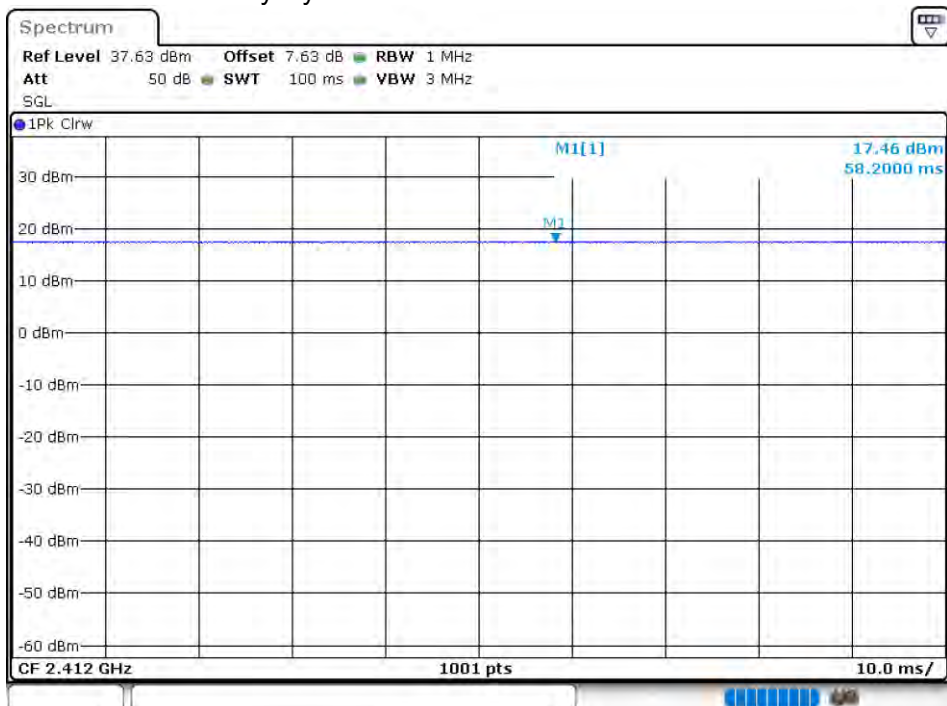


Duty Cycle NVNT 802.11b 2437MHz Ant 3

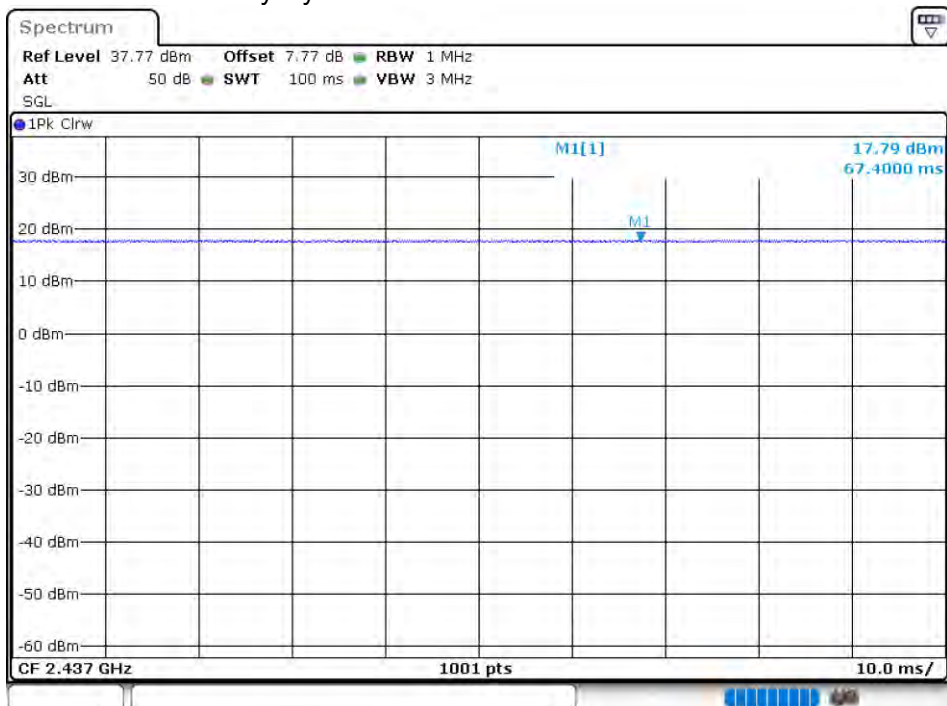


Duty Cycle NVNT 802.11b 2462MHz Ant 3

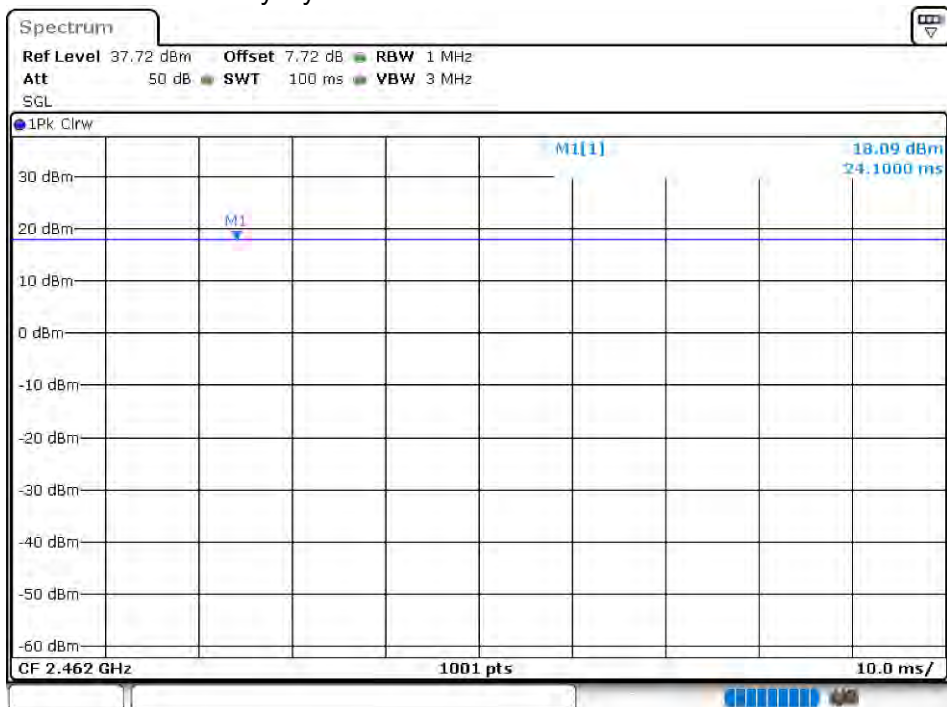


Duty Cycle NVNT 802.11b 2412MHz Ant 4

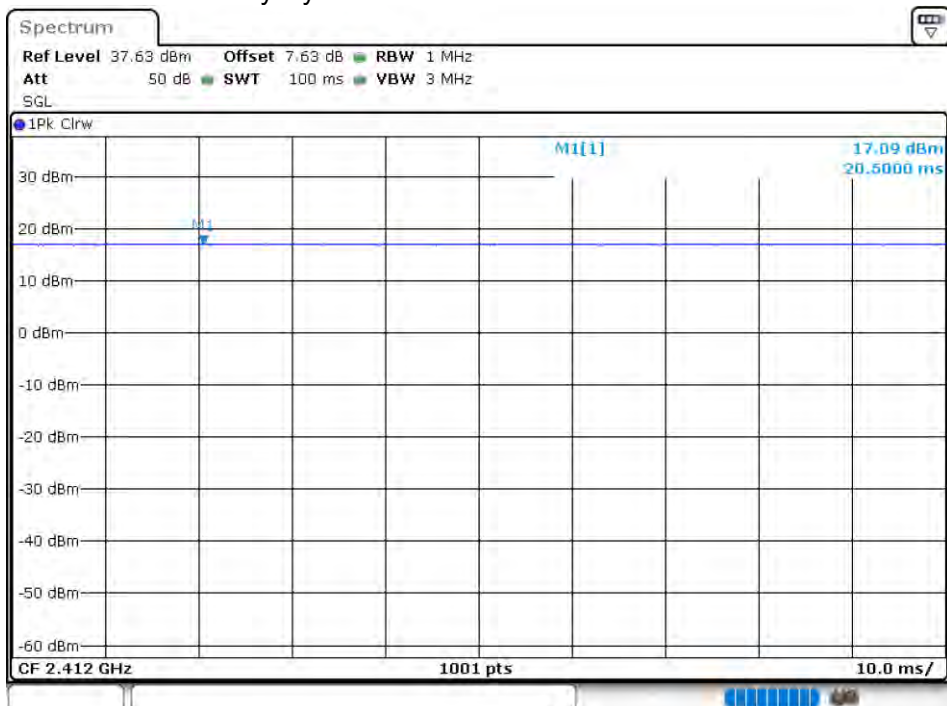


Duty Cycle NVNT 802.11b 2437MHz Ant 4

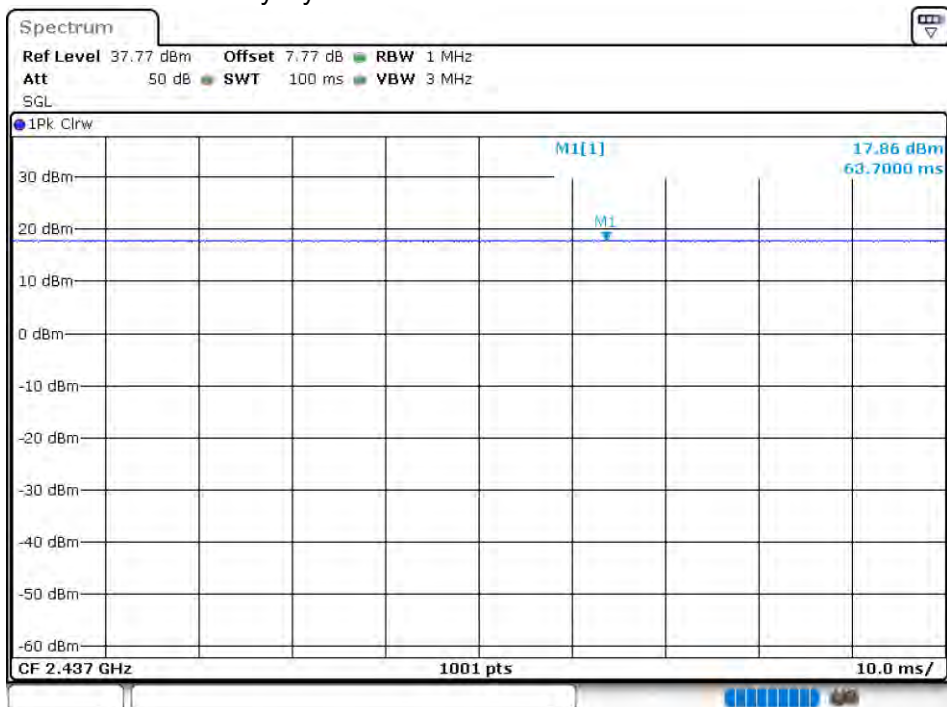


Duty Cycle NVNT 802.11b 2462MHz Ant 4

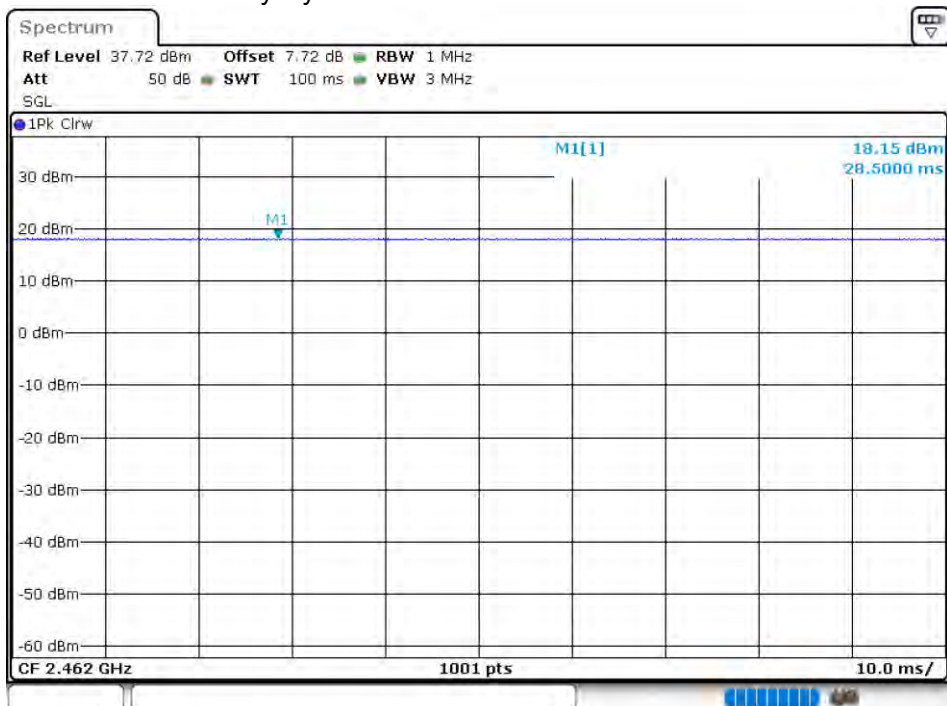


Duty Cycle NVNT 802.11g 2412MHz Ant 3

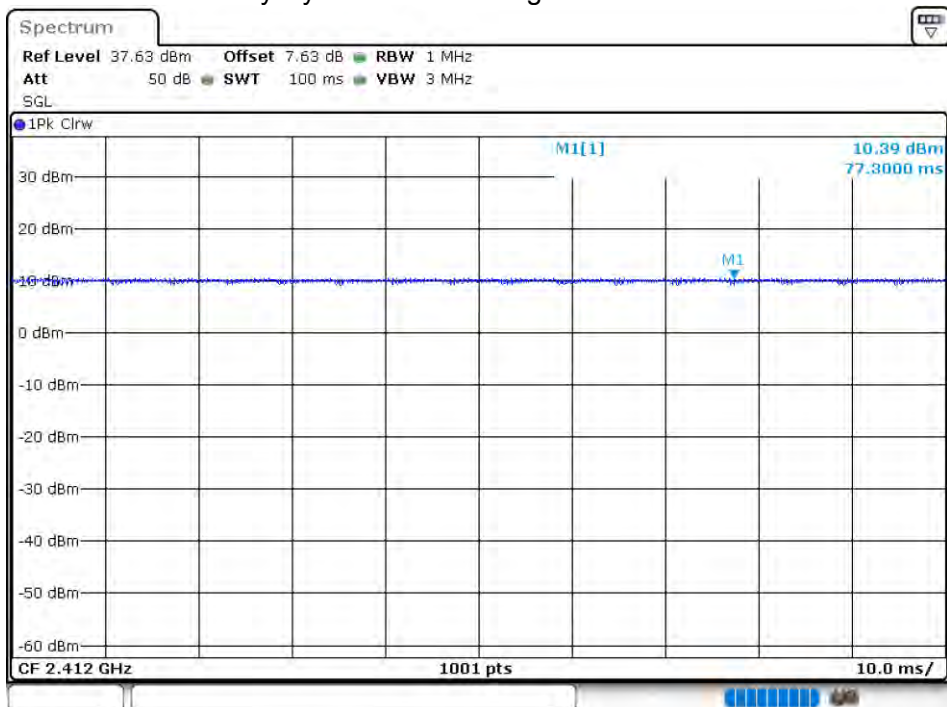


Duty Cycle NVNT 802.11g 2437MHz Ant 3

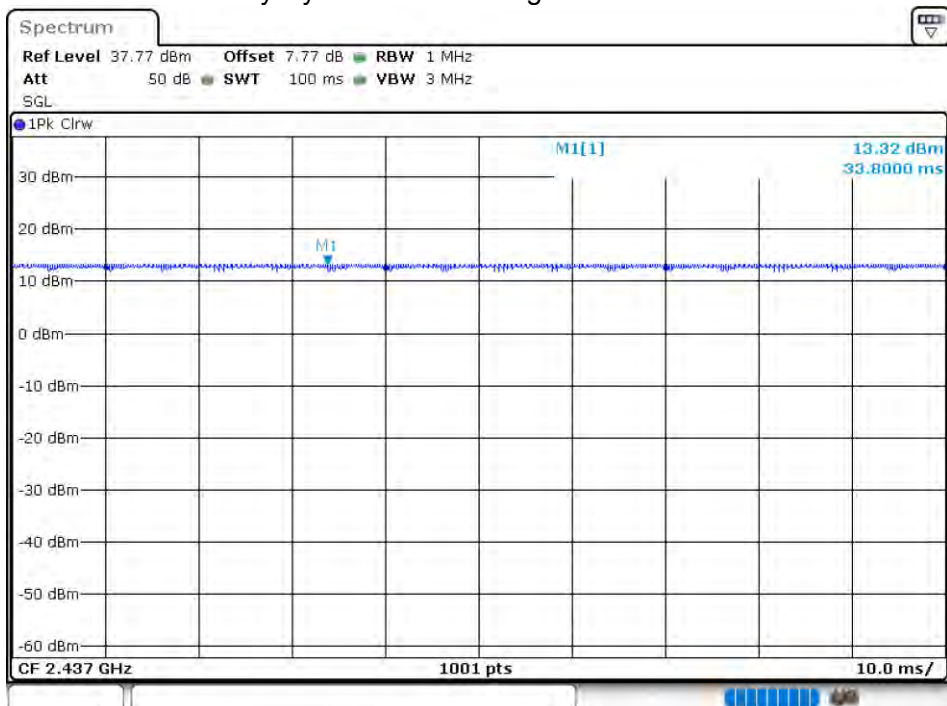


Duty Cycle NVNT 802.11g 2462MHz Ant 3

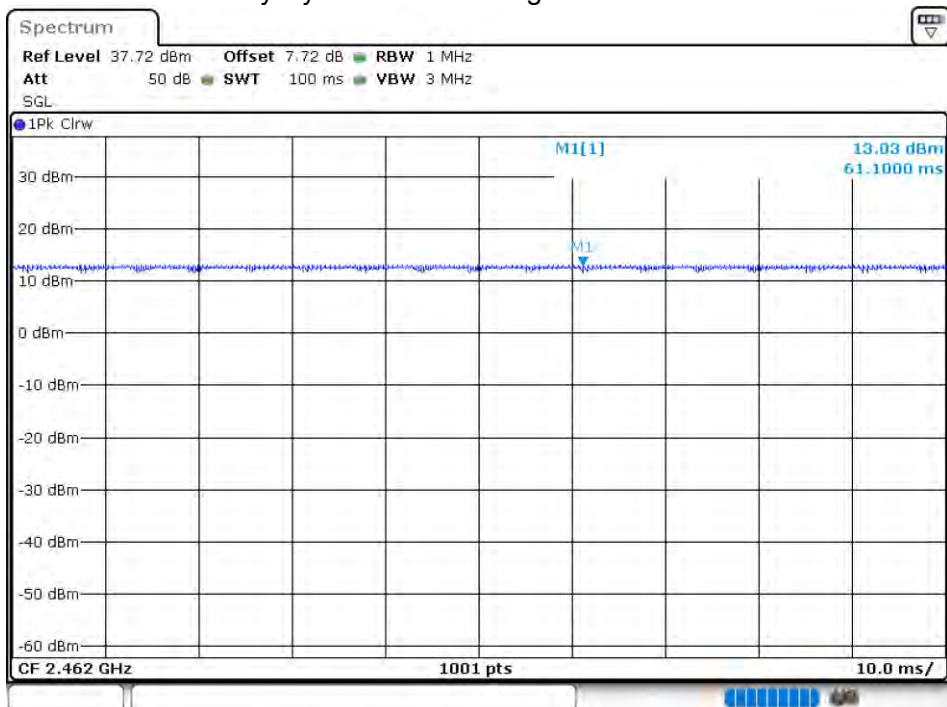


Duty Cycle NVNT 802.11g 2412MHz Ant 4

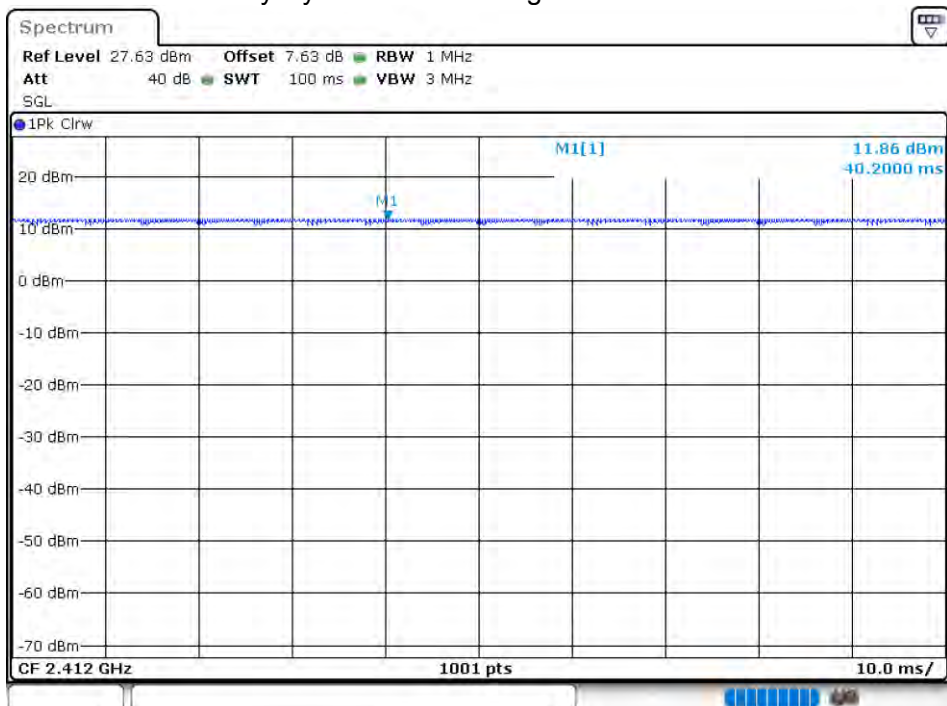


Duty Cycle NVNT 802.11g 2437MHz Ant 4

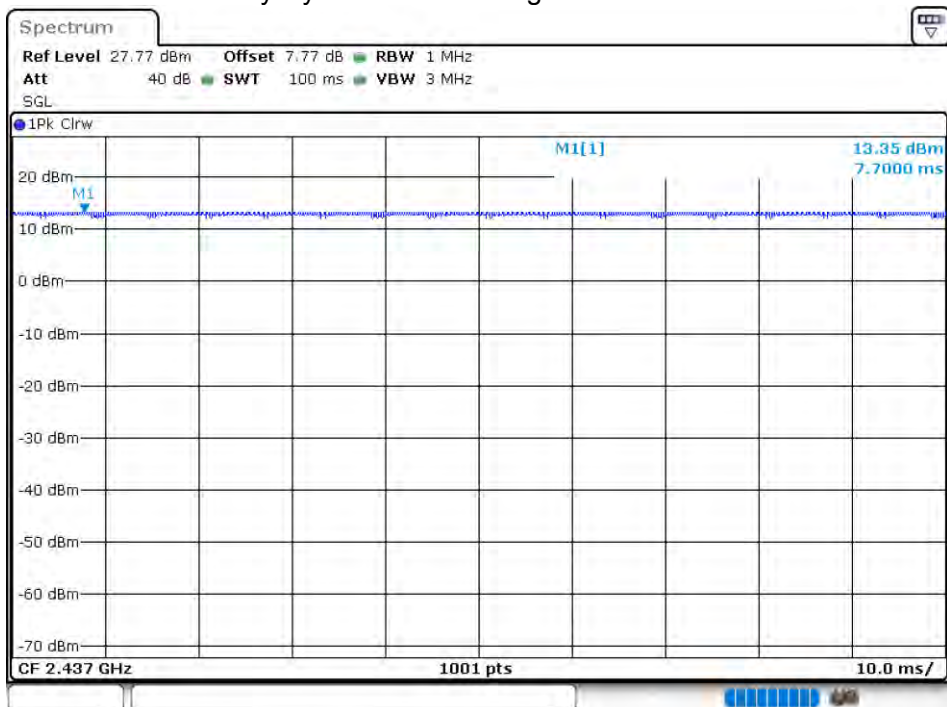


Duty Cycle NVNT 802.11g 2462MHz Ant 4

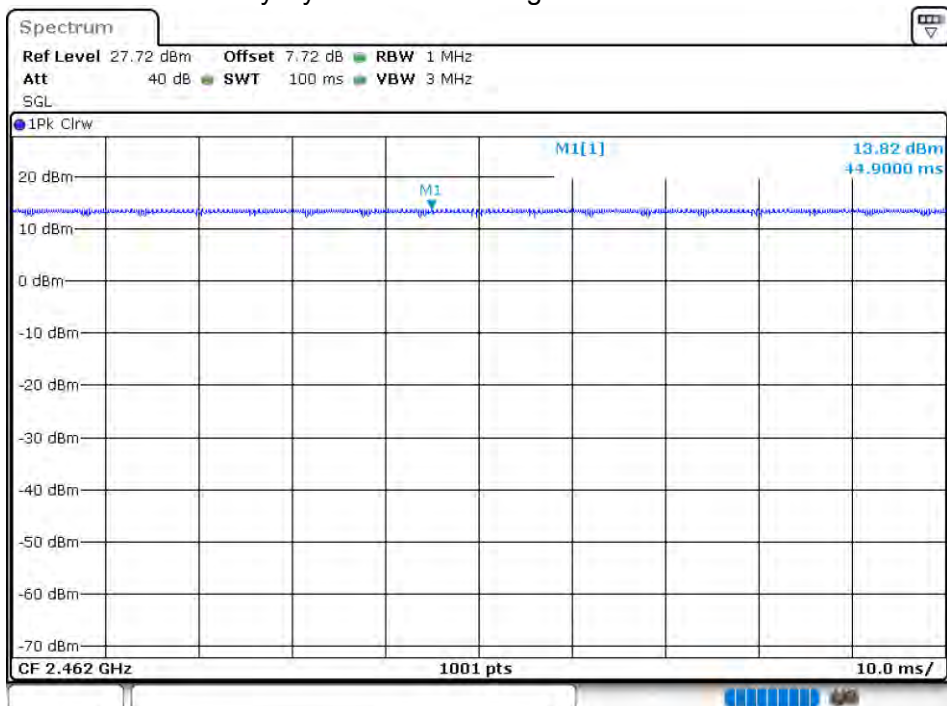


Duty Cycle NVNT 802.11n(HT20) 2412MHz Ant 3

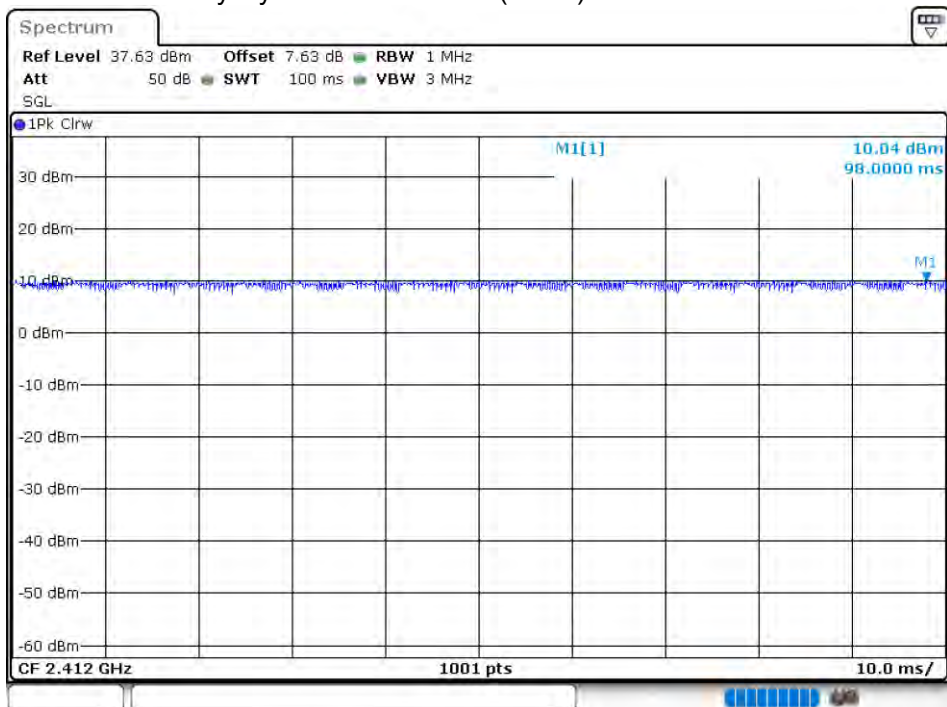


Duty Cycle NVNT 802.11n(HT20) 2437MHz Ant 3

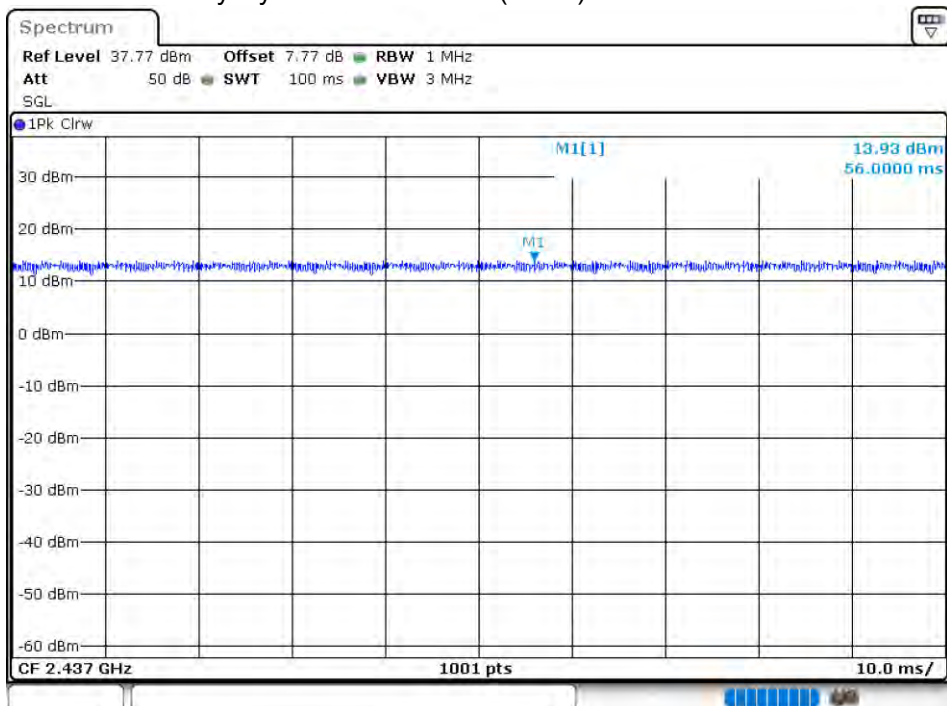


Duty Cycle NVNT 802.11n(HT20) 2462MHz Ant 3

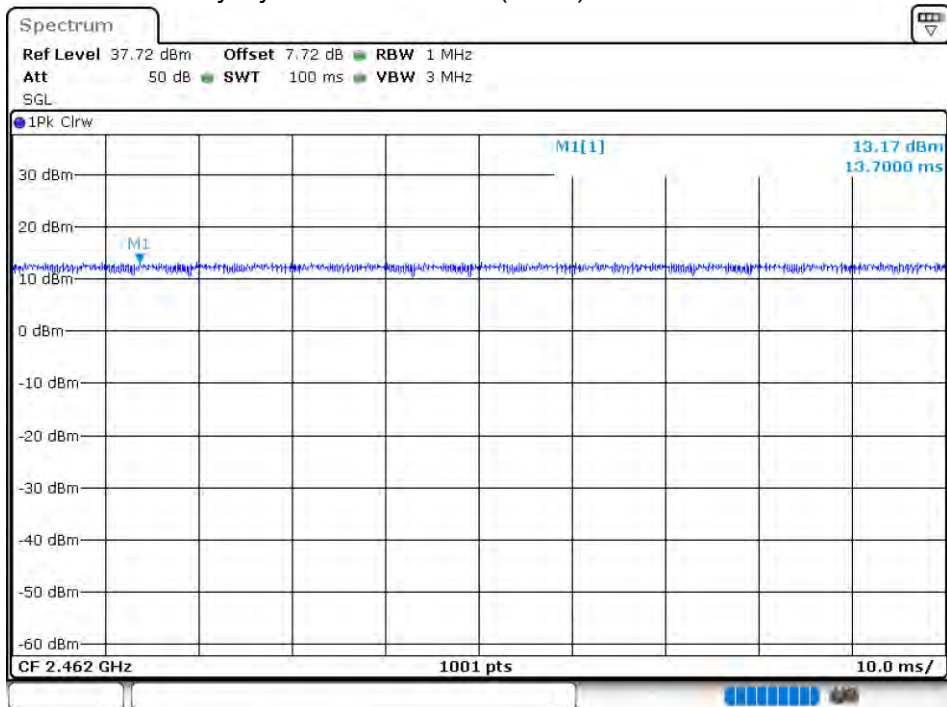


Duty Cycle NVNT 802.11n(HT20) 2412MHz Ant 4

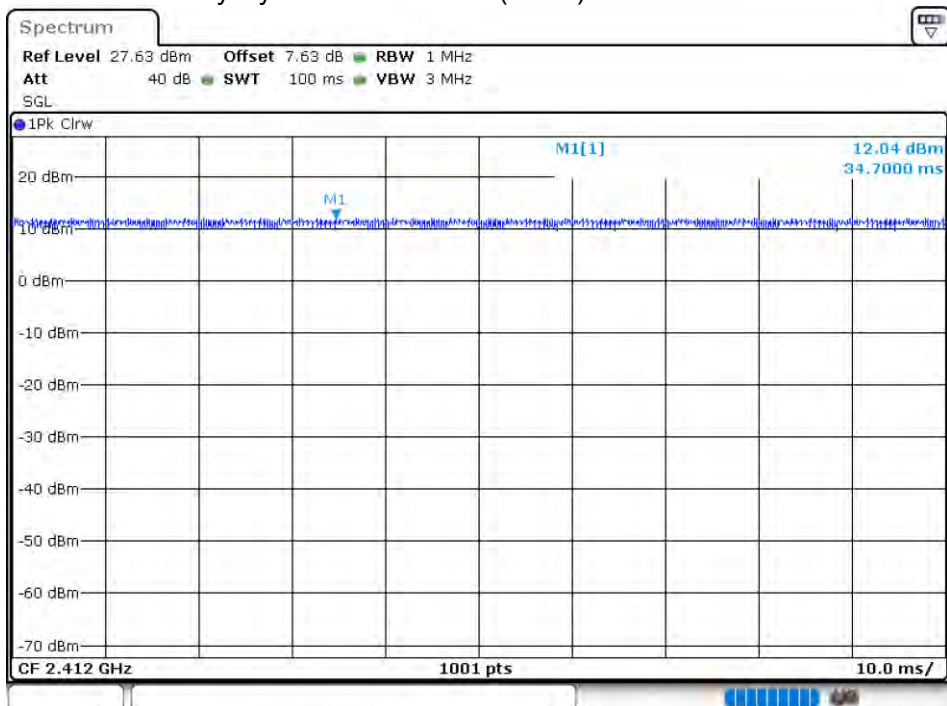


Duty Cycle NVNT 802.11n(HT20) 2437MHz Ant 4

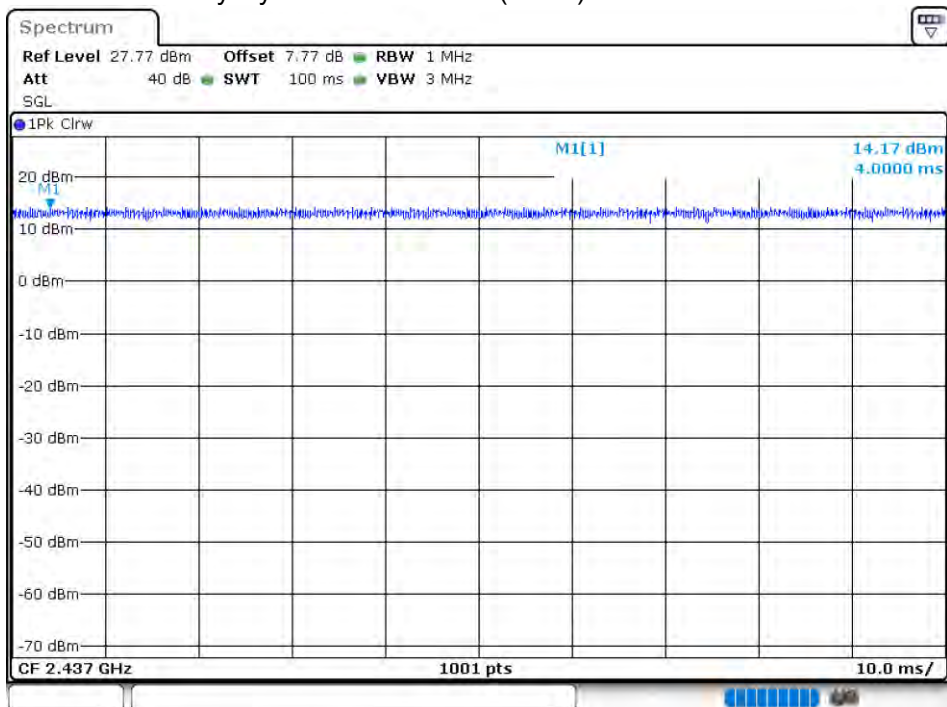


Duty Cycle NVNT 802.11n(HT20) 2462MHz Ant 4

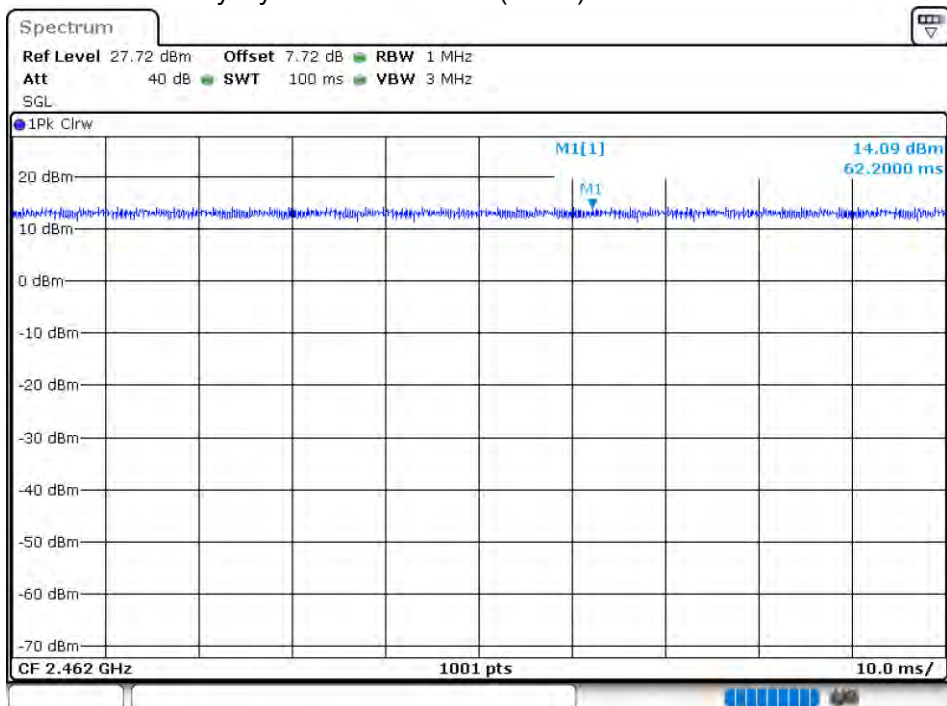


Duty Cycle NVNT 802.11n(HT40) 2422MHz Ant 3

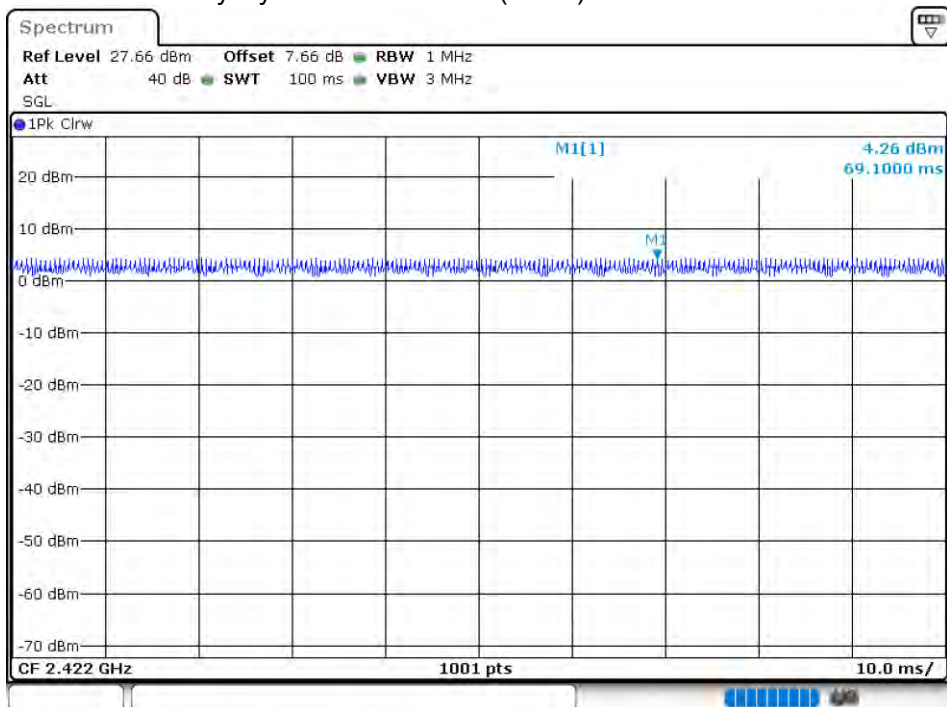


Duty Cycle NVNT 802.11n(HT40) 2437MHz Ant 3

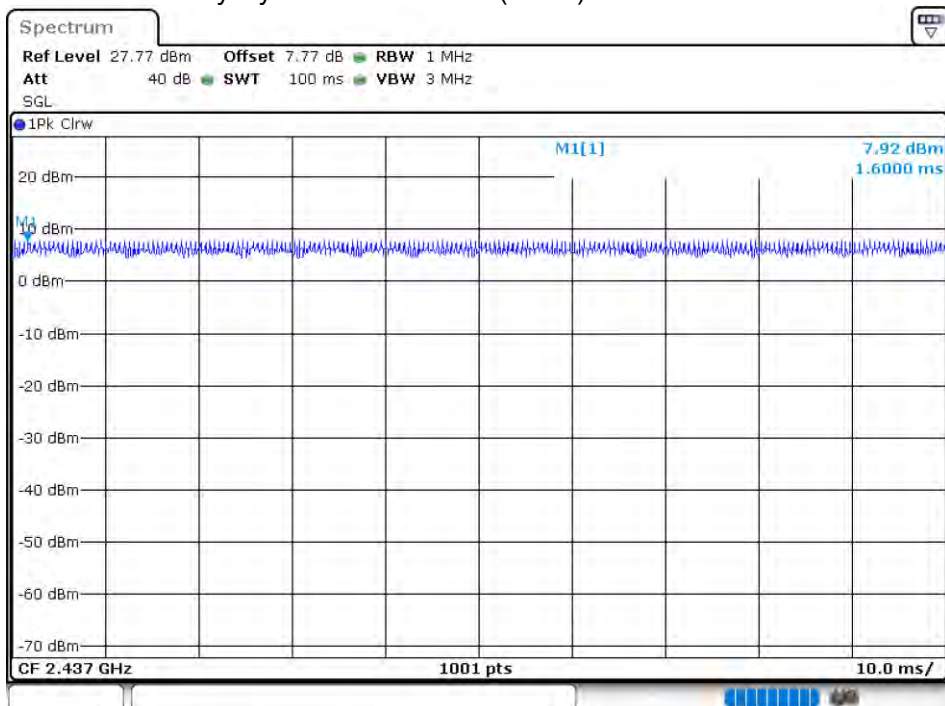


Duty Cycle NVNT 802.11n(HT40) 2452MHz Ant 3

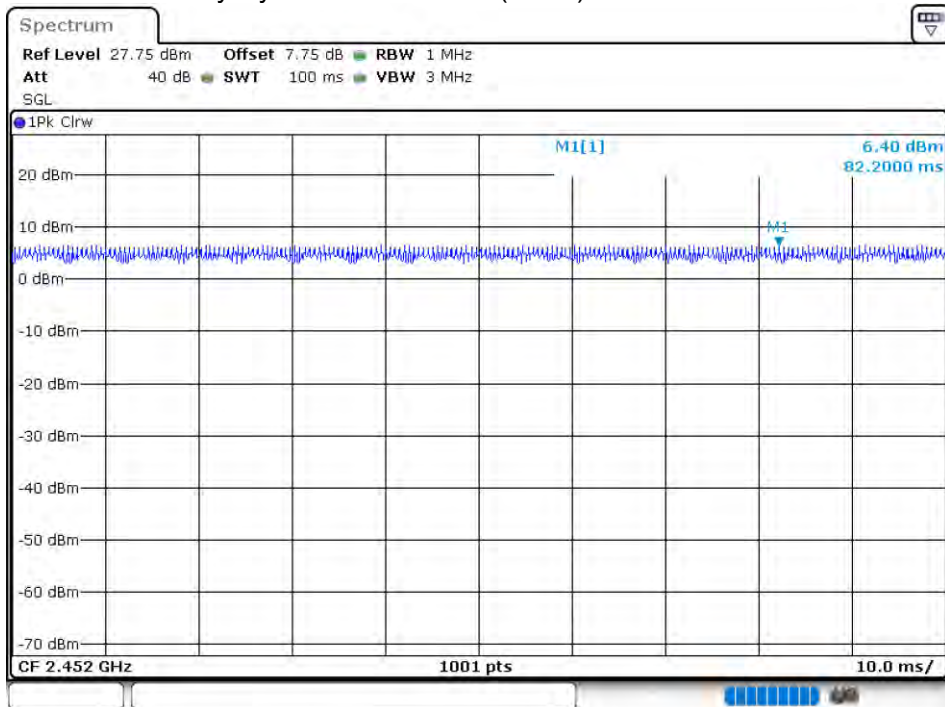


Duty Cycle NVNT 802.11n(HT40) 2422MHz Ant 4

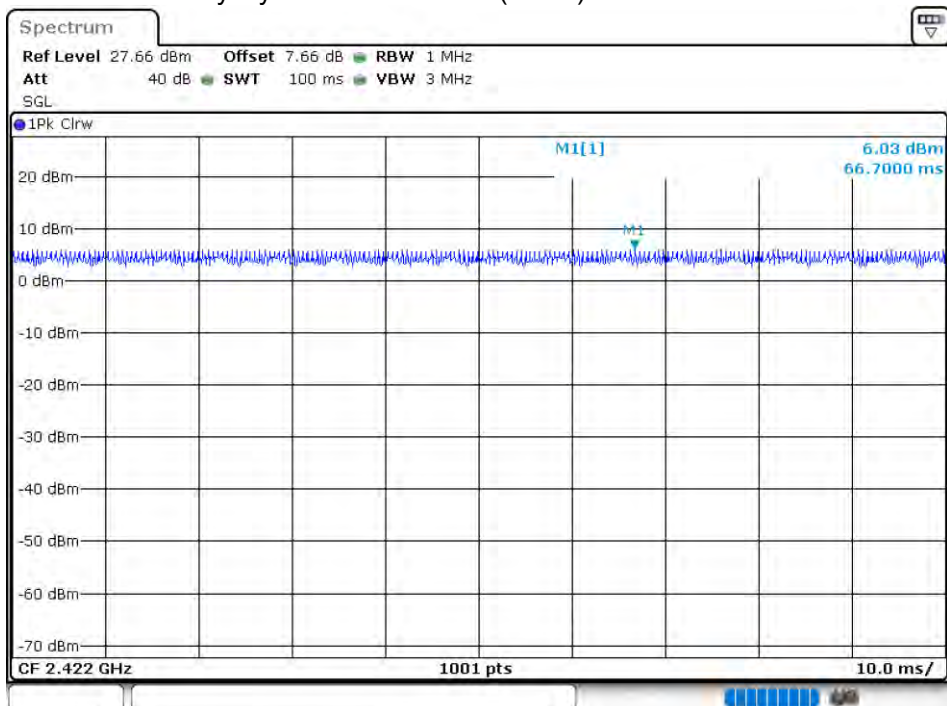

Duty Cycle NVNT 802.11n(HT40) 2437MHz Ant 4

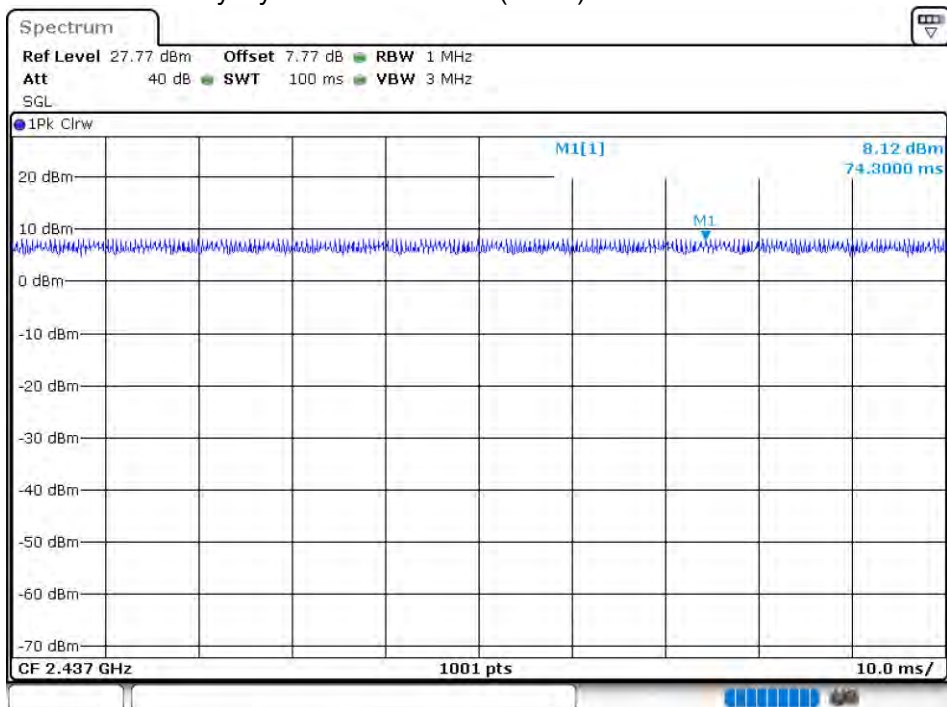

Duty Cycle NVNT 802.11n(HT40) 2452MHz Ant 4

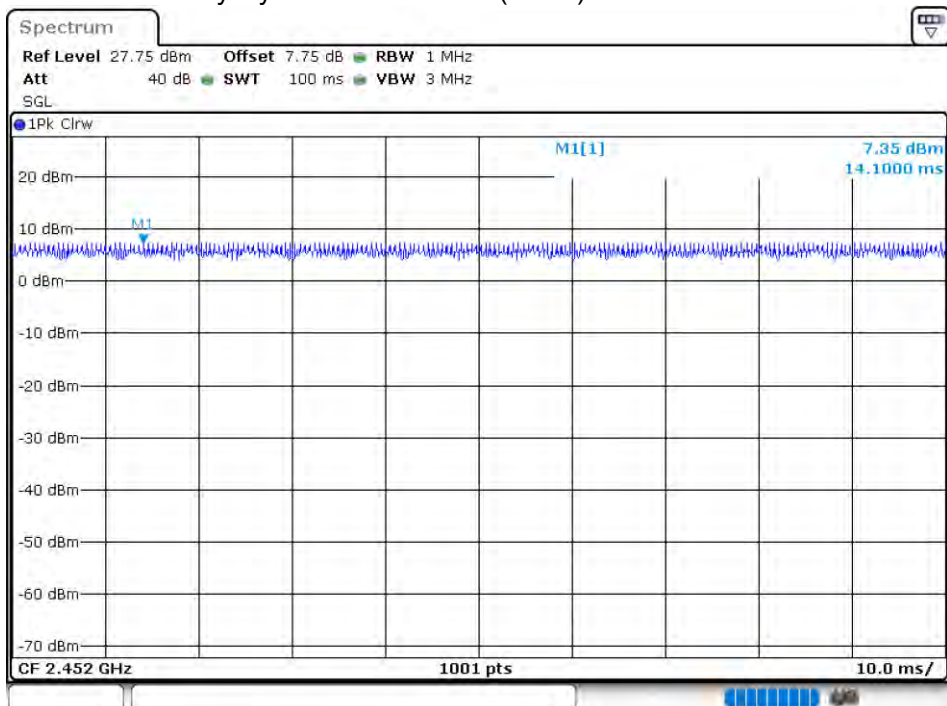

8.2 MAXIMUM CONDUCTED OUTPUT POWER

8812 Module:

Test Channel	Frequency (MHz)	Power Setting	Duty Cycle Factor (dB)	Peak Output Power(dBm)		Total	LIMIT (dBm)	Verdict
				ANT 1	ANT 2	(dBm)		
TX 802.11b Mode								
1	2412	Default	0	23.52	22.65	-	30	PASS
6	2437	Default	0	24.39	24.20	-	30	PASS
11	2462	Default	0	22.07	22.11	-	30	PASS
TX 802.11 g Mode								
1	2412	Default	0	18.48	18.16	-	30	PASS
6	2437	Default	0	20.88	20.65	-	30	PASS
11	2462	Default	0	17.79	16.56	-	30	PASS
TX 802.11 n20M Mode(Single TX)								
1	2412	Default	0	18.42	18.10	-	30	PASS
6	2437	Default	0	20.93	20.61	-	30	PASS
11	2462	Default	0	17.76	16.50	-	30	PASS
TX 802.11 n20M Mode(MIMO TX)								
1	2412	Default	0	15.47	15.16	18.33	30	PASS
6	2437	Default	0	19.65	19.68	22.68	30	PASS
11	2462	Default	0	15.24	15.10	18.18	30	PASS
TX 802.11 n40M Mode(Single TX)								
3	2422	Default	0	14.55	14.29	-	30	PASS
6	2437	Default	0	20.40	20.16	-	30	PASS
9	2452	Default	0	15.68	15.43	-	30	PASS
TX 802.11 n40M Mode(MIMO TX)								
3	2422	Default	0	14.23	14.08	17.17	30	PASS
6	2437	Default	0	19.20	19.16	22.19	30	PASS
9	2452	Default	0	13.26	13.15	16.22	30	PASS

Note: For 802.11n has MIMO mode. Directional gain=5.87dbi
5.87dbi<6.0dbi so power limit= 30.00 in dBm

8192 Module:

Test Channel	Frequency (MHz)	Power Setting	Duty Cycle Factor (dB)	Peak Output Power(dBm)		Total	LIMIT (dBm)	Verdict
				ANT 3	ANT 4	(dBm)		
TX 802.11b Mode								
1	2412	Default	0	22.40	22.20	-	30	PASS
6	2437	Default	0	22.67	22.86	-	30	PASS
11	2462	Default	0	23.17	23.40	-	30	PASS
TX 802.11 g Mode								
1	2412	Default	0	16.24	17.78	-	30	PASS
6	2437	Default	0	18.80	18.97	-	30	PASS
11	2462	Default	0	18.75	19.57	-	30	PASS
TX 802.11 n20M Mode(Single TX)								
1	2412	Default	0	15.19	17.26	-	30	PASS
6	2437	Default	0	18.67	18.97	-	30	PASS
11	2462	Default	0	18.18	19.12	-	30	PASS
TX 802.11 n20M Mode(MIMO TX)								
1	2412	Default	0	15.12	15.66	18.41	29.98	PASS
6	2437	Default	0	17.60	18.29	20.97	29.98	PASS
11	2462	Default	0	16.07	17.04	19.59	29.98	PASS
TX 802.11 n40M Mode(Single TX)								
3	2422	Default	0	14.87	16.66	-	30	PASS
6	2437	Default	0	18.20	18.60	-	30	PASS
9	2452	Default	0	16.99	18.01	-	30	PASS
TX 802.11 n40M Mode(MIMO TX)								
3	2422	Default	0	14.13	14.64	17.40	29.98	PASS
6	2437	Default	0	17.06	17.75	20.43	29.98	PASS
9	2452	Default	0	15.33	16.18	18.79	29.98	PASS

Note: For 802.11n has MIMO mode. Directional gain=6.02dbi
 $6.02\text{dbi} > 6.0\text{dbi}$ so power limit= $30 - (6.02 - 6.0) = 29.98$ in dBm

8.3 OCCUPIED CHANNEL BANDWIDTH

8812 Module:


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	802.11b	2412	Ant 1	15.7864	10.1	≥0.5	Pass
NVNT	802.11b	2437	Ant 1	18.1262	11.052	≥0.5	Pass
NVNT	802.11b	2462	Ant 1	15.3505	10.088	≥0.5	Pass
NVNT	802.11b	2412	Ant 2	15.3225	10.064	≥0.5	Pass
NVNT	802.11b	2437	Ant 2	17.6022	10.108	≥0.5	Pass
NVNT	802.11b	2462	Ant 2	15.1985	10.1	≥0.5	Pass
NVNT	802.11g	2412	Ant 1	16.9663	16.548	≥0.5	Pass
NVNT	802.11g	2437	Ant 1	18.3622	16.556	≥0.5	Pass
NVNT	802.11g	2462	Ant 1	16.7783	16.524	≥0.5	Pass
NVNT	802.11g	2412	Ant 2	16.8663	16.52	≥0.5	Pass
NVNT	802.11g	2437	Ant 2	17.6182	16.544	≥0.5	Pass
NVNT	802.11g	2462	Ant 2	16.7463	16.54	≥0.5	Pass
NVNT	802.11n(HT20)	2412	Ant 1	17.9902	17.764	≥0.5	Pass
NVNT	802.11n(HT20)	2437	Ant 1	19.3941	17.8	≥0.5	Pass
NVNT	802.11n(HT20)	2462	Ant 1	18.1302	17.72	≥0.5	Pass
NVNT	802.11n(HT20)	2412	Ant 2	18.0102	17.608	≥0.5	Pass
NVNT	802.11n(HT20)	2437	Ant 2	18.3622	17.72	≥0.5	Pass
NVNT	802.11n(HT20)	2462	Ant 2	17.9582	17.612	≥0.5	Pass
NVNT	802.11n(HT40)	2422	Ant 1	36.8363	36.448	≥0.5	Pass
NVNT	802.11n(HT40)	2437	Ant 1	38.0922	36.416	≥0.5	Pass
NVNT	802.11n(HT40)	2452	Ant 1	36.9083	36.456	≥0.5	Pass
NVNT	802.11n(HT40)	2422	Ant 2	36.8123	36.408	≥0.5	Pass
NVNT	802.11n(HT40)	2437	Ant 2	38.2922	36.416	≥0.5	Pass
NVNT	802.11n(HT40)	2452	Ant 2	36.8763	36.448	≥0.5	Pass

8192 Module:


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	802.11b	2412	Ant 3	14.9545	10.056	≥0.5	Pass
NVNT	802.11b	2437	Ant 3	15.1305	10.068	≥0.5	Pass
NVNT	802.11b	2462	Ant 3	15.0705	10.092	≥0.5	Pass
NVNT	802.11b	2412	Ant 4	15.1065	10.072	≥0.5	Pass
NVNT	802.11b	2437	Ant 4	15.3145	11.084	≥0.5	Pass
NVNT	802.11b	2462	Ant 4	15.4225	9.768	≥0.5	Pass
NVNT	802.11g	2412	Ant 3	16.7223	16.524	≥0.5	Pass
NVNT	802.11g	2437	Ant 3	16.9783	16.544	≥0.5	Pass
NVNT	802.11g	2462	Ant 3	16.9343	16.532	≥0.5	Pass
NVNT	802.11g	2412	Ant 4	16.7623	16.516	≥0.5	Pass
NVNT	802.11g	2437	Ant 4	16.9143	16.496	≥0.5	Pass
NVNT	802.11g	2462	Ant 4	16.9503	16.528	≥0.5	Pass
NVNT	802.11n(HT20)	2412	Ant 3	18.0502	17.696	≥0.5	Pass
NVNT	802.11n(HT20)	2437	Ant 3	18.1222	17.708	≥0.5	Pass
NVNT	802.11n(HT20)	2462	Ant 3	17.9462	17.788	≥0.5	Pass
NVNT	802.11n(HT20)	2412	Ant 4	17.8142	17.616	≥0.5	Pass
NVNT	802.11n(HT20)	2437	Ant 4	18.0902	17.688	≥0.5	Pass
NVNT	802.11n(HT20)	2462	Ant 4	18.1902	17.7	≥0.5	Pass
NVNT	802.11n(HT40)	2422	Ant 3	36.3484	36.36	≥0.5	Pass
NVNT	802.11n(HT40)	2437	Ant 3	36.5963	36.368	≥0.5	Pass
NVNT	802.11n(HT40)	2452	Ant 3	36.4364	36.36	≥0.5	Pass
NVNT	802.11n(HT40)	2422	Ant 4	36.3884	36.36	≥0.5	Pass
NVNT	802.11n(HT40)	2437	Ant 4	36.6443	36.352	≥0.5	Pass
NVNT	802.11n(HT40)	2452	Ant 4	36.4844	36.352	≥0.5	Pass

8812 Module:


OBW NVNT 802.11b 2412MHz Ant 1

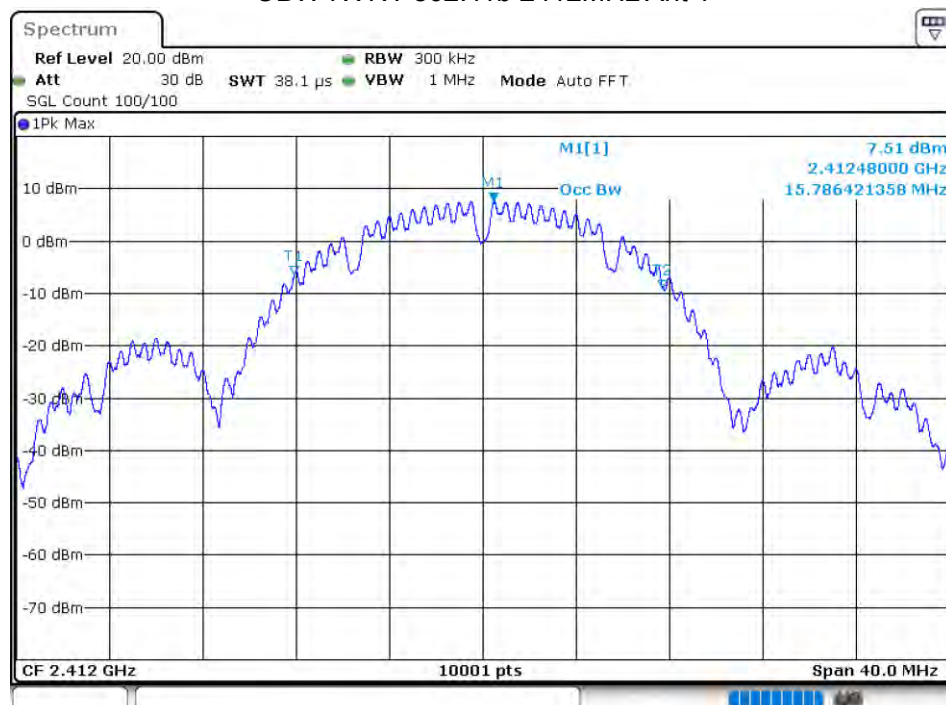


-6 dB BW NVNT 802.11b 2412MHz Ant 1

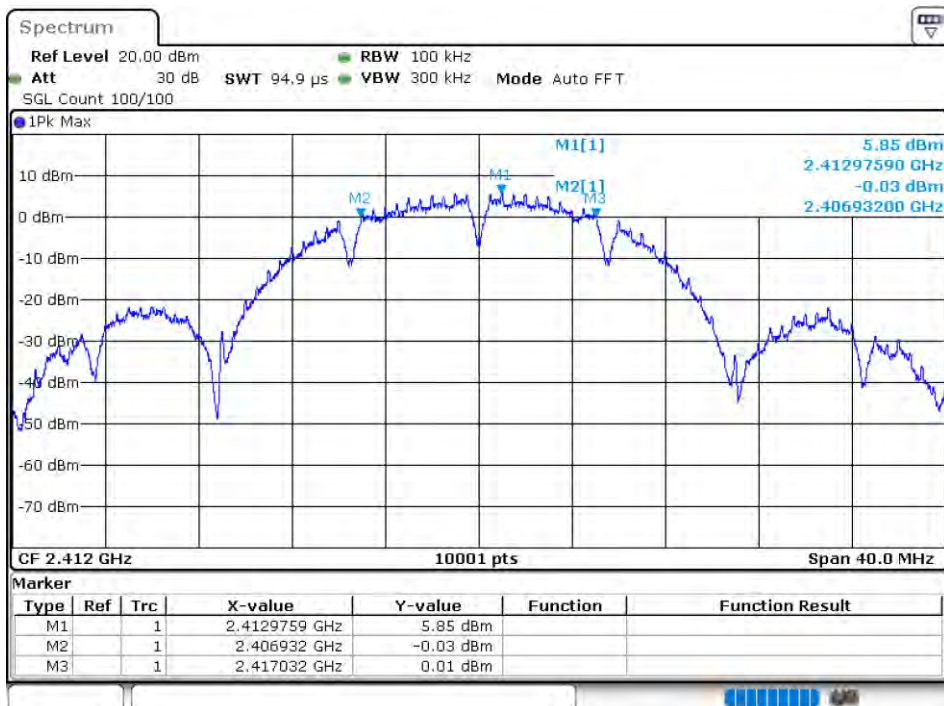


OBW NVNT 802.11b 2437MHz Ant 1

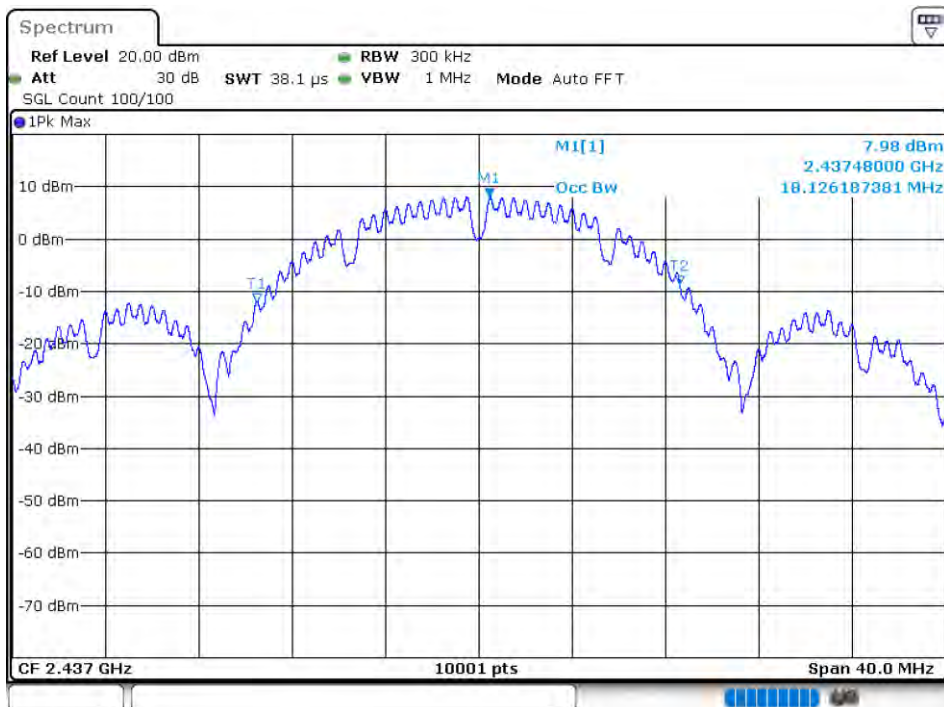


-6 dB BW NVNT 802.11b 2437MHz Ant 1

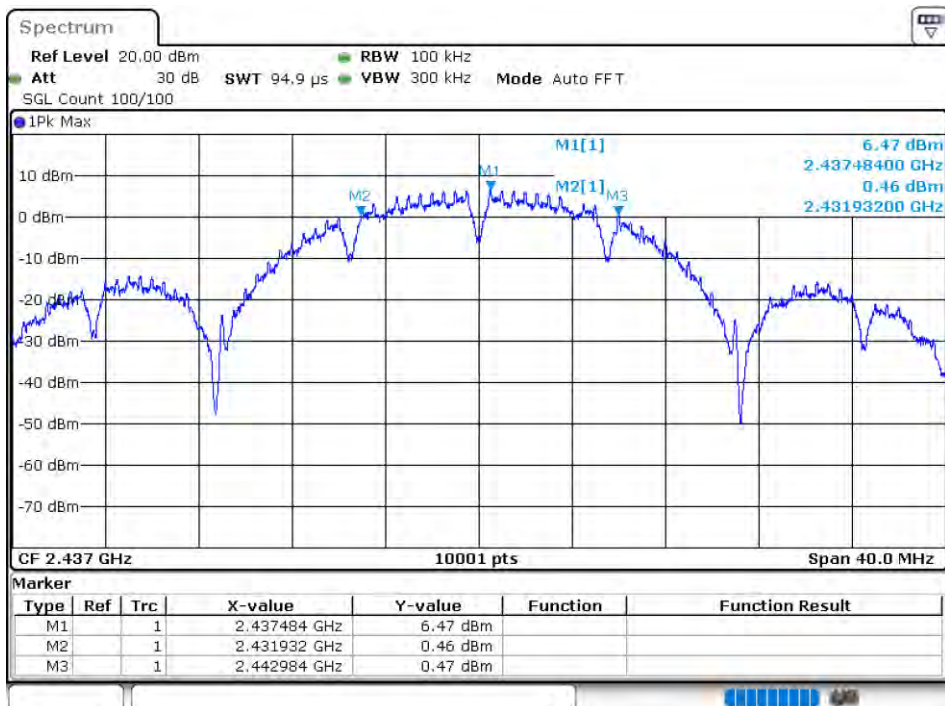


OBW NVNT 802.11b 2462MHz Ant 1

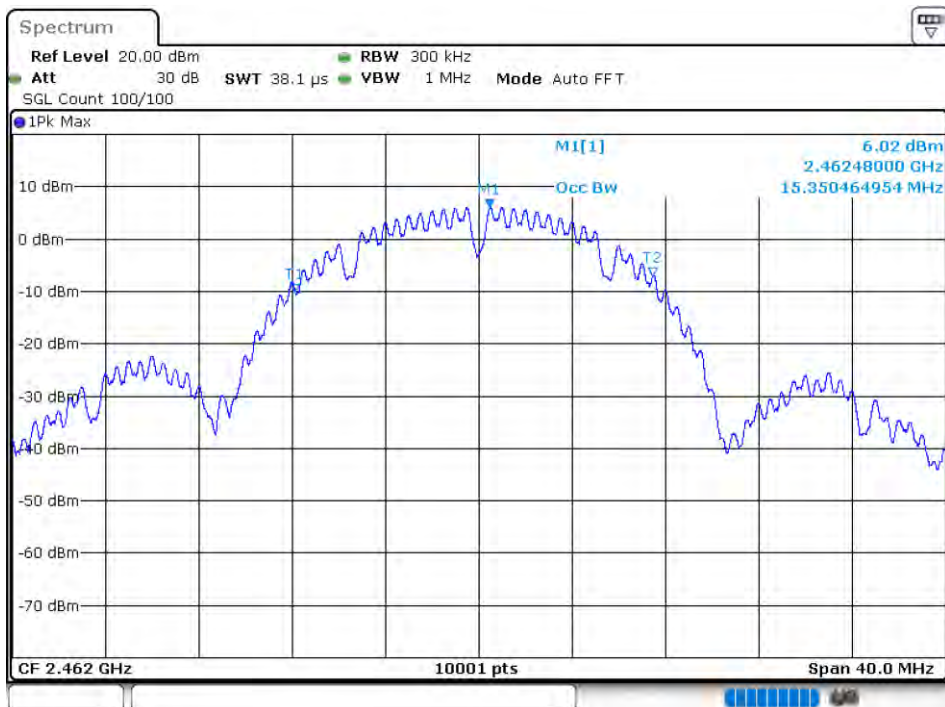


-6 dB BW NVNT 802.11b 2462MHz Ant 1

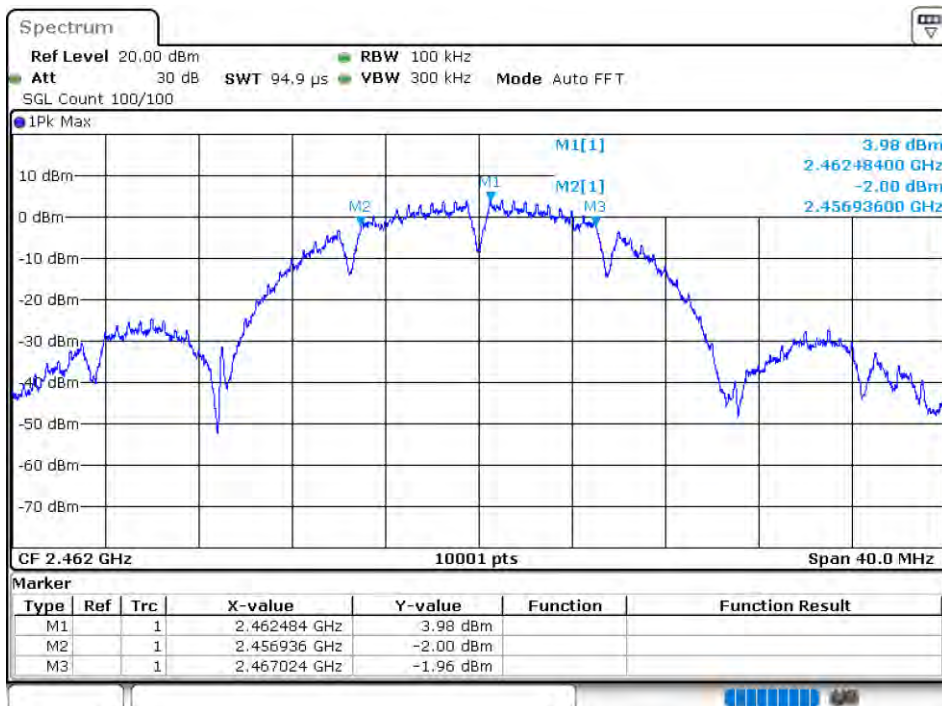


OBW NVNT 802.11b 2412MHz Ant 2

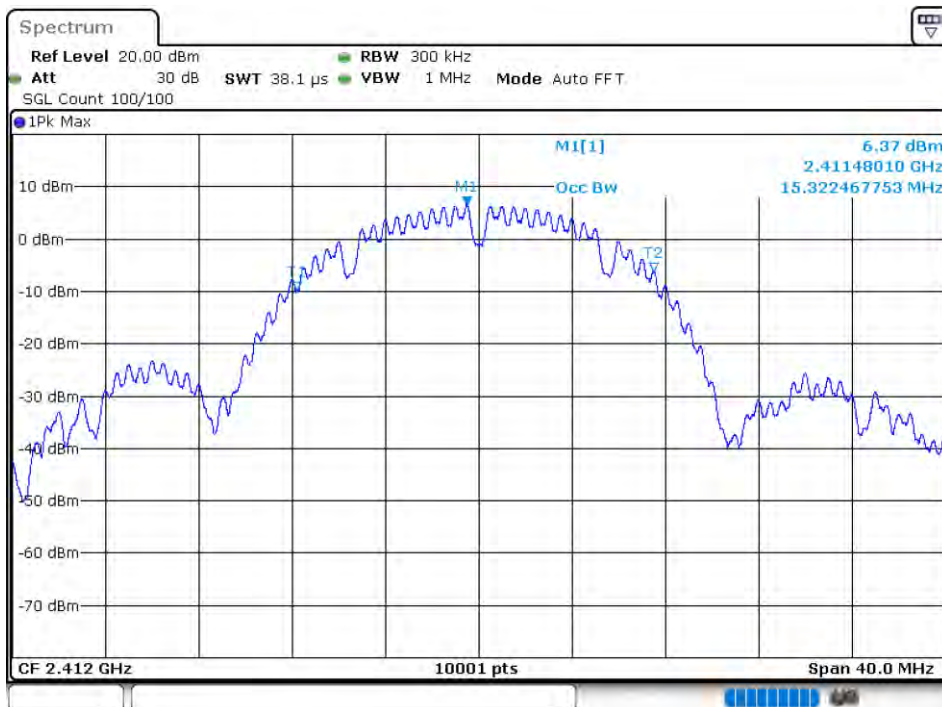


-6 dB BW NVNT 802.11b 2412MHz Ant 2

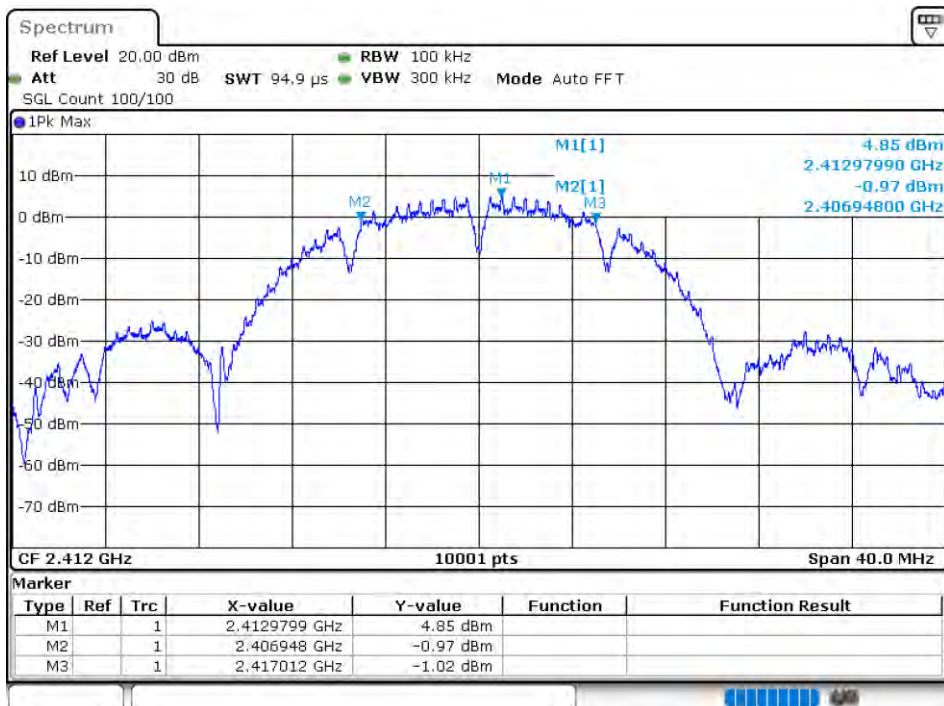


OBW NVNT 802.11b 2437MHz Ant 2

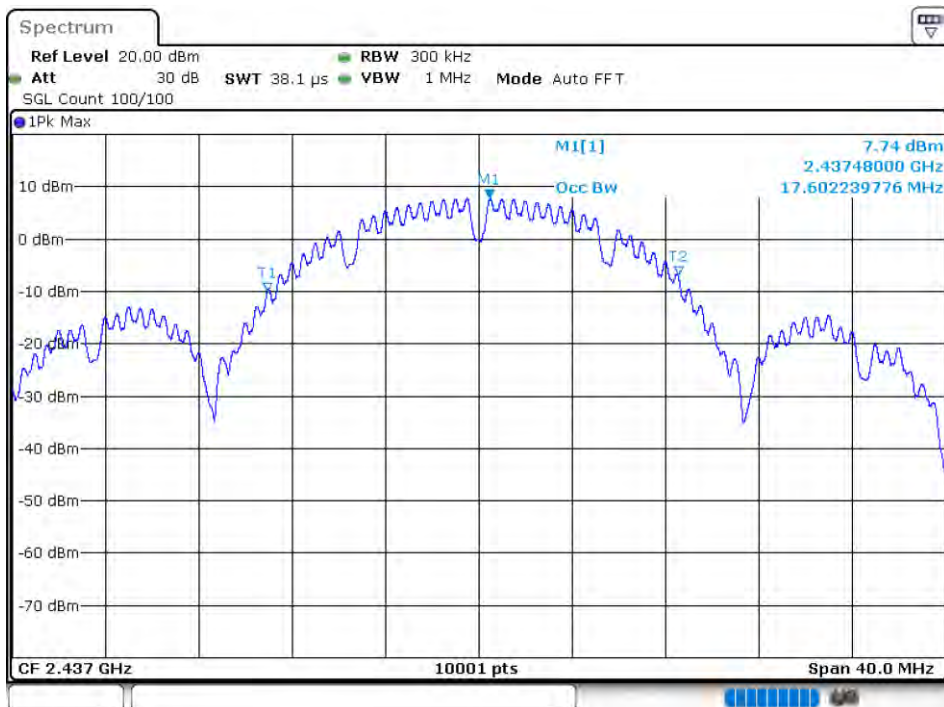


-6 dB BW NVNT 802.11b 2437MHz Ant 2

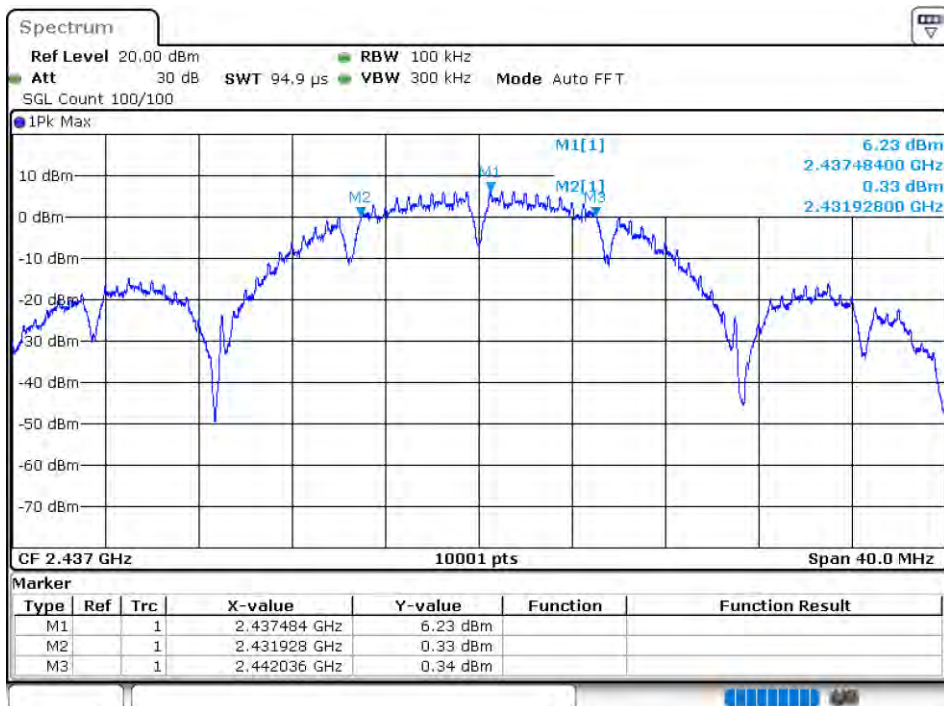

OBW NVNT 802.11b 2462MHz Ant 2

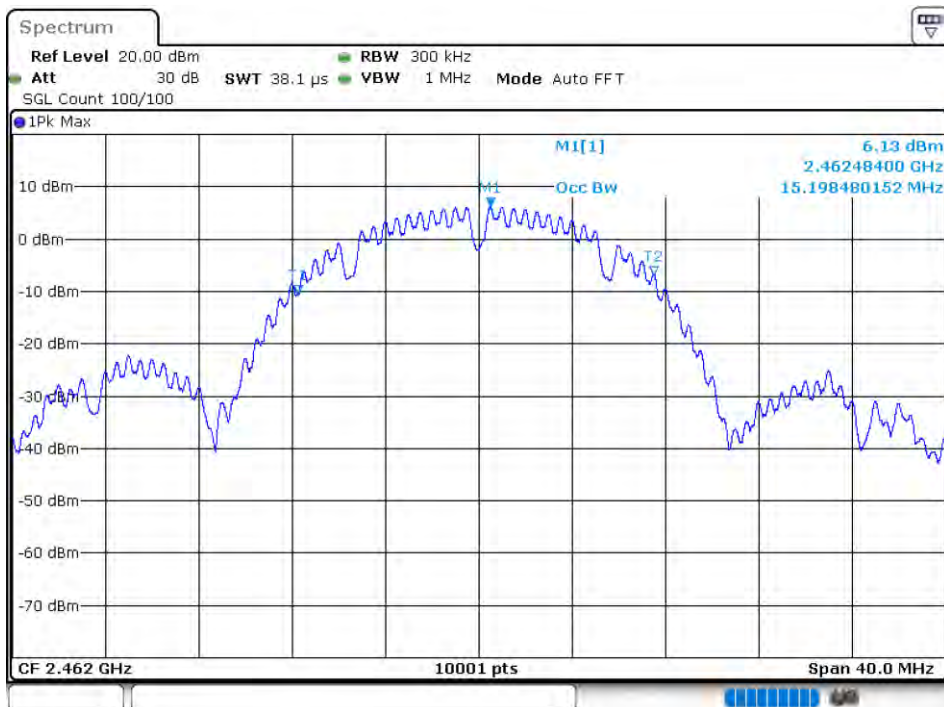


-6 dB BW NVNT 802.11b 2462MHz Ant 2

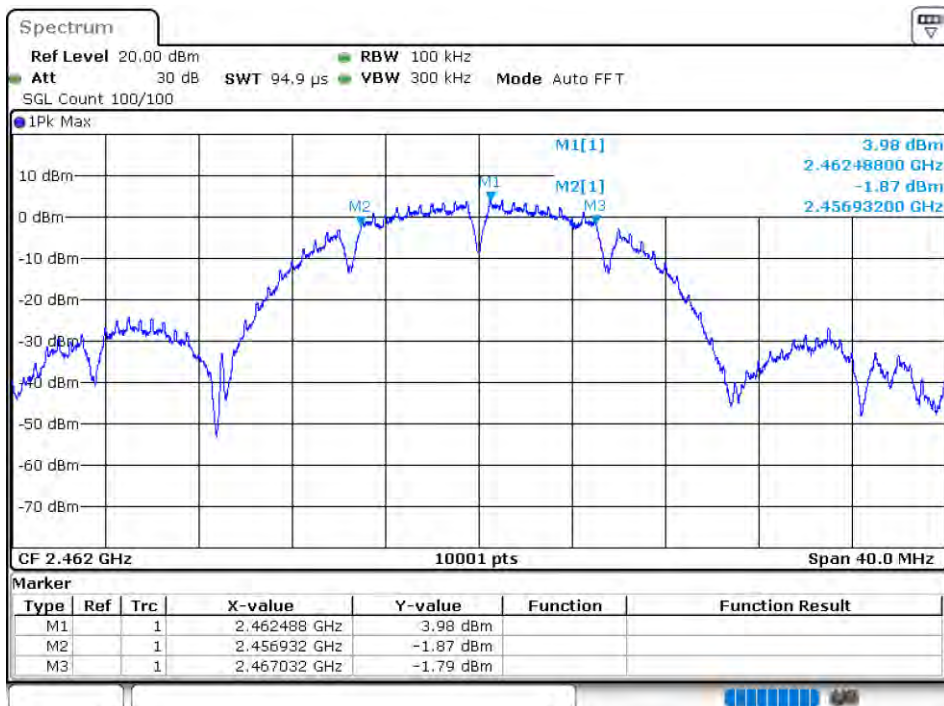


OBW NVNT 802.11g 2412MHz Ant 1




-6 dB BW NVNT 802.11g 2412MHz Ant 1

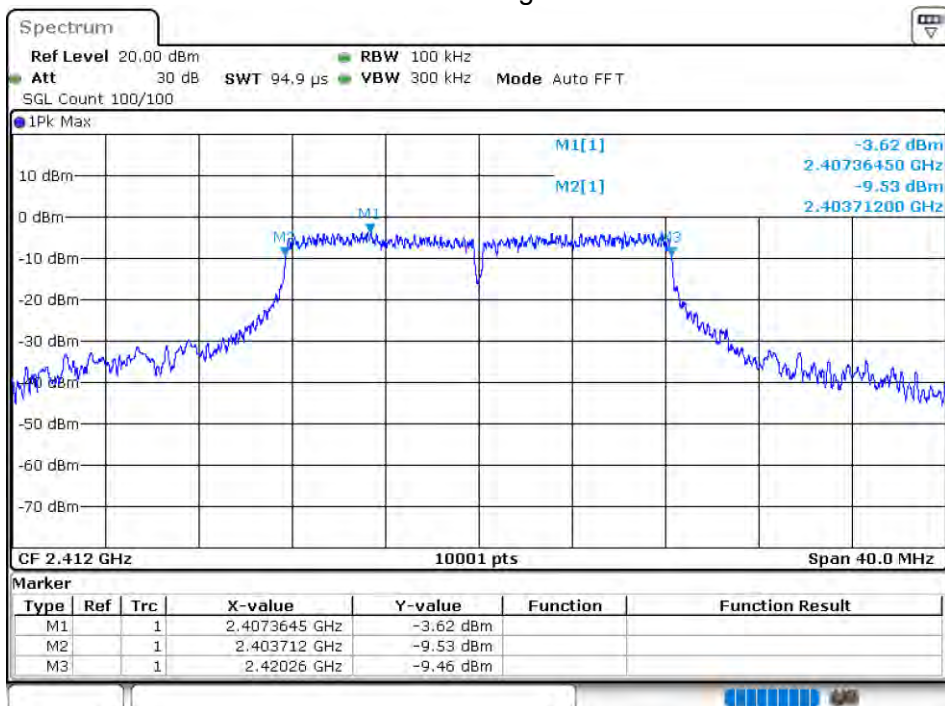

OBW NVNT 802.11g 2437MHz Ant 1

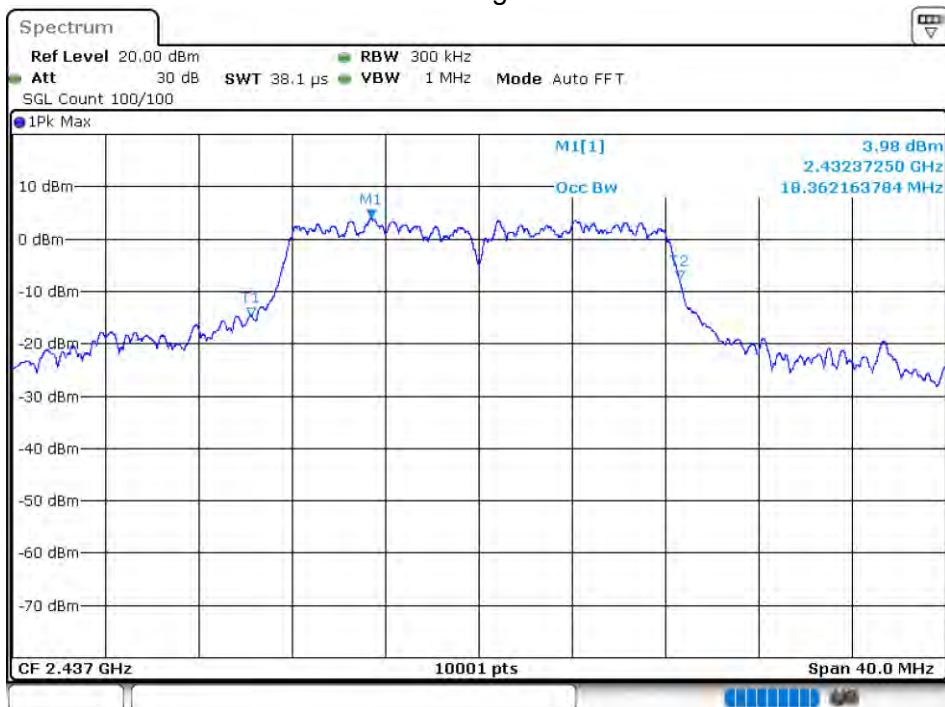


-6 dB BW NVNT 802.11g 2437MHz Ant 1

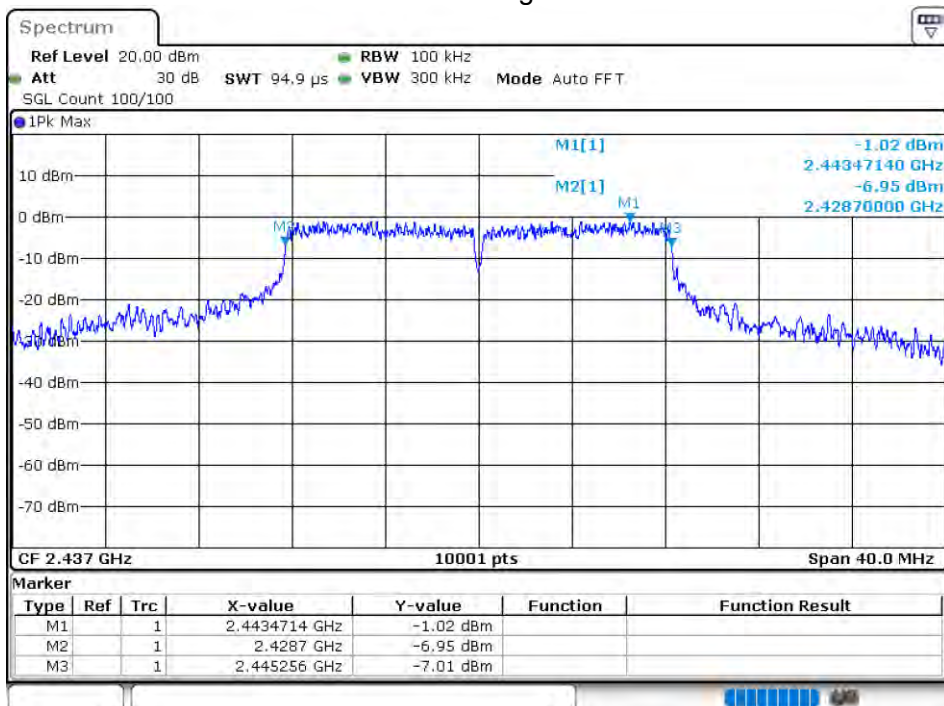

OBW NVNT 802.11g 2462MHz Ant 1




-6 dB BW NVNT 802.11g 2462MHz Ant 1

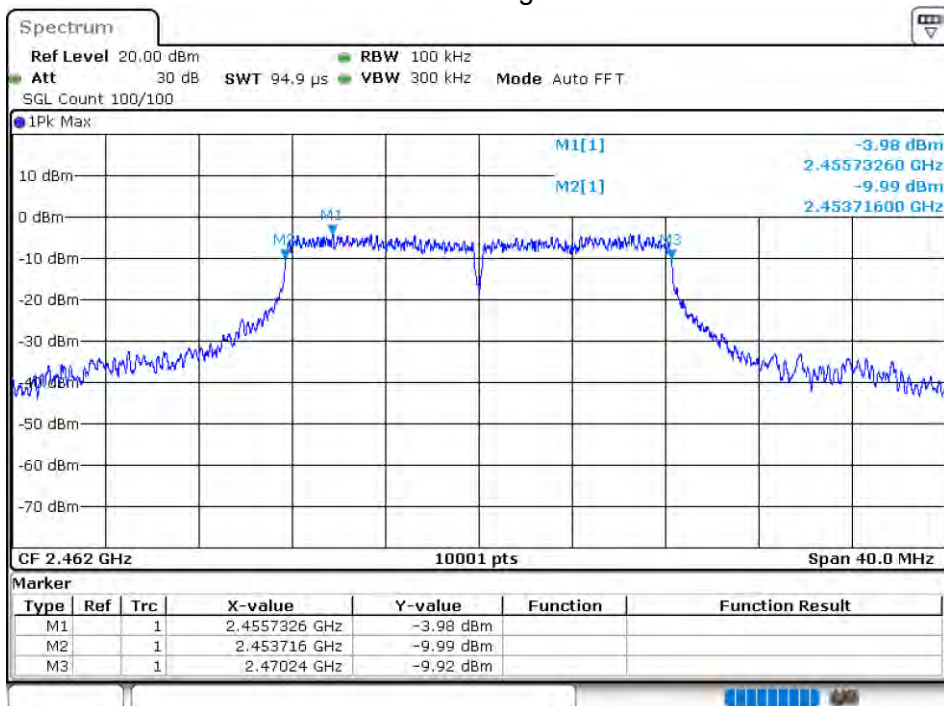


OBW NVNT 802.11g 2412MHz Ant 2




-6 dB BW NVNT 802.11g 2412MHz Ant 2

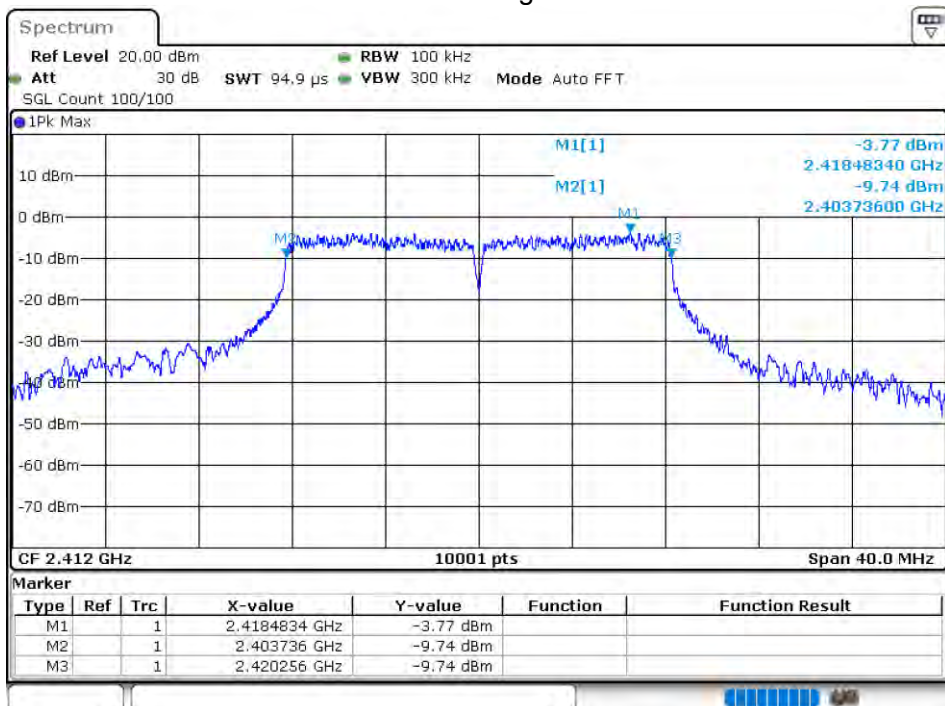

OBW NVNT 802.11g 2437MHz Ant 2

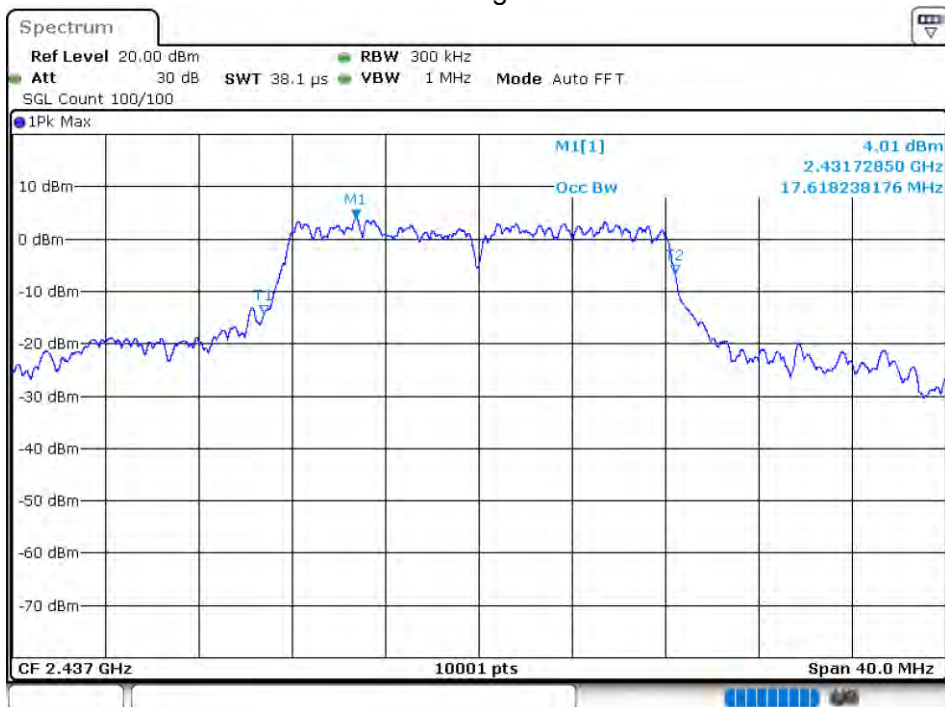


-6 dB BW NVNT 802.11g 2437MHz Ant 2

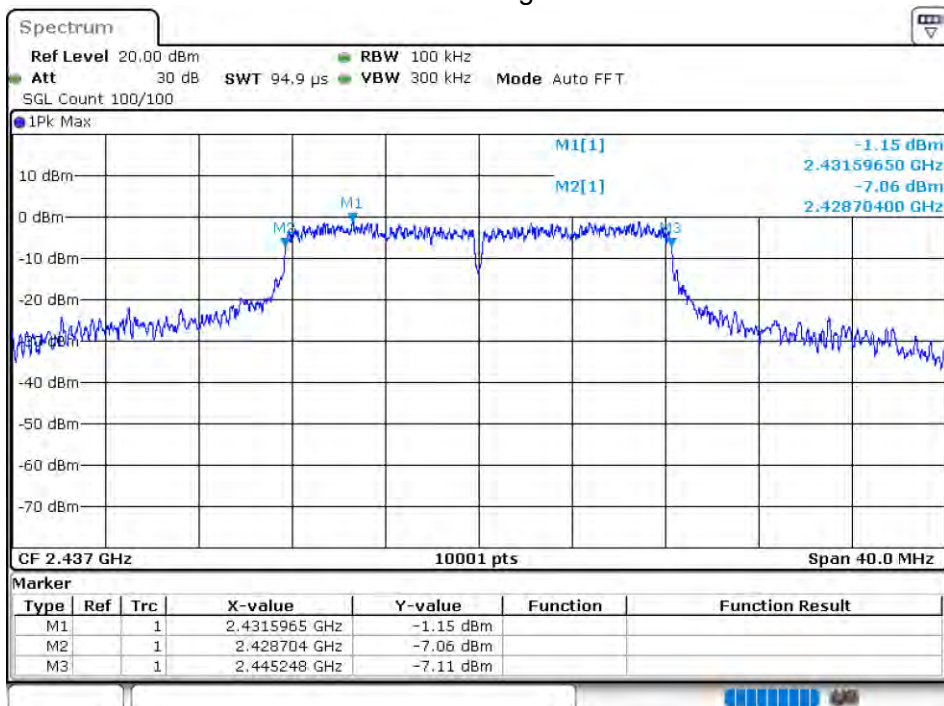

OBW NVNT 802.11g 2462MHz Ant 2




-6 dB BW NVNT 802.11g 2462MHz Ant 2

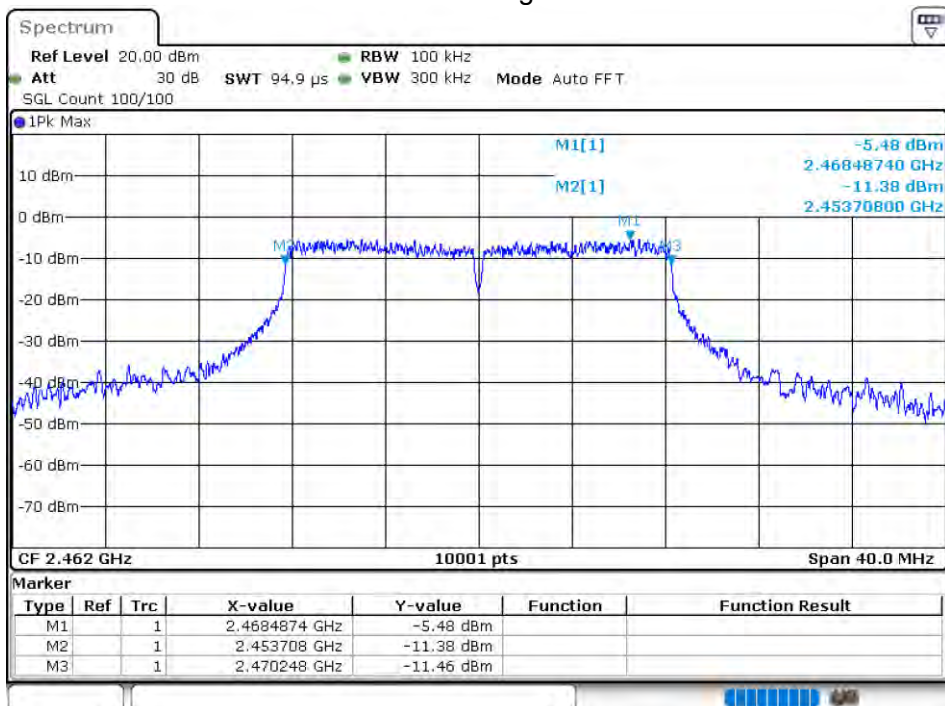

OBW NVNT 802.11n(HT20) 2412MHz Ant 1




-6 dB BW NVNT 802.11n(HT20) 2412MHz Ant 1

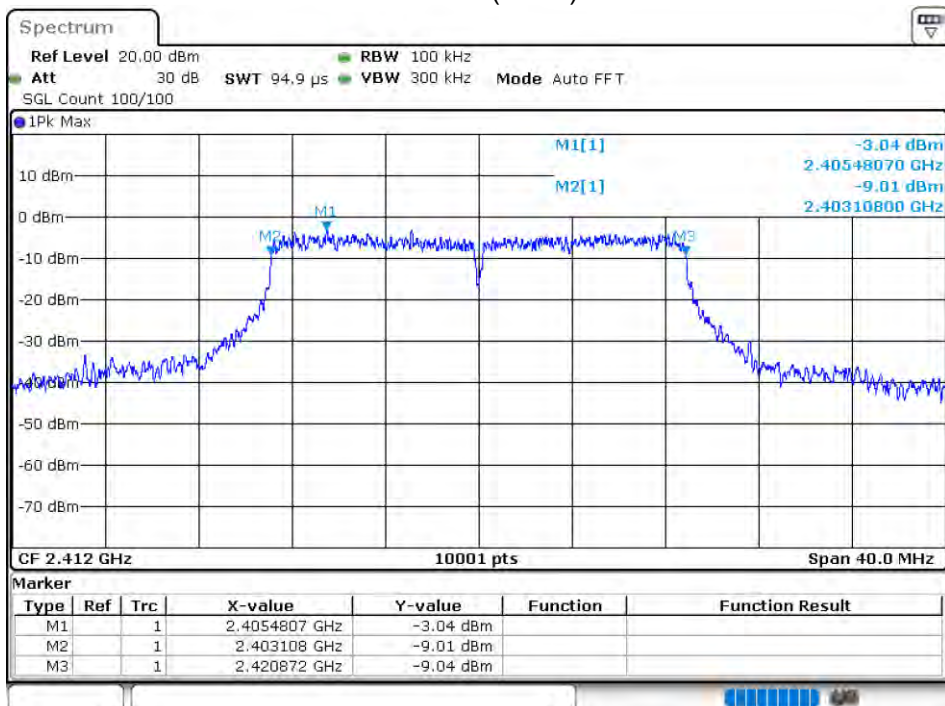

OBW NVNT 802.11n(HT20) 2437MHz Ant 1




-6 dB BW NVNT 802.11n(HT20) 2437MHz Ant 1

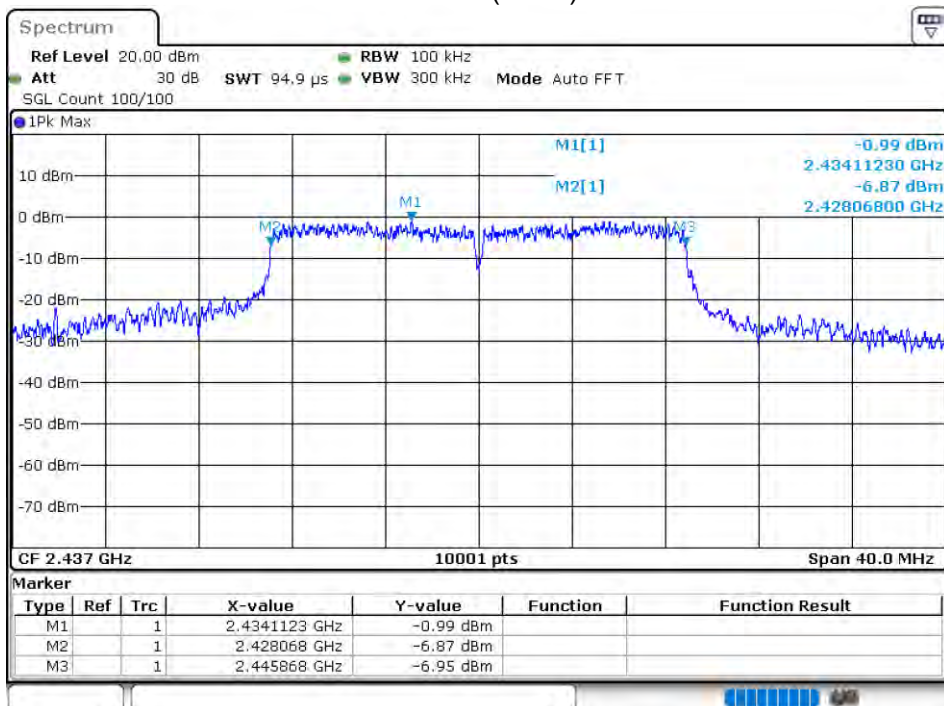


OBW NVNT 802.11n(HT20) 2462MHz Ant 1




-6 dB BW NVNT 802.11n(HT20) 2462MHz Ant 1

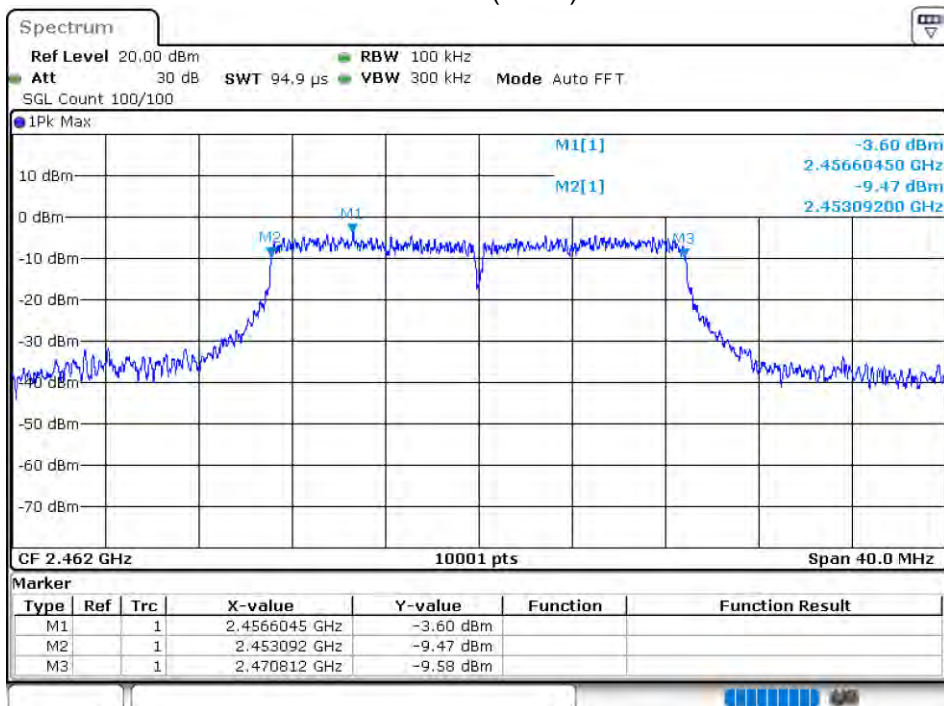

OBW NVNT 802.11n(HT20) 2412MHz Ant 2

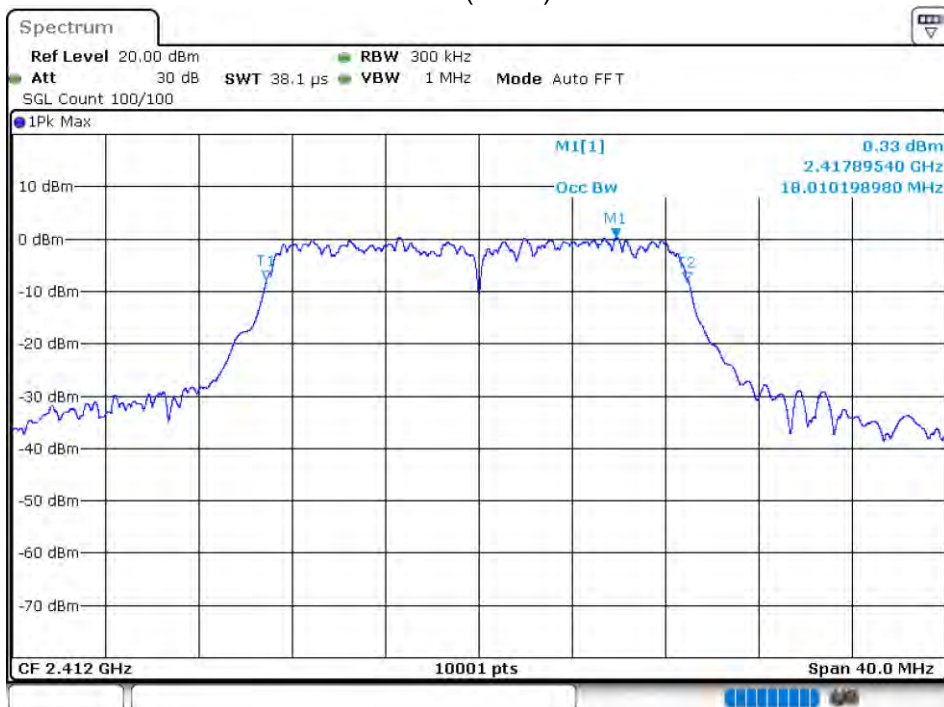


-6 dB BW NVNT 802.11n(HT20) 2412MHz Ant 2

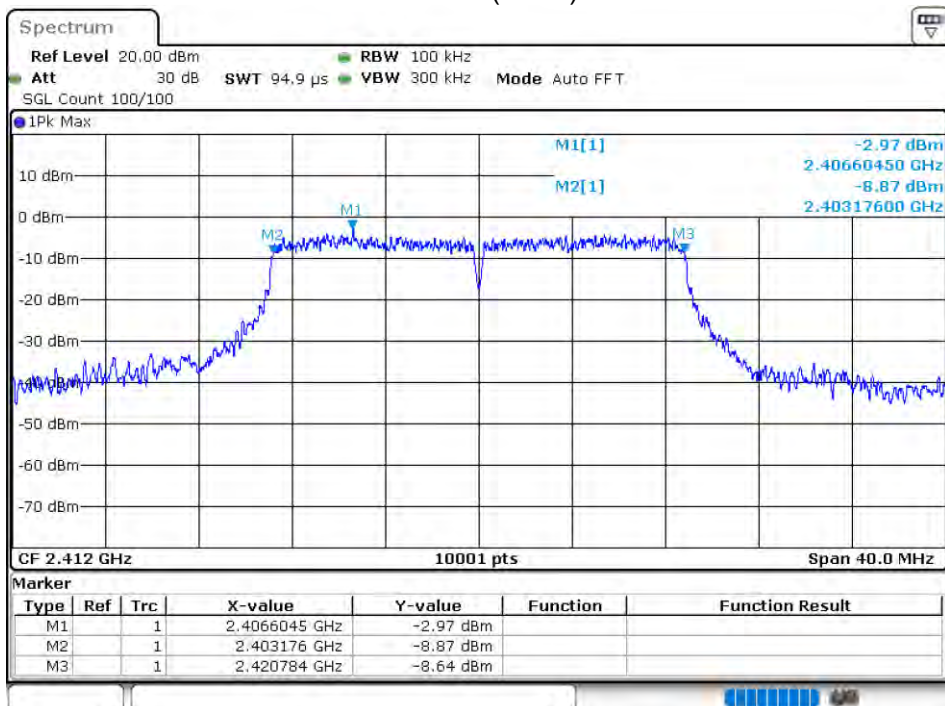

OBW NVNT 802.11n(HT20) 2437MHz Ant 2




-6 dB BW NVNT 802.11n(HT20) 2437MHz Ant 2

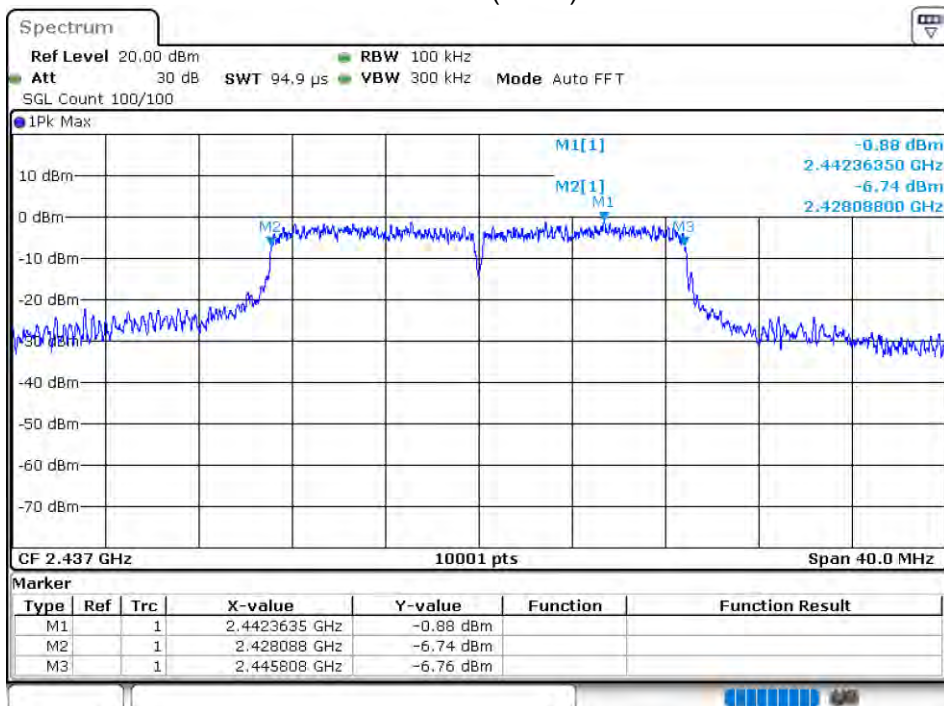


OBW NVNT 802.11n(HT20) 2462MHz Ant 2




-6 dB BW NVNT 802.11n(HT20) 2462MHz Ant 2

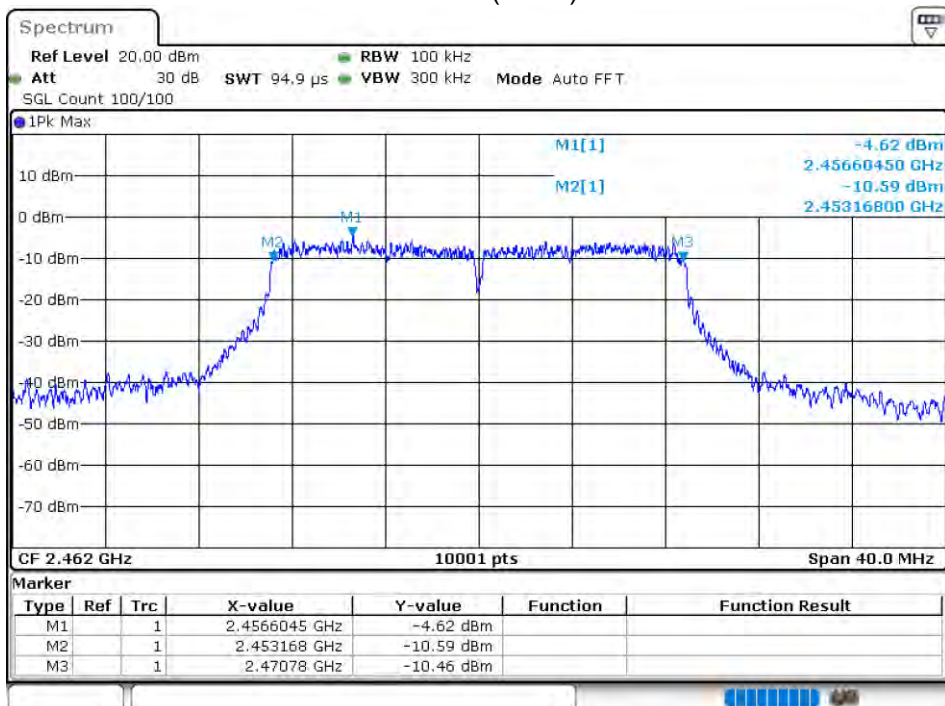


OBW NVNT 802.11n(HT40) 2422MHz Ant 1

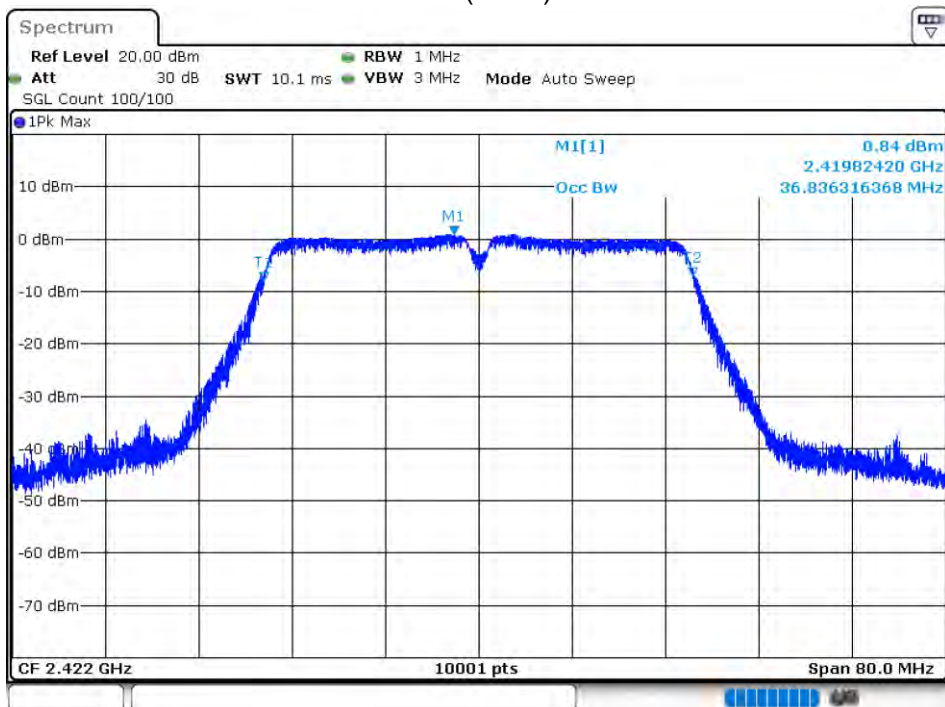


-6 dB BW NVNT 802.11n(HT40) 2422MHz Ant 1

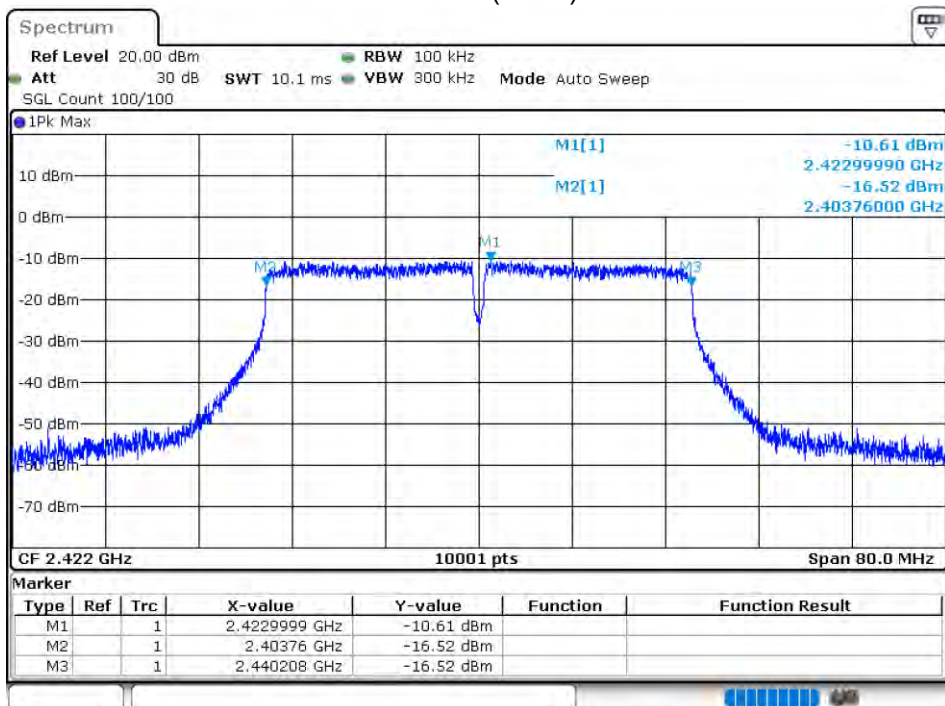


OBW NVNT 802.11n(HT40) 2437MHz Ant 1

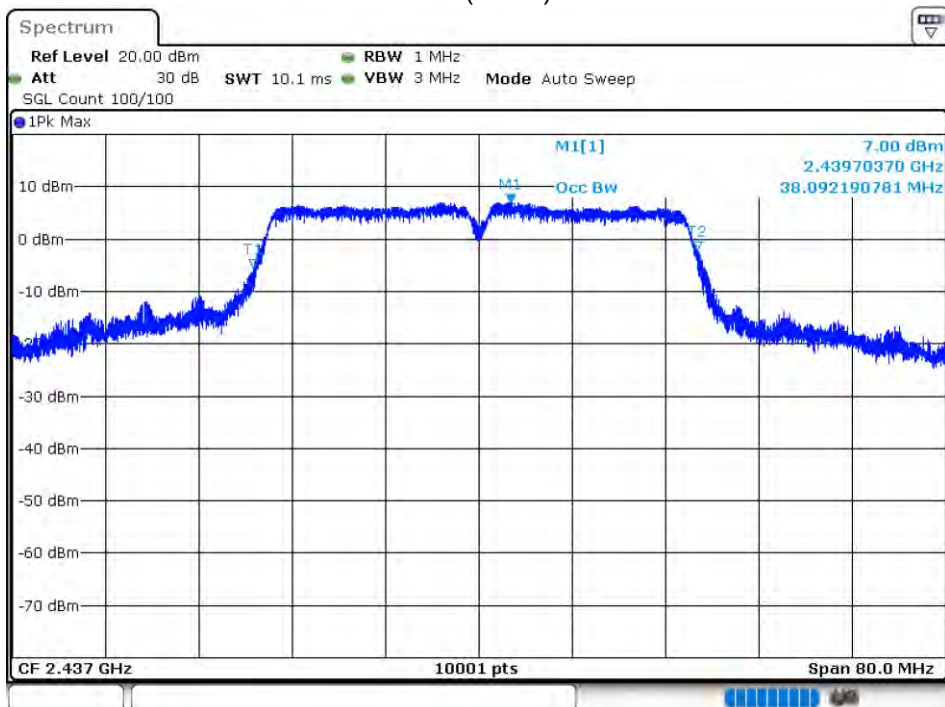


-6 dB BW NVNT 802.11n(HT40) 2437MHz Ant 1

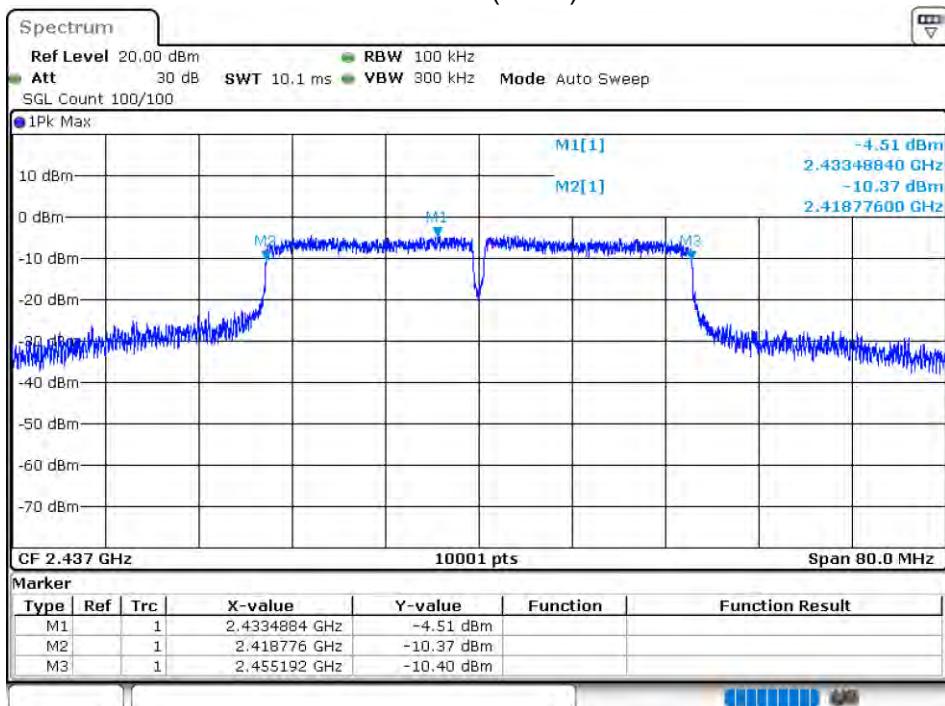


OBW NVNT 802.11n(HT40) 2452MHz Ant 1

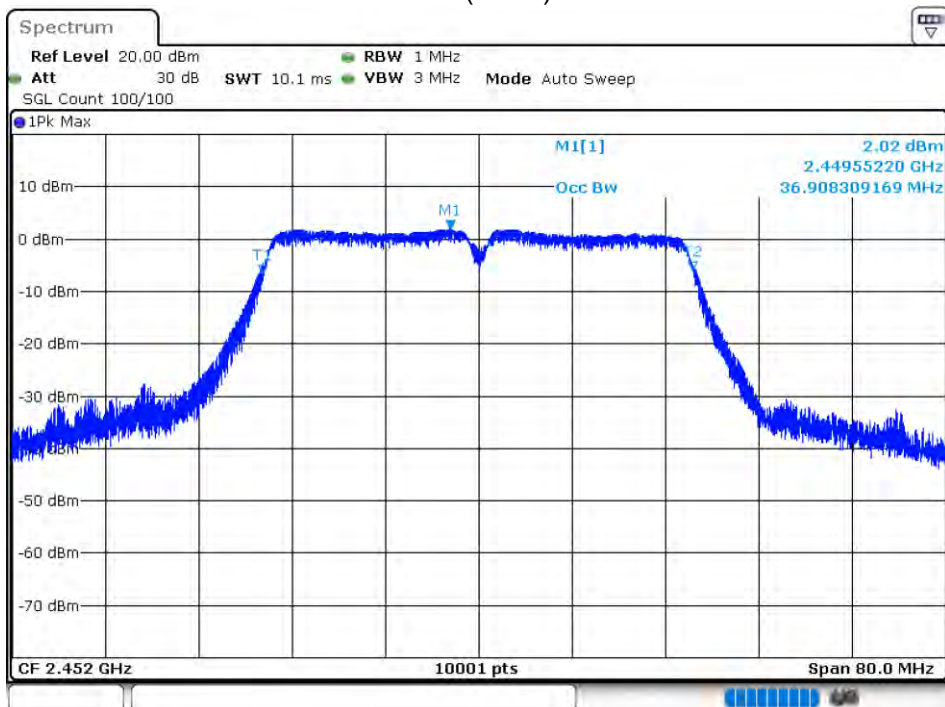


-6 dB BW NVNT 802.11n(HT40) 2452MHz Ant 1

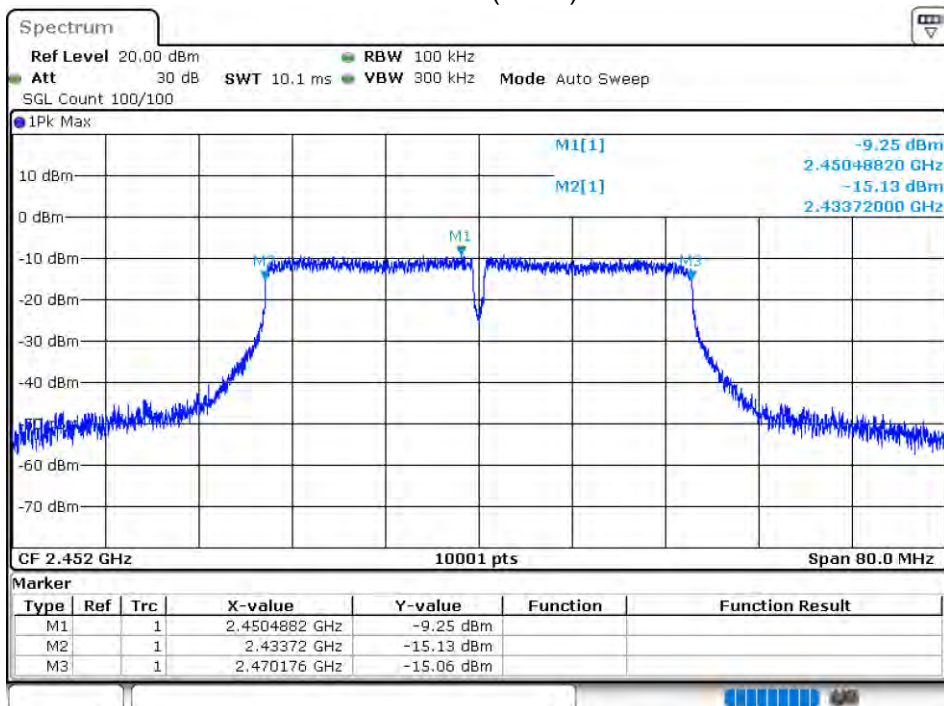


OBW NVNT 802.11n(HT40) 2422MHz Ant 2

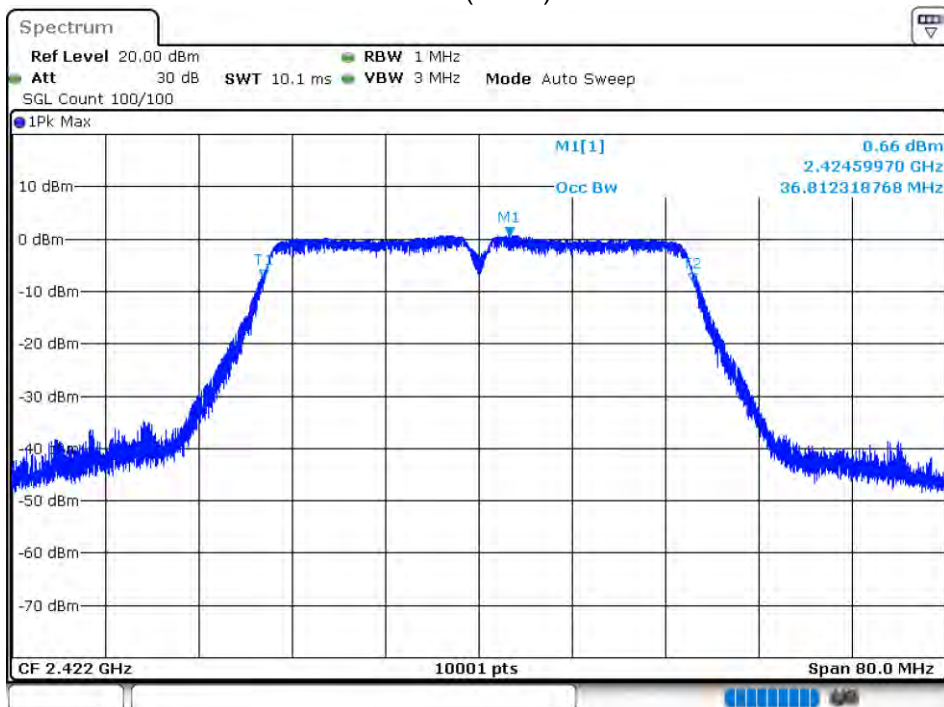


-6 dB BW NVNT 802.11n(HT40) 2422MHz Ant 2

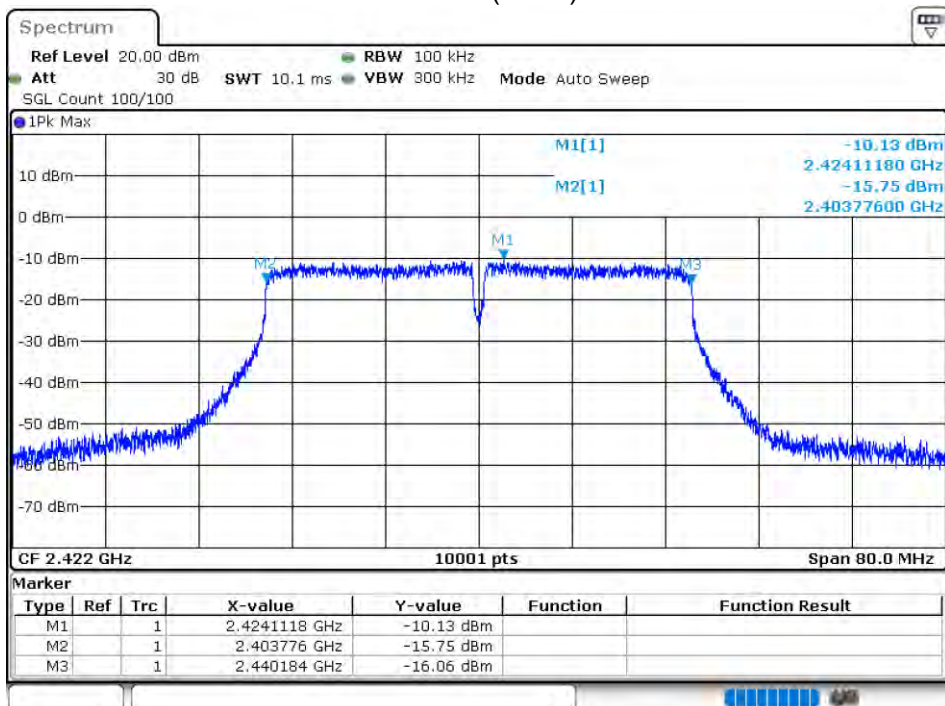


OBW NVNT 802.11n(HT40) 2437MHz Ant 2

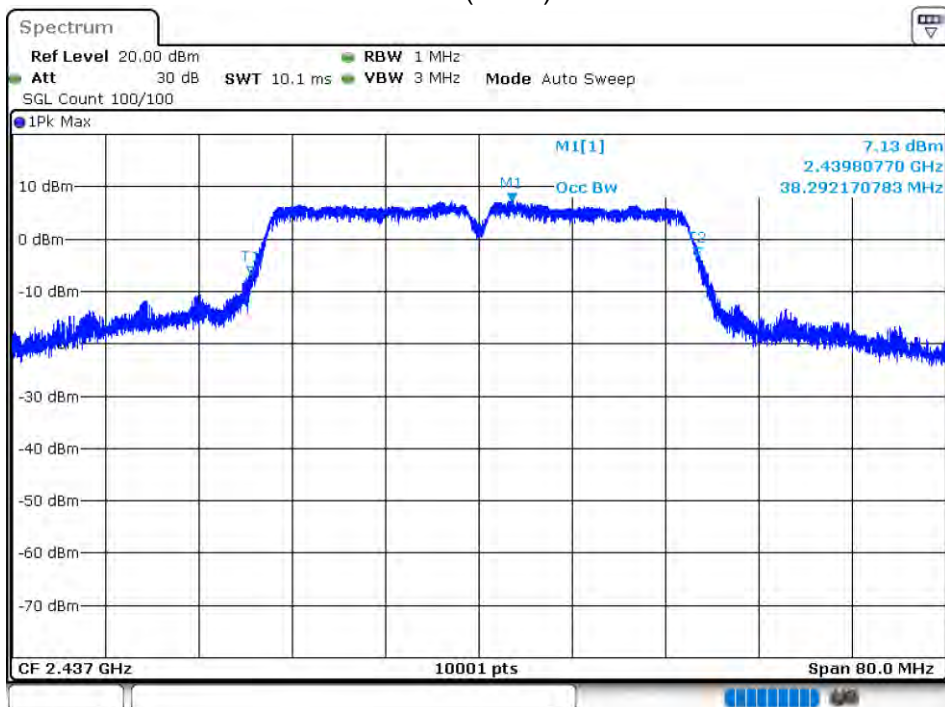


-6 dB BW NVNT 802.11n(HT40) 2437MHz Ant 2

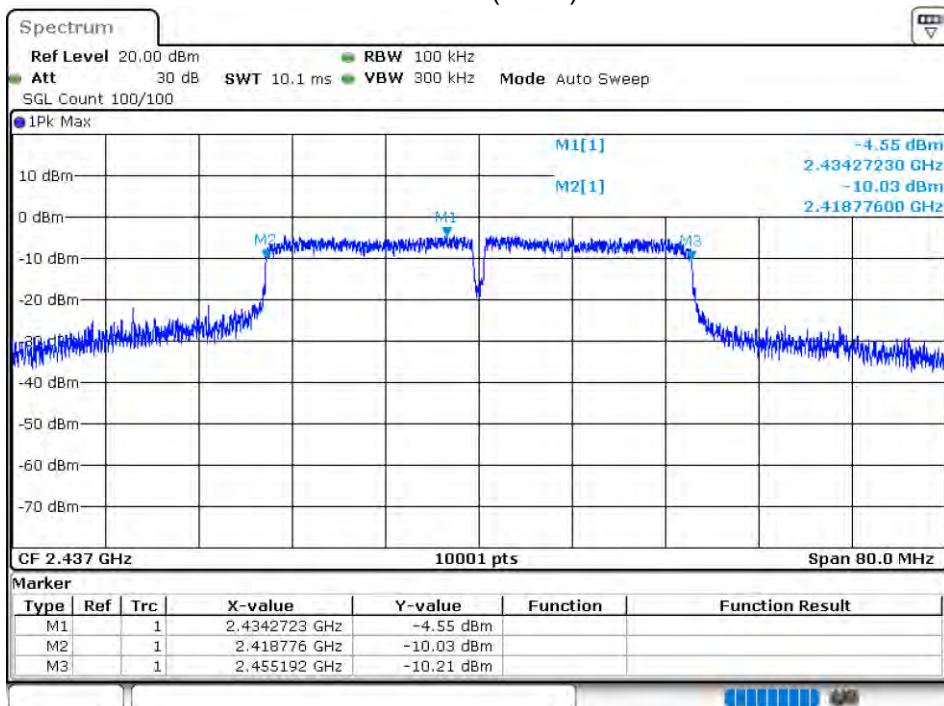

OBW NVNT 802.11n(HT40) 2452MHz Ant 2

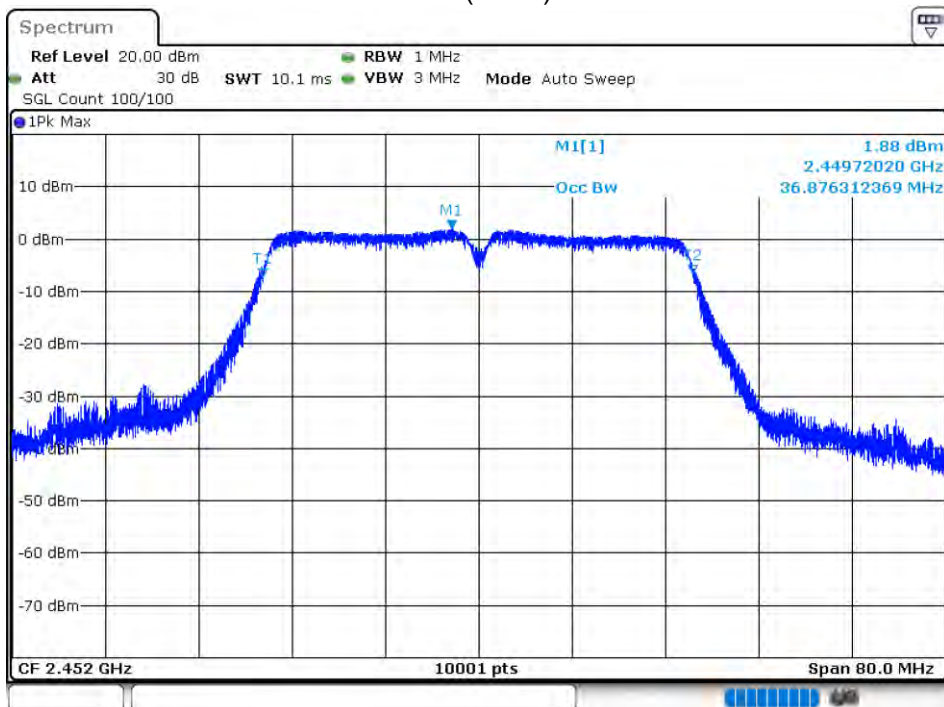


-6 dB BW NVNT 802.11n(HT40) 2452MHz Ant 2

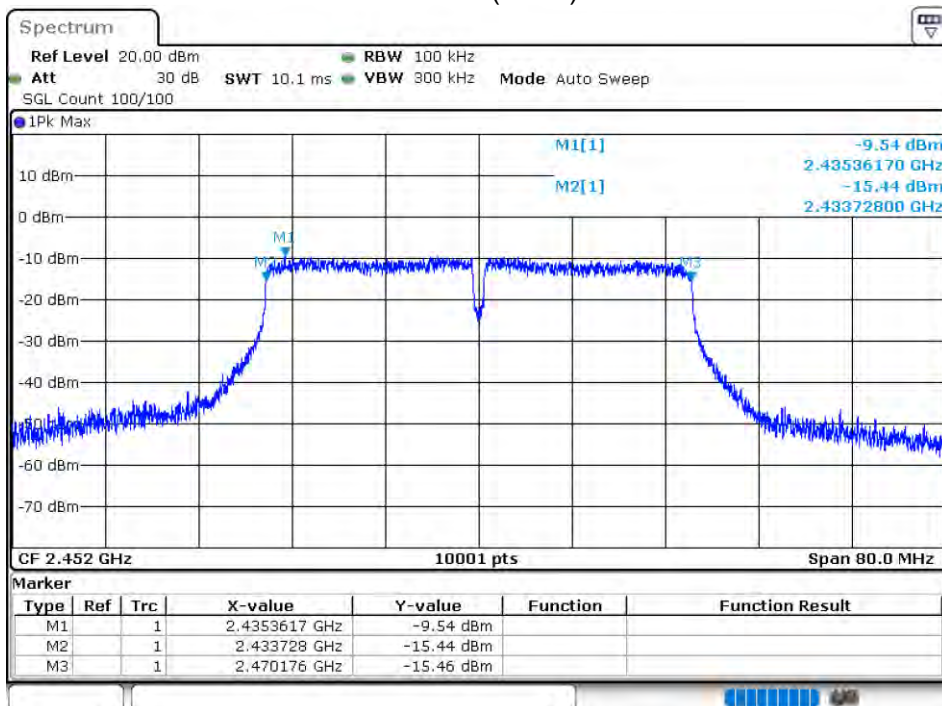


8192 Module:


OBW NVNT 802.11b 2412MHz Ant 3

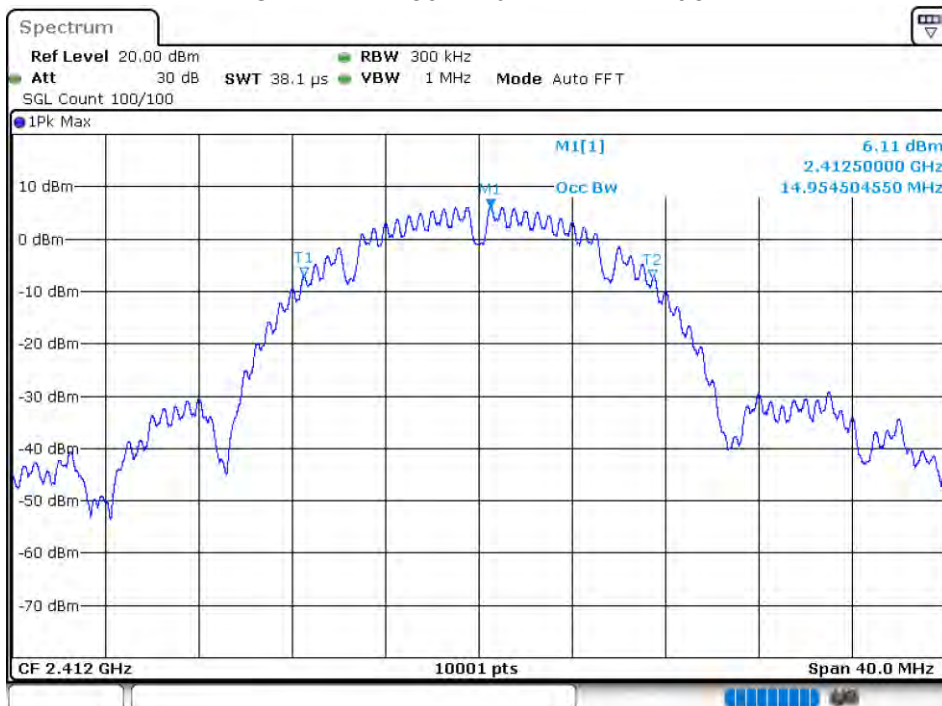


-6 dB BW NVNT 802.11b 2412MHz Ant 3

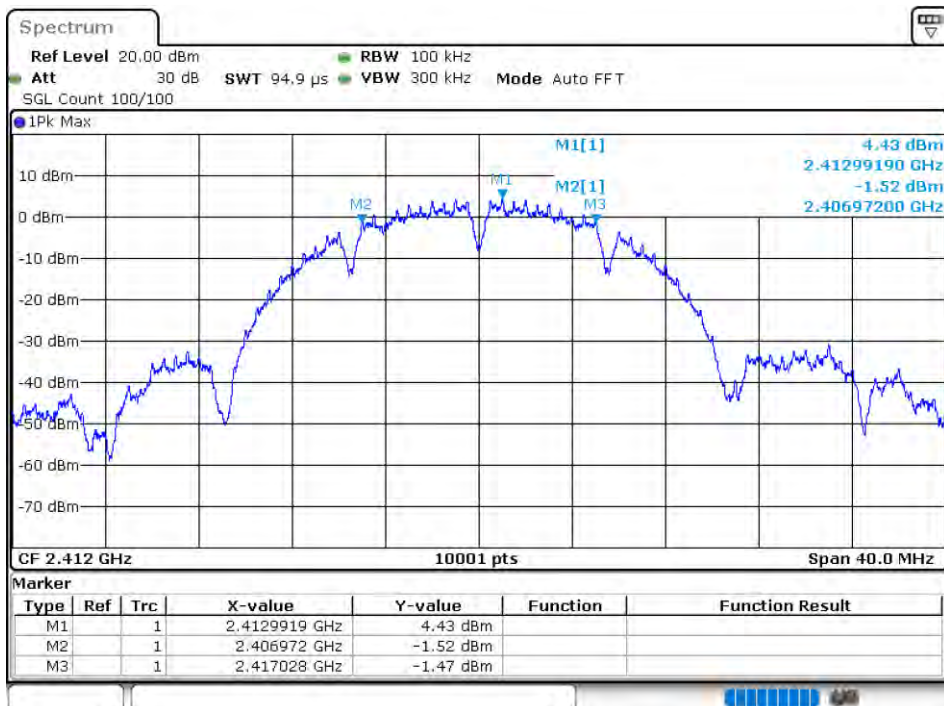


OBW NVNT 802.11b 2437MHz Ant 3

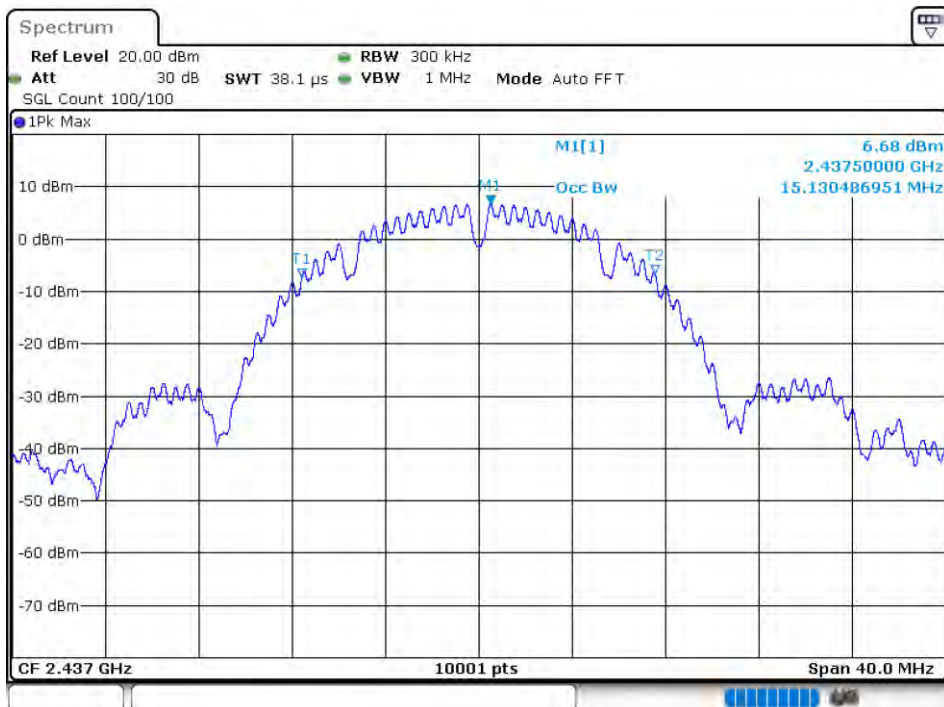


-6 dB BW NVNT 802.11b 2437MHz Ant 3

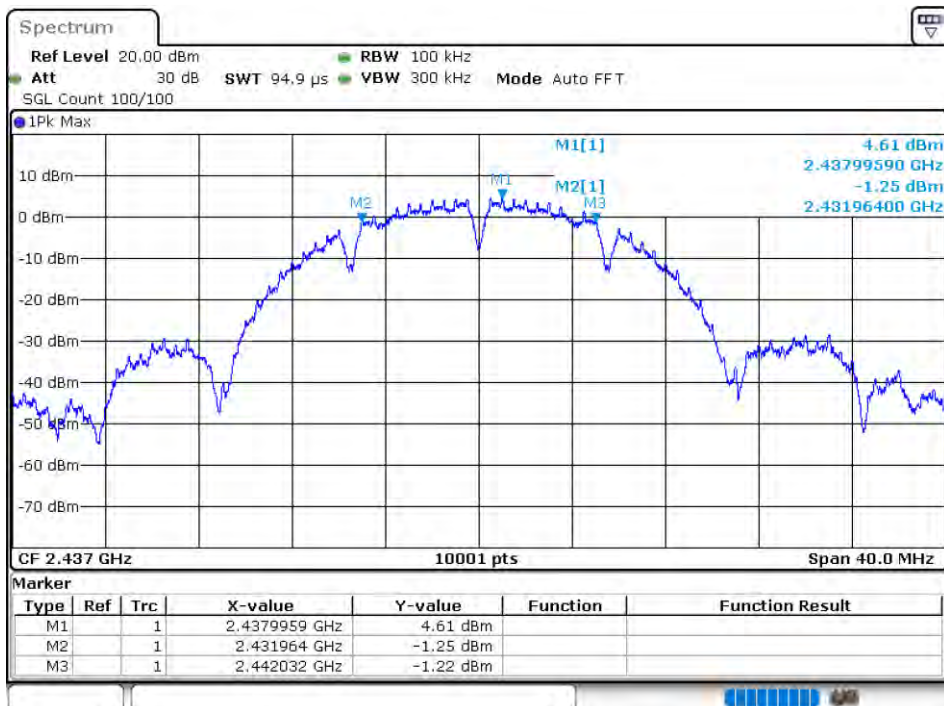


OBW NVNT 802.11b 2462MHz Ant 3

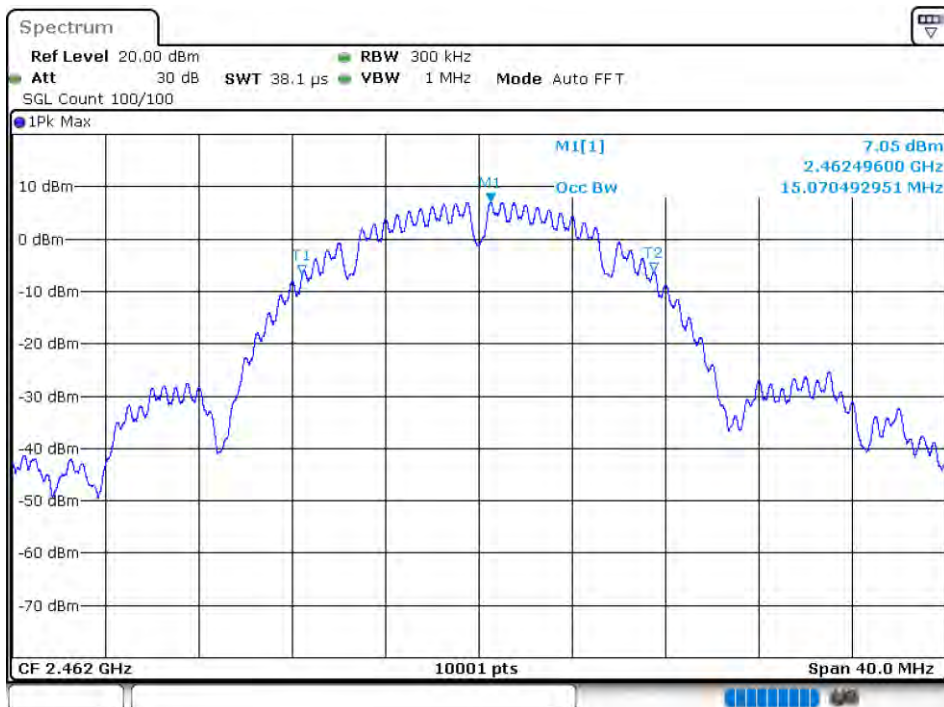


-6 dB BW NVNT 802.11b 2462MHz Ant 3

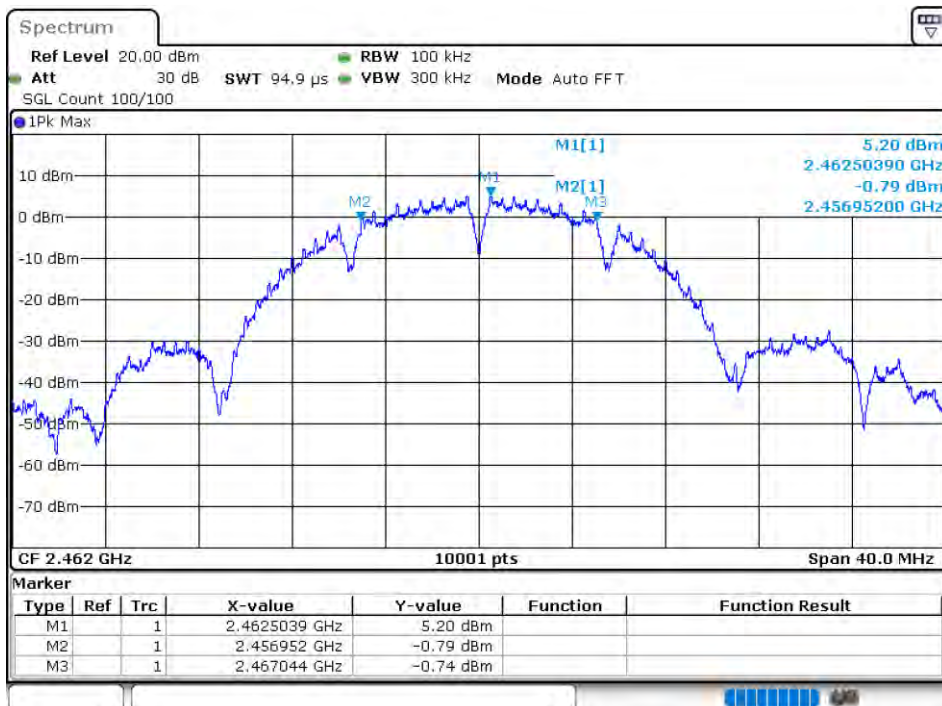


OBW NVNT 802.11b 2412MHz Ant 4

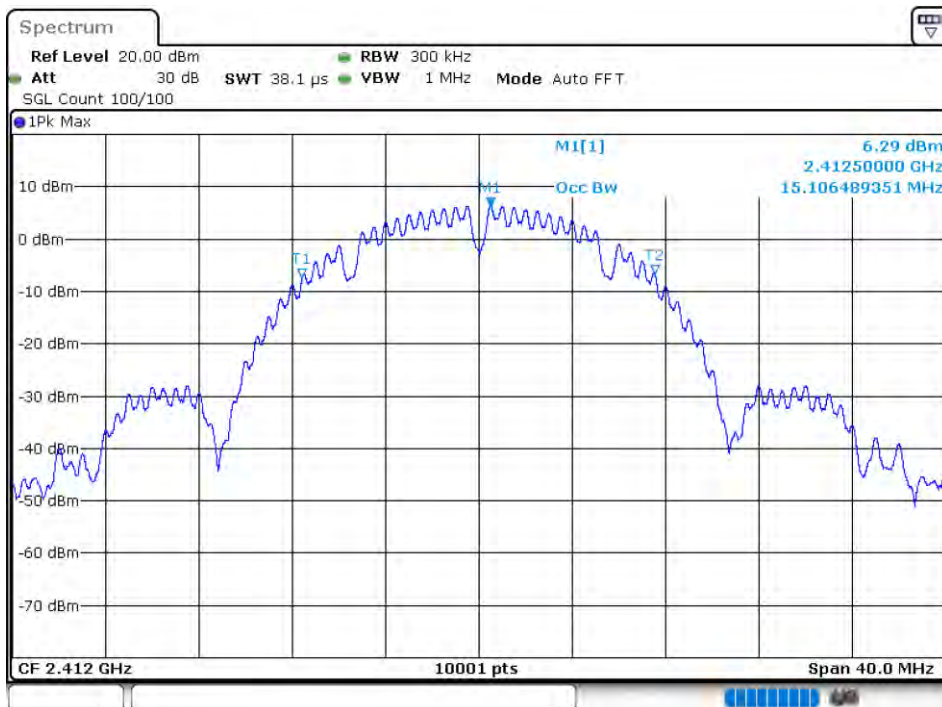


-6 dB BW NVNT 802.11b 2412MHz Ant 4

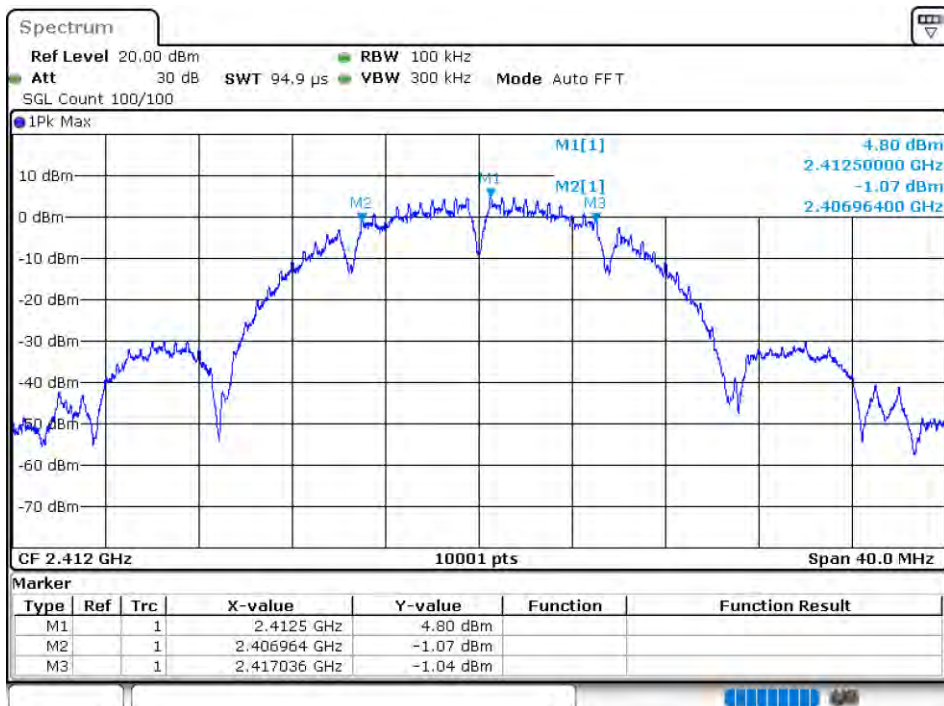


OBW NVNT 802.11b 2437MHz Ant 4

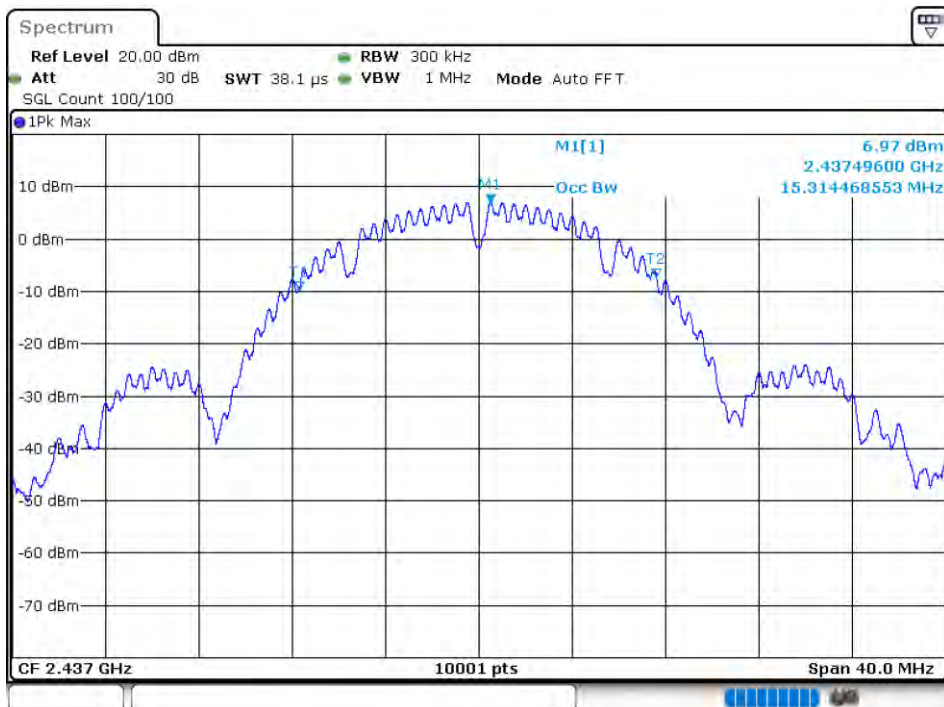


-6 dB BW NVNT 802.11b 2437MHz Ant 4

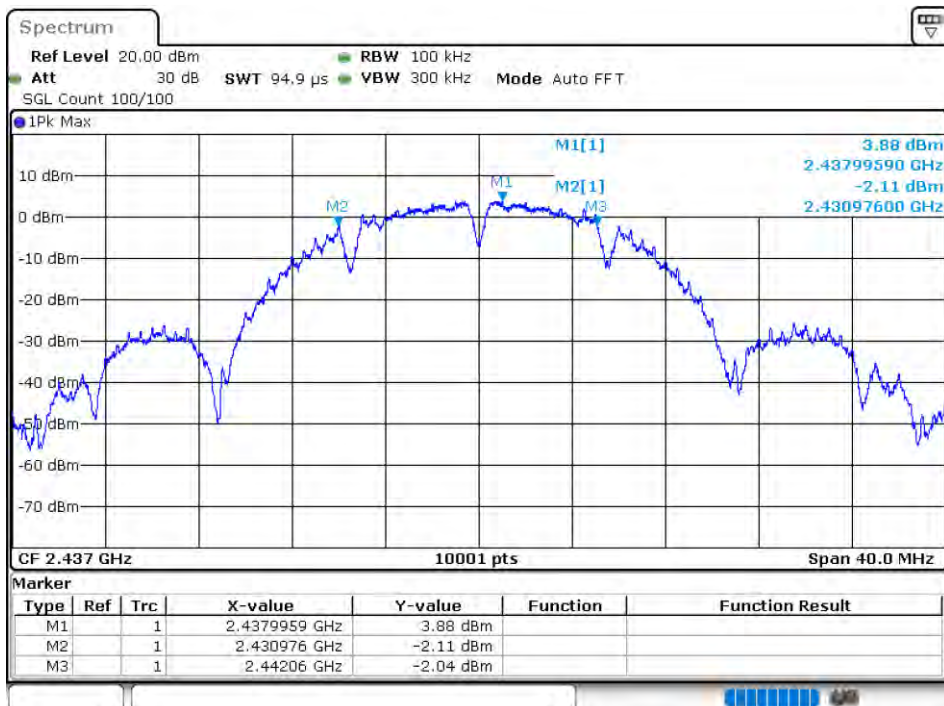

OBW NVNT 802.11b 2462MHz Ant 4

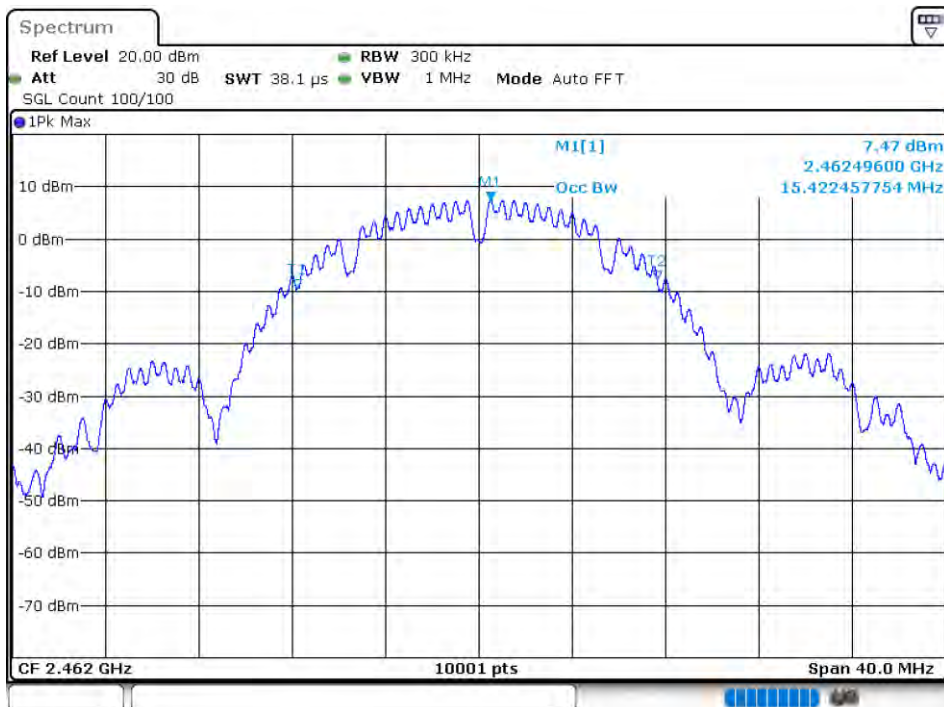


-6 dB BW NVNT 802.11b 2462MHz Ant 4

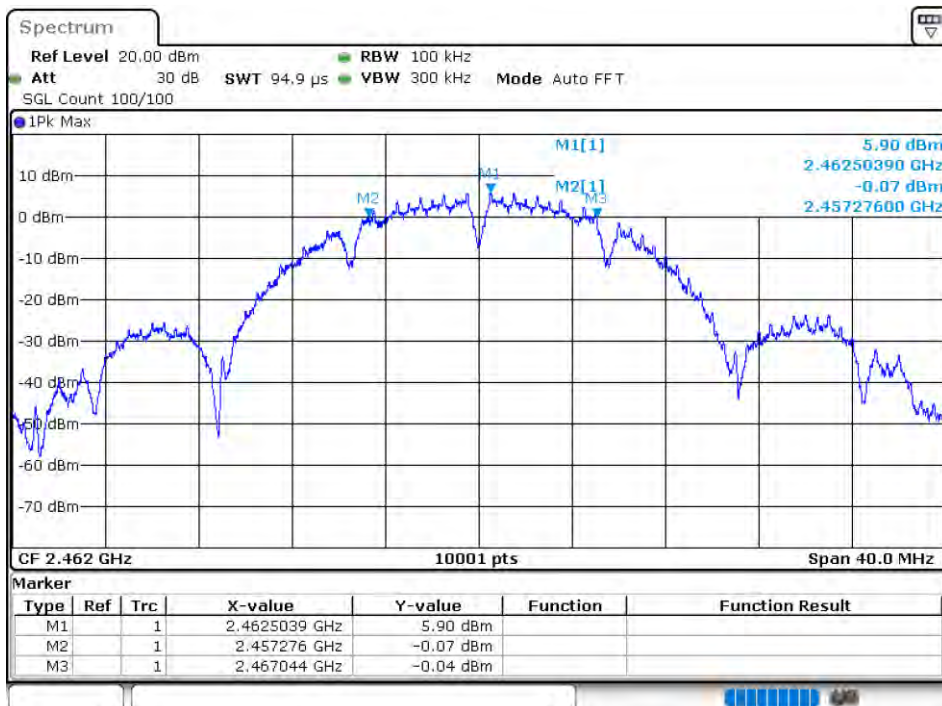

OBW NVNT 802.11g 2412MHz Ant 3




-6 dB BW NVNT 802.11g 2412MHz Ant 3

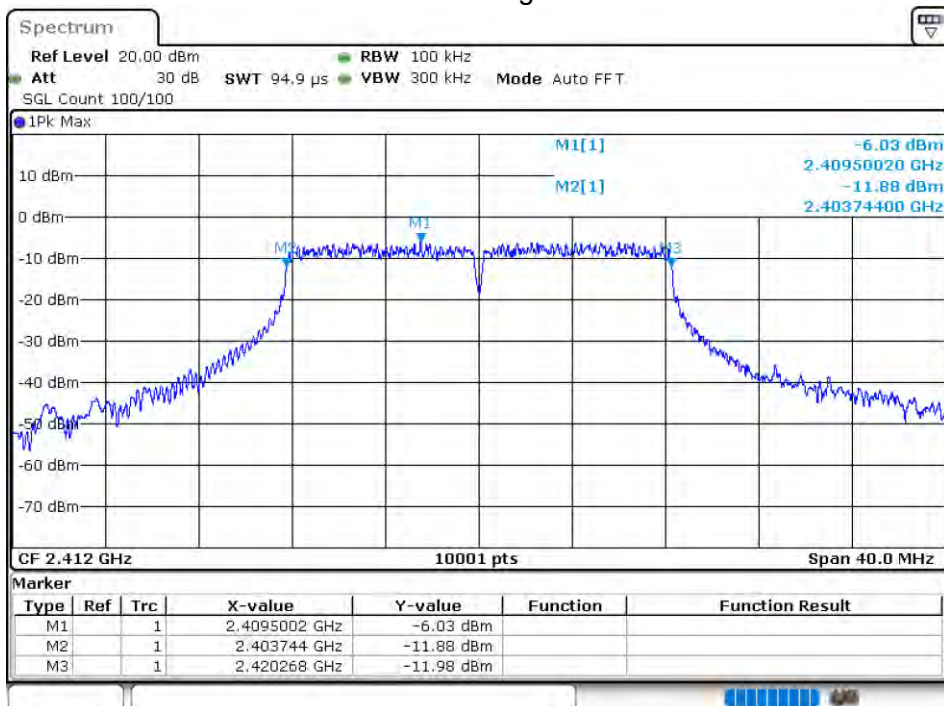

OBW NVNT 802.11g 2437MHz Ant 3




-6 dB BW NVNT 802.11g 2437MHz Ant 3

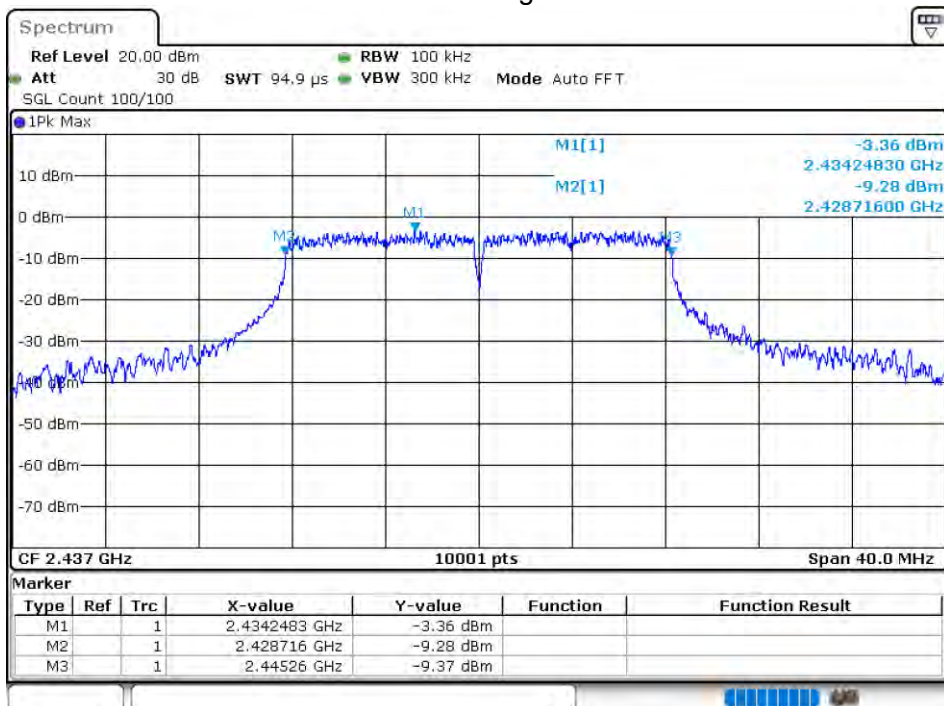

OBW NVNT 802.11g 2462MHz Ant 3




-6 dB BW NVNT 802.11g 2462MHz Ant 3

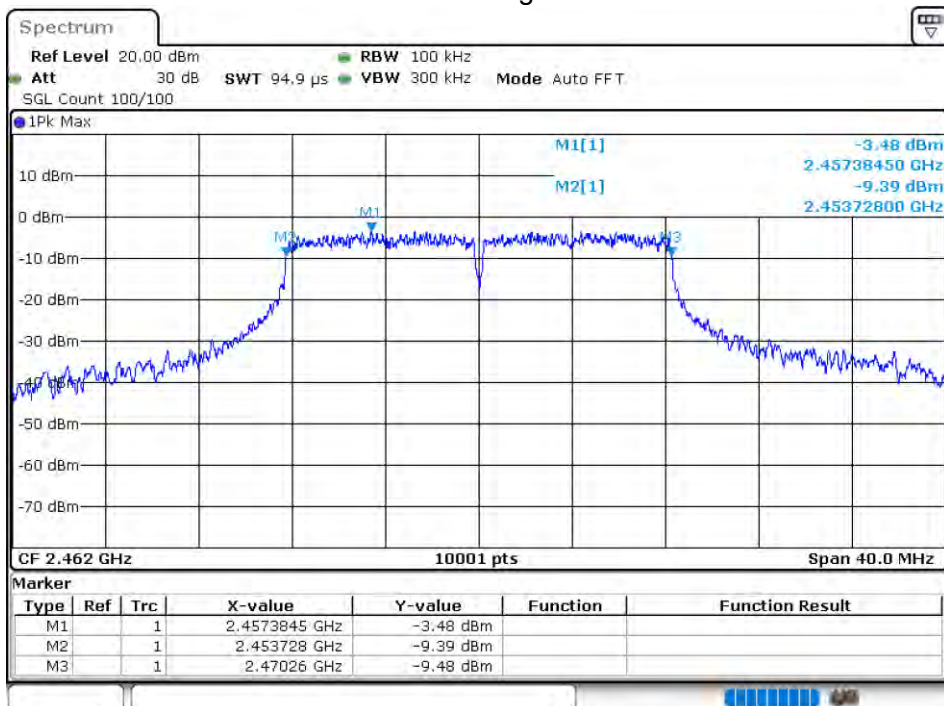

OBW NVNT 802.11g 2412MHz Ant 4




-6 dB BW NVNT 802.11g 2412MHz Ant 4

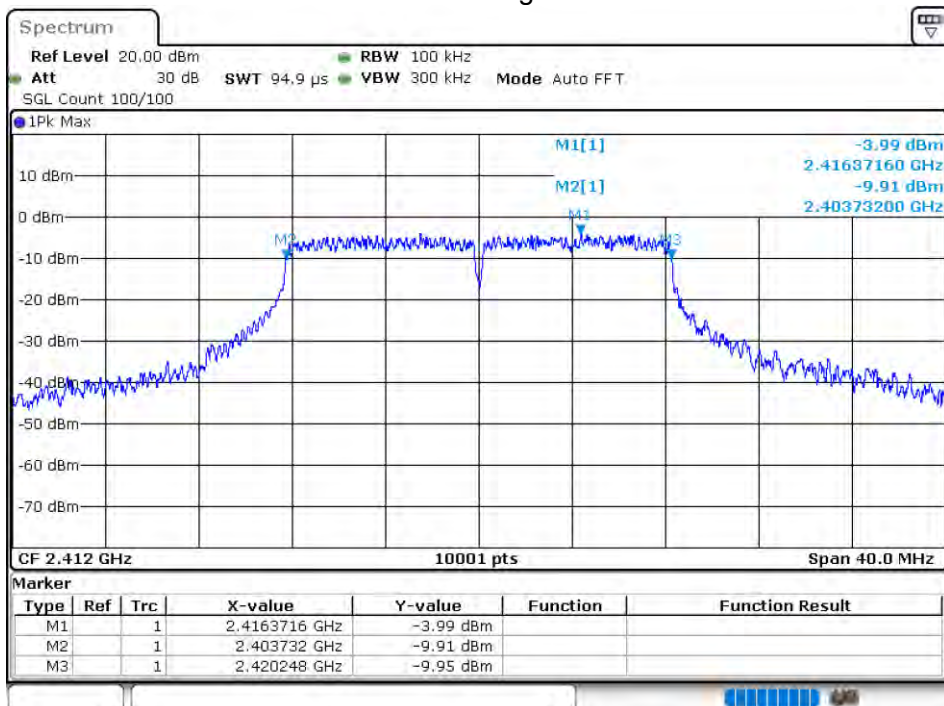

OBW NVNT 802.11g 2437MHz Ant 4




-6 dB BW NVNT 802.11g 2437MHz Ant 4

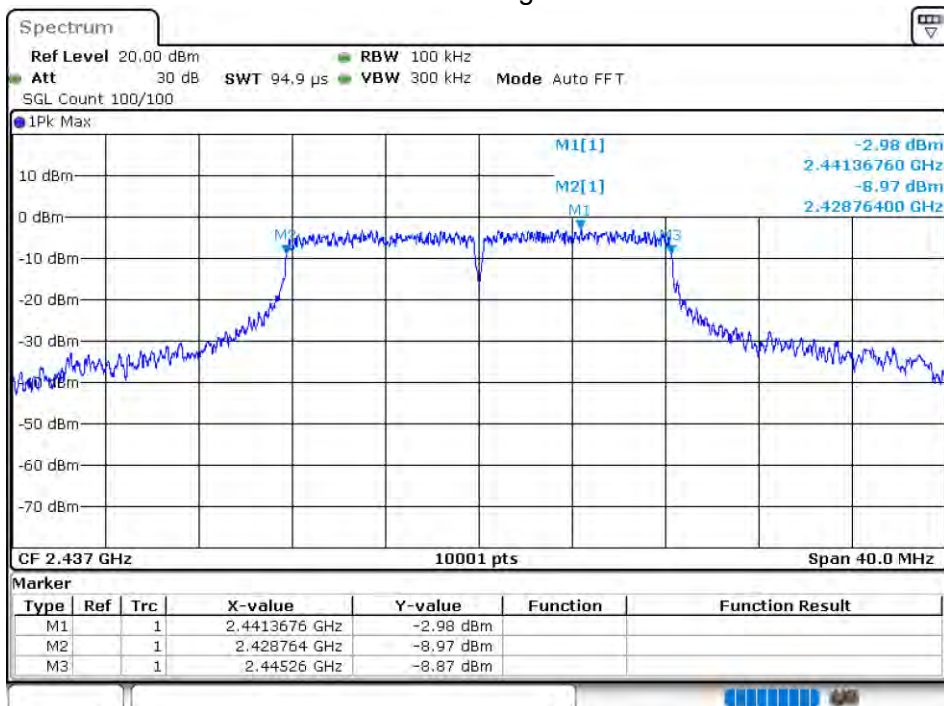

OBW NVNT 802.11g 2462MHz Ant 4




-6 dB BW NVNT 802.11g 2462MHz Ant 4

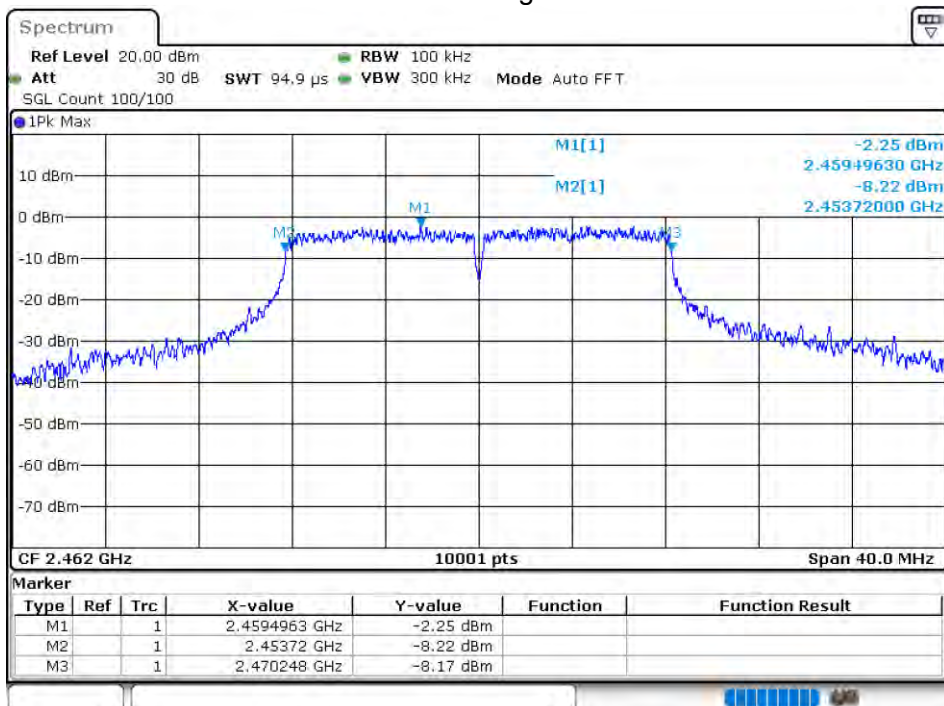

OBW NVNT 802.11n(HT20) 2412MHz Ant 3




-6 dB BW NVNT 802.11n(HT20) 2412MHz Ant 3

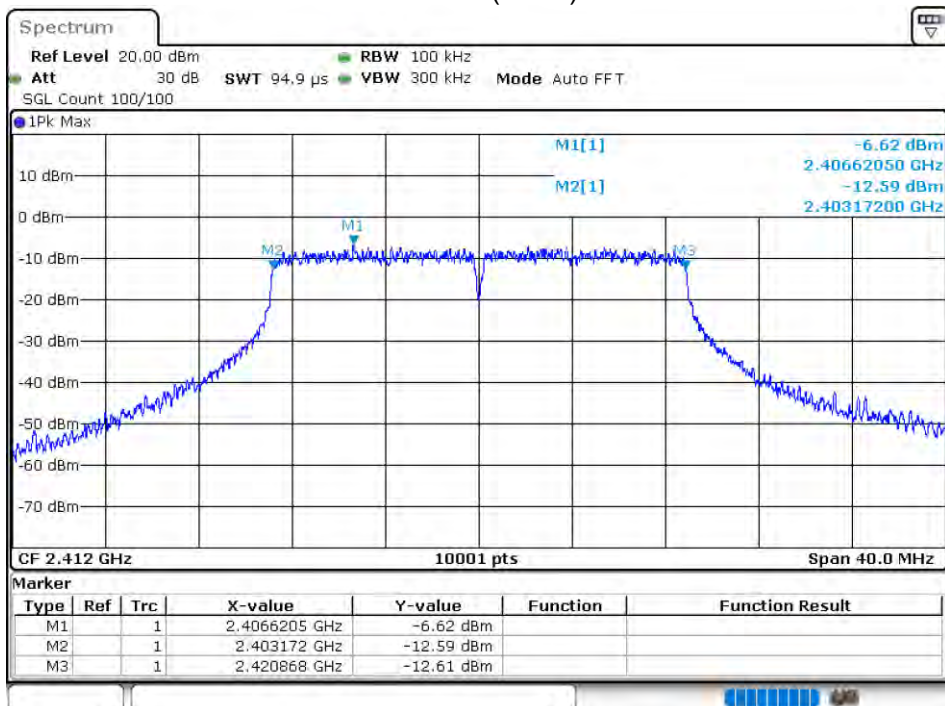


OBW NVNT 802.11n(HT20) 2437MHz Ant 3




-6 dB BW NVNT 802.11n(HT20) 2437MHz Ant 3

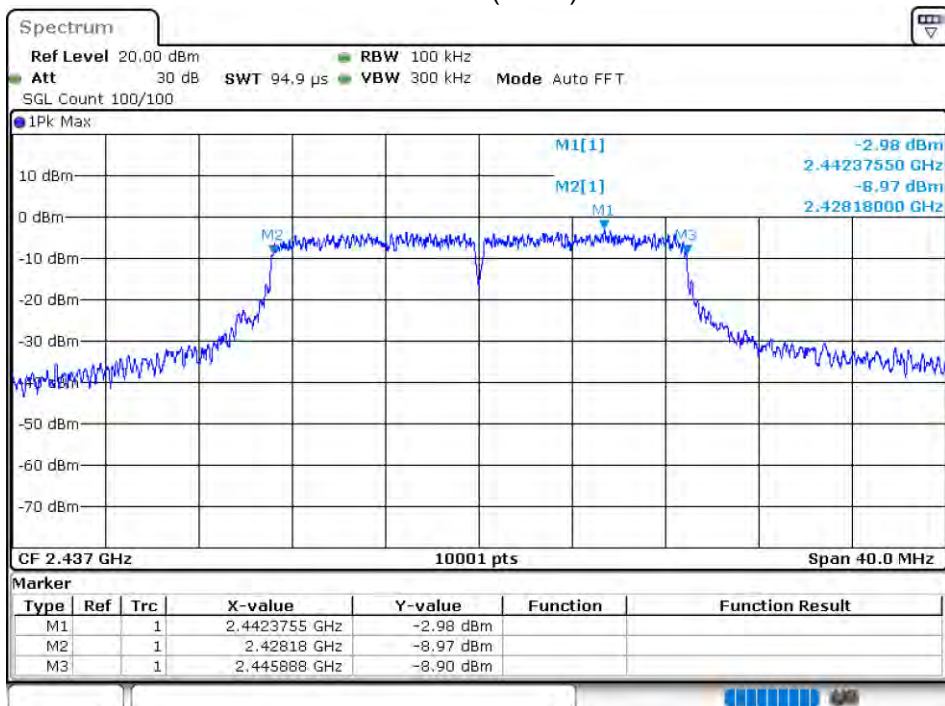


OBW NVNT 802.11n(HT20) 2462MHz Ant 3

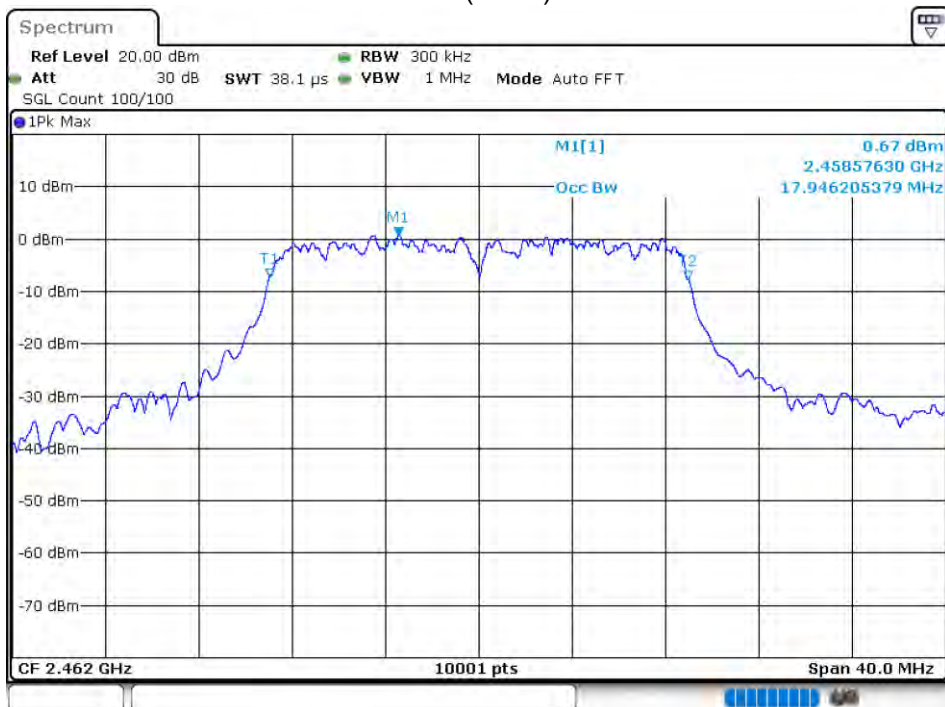


-6 dB BW NVNT 802.11n(HT20) 2462MHz Ant 3

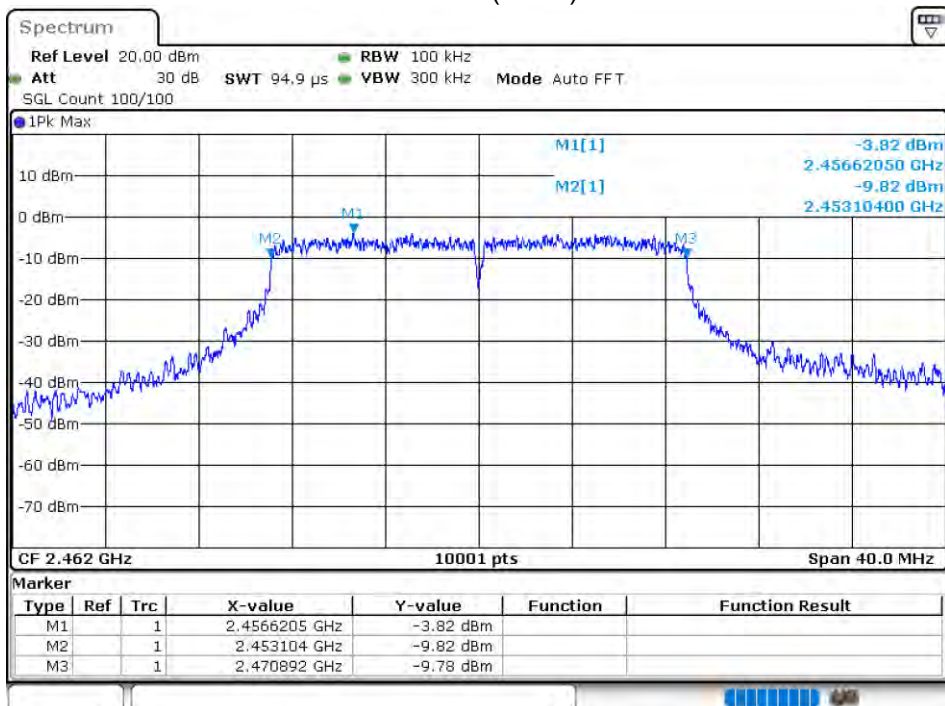


OBW NVNT 802.11n(HT20) 2412MHz Ant 4

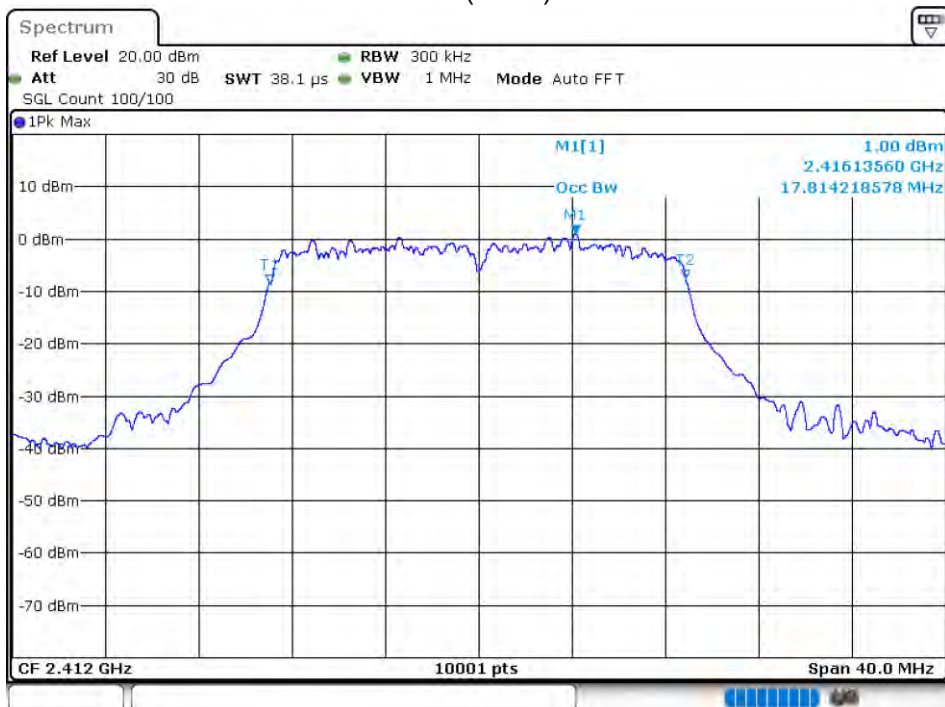


-6 dB BW NVNT 802.11n(HT20) 2412MHz Ant 4

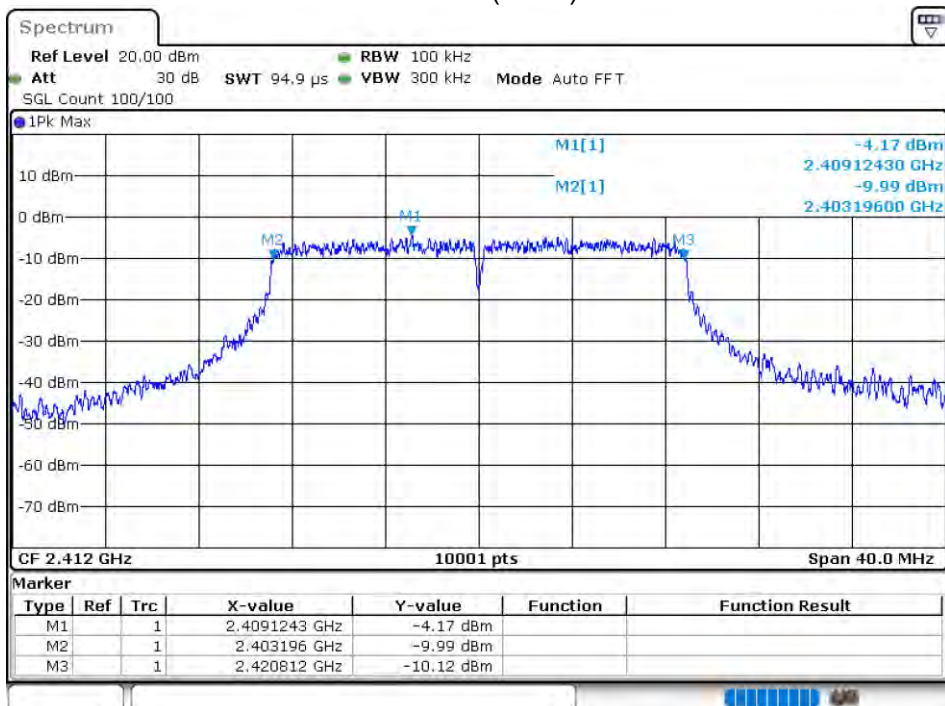

OBW NVNT 802.11n(HT20) 2437MHz Ant 4

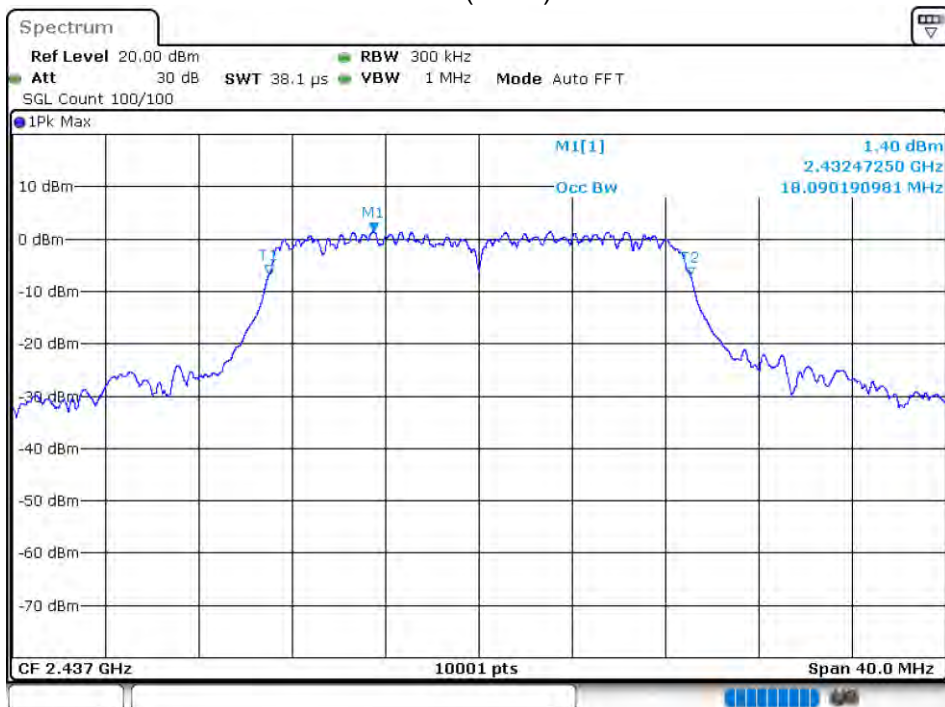


-6 dB BW NVNT 802.11n(HT20) 2437MHz Ant 4

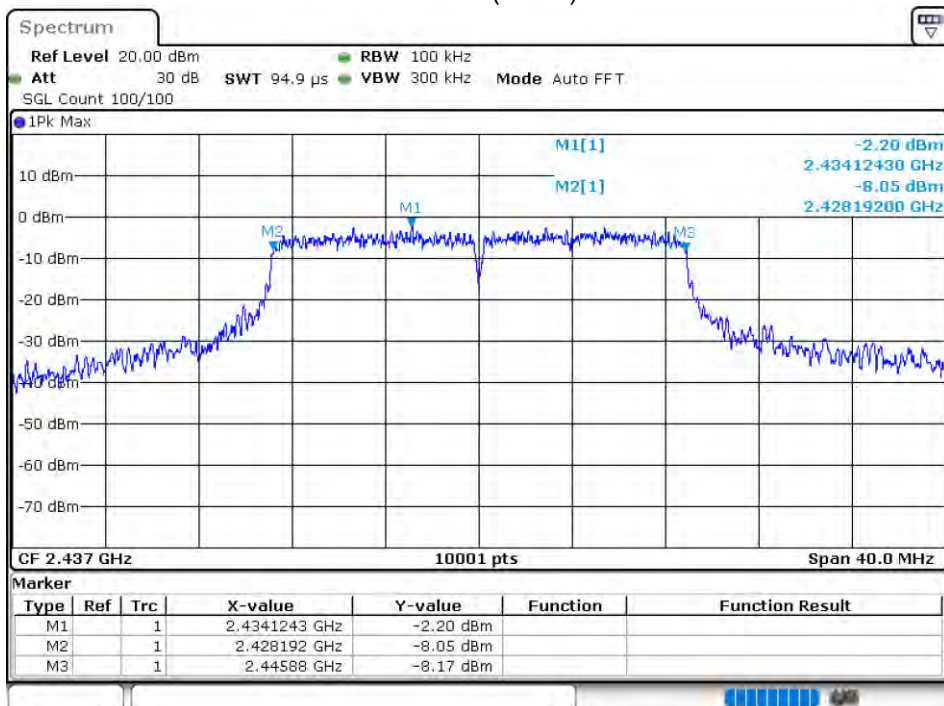


OBW NVNT 802.11n(HT20) 2462MHz Ant 4




-6 dB BW NVNT 802.11n(HT20) 2462MHz Ant 4

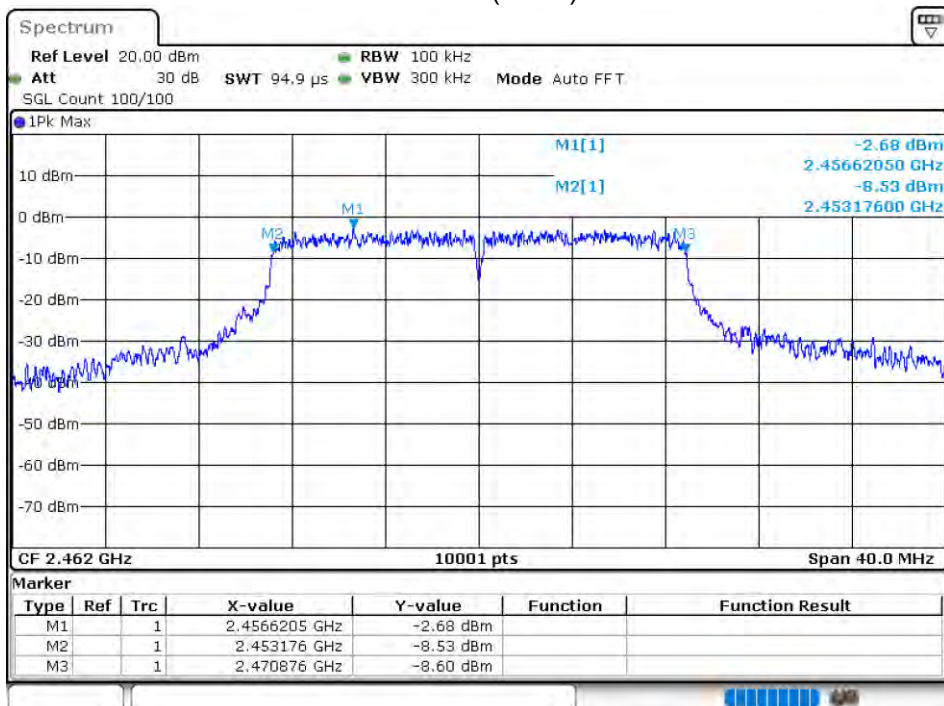


OBW NVNT 802.11n(HT40) 2422MHz Ant 3

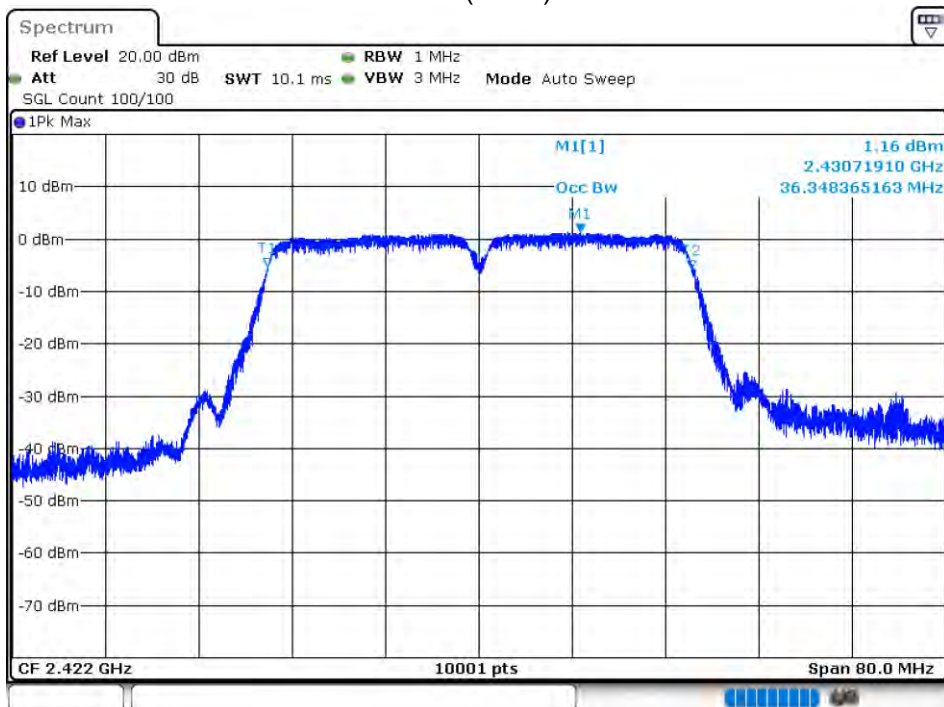


-6 dB BW NVNT 802.11n(HT40) 2422MHz Ant 3

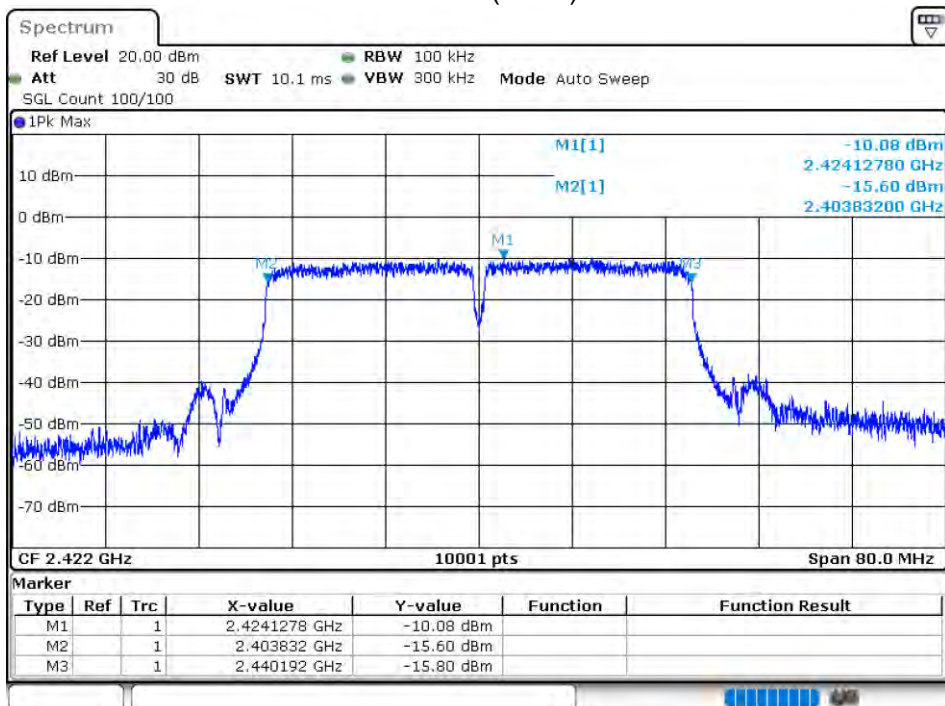


OBW NVNT 802.11n(HT40) 2437MHz Ant 3

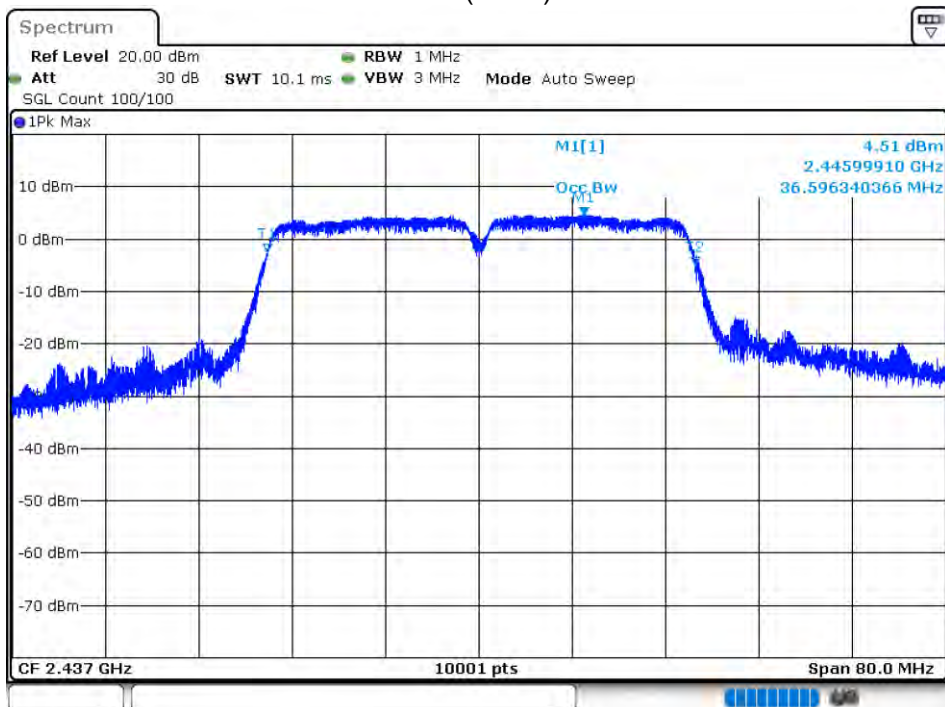


-6 dB BW NVNT 802.11n(HT40) 2437MHz Ant 3

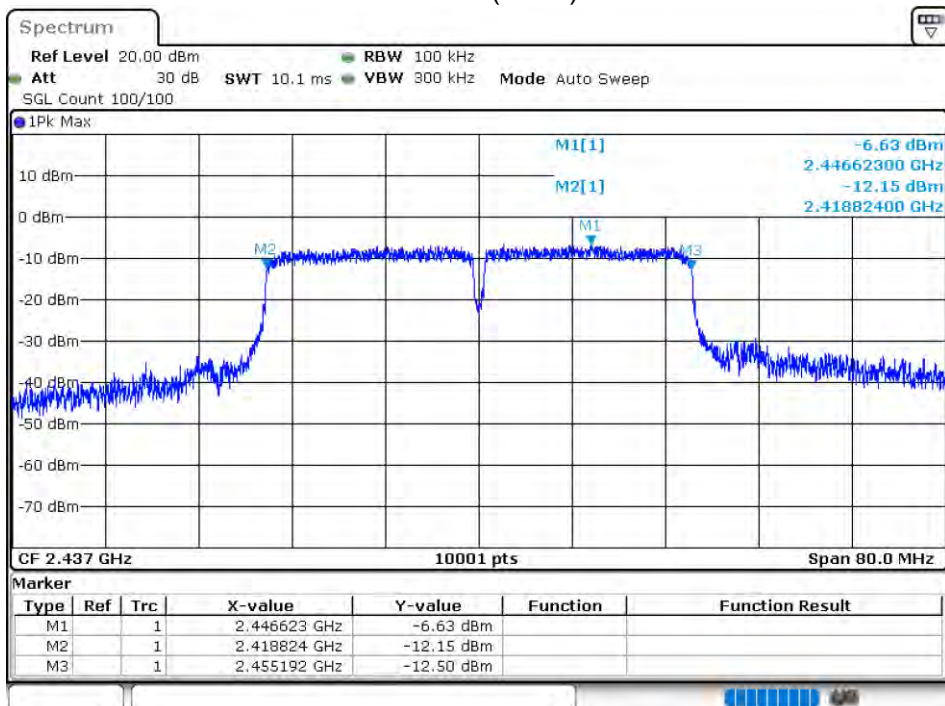


OBW NVNT 802.11n(HT40) 2452MHz Ant 3

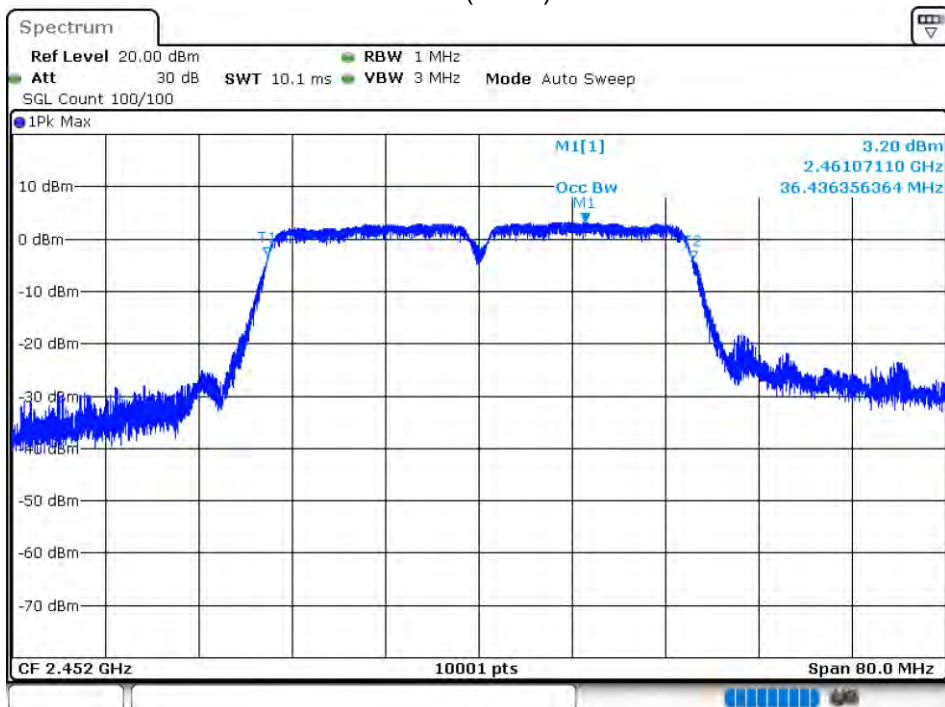


-6 dB BW NVNT 802.11n(HT40) 2452MHz Ant 3

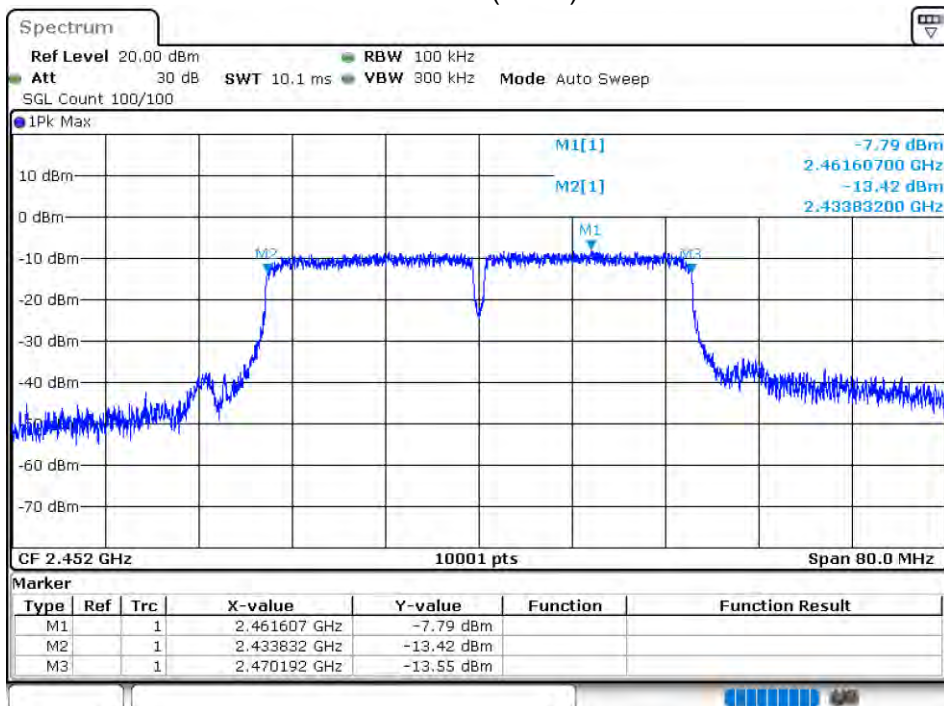


OBW NVNT 802.11n(HT40) 2422MHz Ant 4

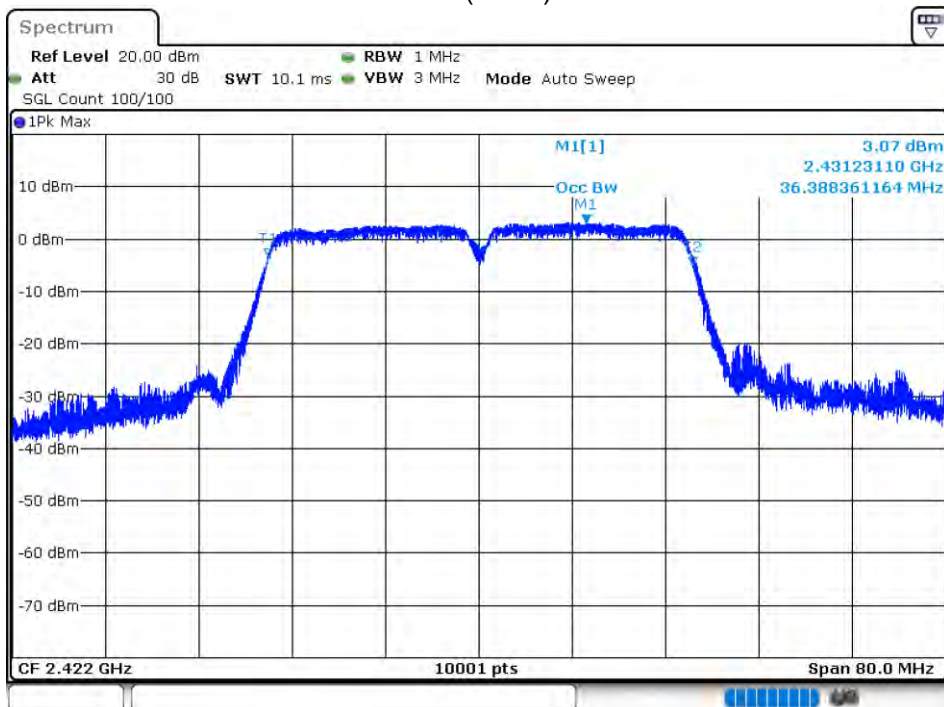


-6 dB BW NVNT 802.11n(HT40) 2422MHz Ant 4

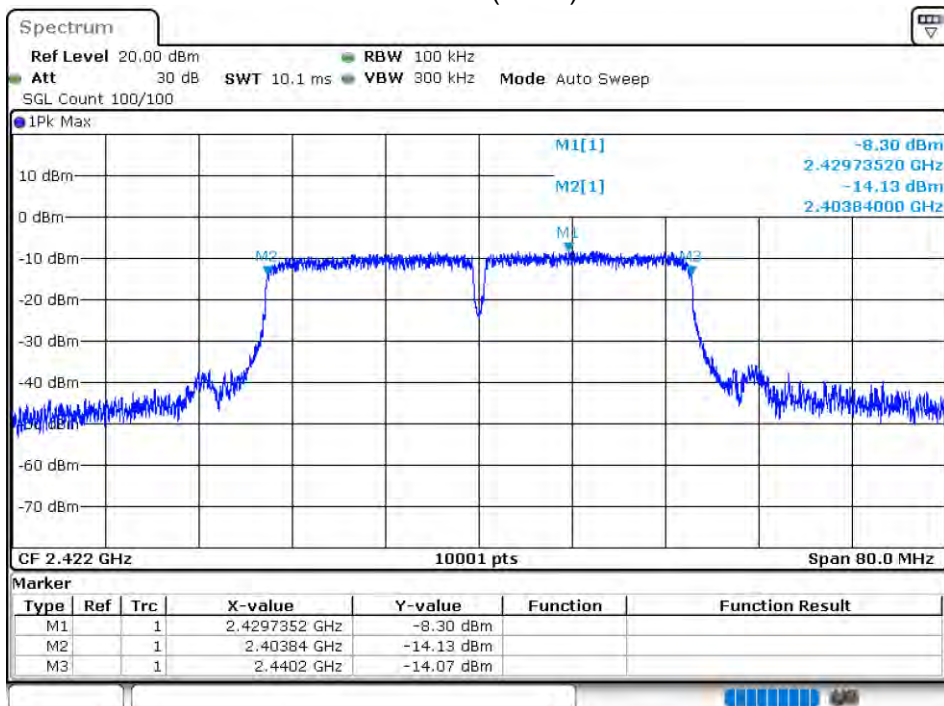


OBW NVNT 802.11n(HT40) 2437MHz Ant 4

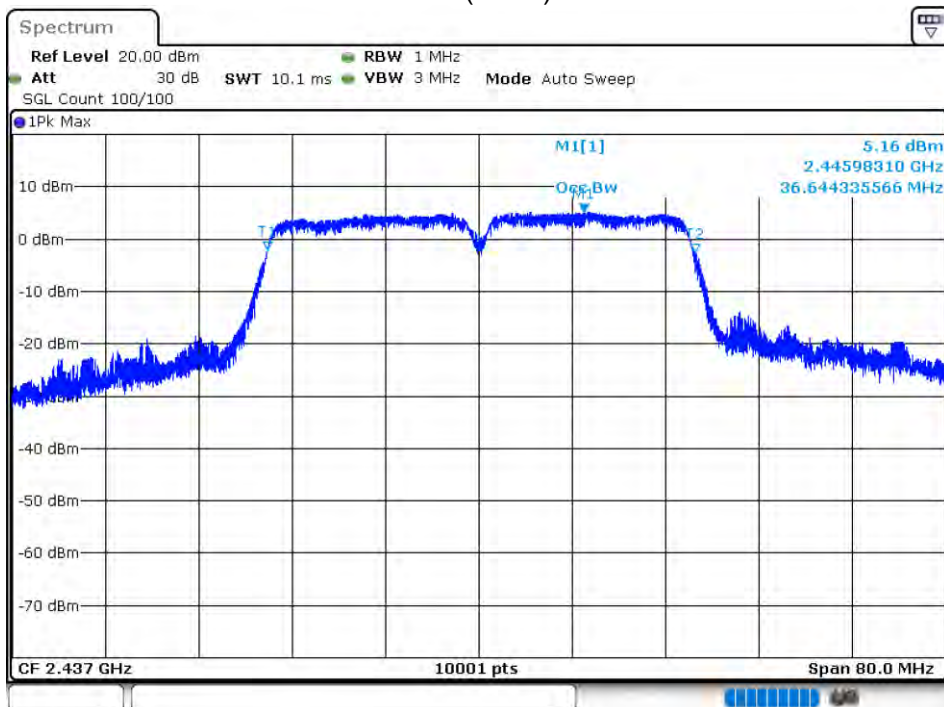

-6 dB BW NVNT 802.11n(HT40) 2437MHz Ant 4

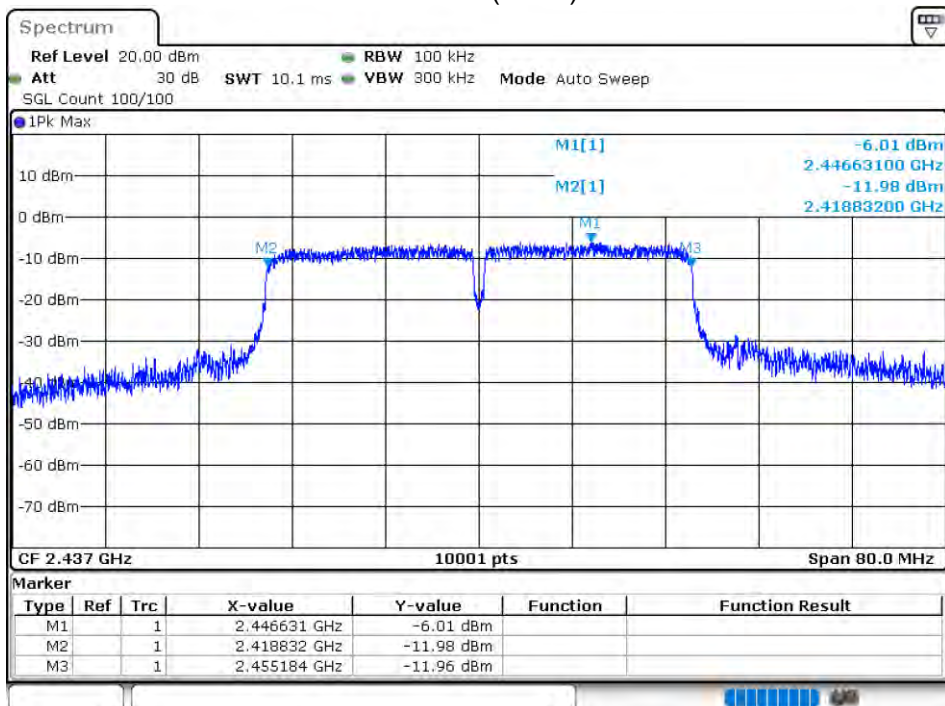

OBW NVNT 802.11n(HT40) 2452MHz Ant 4

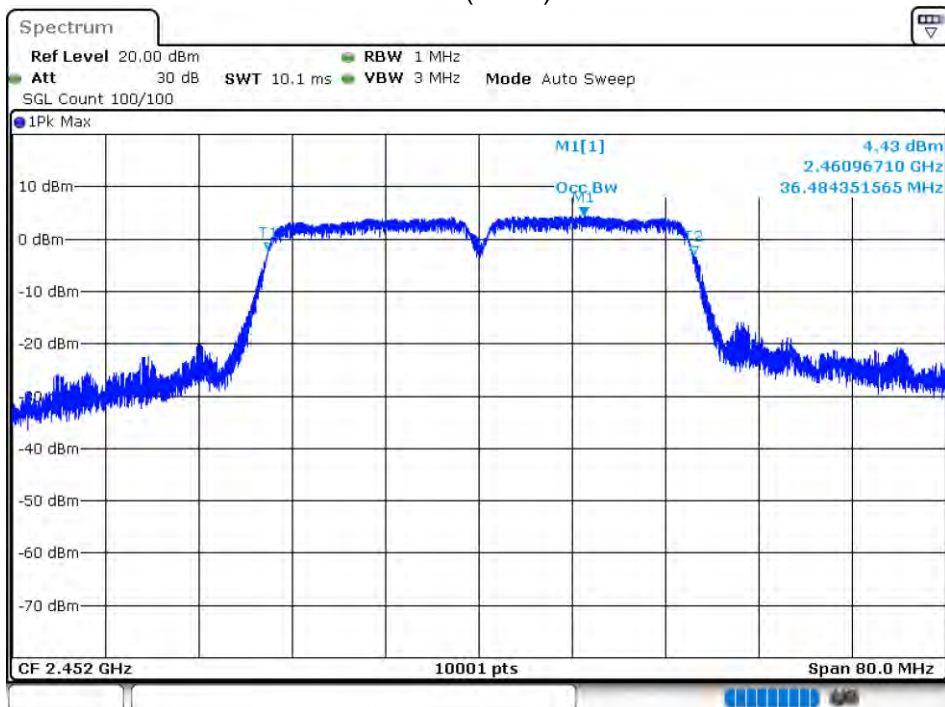

-6 dB BW NVNT 802.11n(HT40) 2452MHz Ant 4

