


Site: SIP-AC1	Time: 2022/05/17 - 23:29
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2417MHz	

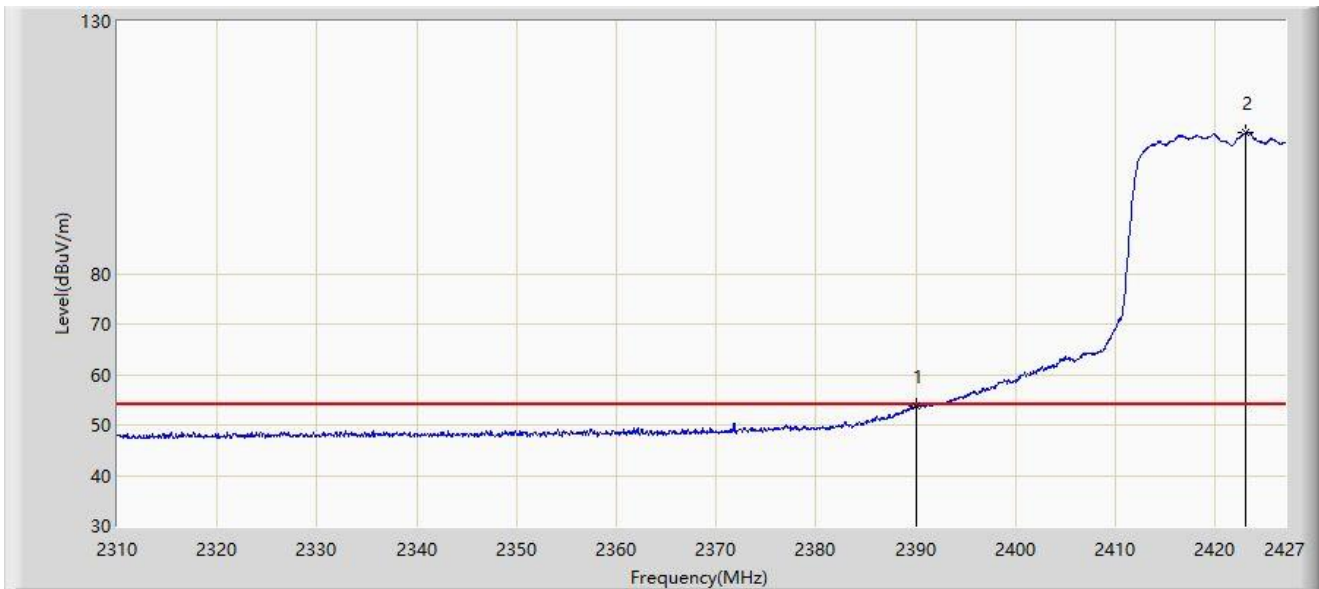


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	53.842	22.253	-0.158	54.000	31.588	AV
2		2423.022	107.833	76.133	N/A	N/A	31.700	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 00:01
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2422MHz	

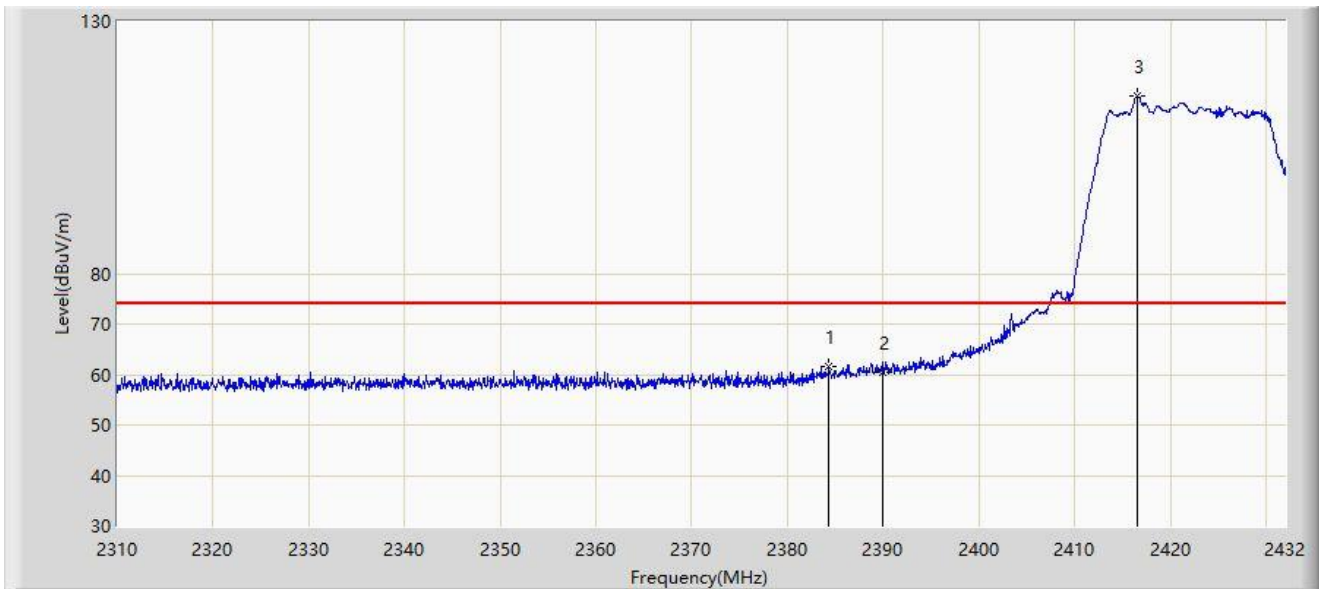


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2384.359	61.546	30.062	-12.454	74.000	31.485	PK
2		2390.000	60.314	28.725	-13.686	74.000	31.588	PK
3		2416.567	115.095	83.404	N/A	N/A	31.691	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/17 - 23:58
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2422MHz	

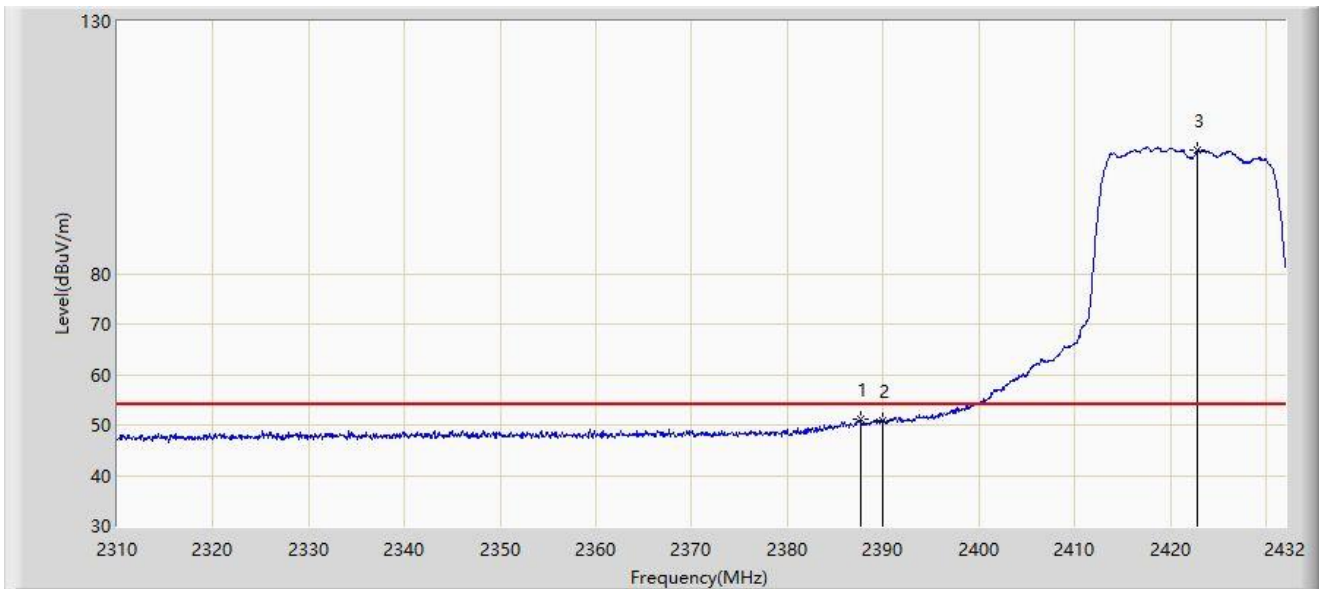


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2387.592	51.071	19.527	-2.929	54.000	31.544	AV
2		2390.000	50.814	19.225	-3.186	54.000	31.588	AV
3		2422.850	104.406	72.706	N/A	N/A	31.700	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/17 - 23:57
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2422MHz	

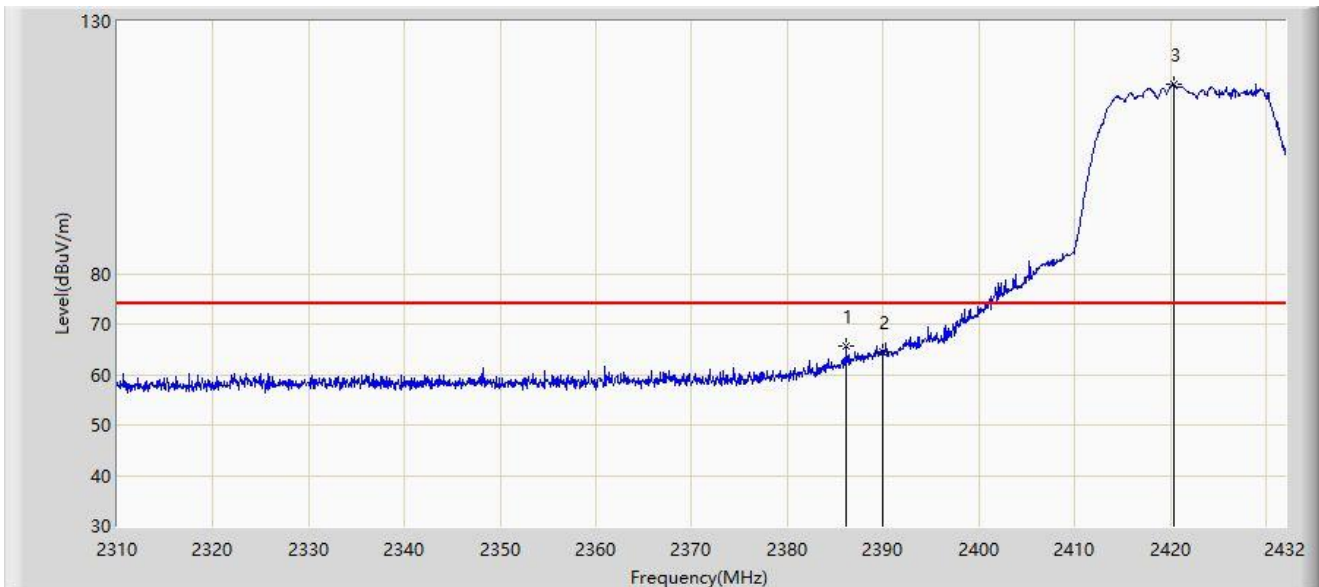


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.128	65.789	34.272	-8.211	74.000	31.518	PK
2		2390.000	64.467	32.878	-9.533	74.000	31.588	PK
3		2420.349	117.454	85.757	N/A	N/A	31.697	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/17 - 23:51
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2422MHz	

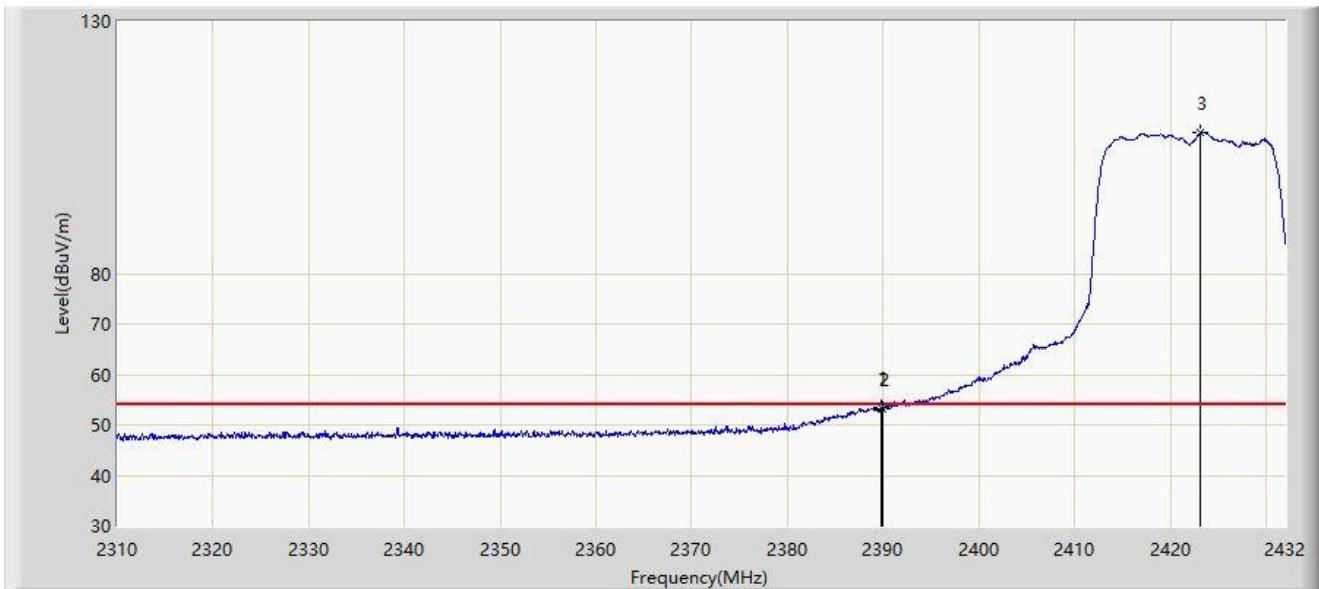


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.788	53.491	21.906	-0.509	54.000	31.584	AV
2		2390.000	53.254	21.665	-0.746	54.000	31.588	AV
3		2423.155	107.866	76.166	N/A	N/A	31.701	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 00:20
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2427MHz	

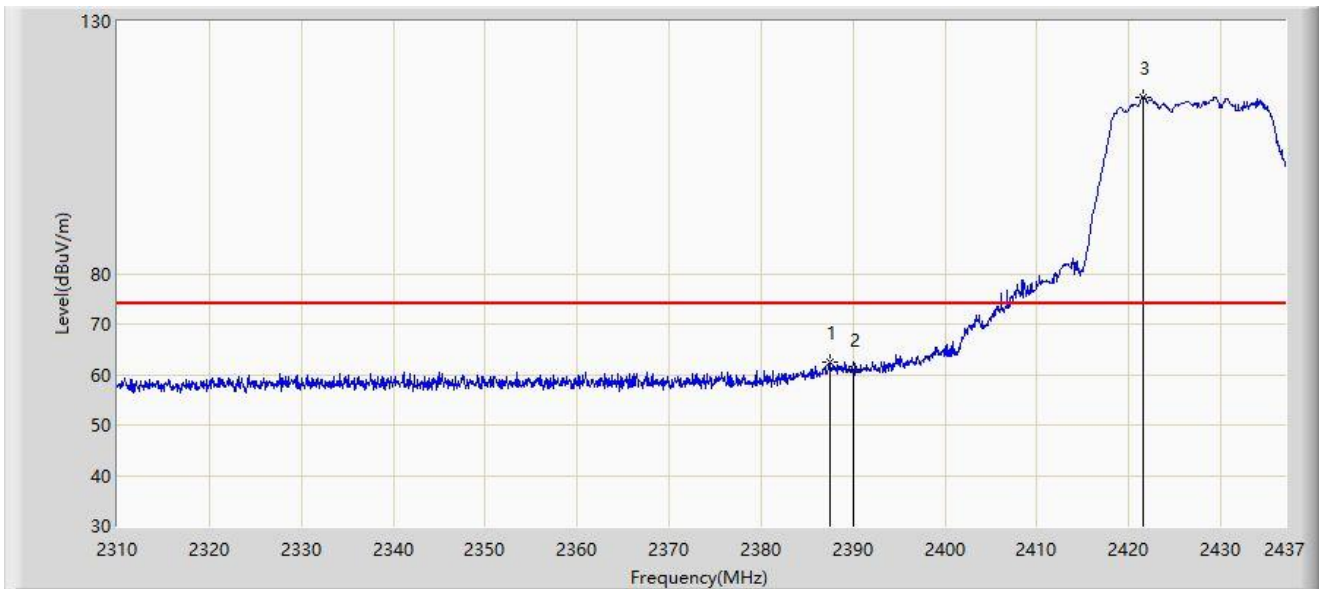


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2387.470	62.390	30.848	-11.610	74.000	31.542	PK
2		2390.000	60.890	29.301	-13.110	74.000	31.588	PK
3		2421.570	115.046	83.348	N/A	N/A	31.699	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 00:18
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2427MHz	

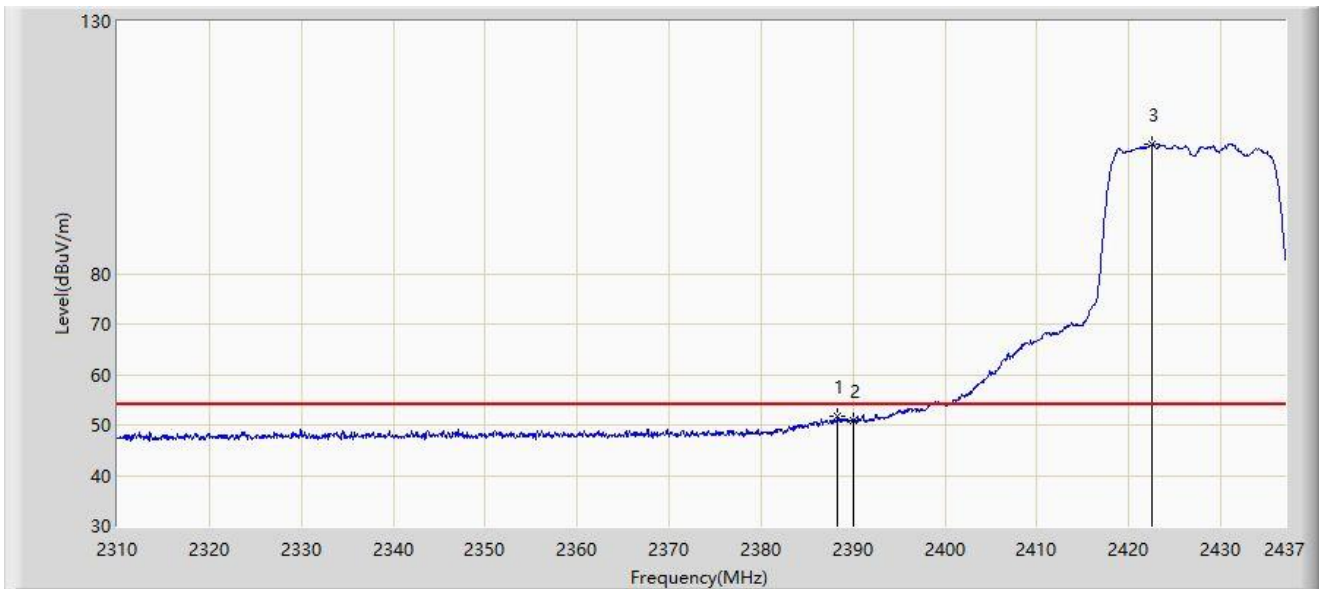


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.359	51.710	20.152	-2.290	54.000	31.558	AV
2		2390.000	50.987	19.398	-3.013	54.000	31.588	AV
3		2422.585	105.664	73.964	N/A	N/A	31.699	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 00:17
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2427MHz	

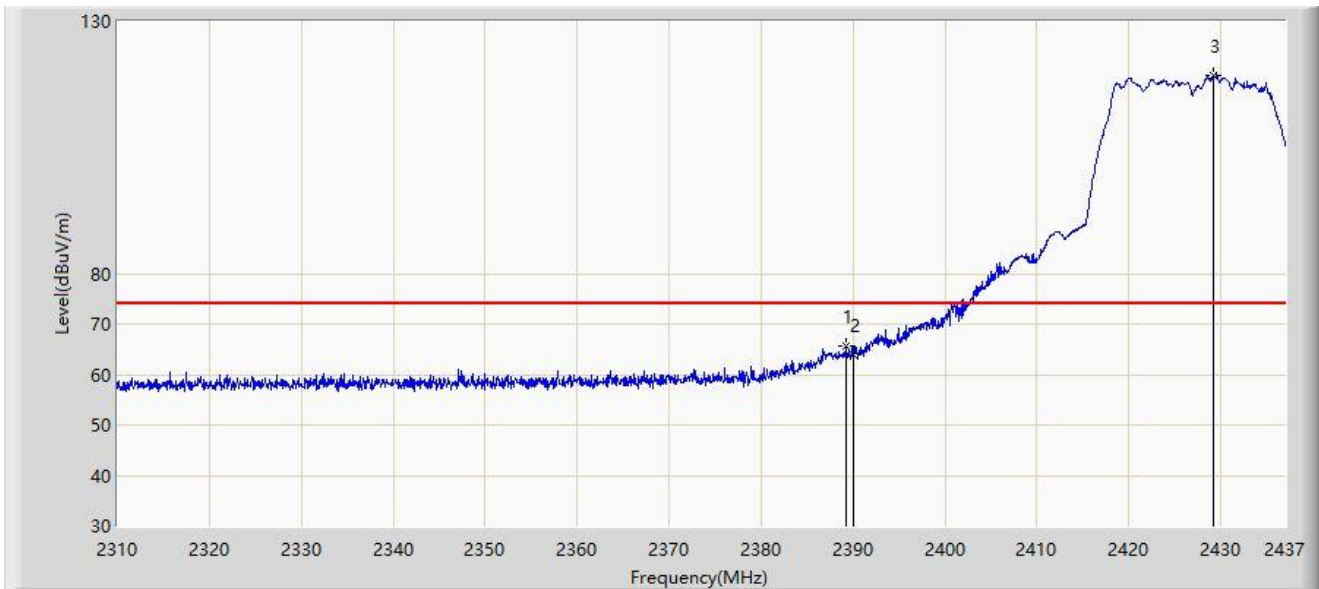


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.185	65.512	33.938	-8.488	74.000	31.573	PK
2		2390.000	63.938	32.349	-10.062	74.000	31.588	PK
3		2429.253	119.379	87.669	N/A	N/A	31.710	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 00:15
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2427MHz	

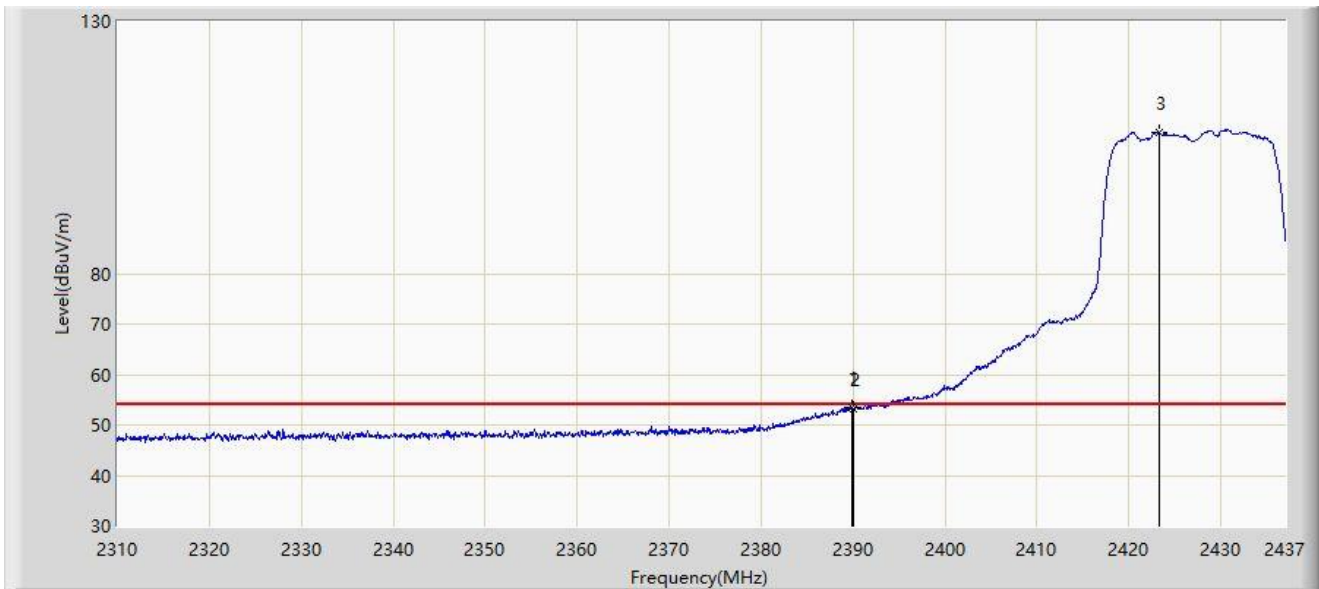


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.883	53.596	22.010	-0.404	54.000	31.587	AV
2		2390.000	53.176	21.587	-0.824	54.000	31.588	AV
3		2423.284	108.001	76.300	N/A	N/A	31.701	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 21:04
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2447MHz	

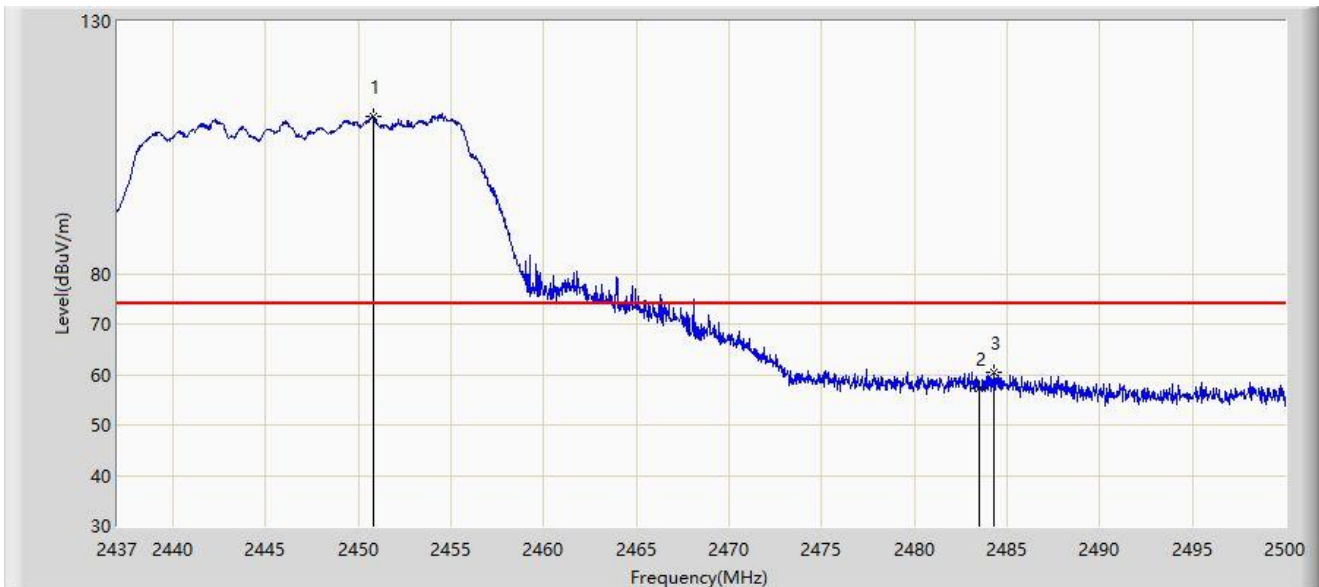


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2450.797	111.142	79.363	N/A	N/A	31.779	PK
2		2483.500	57.199	25.327	-16.801	74.000	31.872	PK
3	*	2484.250	60.533	28.661	-13.467	74.000	31.872	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 21:03
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2447MHz	

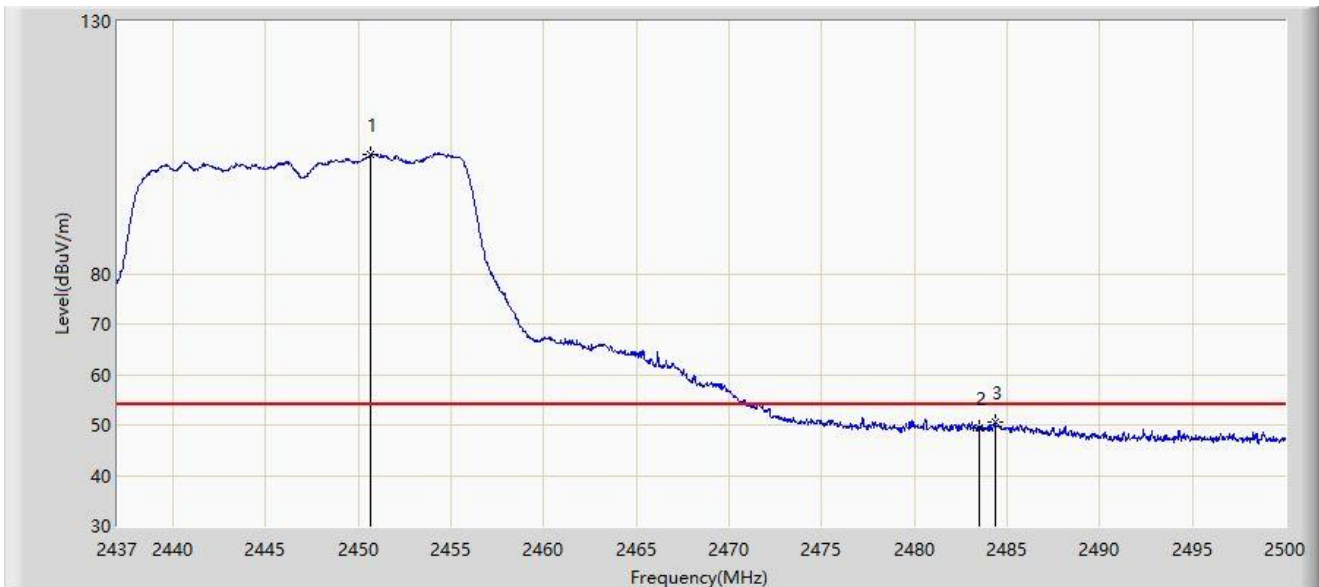


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2450.639	103.501	71.723	N/A	N/A	31.778	AV
2		2483.500	49.435	17.563	-4.565	54.000	31.872	AV
3	*	2484.376	50.439	18.567	-3.561	54.000	31.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 21:01
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2447MHz	

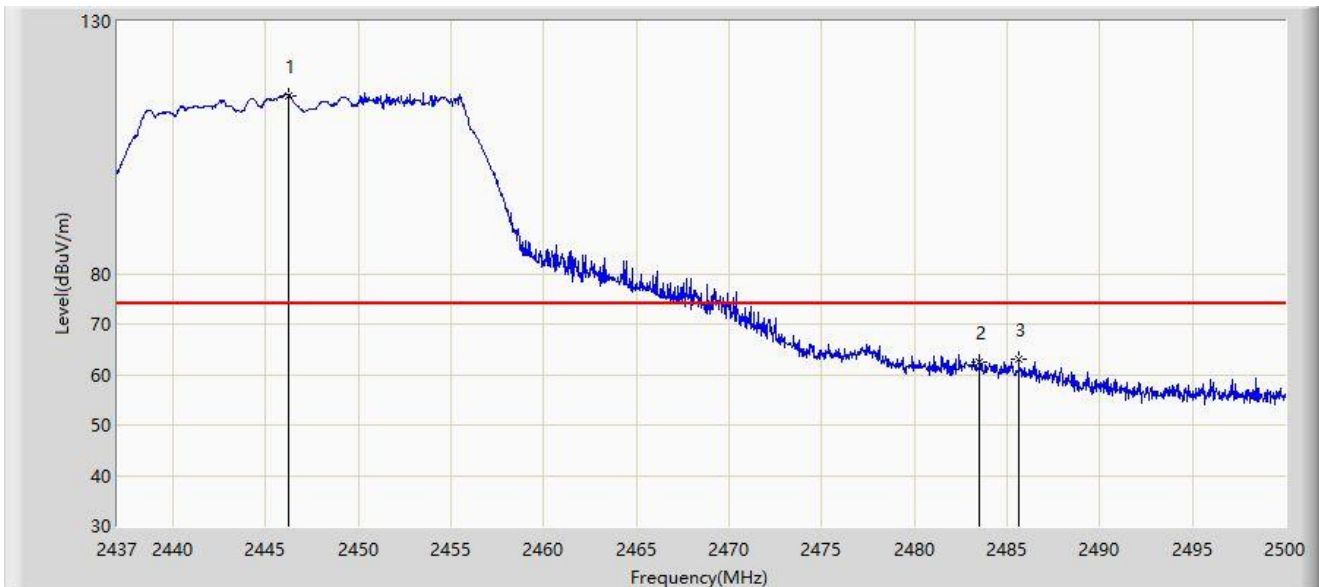


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2446.261	115.296	83.542	N/A	N/A	31.754	PK
2		2483.500	62.544	30.672	-11.456	74.000	31.872	PK
3	*	2485.636	63.095	31.223	-10.905	74.000	31.872	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 20:56
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2447MHz	

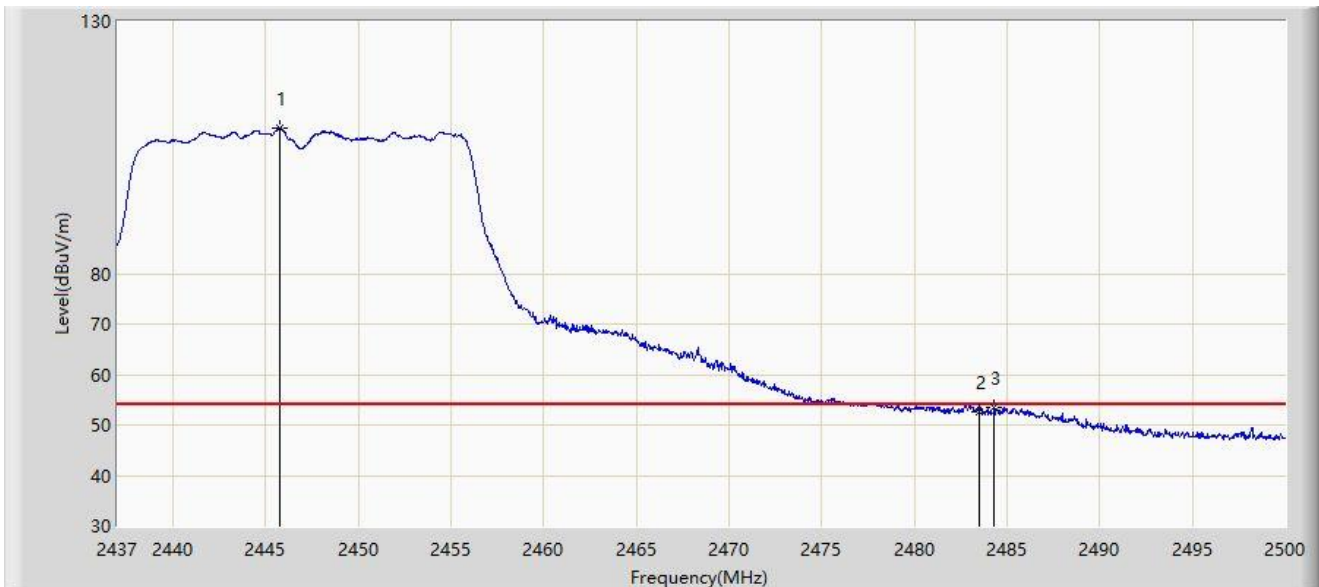


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2445.789	108.779	77.027	N/A	N/A	31.751	AV
2		2483.500	52.633	20.761	-1.367	54.000	31.872	AV
3	*	2484.313	53.615	21.743	-0.385	54.000	31.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 18:15
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2452MHz	

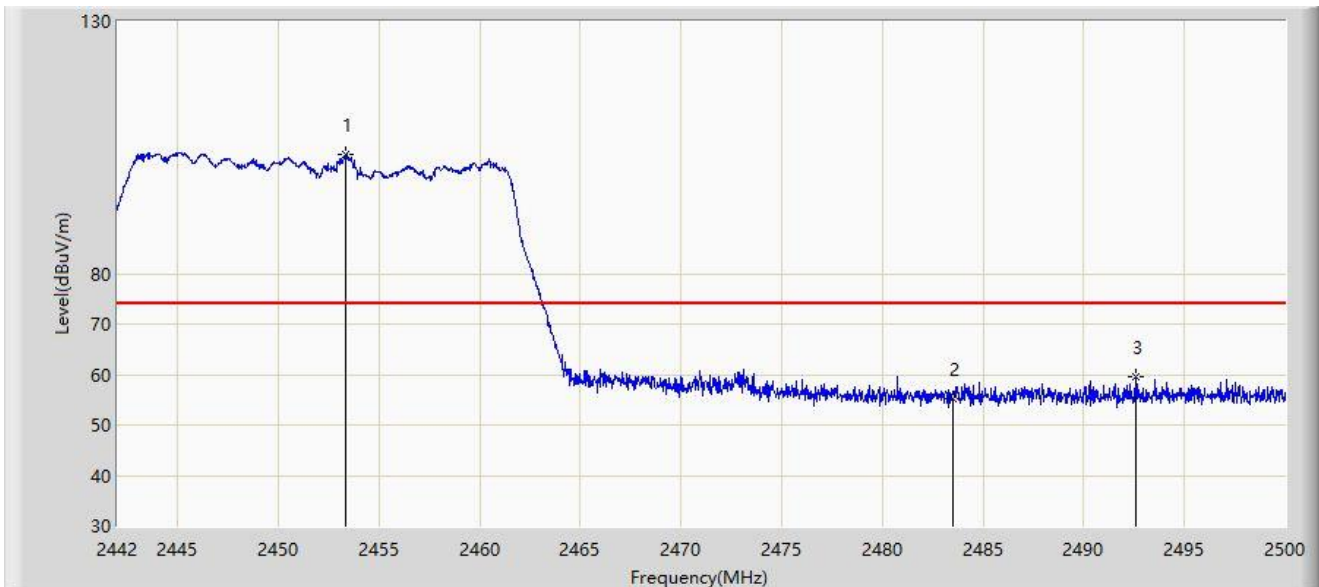


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2453.368	103.528	71.735	N/A	N/A	31.792	PK
2		2483.500	55.165	23.293	-18.835	74.000	31.872	PK
3	*	2492.605	59.424	27.555	-14.576	74.000	31.870	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 18:13
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2452MHz	

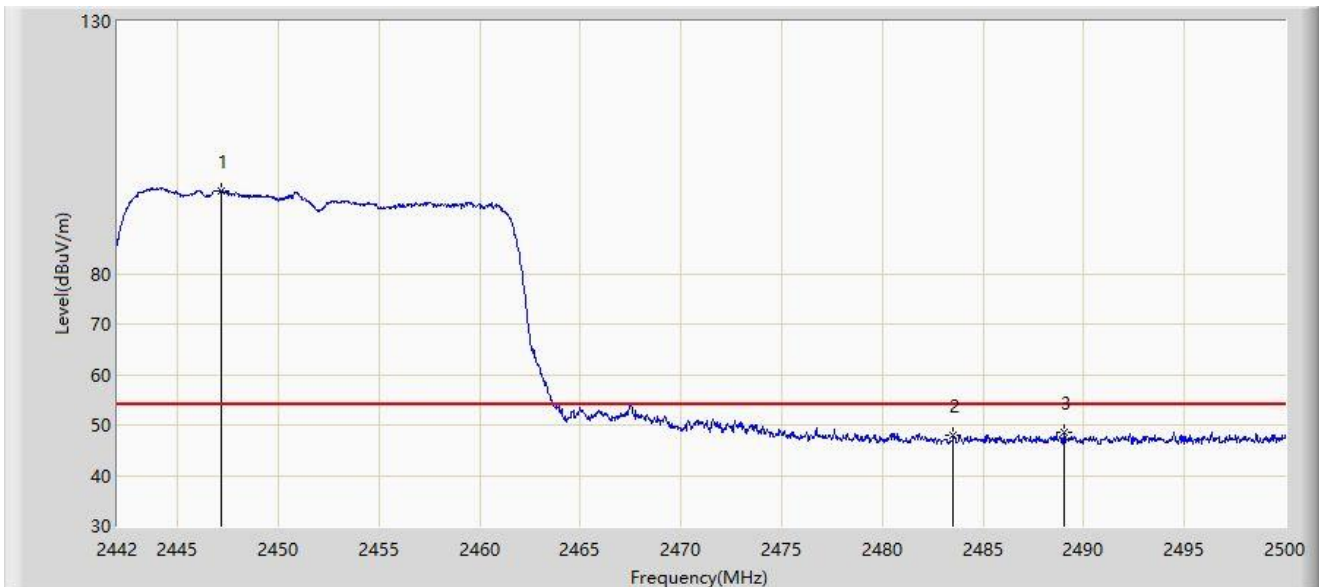


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2447.191	96.364	64.605	N/A	N/A	31.759	AV
2		2483.500	47.996	16.124	-6.004	54.000	31.872	AV
3	*	2489.038	48.542	16.671	-5.458	54.000	31.870	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 18:11
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2452MHz	

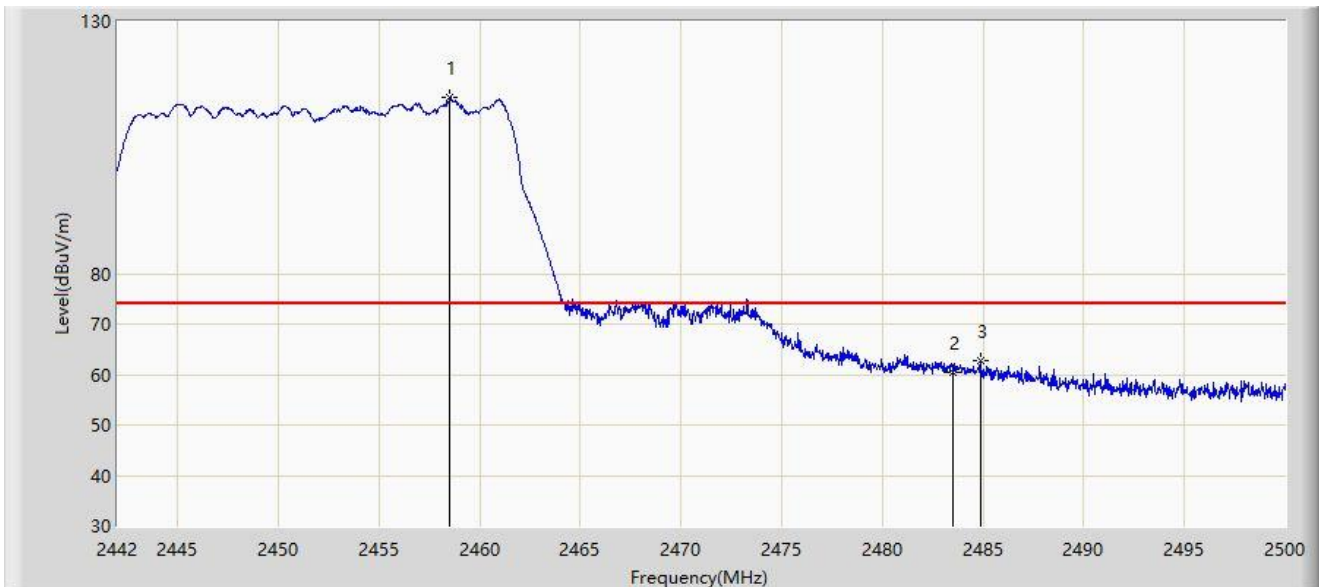


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.501	114.852	83.032	N/A	N/A	31.820	PK
2		2483.500	60.503	28.631	-13.497	74.000	31.872	PK
3	*	2484.862	62.661	30.789	-11.339	74.000	31.872	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 18:08
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2452MHz	

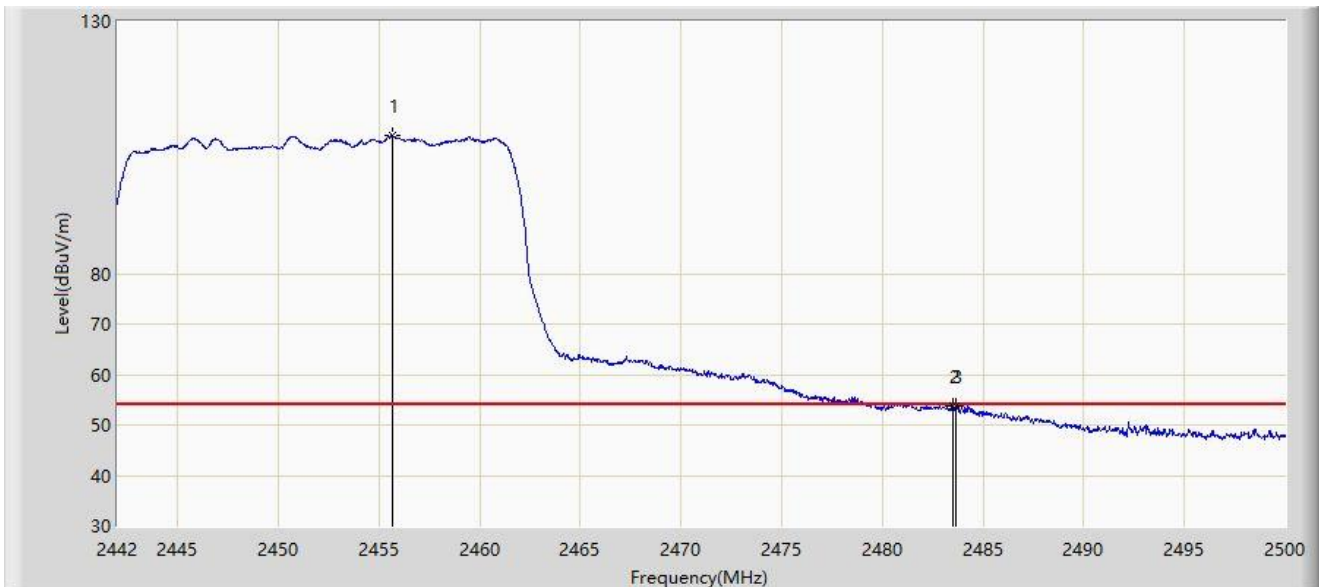


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2455.688	107.248	75.443	N/A	N/A	31.805	AV
2		2483.500	53.624	21.752	-0.376	54.000	31.872	AV
3	*	2483.673	53.895	22.023	-0.105	54.000	31.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 01:06
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2457MHz	

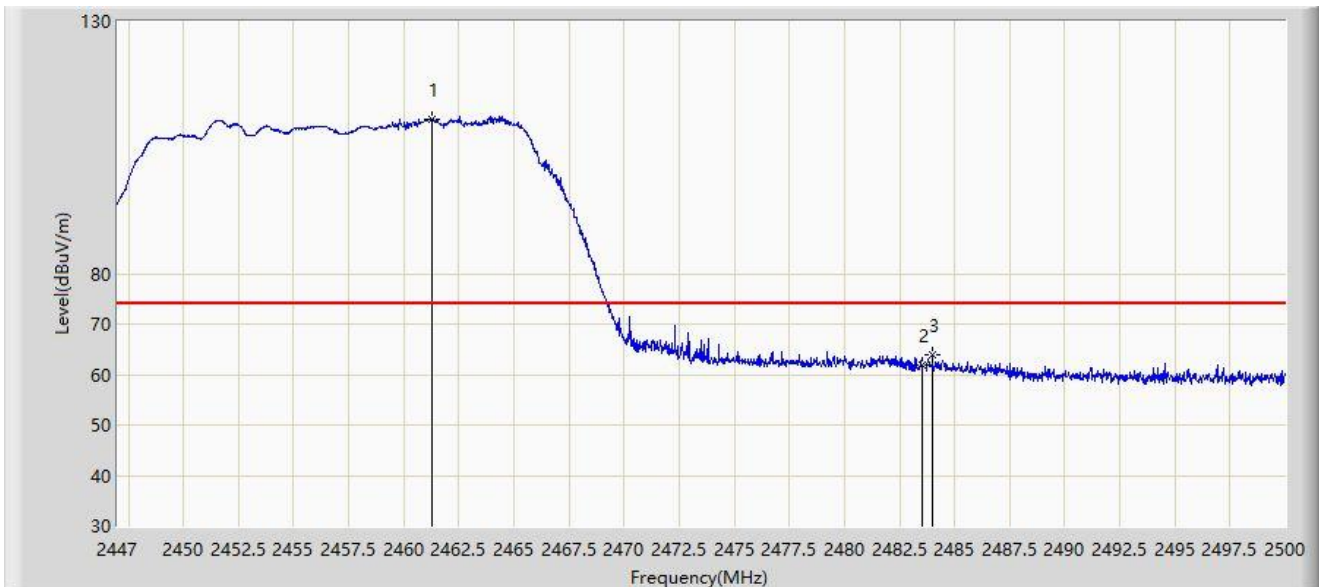


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.310	110.710	78.875	N/A	N/A	31.836	PK
2		2483.500	61.764	29.892	-12.236	74.000	31.872	PK
3	*	2483.994	63.938	32.066	-10.062	74.000	31.873	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 01:03
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2457MHz	

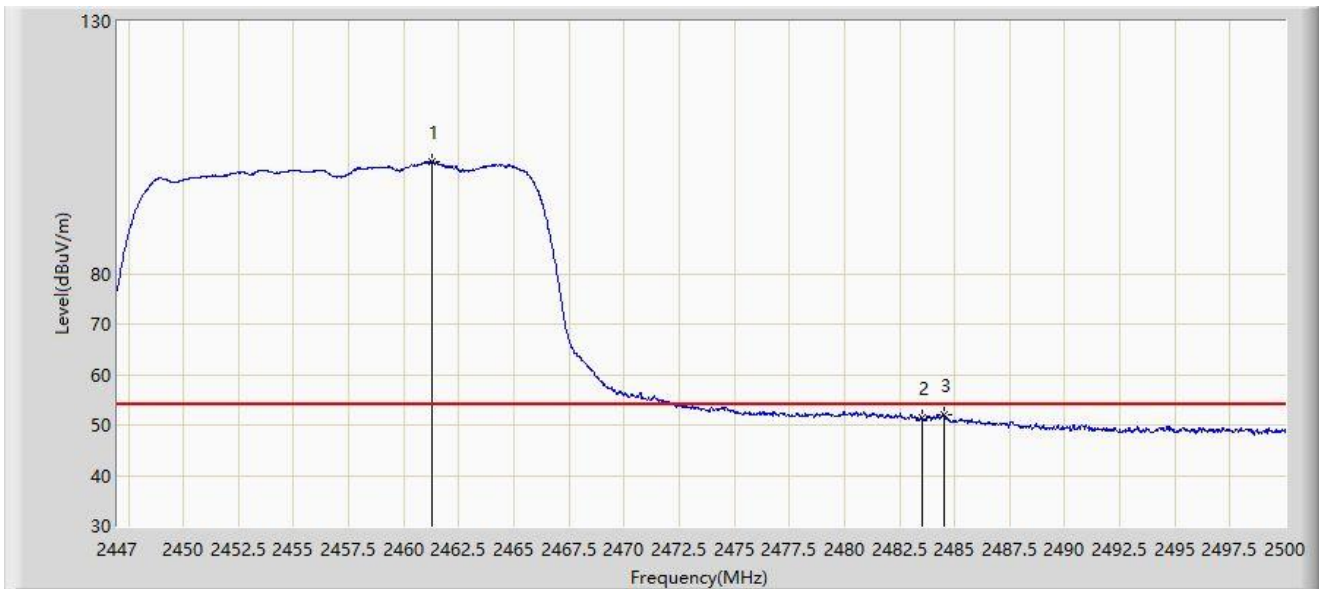


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.257	102.274	70.439	N/A	N/A	31.835	AV
2		2483.500	51.317	19.445	-2.683	54.000	31.872	AV
3	*	2484.551	51.889	20.017	-2.111	54.000	31.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 01:02
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2457MHz	

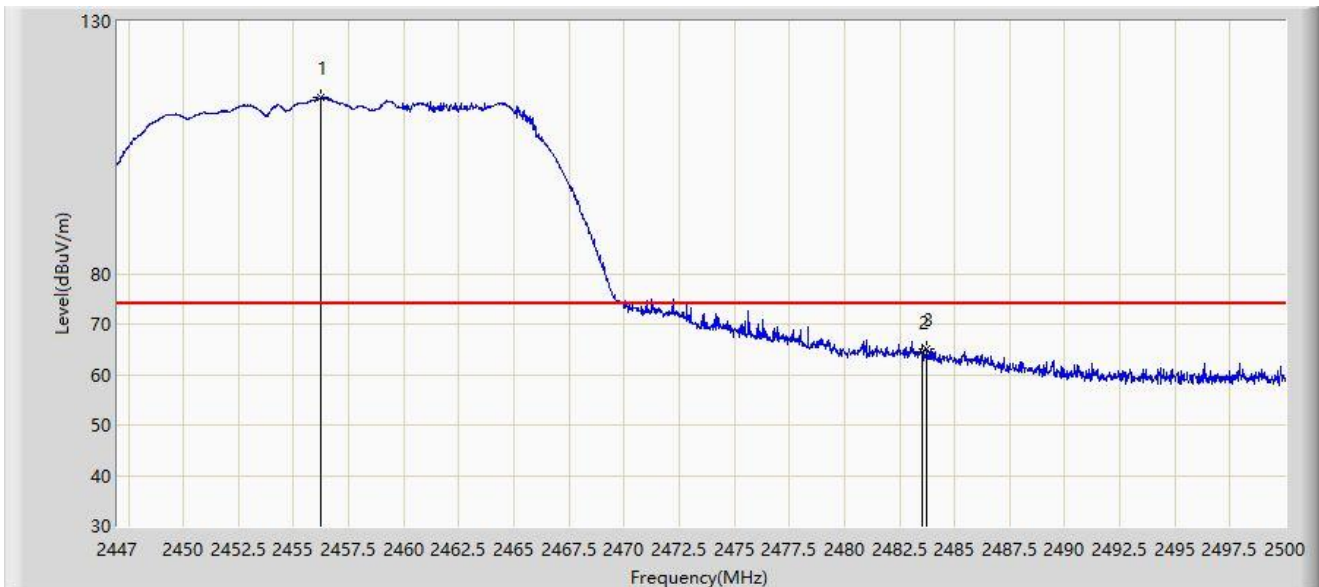


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2456.249	114.960	83.152	N/A	N/A	31.808	PK
2		2483.500	64.448	32.576	-9.552	74.000	31.872	PK
3	*	2483.756	65.126	33.254	-8.874	74.000	31.872	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 00:56
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2457MHz	

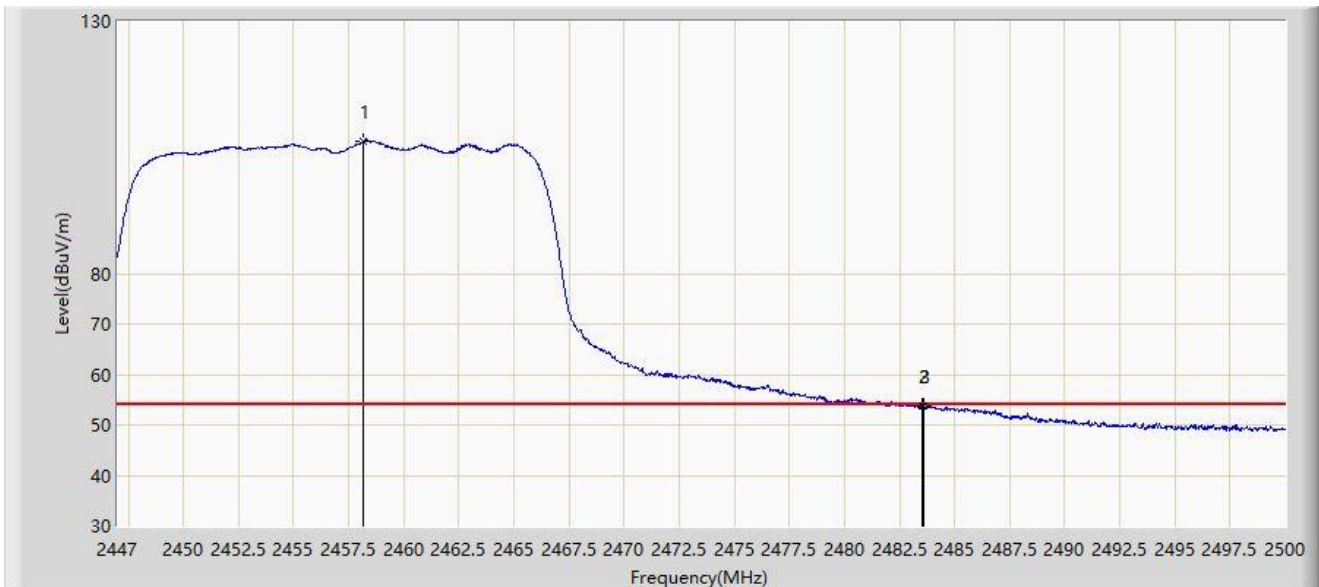


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.156	106.242	74.424	N/A	N/A	31.818	AV
2		2483.500	53.685	21.813	-0.315	54.000	31.872	AV
3	*	2483.623	53.718	21.846	-0.282	54.000	31.873	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 00:54
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

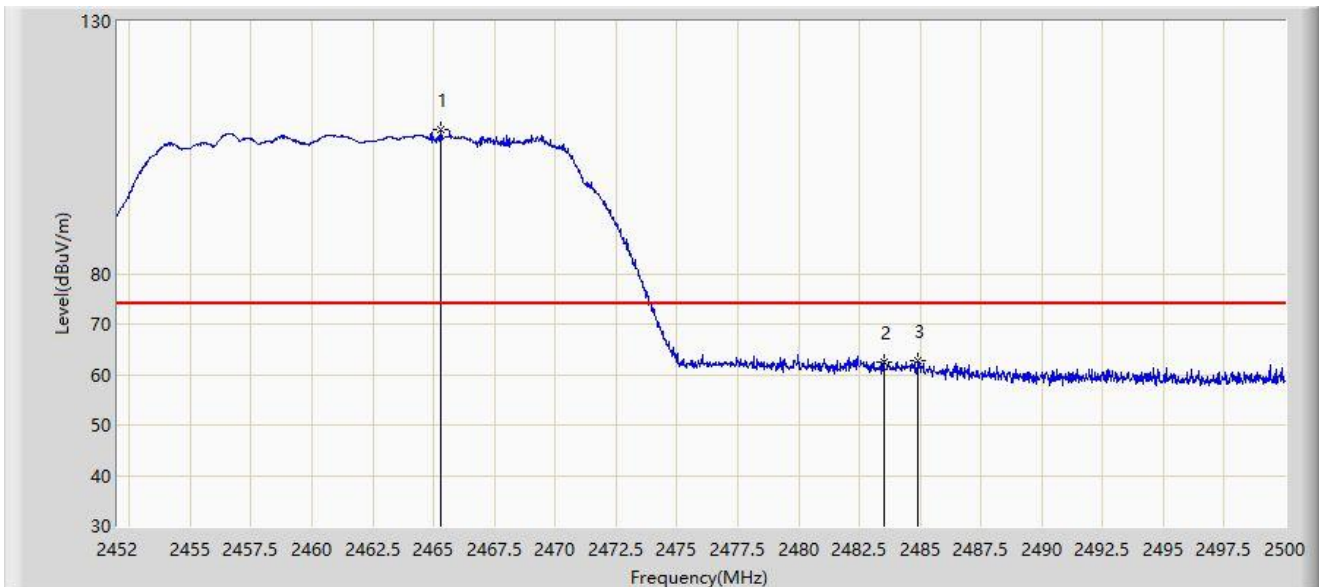


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2465.320	108.485	76.639	N/A	N/A	31.846	PK
2		2483.500	62.369	30.497	-11.631	74.000	31.872	PK
3	*	2484.880	62.646	30.774	-11.354	74.000	31.872	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 00:51
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

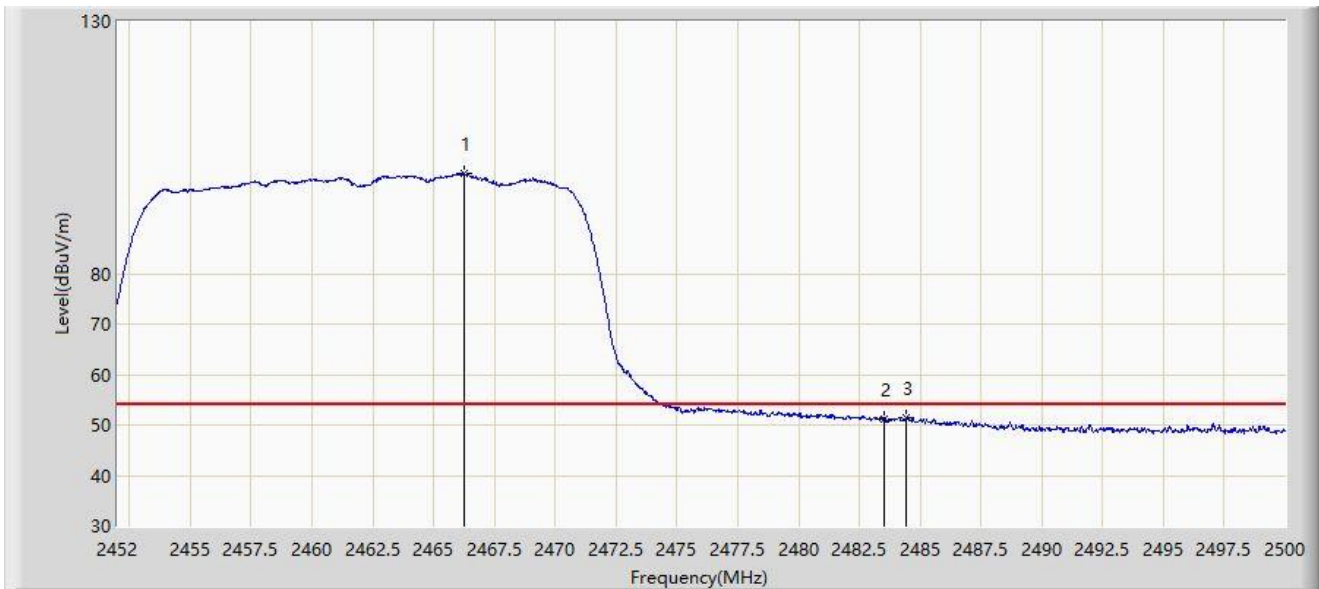


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2466.232	99.808	67.960	N/A	N/A	31.848	AV
2		2483.500	51.177	19.305	-2.823	54.000	31.872	AV
3	*	2484.448	51.533	19.661	-2.467	54.000	31.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 00:49
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

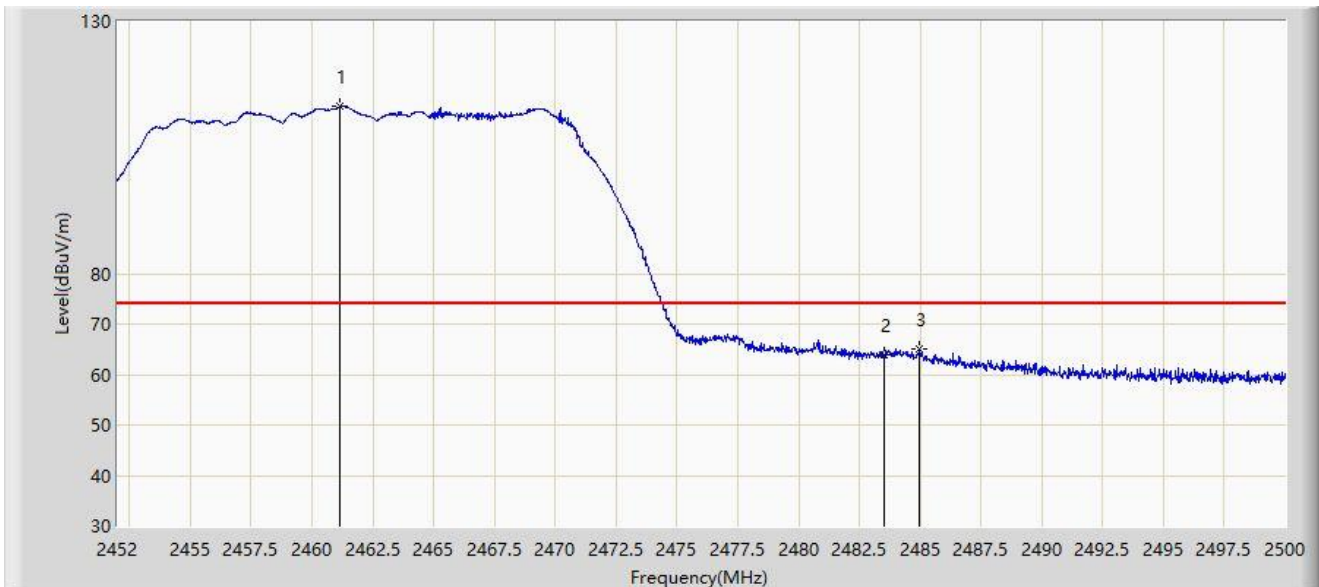


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.120	113.075	81.241	N/A	N/A	31.834	PK
2		2483.500	64.027	32.155	-9.973	74.000	31.872	PK
3	*	2484.976	65.075	33.203	-8.925	74.000	31.872	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 00:47
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

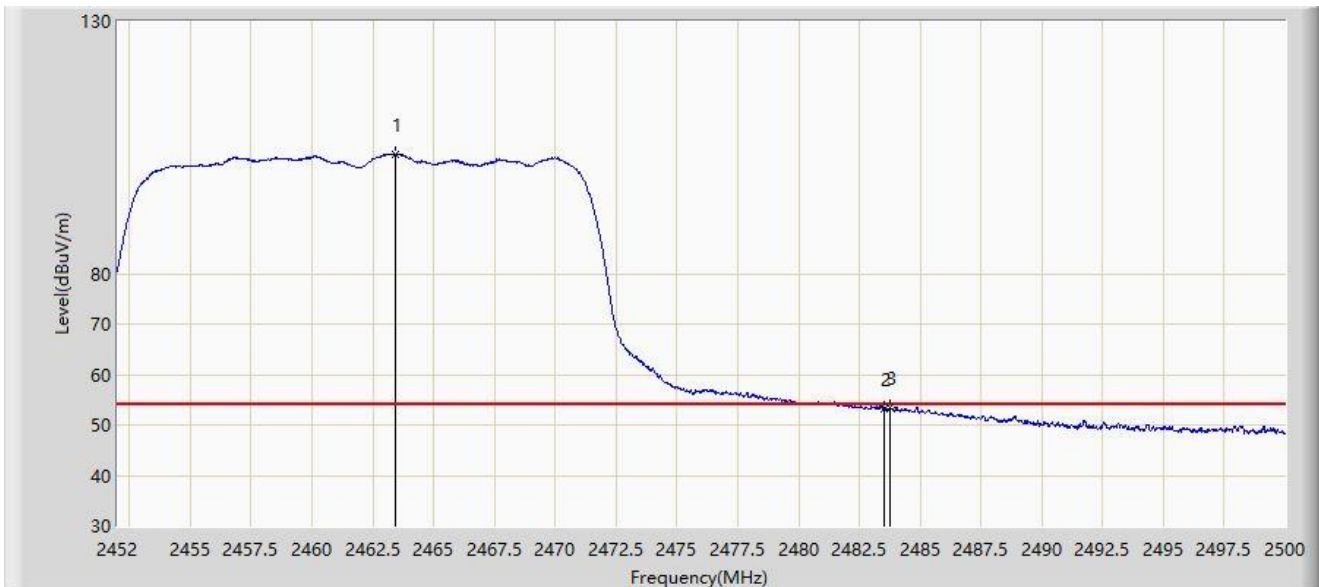


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.448	103.760	71.918	N/A	N/A	31.842	AV
2		2483.500	53.246	21.374	-0.754	54.000	31.872	AV
3	*	2483.776	53.515	21.643	-0.485	54.000	31.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 16:51
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

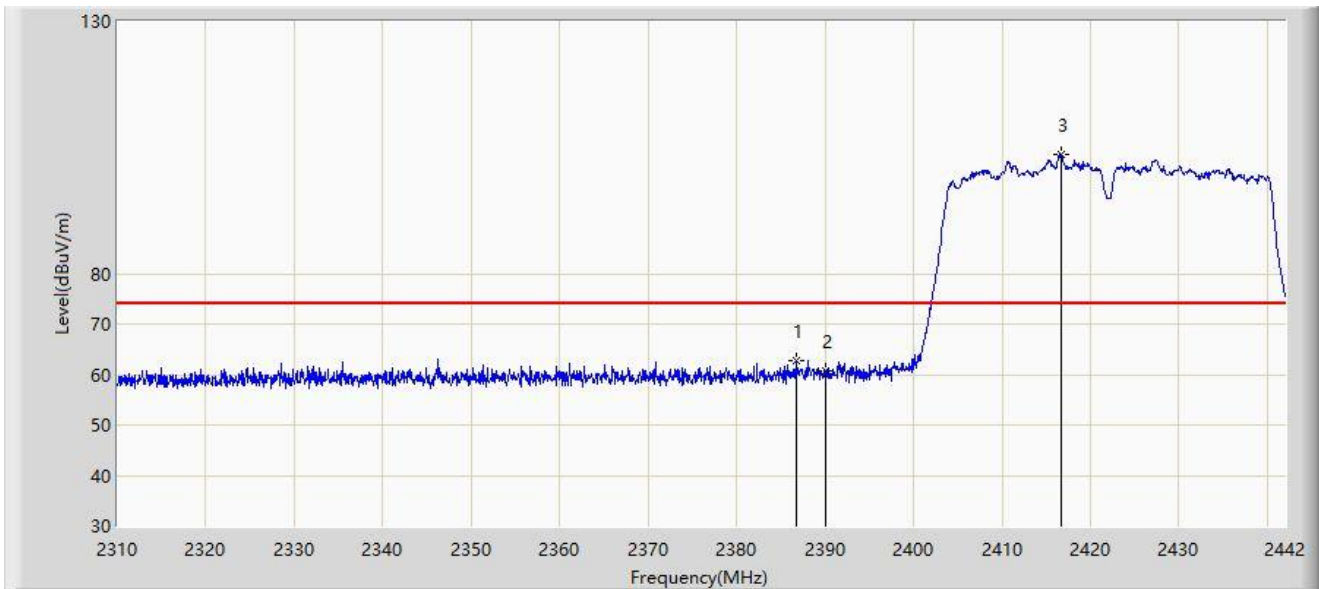


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.824	62.613	31.083	-11.387	74.000	31.530	PK
2		2390.000	60.604	29.015	-13.396	74.000	31.588	PK
3		2416.656	103.642	71.951	N/A	N/A	31.691	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 16:53
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

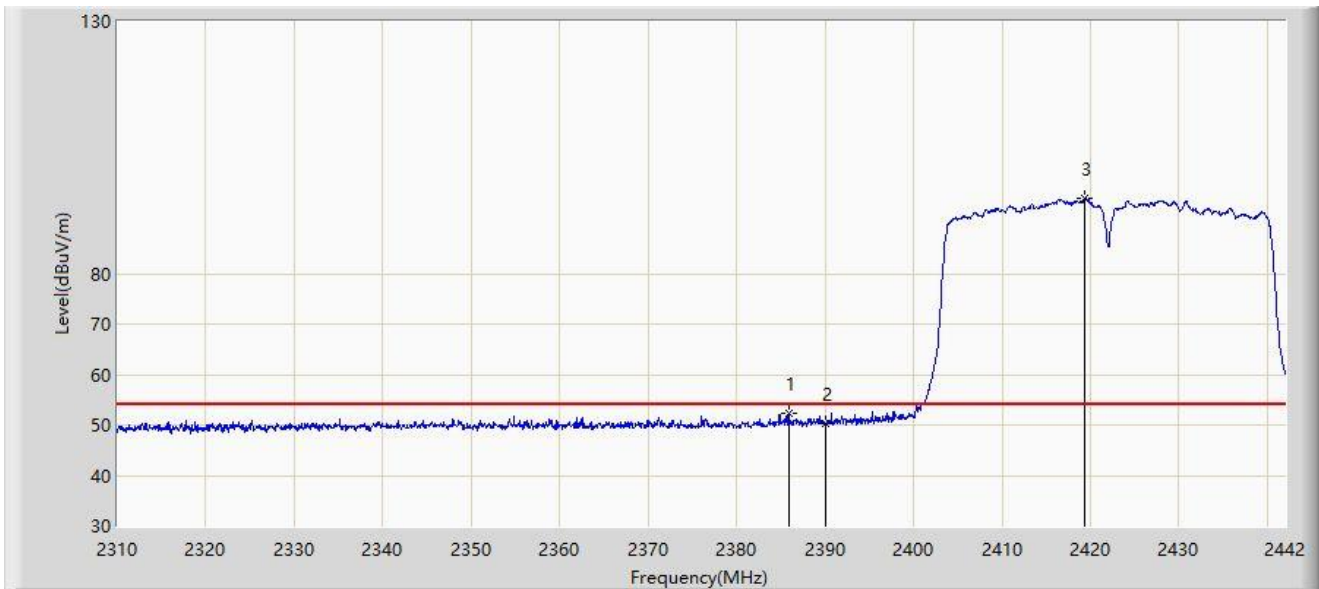


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2385.900	52.293	20.780	-1.707	54.000	31.513	AV
2		2390.000	50.231	18.642	-3.769	54.000	31.588	AV
3		2419.296	94.853	63.158	N/A	N/A	31.695	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 16:50
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

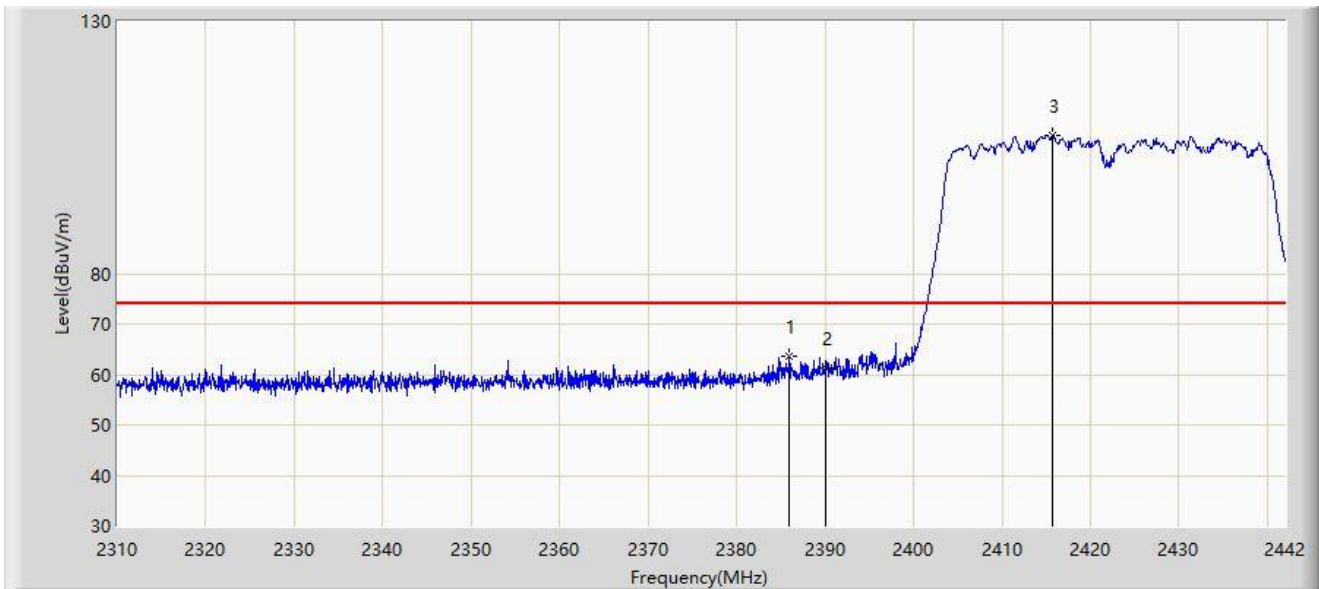


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2385.966	63.655	32.141	-10.345	74.000	31.514	PK
2		2390.000	61.377	29.788	-12.623	74.000	31.588	PK
3		2415.732	107.488	75.798	N/A	N/A	31.690	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 16:49
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

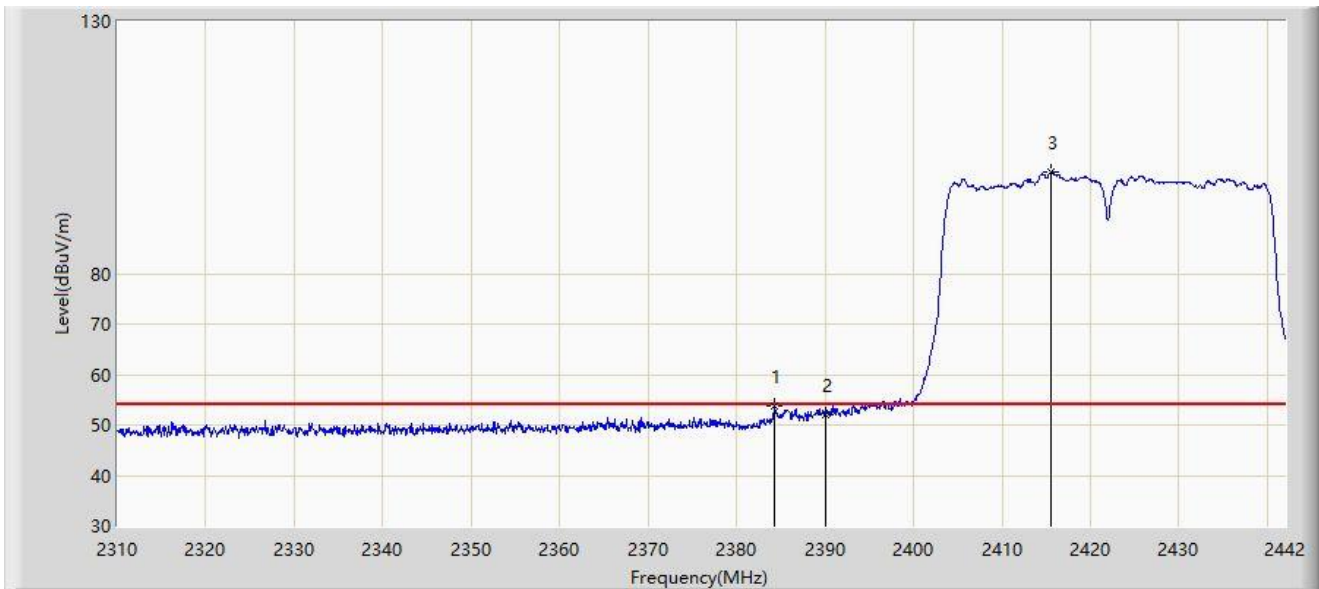


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2384.316	53.703	22.219	-0.297	54.000	31.484	AV
2		2390.000	52.114	20.525	-1.886	54.000	31.588	AV
3		2415.468	100.135	68.445	N/A	N/A	31.689	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 22:19
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

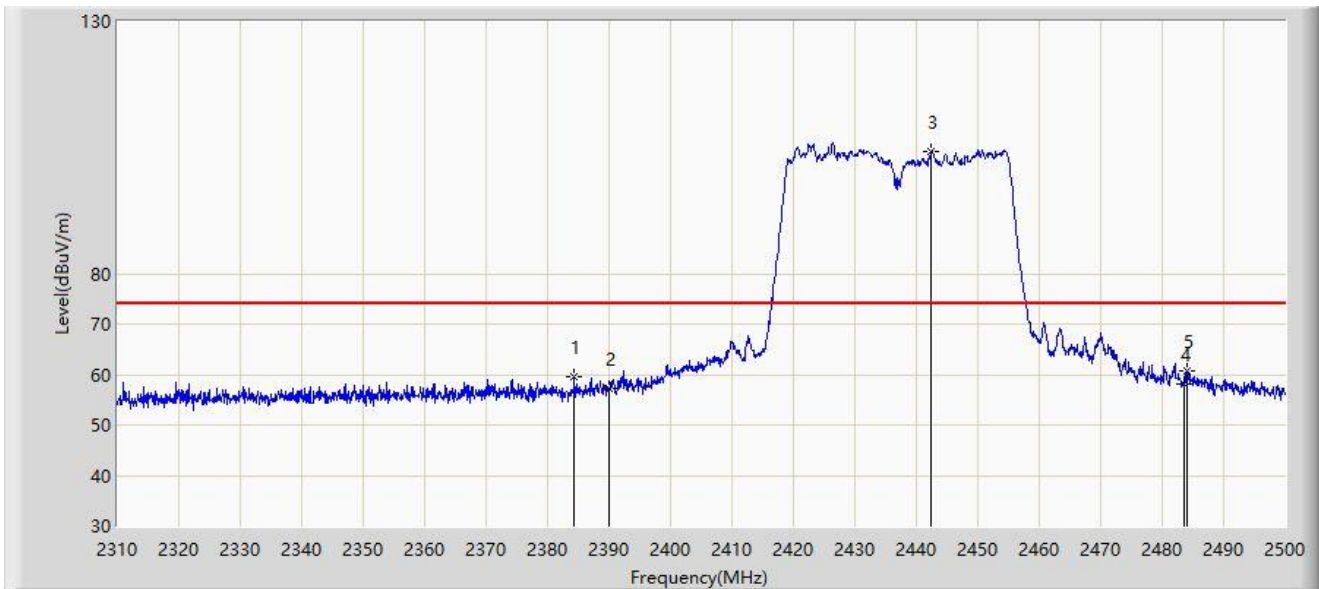


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2384.385	59.434	27.949	-14.566	74.000	31.485	PK
2		2390.000	57.257	25.668	-16.743	74.000	31.588	PK
3		2442.430	104.185	72.444	N/A	N/A	31.741	PK
4		2483.500	58.012	26.140	-15.988	74.000	31.872	PK
5	*	2484.135	60.724	28.852	-13.276	74.000	31.872	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 22:17
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

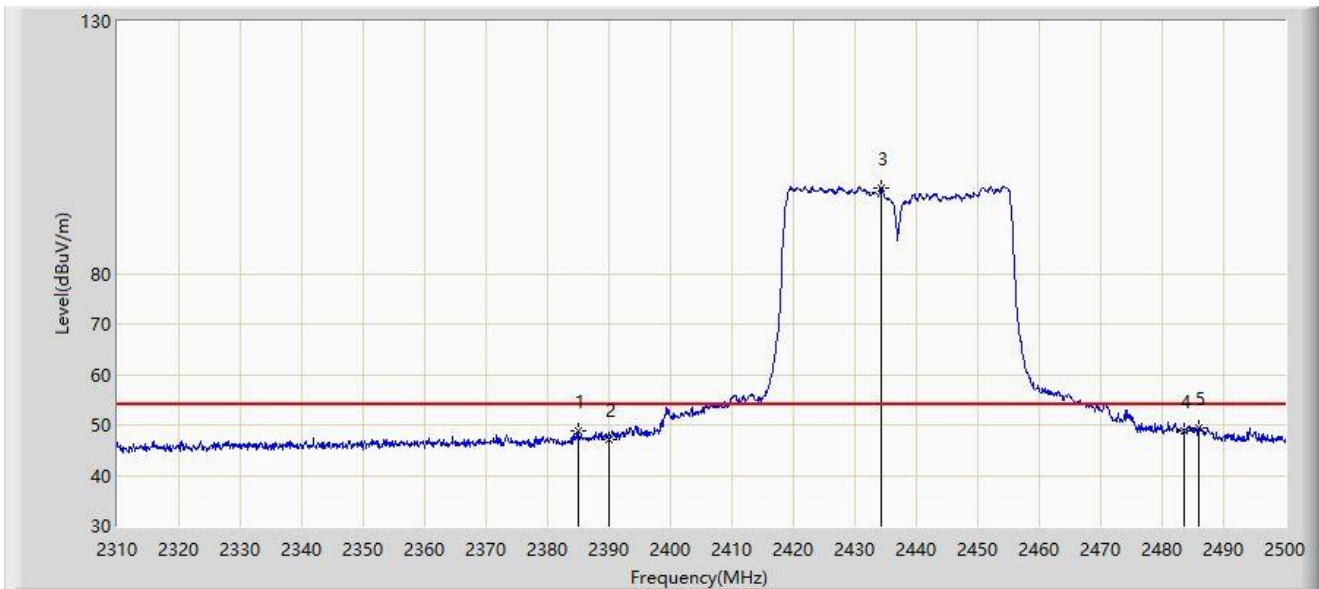


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2385.050	48.851	17.354	-5.149	54.000	31.497	AV
2		2390.000	47.123	15.534	-6.877	54.000	31.588	AV
3		2434.260	97.001	65.279	N/A	N/A	31.722	AV
4		2483.500	48.772	16.900	-5.228	54.000	31.872	AV
5	*	2486.035	49.497	17.626	-4.503	54.000	31.871	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 22:15
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

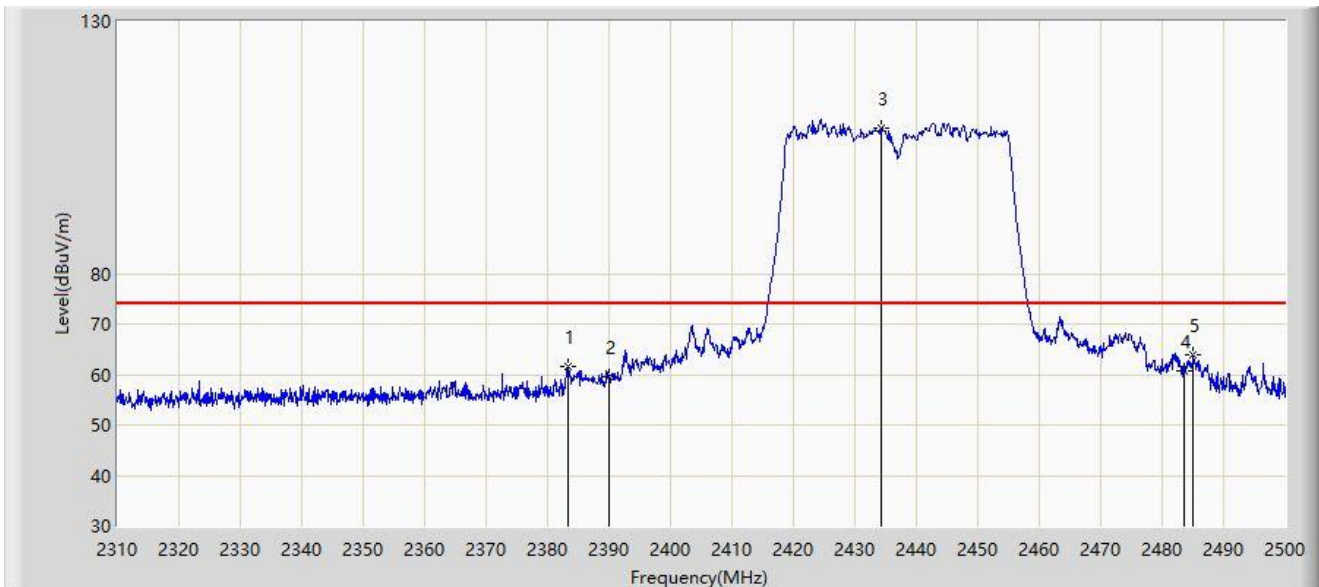


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2383.245	61.665	30.201	-12.335	74.000	31.464	PK
2		2390.000	59.670	28.081	-14.330	74.000	31.588	PK
3		2434.355	108.894	77.172	N/A	N/A	31.723	PK
4		2483.500	60.802	28.930	-13.198	74.000	31.872	PK
5	*	2485.085	63.792	31.920	-10.208	74.000	31.871	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 22:05
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

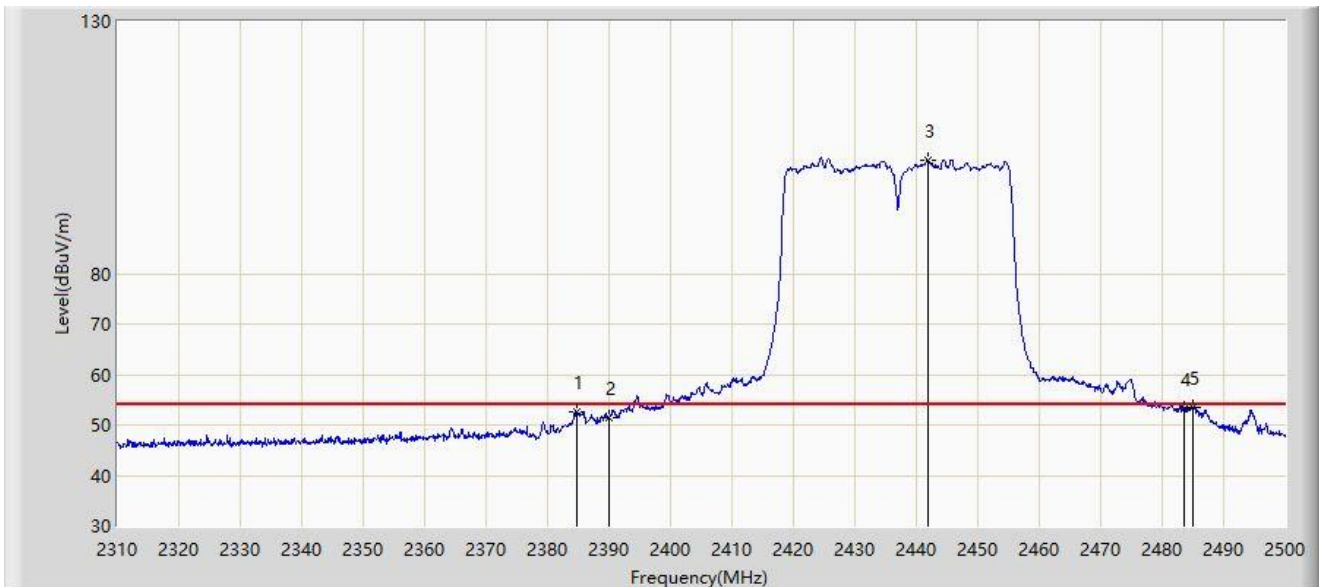

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2384.765	52.696	21.204	-1.304	54.000	31.492	AV
2		2390.000	51.519	19.930	-2.481	54.000	31.588	AV
3		2441.860	102.566	70.826	N/A	N/A	31.740	AV
4		2483.500	53.320	21.448	-0.680	54.000	31.872	AV
5	*	2484.895	53.600	21.728	-0.400	54.000	31.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 23:14
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2442MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2428.279	104.066	72.358	N/A	N/A	31.708	PK
2		2483.500	56.592	24.720	-17.408	74.000	31.872	PK
3	*	2486.272	59.792	27.921	-14.208	74.000	31.872	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 23:12
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2442MHz	

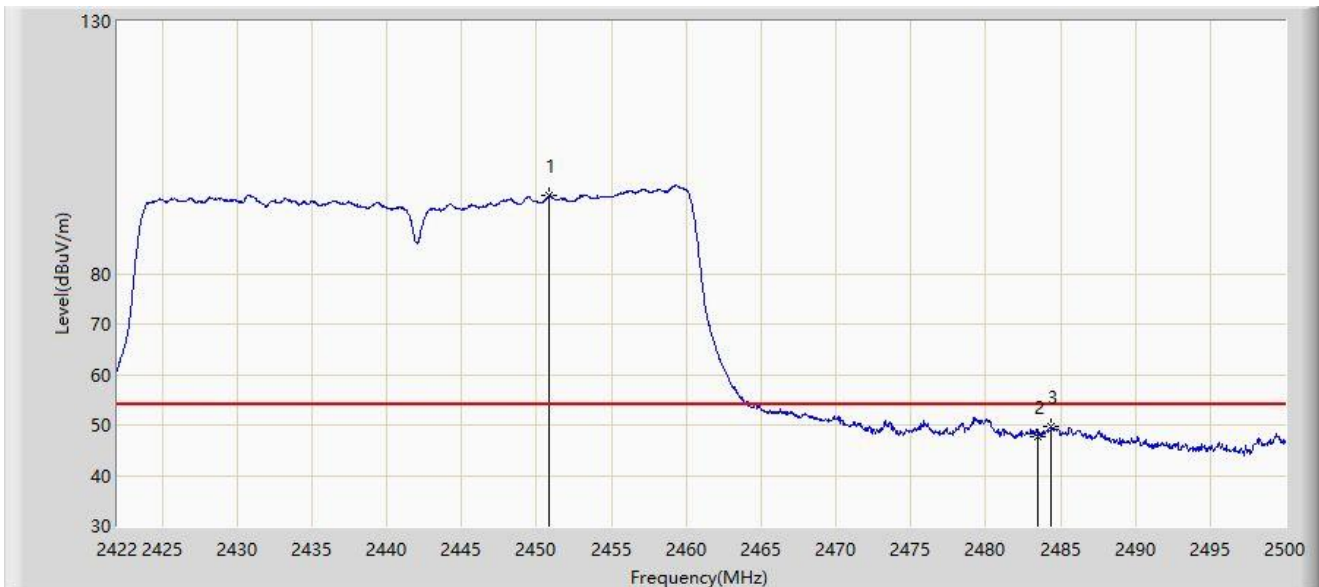

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2450.860	95.383	63.604	N/A	N/A	31.779	AV
2		2483.500	47.826	15.954	-6.174	54.000	31.872	AV
3	*	2484.361	49.568	17.696	-4.432	54.000	31.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 23:11
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2442MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2450.236	109.713	77.937	N/A	N/A	31.775	PK
2		2483.500	61.174	29.302	-12.826	74.000	31.872	PK
3	*	2483.893	62.175	30.303	-11.825	74.000	31.872	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 23:07
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2442MHz	

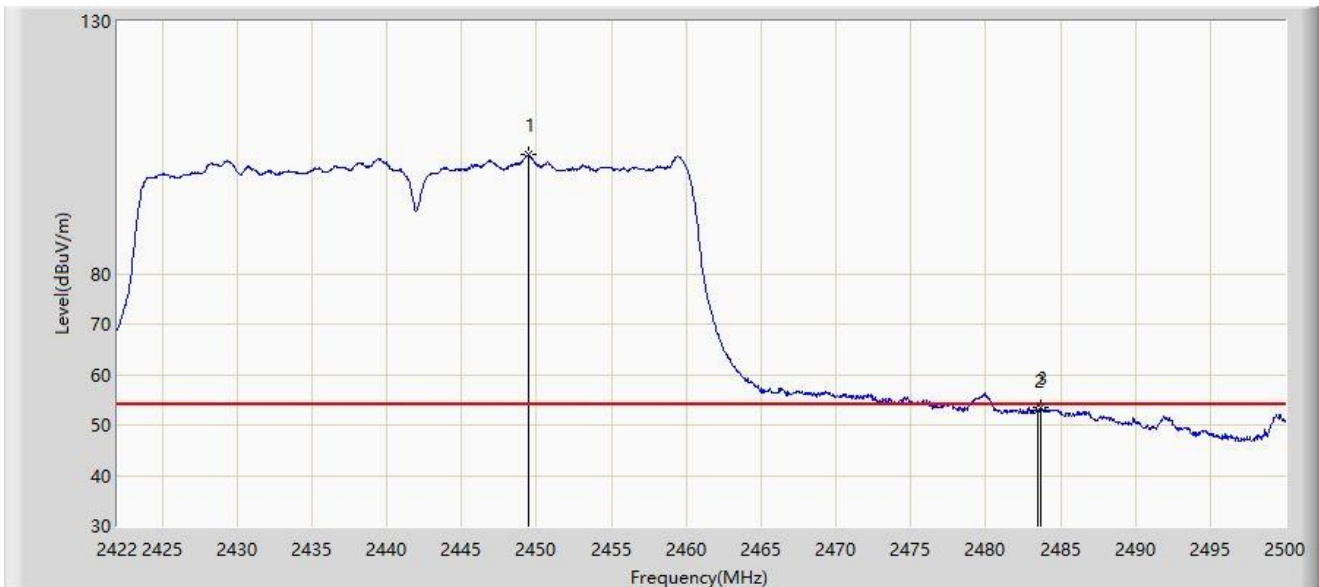


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2449.456	103.480	71.709	N/A	N/A	31.772	AV
2		2483.500	52.844	20.972	-1.156	54.000	31.872	AV
3	*	2483.659	53.418	21.546	-0.582	54.000	31.873	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 22:43
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2447MHz	

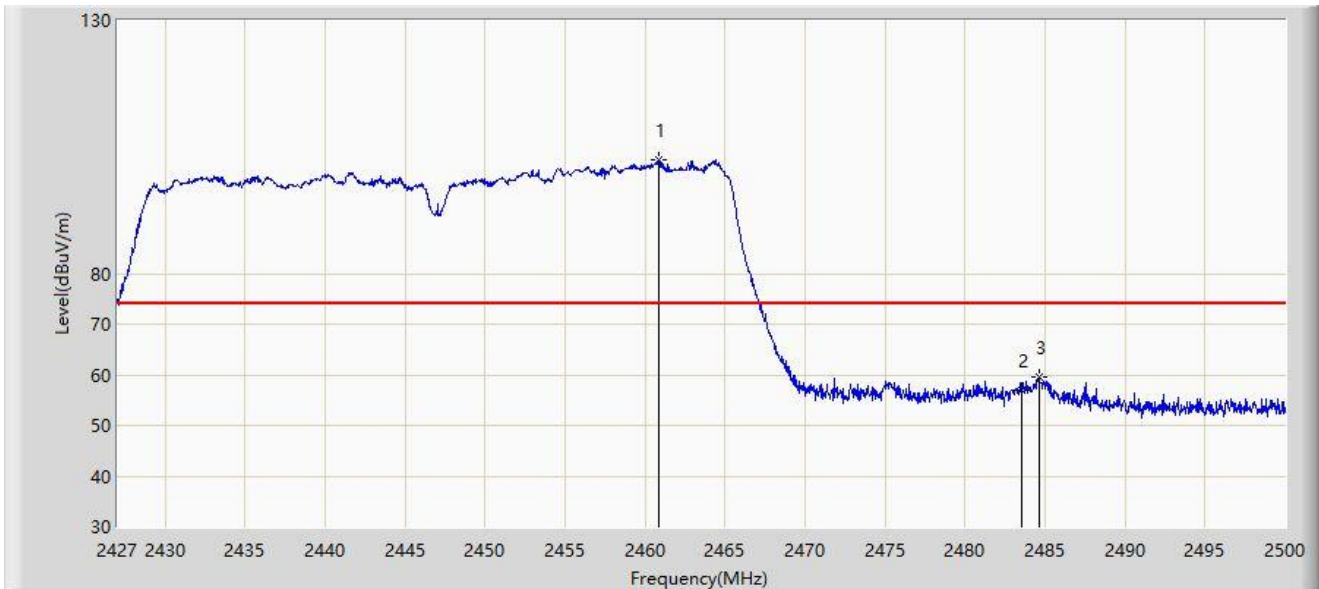


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.835	102.529	70.696	N/A	N/A	31.833	PK
2		2483.500	56.872	25.000	-17.128	74.000	31.872	PK
3	*	2484.634	59.531	27.659	-14.469	74.000	31.872	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 22:41
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2447MHz	

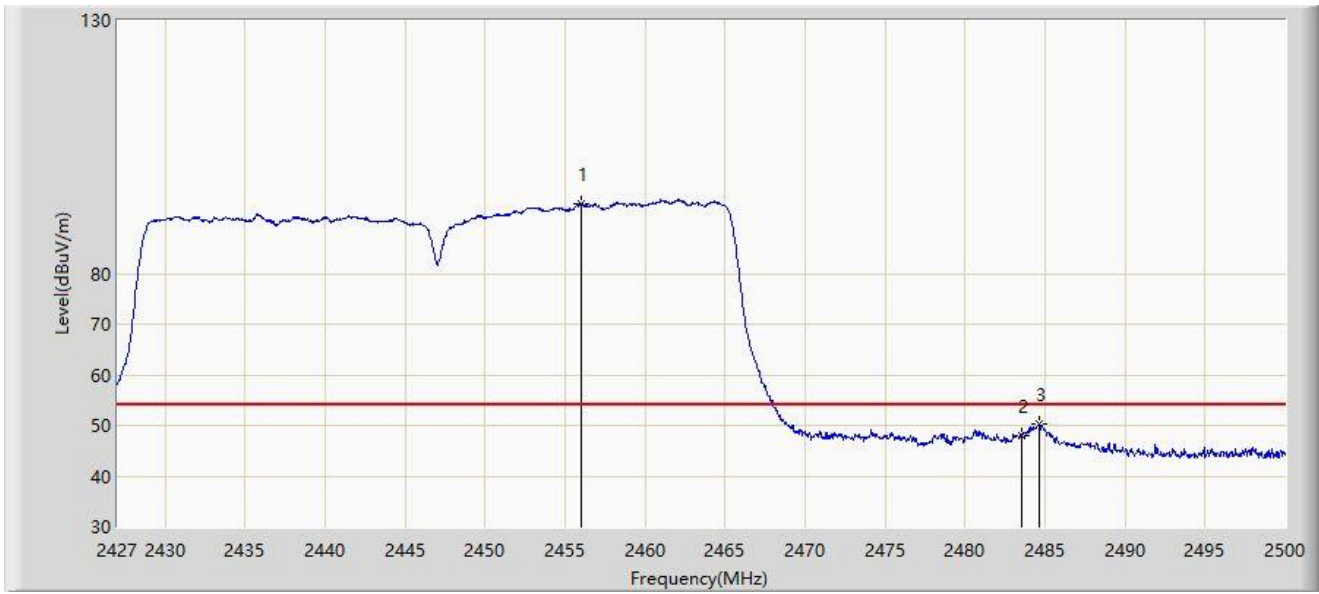


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2456.018	93.903	62.096	N/A	N/A	31.807	AV
2		2483.500	47.874	16.002	-6.126	54.000	31.872	AV
3	*	2484.634	50.189	18.317	-3.811	54.000	31.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 22:40
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2447MHz	

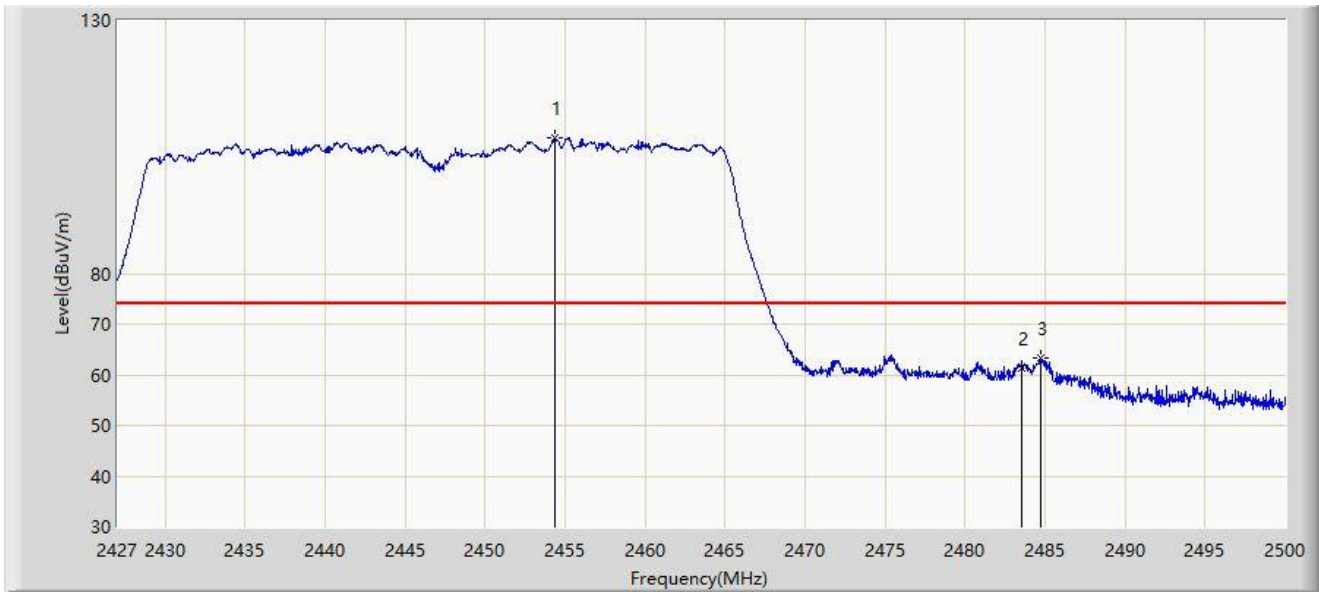


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2454.375	106.740	74.942	N/A	N/A	31.798	PK
2		2483.500	61.187	29.315	-12.813	74.000	31.872	PK
3	*	2484.707	63.312	31.440	-10.688	74.000	31.871	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 22:34
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2447MHz	

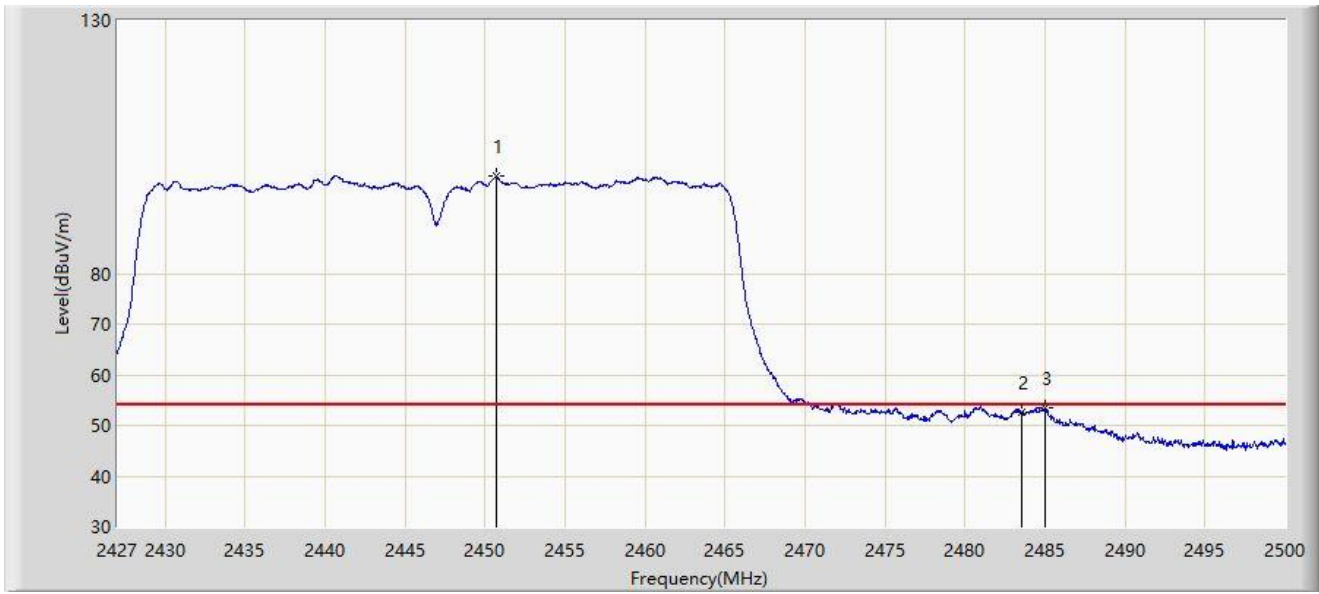


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2450.652	99.167	67.389	N/A	N/A	31.778	AV
2		2483.500	52.547	20.675	-1.453	54.000	31.872	AV
3	*	2485.035	53.533	21.661	-0.467	54.000	31.871	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 17:11
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

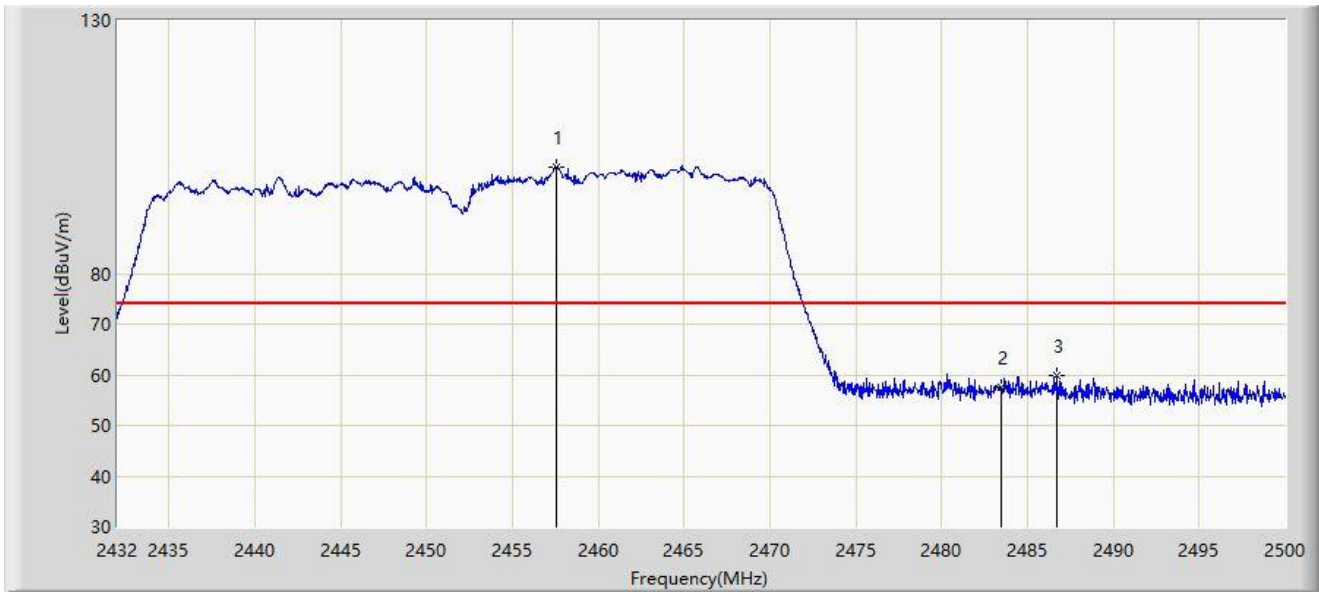


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2457.534	100.971	69.156	N/A	N/A	31.815	PK
2		2483.500	57.394	25.522	-16.606	74.000	31.872	PK
3	*	2486.672	59.821	27.950	-14.179	74.000	31.871	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 17:12
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

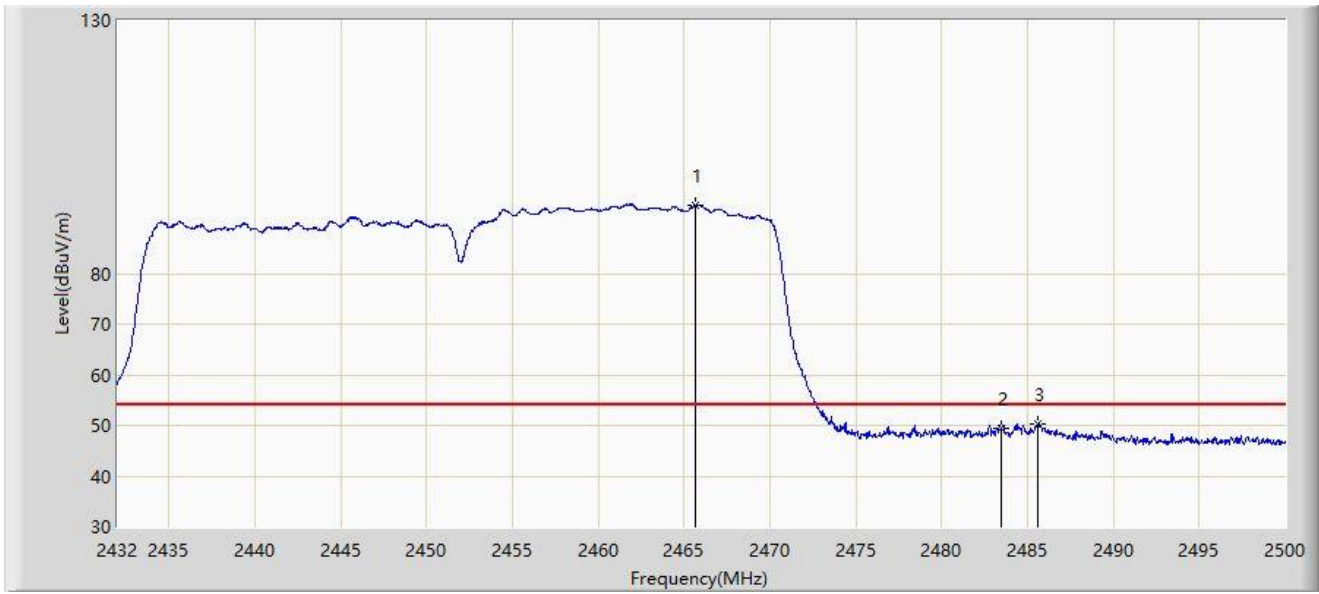


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2465.694	93.567	61.720	N/A	N/A	31.847	AV
2		2483.500	49.429	17.557	-4.571	54.000	31.872	AV
3	*	2485.584	50.367	18.495	-3.633	54.000	31.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 17:10
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

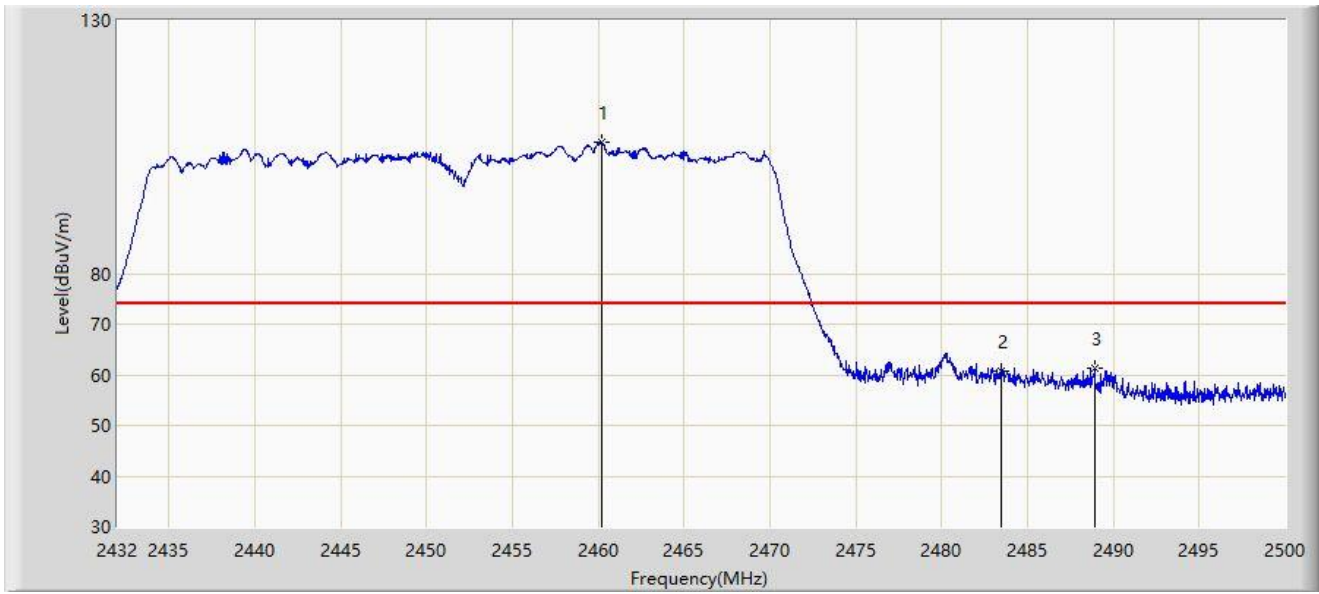


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.186	105.827	73.998	N/A	N/A	31.829	PK
2		2483.500	60.773	28.901	-13.227	74.000	31.872	PK
3	*	2488.916	61.355	29.484	-12.645	74.000	31.871	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 17:04
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

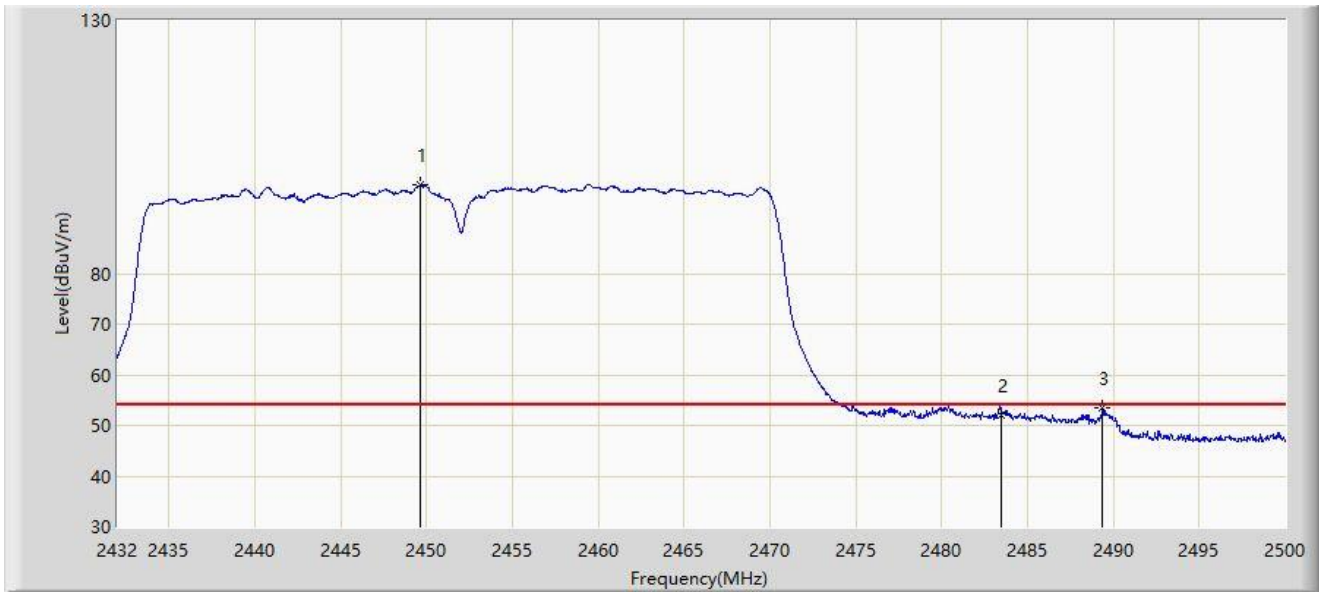


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2449.612	97.603	65.831	N/A	N/A	31.772	AV
2		2483.500	51.996	20.124	-2.004	54.000	31.872	AV
3	*	2489.358	53.372	21.502	-0.628	54.000	31.870	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/05/12 - 00:04
Limit: FCC_Part15_Band Edge(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

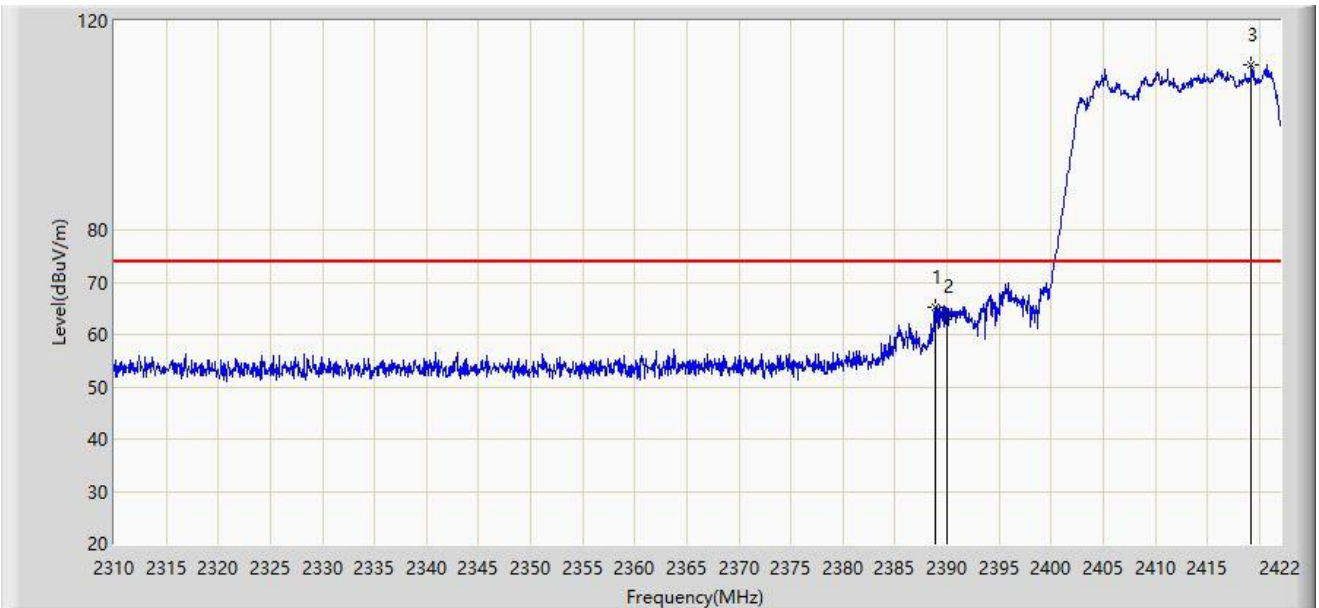


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.848	65.355	33.916	-8.645	74.000	31.439	PK
2		2390.000	63.498	32.065	-10.502	74.000	31.433	PK
3		2419.256	111.616	80.276	N/A	N/A	31.340	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/05/12 - 00:08
Limit: FCC_Part15_Band Edge(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

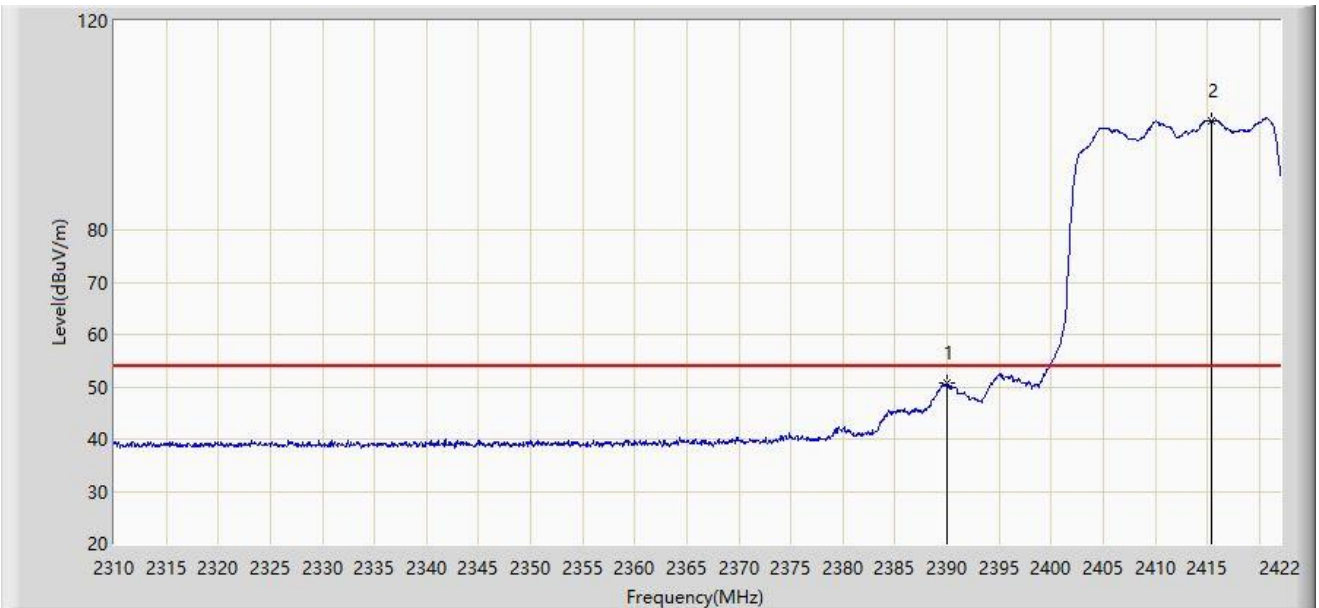


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	50.603	19.170	-3.397	54.000	31.433	AV
2		2415.392	100.966	69.616	N/A	N/A	31.350	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/05/12 - 00:08
Limit: FCC_Part15_Band Edge(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

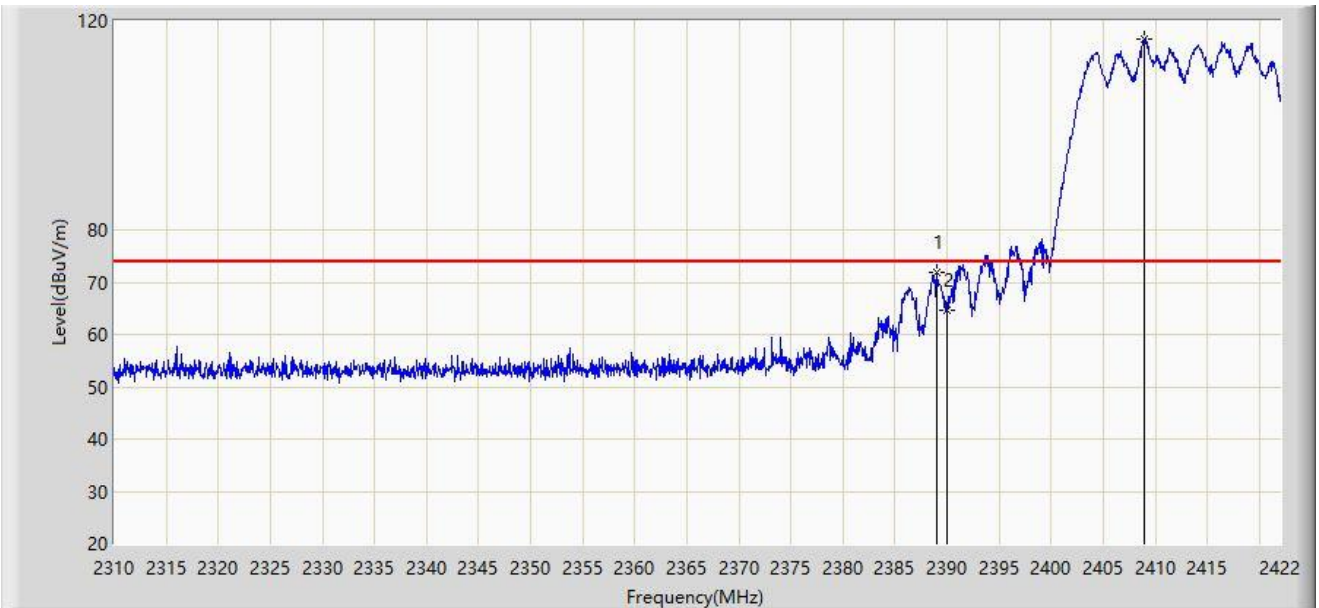


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.960	71.960	40.522	-2.040	74.000	31.438	PK
2		2390.000	64.774	33.341	-9.226	74.000	31.433	PK
3		2408.952	116.434	85.067	N/A	N/A	31.367	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/05/12 - 00:08
Limit: FCC_Part15_Band Edge(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

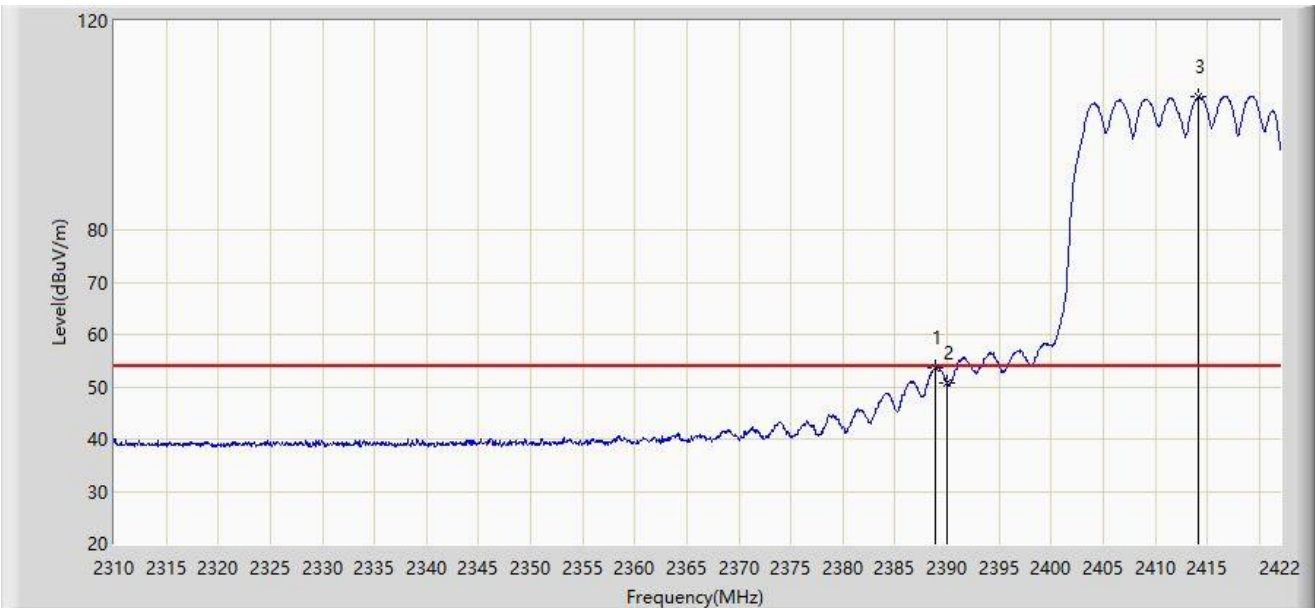


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.848	53.744	22.305	-0.256	54.000	31.439	AV
2		2390.000	50.661	19.228	-3.339	54.000	31.433	AV
3		2414.104	105.364	74.010	N/A	N/A	31.354	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 14:49
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2417MHz	

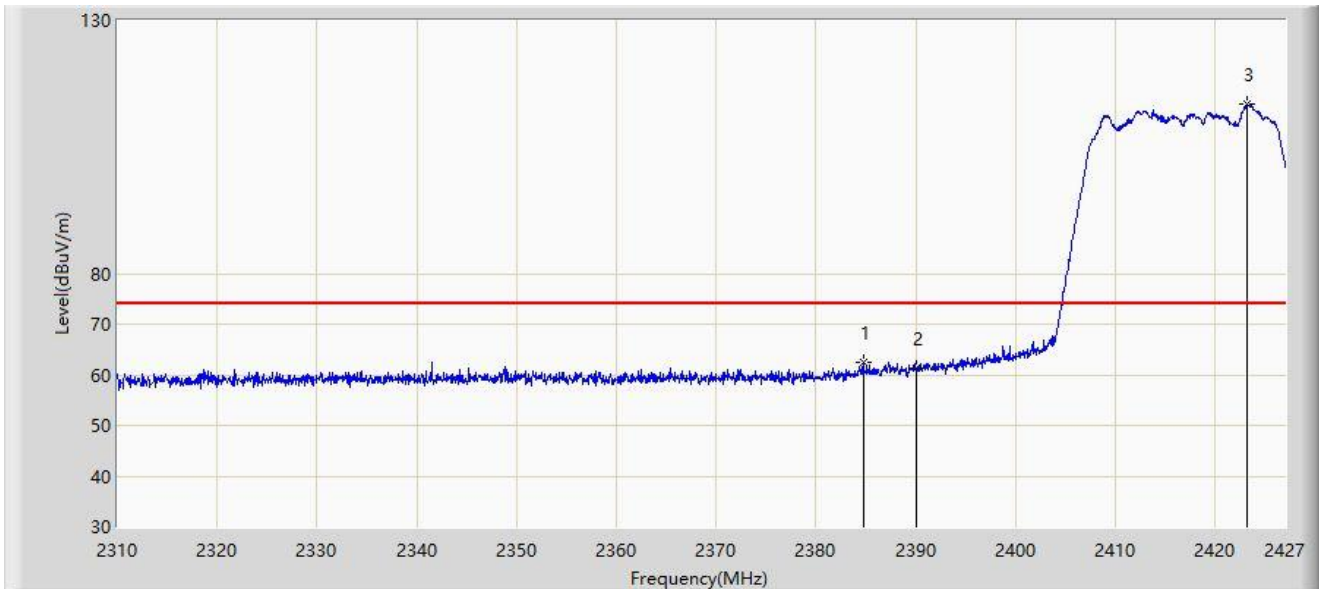


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2384.705	62.448	30.957	-11.552	74.000	31.491	PK
2		2390.000	61.296	29.707	-12.704	74.000	31.588	PK
3		2423.256	113.421	81.720	N/A	N/A	31.701	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 14:46
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2417MHz	

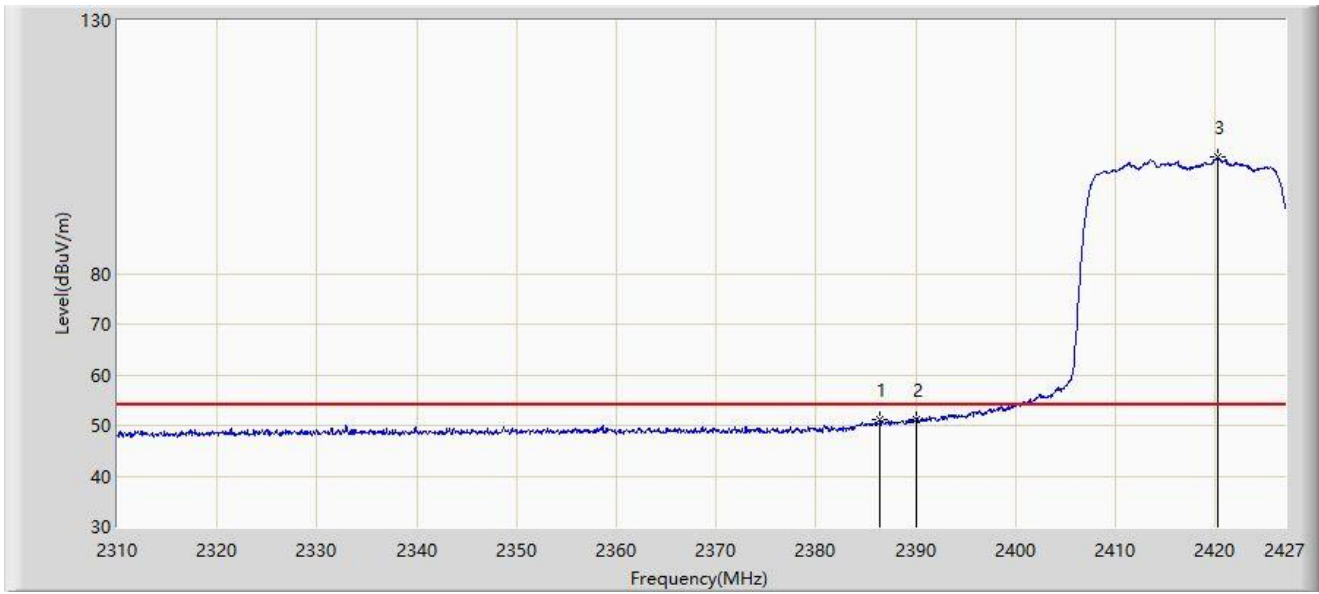


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.401	51.231	19.709	-2.769	54.000	31.522	AV
2		2390.000	51.107	19.518	-2.893	54.000	31.588	AV
3		2420.214	102.929	71.233	N/A	N/A	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 14:45
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2417MHz	

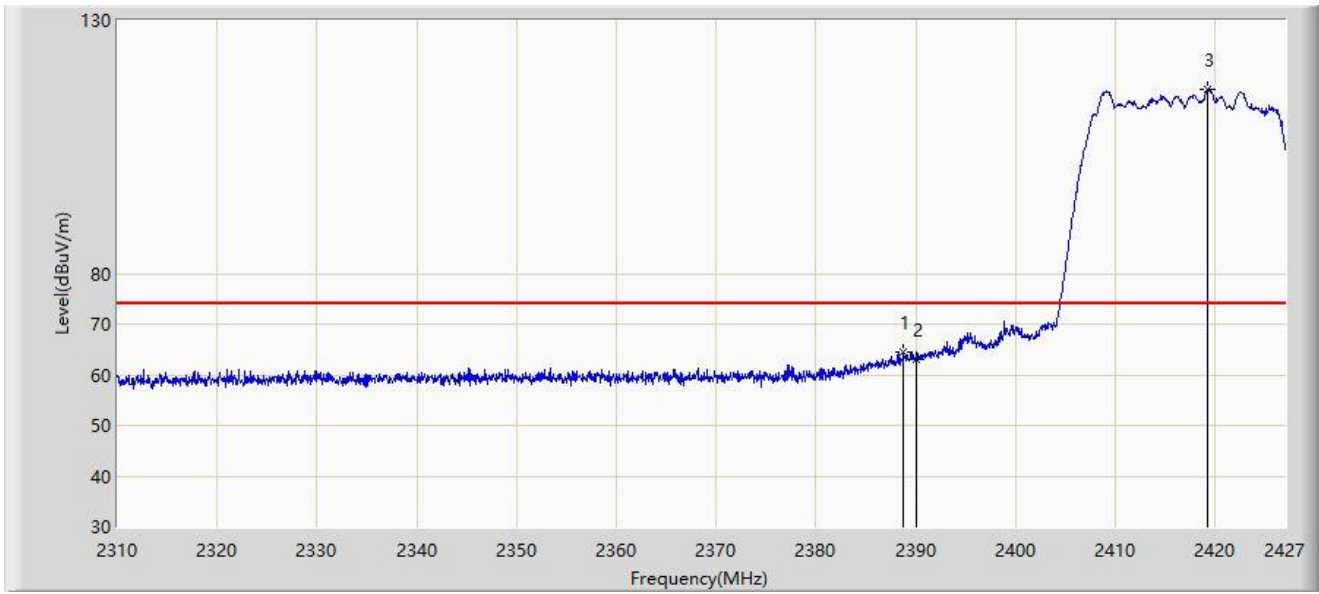


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.800	64.503	32.937	-9.497	74.000	31.566	PK
2		2390.000	63.065	31.476	-10.935	74.000	31.588	PK
3		2419.278	116.342	84.647	N/A	N/A	31.695	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 14:41
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2417MHz	

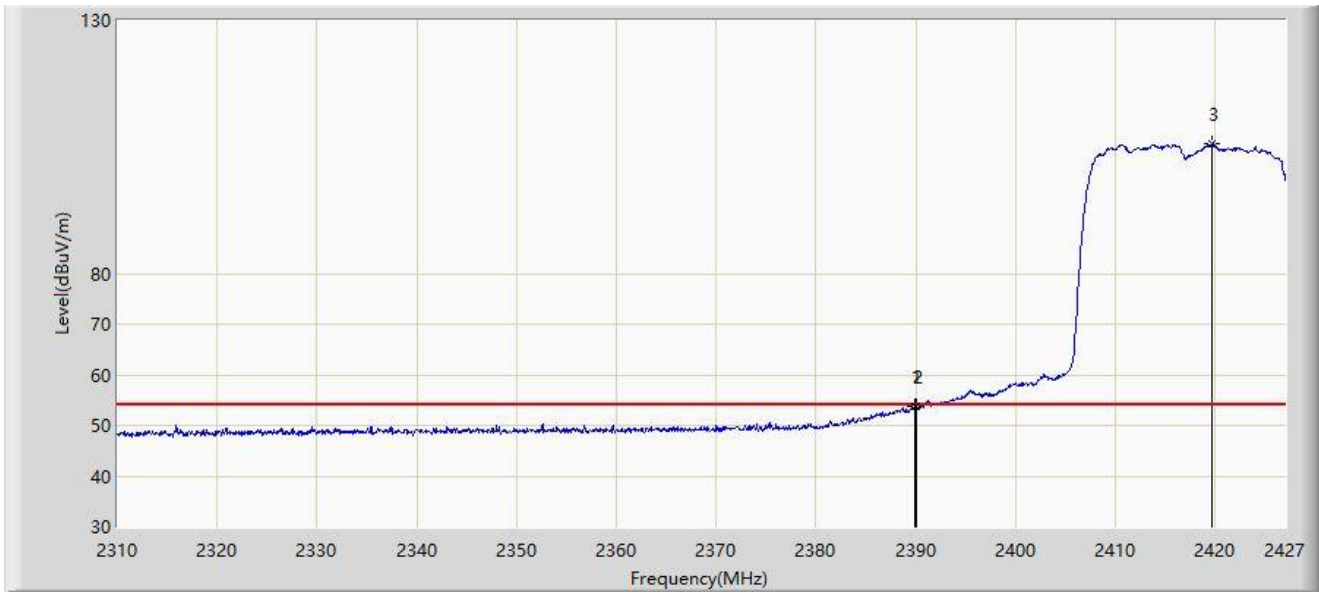


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.969	53.714	22.126	-0.286	54.000	31.588	AV
2		2390.000	53.638	22.049	-0.362	54.000	31.588	AV
3		2419.687	105.752	74.056	N/A	N/A	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 15:04
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2422MHz	

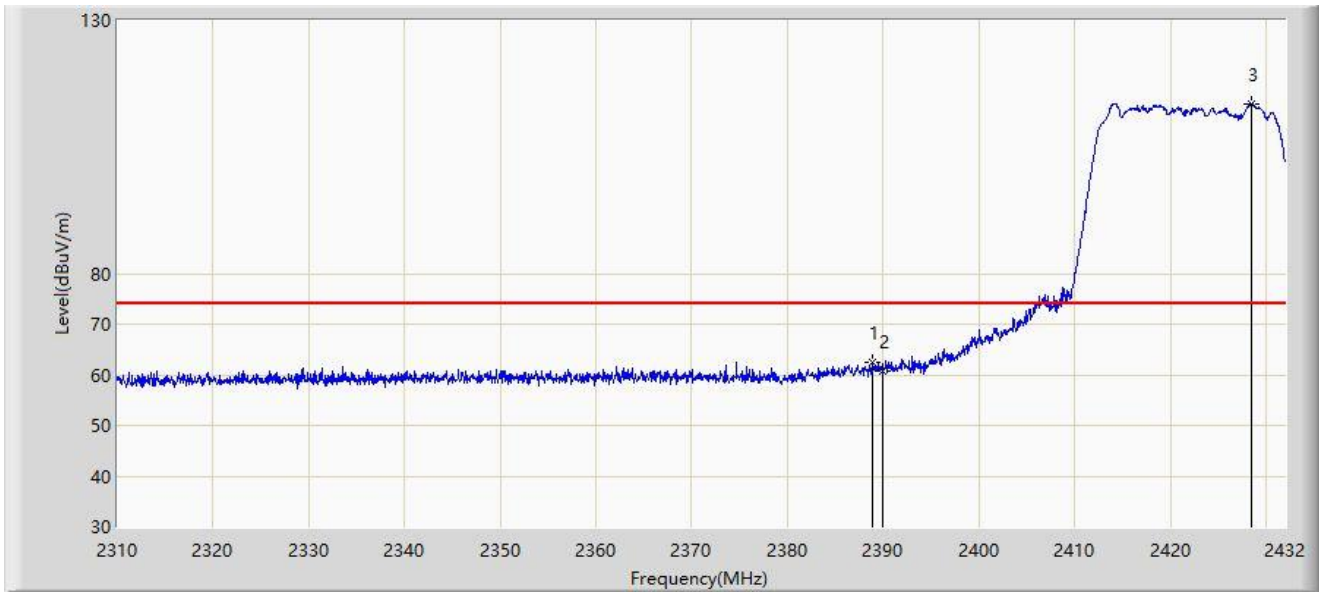


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.934	62.458	30.889	-11.542	74.000	31.569	PK
2		2390.000	60.786	29.197	-13.214	74.000	31.588	PK
3		2428.523	113.536	81.827	N/A	N/A	31.708	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 15:01
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2422MHz	

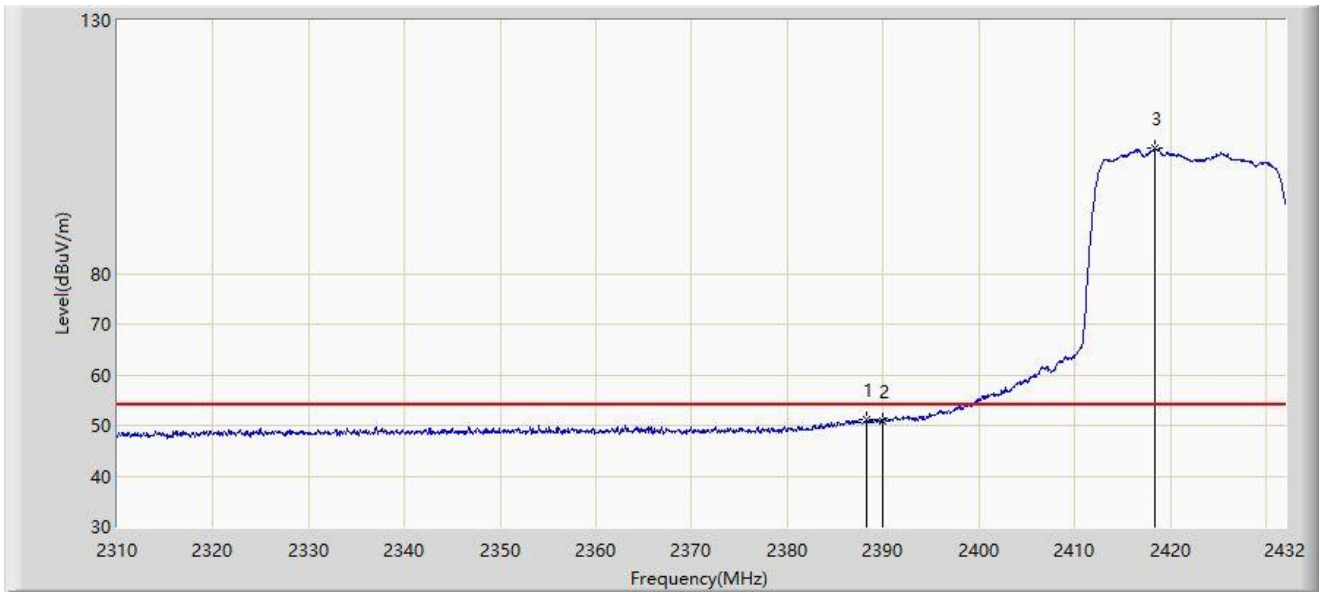


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.263	51.118	19.562	-2.882	54.000	31.556	AV
2		2390.000	50.971	19.382	-3.029	54.000	31.588	AV
3		2418.397	104.727	73.033	N/A	N/A	31.694	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 14:59
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2422MHz	

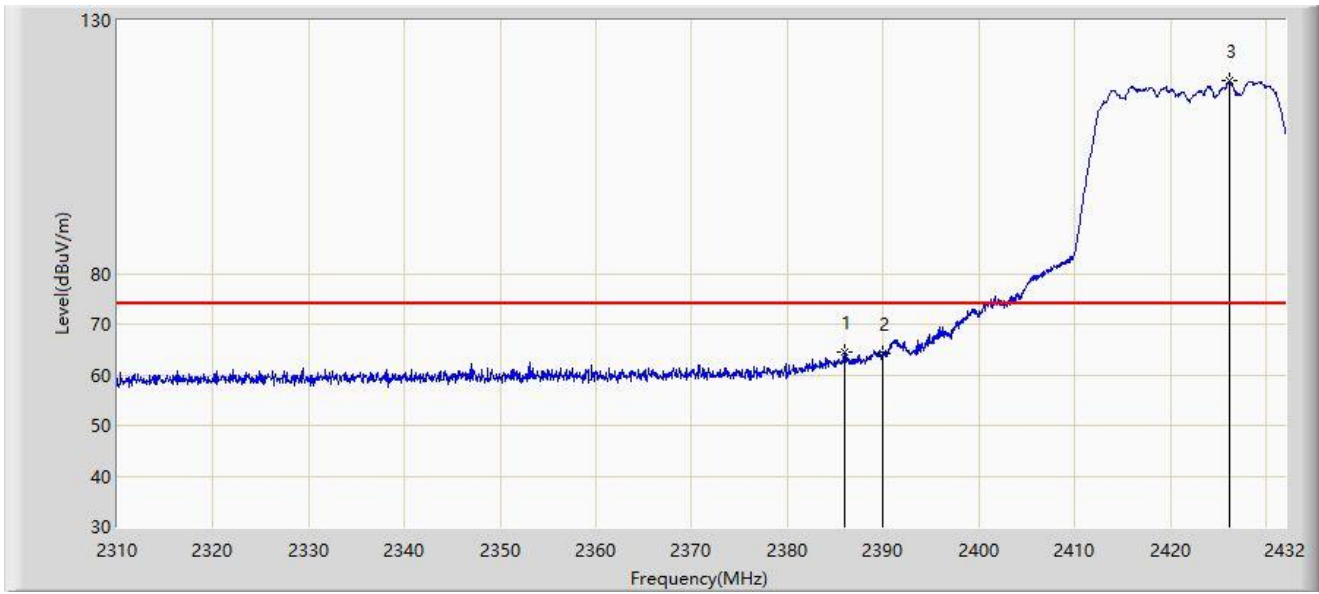


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2385.945	64.523	33.009	-9.477	74.000	31.514	PK
2		2390.000	64.263	32.674	-9.737	74.000	31.588	PK
3		2426.205	118.082	86.377	N/A	N/A	31.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 14:57
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2422MHz	

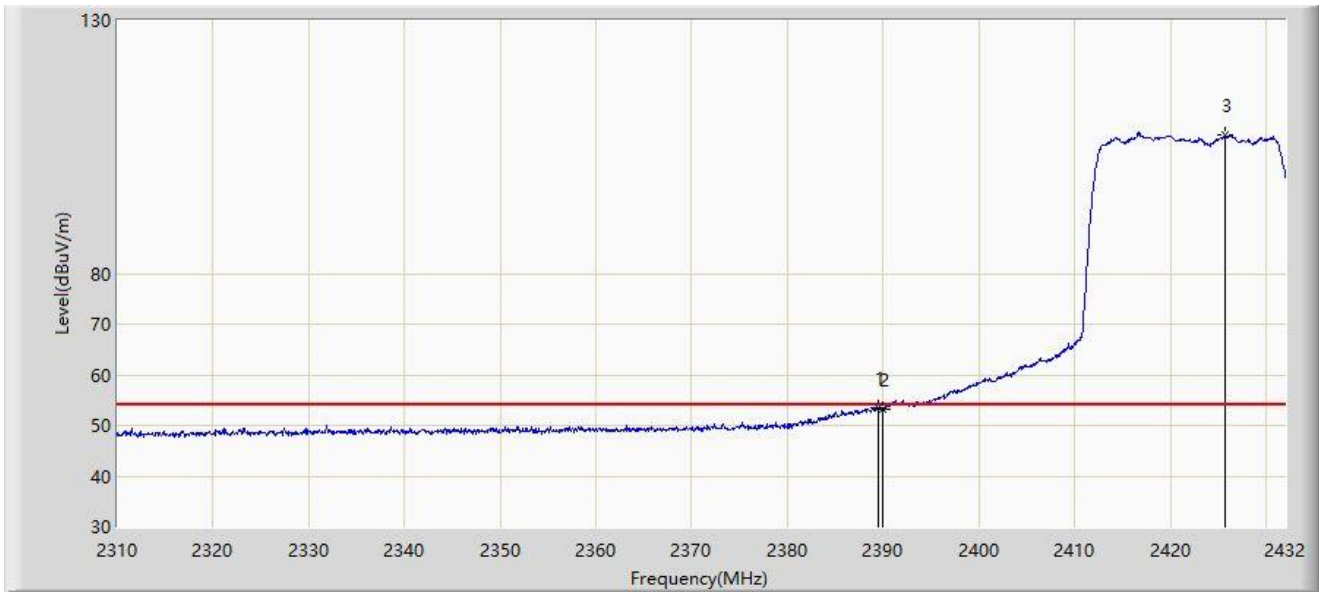


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.544	53.545	21.965	-0.455	54.000	31.581	AV
2		2390.000	53.152	21.563	-0.848	54.000	31.588	AV
3		2425.717	107.427	75.723	N/A	N/A	31.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 14:17
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

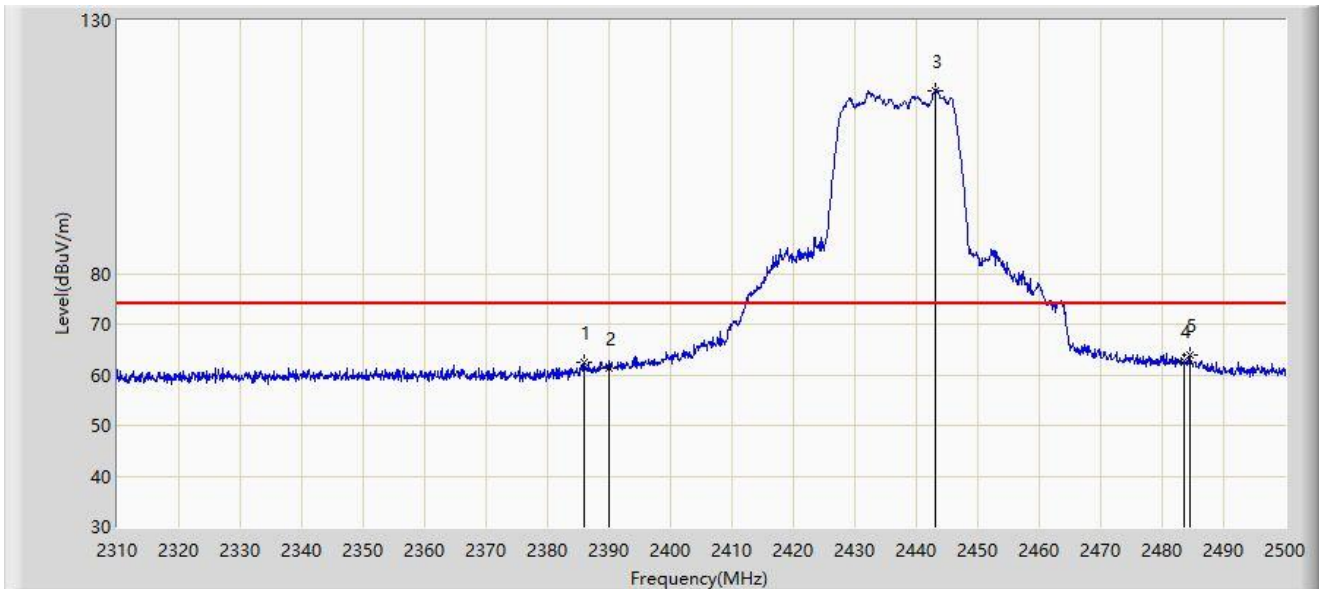


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2385.905	62.507	30.994	-11.493	74.000	31.513	PK
2		2390.000	61.301	29.712	-12.699	74.000	31.588	PK
3		2443.095	116.225	84.482	N/A	N/A	31.743	PK
4		2483.500	62.731	30.859	-11.269	74.000	31.872	PK
5	*	2484.420	63.794	31.922	-10.206	74.000	31.872	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 14:12
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

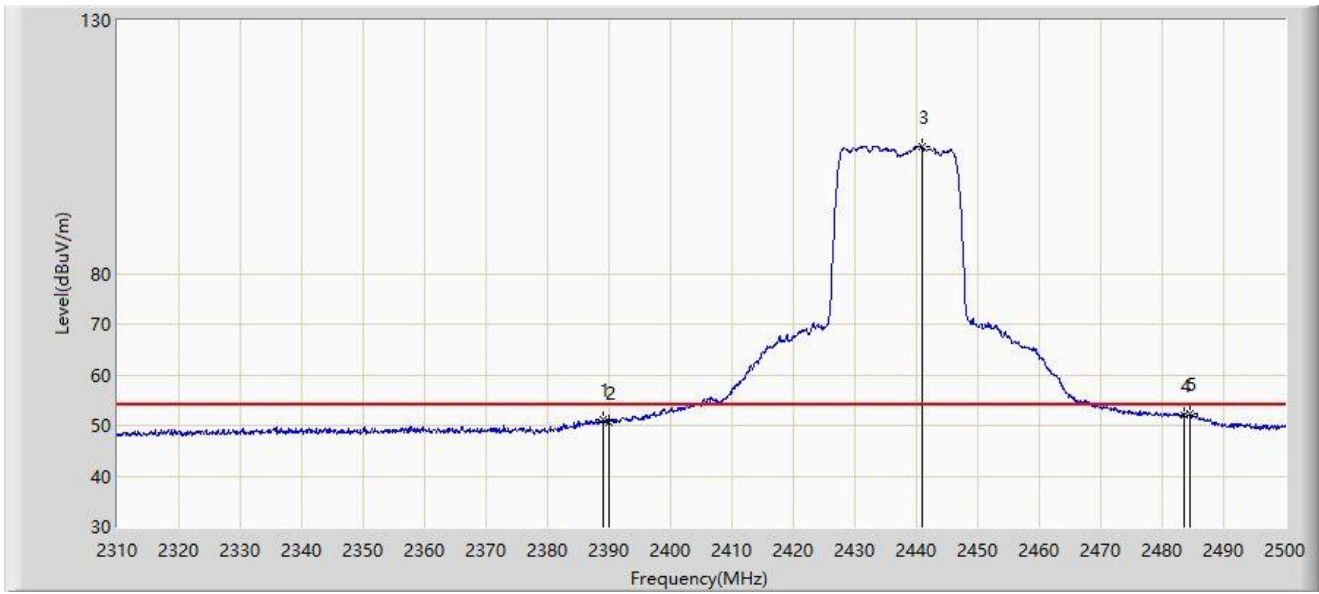


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		2389.040	51.127	19.556	-2.873	54.000	31.571	AV
2		2390.000	50.715	19.126	-3.285	54.000	31.588	AV
3		2440.910	105.047	73.309	N/A	N/A	31.738	AV
4		2483.500	52.060	20.188	-1.940	54.000	31.872	AV
5	*	2484.420	52.194	20.322	-1.806	54.000	31.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 14:09
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

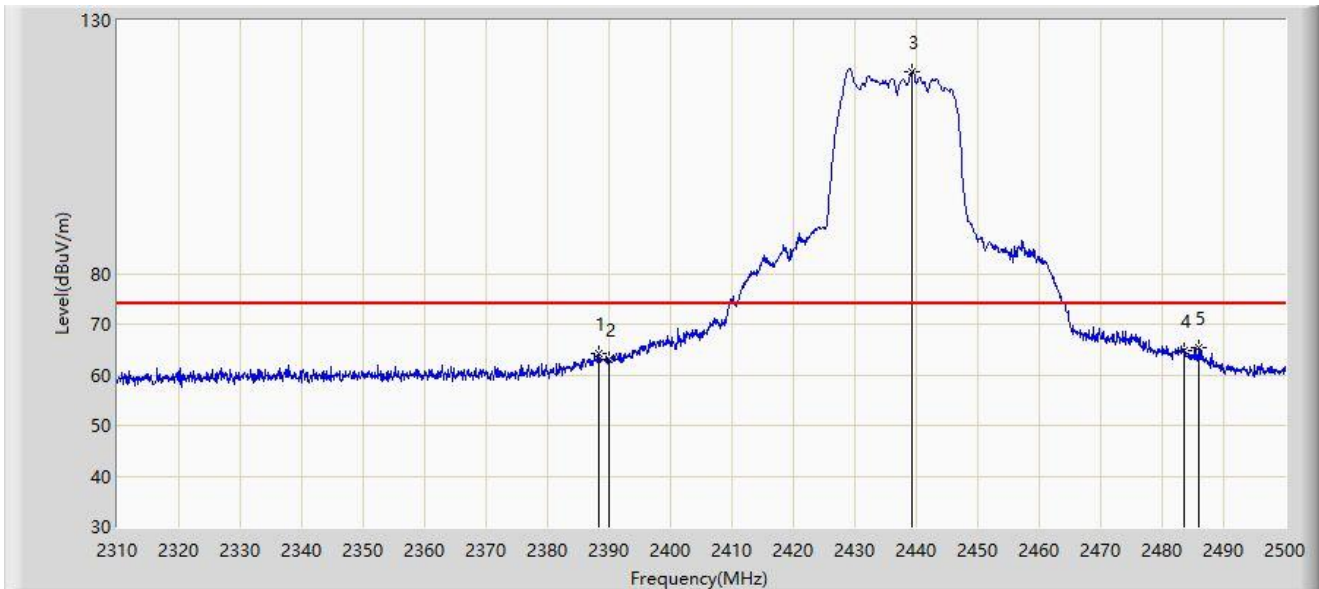


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2388.280	64.220	32.663	-9.780	74.000	31.556	PK
2		2390.000	63.002	31.413	-10.998	74.000	31.588	PK
3		2439.295	119.975	88.241	N/A	N/A	31.734	PK
4		2483.500	64.638	32.766	-9.362	74.000	31.872	PK
5	*	2485.940	65.282	33.411	-8.718	74.000	31.872	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 14:07
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

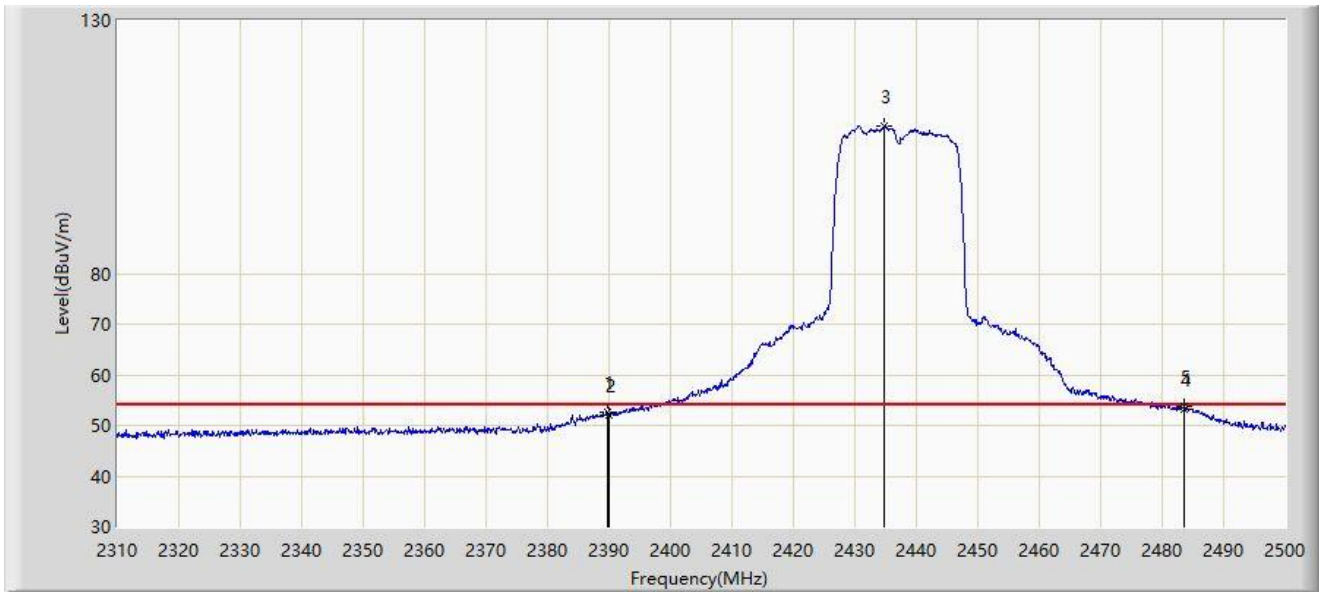


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2389.705	52.527	20.944	-1.473	54.000	31.583	AV
2		2390.000	51.995	20.406	-2.005	54.000	31.588	AV
3		2434.830	109.158	77.435	N/A	N/A	31.724	AV
4		2483.500	53.173	21.301	-0.827	54.000	31.872	AV
5	*	2483.660	53.668	21.796	-0.332	54.000	31.873	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 15:33
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2452MHz	

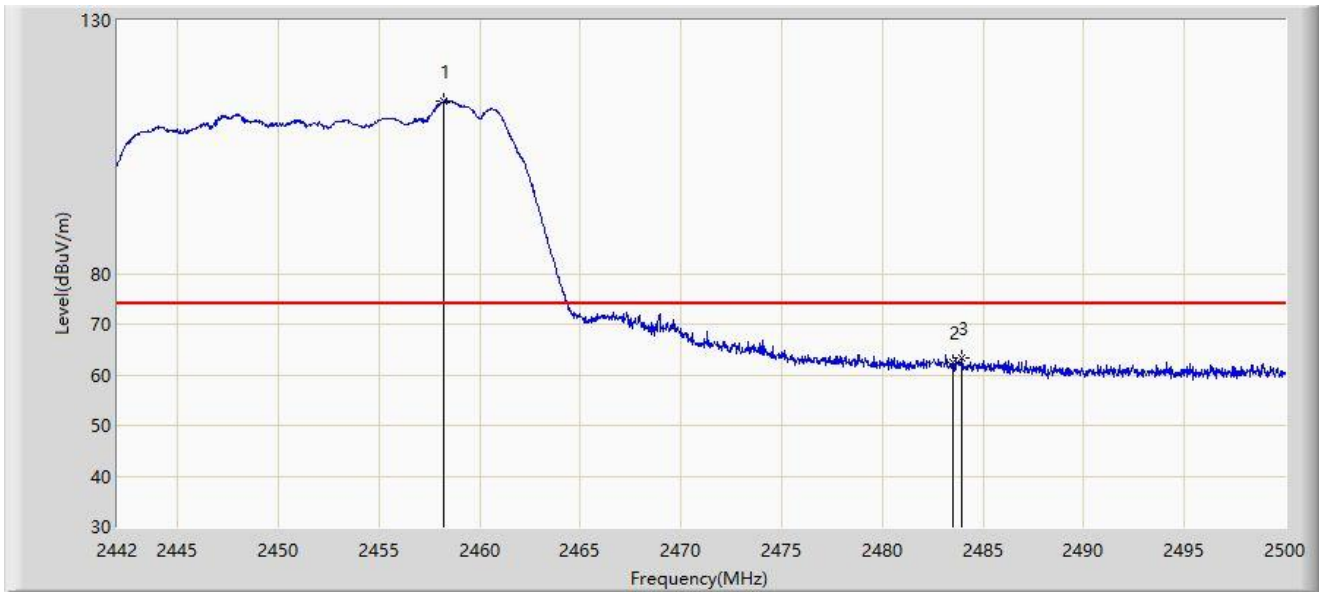


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.211	114.084	82.265	N/A	N/A	31.819	PK
2		2483.500	62.524	30.652	-11.476	74.000	31.872	PK
3	*	2483.963	63.191	31.319	-10.809	74.000	31.872	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 15:31
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2452MHz	

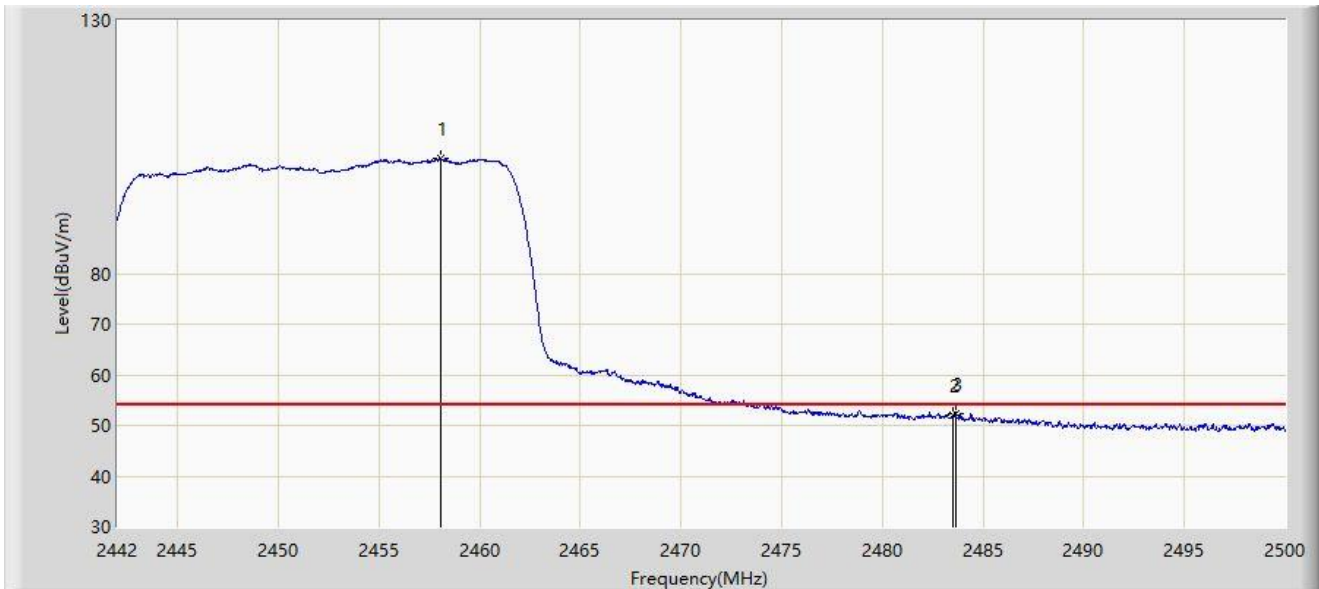


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.037	102.742	70.924	N/A	N/A	31.818	AV
2		2483.500	51.994	20.122	-2.006	54.000	31.872	AV
3	*	2483.644	52.244	20.372	-1.756	54.000	31.873	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 15:30
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2452MHz	

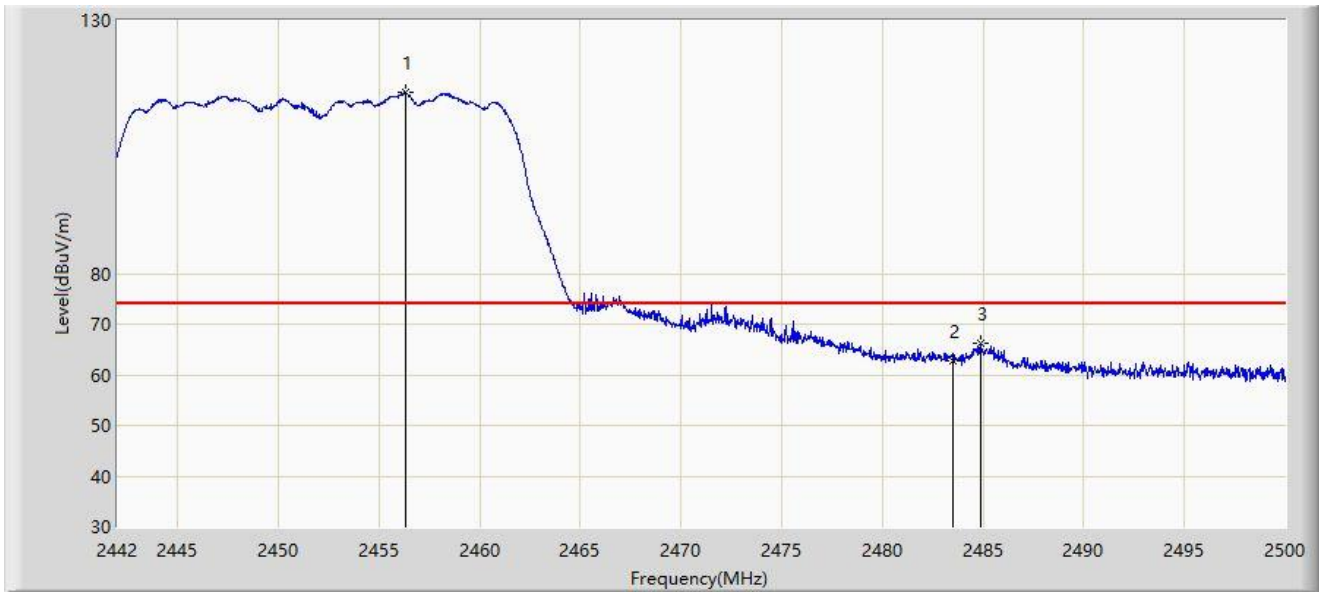


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2456.326	115.915	84.106	N/A	N/A	31.808	PK
2		2483.500	62.865	30.993	-11.135	74.000	31.872	PK
3	*	2484.891	66.328	34.456	-7.672	74.000	31.872	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 15:25
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2452MHz	

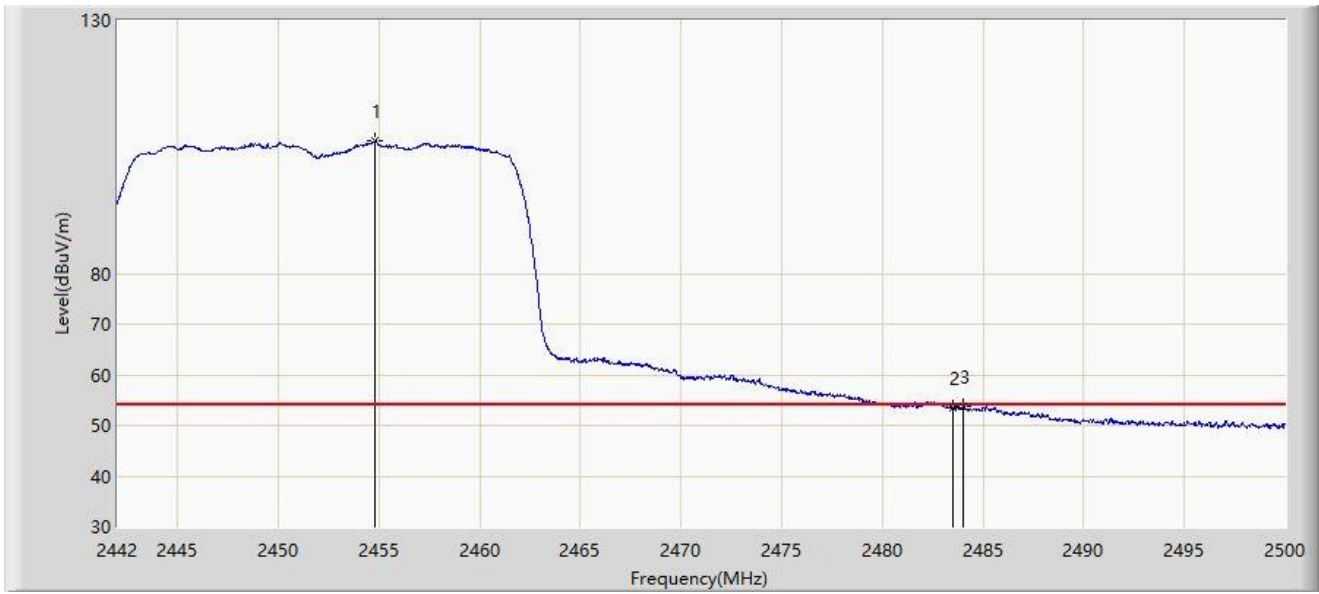


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2454.760	106.208	74.408	N/A	N/A	31.800	AV
2		2483.500	53.502	21.630	-0.498	54.000	31.872	AV
3	*	2484.021	53.796	21.924	-0.204	54.000	31.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 15:23
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2457MHz	

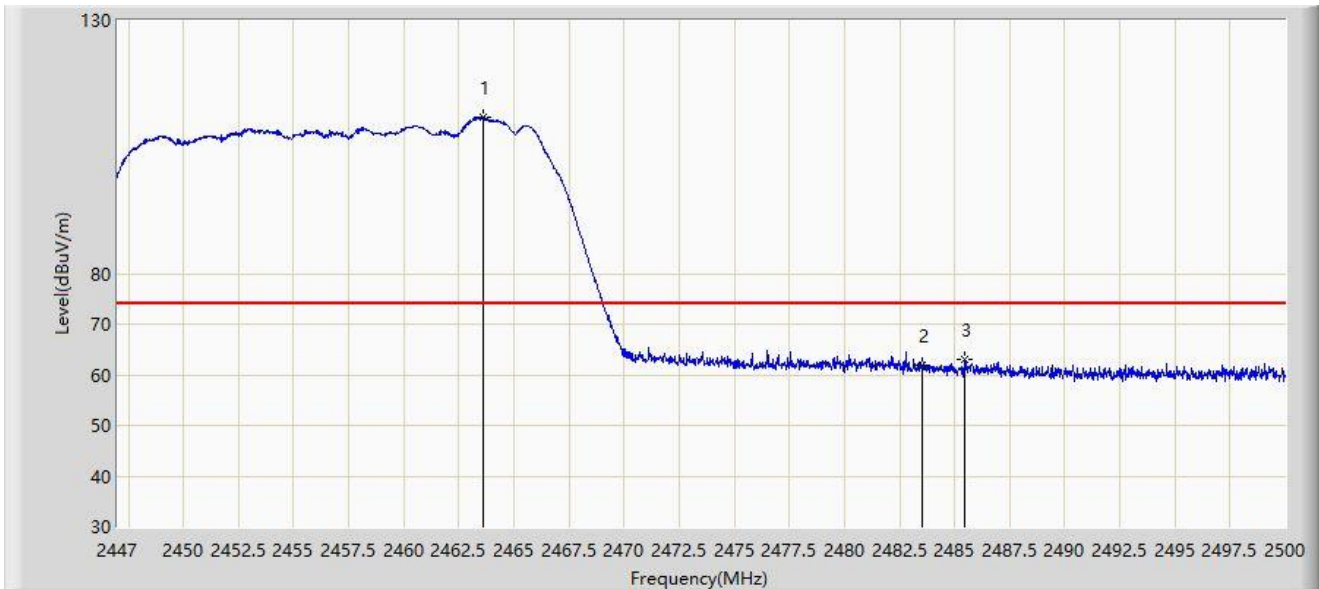


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		2463.615	110.929	79.087	N/A	N/A	31.842	PK
2		2483.500	61.824	29.952	-12.176	74.000	31.872	PK
3	*	2485.451	63.169	31.297	-10.831	74.000	31.871	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 15:20
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2457MHz	

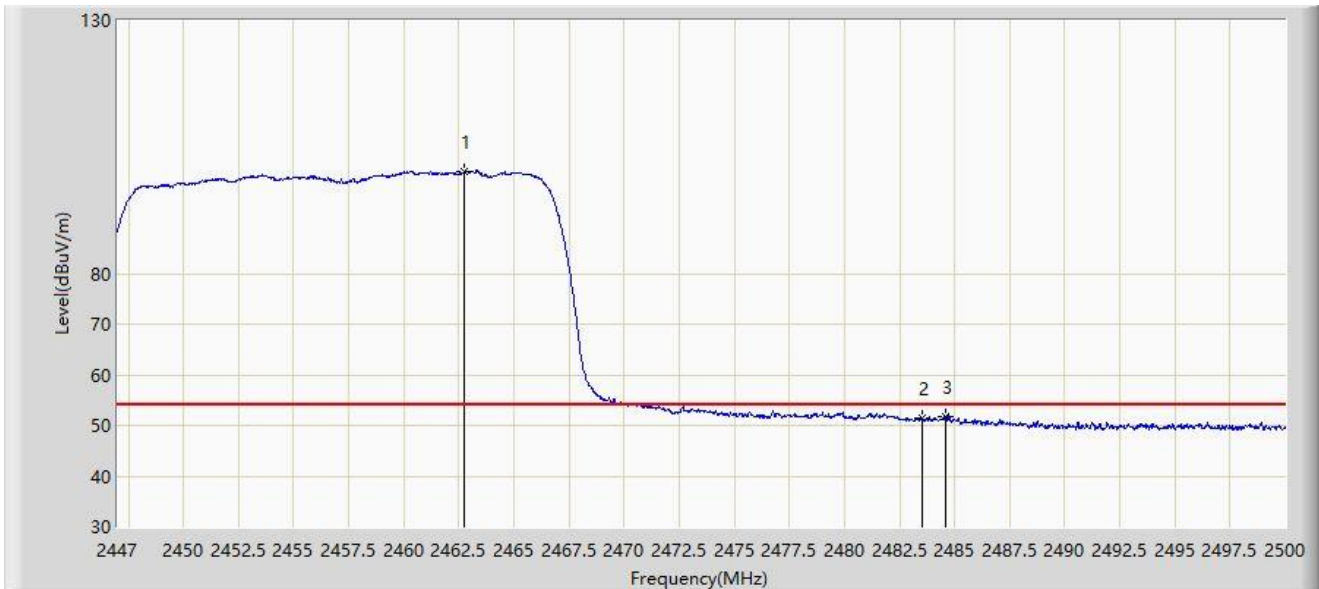


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.715	100.110	68.269	N/A	N/A	31.841	AV
2		2483.500	51.485	19.613	-2.515	54.000	31.872	AV
3	*	2484.577	51.844	19.972	-2.156	54.000	31.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 15:18
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2457MHz	

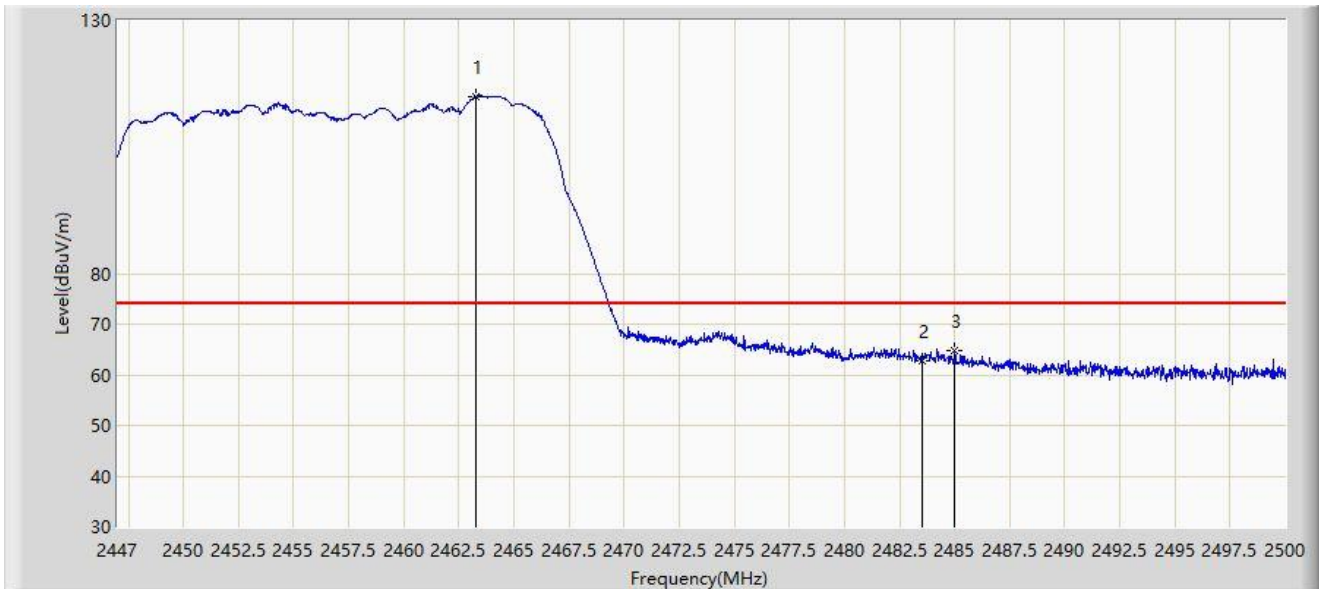


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.271	114.948	83.106	N/A	N/A	31.842	PK
2		2483.500	62.814	30.942	-11.186	74.000	31.872	PK
3	*	2485.001	64.839	32.967	-9.161	74.000	31.871	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/22 - 15:17
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2457MHz	

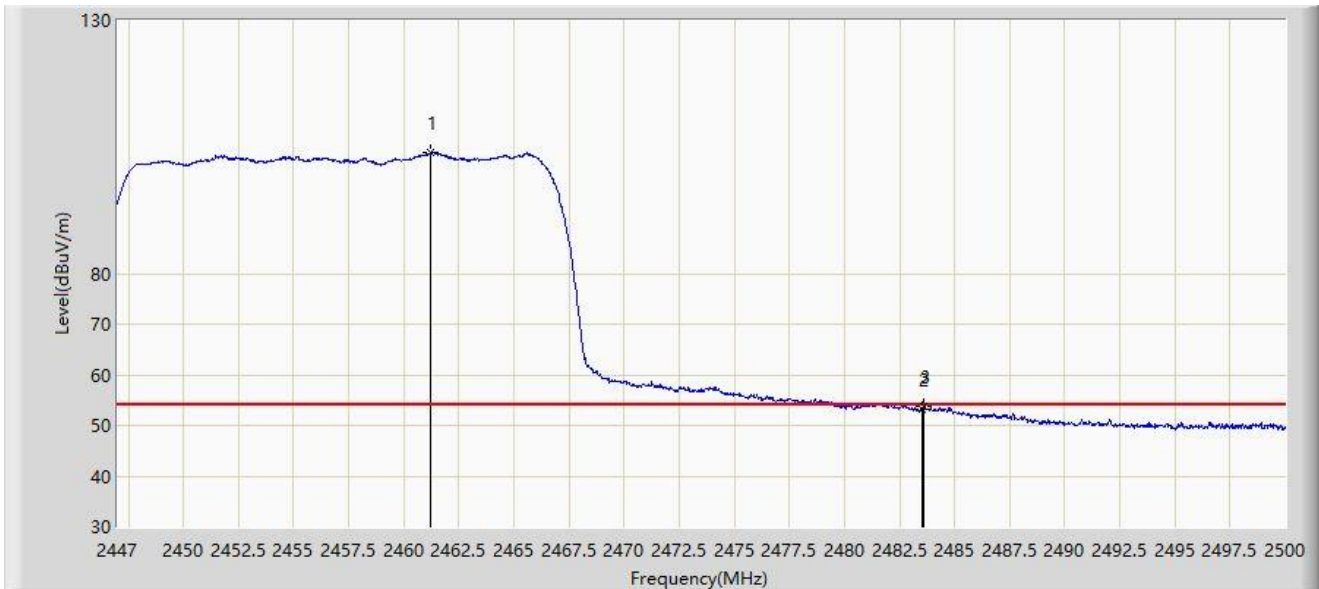


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.230	103.778	71.943	N/A	N/A	31.835	AV
2		2483.500	53.332	21.460	-0.668	54.000	31.872	AV
3	*	2483.570	53.696	21.824	-0.304	54.000	31.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/05/12 - 00:28
Limit: FCC_Part15_Band Edge(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

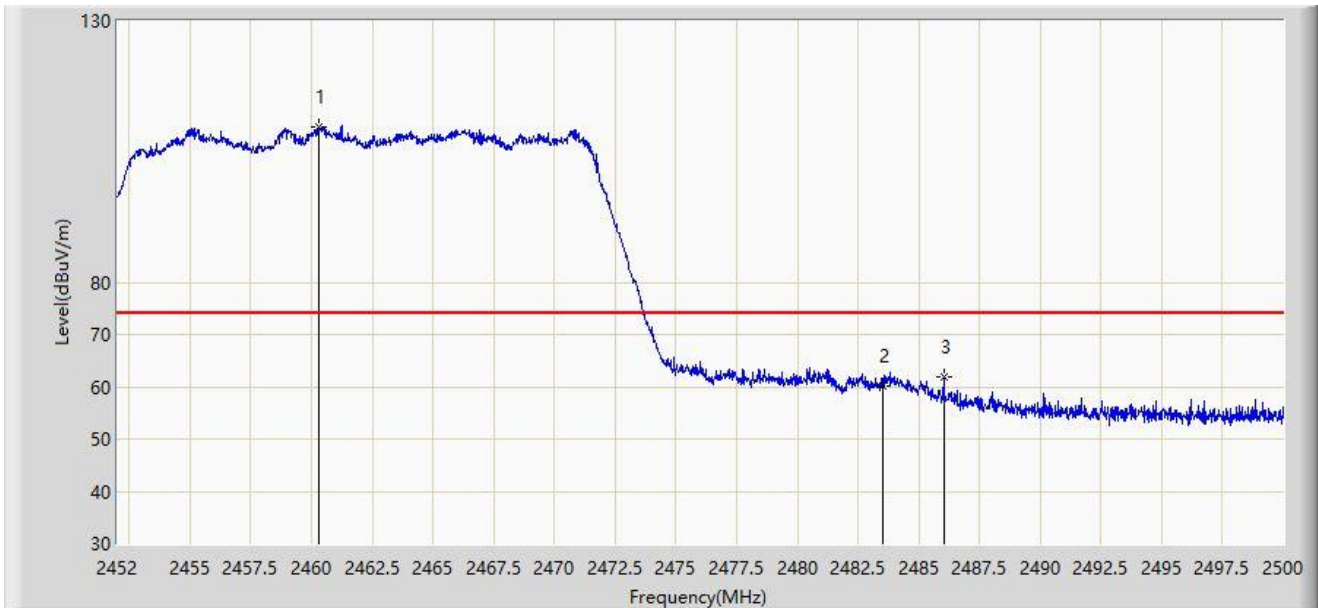


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.280	109.682	78.348	N/A	N/A	31.334	PK
2		2483.500	60.105	28.790	-13.895	74.000	31.315	PK
3	*	2486.032	61.996	30.677	-12.004	74.000	31.319	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/05/12 - 00:31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

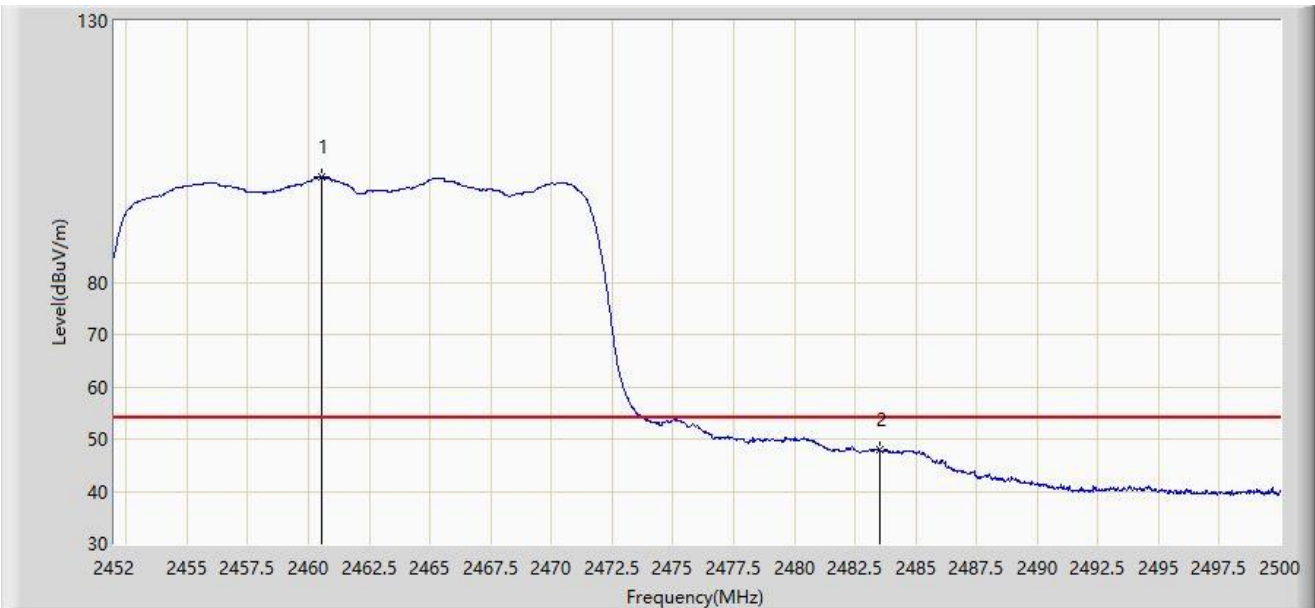


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.568	100.079	68.746	N/A	N/A	31.333	AV
2	*	2483.500	47.949	16.634	-6.051	54.000	31.315	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/05/12 - 00:31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

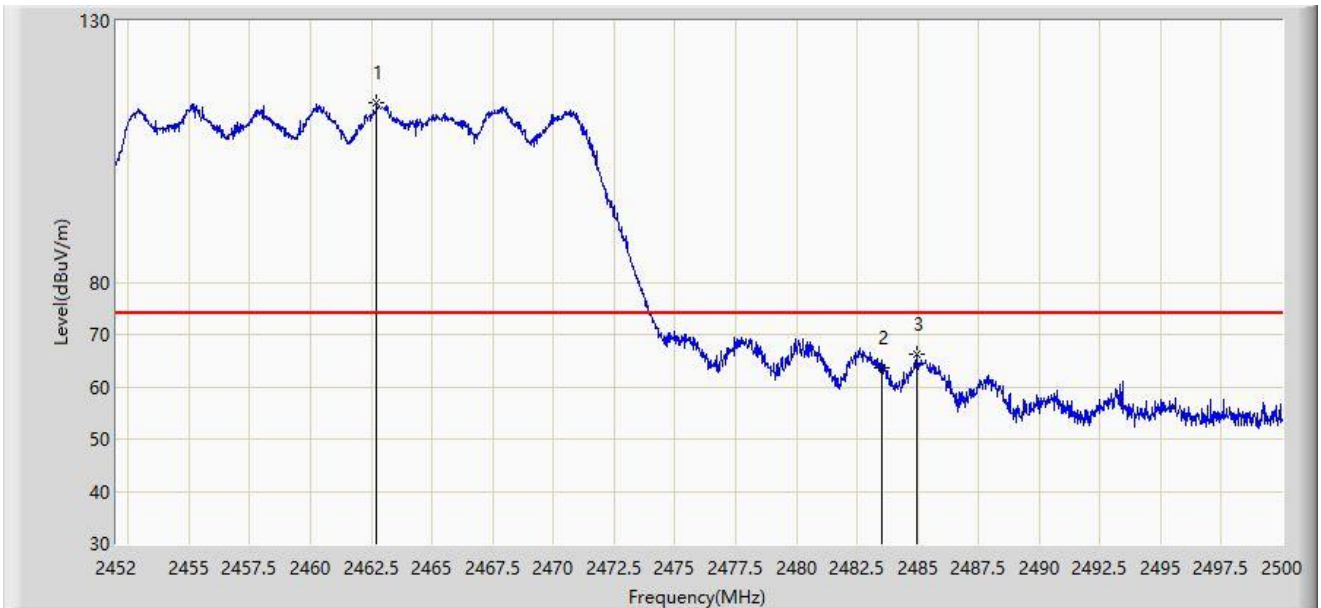


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.728	114.341	83.013	N/A	N/A	31.327	PK
2		2483.500	63.695	32.380	-10.305	74.000	31.315	PK
3	*	2484.952	66.203	34.886	-7.797	74.000	31.317	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/05/12 - 00:31
Limit: FCC_Part15_Band Edge(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

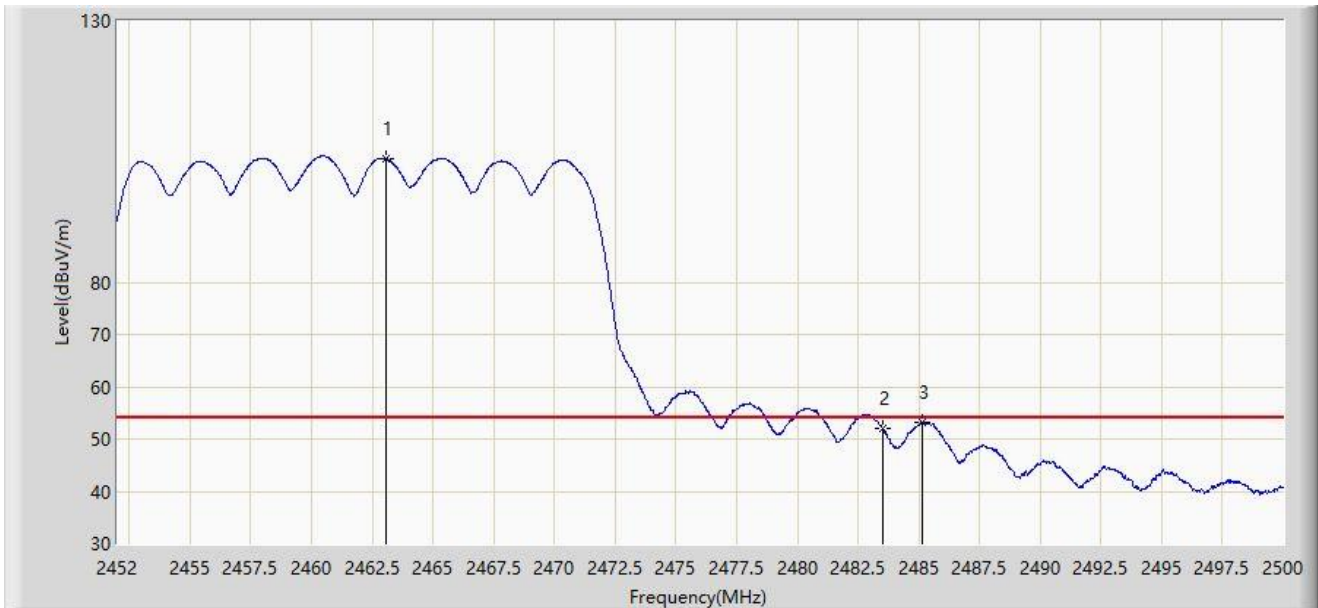


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.088	103.519	72.192	N/A	N/A	31.327	AV
2		2483.500	52.121	20.806	-1.879	54.000	31.315	AV
3	*	2485.120	53.208	21.890	-0.792	54.000	31.318	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 17:27
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

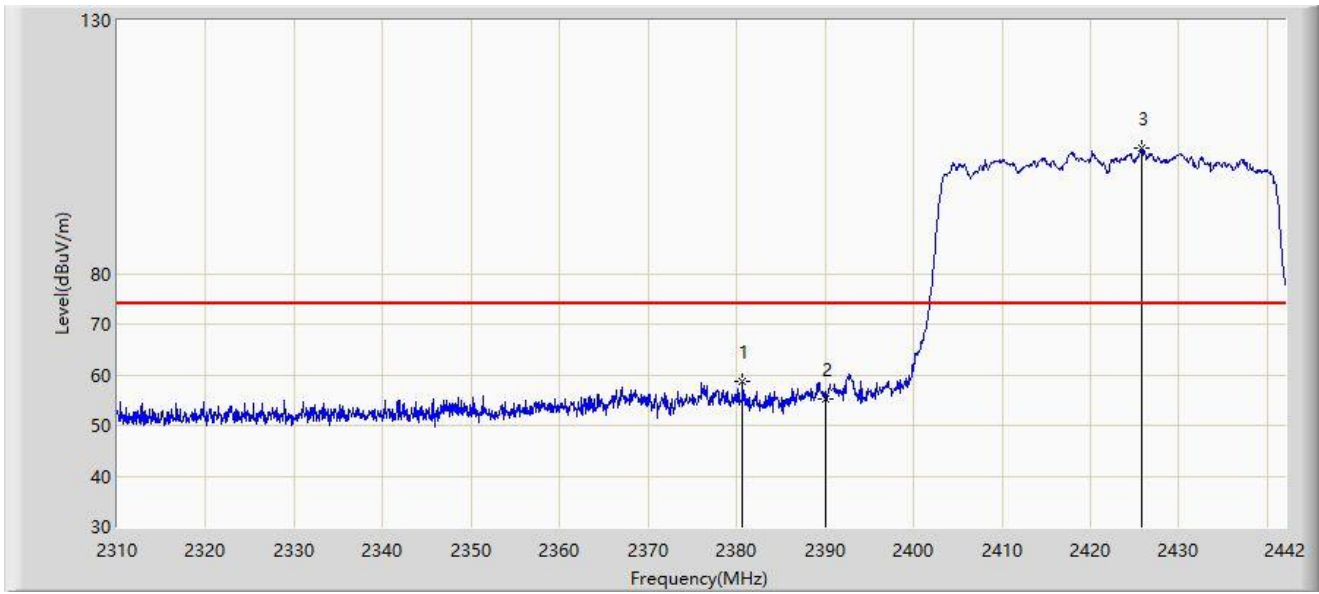


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2380.686	58.619	27.202	-15.381	74.000	31.417	PK
2		2390.000	55.186	23.597	-18.814	74.000	31.588	PK
3		2425.830	104.678	72.974	N/A	N/A	31.705	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 17:28
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

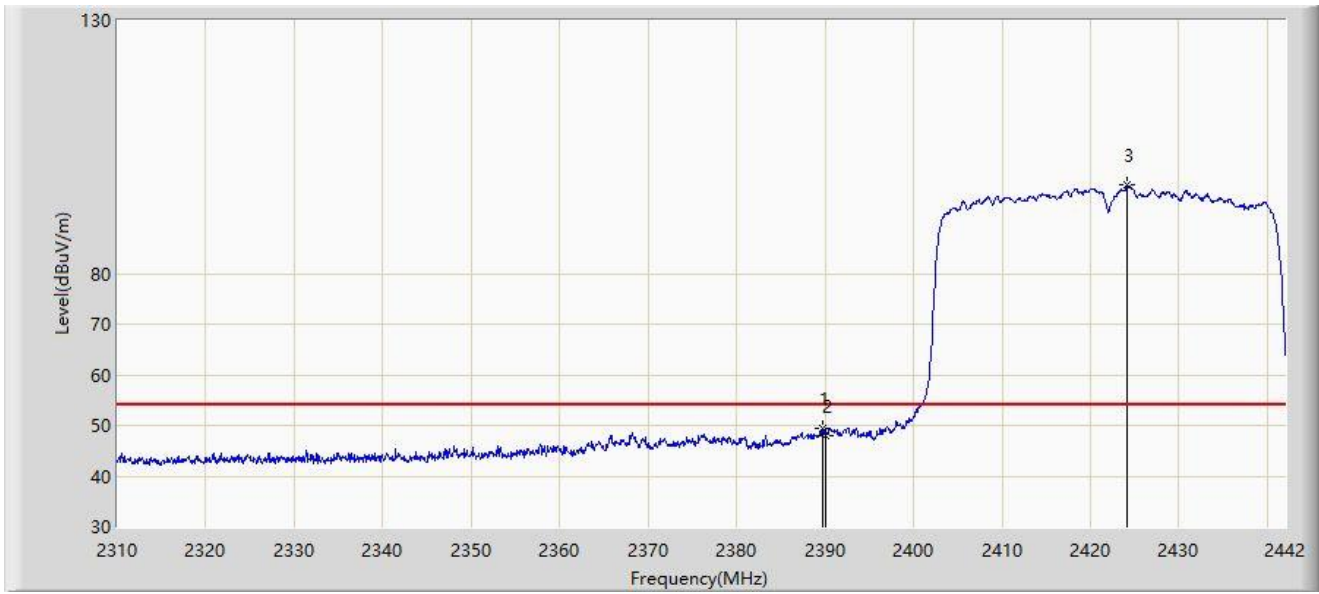


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.794	49.351	17.766	-4.649	54.000	31.584	AV
2		2390.000	48.086	16.497	-5.914	54.000	31.588	AV
3		2424.114	97.560	65.858	N/A	N/A	31.702	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 17:26
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

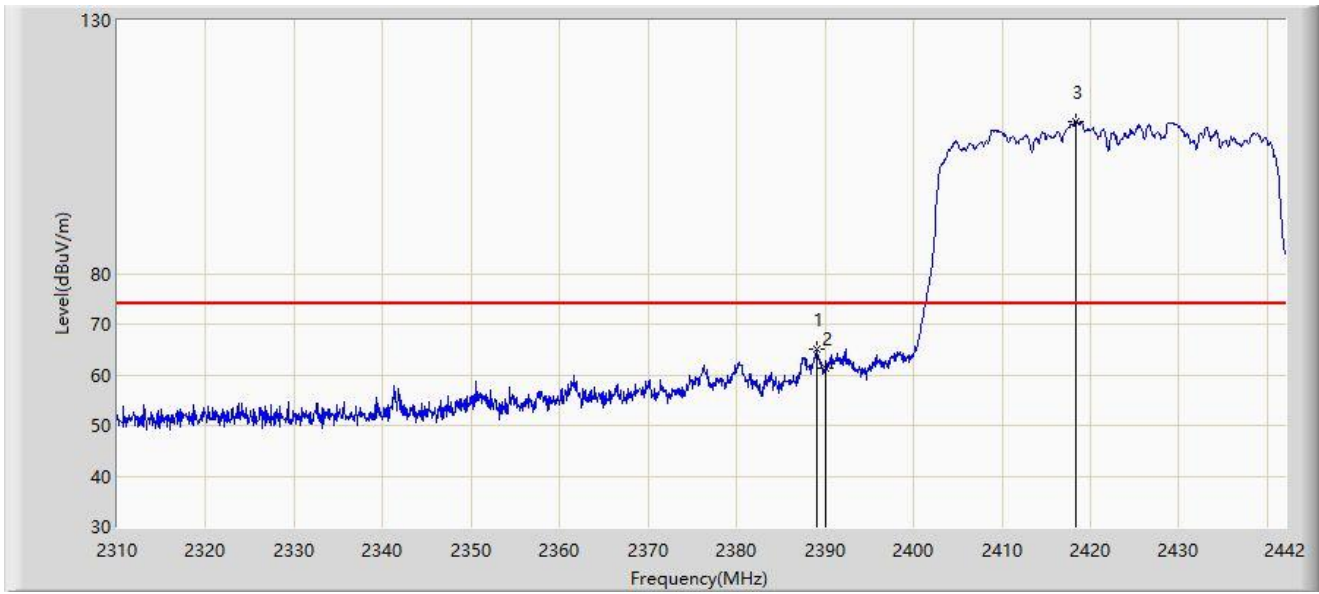


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.068	65.059	33.488	-8.941	74.000	31.571	PK
2		2390.000	61.236	29.647	-12.764	74.000	31.588	PK
3		2418.306	110.016	78.322	N/A	N/A	31.693	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 17:25
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

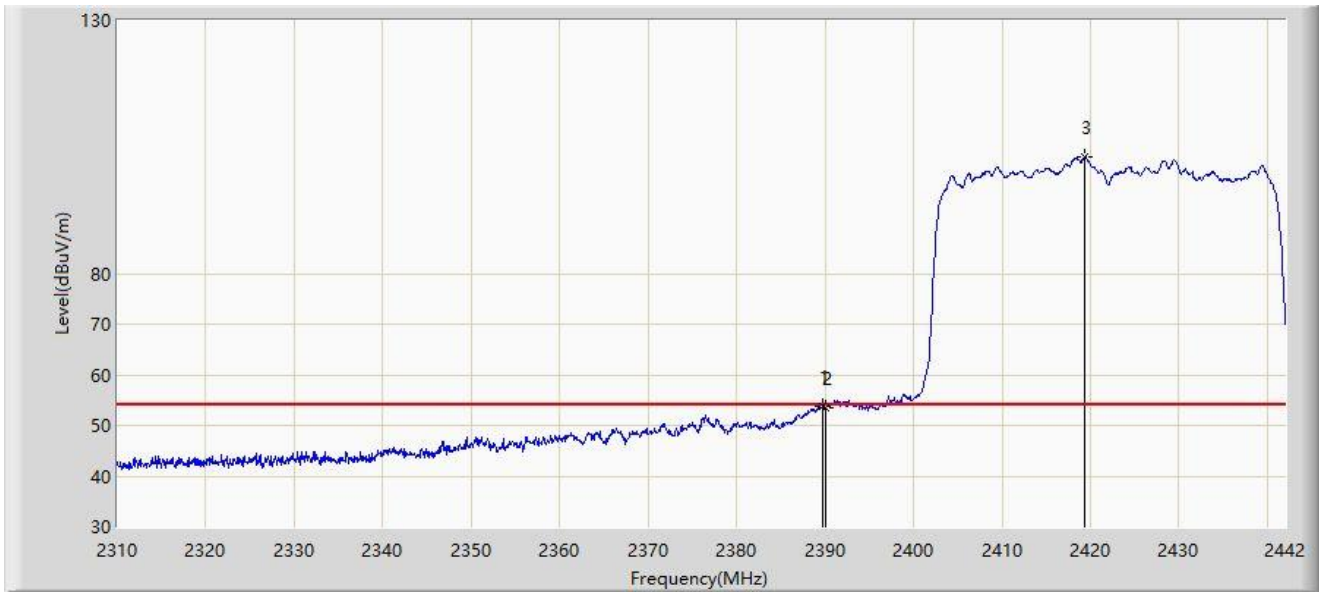


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.728	53.847	22.263	-0.153	54.000	31.583	AV
2		2390.000	53.531	21.942	-0.469	54.000	31.588	AV
3		2419.362	103.134	71.439	N/A	N/A	31.695	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 23:29
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

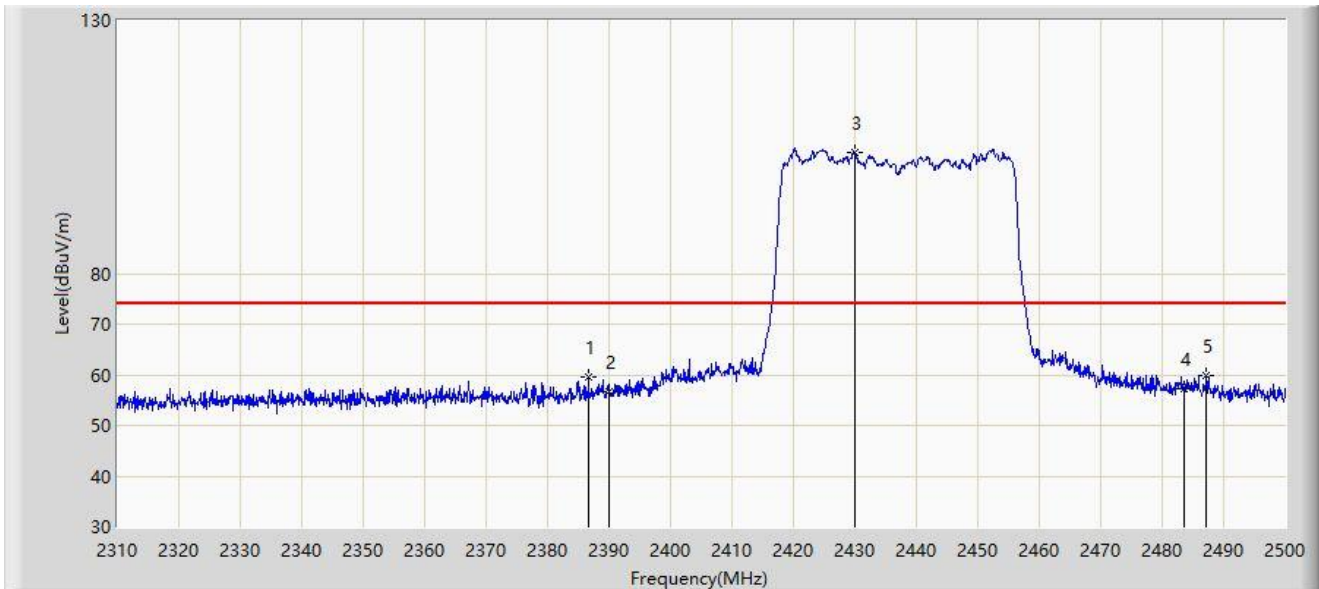


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2386.665	59.570	28.043	-14.430	74.000	31.527	PK
2		2390.000	56.781	25.192	-17.219	74.000	31.588	PK
3		2429.890	103.889	72.177	N/A	N/A	31.711	PK
4		2483.500	57.159	25.287	-16.841	74.000	31.872	PK
5	*	2487.175	59.759	27.888	-14.241	74.000	31.871	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 23:28
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

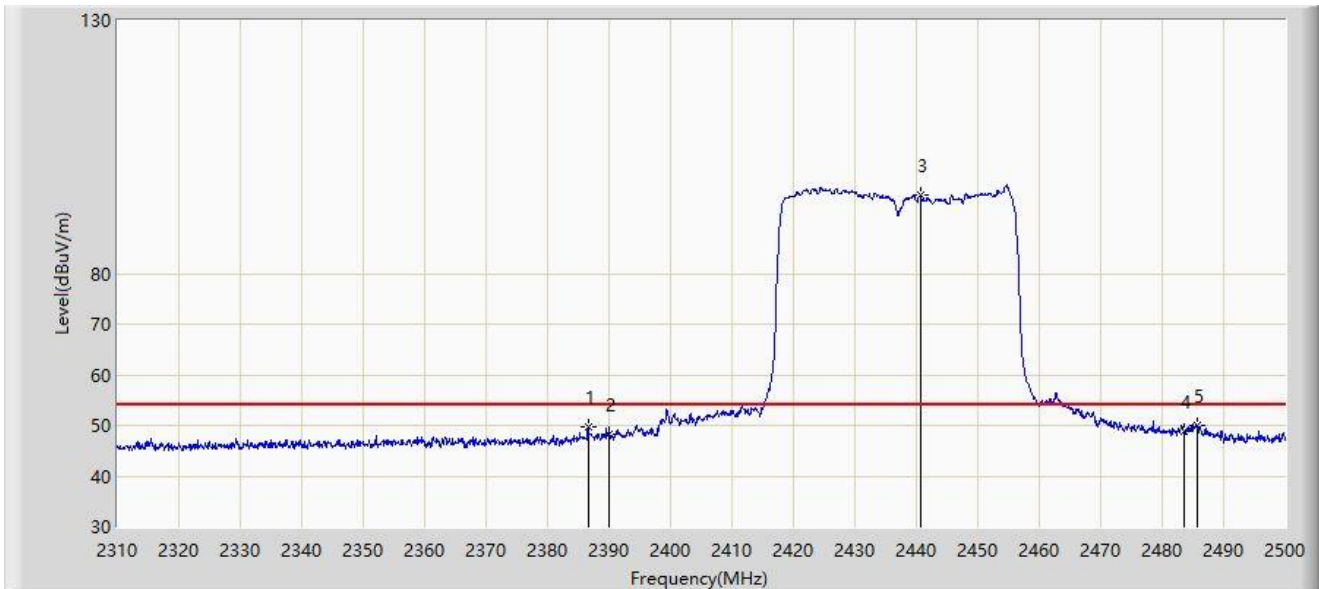


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2386.570	49.575	18.050	-4.425	54.000	31.525	AV
2		2390.000	48.226	16.637	-5.774	54.000	31.588	AV
3		2440.625	95.434	63.697	N/A	N/A	31.737	AV
4		2483.500	48.873	17.001	-5.127	54.000	31.872	AV
5	*	2485.750	50.111	18.239	-3.889	54.000	31.871	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 23:26
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

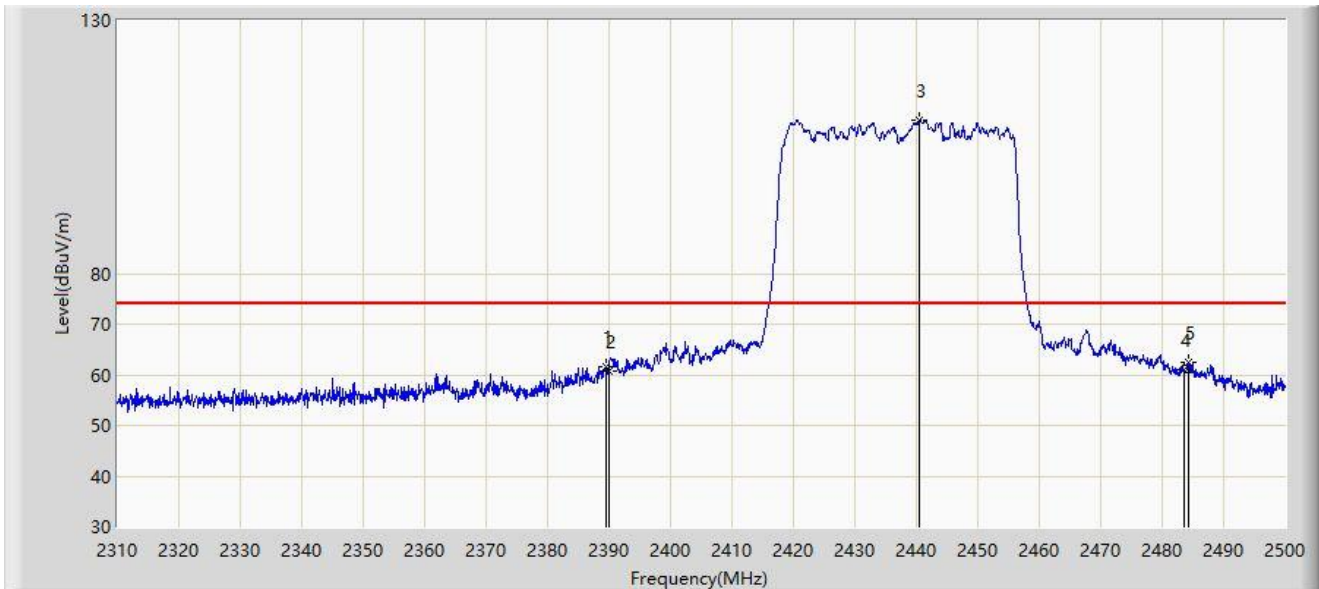


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2389.420	61.559	29.981	-12.441	74.000	31.578	PK
2		2390.000	60.673	29.084	-13.327	74.000	31.588	PK
3		2440.435	110.340	78.603	N/A	N/A	31.737	PK
4		2483.500	61.050	29.178	-12.950	74.000	31.872	PK
5	*	2484.230	62.582	30.710	-11.418	74.000	31.872	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 23:20
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

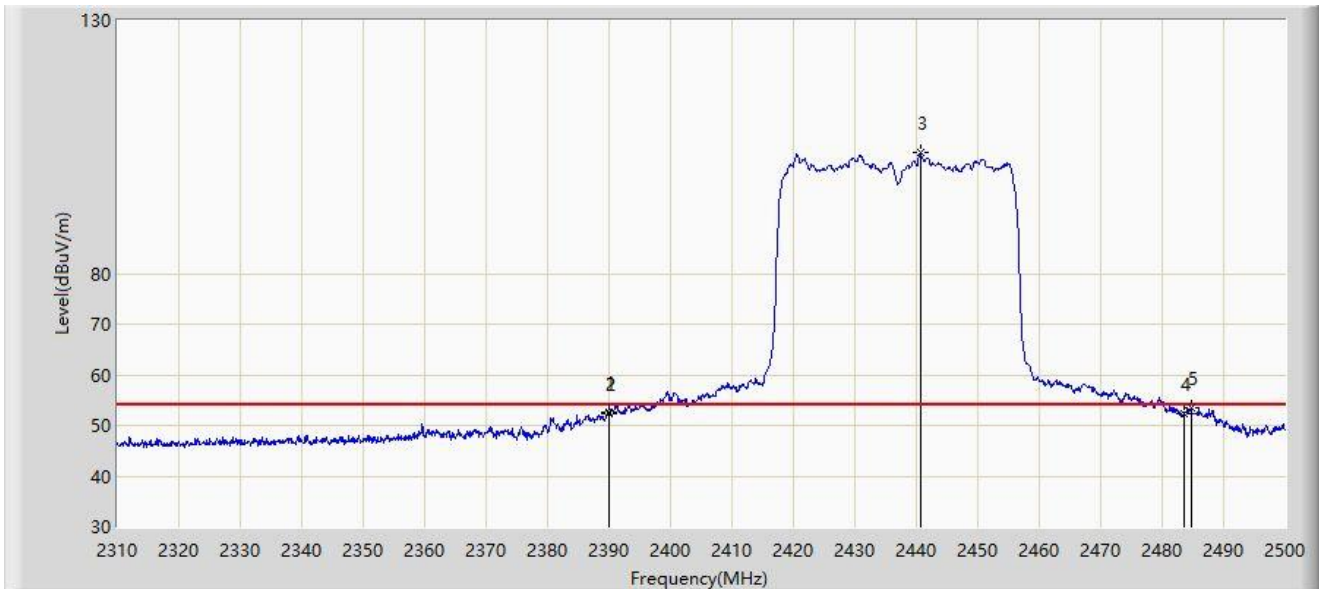


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		2389.895	52.542	20.955	-1.458	54.000	31.587	AV
2		2390.000	52.450	20.861	-1.550	54.000	31.588	AV
3		2440.625	103.850	72.113	N/A	N/A	31.737	AV
4		2483.500	52.342	20.470	-1.658	54.000	31.872	AV
5	*	2484.705	53.560	21.688	-0.440	54.000	31.871	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 17:37
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

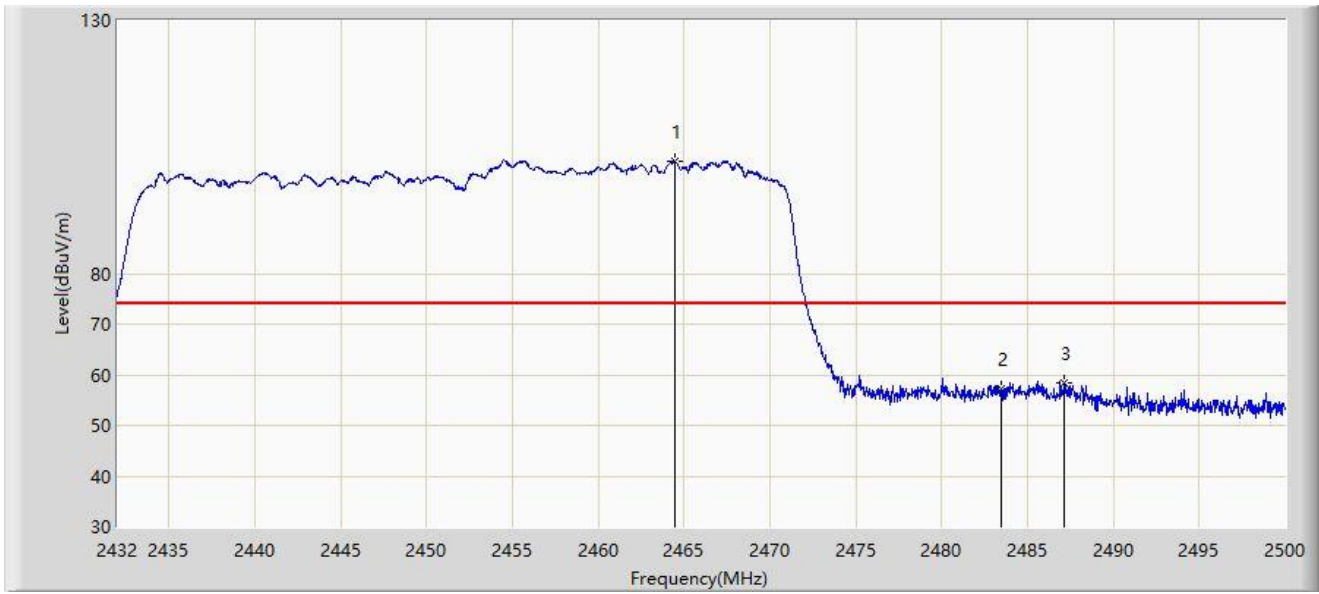


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2464.470	102.229	70.385	N/A	N/A	31.844	PK
2		2483.500	57.113	25.241	-16.887	74.000	31.872	PK
3	*	2487.148	58.485	26.614	-15.515	74.000	31.871	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 17:38
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

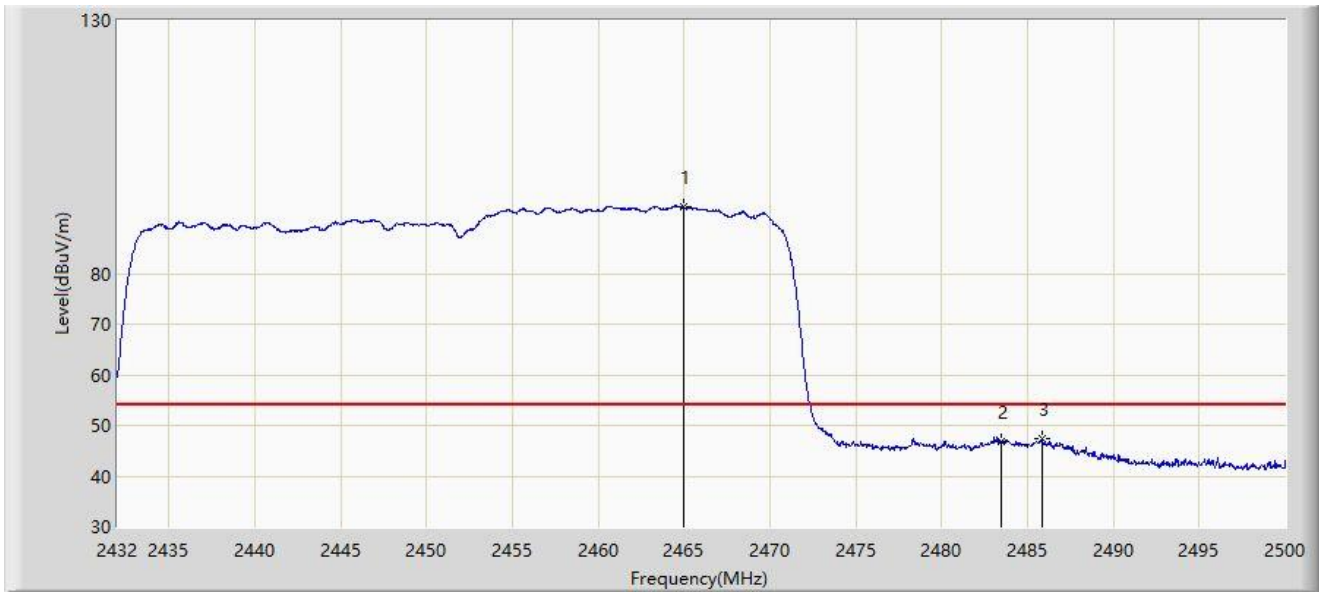


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2464.946	93.233	61.388	N/A	N/A	31.845	AV
2		2483.500	46.698	14.826	-7.302	54.000	31.872	AV
3	*	2485.856	47.335	15.464	-6.665	54.000	31.872	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 17:36
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

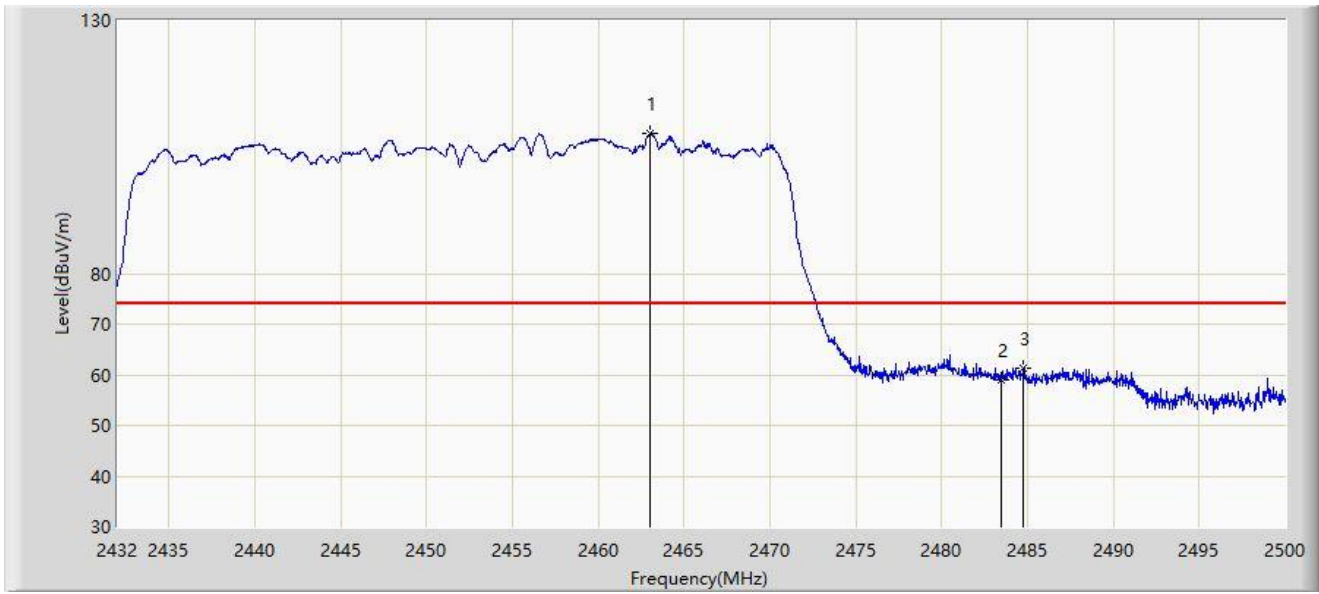


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.008	107.634	75.793	N/A	N/A	31.841	PK
2		2483.500	58.925	27.053	-15.075	74.000	31.872	PK
3	*	2484.768	61.233	29.361	-12.767	74.000	31.872	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Time: 2022/05/18 - 17:34
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

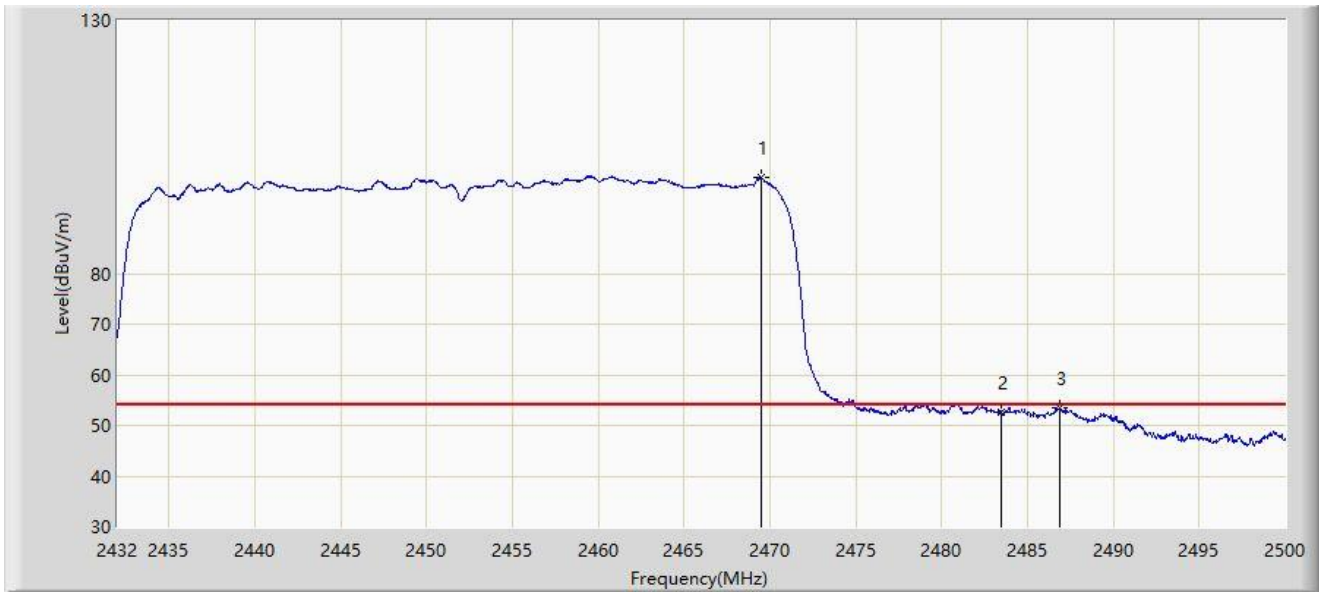

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2469.468	99.100	67.246	N/A	N/A	31.854	AV
2		2483.500	52.525	20.653	-1.475	54.000	31.872	AV
3	*	2486.876	53.552	21.681	-0.448	54.000	31.871	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

A.8 AC Conducted Emissions Test Result

Site: WZ-SR2	Time: 2022/06/01 - 11:37
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_E	Polarity: Line
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2437MHz	

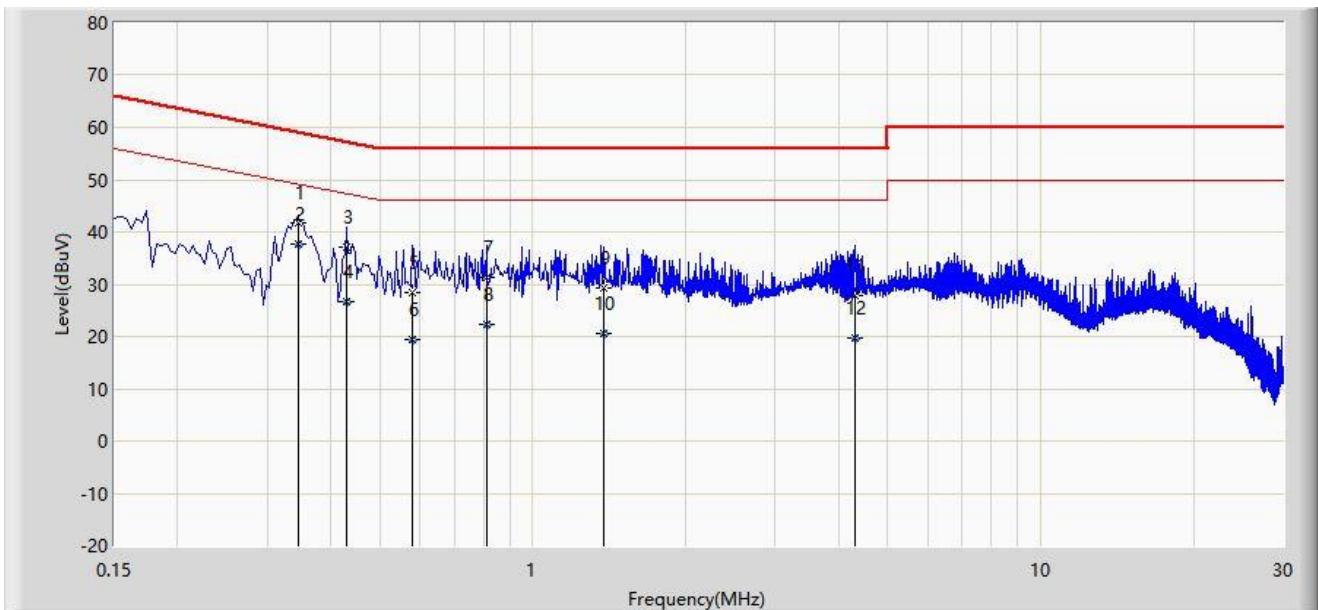


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.346	41.740	31.831	-17.318	59.058	9.909	QP
2	*	0.346	37.783	27.874	-11.275	49.058	9.909	AV
3		0.430	37.045	27.130	-20.207	57.253	9.915	QP
4		0.430	26.725	16.810	-20.528	47.253	9.915	AV
5		0.578	28.399	18.476	-27.601	56.000	9.923	QP
6		0.578	19.337	9.414	-26.663	46.000	9.923	AV
7		0.810	31.185	21.248	-24.815	56.000	9.937	QP
8		0.810	22.436	12.500	-23.564	46.000	9.937	AV
9		1.378	29.351	19.393	-26.649	56.000	9.958	QP
10		1.378	20.460	10.502	-25.540	46.000	9.958	AV
11		4.302	27.822	17.430	-28.178	56.000	10.393	QP
12		4.302	19.602	9.209	-26.398	46.000	10.393	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Time: 2022/06/01 - 11:44
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_E	Polarity: Neutral
EUT: Wi-Fi 6 DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2437MHz	

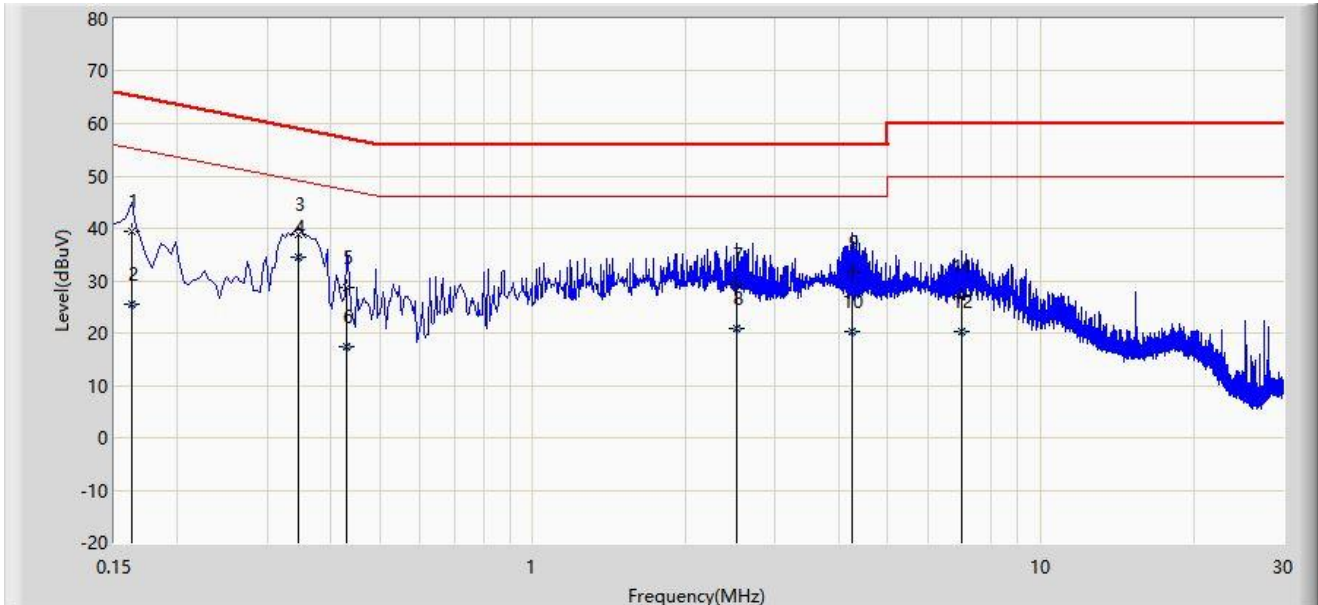

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.162	39.300	29.383	-26.061	65.361	9.917	QP
2		0.162	25.430	15.512	-29.931	55.361	9.917	AV
3		0.346	38.751	28.832	-20.307	59.058	9.919	QP
4	*	0.346	34.381	24.461	-14.677	49.058	9.919	AV
5		0.430	28.602	18.677	-28.651	57.253	9.925	QP
6		0.430	17.263	7.338	-29.989	47.253	9.925	AV
7		2.518	29.391	19.308	-26.609	56.000	10.084	QP
8		2.518	20.828	10.745	-25.172	46.000	10.084	AV
9		4.262	31.510	21.113	-24.490	56.000	10.397	QP
10		4.262	20.260	9.863	-25.740	46.000	10.397	AV
11		7.006	26.862	16.210	-33.138	60.000	10.652	QP
12		7.006	20.315	9.663	-29.685	50.000	10.652	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B – Test Setup Photograph

Refer to “2205RSU015-UT” file.

Appendix C – EUT Photograph

Refer to “2205RSU015-UE” file.

_____ The End _____