



F2 Labs
16740 Peters Road
Middlefield, Ohio 44062
United States of America
www.f2labs.com

CERTIFICATION TEST REPORT

Manufacturer: Structured Mining Systems, Inc.
d.b.a. Cervis Inc.
170 Thornhill Road
Warrendale, Pennsylvania 15086
United States of America

Applicant: Same As Above

Product: SmaRT Portable Radio

Model: HH-2H06

FCC ID: LOB2H06

Testing Commenced: Aug. 22, 2013

Testing Ended: Dec. 4, 2013

Summary of Test Results: Page 4

Standards:

- FCC Part 15 Subpart C, Section 15.247

Evaluation Conducted by:

Ken Littell, EMC Tech. Mgr.

Report Reviewed by:

Wendy Fuster, President

F2 Labs
26501 Ridge Road
Damascus, MD 20872
Ph 301.253.4500
Fax 301.253.5179

F2 Labs
16740 Peters Road
Middlefield, OH 44062
Ph 440.632.5541
Fax 440.632.5542

This test report may be reproduced in full; partial reproduction only may be made with the written consent of F2 Labs. The results in this report apply only to the equipment tested.



TABLE OF CONTENTS

Section	Title	Page
1	ADMINISTRATIVE INFORMATION	3
2	SUMMARY OF TEST RESULTS/MODIFICATIONS	4
3	TABLE OF MEASURED RESULTS	5
4	ENGINEERING STATEMENT	6
5	EUT INFORMATION AND DATA	7
6	FCC Part 15.247(a)(2) – -6dB Occupied Bandwidth	8
7	FCC Part 15.247(b)(3) – Conducted Output Power	12
8	FCC Part 15.247(d) – Conducted Spurious Emissions	16
9	Radiated Spurious Emission	32
10	FCC PART 15.247 – Peak Power Spectral Density (PSD)	57
11	Photos/Exhibits – Product Photos, Test Setups	60



1 ADMINISTRATIVE INFORMATION

1.1 Measurement Location:

F2 Labs in Middlefield, Ohio. Site description and attenuation data are on file with the FCC's Sampling and Measurement Branch at the FCC Laboratory in Columbia, MD.

1.2 Measurement Procedure:

All measurements were performed according to the 2003 version of ANSI C63.4 and recommended FCC procedure of measurement of DTS operating under Section 15.247 and in KDB558074. A list of the measurement equipment can be found in Section 6.

1.3 Uncertainty Budget:

Radiated Emission

- Combined Uncertainty (+ or -) 2.24 dB
- Expanded Uncertainty (+ or -) 4.48 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.4 Document History:

Document Number	Description	Issue Date	Approved By
F2LQ5479A-01E	First Issue	Oct. 16, 2013	W. Fuster
F2LQ5479A-01E Rev. 1	Pg. 34; pp. 69-75; pp. 76-78	Nov. 15, 2013	W. Fuster
F2LQ5479A-01E Rev. 2	Revision to finished product certification	Dec. 11, 2013	W. Fuster
F2LQ5479A-01E Rev. 3	Revisions to test equipment listings	Dec. 19, 2013	W. Fuster

**2 SUMMARY OF TEST RESULTS**

Test Name	Standard(s)	Results
-6dB Occupied Bandwidth	CFR 47 Part 15.247(a)(2) / KDB558074	Complies
Conducted Output Power	CFR 47 Part 15.247(b)(3) / KDB558074	Complies
Conducted Spurious Emissions	CFR 47 Part 15.247(d) / Part 15.209 / KDB558074	Complies
Radiated Spurious Emission with 3.8dBi Integral Antenna	CFR 47 Part 15.247(d) / Part 15.209 / KDB558074	Complies
Peak Power Spectral Density	CFR 47 Part 15.247(e) / KDB558074	Complies

Note: product was operated using AAA batteries.
Requirements of 15.31 were met by using new batteries.

Modifications Made to the Equipment
None

**3 TABLE OF MEASURED RESULTS**

Test	High Channel 2.480GHz	Mid Channel 2.440GHz	Low Channel 2.405GHz
Conducted Output Power	99.77mW (19.99dBm)	98.628mW (19.94dBm)	99.083mW (19.95dBm)
Conducted Output Power Limit	1 Watt, (30dBm)	1 Watt, (30dBm)	1 Watt, (30dBm)
E.I.R.P. with 3.8dBi Integral antenna	239.33mW (23.79dBm)	236.591mW (23.74dBm)	237.68mW (23.76dBm)
E.I.R.P. Limit	4 Watts, (36.02dBm)	4 Watts, (36.02dBm)	4 Watts, (36.02dBm)
Peak Power Spectral Density	7.327 dBm	7.312 dBm	7.831 dBm
Peak Power Spectral Density Limit	8 dBm	8 dBm	8 dBm
-6dB Occupied bandwidth	2.335 MHz	2.310 MHz	2.270 MHz
-6dB Occupied Bandwidth Limit	≥ 500KHz	≥ 500KHz	≥ 500KHz



4 ENGINEERING STATEMENT

This report has been prepared on behalf of Cervis Inc. to provide documentation for the testing described herein. This equipment has been tested and found to comply with Part 15.247 of the FCC Rules using ANSI C63.4 2003 and KDB558074 standards. The test results found in this test report relate only to the items tested.



5 EUT INFORMATION AND DATA

5.1 Equipment Under Test:

Product: SmaRT Portable Radio

Model: HH-2H06

Serial No.: None

FCC ID: LOB2H06

5.2 Trade Name:

Structured Mining Systems, Inc. d.b.a. Cervis Inc.

5.3 Power Supply:

Non-rechargeable AAA Batteries

5.4 Applicable Rules:

CFR 47, Part 15.247, subpart C

5.5 Equipment Category:

Radio Transmitter-DTS

5.6 Antenna:

3.8dBi gain Integral Chip antenna

5.7 Accessories:

N/A

5.8 Test Item Condition:

The equipment to be tested was received in good condition.

5.9 Testing Algorithm:

The EUT was configured to permit frequency changes from low-mid-upper transmission channel using digital modulation (required for digital transmission systems). For RF antenna conducted tests, the EUT was equipped with an SMA connector for connection to the measuring equipment. For radiated emissions tests, in a semi-anechoic chamber and on the OATS, the EUT was equipped with integral/internal chip antenna. The highest emissions were recorded in the data tables.

**6 FCC PART 15.247(a)(2) – OCCUPIED BANDWIDTH****6.1 Requirements:**

The 6dB bandwidth shall be greater than 500 kHz.

Bandwidth measurements were made at the low (2.405 GHz), mid (2.440 GHz) and upper (2.480 GHz) frequencies. The bandwidth was measured using the analyzer's marker function.


6.2 Equipment Used:

Equipment Type	Asset Number	Manufacturer	Model	Serial Number	Calibration Due Date
Temp/Hum. Recorder	CL137	Extech	RH520	CH16992	Apr. 17, 2014
Receiver	CL151	Rohde & Schwarz	ESU40	100319	Oct. 31, 2014
Cable: 0.3m Low Loss	CL116	A.H. Systems, Inc.	SAC-26G-0.3	206	Mar. 1, 2014
Spectrum Analyzer	CL138	Agilent Technologies	E4407B	US41192779	Oct. 31, 2013




6.3 Occupied Bandwidth Test Data

Test Date:	Sept. 14, 2013	Test Engineer:	K. Littell
Standards:	CFR 47 Part 15.247(a)(2); KDB558074	Air Temperature:	21.9°C
		Relative Humidity:	43%

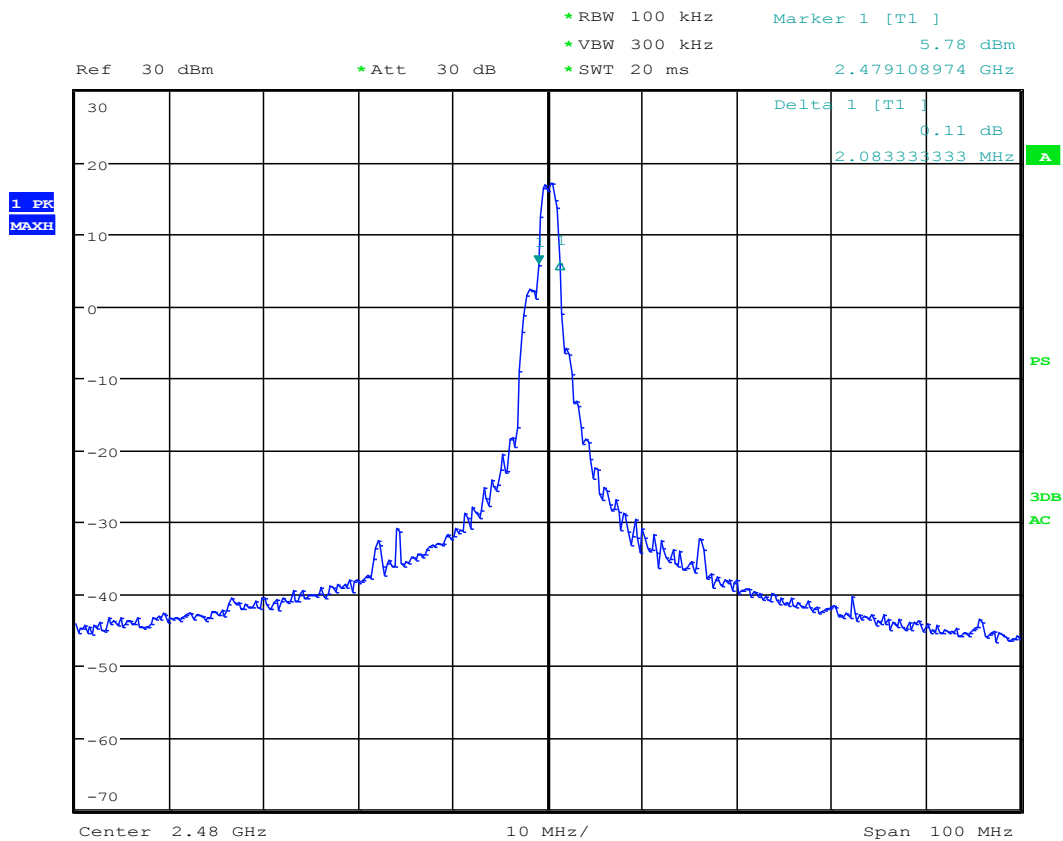

Date: 14.SEP.2013 17:16:33

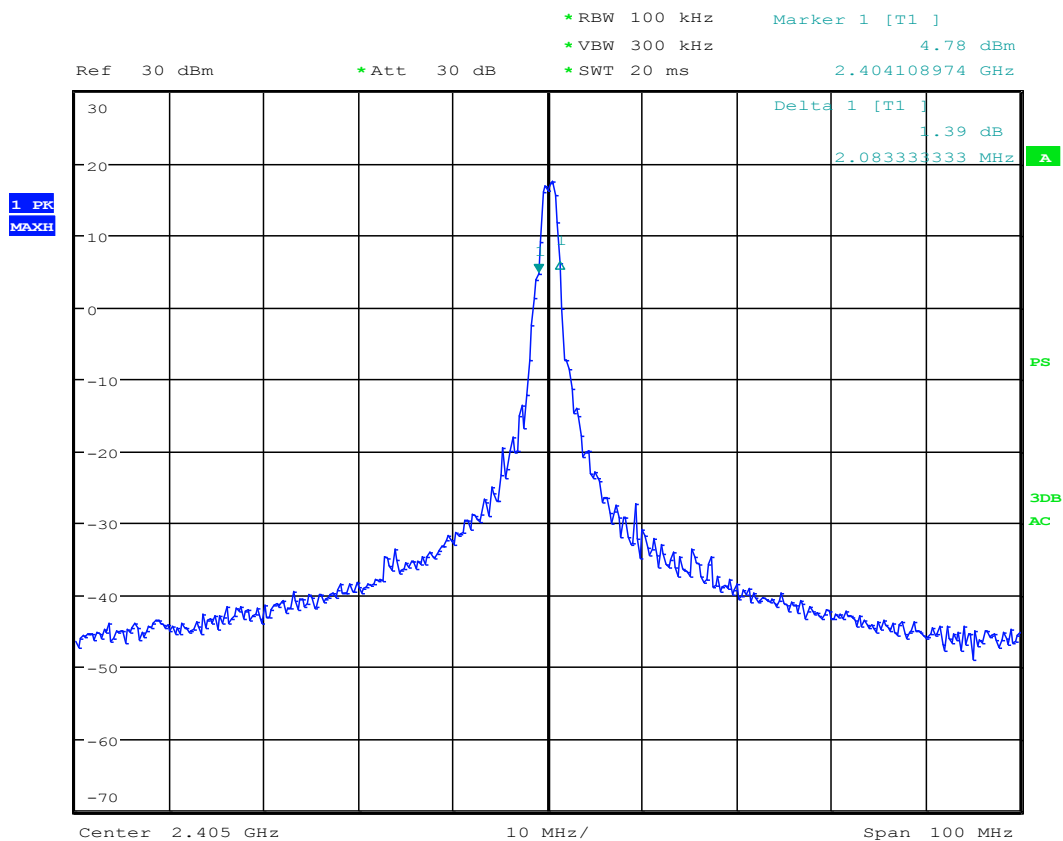


Date: 14.SEP.2013 17:17:46



Order Number: F2LQ5479A

Client: Cervis Inc.

Model: HH-2H06

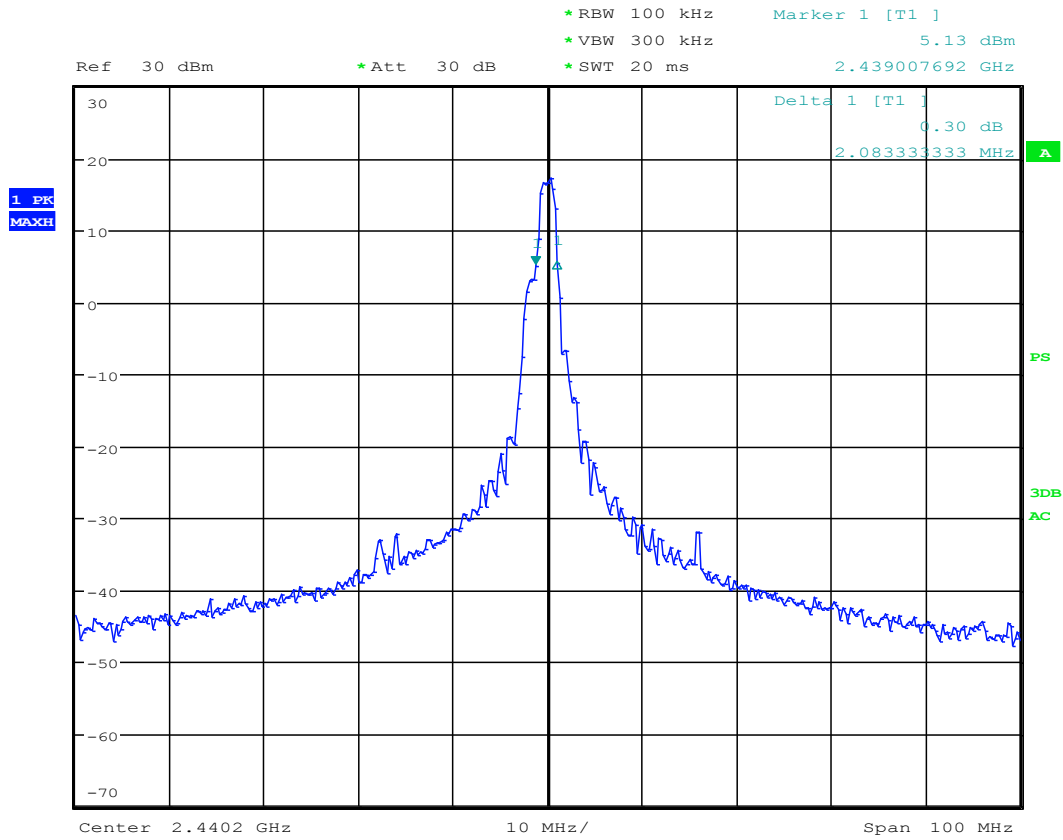

Date: 14.SEP.2013 17:23:34

**7 FCC PART 15.247(b)(3) – CONDUCTED OUTPUT POWER**

The EUT antenna port was fitted with an SMA connector and directly connected to the input of the receiver. The peak power output was measured.

7.1 Requirements:

The peak power output shall be 1 watt (30 dBm) or less when using an antenna with a gain of less than 6dBi. For antennas having a gain of more than 6dBi, the limit is reduced by 1dB for every dB the antenna gain is over 6dBi.

7.2 Equipment Used:


Equipment Type	Asset Number	Manufacturer	Model	Serial Number	Calibration Due Date
Temp/Hum. Recorder	CL137	Extech	RH520	CH16992	Apr. 17, 2014
Receiver	CL151	Rohde & Schwarz	ESU40	100319	Oct. 31, 2014
Cable: 0.3m Low Loss	CL116	A.H. Systems, Inc.	SAC-26G-0.3	206	Mar. 1, 2014



7.3

Conducted Output Power Test Data

Test Date:	Sept. 28, 2013	Test Engineer:	K. Littell
Standards:	CFR 47 Part 15.247(b)(3); KDB558074	Air Temperature:	21.9°C
		Relative Humidity:	43%

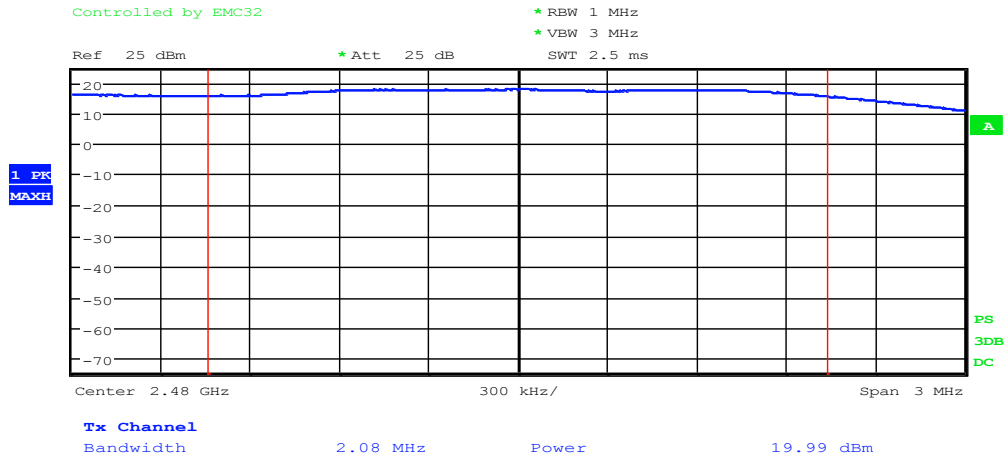


Date: 28.SEP.2013 14:40:51



Order Number: F2LQ5479A

Client: Cervis Inc.

Model: HH-2H06

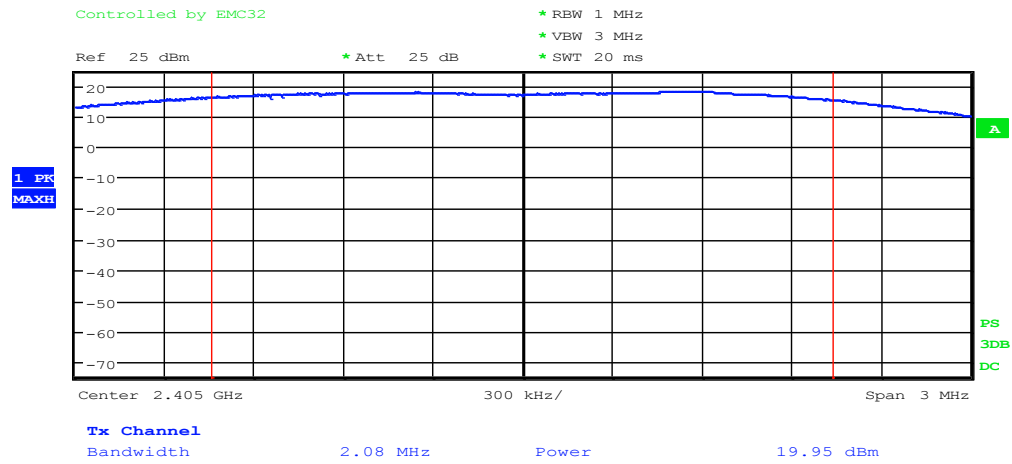


Date: 28.SEP.2013 15:27:00



Order Number: F2LQ5479A

Client: Cervis Inc.

Model: HH-2H06

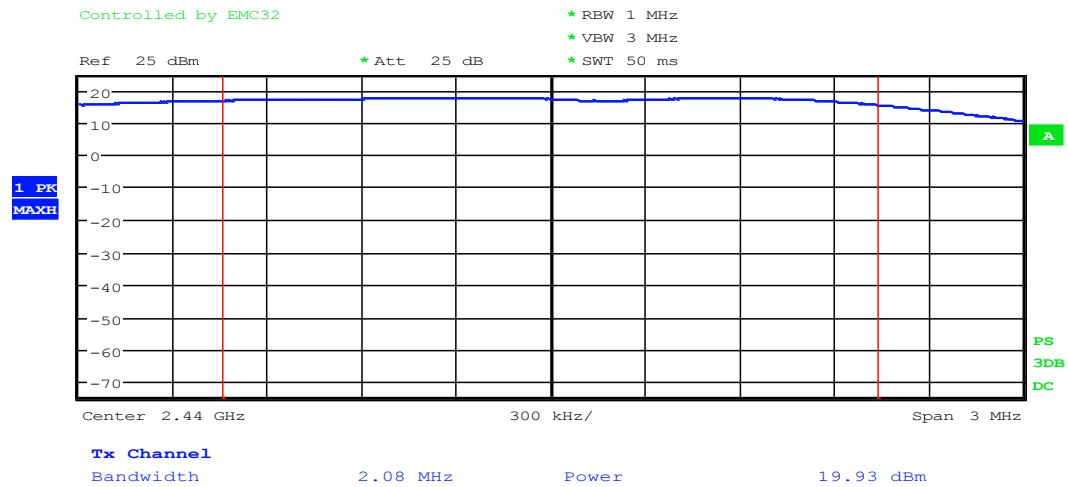

Date: 28.SEP.2013 15:05:56



8 FCC Part 15.247(c) – CONDUCTED SPURIOUS EMISSIONS

The following tests were performed to demonstrate compliance.

RF Antenna Conducted Test

The EUT antenna port was fitted with an SMA connector and directly connected to the input of the spectrum analyzer.

8.1 Requirements:

All Spurious Emissions must be at least 20dB down from the highest emission level measured within the authorized band up through the tenth harmonic.

Spurious emissions measurements were made at the low, mid, and upper channels with the appropriate spectrum analyzer impulse bandwidth. Additionally, 20dB down points were measured for the low and high channels to verify band edge compliance.

8.2 Equipment Used:



Equipment Type	Asset Number	Manufacturer	Model	Serial Number	Calibration Due Date
Temp/Hum. Recorder	CL137	Extech	RH520	CH16992	Apr. 17, 2014
Spectrum Analyzer	CL138	Agilent Technologies	E4407B	US41192779	Oct. 31, 2013
Cable: 0.3m Low Loss	CL116	A.H. Systems, Inc.	SAC-26G-0.3	206	Mar. 1, 2014



8.3 Test Data – CONDUCTED SPURIOUS EMISSIONS



Test Date:	Aug. 21, 2013; Sept. 18, 2013	Test Engineer:	K. Littell
Standards:	CFR 47 Part 15.247(d) / Part 15.209; KDB558074	Air Temperature:	22.2°C
		Relative Humidity:	43%

Low Channel

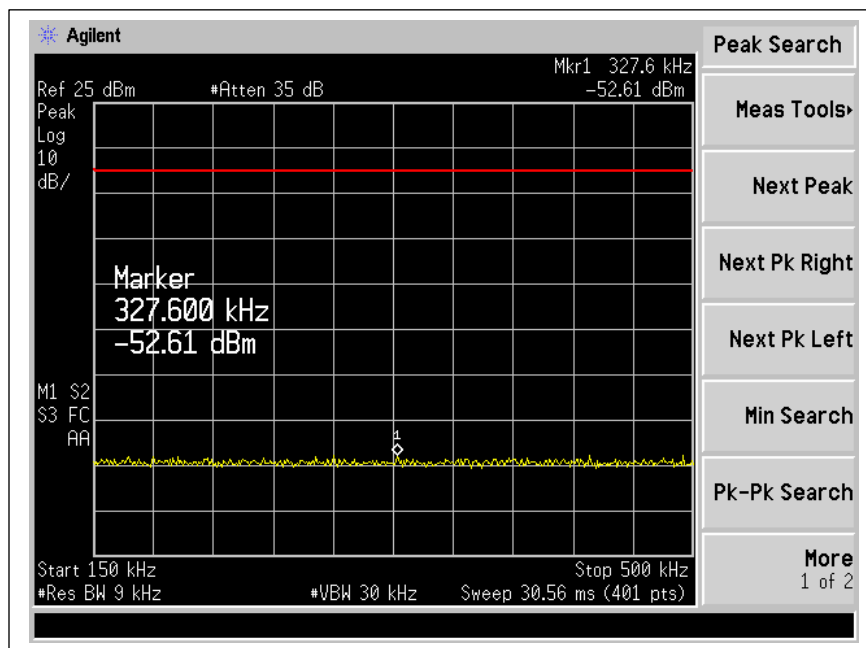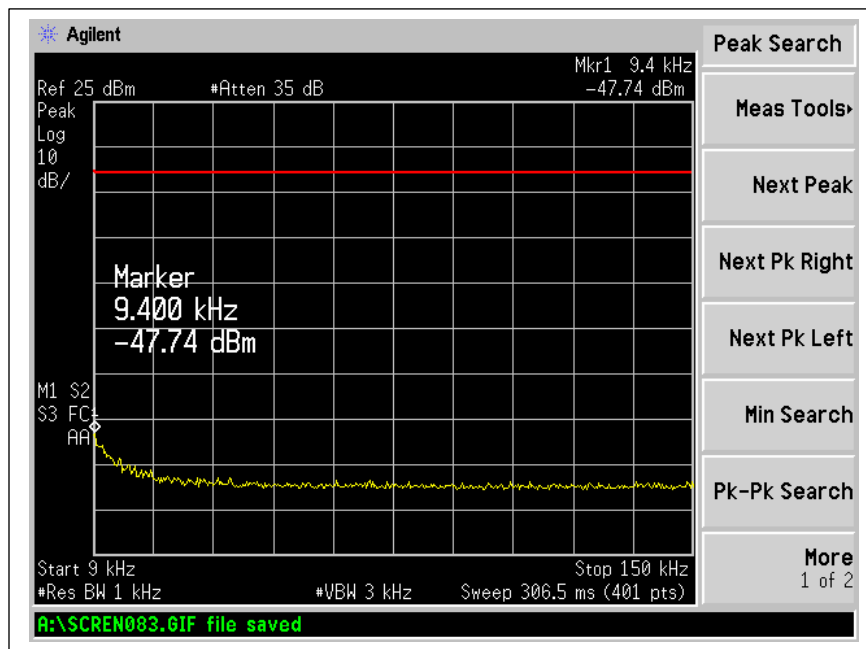





Low Channel, cont'd

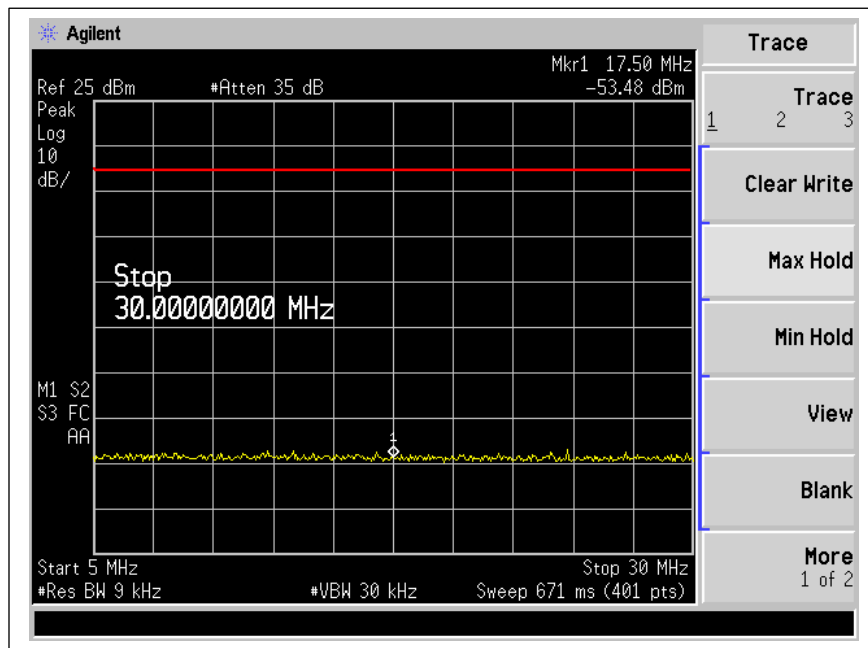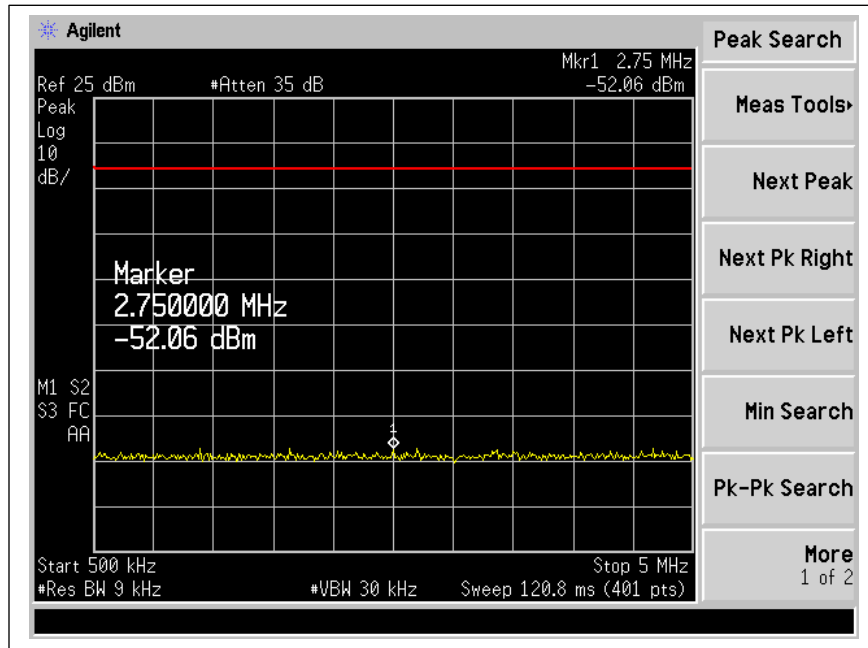





Low Channel, cont'd

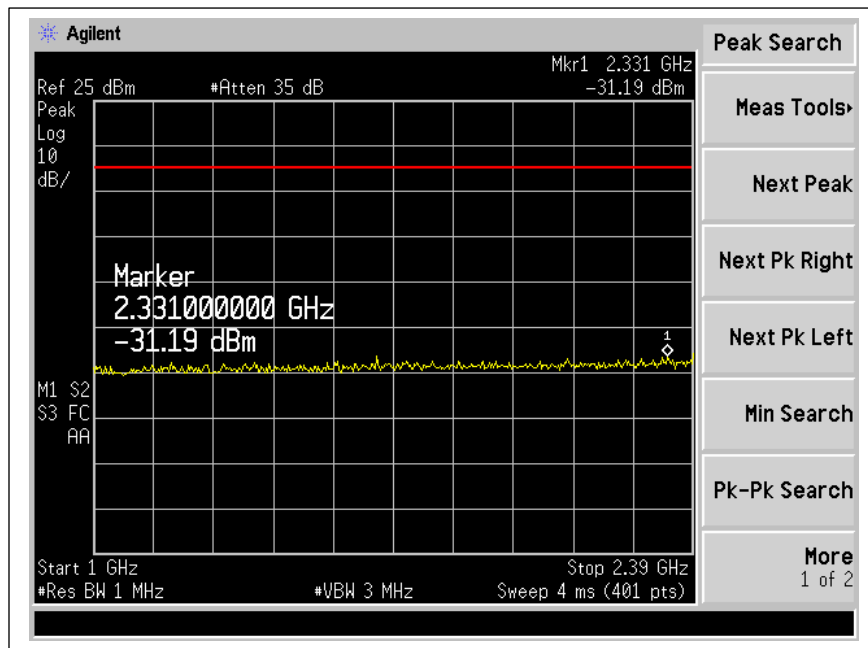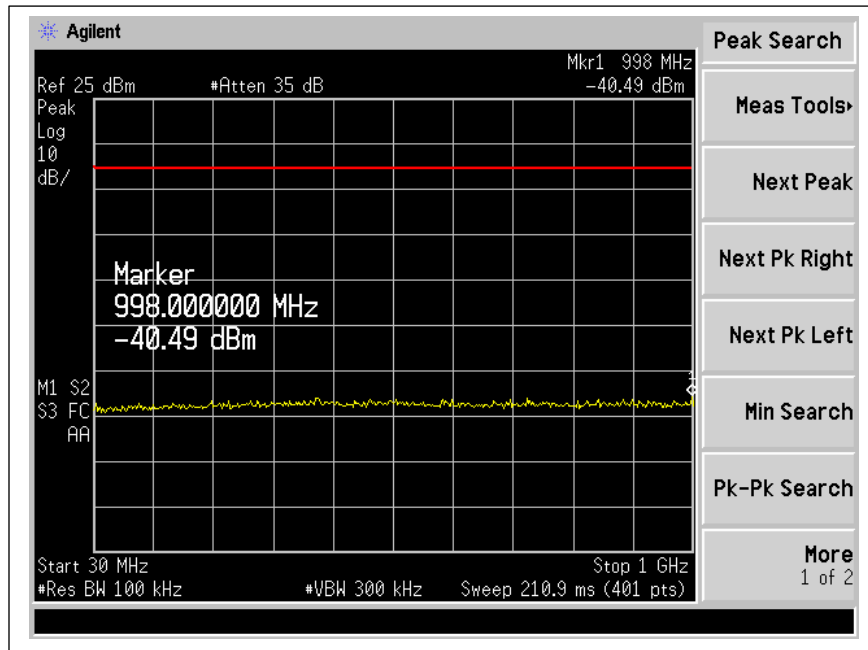





Low Channel, cont'd

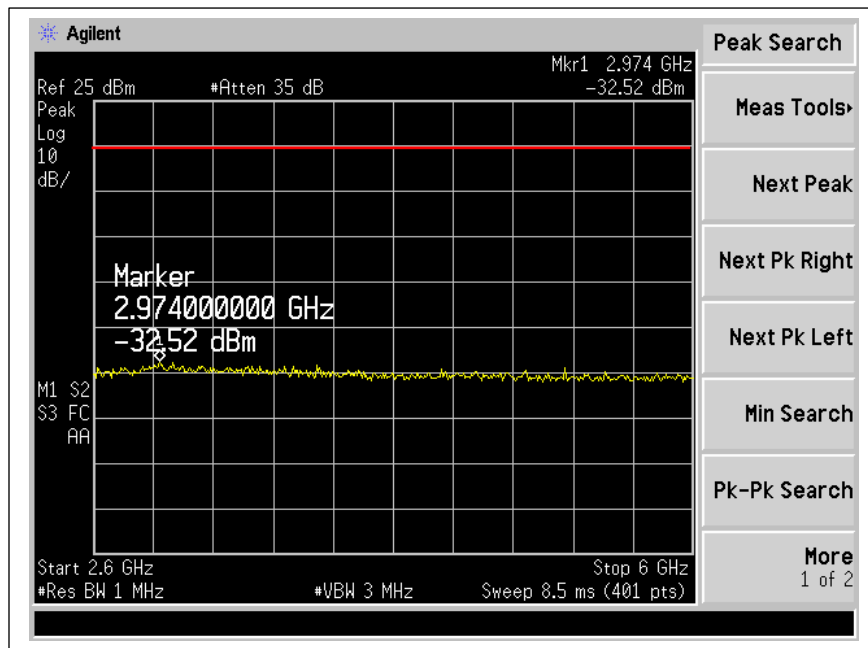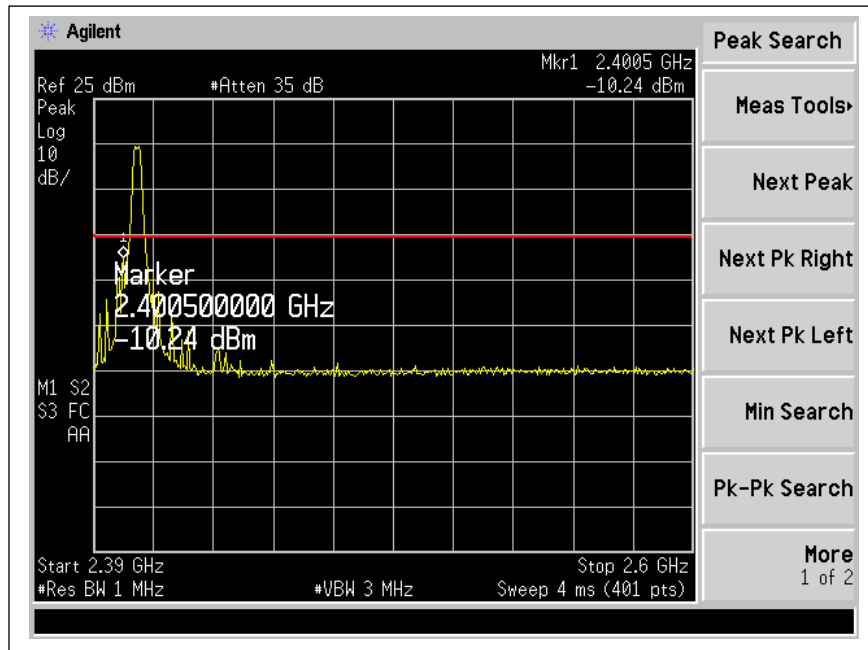





Low Channel, cont'd

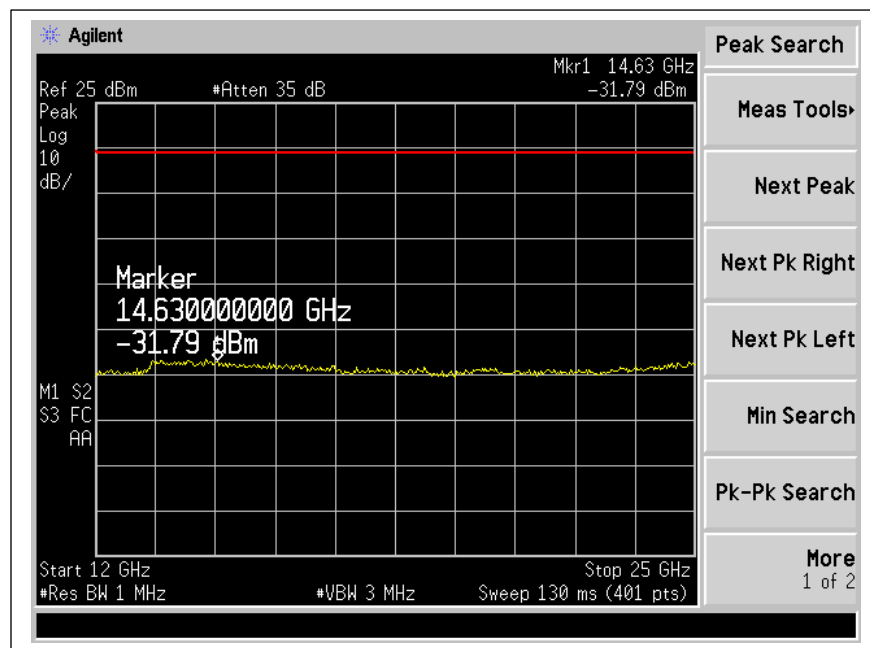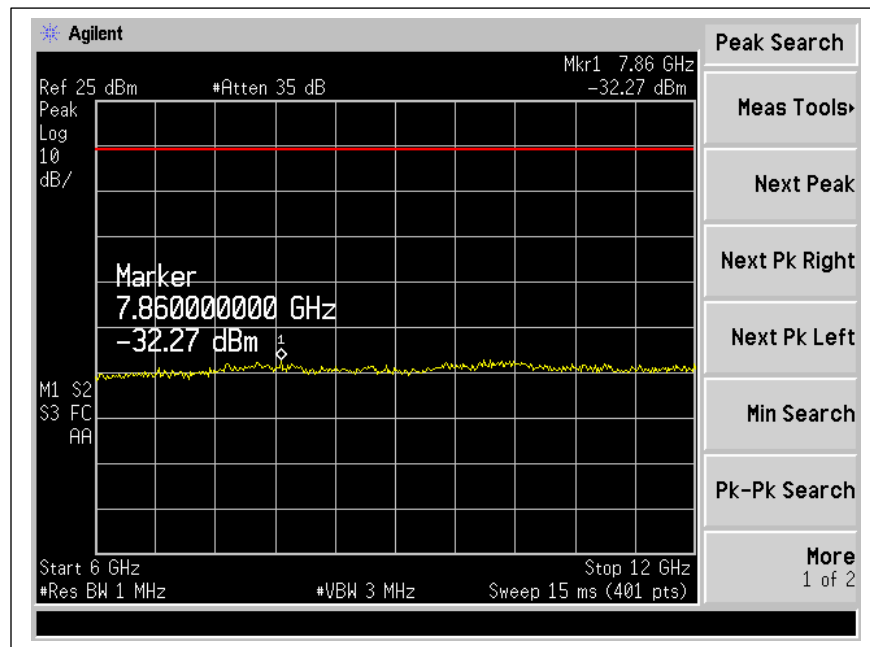





Mid-Channel

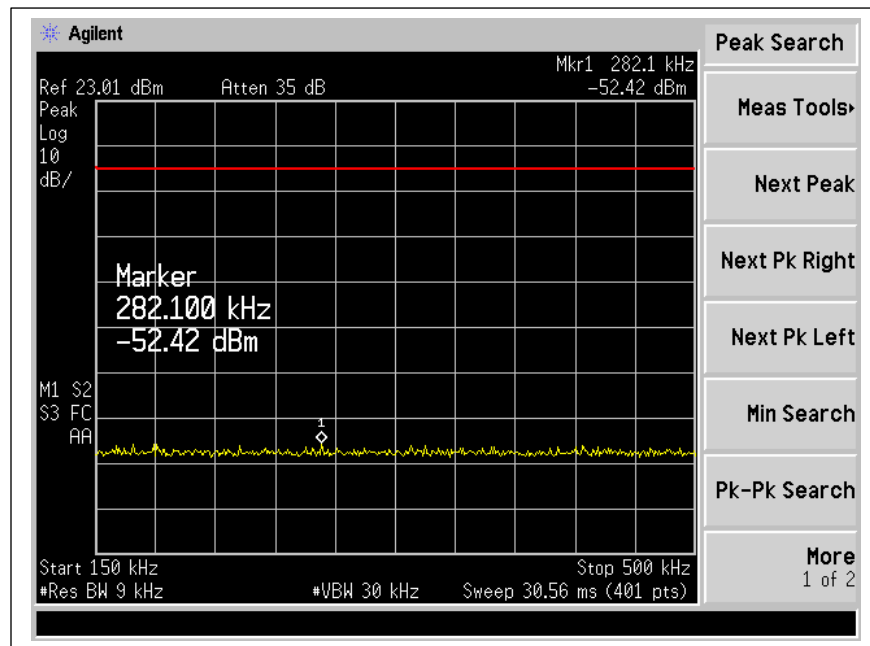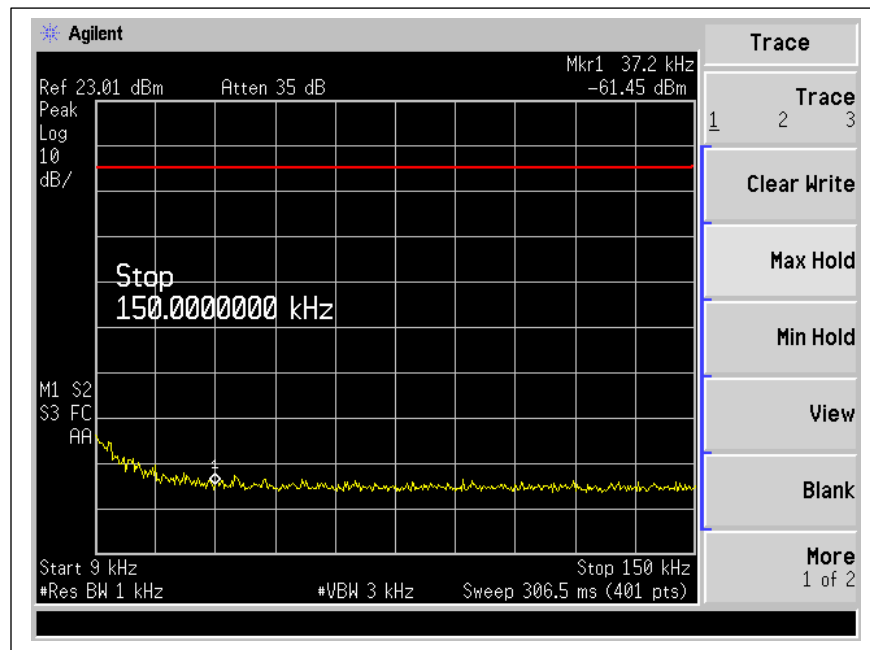





Mid-Channel, cont'd

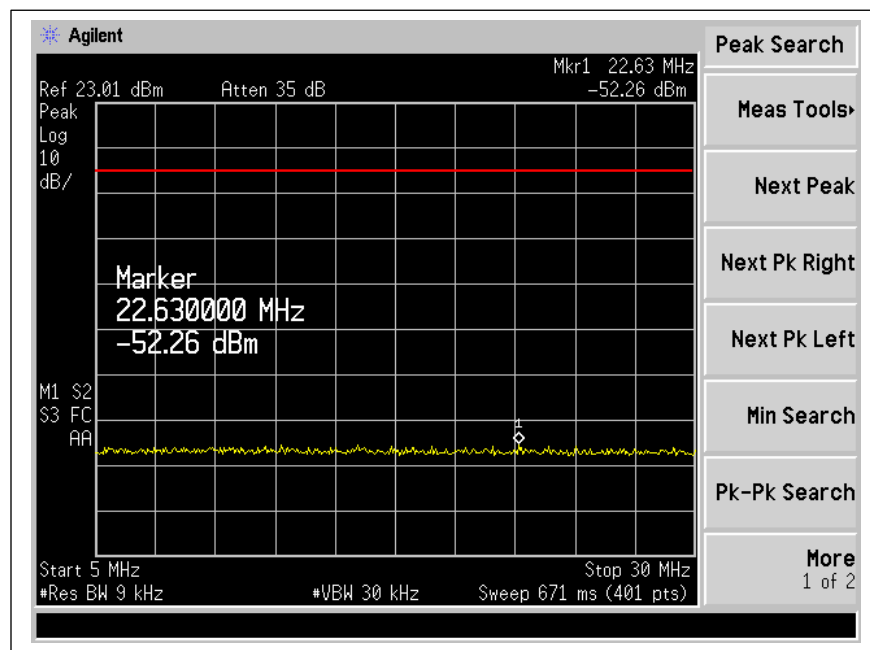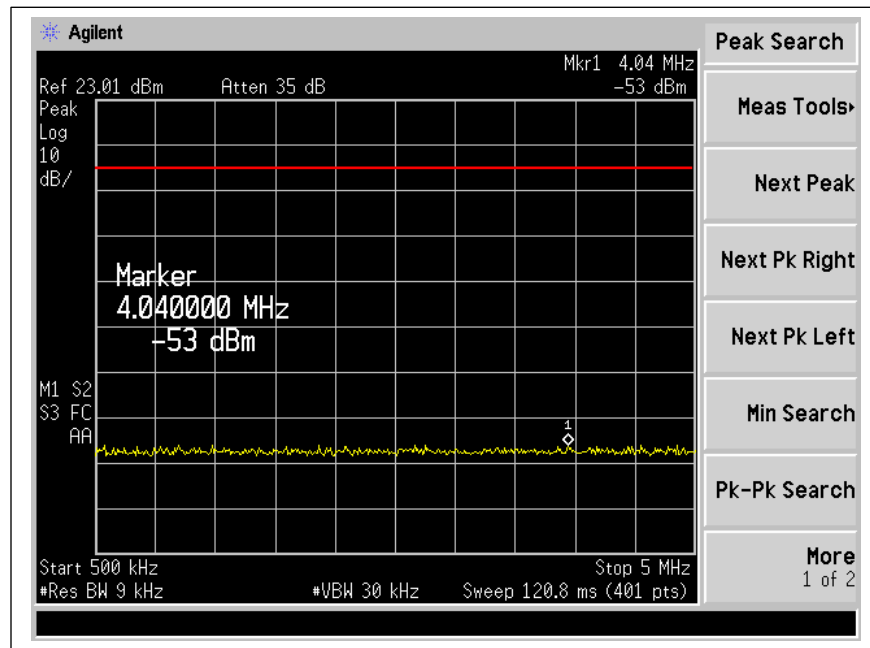





Mid-Channel, cont'd

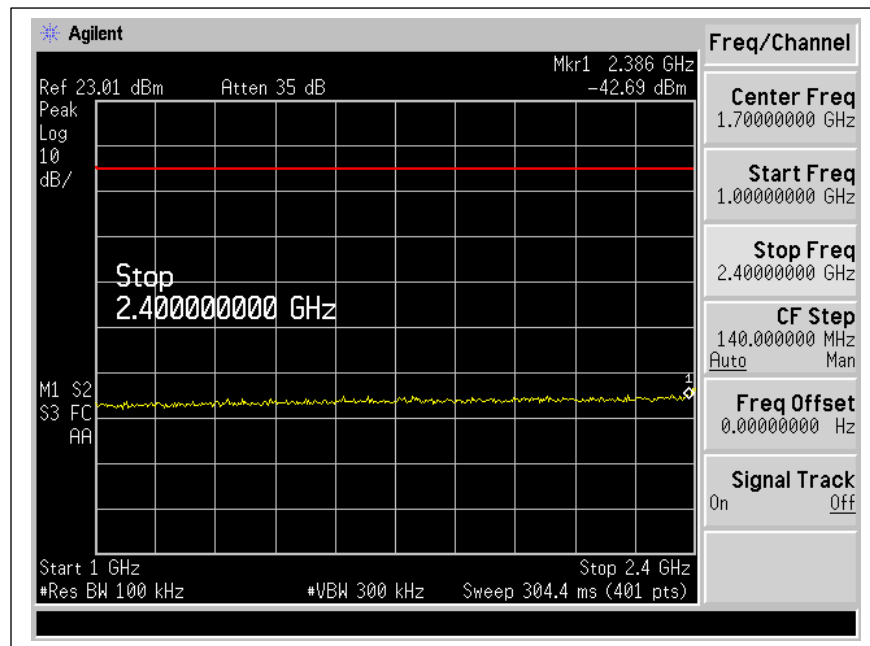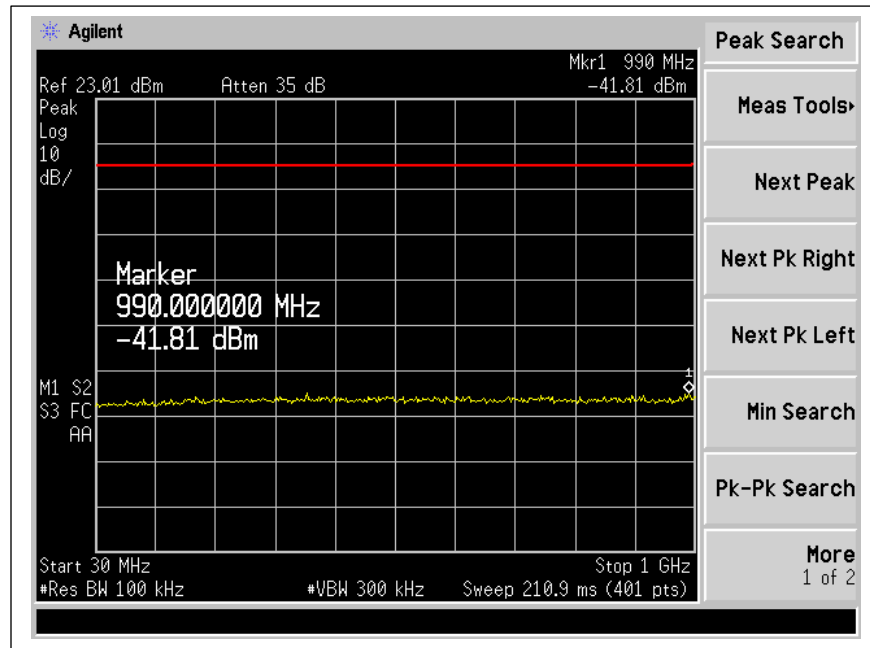





Mid-Channel, cont'd

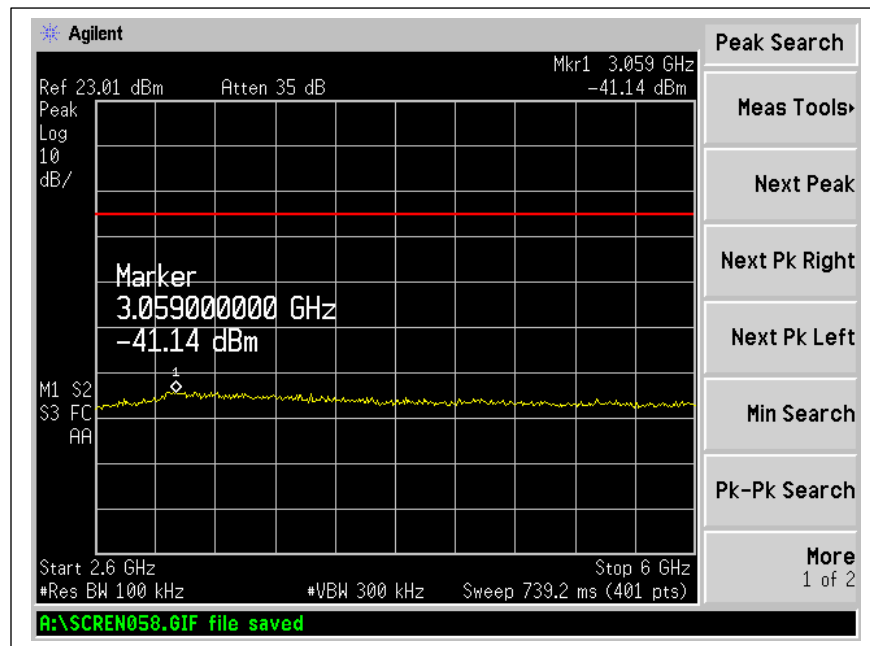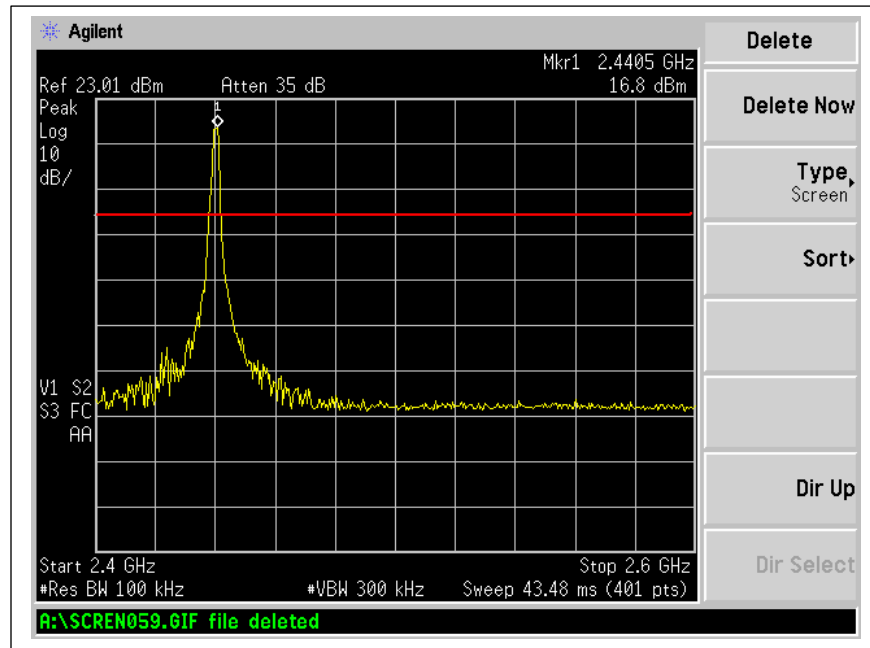





Mid-Channel, cont'd

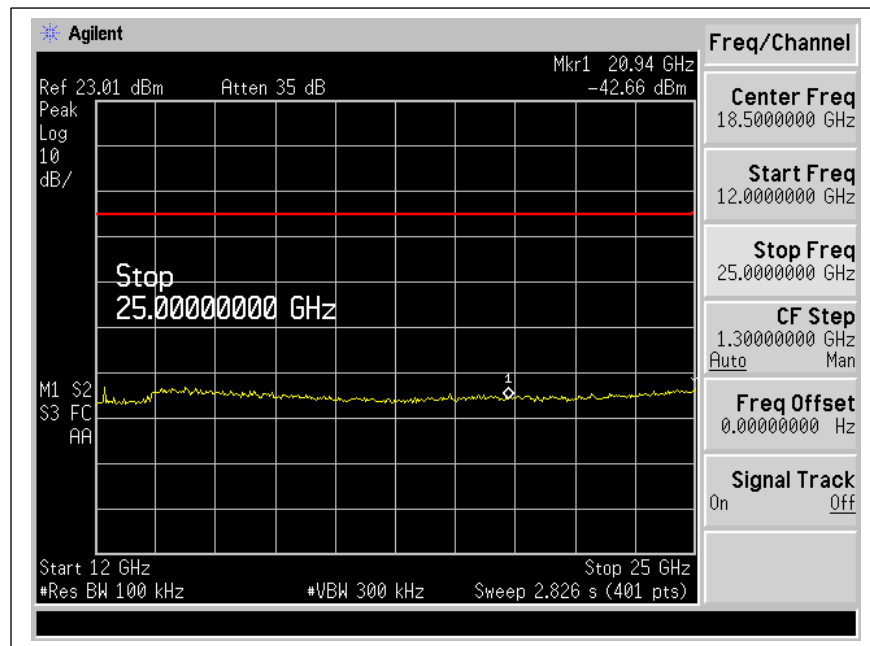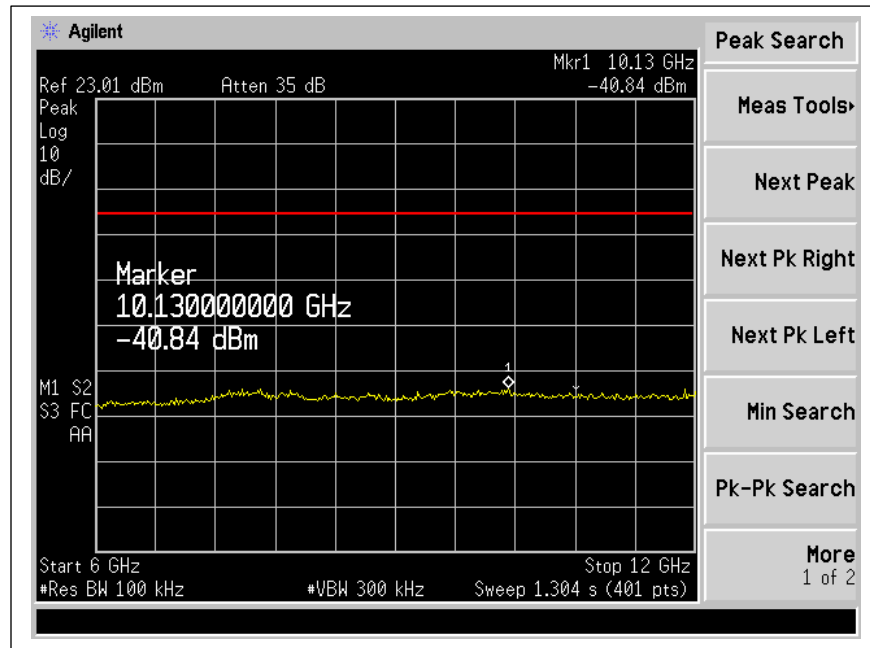





High Channel

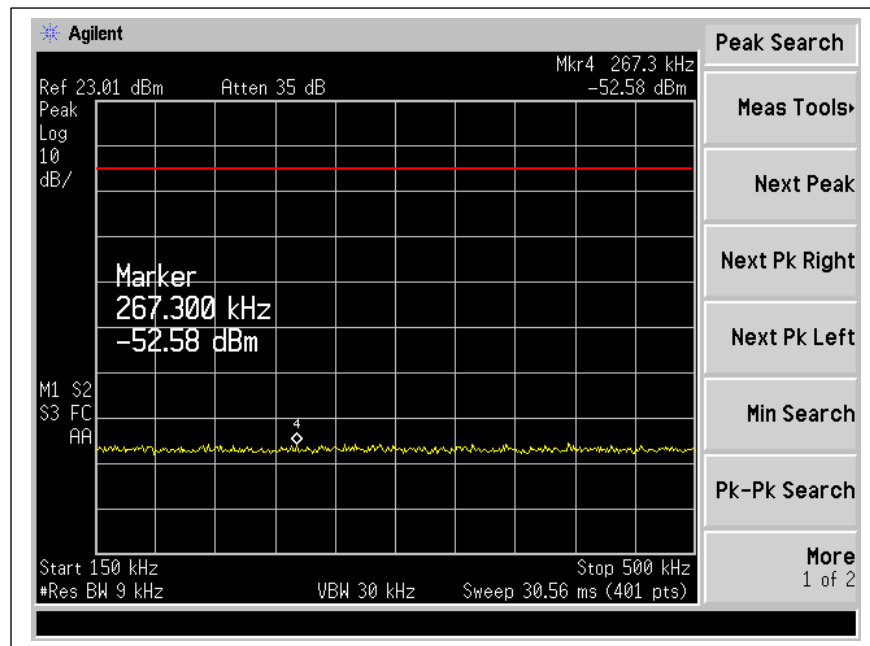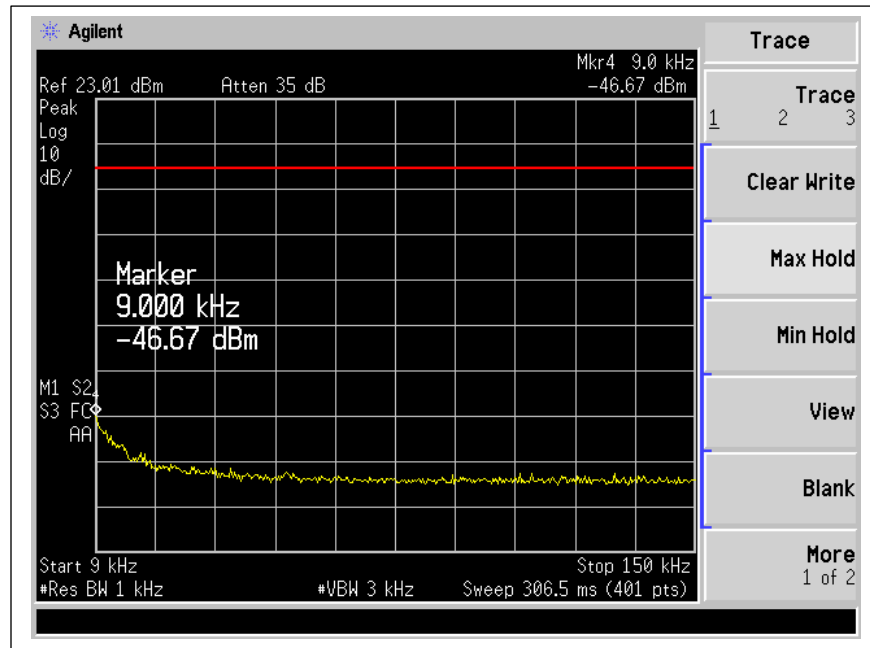





High Channel, cont'd

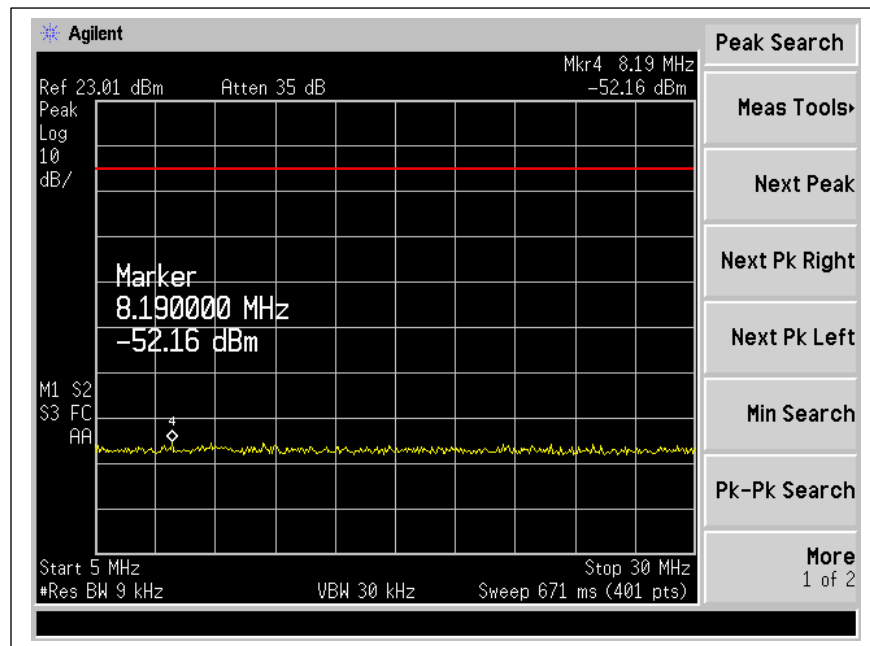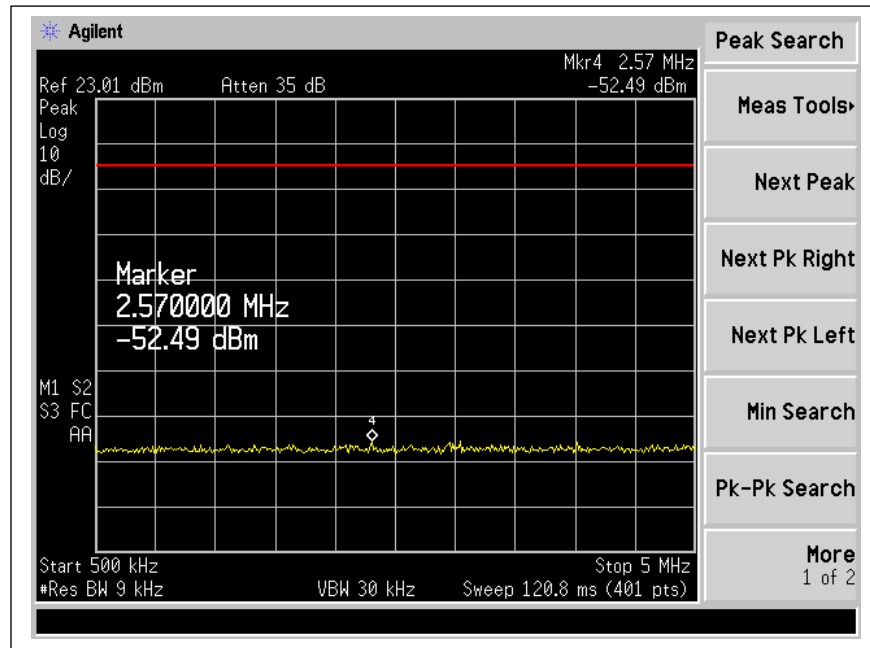





High Channel, cont'd

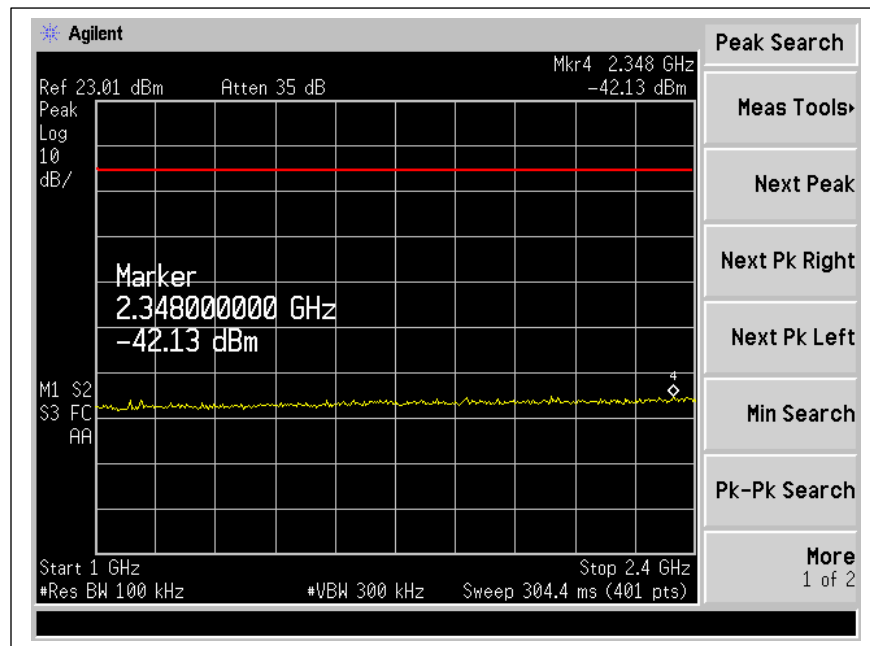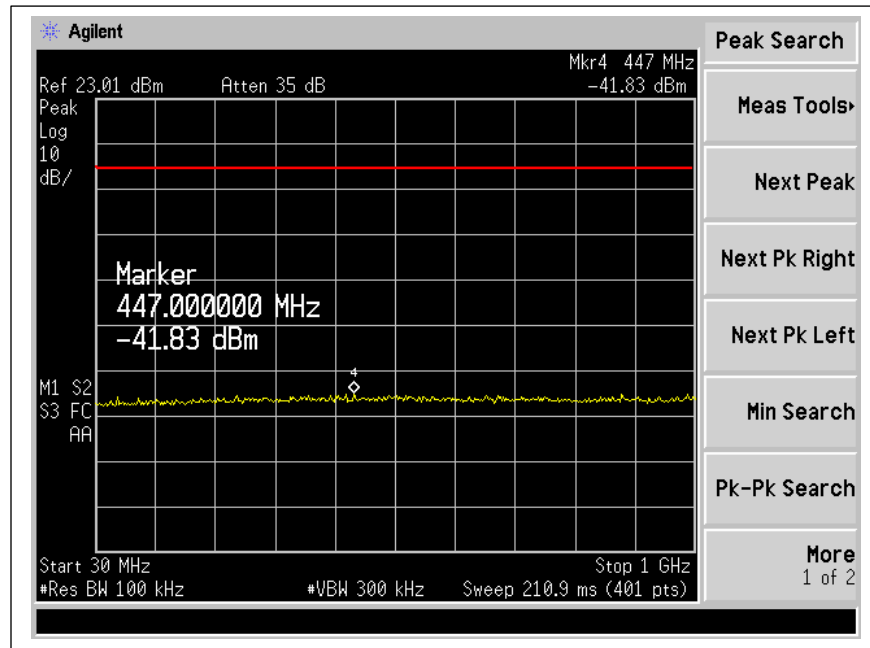





High Channel, cont'd

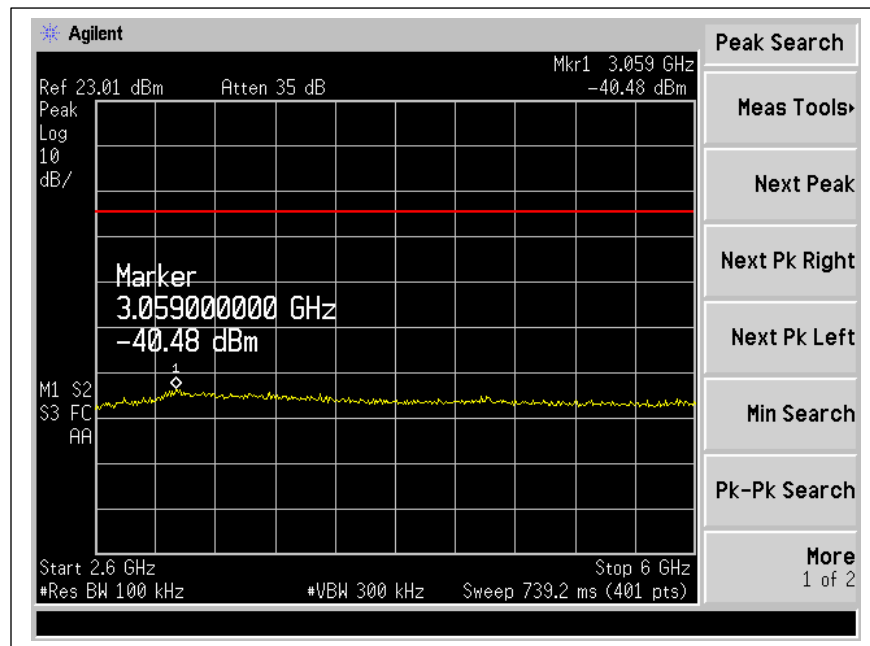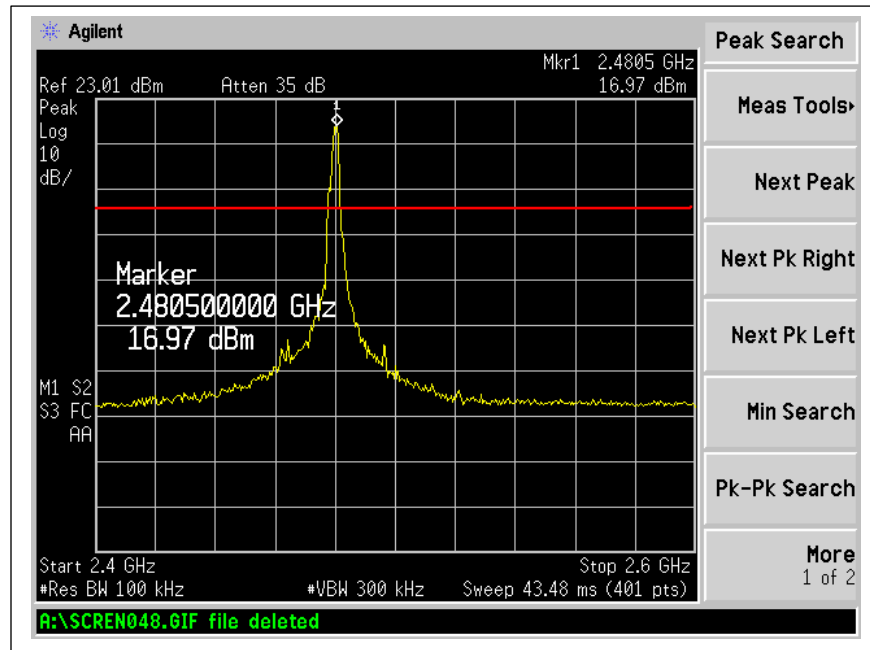



High Channel, cont'd

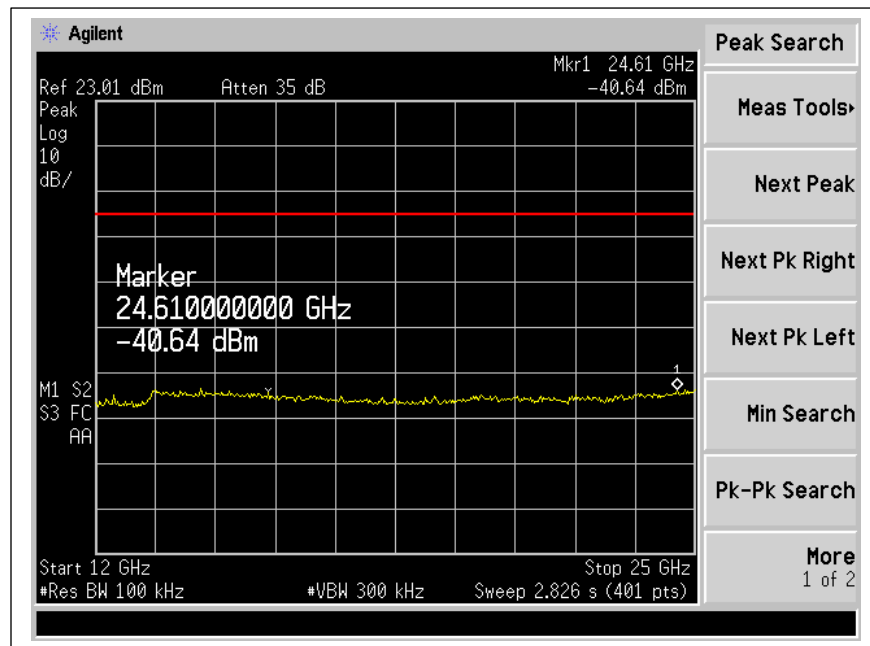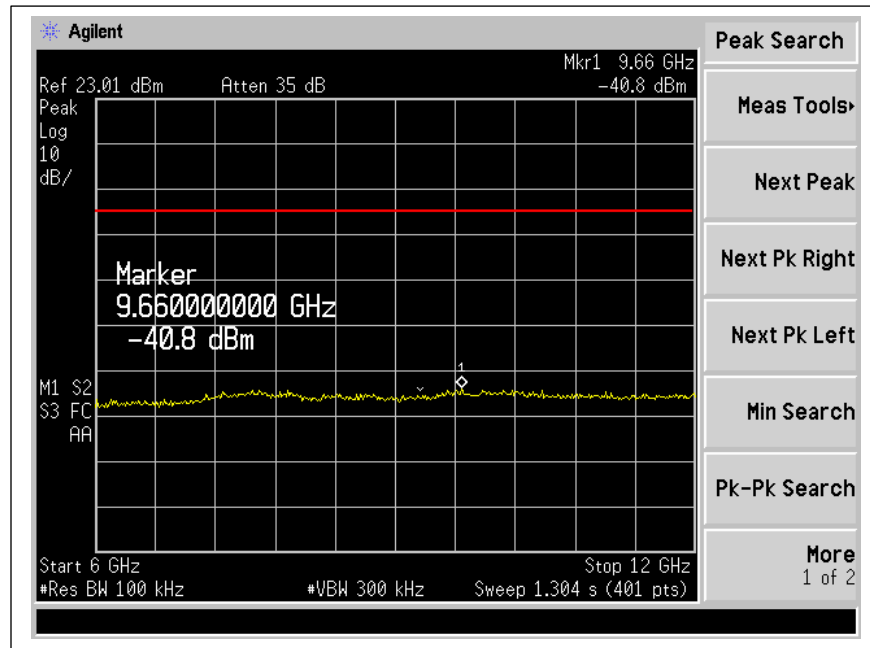



9 RADIATED SPURIOUS EMISSION

The EUT antenna port was fitted with its integral/internal chip antenna. Radiated emissions were measured on the Open Area Test Site (OATS). All emissions generated that fall in the restricted bands per FCC Part 15.205 were examined.

9.1 Requirements:

All emissions that fall in the restricted bands defined in FCC Part 15.205 shall not exceed the maximum field strength listed in FCC Part 15.209(a).

9.2 Equipment Used:

Equipment Type	Asset Number	Manufacturer	Model	Serial Number	Calibration Due Date
Shield Room	0175	Ray Proof	N/A	11645	Verified
Temp/Hum. Recorder	CL137	Extech	RH520	CH16992	Apr. 17, 2014
OATS-3m	CL017	Compliance Labs	N/A	001	Dec. 17, 2013
Receiver	CL151	Rohde & Schwarz	ESU40	100319	Oct. 31, 2014
Antenna 1-Chamber	0142	ETS/EMCO	3142B	9811-1330	Verified
Antenna 2-OATS	0105	Sunol Sciences	JB1	A101101	May 7, 2015
Pre-Amplifier	0139	Hewlett Packard	83006A	3104A00500	Feb. 20, 2014
Active 18" Loop Antenna	CL082	A.H. Systems, Inc.	SAS-562B	241	Sept. 6, 2014
Antenna, Horn	CL098	Emco	3115	9809-5580	Dec. 17, 2013
Cable: 0.3m Low Loss	CL117	A.H. Systems, Inc.	SAC-26G-3	207	Dec. 17, 2013
Coaxial Cable	CL139	Thermax	M17/128-RG400	JB (Brown)	Feb., 21, 2014
Coaxial Cable	CL140	Thermax	M17/128-RG400	JC (Brown)	Feb. 21, 2014





9.3 Radiated Spurious Emission Test Data

Test Dates:	Aug. 29-30, 2013; Dec. 4, 2013	Test Engineer:	K. Littell
Standards:	CFR 47 Part 15.247(d); Part 15.209 / KDB558074	Air Temperature:	20.9-21.4°C
		Relative Humidity:	40-42%



Notes: Plots are peak, max hold prescan data included only to determine what frequencies to investigate and measure. No emissions from the EUT were measurable over the ambient noise floor. The readings did not change with EUT on and EUT off. At least 6 of the highest frequencies were measured per ANSI 63.4 but these were ambient frequencies which did not change with the EUT on. The test distance was shortened to 1 meter and still no emissions from the EUT were visible.

Radiated Spurious Emission with 3.8dBi Integral Antenna: Low Channel

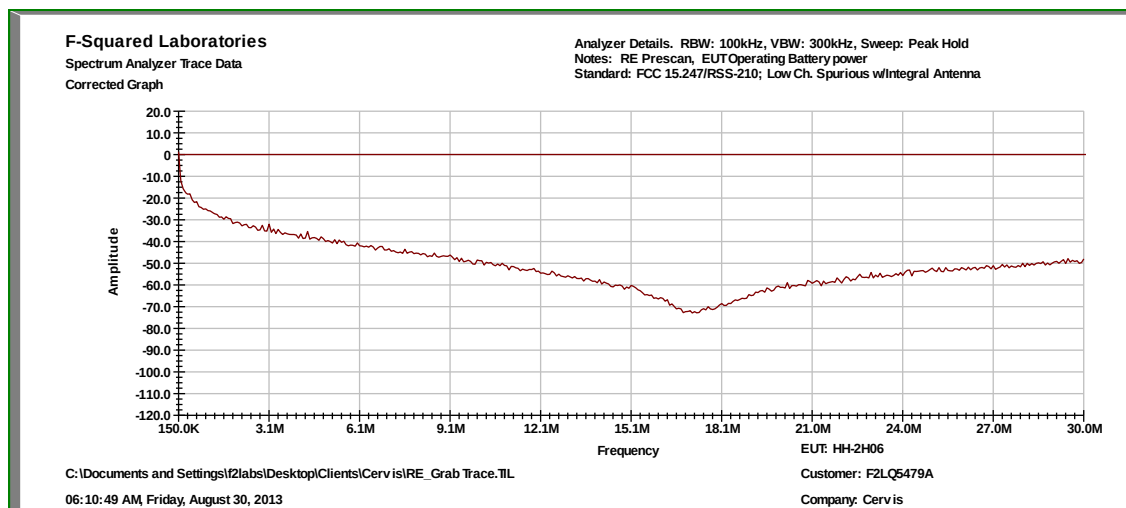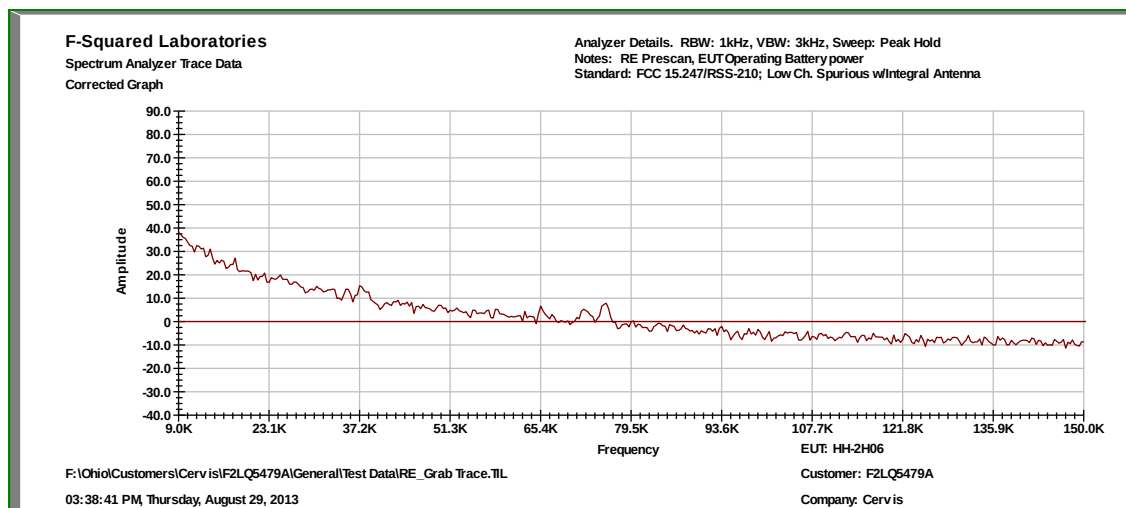





Radiated Spurious Emission with 3.8dBi Integral Antenna: Low Channel, cont'd

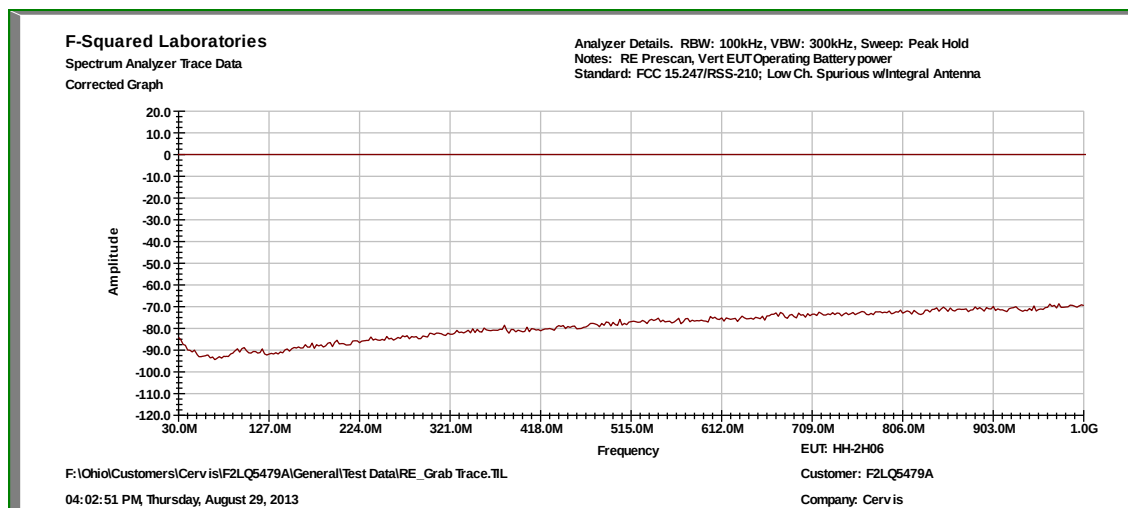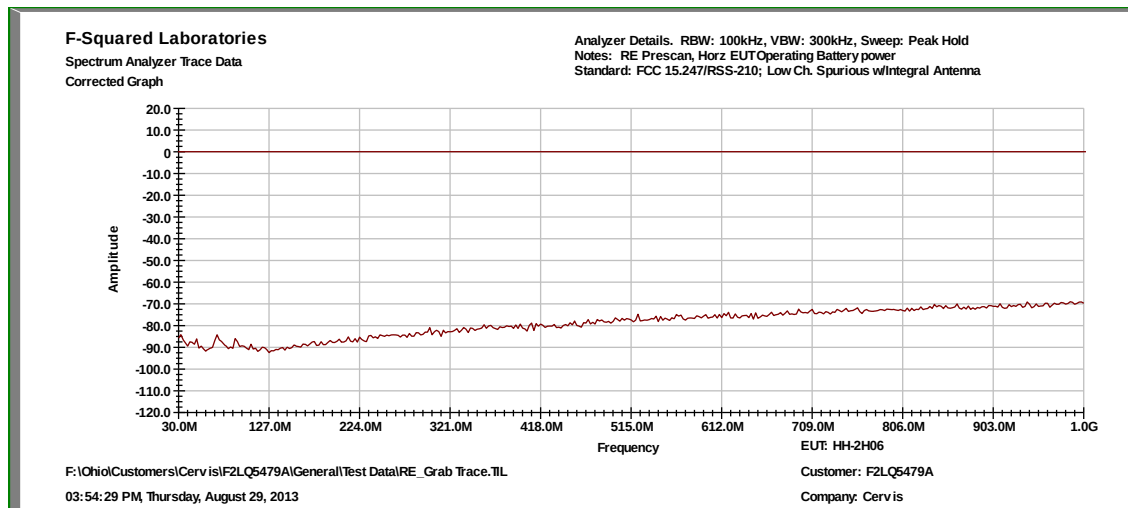





Radiated Spurious Emission with 3.8dBi Integral Antenna: Low Channel, cont'd

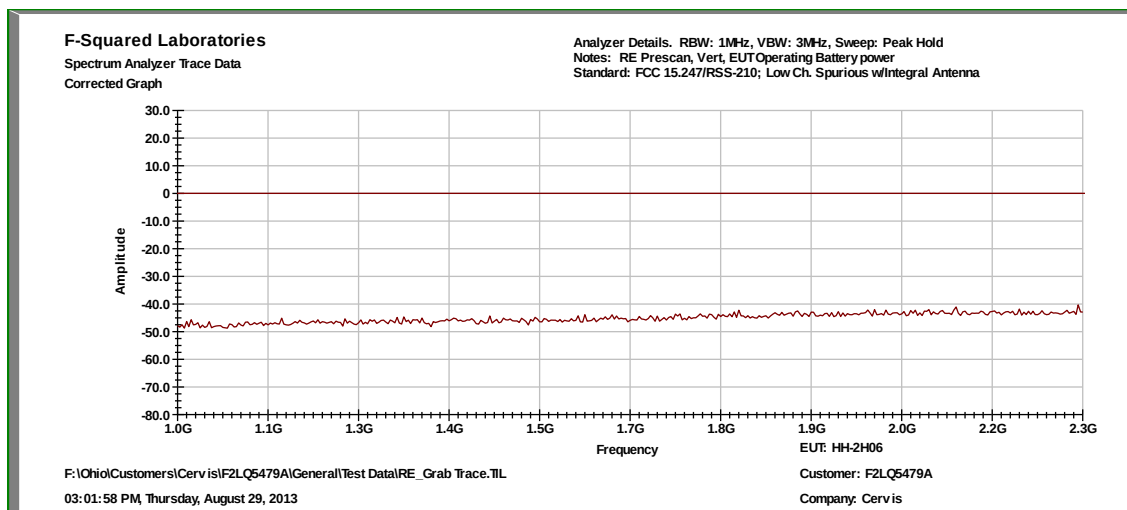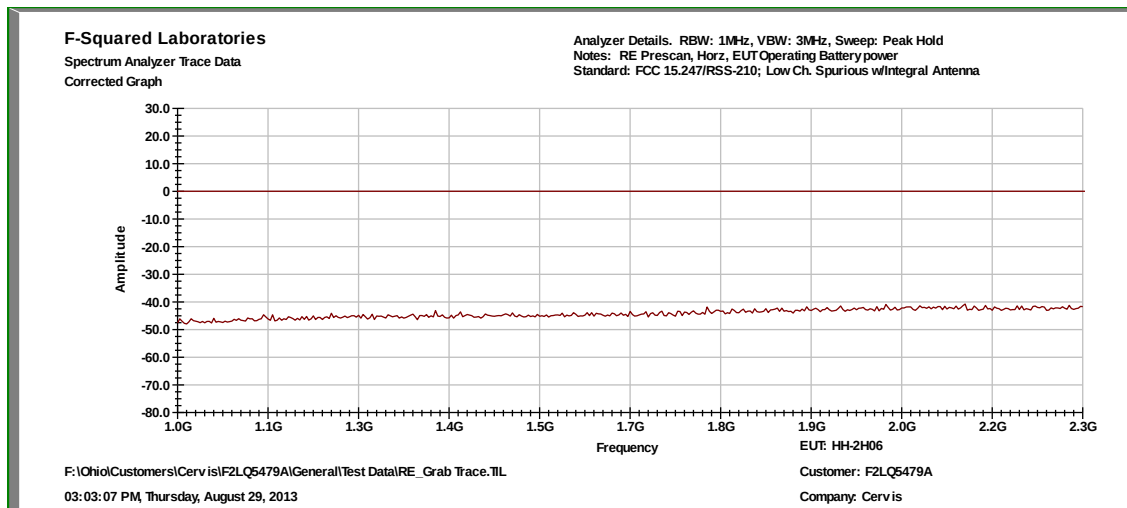





Radiated Spurious Emission with 3.8dBi Integral Antenna: Low Channel, cont'd

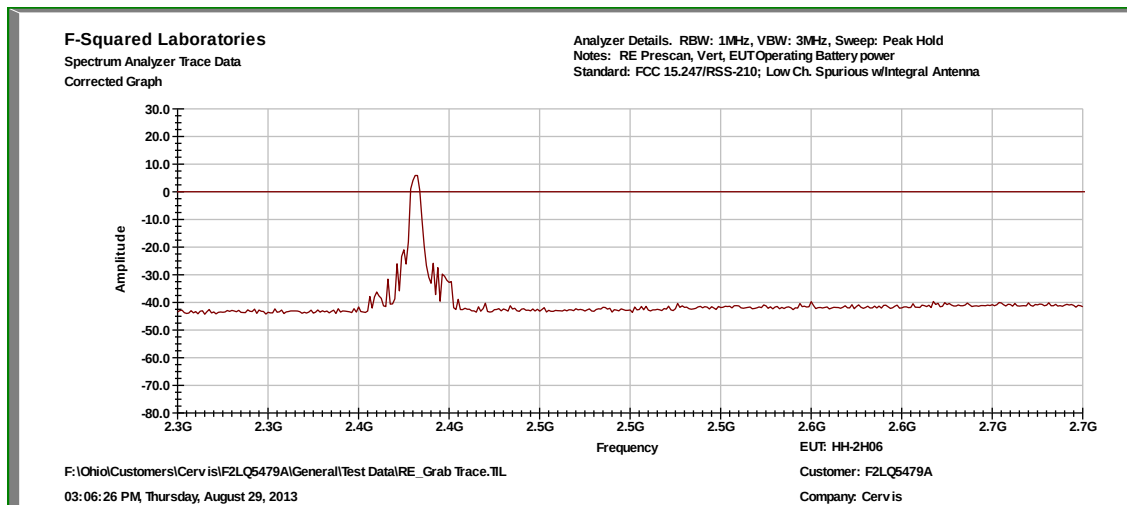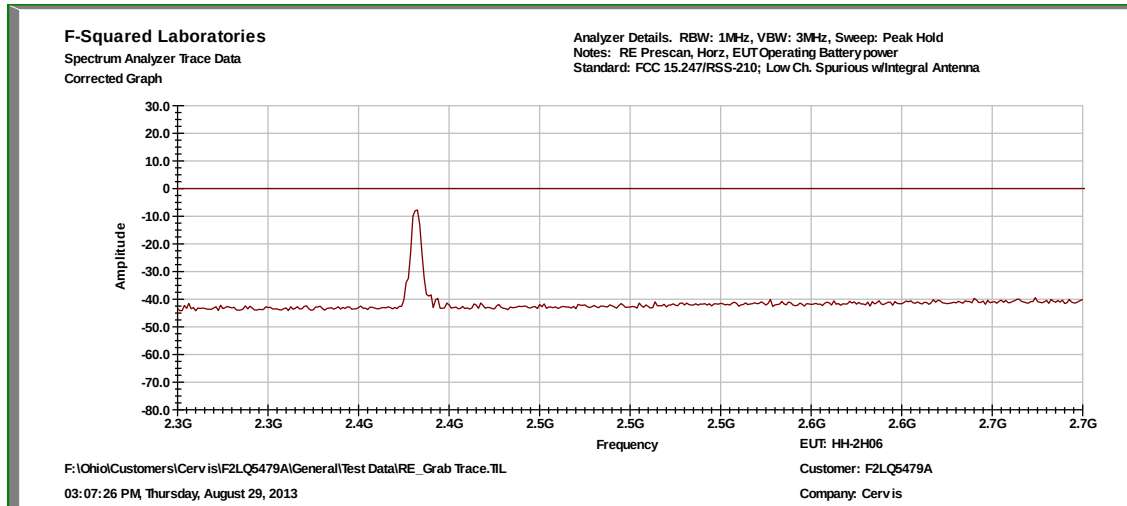





Radiated Spurious Emission with 3.8dBi Integral Antenna: Low Channel, cont'd

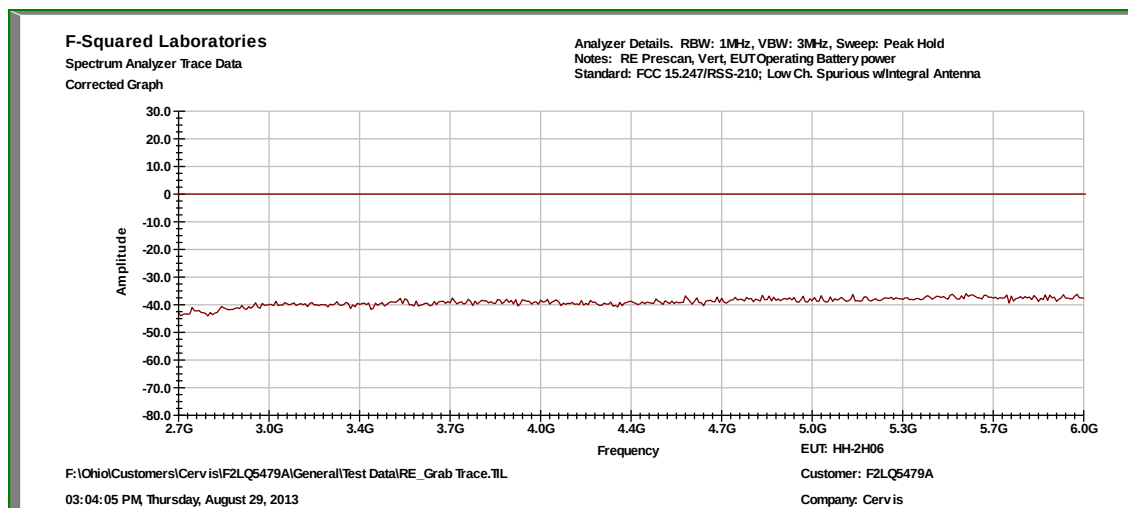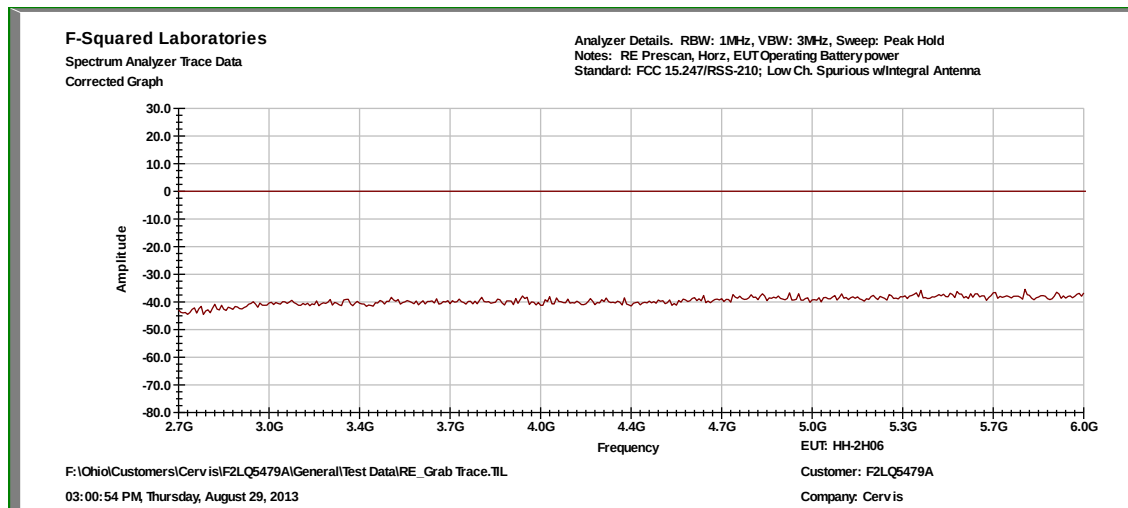





Radiated Spurious Emission with 3.8dBi Integral Antenna: Low Channel, cont'd

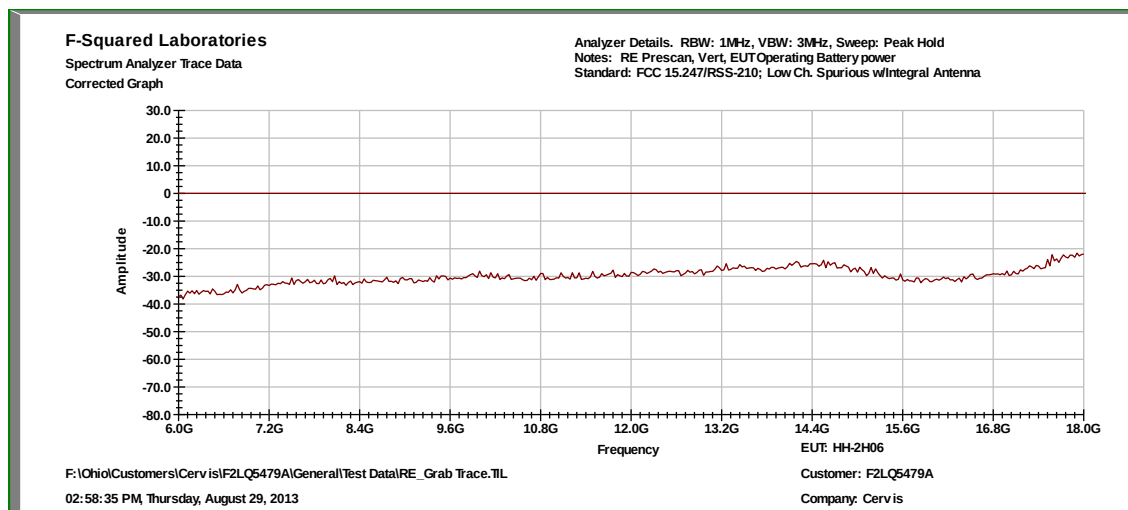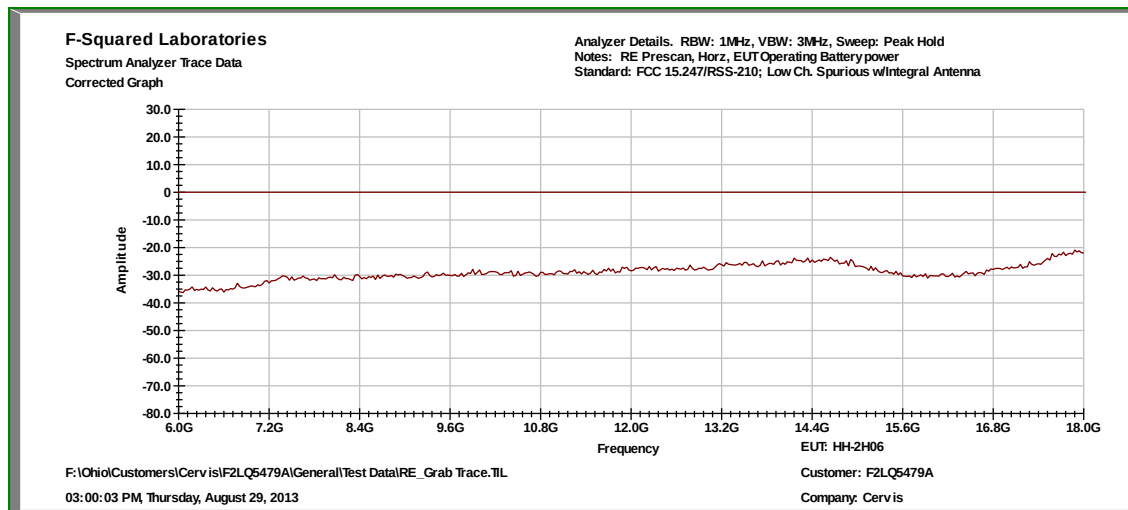





Radiated Spurious Emission with 3.8dBi Integral Antenna: Low Channel, cont'd

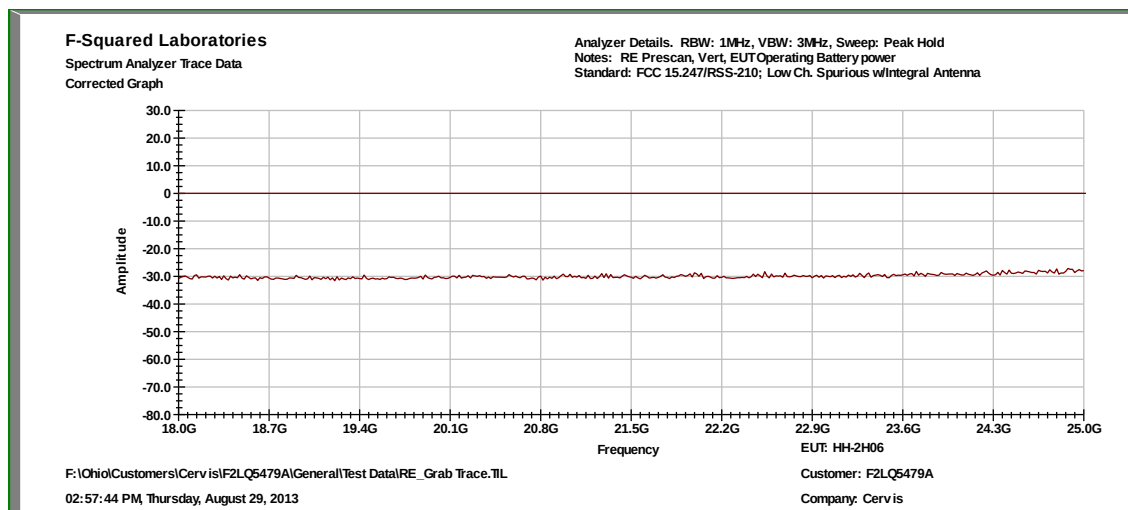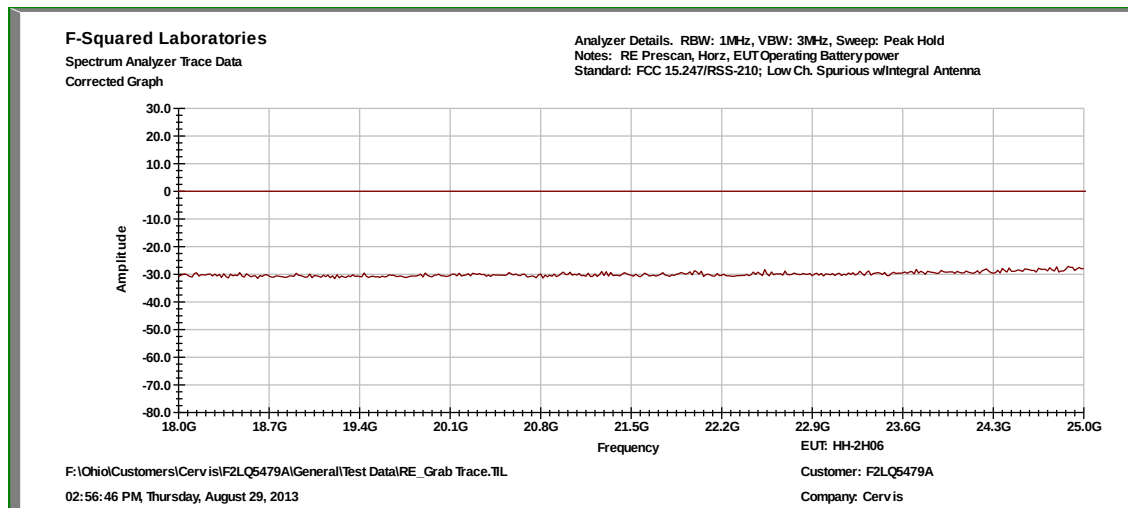





Radiated Spurious Emission with 3.8dBi Integral Antenna: Mid Channel

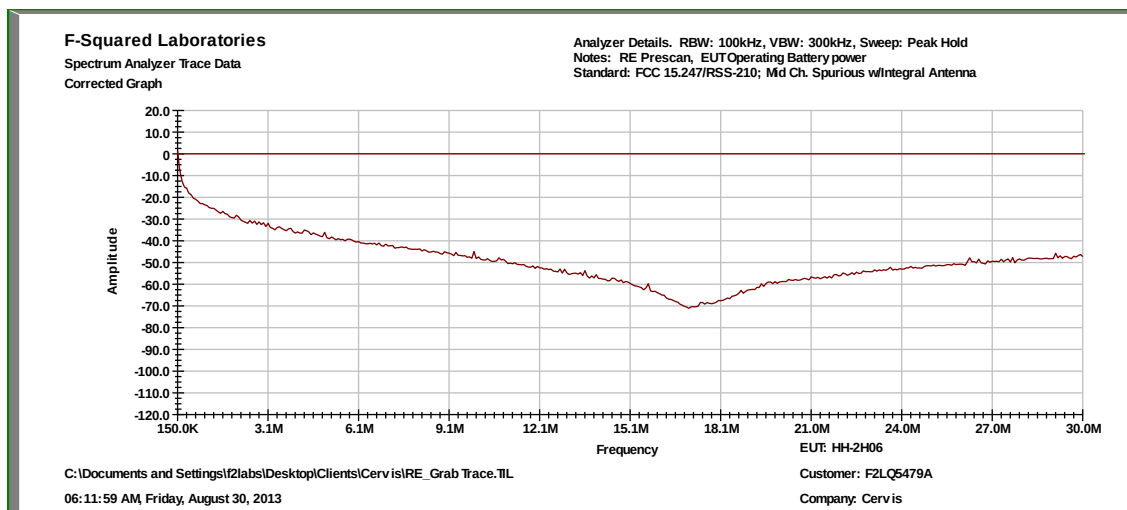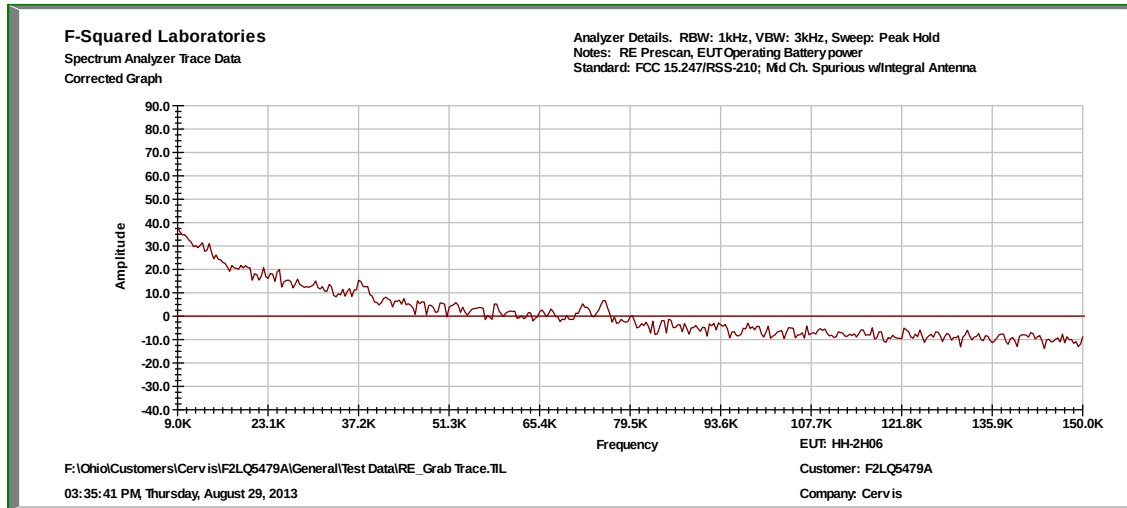





Radiated Spurious Emission with 3.8dBi Integral Antenna: Mid Channel, cont'd

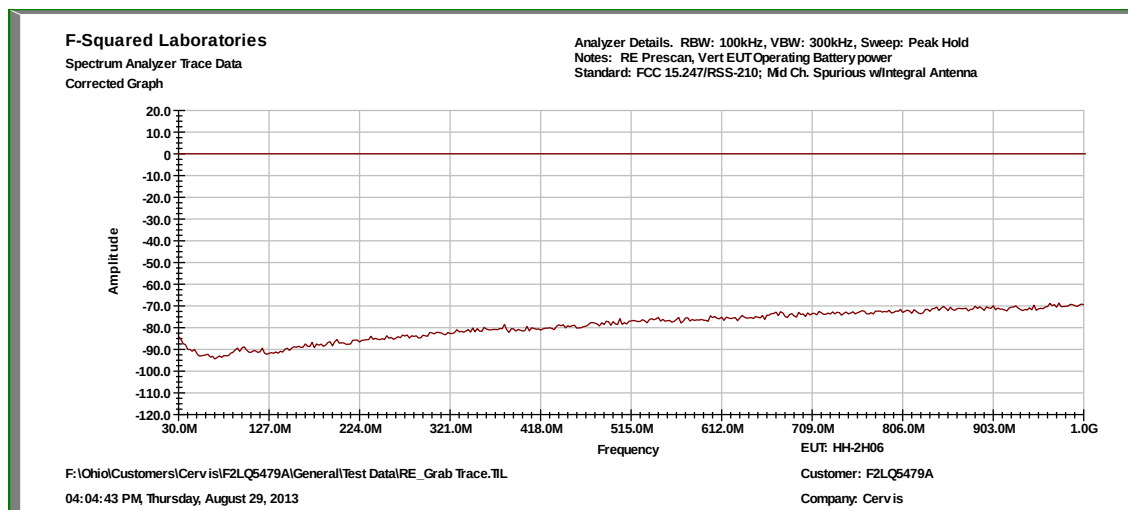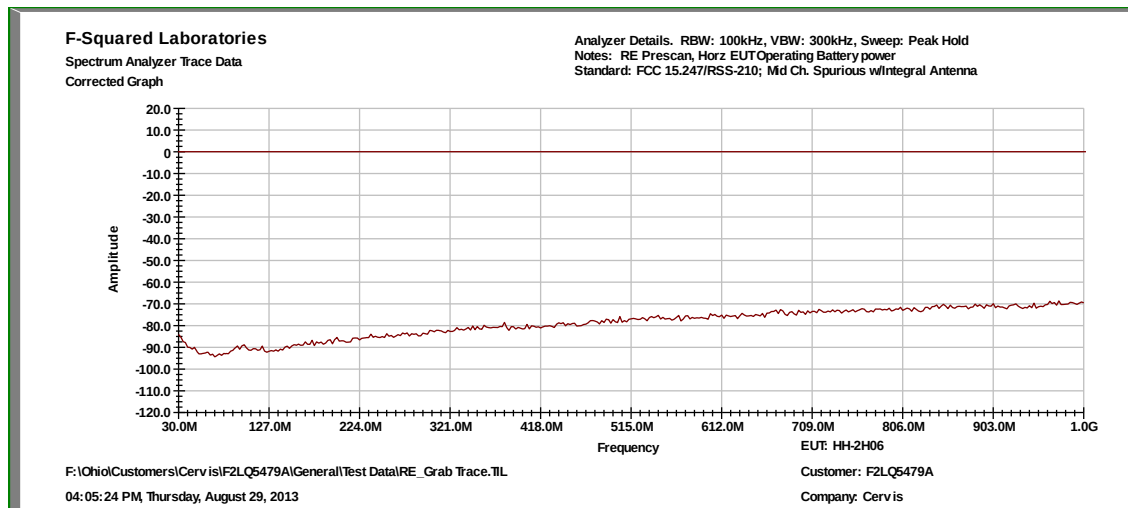





Radiated Spurious Emission with 3.8dBi Integral Antenna: Mid Channel, cont'd

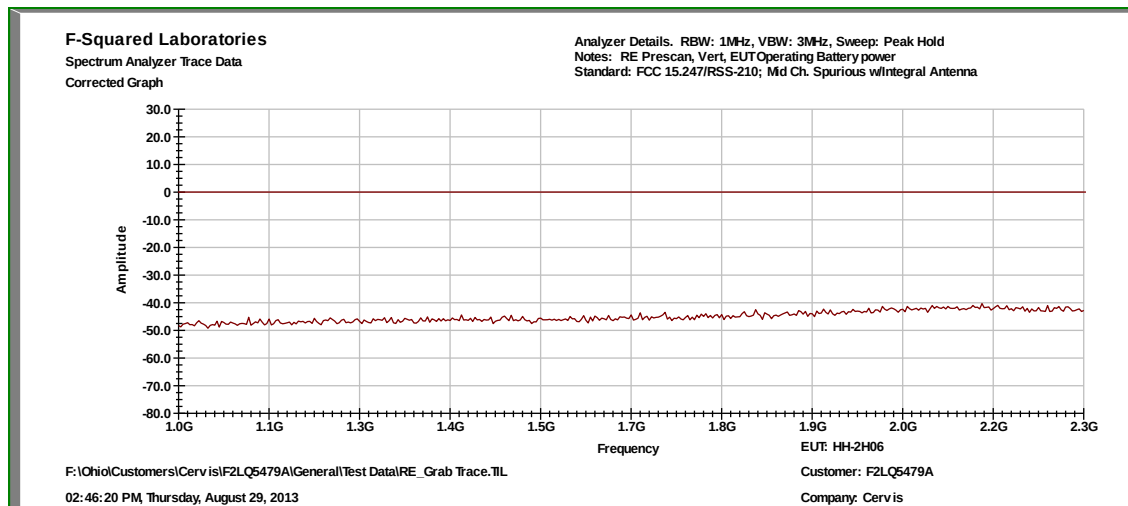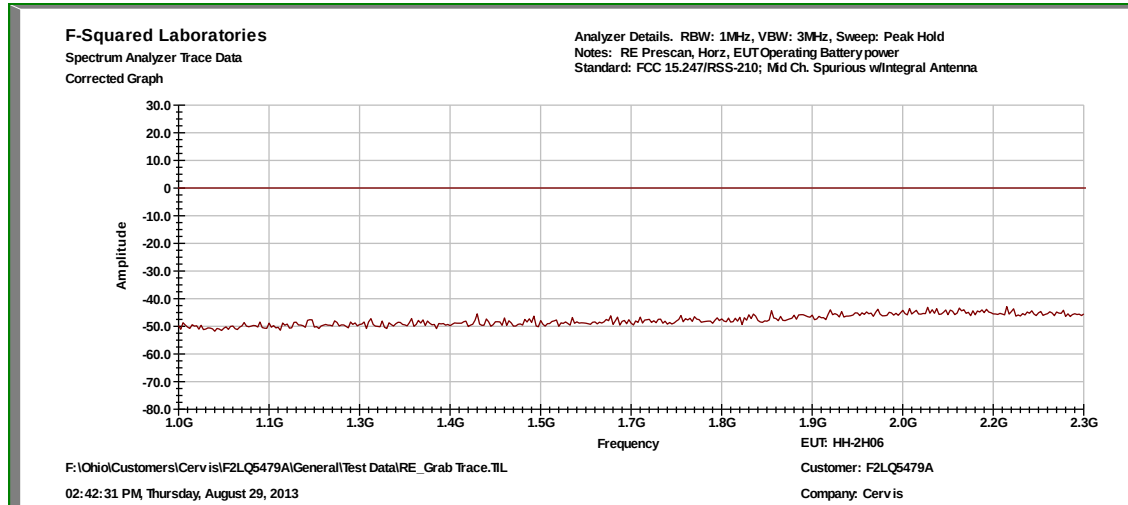





Radiated Spurious Emission with 3.8dBi Integral Antenna: Mid Channel, cont'd

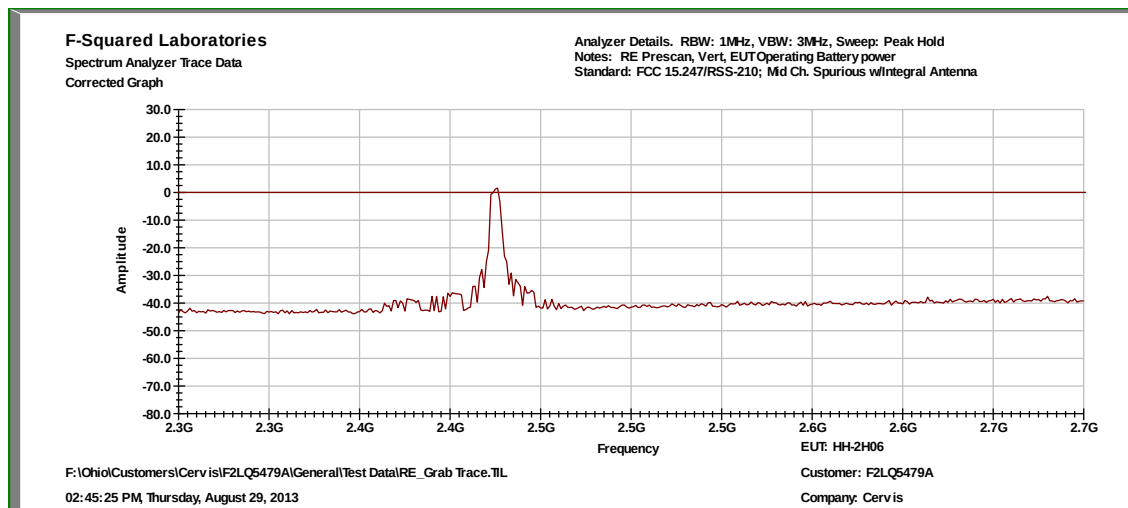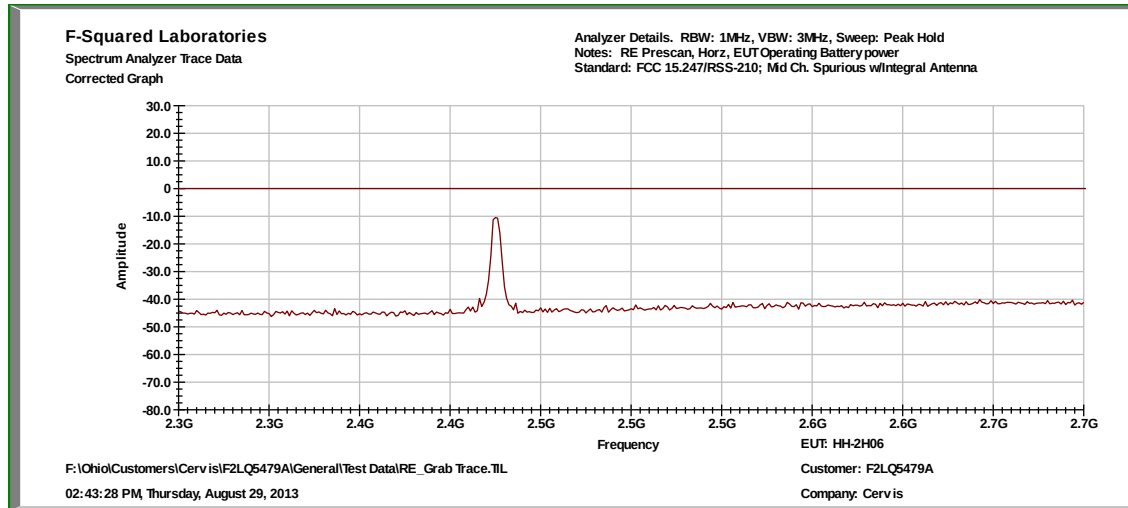





Radiated Spurious Emission with 3.8dBi Integral Antenna: Mid Channel, cont'd

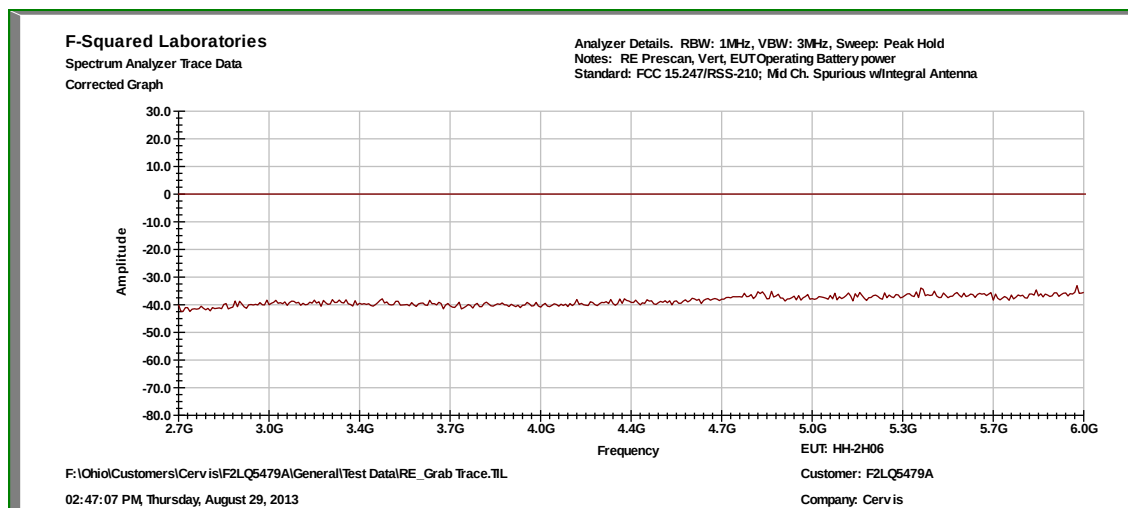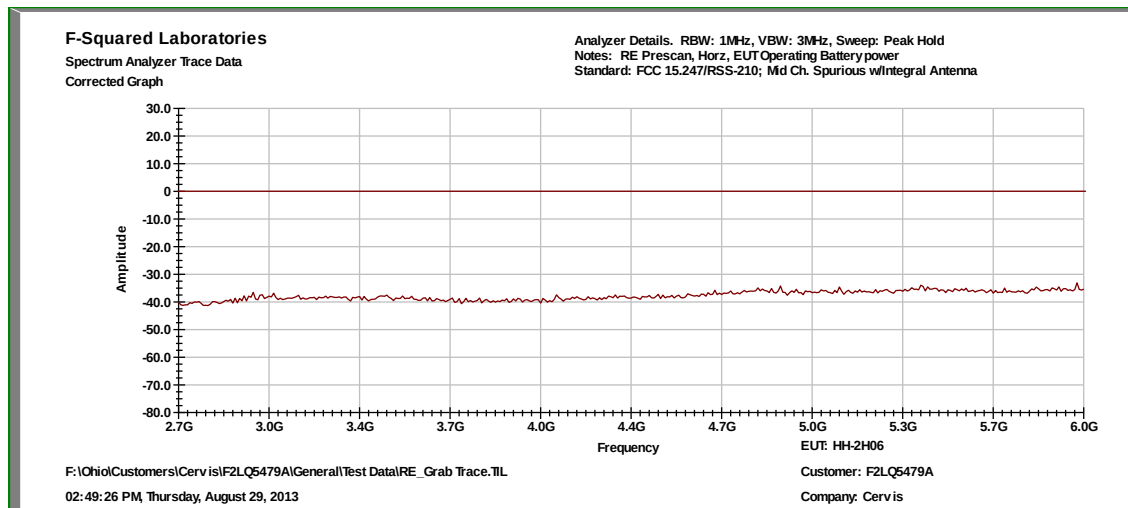





Radiated Spurious Emission with 3.8dBi Integral Antenna: Mid Channel, cont'd

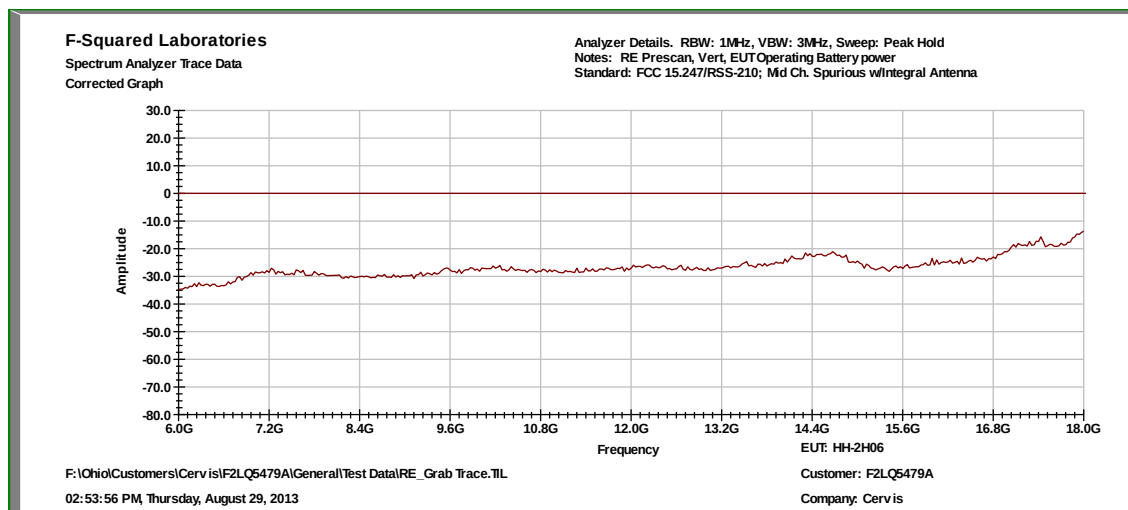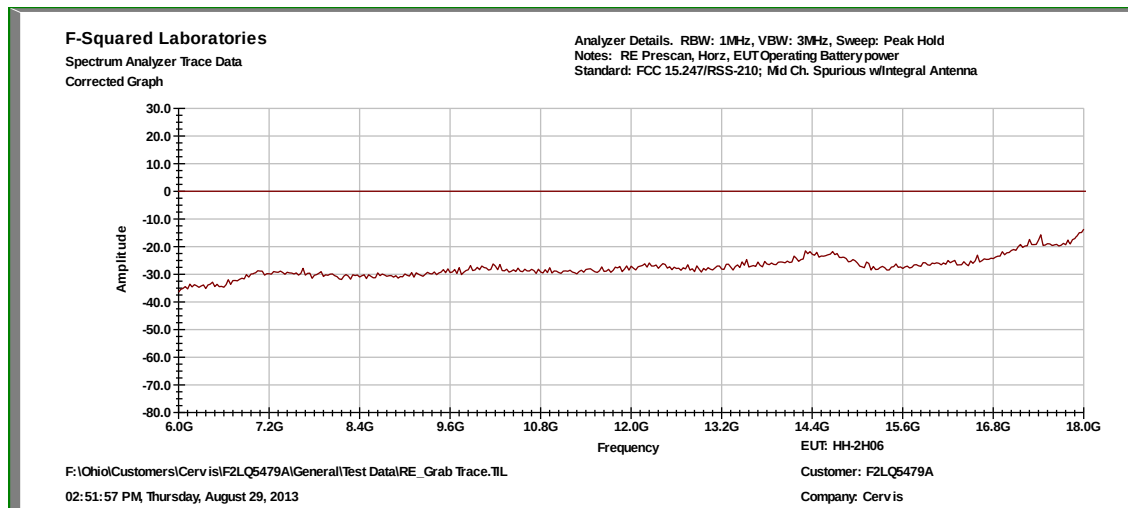





Radiated Spurious Emission with 3.8dBi Integral Antenna: Mid Channel, cont'd

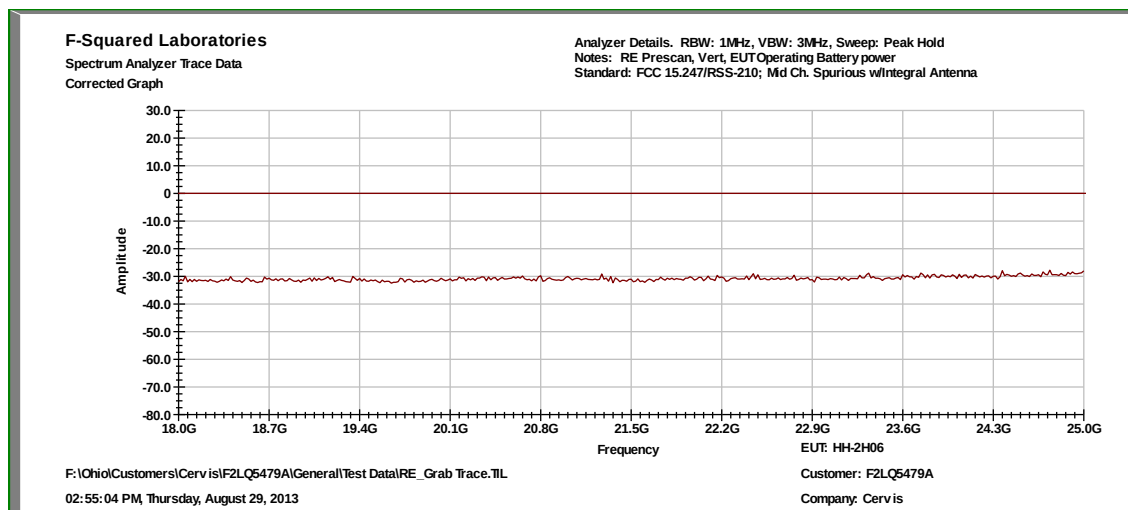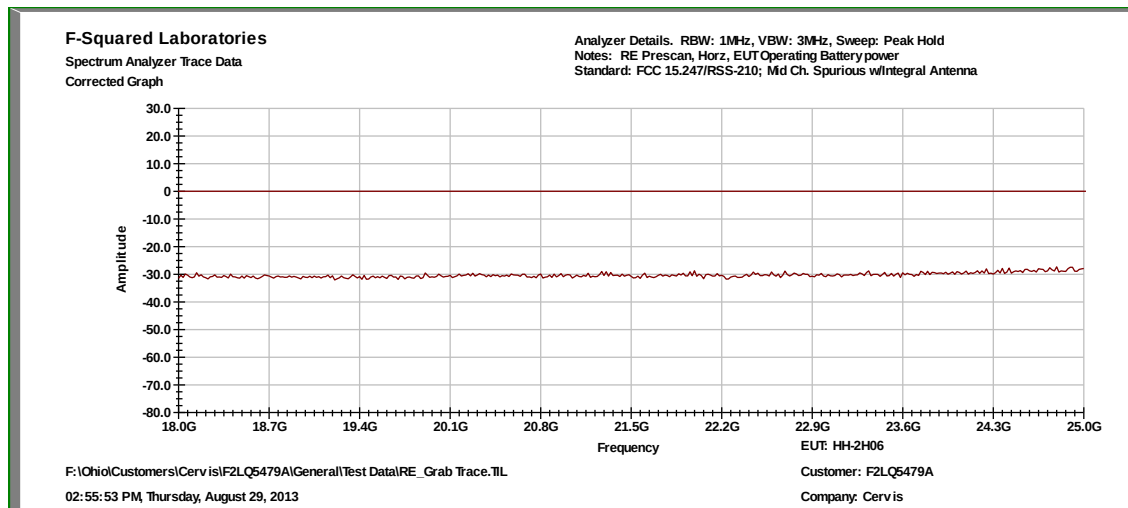





Radiated Spurious Emission with 3.8dBi Integral Antenna: High Channel

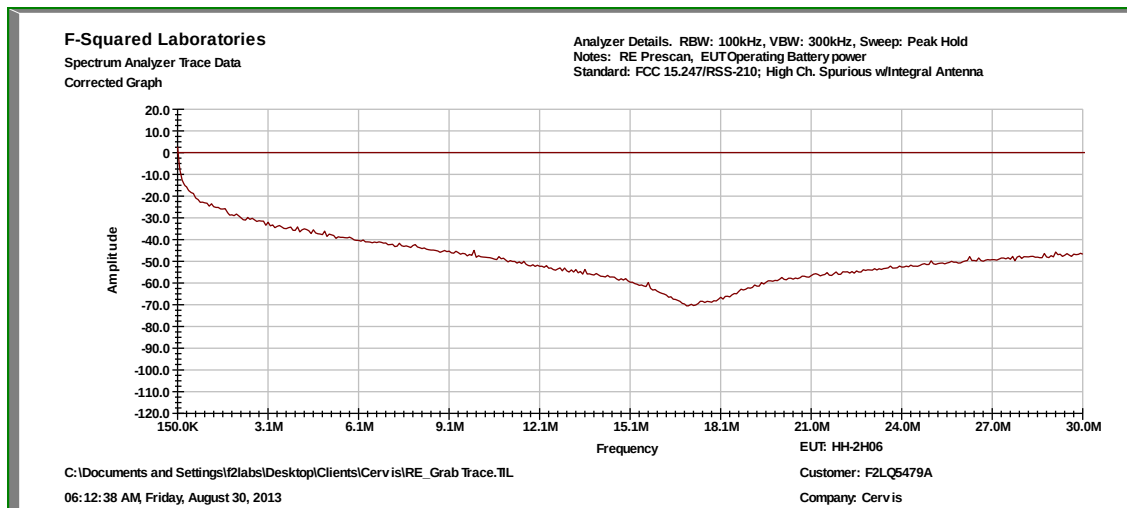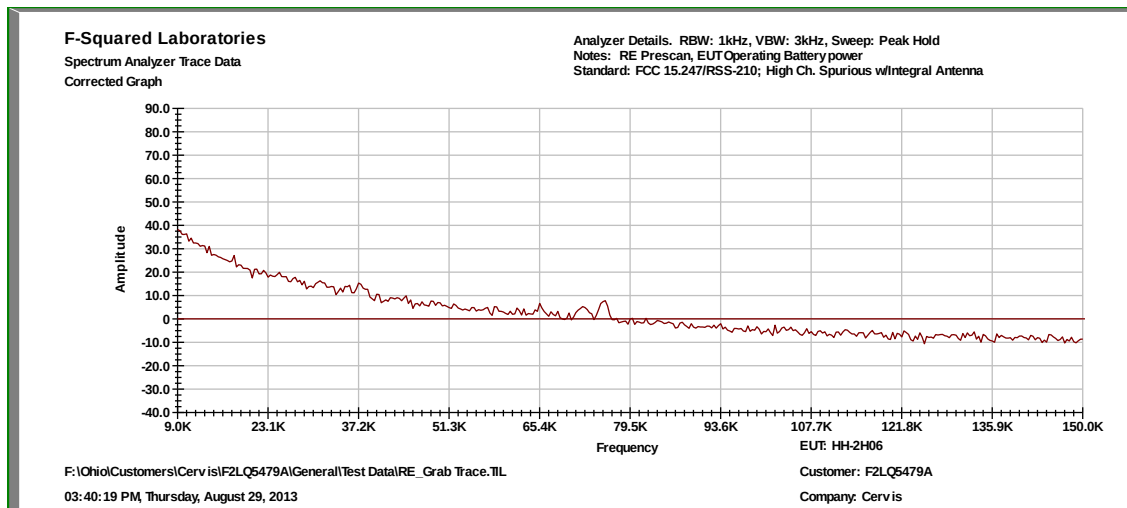





Radiated Spurious Emission with 3.8dBi Integral Antenna: High Channel, cont'd

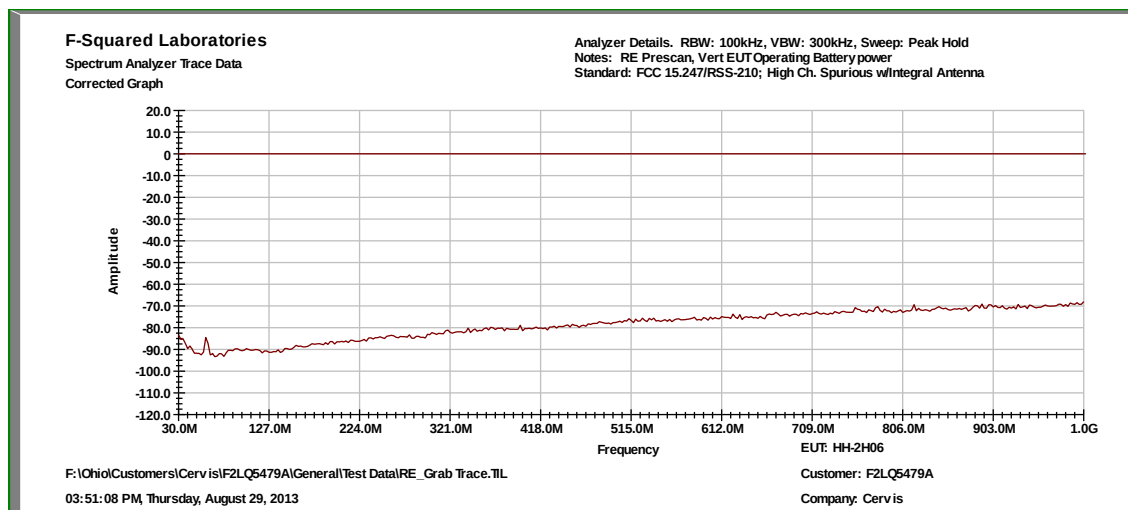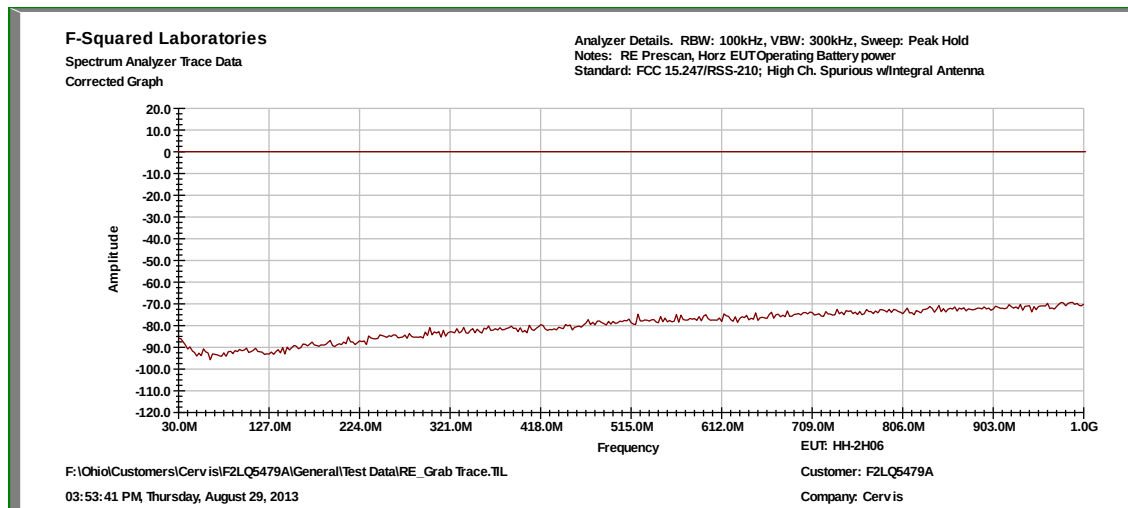





Radiated Spurious Emission with 3.8dBi Integral Antenna: High Channel, cont'd

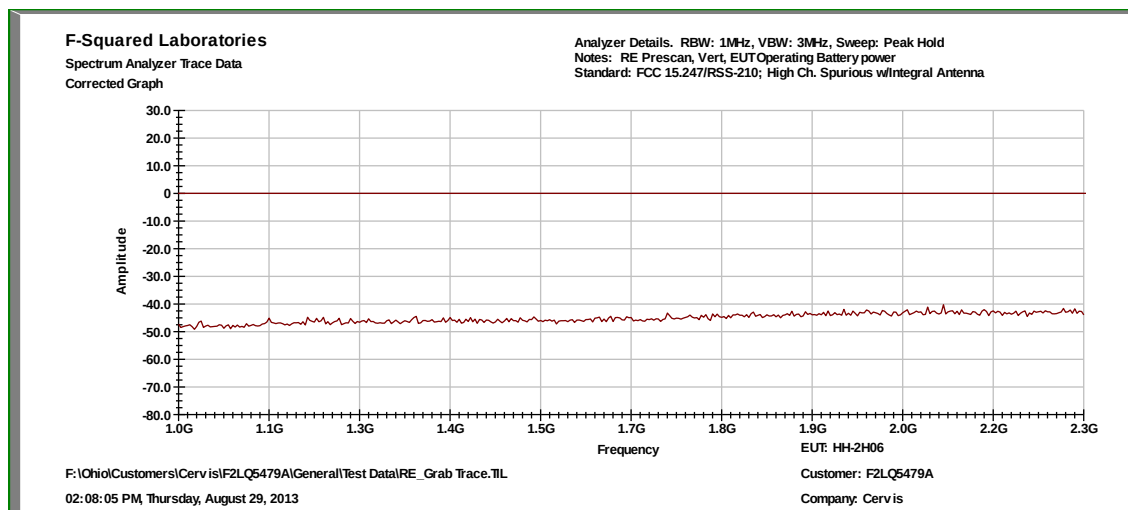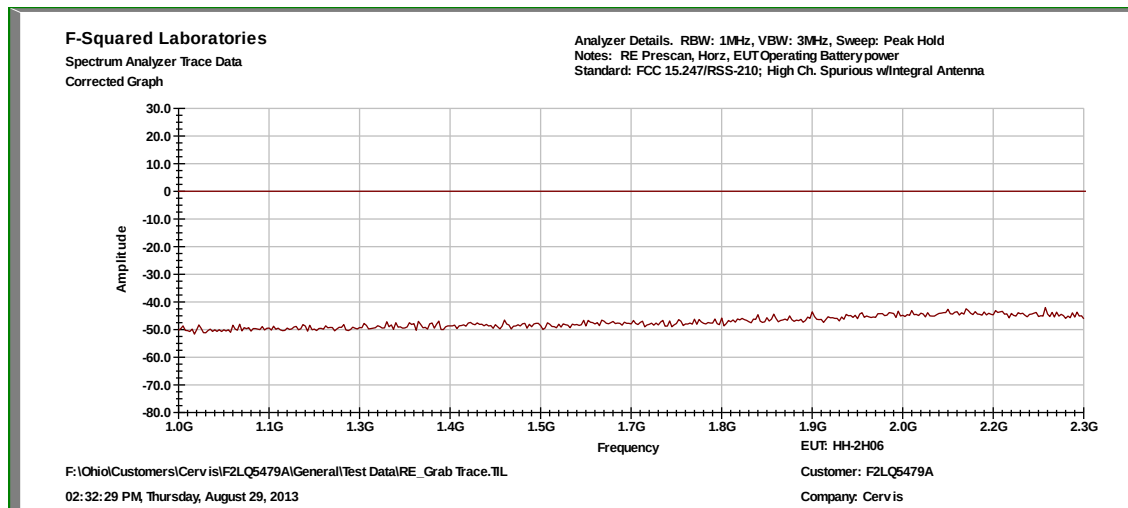





Radiated Spurious Emission with 3.8dBi Integral Antenna: High Channel, cont'd

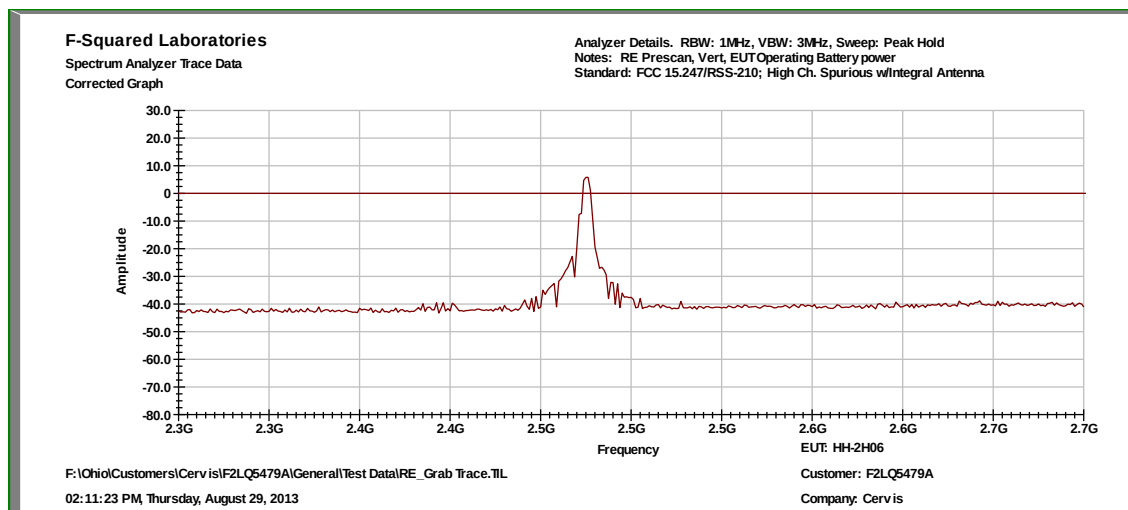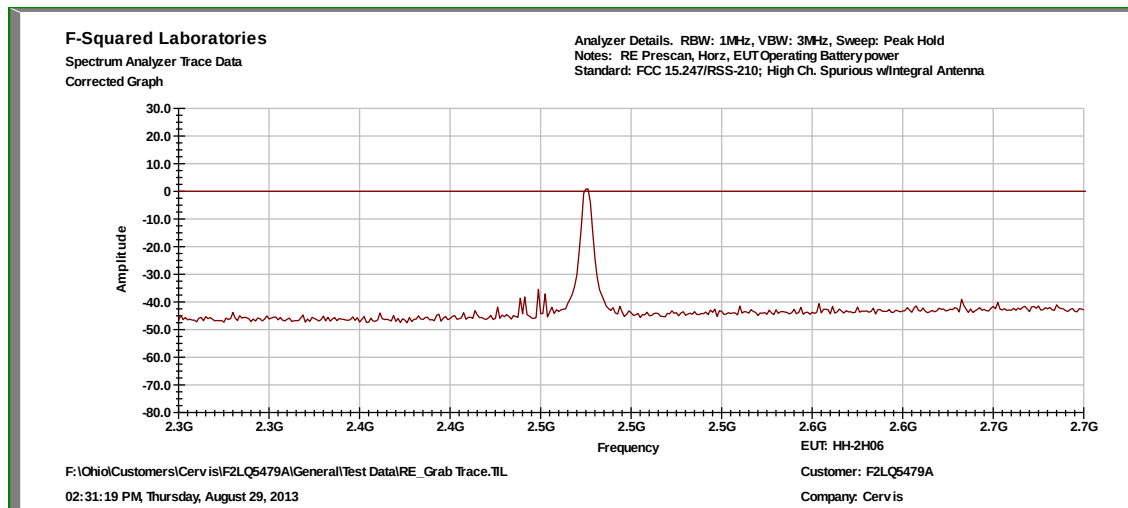





Radiated Spurious Emission with 3.8dBi Integral Antenna: High Channel, cont'd

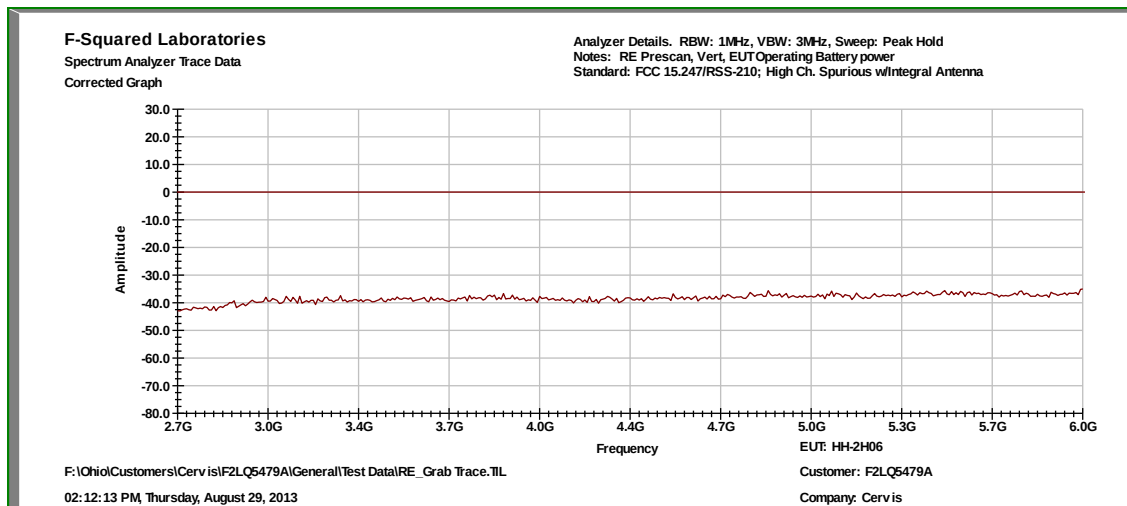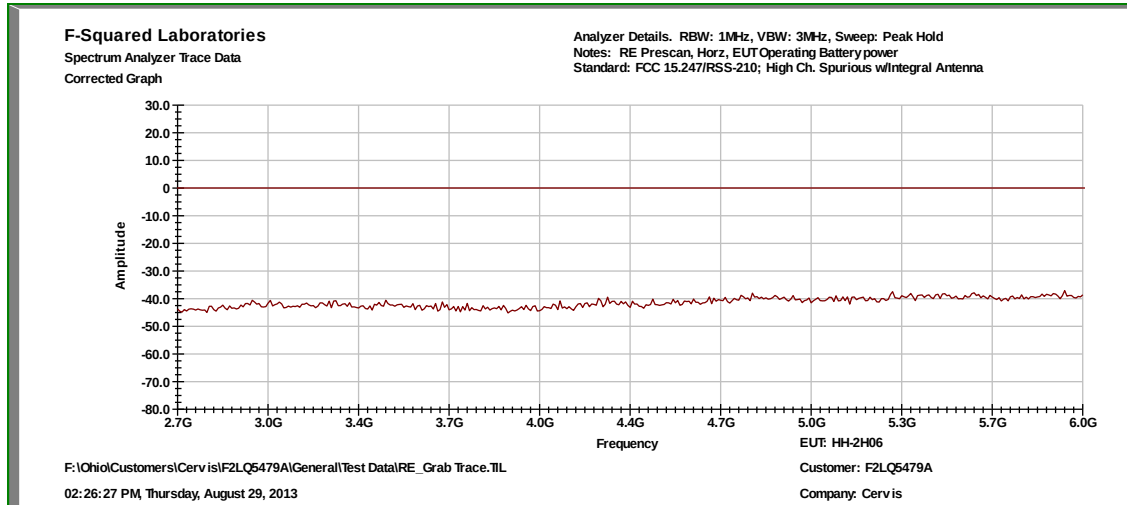





Radiated Spurious Emission with 3.8dBi Integral Antenna: High Channel, cont'd

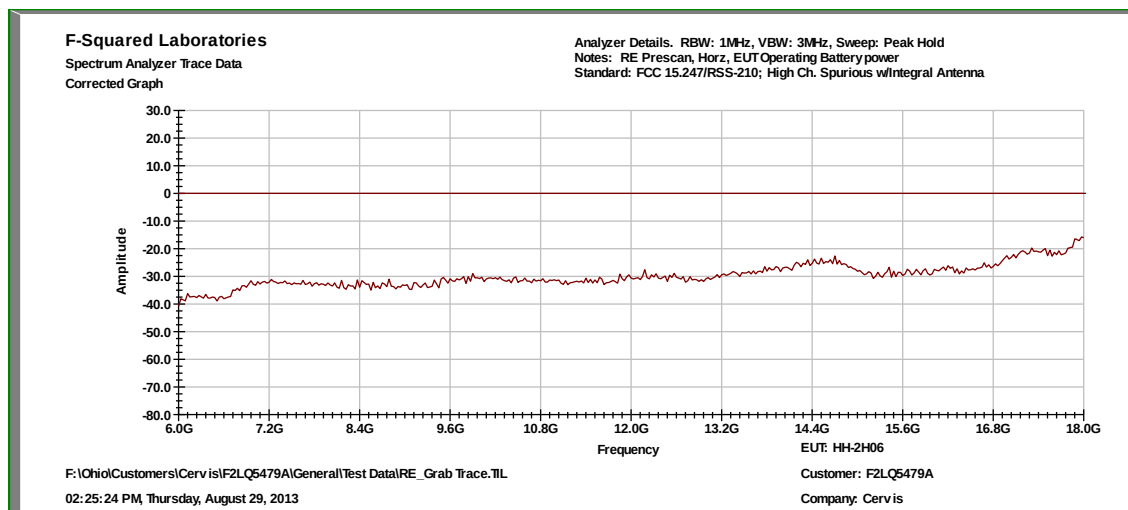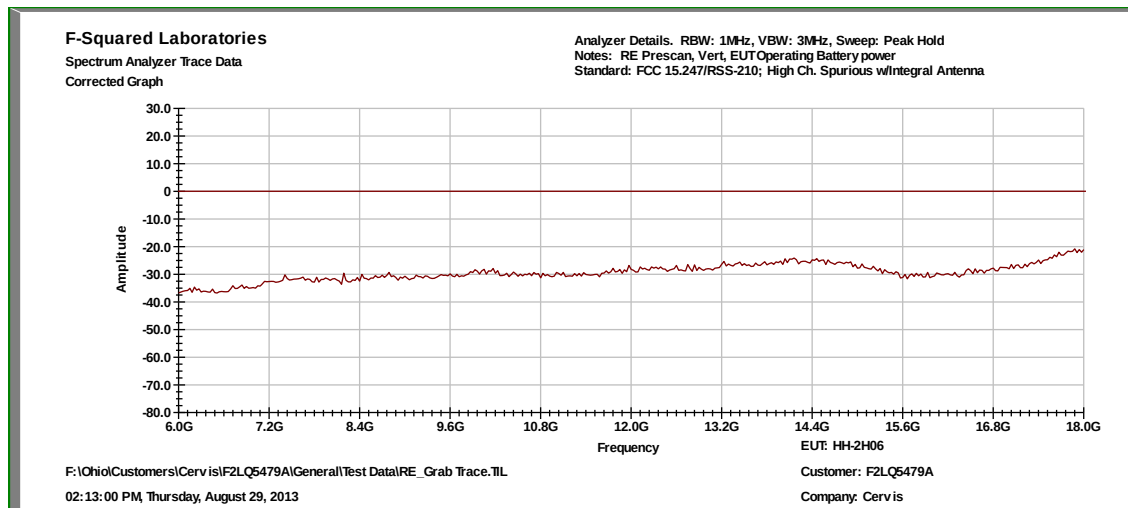



Radiated Spurious Emission with 3.8dBi Integral Antenna: High Channel, cont'd

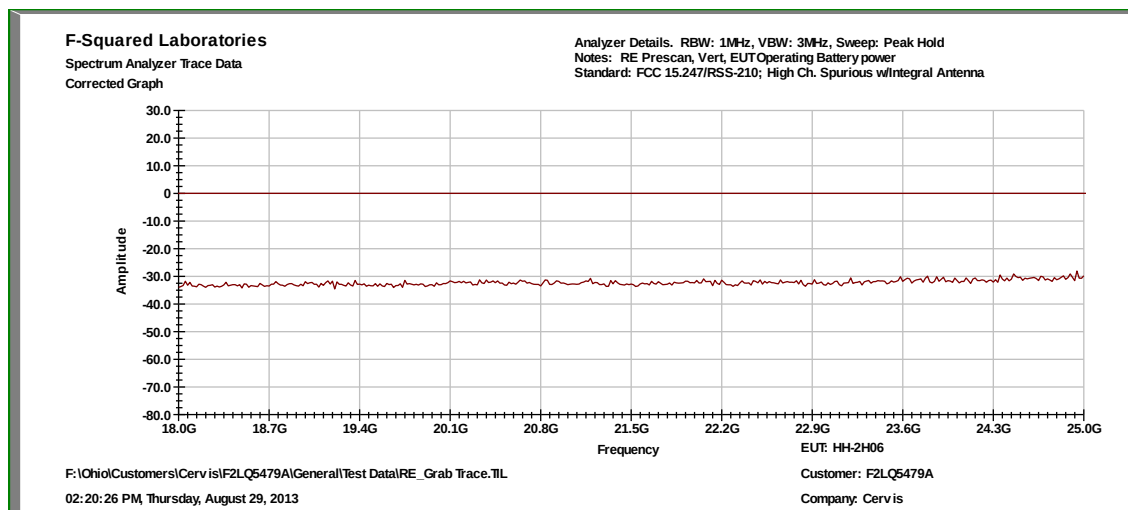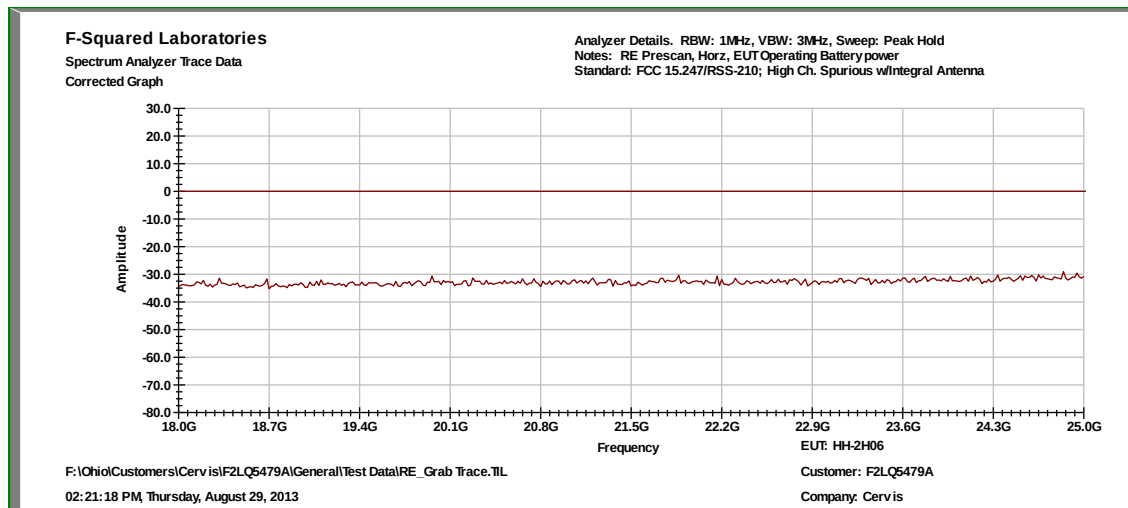



Measurements

Low Channel

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Bandwidth (kHz)	Polarity	Corr. (dB)
31.550000	----	----	25.30	40.0	----	----	120.000	H	19.7
31.970000	----	----	26.70	40.0	----	----	120.000	V	19.4
54.420000	----	----	19.45	40.0	----	----	120.000	V	8.9
55.230000	----	----	22.97	40.0	----	----	120.000	H	8.6
72.880000	----	----	18.13	40.0	----	----	120.000	V	9.0
74.560000	----	----	18.06	40.0	----	----	120.000	H	9.6
122.240000	----	----	27.12	43.5	----	----	120.000	V	15.5
122.250000	----	----	21.99	43.5	----	----	120.000	H	15.8
166.680000	----	----	26.44	43.5	----	----	120.000	H	14.5
176.320000	----	----	20.33	43.5	----	----	120.000	H	14.2
177.770000	----	----	28.25	43.5	----	----	120.000	V	13.9
1800.32000	50.23	74.0	----	----	34.14	54.0	1000.000	V	27.5
1800.64000	53.18	74.0	----	----	34.58	54.0	1000.000	H	28.1
2380.00000	54.87	74.0	----	----	33.79	54.0	1000.000	H	28.9
2380.00000	56.12	74.0	----	----	34.12	54.0	1000.000	V	28.7
2395.00000	57.24	74.0	----	----	38.65	54.0	1000.000	V	29.4
2395.00000	59.19	74.0	----	----	39.04	54.0	1000.000	H	29.6
2405.00000	65.61	74.0	----	----	45.71	54.0	1000.000	H	30.0
2405.00000	64.98	74.0	----	----	43.22	54.0	1000.000	V	29.8
2415.00000	63.77	74.0	----	----	41.87	54.0	1000.000	V	29.9
2415.00000	62.31	74.0	----	----	43.17	54.0	1000.000	H	30.2
2483.50000	57.96	74.0	----	----	36.11	54.0	1000.000	V	29.6
2483.50000	58.16	74.0	----	----	36.84	54.0	1000.000	H	29.9
4961.00000	58.22	74.0	----	----	43.98	54.0	1000.000	H	33.1
4961.00000	62.44	74.0	----	----	44.60	54.0	1000.000	V	33.1



Mid Channel

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Bandwidth (kHz)	Polarity	Corr. (dB)
31.550000	----	----	25.12	40.0	----	----	120.000	H	19.7
31.970000	----	----	28.17	40.0	----	----	120.000	V	19.4
54.420000	----	----	20.22	40.0	----	----	120.000	V	8.9
55.230000	----	----	23.00	40.0	----	----	120.000	H	8.6
72.880000	----	----	21.14	40.0	----	----	120.000	V	9.0
74.560000	----	----	17.13	40.0	----	----	120.000	H	9.6
122.240000	----	----	25.97	43.5	----	----	120.000	V	15.5
122.250000	----	----	22.89	43.5	----	----	120.000	H	15.8
166.680000	----	----	25.90	43.5	----	----	120.000	H	14.5
176.320000	----	----	25.47	43.5	----	----	120.000	H	14.2
177.770000	----	----	26.99	43.5	----	----	120.000	V	13.9
1800.32000	49.88	74.0	----	----	31.90	54.0	1000.000	V	27.5
1800.64000	52.89	74.0	----	----	32.45	54.0	1000.000	H	28.1
2350.00000	53.15	74.0	----	----	32.56	54.0	1000.000	H	28.9
2350.00000	52.47	74.0	----	----	35.29	54.0	1000.000	V	28.7
2430.00000	56.24	74.0	----	----	37.28	54.0	1000.000	V	29.4
2430.00000	60.12	74.0	----	----	36.99	54.0	1000.000	H	29.6
2460.00000	64.25	74.0	----	----	44.84	54.0	1000.000	H	30.0
2460.00000	63.81	74.0	----	----	43.76	54.0	1000.000	V	29.8
2483.50000	60.14	74.0	----	----	42.37	54.0	1000.000	V	29.9
2483.50000	58.03	74.0	----	----	42.98	54.0	1000.000	H	29.8
2520.00000	61.72	74.0	----	----	41.23	54.0	1000.000	V	29.9
2520.00000	63.98	74.0	----	----	43.11	54.0	1000.000	H	30.2
4961.00000	58.01	74.0	----	----	42.18	54.0	1000.000	H	33.1
4961.00000	60.33	74.0	----	----	43.98	54.0	1000.000	V	33.1



High Channel

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Bandwidth (kHz)	Polarity	Corr. (dB)
31.550000	----	----	26.78	40.0	----	----	120.000	H	19.7
31.970000	----	----	27.99	40.0	----	----	120.000	V	19.4
54.420000	----	----	21.43	40.0	----	----	120.000	V	8.9
55.230000	----	----	22.14	40.0	----	----	120.000	H	8.6
72.880000	----	----	22.33	40.0	----	----	120.000	V	9.0
74.560000	----	----	18.23	40.0	----	----	120.000	H	9.6
122.240000	----	----	25.98	43.5	----	----	120.000	V	15.5
122.250000	----	----	23.85	43.5	----	----	120.000	H	15.8
166.680000	----	----	24.97	43.5	----	----	120.000	H	14.5
176.320000	----	----	26.14	43.5	----	----	120.000	H	14.2
177.770000	----	----	27.25	43.5	----	----	120.000	V	13.9
1800.32000	51.33	74.0	----	----	33.44	54.0	1000.000	V	27.5
1800.64000	51.77	74.0	----	----	32.14	54.0	1000.000	H	28.1
2400.00000	52.21	74.0	----	----	33.54	54.0	1000.000	V	29.6
2400.00000	51.95	74.0	----	----	34.16	54.0	1000.000	H	30.0
2470.00000	53.68	74.0	----	----	34.68	54.0	1000.000	H	28.9
2470.00000	53.46	74.0	----	----	36.77	54.0	1000.000	V	28.7
2475.00000	57.57	74.0	----	----	41.35	54.0	1000.000	V	29.4
2475.00000	58.11	74.0	----	----	38.91	54.0	1000.000	H	29.6
2482.00000	65.10	74.0	----	----	44.84	54.0	1000.000	H	30.0
2482.00000	64.87	74.0	----	----	46.22	54.0	1000.000	V	29.8
2484.00000	63.57	74.0	----	----	43.38	54.0	1000.000	V	29.9
2484.00000	64.13	74.0	----	----	43.88	54.0	1000.000	H	30.2
4961.00000	55.94	74.0	----	----	42.31	54.0	1000.000	H	33.1
4961.00000	63.17	74.0	----	----	43.70	54.0	1000.000	V	33.1

**10 FCC PART 15.247 – PEAK POWER SPECTRAL DENSITY (PSD)**

Peak power spectral density measurements were performed.

10.1 Requirements:

The peak power spectral density shall not exceed +8dBm in any 3 kHz band during any time interval of continuous transmission.

Power spectral density measurements were performed at a resolution bandwidth of 3 kHz (video bandwidth set at 10 KHz). The peak spectral densities were measured at the low, mid, and upper channels.



10.2 Equipment Used:

Equipment Type	Asset Number	Manufacturer	Model	Serial Number	Calibration Due Date
Temp/Hum. Recorder	CL137	Extech	RH520	CH16992	Apr. 17, 2014
Receiver	CL151	Rohde & Schwarz	ESU40	100319	Oct. 31, 2014
Cable: 0.3m Low Loss	CL116	A.H. Systems, Inc.	SAC-26G-0.3	206	Mar. 1, 2014



10.3 Peak Power Spectral Density Test Data

Test Date:	Aug. 22, 2013	Test Engineer:	K. Littell
Standards:	CFR 47 Part 15.247; KDB558074	Air Temperature:	22.2°C
		Relative Humidity:	43%

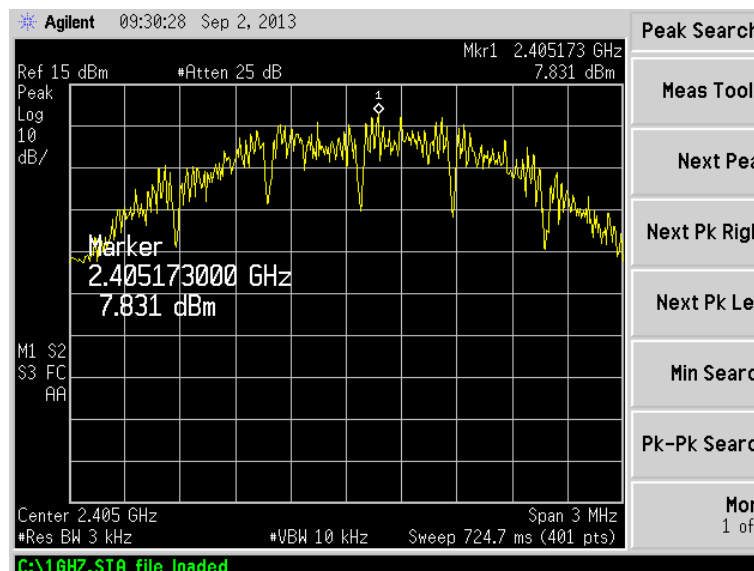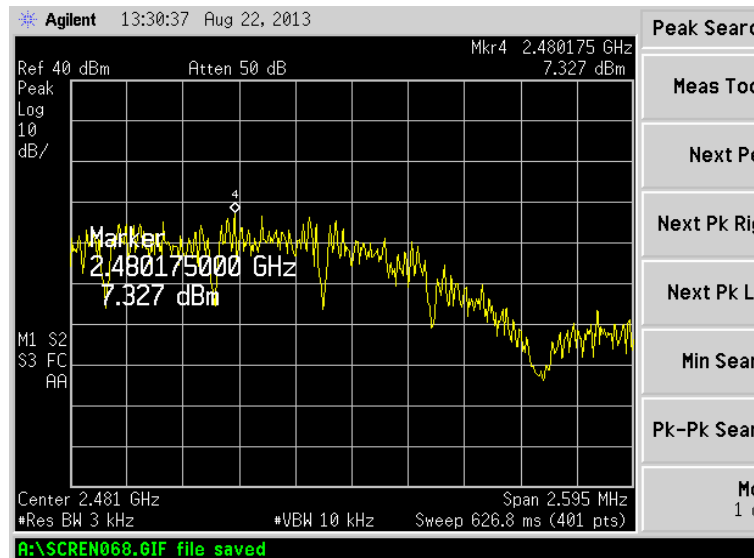




Order Number: F2LQ5479A

Client: Cervis Inc.

Model: HH-2H06

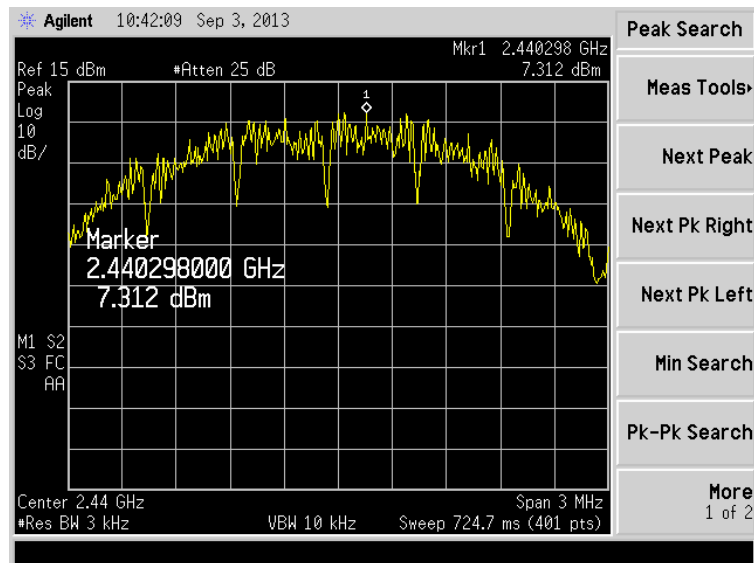



11 PHOTOGRAPHS/EXHIBITS – PRODUCT PHOTOS, TEST SETUPS

Radiated Spurious Emission with 3.8dBi Integral Antenna





Order Number: F2LQ5479A

Client: Cervis Inc.

Model: HH-2H06

**Conducted Output Power, Peak Power Spectral Density,
-6dB Occupied Bandwidth, and Conducted Spurious Emissions**

