




VIII) Summary SmartRadar LT

- Advanced Radar Transceiver (ART)
- Designed for intermediate liquid storage tanks
- Instrument accuracy +/- 3 mm
- Advanced Digital Signal Processing (ADSP)
- Smart thresholds
- Temperature independent
- Smart Echo Analysis (SEA)


- Outputs:
 - HART
 - RS-232 C and RS-458
 - Intrinsically safe
- Direct inputs for:
 - Spot or average temperature
 - Pressure transmitters (HART)
 - Water and interface probes (HART)

III Equipment and Module Photographs

A. Board ICU

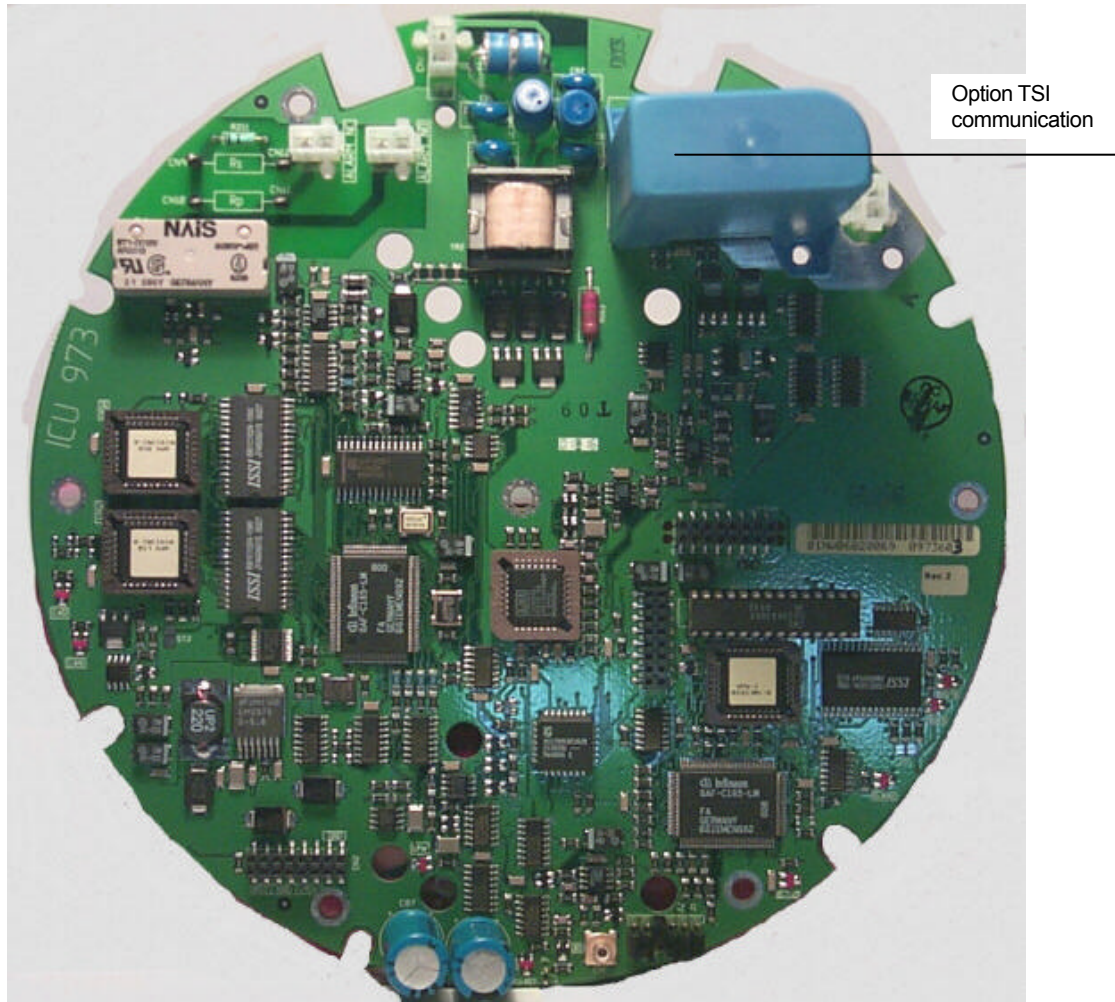


B. Board RFB3-DAB

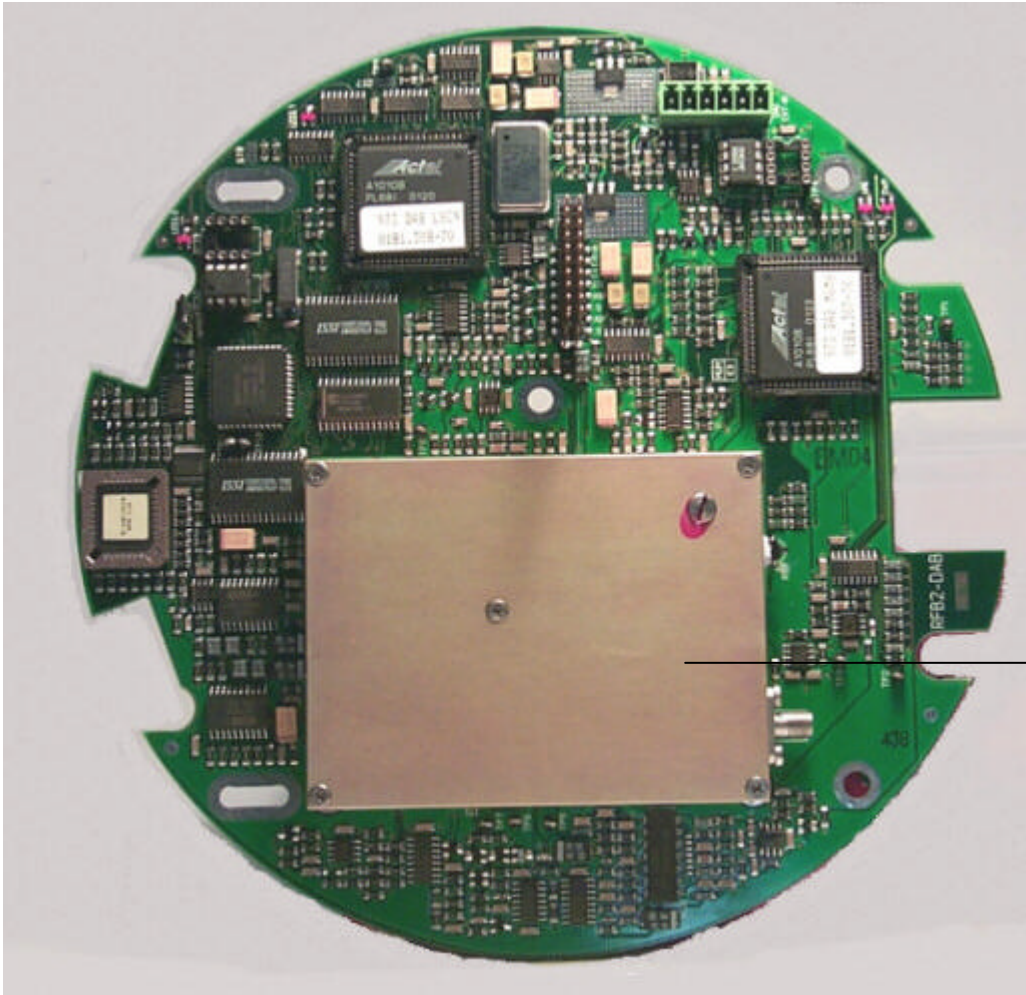


ART 1a

B. Shielding removed from Board RFB3-DAB

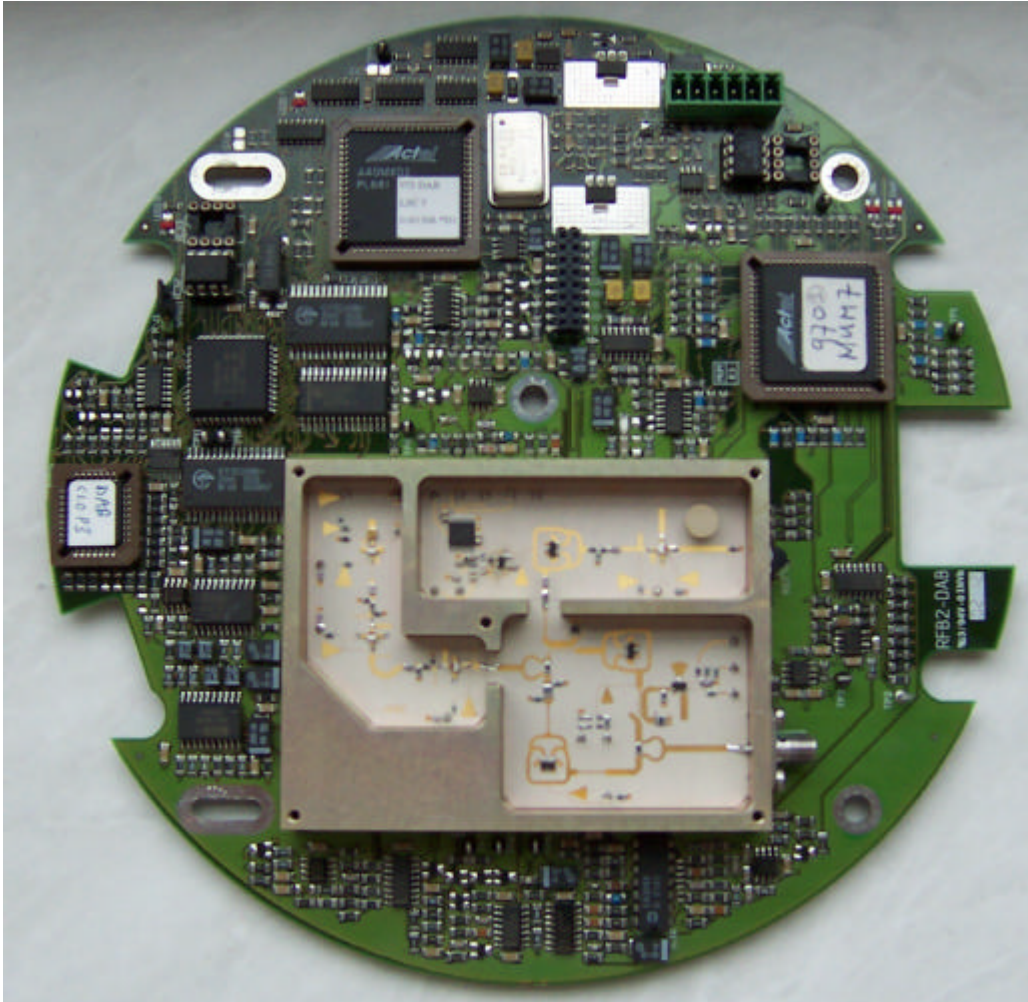


D. Option Board ICU

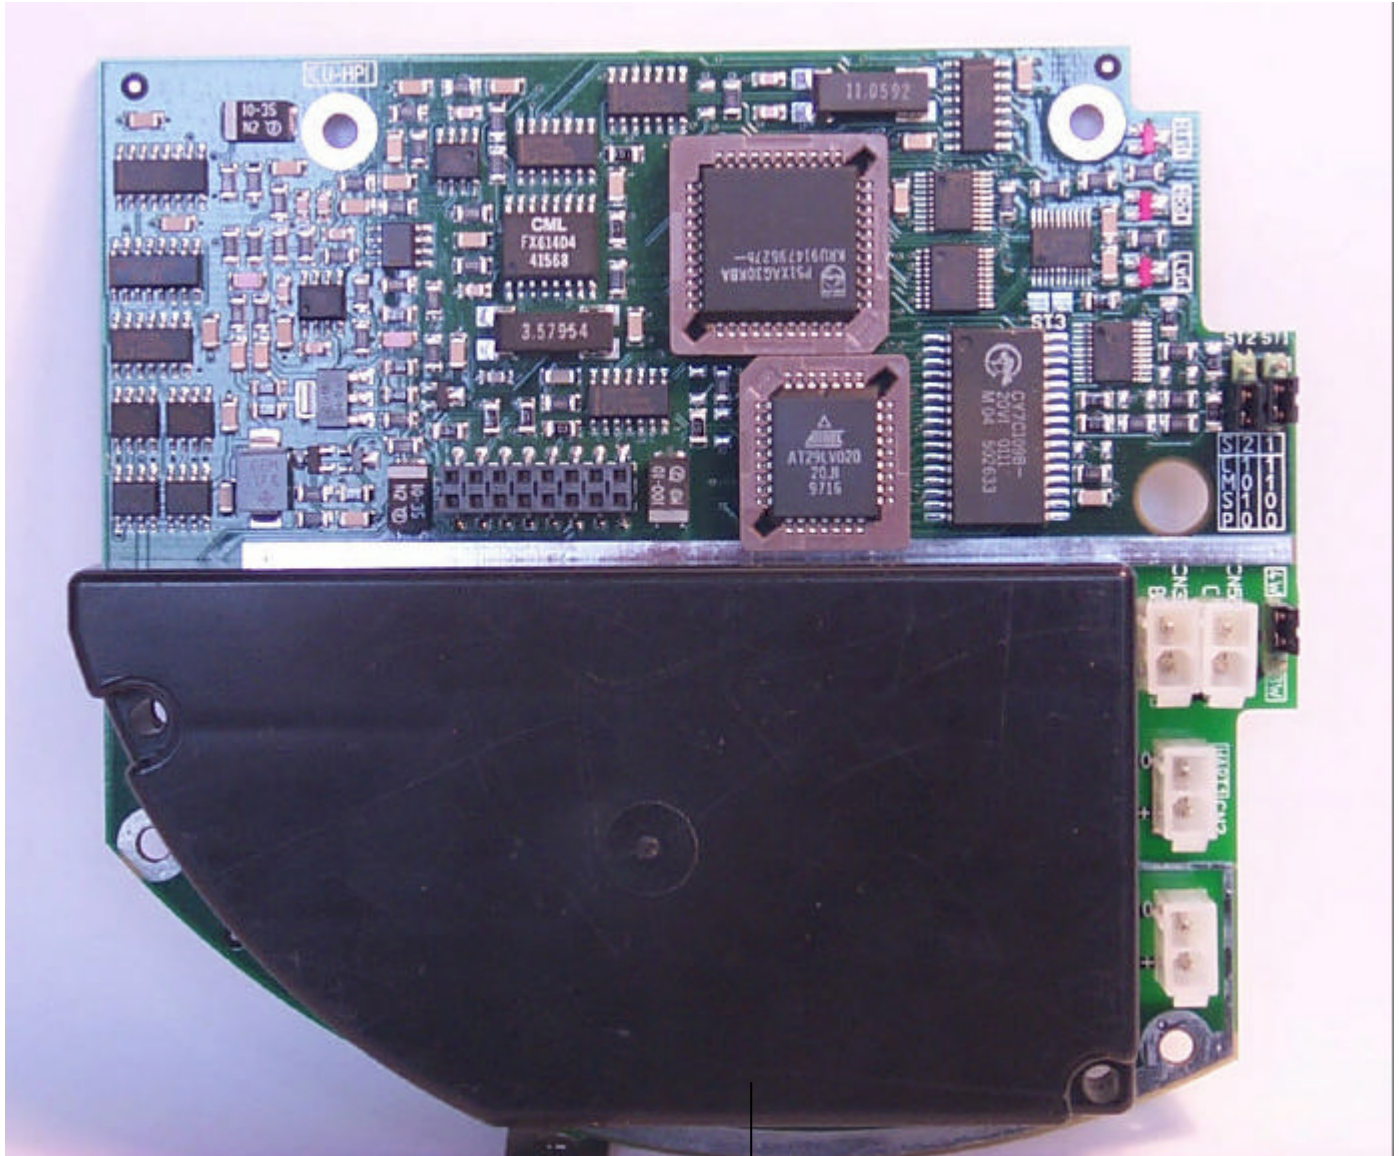


Hart1, Hart 2, and Spot option


E. Board GPS

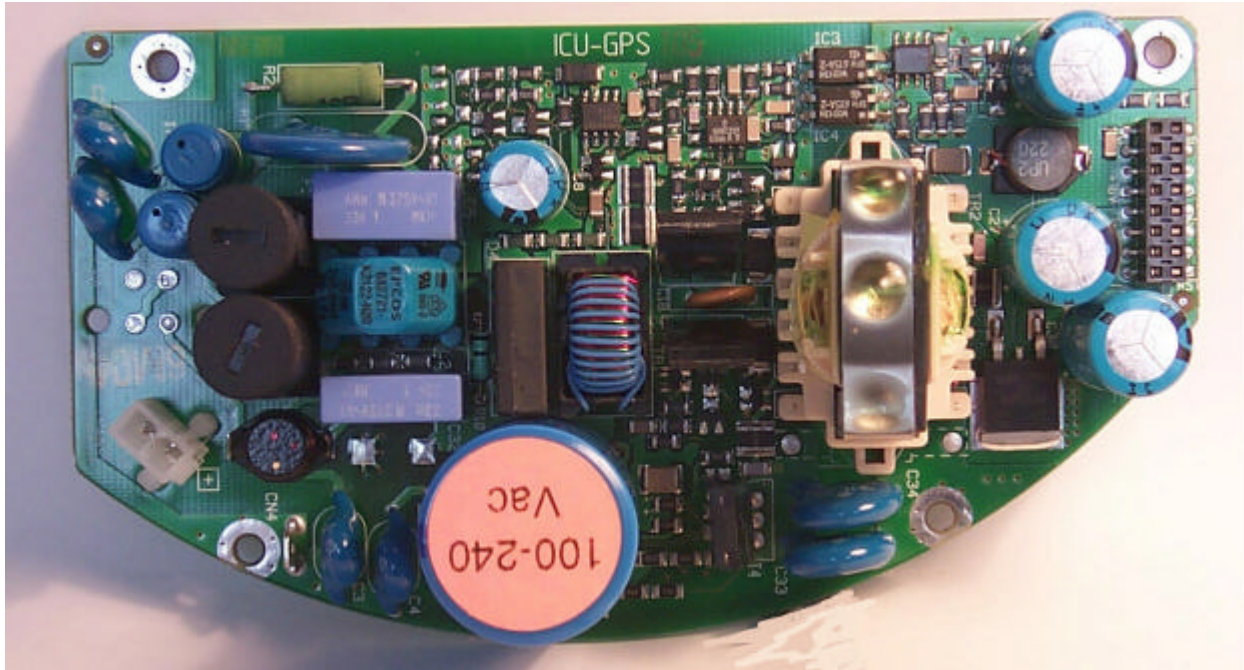


F. Option Board RS 232C/RS 485

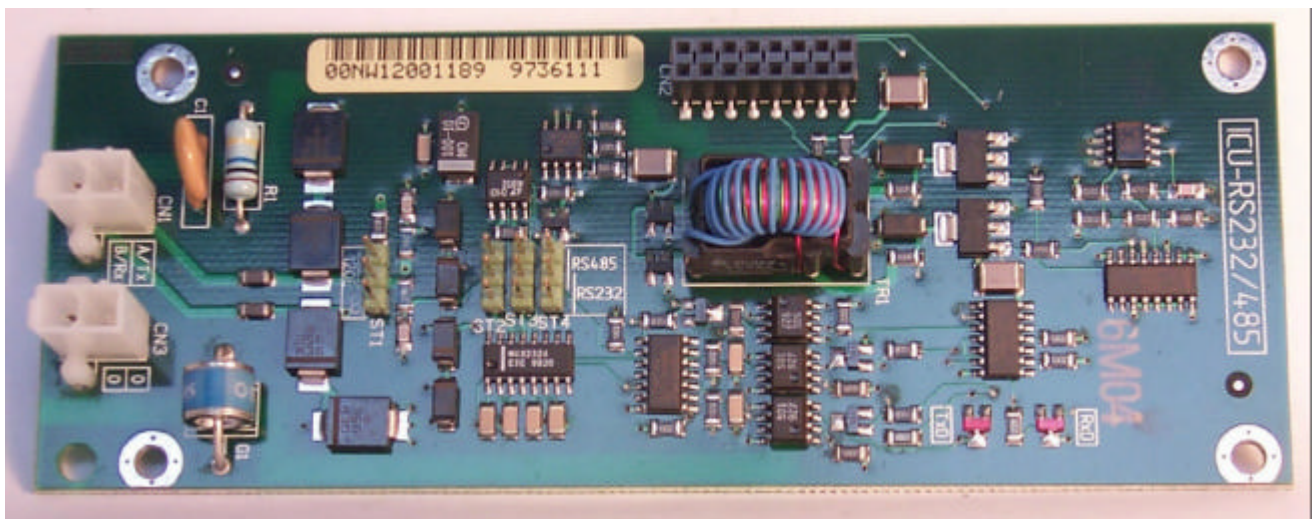

G. Optional Board HART 4 – 20 mA

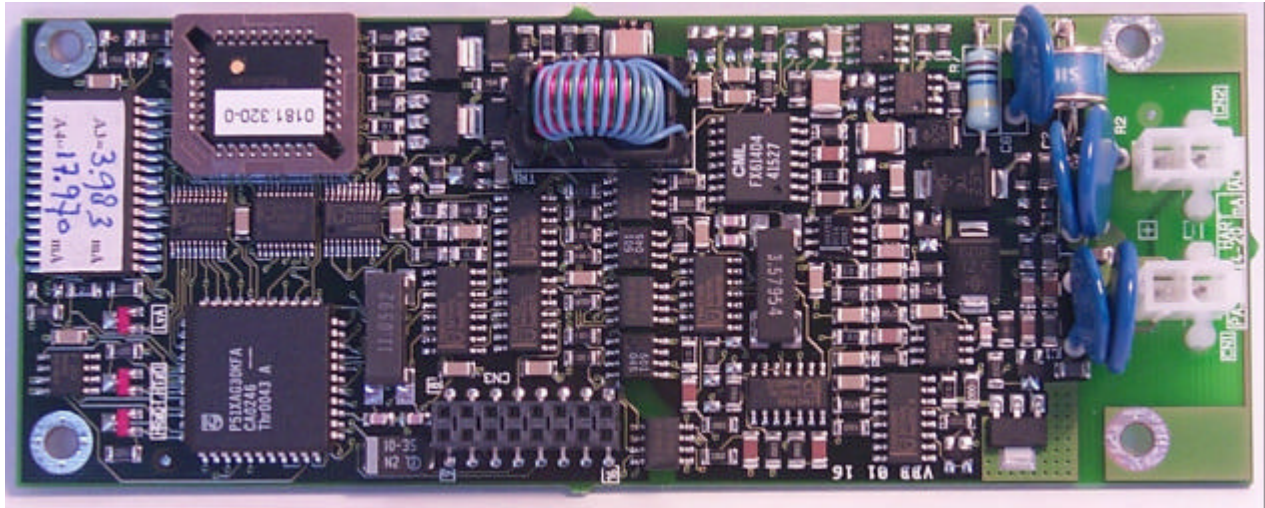


H. 973 SmartRadar (without cover)

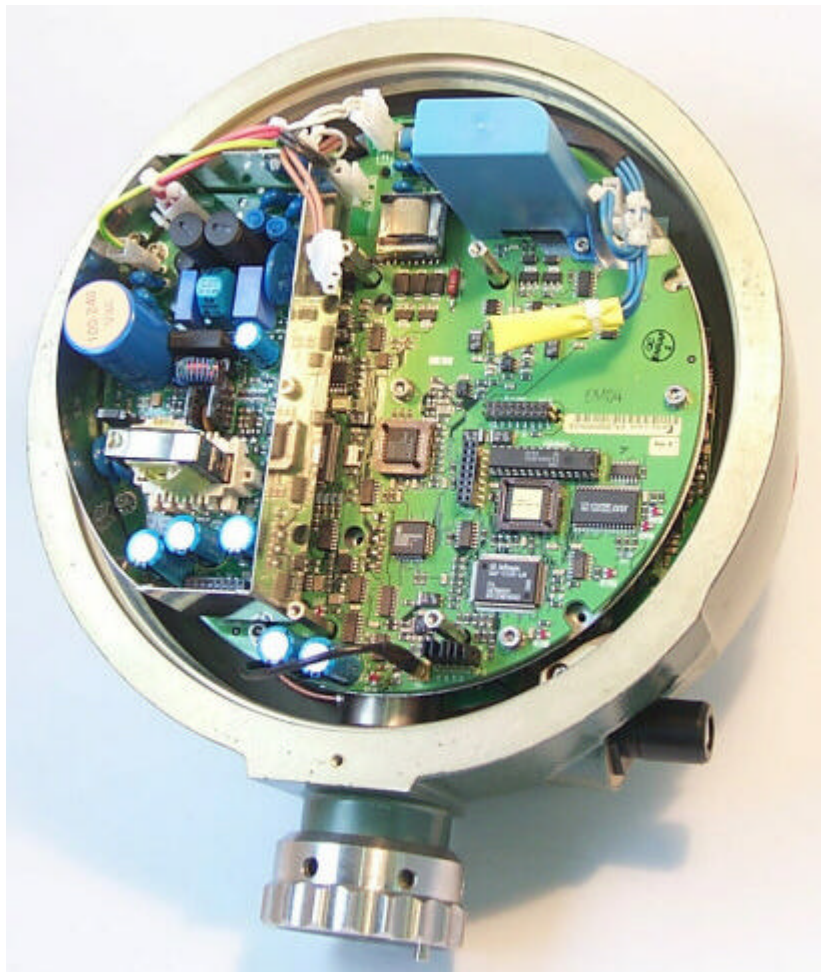



Enraf B.V.
Röntgenweg 1
2600 BD Delft
The Netherlands

H. 973 SmartRadar Interior

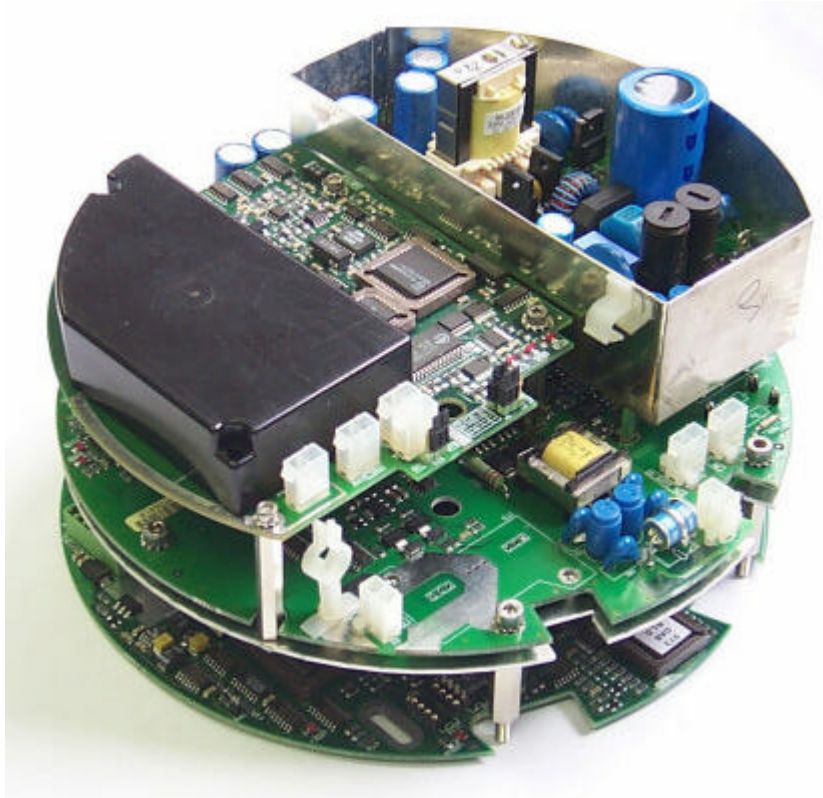

I 973 SmartRadar Interior

