


2.4.3 Spurious radiation in the frequency range up to 4 GHz.

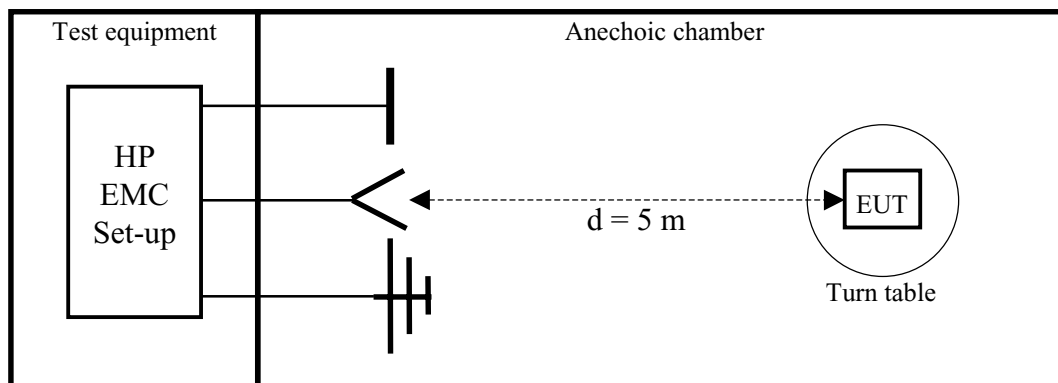

Test equipment	Manufacturer	Type	S/No.	Calibration due
Spectrum analyser	HP	HP 85660B	2478A05306	05.07.2001
Analyser display	HP	HP 85662A	2816A16541	05.07.2001
Quasi peak adapter	HP	HP 85650A	2811A01131	05.07.2001
RF-preselector	HP	HP 85685A	2833A00768	05.07.2001
Biconical antenna	Emco	3104	3758	01.07.2001
Log.-per.-antenna	Emco	3146	2304	01.07.2001
Double ridge horn	Emco	3115	3007	01.07.2001
Relay switch	R&S	RSU	375 339/002	01.07.2001
High pass filter	FSY Microwave	HM 985955	001	01.07.2001
Amplifier	Tron-Tech	P42-GA29	B2302	01.07.2001
Power supply	HP	HP 6038A	2848A07027	12.12.2001
RF-cable	HP	5061-5359	P36303	12.12.2001

Measurement uncertainty

Test parameter	Measurement uncertainty
Power supply	±0.1 VAC
Temperature	±0.2 °C
Frequency	±0.01 ppm
eirp	±1.0 dB