

<b>Document #</b>	<b>Title</b>	<b>Page</b>
021029-01	SAIC Bell South Fleet Manager – Spurious Emissions Measurement	1 of 11

**Science Applications International  
Corporation  
Bell South Fleet Manager**

**Spurious Emissions Measurements  
IAW CFR 47, Parts 2, 15 & 90**

**Date of Test  
02 October 2002**

Conducted For: Science Applications International Corporation  
10260 Campus Point Drive  
San Diego, CA 92121

Conducted By: Aegis Labs, Inc.  
22431-B160 Antonio Parkway #417  
Rancho Santa Margarita, CA 92688

**AEGIS LABS, INC.**

**22431-B160 Antonio Parkway, #417, Rancho Santa Margarita, CA 92688**

Document #	Title	Page
021029-01	SAIC Bell South Fleet Manager – Spurious Emissions Measurement	2 of 11

## CERTIFICATION OF TEST DATA

Aegis Labs, Inc. operates as both a Nevada and California Corporation with no organizational or financial relationship with any company, institution, or private individual.

Testing and engineering functions provided by Aegis Labs are furnished through the use of part-time, full-time or consulting engineers with the appropriate qualifications to carry out their duties. Limits for testing are described under the referenced standards.

The data, data evaluation and equipment configuration represented herein are a true and accurate representation of the Equipment Under Test (EUT). The entity and/or person(s) for which this report has been prepared acknowledge that such the report - in its entirety - is for verification of the EUT to the requirements cited below.

The test results provided within this report are based upon the following global standards:

REFERENCE STANDARD	COMMENT
CFR 47, Part 2, 2.1046(a) RF Power Output – Radiated	(ERP)
ANSI TIA/EIA 603-1992 RF Power Output – Signal Substitution	(EIRP)
CFR 47, Part 2, 2.1053(a) RF Spurious Emissions – Radiated	(ERP)
ANSI TIA/EIA 603-1992 RF Spurious Emissions – Signal Substitution	(EIRP)
CFR 47, Part 15, Class A Emissions – Radiated	(Unintentional Radiated)

When measured in accordance with the above-referenced documents, the RIM ICU spurious emissions are compliant.


~~Prepared By:~~

  
 Rick Candelas  
 Staff Engineer  
 Aegis Labs, Inc.

~~Date:~~

10/02/02

~~Report Approved By:~~

  
 T. Bruce Ketterling  
 Chief Operating Officer  
 Aegis Labs, Inc.

~~Date:~~

10/02/02

**AEGIS LABS, INC.**

22431-B160 Antonio Parkway, #417, Rancho Santa Margarita, CA 92688

Document #	Title	Page
021029-01	SAIC Bell South Fleet Manager – Spurious Emissions Measurement	3 of 11

## 1.0 TEST REFERENCES:


Federal Communications Commission - CFR 47, Part 2  
 Federal Communications Commission - CFR 47, Part 15  
 ANSI TIA/EIA 603-1992

## 2.0 EQUIPMENT SETUP REFERENCES:

Federal Communications Commission - CFR 47, Part 2, 2.1046(a) & 2.1053(a)  
 Federal Communications Commission - CFR 47, Part 15, 15.209  
 ANSI TIA/EIA 603-1992, 2.2.12

The RIM ICU was configured in a typical-use configuration for testing. The EUT consisted of an ICU which receives power from an external DC source, and a Tri Mode antenna assembly.

The ICU is controlled with the lap-top PC running Hyperterminal software. Figure 1 shows the equipment setup.

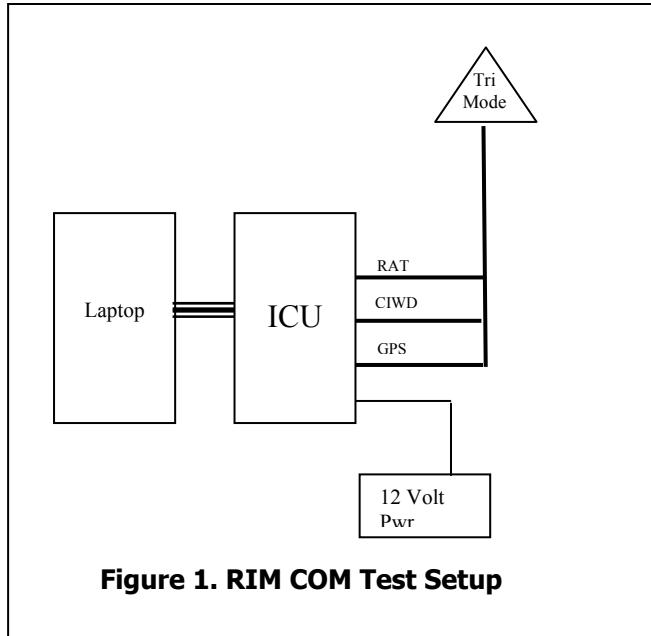

**Figure 1. RIM COM Test Setup**

## 2.1 Test Setup

The RIM ICU was placed on an 80cm dielectric stand. The unit was powered on and operational during testing. The GPS satellite signal was acquired and the test data stream was generated on a laptop in HyperTerminal (19.2k baud, 8 bits, no parity) and was routed out Com1 to the RIM ICU. For testing, the ICU sent a continuous data stream to the appropriate antenna for transmission. The equipment setup information is given in Table 1.

<b>EUT &amp; Mode:</b>	<i>Model</i>	RIM with TriMode Antenna
	<i>ERP</i>	RIM +3.44dBm
	<i>Frequency MHz</i>	RIM 896-902MHz
	<i>Operating Mode:</i> <i>Signals Acquired &amp; Transmitting</i>	RIM with TriMode Antenna
	<i>Spec Analyzer</i>	HP 8564EC 100kHz-40GHz
<b>Test Instruments:</b>	<i>Pre Amplifier</i>	HP 8449B 1-18GHz
	<i>Antennas</i>	Biconical 20MHz-200MHz Log Periodic 200MHz – 1000MHz Double Ridge Guide 1-18GHz
<b>Limit Line:</b>	-31dBc	RIM -27.5dBm
<b>Measurement Distance:</b>	10m	

**Table 1. Test Information**

**AEGIS LABS, INC.**



**22431-B160 Antonio Parkway, #417, Rancho Santa Margarita, CA 92688**

Document #	Title	Page
021029-01	SAIC Bell South Fleet Manager – Spurious Emissions Measurement	4 of 11

## **2.2 Test Detection System**

The test data collection system for ERP measurements was comprised of a spectrum analyzer, a preamplifier and a high pass filter – when required (see Figure 2). This same system was also used in the EIRP / signal substitution measurements; additionally, a synthesizer and radiating horn were required to complete EIRP measurements (see Figure 3).

The RIM ICU emissions testing was accomplished on a certified 3/10 m Open Area Test Site at Aegis Labs, Inc. A 1 to 4 meter mast and a turntable were used on the OATS to maximize the signals selected for measurement. All test equipment are in current calibration (see Table 2).

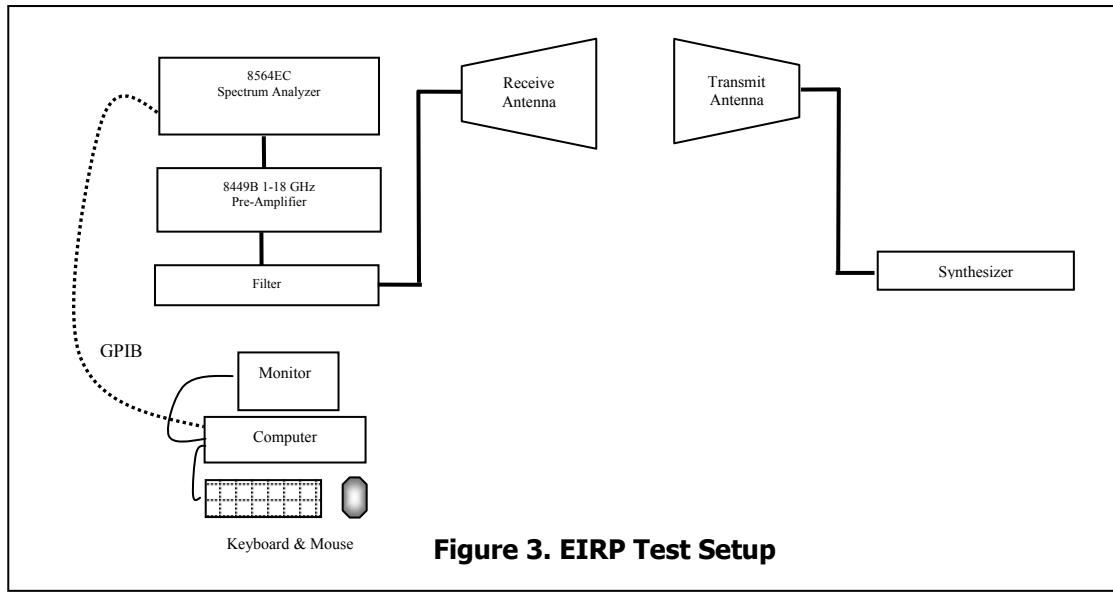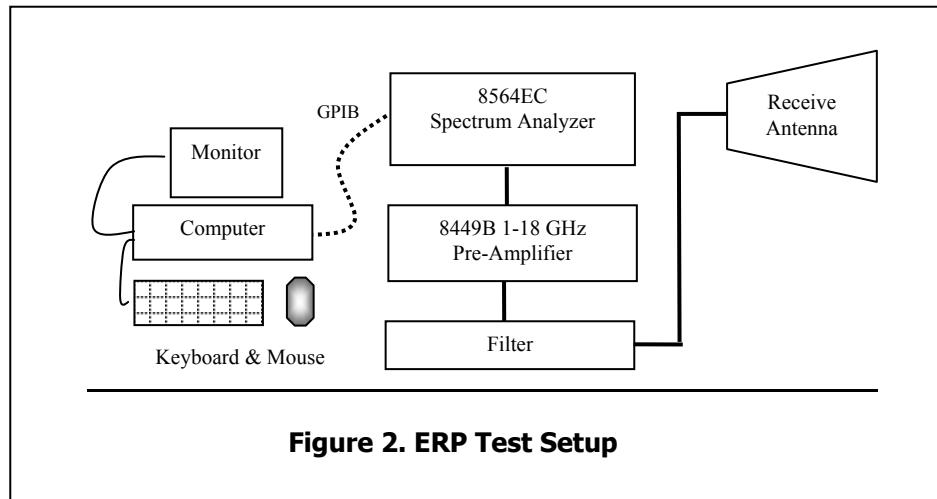

Document #	Title	Page
021029-01	SAIC Bell South Fleet Manager – Spurious Emissions Measurement	5 of 11

Equipment Name	Manufacturer	Model Number	Serial Number	Cal. Due Date	Cal Cycle
Site #2 NSA	Aegis Labs, Inc.	N/A	N/A	10/24/02	1 Year
Spectrum Analyzer	Agilent	8564EC	4046A00387	02/28/04	2 Years
Preamplifier	Agilent	8449B	3008A01573	04/29/03	1 Year
Antenna-Bicon	EMCO	9018-1421	3110	10/12/02	1 Year
Antenna – Log Periodic	EMCO	3148	1947	10/12/02	1 Year
Antenna - Horn	EMCO	3115	2230	09/14/03	1 Year
Temperature/Humidity Monitor	Dickson	TH550	7255185	01/08/03	1 Year

**Table 2. Test Equipment Calibration**

### **2.3 Derivation of Limit Line**

The limit cited in the tables is the level at which the measured spurious emission is -31dBc from the transmitter fundamental. The limit line calculation is given in Table 3.

RIM					
Freq. (MHz)	Meter (dBuV)	Corrected (dBuV/m)	ERP dBm	Limit at 31dBc	
897.96	81.20	110.44	3.44	-27.56	

**Table 3. Limit Line Calculation**

Document #	Title	Page
021029-01	SAIC Bell South Fleet Manager – Spurious Emissions Measurement	6 of 11

### 3.0 ERP Test Data

The ERP test data collection for RIM ICU was accomplished on the OATS at a distance of 10m from the perimeter of the EUT. The equipment was operated in a typical mode; GPS satellite locked and tracking and data transmitting.

#### 3.1 RIM ERP Test Data

The RIM data reported below were the highest readings received in each receive antenna polarization. The ERP data were collected, corrected for the cable loss or amplification factor and are presented as corrected data in Table 4.

RIM Harmonic ERP Measurements							
Horizontal Open Field Maximized Data							
Freq. (MHz)	Meter (dBuV)	Ant Ht. (cm)	Azimuth (degrees)	Corrected (dBuV/m)	ERP (dBm)	Limits dBm	Diff (dB) +=FAIL
1795.5	75.5	100	0	69.66	-37.34	-27.56	-9.77
2693.37	56.67	100	0	53.55	-53.45	-27.56	-25.89
3591.04	52.33	100	0	52.41	-54.59	-27.56	-27.02
4488.74	42.67	100	0	44.54	-62.46	-27.56	-34.90
5386.12	42.5	100	0	46.12	-60.88	-27.56	-33.32
6284.38	44.67	100	0	48.77	-58.23	-27.56	-30.67
No signals found for the remaining harmonics							
RIM Harmonic ERP Measurements							
Vertical Open Field Maximized Data							
Freq. (MHz)	Meter (dBuV)	Ant Ht. (cm)	Azimuth (degrees)	Corrected (dBuV/m)	ERP (dBm)	Limits dBm	Diff (dB) +=FAIL
1795.48	85.17	100	0	79.33	-27.67	-27.56	-0.10
2693.25	66.17	100	0	63.05	-43.95	-27.56	-16.39
3591.01	59	100	0	59.08	-47.92	-27.56	-20.36
4488.78	45.5	100	0	47.37	-59.63	-27.56	-32.07
5386.88	43.32	100	0	46.94	-60.06	-27.56	-32.50
6284.27	44.17	100	0	48.27	-58.73	-27.56	-31.17
No signals found for the remaining harmonics							
Table 4. RIM Spurious Emissions - ERP							

Document #	Title	Page
021029-01	SAIC Bell South Fleet Manager – Spurious Emissions Measurement	8 of 11

#### 4.0 EIRP Test Data

The EIRP data were derived using a signal substitution method presented in TIA/EIA 603-1992, paragraph 2.2.12. The frequency under evaluation was radiated from the RIM ICU, a synthesizer and radiating horn were placed at the EUT location on the OATS and a signal was radiated which matched the amplitude of the EUT spurious emission. That synthesizer RF level, adjusted for the transmit antenna cable loss and substitute-antenna gain figure, is presented as corrected EIRP data. Again, the limit cited in the tables is the level at which the measured spurious emission is -31dBc from the transmitter fundamental.

#### 4.1 RIM EIRP Test Data

The RIM data reported below were the highest readings received in each receive antenna polarization. The EIRP data were collected, corrected for the cable loss and antenna gain figure and are presented as corrected data in Table 6.

##### RIM Harmonic EIRP Measurements

##### Horizontal Measurement using Signal Substitution TIA/EIA 603

Frequency (MHz)	Spec. An. (dBuV)	Sig. Gen. (dBm)	Antenna Gain (Db)	EIRP (dBm)	Limit (dBm)	Differ +=FAIL
1795.5	75.5	-37.7	4.6	-33.1	-27.56	-5.54
2693.37	56.67	-56.3	6.9	-49.4	-27.56	-21.84
3591.04	52.33	-58.2	9.2	-49	-27.56	-21.44
4488.74	42.67	-67.8	8.7	-59.1	-27.56	-31.54
5386.12	42.5	-69.6	8.4	-61.2	-27.56	-33.64
6284.38	44.67	-65.8	8.8	-57	-27.56	-29.44

##### RIM Harmonic EIRP Measurements

##### Vertical Measurement using Signal Substitution TIA/EIA 603

Frequency (MHz)	Spec. An. (dBuV)	Sig. Gen. (dBm)	Antenna Gain (Db)	EIRP (dBm)	Limit (dBm)	Differ +=FAIL
1795.48	78.17	-34.8	4.6	-30.2	-27.56	-2.64
2693.25	66.17	-44.7	6.9	-37.8	-27.56	-10.24
3591.01	59	-51.1	9.2	-41.9	-27.56	-14.34
4488.78	45.5	-63	8.7	-54.3	-27.56	-26.74
5386.88	43.32	-65.1	8.4	-56.7	-27.56	-29.14
6284.27	44.17	-63.5	8.8	-54.7	-27.56	-27.14

Table 6. RIM Spurious Emissions - EIRP

Document #	Title	Page
021029-01	SAIC Bell South Fleet Manager – Spurious Emissions Measurement	10 of 11

## 5.0 Radiated Emissions Test Data

The radiated emissions were measured on the OATS from 30MHz to 1000MHz and compared to the CFR 47, Part 15, Class A limits. The test data collection for RIM ICU was accomplished at a distance of 10m from the perimeter of the EUT. The equipment was operated in a typical mode; satellite locked and tracking and data transmitting.

### 5.1 RIM Radiated Emissions Test Data

The RIM data reported below were the highest readings received in each receive antenna polarization. The data were collected, corrected for the cable loss or amplification factor and are presented as corrected data in Table 8.

#### RIM Radiated Emissions 30M-1000MHz

##### Horizontal Open Field Maximized Data

Freq. (MHz)	Meter (dBuV)	Ant Hgt (cm)	Azimuth (degrees)	QP or AV (dBuV)		Corrected (dBuV/m)	Limits (dBuV/m)	Delta Limit (dB)
34.11	43.60	350.00	180.00			27.74	39.00	-11.26
65.18	44.00	400.00	0.00			18.62	39.00	-20.38
128.90	48.60	400.00	135.00			30.38	43.50	-13.12
199.90	47.30	400.00	270.00			32.29	43.50	-11.21
288.06	35.70	400.00	270.00			23.96	46.50	-22.54
298.58	44.50	400.00	45.00			33.37	46.50	-13.13
331.79	47.10	250.00	225.00			31.09	46.50	-15.41
344.09	39.20	300.00	225.00			23.27	46.50	-23.23
347.67	39.50	300.00	270.00			23.59	46.50	-22.91
400.34	44.40	200.00	270.00			29.78	46.50	-16.72

#### RIM Radiated Emissions 30M-1000MHz

##### Vertical Open Field Maximized Data

Freq. (MHz)	Meter (dBuV)	Ant Hgt (cm)	Azimuth (degrees)	QP or AV (dBuV)		Corrected (dBuV/m)	Limits (dBuV/m)	Delta Limit (dB)
34.65	46.40	100.00	0.00			30.35	39.00	-8.65
65.18	54.30	100.00	315.00			28.92	39.00	-10.08
127.81	54.00	100.00	135.00	53.59	Q	35.26	43.50	-8.24
200.08	43.70	100.00	270.00			28.69	43.50	-14.81
288.04	33.40	100.00	0.00			21.66	46.50	-24.84
299.72	47.90	100.00	270.00	46.45	Q	35.39	46.50	-11.11
306.62	38.50	100.00	90.00			21.64	46.50	-24.86
320.66	38.70	100.00	0.00			22.45	46.50	-24.05
333.10	43.30	100.00	270.00			27.29	46.50	-19.21
344.11	36.10	100.00	315.00			20.17	46.50	-26.33
368.65	36.30	100.00	315.00			20.74	46.50	-25.76
414.46	46.20	100.00	45.00			31.78	46.50	-14.72

Table 8. RIM Radiated Emissions – Class A Limit