



FCC PART 90
ISED C RSS-119, ISSUE 12, MAY 2015
TEST AND MEASUREMENT REPORT

For
Pyramid Communications

37 Shield, Irvine, CA 92618, USA

FCC ID: LRUSVR-P250UA
IC: 2390A-SVRP250UA

Report Type: CIIPC	Product Type: Vehicular Repeater System (VRS)
Prepared By: Frank Wang Test Engineer	
Report Number: R1808143-90	
Report Date: 2018-09-26	
Reviewed By: Jin Yang Test Engineer	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: 1 (408) 732-9162 Fax: 1 (408) 732-9164	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" (Rev.3)

TABLE OF CONTENTS

1. General Information.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 MECHANICAL DESCRIPTION	4
1.3 OBJECTIVE.....	4
1.4 RELATED SUBMITTAL(S)/GRANT(S)	4
1.5 TEST METHODOLOGY	5
1.6 MEASUREMENT UNCERTAINTY	5
1.7 TEST FACILITY	5
1.8 TEST FACILITY ACCREDITATIONS	6
2 System Test Configuration.....	9
2.1 JUSTIFICATION.....	9
2.2 EQUIPMENT MODIFICATIONS.....	9
2.3 LOCAL SUPPORT EQUIPMENT	9
2.4 SUPPORT EQUIPMENT	9
2.5 LOCAL SUPPORT EQUIPMENT POWER SUPPLY AND LINE FILTERS	10
2.6 EXTERNAL I/O CABLING LIST AND DETAILS	10
2.7 TEST SETUP BLOCK DIAGRAM	10
2.8 ANTENNA PORT CONDUCTED TEST	11
3 Summary of Test Results.....	12
4 FCC §2.1091 & ISEDC RSS-102 - RF Exposure.....	13
4.1 APPLICABLE STANDARDS	13
4.2 MPE PREDICTION	14
4.3 MPE RESULTS	14
5 FCC §2.1046, §90.205 & ISEDC RSS-119 §5.4 - RF Output Power.....	15
5.1 APPLICABLE STANDARD.....	15
5.2 TEST PROCEDURE	16
5.3 TEST EQUIPMENT LIST AND DETAILS	16
5.4 TEST ENVIRONMENTAL CONDITIONS.....	16
5.5 TEST RESULTS	16
6 FCC §2.1053, §90.210 & ISEDC RSS-119 §5.8 - Field Strength of Spurious Radiation	26
6.1 APPLICABLE STANDARD.....	26
6.2 TEST PROCEDURE	27
6.3 TEST EQUIPMENT LIST AND DETAILS	27
6.4 TEST ENVIRONMENTAL CONDITIONS.....	27
6.5 TEST RESULTS	28
7 Appendix A - EUT Test Setup Photographs.....	29
8 Appendix B - EUT External Photographs	30
9 Appendix C - EUT Internal Photographs.....	31
10 Appendix D (Normative) - A2LA Electrical Testing Certificate.....	32

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1808143-90	CIIPC Report	2018-09-26

1. General Information

1.1 Product Description for Equipment under Test (EUT)

This test and measurement report was prepared on behalf *Pyramid Communications* and their product, FCC ID: LRUSVR-P250UA, IC: 2390A-SVRP250UA model: SVR-P250UA, which will henceforth be referred to as the EUT (Equipment Under Test). The EUT is a UHF digital transceiver that operates in frequency band 406.1-470 MHz.

The EUTs are UHF Transceivers that operates under FCC Part 90, ISERC RSS-119.

Specifications	
Frequency Bands	FCC: 406.1-470 MHz IC: 406.1-430 MHz, 450-470 MHz
Emission Designator	FCC: 11K0F3E/6K6F2D/7K80F2D/9K60F2D/10K8F2D/8K10F1E/8K10F7E/8K10F1D/8K10F7D/8K10F1W/7K60FXW/7K60FXD IC: 11K0F3E/16K0F3E/6K6F2D/7K80F2D/9K60F2D/10K8F2D/8K10F1E/8K10F7E/8K10F1D/8K10F7D/8K10F1W/7K60FXW/7K60FXD
RF Output Power	0.5/1/2 Watt
Channel Spacing	FCC: 12.5 kHz IC: 12.5 kHz, 25 kHz
Power Supply	12-13.6 VDC

1.2 Mechanical Description

The EUT measures approximately 23.1 cm (L) x 14.0 cm (W) x 5.0 cm (H) and weighs approximately 1250 g.

The test data gathered are from production sample, serial number: 20580515, provided by the manufacturer.

1.3 Objective

This type approval report is prepared on behalf of *Pyramid Communications* in accordance with Part 90 of the Federal Communication Commissions rules and ISERC RSS-119.

The objective was to determine that the changes in components do not degrade the performance of the EUT.

1.4 Related Submittal(s)/Grant(s)

N/A

1.5 Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J, Part 90 – Private Land Mobile Radio Service and ISERC RSS-119.

Applicable Standards: TIA-603-D, Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

All emissions measurement was performed by Bay Area Compliance Laboratories Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48dB
Unwanted Emissions, conducted	±1.57dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

1.7 Test Facility

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.8 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3279.02), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.03) to certify

- For the USA (Federal Communications Commission):

- 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
- 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
- 3- All Telephone Terminal Equipment within FCC Scope C.

- For the Canada (Innovation, Science and Economic development Canada - ISED):

- 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
- 2 All Scope 2-Licensed Personal Mobile Radio Services;
- 3 All Scope 3-Licensed General Mobile & Fixed Radio Services;
- 4 All Scope 4-Licensed Maritime & Aviation Radio Services;
- 5 All Scope 5-Licensed Fixed Microwave Radio Services
- 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.

- For Singapore (Infocomm Media Development Authority - IMDA):

- 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2

- For the Hong Kong Special Administrative Region:

- 1 All Radio Equipment, per KHCA 10XX-series Specifications;
- 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
- 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.

- For Japan:

- 1 MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
- 2 Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes & Cable Boxes (ver. 4.1)
 - for Televisions (ver. 6.1)
 - for Computers (ver. 6.0)
 - for Displays (ver. 6.0)
 - for Imaging Equipment (ver. 2.0)
 - for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
 - for Commercial Dishwashers (ver. 2.0)
 - for Commercial Ice Machines (ver. 2.0)
 - for Commercial Ovens (ver. 2.1)
 - for Commercial Refrigerators and Freezers
- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminaires (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
 - for Residential Ceiling Fans (ver. 3.0)
 - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Innovation, Science and Economic development Canada - ISEDC) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2014/30/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA)
APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Media Development Authority - IMDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA

- o Telecommunications Certification Body (TCB) – US FCC;
 - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to TIA-603-D and the instructions and default settings provided by Pyrammid Communications.

The EUT was tested in the normal (native) operating mode to represent *worst-case* results during the final qualification test.

Bands (MHz)	Channel	Frequency (MHz)	Power Setting (W)
406.1-470 MHz	1	406.2	0.5
			1
			2
	2	429.9	0.5
			1
			2
	3	450.1	0.5
			1
			2
	4	459.9	0.5
			1
			2
	5	469.9	0.5
			1
			2

2.2 Equipment Modifications

No modifications were made to the EUT.

2.3 Local Support Equipment

Manufacturer	Description	Model No.	Serial No.
Fluke	Multimeter	75 Series II	56500901

2.4 Support Equipment

Manufacturer	Description	Model No.	Serial No.
Pyrammid Communications	EUT Test Set	-	-

2.5 Local Support Equipment Power Supply and Line Filters


Manufacturer	Description	Model	Serial Number
MASTECH	DC Power Supply	HY3010E	-

2.6 External I/O Cabling List and Details


Cable Description	Length (m)	From	To
RS-232 Adapter	< 1.0	EUT Test Set	EUT
DC Adapter with Banana Plugs	> 1.0	DC Barrel Jack	Power Supply

2.7 Test Setup Block Diagram

Radiated Emission Test

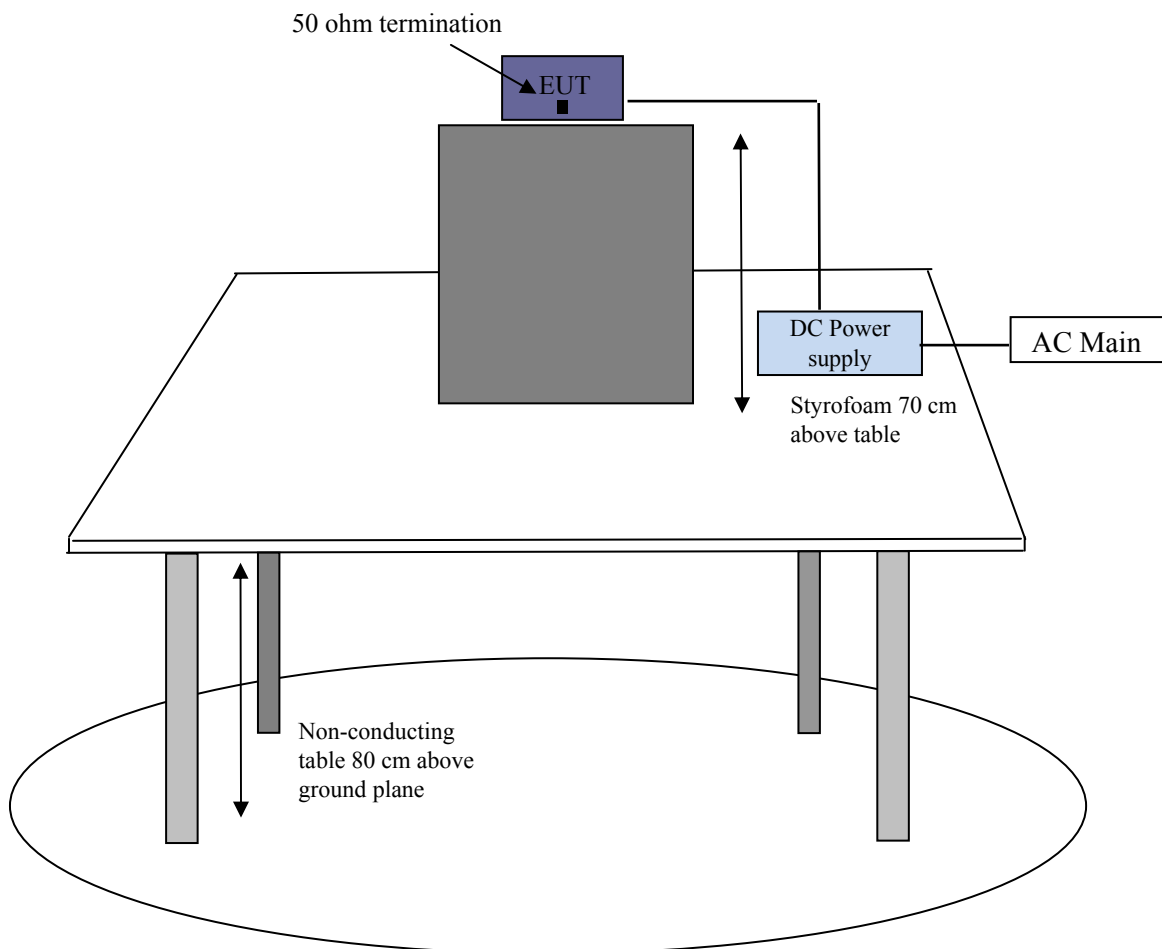

2.8 Antenna Port Conducted Test

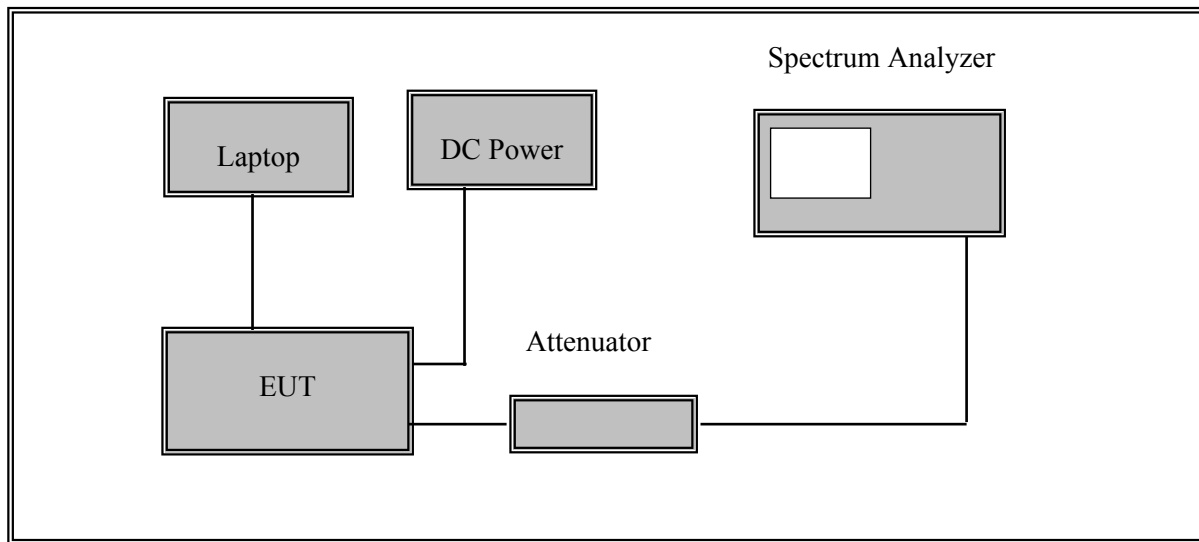

3 Summary of Test Results

FCC & ISEDC Rules	Description of Tests	Results
FCC §2.1091 ISEDC RSS-102	RF Exposure	Compliant
FCC §2.1046, §90.205 ISEDC RSS-119 §5.4	RF Output Power	Compliant
FCC §2.1053, §90.210 ISEDC RSS-119 §5.8	Field Strength of Spurious Radiation	Compliant

4 FCC §2.1091 & ISED RSS-102 - RF Exposure

4.1 Applicable Standards

According to FCC §15.247(i), §15.407(f) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	* (100)	30
1.34-30	824/f	2.19/f	* (180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Before equipment certification is granted, the procedure of ISED RSS-102 must be followed concerning the exposure of humans to RF field

According to ISED RSS-102 Issue 5:

Table 4: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)				
Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Reference Period (minutes)
0.003-10 ²¹	83	90	-	Instantaneous [*]
0.1-10	-	0.73/ f	-	6 ^{**}
1.1-10	87/ f ^{0.5}	-	-	6 ^{**}
10-20	27.46	0.0728	-2	6
20-48	58.07/ f ^{0.25}	0.1540/ f ^{0.25}	8.944/ f ^{0.5}	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 f ^{0.3417}	0.008335 f ^{0.3417}	0.02619 f ^{0.6834}	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ f ^{1.2}
150000-300000	0.158 f ^{0.5}	4.21 x 10 ⁻⁴ f ^{0.5}	6.67 x 10 ⁻⁵ f	616000/f ^{1.2}

Note: f is frequency in MHz.
^{*} Based on nerve stimulation (NS).
^{**} Based on specific absorption rate (SAR).

4.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

4.3 MPE Results

Safe Distance: Recommended minimum lateral safe distance from the antenna: 90 cm

Recommmented Antennas:	Antenna Gain (dBi)
Monopole ($\lambda/4$ antenna	2.15
Monopole ($5/8\lambda$ antenna)	5.15

The maximum antenna gian is 5.15 dBi which is used for worst MPE prediction

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>33.02</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>2004.47</u>
<u>Prediction distance (cm):</u>	<u>90</u>
<u>Prediction frequency (MHz):</u>	<u>469.9</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>5.15</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>3.27</u>
<u>Power density of prediction frequency at 90.0 cm (mW/cm²):</u>	<u>0.064</u>
<u>Power density of prediction frequency at 90.0 cm (W/m²):</u>	<u>0.644</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>0.313</u>
<u>ISED MPE limit for uncontrolled exposure at prediction frequency (W/m²):</u>	<u>1.755</u>

Conclusion

The device is compliant with the requirement MPE limit for uncontrolled exposure. All transceiver modules must be installed with a separation distance of no less than **90** cm from all persons.

5 FCC §2.1046, §90.205 & ISEDC RSS-119 §5.4 - RF Output Power

5.1 Applicable Standard

According to FCC §2.1046, and §90.205, (g) 421-430 MHz. Limitations on power and antenna heights are specified in §90.279.

(h) 450-470 MHz. (1) The maximum allowable station effective radiated power (ERP) is dependent upon the station's antenna HAAT and required service area and will be authorized in accordance with table 2. Applicants requesting an ERP in excess of that listed in table 2 must submit an engineering analysis based upon generally accepted engineering practices and standards that includes coverage contours to demonstrate that the requested station parameters will not produce coverage in excess of that which the applicant requires.

(s) The output power shall not exceed by more than 20 percent either the output power shown in the Radio Equipment List [available in accordance with §90.203(a)(1)] for transmitters included in this list or when not so listed, the manufacturer's rated output power for the particular transmitter specifically listed on the authorization.

As per ISEDC RSS-119 §5.4,

Table 2 — Transmitter Output Power		
Frequency Bands (MHz)	Transmitter Output Power (W)	
	Base/Fixed Equipment	Mobile Equipment
27.41-28 and 29.7-50	300	30
72-76	No limit	1
138-174	110	60
217-218 and 219-220	110	30 
220-222	See SRSP-512 for ERP limit	50
406.1-430 and 450-470	110	60
768-776 and 798-806	See SRSP-511 for ERP limit	30 3 W ERP for portable equipment
806-821/851-866 and 821-824/866-869	110	30
896-901/935-940	110	60
929-930/931-932	110	30
928-929/952-953 and 932-932.5/941-941.5	110	30
932.5-935/941.5-944	110	30

5.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

5.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Rhode & Schwarz	Spectrum Analyzer	FSV40	1321.3008K3 9-101203-UW	2018-07-23	1 year
-	20 dB Attenuator	-	-	-	-

Statement of Traceability: BACL Corp. attests that all calibrations have been performed according to A2LA requirements, traceable to the NIST.

5.4 Test Environmental Conditions

Temperature:	20-25 °C
Relative Humidity:	44-55 %
ATM Pressure:	101-102 kPa

The testing was performed by Frank Wang on 2018-09-12 in RF Site

5.5 Test Results

FCC:

Frequency (MHz)	Channel	Frequency (MHz)	Power Setting (Watt)	Carrier Conducted Output Power		Output Power Limit (Watt)
				(dBm)	(Watt)	
406.1-470	1	406.2	0.5	27.19	0.524	0.6
			1.0	30.10	1.023	1.2
			2.0	32.95	1.972	2.4
	2	429.9	0.5	27.29	0.536	0.6
			1.0	30.06	1.014	1.2
			2.0	32.65	1.841	2.4
	3	450.1	0.5	27.52	0.565	0.6
			1.0	30.13	1.030	1.2
			2.0	32.87	1.936	2.4
	4	459.9	0.5	27.44	0.555	0.6
			1.0	30.25	1.059	1.2
			2.0	32.86	1.932	2.4
	5	469.9	0.5	27.56	0.570	0.6
			1.0	30.39	1.094	1.2
			2.0	33.02	2.004	2.4


Note: The maximum output power allowed is referred by FCC §90.205(s).

ISED:

Frequency (MHz)	Channel	Frequency (MHz)	Power Setting (Watt)	Carrier Conducted Output Power		Limit (Watt)
				(dBm)	(Watt)	
406.1-430&450-470	1	406.2	0.5	27.19	0.524	60
			1.0	30.10	1.023	60
			2.0	32.95	1.972	60
	2	429.9	0.5	27.29	0.536	60
			1.0	30.06	1.014	60
			2.0	32.65	1.841	60
	3	450.1	0.5	27.52	0.565	60
			1.0	30.13	1.030	60
			2.0	32.87	1.936	60
	4	459.9	0.5	27.44	0.555	60
			1.0	30.25	1.059	60
			2.0	32.86	1.932	60
	5	469.9	0.5	27.56	0.570	60
			1.0	30.39	1.094	60
			2.0	33.02	2.004	60


Channel 1: 406.2 MHz

0.5 W power setting

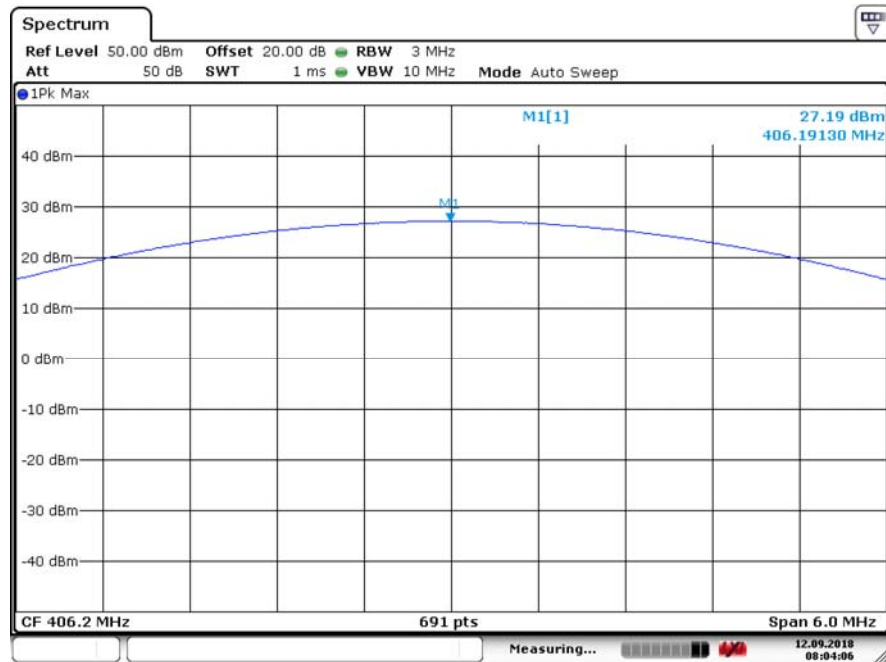


Date: 12 SEP. 2018 08:04:06

1 W power setting

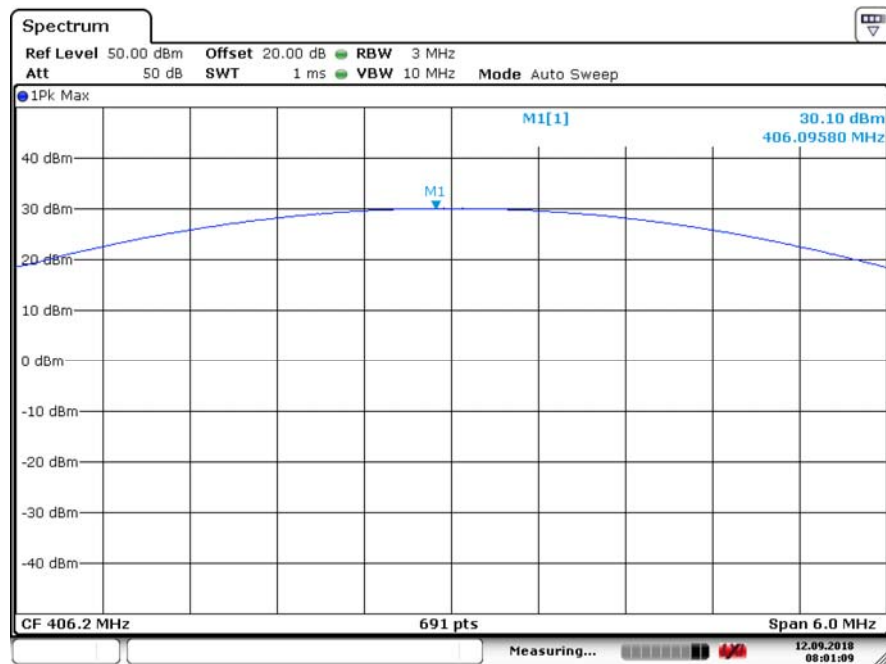

Date: 12 SEP. 2018 08:01:10


2 W power setting

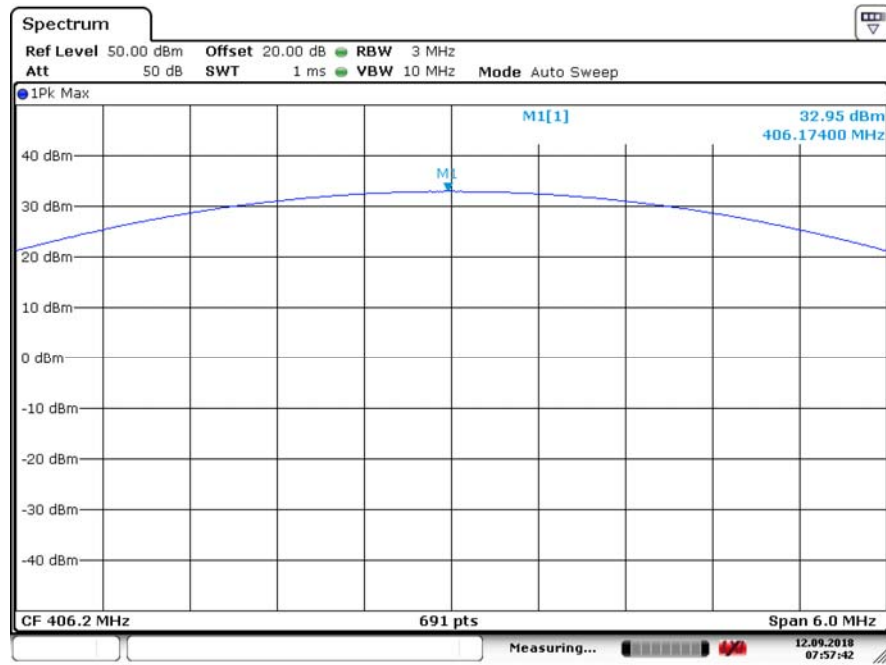

Date: 12.SEP.2018 07:57:42


Channel 2: 429.9 MHz

0.5 W power setting

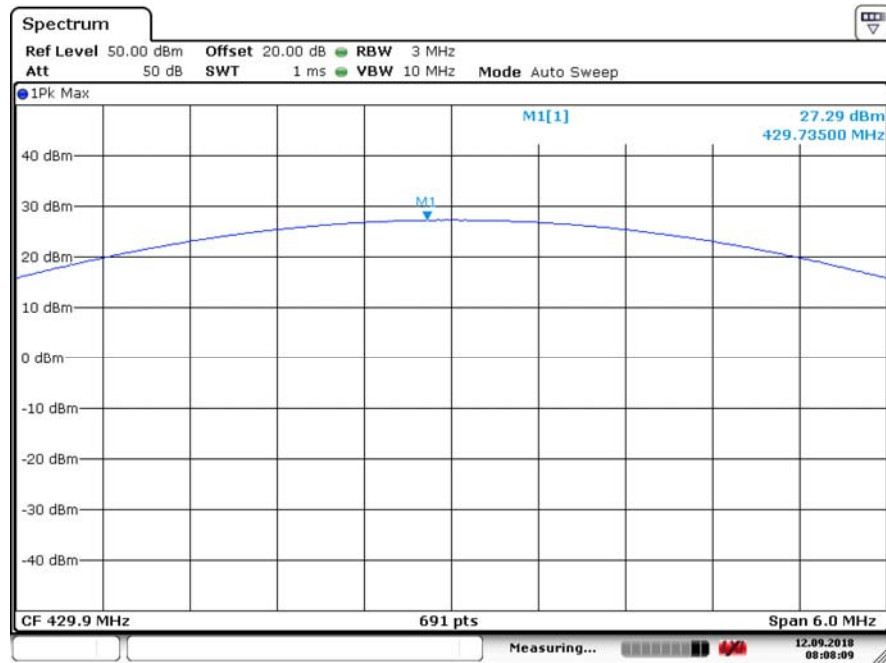


Date: 12.SEP.2018 08:08:10

1 W power setting

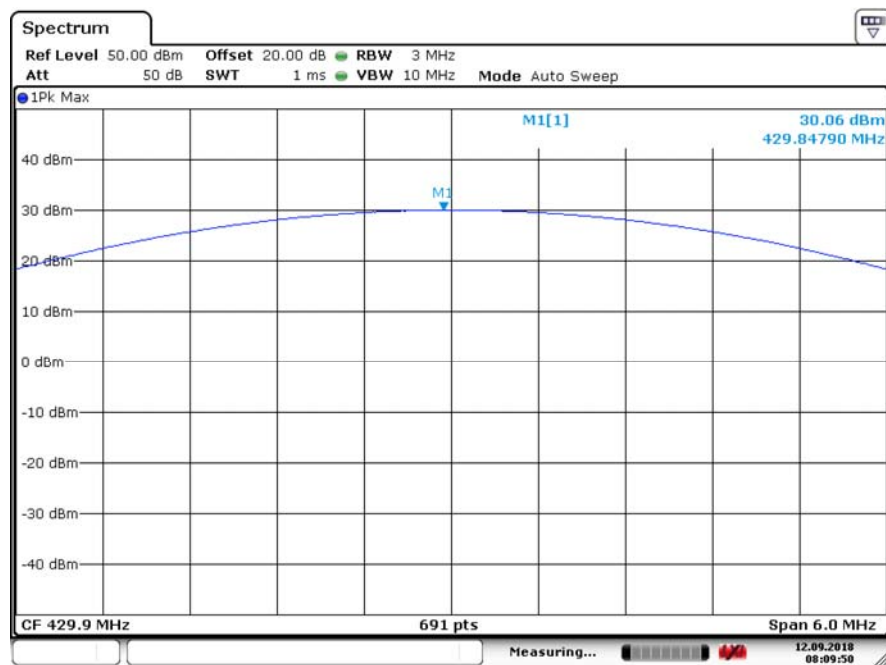

Date: 12.SEP.2018 08:09:50


2 W power setting

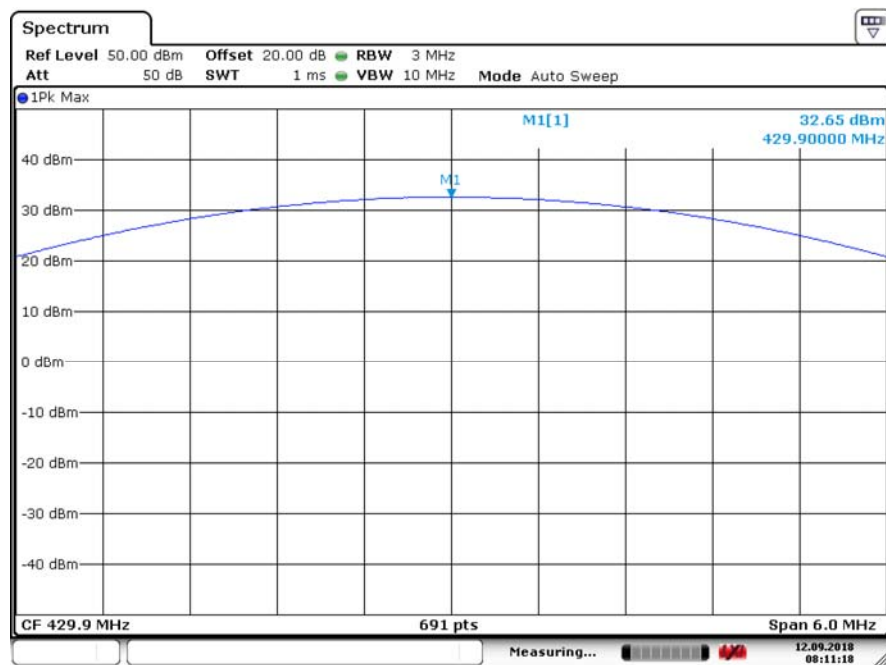

Date: 12.SEP.2018 08:11:18


Channel 3: 450.1 MHz

0.5 W power setting

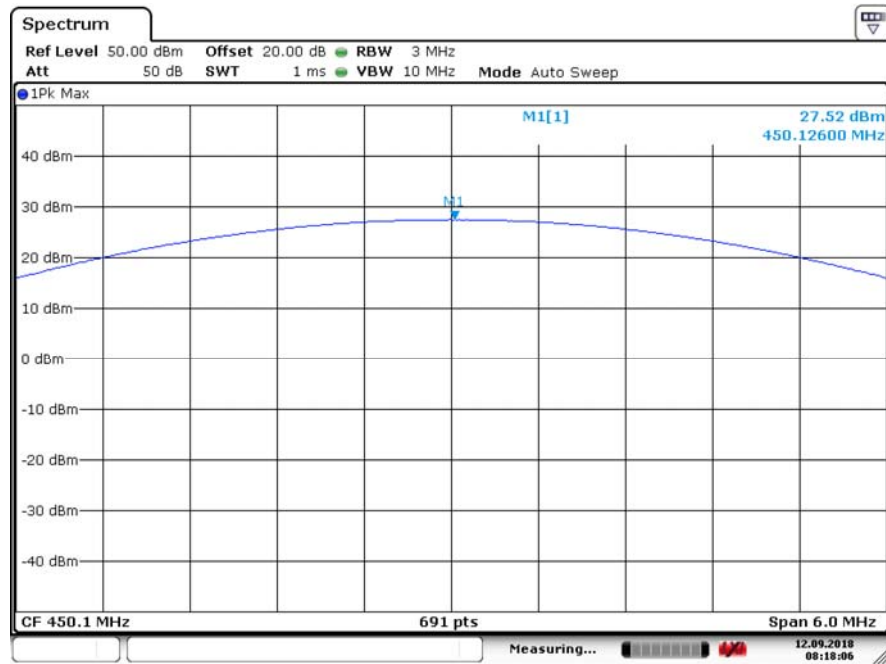

Date: 12.SEP.2018 08:18:06

1 W power setting

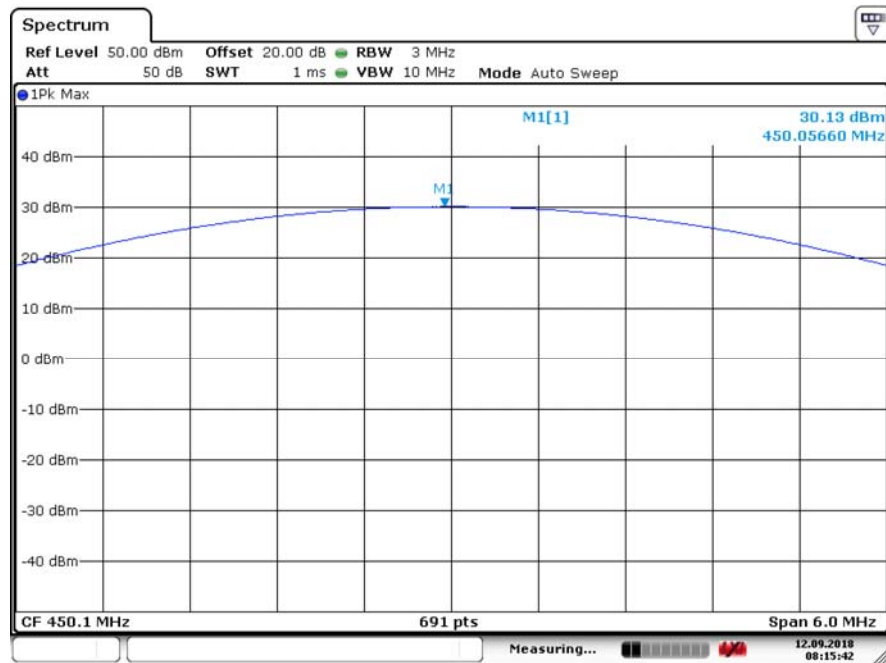

Date: 12.SEP.2018 08:15:42

Spectrum

Ref Level 50.00 dBm Offset 20.00 dB RBW 3 MHz
Att 50 dB SWT 1 ms VBW 10 MHz Mode Auto Sweep

● 1Pk Max


M1[1] 32.87 dBm
450.12600 MHz

CF 450.1 MHz 691 pts Span 6.0 MHz

Measuring... 12.09.2018 08:14:48


Date: 12.SEP.2018 08:14:49

0.5 W power setting

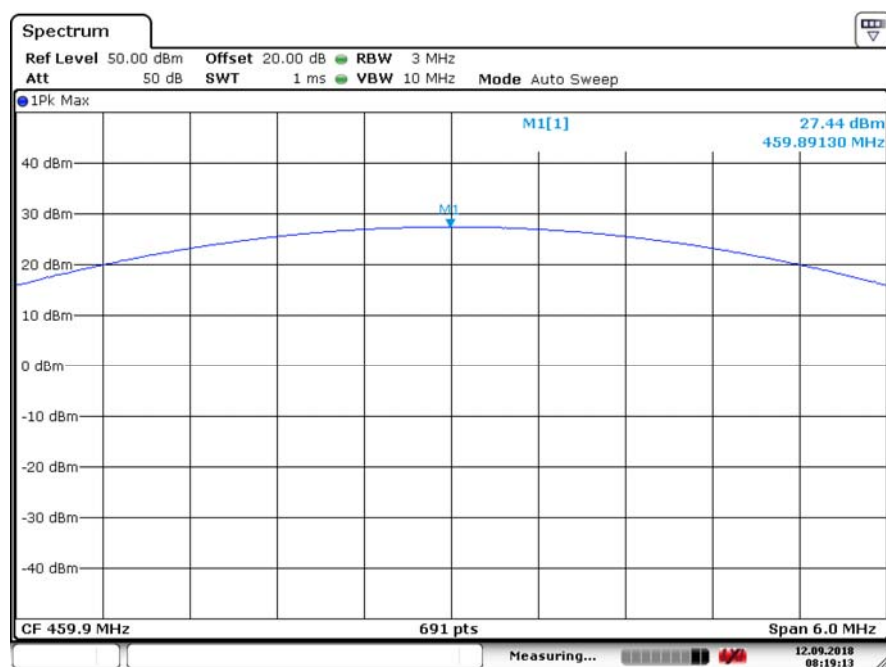


Date: 12.SEP.2018 08:19:14

1 W power setting

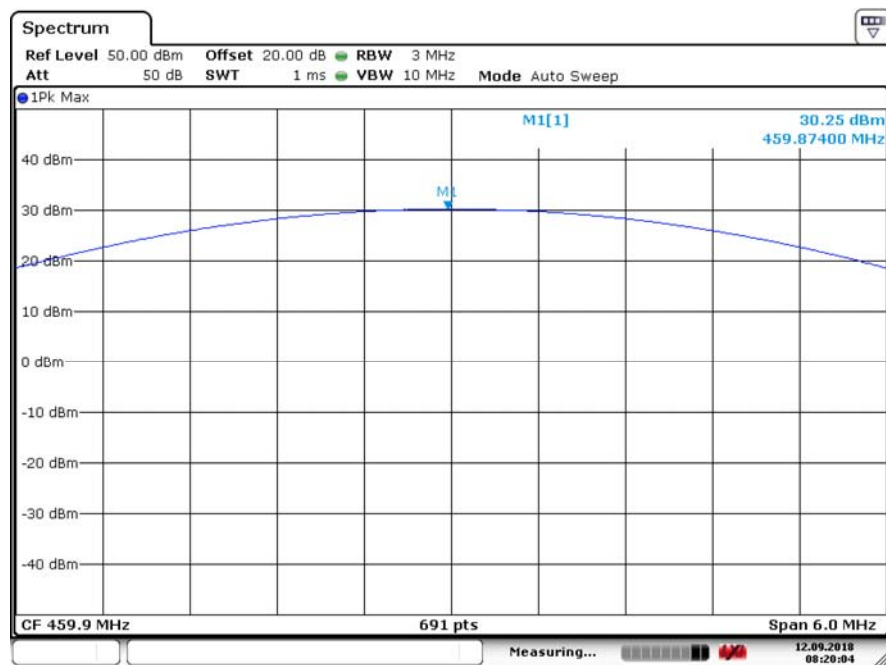

Date: 12.SEP.2018 08:20:04


2 W power setting

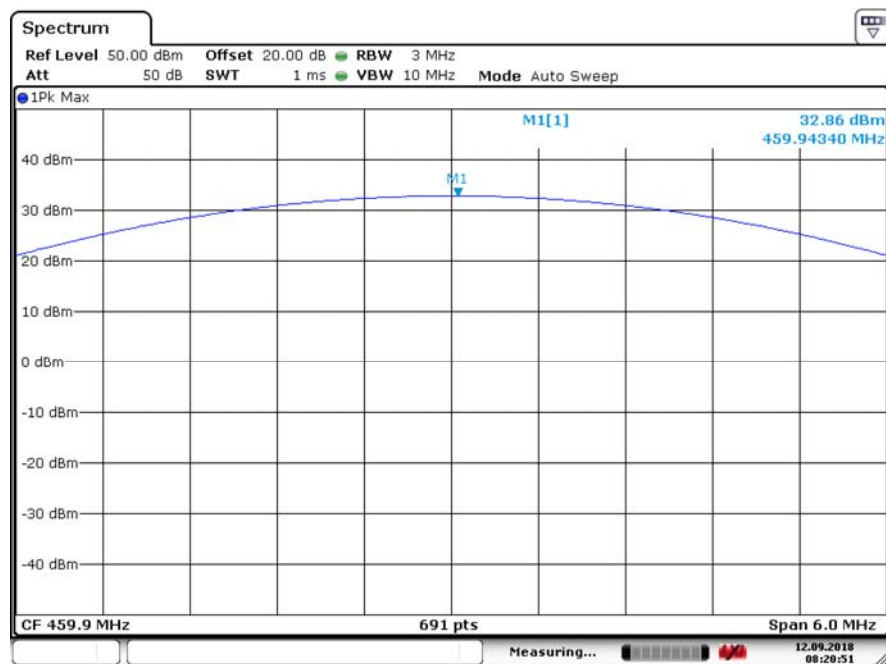

Date: 12.SEP.2018 08:20:51


Channel 5: 469.9 MHz

0.5 W power setting

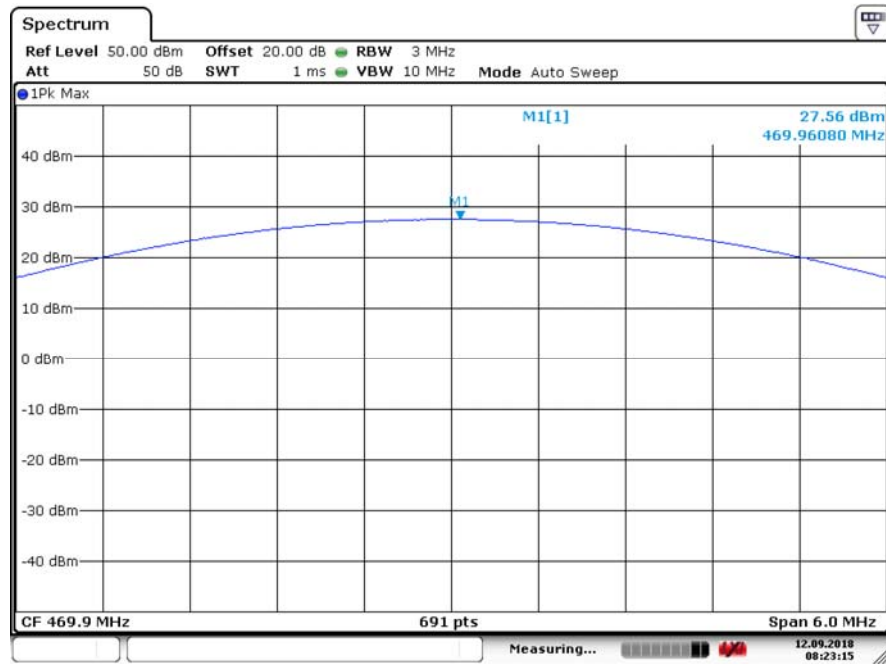


Date: 12.SEP.2018 08:23:15

1 W power setting

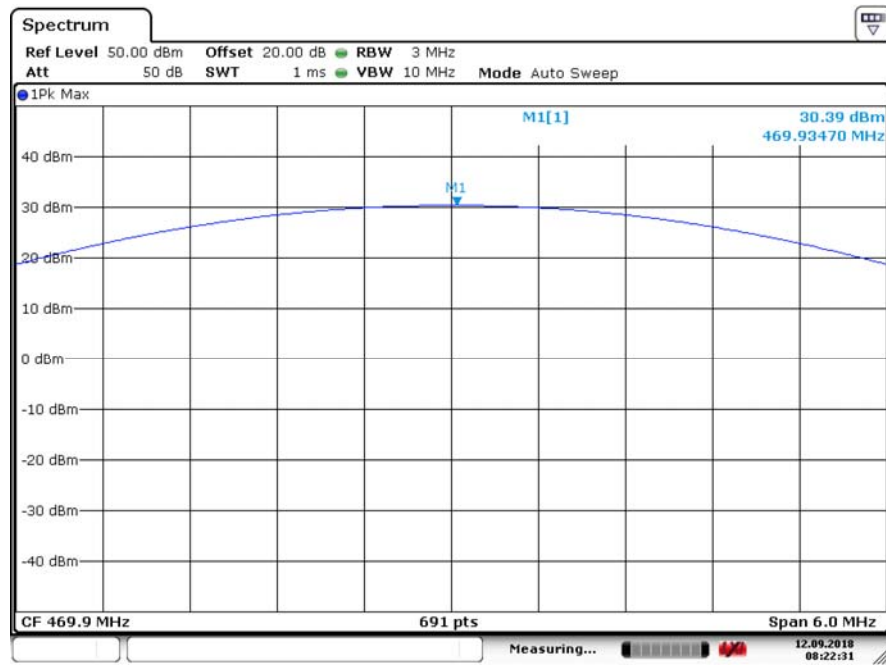

Date: 12.SEP.2018 08:22:31

2 W power setting

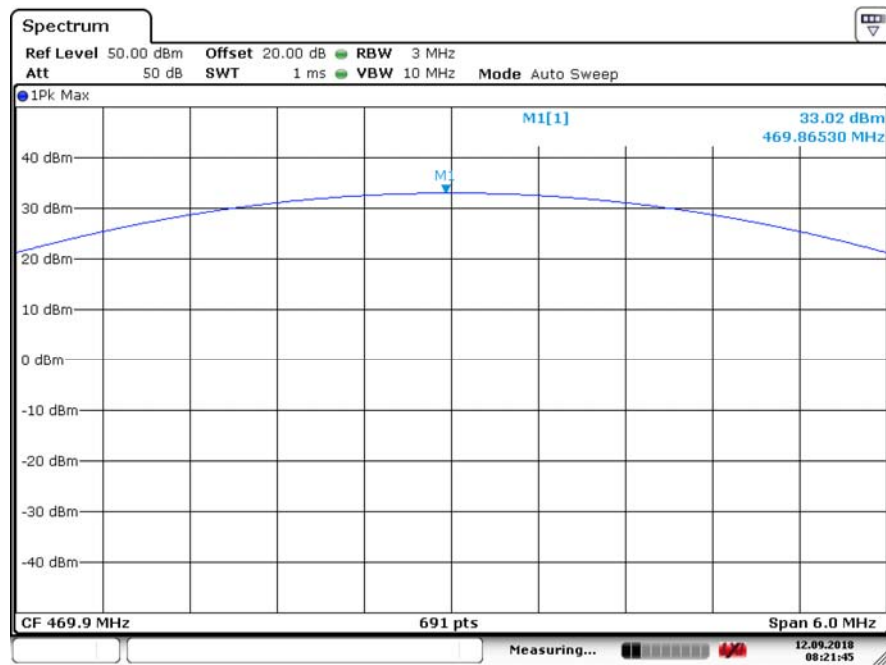

Date: 12.SEP.2018 08:21:44

6 FCC §2.1053, §90.210 & ISEDC RSS-119 §5.8 - Field Strength of Spurious Radiation

6.1 Applicable Standard

According to FCC §90.210:

(d) *Emission Mask D—12.5 kHz channel bandwidth equipment.* For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.

(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88)$ dB.

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log(P)$ dB or 70 dB, whichever is the lesser attenuation.

(4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

As per ISEDC RSS-119 §5.8,

Table 7 — Emission Mask D		
Displacement Frequency, f_d (kHz)	Minimum Attenuation (dB)	Resolution Bandwidth (Hz)
$5.625 < f_d \leq 12.5$	$7.27(f_d - 2.88)$	Specified in Section 4.2.2
$f_d > 12.5$	Whichever is the lesser: 70 or $50 + 10 \log_{10}(p)$	Specified in Section 4.2.2

6.2 Test Procedure

The transmitter was placed on a Styrofoam with wooden turntable, and it was normal transmitting with 50ohm termination which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001) – the absolute level

6.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Agilent	Signal Analyzer	E4446A	MY48250238	2018-05-08	1 year
Sunol Science Corp	System Controller	SC99V	122303-1	N/R	N/R
Sunol Sciences	Antenna, Biconi-Log	JB3	A020106-3	2017-11-02	2 years
Agilent	Pre-Amplifier	8449B	3008A01978	2018-08-10	1 year
Agilent	Amplifier, Pre	8447D	2944A10187	2018-04-02	1 year
Sunol Sciences	Antenna, Horn	DRH-118	A052704	2017-03-27	2 years
EMCO	Antenna, Horn	3115	9511-4627	2018-03-28	2 years
Keysight Technologies	Generator, Signal	N5182B	MY51350070	2018-01-06	1 year
COM-POWER	Antenna, Dipole	AD-100	721033DB1, 2, 3, 4	2017-02-13	2 years
-	RF Cable	-	-	Each time ¹	N/A

Statement of Traceability: BACL Corp. attests that all calibrations have been performed according to A2LA requirements, traceable to the NIST.

6.4 Test Environmental Conditions

Temperature:	18-24 °C
Relative Humidity:	35-50 %
ATM Pressure:	101-102 kPa

The testing was performed by Frank Wang on 2018-09-13 in 5 meter chamber 3.

6.5 Test Results

12.5 kHz Channel Spacing

Frequency: 406.2-469.9 MHz:

Worst Margin: -30.135 dB at 2500 MHz in the Horizontal polarization.

12.5 kHz Channel Spacing, Channel 3 – 450.1 MHz, 2 W power setting

Indicated		Azimuth (Degrees)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Freq. (MHz)	Amp. (dBuV)		Height (cm)	Polar (H/V)	Freq. (MHz)	Level (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	Absolute Level (dBm)		
191	33.36	200	100	H	191	-62.91	0	0.071	-62.981	-20	-42.981
191	29.66	200	100	V	191	-64.8	0	0.071	-64.871	-20	-44.871
950	28.46	0	100	H	950	-67.81	0	0.335	-68.145	-20	-48.145
950	27.54	0	100	V	950	-66.92	0	0.335	-67.255	-20	-47.255
1500	48.27	0	100	H	1500	-62.16	8.168	0.423	-54.415	-20	-34.415
1500	48.23	0	100	V	1500	-62.2	8.168	0.423	-54.455	-20	-34.455
2500	46.69	0	100	H	2500	-59.23	9.79	0.695	-50.135	-20	-30.135
2500	46.23	0	100	V	2500	-59.69	9.79	0.695	-50.595	-20	-30.595

Note: Testing frequency range is from 30 MHz-5 GHz.

7 Appendix A - EUT Test Setup Photographs

Please refer to the attachment

8 Appendix B - EUT External Photographs

Please refer to the attachment

9 Appendix C - EUT Internal Photographs

Please refer to the attachment

10 Appendix D (Normative) - A2LA Electrical Testing Certificate



Accredited Laboratory

A2LA has accredited

BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This laboratory also meets A2LA R222 - Specific Requirements EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 2nd day of October 2018.

President and CEO
For the Accreditation Council
Certificate Number 3297.02
Valid to September 30, 2020

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

--- End of Report ---