

Test Report of FCC CFR 47 Part 15 Subpart C

On Behalf of

Shenzhen YIDONG Technology Co., Ltd

FCC ID: LU7-LT7052
Product Description: Tablet PC
Model No.: LT7052
Supplementary Model: F7, EMR1878

Prepared for: **Shenzhen YIDONG Technology Co., Ltd**
Floor 1-5, Building B, Area B, Yuanfen Industrial Zone, Dalang,
Bao'an District, Shenzhen, China

Prepared by: **Bontek Compliance Testing Laboratory Ltd**
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East
Road, Nanshan, Shenzhen, China
Tel: 86-755-86337020
Fax: 86-755-86337028

Report No.: BCT12DR105E-1

Issue Date: April 23, 2012

Test Date: April 17~23, 2012

Test by:

Reviewed By:



Nie Quan



Kevin Chi

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 RELATED SUBMITTAL(S) / GRANT (S) AND TEST METHODOLOGY.....	4
1.3 TEST FACILITY.....	4
2. SYSTEM TEST CONFIGURATION.....	5
2.1 EUT CONFIGURATION.....	5
2.2 EUT EXERCISE	5
2.3 GENERAL TEST PROCEDURES.....	5
2.4 MEASUREMENT UNCERTAINTY	5
2.5 TEST EQUIPMENT LIST AND DETAILS	6
3. SUMMARY OF TEST RESULTS.....	8
4. TEST OF AC POWER LINE CONDUCTED EMISSION	9
4.1 APPLICABLE STANDARD.....	9
4.2 TEST SETUP DIAGRAM.....	9
4.3 TEST RESULT	9
5. TEST OF MAXIMUM PEAK OUTPUT POWER.....	14
5.1 APPLICABLE STANDARD.....	14
5.2 EUT SETUP.....	14
5.3 TEST EQUIPMENT LIST AND DETAILS	14
5.4 TEST PROCEDURE	14
5.5 TEST RESULT	14
6. TEST OF PEAK POWER SPECTRAL DENSITY	25
6.1 APPLICABLE STANDARD.....	25
6.2 EUT SETUP.....	25
6.3 TEST EQUIPMENT LIST AND DETAILS	25
6.4 TEST PROCEDURE	25
6.5 TEST RESULT	25
7. TEST OF 6DB BANDWIDTH.....	36
7.1 APPLICABLE STANDARD.....	36
7.2 EUT SETUP.....	36
7.3 TEST EQUIPMENT LIST AND DETAILS	36
7.4 TEST PROCEDURE	36
7.5 TEST RESULT	36
8. TEST OF CONDUCTED SPURIOUS EMISSION	47
8.1 APPLICABLE STANDARD.....	47
8.2 EUT SETUP.....	47
8.3 TEST EQUIPMENT LIST AND DETAILS	47
8.4 TEST PROCEDURE	47
8.5 TEST RESULT	47
9. TEST OF RADIATED SPURIOUS EMISSION	51
9.1 RADIATED SPURIOUS EMISSION	51
9.2 RESTRICTED BAND EDGES.....	67
10. ANTENNA REQUIREMENT	85
10.1 STANDARD APPLICABLE.....	85
10.2 ANTENNA CONNECTED CONSTRUCTION	85

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: **Shenzhen YIDONG Technology Co., Ltd**
Address of applicant: Floor 1-5,Building B, Area B, Yuanfen Industrial Zone, Dalang, Bao'an District, Shenzhen, China
Manufacturer: **Shenzhen YIDONG Technology Co., Ltd**
Address of manufacturer: Floor 1-5,Building B, Area B, Yuanfen Industrial Zone, Dalang, Bao'an District, Shenzhen, China

General Description of E.U.T

Items	Description
EUT Description:	Tablet PC
Trade Name:	N/A
Model No.:	LT7052
Supplementary Model:	F7, EMR1878
Frequency Band:	IEEE 802.11b/g, IEEE 802.11n HT20 (DTS Band) : 2412MHz~2462MHz, IEEE 802.11n HT40 (DTS Band) : 2422MHz~2452MHz
Channel Spacing:	IEEE 802.11b/g, 802.11n HT20/HT40: 5MHz
Number of Channels:	IEEE 802.11b/g, 802.11n HT20:11 Channels IEEE 802.11n HT40 :7 Channels
Transmit Data Rate:	IEEE802.11b : 11 , 5.5 , 2 , 1 Mbps IEEE802.11g : 54 , 48 , 36 , 24 , 18 , 12 , 9 , 6 Mbps IEEE802.11n HT20 : 130 , 117 , 104 , 78 , 52 , 39 , 26 , 13 Mbps IEEE802.11n HT40 : 270 , 243 , 216 , 162 , 108 , 81 , 54 , 27 Mbps
Type of Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20/40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Type:	Built-in Antenna
Rated Voltage:	Intput:5VDC 2.0A
Adapter description:	Model: HNC050200U Input:100-240V~ 50/60Hz 0.35A MAX Output:5VDC 2.0A

Remark: * The test data gathered are from the production sample provided by the manufacturer.
* **Supplementary models have same circuit and appearance, Just sales for different customers.**

1.2 Related Submittal(s) / Grant (s) and Test Methodology

The tests were performed based on the Electromagnetic Interference (EMI) tests performed on the EUT. Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003 Radiated testing was performed at an antenna to EUT distance 3 meters.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.207, 15.209 and 15.247 rules.

1.3 Test Facility

All measurement required was performed at laboratory of Bontek Compliance Testing Laboratory Ltd at 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China.

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 338263

BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 03, 2011.

IC Registration No.: 7631A

The 3m alternate test site of BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on January 25, 2011.

CNAS - Registration No.: L3923

BONTEK COMPLIANCE TESTING LABORATORY LTD. to ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. The acceptance letter from the CNAS is maintained in our files: Registration: L3923, March 22, 2012.

TUV - Registration No.: UA 50203122-0001

BONTEK COMPLIANCE TESTING LABORATORY LTD. An assessment of the laboratory was conducted according to the "Procedures and Conditions for EMC Test Laboratories" with reference to EN ISO/IEC 17025 by a TUV Rheinland auditor. Audit Report NO. 17010783-002.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

2.3 General Test Procedures

Conducted Emissions: The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions: The EUT is placed on a turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

2.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

2.5 Test Equipment List and Details

Test equipments list of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd .

No.	Equipment	Manufacturer	Model No.	S/N	Calculator date	Calculator due date
1	EMI Test Receiver	R&S	ESCI	100687	2012-4-6	2013-4-5
2	EMI Test Receiver	R&S	ESPI	100097	2011-7-25	2012-7-24
3	Amplifier	HP	8447D	1937A02492	2012-4-6	2013-4-5
4	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07101	2012-4-6	2013-4-5
5	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07102	2012-4-6	2013-4-5
6	Power Clamp	SCHWARZBECK	MDS-21	3812	2012-4-6	2013-4-5
7	Positioning Controller	C&C	CC-C-1F	MF7802113	N/A	N/A
8	Electrostatic Discharge Simulator	TESEQ	NSG437	125	2011-4-11	2012-4-10
9	Fast Transient Burst Generator	SCHAFFNER	MODULA6150	34572	2012-4-6	2013-4-5
10	Fast Transient Noise Simulator	Noiseken	FNS-105AX	10501	2011-6-16	2012-6-15
11	Color TV Pattern Generator	PHILIPS	PM5418	TM209947	N/A	N/A
12	Power Frequency Magnetic Field Generator	EVERFINE	EMS61000-8K	608002	2012-4-6	2013-4-5
14	Capacitive Coupling Clamp	TESEQ	CDN8014	25096	2012-4-6	2013-4-5
15	High Field Biconical Antenna	ELECTRO-METRICS	EM-6913	166	2011-11-28	2012-11-27
16	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	811	2011-11-28	2012-11-27
17	Remote Active Vertical Antenna	ELECTRO-METRICS	EM-6892	304	2011-11-28	2012-11-27
18	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	N/A	N/A
19	Horn Antenna	SCHWARZBECK	BBHA9120A	0499	2011-11-28	2012-11-27
20	Teo Line Single Phase Module	SCHWARZBECK	NSLK8128	8128247	2011-10-24	2012-10-23
21	Triple-Loop Antenna	EVERFINE	LLA-2	711002	2012-4-6	2013-4-5
22	Electric bridge	Jhai	JK2812C	803024	N/A	N/A
23	RF POWER AMPLIFIER	FRANKONIA	FLL-75	1020A1109	2012-4-6	2013-4-5
24	CDN	FRANKONIA	CDN M2+M3	A3027019	2012-4-6	2013-4-5
25	6DB Attenuator	FRANKONIA	N/A	1001698	2012-4-6	2013-4-5
26	EM Injection clamp	FCC	F-203I-23mm	091536	2012-4-6	2013-4-5
27	9kHz-2.4GHz signal generator 2024	MARCONI	10S/6625-99-457-8730	112260/042	2012-4-6	2013-4-5

28	10dB attenuator	ELECTRO-METRICS	EM-7600	836	2012-4-6	2013-4-5
29	ISN	TESEQ	ISN-T800	30301	2011-6-23	2012-6-22
30	10KV surge generator	SANKI	SKS-0510M	048110003E321	2011-11-14	2012-11-13
31	HRMONICS&FLICKRE ANALYSER	VOLTECH	PM6000	200006700433	2011-6-27	2012-6-26
32	Spectrum Analyzer	R&S	FSP	100397	2011-11-2	2012-11-1
33	Broadband preamplifier	SCHWARZBECK	BBV9718	9718-182	2012-4-6	2013-4-5
34	Temperature & Humidity Chamber	TOPSTAT	TOS-831A	3438A05208	2012-4-6	2013-4-5

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207	AC Power Line Conducted Emission	Pass
FCC §15.247(b)	Maximum Peak Output Power	Pass
FCC §15.247(e)	Power Spectral Density	Pass
FCC §15.247(a)	6dB Bandwidth	Pass
FCC §15.247 (d)	Conducted Spurious Emission	Pass
FCC §15.205 and §15.209 &	Radiated Spurious Emission	Pass
FCC §15.203/15.247(b)/(c)	Antenna Requirement	Pass

4. TEST OF AC POWER LINE CONDUCTED EMISSION


4.1 Applicable Standard

Refer to FCC §15.207.

For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

4.2 Test Setup Diagram

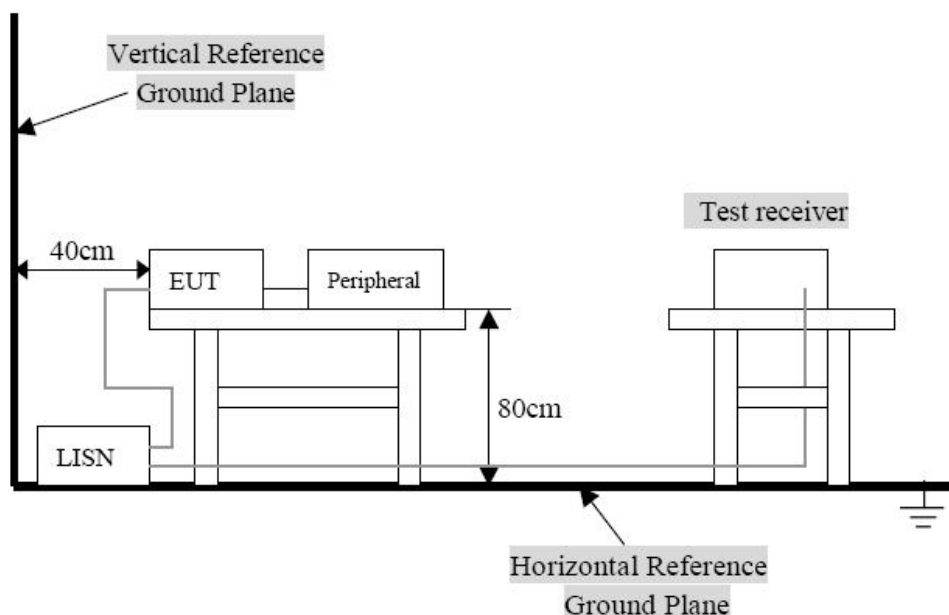

Remark: The EUT was connected to a 120VAC/ 60Hz power source.

4.3 Test Result


Temperature (°C) : 23~25	EUT: Tablet PC
Humidity (%RH) : 45~58	M/N: LT7052
Barometric Pressure (mbar) : 950~1000	Operation Condition: Charging/ Connect to PC

Conducted Emission:

EUT: Tablet PC
Operating Condition: Charging
Test Site: Shielded Room
Operator: Andy
Test Specification: AC/DC adapter (AC 120V/60Hz)
Comment: Live Line

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

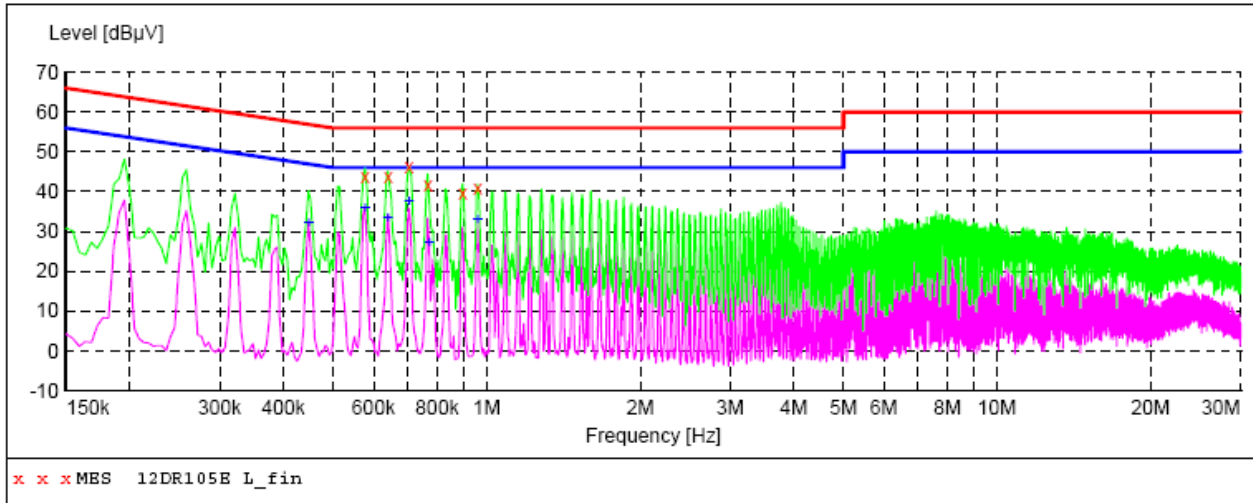

MEASUREMENT RESULT: "12DR105E L_fin"

4/18/2012 13:54

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.577500	43.80	10.2	56	12.2	QP	L1	GND
0.640500	44.00	10.2	56	12.0	QP	L1	GND
0.703500	46.20	10.2	56	9.8	QP	L1	GND
0.766500	41.60	10.1	56	14.4	QP	L1	GND
0.897000	39.50	10.1	56	16.5	QP	L1	GND
0.960000	40.80	10.1	56	15.2	QP	L1	GND

MEASUREMENT RESULT: "12DR105E L_fin2"

4/18/2012 13:54


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.447000	32.10	10.2	47	14.8	AV	L1	GND
0.577500	35.90	10.2	46	10.1	AV	L1	GND
0.640500	33.50	10.2	46	12.5	AV	L1	GND
0.703500	37.70	10.2	46	8.3	AV	L1	GND
0.771000	27.10	10.1	46	18.9	AV	L1	GND
0.960000	32.90	10.1	46	13.1	AV	L1	GND

Conducted Emission:

EUT: Tablet PC
Operating Condition: Charging
Test Site: Shielded Room
Operator: Andy
Test Specification: AC/DC adapter (AC 120V/60Hz)
Comment: Neutral Line

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

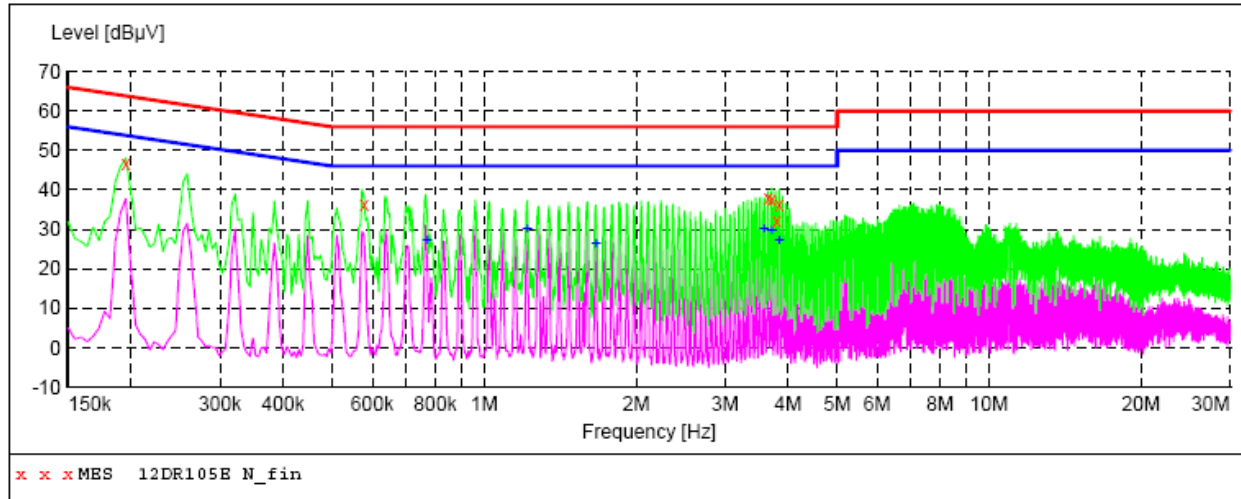

MEASUREMENT RESULT: "12DR105E N_fin"

4/18/2012 13:49

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.195000	46.70	10.1	64	17.1	QP	N	GND
0.577500	36.20	10.2	56	19.8	QP	N	GND
3.646500	37.80	10.2	56	18.2	QP	N	GND
3.709500	37.70	10.2	56	18.3	QP	N	GND
3.790500	32.10	10.2	56	23.9	QP	N	GND
3.835500	36.50	10.2	56	19.5	QP	N	GND

MEASUREMENT RESULT: "12DR105E N_fin2"

4/18/2012 13:49


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.771000	27.10	10.1	46	18.9	AV	N	GND
1.216500	30.00	10.1	46	16.0	AV	N	GND
1.666500	26.50	10.1	46	19.5	AV	N	GND
3.583500	30.20	10.2	46	15.8	AV	N	GND
3.709500	29.90	10.2	46	16.1	AV	N	GND
3.835500	27.10	10.2	46	18.9	AV	N	GND

Conducted Emission:

EUT: Tablet PC
Operating Condition: Connect to PC
Test Site: Shielded Room
Operator: Andy
Test Specification: AC/DC adapter (AC 120V/60Hz)
Comment: Live Line

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

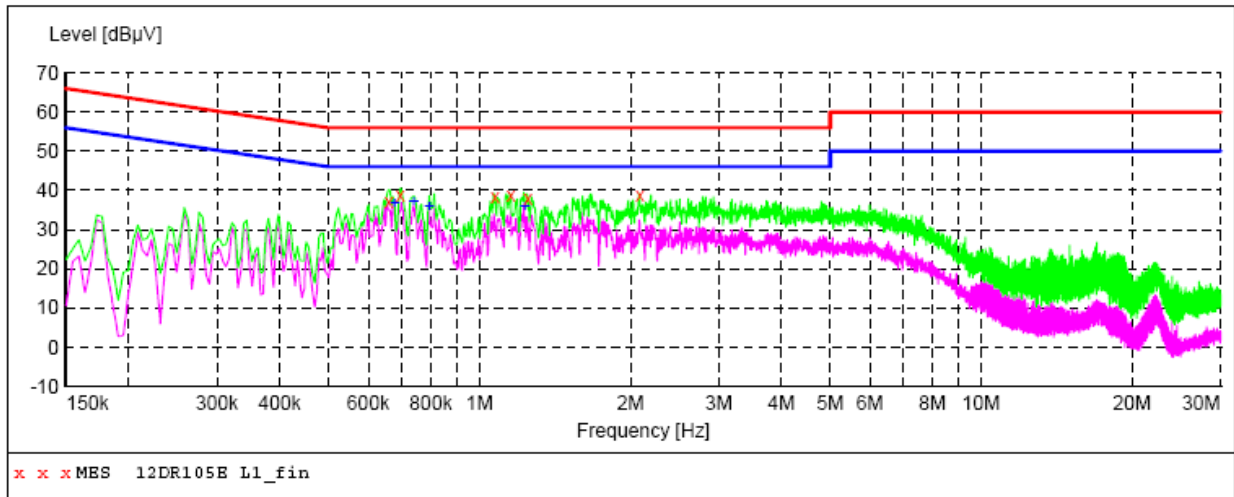

MEASUREMENT RESULT: "12DR105E L1_fin"

4/18/2012 14:06

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.658500	37.20	10.2	56	18.8	QP	L1	GND
0.694500	38.70	10.2	56	17.3	QP	L1	GND
1.072500	38.30	10.1	56	17.7	QP	L1	GND
1.153500	38.80	10.1	56	17.2	QP	L1	GND
1.248000	38.00	10.1	56	18.0	QP	L1	GND
2.085000	38.70	10.0	56	17.3	QP	L1	GND

MEASUREMENT RESULT: "12DR105E L1_fin2"

4/18/2012 14:06


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.676500	36.80	10.2	46	9.2	AV	L1	GND
0.739500	37.30	10.2	46	8.7	AV	L1	GND
0.793500	35.90	10.1	46	10.1	AV	L1	GND
1.230000	36.00	10.1	46	10.0	AV	L1	GND

Conducted Emission:

EUT: Tablet PC
Operating Condition: Connect to PC
Test Site: Shielded Room
Operator: Andy
Test Specification: AC/DC adapter (AC 120V/60Hz)
Comment: Neutral Line

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

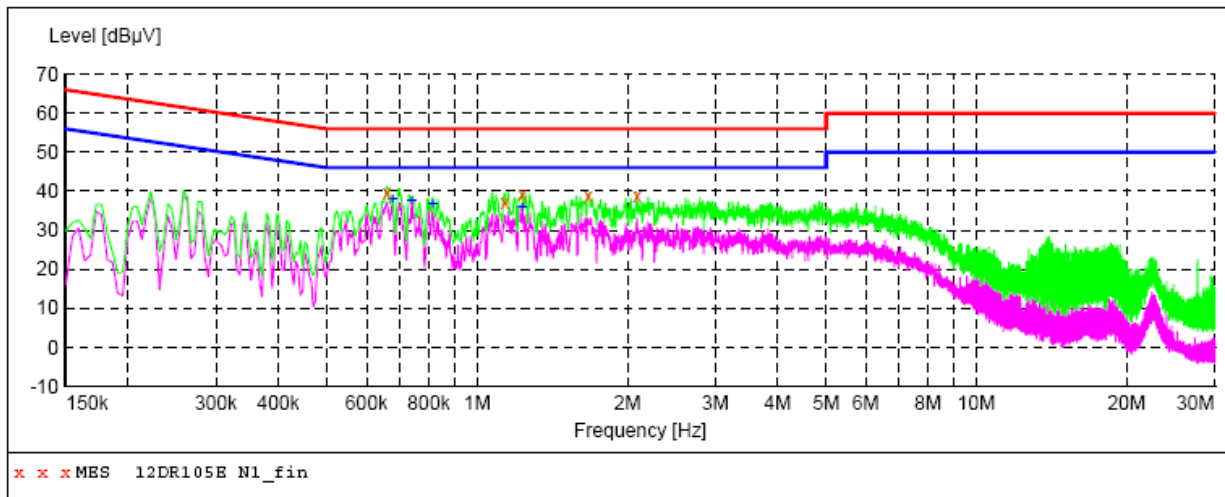

MEASUREMENT RESULT: "12DR105E N1_fin"

4/18/2012 14:08

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.658500	39.60	10.2	56	16.4	QP	N	GND
1.135500	37.30	10.1	56	18.7	QP	N	GND
1.230000	39.10	10.1	56	16.9	QP	N	GND
1.666500	38.90	10.1	56	17.1	QP	N	GND
2.089500	39.00	10.0	56	17.0	QP	N	GND

MEASUREMENT RESULT: "12DR105E N1_fin2"

4/18/2012 14:08


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.676500	38.00	10.2	46	8.0	AV	N	GND
0.739500	37.50	10.2	46	8.5	AV	N	GND
0.816000	36.70	10.1	46	9.3	AV	N	GND
1.230000	35.80	10.1	46	10.2	AV	N	GND

5. Test of Maximum Peak Output Power

5.1 Applicable Standard

Refer to FCC §15.247 (b)

5.2 EUT Setup

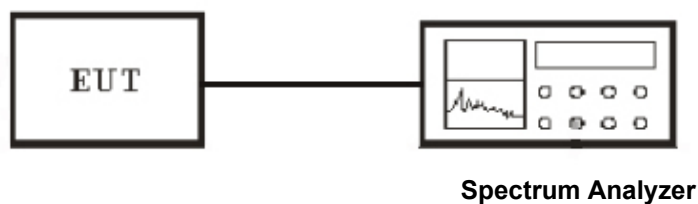

5.3 Test Equipment List and Details

See section 2.5.

5.4 Test Procedure

Connect the EUT to spectrum analyzer, set the center frequency of the spectrum analyzer to the channel center frequency. Set the RBW to 1MHz and VBW to 3MHz.

Measurement of Digital Transmission Systems Operating under Section 15.247

5.5 Test Result

Temperature (°C) : 22~23	EUT: Tablet PC
Humidity (%RH) : 50~54	M/N: LT7052
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	Peak Power Chain C (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	9.55	30	PASS
Middle	2437	10.32	30	PASS
High	2462	10.61	30	PASS

NOTE : 1. At final test to get the worst-case emission at 11Mbps.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	5.79	30	PASS
Middle	2437	5.77	30	PASS
High	2462	5.80	30	PASS

NOTE : 1. At final test to get the worst-case emission at 6Mbps.

IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	3.31	30	PASS
Middle	2437	4.25	30	PASS
High	2462	4.36	30	PASS


NOTE : 1. At final test to get the worst-case emission at 13Mbps.

IEEE 802.11n HT40 mode


Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2422	0.76	30	PASS
Middle	2437	1.11	30	PASS
High	2452	1.21	30	PASS

NOTE : 1. At final test to get the worst-case emission at 27Mbps.


MAXIMUM PEAK OUTPUT POWER (802.11b MODE CH Low)

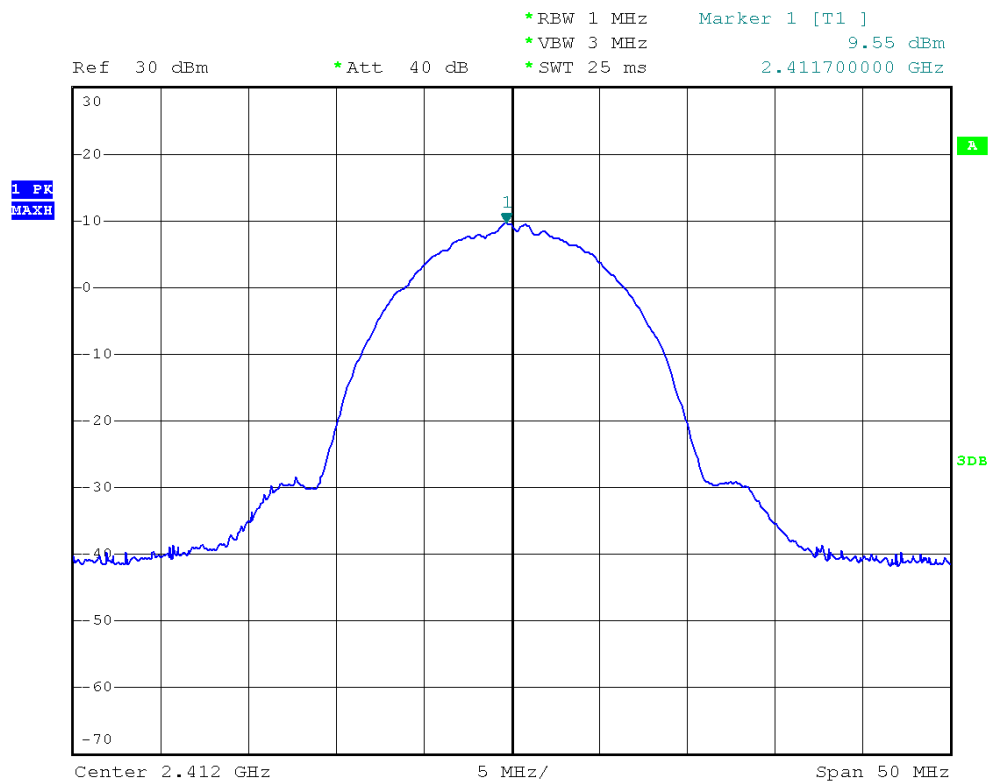


MAXIMUM PEAK OUTPUT POWER (802.11b MODE CH Mid)

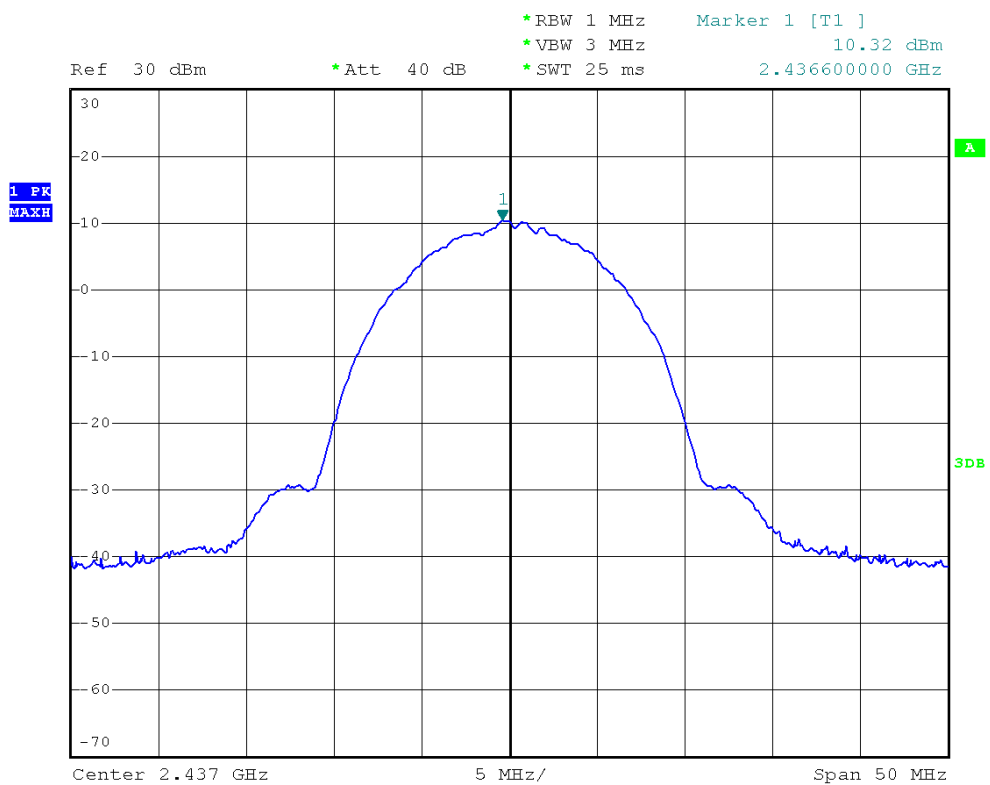


MAXIMUM PEAK OUTPUT POWER (802.11b MODE CH High)

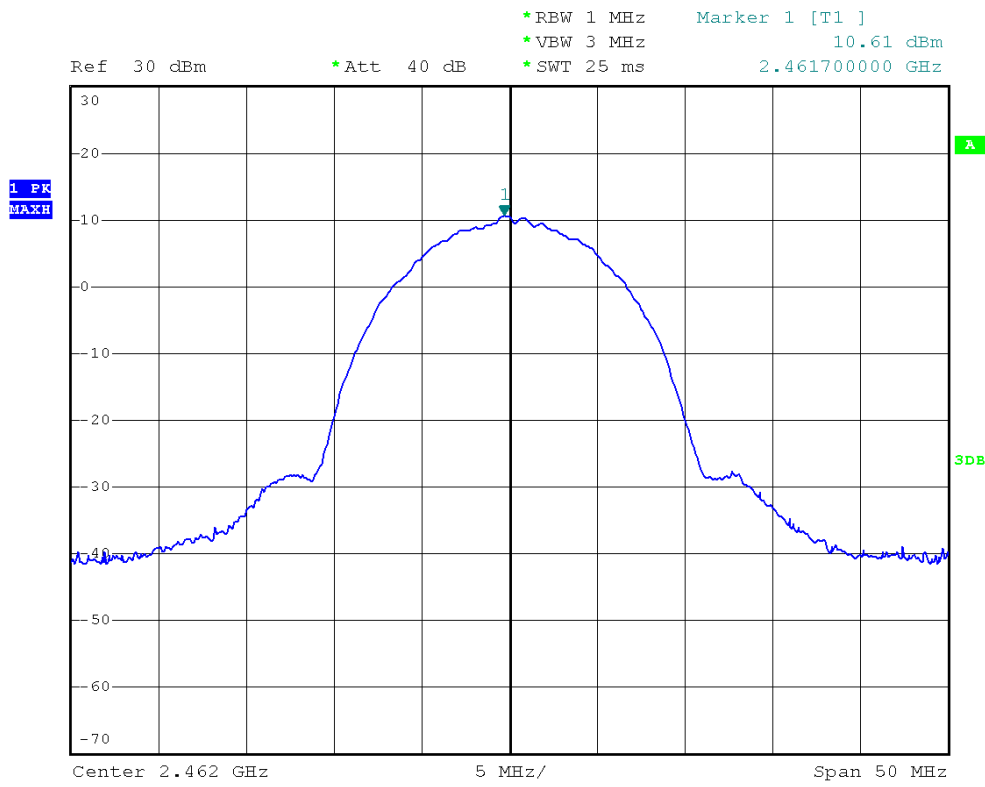


MAXIMUM PEAK OUTPUT POWER (802.11g MODE CH Low)

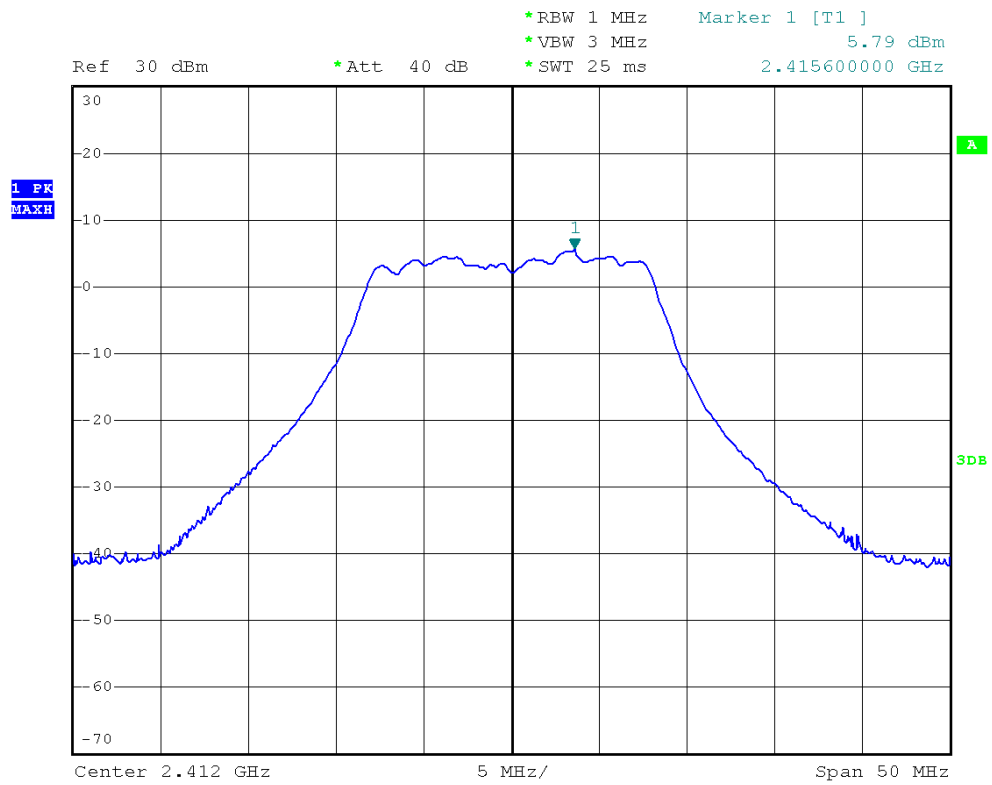


MAXIMUM PEAK OUTPUT POWER (802.11g MODE CH Mid)

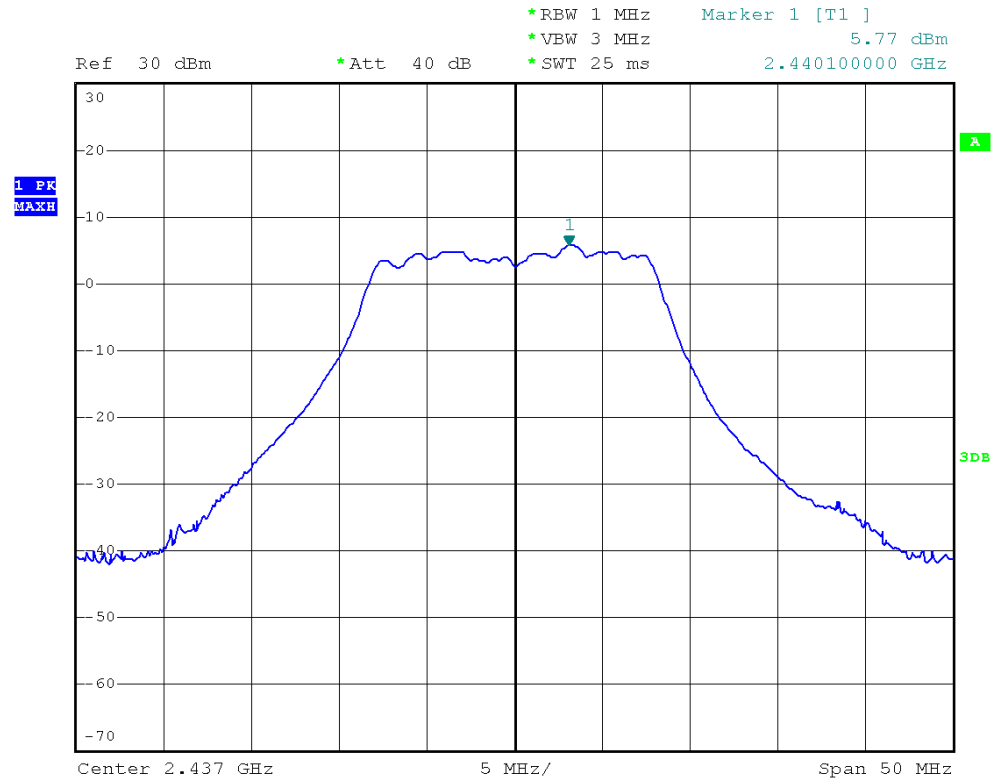


MAXIMUM PEAK OUTPUT POWER (802.11g MODE CH High)

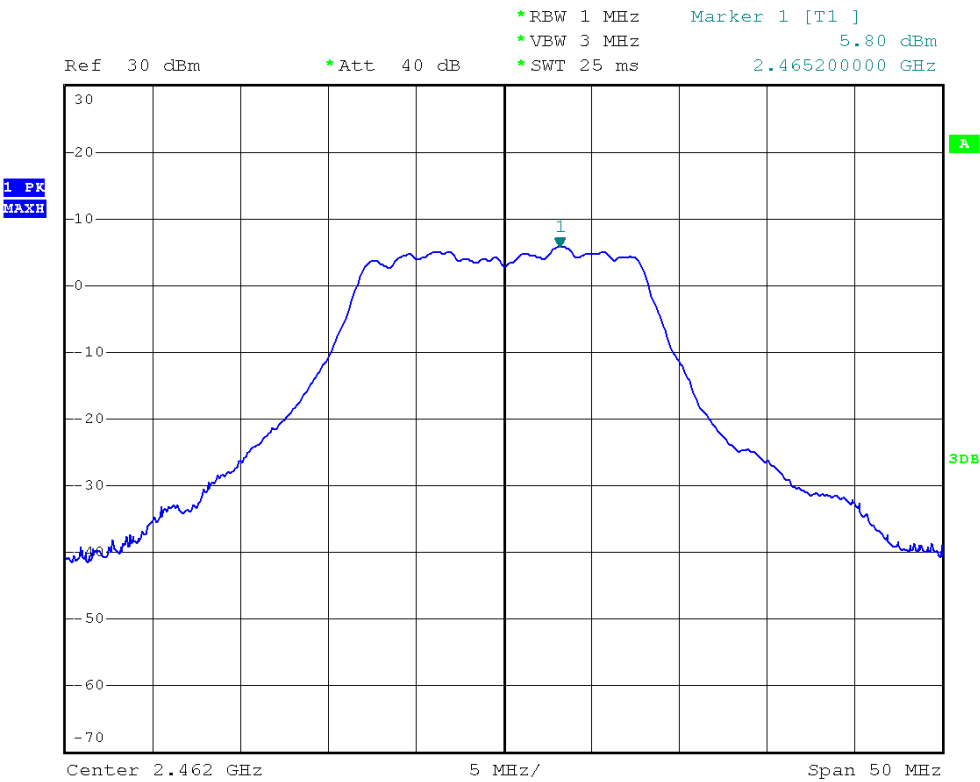


MAXIMUM PEAK OUTPUT POWER (802.11n HT20 MODE CH Low)

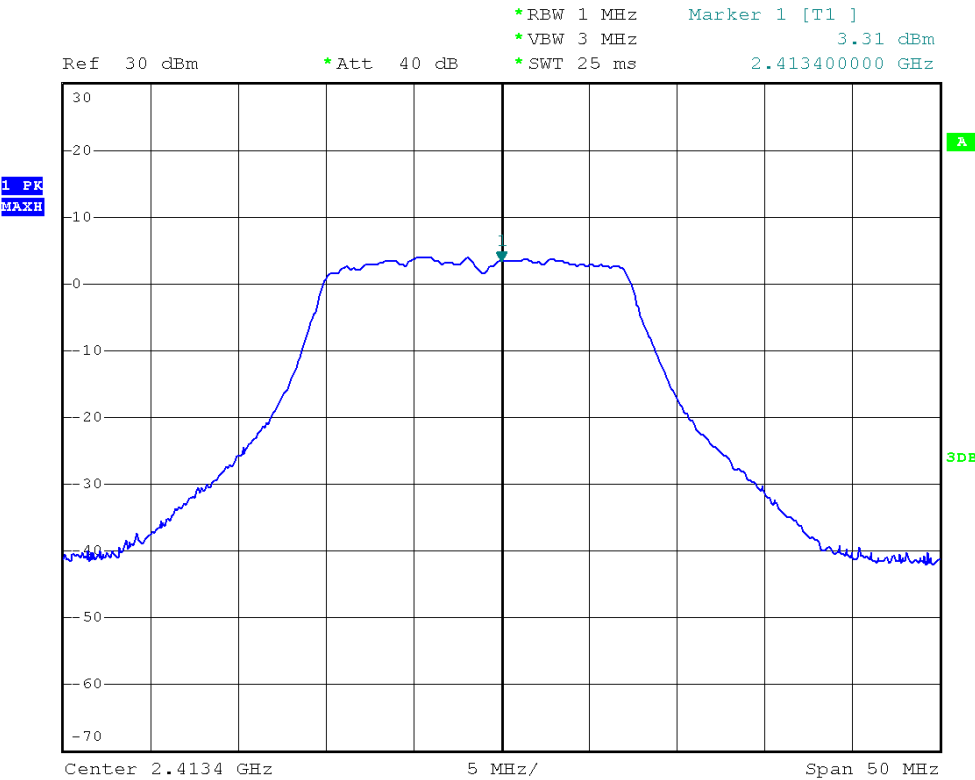


MAXIMUM PEAK OUTPUT POWER (802.11n HT20 MODE CH Mid)

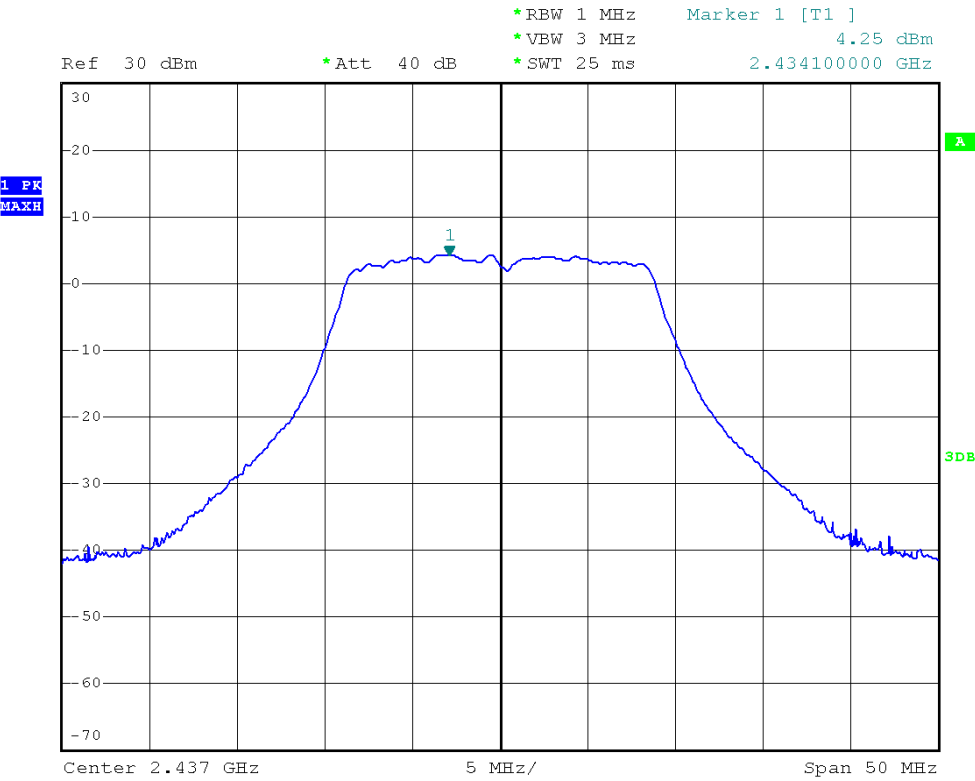


MAXIMUM PEAK OUTPUT POWER (802.11n HT20 MODE CH High)

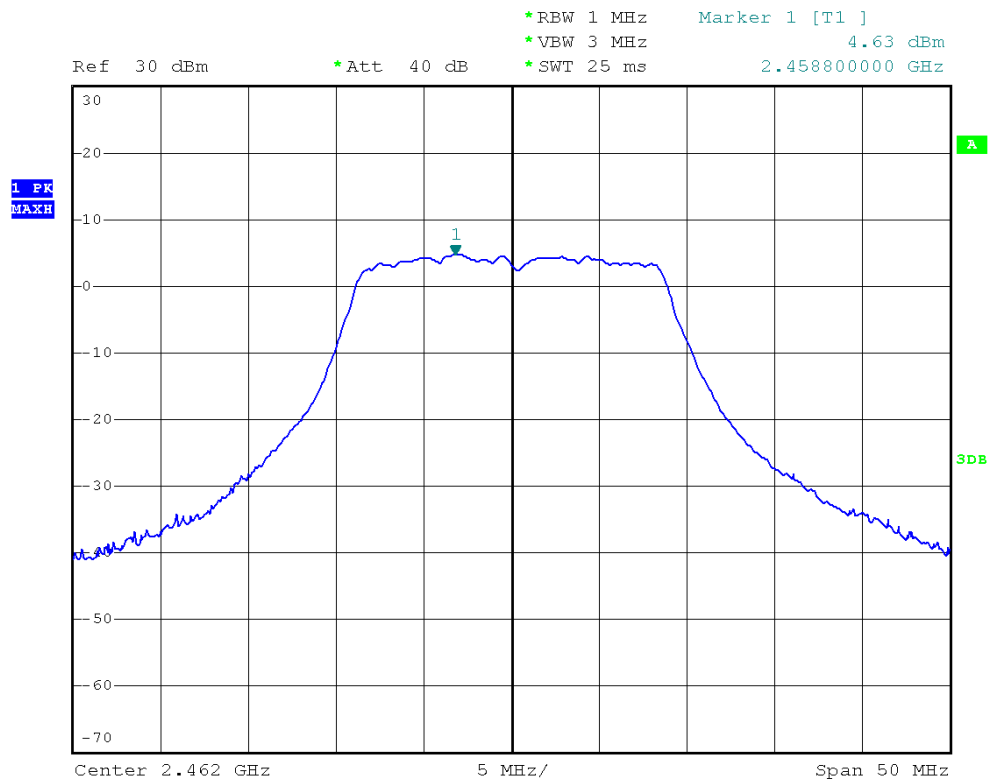


MAXIMUM PEAK OUTPUT POWER (802.11n HT40 MODE CH Low)

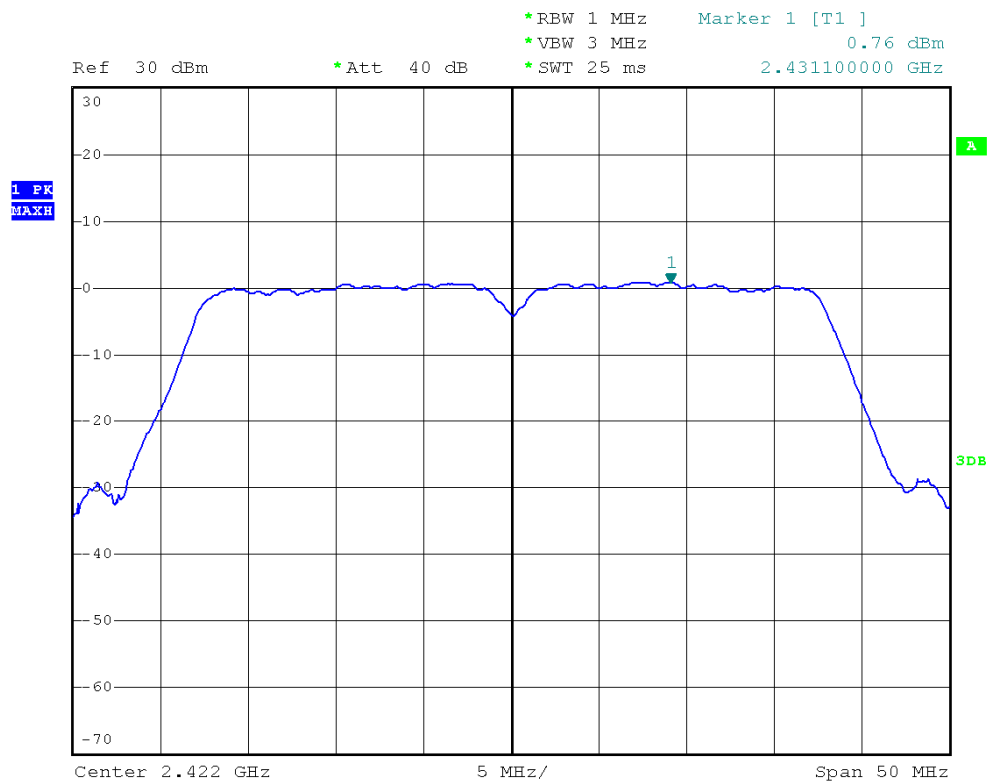

MAXIMUM PEAK OUTPUT POWER (802.11n HT40 MODE CH Mid)

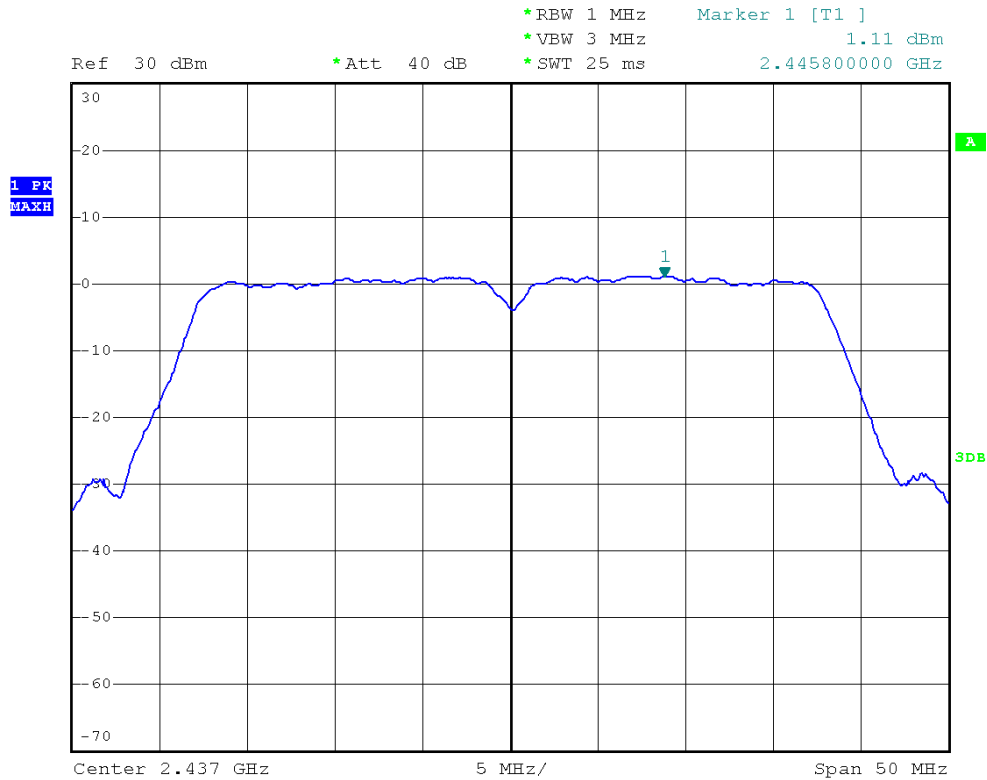

MAXIMUM PEAK OUTPUT POWER (802.11n HT40 MODE CH High)

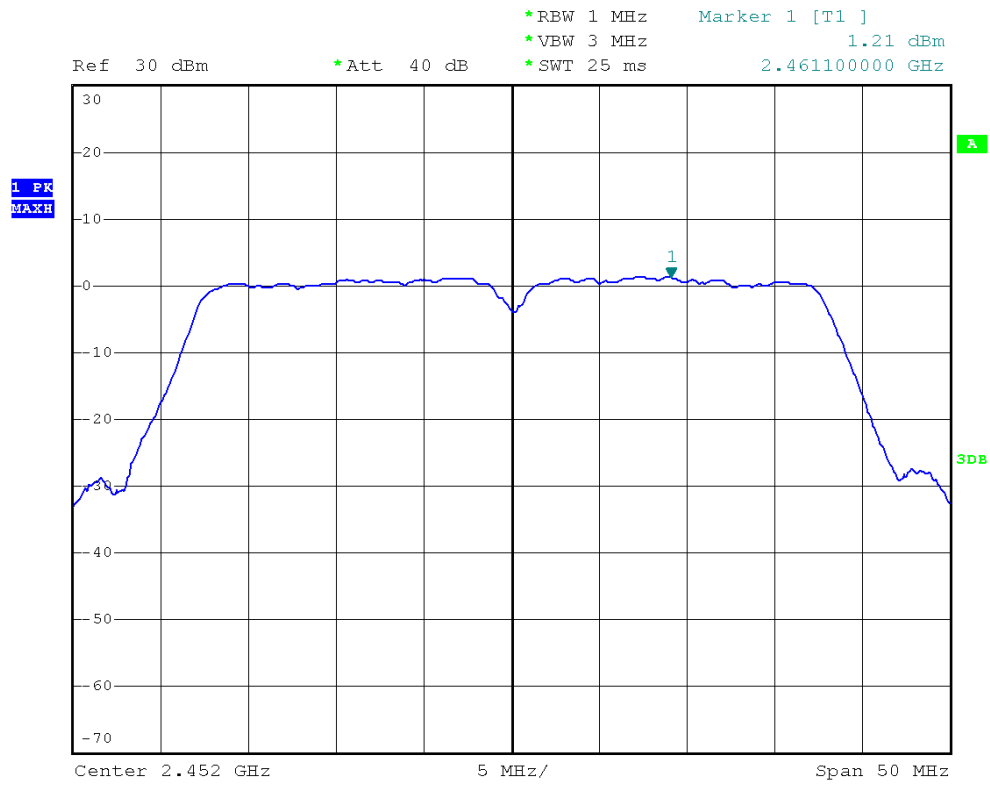


6. Test of Peak Power Spectral Density

6.1 Applicable Standard

Refer to FCC §15.247 (e).

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.2 EUT Setup

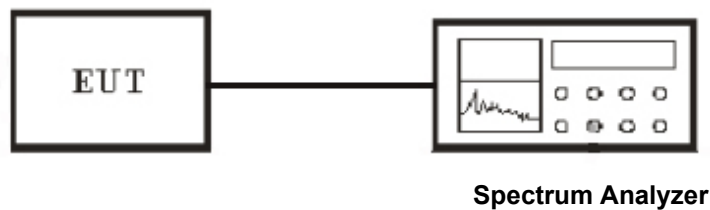

6.3 Test Equipment List and Details

See section 2.5.

6.4 Test Procedure

The transmitter output was connected to the spectrum analyzer, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=3KHz and VBW $\geq$ RBW, set sweep time=span / 3KHz.

The power spectral density was measured and recorded. The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

NOTE: Total peak power calculation formula:

$$10 \log (10^{\text{Chain A Power} / 10} + 10^{\text{Chain C Power} / 10}).$$

6.5 Test Result

Temperature (°C) : 22~23	EUT: Tablet PC
Humidity (%RH) : 50~54	M/N: LT7052
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-16.22	8	PASS
Middle	2437	-15.67	8	PASS
High	2462	-15.73	8	PASS

NOTE : 1. At final test to get the worst-case emission at 11Mbps.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-29.64	8	PASS
Middle	2437	-29.65	8	PASS
High	2462	-19.26	8	PASS

NOTE : 1. At final test to get the worst-case emission at 6Mbps.

IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-29.18	8	PASS
Middle	2437	-18.50	8	PASS
High	2462	-28.26	8	PASS


NOTE : 1. At final test to get the worst-case emission at 13Mbps.

IEEE 802.11n HT40 mode


Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2422	-29.20	8	PASS
Middle	2437	-29.13	8	PASS
High	2452	-28.59	8	PASS

NOTE : 1. At final test to get the worst-case emission at 27Mbps.


POWER SPECTRAL DENSITY (802.11b MODE CH Low)

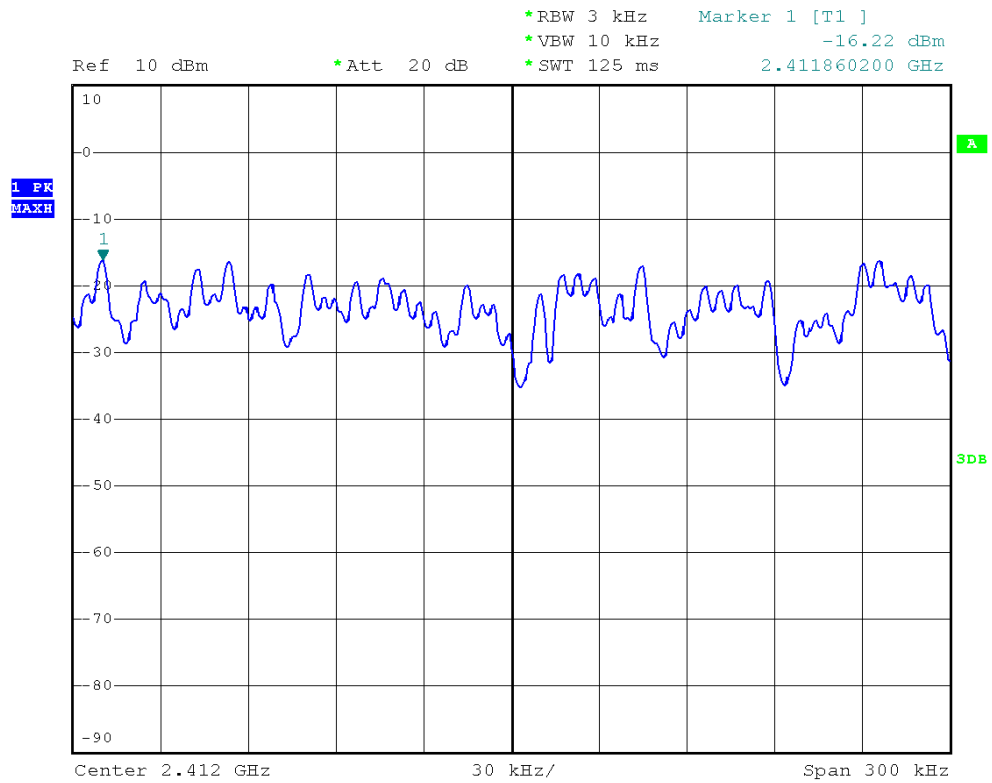


POWER SPECTRAL DENSITY (802.11b MODE CH Mid)

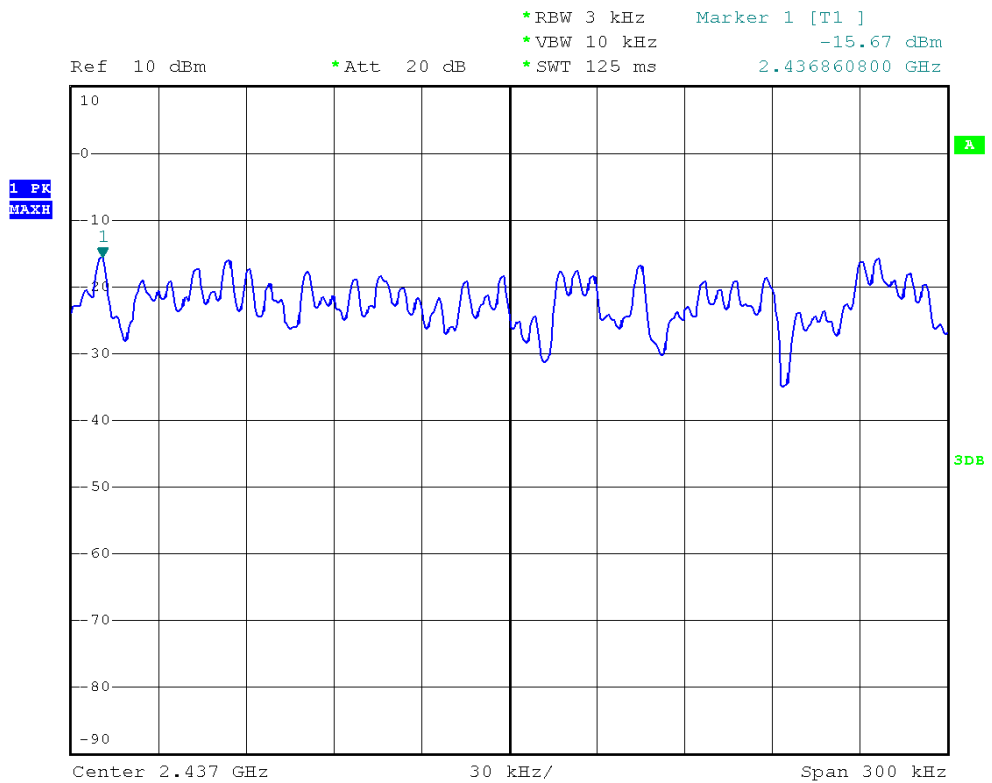


POWER SPECTRAL DENSITY (802.11b MODE CH High)

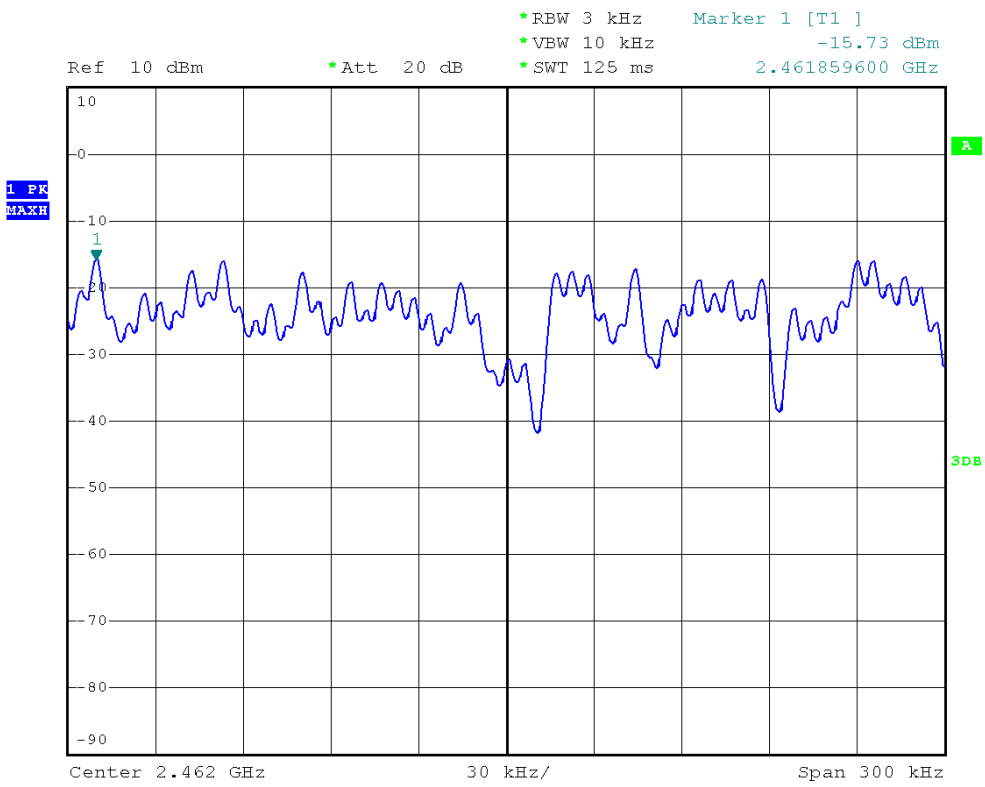


POWER SPECTRAL DENSITY (802.11g MODE CH Low)

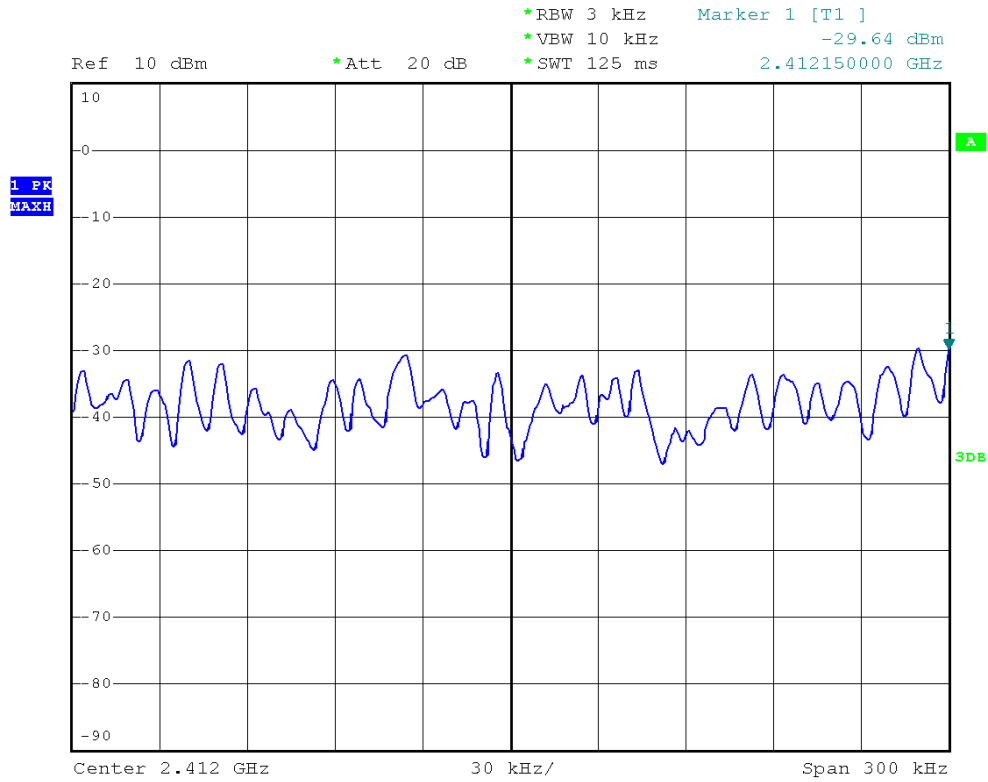


POWER SPECTRAL DENSITY (802.11g MODE CH Mid)

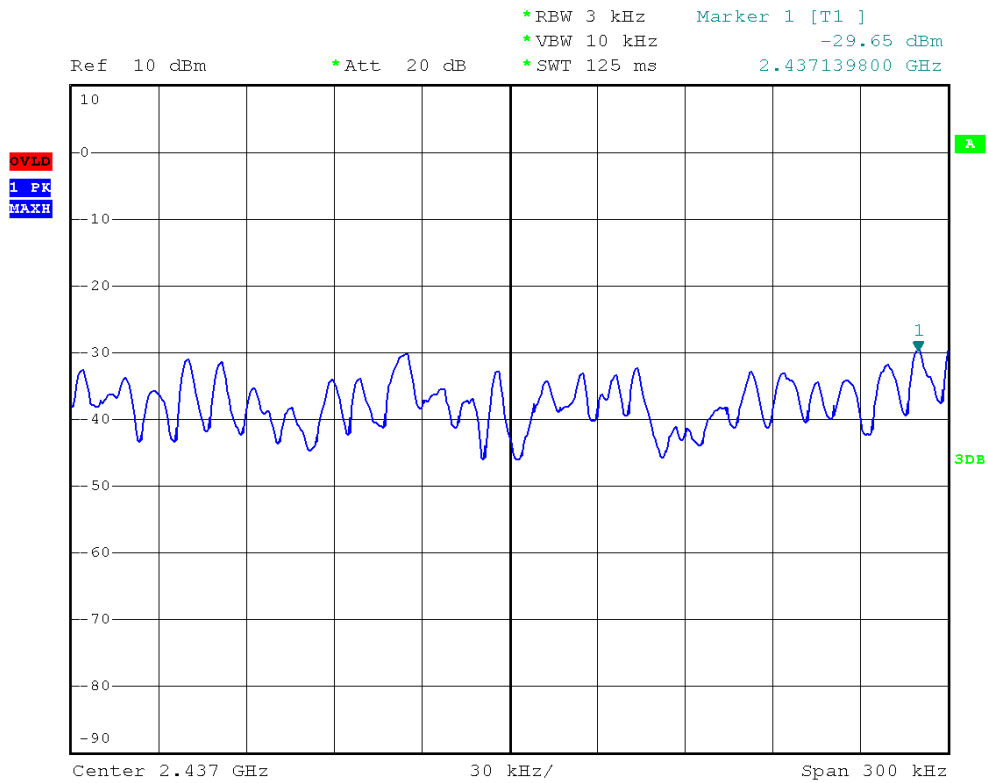


POWER SPECTRAL DENSITY (802.11g MODE CH High)

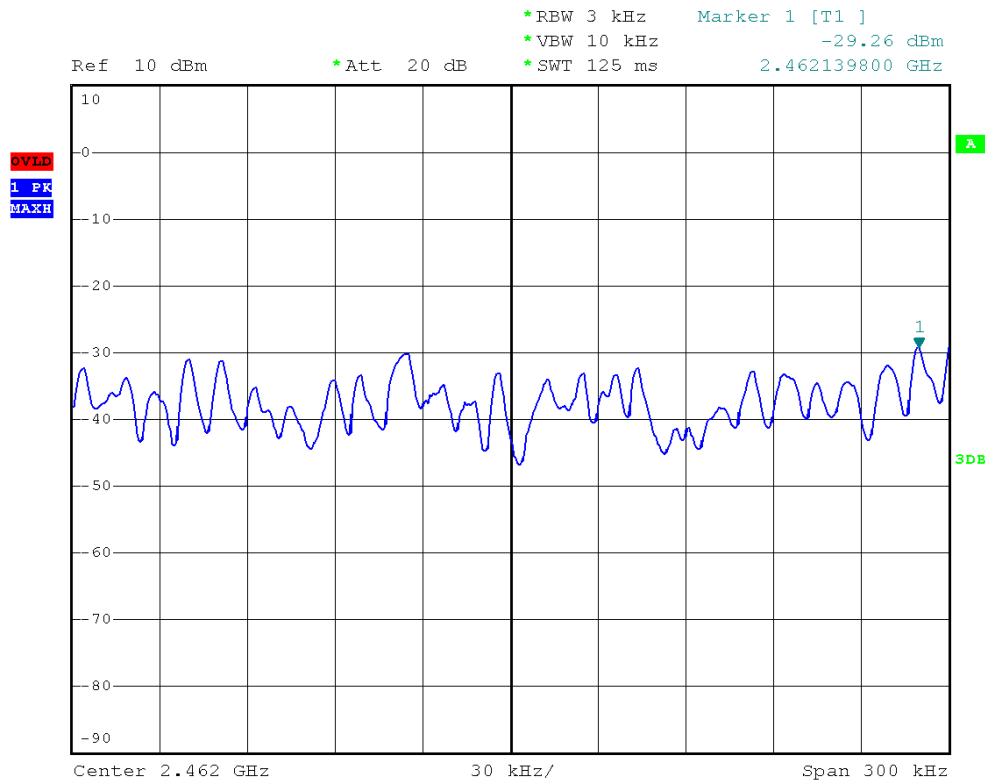


POWER SPECTRAL DENSITY (802.11n HT20 MODE CH Low)

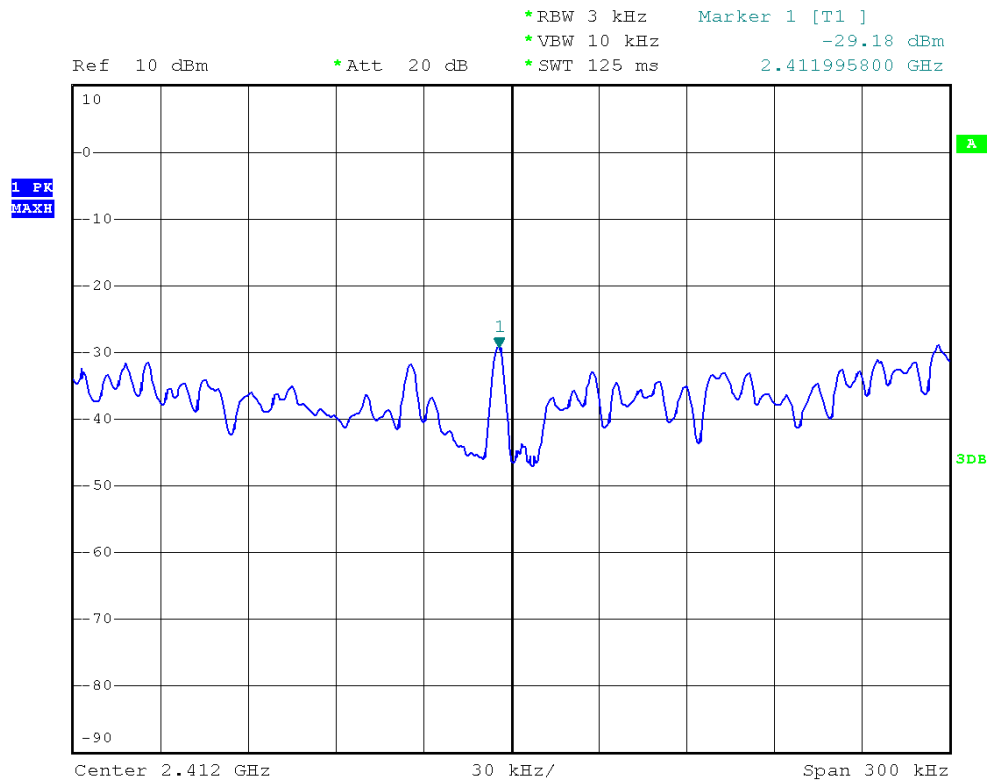


POWER SPECTRAL DENSITY (802.11n HT20 MODE CH Mid)

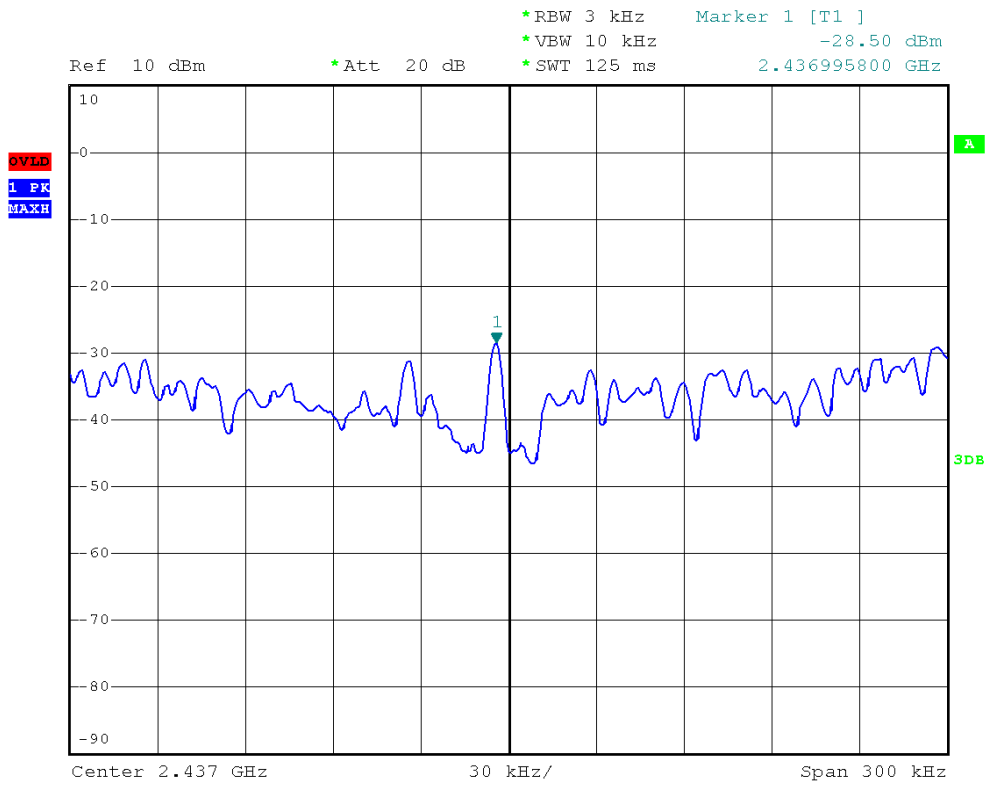


POWER SPECTRAL DENSITY (802.11n HT20 MODE CH High)

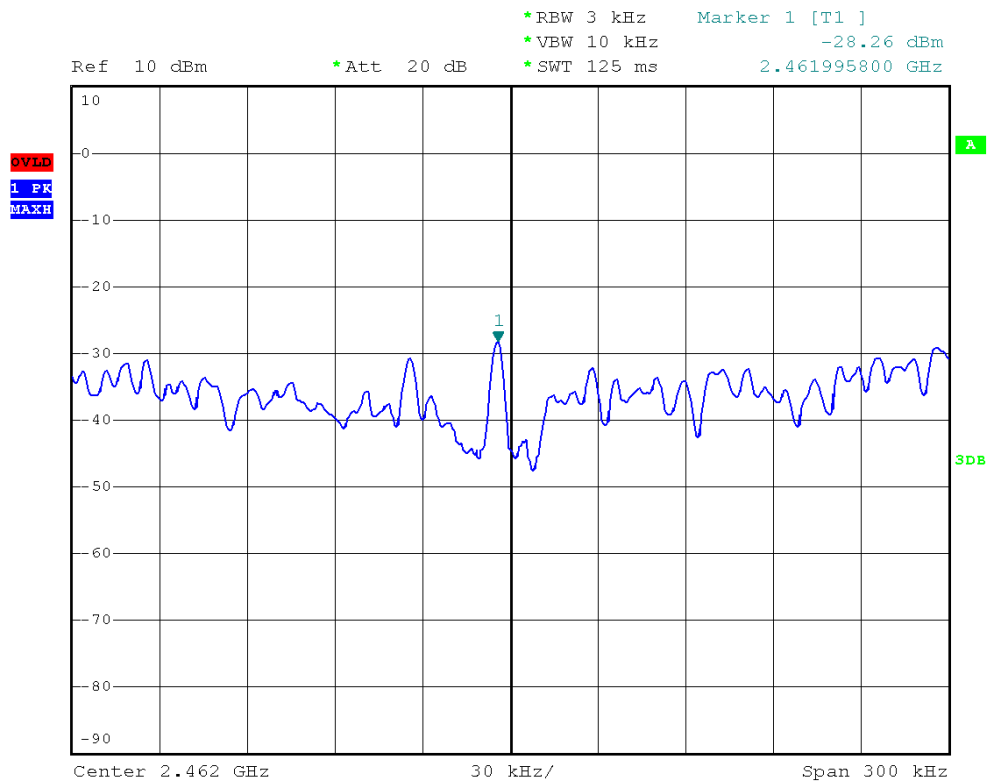


POWER SPECTRAL DENSITY (802.11n HT40 MODE CH Low)

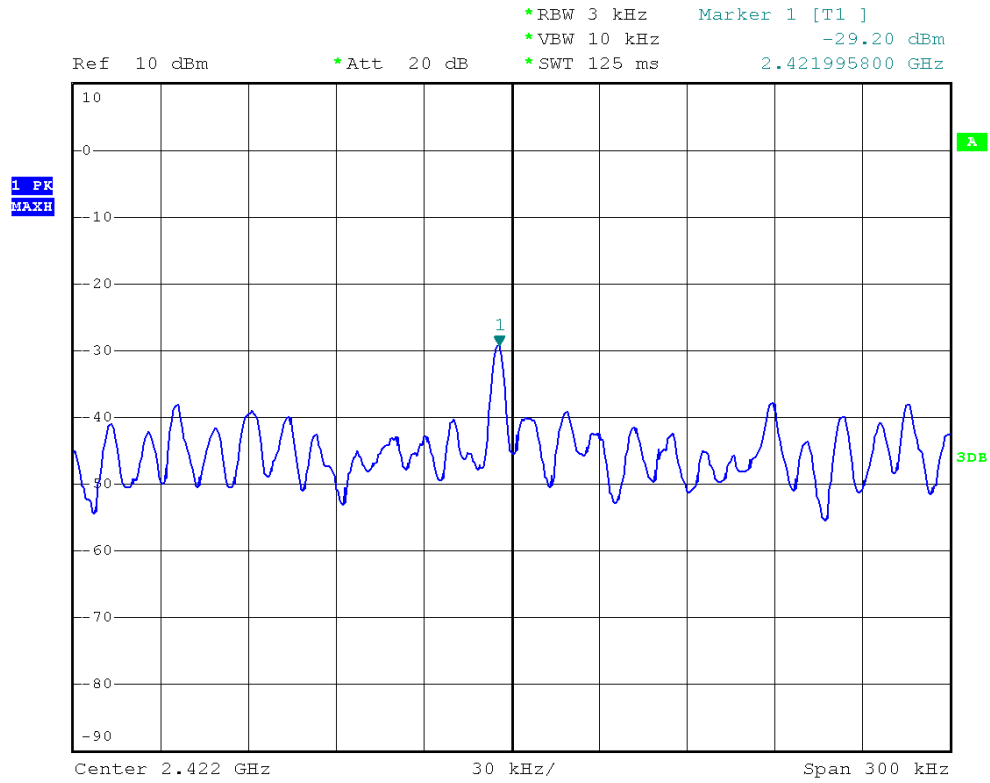

POWER SPECTRAL DENSITY (802.11n HT40 MODE CH Mid)

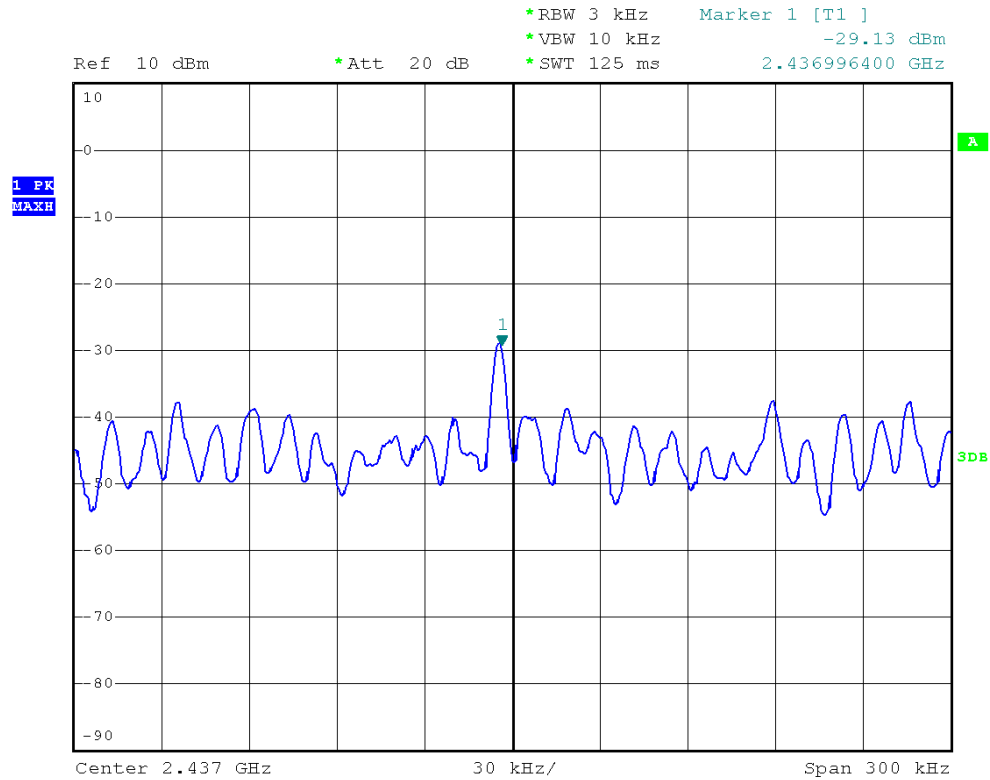

POWER SPECTRAL DENSITY (802.11n HT40 MODE CH High)

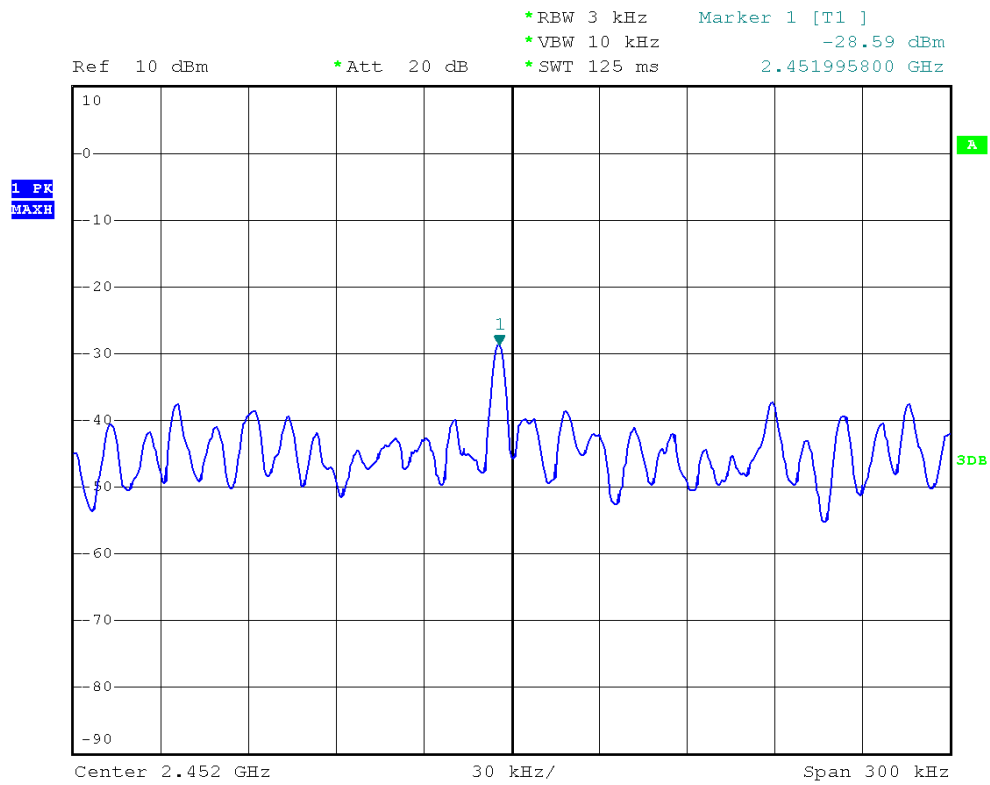


7. Test of 6dB Bandwidth

7.1 Applicable Standard

Refer to FCC §15.247 (a) (2).

The minimum 6 dB bandwidth shall be at least 500 kHz.

7.2 EUT Setup

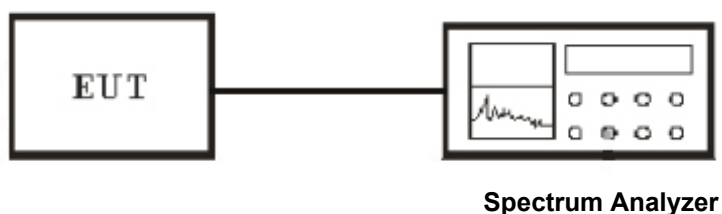

7.3 Test Equipment List and Details

See section 2.5.

7.4 Test Procedure

The transmitter output was connected to a spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 100 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

7.5 Test Result

Temperature (°C) : 22~23	EUT: Tablet PC
Humidity (%RH) : 50~54	M/N: LT7052
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	8600	500	PASS
Middle	2437	9600	500	PASS
High	2462	8500	500	PASS

NOTE : 1. At final test to get the worst-case emission at 11Mbps.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	16600	500	PASS
Middle	2437	16600	500	PASS
High	2462	16600	500	PASS

NOTE : 1. At final test to get the worst-case emission at 6Mbps.

IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	17900	500	PASS
Middle	2437	17800	500	PASS
High	2462	17800	500	PASS


NOTE : 1. At final test to get the worst-case emission at 13Mbps.

IEEE 802.11n HT40 mode


Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2422	36300	500	PASS
Middle	2437	36300	500	PASS
High	2452	36600	500	PASS

NOTE : 1. At final test to get the worst-case emission at 27Mbps.


6dB BANDWIDTH (802.11b MODE CH Low)

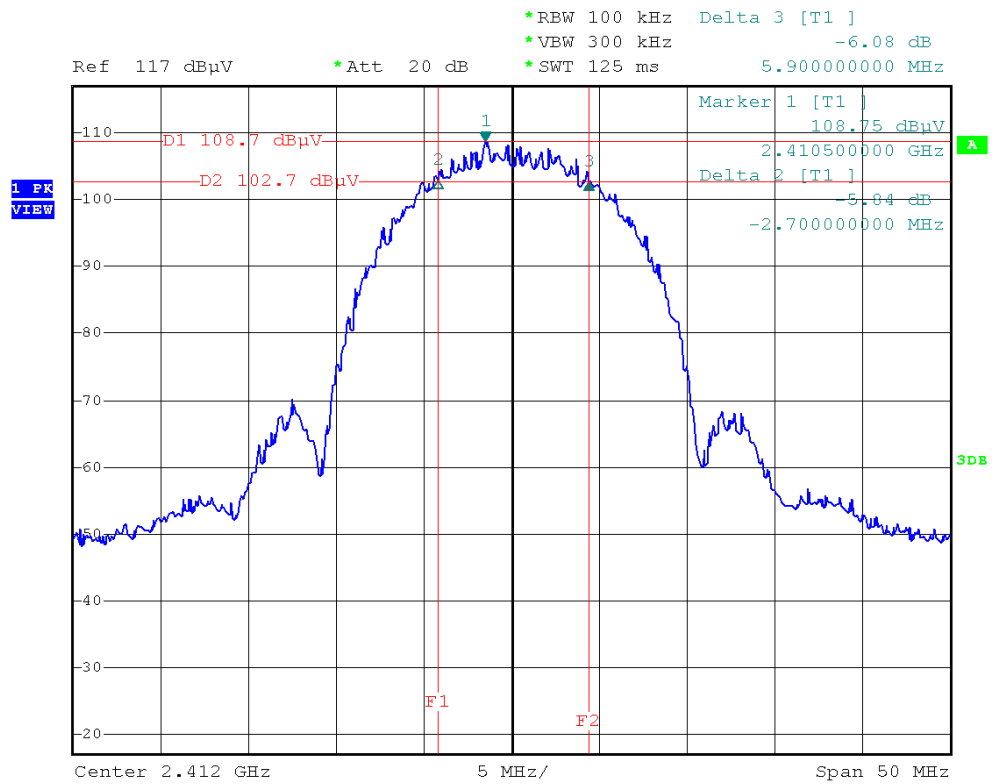


6dB BANDWIDTH (802.11b MODE CH Mid)

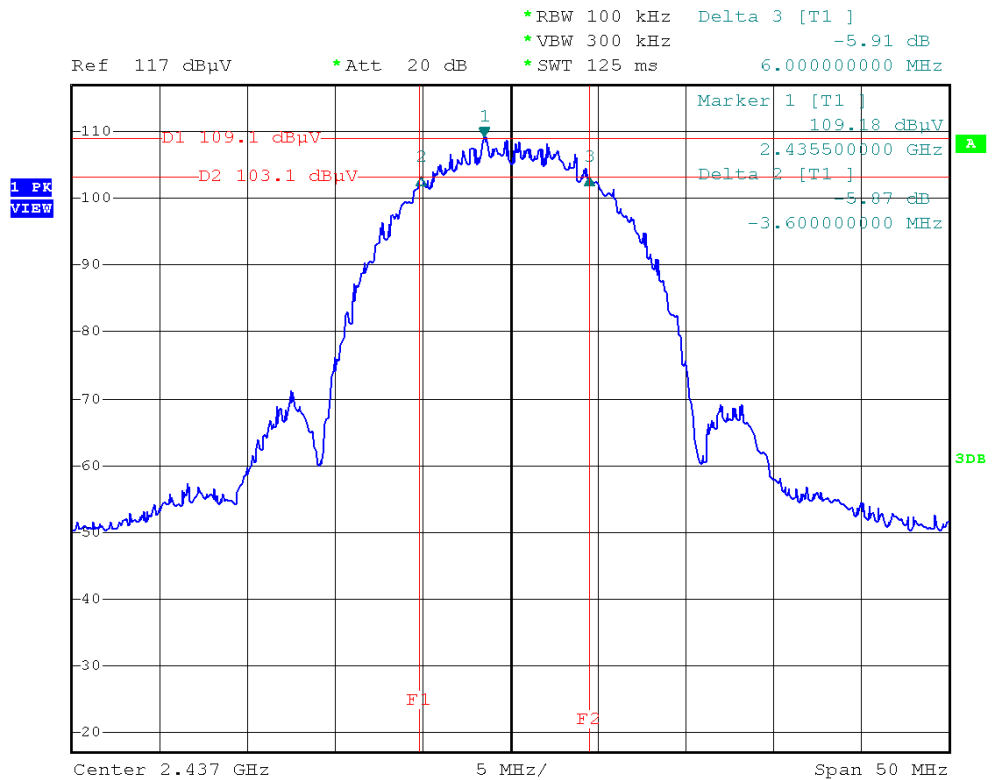


6dB BANDWIDTH (802.11b MODE CH High)

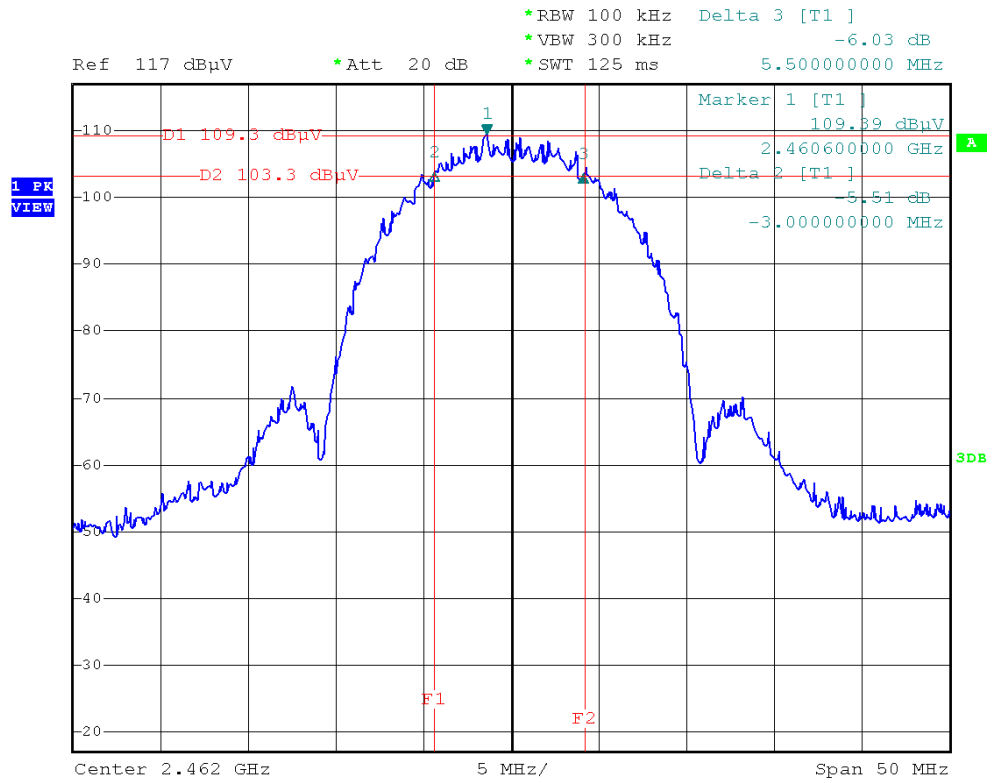


6dB BANDWIDTH (802.11g MODE CH Low)

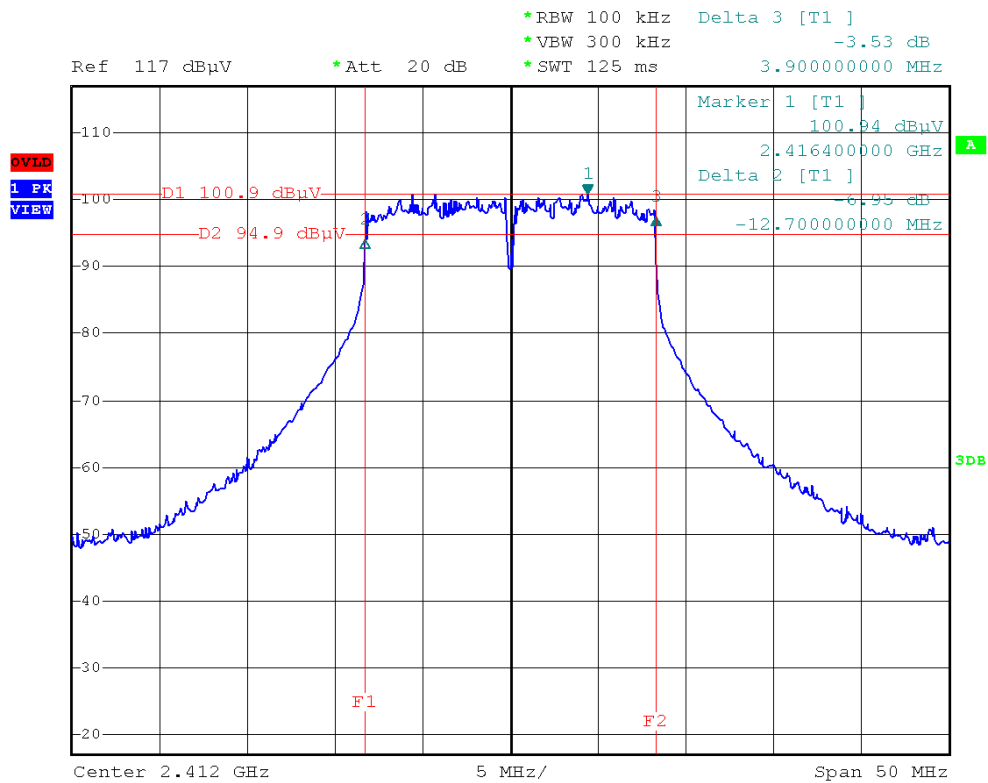


6dB BANDWIDTH (802.11g MODE CH Mid)

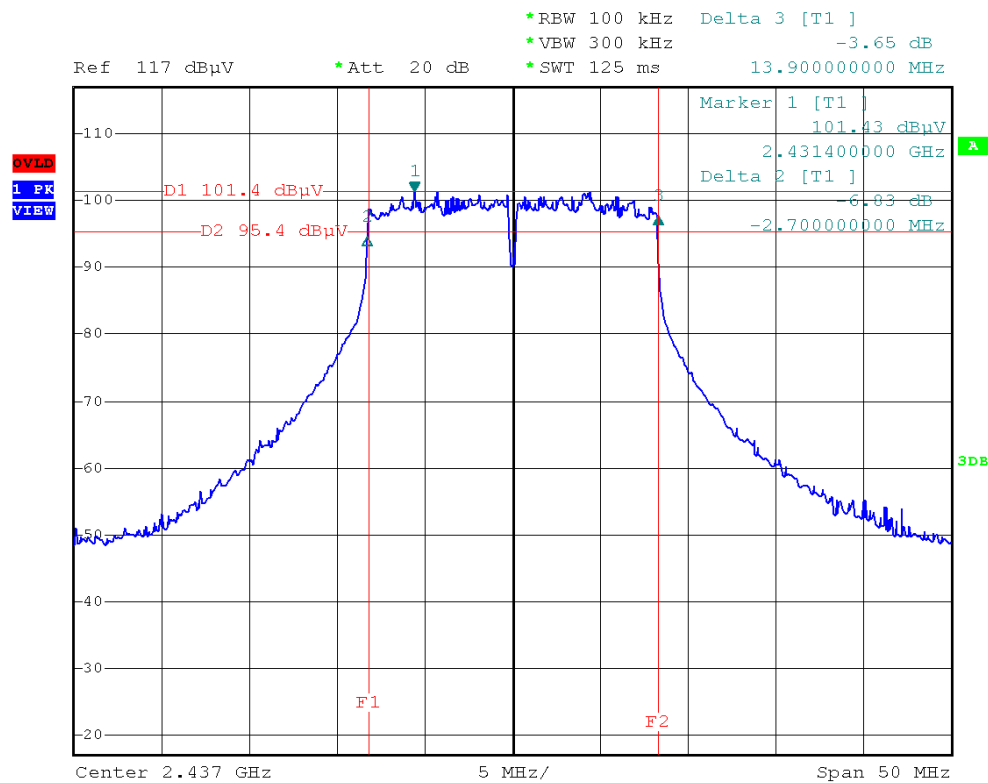


6dB BANDWIDTH (802.11g MODE CH High)

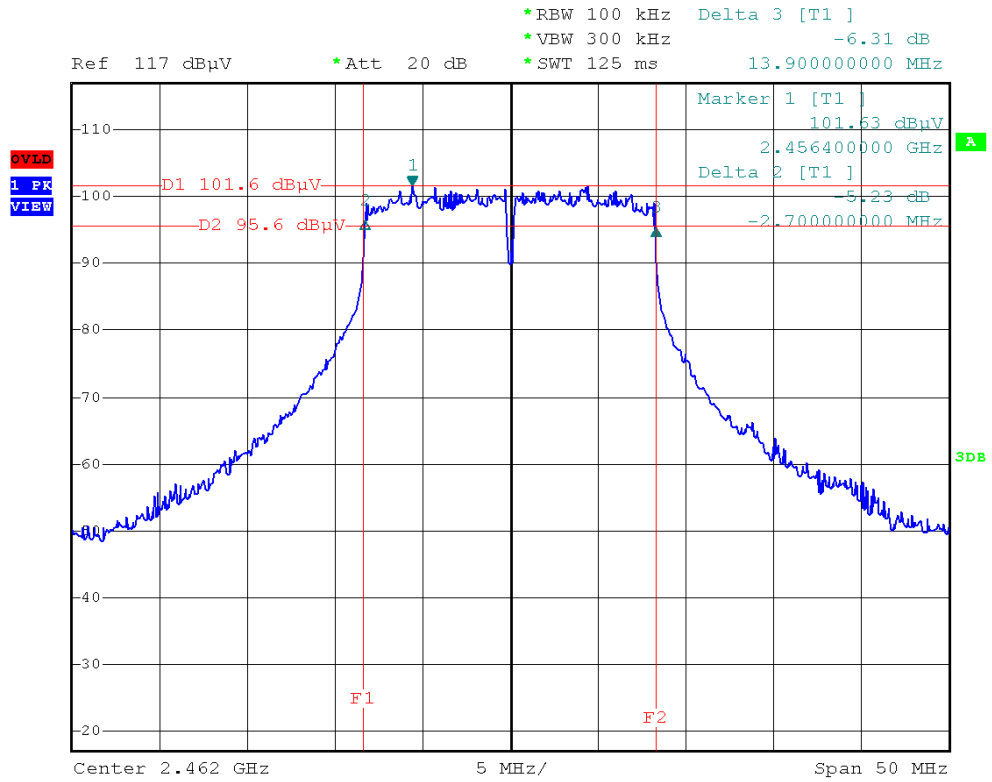


6dB BANDWIDTH (802.11n HT20 MODE CH Low)

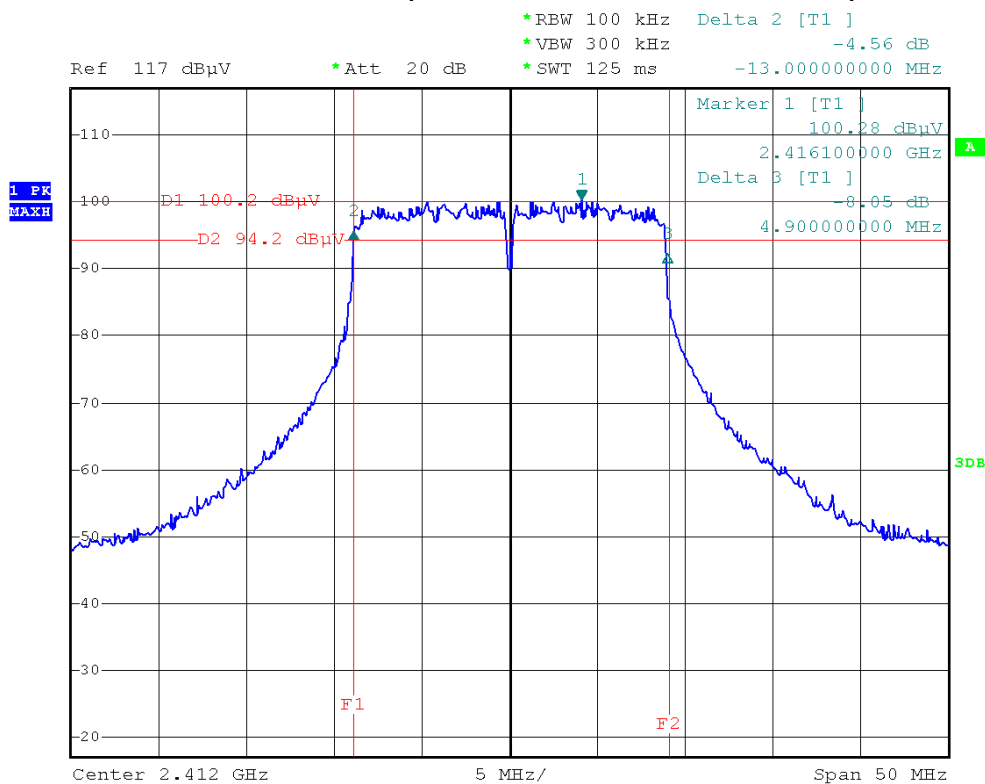


6dB BANDWIDTH (802.11n HT20 MODE CH Mid)

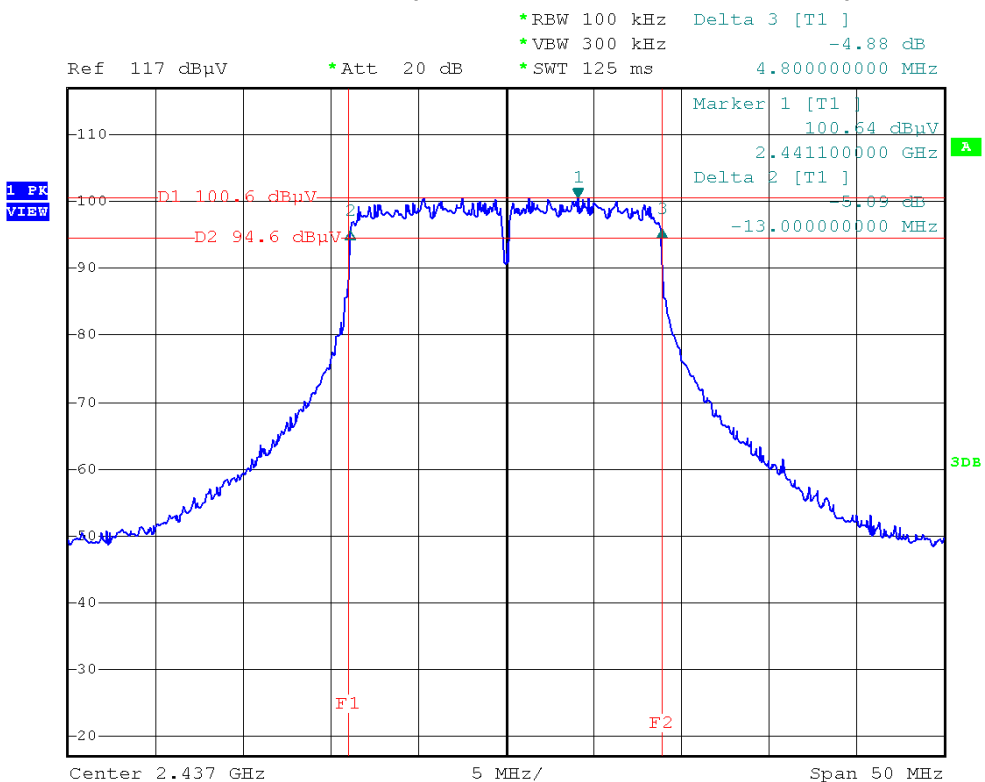


6dB BANDWIDTH (802.11n HT20 MODE CH High)

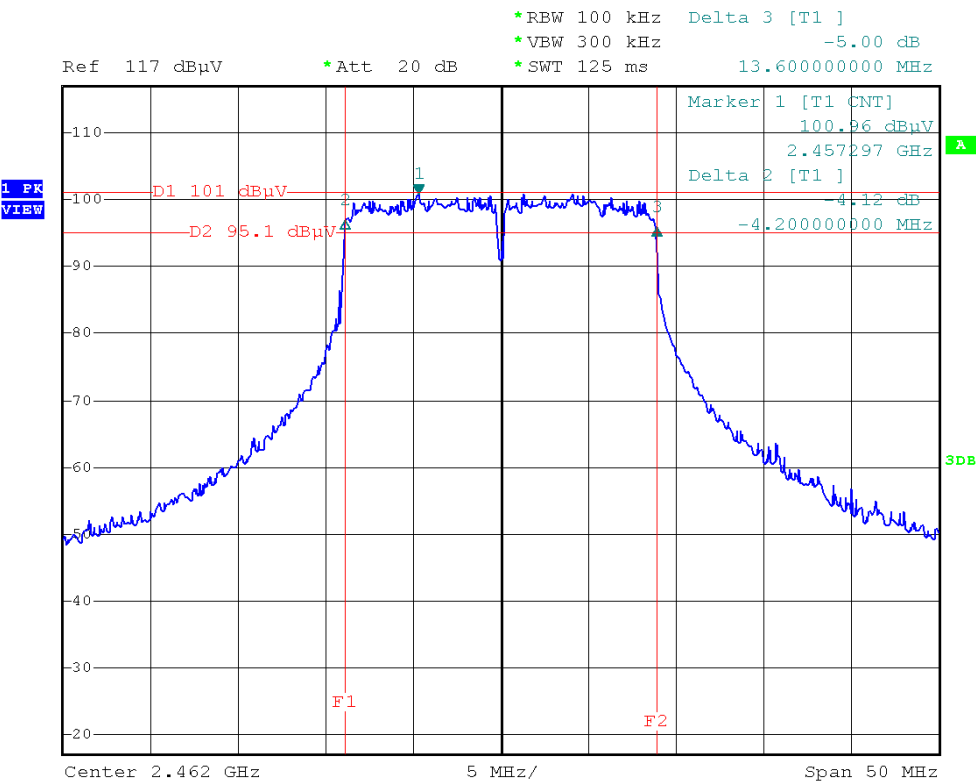


6dB BANDWIDTH (802.11n HT40 MODE CH Low)

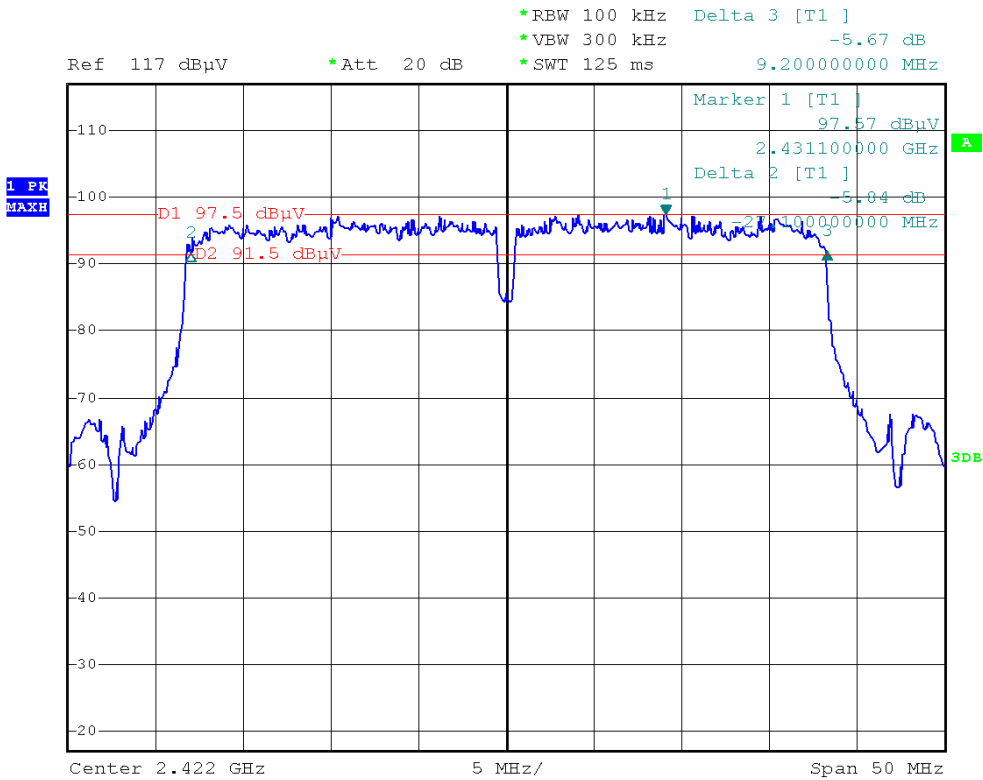

6dB BANDWIDTH (802.11n HT40 MODE CH Mid)

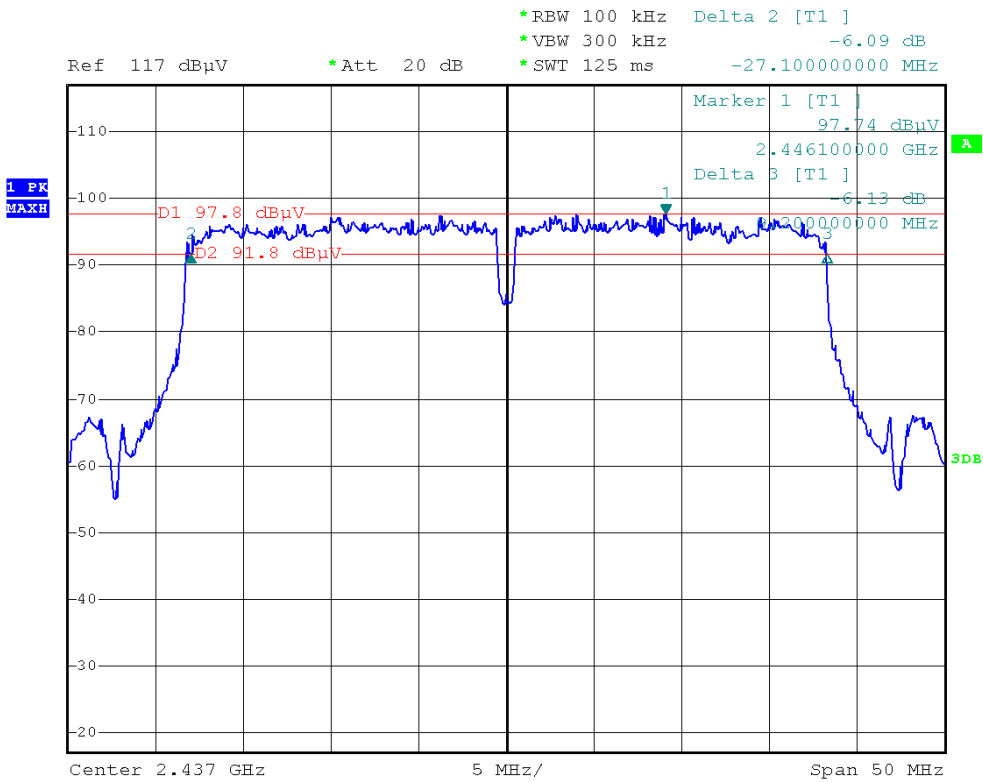

6dB BANDWIDTH (802.11n HT40 MODE CH High)

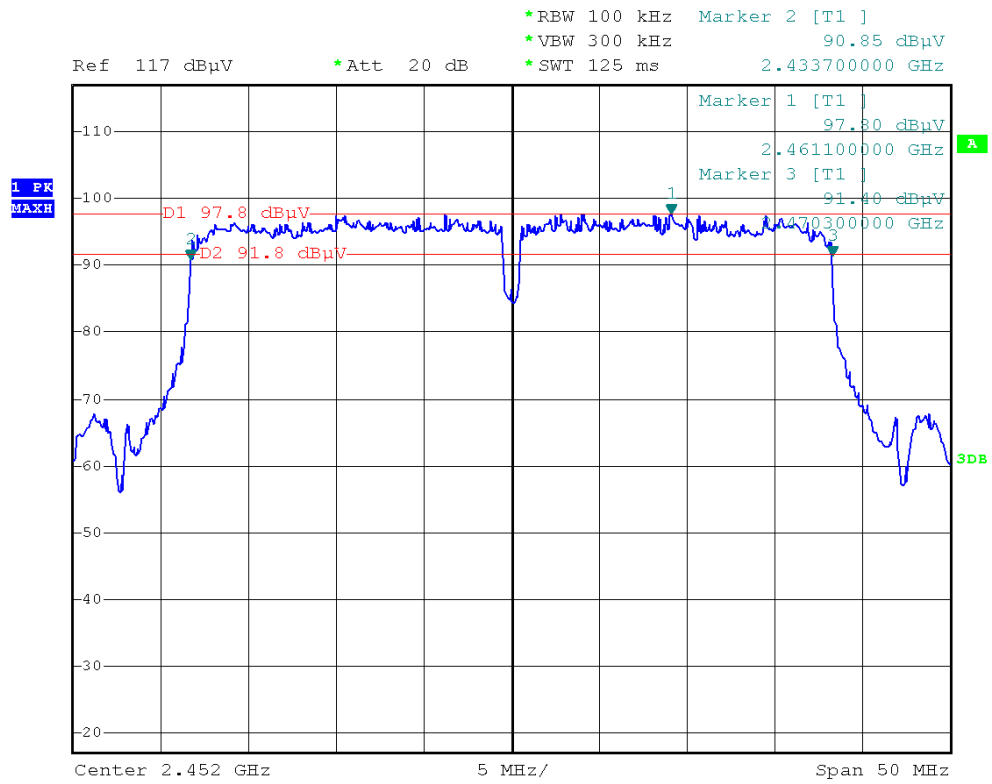


8. Test of Conducted Spurious Emission

8.1 Applicable Standard

Refer to FCC §15.247 (d).

Output power was measured based on the use of RMS averaging over a time interval, therefore the required attenuation is 30 dB.

8.2 EUT Setup

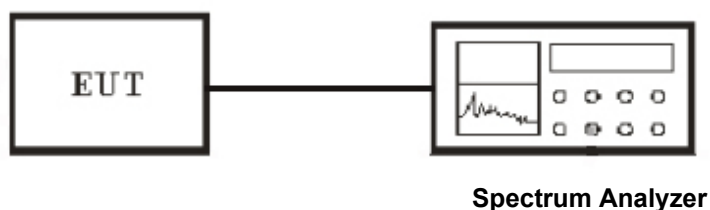

8.3 Test Equipment List and Details

See section 2.5.

8.4 Test Procedure

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

The spectrum from 30 MHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

8.5 Test Result

Temperature (°C) : 22~23	EUT: Tablet PC
Humidity (%RH) : 50~54	M/N: LT7052
Barometric Pressure (mbar) : 950~1000	Operation Condition: TX Mode

IEEE 802.11b mode**CH Low**

Frequency (MHz)	Reading (dBμV)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2412.6535	97.49	109.19	N/A	N/A	
1197.014	40.58	52.28	89.19	-36.91	PASS
4910.2404	42.91	54.61	89.19	-34.58	PASS
6979.038	46.45	58.15	89.19	-31.04	PASS

CH Mid

Frequency (MHz)	Reading (dBμV)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2437.1524	98.78	110.48	N/A	N/A	
1462.2444	41.28	52.98	90.48	-37.50	PASS
4857.1943	44.06	55.76	90.48	-34.72	PASS
6819.8998	45.76	57.46	90.48	-33.02	PASS

CH High

Frequency (MHz)	Reading (dBμV)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2462.5352	97.74	109.44	N/A	N/A	
1303.1062	40.93	52.63	89.44	-36.81	PASS
5493.7474	44.02	55.72	89.44	-33.72	PASS
6766.8537	45.39	57.09	89.44	-32.35	PASS

IEEE 802.11g mode**CH Low**

Frequency (MHz)	Reading (dBμV)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2412.6352	93.04	104.74	N/A	N/A	
1409.7984	40.47	52.17	84.74	-32.57	PASS
5865.0701	44.22	55.92	84.74	-28.82	PASS
6713.8076	45.37	57.07	84.74	-27.67	PASS

CH Mid

Frequency (MHz)	Reading (dBμV)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2436.9525	93.81	105.51	N/A	N/A	
1674.4288	41.44	53.14	85.51	-32.37	PASS
5546.7935	43.12	54.82	85.51	-30.69	PASS
6766.8537	45.53	57.23	85.51	-28.28	PASS

CH High

Frequency (MHz)	Reading (dBμV)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2461.5352	92.89	104.59	N/A	N/A	
1780.521	41.29	52.99	84.59	-31.60	PASS
6501.6232	45.57	57.27	84.59	-27.32	PASS
6979.038	45.45	57.15	84.59	-27.44	PASS

IEEE 802.11n HT20 mode**CH Low**

Frequency (MHz)	Reading (dBμV)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2411.8565	89.64	101.34	N/A	N/A	
1462.2444	42.12	53.82	81.34	-27.52	PASS
5440.7014	43.81	55.51	81.34	-25.83	PASS
6925.9919	46.22	57.92	81.34	-23.42	PASS

CH Mid

Frequency (MHz)	Reading (dBμV)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2437.5246	89.92	101.62	N/A	N/A	
1674.4288	41.33	53.03	81.62	-28.59	PASS
5546.7935	42.93	54.63	81.62	-26.99	PASS
6713.8076	45.86	57.56	81.62	-24.06	PASS

CH High

Frequency (MHz)	Reading (dBμV)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2462.5385	89.32	101.02	N/A	N/A	
1886.6132	40.59	52.29	81.02	-28.73	PASS
5546.7935	43.14	54.84	81.02	-26.18	PASS
6925.9919	46.11	57.81	81.02	-23.21	PASS

IEEE 802.11n HT40 mode**CH Low**

Frequency (MHz)	Reading (dBμV)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2422.8563	86.88	98.58	N/A	N/A	
1780.521	41.73	53.43	78.58	-25.15	PASS
6012.7248	44.55	56.25	78.58	-22.33	PASS
6861.4623	46.00	57.7	78.58	-20.88	PASS

CH Mid

Frequency (MHz)	Reading (dBμV)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2437.5263	87.00	98.7	N/A	N/A	
1037.8757	41.52	53.22	78.70	-25.48	PASS
4963.2865	43.22	54.92	78.70	-23.78	PASS
6660.7615	45.72	57.42	78.70	-21.28	PASS

CH High

Frequency (MHz)	Reading (dBμV)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2452.6535	87.28	98.98	N/A	N/A	
1727.4749	41.01	52.71	78.98	-26.27	PASS
5599.8396	45.15	56.85	78.98	-22.13	PASS
6779.038	45.82	57.52	78.98	-21.46	PASS

9. Test of Radiated Spurious Emission

9.1 Radiated Spurious Emission

9.1.1 Limits

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz, However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.

15.209 (b) In the emission table above, the tighter limit applies at the band edges.

9.1.2 EUT Setup

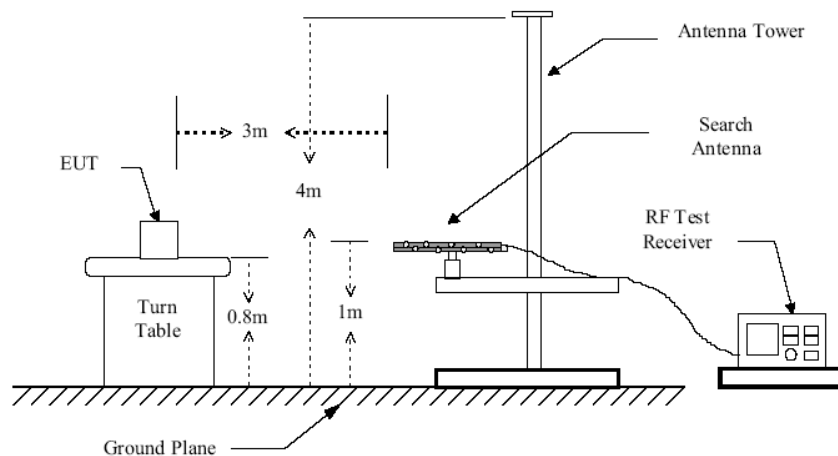


Figure 1 : Frequencies measured below 1 GHz configuration

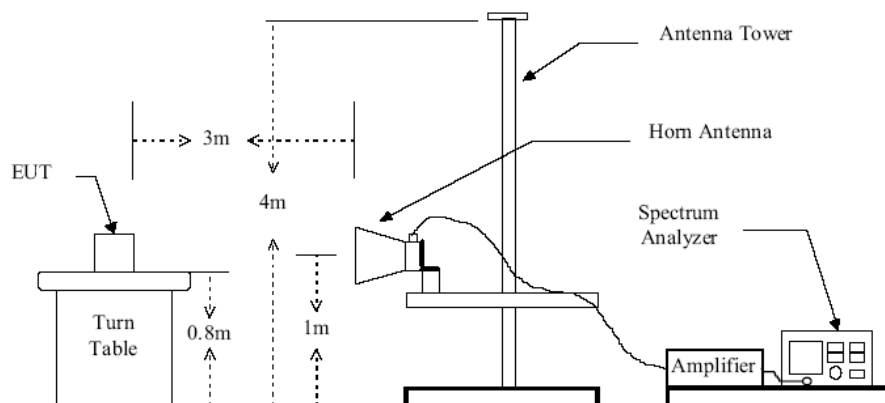


Figure 2 : Frequencies measured above 1 GHz configuration

9.1.3 Test Procedure

- a). The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b). While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna.
- c). The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d). For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e). The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f). If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

9.1.4 Test Result

Temperature (°C) : 22~23	EUT: Tablet PC
Humidity (%RH) : 50~54	M/N: LT7052
Barometric Pressure (mbar) : 950~1000	Operation Condition: ON & TX Mode

Note: In this testing, the EUT was respectively tested in three different orientations. That is:

- (1) EUT was lie vertically, and then its Antenna oriented upward
- (2) EUT was lie vertically, and then its Antenna oriented downward
- (3) EUT was lie flatwise, and then its Antenna oriented to the receiving antenna

The worst test data see following pages When the EUT was lie flatwise, and its Antenna oriented to the receiving antenna, the worst test data was got as following table.

WORST-CASE RADIATED EMISSION BELOW 1 GHz

Normal operating Mode:

Horizontal

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Levels	Limits	Margin	Detector Mode
(MHz)	(dBμV)	(dB/M)	(dB)	(dBμV/M)	(dB μV/M)	(dB)	PK/QP
84.32	26.40	7.97	1.18	36.56	40.00	-3.44	QP
160.01	16.50	12.60	1.59	30.69	43.50	-12.81	QP
402.48	14.50	14.44	2.72	36.66	46.00	-9.34	QP
652.74	14.50	18.00	3.05	35.55	46.00	-10.45	QP
726.46	9.60	20.84	3.84	34.28	46.00	-11.72	QP
823.46	10.30	21.80	4.14	36.24	46.00	-9.76	QP
N/A	----	----	----	----	----	----	----

Vertical

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Levels	Limits	Margin	Detector Mode
(MHz)	(dBμV)	(dB/M)	(dB)	(dBμV/M)	(dB μV/M)	(dB)	PK/QP
142.52	21.40	7.89	1.01	30.30	40.00	-9.70	QP
191.02	16.10	12.60	1.59	30.29	43.50	-13.21	QP
216.24	25.70	12.20	2.02	39.92	46.00	-6.08	QP
239.52	22.80	14.44	2.72	39.96	46.00	-6.04	QP
503.36	16.50	18.00	3.05	37.55	46.00	-8.45	QP
749.74	13.20	21.80	4.14	39.14	46.00	-6.86	QP
N/A	----	----	----	----	----	----	----

REMARK: Emission level (dBμV/m) =Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dBμV).

WORST-CASE RADIATED EMISSION BELOW 30 MHz

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Levels	Limits	Margin	Detector Mode
(MHz)	(dBμV)	(dB/M)	(dB)	(dBμV/M)	(dB μV/M)	(dB)	PK/QP
0.510	19.10	7.89	1.02	28.01	67.0	-38.99	QP
15.40	19.50	8.75	1.21	29.46	49.5	-20.04	QP
19.30	16.20	8.73	1.05	25.98	49.5	-23.52	QP
23.20	21.20	7.33	1.68	30.21	49.5	-19.29	QP

TRANSMITTER RADIATED EMISSION ABOVE 1 GHz

IEEE 802.11b TX (CH Low)

Horizontal

TX / IEEE 802.11b mode / CH Low				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4824.15	51.24	32.81	3.71	41.34	0.69	47.12	74.00	-26.88	P
4824.15	39.25	32.81	3.71	41.34	0.69	35.13	54.00	-18.87	A
7236.35	49.85	38.83	4.93	41.42	1.44	53.62	74.00	-20.38	P
7236.35	37.49	38.83	4.93	41.42	1.44	41.26	54.00	-12.74	A
9645.85	48.75	38.75	5.74	38.43	0.61	55.42	74.00	-18.58	P
9645.85	37.69	38.75	5.74	38.43	0.61	44.36	54.00	-9.64	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11b mode / CH Low				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4823.85	53.62	32.81	3.70	41.34	0.69	49.49	74.00	-24.51	P
4823.85	42.00	32.81	3.70	41.34	0.69	37.87	54.00	-16.13	A
7236.18	51.42	38.83	4.93	41.42	1.44	55.19	74.00	-18.81	P
7236.18	39.85	38.83	4.93	41.42	1.44	43.62	54.00	-10.38	A
9647.94	50.24	38.75	5.74	38.43	0.61	56.92	74.00	-17.08	P
9647.94	39.68	38.75	5.74	38.43	0.61	46.36	54.00	-7.64	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11b TX (CH Middle)**Horizontal**

				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4876.53	51.28	32.93	3.73	41.41	0.71	47.24	74.00	-26.76	P
4876.53	41.96	32.93	3.73	41.41	0.71	37.92	54.00	-16.08	A
7309.41	50.24	38.93	4.96	41.32	1.59	54.40	74.00	-19.60	P
7309.41	39.42	38.93	4.96	41.32	1.59	43.58	54.00	-10.42	A
9747.83	49.85	38.85	5.75	38.24	0.55	56.76	74.00	-17.24	P
9747.83	38.65	38.85	5.75	38.24	0.55	45.56	54.00	-8.44	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11b mode / CH Middle				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4876.92	53.64	32.93	3.73	41.42	0.71	49.60	74.00	-24.40	P
4876.92	43.84	32.93	3.73	41.42	0.71	39.80	54.00	-14.20	A
7309.25	51.51	38.93	4.96	41.32	1.59	55.67	74.00	-18.33	P
7309.25	40.93	38.93	4.96	41.32	1.59	45.09	54.00	-8.91	A
9748.35	52.14	38.85	5.75	38.24	0.55	59.05	74.00	-14.95	P
9748.35	40.57	38.85	5.75	38.24	0.55	47.48	54.00	-6.52	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11b TX (CH High)

Horizontal

TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4923.85	52.46	33.03	3.76	41.49	0.73	48.50	74.00	-25.50	P
4923.85	42.11	33.03	3.76	41.49	0.73	38.15	54.00	-15.85	A
7385.69	51.24	39.04	4.99	41.21	1.76	55.82	74.00	-18.18	P
7385.69	39.51	39.04	4.99	41.21	1.76	44.09	54.00	-9.91	A
9848.15	50.24	38.95	5.76	38.06	0.49	57.39	74.00	-16.61	P
9848.15	38.96	38.95	5.76	38.06	0.49	46.10	54.00	-7.90	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4924.03	53.84	33.03	3.76	41.49	0.73	49.88	74.00	-24.12	P
4924.03	43.45	33.03	3.76	41.49	0.73	39.49	54.00	-14.51	A
7386.08	52.41	39.04	4.99	41.21	1.76	56.99	74.00	-17.01	P
7386.08	40.57	39.04	4.99	41.21	1.76	45.15	54.00	-8.85	A
9847.35	52.11	38.95	5.76	38.06	0.49	59.25	74.00	-14.75	P
9847.35	41.35	38.95	5.76	38.06	0.49	48.49	54.00	-5.51	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11g TX (CH Low)

Horizontal

TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4824.23	52.12	32.81	3.71	41.34	0.69	48.00	74.00	-26.00	P
4824.23	42.11	32.81	3.71	41.34	0.69	37.99	54.00	-16.01	A
7236.00	51.24	38.83	4.93	41.42	1.44	55.01	74.00	-18.99	P
7236.00	40.35	38.83	4.93	41.42	1.44	44.12	54.00	-9.88	A
9642.15	50.22	38.74	5.74	38.44	0.61	56.88	74.00	-17.12	P
9642.15	38.95	38.74	5.74	38.44	0.61	45.61	54.00	-8.39	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4824.00	54.24	32.81	3.70	41.34	0.69	50.11	74.00	-23.89	P
4824.00	43.97	32.81	3.70	41.34	0.69	39.84	54.00	-14.16	A
7236.39	51.62	38.83	4.93	41.42	1.44	55.39	74.00	-18.61	P
7236.39	41.52	38.83	4.93	41.42	1.44	45.29	54.00	-8.71	A
9641.57	52.21	38.74	5.74	38.44	0.62	58.87	74.00	-15.13	P
9641.57	41.25	38.74	5.74	38.44	0.62	47.91	54.00	-6.09	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11g TX (CH Middle)

Horizontal

TX / IEEE 802.11g mode / CH Middle				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4871.16	50.24	32.92	3.73	41.41	0.71	46.19	74.00	-27.81	P
4871.16	41.35	32.92	3.73	41.41	0.71	37.30	54.00	-16.70	A
7318.25	49.85	38.95	4.96	41.31	1.61	54.06	74.00	-19.94	P
7318.25	40.22	38.95	4.96	41.31	1.61	44.43	54.00	-9.57	A
9748.35	50.24	38.85	5.75	38.24	0.55	57.15	74.00	-16.85	P
9748.35	39.58	38.85	5.75	38.24	0.55	46.49	54.00	-7.51	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11g mode / CH Middle				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4871.56	53.62	32.92	3.73	41.41	0.71	49.57	74.00	-24.43	P
4871.56	44.17	32.92	3.73	41.41	0.71	40.12	54.00	-13.88	A
7317.24	51.24	38.94	4.96	41.31	1.61	55.45	74.00	-18.55	P
7317.24	42.33	38.94	4.96	41.31	1.61	46.54	54.00	-7.46	A
9747.26	52.34	38.85	5.75	38.25	0.55	59.25	74.00	-14.75	P
9747.26	41.52	38.85	5.75	38.25	0.55	48.43	54.00	-5.57	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11g TX (CH High)

Horizontal

TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4924.35	51.24	33.03	3.76	41.49	0.73	47.28	74.00	-26.72	P
4924.35	40.26	33.03	3.76	41.49	0.73	36.30	54.00	-17.70	A
7384.86	49.87	39.04	4.99	41.21	1.75	54.44	74.00	-19.56	P
7384.86	38.65	39.04	4.99	41.21	1.75	43.22	54.00	-10.78	A
9847.56	50.14	38.95	5.76	38.06	0.49	57.28	74.00	-16.72	P
9847.56	39.85	38.95	5.76	38.06	0.49	46.99	54.00	-7.01	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4923.85	53.22	33.03	3.76	41.49	0.73	49.26	74.00	-24.74	P
4923.85	42.61	33.03	3.76	41.49	0.73	38.65	54.00	-15.35	A
7385.94	51.33	39.04	4.99	41.21	1.76	55.91	74.00	-18.09	P
7385.94	40.25	39.04	4.99	41.21	1.76	44.83	54.00	-9.17	A
9847.59	52.64	38.95	5.76	38.06	0.49	59.78	74.00	-14.22	P
9847.59	41.24	38.95	5.76	38.06	0.49	48.38	54.00	-5.62	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11n HT20 TX (CH Low)

Horizontal

TX / IEEE 802.11n HT20 mode / CH Low				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4824.35	50.24	32.81	3.71	41.34	0.69	46.12	74.00	-27.88	P
4824.35	38.95	32.81	3.71	41.34	0.69	34.83	54.00	-19.17	A
7235.86	51.22	38.83	4.93	41.43	1.43	54.99	74.00	-19.01	P
7235.86	38.97	38.83	4.93	41.43	1.43	42.74	54.00	-11.26	A
9648.35	50.22	38.75	5.74	38.43	0.61	56.90	74.00	-17.10	P
9648.35	38.64	38.75	5.74	38.43	0.61	45.32	54.00	-8.68	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11n HT20 mode / CH Low				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4823.59	52.64	32.81	3.70	41.34	0.69	48.51	74.00	-25.49	P
4823.59	41.25	32.81	3.70	41.34	0.69	37.12	54.00	-16.88	A
7236.24	53.26	38.83	4.93	41.42	1.44	57.03	74.00	-16.97	P
7236.24	41.25	38.83	4.93	41.42	1.44	45.02	54.00	-8.98	A
9647.15	52.14	38.75	5.74	38.43	0.61	58.81	74.00	-15.19	P
9647.15	40.36	38.75	5.74	38.43	0.61	47.03	54.00	-6.97	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11n HT20 TX (CH Middle)

Horizontal

TX / IEEE 802.11n HT20 mode / CH Middle				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4872.69	50.24	32.92	3.73	41.41	0.71	46.19	74.00	-27.81	P
4872.69	40.36	32.92	3.73	41.41	0.71	36.31	54.00	-17.69	A
7311.54	49.87	38.94	4.96	41.32	1.60	54.05	74.00	-19.95	P
7311.54	38.65	38.94	4.96	41.32	1.60	42.83	54.00	-11.17	A
9748.27	50.24	38.85	5.75	38.24	0.55	57.15	74.00	-16.85	P
9748.27	39.85	38.85	5.75	38.24	0.55	46.76	54.00	-7.24	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11n HT20 mode / CH Middle				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4873.26	52.14	32.92	3.73	41.41	0.71	48.09	74.00	-25.91	P
4873.26	42.33	32.92	3.73	41.41	0.71	38.28	54.00	-15.72	A
7312.25	51.84	38.94	4.96	41.32	1.60	56.02	74.00	-17.98	P
7312.25	40.25	38.94	4.96	41.32	1.60	44.43	54.00	-9.57	A
9748.65	51.68	38.85	5.75	38.24	0.55	58.59	74.00	-15.41	P
9748.65	41.25	38.85	5.75	38.24	0.55	48.16	54.00	-5.84	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11n HT20 TX (CH High)

Horizontal

TX / IEEE 802.11n HT20 mode / CH High				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4923.85	51.14	33.03	3.76	41.49	0.73	47.18	74.00	-26.82	P
4923.85	40.35	33.03	3.76	41.49	0.73	36.39	54.00	-17.61	A
7386.54	50.28	39.04	4.99	41.21	1.76	54.86	74.00	-19.14	P
7386.54	39.48	39.04	4.99	41.21	1.76	44.06	54.00	-9.94	A
9849.33	49.87	38.95	5.76	38.06	0.49	57.02	74.00	-16.98	P
9849.33	39.65	38.95	5.76	38.06	0.49	46.80	54.00	-7.20	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11n HT20 mode / CH High				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4923.16	53.26	33.03	3.76	41.48	0.73	49.30	74.00	-24.70	P
4923.16	42.17	33.03	3.76	41.48	0.73	38.21	54.00	-15.79	A
7385.46	52.86	39.04	4.99	41.21	1.75	57.43	74.00	-16.57	P
7385.46	41.33	39.04	4.99	41.21	1.75	45.90	54.00	-8.10	A
9849.17	52.34	38.95	5.76	38.06	0.49	59.49	74.00	-14.51	P
9849.17	42.65	38.95	5.76	38.06	0.49	49.80	54.00	-4.20	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11n HT40 TX (CH Low)

Horizontal

TX / IEEE 802.11n HT40 mode / CH Low				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4843.16	50.24	32.85	3.72	41.36	0.70	46.15	74.00	-27.85	P
4843.16	39.86	32.85	3.72	41.36	0.70	35.77	54.00	-18.23	A
7264.86	49.87	38.87	4.94	41.38	1.50	53.79	74.00	-20.21	P
7264.86	38.56	38.87	4.94	41.38	1.50	42.48	54.00	-11.52	A
9687.35	50.24	38.79	5.75	38.36	0.59	57.01	74.00	-16.99	P
9687.35	38.97	38.79	5.75	38.36	0.59	45.74	54.00	-8.26	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11n HT40 mode / CH Low				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4844.65	52.64	32.86	3.72	41.37	0.70	48.55	74.00	-25.45	P
4844.65	41.35	32.86	3.72	41.37	0.70	37.26	54.00	-16.74	A
7265.14	51.24	38.87	4.94	41.38	1.50	55.17	74.00	-18.83	P
7265.14	40.33	38.87	4.94	41.38	1.50	44.26	54.00	-9.74	A
9686.35	53.26	38.79	5.75	38.36	0.59	60.03	74.00	-13.97	P
9686.35	41.57	38.79	5.75	38.36	0.59	48.34	54.00	-5.66	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11n HT40 TX (CH Middle)

Horizontal

TX / IEEE 802.11n HT40 mode / CH Middle				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4873.26	51.24	32.92	3.73	41.41	0.71	47.19	74.00	-26.81	P
4873.26	38.59	32.92	3.73	41.41	0.71	34.54	54.00	-19.46	A
7312.19	50.24	38.94	4.96	41.32	1.60	54.42	74.00	-19.58	P
7312.19	40.16	38.94	4.96	41.32	1.60	44.34	54.00	-9.66	A
9747.85	49.87	38.85	5.75	38.24	0.55	56.78	74.00	-17.22	P
9747.85	38.97	38.85	5.75	38.24	0.55	45.88	54.00	-8.12	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11n HT40 mode / CH Middle				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4874.59	53.26	32.92	3.73	41.41	0.71	49.22	74.00	-24.78	P
4874.59	41.14	32.92	3.73	41.41	0.71	37.10	54.00	-16.90	A
7312.24	52.87	38.94	4.96	41.32	1.60	57.05	74.00	-16.95	P
7312.24	42.33	38.94	4.96	41.32	1.60	46.51	54.00	-7.49	A
9747.16	51.24	38.85	5.75	38.25	0.55	58.15	74.00	-15.85	P
9747.16	40.16	38.85	5.75	38.25	0.55	47.07	54.00	-6.93	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit

IEEE 802.11n HT40 TX (CH High)

Horizontal

TX / IEEE 802.11n HT40 mode / CH High				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4903.26	50.14	32.99	3.75	41.45	0.72	46.14	74.00	-27.86	P
4903.26	39.87	32.99	3.75	41.45	0.72	35.87	54.00	-18.13	A
7354.89	51.24	39.00	4.98	41.26	1.69	55.65	74.00	-18.35	P
7354.89	38.59	39.00	4.98	41.26	1.69	43.00	54.00	-11.00	A
9808.35	50.24	38.91	5.76	38.13	0.51	57.29	74.00	-16.71	P
9808.35	39.87	38.91	5.76	38.13	0.51	46.92	54.00	-7.08	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11n HT40 mode / CH High				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4904.15	52.47	32.99	3.75	41.46	0.72	48.47	74.00	-25.53	P
4904.15	41.24	32.99	3.75	41.46	0.72	37.24	54.00	-16.76	A
7353.65	53.25	39.00	4.98	41.26	1.69	57.65	74.00	-16.35	P
7353.65	40.15	39.00	4.98	41.26	1.69	44.55	54.00	-9.45	A
9808.15	52.14	38.91	5.76	38.13	0.52	59.19	74.00	-14.81	P
9808.15	41.25	38.91	5.76	38.13	0.52	48.30	54.00	-5.70	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit

9.2 RESTRICTED BAND EDGES

TEST RESULT

IEEE 802.11b mode

Channel	Polarity	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	H	2390	56.76	74	-17.24	Peak
	H	2390	46.54	54	-7.46	Average
	V	2390	56.93	74	-17.07	Peak
LOW	V	2390	46.64	54	-7.36	Average
	H	2483.5	60.45	74	-13.55	Peak
	H	2483.5	50.36	54	-3.64	Average
	V	2483.5	60.74	74	-13.26	Peak
HIGH	V	2483.5	50.36	54	-3.64	Average

IEEE 802.11g mode

Channel	Polarity	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	H	2390	55.83	74	-18.17	Peak
	H	2390	45.16	54	-8.84	Average
	V	2390	56.63	74	-17.37	Peak
LOW	V	2390	45.27	54	-8.73	Average
	H	2483.5	65.18	74	-8.82	Peak
	H	2483.5	49.11	54	-4.89	Average
	V	2483.5	64.88	74	-9.12	Peak
HIGH	V	2483.5	48.83	54	-5.17	Average


IEEE 802.11n HT20 mode

Channel	Polarity	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	H	2390	54.96	74	-19.04	Peak
	H	2390	45.16	54	-8.84	Average
	V	2390	56.71	74	-17.29	Peak
LOW	V	2390	45.16	54	-8.84	Average
	H	2483.5	54.11	74	-19.89	Peak
	H	2483.5	45.29	54	-8.71	Average
	V	2483.5	53.31	74	-20.69	Peak
HIGH	V	2483.5	45.00	54	-9.00	Average


IEEE 802.11n HT40 mode

Channel	Polarity	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	H	2390	53.67	74	-20.33	Peak
	H	2390	44.23	54	-9.77	Average
	V	2390	50.28	74	-23.72	Peak
LOW	V	2390	43.08	54	-10.92	Average
	H	2483.5	59.30	74	-14.70	Peak
	H	2483.5	47.26	54	-6.74	Average
	V	2483.5	60.78	74	-13.22	Peak
HIGH	V	2483.5	47.85	54	-6.15	Average


CH Low (802.11b MODE–Horizontal–Peak)

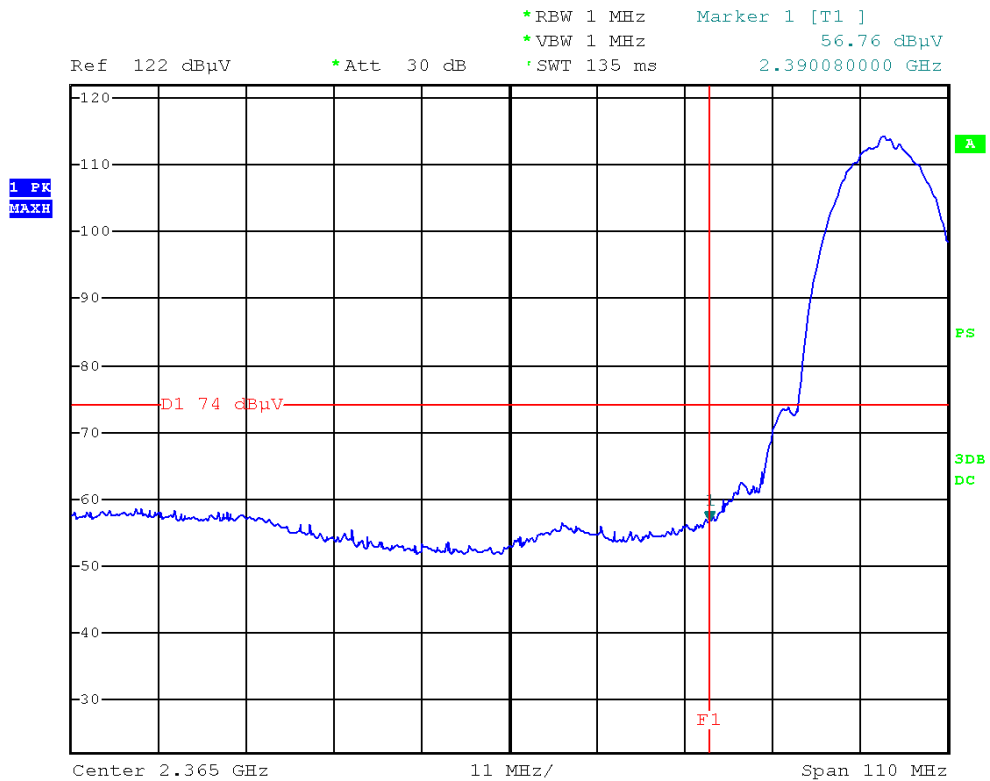


CH Low (802.11b MODE–Horizontal–Average)

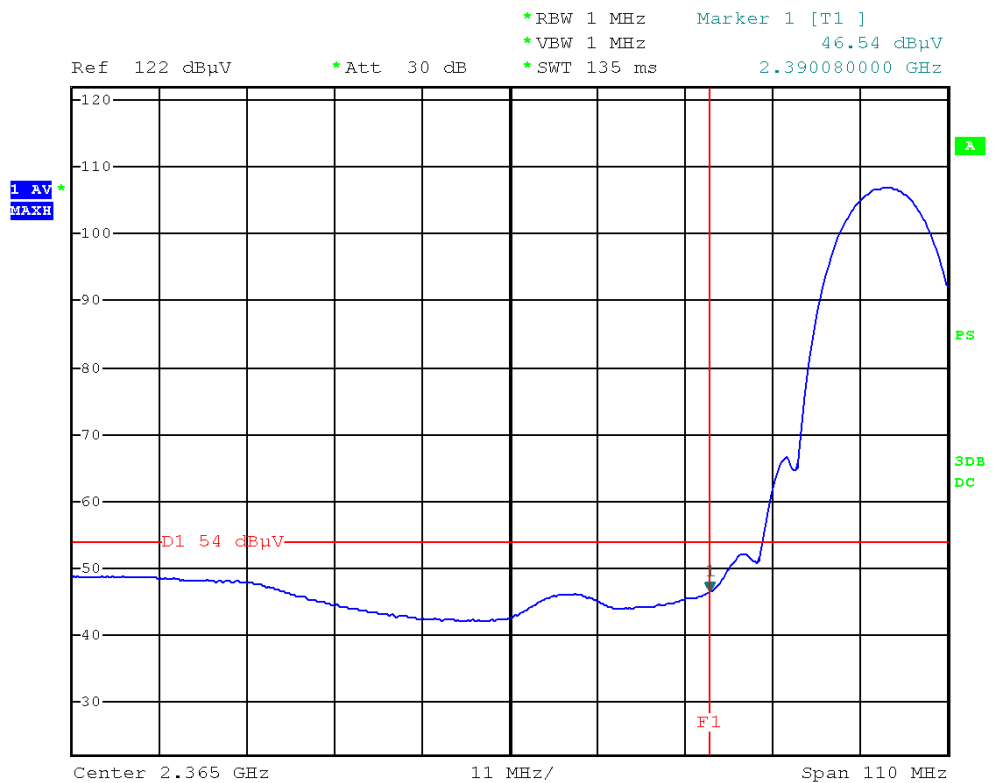


CH Low (802.11b MODE-Vertical-Peak)

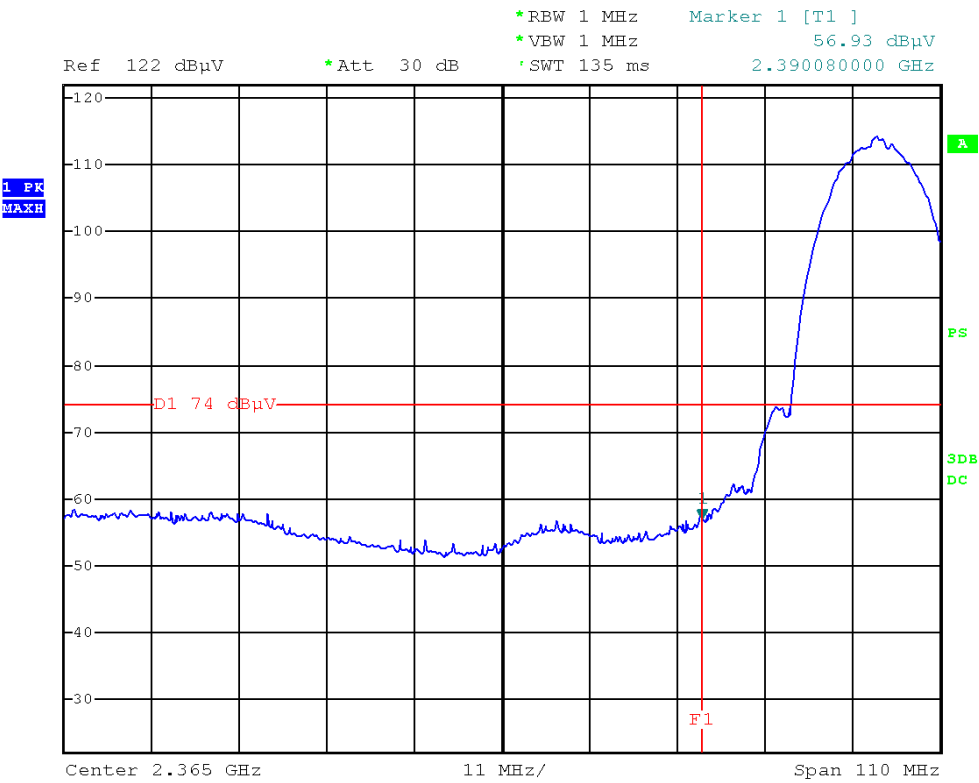


CH Low (802.11b MODE-Vertical-Average)

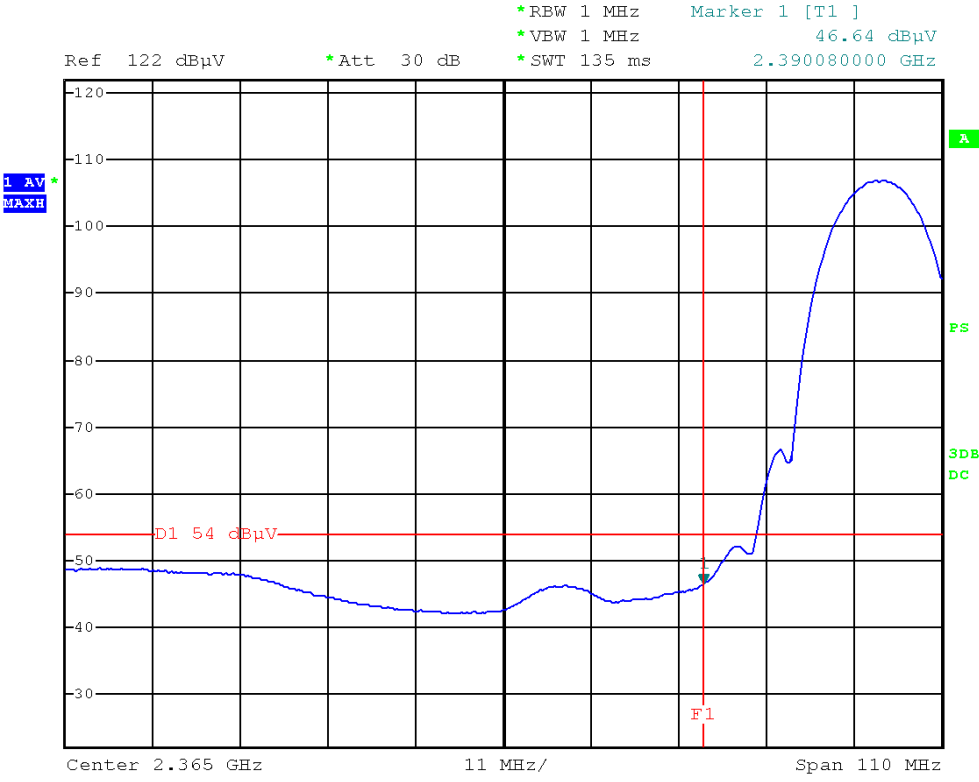


CH High (802.11b MODE–Horizontal–Peak)

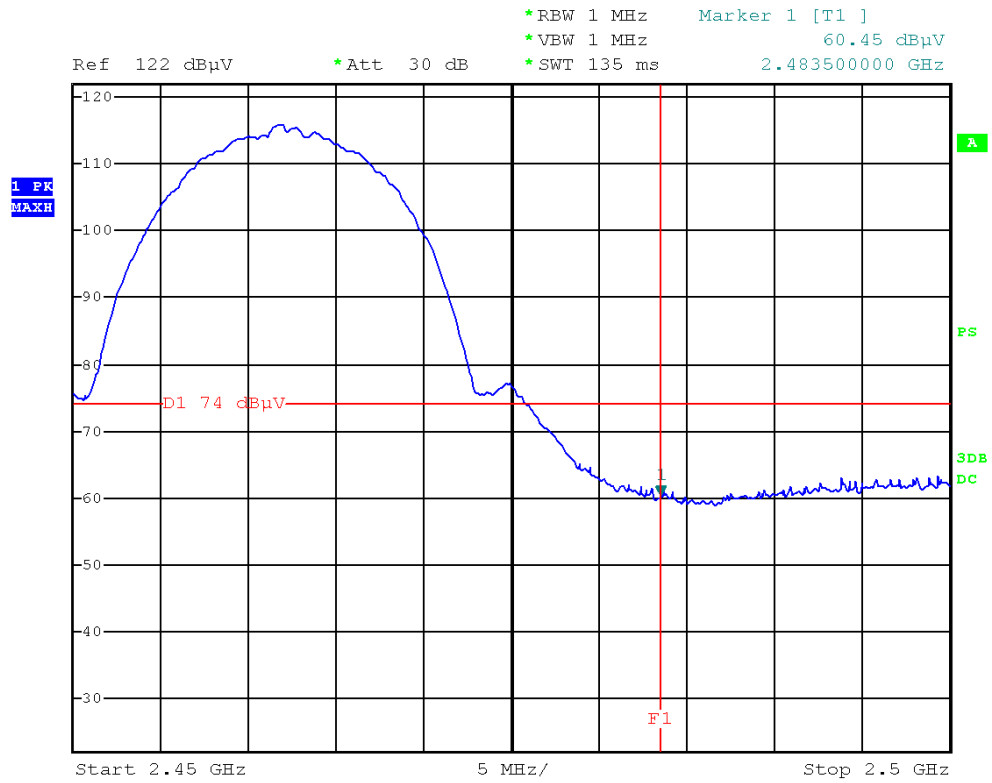


CH High (802.11b MODE–Horizontal–Average)

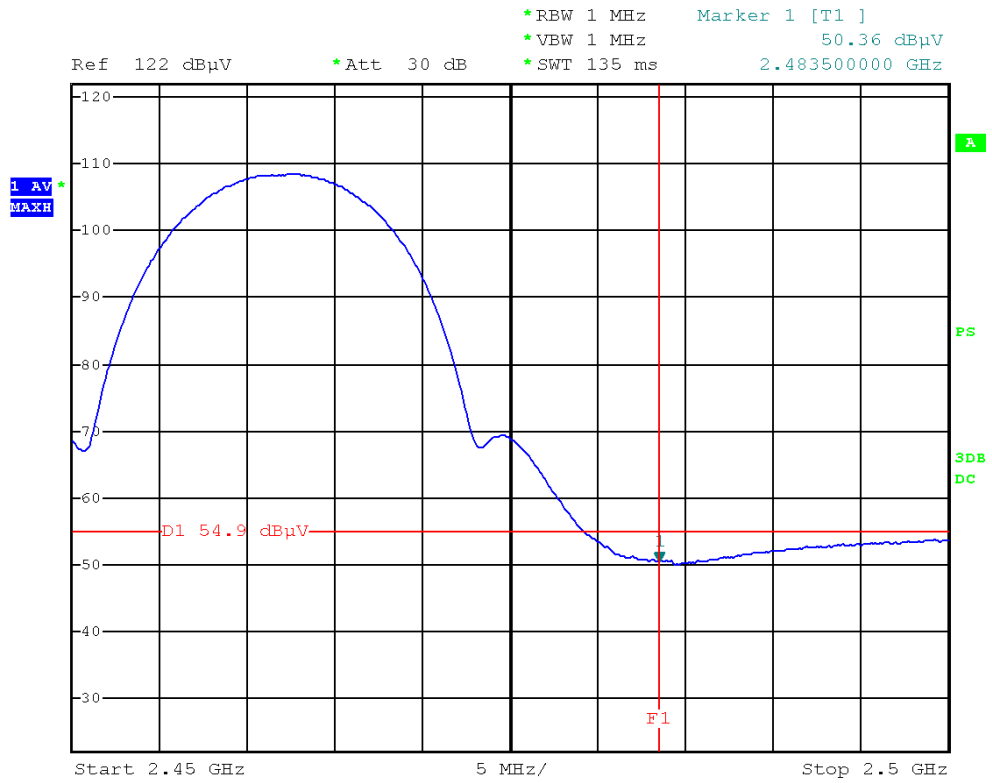


CH High (802.11b MODE-Vertical-Peak)

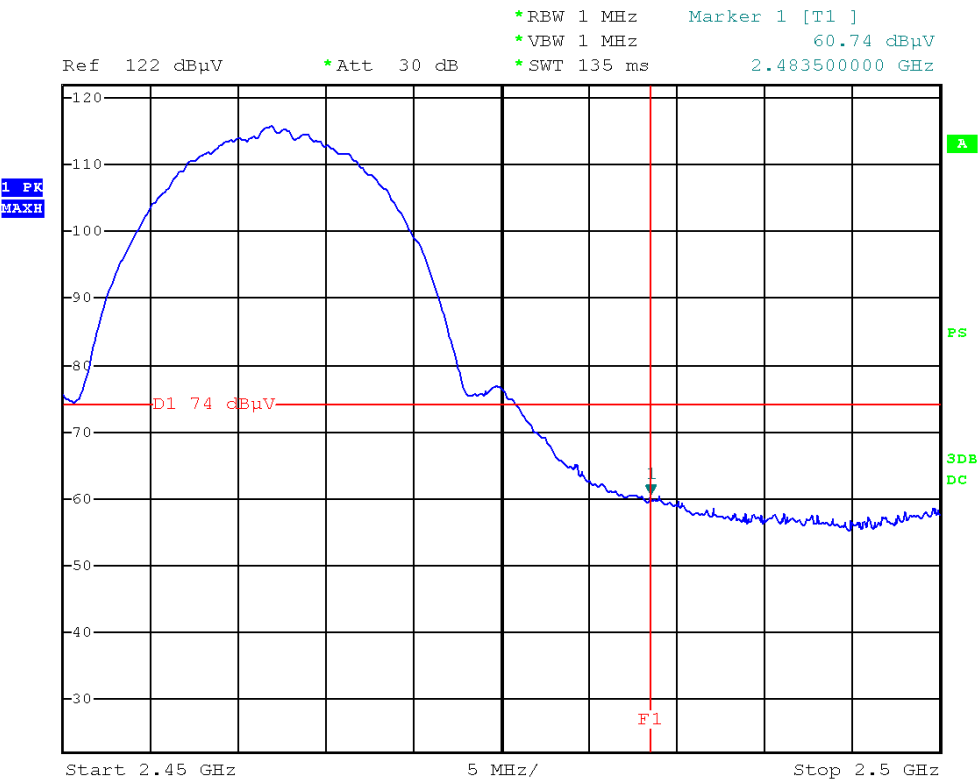


CH High (802.11b MODE-Vertical-Average)

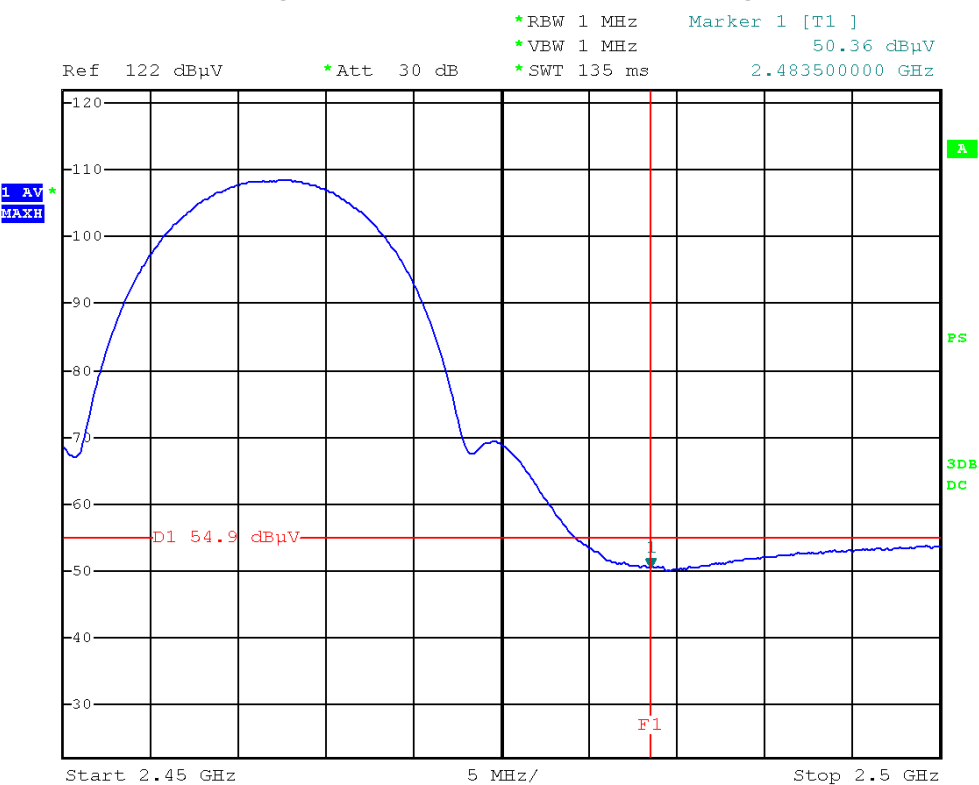


CH Low (802.11g MODE–Horizontal–Peak)

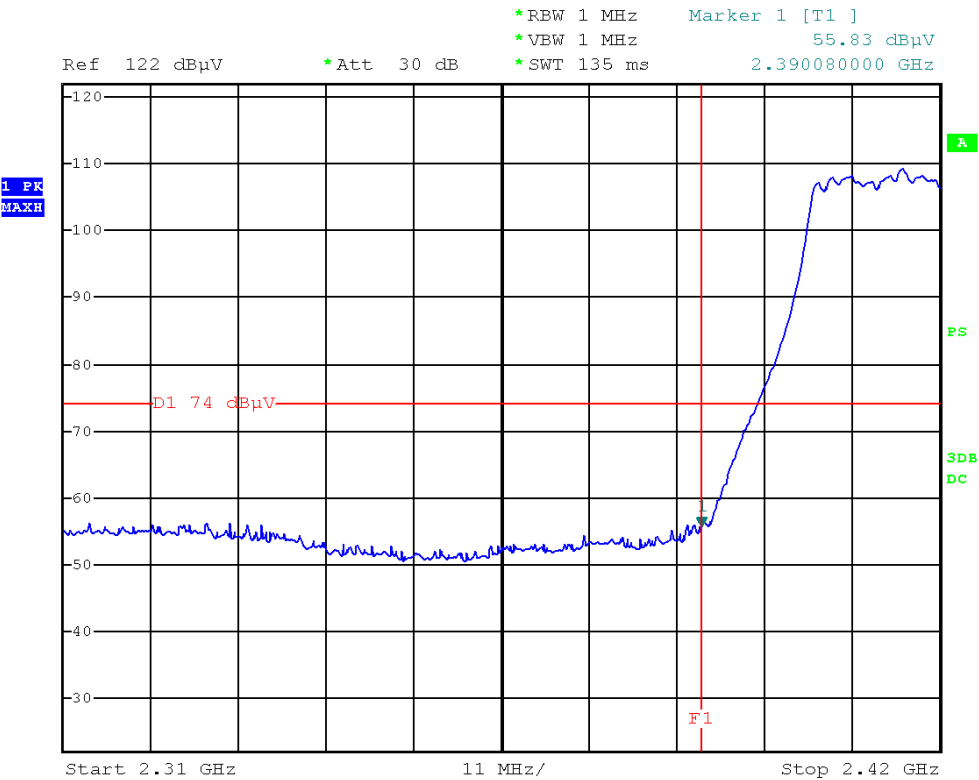


CH Low (802.11g MODE–Horizontal–Average)

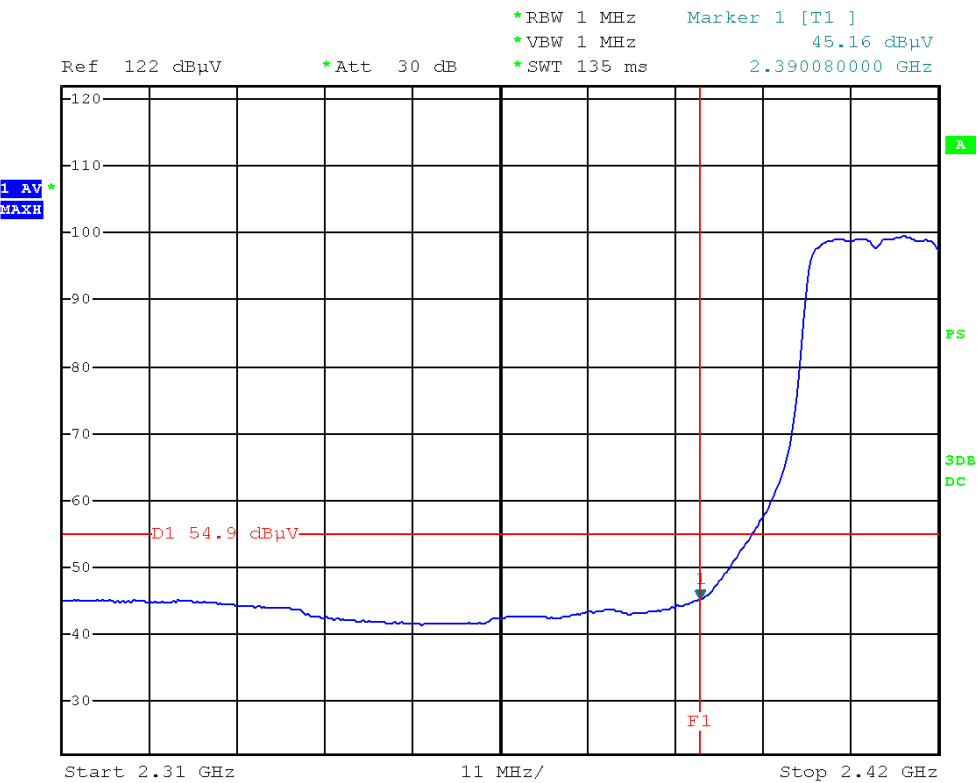


CH Low (802.11g MODE-Vertical-Peak)

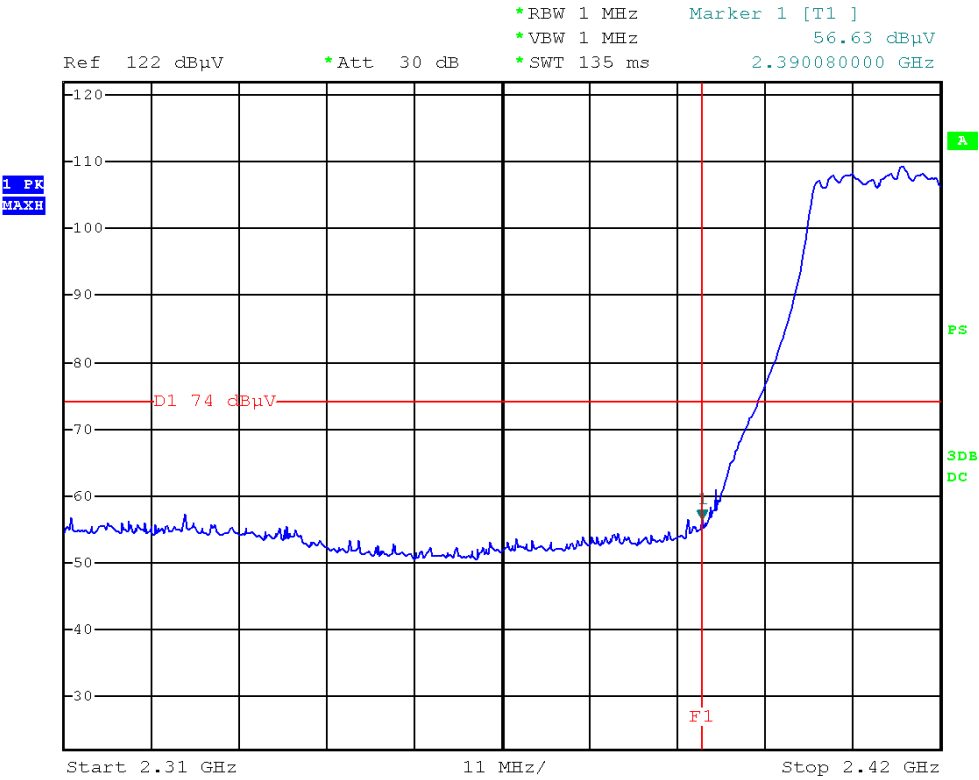


CH Low (802.11g MODE-Vertical-Average)

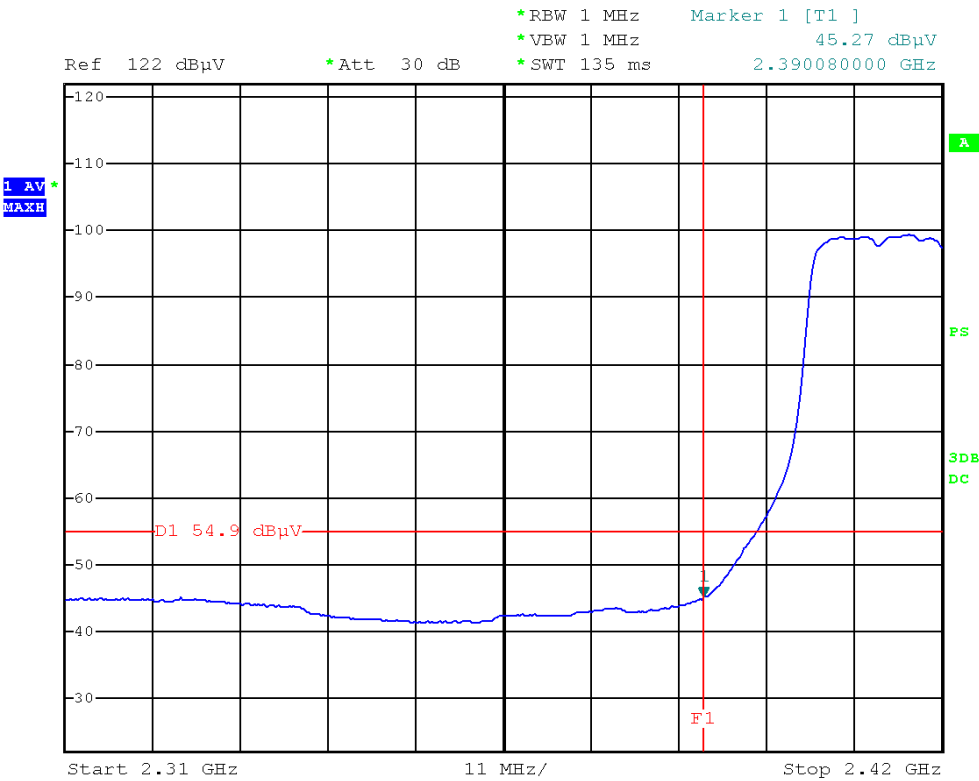


CH High (802.11g MODE–Horizontal–Peak)

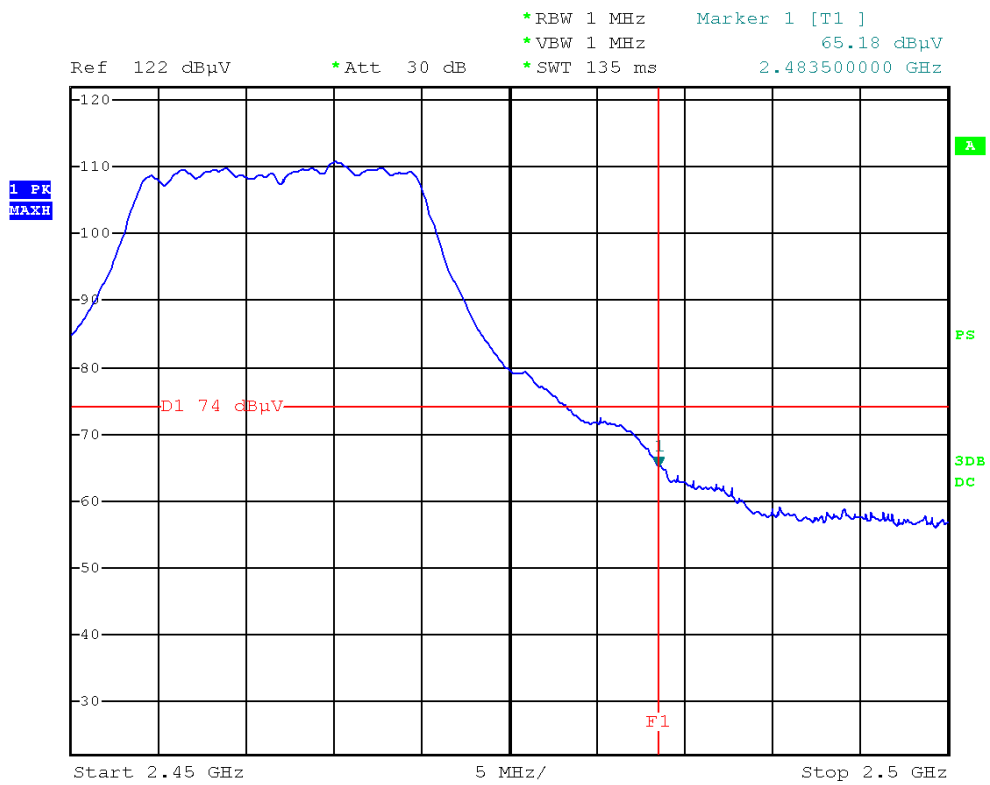


CH High (802.11g MODE–Horizontal–Average)

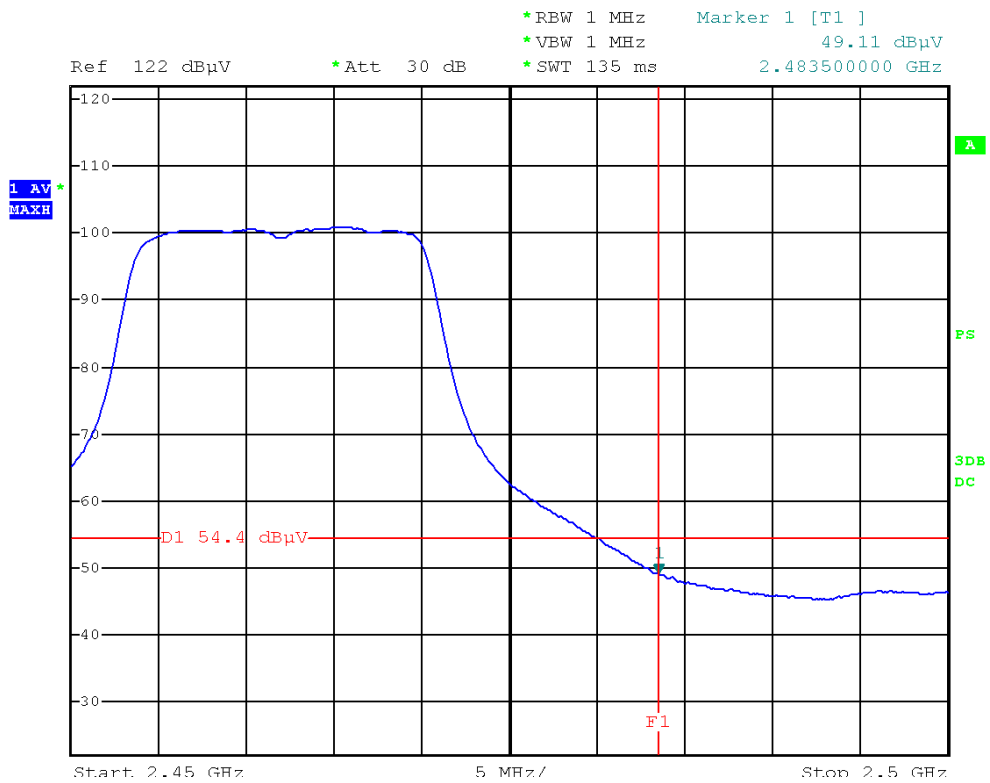


CH High (802.11g MODE-Vertical-Peak)

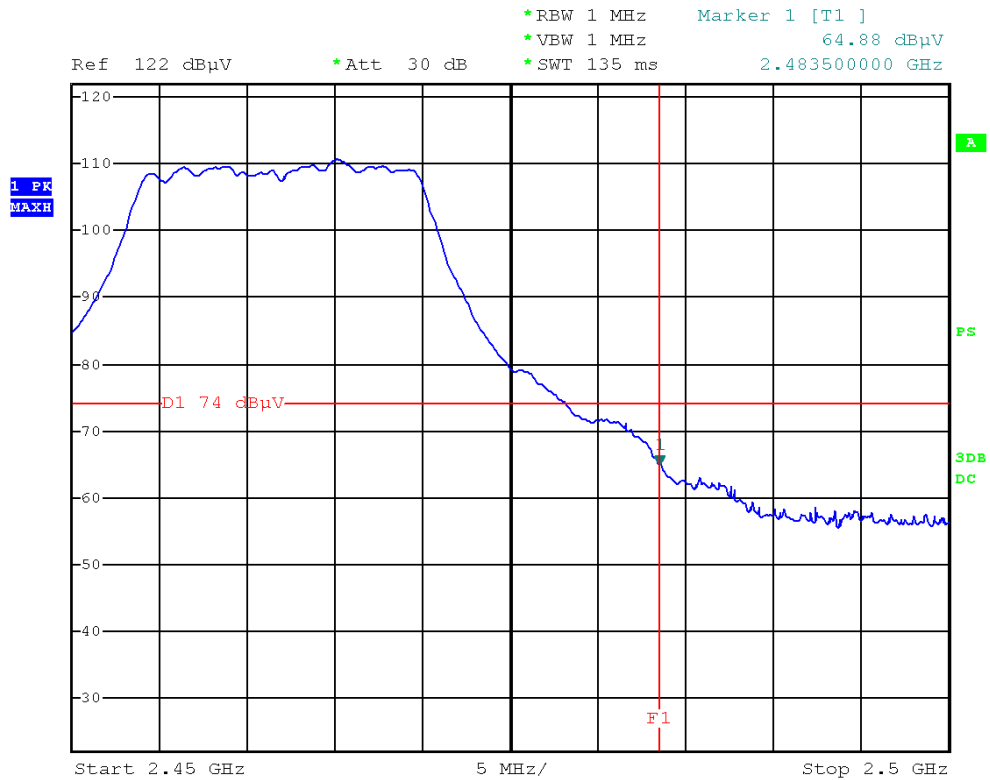


CH High (802.11g MODE-Vertical-Average)

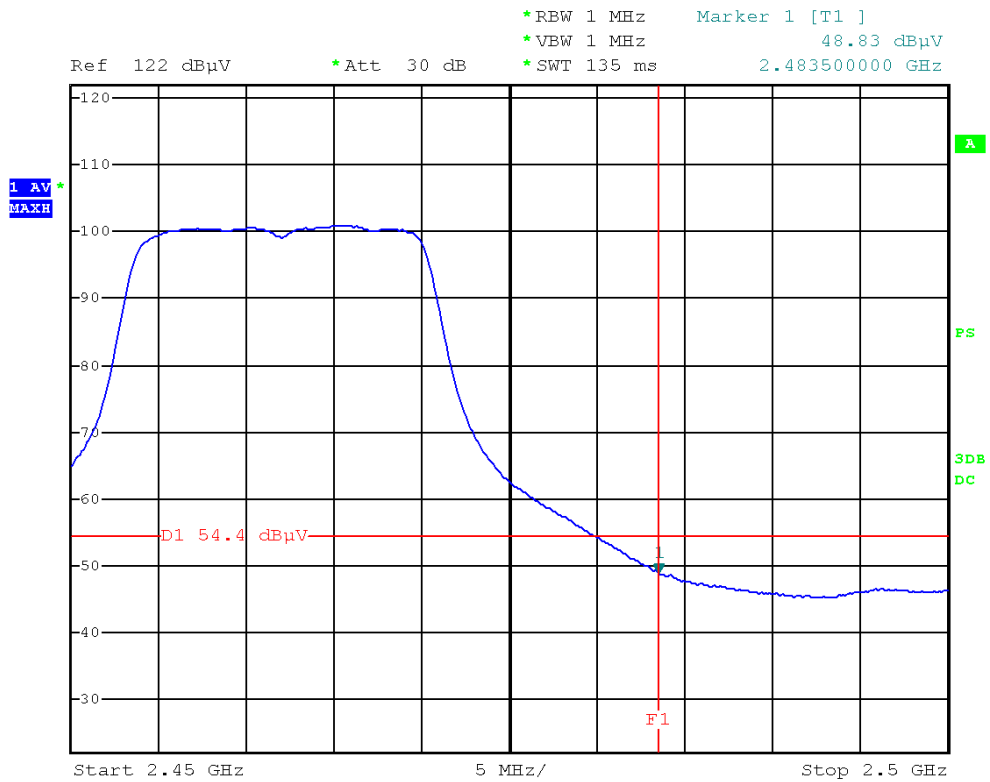


CH Low (802.11n HT20 MODE–Horizontal–Peak)

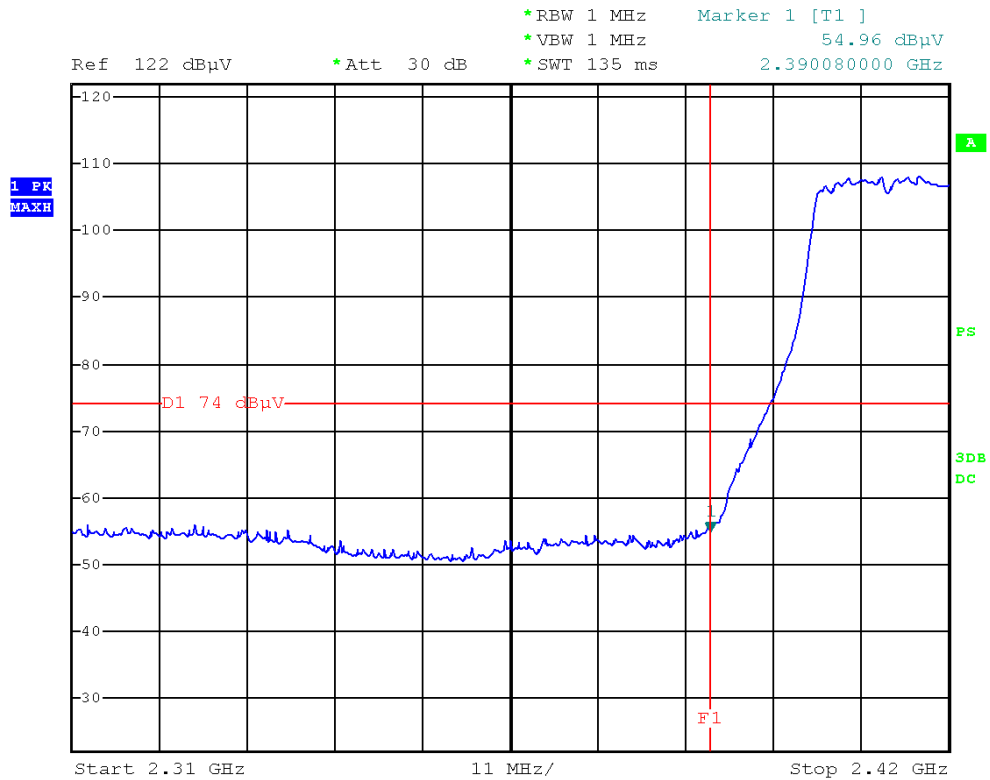


CH Low (802.11n HT20 MODE–Horizontal–Average)

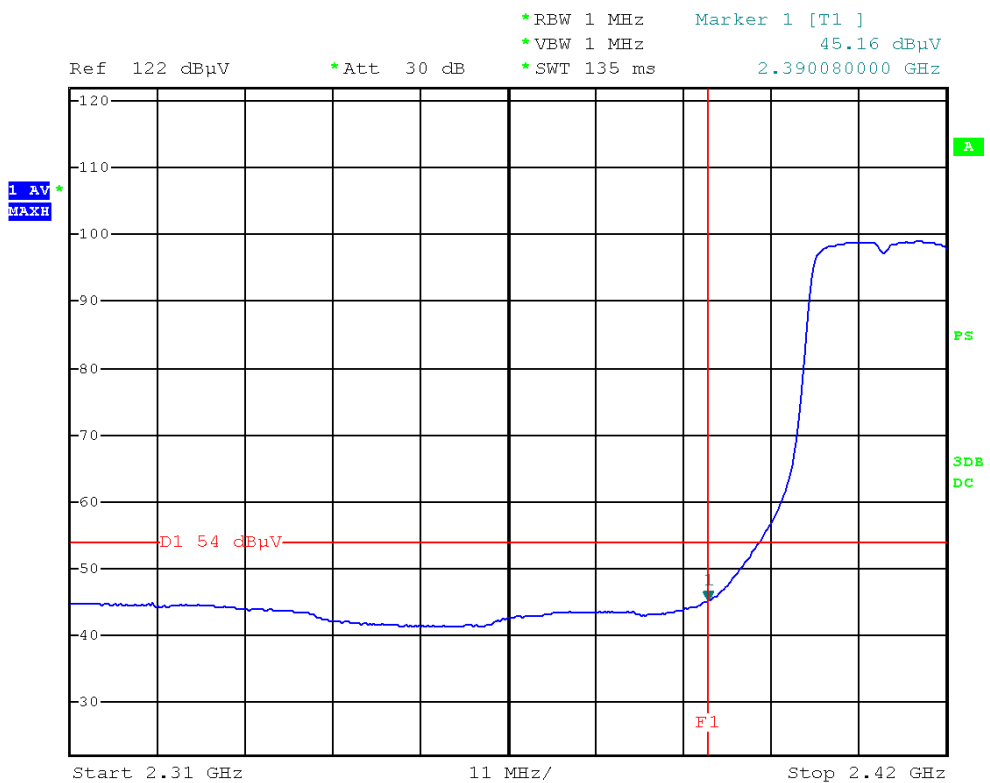


CH Low (802.11n HT20 MODE-Vertical-Peak)

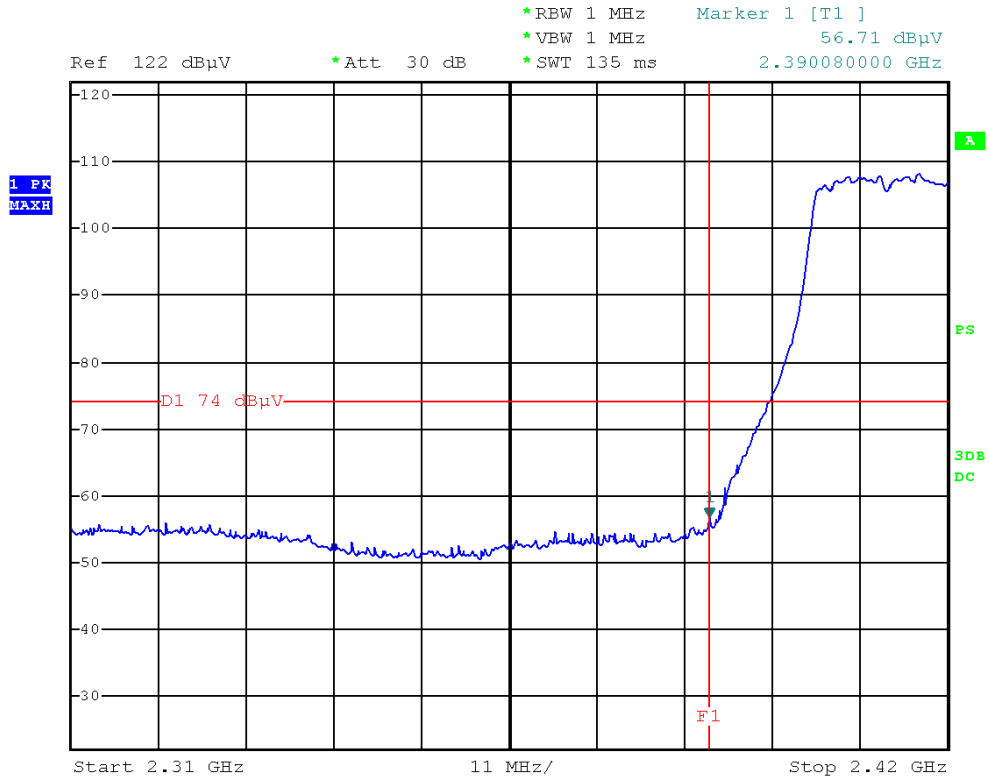


CH Low (802.11n HT20 MODE-Vertical-Average)

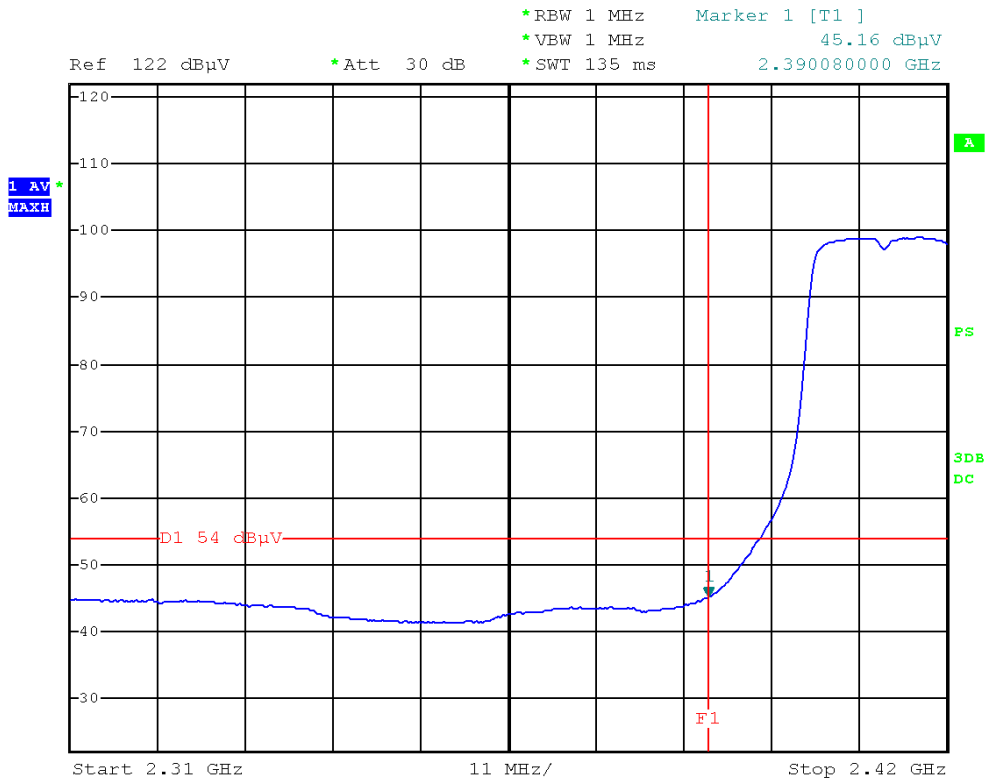


CH High (802.11n HT20 MODE–Horizontal–Peak)

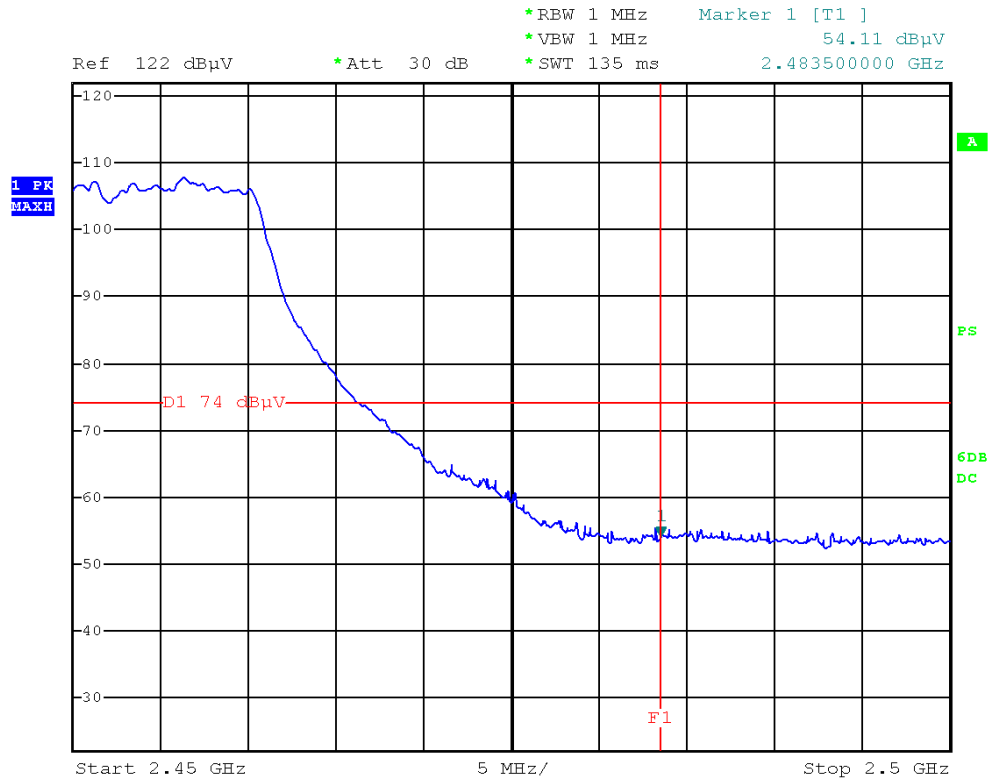


CH High (802.11n HT20 MODE–Horizontal–Average)

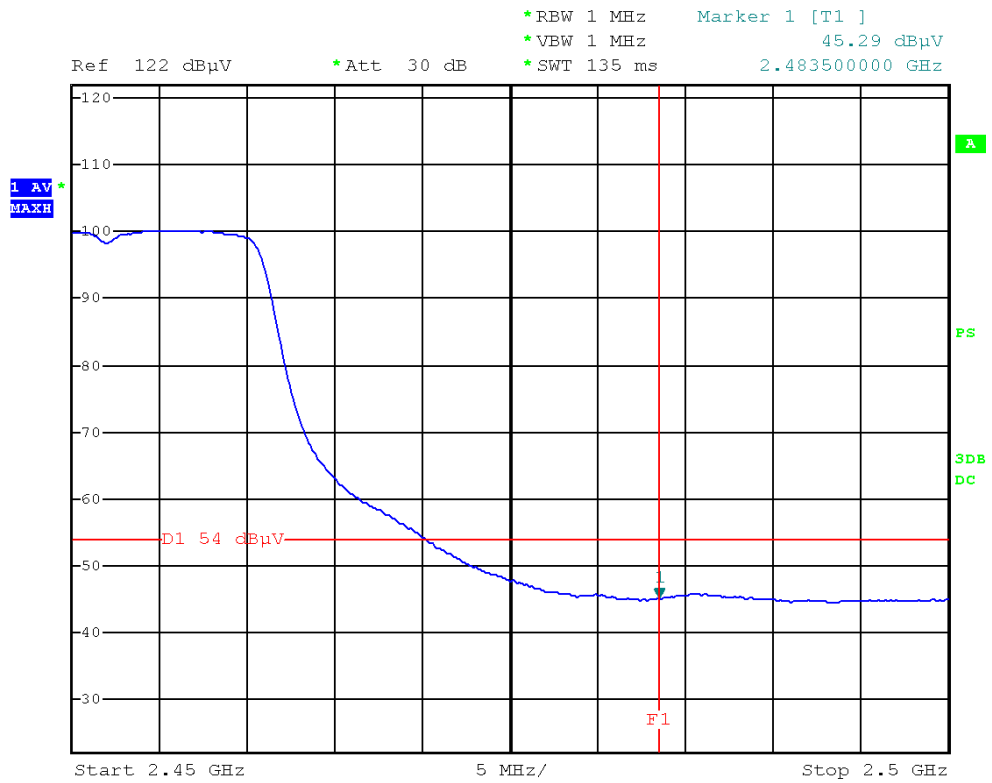


CH High (802.11n HT20 MODE-Vertical-Peak)

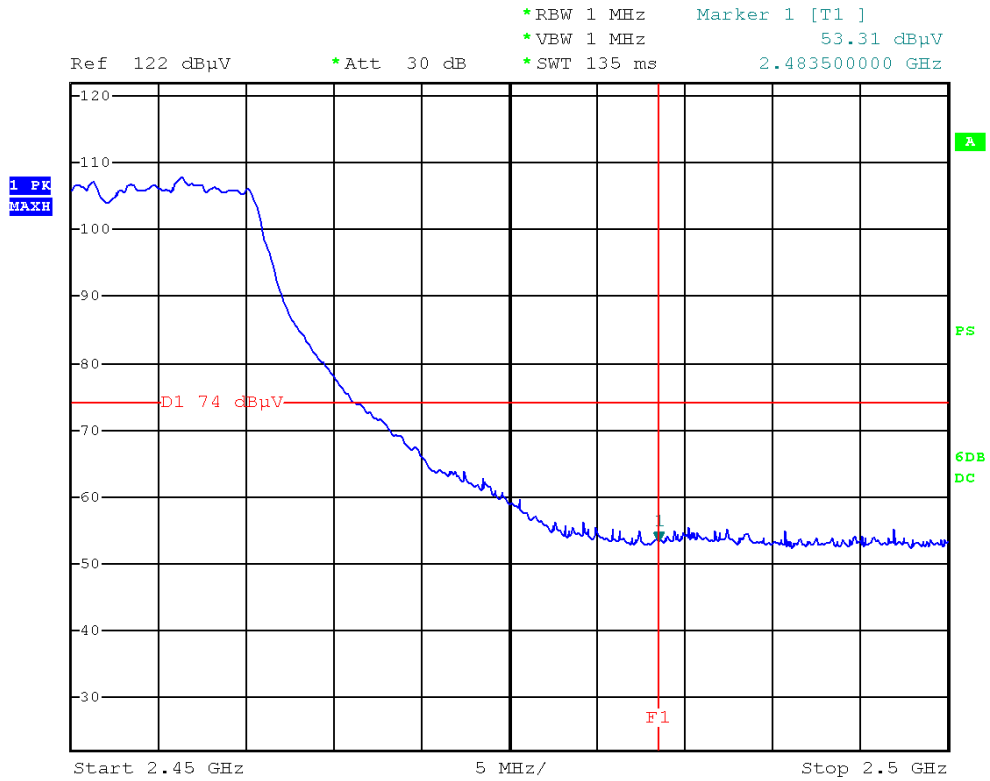


CH High (802.11n HT20 MODE-Vertical-Average)

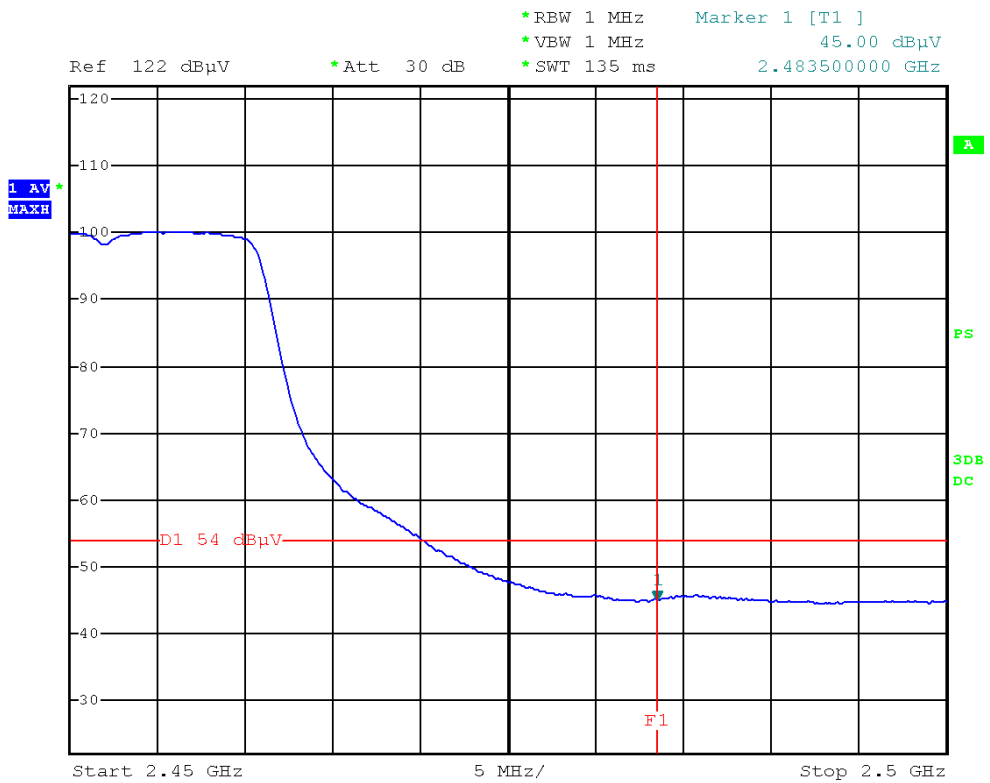


CH Low (802.11n HT40 MODE-Horizontal-Peak)

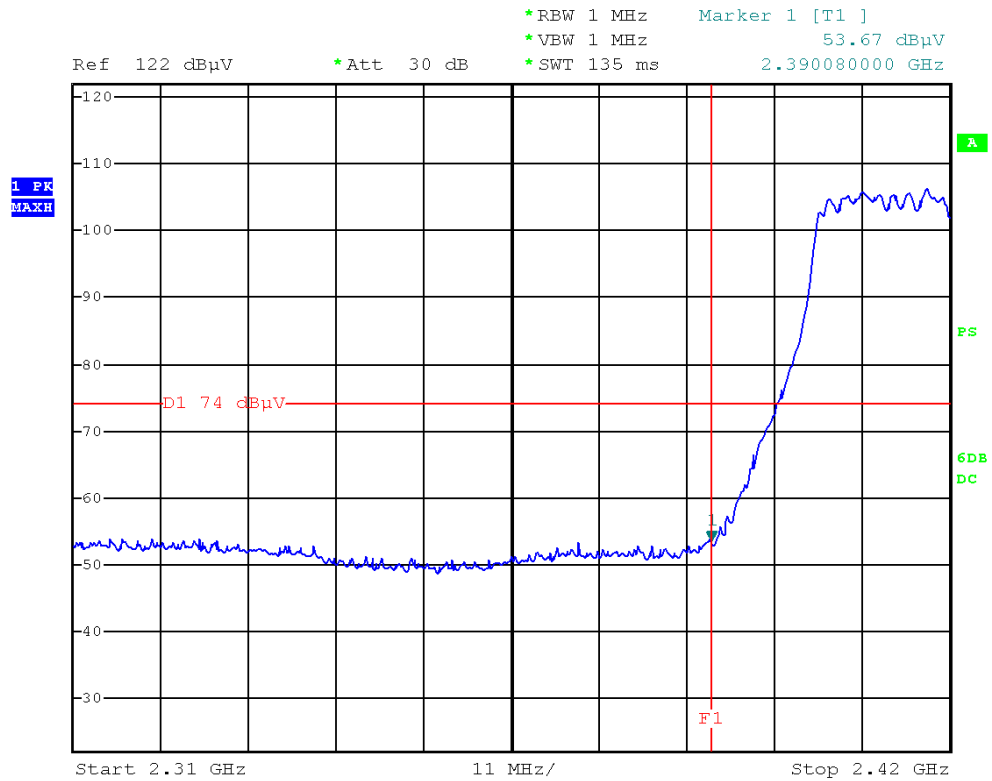


CH Low (802.11n HT40 MODE-Horizontal-Average)

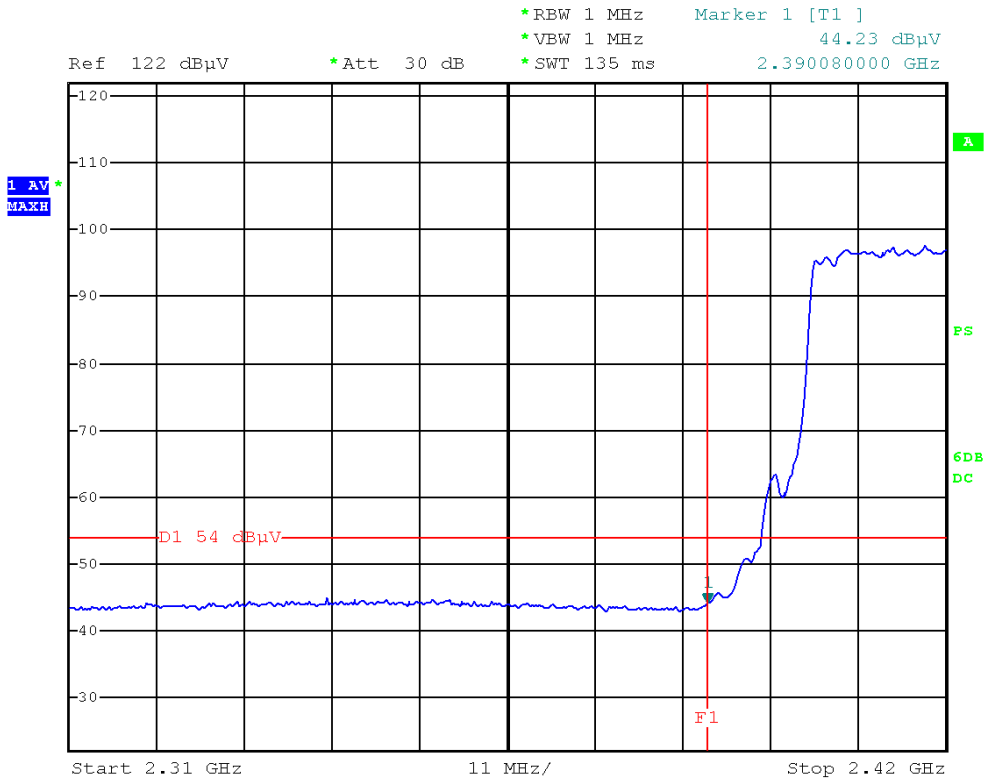


CH Low (802.11n HT40 MODE-Vertical-Peak)

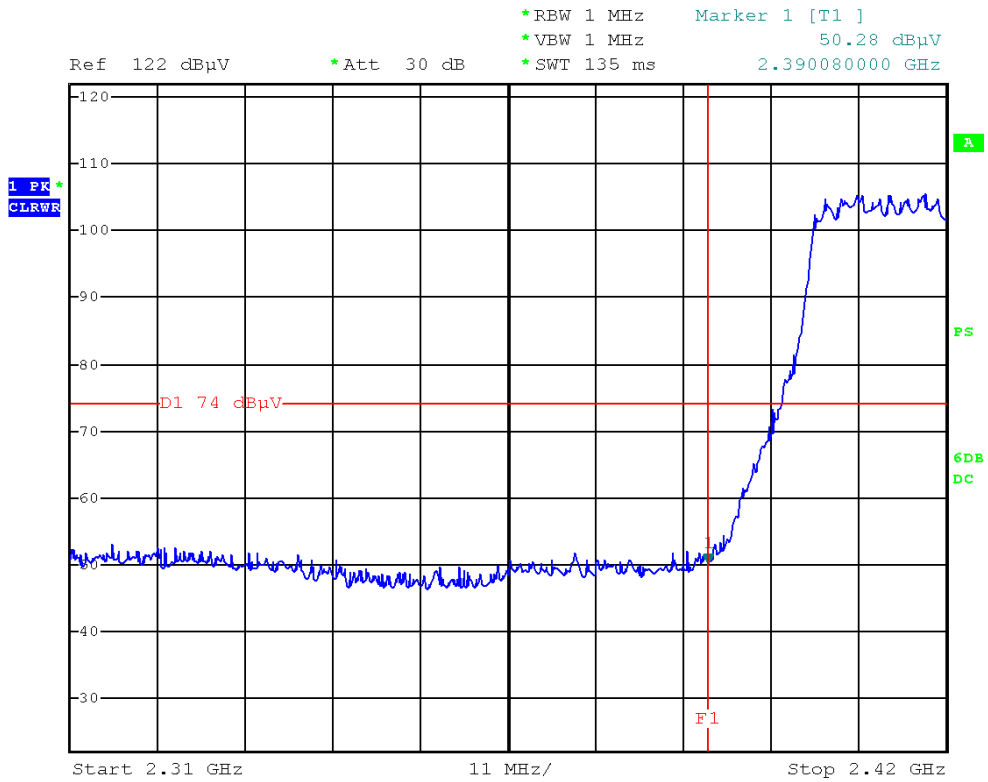


CH Low (802.11n HT40 MODE-Vertical-Average)

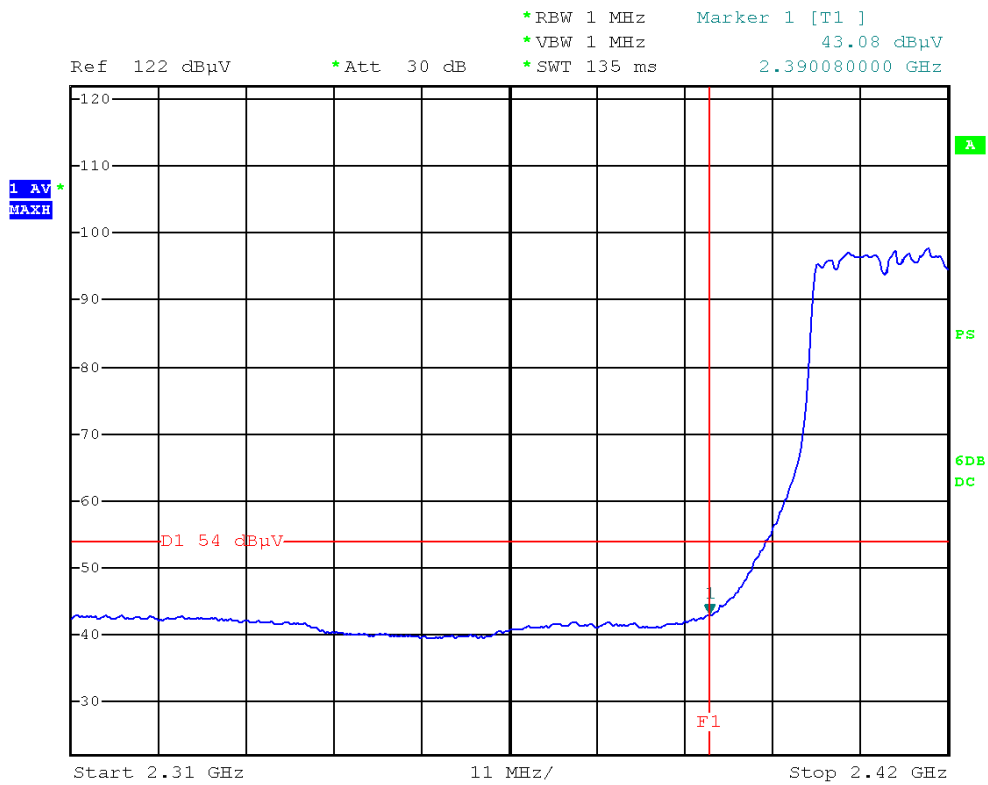


CH High (802.11n HT40 MODE–Horizontal–Peak)

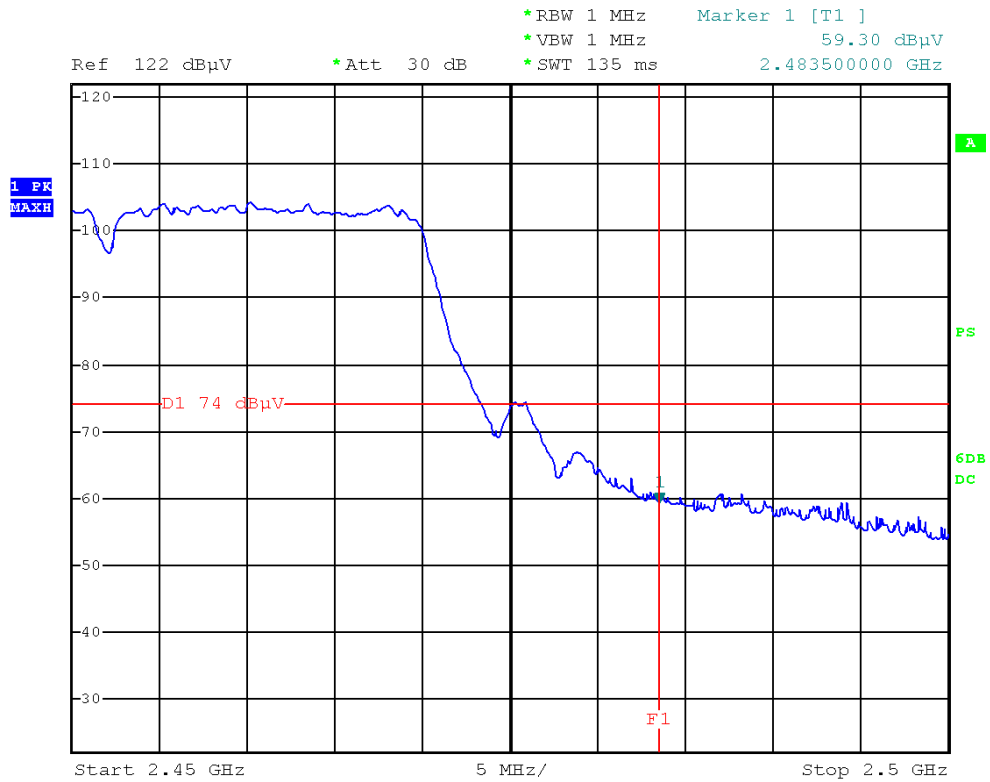


CH High (802.11n HT40 MODE–Horizontal–Average)

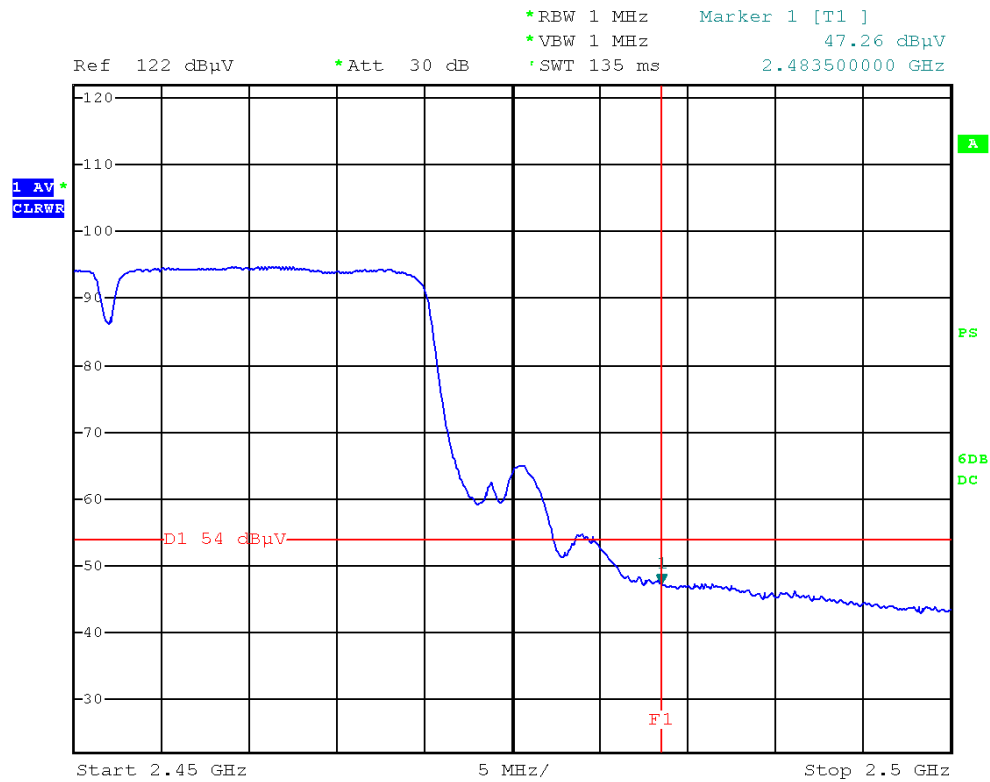

CH High (802.11n HT40 MODE-Vertical-Peak)

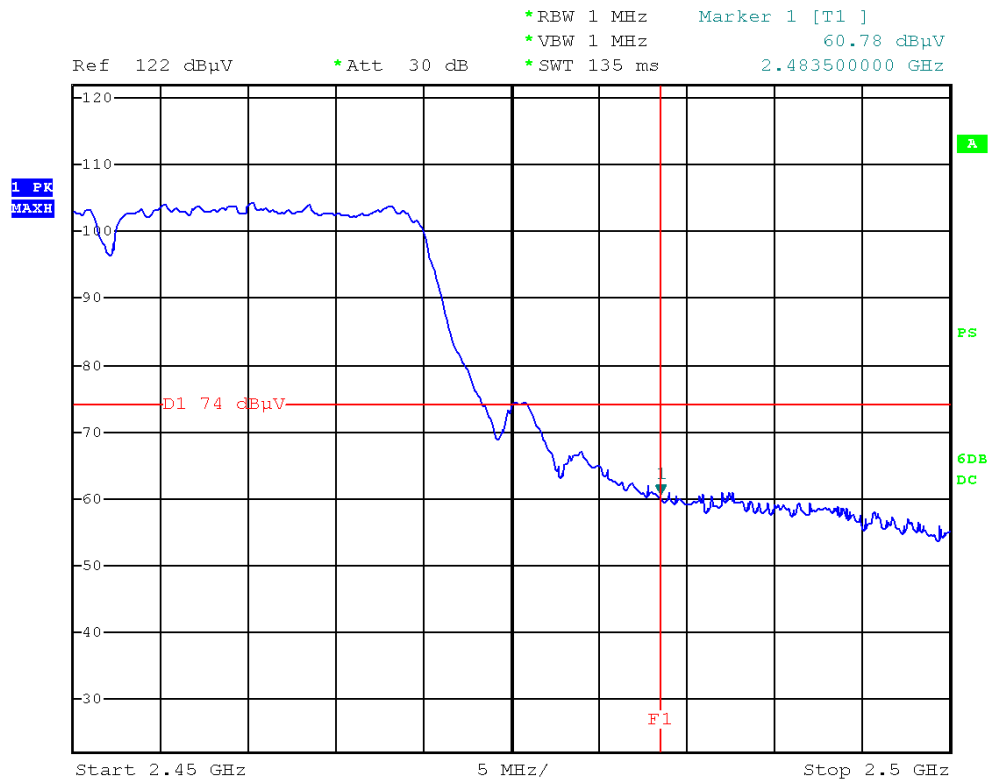

CH High (802.11n HT40 MODE-Vertical-Average)

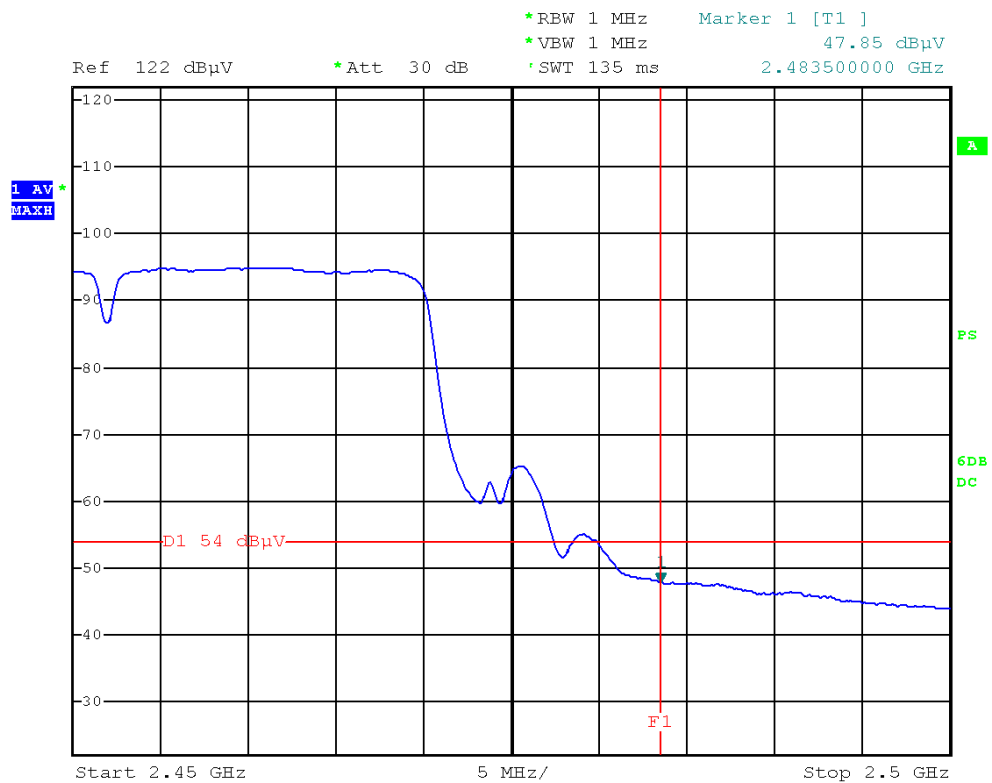

10. ANTENNA REQUIREMENT

10.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

10.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement.