

Test Report of FCC CFR 47 Part 15 Subpart B

On Behalf of

Shenzhen YIDONG Technology Co., Ltd

FCC ID: LU7- PLT7044K

Product Description: Flat Computer

Model No.: PLT7044K

Supplementary Model: EMR2672

Brand Name: N/A

Prepared for: Shenzhen YIDONG Technology Co., Ltd

Floor 1-5,Building B, Area B, Yuanfen Industrial Zone, Dalang,
Bao'an District, Shenzhen, China

Prepared by: Shenzhen Bontek Compliance Testing Laboratory Co., Ltd.

1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East
Road, Nanshan, Shenzhen, China

Tel: 86-755-86337020


Fax: 86-755-86337028

Report No.: BCT13CR075E


Issue Date: March 24, 2013

Test Date: March 15~24, 2013

Tested by:


Lion Cai

Reviewed by:


Kendy Wang

Approved by:



Tony Wu

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS	4
1.3 TEST FACILITY	4
2. SYSTEM TEST CONFIGURATION	5
2.1 EUT CONFIGURATION	5
2.2 SUPPORT EQUIPMENTS	5
2.3 GENERAL TEST PROCEDURES	5
2.4 MEASUREMENT UNCERTAINTY	5
2.5 LIST OF MEASURING EQUIPMENTS USED	6
3. SUMMARY OF TEST RESULTS.....	7
4. TEST OF AC POWER LINE CONDUCTED EMISSION	8
4.1 LIMIT OF AC POWER LINE CONDUCTED EMISSION	8
4.2 EUT SETUP	8
4.3 INSTRUMENT SETUP	9
4.4 TEST PROCEDURE	9
4.5 TEST RESULT	9
5 - RADIATED DISTURBANCES	14
5.1 LIMIT OF RADIATED DISTURBANCES	14
5.2 EUT SETUP	14
5.3 TEST RECEIVER SETUP	15
5.4 TEST PROCEDURE	15
5.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	15
5.6 RADIATED EMISSIONS TEST RESULT	15

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant:	Shenzhen YIDONG Technology Co., Ltd
Address of Applicant:	Floor 1-5,Building B, Area B, Yuanfen Industrial Zone, Dalang, Bao'an District, Shenzhen, China
Manufacturer:	Shenzhen YIDONG Technology Co., Ltd
Address of Manufacturer:	Floor 1-5,Building B, Area B, Yuanfen Industrial Zone, Dalang, Bao'an District, Shenzhen, China

General Description of E.U.T

Items	Description
EUT Description:	Flat Computer
Trade Name:	N/A
Model No.:	PLT7044K
Supplementary Model:	EMR2672
Frequency Band:	IEEE 802.11b/g, IEEE 802.11n HT20 (ISM Band) : 2412MHz~2462MHz
Channel Spacing:	IEEE 802.11b/g, 802.11n HT20: 5MHz
Number of Channels:	IEEE 802.11b/g, 802.11n HT20:11 Channels
Transmit Data Rate:	maximum of 150Mbps
Type of Modulation:	IEEE 802.11b:DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g:OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20:OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Type:	Built-in Antenna
Antenna Gain:	0dBi
Power Supply:	AC/DC Adapter and build-in battery with DC3.7V 2100mAh
Adapter Information:	Model:HNC050200U Input:AC 100-240V 50/60Hz 0.35A Max Output: DC 5V 2A

* The test data gathered are from the production sample provided by the manufacturer.

* Supplementary models have the same circuit, but with different appearance.

1.2 Test Standards

The report of EUT is prepared in accordance with FCC Rules and Regulations Part 15 Subpart B. The objective of the manufacturer is to demonstrate compliance with the described above standards.

1.3 Test Facility

All measurement required was performed at laboratory of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd. at 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China.

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 338263

Shenzhen Bontek Compliance Testing Laboratory Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 03, 2011.

IC Registration No.: 7631A

The 3m alternate test site of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on January 25, 2011.

CNAS - Registration No.: L3923

Shenzhen Bontek Compliance Testing Laboratory Co., Ltd. to ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. The acceptance letter from the CNAS is maintained in our files: Registration: L3923, March 22, 2012.

TUV - Registration No.: UA 50242657-0001

Shenzhen Bontek Compliance Testing Laboratory Co., Ltd. An assessment of the laboratory was conducted according to the "Procedures and Conditions for EMC Test Laboratories" with reference to EN ISO/IEC 17025 by a TUV Rheinland auditor. Audit Report NO. 17010783-003.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 Support Equipments

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

Support equipments or special accessories in test configuration:

AUX Description:	Manufacturer	Model No.	Certificate	CABLE
Host Computer	Dell	78MD82X	CE, FCC	1.5m Unshielded Power Cord
Monitor	Dell	E178Pc	CE, FCC	1.5m Unshielded Power Cord 1.8m shielded data Cable with core
Keyboard	Dell	L100	CE, FCC	1.8m shielded data Cable with core
Mouse	Dell	OCJ339	CE, FCC	1.8m shielded data Cable with core
Printer	EPSON	P330A	CE, FCC	1.2m Unshielded Power Cord 1.5m shielded data Cable

2.3 General Test Procedures

Conducted Emissions: The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions: The EUT is placed on a turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

2.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

2.5 List of Measuring Equipments Used

Test equipments list of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd.

No.	Equipment	Manufacturer	Model No.	S/N	Calibration date	Calibration due date
1	EMI Test Receiver	R&S	ESCI	100687	2012-4-6	2013-4-5
2	EMI Test Receiver	R&S	ESPI	100097	2012-7-25	2013-7-24
3	Amplifier	HP	8447D	1937A02492	2012-4-6	2013-4-5
4	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07101	2012-4-6	2013-4-5
5	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07102	2012-4-6	2013-4-5
6	Positioning Controller	C&C	CC-C-1F	MF7802113	N/A	N/A
7	Signal generator	Rhode & Schwarz	SMIQ 03HD + option SM-B1, SMIQB11, SMIQB12, SMIQB14, SMIQB17, SMIQB20	1125.5555.46	2012-4-6	2013-4-5
8	GSM system simulator	Rhode & Schwarz	CMU200 + option K20, K21, K22, K23, K24, K27, K28, K29, K42, K65, B12, B41, B52, B66, B56	1100.0008.34	2012-4-6	2013-4-5
9	GSM system simulator	Agilent	8960 Series 10 E1985A + GSM_AMPS	B.01.76 GB42450443	2012-4-6	2013-4-5
10	Spectrum Analyzer	Agilent	E4404B	US41192833	2012-4-6	2013-4-5
11	6dB Attenuator	Atten	Attenuator	DC-4GHz	2012-4-6	2013-4-5
12	Digital Multimeter	Fluke	15B	91280239	2012-4-6	2013-4-5
13	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	2012-4-10	2013-4-9
14	Horn Antenna	SCHWARZBECK	BBHA9120A	0499	2012-11-27	2013-11-26
15	Active Loop Antenna	DAZE	ZN30900A	1200	2012-4-6	2013-4-6
16	9kHz-2.4GHz signal generator 2024	MARCONI	10S/6625-99-457-8730	112260/042	2012-4-6	2013-4-5
17	10dB attenuator	ELECTRO-METRICS	EM-7600	836	2012-4-6	2013-4-5
18	Spectrum Analyzer	R&S	FSP	100397	2012-11-2	2013-11-1
19	Broadband preamplifier	SCHWARZBECK	BBV9718	9718-182	2012-4-6	2013-4-5
20	Temperature & Humidity Chamber	TOPSTAT	TOS-831A	3438A05208	2012-4-6	2013-4-5

3. SUMMARY OF TEST RESULTS

Standard	Test Items	Result
FCC Part 15 Subpart B	Conduction Emission, 0.15MHz to 30MHz	Pass
FCC Part 15 Subpart B	Radiation Emission, 30MHz to 1000MHz	Pass

4. TEST OF AC POWER LINE CONDUCTED EMISSION

4.1 Limit of AC Power Line Conducted Emission

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

4.2 EUT Setup


The setup of EUT is according with ANSI C63.4-2009 measurement procedure. The specification used was the FCC Rules and Regulations Part 15 Subpart B limits.

The EUT was placed center and the back edge of the test table.

The AV cables were draped along the test table and bundled to 30-40cm in the middle.

The spacing between the peripherals was 10 cm.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

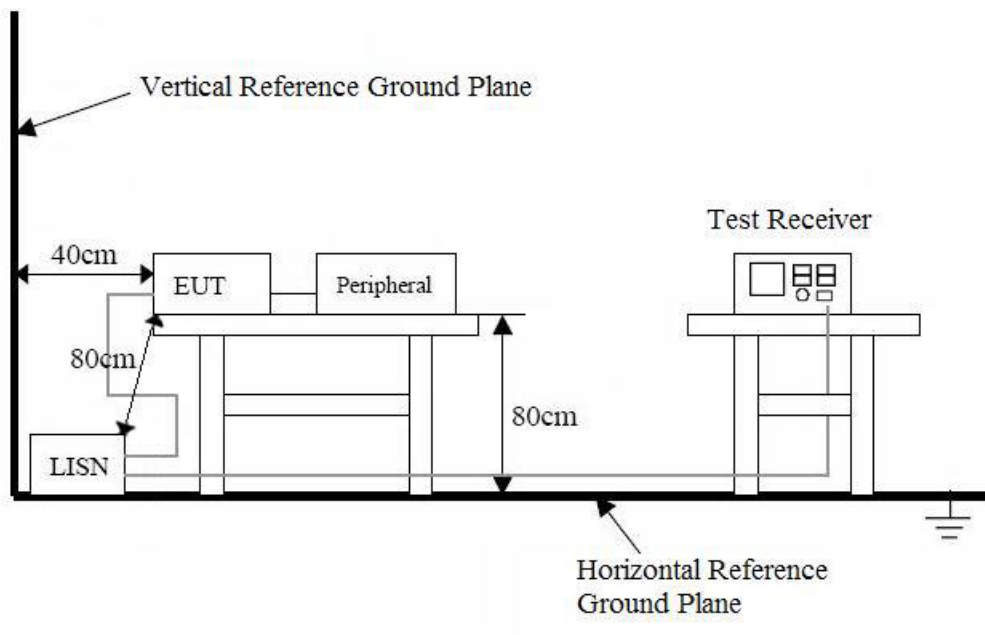

Remark: The EUT was connected to a 120VAC/ 60Hz power source.

4.3 Instrument Setup

The test receiver was set with the following configurations:

Test Receiver Setting:

Frequency Range.....150 KHz to 30 MHz
Detector.....Peak & Quasi-Peak & Average
Sweep Speed.....Auto
IF Band Width.....9 KHz

4.4 Test Procedure

During the conducted emission test, the EUT power cord was connected to the auxiliary outlet of the first Artificial Mains.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance using all installation combination.

All data was recorded in the peak detection mode. Quasi-peak and Average readings were only performed when an emission was found to be marginal (within -10 dB μ V of specification limits). Quasi-peak readings are distinguished with a "QP". Average readings are distinguished with a "AV".


4.5 Test Result

Temperature (°C) : 22~23	EUT: Flat Computer
Humidity (%RH) : 50~54	M/N: PLT7044K
Barometric Pressure (mbar) : 950~1000	Operation Condition: Charging & Camera / PC & Download

Conducted Emission:

EUT: Flat Computer
M/N: PLT7044K
Operating Condition: Charging & Camera
Test Site: Shielded Room
Operator: Yang
Test Specification: AC 120V/60Hz for adapter
Comment: L Line

SCAN TABLE: "Voltage (9K-30M)FIN"
Short Description: 150K-30M Voltage

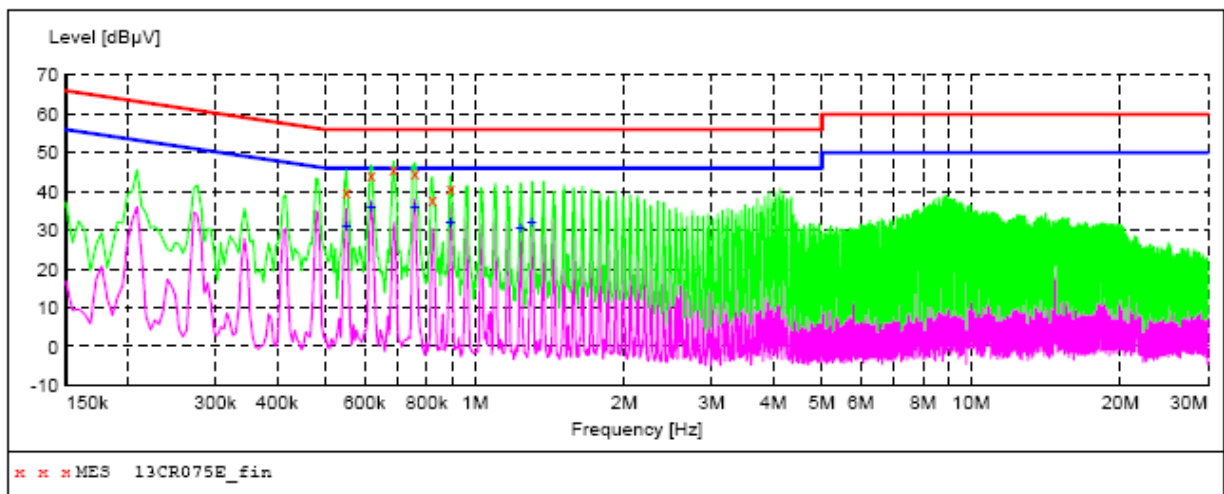

MEASUREMENT RESULT: "13CR075E_fin"

3/18/2013 7:54PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.550500	39.80	10.2	56	16.2	QP	L1	GND
0.618000	44.50	10.2	56	11.5	QP	L1	GND
0.685500	45.60	10.2	56	10.4	QP	L1	GND
0.757500	44.80	10.2	56	11.2	QP	L1	GND
0.820500	38.00	10.2	56	18.0	QP	L1	GND
0.892500	41.10	10.2	56	14.9	QP	L1	GND

MEASUREMENT RESULT: "13CR075E_fin2"


3/18/2013 7:54PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.550500	31.40	10.2	46	14.6	AV	L1	GND
0.618000	36.00	10.2	46	10.0	AV	L1	GND
0.757500	36.20	10.2	46	9.8	AV	L1	GND
0.892500	31.90	10.2	46	14.1	AV	L1	GND
1.234500	30.60	10.3	46	15.4	AV	L1	GND
1.302000	31.90	10.2	46	14.1	AV	L1	GND

Conducted Emission:

EUT: Flat Computer
M/N: PLT7044K
Operating Condition: Charging & Camera
Test Site: Shielded Room
Operator: Yang
Test Specification: AC 120V/60Hz for adapter
Comment: N Line

SCAN TABLE: "Voltage (9K-30M)FIN"
Short Description: 150K-30M Voltage

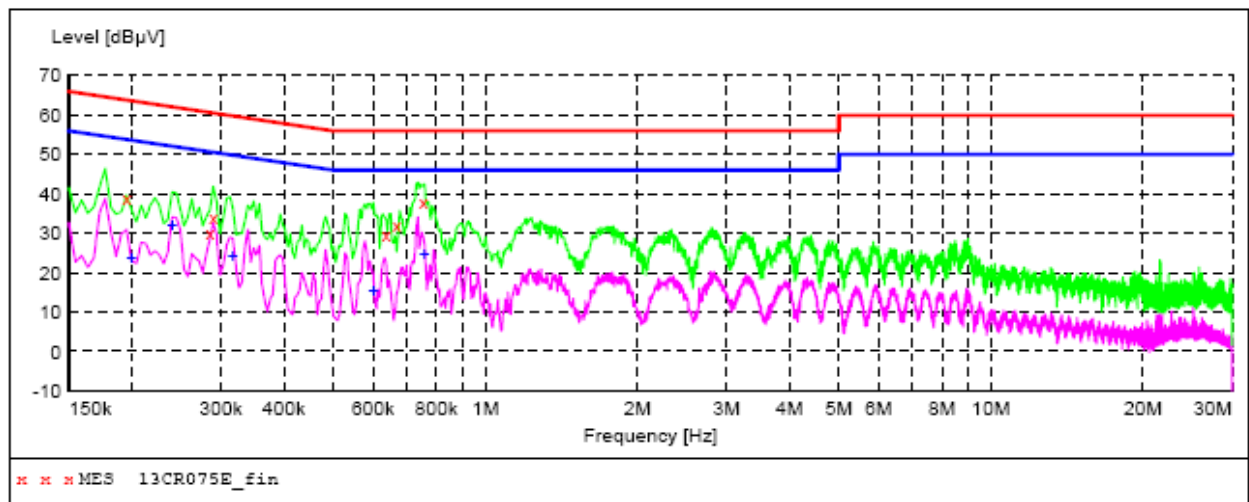

MEASUREMENT RESULT: "13CR075E_fin"

3/18/2013 7:57PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.195000	39.20	10.9	64	24.6	QP	N	GND
0.285000	30.10	10.6	61	30.6	QP	N	GND
0.289500	34.00	10.6	61	26.5	QP	N	GND
0.636000	29.80	10.2	56	26.2	QP	N	GND
0.667500	32.10	10.2	56	23.9	QP	N	GND
0.753000	38.00	10.2	56	18.0	QP	N	GND

MEASUREMENT RESULT: "13CR075E_fin2"


3/18/2013 7:57PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.199500	23.80	10.8	54	29.8	AV	N	GND
0.240000	31.90	10.7	52	20.2	AV	N	GND
0.316500	24.40	10.5	50	25.4	AV	N	GND
0.600000	15.60	10.2	46	30.4	AV	N	GND
0.757500	24.70	10.2	46	21.3	AV	N	GND

Conducted Emission:

EUT: Flat Computer
M/N: PLT7044K
Operating Condition: PC & Download
Test Site: Shielded Room
Operator: Yang
Test Specification: AC 120V/60Hz for PC
Comment: L Line

SCAN TABLE: "Voltage (9K-30M)FIN"
Short Description: 150K-30M Voltage

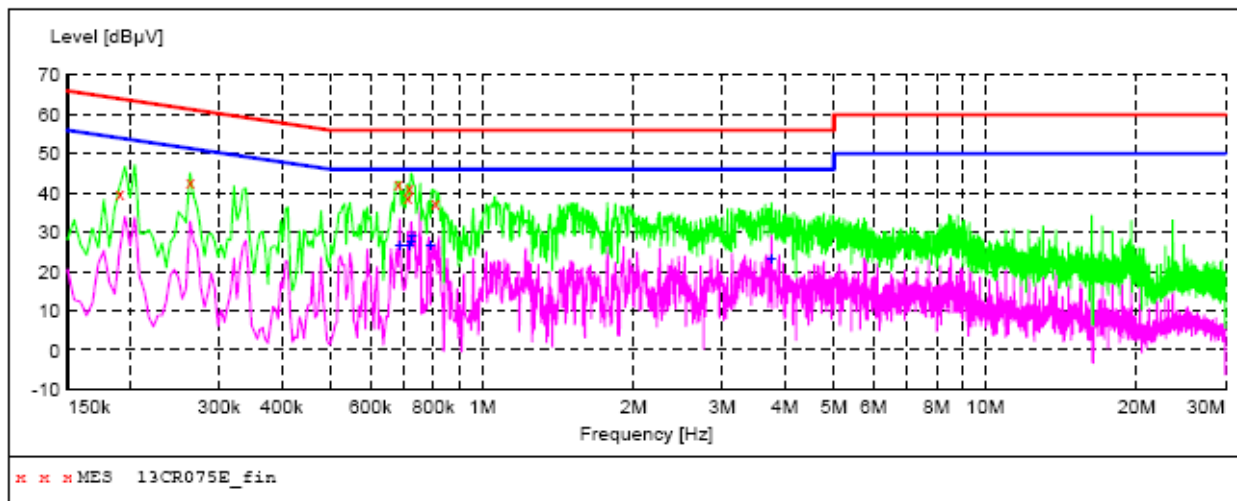

MEASUREMENT RESULT: "13CR075E_fin"

3/18/2013 7:43PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.190500	39.70	10.9	64	24.3	QP	L1	GND
0.262500	42.90	10.6	61	18.5	QP	L1	GND
0.681000	42.30	10.2	56	13.7	QP	L1	GND
0.712500	38.70	10.2	56	17.3	QP	L1	GND
0.717000	41.10	10.2	56	14.9	QP	L1	GND
0.807000	37.30	10.2	56	18.7	QP	L1	GND

MEASUREMENT RESULT: "13CR075E_fin2"


3/18/2013 7:43PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.685500	26.90	10.2	46	19.1	AV	L1	GND
0.717000	26.90	10.2	46	19.1	AV	L1	GND
0.721500	27.80	10.2	46	18.2	AV	L1	GND
0.726000	29.00	10.2	46	17.0	AV	L1	GND
0.789000	26.80	10.2	46	19.2	AV	L1	GND
3.759000	23.10	10.3	46	22.9	AV	L1	GND

Conducted Emission:

EUT: Flat Computer
M/N: PLT7044K
Operating Condition: PC & Download
Test Site: Shielded Room
Operator: Yang
Test Specification: AC 120V/60Hz for PC
Comment: N Line

SCAN TABLE: "Voltage (9K-30M)FIN"
Short Description: 150K-30M Voltage

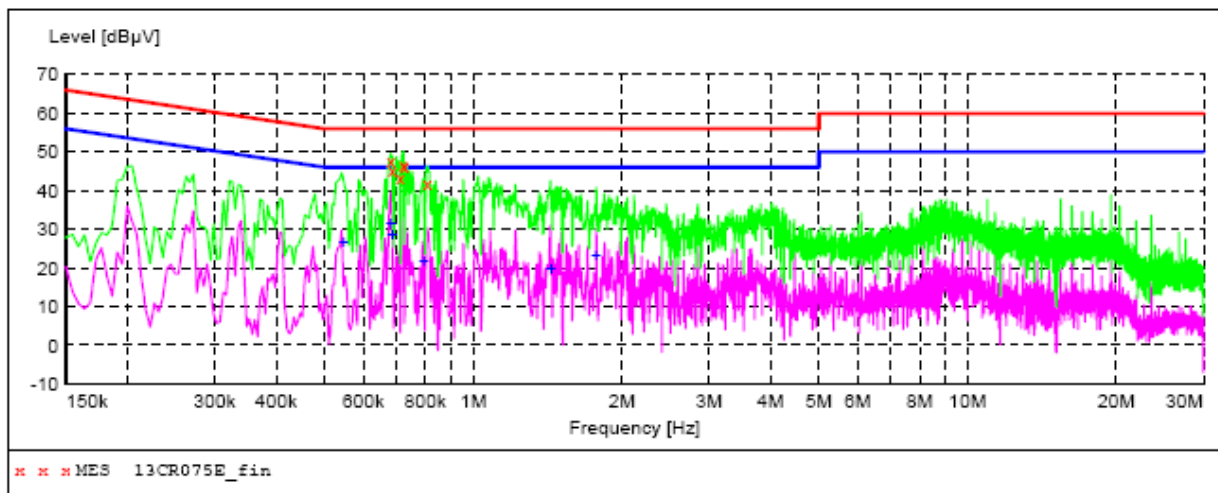

MEASUREMENT RESULT: "13CR075E_fin"

3/18/2013 7:39PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.681000	47.80	10.2	56	8.2	QP	N	GND
0.685500	45.00	10.2	56	11.0	QP	N	GND
0.712500	43.30	10.2	56	12.7	QP	N	GND
0.721500	46.50	10.2	56	9.5	QP	N	GND
0.726000	46.20	10.2	56	9.8	QP	N	GND
0.807000	42.10	10.2	56	13.9	QP	N	GND

MEASUREMENT RESULT: "13CR075E_fin2"

3/18/2013 7:39PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.546000	26.60	10.2	46	19.4	AV	N	GND
0.681000	31.60	10.2	46	14.4	AV	N	GND
0.685500	28.50	10.2	46	17.5	AV	N	GND
0.793500	21.80	10.2	46	24.2	AV	N	GND
1.437000	19.70	10.2	46	26.3	AV	N	GND
1.774500	23.10	10.2	46	22.9	AV	N	GND

5 - RADIATED DISTURBANCES

5.1 Limit of Radiated Disturbances

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dB μ V/m)
30 ~ 88	3	40
88~216	3	43.5
216 ~ 960	3	46
960 ~ 1000	3	54

Note:

- (1) The tighter limit shall apply at the edge between two frequency bands.
- (2) Distance refers to the distance in meters between the test instrument antenna and the closest point of any part of the E.U.T.


5.2 EUT Setup

The radiated emission tests were performed in the in the 3-meter anechoic chamber, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part 15 Subpart B limits.

The EUT was placed on the center of the test table.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

Below 1 GHz

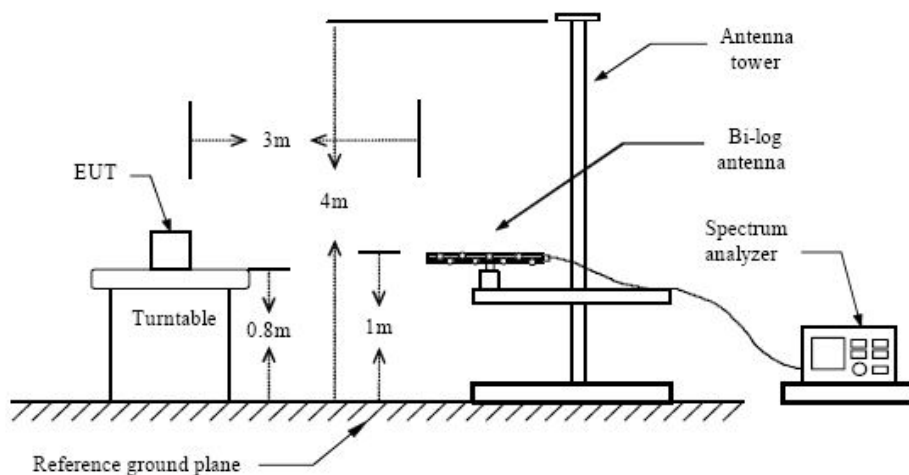

5.3 Test Receiver Setup

According to FCC Part 15 rule, the frequency was investigated from 30 to 1000 MHz. During the radiated emission test, the test receiver was set with the following configurations:

Test Receiver Setting:

Detector.....Peak & Quasi-Peak
IF Band Width.....120KHz
Frequency Range.....30MHz to 1000MHz
Turntable Rotated.....0 to 360 degrees

Antenna Position:

Height.....1m to 4m
Polarity.....Horizontal and Vertical

5.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings performed only when an emission was found to be marginal (within -10 dB μ V of specification limits), and are distinguished with a "QP" in the data table.

5.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

Corr. Ampl. = Indicated Reading + Antenna Factor + Cable Factor - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Subpart B. The equation for margin calculation is as follows:

Margin = Limit – Corr. Ampl.

5.6 Radiated Emissions Test Result


Temperature (°C) : 22~23	EUT: Flat Computer
Humidity (%RH) : 50~54	M/N: PLT7044K
Barometric Pressure (mbar) : 950~1000	Operation Condition: Charging & Camera / PC & Download

Radiated Emission Test Data:

EUT: Flat Computer
M/N: PLT7044K
Operating Condition: Charging & Camera
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: AC 120V/60Hz for adapter
Comment: Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

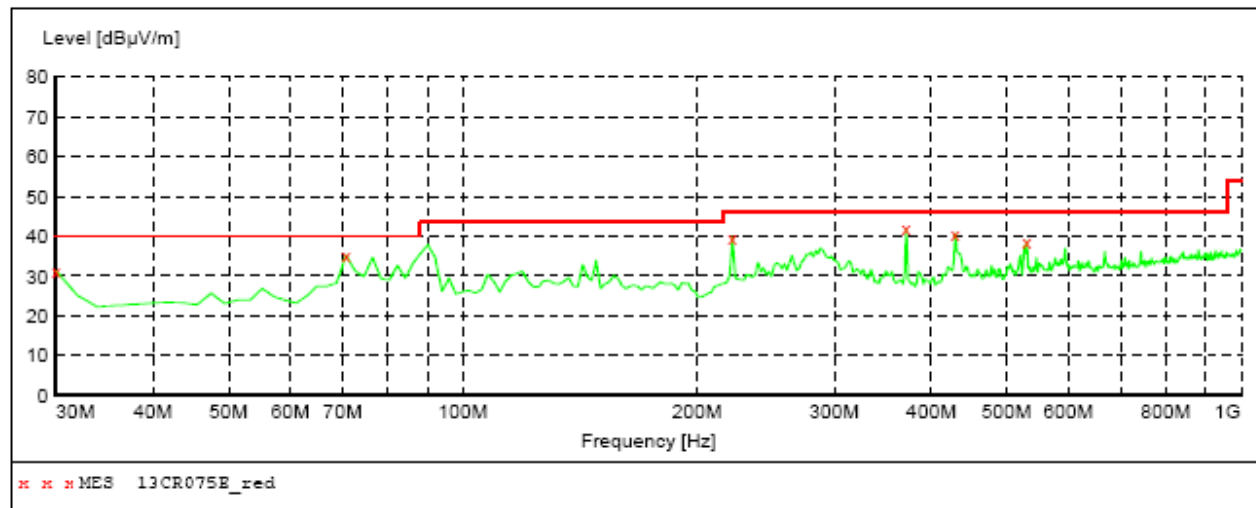

MEASUREMENT RESULT: "13CR075E_red"

3/19/2013 11:22AM


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	31.30	14.3	40.0	8.7	QP	300.0	0.00	HORIZONTAL
70.740000	35.30	12.4	40.0	4.7	QP	300.0	0.00	HORIZONTAL
222.060000	39.70	15.5	46.0	6.3	QP	100.0	0.00	HORIZONTAL
371.440000	42.00	20.8	46.0	4.0	QP	100.0	0.00	HORIZONTAL
429.640000	40.70	22.0	46.0	5.3	QP	100.0	0.00	HORIZONTAL
530.520000	38.80	24.6	46.0	7.2	QP	100.0	0.00	HORIZONTAL

Radiated Emission Test Data:

EUT: Flat Computer
M/N: PLT7044K
Operating Condition: Charging & Camera
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: AC 120V/60Hz for adapter
Comment: Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

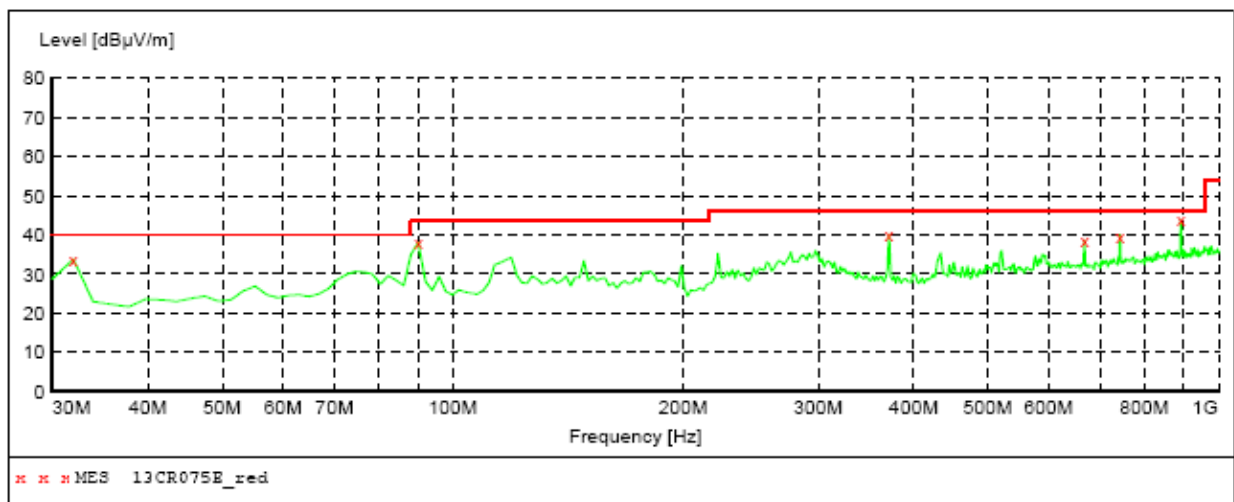

MEASUREMENT RESULT: "13CR075E_red"

3/19/2013 11:24AM


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
31.940000	33.80	14.4	40.0	6.2	QP	300.0	0.00	VERTICAL
90.140000	38.10	16.1	43.5	5.4	QP	300.0	0.00	VERTICAL
371.440000	40.10	20.8	46.0	5.9	QP	100.0	0.00	VERTICAL
668.260000	38.70	26.3	46.0	7.3	QP	100.0	0.00	VERTICAL
743.920000	39.80	27.2	46.0	6.2	QP	100.0	0.00	VERTICAL
893.300000	43.80	29.1	46.0	2.2	QP	100.0	0.00	VERTICAL

Radiated Emission Test Data:

EUT: Flat Computer
M/N: PLT7044K
Operating Condition: PC & Download
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: AC 120V/60Hz for PC
Comment: Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	5.0 ms	100 kHz	VULB9163 NEW

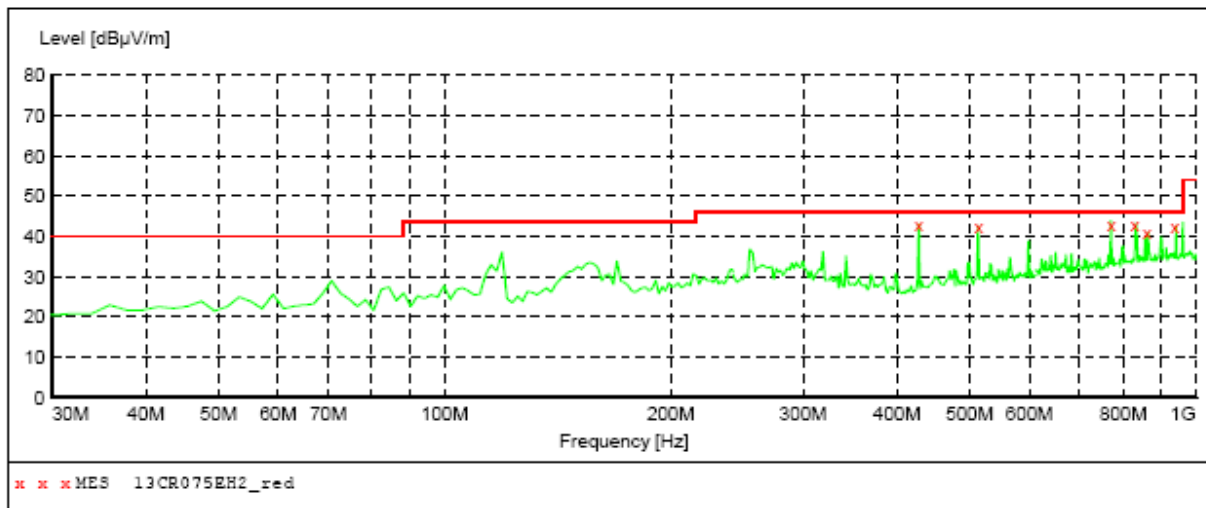

MEASUREMENT RESULT: "13CR075EH2_red"

3/19/2013 11:30AM


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
427.700000	42.80	22.0	46.0	3.2	QP	100.0	0.00	HORIZONTAL
513.060000	42.70	24.2	46.0	3.3	QP	100.0	0.00	HORIZONTAL
771.080000	42.90	27.6	46.0	3.1	QP	100.0	0.00	HORIZONTAL
833.160000	43.00	28.4	46.0	3.0	QP	100.0	0.00	HORIZONTAL
864.200000	41.00	28.8	46.0	5.0	QP	100.0	0.00	HORIZONTAL
941.800000	42.50	29.5	46.0	3.5	QP	100.0	0.00	HORIZONTAL

Radiated Emission Test Data:

EUT: Flat Computer
M/N: PLT7044K
Operating Condition: PC & Download
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: AC 120V/60Hz for PC
Comment: Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	5.0 ms	100 kHz	VULB9163 NEW

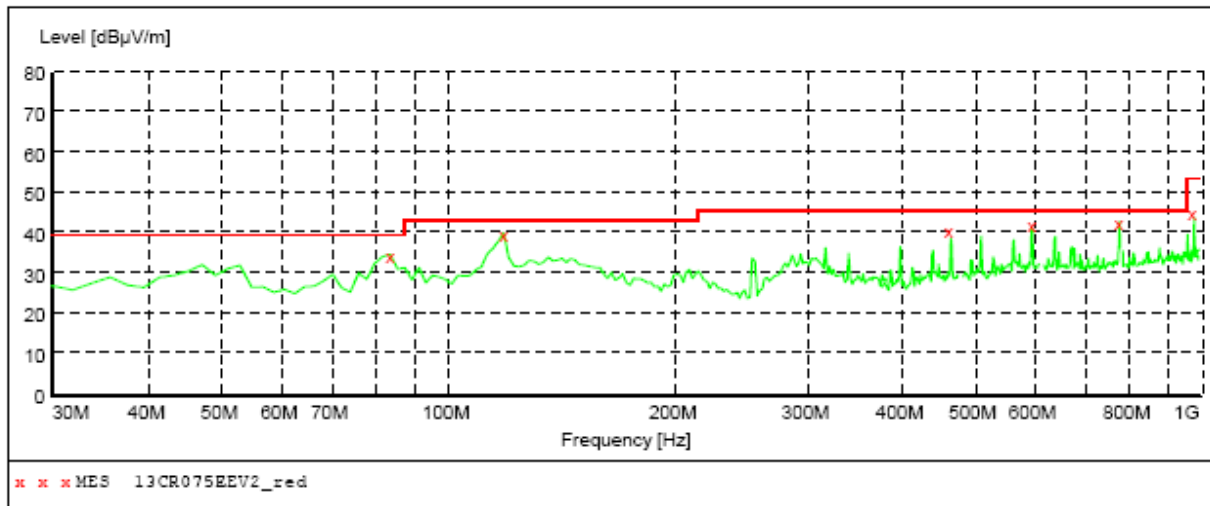

MEASUREMENT RESULT: "13CR075EEV2_red"

3/19/2013 11:33AM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
84.320000	35.20	14.1	40.0	4.8	QP	100.0	0.00	VERTICAL
119.240000	40.40	14.8	43.5	3.1	QP	100.0	0.00	VERTICAL
427.700000	44.20	22.0	46.0	3.0	QP	100.0	0.00	VERTICAL
598.420000	41.70	25.9	46.0	4.3	QP	100.0	0.00	VERTICAL
771.080000	42.80	27.6	46.0	3.2	QP	100.0	0.00	VERTICAL
941.800000	40.80	29.5	46.0	5.2	QP	100.0	0.00	VERTICAL