


FCC PART 15.247
MEASUREMENT AND TEST REPORT

For

Shenzhen YIDONG Technology Co., Ltd.

Floor 1-5, Building B, Area B, Yuanfen Industrial Zone,
Dalang, Bao'an District, Shenzhen, China

FCC ID: LU7-PLT8223GX

Report Type: Original Report	Product Type: Tablet PC
Test Engineer: Rocky Kang	
Report Number: RSZ130926004-00B	
Report Date: 2013-11-01	
Reviewed By: RF Leader	
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLING LIST AND DETAILS.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
FCC §15.247 (i) & §2.1093 – RF EXPOSURE	10
APPLICABLE STANDARD	10
RESULT	10
FCC §15.203 - ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) - CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
MEASUREMENT UNCERTAINTY.....	12
EUT SETUP.....	12
EMI TEST RECEIVER SETUP.....	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST PROCEDURE	13
CORRECTED FACTOR & MARGIN CALCULATION	13
TEST RESULTS SUMMARY	14
TEST DATA	14
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	19
APPLICABLE STANDARD	19
MEASUREMENT UNCERTAINTY.....	19
EUT SETUP.....	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST RESULTS SUMMARY	21
TEST DATA	21
FCC §15.247(a) (2) – 6 dB EMISSIONS BANDWIDTH	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST DATA	36

FCC §15.247(b) (3) - MAXIMUM OUTPUT POWER	44
APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST EQUIPMENT LIST AND DETAILS.....	44
TEST DATA	44
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	52
APPLICABLE STANDARD	52
TEST PROCEDURE	52
TEST EQUIPMENT LIST AND DETAILS.....	52
TEST DATA	53
FCC §15.247(e) - POWER SPECTRAL DENSITY	58
APPLICABLE STANDARD	58
TEST PROCEDURE	58
TEST EQUIPMENT LIST AND DETAILS.....	58
TEST DATA	58
PRODUCT SIMILARITY DECLARATION LETTER.....	66

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Shenzhen YIDONG Technology Co., Ltd.'s product, model number: PLT8223GX (FCC ID: LU7-PLT8223GX) or the "EUT" as referred to in this report was a Tablet PC, which was measured approximately: 20.0 cm (L) x 15.4 cm (W) x 1.2 cm (H), rated input voltage: DC 3.7V rechargeable battery and DC 5V charging from adapter.

Adapter 1 information: Switching power adapter

Model: STC-A515B-D

Input: DC 100-240V, 50/60Hz 0.3A

Output: DC 5V, 1.5A

Adapter 2 information: Switching power adapter

Model: WRP2U-050150C

Input: DC 100-240V, 50/60Hz 0.4A max

Output: DC 5V, 1.5A

Note: The product Tablet PC, model PLT8223GX and EMR2884, they are electrically identical and the difference between them are only the model number and printing & shell color. Model PLT8223GX was selected for fully testing, which was explained in the attached product similarity declaration letter provided and guaranteed by applicant.

** All measurement and test data in this report was gathered from production sample serial number: 1309097 (Assigned by the BACL, Shenzhen). The EUT supplied by the applicant was received on 2013-09-26.*

Objective

This report is prepared on behalf of Shenzhen YIDONG Technology Co., Ltd. in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: LU7-PLT8223GX.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, Shihua Road, Futian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g, and 802.11n-HT20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40 mode, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	6	2447
2	2427	7	2452
3	2432	/	/
4	2437	/	/
5	2442	/	/

EUT was tested with Channel 1, 4 and 7.

EUT Exercise Software

Wifi test with adb command

The test was performed under:

802.11b: Data rate: 1 Mbps, Power level: 50

802.11g: Data rate: 6 Mbps, Power level: 50

802.11n-HT20: Data rate: MCS 0 Mbps, Power level: 50

802.11n-HT40: Data rate: MCS 0 Mbps, Power level: 50

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	PC	VOSTRO 220S	127BP2X
DELL	Keyboard	L100	CNORH656658907BL05DC
DELL	Mouse	MOC5UO	G1900NKD
DELL	LCD Monitor	E178WFPC	CN-OWY564-64180-7C4-2SQH

External I/O Cabling List and Details


Cable Description	Length (m)	From Port	To
Unshielded Undetachable Adapter Cable	1.0	EUT	Adapter
Shielding Detachable USB Cable	1.5	Host PC	Mouse
Shielding Detachable K/B Cable	1.5	Host PC	Keyboard
Shielding Detachable VGA Cable	1.5	Host PC	LCD Monitor
Shielding Detachable USB Cable	1.0	EUT	Host PC

Block Diagram of Test Setup

Conducted Emissions:

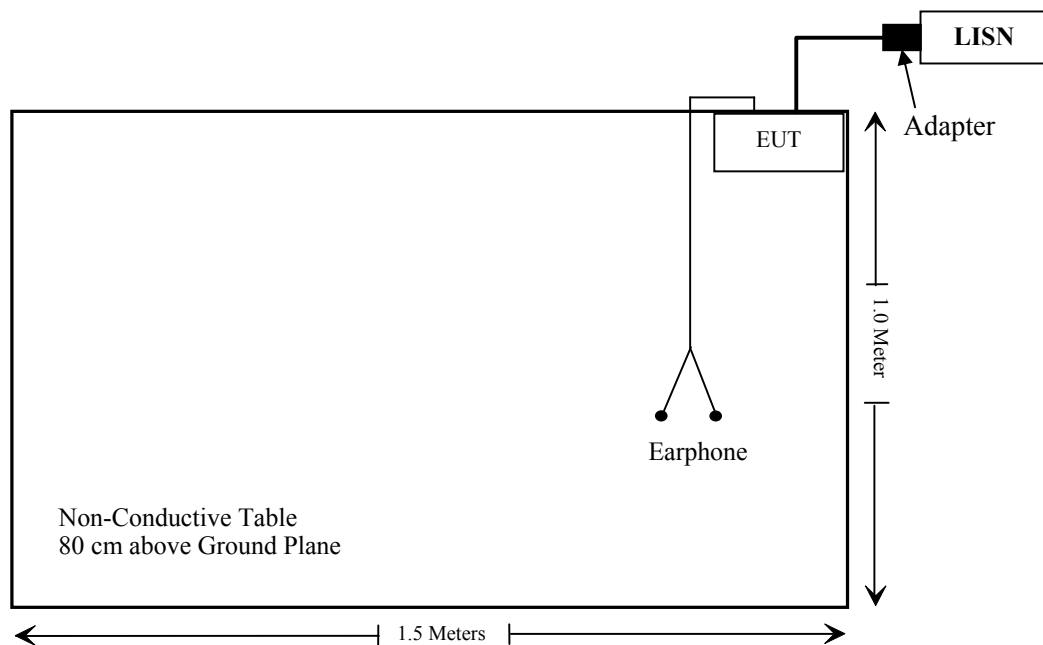

Radiated Emissions:

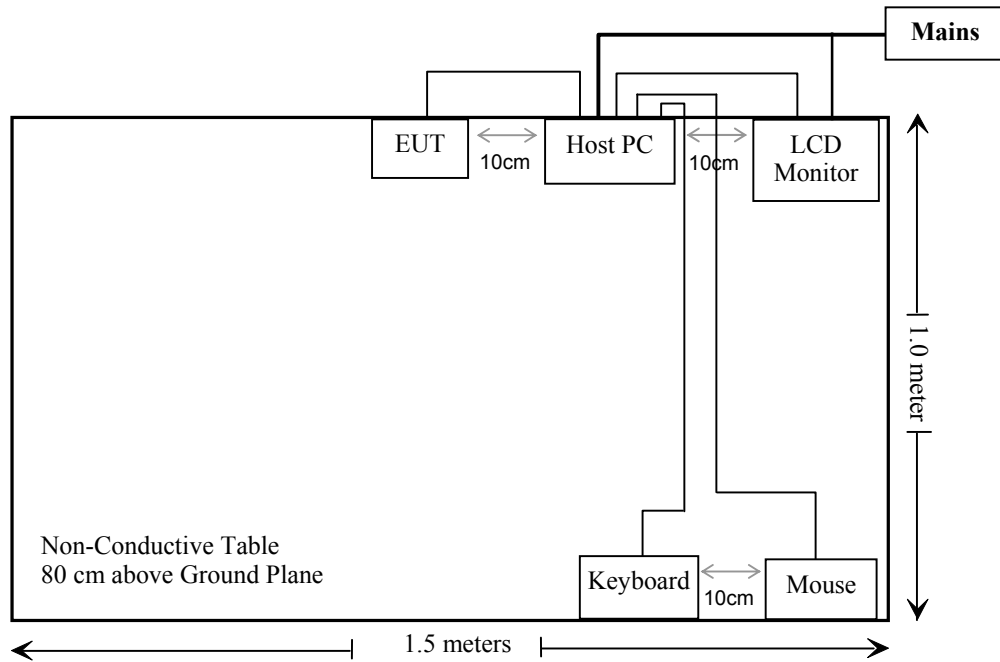

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Bandwidth	Compliance
§15.247(b)(3)	Maximum Output Power	Compliance
§15.247(d)	100kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance v05

Result

According to FCC KDB 447498 D01 General RF Exposure Guidance v05 generic portable criteria

The Maximum output power: 8.30dBm (6.76mW)

According to KDB 447498, the exclusion thresholds for 2450 MHz is 10 mW

Conclusion:

The test time-averaged output power is 6.76 mW < the exclusion thresholds 10 mW, so stand-alone SAR evaluation is not required.

Result: Compliance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has a FPC antenna arrangement for WiFi, which was permanently attached and the gain was 2.0 dBi, fulfill the requirement of this section. Please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) - CONDUCTED EMISSIONS

Applicable Standard

According to FCC§15.207


Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements may be receiver reading, attenuation of the connection between AMN/ISN and receiver, AMN/ISN voltage division factor, AMN/ISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report

Port	Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

EUT Setup

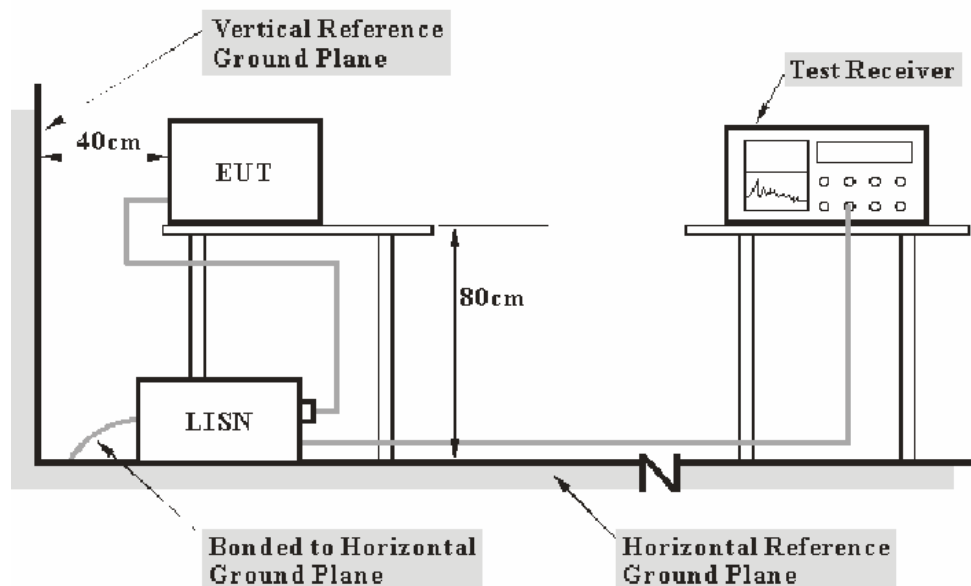

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The adapters were connected to a 120 V_{AC}/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2013-06-17	2014-06-17
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2013-05-07	2014-05-07
Rohde & Schwarz	Transient limiter	ESH3Z2	DE25985	2013-08-09	2014-08-09
Rohde & Schwarz	CE Test software	EMC 32	V8.53	-	-

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Pulse Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Pulse Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, with the worst margin reading of:

14.4 dB at 2.610000 MHz in the **Line** conducted mode (Adapter 1 Power Supply)

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cisp\text{r}}$$

in BACL, $U_{(Lm)}$ is less than $U_{cisp\text{r}}$, if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	100.1 kPa


The testing was performed by Rocky Kang on 2013-10-08 and 2013-10-31.

EUT operation mode: Charging & Transmitting

Adapter 1 Power Supply:

AC 120V / 60Hz – Line


EMI Auto Test L

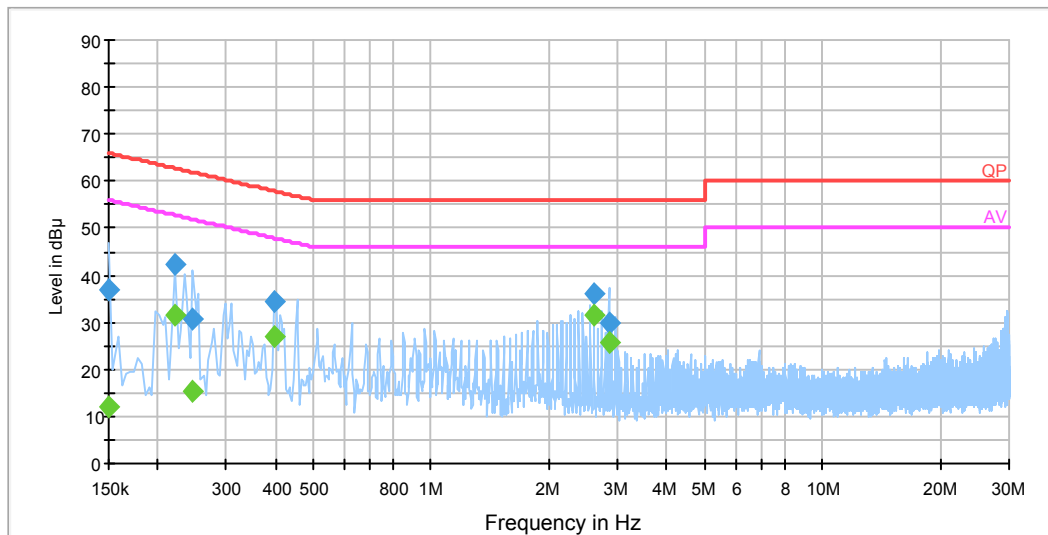

Frequency (MHz)	Corrected Amplitude (dBμV)	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK /QP/Ave.)
0.150000	37.1	19.5	66.0	28.9	QP
0.150000	12.1	19.5	56.0	43.9	Ave.
0.222000	42.5	19.5	62.7	20.2	QP
0.222000	31.6	19.5	52.7	21.1	Ave.
0.246000	30.7	19.5	61.9	31.2	QP
0.246000	15.3	19.5	51.9	36.6	Ave.
0.398000	34.5	19.5	57.9	23.4	QP
0.398000	27.0	19.5	47.9	20.9	Ave.
2.610000	35.9	19.5	56.0	20.1	QP
2.610000	31.6	19.5	46.0	14.4	Ave.
2.842000	29.9	19.5	56.0	26.1	QP
2.842000	25.5	19.5	46.0	20.5	Ave.

AC 120V / 60Hz – Neutral:


EMI Auto Test N

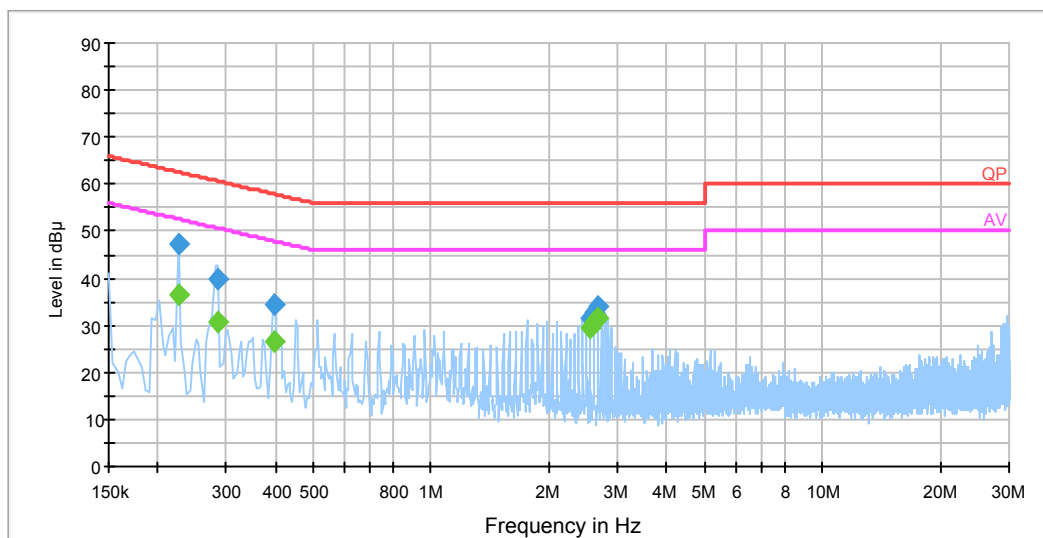

Frequency (MHz)	Corrected Amplitude (dBμV)	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK /QP/Ave.)
0.226000	47.1	19.5	62.6	15.5	QP
0.226000	36.5	19.5	52.6	16.1	Ave.
0.286000	39.9	19.5	60.6	20.7	QP
0.286000	30.6	19.5	50.6	20.0	Ave.
0.398000	34.4	19.5	57.9	23.5	QP
0.398000	26.4	19.5	47.9	21.5	Ave.
2.554000	31.6	19.6	56.0	24.4	QP
2.554000	29.3	19.6	46.0	16.7	Ave.
2.610000	33.0	19.6	56.0	23.0	QP
2.610000	30.6	19.6	46.0	15.4	Ave.
2.666000	33.9	19.6	56.0	22.1	QP
2.666000	31.6	19.6	46.0	14.4	Ave.

Adapter 2 Power Supply:**AC 120V / 60Hz – Line**


EMI Auto Test L

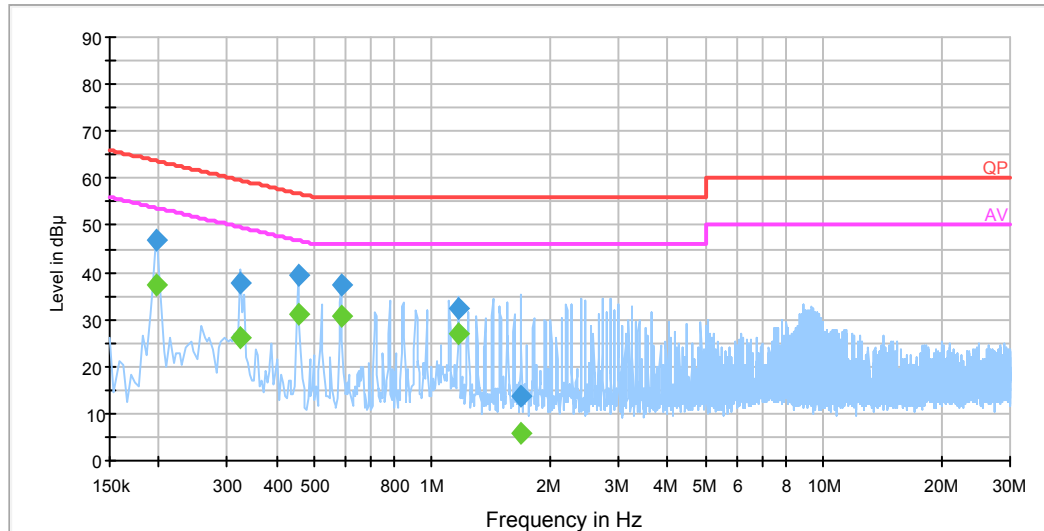

Frequency (MHz)	Corrected Amplitude (dBμV)	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK /QP/Ave.)
0.198000	46.7	19.5	63.7	17.0	QP
0.198000	37.2	19.5	53.7	16.5	Ave.
0.322000	37.8	19.5	59.7	21.8	QP.
0.322000	26.3	19.5	49.7	23.4	Ave.
0.454000	39.3	19.5	56.8	17.5	QP
0.454000	31.1	19.5	46.8	15.7	Ave.
0.586000	37.1	19.5	56.0	18.9	QP
0.586000	30.9	19.5	46.0	15.1	Ave.
1.170000	32.5	19.5	56.0	23.5	QP
1.170000	26.9	19.5	46.0	19.1	Ave.
1.686000	13.6	19.5	56.0	42.4	QP
1.686000	5.9	19.5	46.0	40.1	Ave.

AC 120V / 60Hz – Neutral:

EMI Auto Test N

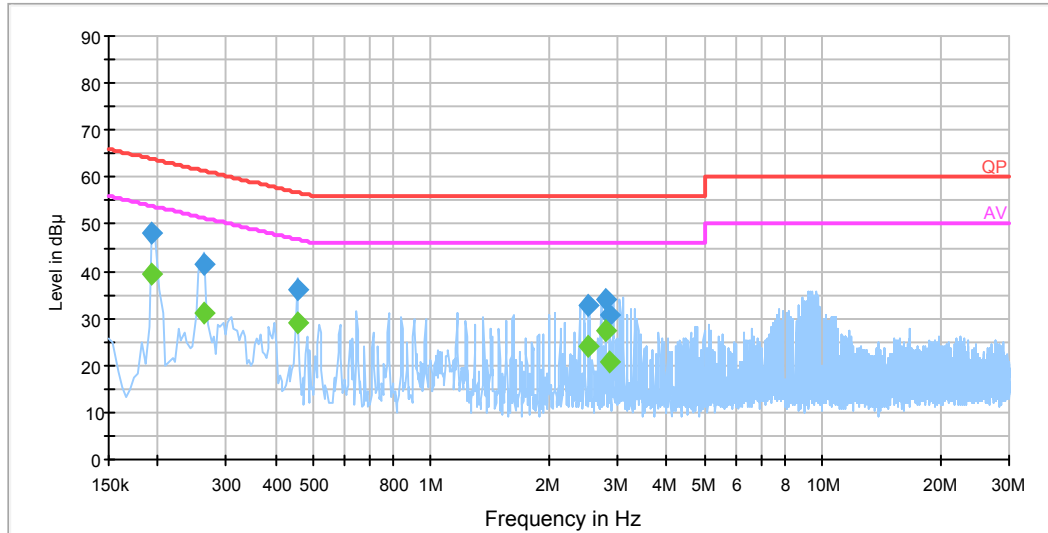

Frequency (MHz)	Corrected Amplitude (dBμV)	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/QP/Ave.)
0.194000	48.0	19.5	63.9	15.9	QP
0.194000	39.4	19.5	53.9	14.5	Ave.
0.262000	41.4	19.5	61.4	19.9	QP.
0.262000	31.1	19.5	51.4	20.3	Ave.
0.454000	36.2	19.5	56.8	20.6	QP
0.454000	29.1	19.5	46.8	17.7	Ave.
2.530000	32.9	19.6	56.0	23.1	QP
2.530000	24.2	19.6	46.0	21.8	Ave.
2.790000	34.1	19.6	56.0	21.9	QP
2.790000	27.4	19.6	46.0	18.6	Ave.
2.850000	30.6	19.6	56.0	25.4	QP
2.850000	20.7	19.6	46.0	25.4	Ave.

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, and it will not be taken into consideration for the test data recorded in the report

EUT Setup

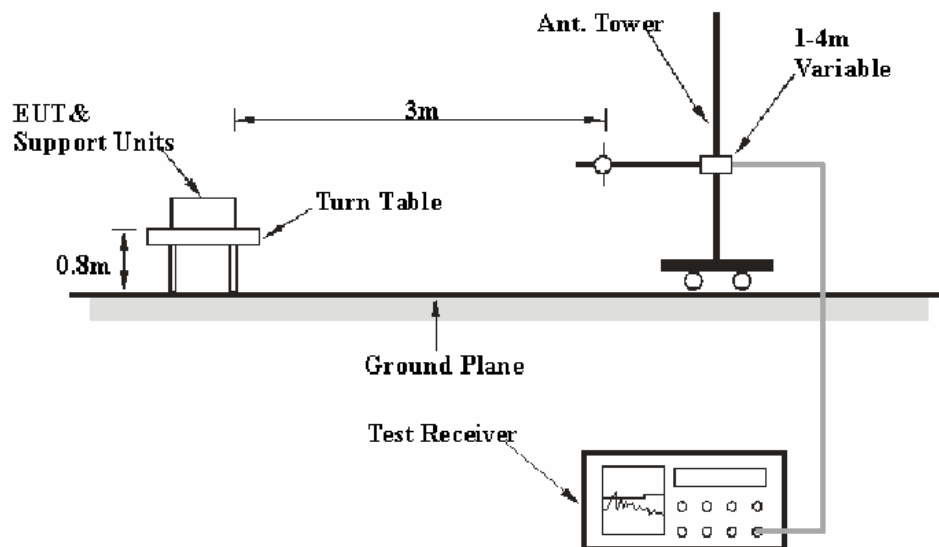

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to an AC 120V/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2013-09-30	2014-09-30
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-09-17	2014-09-17
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2013-04-03	2014-04-03
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2014-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2010-10-14	2013-10-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the data in the following table, with the worst margin reading of:

3.98 dB at 4824.0 MHz in the **Horizontal** polarization for 802.11n-HT20 mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

in BACL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53 %
ATM Pressure:	100.1 kPa

The testing was performed by Rocky Kang on 2013-10-11.

EUT operation mode: Transmitting

30 MHz-25 GHz(Pre-scan with two adapters,and worst case is adapter 1,the test data as below)

802.11b mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/15.205/15.209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
2412.0	79.65	PK	130	1.3	H	6.13	85.78	/	/
2412.0	62.57	Ave.	130	1.3	H	6.13	68.70	/	/
2412.0	73.24	PK	241	1.3	V	6.13	79.37	/	/
2412.0	60.58	Ave.	241	1.3	V	6.13	66.71	/	/
4824.0	36.12	Ave.	359	1.3	V	12.40	48.52	54	5.48
4824.0	52.86	PK	359	1.3	V	12.40	65.26	74	8.74
7236.0	27.25	Ave.	61	1.5	V	16.62	43.87	54	10.13
350.2	45.33	QP	84	1.1	H	-13.3	32.03	46	13.97
9608.0	20.33	Ave.	81	1.2	H	19.28	39.61	54	14.39
7236.0	41.84	PK	61	1.5	V	16.62	58.46	74	15.54
2387.5	25.74	Ave.	25	1.3	H	6.13	31.87	54	22.13
9608.0	32.24	PK	81	1.2	H	19.28	51.52	74	22.48
2338.5	25.82	Ave.	170	1.4	V	5.48	31.30	54	22.70
2484.7	24.00	Ave.	197	1.2	H	7.21	31.21	54	22.79
2484.7	40.50	PK	197	1.2	H	7.21	47.71	74	26.29
2338.5	40.50	PK	170	1.4	V	5.48	45.98	74	28.02
2387.5	39.52	PK	25	1.3	H	6.13	45.65	74	28.35
Middle Channel (2437 MHz)									
2437.0	77.26	PK	232	1.5	H	7.21	84.47	/	/
2437.0	62.49	Ave.	232	1.5	H	7.21	69.70	/	/
2437.0	70.64	PK	225	1.3	V	7.21	77.85	/	/
2437.0	59.68	Ave.	225	1.3	V	7.21	66.89	/	/
4874.0	35.58	Ave.	197	1.3	V	12.46	48.04	54	5.96
7311.0	29.21	Ave.	324	1.3	H	16.49	45.70	54	8.30
4874.0	51.26	PK	197	1.3	V	12.46	63.72	74	10.28
9748.0	21.65	Ave.	250	1.3	V	19.40	41.05	54	12.95
350.2	44.80	QP	236	1.4	H	-13.3	31.50	46	14.50
7311.0	40.13	PK	324	1.3	H	16.49	56.62	74	17.38
9748.0	33.30	PK	250	1.3	V	19.40	52.70	74	21.30
2490.4	25.12	Ave.	75	1.5	H	7.21	32.33	54	21.67
2386.7	25.94	Ave.	287	1.4	H	6.13	32.07	54	21.93
2364.5	25.82	Ave.	28	1.2	V	5.48	31.30	54	22.70
2386.7	41.50	PK	287	1.4	H	6.13	47.63	74	26.37
2490.4	38.21	PK	75	1.5	H	7.21	45.42	74	28.48
2364.5	40.03	PK	28	1.2	V	5.48	45.51	74	28.49

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/15.205/15.209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel(2462 MHz)									
2462.0	74.65	PK	40	1.5	H	7.21	81.86	/	/
2462.0	61.84	Ave.	40	1.5	H	7.21	69.05	/	/
2462.0	73.28	PK	96	1.5	V	7.21	80.49	/	/
2462.0	60.82	Ave.	96	1.5	V	7.21	68.03	/	/
7386.0	28.31	Ave.	220	1.3	H	15.91	44.22	54	9.78
4924.0	36.09	Ave.	280	1.3	V	12.50	43.08	54	10.92
9848.0	21.50	Ave.	33	1.4	H	19.39	40.89	54	13.11
350.2	44.92	QP	83	1.3	H	-13.3	31.62	46	14.38
4924.0	52.17	PK	280	1.3	V	12.50	53.68	74	19.32
2478.2	25.62	Ave.	136	1.3	V	7.21	32.83	54	21.17
2492.0	25.34	Ave.	6	1.2	V	7.21	32.55	54	21.45
9848.0	32.04	PK	33	1.4	H	19.39	51.43	74	22.57
2322.6	24.64	Ave.	45	1.2	H	5.48	30.12	54	23.88
2478.2	41.30	PK	136	1.3	V	7.21	48.51	74	25.49
2492.0	40.08	PK	6	1.2	V	7.21	47.29	74	26.71
2322.6	39.26	PK	45	1.2	H	5.48	44.74	74	29.26
7386.0	40.66	PK	220	1.3	H	15.91	56.57	74	1743

802.11g mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/15.205/15.209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel(2412 MHz)									
2412.0	74.26	PK	73	1.4	H	6.13	80.39	/	/
2412.0	58.34	Ave.	73	1.4	H	6.13	64.47	/	/
2412.0	77.23	PK	198	1.4	V	6.13	83.36	/	/
2412.0	60.76	Ave.	198	1.4	V	6.13	66.89	/	/
7236.0	29.21	Ave.	166	1.3	V	16.62	45.83	54	8.17
4824.0	52.42	PK	274	1.2	H	12.40	64.82	74	9.18
4824.0	29.04	Ave.	274	1.2	H	12.40	41.44	54	12.56
350.2	45.61	QP	180	1.5	H	-13.3	32.31	46	13.69
9648.0	20.10	Ave.	192	1.4	H	19.29	39.39	54	14.61
7236.0	38.67	PK	166	1.3	V	16.62	55.29	74	18.71
2492.2	22.65	Ave.	119	1.4	V	7.21	29.86	54	24.14
2354.2	24.32	Ave.	267	1.3	H	5.48	29.80	54	24.20
9648.0	30.14	PK	192	1.4	H	19.29	49.43	74	24.57
2386.9	23.28	Ave.	263	1.3	V	6.13	29.41	54	24.59
2386.9	42.22	PK	263	1.3	V	6.13	48.35	74	25.65
2354.2	41.01	PK	267	1.3	H	5.48	46.49	74	27.51
2492.2	36.28	PK	119	1.4	V	7.21	43.49	74	30.51
Middle Channel(2437 MHz)									
2437.0	77.82	PK	10	1.4	H	7.21	85.03	/	/
2437.0	63.24	Ave.	10	1.4	H	7.21	70.45	/	/
2437.0	74.62	PK	120	1.4	V	7.21	81.83	/	/
2437.0	60.18	Ave.	120	1.4	V	7.21	67.39	/	/
7311.0	29.98	Ave.	81	1.3	H	16.49	46.47	54	7.53
4874.0	52.65	PK	151	1.3	V	12.46	65.11	74	8.89
4874.0	32.17	Ave.	151	1.3	V	12.46	44.63	54	9.37
9748.0	21.16	Ave.	252	1.4	V	19.40	40.56	54	13.44
350.2	44.60	QP	282	1.4	H	-13.3	31.30	46	14.70
7311.0	39.63	PK	81	1.3	H	16.49	56.12	74	17.88
2384.6	23.84	Ave.	58	1.2	V	6.13	29.97	54	24.03
2365.0	24.42	Ave.	109	1.2	V	5.48	29.90	54	24.10
9748.0	30.50	PK	252	1.4	V	19.40	49.90	74	24.10
2492.5	22.54	Ave.	105	1.3	H	7.21	29.75	54	24.25
2365.0	41.21	PK	109	1.2	V	5.48	46.69	74	27.31
2384.6	38.21	PK	58	1.2	V	6.13	44.34	74	29.66
2492.5	36.28	PK	105	1.3	H	7.21	43.49	74	30.51

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/15.205/15.209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel(2462 MHz)									
2462.0	78.24	PK	62	1.6	H	7.21	85.45	/	/
2462.0	64.20	Ave.	62	1.6	H	7.21	71.41	/	/
2462.0	74.61	PK	31	1.3	V	7.21	81.82	/	/
2462.0	61.38	Ave.	31	1.3	V	7.21	68.59	/	/
4924.0	53.24	PK	200	1.4	H	12.50	65.74	74	8.26
4924.0	33.18	Ave.	200	1.4	H	12.50	45.68	54	8.32
7386.0	28.58	Ave.	76	1.3	H	15.91	44.49	54	9.51
9848.0	21.11	Ave.	187	1.3	V	19.39	40.50	54	13.50
350.2	45.50	QP	152	1.4	H	-13.3	32.20	46	13.80
7386.0	38.33	PK	76	1.3	H	15.91	54.24	74	19.76
9848.0	32.22	PK	187	1.3	V	19.39	51.61	74	22.39
2486.2	23.70	Ave.	90	1.4	V	7.21	30.91	54	23.09
2485.6	23.26	Ave.	186	1.3	H	7.21	30.47	54	23.53
2323.4	24.44	Ave.	228	1.5	V	5.48	29.92	54	24.08
2486.2	40.01	PK	90	1.4	V	7.21	47.22	74	26.78
2323.4	40.24	PK	228	1.5	V	5.48	45.72	74	28.28
2485.6	37.64	PK	186	1.3	H	7.21	44.85	74	29.15

802.11n-HT20 mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/15.205/15.209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel(2412 MHz)									
2412.0	75.64	PK	52	1.2	H	6.13	81.77	/	/
2412.0	60.57	Ave.	52	1.2	H	6.13	66.70	/	/
2412.0	74.38	PK	90	1.5	V	6.13	80.51	/	/
2412.0	59.29	Ave.	90	1.5	V	6.13	65.42	/	/
4824.0	57.62	PK	337	1.2	H	12.40	70.02	74	3.98
4824.0	35.48	Ave.	337	1.2	H	12.40	47.88	54	6.12
7236.0	25.69	Ave.	249	1.4	V	16.49	42.18	54	11.82
350.2	46.31	QP	57	1.7	H	-13.3	33.01	46	12.99
9648.0	20.44	Ave.	27	1.3	H	19.29	39.73	54	14.27
7236.0	38.24	PK	249	1.4	V	16.49	54.73	74	19.27
2490.4	23.64	Ave.	298	1.5	H	7.59	31.23	54	22.69
2360.5	24.38	Ave.	194	1.4	V	5.48	29.86	54	24.14
9648.0	30.57	PK	27	1.3	H	19.29	49.86	74	24.14
2383.6	23.52	Ave.	322	1.3	V	6.13	29.65	54	24.35
2383.6	40.31	PK	322	1.3	V	6.13	46.44	74	27.56
2490.4	37.57	PK	298	1.5	H	7.59	45.16	74	28.84
2360.5	37.52	PK	194	1.4	V	5.48	43.00	74	31.00
Middle Channel(2437 MHz)									
2437.0	75.64	PK	284	1.4	H	7.21	82.85	/	/
2437.0	59.37	Ave.	284	1.4	H	7.21	66.58	/	/
2437.0	73.64	PK	90	1.3	V	7.21	80.85	/	/
2437.0	58.25	Ave.	90	1.3	V	7.21	65.46	/	/
4874.0	56.28	PK	163	1.5	V	12.46	68.74	74	5.26
4874.0	36.19	Ave.	163	1.5	V	12.46	48.65	54	5.35
7311.0	31.34	Ave.	246	1.4	H	16.49	47.83	54	6.17
9748.0	21.21	Ave.	158	1.4	H	19.40	40.61	54	13.39
350.2	45.84	QP	82	1.8	H	-13.3	32.54	46	13.46
7311.0	39.04	PK	246	1.4	H	16.49	55.53	74	18.47
9748.0	32.30	PK	158	1.4	H	19.40	51.70	74	22.30
2342.1	24.24	Ave.	220	1.2	V	7.21	31.45	54	22.55
2491.2	23.20	Ave.	96	1.4	H	7.21	30.41	54	23.59
2385.8	23.52	Ave.	178	1.2	H	6.13	29.65	54	24.35
2342.1	40.82	PK	220	1.2	V	7.21	48.03	74	25.97
2385.8	40.61	PK	178	1.2	H	6.13	46.74	74	27.26
2491.2	36.24	PK	96	1.4	H	7.21	43.45	74	30.55

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/15.205/15.209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel(2462 MHz)									
2462.0	76.64	PK	284	1.4	H	7.21	83.85	/	/
2462.0	61.34	Ave.	284	1.4	H	7.21	68.55	/	/
2462.0	73.18	PK	90	1.3	V	7.21	80.39	/	/
2462.0	59.82	Ave.	90	1.3	V	7.21	67.03	/	/
4924.0	56.28	PK	163	1.5	H	12.50	68.78	74	5.22
4924.0	36.27	Ave.	163	1.5	H	12.50	48.77	54	5.23
7386.0	26.54	Ave.	246	1.4	H	15.91	42.45	54	11.55
9848.0	22.30	Ave.	158	1.4	V	19.39	41.69	54	12.31
350.2	45.91	QP	179	1.2	H	-13.3	32.61	46	13.39
9848.0	33.67	PK	158	1.4	V	19.39	53.06	74	20.94
7386.0	36.24	PK	246	1.4	H	15.91	52.15	74	21.85
2492.7	22.67	Ave.	96	1.4	V	7.21	29.88	54	24.12
2350.6	24.13	Ave.	220	1.2	H	5.48	29.61	54	24.39
2485.9	22.31	Ave.	178	1.2	V	7.21	29.52	54	24.48
2485.9	41.04	PK	178	1.2	V	7.21	48.25	74	25.75
2350.6	40.52	PK	220	1.2	H	5.48	46.00	74	28.00
2492.7	34.24	PK	96	1.4	V	7.21	41.45	74	32.55

802.11n-HT40 mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/15.205/15.209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel(2422 MHz)									
2422.0	77.64	PK	329	1.5	H	6.13	83.77	/	/
2422.0	63.04	Ave.	329	1.5	H	6.13	69.17	/	/
2422.0	71.60	PK	339	1.4	V	6.13	77.73	/	/
2422.0	59.82	Ave.	339	1.4	V	6.13	64.95	/	/
4844.0	53.61	PK	204	1.2	H	12.40	66.01	74	7.99
4844.0	31.52	Ave.	204	1.2	H	12.40	43.92	54	10.08
9688.0	24.17	Ave.	184	1.3	V	19.28	43.45	54	10.55
7266.0	24.93	Ave.	288	1.4	V	17.06	41.99	54	12.01
350.2	45.12	QP	53	1.5	H	-13.3	31.82	46	14.18
7266.0	40.76	PK	288	1.4	V	17.06	57.82	74	16.18
9688.0	38.42	PK	184	1.3	V	19.28	57.70	74	16.30
2386.7	27.13	Ave.	145	1.5	V	6.13	33.26	54	20.74
2493.4	25.99	Ave.	307	1.2	V	7.21	33.20	54	20.80
2320.7	27.29	Ave.	324	1.4	V	5.48	32.77	54	21.23
2493.4	40.90	PK	307	1.2	V	7.21	48.11	74	25.89
2386.7	41.72	PK	145	1.5	V	6.13	47.85	74	26.15
2320.7	41.84	PK	324	1.4	V	5.48	47.32	74	26.68
Middle Channel(2437 MHz)									
2437.0	76.58	PK	189	1.2	H	7.21	83.79	/	/
2437.0	63.26	Ave.	189	1.2	H	7.21	70.47	/	/
2437.0	74.64	PK	338	1.4	V	7.21	81.85	/	/
2437.0	58.19	Ave.	338	1.4	V	7.21	65.40	/	/
4874.0	53.67	PK	270	1.2	V	12.46	66.13	74	7.87
9748.0	24.23	Ave.	57	1.4	H	19.40	43.63	54	10.37
4874.0	30.24	Ave.	270	1.2	V	12.46	42.70	54	11.30
350.2	46.68	QP	201	1.6	H	-13.3	33.38	46	12.62
7311.0	24.47	Ave.	322	1.3	V	16.49	40.96	54	13.04
9748.0	39.20	PK	57	1.4	H	19.40	58.60	74	15.40
7311.0	38.04	PK	322	1.3	V	16.49	54.53	74	19.47
2489.2	26.12	Ave.	253	1.2	H	7.21	33.33	54	20.67
2494.3	26.09	Ave.	35	1.3	H	7.21	33.30	54	20.70
2385.8	26.90	Ave.	107	1.5	V	6.13	33.03	54	20.97
2494.3	41.02	PK	35	1.3	H	7.21	48.23	74	25.77
2489.2	40.82	PK	253	1.2	H	7.21	48.03	74	25.97
2385.8	41.75	PK	107	1.5	V	6.13	47.88	74	26.12

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/15.205/15.209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel(2452 MHz)									
2452.0	75.61	PK	122	1.3	H	7.21	82.82	/	/
2452.0	61.28	Ave.	122	1.3	H	7.21	68.49	/	/
2452.0	74.72	PK	29	1.3	V	7.21	81.93	/	/
2452.0	60.15	Ave.	29	1.3	V	7.21	67.36	/	/
4904.0	53.14	PK	61	1.3	V	12.46	65.60	74	8.40
4904.0	31.20	Ave.	61	1.3	V	12.46	43.66	54	10.34
9808.0	24.14	Ave.	64	1.5	V	19.38	43.52	54	10.48
7356.0	24.72	Ave.	293	1.4	H	15.90	40.62	54	13.38
350.2	45.20	QP	16	1.2	H	-13.3	31.90	46	14.10
9808.0	39.37	PK	64	1.5	V	19.38	58.75	74	15.25
2484.5	50.32	PK	236	1.5	V	7.21	57.53	74	16.47
2484.5	29.90	Ave.	236	1.5	V	7.21	37.11	54	16.89
2489.8	29.82	Ave.	78	1.3	V	7.21	37.03	54	16.97
2489.8	49.60	PK	78	1.3	V	7.21	56.81	74	17.19
7356.0	40.60	PK	293	1.4	H	15.90	56.50	74	17.50
2325.8	26.68	Ave.	322	1.3	H	5.48	32.16	54	21.84
2325.8	40.69	PK	322	1.3	H	5.48	46.17	74	27.83

Note:


Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor (RX) + cable loss – amplifier factor


Margin = Limit- Corr. Amplitude

Conducted Spurious Emissions at Antenna Port:


802.11b Low Channel

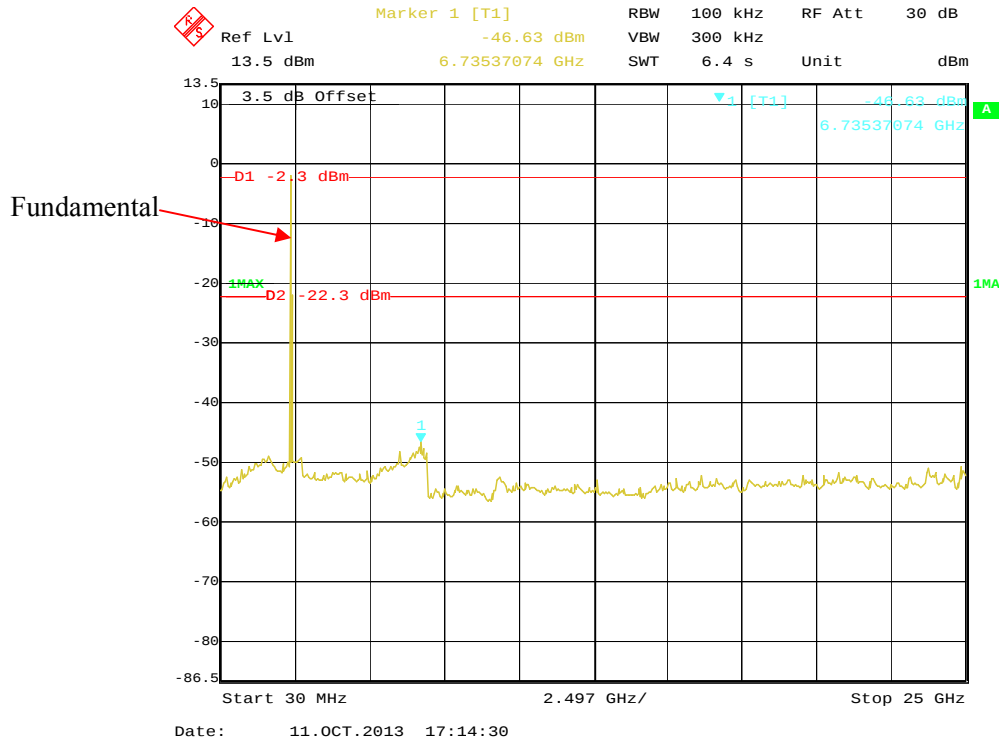


802.11b Middle Channel

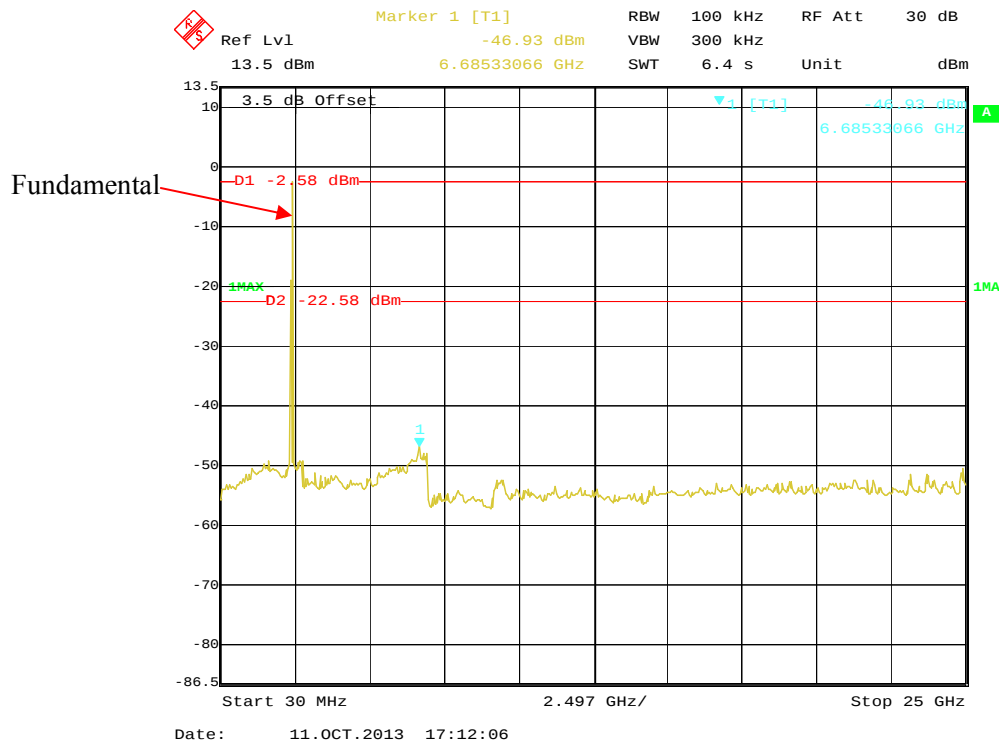


802.11b High Channel

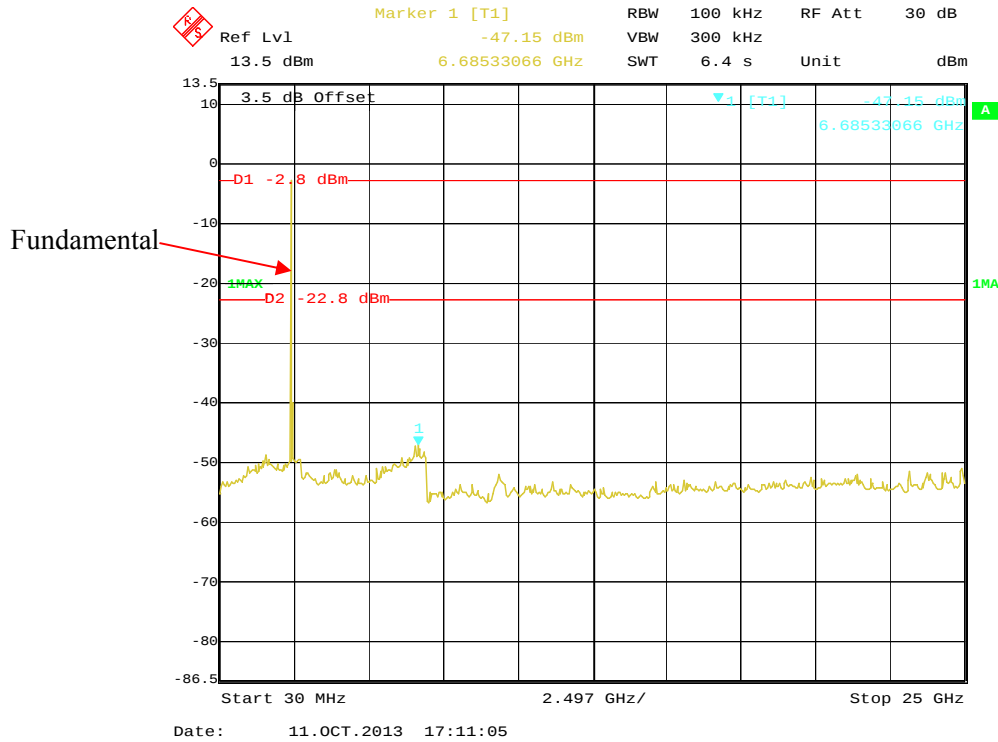


802.11g Low Channel

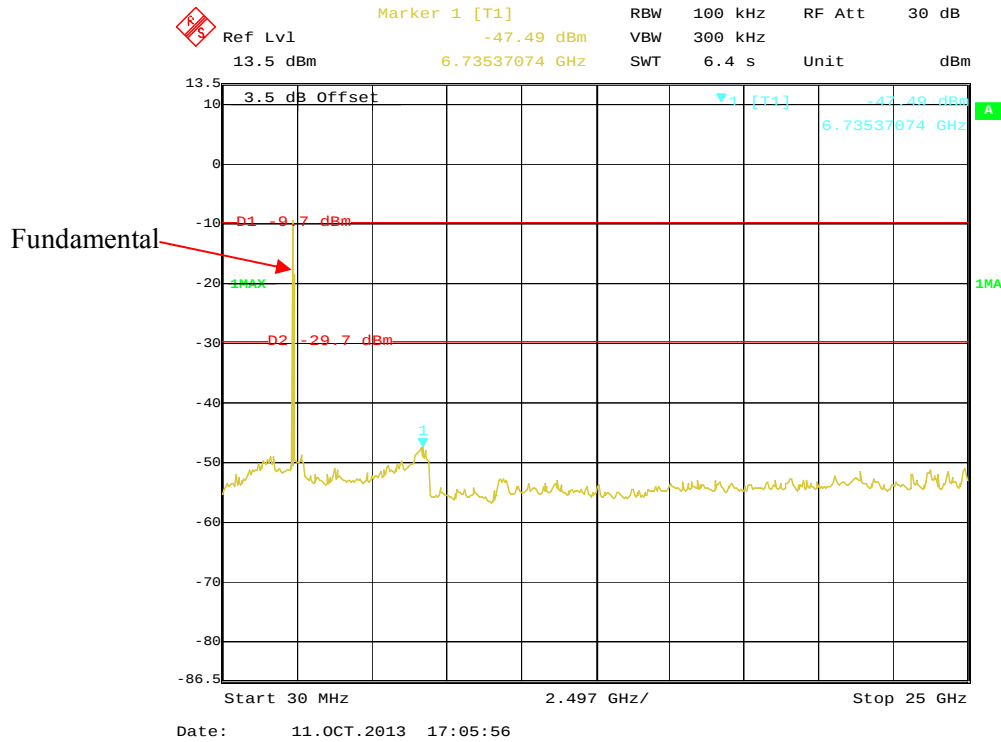


802.11g Middle Channel

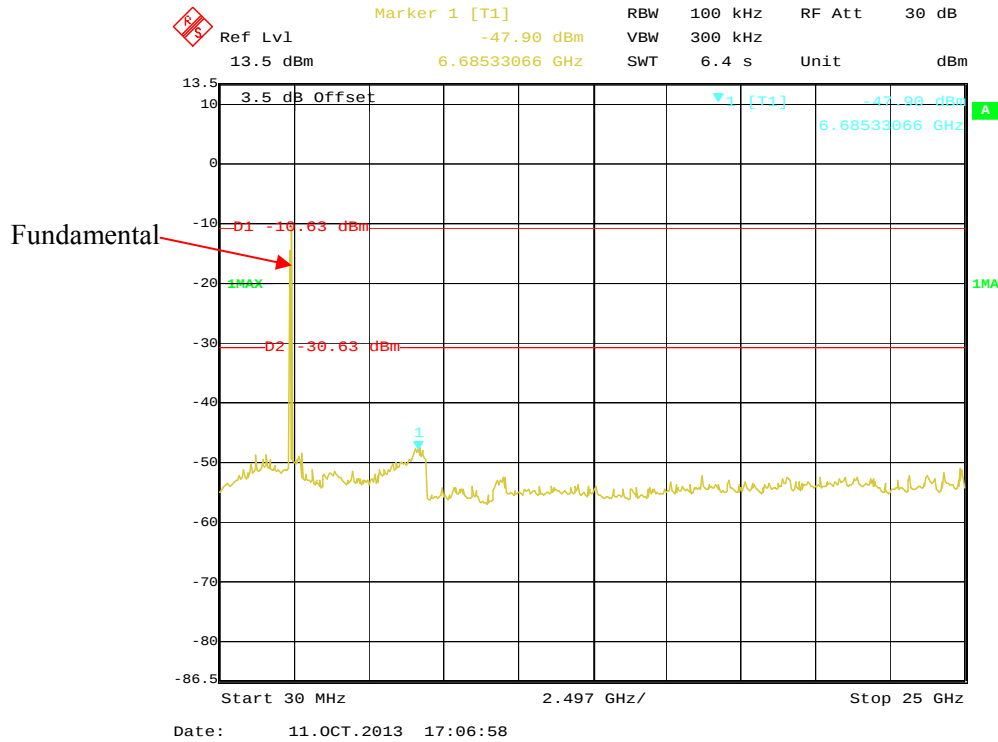


802.11g High Channel

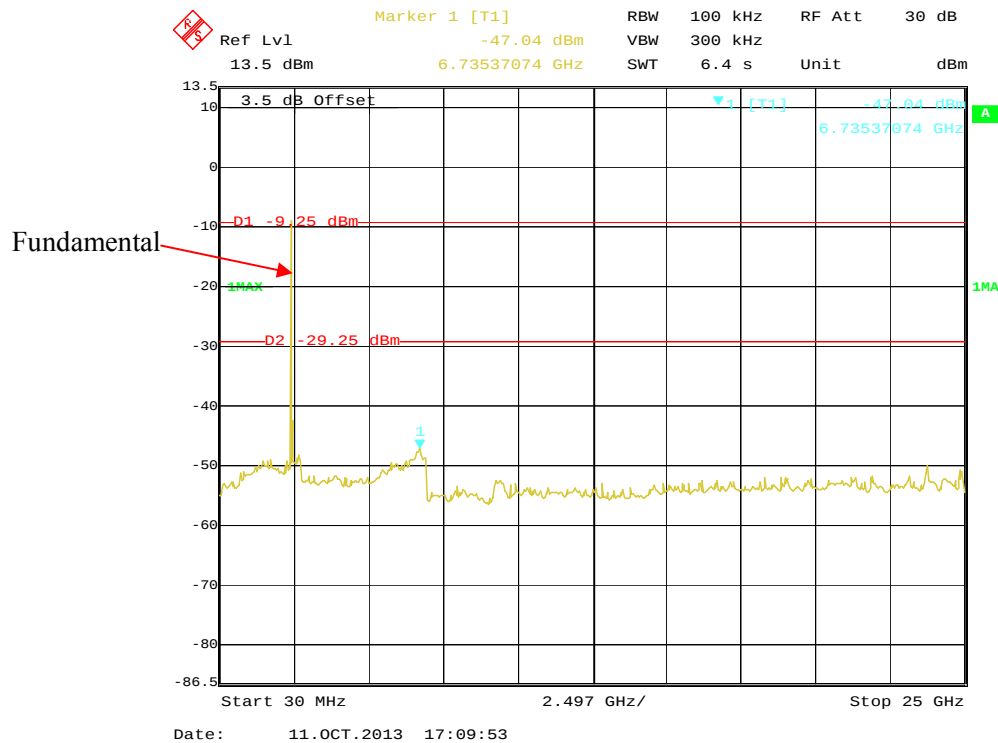


802.11n-HT20 Low Channel

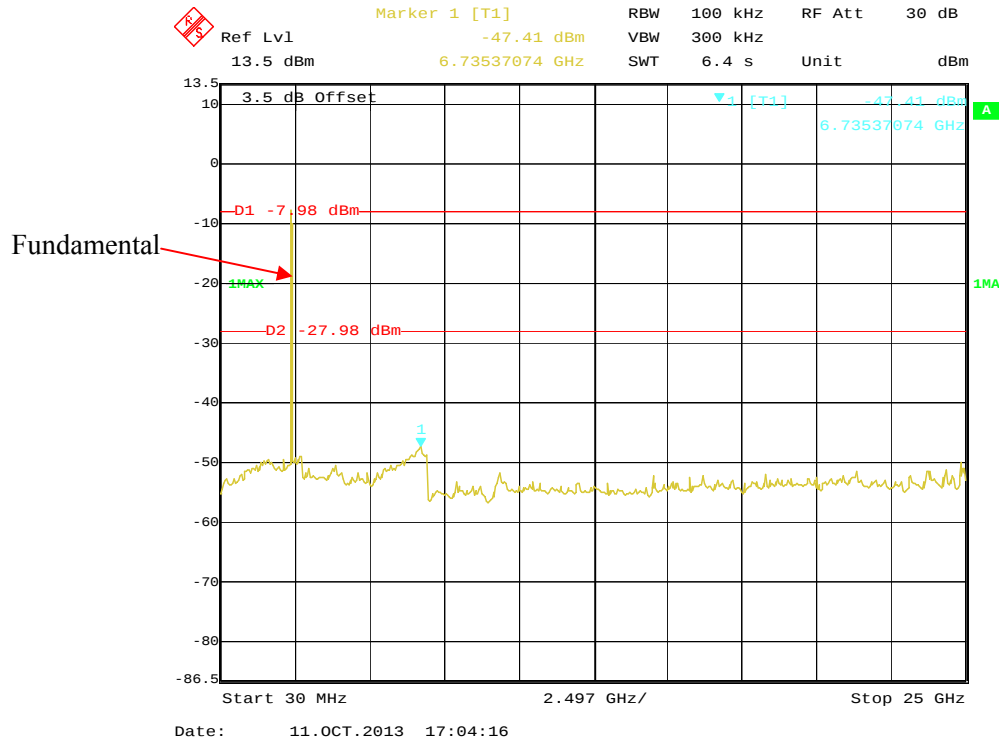


802.11n-HT20 Middle Channel

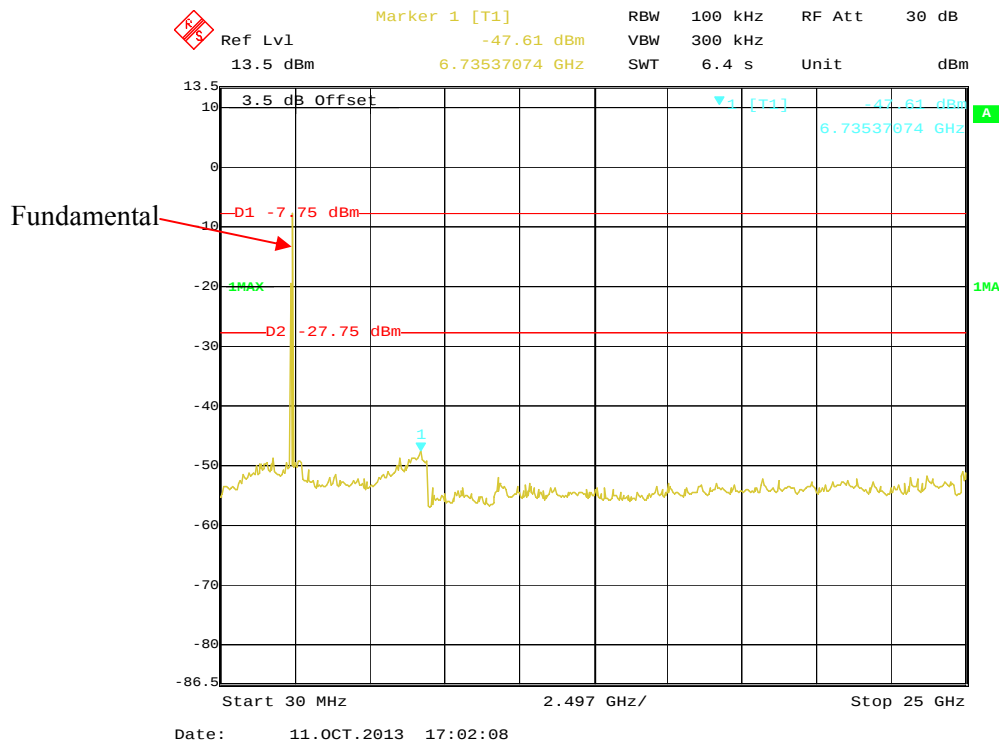


802.11n-HT20 High Channel

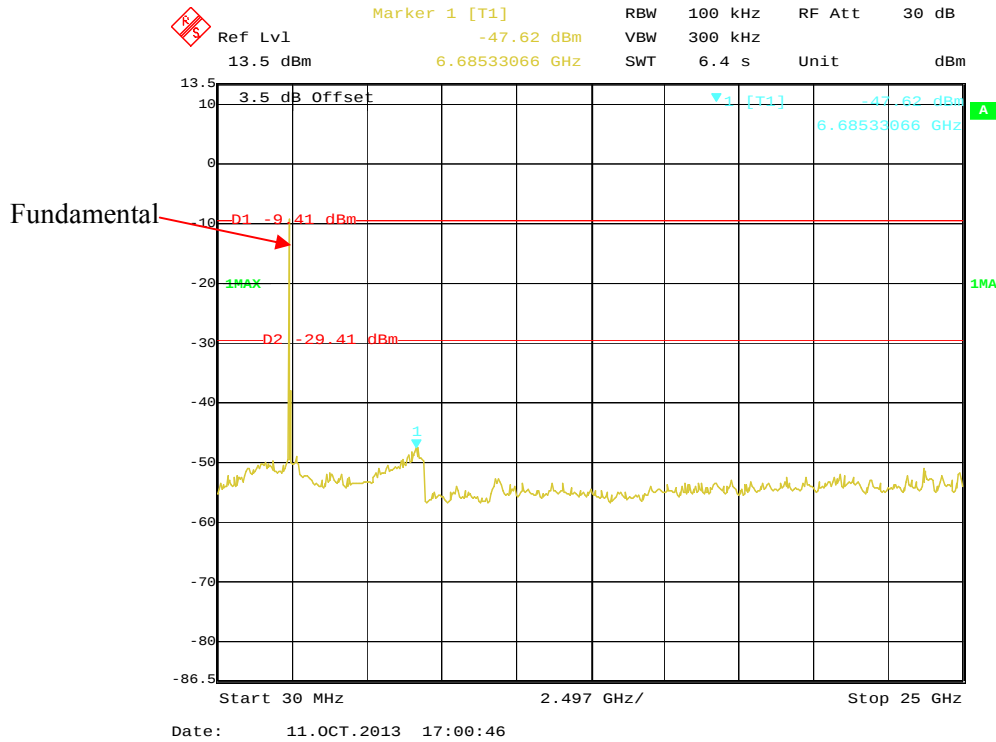


802.11n-HT40 Low Channel

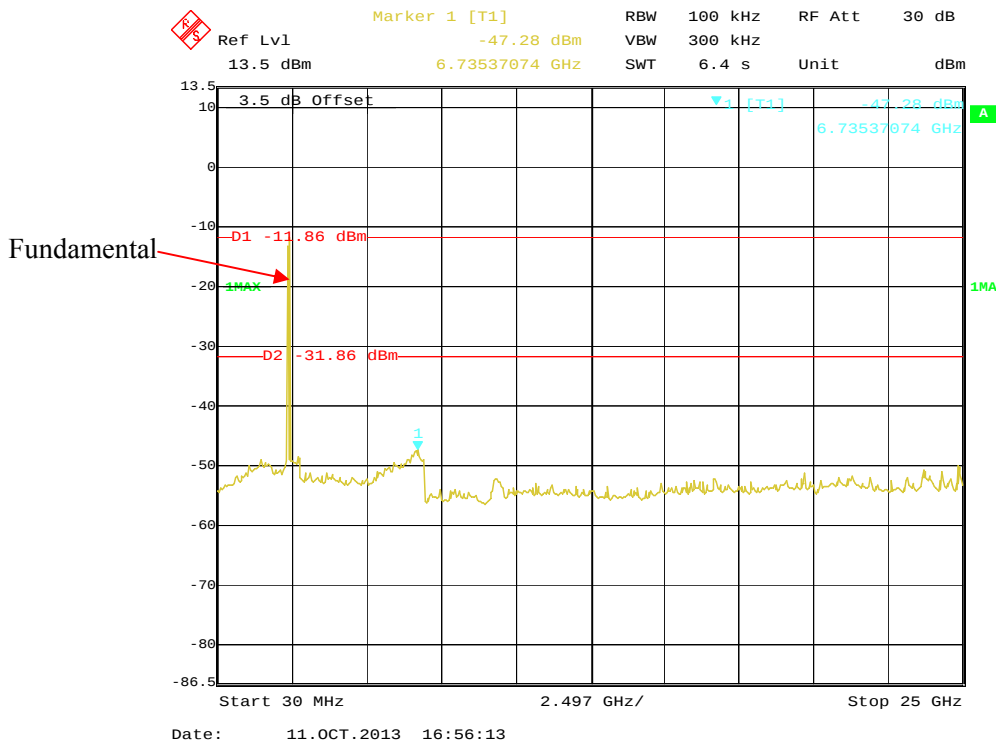

802.11n-HT40 Middle Channel

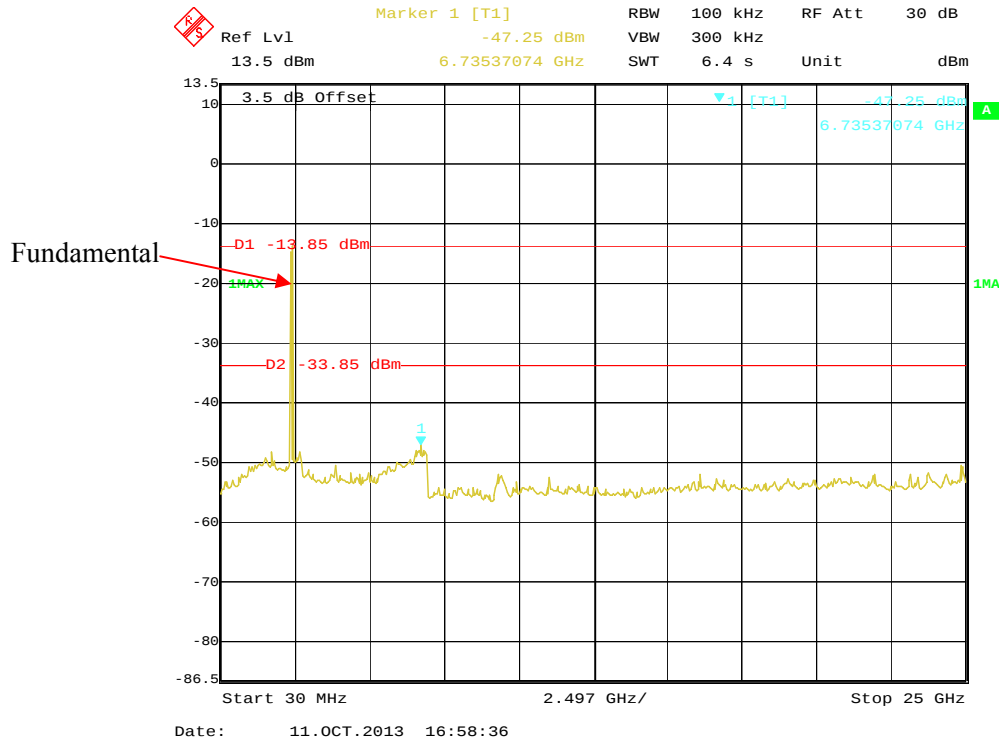

802.11n-HT40 High Channel

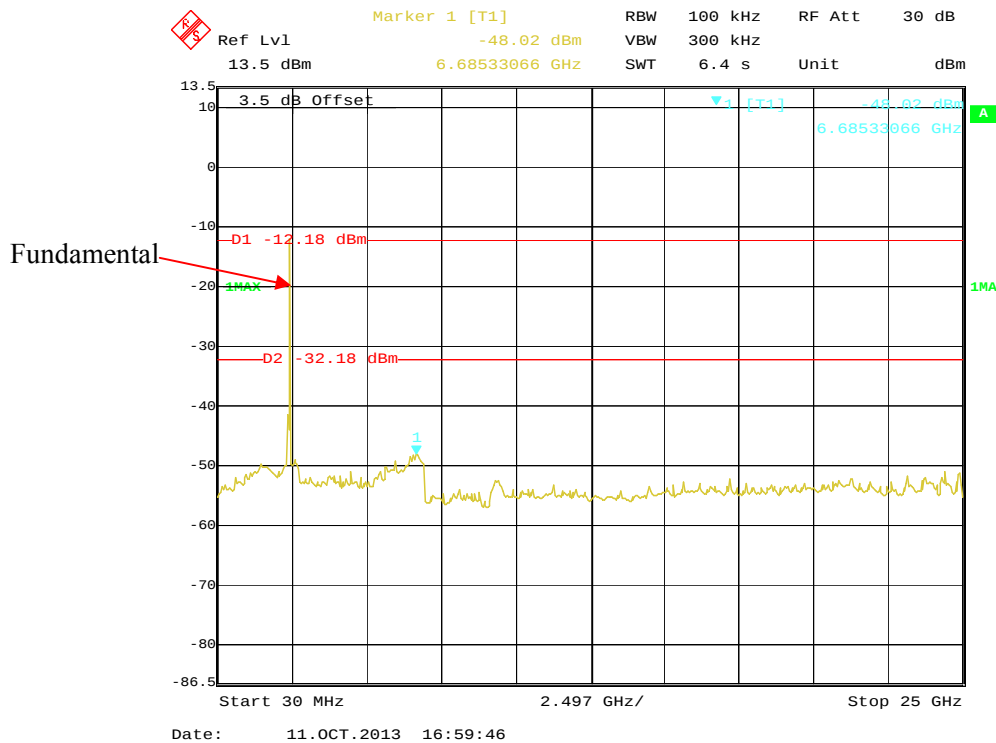

FCC §15.247(a) (2) – 6 dB EMISSIONS BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53 %
ATM Pressure:	100.1 kPa

The testing was performed by Rocky Kang on 2013-10-11.

EUT operation mode: Transmitting

Test Result: Pass.

Please refer to the following tables and plots.

Channel	Frequency (MHz)	Data Rate (Mbps)	6dB Emissions Bandwidth (MHz)	Limit (kHz)	Result
802.11b mode					
Low	2412	1	10.22	≥ 500	Pass
Middle	2437	1	10.22	≥ 500	Pass
High	2462	1	10.22	≥ 500	Pass
802.11g mode					
Low	2412	6	16.47	≥ 500	Pass
Middle	2437	6	16.47	≥ 500	Pass
High	2462	6	16.47	≥ 500	Pass
802.11n-HT20 mode					
Low	2412	MCS0	17.68	≥ 500	Pass
Middle	2437	MCS0	17.68	≥ 500	Pass
High	2462	MCS0	17.68	≥ 500	Pass
802.11n-HT40 mode					
Low	2422	MCS0	35.59	≥ 500	Pass
Middle	2437	MCS0	35.59	≥ 500	Pass
High	2452	MCS0	35.59	≥ 500	Pass

Ref Lvl 23.5 dBm Delta 1 [T1] -1.60 dB RBW 100 kHz RF Att 30 dB
 10.22044088 MHz SWT 7.5 ms Unit dBm

3.5 dB Offset

1MAX

1MA

Center 2.412 GHz 3 MHz/ Span 30 MHz

Date: 11.OCT.2013 15:14:21

Delta 1 [T1] -1.50 dB
 Ref Lvl 23.5 dBm
 RBW 100 kHz
 VBW 300 kHz
 SWT 7.5 ms
 RF Att 30 dB
 Unit dBm

3.5 dB Offset


D1 -1.84 dBm
 D2 -7.84 dBm

1MAX


Center 2.437 GHz
 Span 30 MHz

23.5
 20
 10
 0
 -10
 -20
 -30
 -40
 -50
 -60
 -70
 -76.5


802.11b High Channel

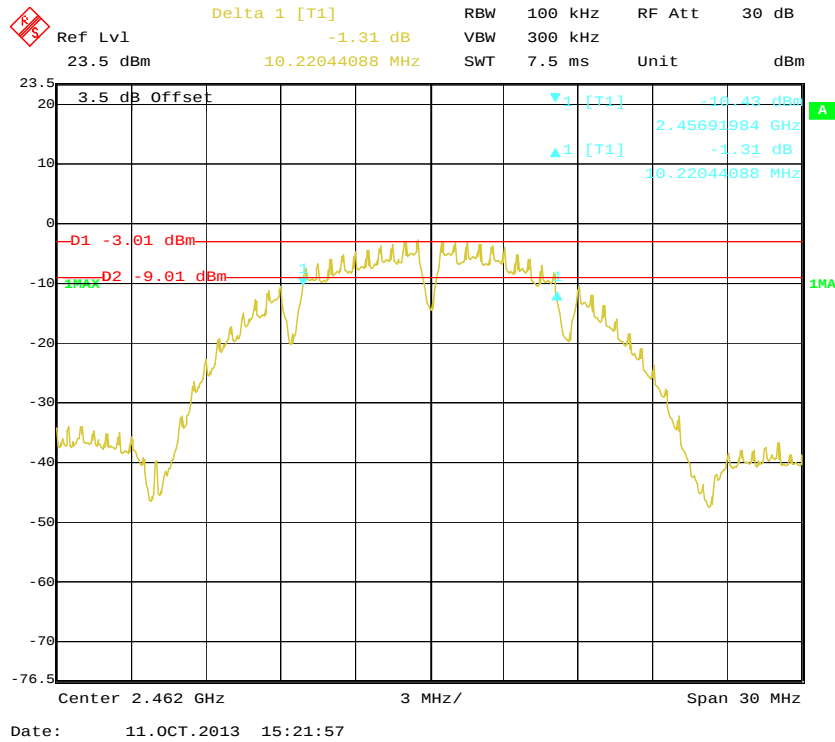


802.11g Low Channel

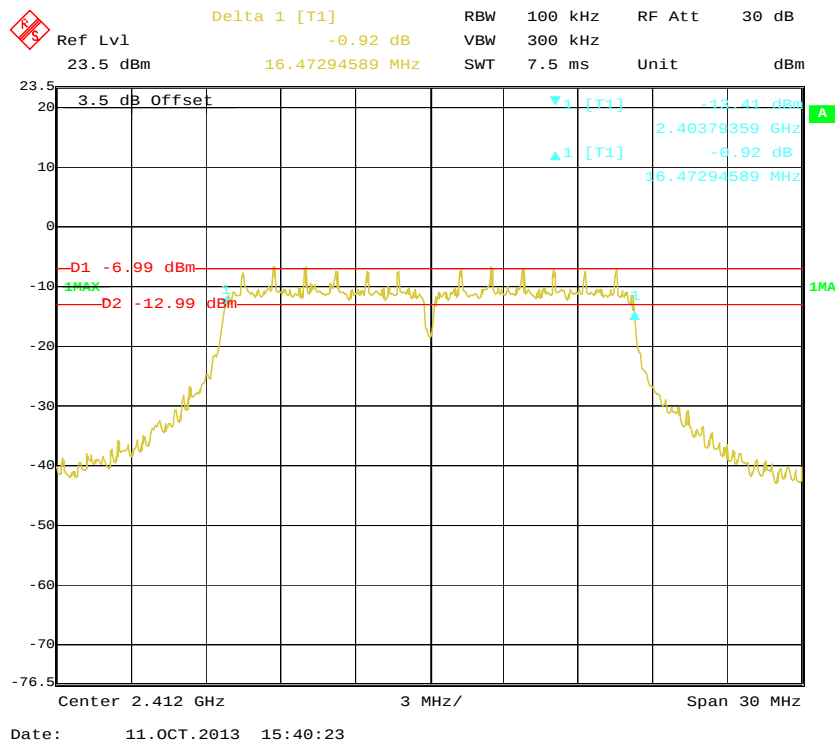

802.11g Middle Channel

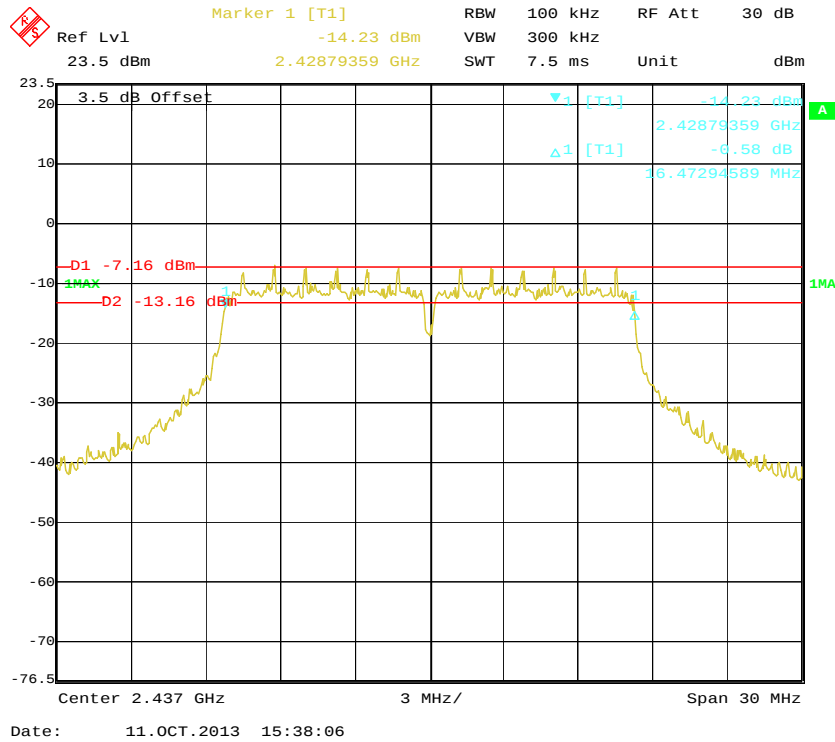

802.11g High Channel

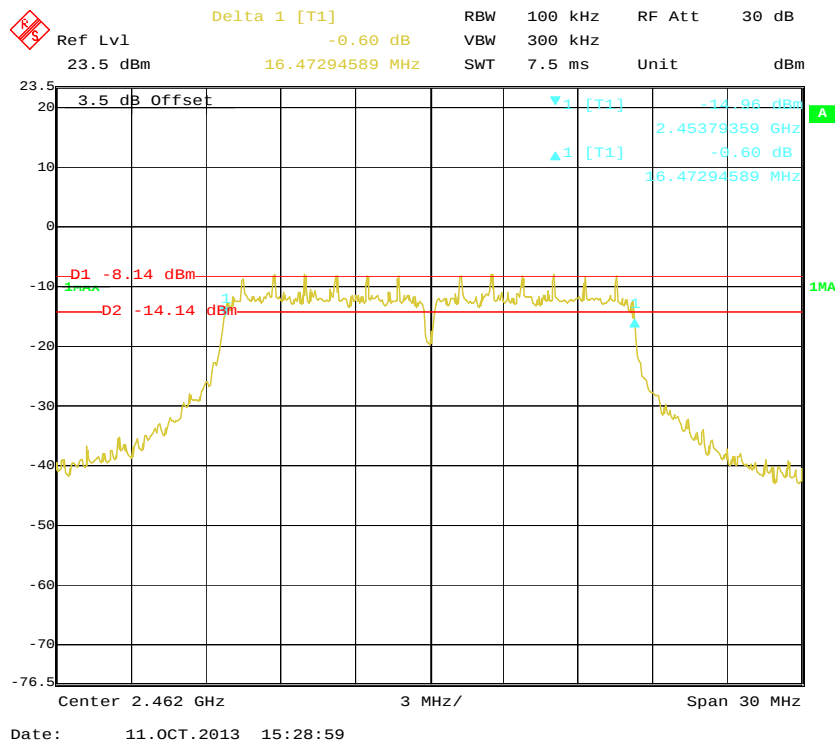

Ref Lvl 23.5 dBm Delta 1 [T1] -1.44 dB RBW 100 kHz RF Att 30 dB

3.5 dB Offset 17.67535070 MHz VBW 300 kHz SWT 7.5 ms Unit dBm

3.5 dB Offset

1 MAX

D1 -6.65 dBm

D2 -12.65 dBm

1 [T1] -1.44 dB

2.40319238 GHz

17.67535070 MHz

Center 2.412 GHz 3 MHz/ Span 30 MHz

Date: 11.OCT.2013 15:48:36

Ref Lvl 23.5 dBm Delta 1 [T1] -0.90 dB RBW 100 kHz RF Att 30 dB

3.5 dB Offset 17.67535070 MHz VSWR 300 kHz Unit dBm

23.5 20 10 0 -10 -20 -30 -40 -50 -60 -70 -76.5

3.5 dB Offset

D1 -7.08 dBm


D2 -13.08 dBm

Center 2.437 GHz 3 MHz/ Span 30 MHz


2.42819238 GHz -6.90 dB 17.67535070 MHz

Date: 11.OCT.2013 16:01:44


802.11n-HT20 High Channel

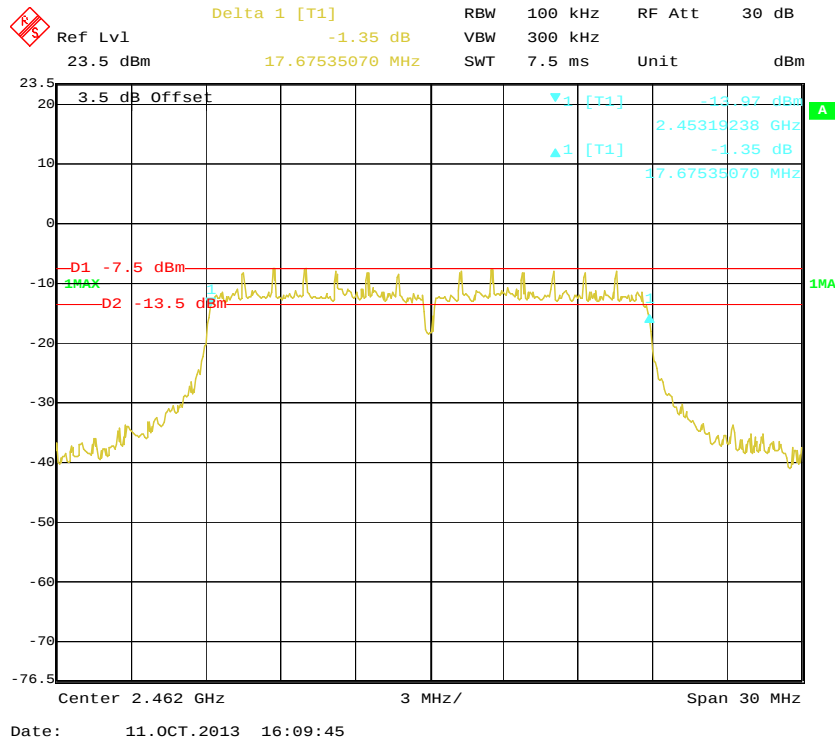


802.11n-HT40 Low Channel

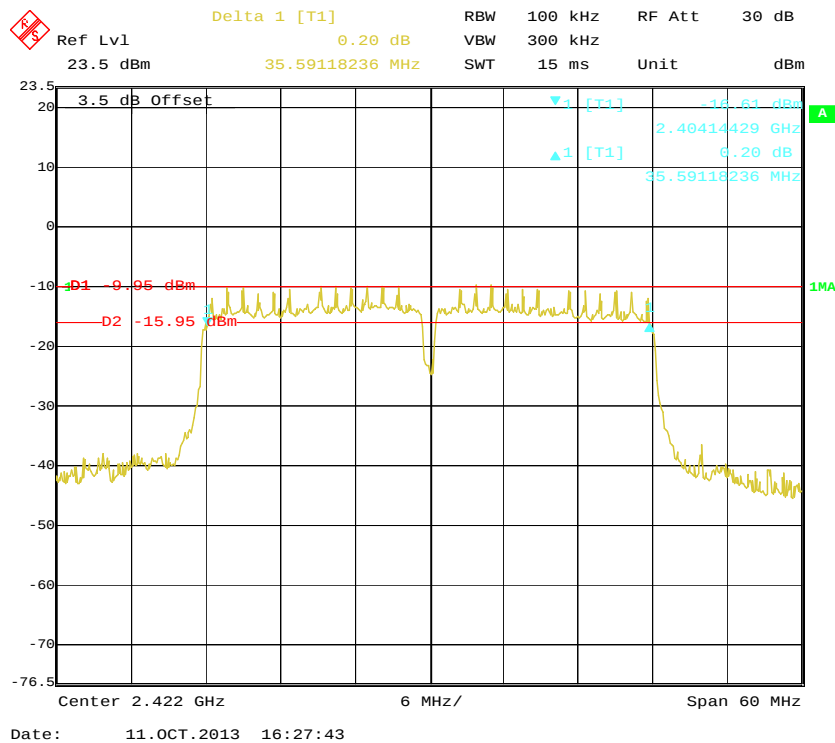

802.11n-HT40 Middle Channel

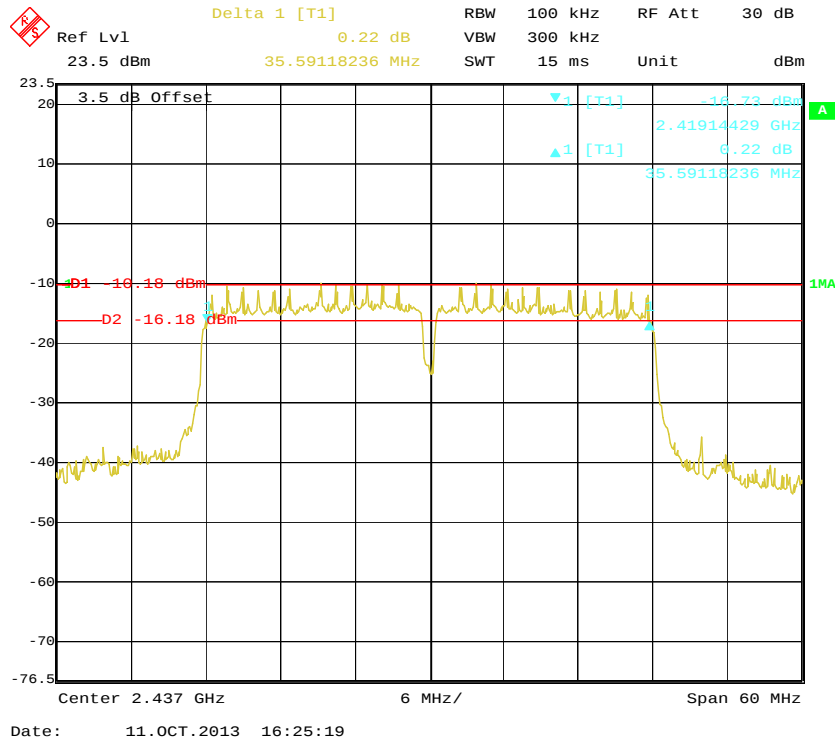

802.11n-HT40 High Channel

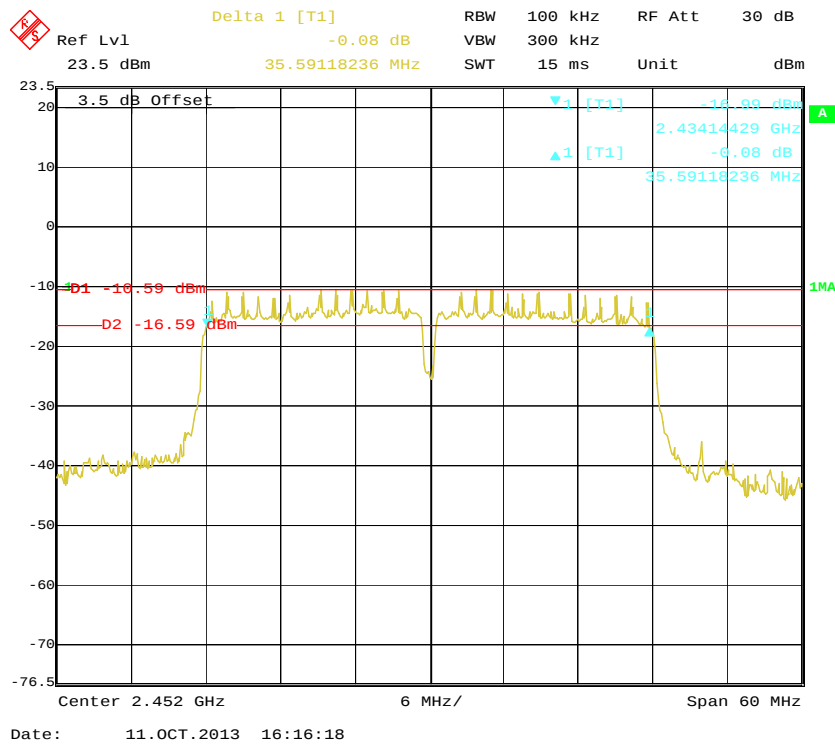

FCC §15.247(b) (3) - MAXIMUM OUTPUT POWER


Applicable Standard

According to §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	53 %
ATM Pressure:	100.1 kPa

The testing was performed by Rocky Kang on 2013-10-11.


EUT operation mode: Transmitting

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)
802.11b			
Low	2412	8.30	30
Middle	2437	7.03	30
High	2462	6.26	30
802.11g			
Low	2412	4.93	30
Middle	2437	4.98	30
High	2462	4.01	30
802.11n-HT20			
Low	2412	4.82	30
Middle	2437	4.32	30
High	2462	4.05	30
802.11n-HT40			
Low	2422	4.60	30
Middle	2437	4.85	30
High	2452	4.05	30


802.11b RF Output Power, Low Channel

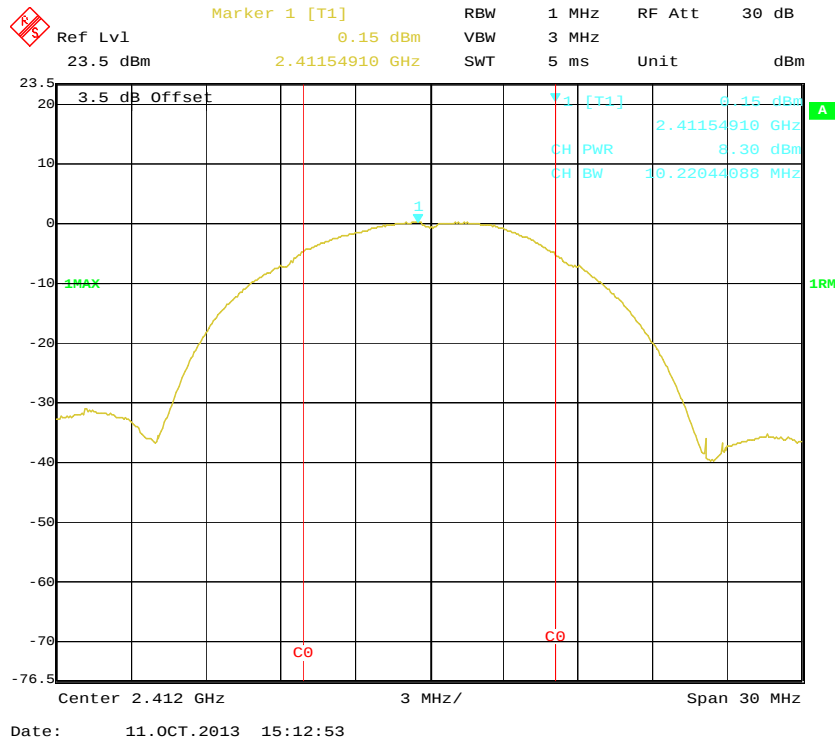


802.11b RF Output Power, Middle Channel

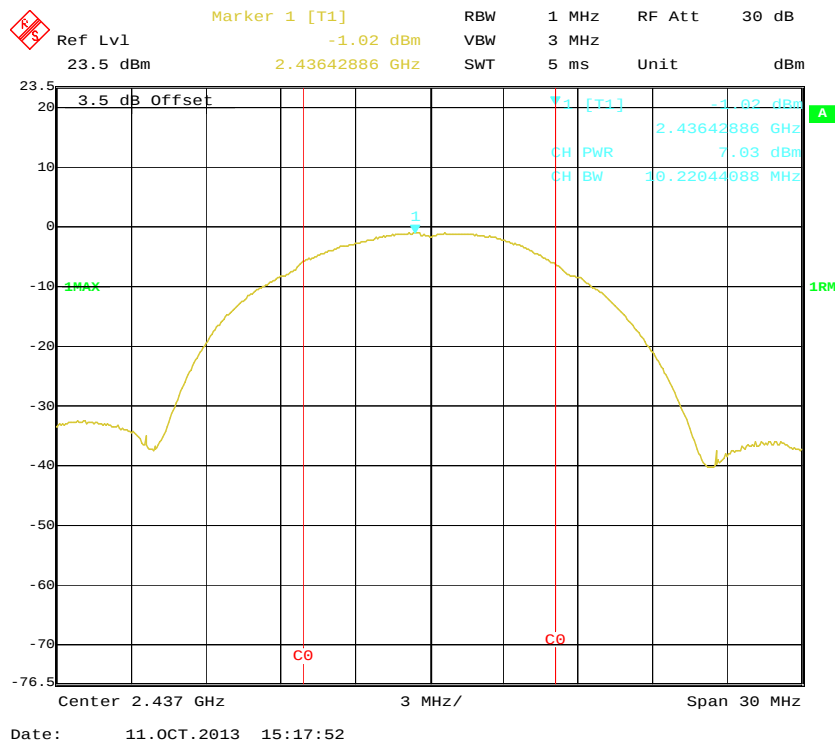


802.11b RF Output Power, High Channel

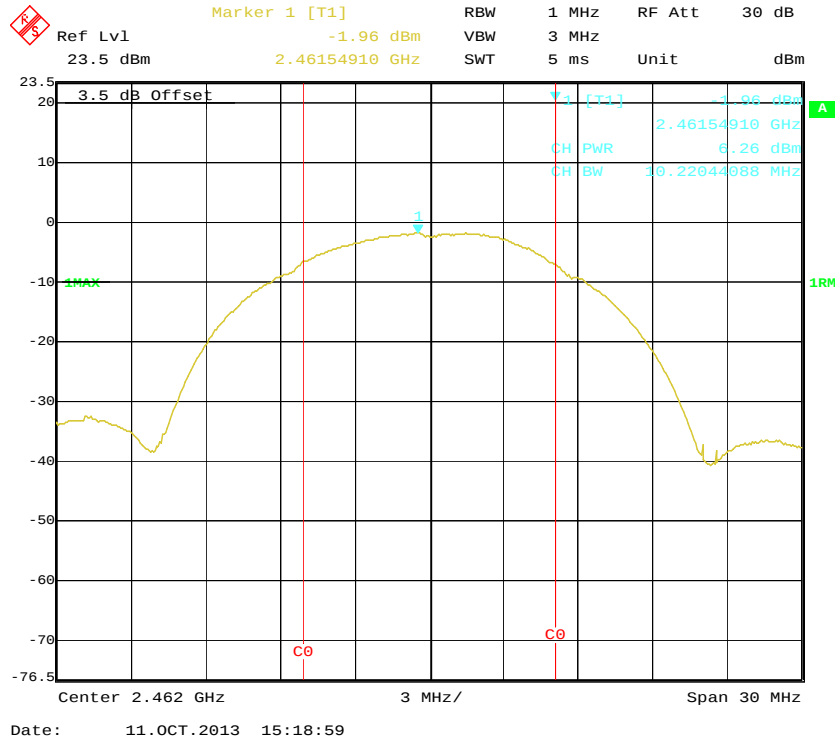


802.11g RF Output Power, Low Channel

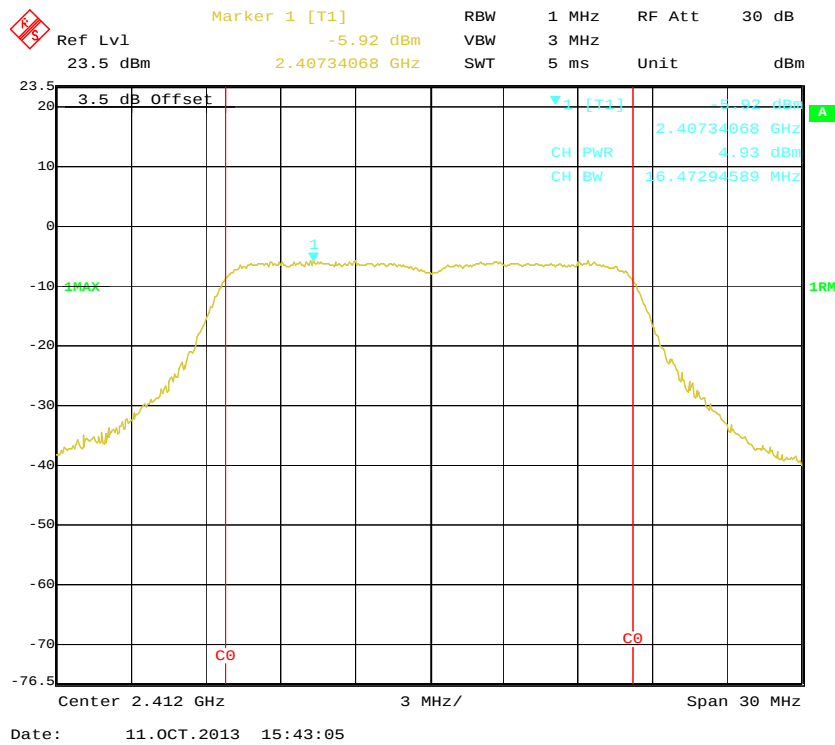


802.11g RF Output Power, Middle Channel

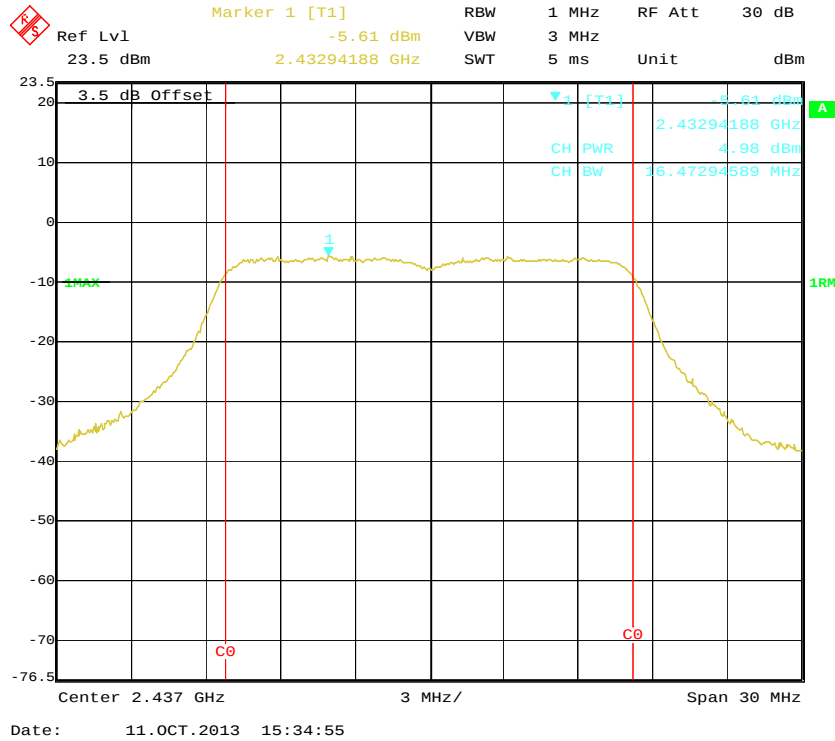


802.11g RF Output Power, High Channel

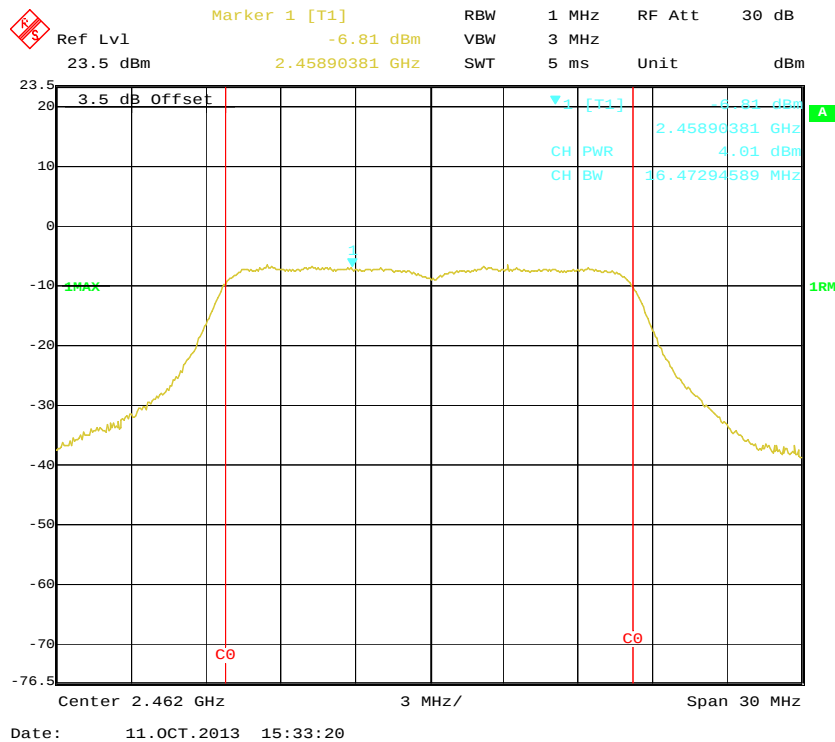


802.11n-HT20 RF Output Power, Low Channel

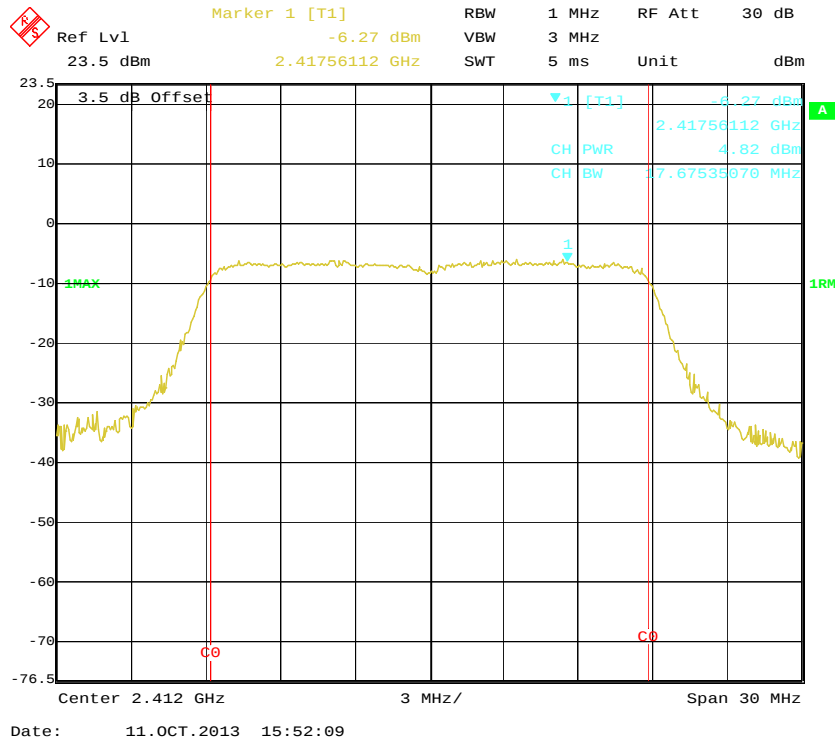


802.11n-HT20 RF Output Power, Middle Channel

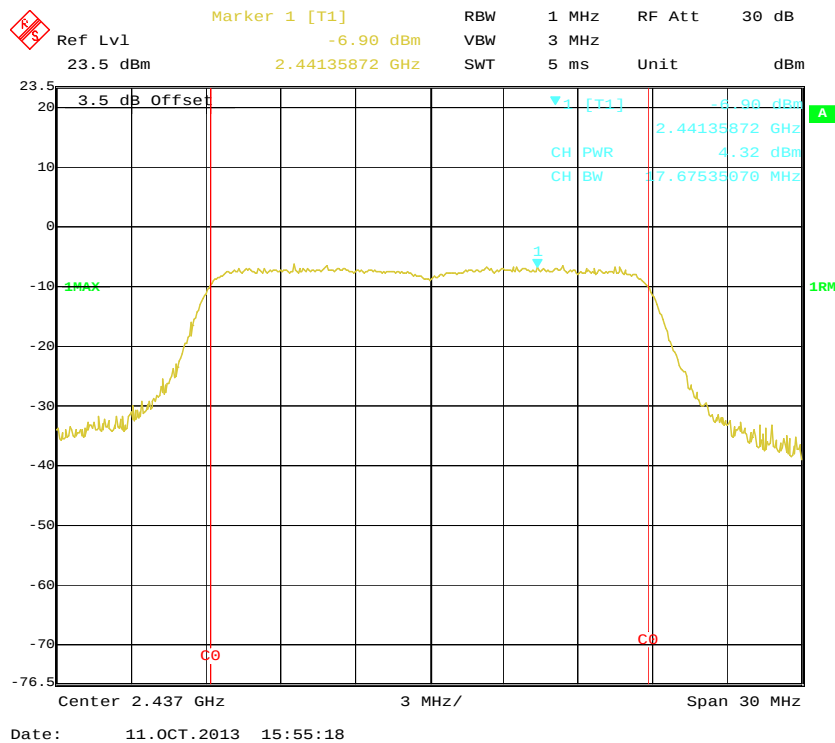


802.11n-HT20 RF Output Power, High Channel

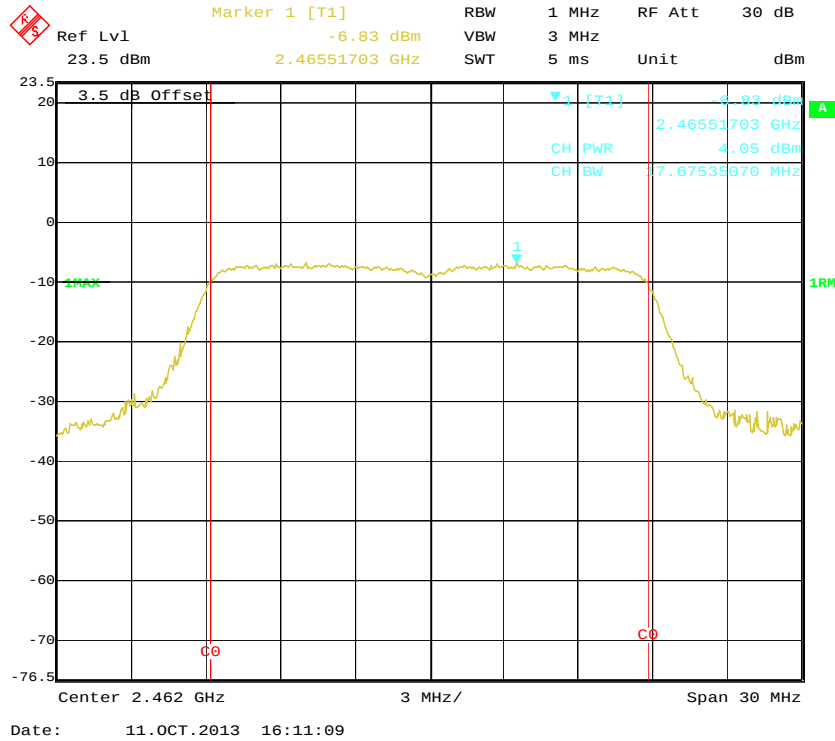


802.11n-HT40 RF Output Power, Low Channel

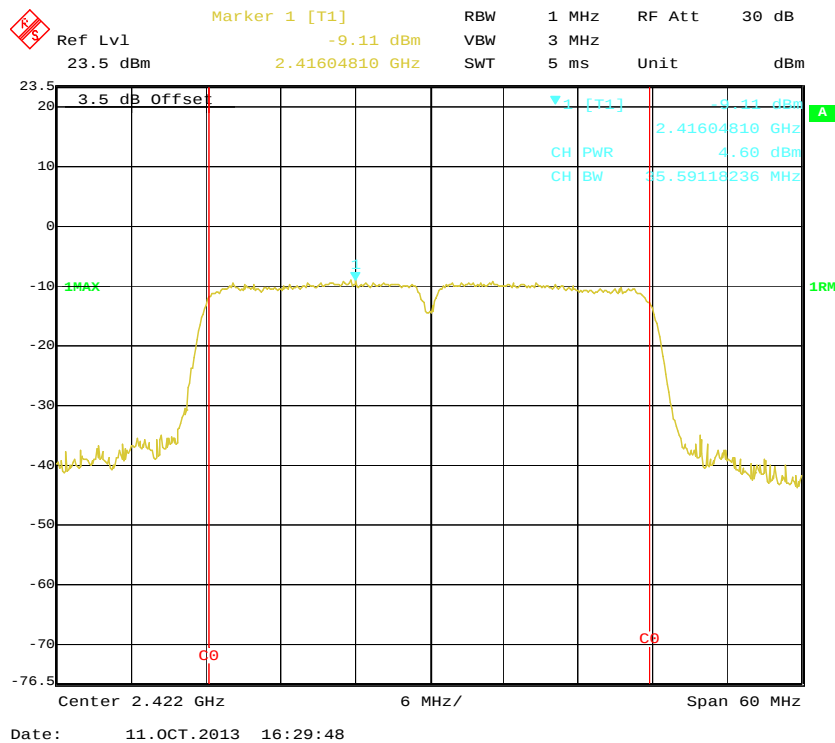

802.11n-HT40 RF Output Power, Middle Channel

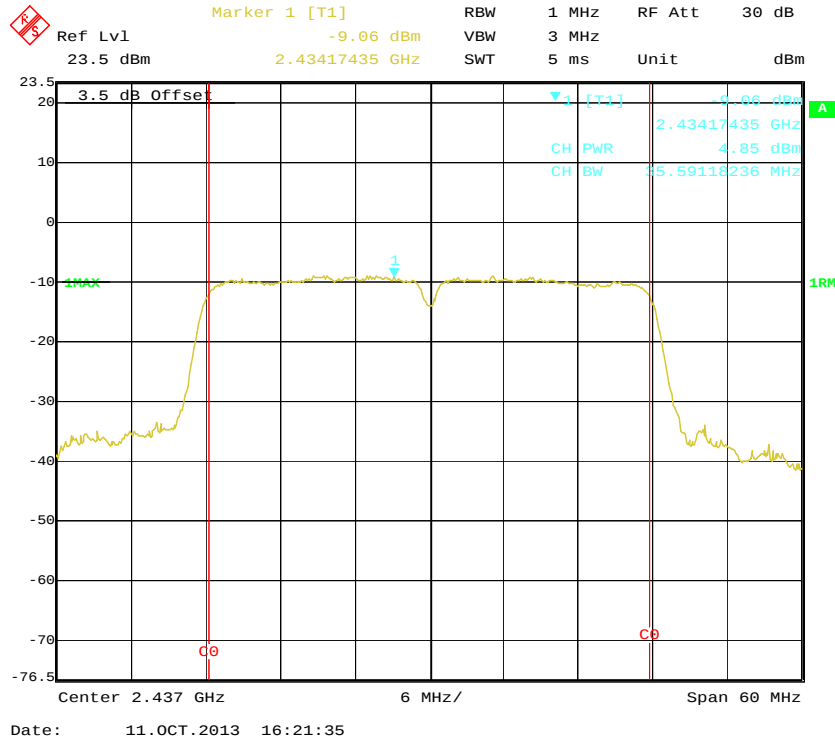

802.11n-HT40 RF Output Power, High Channel

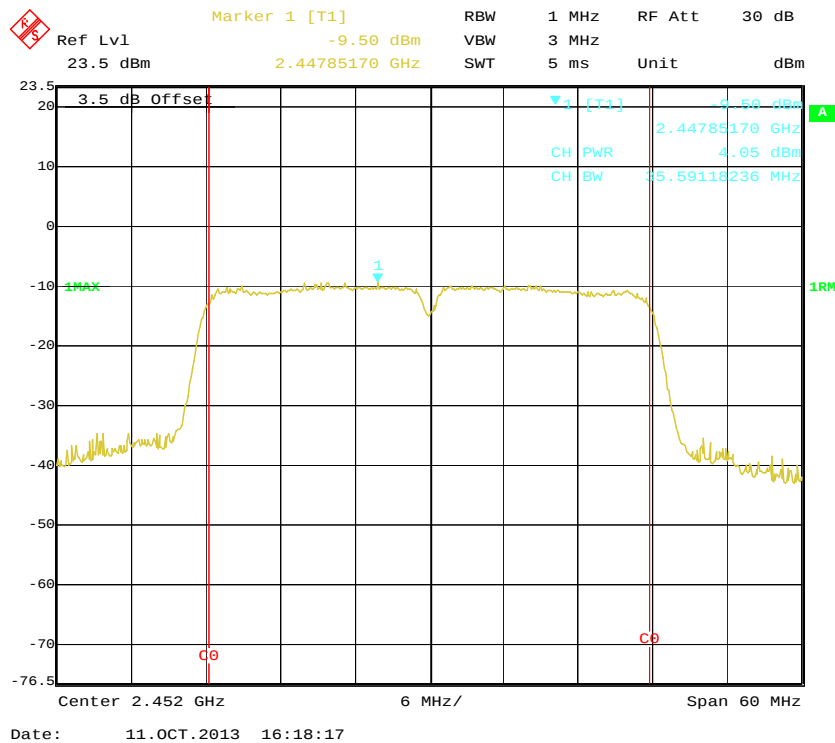


FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	53 %
ATM Pressure:	100.1 kPa


The testing was performed by Rocky Kang on 2013-10-11.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following plots.

Band edge	Delta Peak to band emission (dBc)	Limit (dBc)	Result
802.11b			
Left band	31.76	≥ 20	Pass
Right band	45.83	≥ 20	Pass
802.11g			
Left band	29.74	≥ 20	Pass
Right band	39.75	≥ 20	Pass
802.11n-HT20			
Left band	27.98	≥ 20	Pass
Right band	37.51	≥ 20	Pass
802.11n-HT40			
Left band	28.14	≥ 20	Pass
Right band	32.38	≥ 20	Pass


802.11b Band Edge, Left Side

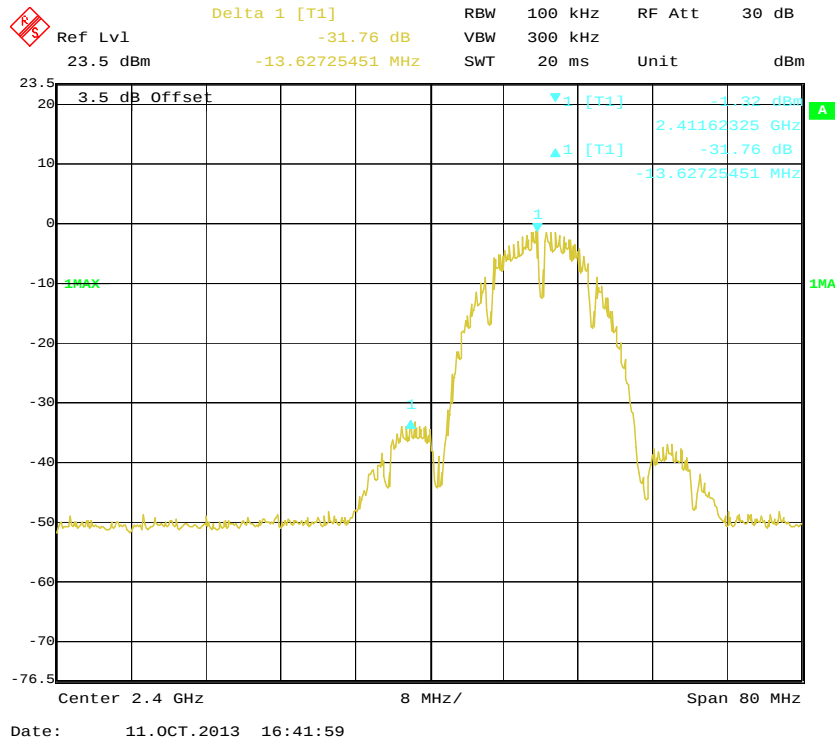


802.11b Band Edge, Right Side

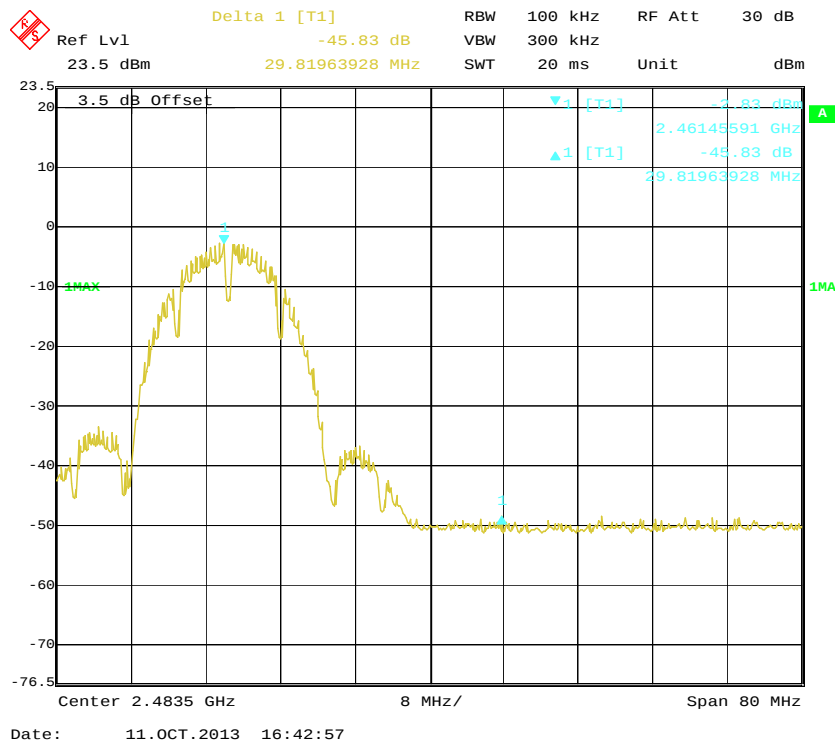


802.11g Band Edge, Left Side

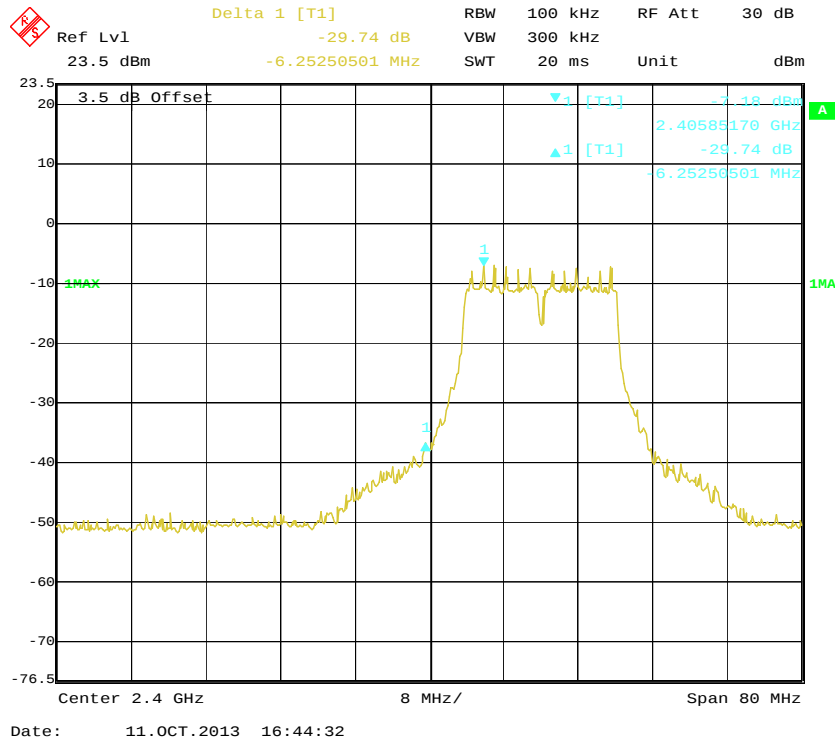


802.11g Band Edge, Right Side

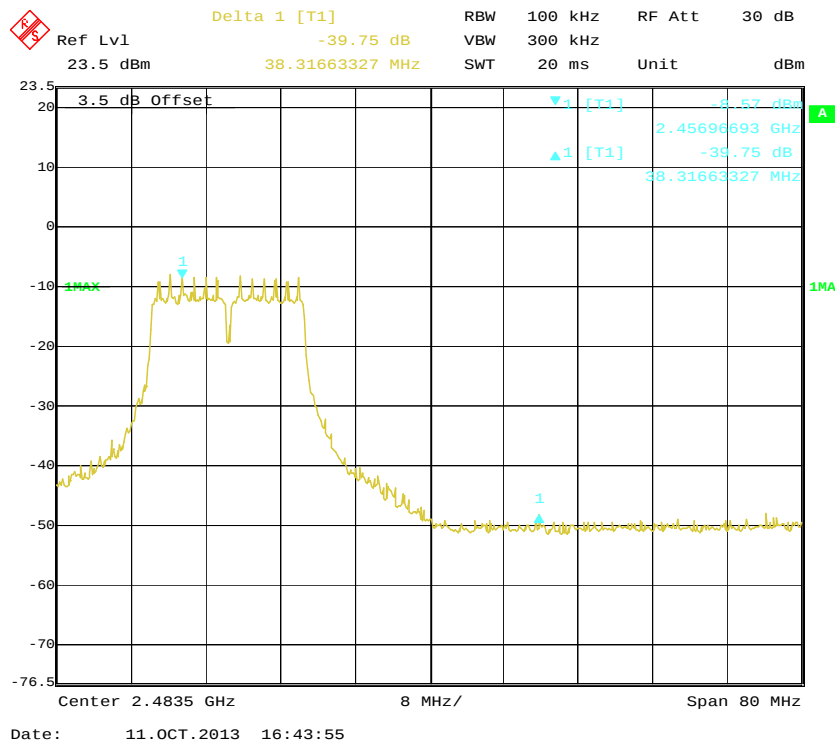


802.11n-HT20 Band Edge, Left Side

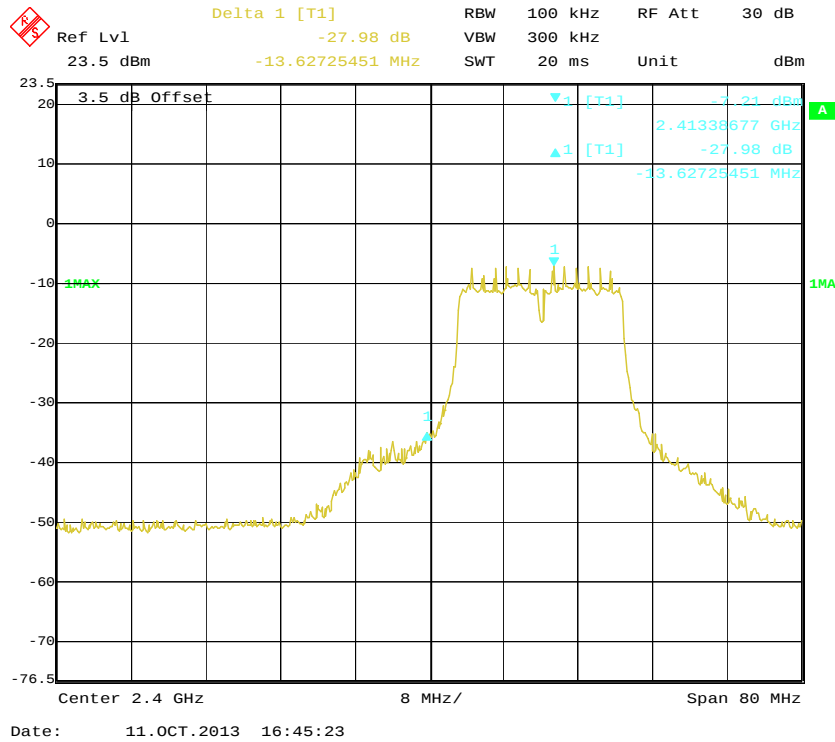


802.11n-HT20 Band Edge, Right Side

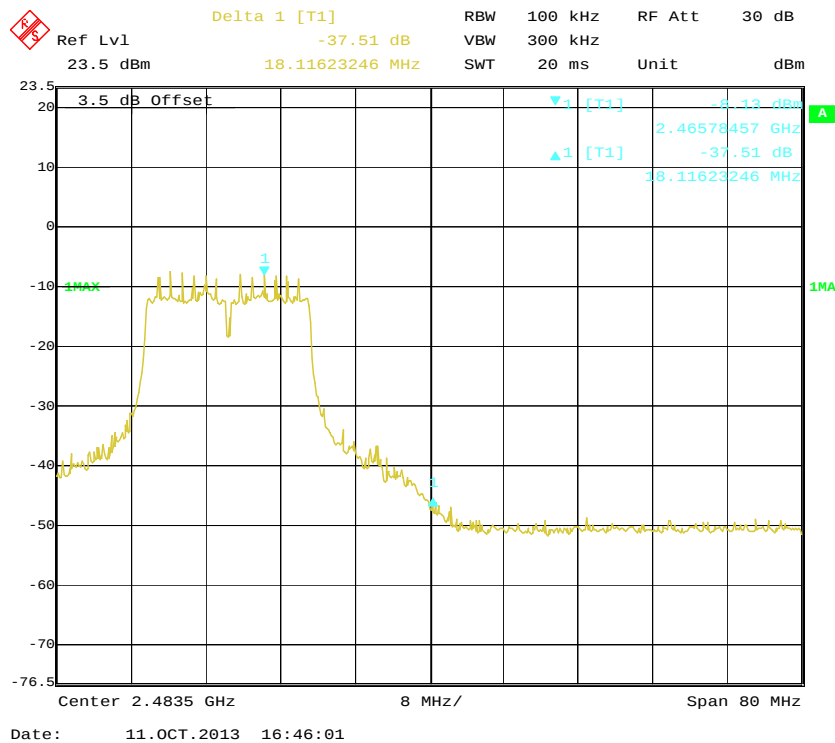

802.11n-HT40 Band Edge, Left Side

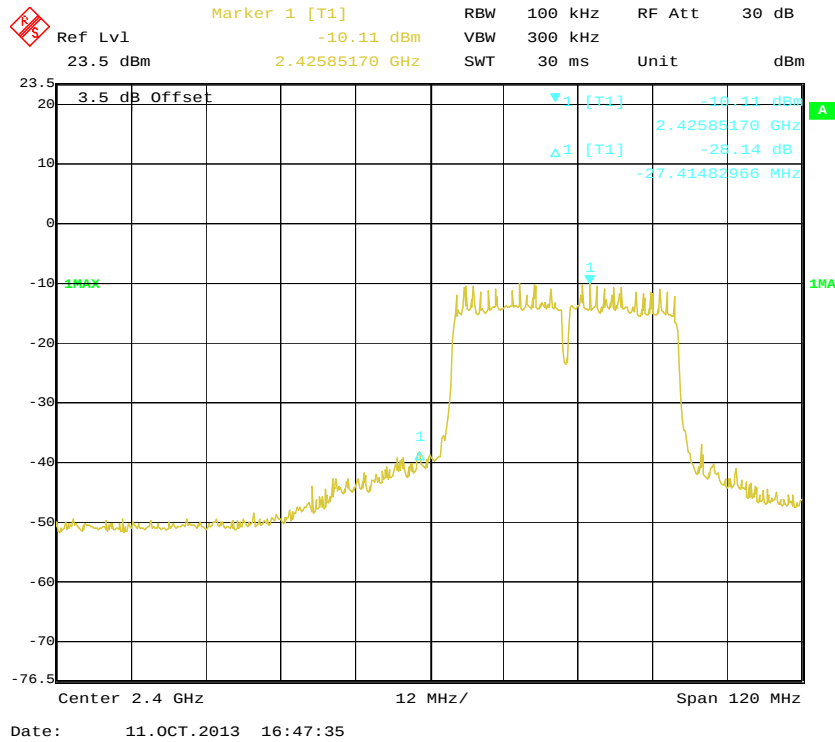

802.11n-HT40 Band Edge, Right Side

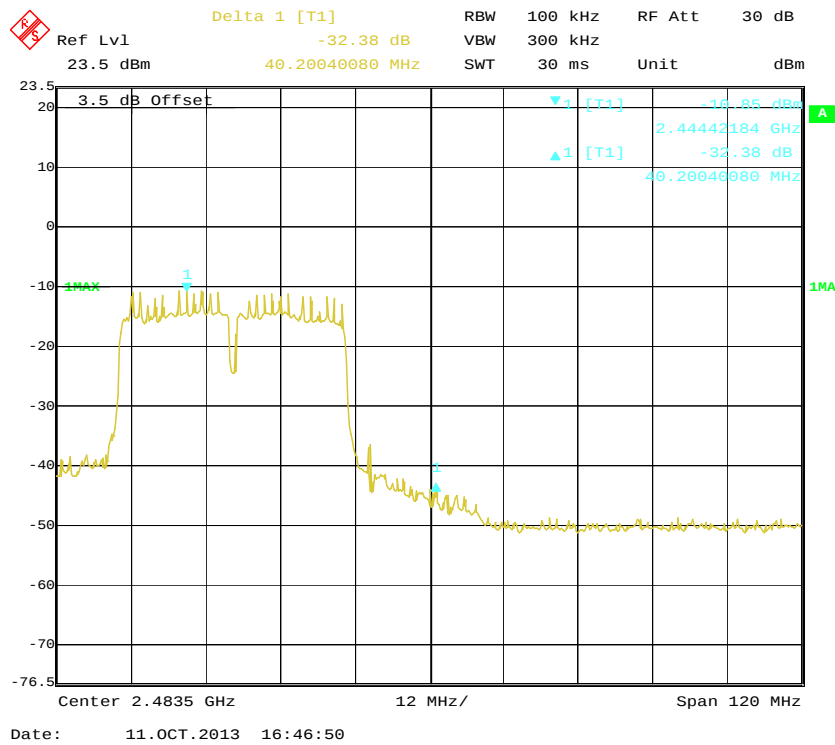

FCC §15.247(e) - POWER SPECTRAL DENSITY


Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW ≥ 3 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measurement value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	100.1 kPa

The testing was performed by Rocky Kang on 2013-10-11.


*EUT operation mode: Transmitting***Test Result:** Pass

Channel	Frequency (MHz)	Data Rate (Mbps)	Correct Power spectral density (dBm/3 kHz)	≤Limit (dBm)
802.11b mode				
Low	2412	1	-17.61	8
Middle	2437	1	-18.65	8
High	2462	1	-19.23	8
802.11g mode				
Low	2412	6	-23.35	8
Middle	2437	6	-24.28	8
High	2462	6	-22.02	8
802.11n-HT20 mode				
Low	2412	MCS0	-22.77	8
Middle	2437	MCS0	-23.08	8
High	2462	MCS0	-24.53	8
802.11n-HT40 mode				
Low	2422	MCS0	-24.99	8
Middle	2437	MCS0	-26.57	8
High	2452	MCS0	-26.58	8


Power Spectral Density, 802.11b Low Channel

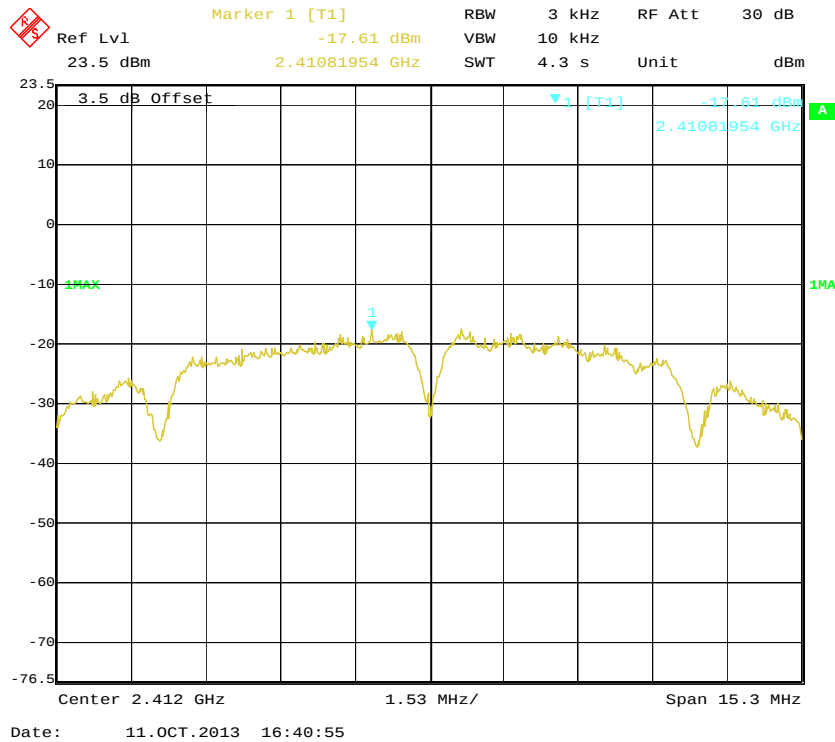


Power Spectral Density, 802.11b Middle Channel

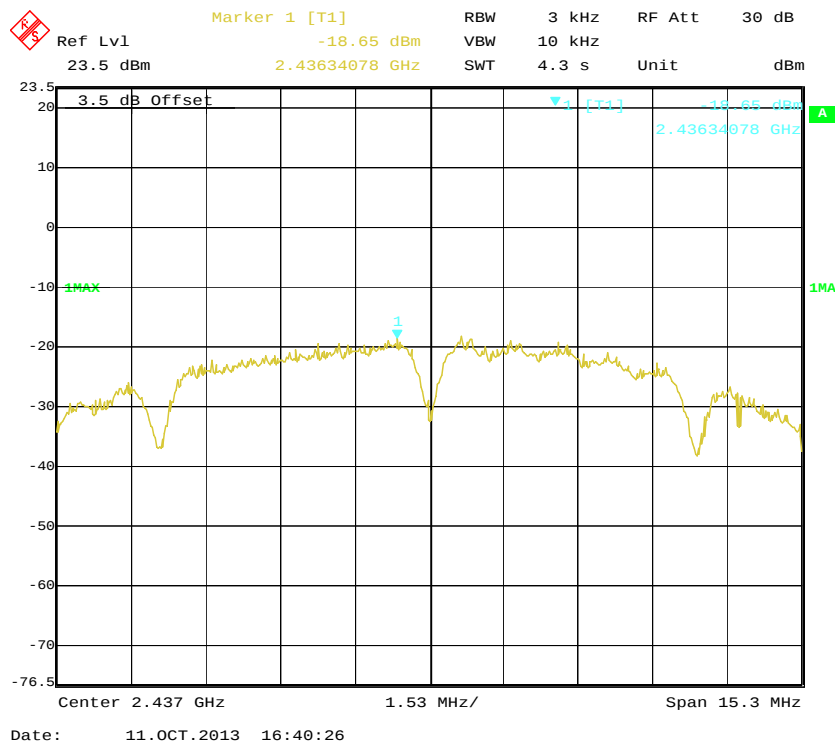


Power Spectral Density, 802.11b High Channel

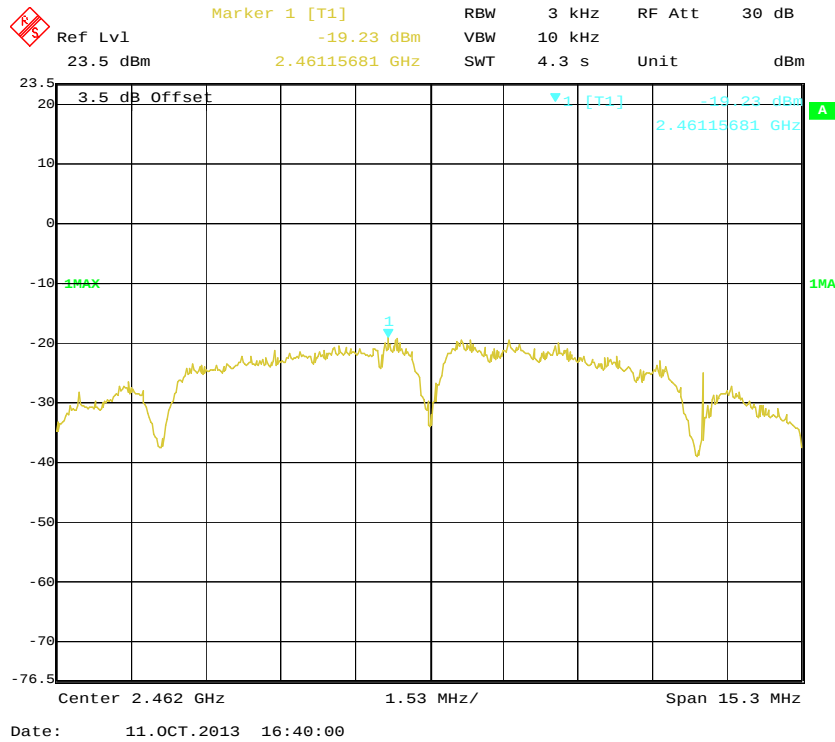


Power Spectral Density, 802.11g Low Channel

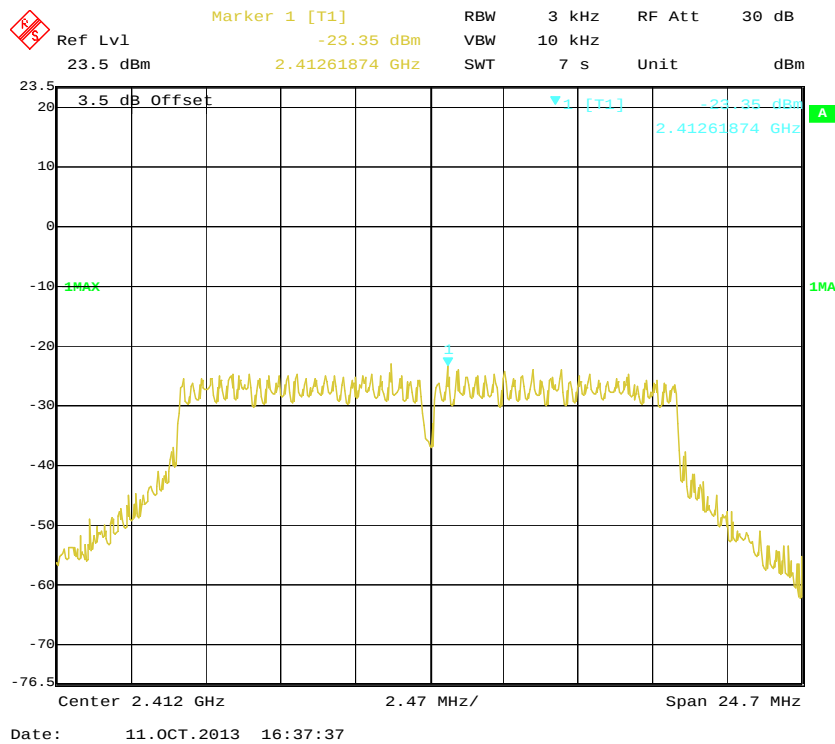


Power Spectral Density, 802.11g Middle Channel

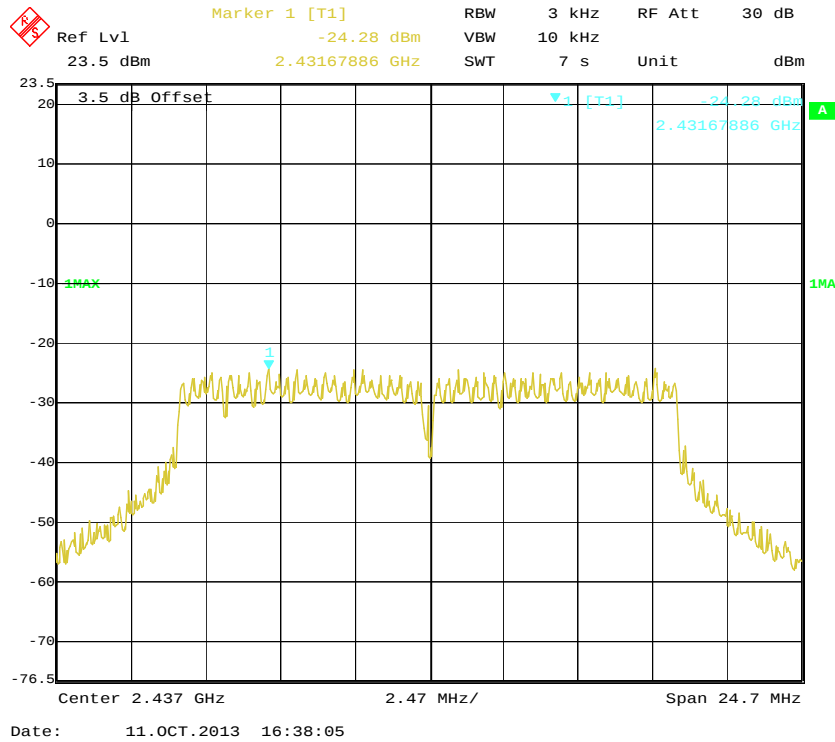


Power Spectral Density, 802.11g High Channel

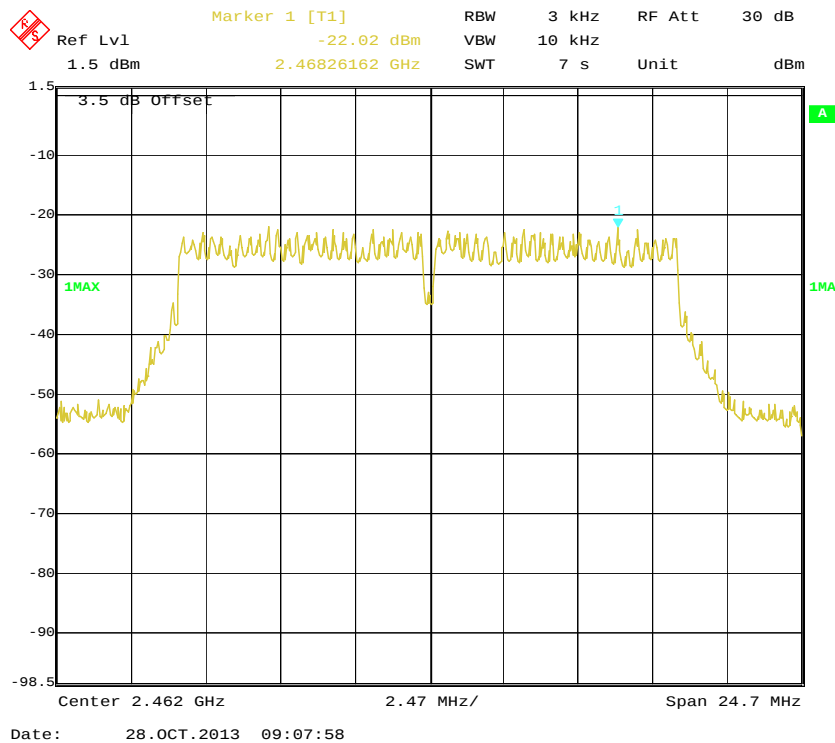


Power Spectral Density, 802.11n-HT20 Low Channel

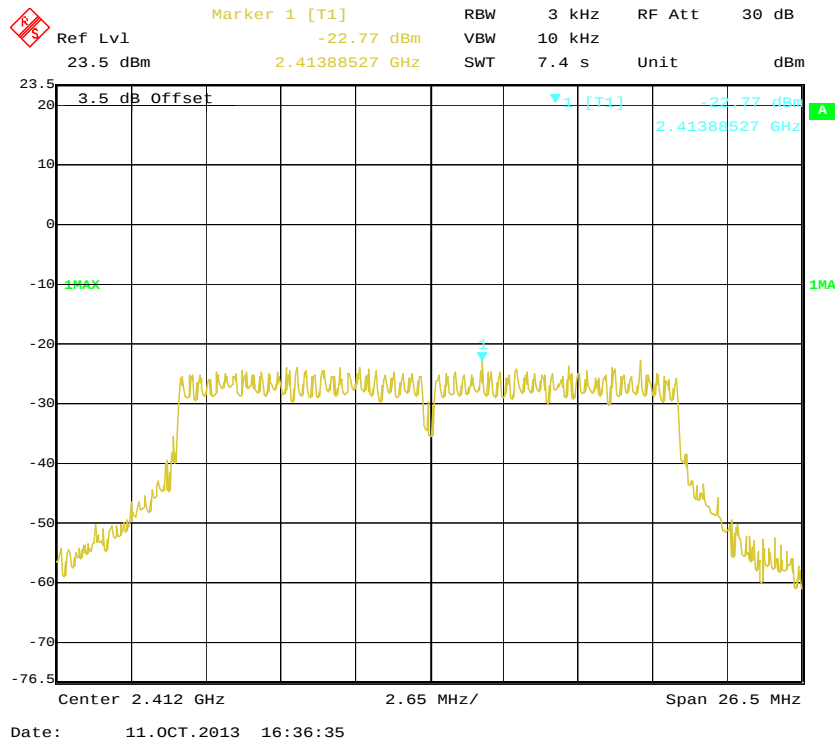


Power Spectral Density, 802.11n-HT20 Middle Channel

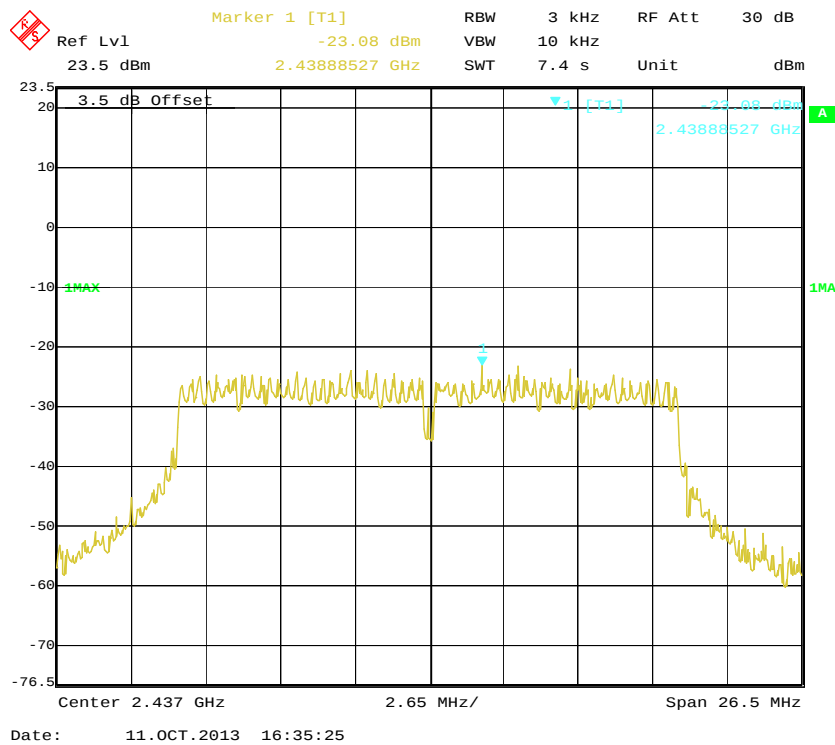


Power Spectral Density, 802.11n-HT20 High Channel

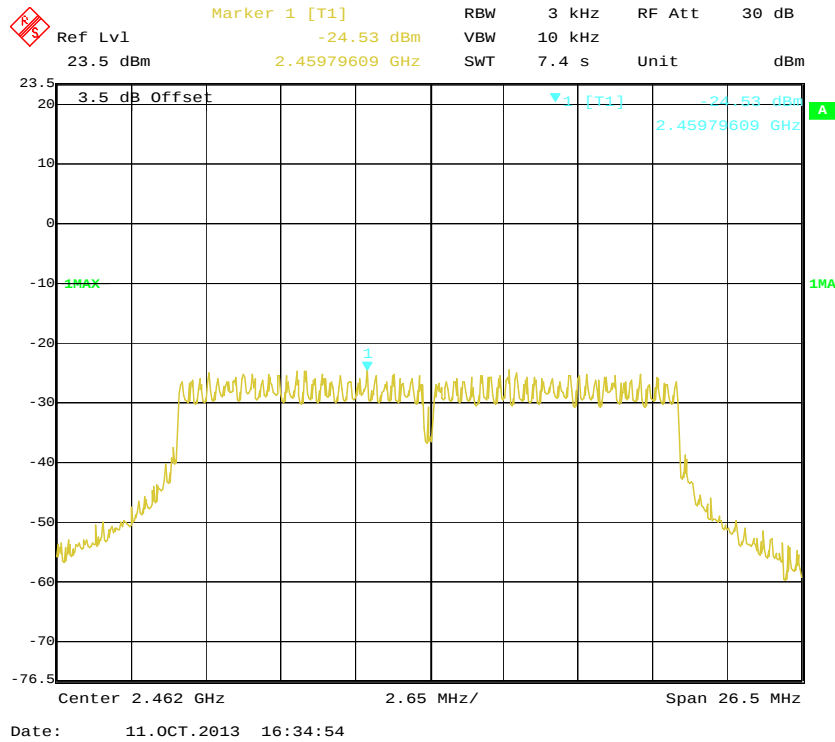


Power Spectral Density, 802.11n-HT40 Low Channel

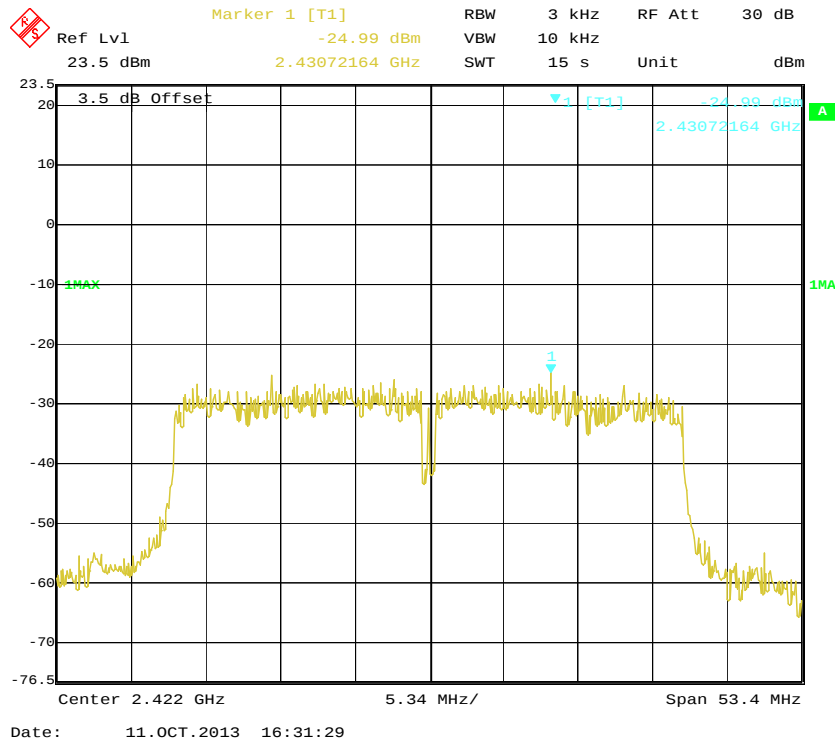

Power Spectral Density, 802.11n-HT40 Middle Channel

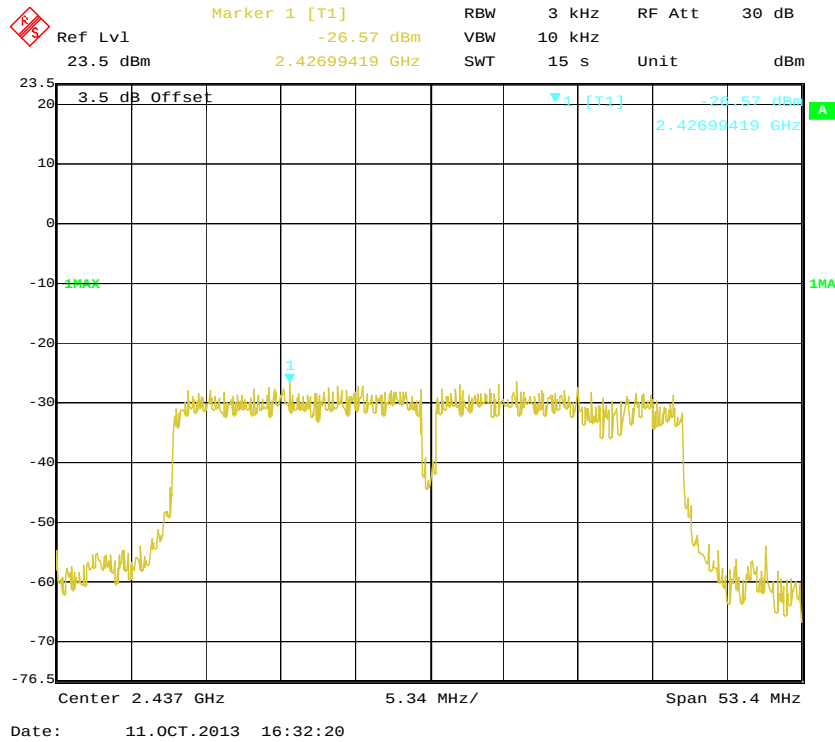

Power Spectral Density, 802.11n-HT40 High Channel

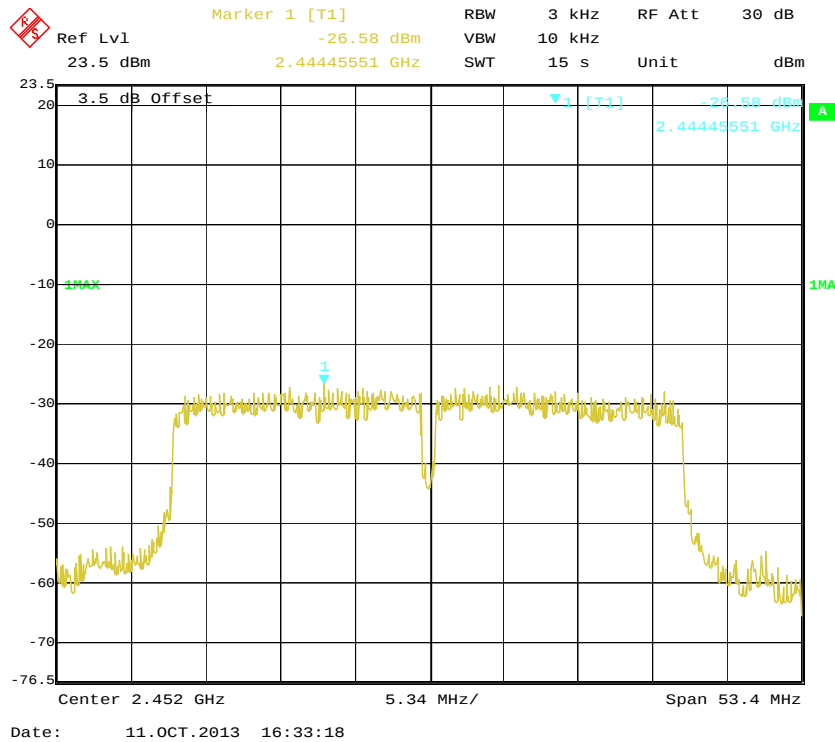

PRODUCT SIMILARITY DECLARATION LETTER

Shenzhen YIDONG Technology Co., Ltd.
Floor 1-5, Building B, Area B, Yuanfen Industrial Zone, Dalang, Bao'an District, Shenzhen, China
Tel: 0755-82507136 Fax: 0755-82507126

Declaration Letter of Product Similarity

To whom it may concern:

We, **Shenzhen YIDONG Technology Co., Ltd.** declared that our product Tablet PC have two models: **PLT8223GX** and **EMR2884**, FCC ID.: **LU7-PLT8223GX**, they were identical inside, since the electrical circuit design, layout, components used and internal wiring were identical for the above items, with only difference being the **printing&shell color**.

PLT8223GX was tested by BACL.

Sincerely yours

Signature:

Li, Guoquan

Guoquan Li
Project Manager
2013-9-28

*******END OF REPORT*******