

# EMC TEST REPORT

**Report No.** : TS11020010-EME

**Model No.** : Go Wi-Fi! P322

**Issued Date** : Jul. 28, 2011

**Applicant:** **Socket Mobile, Inc.**  
39700 Eureka Drive, Newark, CA 94560, USA

**Test Method/ Standard:** **CFR 47 FCC Part 15.247 & ANSI C63.4 2003**

**Test By:** **Intertek Testing Services Taiwan Ltd.**  
No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li,  
Shiang-Shan District, Hsinchu City, Taiwan

It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Intertek Laboratory. The test result(s) in this report only applies to the tested sample(s).

**The test report was prepared by:** **Sign on File**  
Jill Chen / Assistant

**These measurements were taken by:** **Sign on File**  
Terry Hsu / Engineer

**The test report was reviewed by:**

**Name** Jimmy Yang  
**Title** Engineer

## Table of Contents

1. Summary of Test Data.....	3
2. General Information .....	4
3. Maximum 6 dB Bandwidth .....	7
4. 99 % Occupied Bandwidth .....	11
5. Maximum Output Power.....	16
6. Power Spectral Density.....	18
7. RF Antenna Conducted Spurious.....	26
8. Radiated Spurious Emission .....	36
9. Emission on Band Edge.....	42
Appendix A: Test Equipment List.....	53

## 1. Summary of Test Data

Test/Requirement Description	Applicable Rule	Result
Minimum 6 dB Bandwidth	15.247(a)(2)	Pass
Maximum Output Power	15.247(b)	Pass
Power Spectral Density	15.247(e)	Pass
RF Antenna Conducted Spurious	15.247(d)	Pass
Radiated Spurious Emission	15.247(d), 15.205, 15.209	Pass
Emission on the Band Edge	15.247(d)	Pass
AC Power Line Conducted Emission	15.207	Pass

## 2. General Information

### Identification of the EUT

Product: 802.11a/b/g SDIO Card  
Model No.: Go Wi-Fi! P322  
FCC ID.: LUB-P322SDIO  
Frequency Range: 2412 MHz ~ 2462 MHz for 802.11b, 802.11g  
Channel Number: 11 channels for 2412 MHz ~ 2462 MHz  
Rated Power: DC 3.3 V  
Power Cord: N/A  
Data Cable: N/A  
Sample Received: Feb. 01, 2011  
Test Date(s): Apr. 01, 2011 ~ Jul. 28, 2011  
Note 1: This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.  
Note 2: When determining the test conclusion, the Measurement Uncertainty of test has been considered.

**Description of EUT**

The EUT is an 802.11a/b/g SDIO Card, and was defined as information technology equipment.

For more detail features, please refer to User's manual as file name "Installation guide.pdf"

**Antenna description**

The EUT uses a permanently connected antenna.

Antenna Gain : -1.5 dBi  
Antenna Type : Printed PCB internal antenna  
Connector Type : N/A

**Peripherals equipment**

Peripherals	Brand	Model No.	Serial No.	Description of Data Cable
PC	DELL	GX-520	8WJK1S	N/A
Monitor	BenQ	FP556MS	N/A	N/A
Keyboard	Logitech	Y-BF37	MCT32000524	N/A
Mouse	IBM	M-SAU-IBM6	23-070576	N/A
Printer	HP	DeskJet 400	TH86I1K30S	N/A
Modem	Dynalink	V1456VQE	00V230A00116311	N/A
PCI Card	N/A	M01-SDADT-X20	N/A	N/A

**Operation mode**

The EUT was supplied with 3.3 Vdc from PCI Card (Test voltage: 120Vac, 60Hz).

The EUT was inserted into the PCI Card installed on the PC, and it was run in TX mode that was controlled by “art” program. The EUT was transmitted continuously during the test.

The EUT channel range is from channel 1 to channel 11. These testing channels have channel 1 (2412 MHz), channel 6 (2437 MHz) and channel 11 (2462 MHz). The final tests were executed under these conditions recorded in this report individually. Please refer the details below:

802.11b channel 6	
Data rate (Mbps)	PK(dBm)
1	18.11
2	18.06
5.5	18.03
11	18.02

802.11g channel 6	
Data rate (Mbps)	PK(dBm)
6	20.39
9	20.36
12	20.33
18	20.31
24	20.30
36	20.29
48	20.26
54	20.25

### 3. Maximum 6 dB Bandwidth

<b>Name of Test</b>	Maximum 6 dB Bandwidth
<b>Base Standard</b>	FCC 15.247 (a)(2)


**Test Result:** Complies

**Measurement Data:** See Table & plots below

#### Method of Measurement:

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

#### Test Diagram:

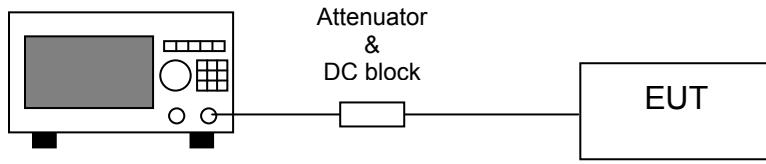


Spectrum Analyzer

**Note:** The EUT was tested while in a continuous transmit mode and the worst case data rates are 1 Mbps data rate for 802.11b mode, 6 Mbps data rate for 802.11g mode. The EUT was tuned to a low, middle and high channel.


**Table 1 Maximum 6 dB Bandwidth**

Mode	Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (MHz)	Pass/Fail
			ant A		
802.11b	1	2412	10.200	0.5	Pass
	6	2437	10.200	0.5	Pass
	11	2462	10.200	0.5	Pass
802.11g	1	2412	16.455	0.5	Pass
	6	2437	16.455	0.5	Pass
	11	2462	16.455	0.5	Pass


## 6 dB Bandwidth @ 802.11b mode channel 1

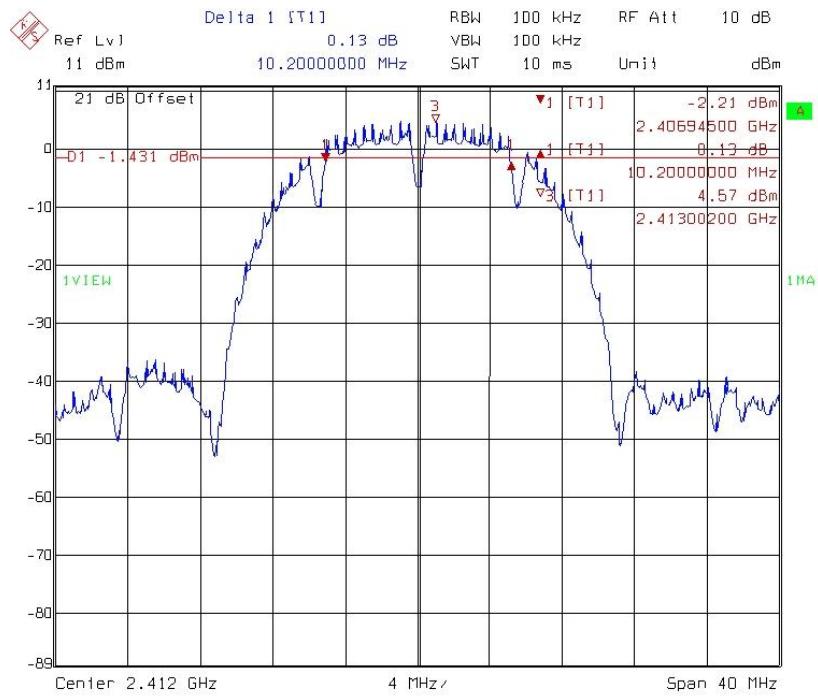

## 6 dB Bandwidth @ 802.11b mode channel 6

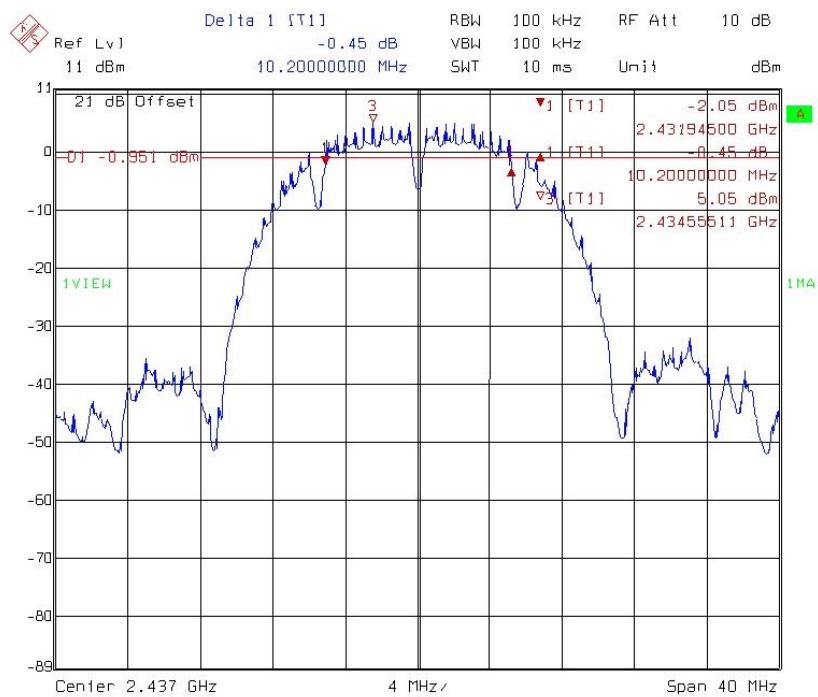


## 6 dB Bandwidth @ 802.11b mode channel 11

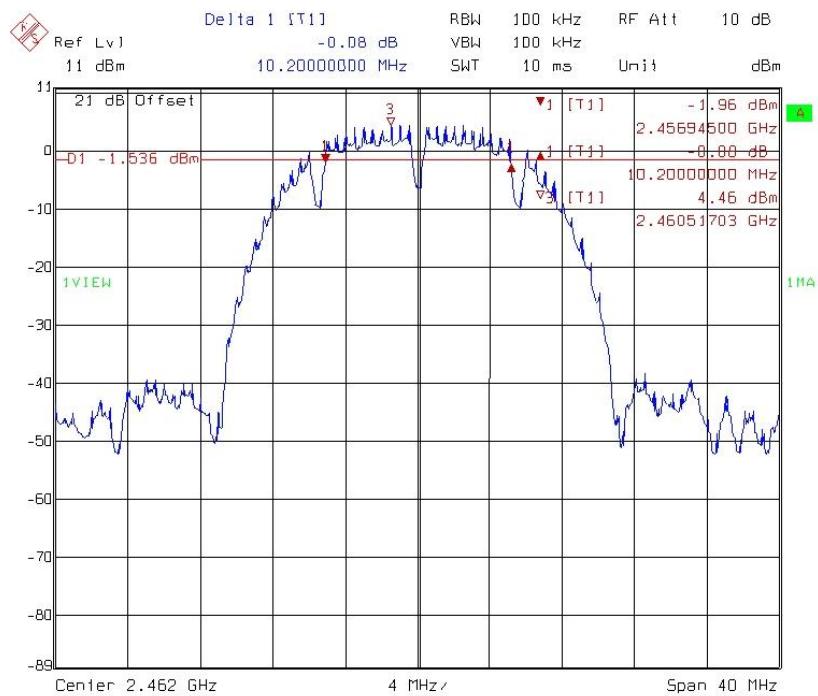


Title: 6dB Occupied Bandwidth, TS11020010-EME  
Comment A: 11b 2462 ch11 Chain0  
Date: 18.APR.2011 17:51:36

## 6 dB Bandwidth @ 802.11g mode channel 1

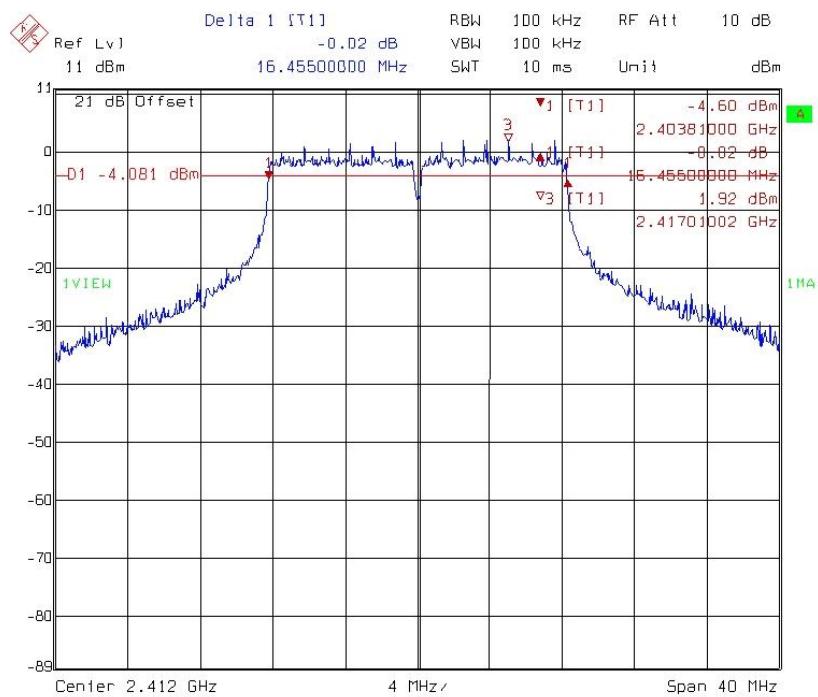


Title: 6dB Occupied Bandwidth, TS11020010-EME  
Comment A: 11g 2412 ch1 Chain0  
Date: 18.APR.2011 17:48:27

## 6 dB Bandwidth @ 802.11g mode channel 6

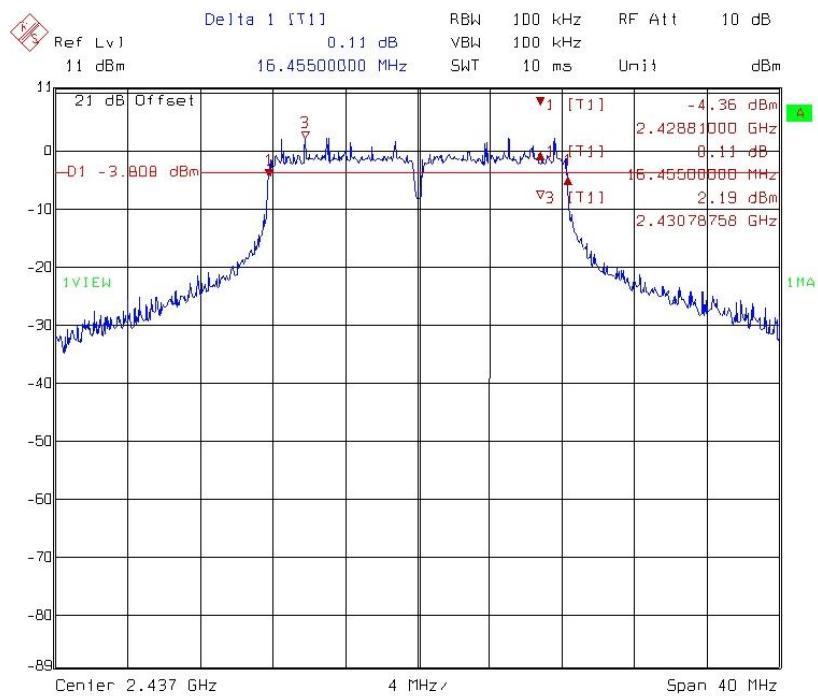

## 6 dB Bandwidth @ 802.11g mode channel 11

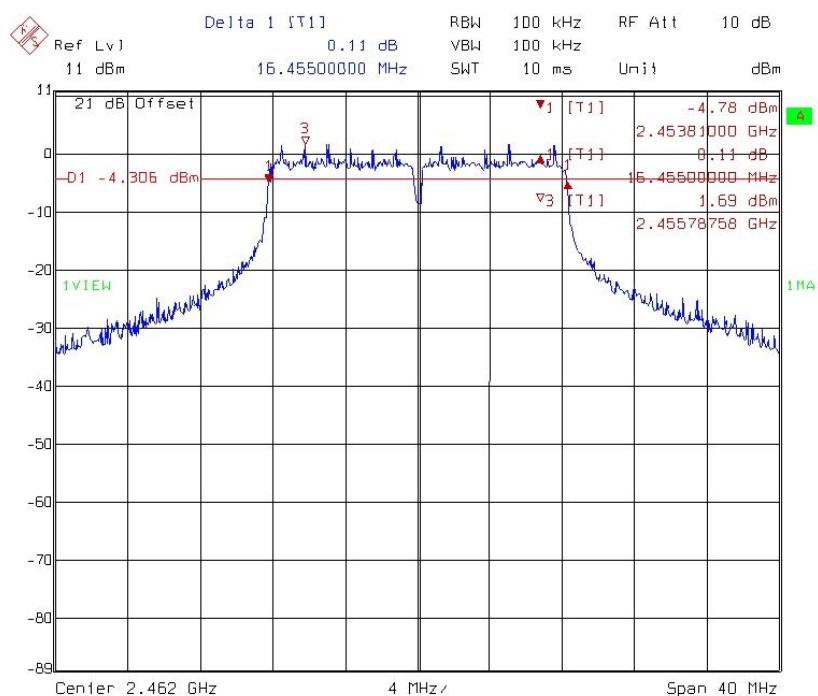

## 4. 99 % Occupied Bandwidth

<b>Name of Test</b>	99 % Occupied Bandwidth
<b>Base Standard</b>	None; for reporting purposes only

**Test Result:** Complies


**Measurement Data:** See Table & plots below

### Method of Measurement:

#### Reference FCC document: KDB558074

A portion of the transmitted signal is coupled to a Spectrum Analyzer with a resolution bandwidth of at least 1 % of the bandwidth of the transmitted signal. The resolution bandwidth is chosen so as not to reduce the peak level of the measured waveform. The appropriate bandwidth mask is applied to the output waveform to verify compliance.

### Test Diagram:

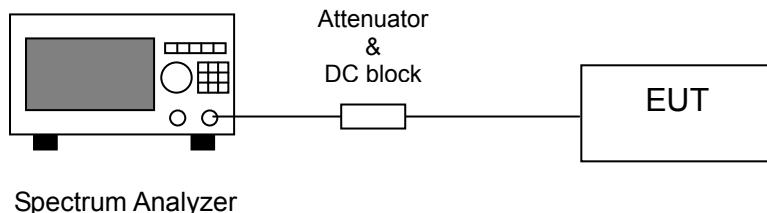


**Note:** The EUT was tested while in a continuous transmit mode and the worst case data rates are 1 Mbps data rate for 802.11b mode, 6 Mbps data rate for 802.11g mode. The EUT was tuned to a low, middle and high channel.

**Table 2 99 % Occupied Bandwidth**


Mode	Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
			ant A
802.11b	1	2412	15.73
	6	2437	15.73
	11	2462	15.83
802.11g	1	2412	17.83
	6	2437	18.73
	11	2462	18.13

## 99 % Occupied Bandwidth @ 802.11b mode channel 1

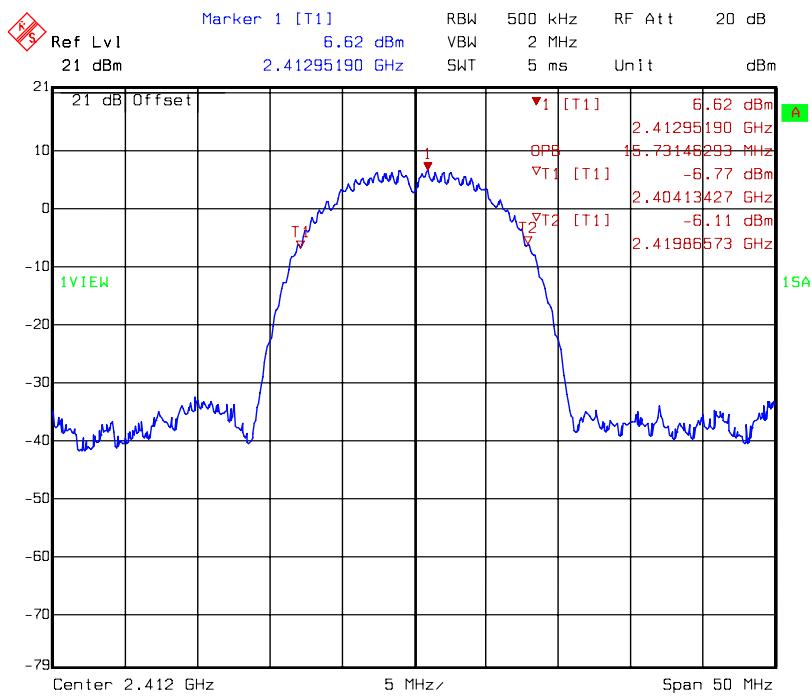


Title: Occupied Band-Width, TS11020010-EME  
Comment A: 11b 2412 ch1 Chain0  
Date: 18.APR.2011 17:53:42

## 99 % Occupied Bandwidth @ 802.11b mode channel 6

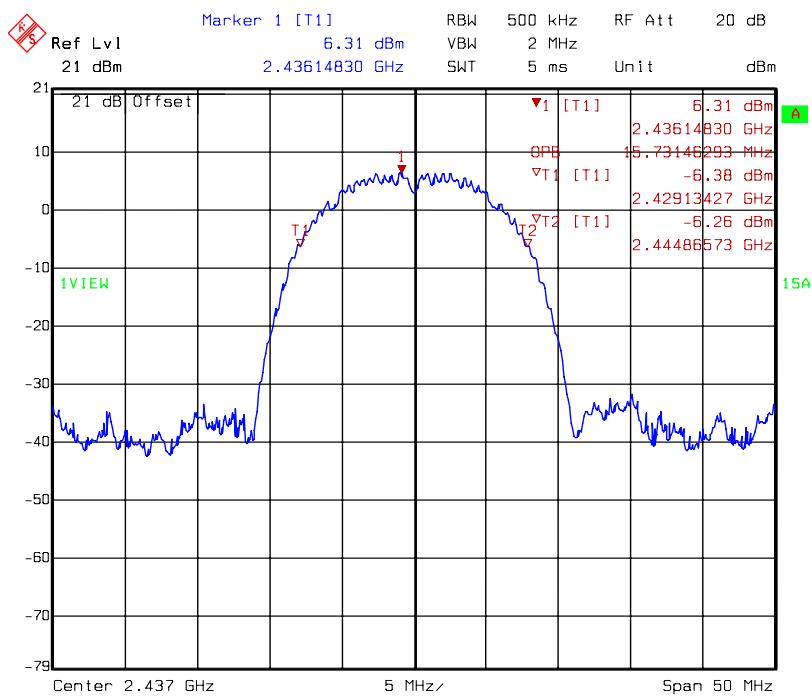


Title: Occupied Band-Width, TS11020010-EME  
Comment A: 11b 2437 ch6 Chain0  
Date: 19.APR.2011 11:54:11

## 99 % Occupied Bandwidth @ 802.11b mode channel 11

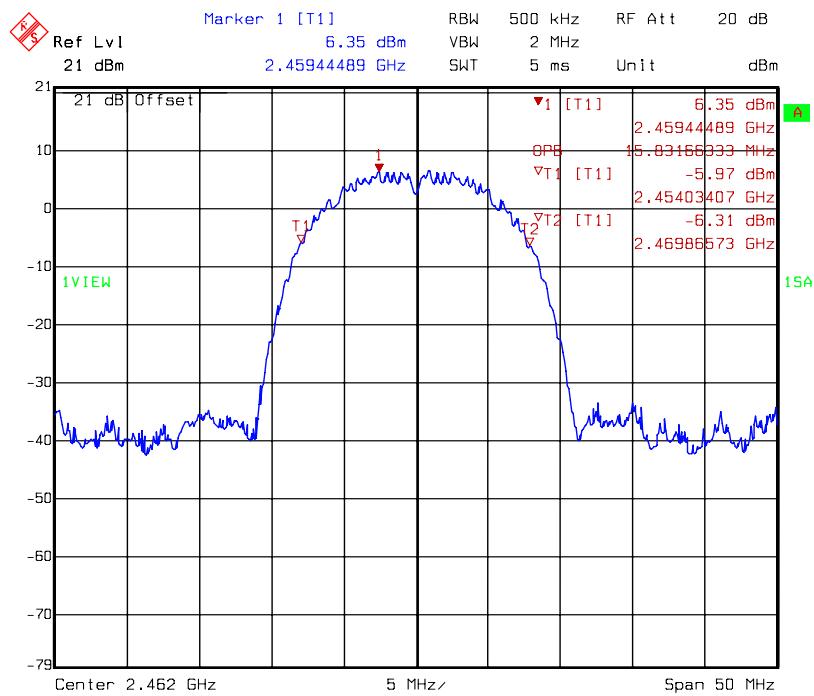


Title: Occupied Band-Width, TS11020010-EME  
Comment A: 11b 2462 ch11 Chain0  
Date: 19.APR.2011 11:55:06

## 99 % Occupied Bandwidth @ 802.11g mode channel 1

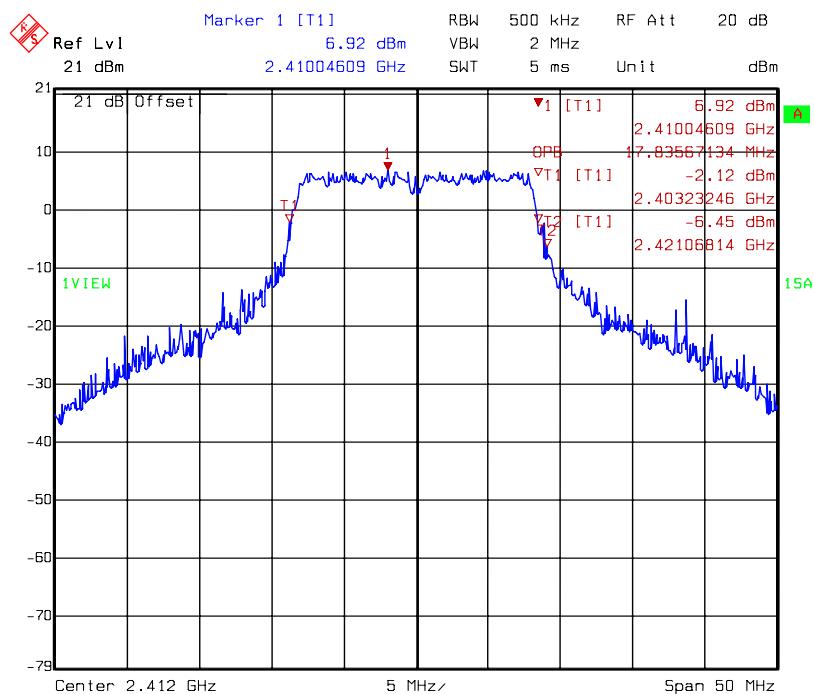


Title: Occupied Band-Width, TS11020010-EME  
Comment A: 11g 2412 ch1 Chain0  
Date: 19.APR.2011 11:57:58

## 99 % Occupied Bandwidth @ 802.11g mode channel 6

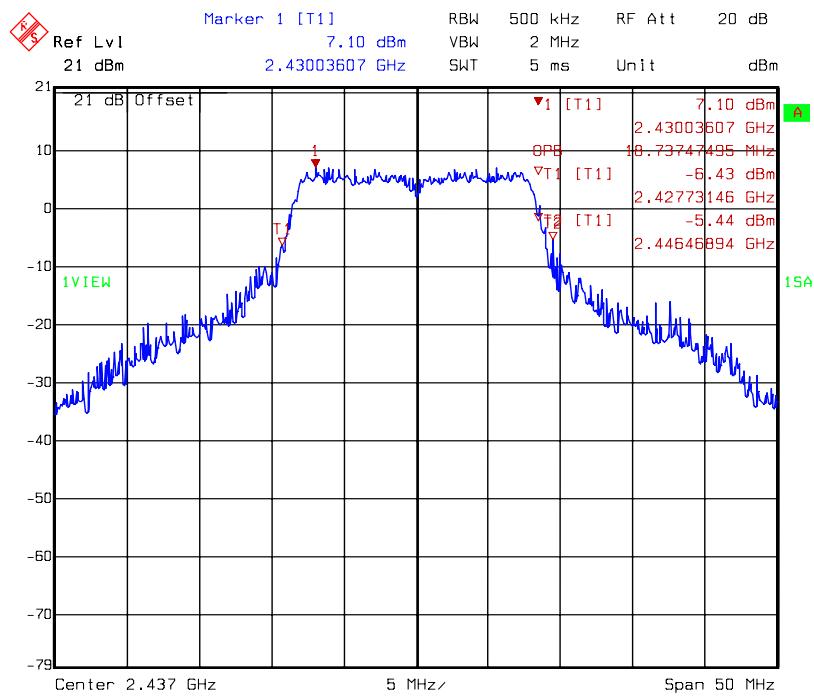

Title: Occupied Band-Width,TS11020010-EME  
Comment A: 11g 2437 ch6 Chain0  
Date: 19.APR.2011 11:59:00

## 99 % Occupied Bandwidth @ 802.11g mode channel 11

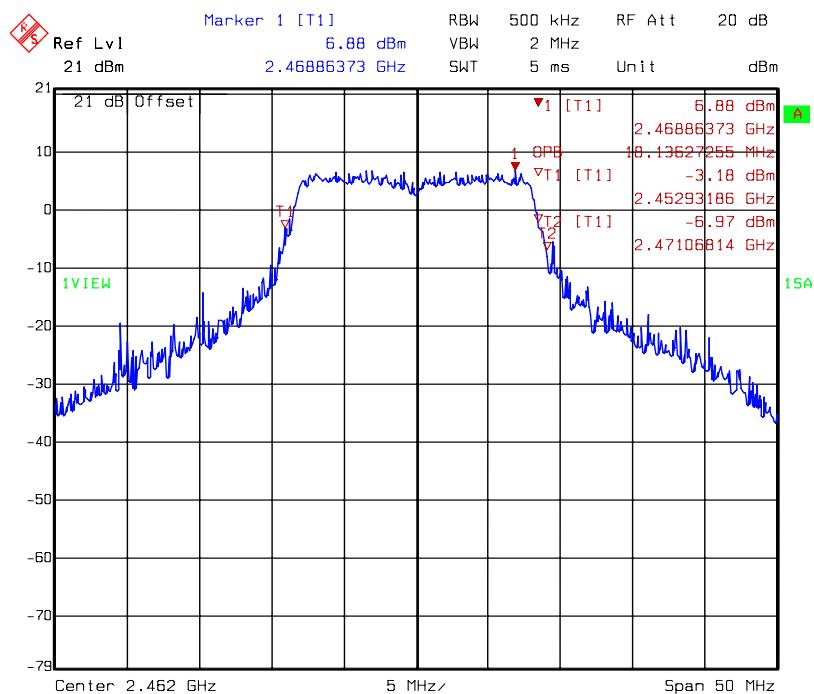

Title: Occupied Band-Width,TS11020010-EME  
Comment A: 11g 2462 ch11 Chain0  
Date: 19.APR.2011 11:59:45

## 5. Maximum Output Power

<b>Name of Test</b>	Maximum output power
<b>Base Standard</b>	FCC 15.247(b)

**Measurement Uncertainty:**  $\pm 0.392$  dB (k=2)

**Test Result:** Complies


**Measurement Data:** See Table below

### Method of Measurement:

#### Reference FCC document: KDB558074

The power output was measured on the EUT using a 50 ohm SMA Cable connected to peak power meter via power sensor. Connect 20 dB attenuator and DC block at the input port of the power sensor. Measure conducted transmit power of at each antenna port ,besides another ports were terminated by 50 ohm and sum these power in linear power units,Power output was measured with the maximum rated input level.

### Test Diagram:

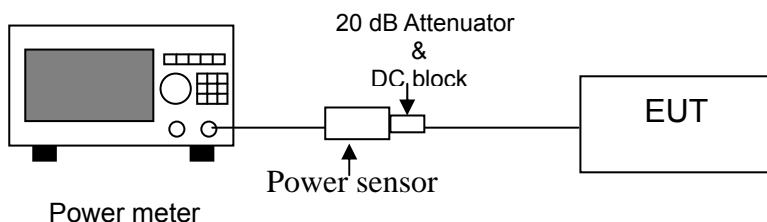

**Note 1:** §15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Note 2:** §15.247 (b) (4) (ii) Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

**Table 3 Maximum output power**

Mode	Channel	Frequency (MHz)	C.L. (dB)	Reading (dBm)	Conducted Peak Output Power		Limit (dBm)
					(dBm)	(mW)	
802.11b	1	2412	1.5	16.45	17.95	62.30	30
	6	2437	1.5	16.61	18.11	64.71	30
	11	2462	1.5	15.36	16.86	48.53	30
802.11g	1	2412	1.5	19.21	20.71	117.76	30
	6	2437	1.5	18.89	20.39	109.39	30
	11	2462	1.5	18.62	20.12	102.80	30

## 6. Power Spectral Density

<b>Name of Test</b>	Power Spectral Density
<b>Base Standard</b>	FCC 15.247(e)

**Test Result:** Complies


**Measurement Data:** See Table & plots below

### Method of Measurement:

#### Reference FCC document: KDB558074

The power spectrum density was measured from the antenna port of the EUT using a 50 ohm spectrum analyzer. Locate and zoom in on emission peak(s) within the passband. Set RBW = 3 kHz, VBW > RBW, sweep = 500s. The peak level measured must be no greater than + 8 dBm. Power spectrum density was read directly and cable loss (1 dB)/external attenuator (20 dB) correction was added to the reading to obtain power at the EUT antenna terminals.


### Test Diagram:

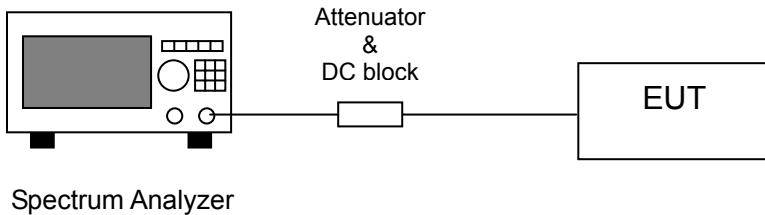

**Table 4 Power Spectral Density**


Mode	Channel	Frequency (MHz)	PSD(dBm)	Limit (dBm)	Margin (dB)
			ant A		
802.11b	1	2412	-7.77	8	-15.77
	6	2437	-7.85	8	-15.85
	11	2462	-7.29	8	-15.29
802.11g	1	2412	-9.42	8	-17.42
	6	2437	-9.26	8	-17.26
	11	2462	-9.60	8	-15.77

## Occupied Frequency Range @ 802.11b mode channel 1

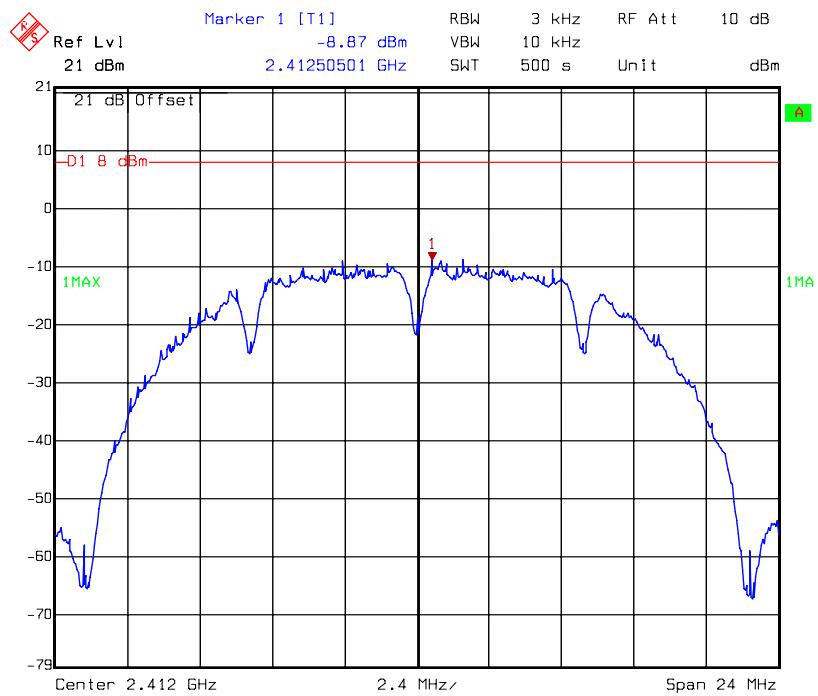


Title: Power Density,  
Comment A: 11b 2412 ch1 Chain0  
Date: 28.JUL.2011 09:41:21

## Power Spectral Density @ 802.11b mode channel 1

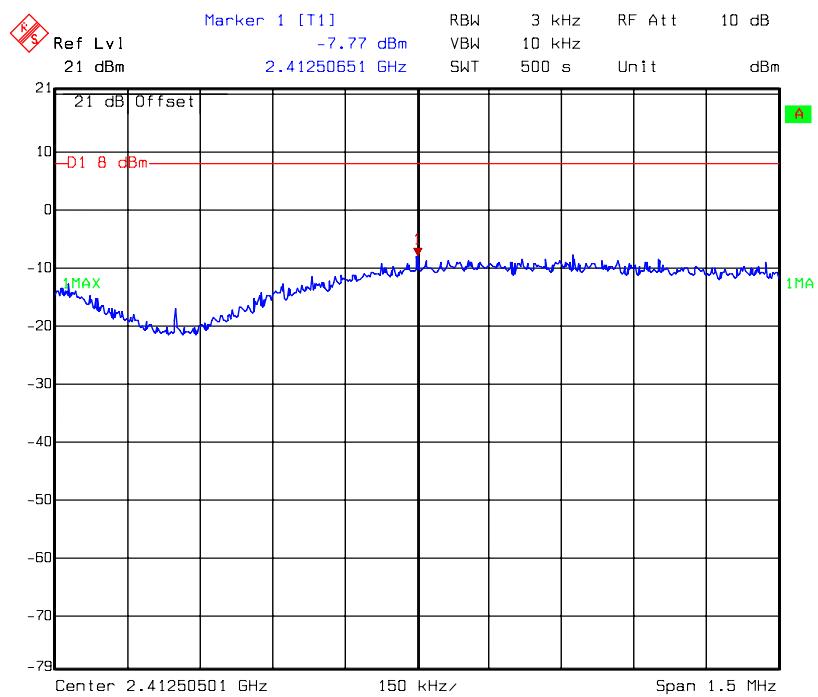


Title: Power Density,  
Comment A: 11b 2412 ch1 Chain0  
Date: 28.JUL.2011 10:18:51


## Occupied Frequency Range @ 802.11b mode channel 6

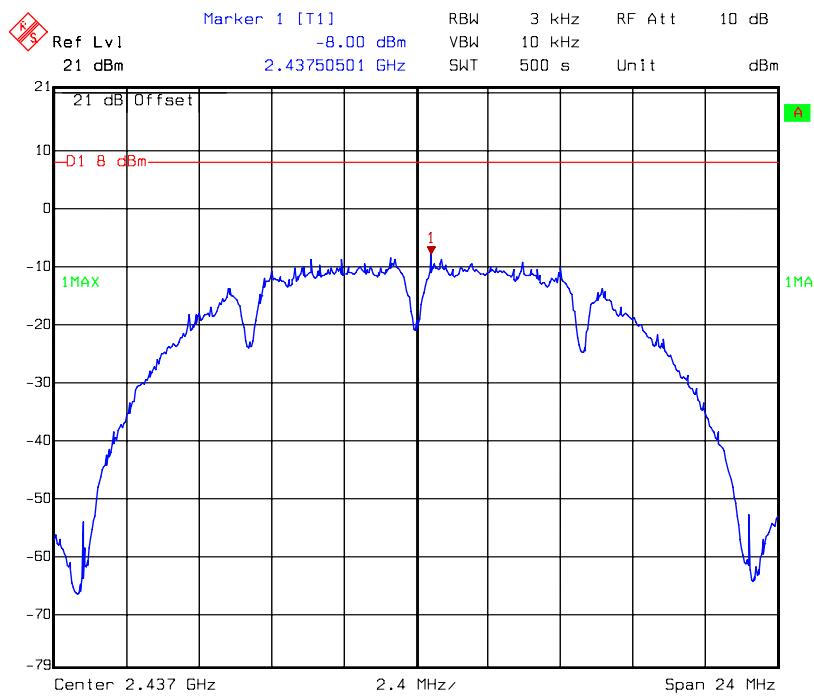

## Power Spectral Density @ 802.11b mode channel 6

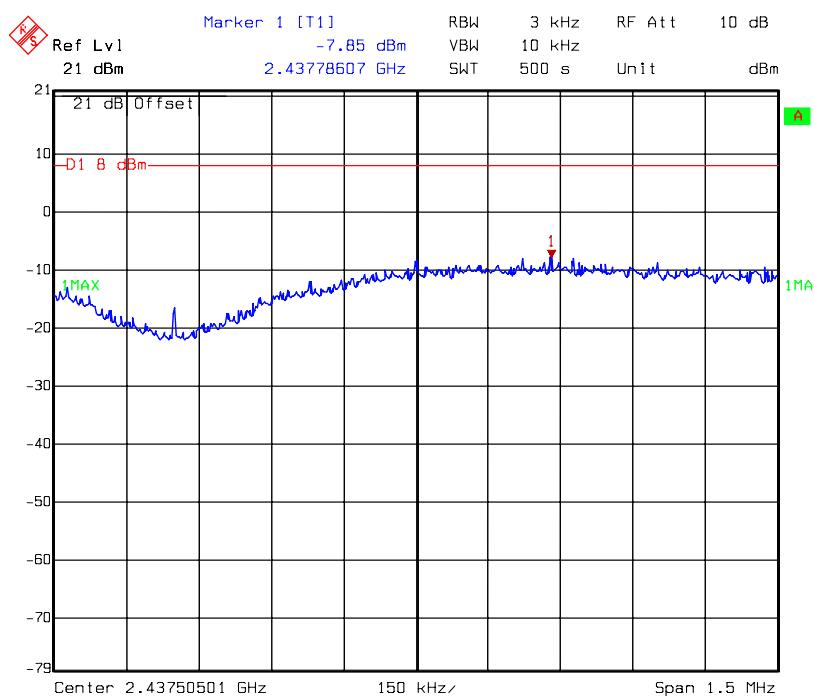


## Occupied Frequency Range @ 802.11b mode channel 11

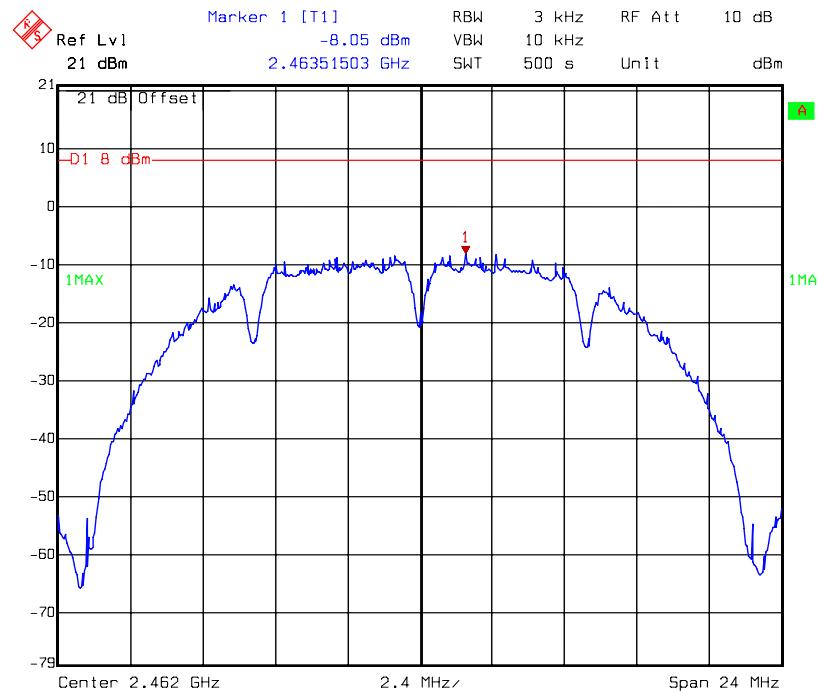


Title: Power Density,  
Comment A: 11b 2462 ch11 Chain0  
Date: 26.JUL.2011 13:33:03

## Power Spectral Density @ 802.11b mode channel 11

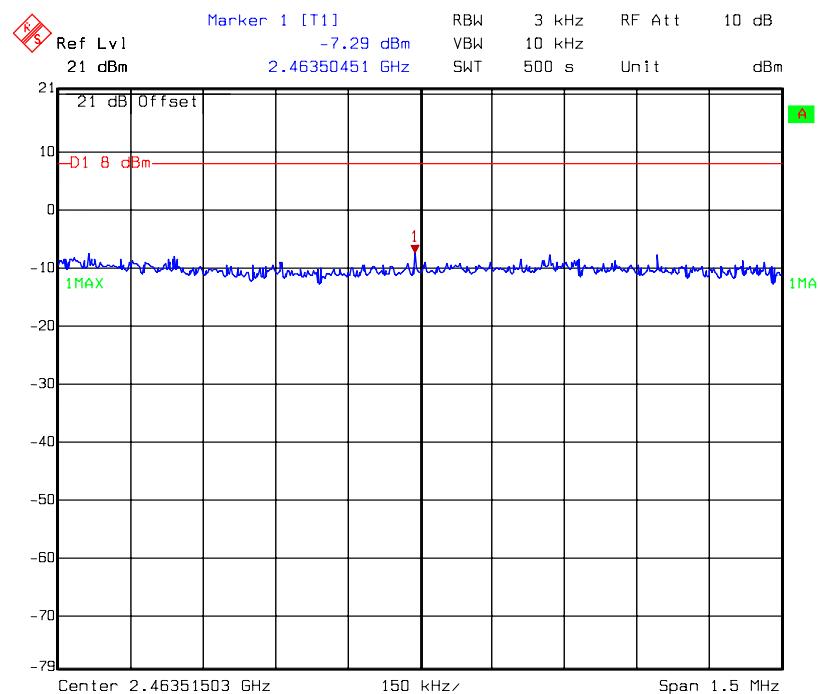


Title: Power Density,  
Comment A: 11b 2462 ch11 Chain0  
Date: 28.JUL.2011 10:44:31

## Occupied Frequency Range @ 802.11g mode channel 1

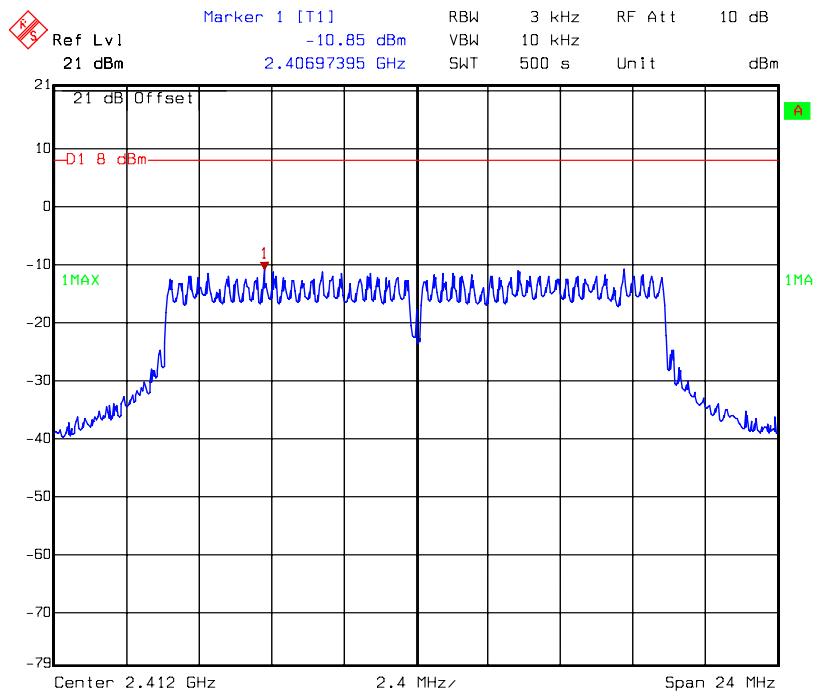


Title: Power Density,  
Comment A: 11g 2412 ch1 Chain0  
Date: 26.JUL.2011 13:44:22

## Power Spectral Density @ 802.11g mode channel 1

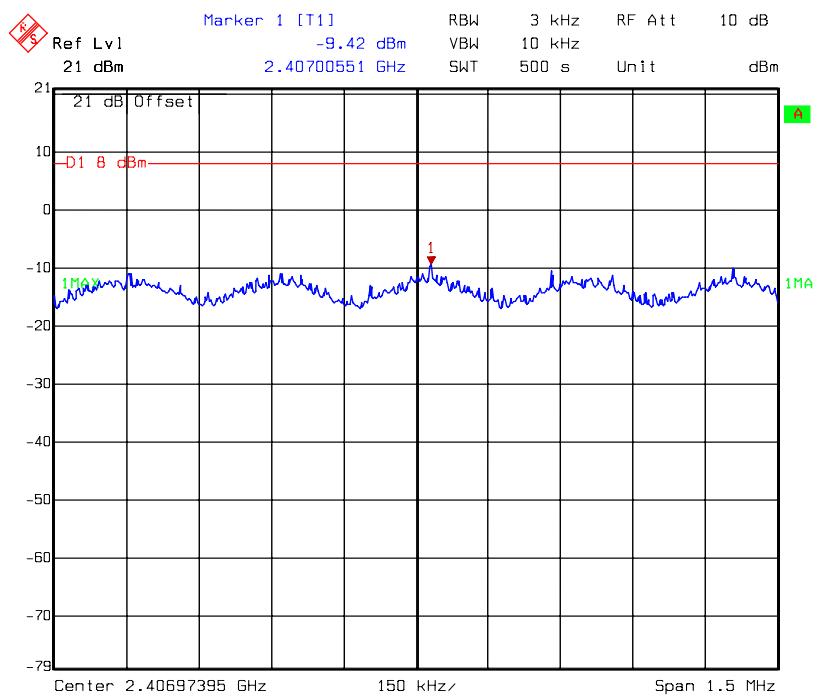


Title: Power Density,  
Comment A: 11g 2412 ch1 Chain0  
Date: 28.JUL.2011 10:56:28

## Occupied Frequency Range @ 802.11g mode channel 6

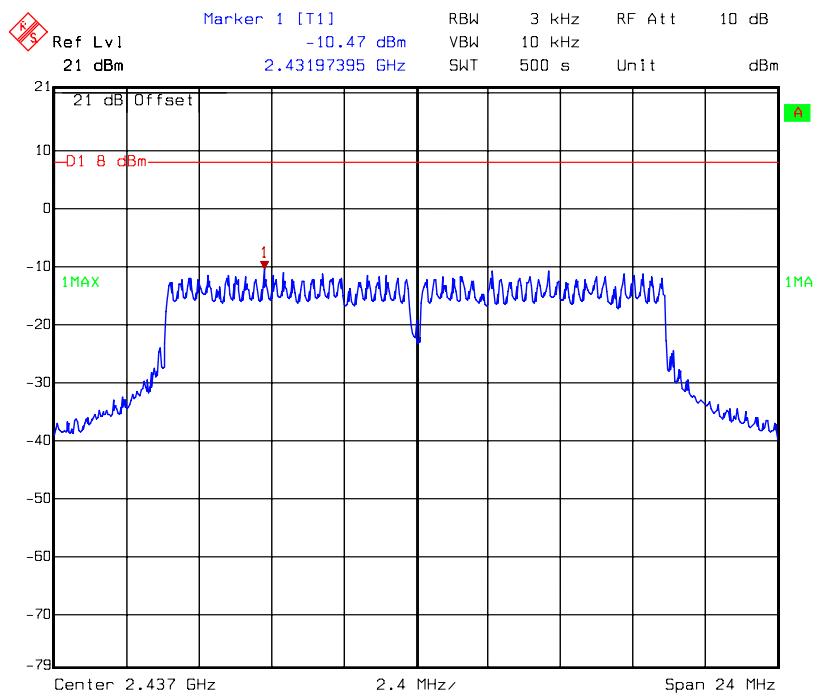


Title: Power Density.  
Comment A: 11g 2437 ch6 Chain0  
Date: 26.JUL.2011 13:57:02

## Power Spectral Density @ 802.11g mode channel 6

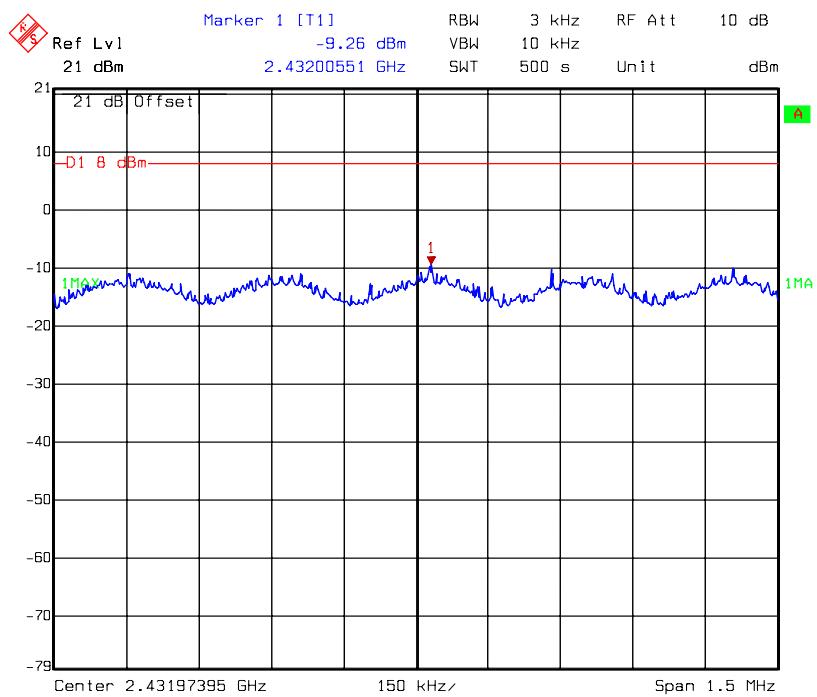


Title: Power Density.  
Comment A: 11g 2437 ch6 Chain0  
Date: 28.JUL.2011 11:10:14

## Occupied Frequency Range @ 802.11g mode channel 11

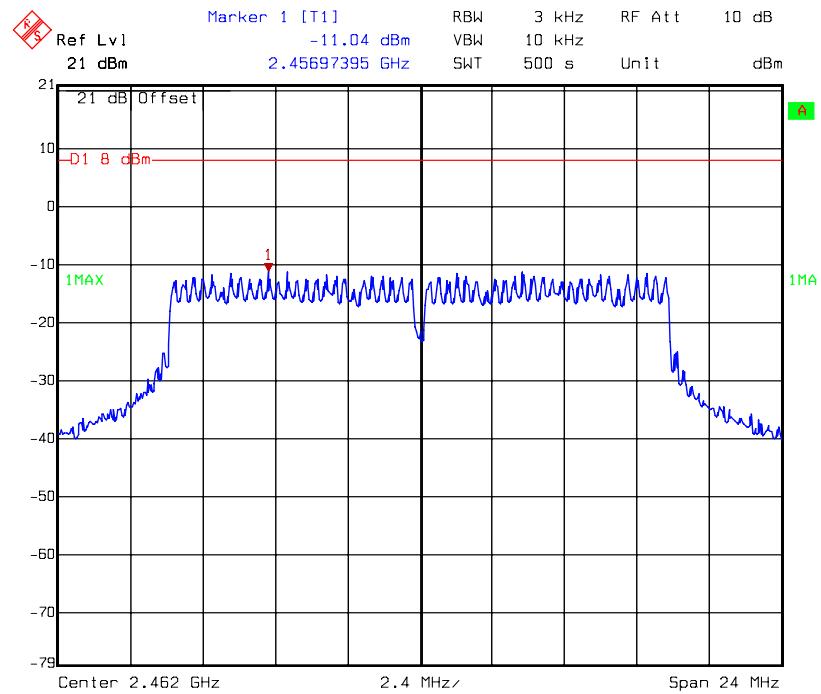

Title: Power Density,  
Comment A: 11g 2462 ch11 Chain0  
Date: 26.JUL.2011 14:06:53

## Power Spectral Density @ 802.11g mode channel 11

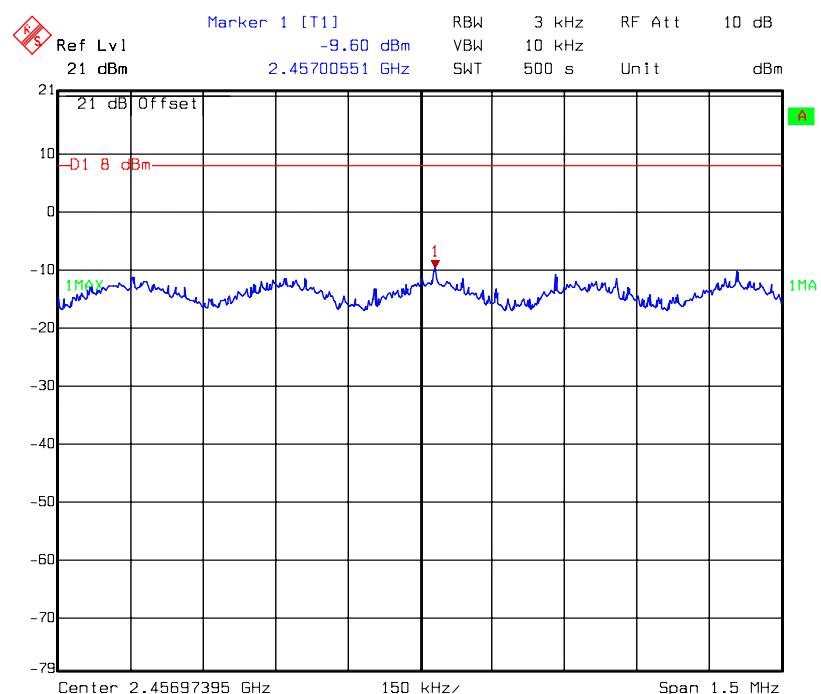

Title: Power Density,  
Comment A: 11g 2462 ch11 Chain0  
Date: 28.JUL.2011 11:25:10

## 7. RF Antenna Conducted Spurious

<b>Name of Test</b>	RF Antenna Conducted Spurious
<b>Base Standard</b>	FCC 15.247(d)

**Test Result:** Complies


**Measurement Data:** See plots below

### Method of Measurement:


#### Reference FCC document: KDB558074

The measurements were performed from 30 MHz to 25 GHz RF antenna conducted per FCC 15.247 (d) was measured from the EUT antenna port using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 100 kHz. Harmonics and spurious noise must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

### Test Diagram:

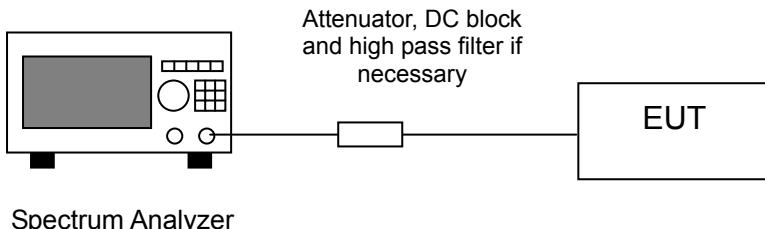


## Conducted spurious @ 802.11b mode channel 1 (30 MHz ~ 2400 MHz)

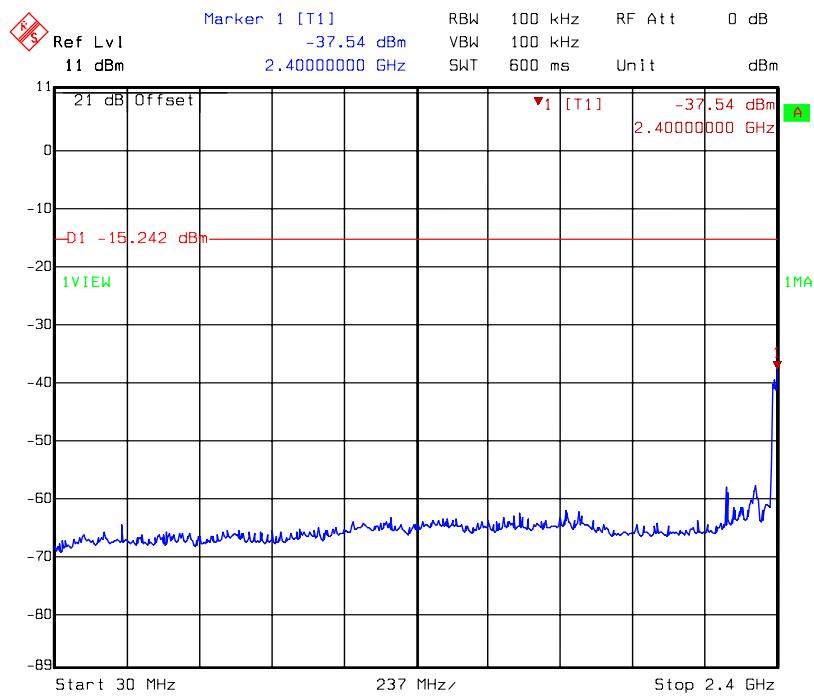


Title: Conductive-Spurious  
Comment A: CH 1 at 802.11b mode 30MHz~2400MHzTS11020010-EME  
Date: 19.APR.2011 12:16:28

## Conducted spurious @ 802.11b mode channel 1 (2400 MHz ~ 2483.5 MHz)

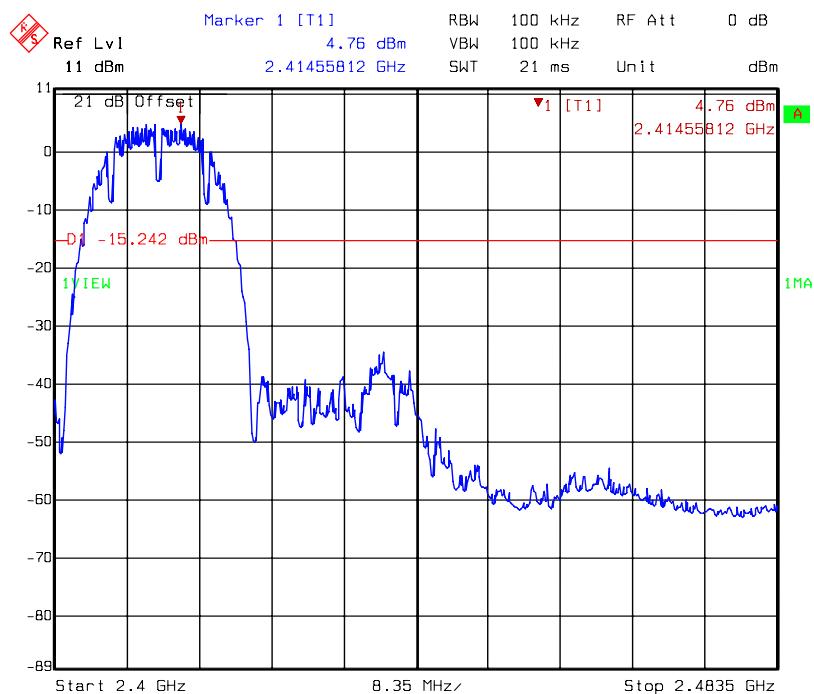


Title: Conductive-Spurious  
Comment A: CH 1 at 802.11b mode 2400MHz~2483.5MHzTS11020010-EME  
Date: 19.APR.2011 12:16:06

## Conducted spurious @ 802.11b mode channel 1 (2483.5 MHz ~ 25 GHz)

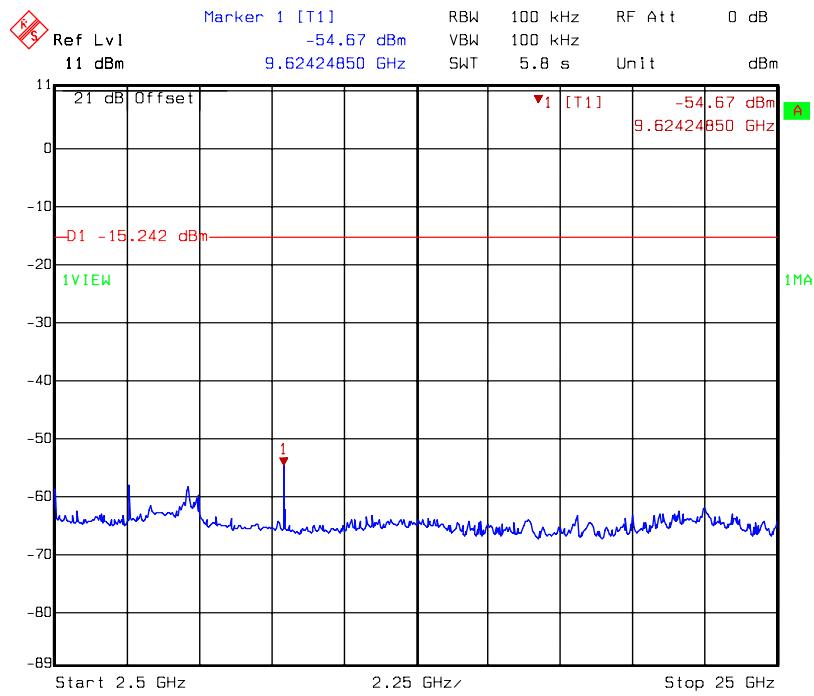


Title: Conductive-Spurious  
Comment A: CH 1 at 802.11b mode 2483.5MHz~25GHzTS11020010-EME  
Date: 19.APR.2011 12:16:56

## Conducted spurious @ 802.11b mode channel 6 (30 MHz ~ 2400 MHz)

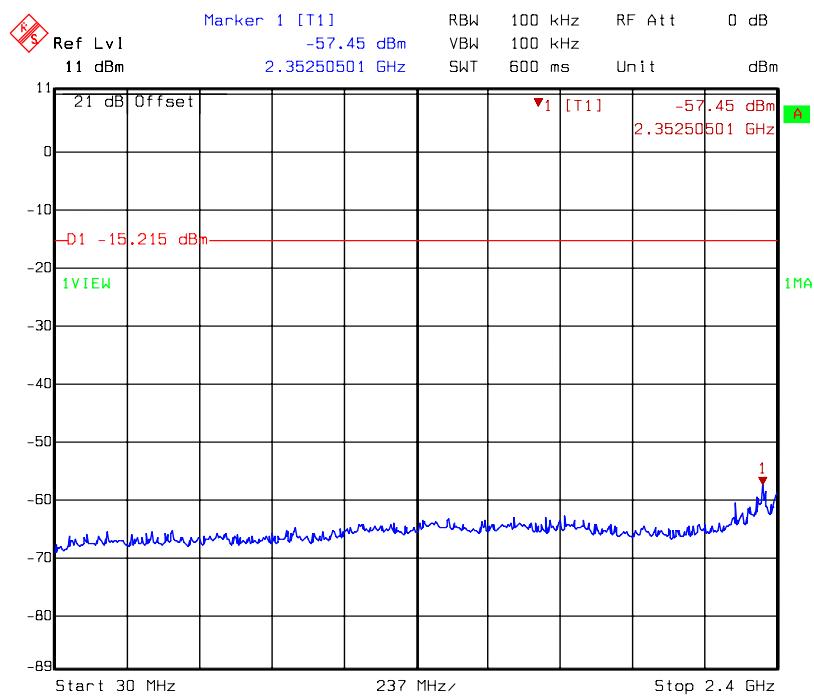


Title: Conductive-Spurious  
Comment A: CH 1 at 802.11b mode 30MHz~2400MHzTS11020010-EME  
Date: 19.APR.2011 12:18:41

## Conducted spurious @ 802.11b mode channel 6 (2400 MHz ~ 2483.5 MHz)

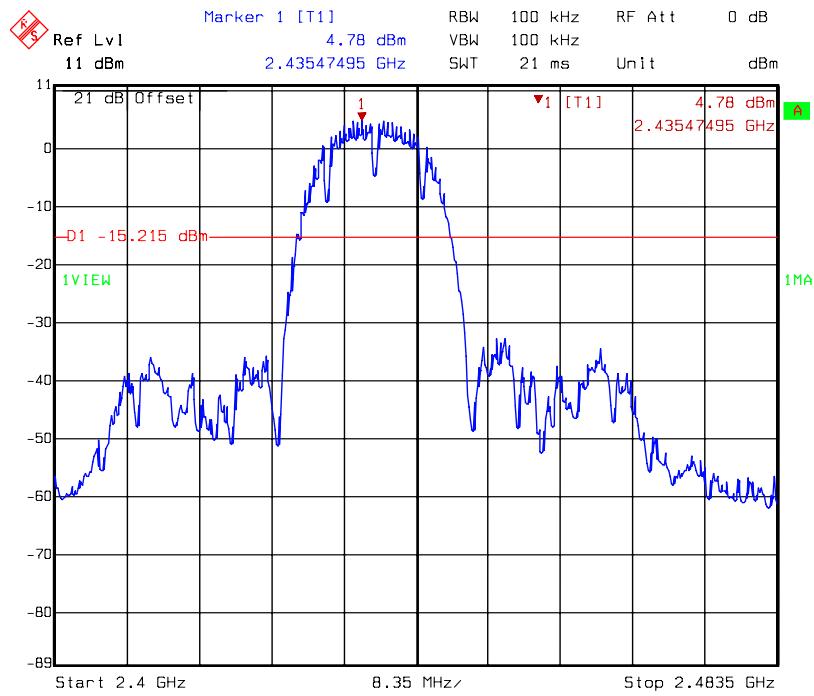


Title: Conductive-Spurious  
Comment A: CH 1 at 802.11b mode 2400MHz~2483.5MHzTS11020010-EME  
Date: 19.APR.2011 12:18:19

## Conducted spurious @ 802.11b mode channel 6 (2483.5 MHz ~ 25 GHz)

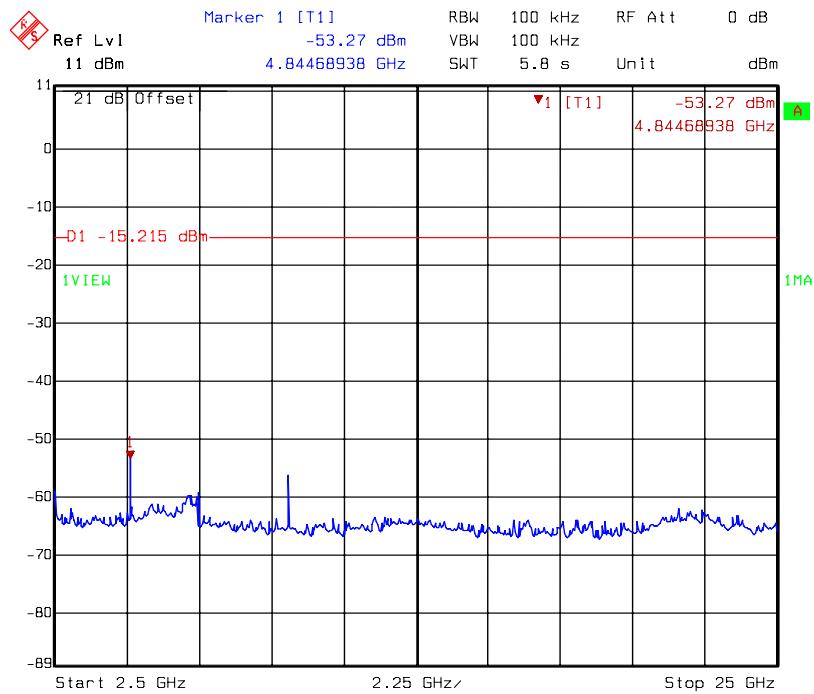


Title: Conductive-Spurious  
Comment A: CH 1 at 802.11b mode 2483.5MHz~25GHzTS11020010-EME  
Date: 19.APR.2011 12:19:08

## Conducted spurious @ 802.11b mode channel 11 (30 MHz ~ 2400 MHz)

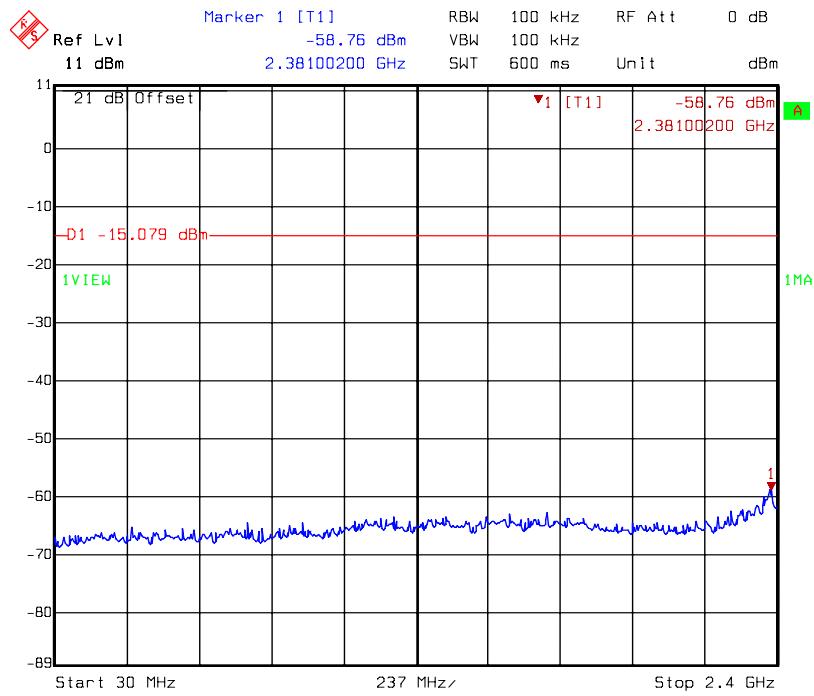


Title: Conductive-Spurious  
Comment A: CH 6 at 802.11b mode 30MHz~2400MHzTS11020010-EME  
Date: 19.APR.2011 12:20:29

## Conducted spurious @ 802.11b mode channel 11 (2400 MHz ~ 2483.5 MHz)

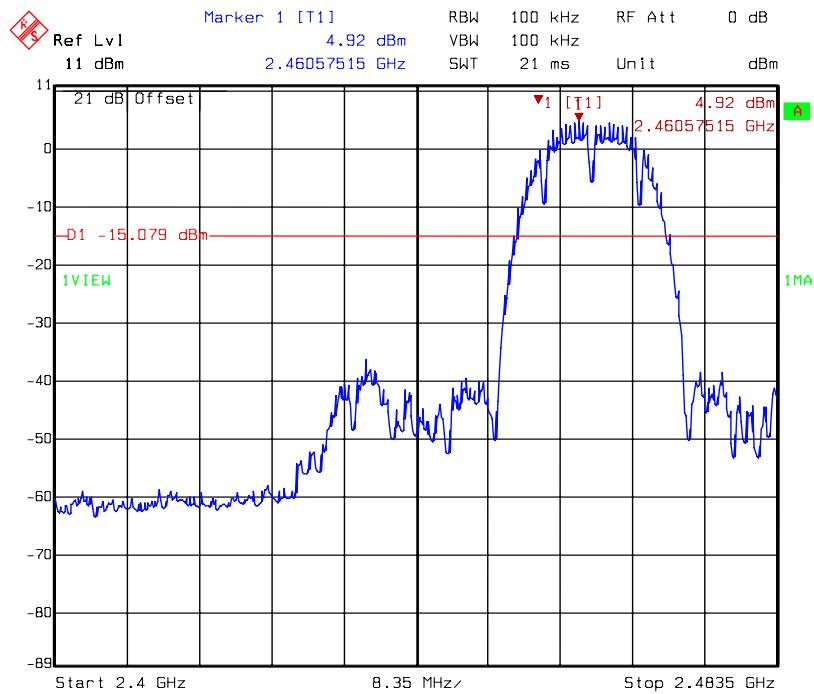


Title: Conductive-Spurious  
Comment A: CH 6 at 802.11b mode 2400MHz~2483.5MHzTS11020010-EME  
Date: 19.APR.2011 12:20:08

## Conducted spurious @ 802.11b mode channel 11 (2483.5 MHz ~ 25 GHz)

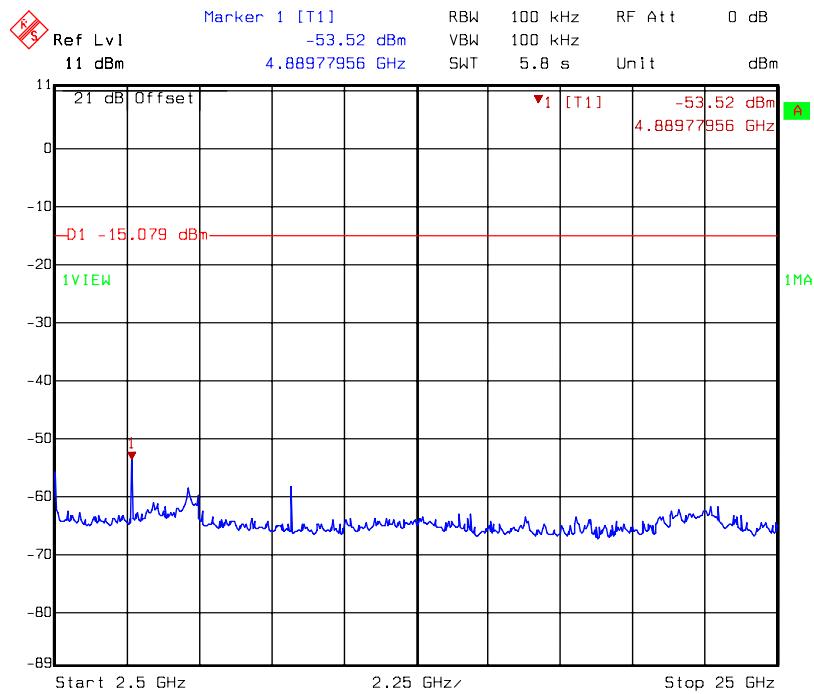


Title: Conductive-Spurious  
Comment A: CH 6 at 802.11b mode 2483.5MHz~25GHzTS11020010-EME  
Date: 19.APR.2011 12:20:57

## Conducted spurious @ 802.11g mode channel 1 (30 MHz ~ 2400 MHz)

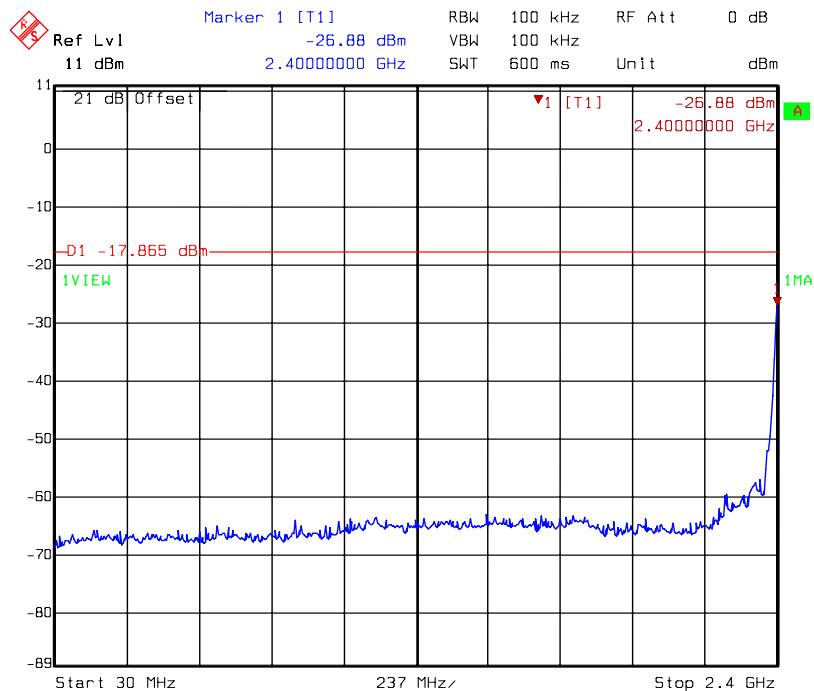


Title: Conductive-Spurious  
Comment A: CH 1 at 802.11g mode 30MHz~2400MHz  
Date: 19.APR.2011 12:24:46

## Conducted spurious @ 802.11g mode channel 1 (2400 MHz ~ 2483.5 MHz)

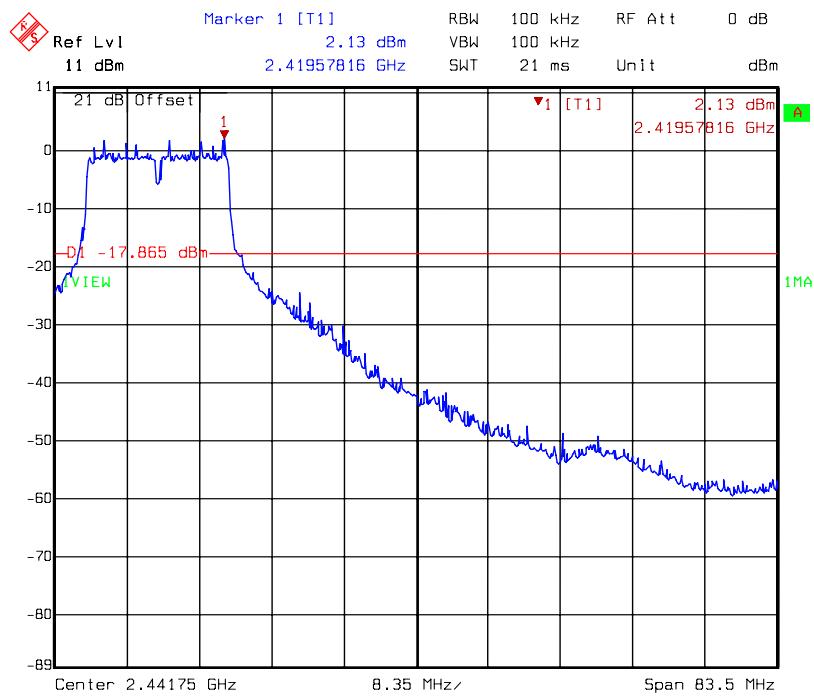


Title: Conductive-Spurious  
Comment A: CH 1 at 802.11g mode 2400MHz~2483.5MHz  
Date: 19.APR.2011 12:24:25

## Conducted spurious @ 802.11g mode channel 1 (2483.5 MHz ~ 25 GHz)

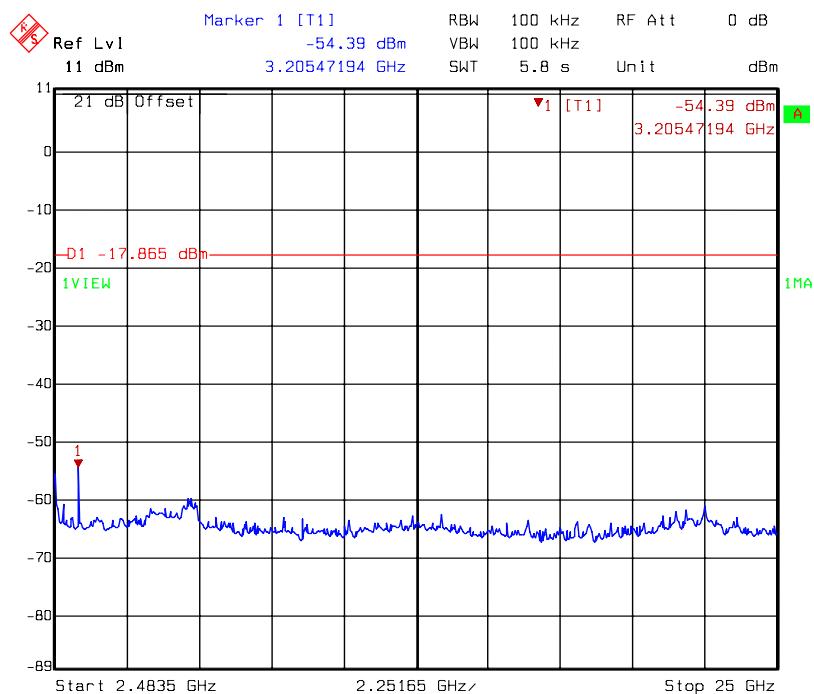


Title: Conductive-Spurious  
Comment A: CH 1 at 802.11g mode 2483.5MHz~25000MHz  
Date: 19.APR.2011 12:25:14


## Conducted spurious @ 802.11g mode channel 6 (30 MHz ~ 2400 MHz)

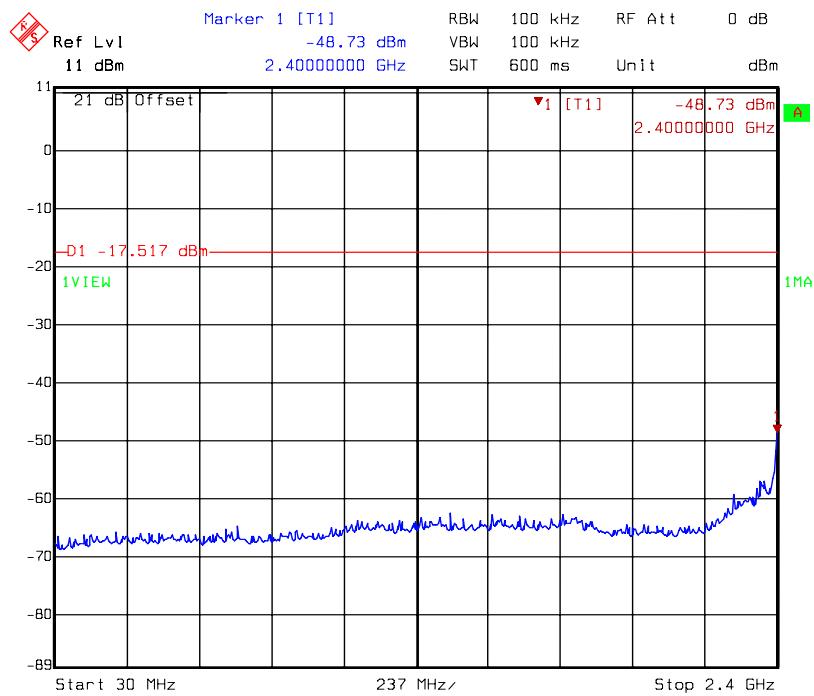


## Conducted spurious @ 802.11g mode channel 6 (2400 MHz ~ 2483.5 MHz)

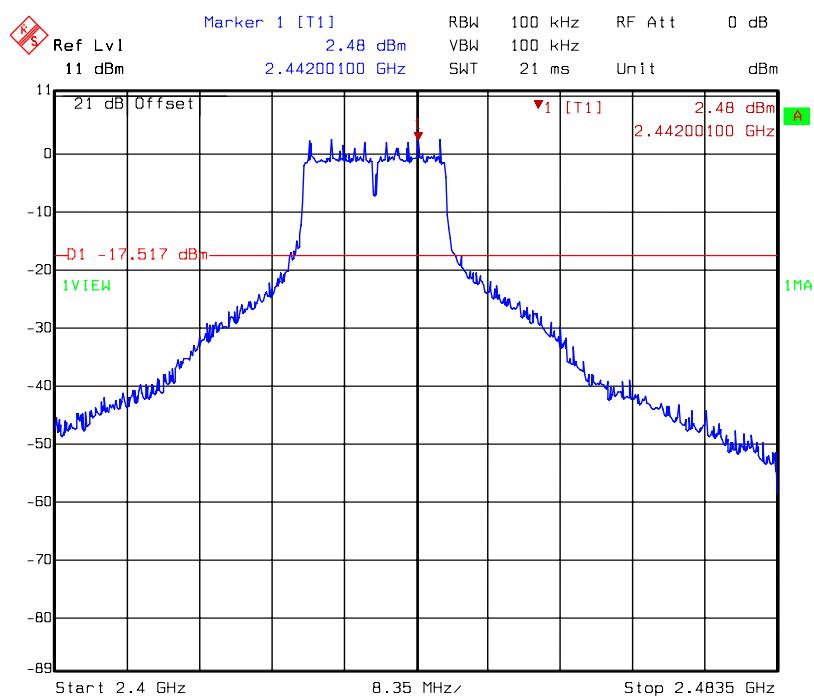


## Conducted spurious @ 802.11g mode channel 6 (2483.5 MHz ~ 25 GHz)

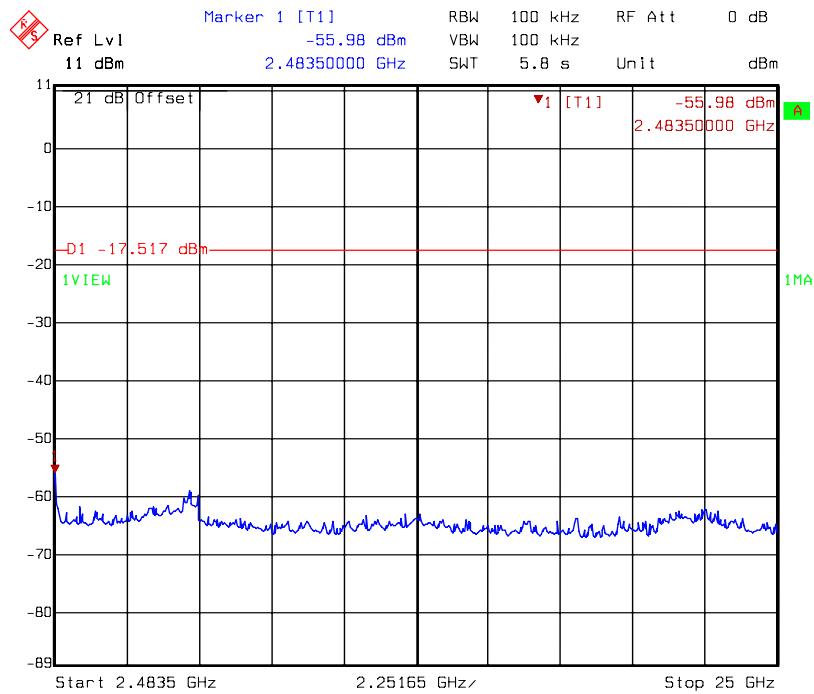

## Conducted spurious @ 802.11g mode channel 11 (30 MHz ~ 2400 MHz)

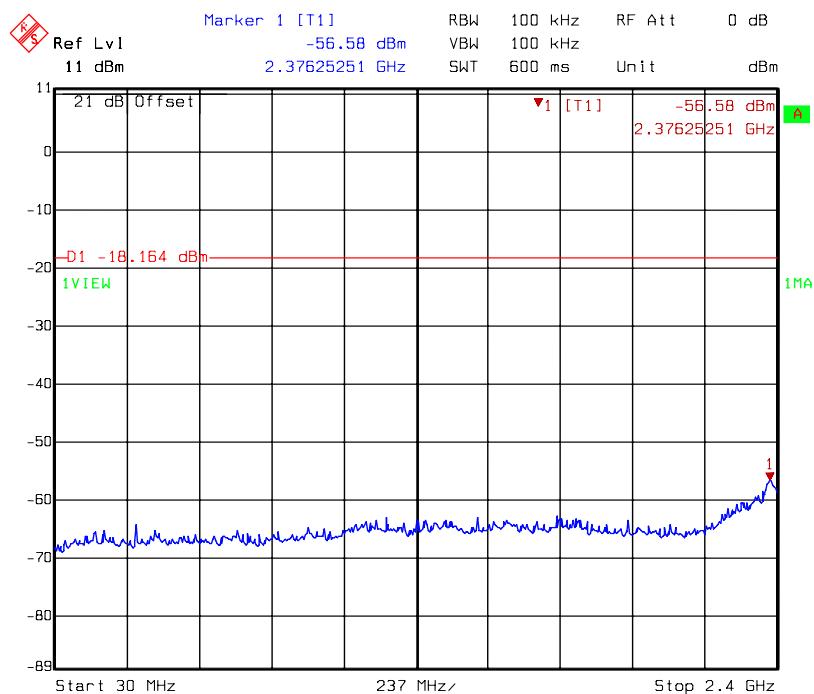


## Conducted spurious @ 802.11g mode channel 11 (2400 MHz ~ 2483.5 MHz)

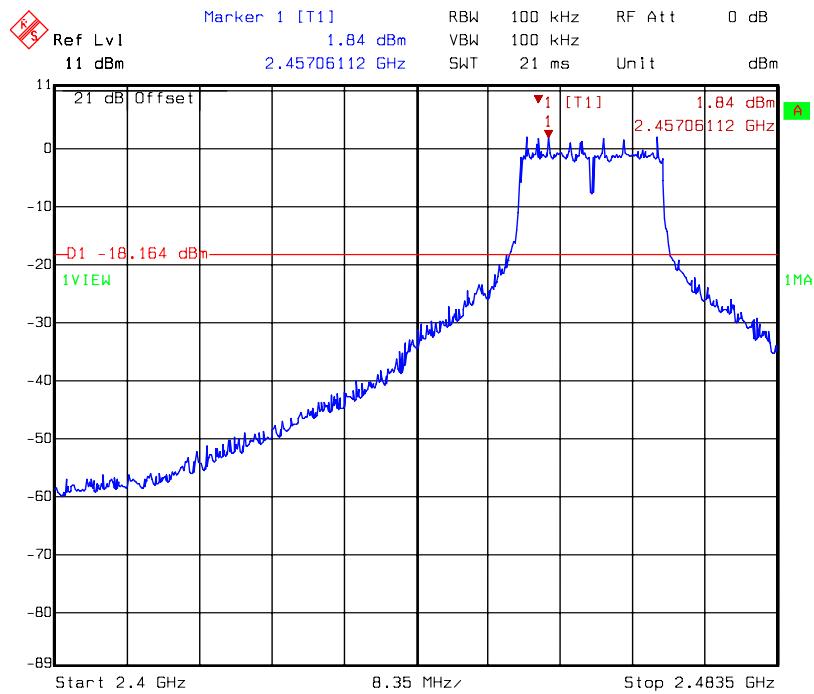

Title: Conductive-Spurious  
Comment A: CH 6 at 802.11g mode 2400MHz~2483.5MHz  
Date: 19.APR.2011 12:35:35

## Conducted spurious @ 802.11g mode channel 11 (2483.5 MHz ~ 25 GHz)

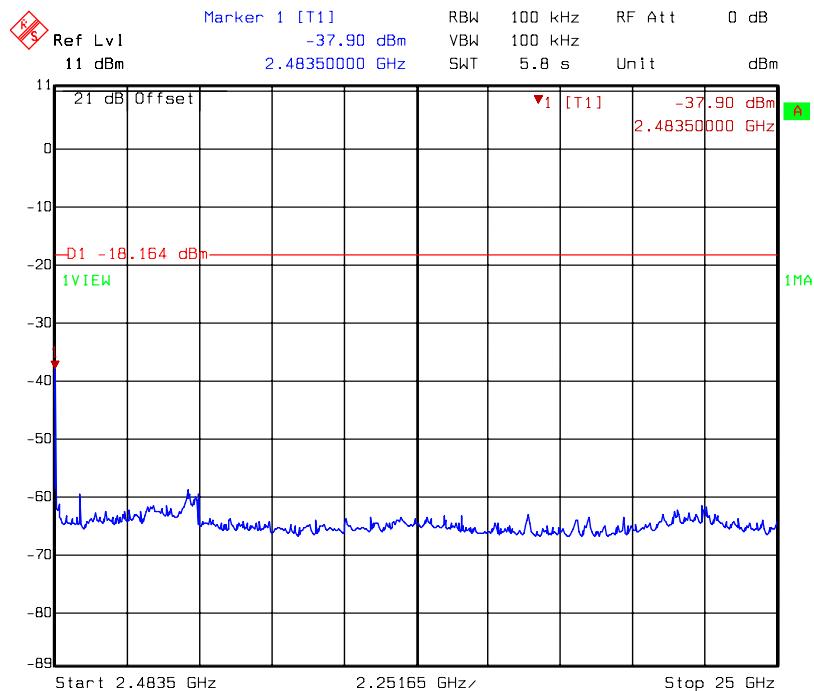

Title: Conductive-Spurious  
Comment A: CH 6 at 802.11g mode 2483.5MHz~25000MHz  
Date: 19.APR.2011 12:36:24

## 8. Radiated Spurious Emission

<b>Name of Test</b>	Radiated Spurious Emission
<b>Base Standard</b>	FCC 15.247(d), 15.209, 15.205

**Test Result:** Complies

**Measurement Data:** See Tables below


### Method of Measurement:

Reference FCC document: KDB558074, ANSI C63.4

The frequency range from 30 MHz to 1000 MHz using Bilog Antenna.  
The frequency range over 1 GHz using Horn Antenna.

Radiated emissions were invested cover the frequency range from 30 MHz to 1000 MHz using a receiver RBW of 120 kHz record QP reading, and the frequency over 1 GHz using a spectrum analyzer RBW of 1 MHz and 10 Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1 MHz RBW/VBW) recorded also on the report. The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter. The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent 3 meters reading using inverse scaling with distance.

The EUT configuration please refer to the "Spurious set-up photo.pdf".

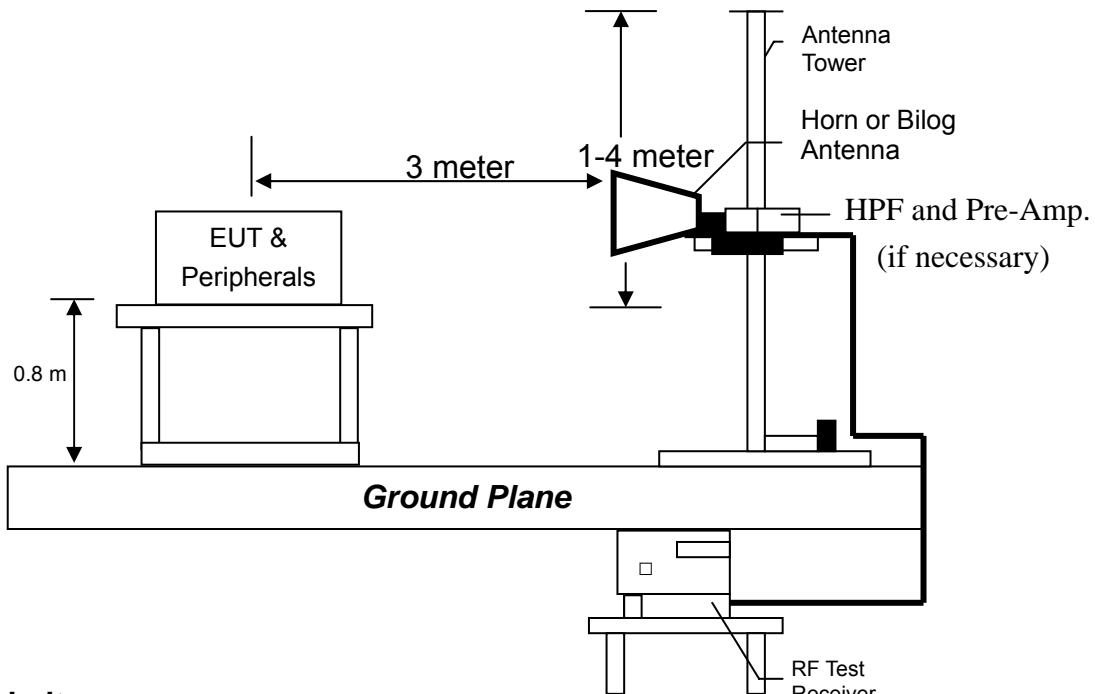**Test Diagram:****Emission Limit:**

The spurious Emission shall test through the 10th harmonic. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Frequency (MHz)	Limits (dB $\mu$ V/m@ 3 meter)
30-88	40
88-216	43.5
216-960	46
Above 960	54

**Remark:**

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

**Note:** (1) The EUT was tested while in a continuous transmit mode and the worst case data rates are Mbps data rate for 802.11b mode, 6 Mbps data rate for 802.11g mode. The EUT was tuned to a low, middle and high channel.  
(2) The EUT operating at 2.4 GHz ISM band. Frequency Range scanned from 30 MHz to 25 GHz.

**Measurement results: frequencies equal to or less than 1 GHz**

The test was performed on EUT under 802.11b and 802.11g continuously transmitting mode. The worst case occurred at 802.11b Tx channel 1.

EUT : Go Wi-Fi! P322  
Worst Case : 802.11b mode channel 1

Antenna Polariz. (V/H)	Freq. (MHz)	Receiver Detector	Corr. Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
V	45.52	QP	12.84	17.27	30.11	40.00	-9.89
V	399.57	QP	16.40	24.68	41.08	46.00	-4.92
V	414.12	QP	16.47	23.93	40.40	46.00	-5.60
V	480.08	QP	18.43	16.99	35.41	46.00	-10.59
V	797.27	QP	23.19	13.76	36.95	46.00	-9.05
V	897.18	QP	24.35	15.02	39.36	46.00	-6.64
H	383.08	QP	16.74	22.65	39.39	46.00	-6.61
H	399.57	QP	16.74	27.55	44.29	46.00	-1.71
H	414.12	QP	16.81	28.07	44.88	46.00	-1.12
H	431.58	QP	18.12	17.18	35.30	46.00	-10.70
H	531.49	QP	19.65	15.22	34.87	46.00	-11.13
H	797.27	QP	23.52	15.21	38.73	46.00	-7.27

Remark:

1. Corr. Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Corr. Factor

**Measurement results: frequency above 1GHz**

EUT : Go Wi-Fi! P322  
Test Condition : 802.11b Tx at channel 1

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4824	PK	V	36.07	37.77	51.30	53.00	54	-1.00
7236	PK	V	36.18	43.97	44.19	51.98	54	-2.02
4824	PK	H	36.07	37.77	48.80	50.50	54	-3.50
7236	PK	H	36.18	43.97	45.19	52.98	54	-1.02

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. The data value listed above which is higher than the system noise floor.

EUT : Go Wi-Fi! P322  
Test Condition : 802.11b Tx at channel 6

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4874	PK	V	36.07	37.77	50.00	51.70	54	-2.30
7311	PK	V	36.18	43.97	44.65	52.44	54	-1.56
4874	PK	H	36.07	37.77	47.31	49.01	54	-4.99
7311	PK	H	36.18	43.97	42.19	49.98	54	-4.02

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. The data value listed above which is higher than the system noise floor.

EUT : Go Wi-Fi! P322  
Test Condition : 802.11b Tx at channel 11

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4924	PK	V	36.07	37.77	47.27	48.97	54	-5.03
7386	PK	V	36.18	43.97	44.48	52.27	54	-1.73
4924	PK	H	36.07	37.77	46.98	48.68	54	-5.32
7386	PK	H	36.18	43.97	42.75	50.54	54	-3.46

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1GHz to 25GHz. The data value listed above which is higher than the system noise floor.

EUT : Go Wi-Fi! P322  
Test Condition : 802.11g Tx at channel 1

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4824	PK	V	36.07	37.77	45.81	47.51	54	-6.49
7236	PK	V	36.18	43.97	45.06	52.85	54	-1.15
4824	PK	H	36.07	37.77	44.88	46.58	54	-7.42
7236	PK	H	36.18	43.97	44.49	52.28	54	-1.72

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. The data value listed above which is higher than the system noise floor.

EUT : Go Wi-Fi! P322  
Test Condition : 802.11g Tx at channel 6

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4874	PK	V	36.07	37.77	44.86	46.56	54	-7.44
7311	PK	V	36.18	43.97	44.24	52.03	54	-1.97
4874	PK	H	36.07	37.77	43.94	45.64	54	-8.36
7311	PK	H	36.18	43.97	42.44	50.23	54	-3.77

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. The data value listed above which is higher than the system noise floor.

EUT : Go Wi-Fi! P322  
Test Condition : 802.11g Tx at channel 11

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4924	PK	V	36.07	37.77	46.43	48.13	54	-5.87
7386	PK	V	36.18	43.97	45.84	53.63	54	-0.37
4924	PK	H	36.07	37.77	42.24	43.94	54	-10.06
7386	PK	H	36.18	43.97	44.59	52.38	54	-1.62

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. The data value listed above which is higher than the system noise floor.

## 9. Emission on Band Edge

<b>Name of Test</b>	Emission Band Edge
<b>Base Standard</b>	FCC 15.247(d)

**Test Result:** Complies

**Measurement Data:** See Tables & plots below

**Method of Measurement:**

**Reference FCC document:** KDB558074, ANSI C63.4

The frequency range from 30 MHz to 1000 MHz using Bilog Antenna.  
The frequency range over 1 GHz using Horn Antenna.

Radiated emissions were investigated cover the frequency range from 30 MHz to 1000 MHz using a receiver RBW of 120 kHz record QP reading, and the frequency over 1 GHz using a spectrum analyzer RBW of 1 MHz and 10 Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1 MHz RBW/VBW) recorded also on the report.


**Test Mode : 802.11b mode**

Channel	Measurement Freq.Band (MHz)	Detector	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
1 (lowest)	2310-2390	PK	58.86	74	-15.14
		AV	50.69	54	-3.31
11 (highest)	2483.5-2500	PK	60.73	74	-13.27
		AV	51.46	54	-2.54


**Test Mode : 802.11g mode**

Channel	Measurement Freq.Band (MHz)	Detector	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
1 (lowest)	2310-2390	PK	66.08	74	-7.92
		AV	47.42	54	-6.58
11 (highest)	2483.5-2500	PK	73.09	74	-0.91
		AV	53.08	54	-0.92


## Band edge @ 802.11b mode channel 1 (PK)

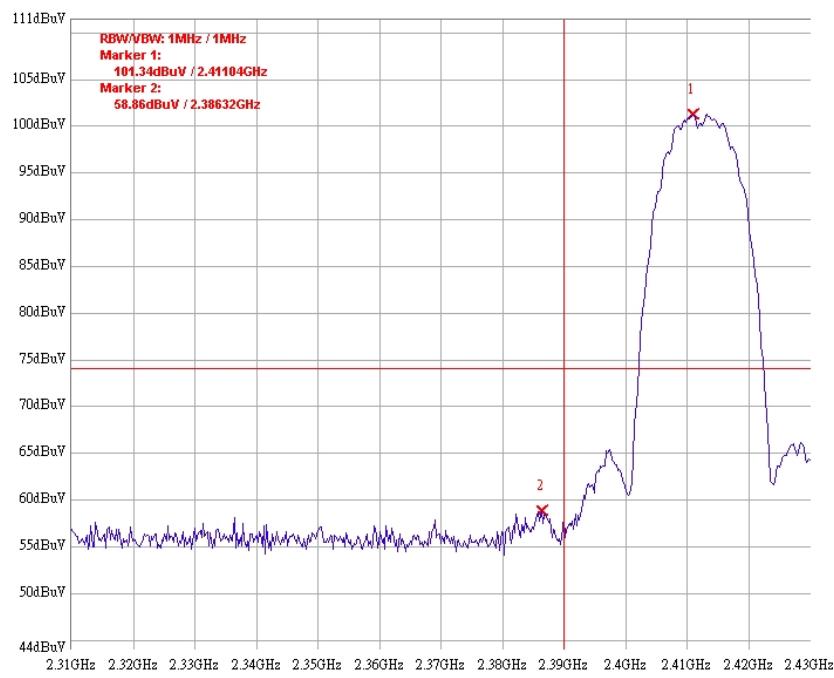


## Band edge @ 802.11b mode channel 1 (AV)

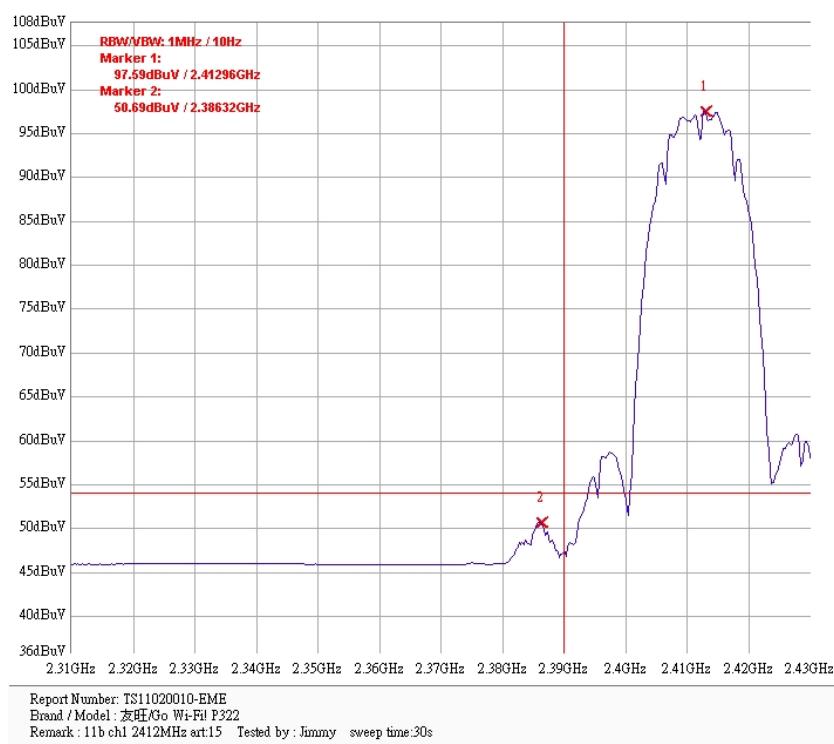


## Band edge @ 802.11b mode channel 11 (PK)

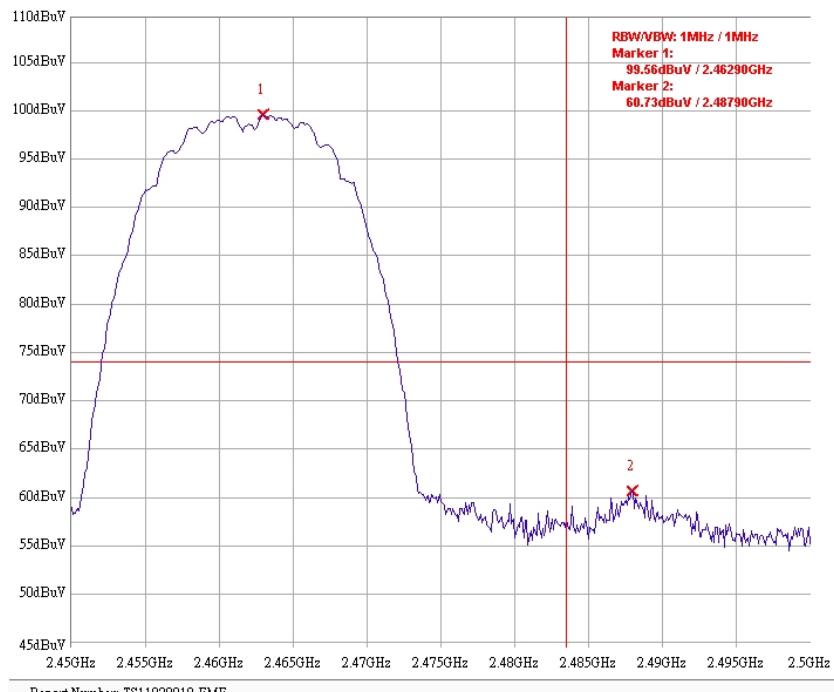


## Band edge @ 802.11b mode channel 11 (AV)

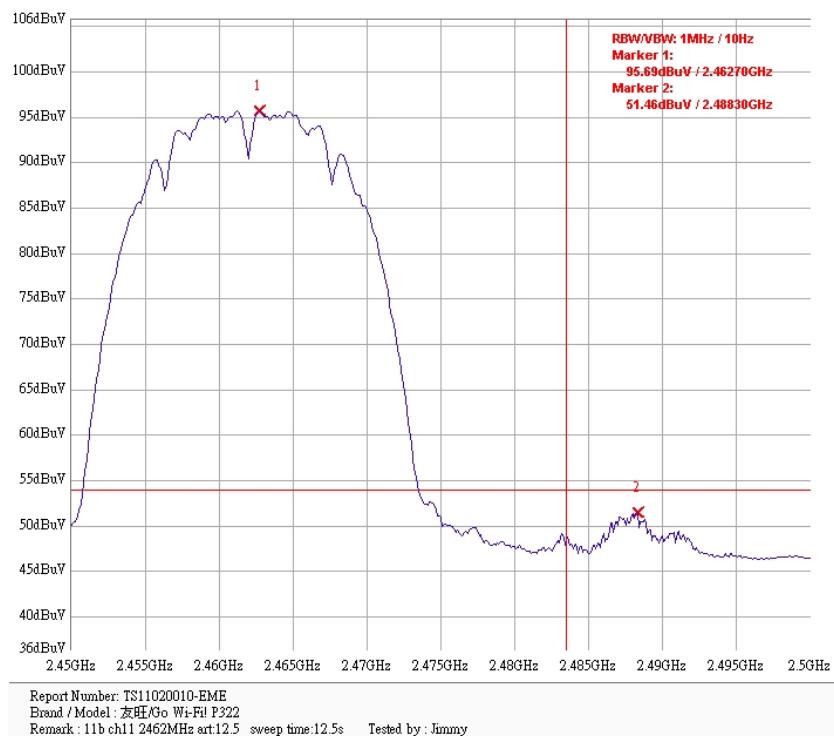


## Band edge @ 802.11g mode channel 1 (PK)

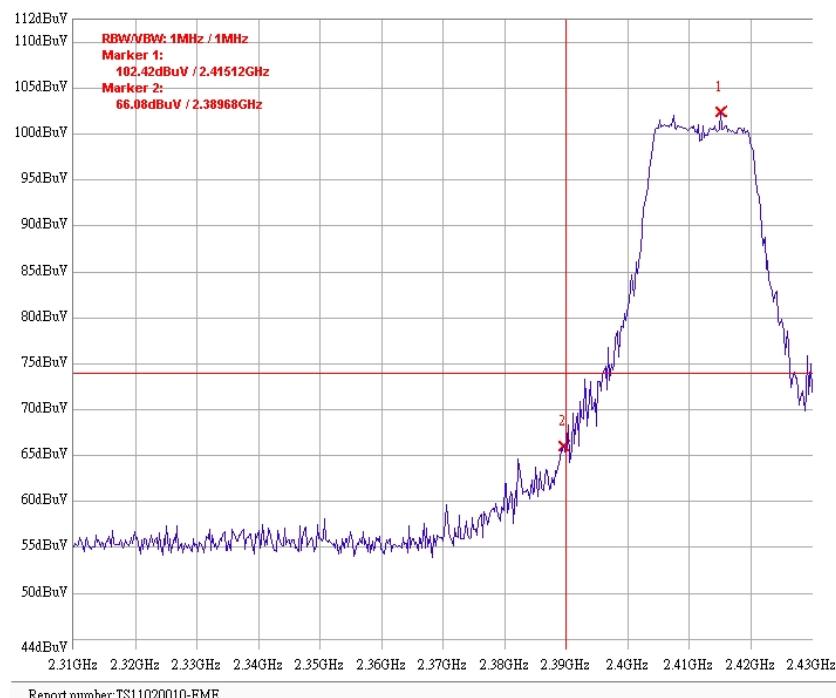


## Band edge @ 802.11g mode channel 1 (AV)

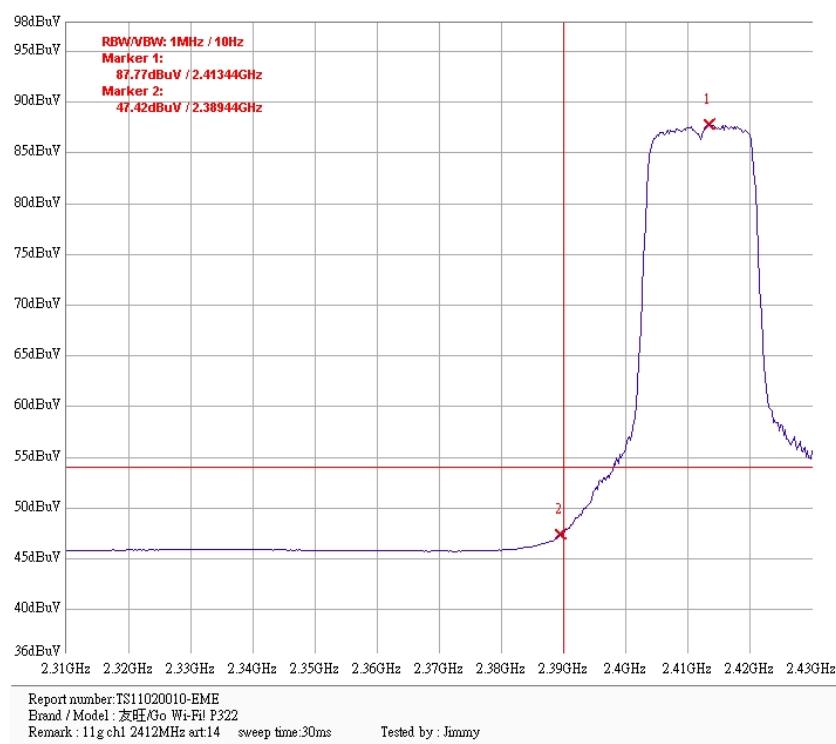

## Band edge @ 802.11g mode channel 11 (PK)

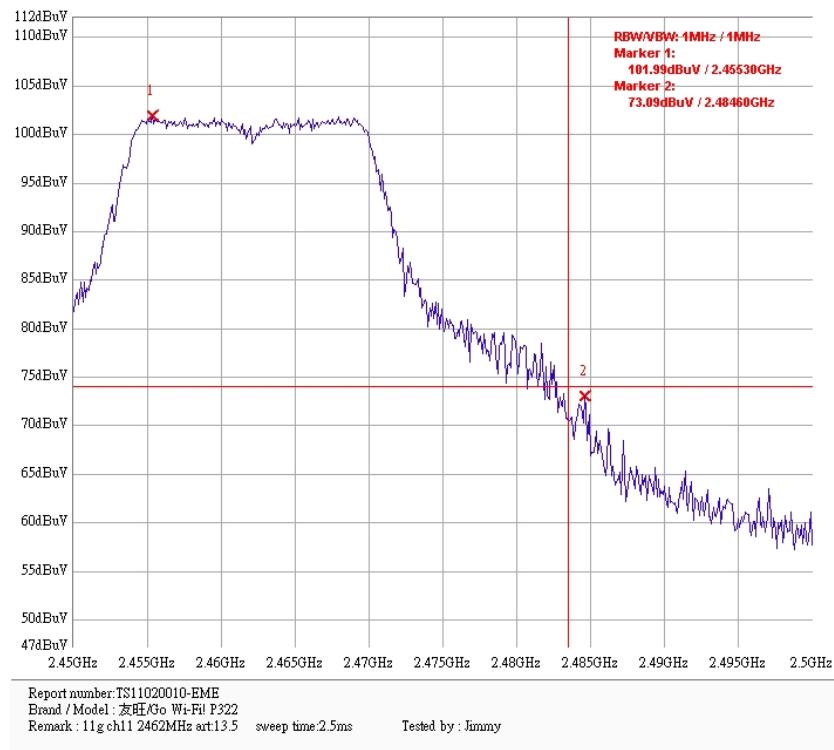

## Band edge @ 802.11g mode channel 11 (AV)

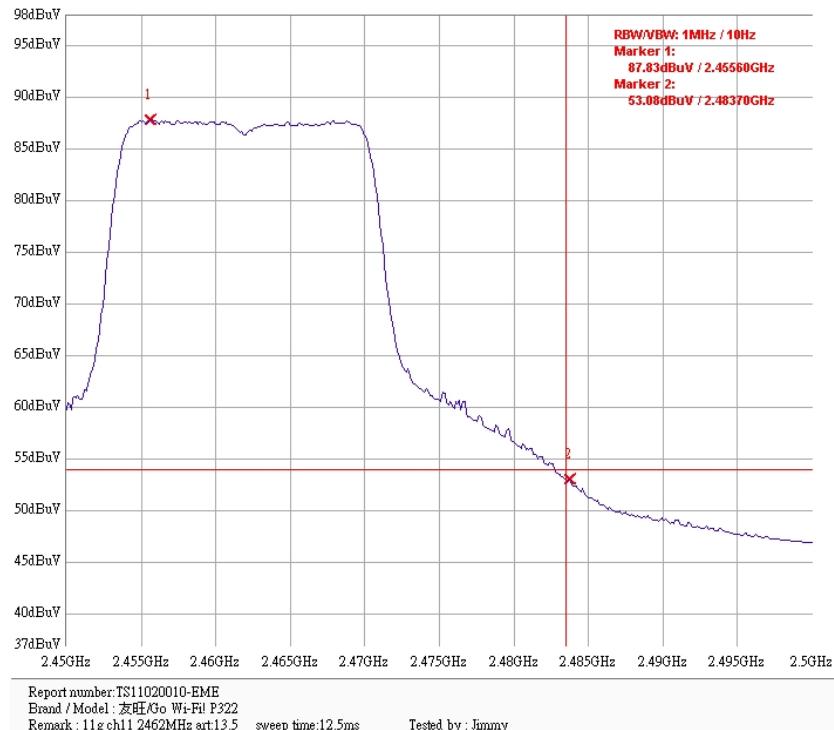

## 10. AC power line conducted emission

<b>Name of Test</b>	AC power line conducted emission
<b>Base Standard</b>	FCC 15.207

**Test Result:** Complies

**Measurement Data:** See Tables & plots below

### Method of Measurement:

**Reference FCC document: KDB558074, ANSI C63.4**


The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a 50 ohm/50 uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 ohm/ 50 uH coupling impedance with 50 ohm termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4/2003 on conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9kHz.

The EUT configuration please refer to the "Conducted set-up photo.pdf".

### Test Diagram:

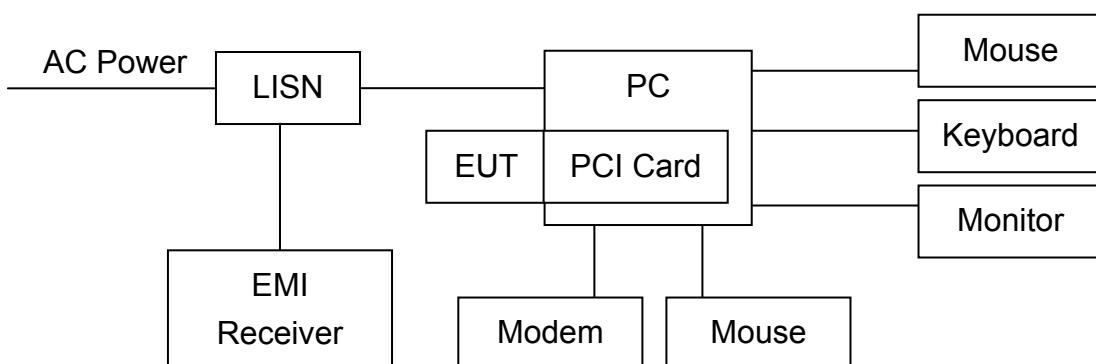

**Emission Limit:**

Freq. (MHz)	Conducted Limit (dBuV)	
	Q.P.	Ave.
0.15~0.50	66 – 56*	56 – 46*
0.50~5.00	56	46
5.00~30.0	60	50

\* Decreases with the logarithm of the frequency.


**Note:** The EUT was tested while in normal communication mode.

Phase : Line  
EUT : Go Wi-Fi P322  
Test Condition : Continuously mode  
Remark : N/A

Frequency (MHz)	Corr. Factor (dB)	Level Q <sub>p</sub> (dBuV)	Limit Q <sub>p</sub> (dBuV)	Level A <sub>v</sub> (dBuV)	Limit A <sub>v</sub> (dBuV)	Margin (dB) Q <sub>p</sub>	Margin (dB) A <sub>v</sub>
0.182	0.80	45.12	64.42	44.00	54.42	-19.30	-10.42
0.205	0.78	40.80	63.40	39.99	53.40	-22.61	-13.42
0.491	0.10	37.94	56.14	38.13	46.14	-18.20	-8.01
1.229	0.17	37.72	56.00	36.23	46.00	-18.28	-9.77
1.970	0.10	37.27	56.00	36.23	46.00	-18.73	-9.77
18.820	0.96	32.10	60.00	20.08	50.00	-27.90	-29.92

Remark:

1. Correction Factor (dB)= LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

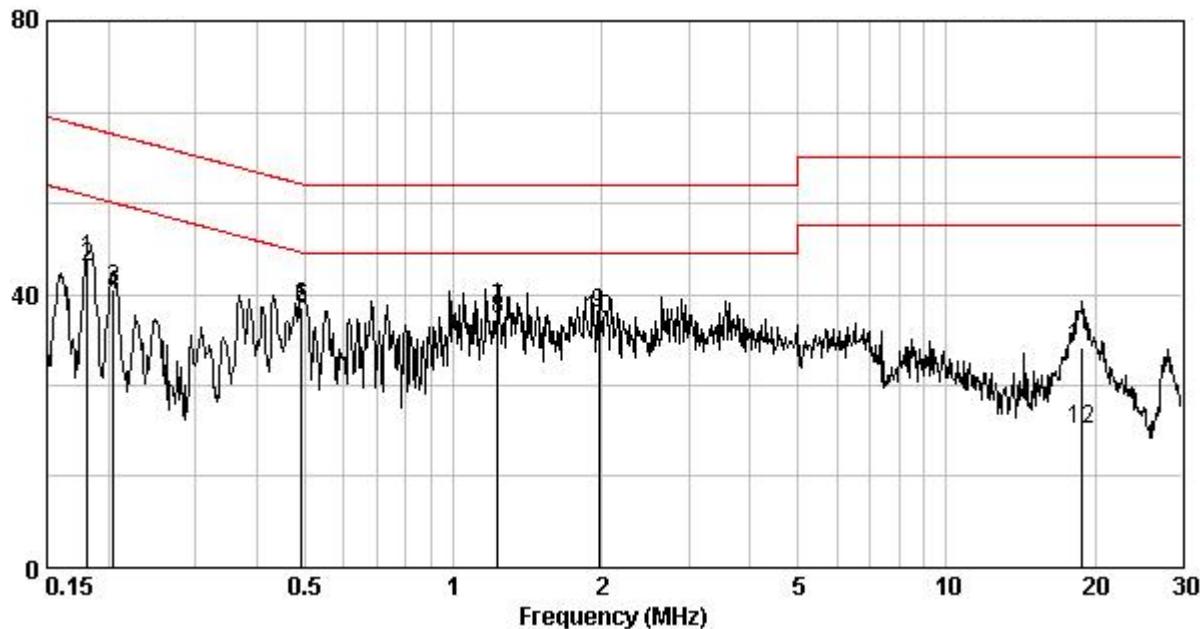


Phase : Neutral  
EUT : Go Wi-Fi! P322  
Test Condition : Continuously mode  
Remark : N/A

Frequency (MHz)	Corr. Factor (dB)	Level Q <sub>p</sub> (dBuV)	Limit Q <sub>p</sub> (dBuV)	Level Av (dBuV)	Limit Av (dBuV)	Margin (dB) Q <sub>p</sub>	Margin (dB) Av
0.182	0.10	47.15	64.37	44.59	54.37	-17.22	-9.78
0.433	0.10	38.21	57.20	34.46	47.20	-18.99	-12.74
0.497	0.10	37.26	56.05	34.76	46.05	-18.79	-11.29
1.229	0.17	37.36	56.00	36.38	46.00	-18.64	-9.62
1.908	0.11	36.82	56.00	36.13	46.00	-19.18	-9.87
2.893	0.19	36.35	56.00	34.92	46.00	-19.65	-11.08

Remark:

1. Correction Factor (dB)= LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

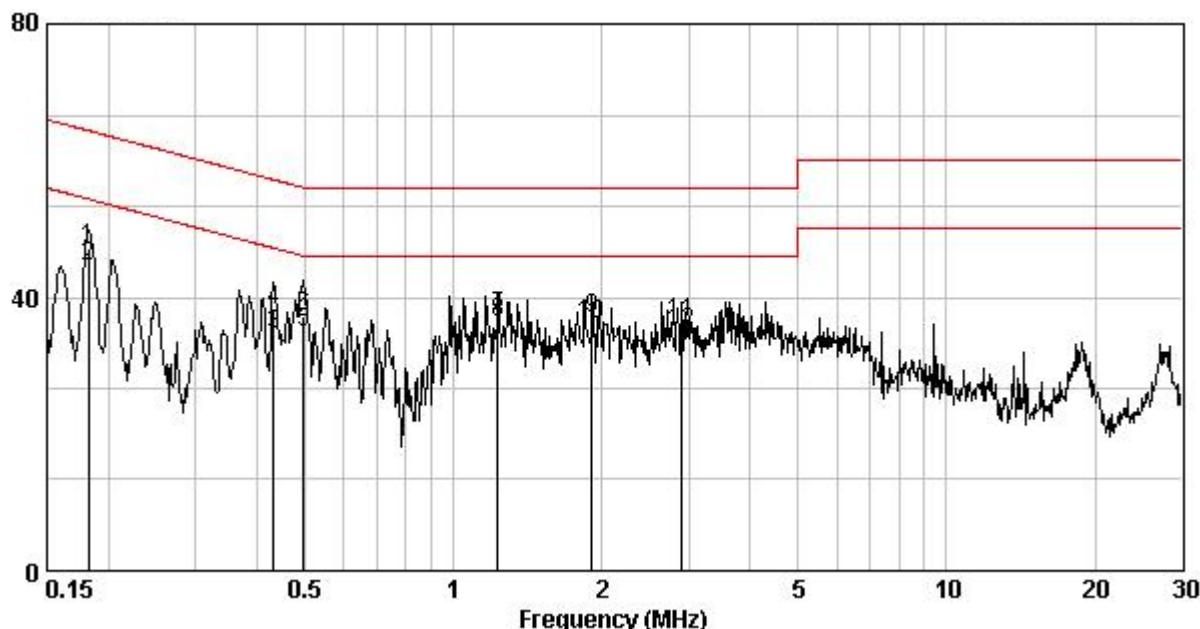

## **APPENDICES**

**Appendix A: Test Equipment List**

Equipment	Brand	Frequency range	Model No.	Cal. Date	Cal. interval
EMI Test Receiver	Rohde & Schwarz	9 kHz~2.75 GHz	ESCS30	9/03/2010	1 year
Spectrum Analyzer	Rohde & Schwarz	9 kHz~30 GHz	FSP30	8/16/2010	1 year
Spectrum Analyzer	Rohde & Schwarz	20 Hz~40 GHz	FSEK30	1/18/2011	1 year
Horn Antenna	SCHWARZBECK	1 GHz~18 GHz	BBHA 9120 D	8/31/2010	2 years
Horn Antenna	SCHWARZBECK	14 GHz~40 GHz	BBHA 9170	9/3/2010	2 years
Bilog Antenna	SCHWARZBECK	25 MHz~1.7 GHz	VULB 9168	9/22/2009	2 years
Pre-Amplifier	MITEQ	100 MHz~26.5 GHz	AFS44-00102650--42-10P-44	10/27/2009	2 years
Pre-Amplifier	MITEQ	26 GHz~40 GHz	JS4-26004000--2 7-8A	9/8/2010	2 years
Power Meter	Anritsu	100 MHz~18 GHz	ML2495A	10/20/2010	1 year
Power Sensor	Anritsu	100 MHz~18 GHz	MA2411B	10/20/2010	1 year
Temperature & Humidity Test Chamber	TERCHY	N/A	MHU-225LRU (SA)	8/6/2010	1 year
LISN	Rohde & Schwarz	9 kHz~30 MHz	ESH3-Z5	10/15/2010	1 year

Note: The above equipments are within the valid calibration period.

**Measurement Uncertainty:**

Measurement uncertainty was calculated in accordance with TR 100 028-1.

Parameter	Uncertainty
Radiated Emission	±5.056 dB
Conducted Emission	±2.786 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.