

TEST REPORT

of

FCC Part 15 Subpart B&C §15.247/RSS-210 Issue 7, RSS-Gen Issue 2

FCC ID/IC Certification: LW5SP5700/3114-SP5700

Equipment Under Test : Industrial Mobile Computer
Model Name : OptimusPDA SP5700 Series
Serial No. : N/A
Applicant : Metrologic Instruments, Inc.
Manufacturer : InnoTeletek, Inc
Date of Test(s) : 2007-11- 20~ 2008-01-10
Date of Issue : 2008-02-04

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Date

2008-02-04

Feel Jeong

Approved By



Date

2008-02-04

Denny Ham

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

INDEX

<u>TABLE OF CONTENTS</u>	<u>Page</u>
1. General Information -----	3
2. Transmitter AC Power Line Conducted Emission-----	7
3. Receiver AC Power Line Conducted Emission-----	12
4. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission-----	16
5. Receiver Radiated Spurious Emission-----	25
6. 20dB Bandwidth and 99% BW-----	27
7. Maximum Peak Output Power -----	33
8. Hopping Channel Separation -----	37
9. Number of Hopping Frequency -----	39
10. Time of Occupancy(Dwell Time) -----	42
11. Power Spectral Density -----	49
12. Antenna Requirement -----	52

Appendix A-1. Photos of Spurious Emission Test

Appendix A -2. Photos of Conducted Power Line Test

Appendix A -3. Photo of RF Conducted Measurement setup

Appendix B. Photos of the EUT

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1. General Information

1.1. Testing Laboratory

SGS Testing Korea Co., Ltd.
- 705, Dongchun-Dong Sooji-Gu, Yongin-Shi, Kyungki-Do, South Korea.
www.electrolab.kr.sgs.com

Telephone : +82 31 428 5700
FAX : +82 31 427 2371

1.2. Details of Applicant

Applicant : Metrologic Instruments, Inc.
Address : P.O. Box 307, Bellmawr, New Jersey, USA 08099-0307
Contact Person : Sandeep Unni
Phone No. : +1 856 228 8100
Fax No. : +1 856 228 6673

1.3. Description of EUT

Kind of Product	Industrial Mobile Computer
Model Name	OptimusPDA SP5700 Series
Serial Number	N/A
Power Supply	DC 3.7 V
Frequency Range	2412 MHz ~ 2462 MHz(11b/g), 2402 MHz ~ 2480 MHz(Bluetooth) 824.2 MHz ~ 848.8 MHz(GSM 850), 1850.2 MHz ~ 1909.8 MHz(GSM 1900)
Modulation Technique	DSSS(11b), OFDM(11g), FHSS(Bluetooth), GMSK, 8-PSK
Number of Channels	11 CH(11b/g), 79 CH(Bluetooth), 300(GSM 1900), 125(GSM 850)
Operating Conditions	-20 ~ 55
Antenna Type	Polded Type(GSM), Plate Type(W-LAN), Chip Type(BT)
Antenna Gain	-1.24 dBi(GSM 850), -0.38dBi(GSM 1900)1.86 dBi(BT),-2.47 dBi(W-LAN)

* This sample uses one of each Symbol laser scan engine (Model: SE-955), HHP scan engine (Model: 5000 LED Aimer), and VuQuest scan engine (Model: IS4910). These 3 kind of scan engine doesn't give any effect on radio characteristics, so we evaluated EMI test only for these 3 kind of scan engines.

1.4. Details of modification

-N/A

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.5. Information about the FHSS characteristics:

1.5.1. Pseudorandom Frequency Hopping Sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1600 hops/s.

1.5.2. Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

1.5.3. System Receiver Input Bandwidth

Each channel bandwidth is 1MHz

1.6. Test Equipment List

EQUIPMENT	MANUFACTURER	MODEL	CAL DUE.
Signal Generator	Agilent	E4438C	May 2008
Spectrum Analyzer	R&S	FPS40	Dec. 2008
Highpass Filter	Wainwright	WHK3.0/18G-10SS	Dec.2008
Pre-amplifier	Agilent	8449B	May 2008
Amplifier	HP	8447F	Sep. 2008
Attenuator	Agilent	8494B	May 2008
Two-Line V-Network	Rohde & Schwarz	ENV216	Jan. 2009
Test Receiver	Rohde & Schwarz	ESVS10	Apr. 2008
Test Receiver	Rohde & Schwarz	ESHS10	Sep. 2008
Ultra-Broadband Antenna	Rohde & Schwarz	HL562	Oct. 2009
Horn Antenna	Electro-Metrics	RGA-60	Jul. 2008
Anechoic Chamber	SY Corporation	L W H 6.5 3.5 3.5	Aug. 2008

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.7. Summary of Test Results

The EUT has been tested according to the following specifications:

APPLIED STANDARD:FCC Part15, RSS-210,RSS-Gen			
Section in FCC 15	Section in RSS-210 RSS-Gen	Test Item	Result
15.207	RSS-Gen 7.2.2	Transmitter AC Power Line Conducted Emission	Complied
15.107	RSS-Gen 7.2.2	Receiver AC Power Line Conducted Emission	Complied
15.205(a) 15.209 15.247(d)	A8.5	Transmitter Radiated Spurious Emissions Conducted Spurious Emission	Complied
15.109(a)	RSS-Gen 6	Receiver Radiated Spurious Emission	complied
15.247(a)(1)	A8.1(1)	20 dB Bandwidth and 99% BW	complied
15.247(b)(1)	A8.4(2)	Maximum Peak Output Power	Complied
15.247(a)(1)	A8.1(2)	Frequency Separation	Complied
15.247(a)(1)()	A8.1(4)	Number of Hopping Frequency	Complied
15.247(a)(1)()	A8.1(4)	Time of Occupancy (Dwell Time)	Complied
15.247(f)	A8.3(2)	Power Spectral Density	Complied

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.8. Conclusion of worst-case and operation mode

The EUT has three type of Scan Engine (Symbol laser, hhp scanner, VuQuest scanner).

The test was tested to the worst case of three type of Scan Engine (Symbol laser, hhp scanner, VuQuest scanner).


The field strength of spurious emission was measured in three orthogonal EUT positions(X-axis, Y-axis and Z-axis).

The highest emission of EUT position is Z-axis.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2. Transmitter AC Power Line Conducted Emission

2.1. Test Setup

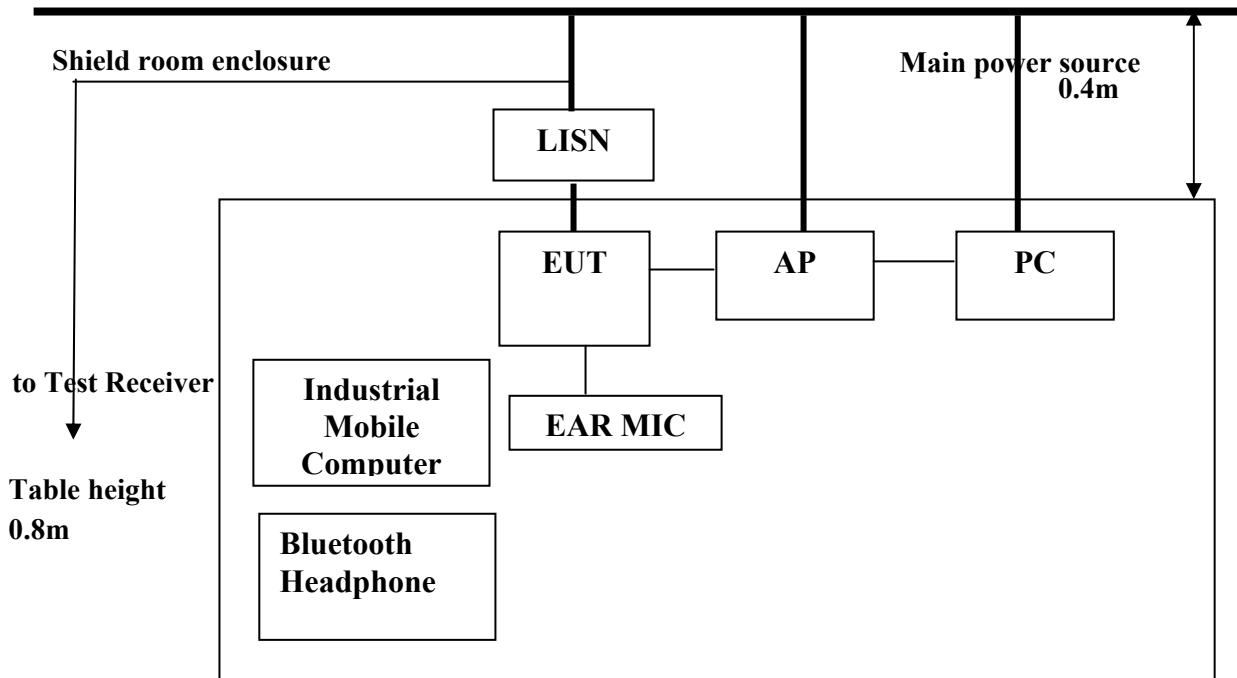

2.2. Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.50	66-56*	56-46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

* Decreases with the logarithm of the frequency.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

1. The test procedure is performed in a 6.5m × 3.6m× 3.6m (L×W×H) shielded room. The EUT along with its peripherals were placed on a 1.0m(W)× 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.4. Test Results

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line.

Ambient temperature : 22 Relative humidity : 43 %

Frequency range : 0.15 MHz – 30 MHz

Measured Bandwidth : 9 kHz

FREQ. (MHz)	LEVEL(dBuV)		LINE	LIMIT(dBuV)		MARGIN(dB)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.195	42.90	29.00	N	63.82	53.82	20.92	24.82
0.265	37.70	29.10	N	61.27	51.27	23.57	22.17
12.470	35.90	28.40	N	60.00	50.00	24.10	21.60
12.535	36.20	35.40	N	60.00	50.00	23.80	14.60
12.735	34.20	29.40	N	60.00	50.00	25.80	20.60
12.930	34.00	30.20	N	60.00	50.00	26.00	19.80
0.195	41.50	27.90	H	63.82	53.82	22.32	25.92
0.265	37.30	29.20	H	61.27	51.27	23.97	22.07
12.470	37.40	36.60	H	60.00	50.00	22.60	13.40
12.535	37.50	36.10	H	60.00	50.00	22.50	13.90
12.735	36.70	34.40	H	60.00	50.00	23.30	15.60
12.930	34.30	30.50	H	60.00	50.00	25.70	19.50

Note ;


Line (H) : Hot

Line (N) : Neutral

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


Plot of Conducted Power line

Test mode : (Hot)

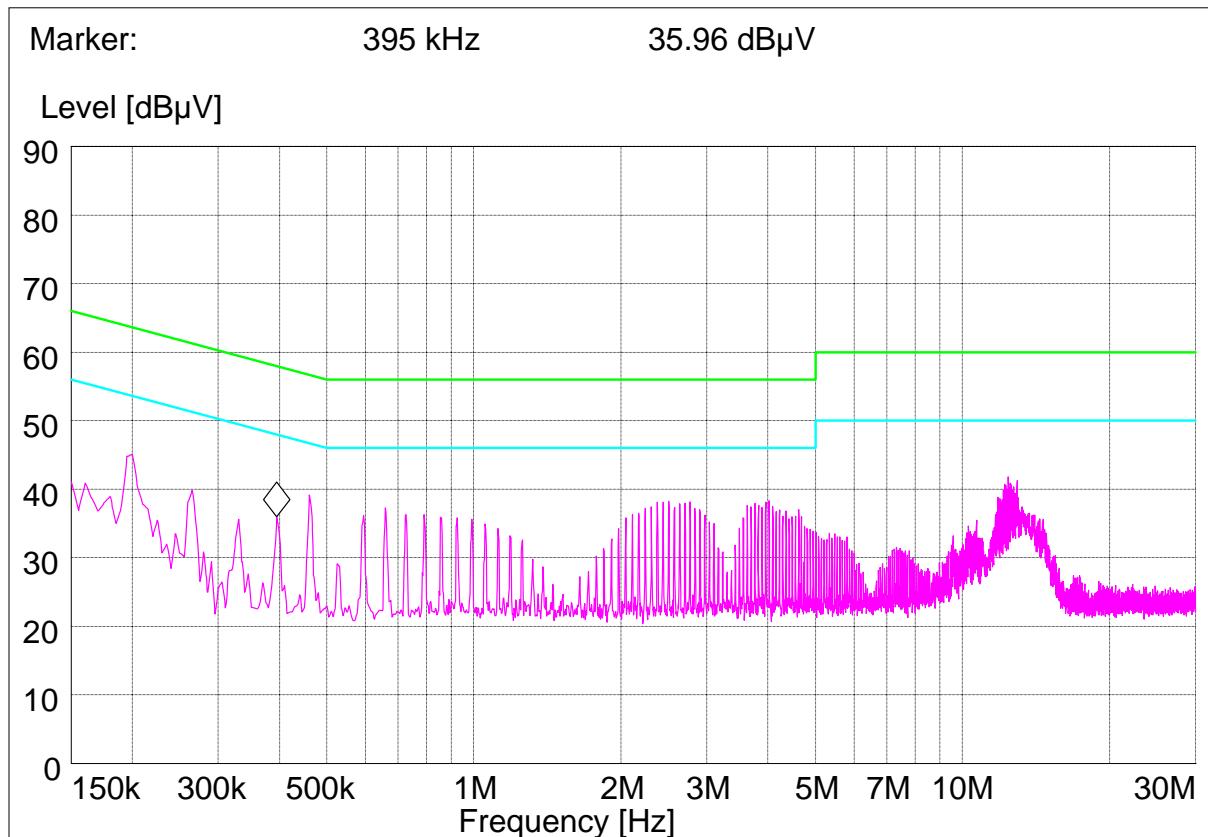

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Test mode : (Neutral)

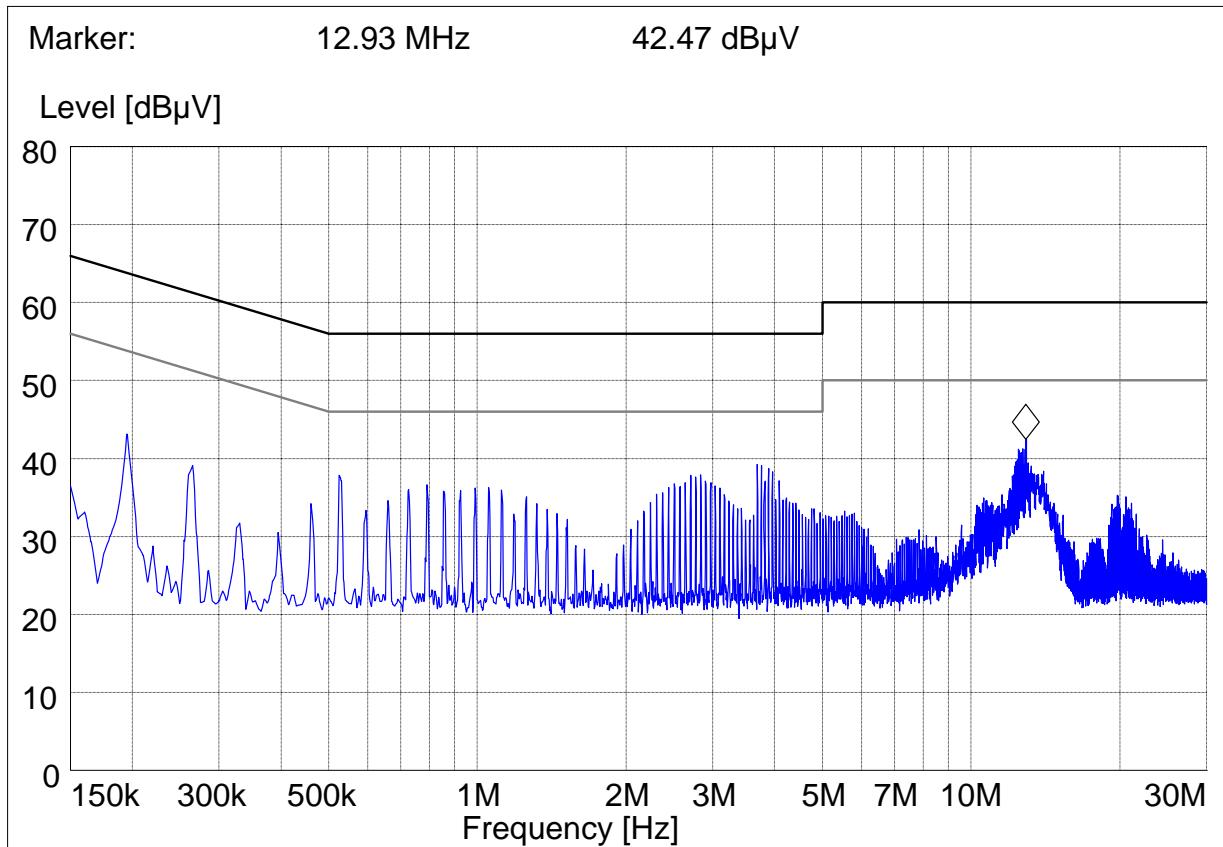

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3. Receiver AC Power Line Conducted Emission

3.1. Test Setup- Same as clause 2.1.

3.2. Limit

According to §15.107(a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency of Emission (MHz)	Conducted limit (dB μ V)	
	Qausi-peak	Average
0.15 – 0.50	66-56*	56-46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

* Decreases with the logarithm of the frequency.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3.3. Test Procedures- Same as clause 2.3.

3.4. Test Results

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line;
Addition,

Ambient temperature : 22 Relative humidity : 43 %

Frequency range : 0.15 MHz – 30 MHz

Measured Bandwidth : 9 kHz

FREQ. (MHz)	LEVEL(dBuV)		LINE	LIMIT(dBuV)		MARGIN(dB)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.190	46.30	36.20	N	64.04	54.04	17.74	17.84
0.330	34.10	25.40	N	59.45	49.45	25.35	24.05
1.790	30.20	24.10	N	56.00	46.00	25.80	21.90
1.980	31.20	26.20	N	56.00	46.00	24.80	19.80
14.150	41.20	37.10	N	60.00	50.00	18.80	12.90
14.510	38.90	33.50	N	60.00	50.00	21.10	16.50
0.190	49.30	37.80	H	64.04	54.04	14.74	16.24
0.330	33.70	24.50	H	59.45	49.45	25.75	24.95
1.790	29.80	25.40	H	56.00	46.00	26.20	20.60
1.980	30.10	25.60	H	56.00	46.00	25.90	20.40
14.150	39.20	37.80	H	60.00	50.00	20.80	12.20
14.510	37.00	34.10	H	60.00	50.00	23.00	15.90

Note ;


Line (H) : Hot

Line (N) : Neutral

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


Plot of Conducted Power line

Test mode : (Hot)

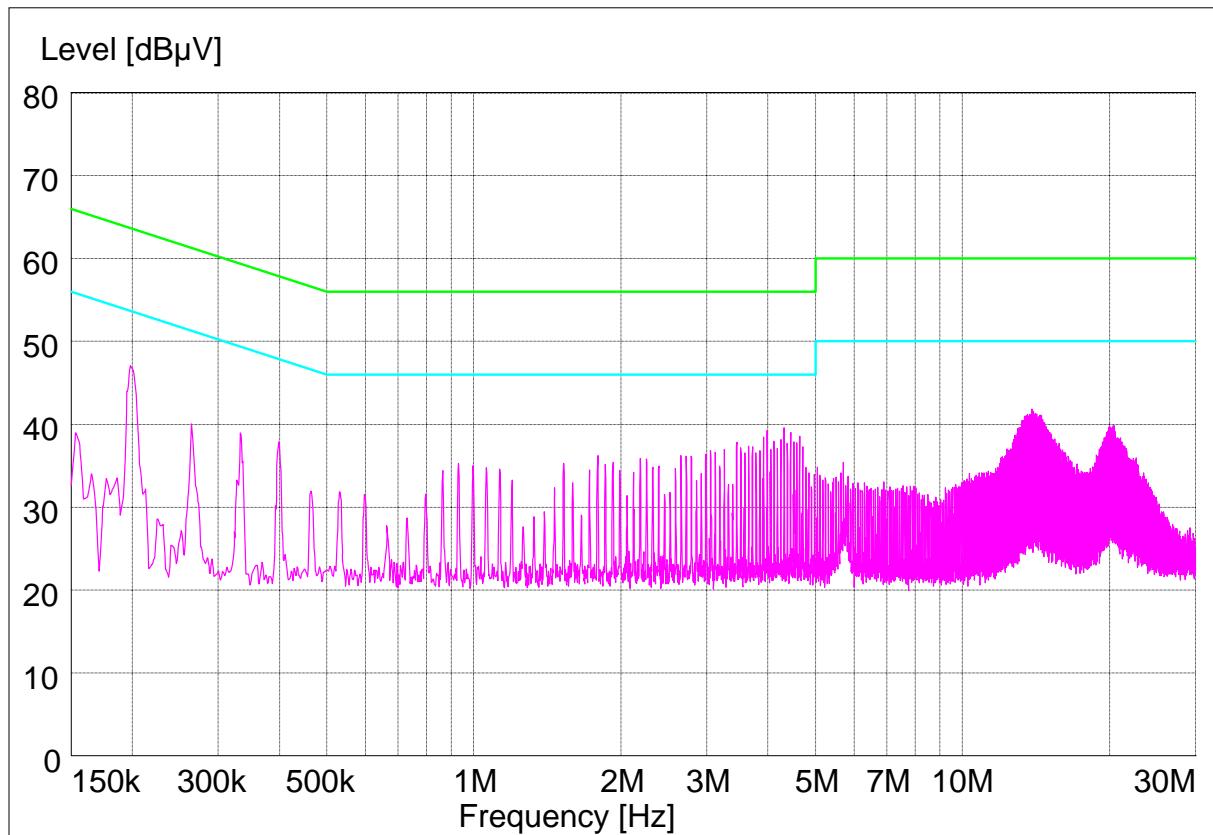

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Test mode : (Neutral)

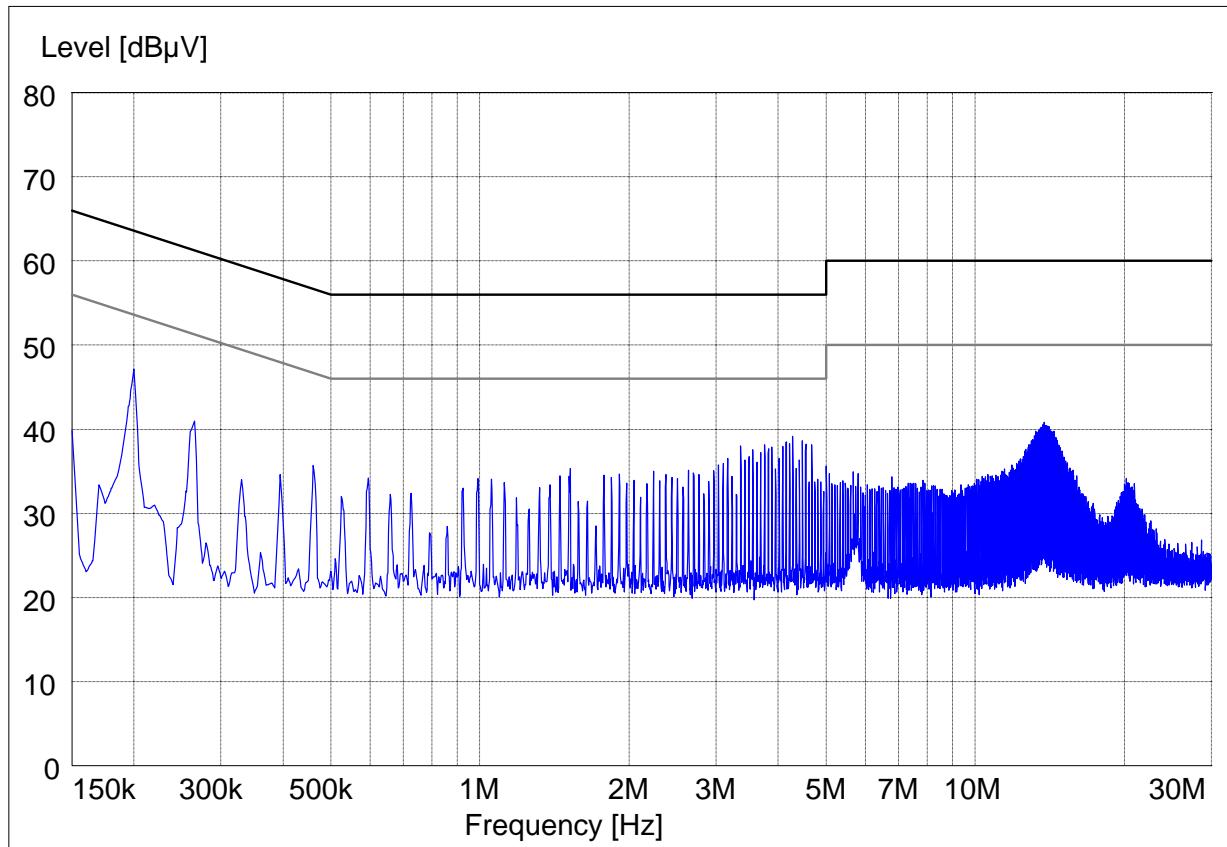


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission


4.1. Test Setup

4.1.1. Transmitter Radiated Spurious Emissions

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

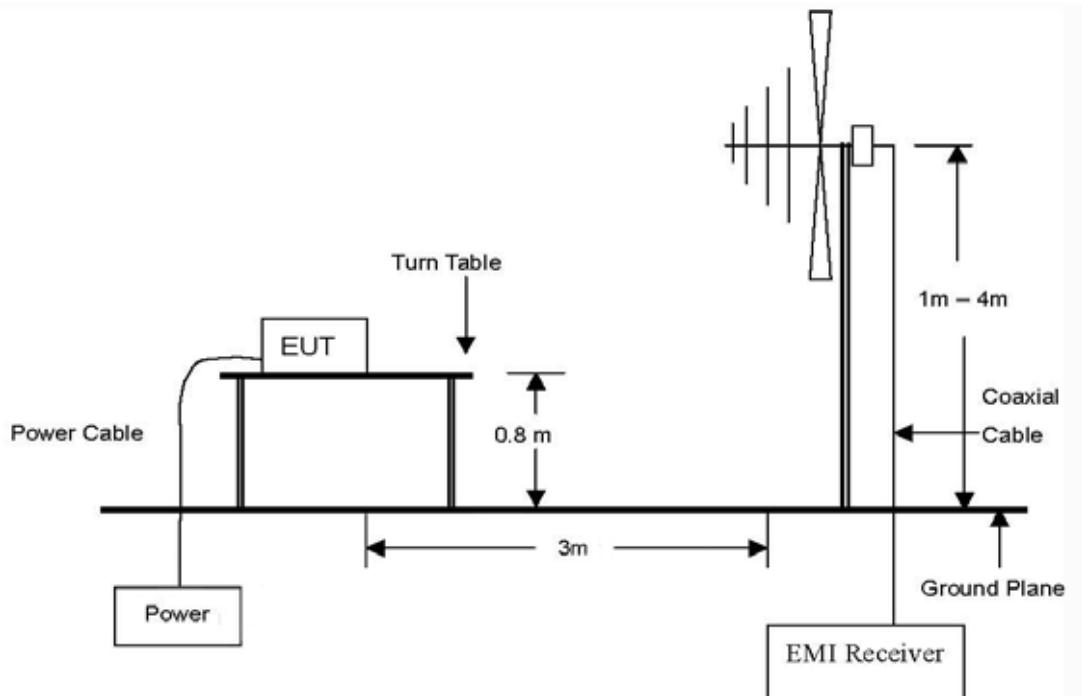

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 24 GHz Emissions.

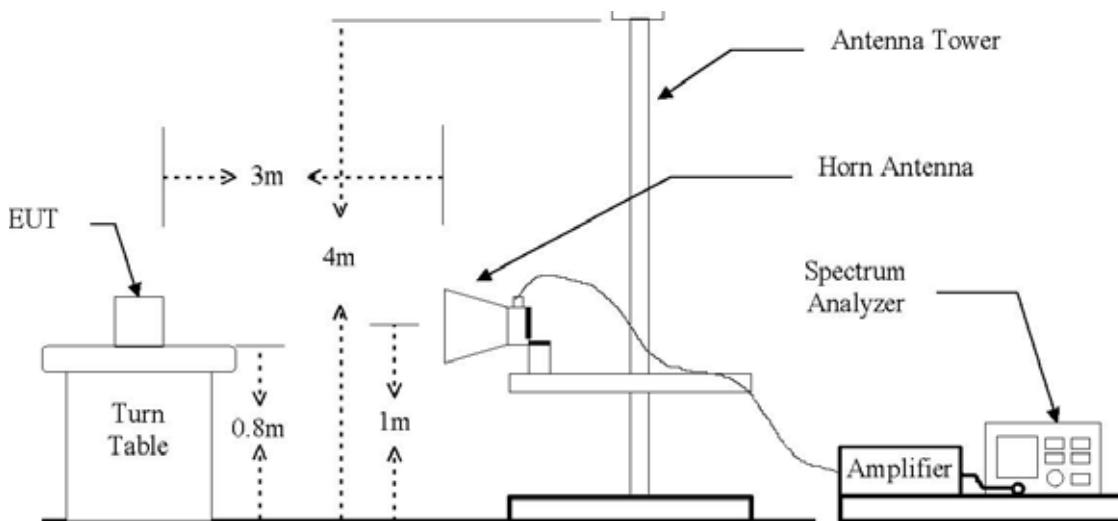

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.1.2. Conducted Spurious Emissions



4.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement , provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval , as permitted under paragraph(b)(3) of this section , the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.109(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

According to §15.109(a), for an unintentional device, except for Class A digital devices, the field strength of radiated emission from unintentional radiators at a distance of 3 meters shall not exceed the above table.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

4.3.1. Test Procedures for Radiated Spurious Emissions

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz for Peak detection and frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

4.3.2. Test Procedures for Conducted Spurious Emissions

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=100 kHz, VBW=100 kHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.4. Test Results

Ambient temperature : 21 Relative humidity : 43 %

4.4.1. Spurious Radiated Emission (Worst case)

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions are not reported much lower than the prescribed limits.

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
122.150	22.65	Q.P.	H	9.52	1.42	33.59	43.50	9.91
202.175	22.43	Q.P.	H	7.31	1.81	31.55	43.50	11.95
505.300	17.20	Q.P.	V	15.57	2.98	35.75	46.00	10.25
553.800	16.00	Q.P.	V	16.25	3.09	35.34	46.00	10.66
624.125	12.16	Q.P.	V	17.38	3.33	32.87	46.00	13.13
898.150	12.09	Q.P.	V	20.58	4.03	36.70	46.00	9.30
956.350	12.06	Q.P.	V	20.86	4.28	37.20	46.00	8.80
Above 960.000	Not Detected	-	-	-	-	-	-	-

Remark:

1. All spurious emission at channels are almost the same below 1 GHz, so that the channel was chosen at representative in final test.
2. “*” means the restricted band.
3. Actual = Reading + AF + CL

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.4.2. Spurious Radiated Emission

The frequency spectrum above 1000 MHz was investigated. All emissions are not reported much lower than the prescribed limits.

A. Low Channel (2402 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain+CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2390.00*	45.69	P	H	28.06	-28.19	45.56	74.00	28.44
4804.00	35.37	P	H	32.90	-24.78	43.49	74.00	30.51
Above 4900.00	Not Detected	-	-	-	-	-	-	-

B. Middle Channel (2441 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain+CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.00	35.40	P	H	32.93	-25.07	43.26	74.00	30.74
Above 4900.00	Not Detected	-	-	-	-	-	-	-

C. High Channel (2480 MHz)

Radiated Emissions			Ant	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain+CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin
2483.50*	54.44	P	H	28.34	-28.14	54.64	74.00	19.36
2483.50*	42.34	A	H	28.34	-28.14	42.54	54.00	11.46
4960.00	35.42	P	H	32.97	-24.95	43.44	74.00	30.56
Above 5000.00	Not Detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


Remarks :

1. “*” means the restricted band.
2. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental Frequency.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using peak/average detector mode.
4. Average test would be performed if the peak result were greater than the average limit.
5. Actual = Reading + AF - Amp Gain + CL


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.4.3. Spurious RF Conducted Emissions: Plot of Spurious RF Conducted Emission

Low Channel

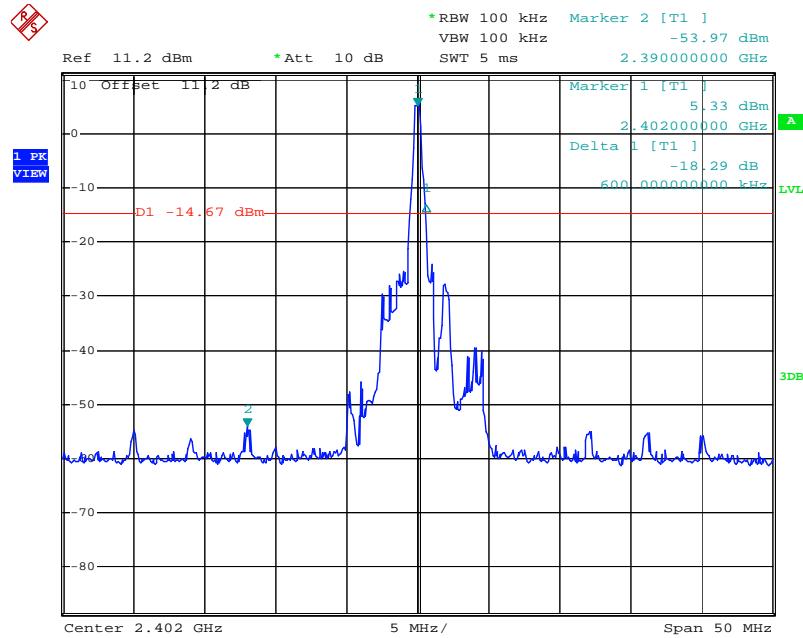


Date: 30.NOV.2007 15:49:10

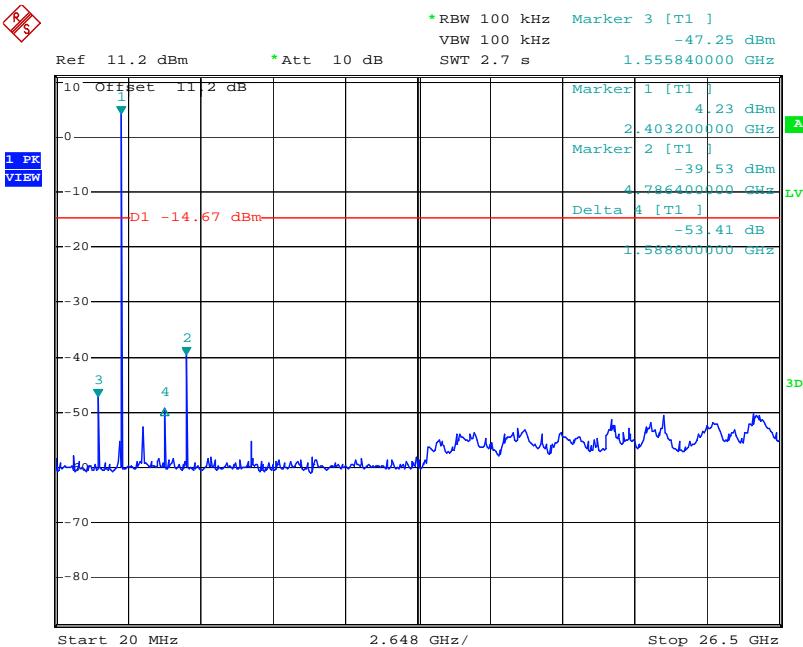


Date: 30.NOV.2007 15:50:35

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

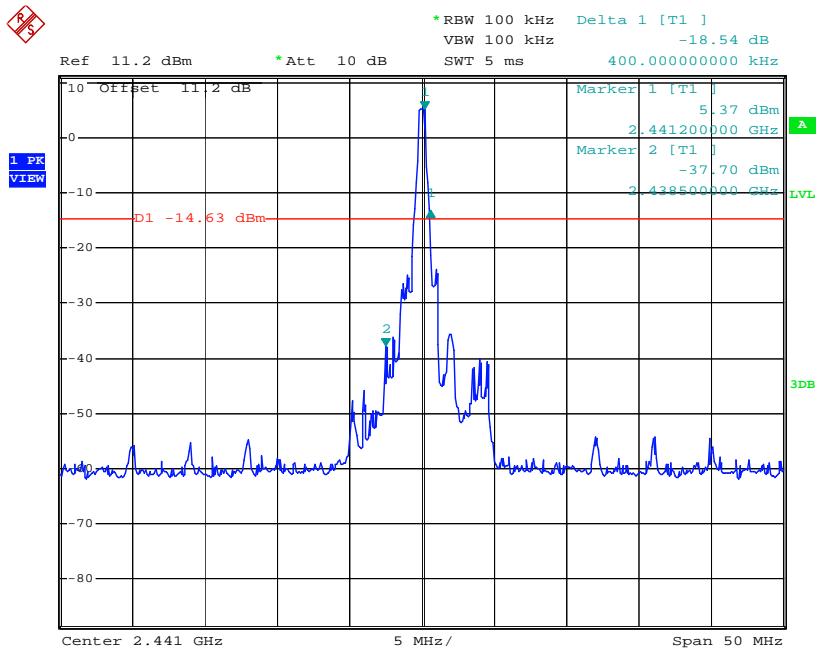


Date: 30.NOV.2007 15:52:47

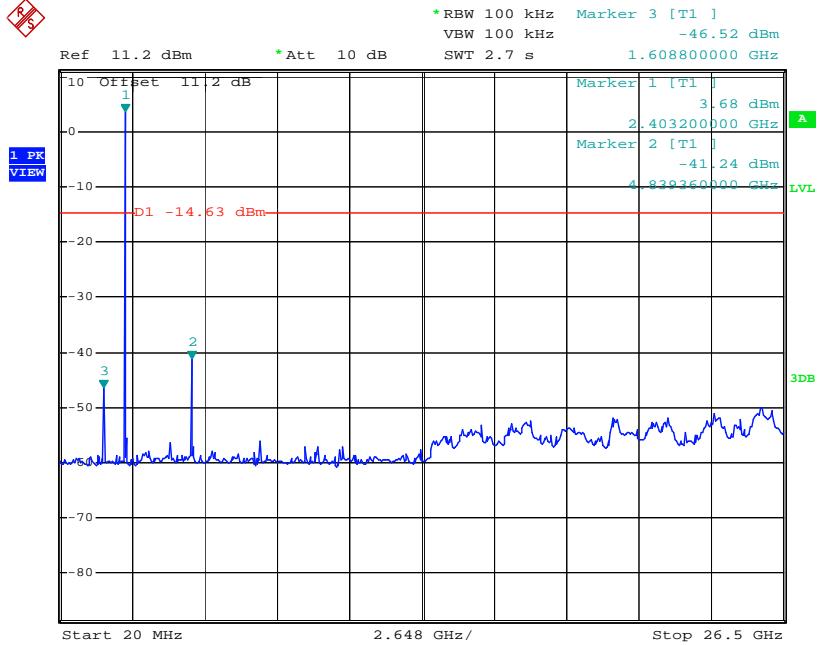


Date: 30.NOV.2007 15:54:18

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

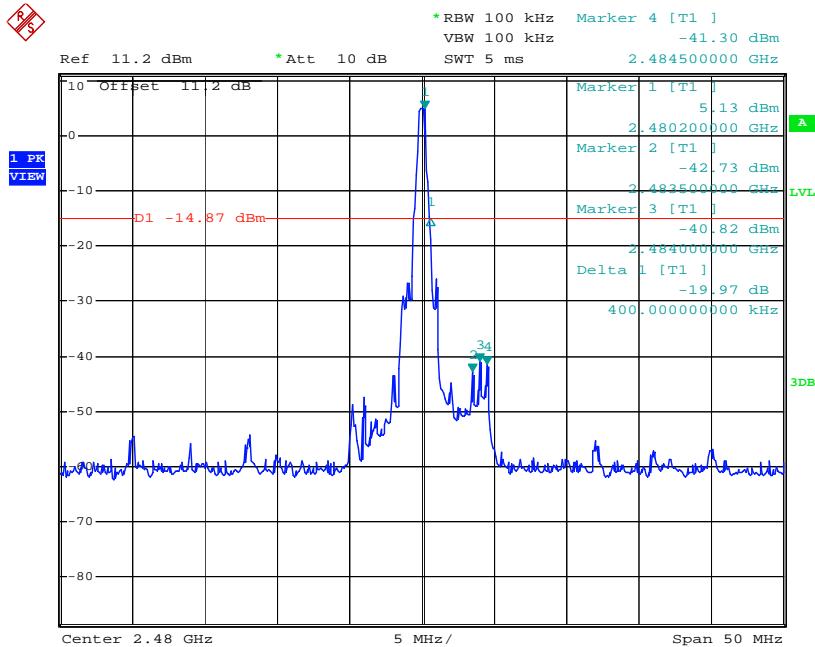

Date: 30.NOV.2007 15:56:06

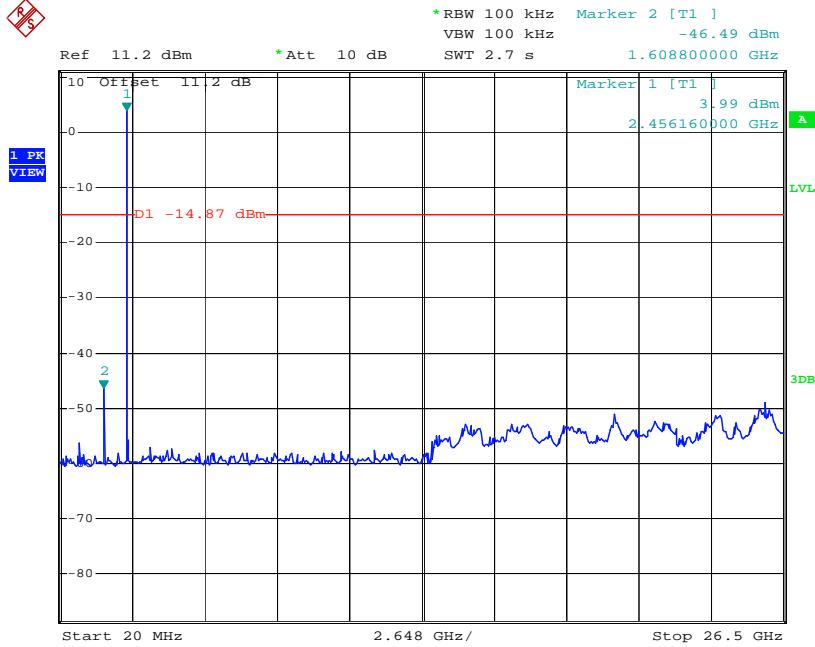

Date: 30.NOV.2007 15:57:10

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

5. Receiver Radiated spurious emissions

5.1. Test setup - Same as clause 4.1.

5.1.1. Receiver Radiated Spurious Emissions - Same as clause 4.1.1.

5.2. Limit

According to §15.109(a), Except for Class A digital devices, the field strength of radiated emission from unintentional radiator at a distance of 3 m shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30 - 88	3	40.0	100
88 – 216	3	43.5	150
216 – 960	3	46.0	200
Above 960	3	54.0	500

5.3. Test Procedures - Same as clause 4.3.

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

5.3.1. Test Procedures for Radiated Spurious Emissions- Same as clause 4.3.1.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

5.4. Test Results

Ambient temperature : 21 Relative humidity : 43 %

5.4.1. Spurious Radiated Emission (Worst case)

All emissions are not reported much lower than the prescribed limits. All reading values are quasi-peak values.

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
35.62	16.30	Q.P.	V	16.76	0.77	33.83	40.0	6.17
82.36	11.50	Q.P.	H	8.08	1.15	20.73	40.0	19.27
116.52	18.50	Q.P.	V	9.78	1.38	29.66	43.5	13.84
179.65	19.60	Q.P.	H	7.92	1.72	29.24	43.5	14.26
405.00	18.70	Q.P.	H	13.52	2.70	34.92	46.0	11.08
668.74	17.40	Q.P.	H	18.12	3.45	38.97	46.0	7.03
Above 670.00	Not Detected	-	-	-	-	-	-	-


Remark:

1. All spurious emission at channels are almost the same below 1 GHz, so that the channel was chosen at representative in final test.
2. “*” means the restricted band.
3. Actual = Reading + AF + CL

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6. 20 dB Bandwidth Measurement and 99% BW

6.1. Test Setup

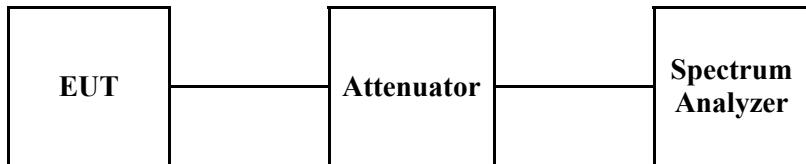

6.2. Limit

Limit: Not Applicable

6.3. Test Procedure

1. The 20dB band width was measured with a spectrum analyzer connected to RF antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 20dB band width of the emission was determined.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=10 kHz, VBW=10 kHz, Span=2 MHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.4. Test Results

Ambient temperature : 21 Relative humidity : 43 %


Operation Mode	Channel	Channel Frequency (MHz)	20 dB Bandwidth (MHz)
GFSK	Low	2402	0.824
	Middle	2441	0.828
	High	2480	0.828

Operation Mode	Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
GFSK	Low	2402	0.875
	Middle	2441	0.865
	High	2480	0.865

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


20 dB Bandwidth

Low Channel

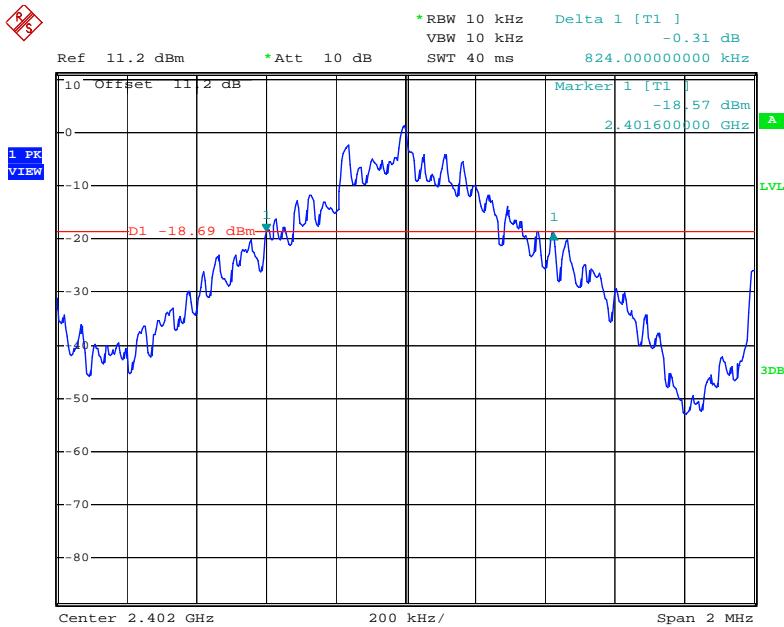

Date: 30.NOV.2007 16:03:00


Middle Channel

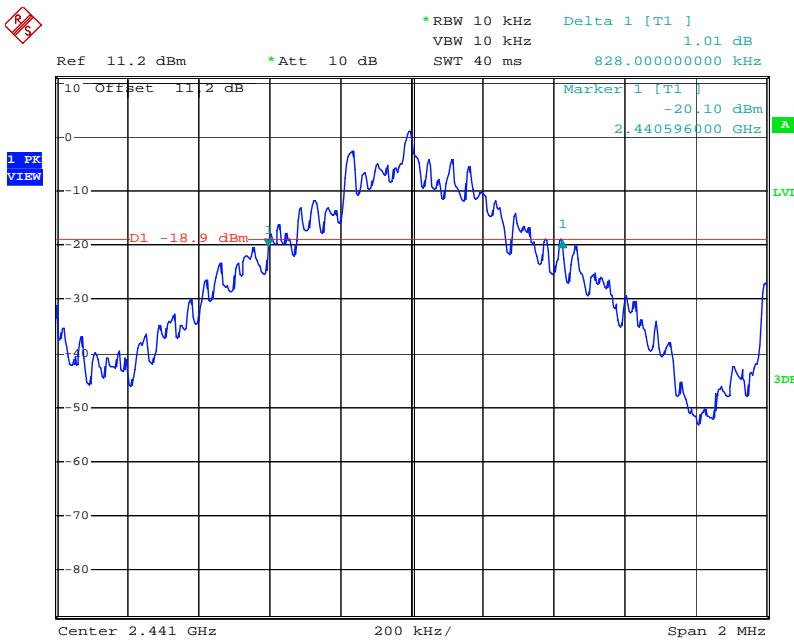

Date: 30.NOV.2007 16:04:49

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

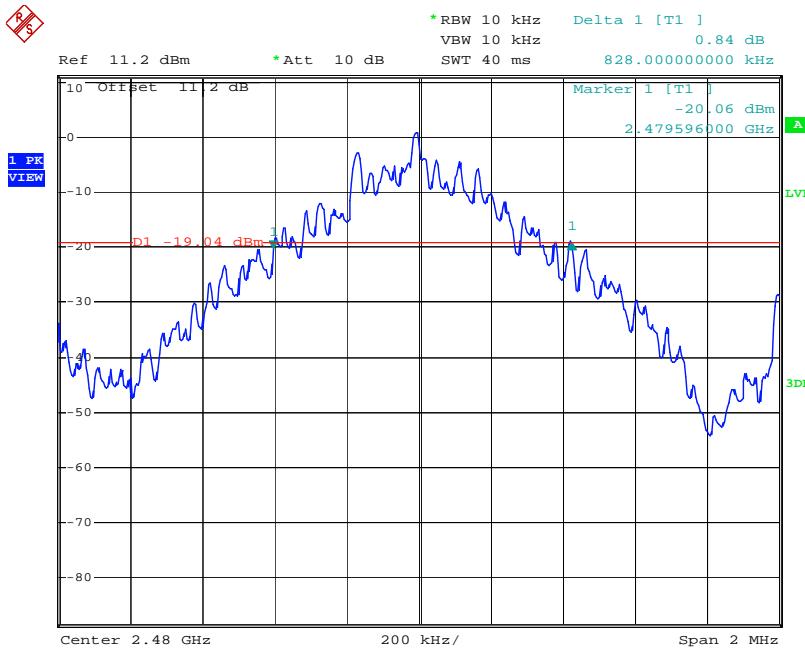

Date: 30.NOV.2007 16:06:49

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.


705, Dongchun-Dong Sooji-Gu, Yongin-Shi, Kyungki-Do, South Korea.

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

99% Bandwidth

Low Channel

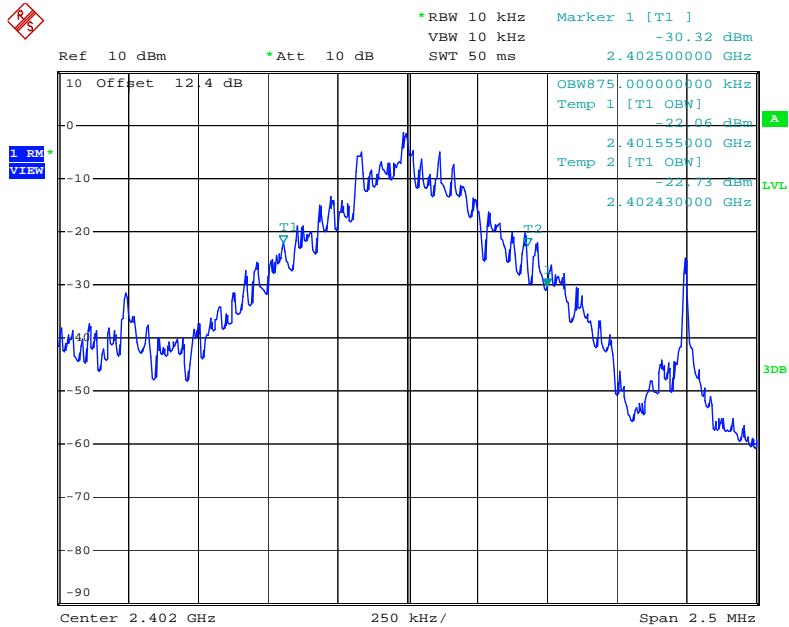

Date: 8.JAN.2008 16:34:59


Middle Channel



Date: 8.JAN.2008 16:36:34

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

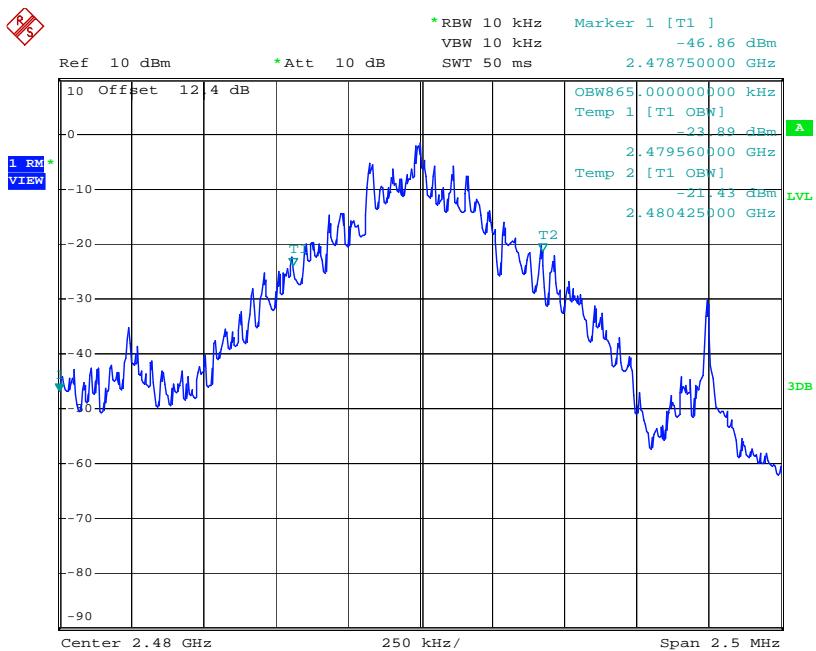

Date: 8.JAN.2008 16:37:06

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.


705, Dongchun-Dong Sooji-Gu, Yongin-Shi, Kyungki-Do, South Korea.

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

7. Maximum Peak Output Power Measurement

7.1. Test Setup

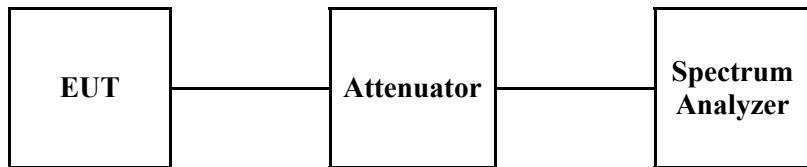

7.2. Limit

§15.247(b)(3) For systems using digital modulation in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz band: 1 Watt.

7.3. Test Procedure

1. The RF power output was measured with a Spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using ;
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
RBW = 1 MHz
VBW \geq RBW
Sweep = auto
Detector function = peak
Trace = max hold

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


7.4. Test Results

Ambient temperature : 21 Relative humidity : 42 %

Operation Mode	Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)
GFSK	Low	2402	5.11	30
	Middle	2441	4.95	30
	High	2480	4.70	30


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Low Channel

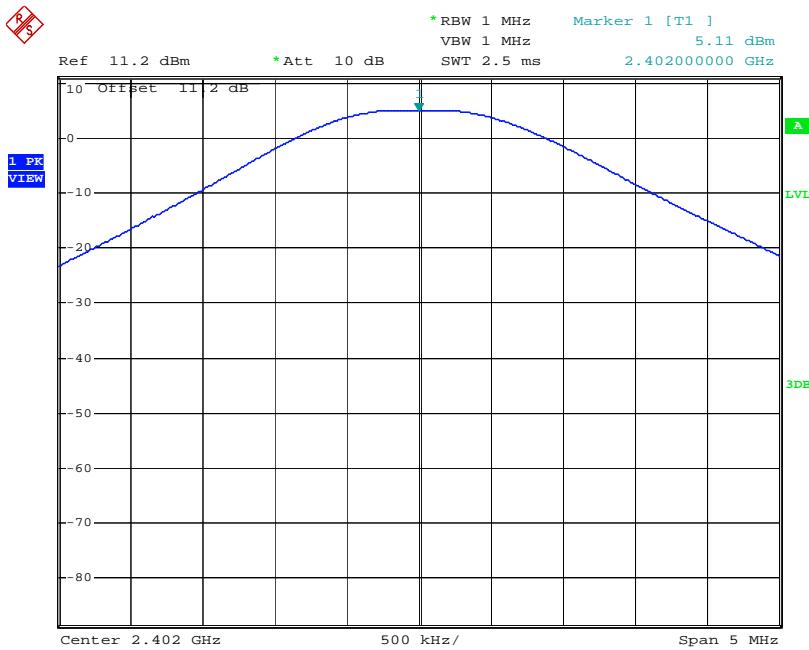

Date: 30.NOV.2007 16:08:19


Middle Channel

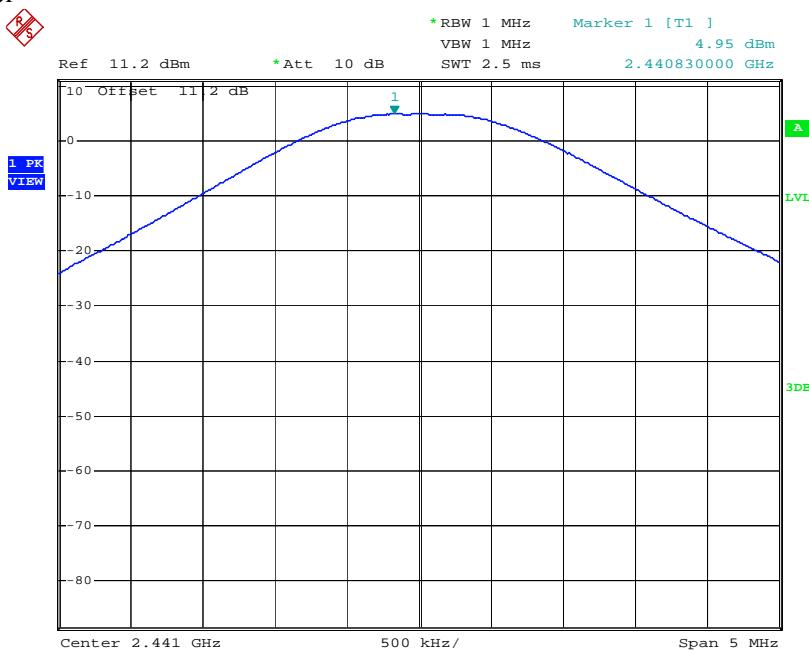

Date: 30.NOV.2007 16:09:01

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

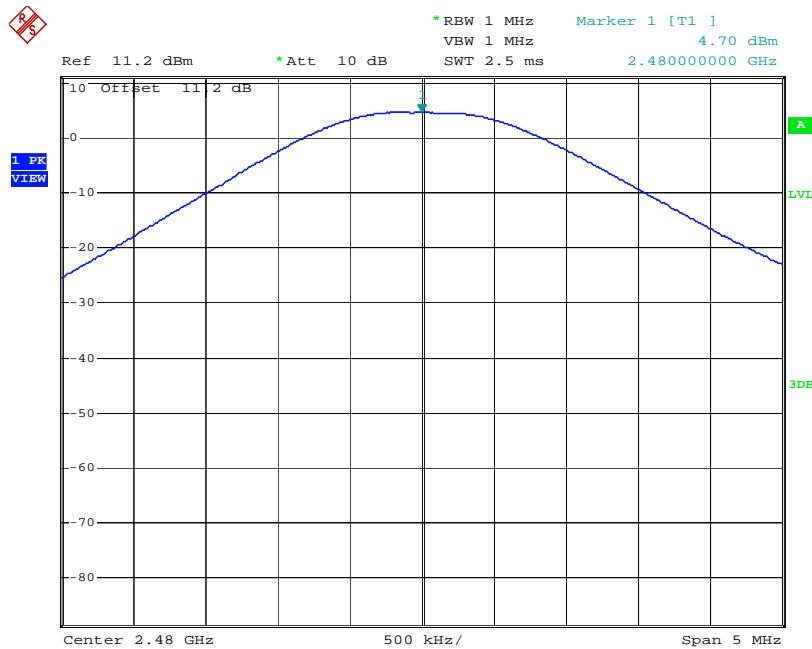


Date: 30.NOV.2007 16:09:41

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

8. Hopping Channel Separation

8.1. Test Setup

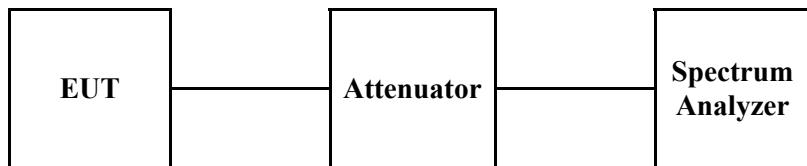

8.2. Limit

§15.247(a)(1) Frequency hopping system operating in 2400-2483.5MHz. Band may have hopping channel carrier frequencies that are separated by 25kHz or two-third of 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

8.3. Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of adjacent channels.
4. Measure the frequency difference of these two adjacent channels by spectrum analyzer MARK function. And then plot the result on spectrum analyzer screen.
5. Repeat above procedures until all frequencies measured were complete.
6. Set center frequency of spectrum analyzer = middle of hopping channel.
7. Set the spectrum analyzer as RBW=100 kHz, VBW=100 kHz, Span=5 MHz and Sweep = auto.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


8.4. Test Results

Ambient temperature : 21 Relative humidity : 43 %

Operation Mode	Channel (Middle)	Adjacent Hopping Channel Separation (kHz)	Two-third of 20 dB Bandwidth (kHz)	Minimum Bandwidth (kHz)
GFSK	2441 MHz	1000	552	25

Note ;

20 dB bandwidth measurement, the measured channel separation should be greater than two-third of 20dB bandwidth or Minimum bandwidth.

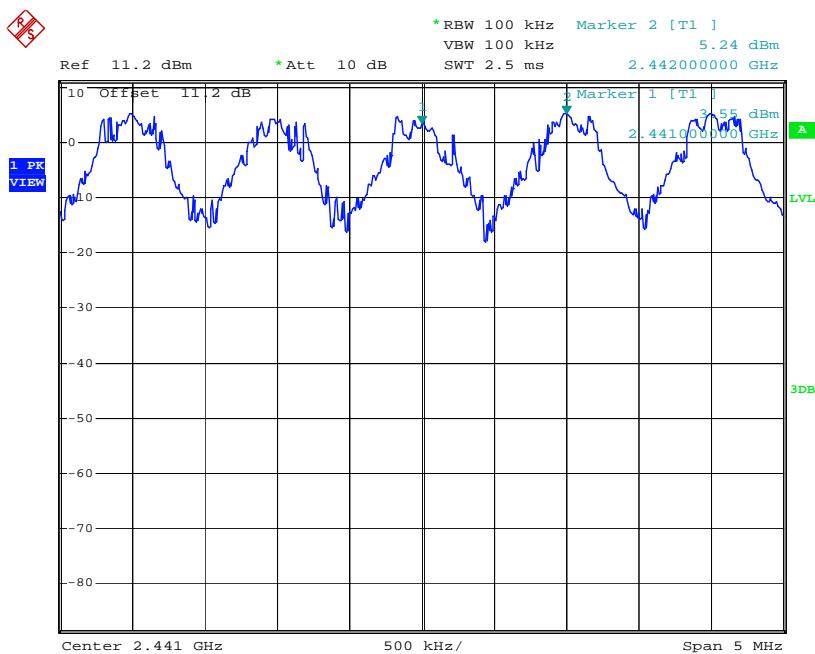


Date: 30.NOV.2007 16:33:42

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

9. Number of Hopping Frequency

9.1. Test Setup

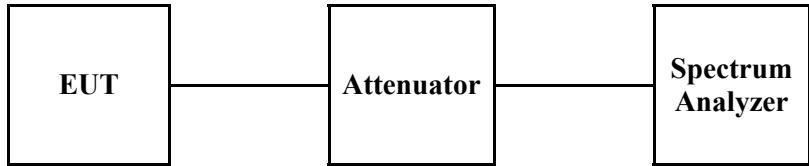

9.2. Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2400-2483.5MHz bands shall use at least 15 hopping frequencies.

9.3. Test Procedure


1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna the port to the Spectrum analyzer
3. Set spectrum analyzer Start=2400 MHz, Stop=2441.5 MHz, Sweep=auto and Start=2441.5 MHz, Stop= 2483.5 MHz, Sweep=auto.
4. Set the spectrum analyzer as RBW, VBW=300 kHz.
5. Max hold, view and count how many channel in the band.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

9.4. Test Results


Ambient temperature : 20 Relative humidity : 43 %

Operation Mode	Number of Hopping Frequency	Limit
GFSK	79	≥ 15

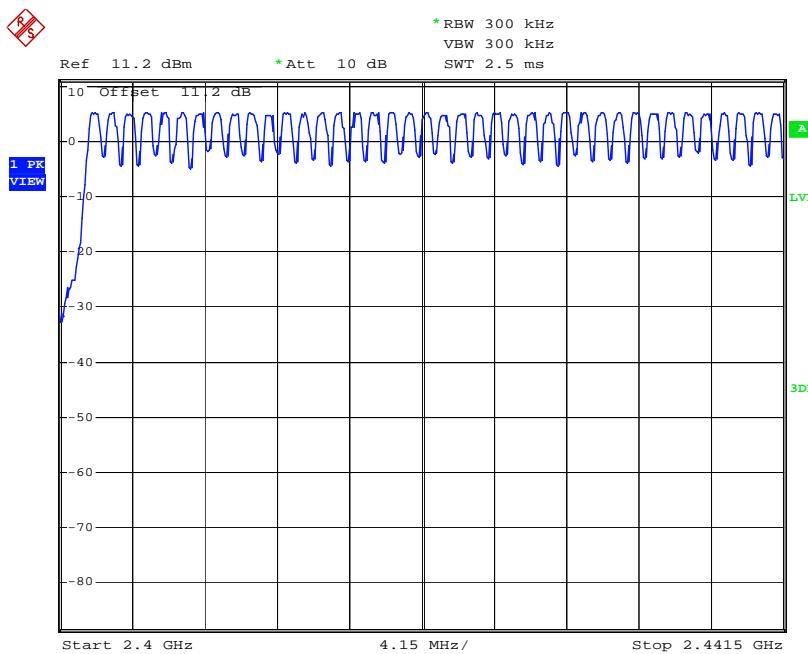

Date: 30.NOV.2007 16:35:55

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

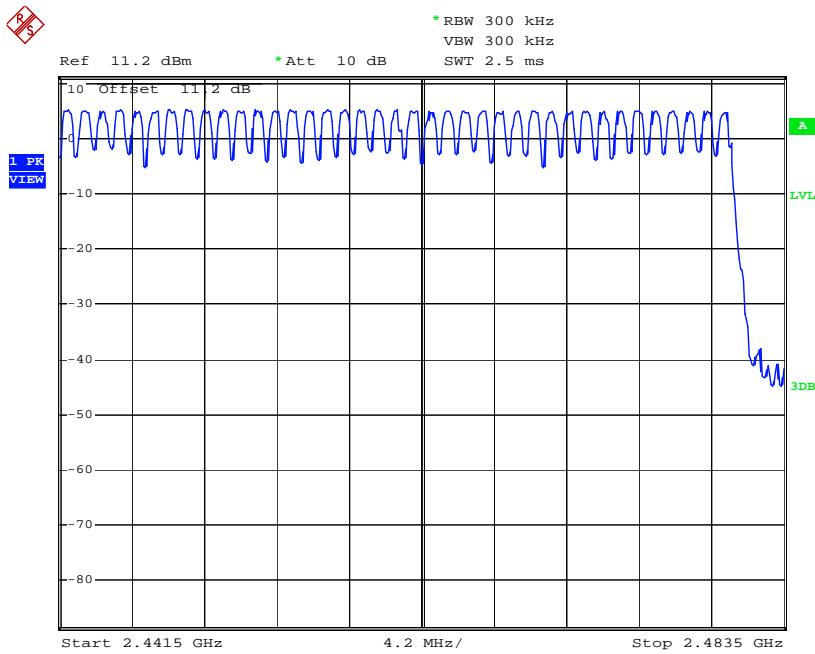

Date: 30.NOV.2007 16:37:27

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.


705, Dongchun-Dong Sooji-Gu, Yongin-Shi, Kyungki-Do, South Korea.

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

www.electrolab.kr.sgs.com

10. TIME OF OCCUPANCY (DWELL TIME)

10.1. Test Set up

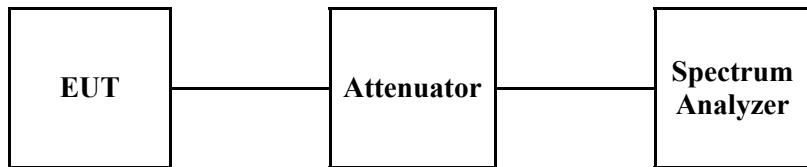

10.2. Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2400-2483.5MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

A period time=0.4(s)*79=31.6(s)

10.3. Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable.
3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The Bluetooth has 3 type of payload, DH1, DH3, DH5. The hopping rate is 1600 per second.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

10.4. Test Results

Ambient temperature : 20 Relative humidity : 43 %

Time of occupancy on the TX channel in 31.6sec
 = time domain slot length \times (hop rate \div number of hop per channel) \times 31.6

10.4.1. Packet Type: DH1


Operation Mode	Frequency	Dwell Time (ms)	Time of occupancy on the Tx Channel in 31.6 sec (ms)	Limit for time of occupancy on the Tx Channel in 31.6 sec (ms)
GFSK	2402	0.420	134.4	400
	2441	0.420	134.4	400
	2480	0.420	134.4	400

2402 MHz : 0.420(ms) \times [(1600 \div 2) \div 79] \times 31.6(s) = 134.4(ms)

2441 MHz : 0.420(ms) \times [(1600 \div 2) \div 79] \times 31.6(s) = 134.4(ms)

2480 MHz : 0.420(ms) \times [(1600 \div 2) \div 79] \times 31.6(s) = 134.4(ms)


Low Channel

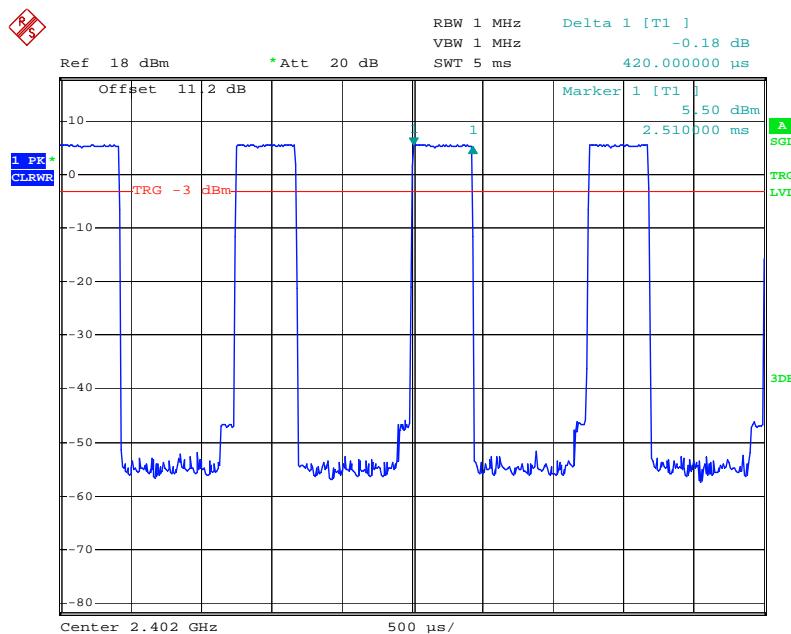

Date: 3.DEC.2007 09:34:10


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

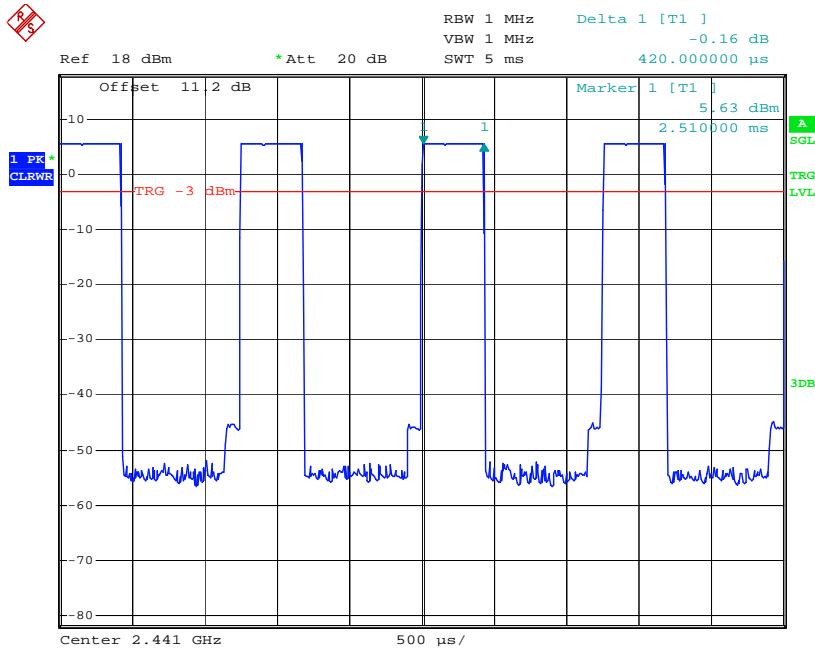

Date: 3.DEC.2007 09:34:58

High Channel

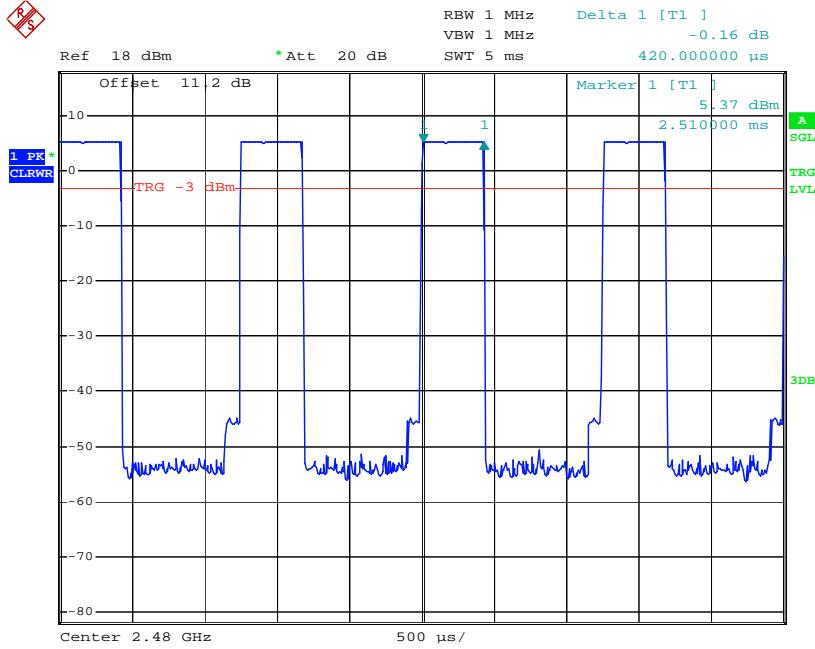

Date: 3.DEC.2007 09:35:34

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

10.4.2. Packet Type: DH3


Operation Mode	Frequency	Dwell Time (ms)	Time of occupancy on the Tx Channel in 31.6 sec (ms)	Limit for time of occupancy on the Tx Channel in 31.6 sec (ms)
GFSK	2402 MHz	1.66	265.6	400
	2441 MHz	1.66	265.6	400
	2480 MHz	1.66	265.6	400

2402 MHz: $1.66 \text{ (ms)} \times [(1600 \div 4) \div 79] \times 31.6(\text{s}) = 265.6 \text{ (ms)}$

2441 MHz: $1.66 \text{ (ms)} \times [(1600 \div 4) \div 79] \times 31.6(\text{s}) = 265.6 \text{ (ms)}$

2480 MHz: $1.66 \text{ (ms)} \times [(1600 \div 4) \div 79] \times 31.6(\text{s}) = 265.6 \text{ (ms)}$


Low Channel

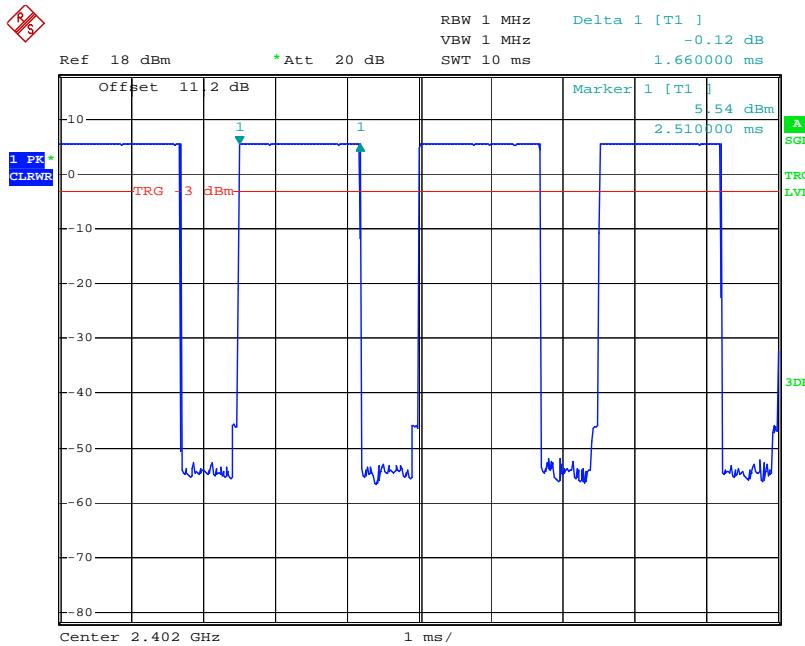

Date: 3.DEC.2007 09:38:08


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

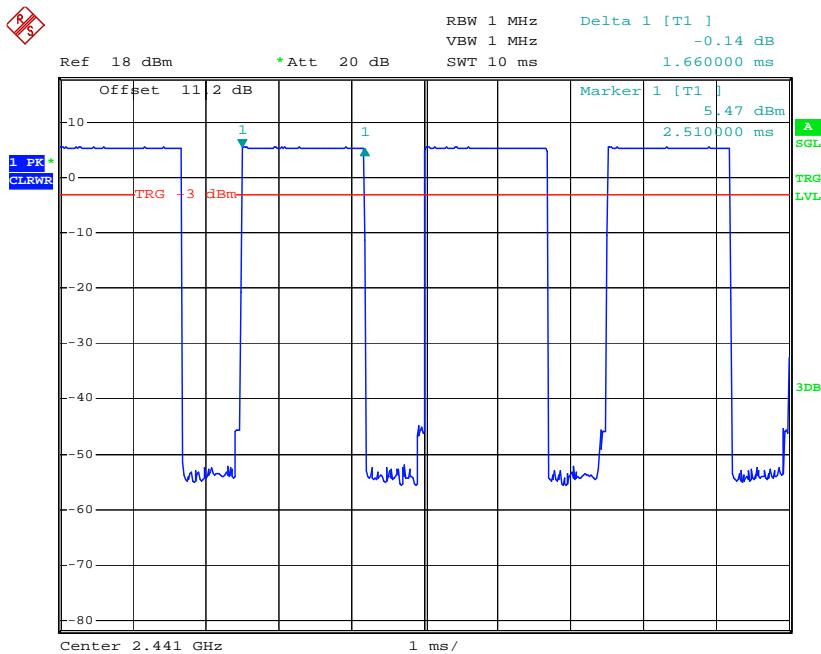

Date: 3.DEC.2007 09:38:41

High Channel

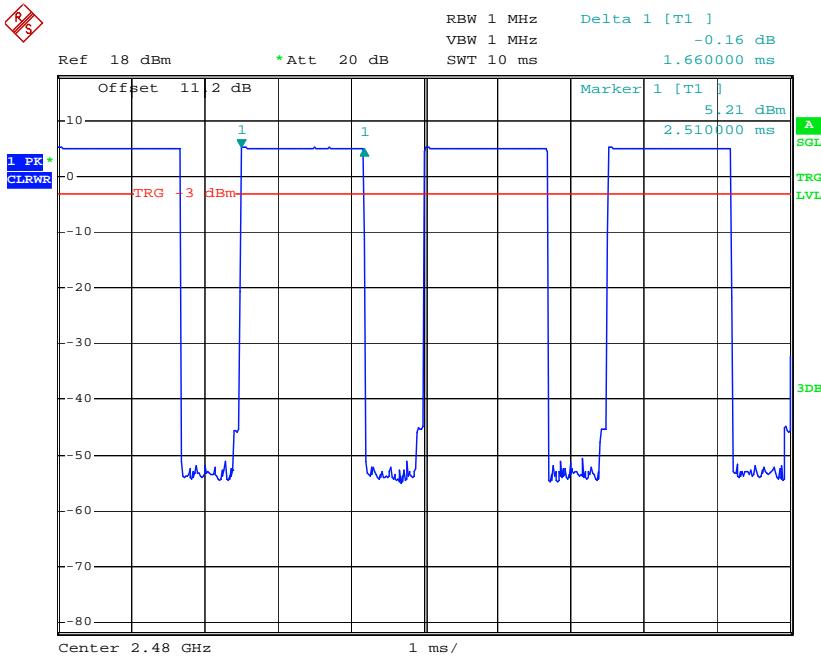

Date: 3.DEC.2007 09:39:12

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

10.4.3. Packet Type: DH5


Operation Mode	Frequency	Dwell Time (ms)	Time of occupancy on the Tx Channel in 31.6 sec (ms)	Limit for time of occupancy on the Tx Channel in 31.6 sec (ms)
GFSK	2402 MHz	2.94	313.6	400
	2441 MHz	2.94	313.6	400
	2480 MHz	2.94	313.6	400

2402 MHz: $2.94 \text{ (ms)} \times [(1600 \div 6) \div 79] \times 31.6(\text{s}) = 313.6(\text{ms})$

2441 MHz: $2.94 \text{ (ms)} \times [(1600 \div 6) \div 79] \times 31.6(\text{s}) = 313.6(\text{ms})$

2480 MHz: $2.94 \text{ (ms)} \times [(1600 \div 6) \div 79] \times 31.6(\text{s}) = 313.6(\text{ms})$


Low Channel

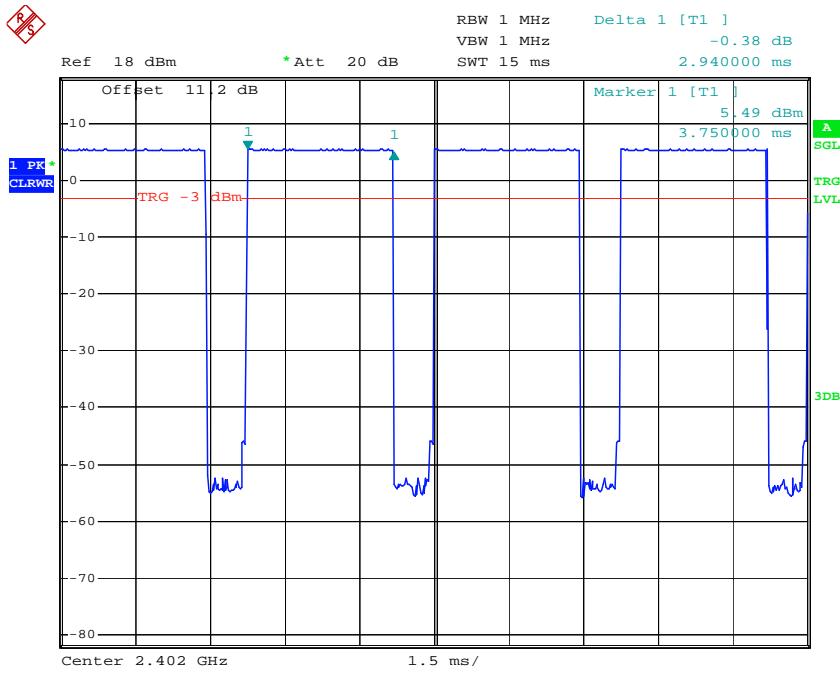

Date: 3.DEC.2007 09:40:46


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

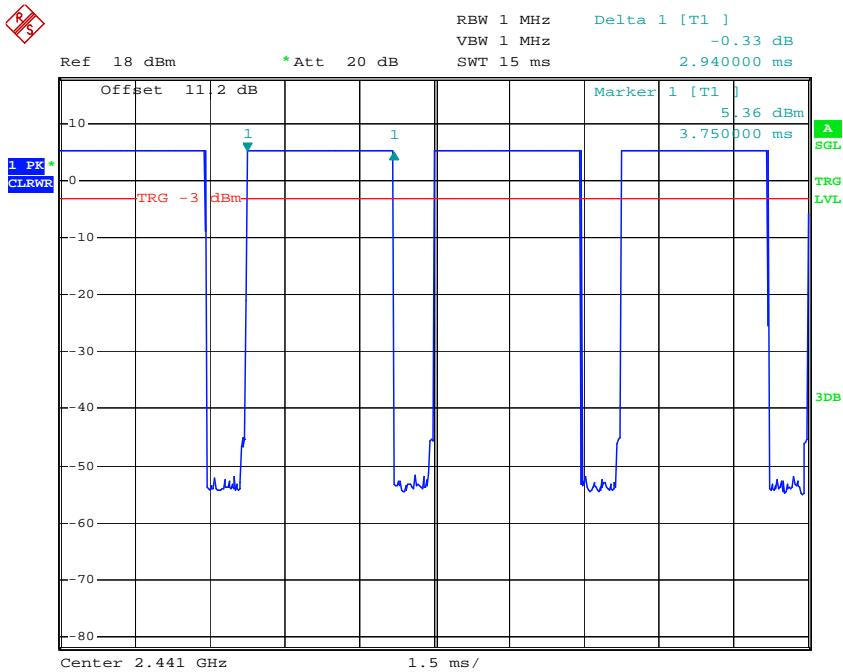

Date: 3.DEC.2007 09:41:19

High Channel

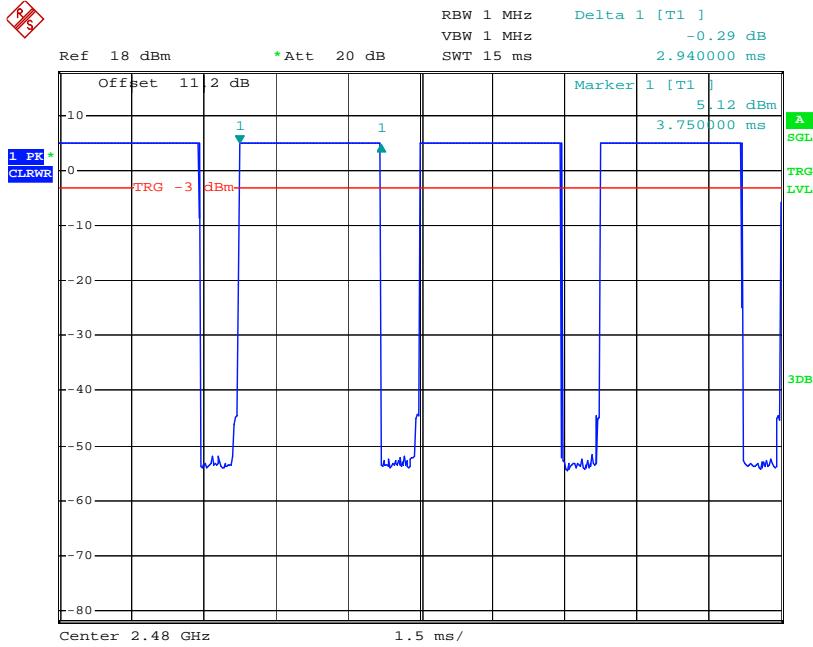


Date: 3.DEC.2007 09:41:52

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

11. POWER SPECTRAL DENSITY MEASUREMENT

11.1. Test Setup

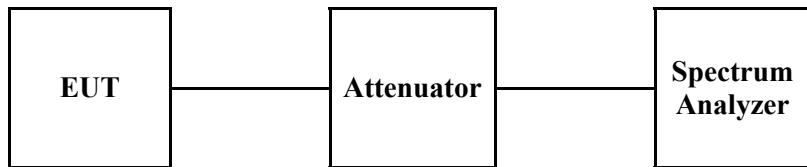

11.2. Limit

§15.247(e) For digitally modulated system, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

11.3. Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the Max Hold function record the separation of adjacent channels.
4. Repeat above procedures until all frequencies measured were complete.
5. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using ;
RBW=3 kHz, VBW=10 kHz, Span=300 kHz and Sweep=100 s.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

11.4. Test Results

Ambient temperature : 21 Relative humidity : 42 %

Operation Mode	Frequency	Final RF Power Level in 3 kHz BW (dBm)	Maximum Limit (dBm)
GFSK	2402 MHz	-5.06	8
	2441 MHz	-4.68	8
	2480 MHz	-4.71	8


Low Channel

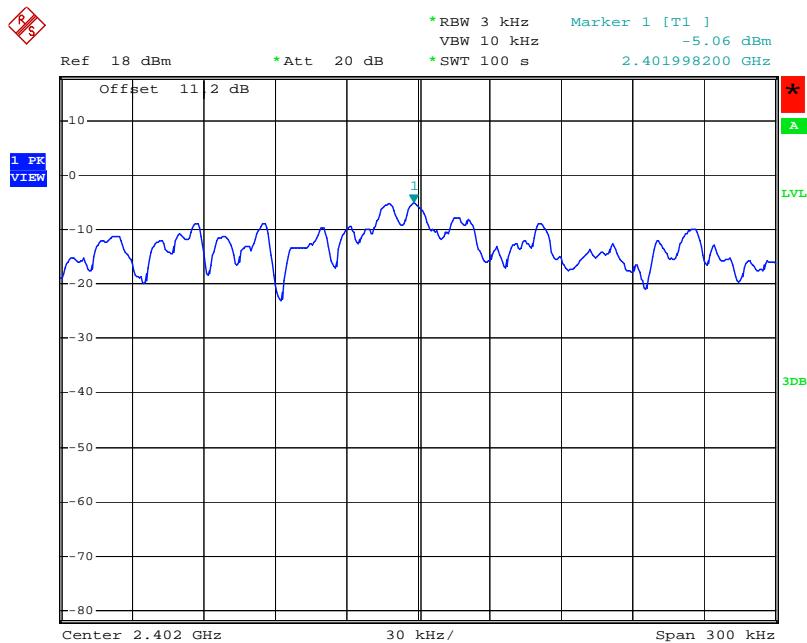

Date: 3.DEC.2007 09:51:35


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

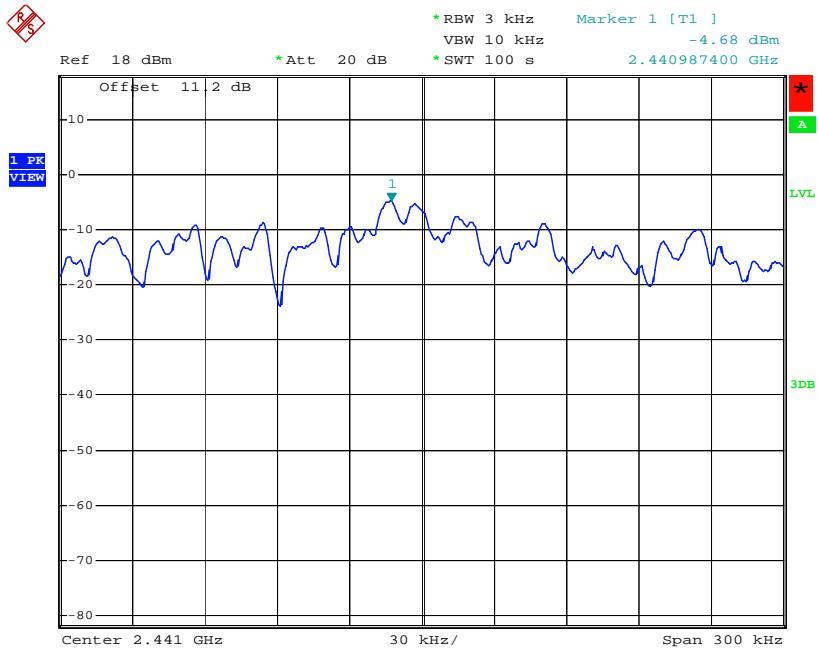

Date: 3.DEC.2007 10:12:03

High Channel

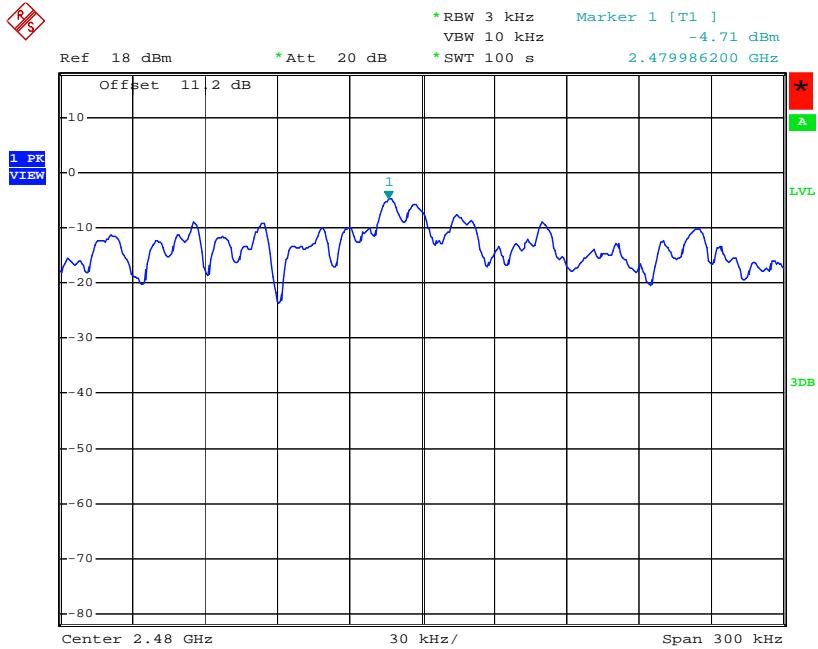

Date: 3.DEC.2007 10:14:29

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

12. ANTENNA REQUIREMENT

12.1. Standard Applicable



For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (b) if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the gain of the antenna exceeds 6dBi.

12.2. Antenna Connected Construction

Antenna used in this product is Fixed type (Chip antenna) gain of 1.86 dBi

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Appendix A-1. Photos of Field Strength Test

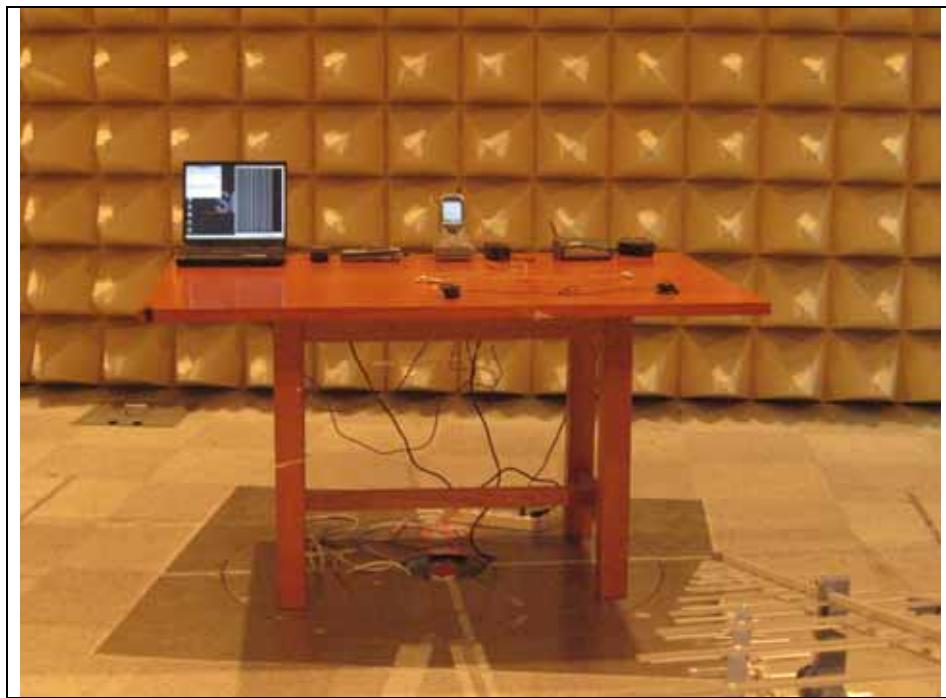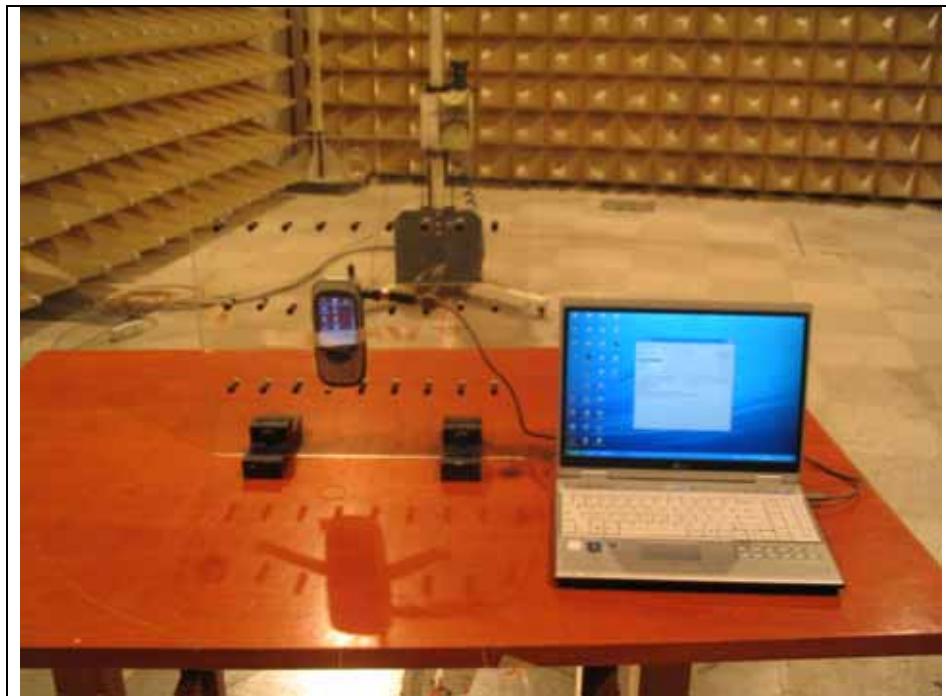

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Appendix A -2. Photos of Conducted Power Line Test

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Appendix A -3. Photo of RF Conducted Measurement setup



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.