

---

Project 12078-10

Prepared for:

Hetronic International, Inc.  
3000 N.W. 149<sup>th</sup> Street  
Oklahoma City, Oklahoma 73134

By

Professional Testing (EMI), Inc.  
1601 N. A.W. Grimes Blvd., Suite B  
Round Rock, Texas 78665

February 15, 2011

---

**CERTIFICATION**  
**Wireless Test Report**  
**Hetronic**  
**LW9-MFS-RX-2G4**  
**2119B-MFSRX**

---

## Table of Contents

<b>Title Page .....</b>	<b>1</b>
<b>Table of Contents .....</b>	<b>2</b>
<b>Certificate of Compliance.....</b>	<b>4</b>
.....	4
<b>1.0      Introduction.....</b>	<b>5</b>
1.1     Scope.....	5
1.2     EUT Description .....	5
1.3     Test Site .....	5
1.4     Applicable Documents.....	6
<b>2.0      Power Line Conducted Emissions .....</b>	<b>7</b>
2.1     Test Procedure .....	7
2.2     Test Criteria .....	7
<b>3.0      Output Power .....</b>	<b>7</b>
3.1     Test Procedure .....	7
3.2     Test Criteria .....	8
<b>4.0      Occupied Bandwidth .....</b>	<b>8</b>
4.1     Test Procedure .....	8
4.2     Test Criteria .....	8
<b>5.0      Power Spectral Density.....</b>	<b>8</b>
5.1     Test Procedure .....	8
5.2     Test Criteria .....	8
<b>6.0      Band Edge Spurious Emissions .....</b>	<b>9</b>
6.1     Test Procedure .....	9
6.2     Test Criteria .....	9
<b>7.0      Out of Band Spurious Emissions .....</b>	<b>9</b>
7.1     Test Procedure .....	9
7.2     Test Criteria .....	10
<b>8.0      Antenna Requirements.....</b>	<b>10</b>
8.1     Evaluation Procedure .....	10
8.2     Evaluation Criteria .....	10
<b>9.0      Modifications.....</b>	<b>10</b>
<b>10.0     Test Equipment .....</b>	<b>10</b>

<b>Appendix A</b>	<b>Test Setup Diagrams.....</b>	<b>13</b>
<b>Appendix B</b>	<b>Test Results.....</b>	<b>16</b>

***THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF PROFESSIONAL TESTING (EMI), INC.***

NOTICE: (1) This Report must not be used to claim product endorsement, by NVLAP, NIST, the FCC or any other Agency. This report also does not warrant certification by NVLAP or NIST.

(2) This report shall not be reproduced except in full, without the written approval of Professional Testing (EMI), Inc.

(3) The significance of this report is dependent on the representative character of the test sample submitted for evaluation and the results apply only in reference to the sample tested. The manufacturer must continuously implement the changes shown herein to attain and maintain the required degree of compliance.



Applicant: Hetronic International, Inc.  
Applicant's Address: 3000 N.W. 149<sup>th</sup> Street  
Oklahoma City, OK 73134  
FCC ID: LW9-MFS-RX-2G4  
IC Number: 2119B-MFSRX  
Project Number: 12078-10  
Test Dates: January 19, 24, 2011

The **Hetronic LW9-MFS-RX-2G4** was tested to and found to be in compliance with FCC 47 CFR Part 15 and IC RSS-210 issue 7.

The highest emissions generated by the above equipment are listed below:

Parameter	Frequency (MHz)	Level		Limit	Margin (dB)
Transmitter: Mains Conducted	.8111	17.6		46	-28.4
Transmitter: Radiated Spurious	4810	58.9 dB $\mu$ V/m @ 1 m		63.5 dB $\mu$ V/m	-4.6
Transmitter: Output Power @ 1m	2405	0.24 dBm	1.057 mW	+30 dBm	-29.76
Receiver: Mains Conducted	.18596	25.1		54.2	-29.1
Receiver: Radiated Spurious	832	23.0 dB $\mu$ V/m @ 10m		35.5 dB $\mu$ V/m	-12.5

Occupied Bandwidth		
6 dB	20 dB	26 dB
1.587 MHz	2.660 MHz	4.391 MHz

I, Jason Anderson, for Professional Testing (EMI), Inc., being familiar with the FCC rules and test procedures have reviewed the test setup, measured data and this report. I believe them to be true and accurate.

Jason Anderson  
Director of Testing Services

This report has been reviewed and accepted by Hetronic International, Inc. The undersigned is responsible for ensuring that this device will continue to comply with the FCC and IC rules.

## 1.0 Introduction

### 1.1 Scope

This report describes the extent of the Equipment Under Test (EUT) conformance to the Intentional Radiator requirements of the USA and Canada.

### 1.2 EUT Description

The Stellar Receiver is a 2.4GHz MFS Receiver with 16 digital outputs, 1 PWM output, 1 main contact output, 4 digital inputs, and 4 analog inputs. The 16 digital outputs are individually configurable for on/off delay, normally open or normally closed (NO/NC) output, output latching, and output assignments of DK or configurable logic functions. The PWM output is configurable for normal or inverted outputs, dithering, and up to 4 speed settings defined per DK and selectable by digital output, digital input, load limit, or logic functions. The EUT was tested while in a continuous transmit mode. The EUT was tuned to a low, middle, and high channel to perform power, occupied bandwidth, power spectral density, and harmonic tests. The EUT was tuned to a middle channel to perform spurious tests. The EUT continuously transmitted at maximum power. The system tested consisted of the following:

Manufacturer	Model	FCC ID Number	IC Identifier
Hetronic International, Inc.	Stellar Receiver	LW9-MFS-RX-2G4	2119B-MFSRX

The following rules apply to the operation of the EUT:

Guidelines	FCC Rules	IC Rules	
	Part 15	RSS-GEN Issue 3	RSS-210 Issue 8
Transmitter Characteristics	15.247	4.1-4.6, 7	2.2, 2.6-2.7, A2.9, A8, A9
Spurious Radiated Power	15.209	4.2, 4.7, 4.8, 6, 7	2.2, 2.6-2.7, A2.9, A8, A9
Power Line Conducted	15.207	4.2, 4.7, 7.2	
Antenna Requirement	15.203	7.1, 7.1.4	

### 1.3 Test Site

Measurements were made at the PTI semi-anechoic facility designated Site 45 (FCC 459644, IC 3036B-1) in Austin, Texas. This site is registered with the FCC under Section 2.948 and Industry Canada per RS-212 and is subsequently confirmed by laboratory accreditation (NVLAP). The test site is located at 11400 Burnett Rd., Austin, Texas, 78758 while the main office is located at 1601 N. A.W. Grimes Blvd., Suite B, Round Rock, Texas, 78665.

Professional Testing (EMI), Inc. (PTI), follows the guidelines of NIST for all uncertainty calculations, estimates and expressions thereof for EMC testing. The procedure of ANSI C63.4:2009 and KDB Publication No. 558074 were utilized for making all emissions measurements.

## **1.4        Applicable Documents**

The data collected for this report are presented entirely in Appendix B.

<b>Document</b>	<b>Title</b>	<b>Release</b>
ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment.	2009
ANSI C63.10	American National Standard for Testing Unlicensed Wireless Devices	2009
47 CFR	Part 15 – Radio Frequency Devices Subpart C -Intentional Radiators	
KDB Publication No. 558074	Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)	April 16, 2007
RSS-210	Low-power License-exempt Radio communication Devices (All Frequency Bands): Category I Equipment	Issue 8
RSS-Gen	General Requirements and Information for the Certification of Radio communication Equipment	Issue 3

## 2.0 Power Line Conducted Emissions

### 2.1 Test Procedure

The EUT was configured and operated in a manner consistent with typical applications. The EUT power cord in excess of one meter was folded back and forth forming a bundle 30 to 40 cm long in the approximate center of the cable. Power supply cords for the peripheral equipment were powered from an auxiliary LISN. Excess interface cable lengths were separately bundled in a non-inductive arrangement at the approximate center of the cable with the bundle 30 to 40 centimeters in length. The conducted emissions were maximized, by varying the operating states and configuration of the EUT.

The tests were performed in an 8' x 8' RayProof modular shielded room. The EUT was placed on a non-metallic table 0.4 meters from a vertical metal reference plane and 0.8 meters from a horizontal metal reference plane. A drawing showing the test setup is given as Figure 1.

### 2.2 Test Criteria

The FCC Part 15 Class B conduction limits are given below.

Frequency (MHz)	Conducted Limits (dBuV)	
	Average	Quasi-Peak
0.15 – .50	66-56*	56 – 46*
.50 - 5	56	46
5 – 30	60	50

The tighter limit shall apply at the edge between two frequency bands.

\*Decreases with the logarithm of the frequency.

## 3.0 Output Power

Output power measurements were made on selected fundamental transmit frequencies of the EUT for the lowest, most center, and highest transmit frequency.

Tests of the fundamental emissions of the EUT also determined the worse case polarization of the device. The emissions of the device were measured with the EUT in three orthogonal axes.

### 3.1 Test Procedure

The EUT was placed on a non-conductive table 0.8 meters above the ground plane. The table was centered on a motorized turntable, which allows 360-degree rotation. For measurements of the fundamental signal, a measurement antenna was positioned at a distance of 1 meter as measured from the closest point of the EUT. Rotating the EUT maximized the emissions.

A spectrum analyzer with peak detection was used to find the maximum field strength during the variability testing. Resolution bandwidth (RBW) is chosen to encompass the entire 6 dB

bandwidth of the fundamental signal, up to 3 times the bandwidth if possible. RBW used is recorded. A calculation was then made to determine the output power at the antenna terminal. A drawing showing the test setup is given in Appendix A.

### **3.2 Test Criteria**

The maximum output power is 1 W for devices operating in the frequency range 2400 -2483.5 MHz according to FCC 15.247 and RSS-210.

## **4.0 Occupied Bandwidth**

Occupied bandwidth measurements were performed on the EUT to determine compliance with FCC 15.247(a)(2) and RSS-210.

### **4.1 Test Procedure**

The occupied bandwidth was measured with a spectrum analyzer connected to a double-ridged guide horn while the EUT was operating in continuous transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency. Display line and marker delta functions were used to measure the occupied bandwidth of the EUT. However, the 20 or 26 dB bandwidth is referenced to a peak power measurement taken at the entire bandwidth or more for RBW, then using 1% RBW for the 20 or 26 dB bandwidth.

Measurements were made at three frequencies. A drawing showing the test setup is given in Appendix A.

### **4.2 Test Criteria**

The minimum 6 dB occupied bandwidth for the EUT is 500 kHz as stated in 15.247(a)(2) and RSS-210. The 20 dB bandwidth must be measured and reported for the FCC and the 26 dB bandwidth must be measured and reported for IC.

## **5.0 Power Spectral Density**

Power spectral density measurements were performed on the EUT to determine compliance with FCC 15.247(d) and RSS-210.

### **5.1 Test Procedure**

The fundamental emission of the EUT is maximized and the spectrum analyzer is tuned to the highest point as measured in max-hold with peak detection. The analyzer is then centered on the maximum peak and set with the following parameters: RBW = 3 kHz, VBW > RBW, span = 300 kHz, and sweep time = 100s. The peak level is obtained after the sweep completes. The test setup is included in Appendix A.

### **5.2 Test Criteria**

According to section FCC 15.247(d) and RSS-210 the maximum power spectral density is +8 dBm in any 3 kHz bandwidth.

## **6.0 Band Edge Spurious Emissions**

Band edge spurious emissions measurements were performed on the EUT to determine compliance to FCC 15.247(c) and RSS-210.

### **6.1 Test Procedure**

The EUT was placed on a non-conductive table 0.8 meters above the ground plane. The table was centered on a motorized turntable, which allows 360-degree rotation. For measurements of the fundamental signal, a measurement antenna was positioned at a distance of 1 meter as measured from the closest point of the EUT. Rotating the EUT maximized the emissions.

The spectrum analyzer was set for peak detection using a 500 kHz resolution bandwidth. The span is set wide enough to show the band edge and the edge of the emission of the screen. Measurement is made at the band edge using the marker delta method while transmitting on the channels nearest the band edge to determine if the EUT meets the test criteria. The test setup is included in Appendix A.

### **6.2 Test Criteria**

According to FCC 15.247(c) and RSS-210 the band edge spurious emissions must be 20 dB below the highest peak in the operating band in any 100 kHz bandwidth. If the frequency falls in the restricted bands of 15.205 the maximum permitted average must be below the field strength listed in 15.209.

Alternatively, the band edge spurious emissions will meet criteria if they are attenuated below the limits specified in FCC 15.209 or RSS-210 Table 3.

## **7.0 Out of Band Spurious Emissions**

Out of band spurious/harmonic emissions measurements were performed on the EUT to determine compliance to FCC sections 15.247(c), 15.209 and RSS-210.

### **7.1 Test Procedure**

The EUT was placed on a non-conductive table 0.8 meters above the ground plane. The table was centered on a rotating turntable at a distance of 10 meters from the measurement antenna.

For spurious emissions below 1 GHz quasi-peak detection is used with a resolution bandwidth of 120 kHz. All measurements below 1 GHz were normalized to 3 meters using a 20 dB/decade distance extrapolation. The emissions were maximized by rotating the EUT and raising and lowering the measurement antenna from 1-4 meters. The test setup is included in Appendix A.

Spurious/harmonic emissions above 1 GHz peak are measured with average and peak detection with a resolution bandwidth of 1 MHz and measured at a distance of 1 meter. Average detection is used to determine compliance of the EUT if the peak does not meet the average limit. Non-harmonic emissions must satisfy the average limit and the peak limit (20 dB above average). The test setup is included in Appendix A.

Above 1 GHz testing was completed at 3 transmit frequencies to determine compliance.

## 7.2 Test Criteria

The radiated limits of FCC 15.209 and RSS-210 are shown below. The limits specified are at 3 meters. The limits are quasi-peak for emissions below 1 GHz and average for emissions above 1 GHz. Also above 1 GHz the peak limit is 20 dB above the average limit.

Frequency MHz	Specification Distance (Meters)	Field Strength (dBuV/m)	Test Distance (Meters)	Field Strength (dBuV/m)
30 to 88	3	40.0	10	29.5
88 to 216	3	43.5	10	33
216 to 960	3	46.0	10	35.5
Above 960	3	54.0	10	43.5

## 8.0 Antenna Requirements

An antenna evaluation was performed on the EUT to determine compliance with FCC sections 15.203, 15.247(b) and RSS-210.

### 8.1 Evaluation Procedure

The design of the EUT antenna is evaluated for conformance to engineering requirements for gain and to prevent substitution of unapproved antennae. Gain of the antenna is assessed by reviewing the antenna manufacturer's data sheet.

### 8.2 Evaluation Criteria

The antenna design must meet at least one of the following criteria:

- a) Antenna is permanently attached to the unit.
- b) Antenna must use a unique type of connector to attach to the EUT.
- c) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Section 15.247(b)(4)(i) states that if the transmitting antenna has a directional gain greater than 6 dBi the power shall be reduced the amount in dB that the directional gain is greater than 6 dBi.

## 9.0 Modifications

N/A

## 10.0 Test Equipment

A list of the test equipment utilized to perform the testing is given below. The date of calibration is given for each.

## Conducted Test Equipment

Asset #	Manufacturer	Model #	Description	Calibration Due
1277	HP	85650A	Quasi-peak Adapter	November 11, 2011
1629	HP	85662A	Spectrum Analyzer Display	NCR
1129	HP	8568B	Spectrum Analyzer	October 5, 2011
1088	PTI	PTI-ALF4	Attenuator, Limiter, Filter	March 31, 2011
0939	Emco	3825/2	Line Impedance Stabilization Network	November 8, 2011
0081	ELGAR	1751SL	AC Power Supply	NCR
1683	TESEQ	T800	ISN	January 29, 2011
1173	PTI	100KHz HPF	High Pass Filter	February 5, 2011

## Radiated Test Equipment


Asset #	Manufacturer	Model #	Description	Calibration Due
0085	HP	85650A	Quasi-peak Adapter (high band)	July 28, 2011
0949	HP	85662A	Spectrum Analyzer Display (high band)	NCR
1841	HP	8566B	Spectrum Analyzer (high band)	June 8, 2011
0990	HP	85685A	RF Preselector (high band)	March 24, 2011
1278	HP	85650A	Quasi-peak Adapter (low band)	July 28, 2011
1834	HP	85662A	Spectrum Analyzer Display (low band)	NCR
1145	HP	8568B	Spectrum Analyzer (low band)	July 28, 2011
1035	HP	85685A	RF Preselector (low band)	March 3, 2011
1454	HP	8447D	RF Preamplifier	July 06, 2011
1497	Emco	3108	Biconical Antenna	August 4, 2011
1486	Emco	3147	Log Periodic Dipole Array Antenna	August 4, 2011
C026	none	none	Coaxial Cable (low band)	August 02, 2011
C027	none	none	Coaxial Cable (high band)	August 02, 2011

## Microwave Radiated Test Equipment

Asset #	Manufacturer	Model #	Description	Calibration Due
1780	ETS-Lindgren	3117	Ridge Guide Antenna	November 11, 2011
1529	Miteq	Antenna Mounted	Microwave Preamplifier (preamp 1)	July 16, 2011
1841	HP	8566B	Spectrum Analyzer	June 8, 2011
0949	HP	85662A	Spectrum Analyzer Display	NCR
1530	Miteq	None	Microwave Preamplifier (preamp 2)	July 16, 2011
C030	None	None	Coaxial Cable (MRE band)	March 22, 2011


<b>Asset #</b>	<b>Manufacturer</b>	<b>Model #</b>	<b>Description</b>	<b>Calibration Due</b>
XXXX	Pasternack	LLS	2 sections, total 12ft	Cal Before Use
0819	EMCO	3115	Ridge Guide Antenna	October 15, 2011
1594 (Rental unit)	Miteq	AFS44-00102650	Microwave Preamplifier (preamp 1)	March 2, 2011
	Rohde & Schwarz	FSQ	Spectrum Analyzer	August 24, 2011
1542	A.H. Systems	SAS 572	Antenna, Horn 18-26.5GHz	NCR
1735	Pasternack	PE9850-20	Antenna, Horn 26.5-40GHz	NCR



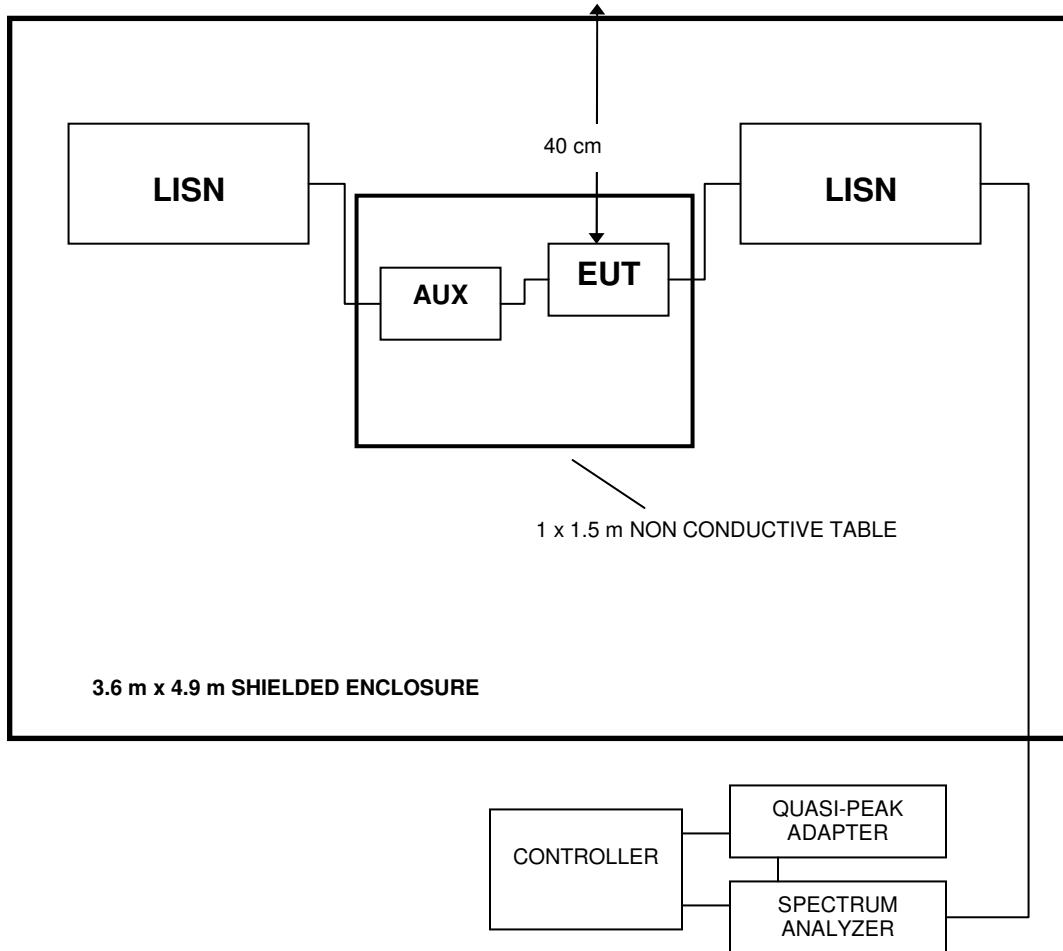

**FIGURE 1: Conducted Emissions Test Setup**

**FIGURE 2: Radiated Emissions Test Setup**

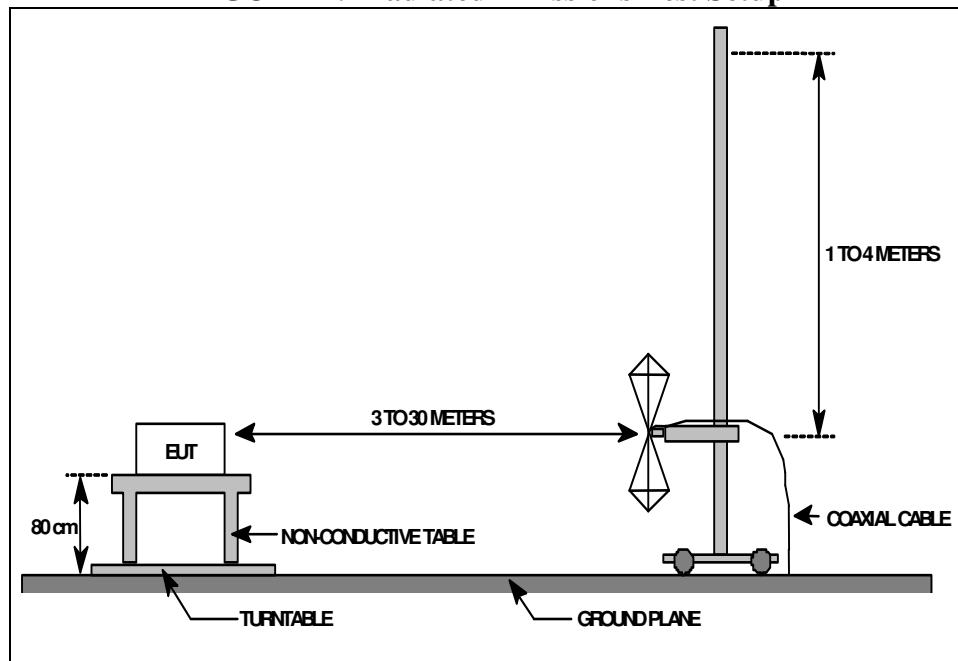




**Mains Conducted Emissions Data Sheet**  
**150 kHz ... 30 MHz**

PROJECT #	DATE	CLASS	LINE	RBW	VBW	DETECTOR
12078-10	January 24, 2011	FCC B	Neutral	CISPR 9 kHz	100 kHz	Quasi-Peak/Avg

<b>COMMENT</b>	Transmitting
----------------	--------------

Frequency Reading (MHz)	Quasi-peak Reading (dBuV)	Average Reading (dBuV)	Quasi-peak Limit (dBuV)	Quasi-peak Margin (dB)	Average Limit (dBuV)	Average Margin (dB)
0.150279	27.7	27.6	66	-38.2	56	-28.3
0.18084	26.3	25.7	64.4	-38.2	54.4	-28.8
0.40655	18.2	16.8	57.7	-39.5	47.7	-30.9
0.5103	19.9	16.3	56	-36.1	46	-29.7
0.6763	19.8	15.8	56	-36.2	46	-30.2
2.7331	19.2	15.4	56	-36.8	46	-30.6
22.1505	20.1	16.4	60	-39.9	50	-33.6
27.1861	20.6	16.8	60	-39.4	50	-33.2
27.7788	21.1	17.2	60	-38.9	50	-32.8
28.7838	21.4	17.6	60	-38.6	50	-32.4

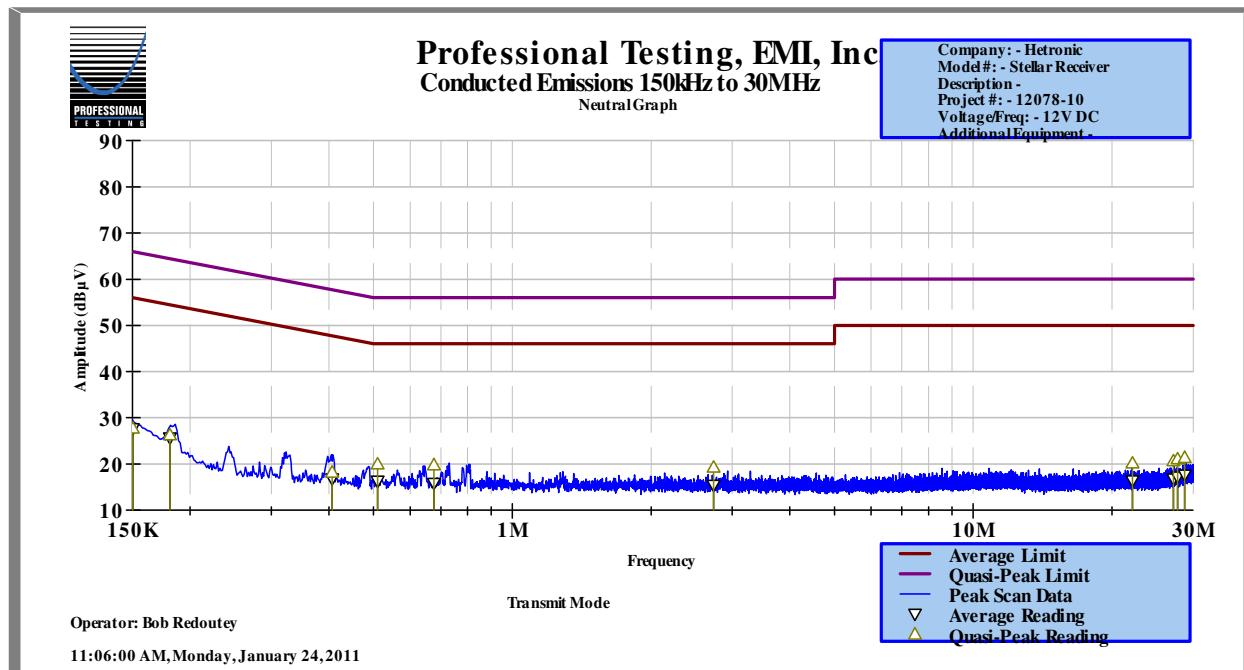


**Mains Conducted Emissions Data Sheet**  
**150 kHz ... 30 MHz**

PROJECT #	DATE	CLASS	LINE	RBW	VBW	DETECTOR
12078-10	January 24, 2011	FCC B	Phase	CISPR 9 kHz	100 kHz	Quasi-Peak/Avg

<b>COMMENT</b>	Transmitting
----------------	--------------

Frequency Reading (MHz)	Quasi-peak Reading (dBuV)	Average Reading (dBuV)	Quasi-peak Limit (dBuV)	Quasi-peak Margin (dB)	Average Limit (dBuV)	Average Margin (dB)
0.18089	26.2	25.5	64.4	-38.2	54.4	-29
0.40735	18.2	16.3	57.7	-39.5	47.7	-31.4
0.48852	15.3	12.5	56.2	-40.9	46.2	-33.7
0.5005	20	16.3	56	-36	46	-29.7
0.8111	21.7	17.6	56	-34.3	46	-28.4
1.017	19.5	15.8	56	-36.5	46	-30.2
5.1536	19.2	15.4	60	-40.8	50	-34.6
17.8168	20.1	16.2	60	-39.9	50	-33.8
26.667	20.9	17.1	60	-39.1	50	-32.9
28.5605	21.8	17.8	60	-38.2	50	-32.2

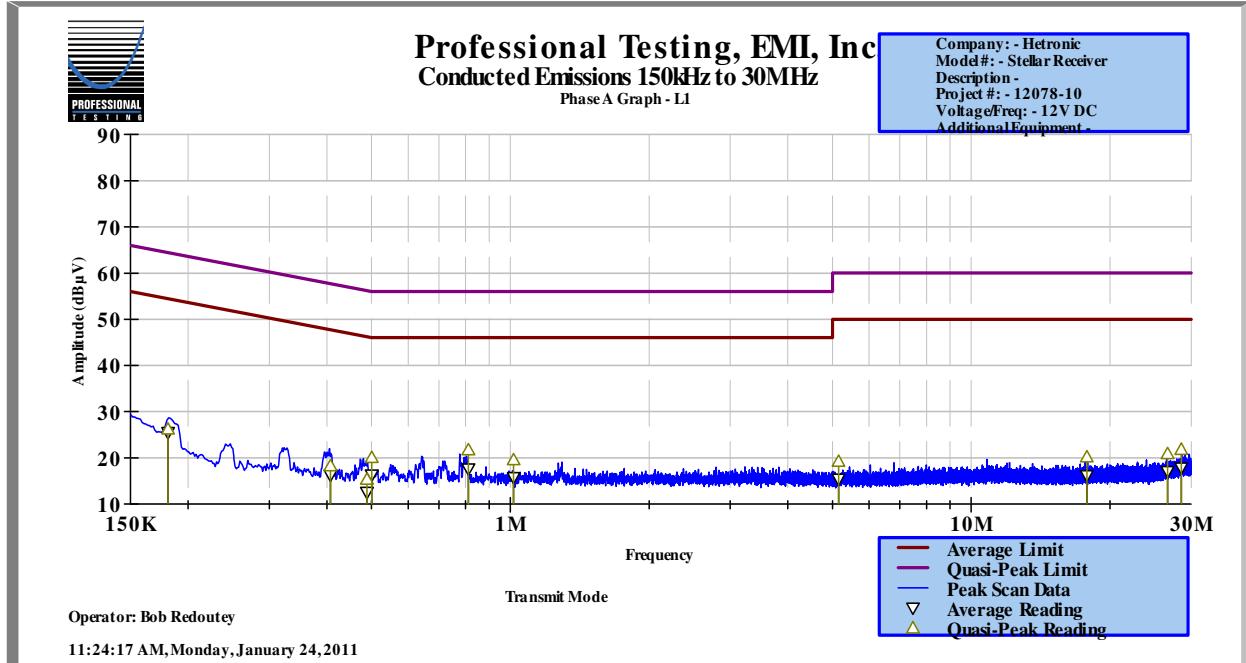


**Mains Conducted Emissions Data Sheet**  
**150 kHz ... 30 MHz**

PROJECT #	DATE	CLASS	LINE	RBW	VBW	DETECTOR
12078-10	January 24, 2011	FCC B	Neutral	CISPR 9 kHz	100 kHz	Quasi-Peak/Avg

<b>COMMENT</b>	Receive Only
----------------	--------------

Frequency Reading (MHz)	Quasi-peak Reading (dBuV)	Average Reading (dBuV)	Quasi-peak Limit (dBuV)	Quasi-peak Margin (dB)	Average Limit (dBuV)	Average Margin (dB)
0.18596	25.8	25.1	64.2	-38.4	54.2	-29.1
0.41321	18	16	57.6	-39.6	47.6	-31.6
0.41522	18.2	16.2	57.5	-39.3	47.5	-31.4
0.53003	20	16.2	56	-36	46	-29.8
0.6063	19.8	16	56	-36.2	46	-30
1.3318	19.5	15.7	56	-36.5	46	-30.3
20.7489	20.3	16.4	60	-39.7	50	-33.6
25.2511	20	16.1	60	-40	50	-33.9
27.5123	20.9	17.1	60	-39.1	50	-32.9
28.6658	21.3	17.5	60	-38.7	50	-32.5

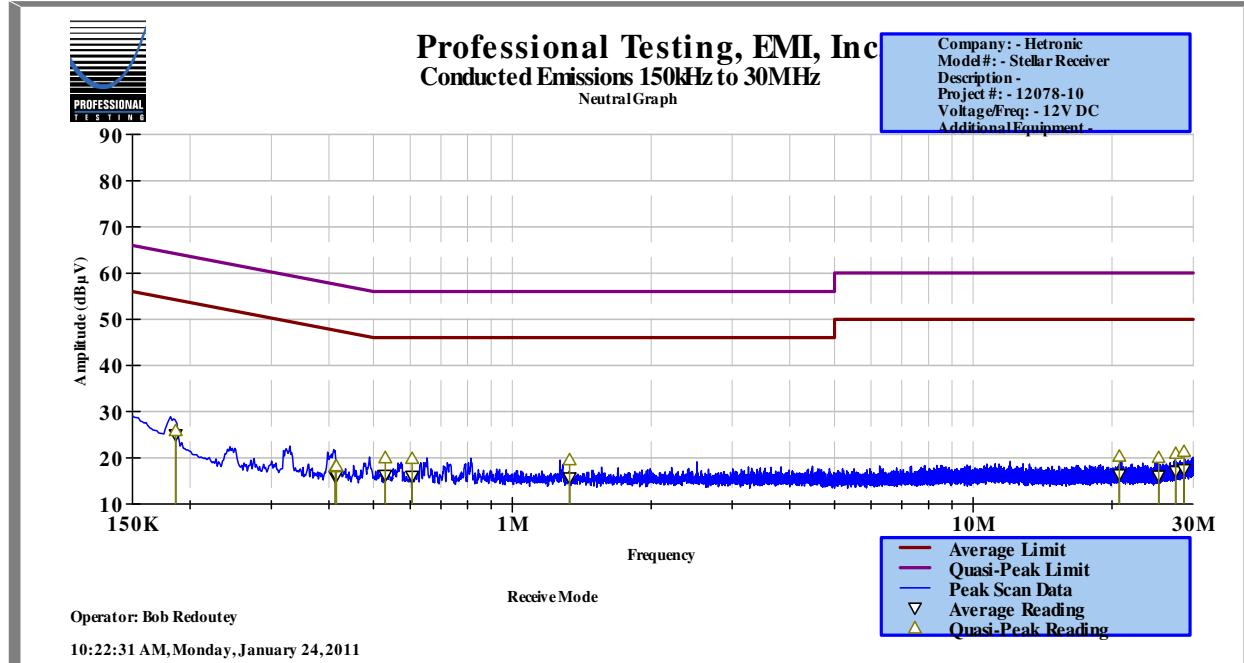


**Mains Conducted Emissions Data Sheet**  
**150 kHz ... 30 MHz**

PROJECT #	DATE	CLASS	LINE	RBW	VBW	DETECTOR
12078-10	January 24, 2011	FCC B	Phase	CISPR 9 kHz	100 kHz	Quasi-Peak/Avg

<b>COMMENT</b>	Receive Only
----------------	--------------

Frequency Reading (MHz)	Quasi-peak Reading (dBuV)	Average Reading (dBuV)	Quasi-peak Limit (dBuV)	Quasi-peak Margin (dB)	Average Limit (dBuV)	Average Margin (dB)
0.18527	25.5	24.9	64.2	-38.8	54.2	-29.3
0.40871	17.8	16.6	57.7	-39.8	47.7	-31.1
0.49466	15.3	12.5	56.1	-40.8	46.1	-33.6
0.5139	20	16.2	56	-36	46	-29.8
0.6964	19.7	15.8	56	-36.3	46	-30.2
0.9403	19.6	15.8	56	-36.4	46	-30.2
5.0797	19	15.3	60	-41	50	-34.7
24.0379	20	16.2	60	-40	50	-33.8
25.9753	20.6	16.7	60	-39.4	50	-33.3
26.9981	20.9	17.1	60	-39.1	50	-32.9

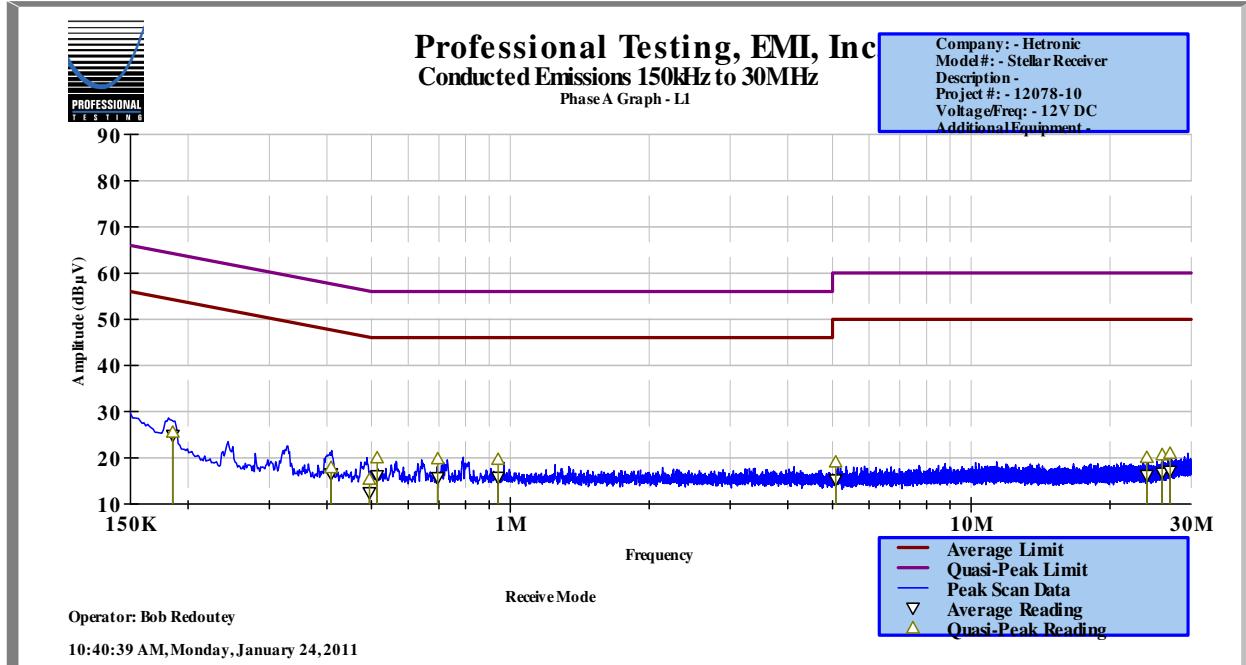

## Output Power Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	15.247	1m	Horn	1 MHz	1 MHz	Peak

COMMENT	Transmitting
---------	--------------

Frequency (MHz)	EUT Direction (degrees)	Antenna Elevation (Meters)	Recorded Level (dB $\mu$ V)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Level (dB $\mu$ V /m)
2405	0	1	97.6	26.4	29.0	2.8	103.0
2440	0	1	96.1	26.3	29.0	2.8	101.6
2480	0	1	94.7	26.4	29.0	2.8	100.1

### Calculations

$$P = \frac{(E * d)^2}{30 * G}$$

P=Power in watts, E=measured maximum field strength in V/m, d=distance in meters, G=numeric gain of transmitting antenna

Distance=1 meters

Gain=0 dBi

### Calculated Result

Frequency (MHz)	Field Strength (dB $\mu$ V)	E.I.R.P.		Limit (dBm)
		dBm	mW	
2405	103.0	0.24	1.057	30
2440	101.6	-1.16	0.765	30
2480	100.1	-2.66	0.542	30

**NOTE: Computed power by applying a bandwidth correction factor of 10 log (EBW/1 MHz) to the spectral peak of the emission.**

**Transmit Power: 10 log (1.59 MHz / 1 MHz) = 2.01**  
**2.01 was added to the measured value to compute real power in mW.**

## Power Spectral Density

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	15.247	1 m	Horn	3 kHz	300 kHz	Peak

COMMENT	Transmitting
---------	--------------

Frequency (MHz)	EUT Direction (degrees)	Antenna Elevation (Meters)	Recorded Level (dB $\mu$ V)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Level (dB $\mu$ V/m)
2405	0	1	75.6	26.4	29.0	2.8	81.0
2440	0	1	72.3	26.3	29.0	2.8	77.8
2480	0	1	65.7	26.4	29.0	2.8	71.1

### Calculations

$$P = \frac{(E * d)^2}{30 * G}$$

P=Power in watts, E=measured maximum field strength in V/m, d=distance in meters, G=numeric gain of transmitting antenna

Distance=1 meters

Gain=0 dBi

### Calculated Result


Frequency (MHz)	Field Strength (dB $\mu$ V / 3 kHz)	E.I.R.P (dBm / 3 kHz)	Limit (dBm / 3 kHz)
2405	81.0	-23.77	8
2440	77.8	-26.97	8
2480	71.1	-33.67	8

Plots of PSD measurements are presented on the following pages.

## Power Spectral Density Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	15.247	1m	Horn	3 kHz	300 kHz	Peak

### Low Channel

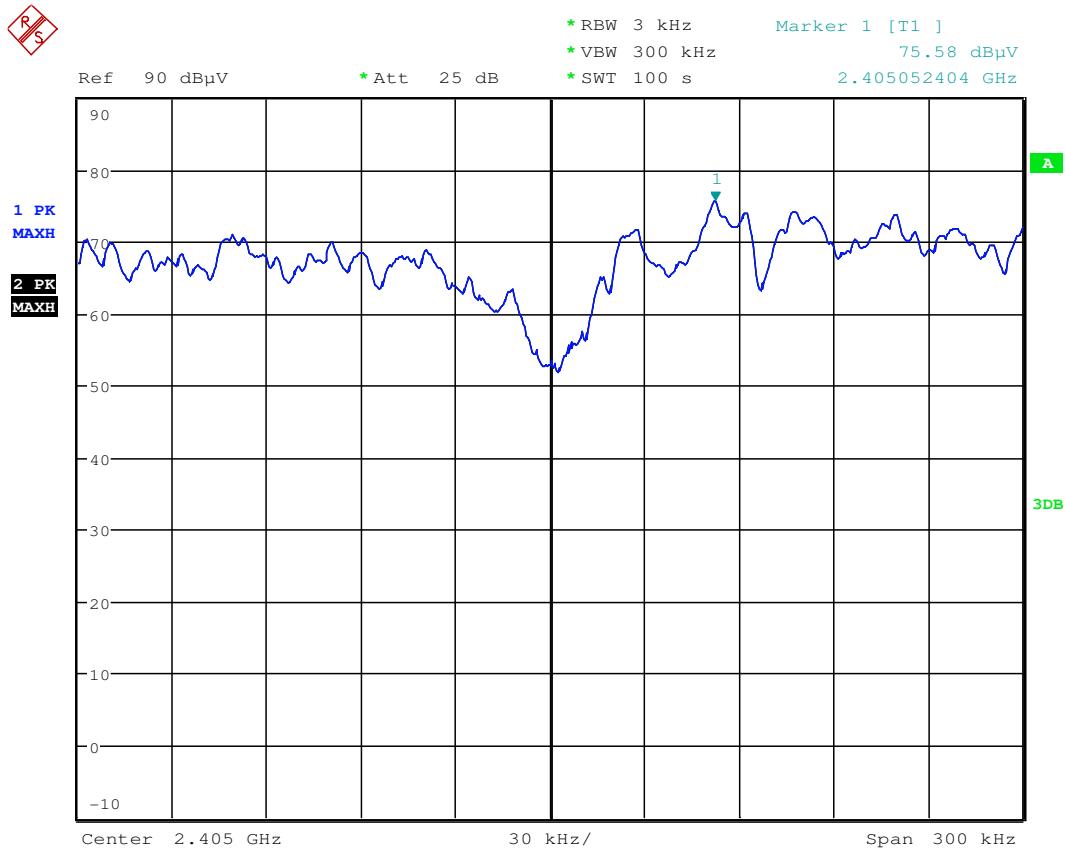


Date: 19.JAN.2011 22:34:51

**Result = Pass**

## Power Spectral Density Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	15.247	1m	Horn	3 kHz	300 kHz	Peak

### Middle Channel

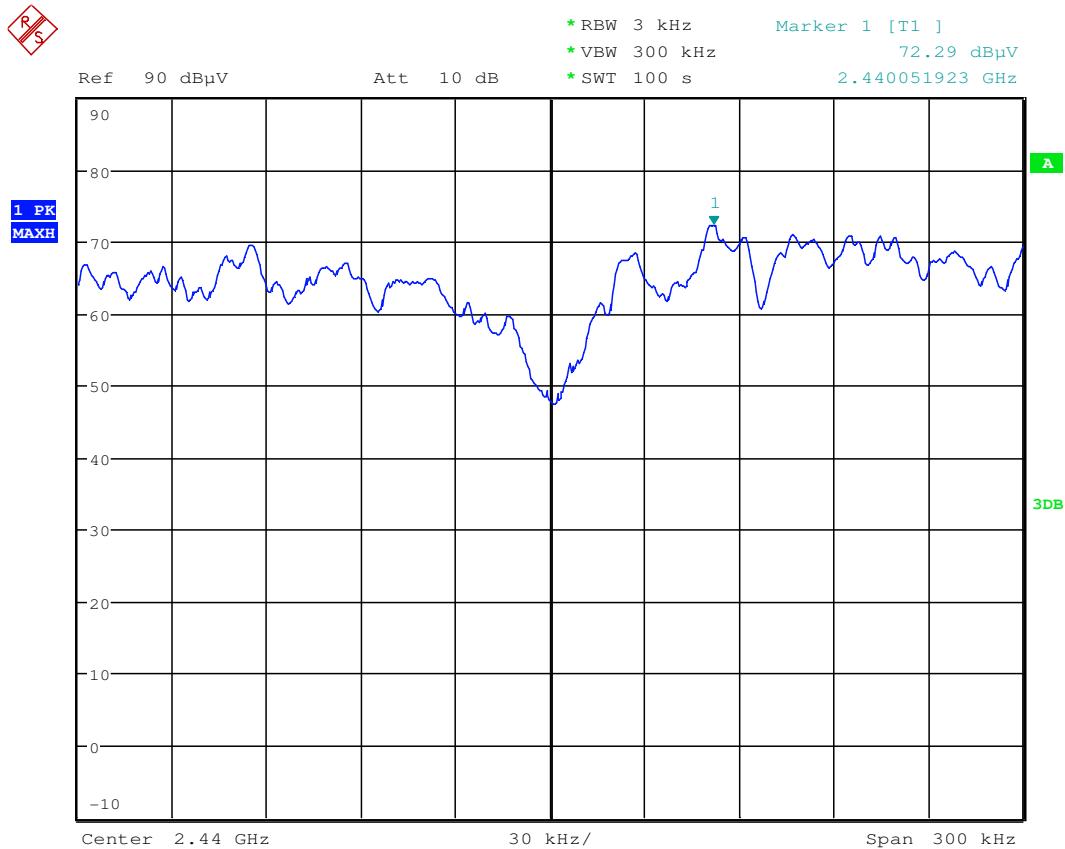


Date: 19.JAN.2011 21:35:17

**Result = Pass**

## Power Spectral Density Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	15.247	1m	Horn	3 kHz	300 kHz	Peak

### High Channel

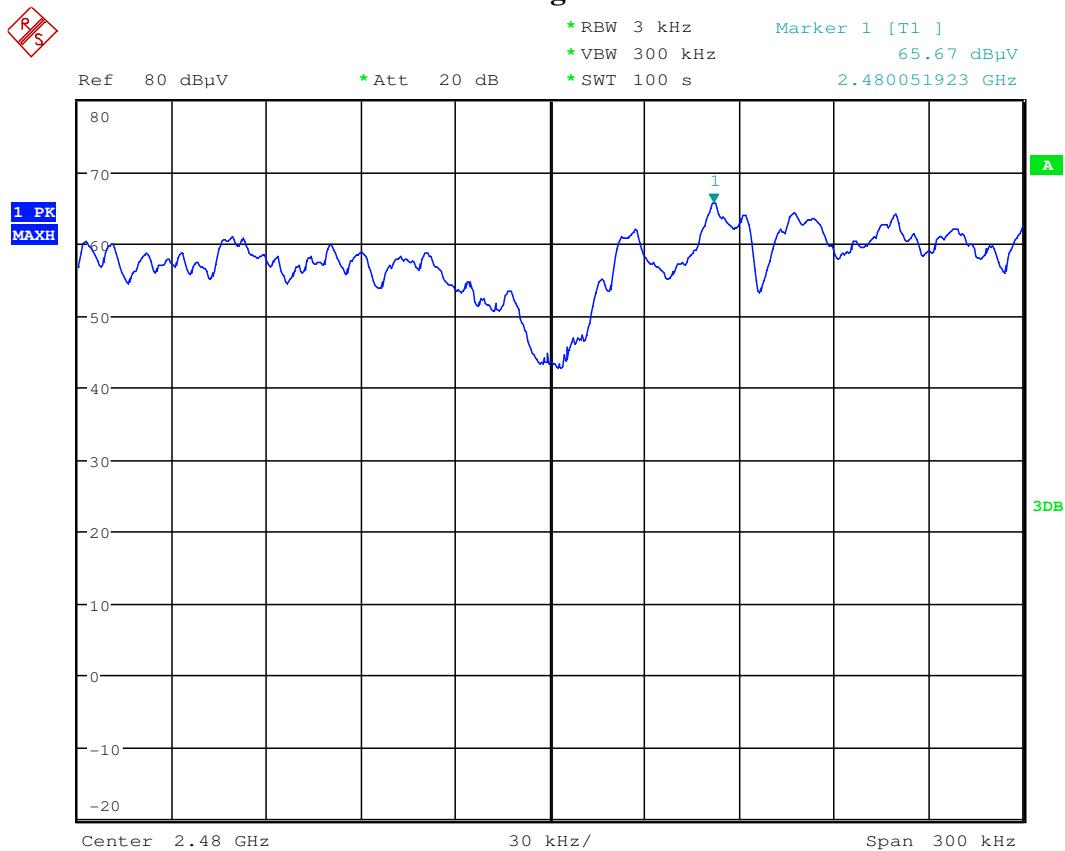

Date: 20.JAN.2011 00:15:59

**Result = Pass**


## Occupied Bandwidth Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	15.247	1m	Horn	100 kHz	100 kHz	Peak

COMMENT	Transmitting Low Channel 6 dB Bandwidth – 1.538 MHz 20 dB Bandwidth – 2.628 MHz 26 dB Bandwidth – 4.263 MHz
---------	--


### Low Channel

**6 dB**

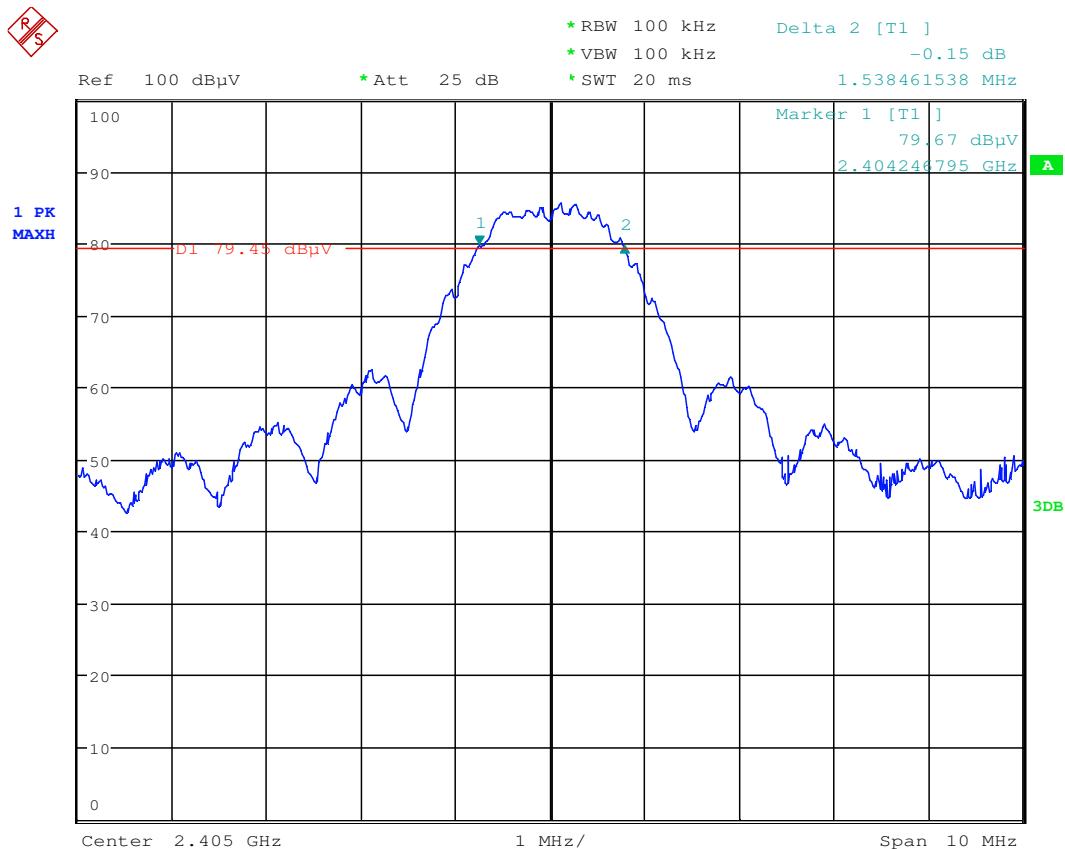

Date: 19.JAN.2011 22:26:40


## Low Channel 20 dB

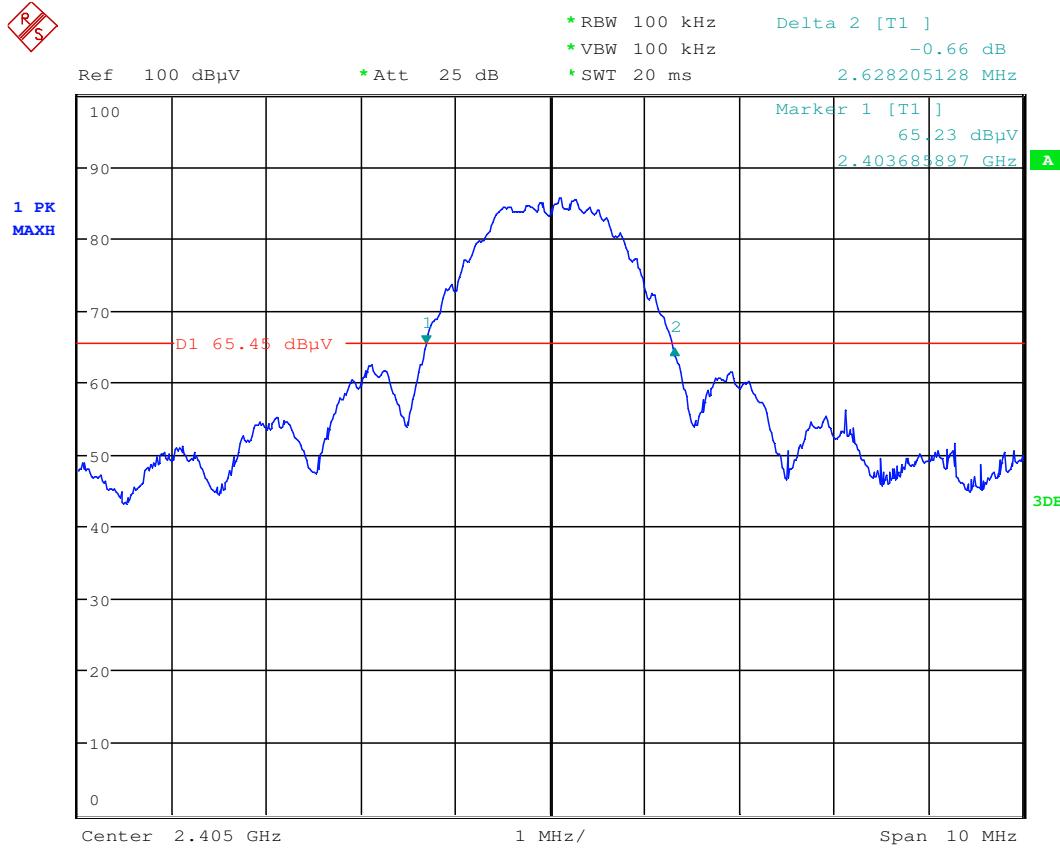

Date: 19.JAN.2011 22:27:21

## Low Channel 26 dB

R/S

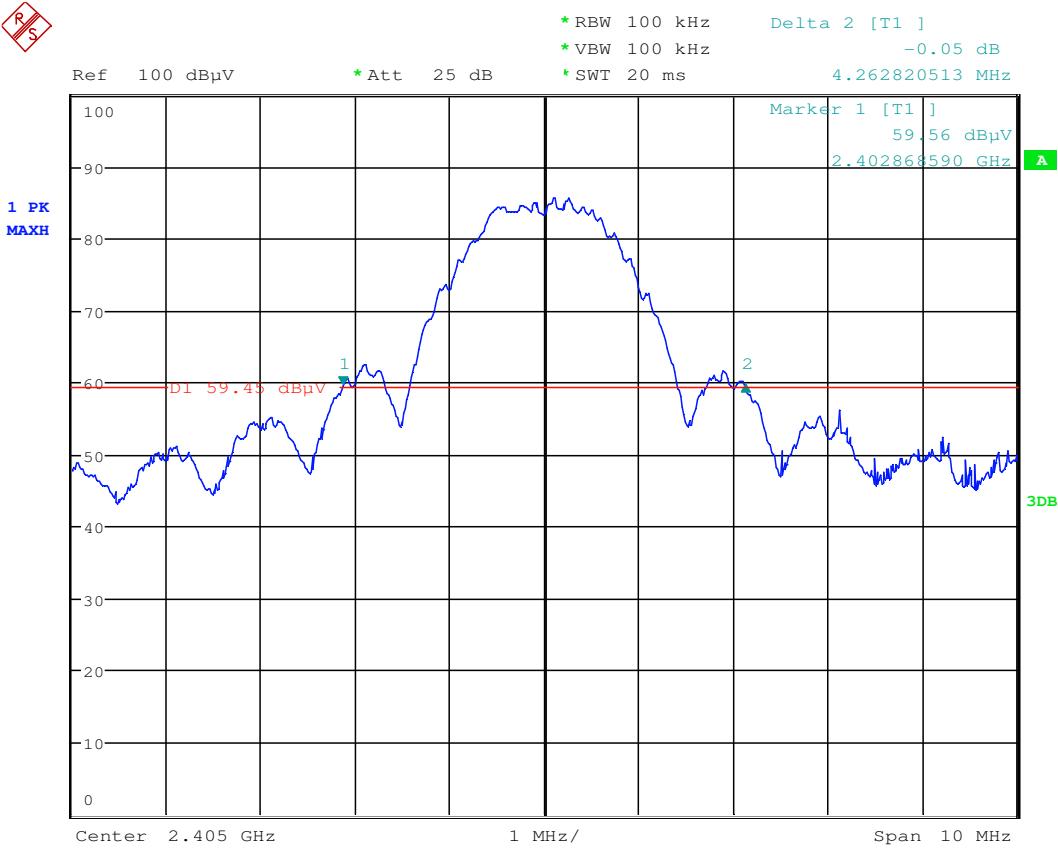

Date: 19.JAN.2011 22:28:03

**Result = Pass**


## Occupied Bandwidth Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	15.247	1m	Horn	100 kHz	100 kHz	Peak

COMMENT	Transmitting Middle Channel 6 dB Bandwidth – 1.570 MHz 20 dB Bandwidth – 2.628 MHz 26 dB Bandwidth – 4.295 MHz
---------	---

### Middle Channel

6dB

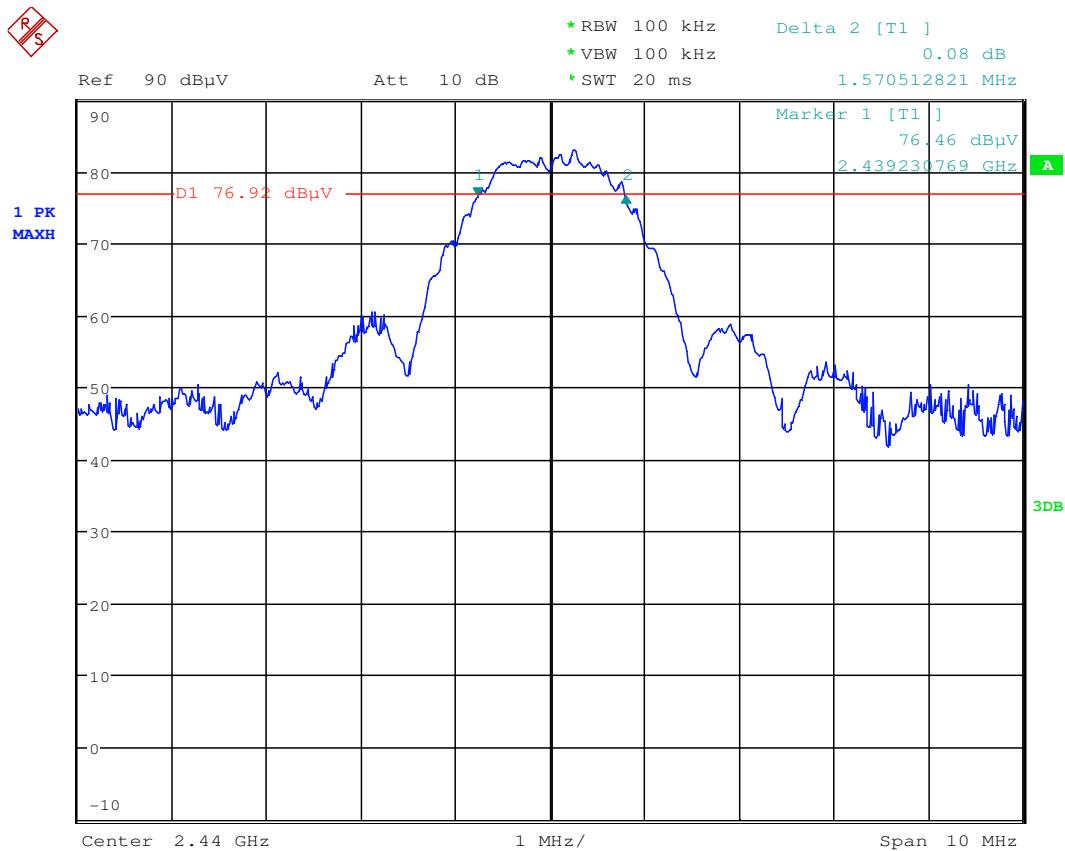


Date: 19.JAN.2011 21:30:57

## Middle Channel


**20 dB**

RS

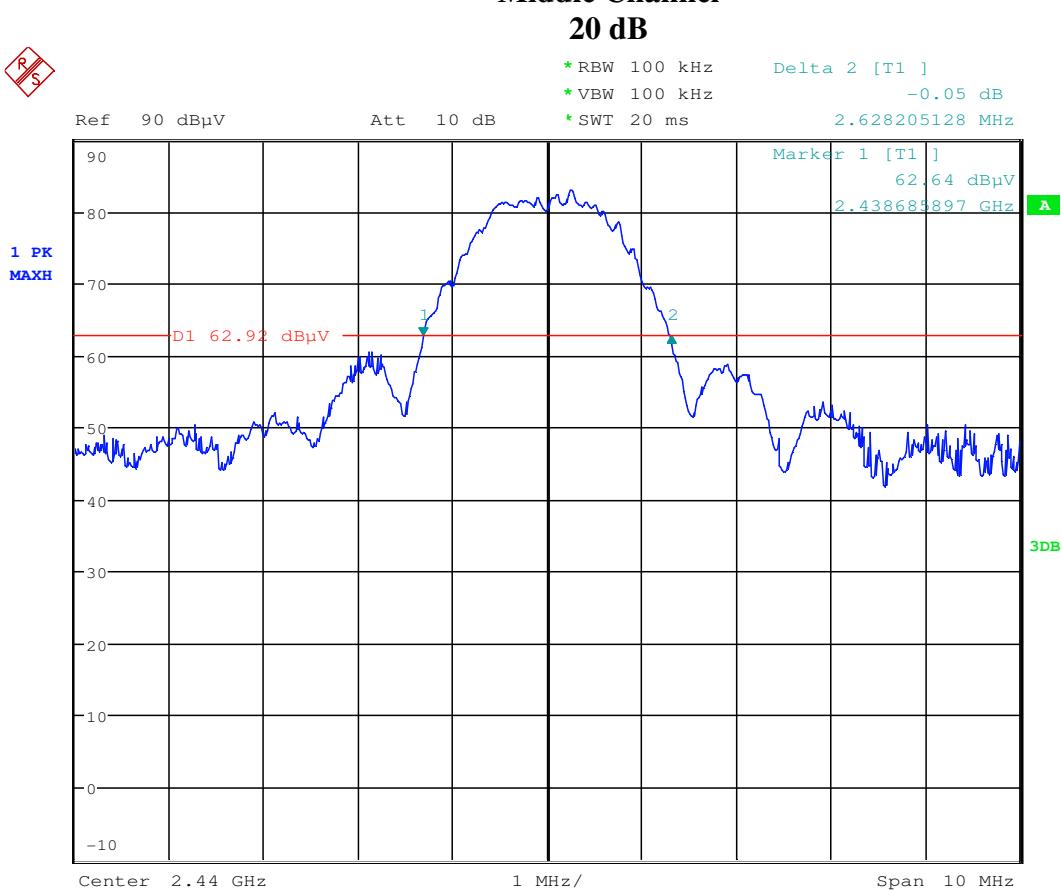

Date: 19.JAN.2011 21:31:48

## Middle Channel 26 dB

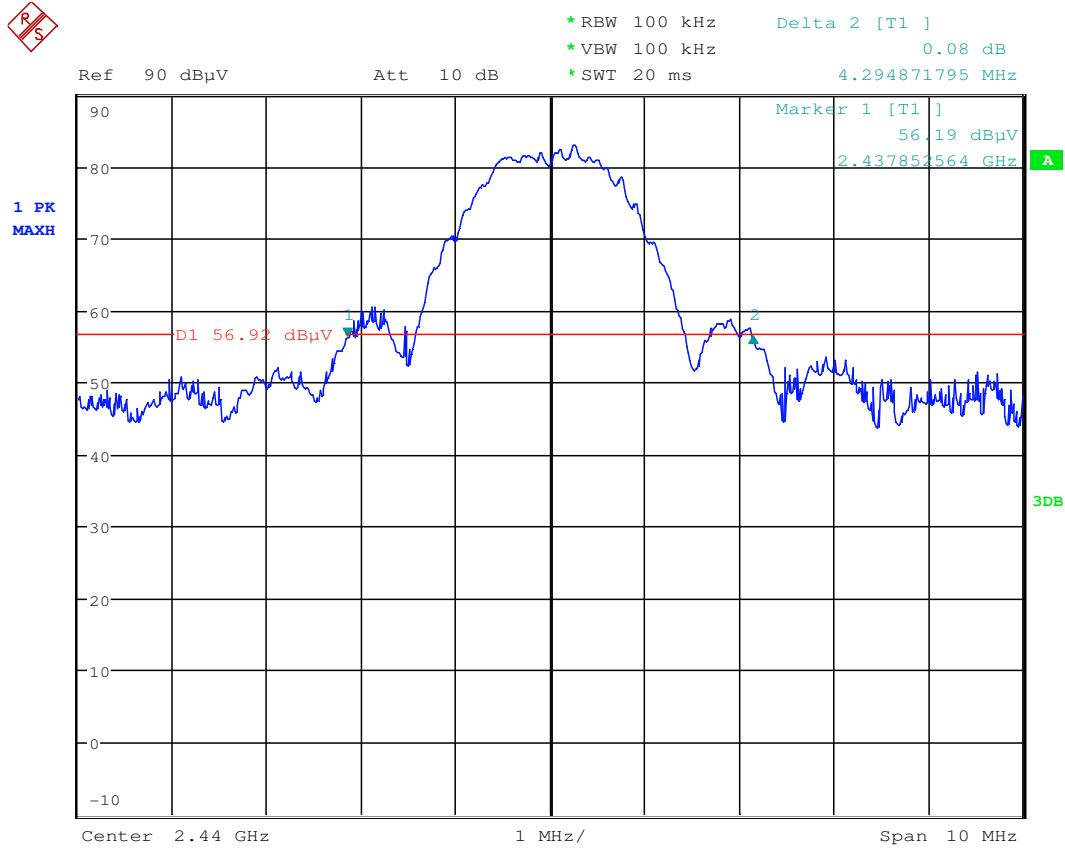

Date: 19.JAN.2011 21:32:34

**Result = Pass**


## Occupied Bandwidth Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	15.247	1m	Horn	100 kHz	100 kHz	Peak

COMMENT	Transmitting High Channel 6 dB Bandwidth – 1.587 MHz 20 dB Bandwidth – 2.660 MHz 26 dB Bandwidth – 4.391 MHz
---------	---

### High Channel


**6 dB**

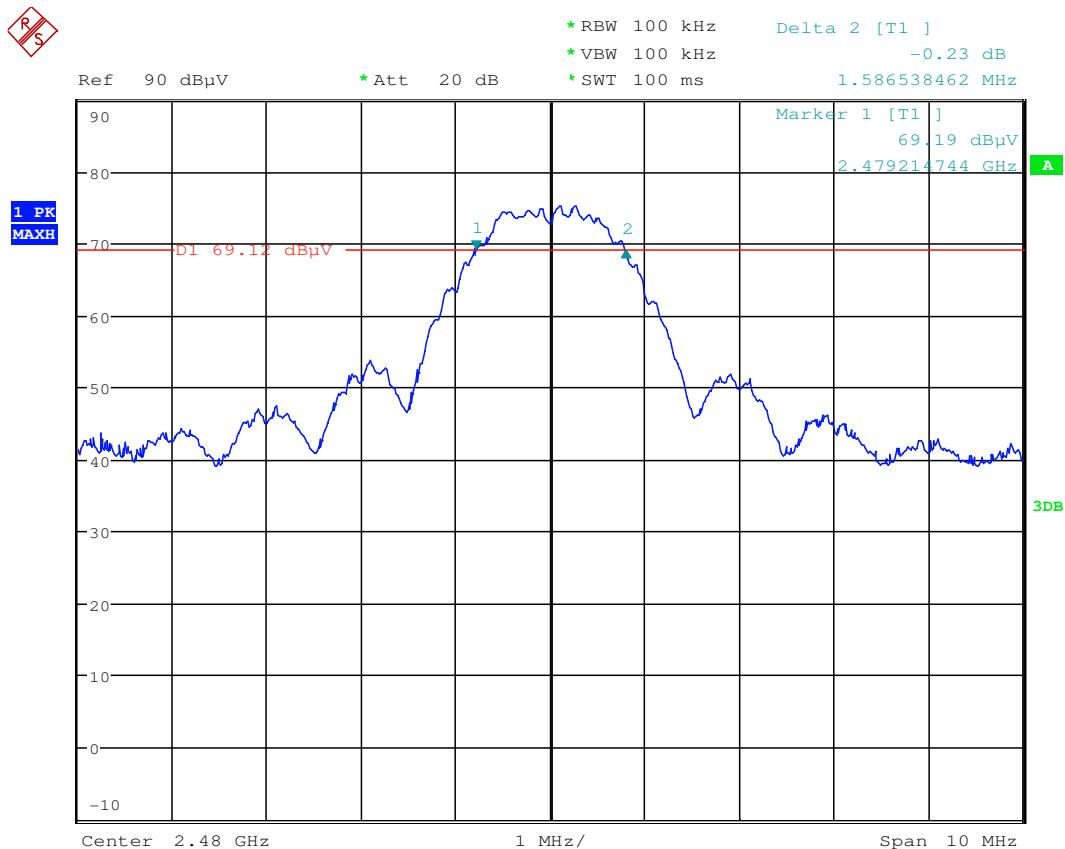

Date: 19.JAN.2011 23:50:22


## High Channel 20 dB

RS

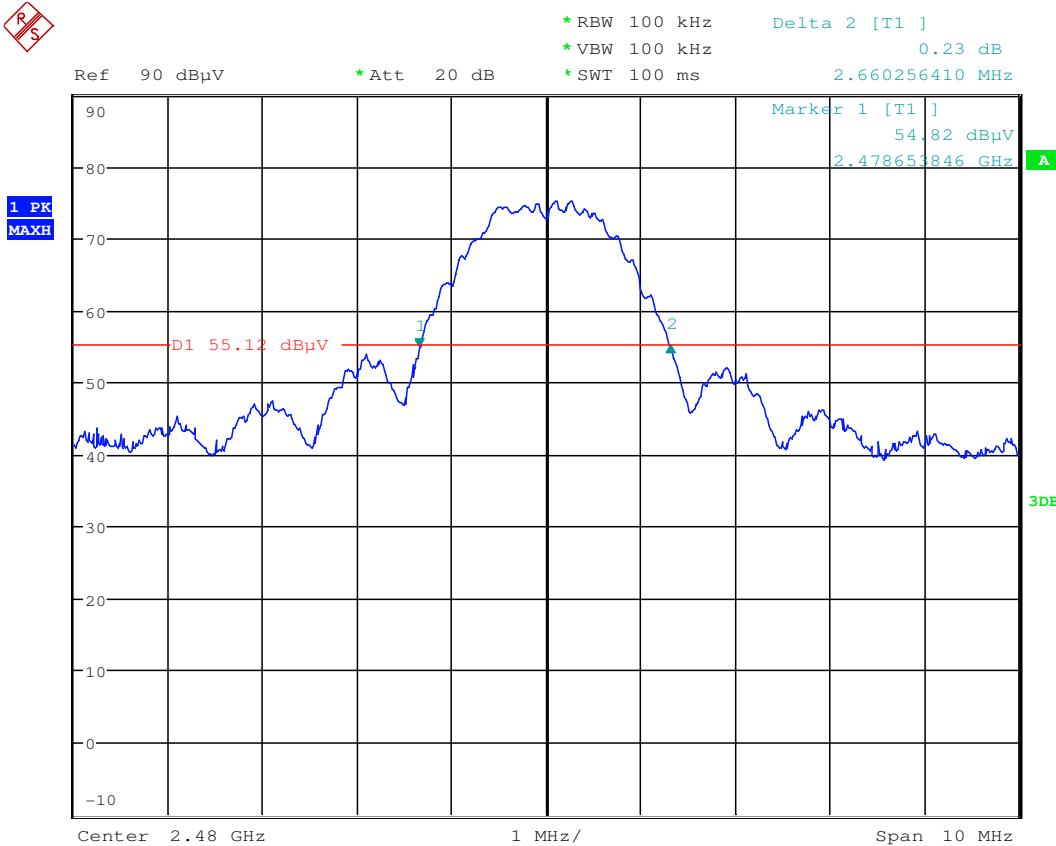

Date: 19.JAN.2011 23:51:17

## High Channel 26 dB

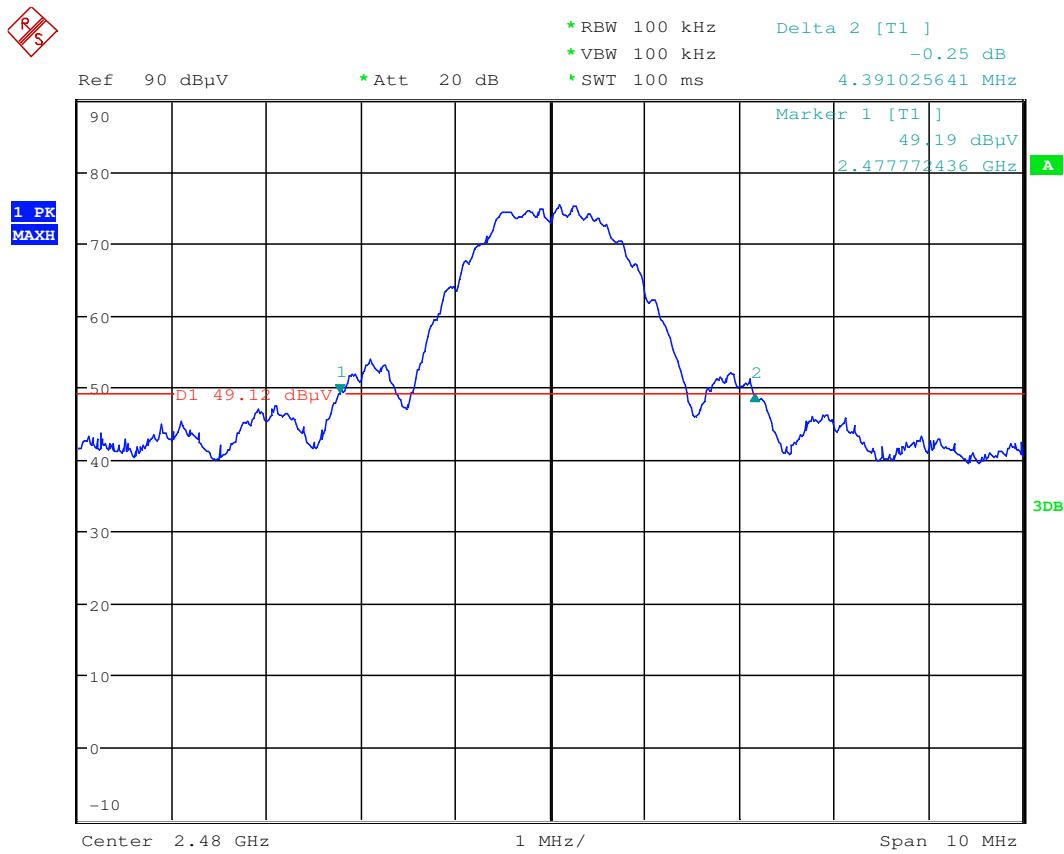

Date: 19.JAN.2011 23:52:17

**Result = Pass**


## Band Edge Spurious Emissions Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	15.247	1m	Horn	500 kHz	500 kHz	Peak

COMMENT	Transmitting No spurs existed at the band edges by inspection of graphs; therefore no radiated measurement was made.
---------	---

Frequency (MHz)	Recorded Level (dB)	Limit (dB) down from fundamental	Margin (dB)	Detector Function
2400	-35.17	-20.0	-15.17	Peak

### Band Edge Low

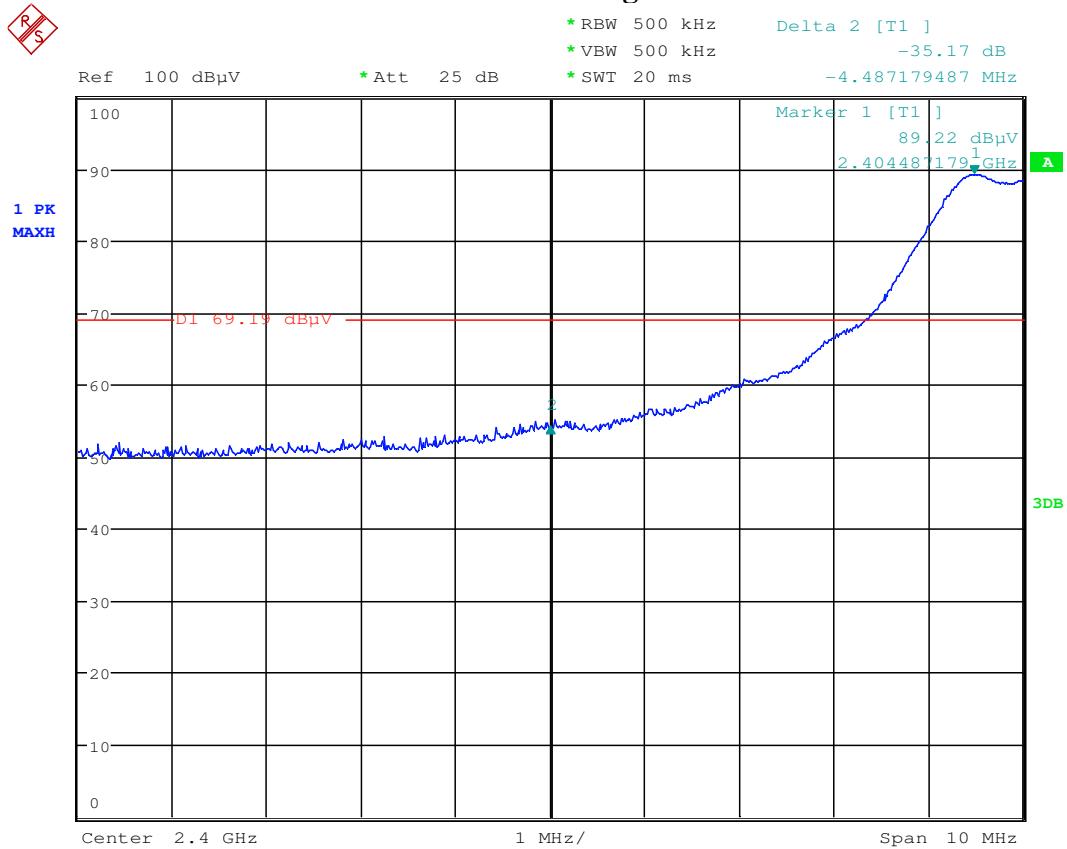

Date: 19.JAN.2011 22:31:04

**Result = Pass**


## Band Edge Spurious Emissions Data Sheet

PROJECT #	DATE	RULE	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	15.247	1m	Horn	500 kHz	500 kHz	Peak

COMMENT	Transmitting No spurs existed at the band edges by inspection of graphs; therefore no radiated measurement was made.
---------	---

Frequency (MHz)	Recorded Level (dB)	Limit (dB) down from fundamental	Margin (dB)	Detector Function
2483.5	-29.21	-20.0	-9.21	Peak

### Band Edge High

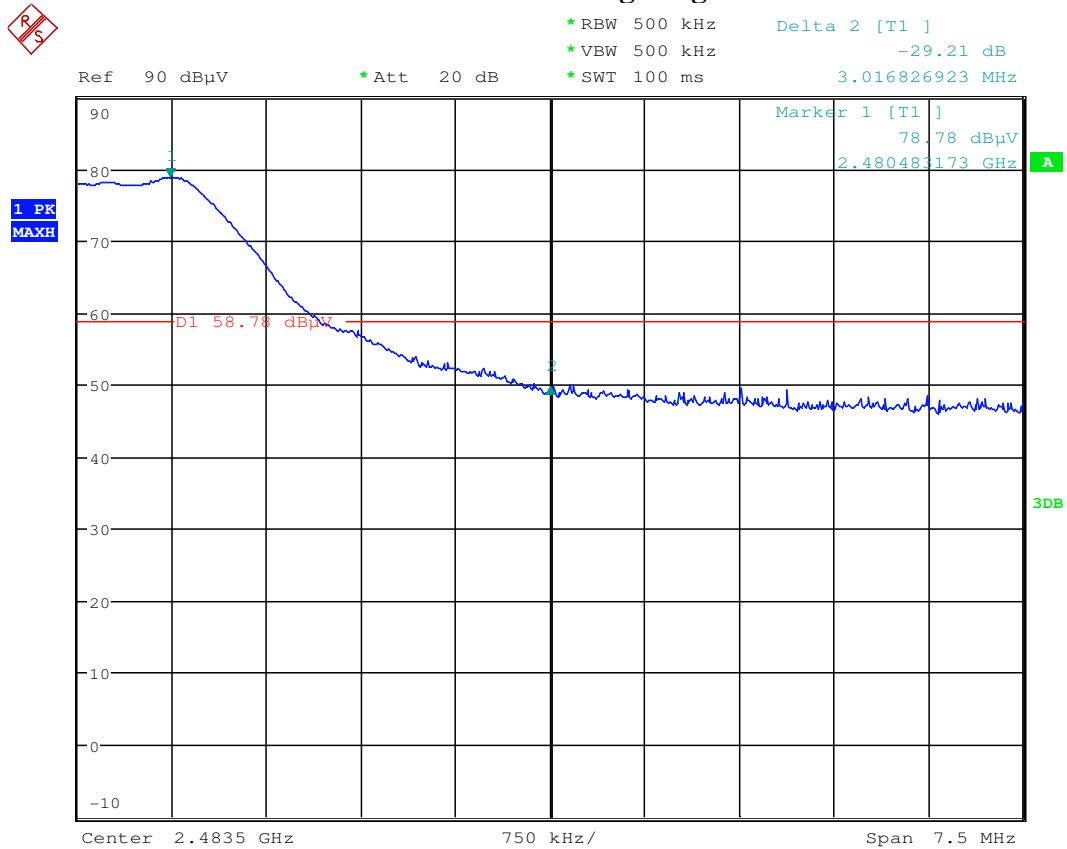

Date: 19.JAN.2011 23:54:04

**Result = Pass**


**Spurious Radiated Emissions Data Sheet**  
**Emissions 30 MHz ... 1 GHz**

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	FCC B	10 m	Bicon I Log	CISPR 120 kHz	1 MHz	Quasi Peak

**COMMENT** Transmitting Middle Channel

**Horizontal**

Frequency Measured (MHz)	Test Distance (Meters)	EUT Direction (Degrees)	Antenna Height (Meters)	Detector Function	Recorded Amplitude (dB $\mu$ V)	Corrected Level (dB $\mu$ V/m)	Limit Level (dB $\mu$ V/m)	Margin (dB)
357.2	10	122	2.6	Quasi-peak	22.4	6.0	35.5	-29.5

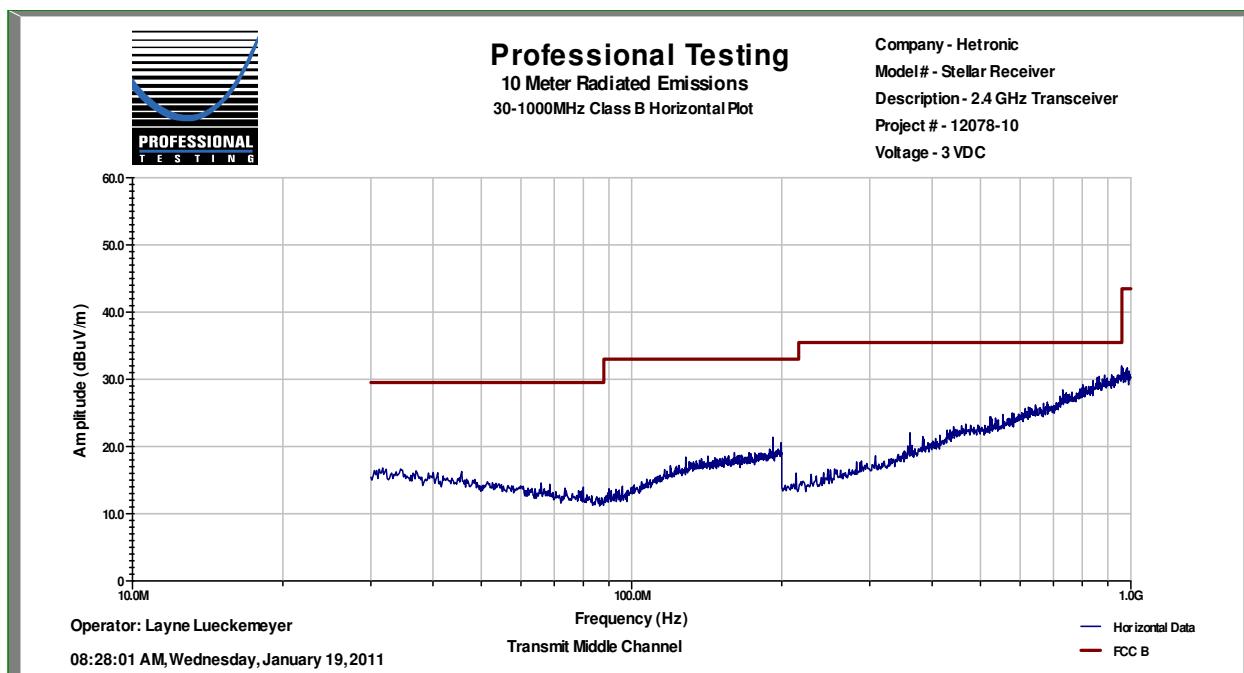

**Result = Pass**


**Spurious Radiated Emissions Data Sheet**  
**Emissions 30 MHz ... 1 GHz**

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	FCC B	10 m	Bicon I Log	CISPR 120 kHz	1 MHz	Quasi Peak

COMMENT	Transmitting Middle Channel
---------	-----------------------------

**Vertical**

Frequency Measured (MHz)	Test Distance (Meters)	EUT Direction (Degrees)	Antenna Height (Meters)	Detector Function	Recorded Amplitude (dB $\mu$ V)	Corrected Level (dB $\mu$ V/m)	Limit Level (dB $\mu$ V/m)	Margin (dB)
357.2	10	256	1	Quasi-peak	29.7	13.3	35.5	-22.2

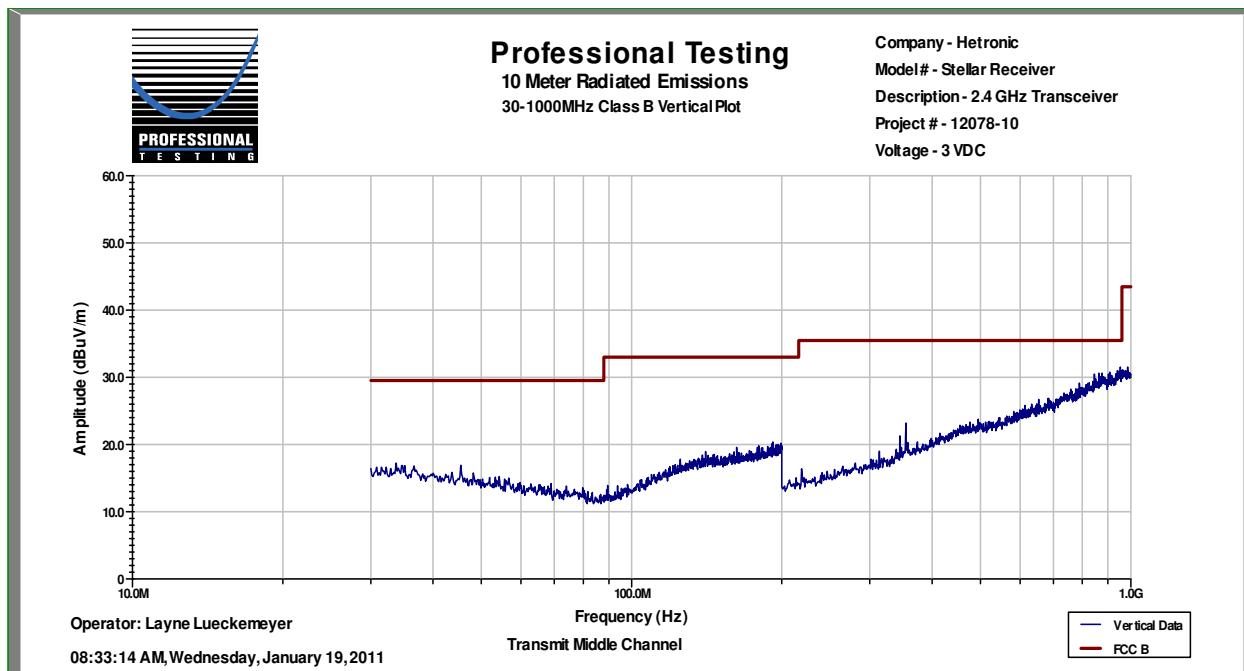


**Result = Pass**

**Spurious Radiated Emissions Data Sheet**  
**1 GHz...12 GHz**

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	FCC B	3 m	Horn	1 MHz	1 MHz	Average

COMMENT	Transmit Middle Channel
---------	-------------------------

**Horizontal**

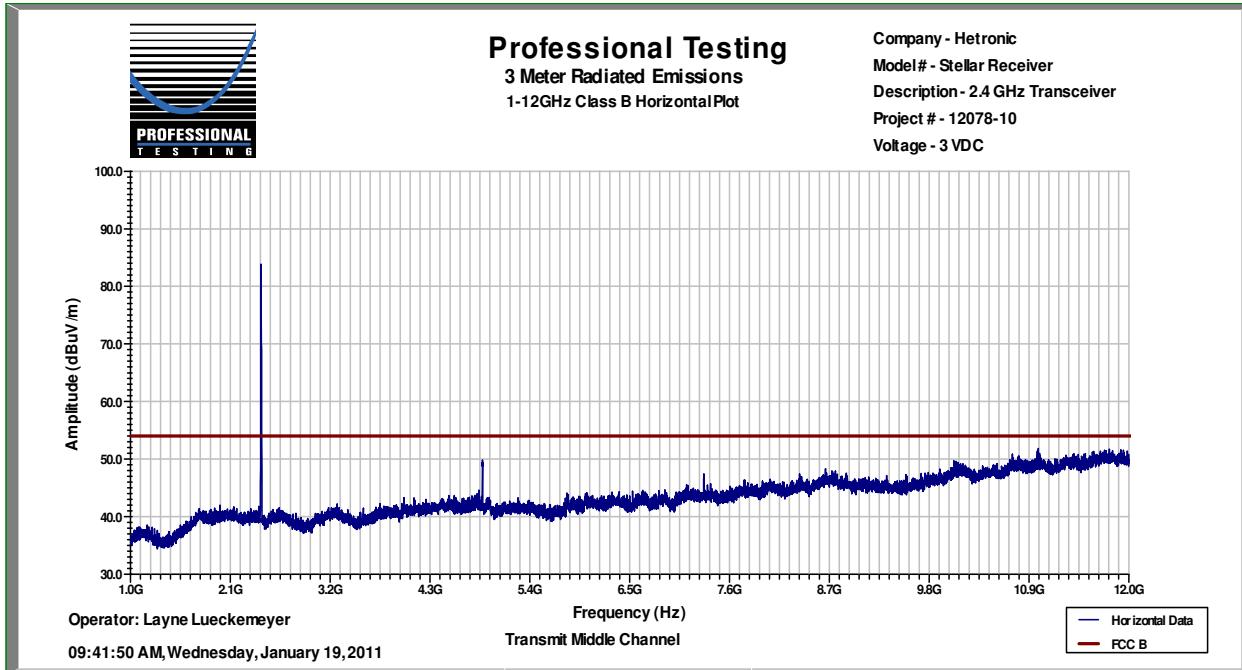


**NOTE: Graphical Data for overview only. Pre scan used to determine if spurious signals other than harmonics were present.**

**Spurious Radiated Emissions Data Sheet**  
**1 GHz...12 GHz**

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	FCC B	3 m	Horn	1 MHz	1 MHz	Average

COMMENT	Transmit Middle Channel
---------	-------------------------

**Vertical**

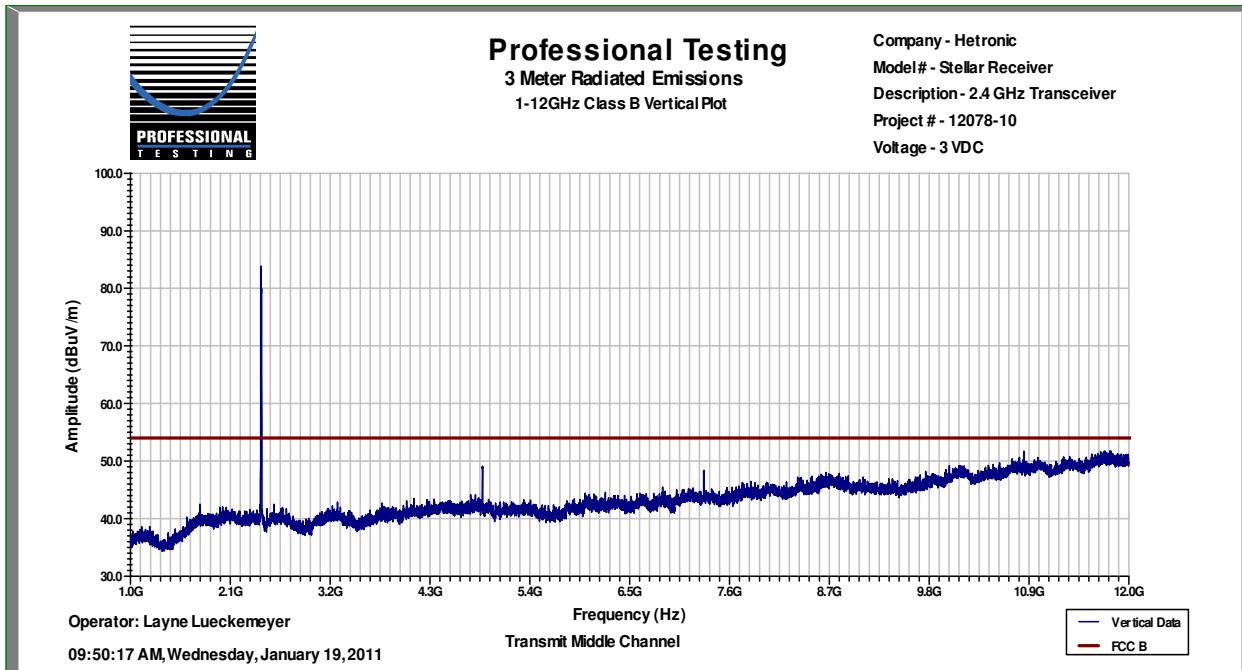

**NOTE: Graphical Data for overview only. Pre scan used to determine if spurious signals other than harmonics were present.**

**Spurious/Harmonic Emissions**  
**1 GHz ... 25 GHz**

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	FCC B	1 m	Horn	1 MHz	1 MHz	Average

COMMENT	Transmitting Low Channel Harmonics and spurious investigated up to 24.05 GHz.
---------	--

**Horizontal**

Frequency (GHz)	EUT Direction (degrees)	Antenna Elevation (Meters)	Recorded Level (dB $\mu$ V)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Level (dB $\mu$ V /m)	Limit (dB $\mu$ V /m)	Margin (dB)	Detector Function
4.81	0	1	45.6	24.4	33.5	4.2	58.9	63.5	-4.6	Average
7.215	0	1	36.3	24.1	36.8	5.0	54.1	63.5	-9.4	Average
9.62	0	1	35.1	28.5	38.2	4.6	49.5	63.5	-14.0	Average
12.025	0	1	35.7	25.3	40.3	7.1	57.8	63.5	-5.7	Average
14.43	0	1	34.9	25.3	42.0	7.7	59.3	63.5	-4.2	Average
16.835	0	1	35.5	24.5	41.0	7.6	59.6	63.5	-3.9	Average
19.24	0	1	39.7	43.2	36.6	8.8	41.9	63.5	-21.6	Average
21.645	0	1	40.3	41.8	36.9	9.5	44.9	63.5	-18.6	Average
24.05	0	1	42.6	42.2	37.1	10.4	47.9	63.5	-15.6	Average

**Vertical**

Frequency (GHz)	EUT Direction (degrees)	Antenna Elevation (Meters)	Recorded Level (dB $\mu$ V)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Level (dB $\mu$ V /m)	Limit (dB $\mu$ V /m)	Margin (dB)	Detector Function
4.81	0	1	40.7	24.4	33.5	4.2	54.0	63.5	-9.5	Average
7.215	0	1	39.7	24.1	36.8	5.0	57.5	63.5	-6.0	Average
9.62	0	1	39.4	28.5	38.2	4.6	53.8	63.5	-9.7	Average
12.025	0	1	33.6	25.3	40.3	7.1	55.7	63.5	-7.8	Average
14.43	0	1	34.9	25.3	42.0	7.7	59.3	63.5	-4.2	Average
16.835	0	1	35.5	24.5	41.0	7.6	59.6	63.5	-3.9	Average
19.24	0	1	39.7	43.2	36.6	8.8	41.9	63.5	-21.6	Average
21.645	0	1	40.3	41.8	36.9	9.5	44.9	63.5	-18.6	Average
24.05	0	1	42.6	42.2	37.1	10.4	47.9	63.5	-15.6	Average

**Result = Pass**

**Spurious/Harmonic Emissions**  
**1 GHz ... 25 GHz**

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	FCC B	1 m	Horn	1 MHz	1 MHz	Average

COMMENT	Transmitting Middle Channel Harmonics and spurious investigated up to 24.4 GHz.
---------	---

**Horizontal**

Frequency (GHz)	EUT Direction (degrees)	Antenna Elevation (Meters)	Recorded Level (dB $\mu$ V)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Level (dB $\mu$ V /m)	Limit (dB $\mu$ V /m)	Margin (dB)	Detector Function
4.88	0	1	42.7	24.4	33.5	4.2	56.1	63.5	-7.4	Average
7.32	0	1	33.4	24.1	36.8	5.1	51.2	63.5	-12.3	Average
9.76	0	1	32	24.4	38.2	5.0	50.7	63.5	-12.8	Average
12.2	0	1	33.5	26.7	39.5	5.6	51.9	63.5	-11.6	Average
14.64	0	1	30.4	24.5	41.4	6.1	53.4	63.5	-10.1	Average
17.08	0	1	30.7	22.8	42.7	7.6	58.2	63.5	-5.3	Average
19.52	0	1	39.7	43.5	36.5	6.7	39.4	63.5	-24.1	Average
21.96	0	1	40.3	40.6	36.9	10.4	47.0	63.5	-16.5	Average
24.4	0	1	42.6	42.2	37.2	10.3	47.8	63.5	-15.7	Average

**Vertical**

Frequency (GHz)	EUT Direction (degrees)	Antenna Elevation (Meters)	Recorded Level (dB $\mu$ V)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Level (dB $\mu$ V /m)	Limit (dB $\mu$ V /m)	Margin (dB)	Detector Function
4.88	0	1	38.5	24.4	33.5	4.2	51.9	63.5	-11.6	Average
7.32	0	1	35.6	24.1	36.8	5.1	53.4	63.5	-10.1	Average
9.76	0	1	31.4	24.4	38.2	5.0	50.1	63.5	-13.4	Average
12.2	0	1	33.6	26.7	39.5	5.6	52.0	63.5	-11.5	Average
14.64	0	1	30.6	24.5	41.4	6.1	53.6	63.5	-9.9	Average
17.08	0	1	30.9	22.8	42.7	7.6	58.4	63.5	-5.1	Average
19.52	0	1	39.7	43.5	36.5	6.7	39.4	63.5	-24.1	Average
21.96	0	1	40.3	40.6	36.9	10.4	47.0	63.5	-16.5	Average
24.4	0	1	42.6	42.2	37.2	10.3	47.8	63.5	-15.7	Average

**Result = Pass**

**Spurious/Harmonic Emissions**  
**1 GHz ... 25 GHz**

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	FCC B	1 m	Horn	1 MHz	1 MHz	Average

COMMENT	Transmitting High Channel Harmonics and spurious investigated up to 24.8 GHz.
---------	--

**Horizontal**

Frequency (GHz)	EUT Direction (degrees)	Antenna Elevation (Meters)	Recorded Level (dB $\mu$ V)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Level (dB $\mu$ V /m)	Limit (dB $\mu$ V /m)	Margin (dB)	Detector Function
4.96	0	1	42.1	24.4	33.5	4.2	55.5	63.5	-8.0	Average
7.44	0	1	35.6	24.7	37.3	4.5	52.7	63.5	-10.8	Average
9.92	0	1	34.8	23.5	38.2	5.0	54.5	63.5	-9.0	Average
12.4	0	1	33.5	27.8	39.9	6.2	51.8	63.5	-11.7	Average
14.88	0	1	30.4	23.4	41.1	7.3	55.4	63.5	-8.1	Average
17.36	0	1	30.7	21.5	44.6	8.7	62.5	63.5	-1.0	Average
19.84	0	1	39.7	43.7	36.5	8.2	40.8	63.5	-22.7	Average
22.32	0	1	40.3	40.5	37.1	9.4	46.3	63.5	-17.2	Average
24.8	0	1	42.6	42.1	37.2	10.1	47.8	63.5	-15.7	Average

**Vertical**

Frequency (GHz)	EUT Direction (degrees)	Antenna Elevation (Meters)	Recorded Level (dB $\mu$ V)	Amplifier Gain (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Level (dB $\mu$ V /m)	Limit (dB $\mu$ V /m)	Margin (dB)	Detector Function
4.96	0	1	39.2	24.4	33.5	4.2	52.6	63.5	-10.9	Average
7.44	0	1	35.3	24.7	37.3	4.5	52.4	63.5	-11.1	Average
9.92	0	1	34.5	23.5	38.2	5.0	54.2	63.5	-9.3	Average
12.4	0	1	33.5	27.8	39.9	6.2	51.8	63.5	-11.7	Average
14.88	0	1	30.4	23.4	41.1	7.3	55.4	63.5	-8.1	Average
17.36	0	1	30.7	21.5	44.6	8.7	62.5	63.5	-1.0	Average
19.84	0	1	39.7	43.7	36.5	8.2	40.8	63.5	-22.7	Average
22.32	0	1	40.3	40.5	37.1	9.4	46.3	63.5	-17.2	Average
24.8	0	1	42.6	42.1	37.2	10.1	47.8	63.5	-15.7	Average

**Result = Pass**


**Receiver Radiated Spurious Emissions Data Sheet**  
**30 MHz...1 GHz**

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	FCC B	10 m	Bicon I Log	CISPR 120 kHz	1 MHz	Quasi Peak

COMMENT	Receive Mode Only
---------	-------------------

**Horizontal**

Frequency Measured (MHz)	Test Distance (Meters)	EUT Direction (Degrees)	Antenna Height (Meters)	Detector Function	Recorded Amplitude (dB $\mu$ V)	Corrected Level (dB $\mu$ V/m)	Limit Level (dB $\mu$ V/m)	Margin (dB)
189.54	10	37	1	Quasi-peak	22.7	13.6	33.1	-19.5

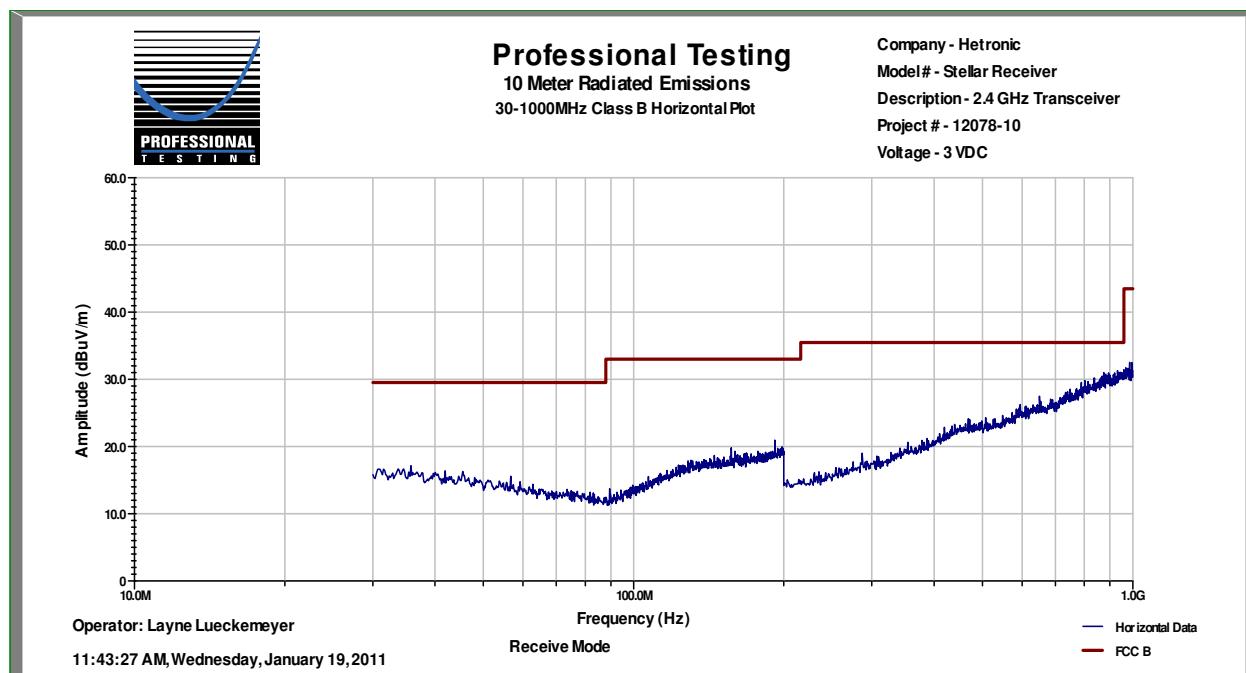

**Result = Pass**


**Receiver Radiated Spurious Emissions Data Sheet**  
**30 MHz...1 GHz**

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	FCC B	10 m	Bicon I Log	CISPR 120 kHz	1 MHz	Quasi Peak

COMMENT	Receive Mode Only
---------	-------------------

**Vertical**

Frequency Measured (MHz)	Test Distance (Meters)	EUT Direction (Degrees)	Antenna Height (Meters)	Detector Function	Recorded Amplitude (dB $\mu$ V)	Corrected Level (dB $\mu$ V/m)	Limit Level (dB $\mu$ V/m)	Margin (dB)
832	10	29	1	Quasi-peak	29.2	23.0	35.5	-12.5

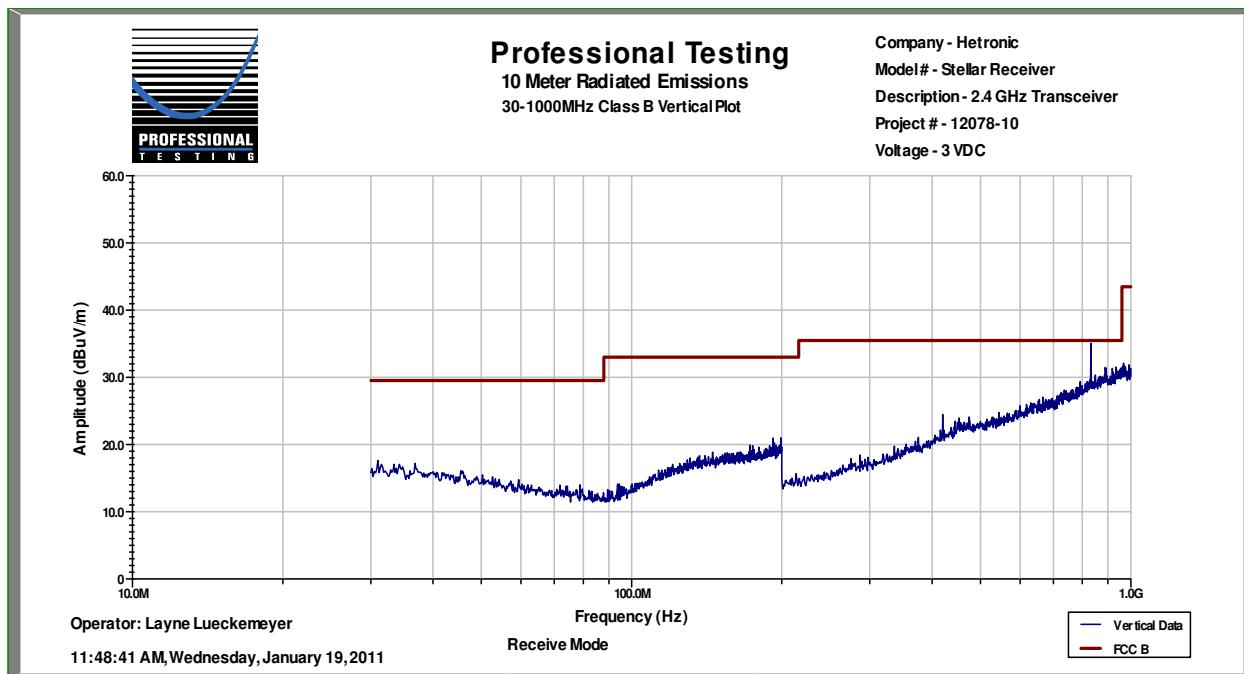

**Result = Pass**


**Receiver Radiated Spurious Emissions Data Sheet**  
**1 GHz ... 12 GHz**

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	FCC B	3 m	Horn	1 MHz	1 MHz	Peak/Avg

COMMENT	Receive Mode only
---------	-------------------

**Horizontal**

Frequency Measured (MHz)	Test Distance (Meters)	EUT Direction (Degrees)	Antenna Height (Meters)	Detector Function	Recorded Amplitude (dB $\mu$ V)	Corrected Level (dB $\mu$ V/m)	Limit Level (dB $\mu$ V/m)	Margin (dB)
4877	3	Noise	Floor	Average	46.6	36.3	54	-17.6
6618	3	Noise	Floor	Average	47.7	40.6	54	-13.4
8770	3	Noise	Floor	Average	50.8	49.0	54	-5.0
10377	3	Noise	Floor	Average	52.3	50.9	54	-3.1

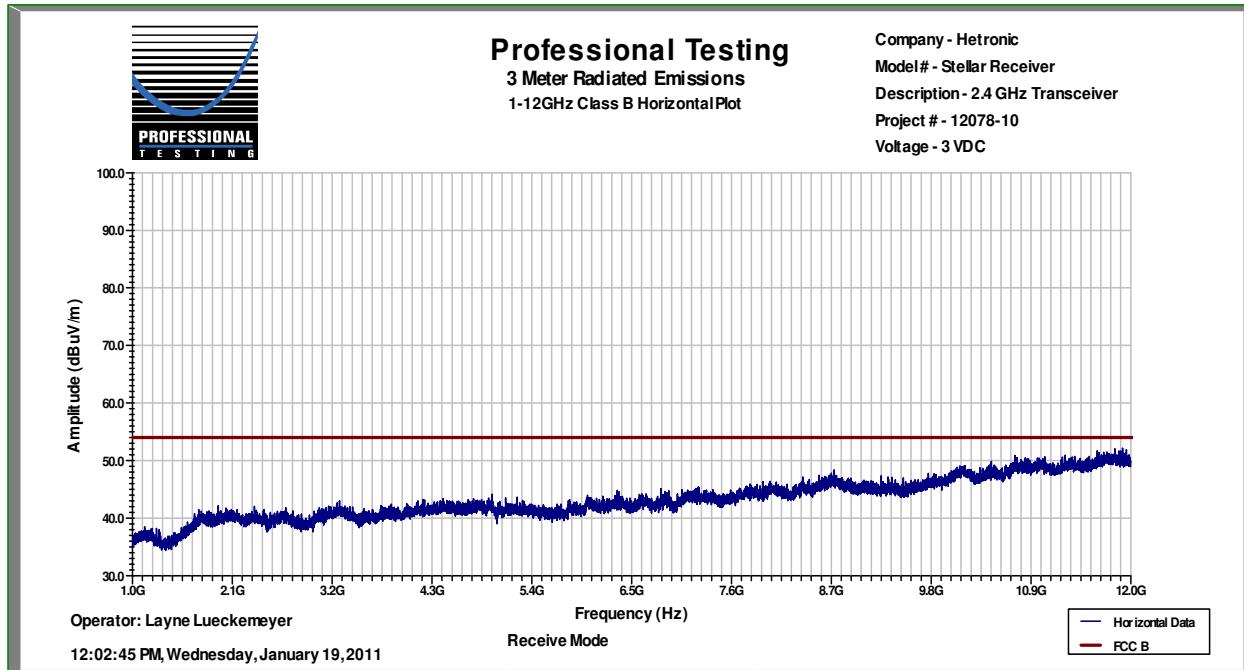

**Result = Pass**


**Receiver Radiated Spurious Emissions Data Sheet**  
**1 GHz ... 12 GHz**

PROJECT #	DATE	CLASS	DISTANCE	ANTENNA	RBW	VBW	DETECTOR
12078-10	January 19, 2011	FCC B	3 m	Horn	1 MHz	1 MHz	Peak/Avg

COMMENT	Receive Mode only
---------	-------------------

**Vertical**

Frequency Measured (MHz)	Test Distance (Meters)	EUT Direction (Degrees)	Antenna Height (Meters)	Detector Function	Recorded Amplitude (dB $\mu$ V)	Corrected Level (dB $\mu$ V/m)	Limit Level (dB $\mu$ V/m)	Margin (dB)
4753	3	Noise	Floor	Average	46.6	36.0	54	-18.0
6670	3	Noise	Floor	Average	48.7	41.8	54	-12.2
7684	3	Noise	Floor	Average	49.7	45.4	54	-8.6
10132	3	Noise	Floor	Average	52.6	50.9	54	-3.1

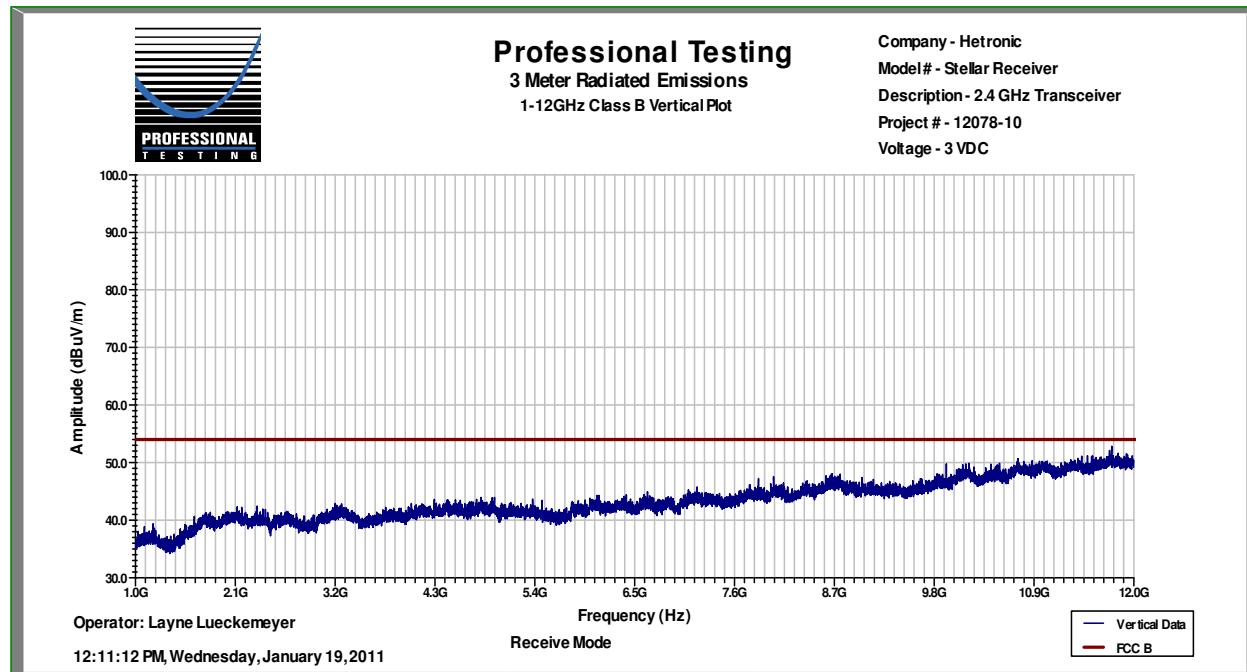

**Result = Pass**