

FCC TEST REPORT

for

47 CFR, Part 15, Subpart C

Equipment : Industrial Radio Remote Controller (Transmitter)

Model No. : F21-6D

FCC ID : LWNF21-6D

Filing Type : Certification

Applicant : Lee's Hi-Tech Enterprise Co., Ltd.
8F-1, No. 288-2, Hsin Ya Rd., Chien Chen Zone,
KaoHsiung, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

CERTIFICATE OF COMPLIANCE.....	3
1. General Description of Equipment under Test.....	4
1.1. Applicant.....	4
1.2. Manufacturer.....	4
1.3. Basic Description of Equipment under Test.....	4
1.4. Feature of Equipment under Test.....	4
2. Test Configuration of Equipment under Test.....	5
2.1. Test Manner.....	5
2.2. Description of Test System.....	5
2.3. Connection Diagram of Test System.....	6
2.4. A plot shows the EUT meet the requirement of 15.231(c).....	7
3. Test Software	9
4. General Information of Test.....	10
4.1. Test Facility.....	10
4.2. Standard for Methods of Measurement	10
4.3. Test in Compliance with	10
4.4. Frequency Range Investigated.....	10
4.5. Test Distance	10
5. Test of Conducted Powerline	11
6. Test of Radiated Emission.....	12
6.1. Major Measuring Instruments	12
6.2. Test Procedures.....	13
6.3. Typical Test Setup Layout of Radiated Emission.....	14
6.4. Test Result of Radiated Emission.....	15
7. Antenna Factor & Cable Loss	21
8. EMI Suppression Component List.....	23
9. List of Measuring Equipments Used	24
10. Uncertainty of Test Site	26
Appendix A. Photographs of EUT	A1 ~ A5

CERTIFICATE OF COMPLIANCE

for

FCC Part 15, Subpart C

Equipment : Industrial Radio Remote Controller (Transmitter)

Model No. : F21-6D

FCC ID : LWNF21-6D

Applicant : **Lee's Hi-Tech Enterprise Co., Ltd.**
8F-1, No. 288-2, Hsin Ya Rd., Chien Chen Zone,
KaoHsiung, Taiwan, R.O.C.

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was **passed** both radiated and conducted emission limits. Testing was carried out on Jan. 5, 2001 at **SPORTON International Inc.** LAB. in Lin Kou.



K. J. Lin
Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

Lee's Hi-Tech Enterprise Co., Ltd.
8F-1, No. 288-2, Hsin Ya Rd., Chien Chen Zone,
KaoHsiung, Taiwan, R.O.C.

1.2. Manufacturer

Same as 1.1.

1.3. Basic Description of Equipment under Test

Equipment	: Industrial Radio Remote Controller (Transmitter)
Model No.	: F21-6D
FCC ID	: LWNF21-6D
Trade Name	: Lee's Hi-Tech
Power Supply Type	: From Battery (AA Size x 4)
Power Cord	: N/A

1.4. Feature of Equipment under Test

- Modulation type is Super Heterodyne.
- Operation Frequency: 433.05~434.79MHz (set by software)
 - ◆ The operation frequency of the EUT may be set from 433.05 to 434.79MHz, but each equipment will be set to only a fixed frequency, such as 433.1MHz, or 434.5MHz, not a frequency range.
- Power Supply: Four 1.5volts Alkaline or Rechargeable Batteries (AA Size)
- RF Power: <7.85nW (3m)
- Modulation: $\leq \pm 2.5\text{KHz}$; NBFM
- Pushbutton Type: Two step mechanical switch
- Dimensions: 186x61x51mm (LxWxH)
- Weight: about 360g (including batteries)

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been tested pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. A receiver, which is designed to be used for EUT when marketed, was used during testing.
- c. The Lee's Receiver was used for EMI test.
- d. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 4,330MHz.
- e. The radiated emissions testing was made by rotating three orthogonal axes.(Normal mode, Horizontal mode, Vertical mode).
- f. The operation frequency of the EUT may be set from 433.05 to 434.79MHz. But each equipment will be set to only a fixed frequency, such as 433.1MHz, or 434.5MHz, not a frequency range.
The actual operation frequency of this EUT are 433.08MHz and 434.78MHz.
- g. The EUT employs a switch that will automatically deactivate the transmitter within no more than 5 seconds of being released.
- h. The EUT has no periodic transmission at regular predetermined interval.
- i. Pursuant to 15.231(c) of Part 15. Subpart C, the bandwidth of the emission at the 20dB point shall be no wider than 0.25% of the center frequency for EUT.

The carrier frequency of EUT is 433.08MHz and 434.78MHz

$433.08\text{MHz} \times 0.25\% = 1082.7\text{KHz}$, $434.78\text{MHz} \times 0.25\% = 1086.9\text{KHz}$

For 433.08MHz, the bandwidth is 293.8KHz (as shown in section 2.4.1 of this test report), which is less than 1082.7KHz.

For 434.78MHz, the bandwidth is 286KHz (as shown in section 2.4.2 of this test report), which is less than 1086.9KHz;


The EUT meet the 20dB point bandwidth requirement.

2.2. Description of Test System

Support Unit 1. -- Receiver (Lee's)

Model No. : F21-6



2.3. Connection Diagram of Test System

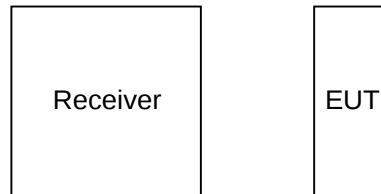


2.4. A plot shows the EUT meet the requirement of 15.231(c)

2.4.1. EUT with 433.08MHz

Here is the
carry
frequency

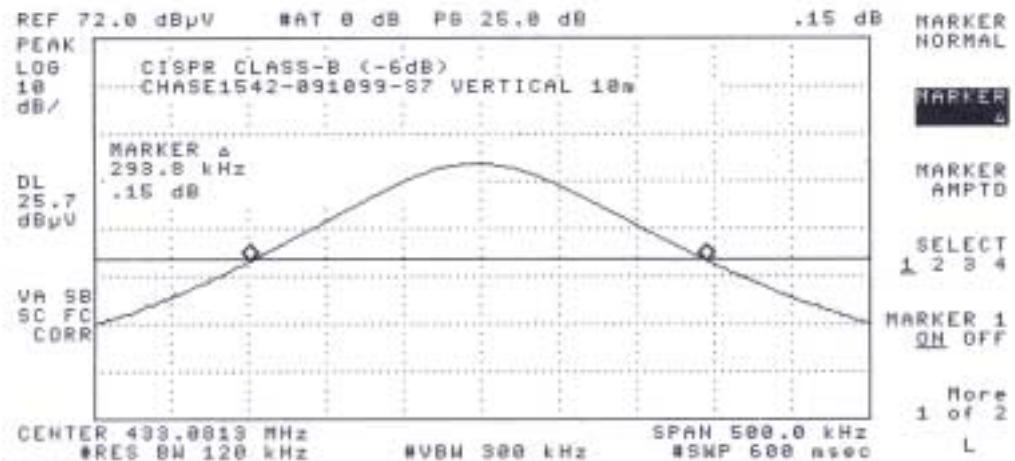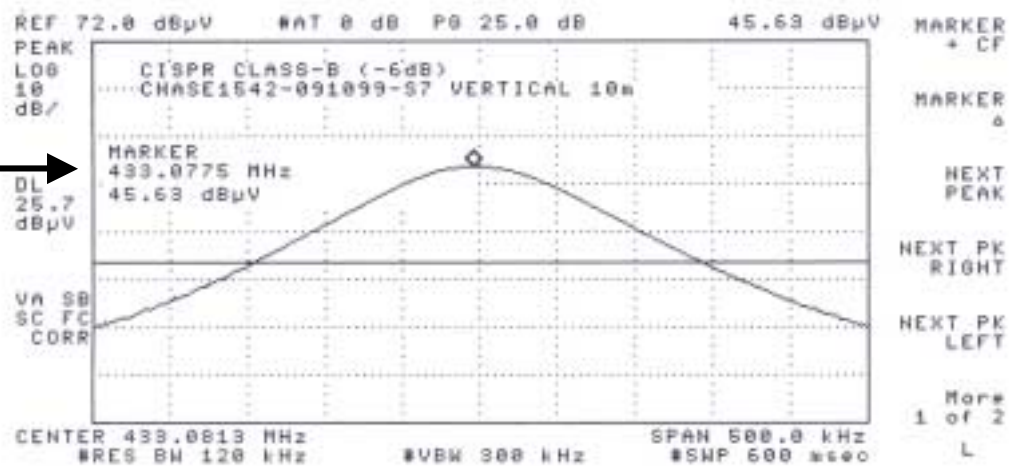

2.4.2. EUT with 434.78MHz

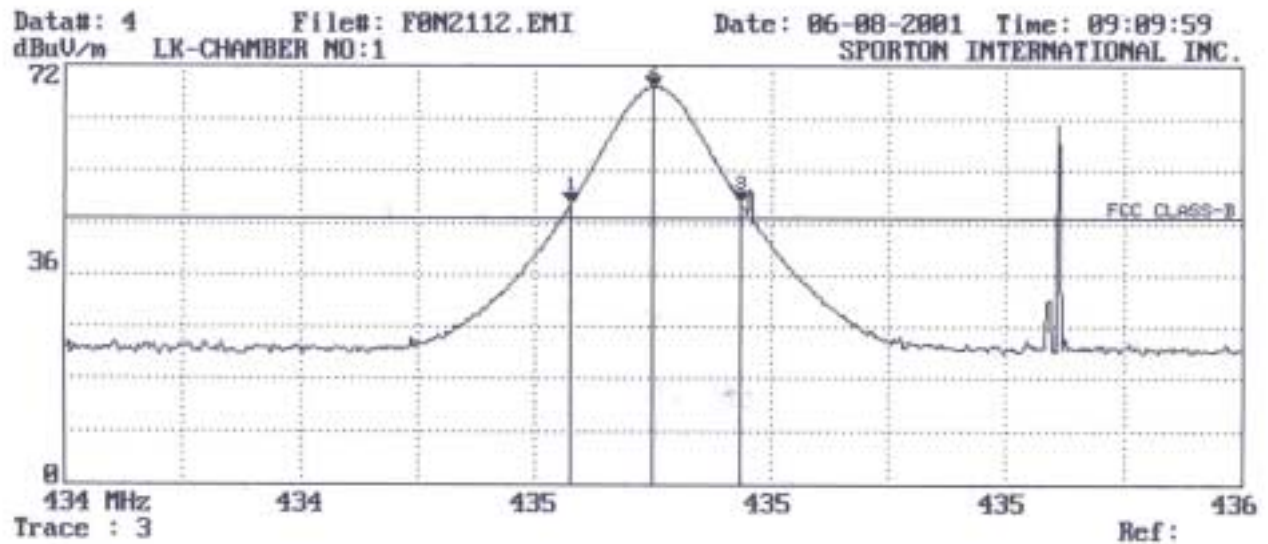

the bandwidth of the emission at the 20dB point is 286KHz

3. Test Software

No test software was used during testing.

4. General Information of Test

4.1. Test Facility

This test was carried out by SPORTON International Inc.

Test Site Location : No. 30-2, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,
Taipei Hsien, Taiwan, R.O.C.

TEL : 886-2-2601-1640

FAX : 886-2-2601-1695

4.2. Standard for Methods of Measurement

ANSI C63.4-1992

4.3. Test in Compliance with

FCC Part 15, Subpart C

4.4. Frequency Range Investigated

- a. Conduction: from 450 kHz to 30 MHz
- b. Radiation : from 30 MHz to 4,348 MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

5. Test of Conducted Powerline

The power supply of the EUT is from battery.

So Conducted Powerline test is not applicable to this equipment.

6. Test of Radiated Emission

Radiated emissions from 30 MHz to 4,348 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

6.1. Major Measuring Instruments

6.1.1. from 30MHz to 1GHz

- Amplifier (HP 87405A)
Attenuation 0 dB
RF Gain 20 dB
Signal Input 10 MHz to 3 GHz
- Spectrum Analyzer (ADVANTEST R3261C)
Attenuation 0 Db
Start Frequency 30 MHz
Stop Frequency 1000 MHz
Resolution Bandwidth 1 MHz
Video Bandwidth 1 MHz
Signal Input 9KHz to 2.6 GHz
- Test Receiver (R&S ESEC30)
Resolution Bandwidth 120 KHz
Frequency Band 9 KHz to 2.75 GHz
Quasi-Peak Detector ON for Quasi-Peak Mode
OFF for Peak Mode


6.1.2. from 1GHz to 4.348GHz

- Receiver (HP 8546A)
Attenuation 0 dB
Start Frequency 1000 MHz
Stop Frequency 4330 MHz
Resolution Bandwidth 1 MHz
Video Bandwidth 1 MHz
Signal Input 9 KHz to 6.5 GHz

6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. Typical Test Setup Layout of Radiated Emission

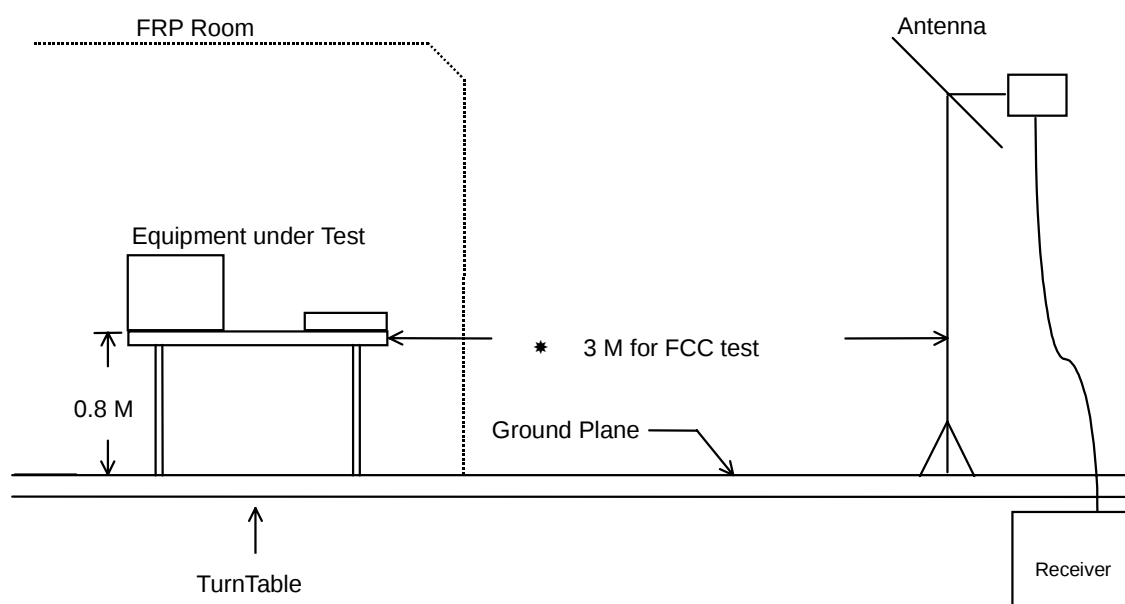

6.4. Test Result of Radiated Emission

6.4.1. EUT with 433.08MHz

6.4.1.1 Test Mode: NORMAL MODE

- Frequency range: 30~1000MHz
- Test Distance : 3 M
- Temperature : 26°C
- Relative Humidity : 54 %
- Test Date : Jan. 11, 2001
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin


563.000 MHz / 41.73 dBuV (HORIZONTAL) Antenna Height 1.1 Meter, Turntable Degree 355 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode
108.200	H	12.11	1.33	1.45	43.50	150	14.89	5.55	-28.61	Peak
563.000	H	18.72	3.34	19.67	46.00	200	41.73	122.04	-4.27	Peak
996.100	H	20.34	4.82	7.37	54.00	501	32.53	42.32	-21.47	Peak
108.200	V	12.11	1.33	2.70	43.50	150	16.14	6.41	-27.36	Peak
563.000	V	18.72	3.34	16.58	46.00	200	38.64	85.51	-7.36	Peak
996.100	V	20.34	4.82	5.20	54.00	501	30.36	32.96	-23.64	Peak

Fundamental Frequency and Spurious Emissions :

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode
433.080	H	16.78	2.72	59.89	80.79	10952	79.39	9321.80	-1.40	Q.P.
866.100	H	20.43	4.50	1.59	60.79	1095	26.52	21.18	-34.27	Q.P.
433.080	V	16.78	2.72	51.99	80.79	10952	71.49	3754.05	-9.30	Q.P.
866.100	V	20.43	4.50	1.51	60.79	1095	26.44	20.99	-34.35	Q.P.

Test Engineer :



Benny Lee

6.4.1.2 HORIZONTAL MODE

- Frequency range: 30~1000MHz
- Test Distance : 3 M
- Temperature : 26°C
- Relative Humidity : 54 %
- Test Date : Jan. 11, 2001
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission


The Radiated Emission test was passed at minimum margin

563.000 MHz / 42.39 dBuV (HORIZONTAL) Antenna Height 1.1 Meter, Turntable Degree 360 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)		Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode
108.200	H	12.11	1.33	3.78	43.50	150	17.22	7.26	-26.28	Peak
563.000	H	18.72	3.34	20.33	46.00	200	42.39	131.67	-3.61	Peak
108.200	V	12.11	1.33	3.03	43.50	150	16.47	6.66	-27.03	Peak
563.000	V	18.72	3.34	16.25	46.00	200	38.31	82.32	-7.69	Peak

Fundamental Frequency and Spurious Emissions :

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)		Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode
433.080	H	16.78	2.72	59.16	80.79	10952	78.66	8570.38	-2.13	Q.P.
866.100	H	20.43	4.50	6.51	60.79	1095	31.44	37.33	-29.35	Q.P.
433.080	V	16.78	2.72	51.32	80.79	10952	70.82	3475.36	-9.97	Q.P.
866.100	V	20.43	4.50	2.34	60.79	1095	27.27	23.09	-33.52	Q.P.

Test Engineer : 

Benny Lee

6.4.1.3 Test mode : VERTICAL MODE

- Frequency range: 30~1000MHz
- Test Distance : 3 M
- Temperature : 26°C
- Relative Humidity : 54 %
- Test Date : Jan. 11, 2001
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

563.000 MHz / 41.90 dBuV (HORIZONTAL) Antenna Height 1 Meter, Turntable Degree 150 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode
108.200	H	12.11	1.33	4.70	43.50	150	18.14	8.07	-25.36	Peak
563.000	H	18.72	3.34	19.84	46.00	200	41.90	124.45	-4.10	Peak
108.200	V	12.11	1.33	2.95	43.50	150	16.39	6.60	-27.11	Peak
563.000	V	18.72	3.34	15.67	46.00	200	37.73	77.00	-8.27	Peak


Fundamental Frequency and Spurious Emissions :

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode
433.080	H	16.78	2.72	51.16	80.79	10952	70.66	3411.93	-10.13	Q.P.
866.100	H	20.43	4.50	0.51	60.79	1095	25.44	18.71	-35.35	Q.P.
433.080	V	16.78	2.72	59.92	80.79	10952	79.42	9354.06	-1.37	Q.P.
866.100	V	20.43	4.50	2.01	60.79	1095	26.94	22.23	-33.85	Q.P.

6.4.1.4 Frequency Range of Test : from 1,000 MHz to 4,330 MHz

Remark: Frequency from 1000MHz to 4,330MHz, the emission emitted by the EUT is too low to be measured

Test Engineer :



Benny Lee

6.4.2. EUT with 434.78MHz

6.4.2.1 Test Mode: NORMAL MODE

- Frequency range: 30~1000MHz
- Test Distance : 3 M
- Temperature : 26°C
- Relative Humidity : 54 %
- Test Date : Jun. 5, 2001
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

130.200 MHz / 26.22 dBuV (HORIZONTAL) Antenna Height 1 Meter, Turntable Degree 125 °.


Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode
					(dBuV/m)	(uV/m)				
130.200	H	12.85	1.60	1.77	43.50	149.62	16.22	6.47	-27.28	Peak
311.200	H	13.69	2.56	2.75	46.00	199.53	19.00	8.91	-27.00	Peak
640.000	H	19.11	3.96	3.17	46.00	199.53	26.24	20.51	-19.76	Peak
130.300	V	12.85	1.60	2.94	43.50	149.62	17.39	7.40	-26.11	Peak
309.600	V	13.63	2.55	2.43	46.00	199.53	18.61	8.52	-27.39	Peak
640.800	V	19.11	3.96	1.34	46.00	199.53	24.41	16.61	-21.59	Peak

Fundamental Frequency and Spurious Emissions :

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode
					(dBuV/m)	(uV/m)				
434.780	H	16.60	3.11	42.35	80.85	11028.08	62.06	1267.65	-18.79	Q.P.
869.500	H	20.20	4.90	2.86	60.85	1102.81	27.96	25.00	-32.89	Q.P.
434.780	V	16.60	3.11	42.35	80.85	11028.08	62.06	1267.65	-18.79	Q.P.
869.500	V	20.20	4.90	2.36	60.85	1102.81	27.46	23.60	-33.39	Q.P.

6.4.2.2 Frequency Range of Test : from 1,000 MHz to 4,348 MHz

Remark: Frequency from 1000MHz to 4,348MHz, the emission emitted by the EUT is too low to be measured

Test Engineer : 

Benny Lee

6.4.2.3 HORIZONTAL MODE

- Frequency range: 30~1000MHz
- Test Distance : 3 M
- Temperature : 26°C
- Relative Humidity : 54 %
- Test Date : Jun. 5, 2001
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

638.400 MHz / 26.90 dBuV (HORIZONTAL) Antenna Height 1 Meter, Turntable Degree 40 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode
					(dBuV/m)	(uV/m)				
131.000	H	12.76	1.61	-0.31	43.50	149.62	14.06	5.05	-29.44	Peak
312.000	H	13.71	2.56	2.59	46.00	199.53	18.86	8.77	-27.14	Peak
638.400	H	19.11	3.96	3.83	46.00	199.53	26.90	22.13	-19.10	Peak
130.300	V	12.85	1.60	2.44	43.50	149.62	16.89	6.99	-26.61	Peak
313.600	V	13.74	2.57	2.08	46.00	199.53	18.39	8.31	-27.61	Peak
638.400	V	19.11	3.95	2.34	46.00	199.53	25.40	18.62	-20.60	Peak

Fundamental Frequency and Spurious Emissions :

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode
					(dBuV/m)	(uV/m)				
434.780	H	16.60	3.11	52.18	80.85	11028.08	71.89	3930.97	-8.96	Q.P.
869.500	H	20.20	4.90	3.02	60.85	1102.81	28.12	25.47	-32.73	Q.P.
434.780	V	16.60	3.11	41.51	80.85	11028.08	61.22	1150.80	-19.63	Q.P.
869.500	V	20.20	4.90	2.19	60.85	1102.81	27.29	23.15	-33.56	Q.P.

6.4.2.4 Frequency Range of Test : from 1,000 MHz to 4,348 MHz

Remark: Frequency from 1000MHz to 4,348MHz, the emission emitted by the EUT is too low to be measured

Test Engineer : 

Benny Lee

6.4.2.5 VERTICAL MODE

- Frequency range: 30~1000MHz
- Test Distance : 3 M
- Temperature : 26°C
- Relative Humidity : 54 %
- Test Date : Jun. 5, 2001
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

632.800 MHz / 26.04 dBuV (HORIZONTAL) Antenna Height 1 Meter, Turntable Degree 110 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode
130.000	H	12.85	1.60	-1.40	43.50	149.62	13.05	4.49	-30.45	Peak
310.400	H	13.66	2.55	2.76	46.00	199.53	18.97	8.88	-27.03	Peak
632.800	H	19.11	3.93	3.00	46.00	199.53	26.04	20.04	-19.96	Peak
129.800	V	12.85	1.60	1.60	43.50	149.62	16.05	6.35	-27.45	Peak
308.800	V	13.61	2.54	3.59	46.00	199.53	19.74	9.71	-26.26	Peak
632.000	V	19.11	3.93	1.34	46.00	199.53	24.38	16.56	-21.62	Peak

Fundamental Frequency and Spurious Emissions :

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode
434.780	H	16.60	3.11	38.18	80.85	11028.08	57.89	784.33	-22.96	Q.P.
869.500	H	20.20	4.90	2.52	60.85	1102.81	27.62	24.04	-33.23	Q.P.
434.780	V	16.60	3.11	53.35	80.85	11028.08	73.06	4497.80	-7.79	Q.P.
869.500	V	20.20	4.90	4.52	60.85	1102.81	29.62	30.27	-31.23	Q.P.

6.4.2.6 Frequency Range of Test : from 1,000 MHz to 4,348 MHz

Remark: Frequency from 1000MHz to 4,348MHz, the emission emitted by the EUT is too low to be measured

Test Engineer : Benny Lee
Benny Lee

7. Antenna Factor & Cable Loss

7.1.1. EUT with 433.08MHz

Frequency (Mhz)	Antenna Factor (dB)	Cable Loss (dB)
30	17.8	0.8
35	16.9	0.8
40	16.2	0.8
45	13.2	0.8
50	10.9	0.8
55	9.0	1.0
60	7.2	1.0
65	6.8	1.0
70	6.5	1.0
75	7.1	1.2
80	7.8	1.2
85	9.1	1.0
90	10.4	1.2
95	10.7	1.2
100	11.0	1.3
110	12.3	1.3
120	13.5	1.3
130	12.9	1.5
140	11.6	1.5
150	10.6	1.7
160	9.5	1.8
170	9.6	1.8
180	9.8	1.7
190	9.8	1.7
200	9.8	1.7
220	11.2	1.8
240	12.6	1.8
260	13.5	2.0
280	13.6	2.0
300	13.8	2.2
320	14.5	2.3
340	15.2	2.4
360	15.8	2.5
380	16.1	2.5
400	16.5	2.5
450	16.9	2.8
500	17.7	3.0
550	18.6	3.3
600	19.1	3.3
650	19.8	3.5
700	18.8	3.7
750	18.6	4.0
800	20.3	4.2
850	20.9	4.3
900	19.4	4.8
950	21.9	4.7
1000	20.2	4.8
1000	24.3	4.1
2000	28.1	5.8
3000	30.3	7.2
4000	32.8	8.6
5000	33.6	10.0

7.1.2. EUT with 434.78MHz

Frequency (Mhz)	Antenna Factor (dB)	Cable Loss (dB)
30	17.8	0.8
35	16.9	0.9
40	16.2	1.0
45	13.2	1.1
50	10.9	1.2
55	9.0	1.2
60	7.2	1.2
65	6.8	1.3
70	6.5	1.3
75	7.1	1.3
80	7.8	1.3
85	9.1	1.4
90	10.4	1.5
95	10.7	1.5
100	11.0	1.5
110	12.3	1.5
120	13.5	1.5
130	12.9	1.6
140	11.6	1.7
150	10.6	1.8
160	9.5	2.0
170	9.6	2.1
180	9.8	2.2
190	9.8	2.2
200	9.8	2.2
220	11.2	2.2
240	12.6	2.2
260	13.5	2.3
280	13.6	2.3
300	13.8	2.5
320	14.5	2.6
340	15.2	2.6
360	15.8	2.7
380	16.1	2.8
400	16.5	2.8
450	16.9	3.3
500	17.7	3.3
550	18.6	3.7
600	19.1	3.8
650	19.8	4.0
700	18.8	4.2
750	18.6	4.3
800	20.3	4.5
850	20.9	4.7
900	19.4	5.2
950	21.9	5.0
1000	20.2	5.2
1000	24.3	4.1
2000	28.1	5.8
3000	30.3	7.2
4000	32.8	8.6
5000	33.6	10.0

8. EMI Suppression Component List

1. Add a core on internal power cable(as shown on internal photos page 2).

9. List of Measuring Equipments Used

9.1.1. EUT with 433.08MHz

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer (Site 6)	ADVANTEST	R3261C	71720760	9KHz – 2.6GHz	Mar. 08, 2000	Radiation
Receiver (Site 6)	R&S	ESCS30	847793/003	9 K – 2.75 GHz	Dec. 27, 2000	Radiation
Amplifier (Site 6)	HP	87405A	3207A01437	100K - 3GHz	Aug. 03, 2000	Radiation
Bilog Antenna (Site 6)	CHASE	CBL6112A	2442	30MHz -2GHz	Jun. 23, 2000	Radiation
Half-wave dipole antenna (Site 6)	EMCO	3121C	9705-1285	28 M - 1GHz	May 17, 2000	Radiation
Turn Table (site 6)	EMCO	2080	9711-2021	0 ~ 360 degree	N/A	Radiation
Antenna Mast (site 6)	EMCO	2075	9711-2115	1 m- 4 m	N/A	Radiation
Receiver	HP	8546A	3325A00108	9KHz~6.5GHz	Dec.15, 2000	Radiation
Horn Antenna	EMCO	3115	4976	1GHz~18GHz	Jun. 21, 2000	Radiation

※ Calibration Interval of instruments listed above is one year.

9.1.2. EUT with 434.78MHz

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer (Site 6)	HP	8560E	3728A03186	9KHz – 2.6GHz	Sep. 15, 2000	Radiation
Receiver (Site 6)	R&S	ESCS30	847793/003	9 K – 2.75 GHz	Dec. 27, 2000	Radiation
Amplifier (Site 6)	HP	87405A	3207A01437	100K - 3GHz	Aug. 03, 2000	Radiation
Bilog Antenna (Site 6)	CHASE	CBL6112A	2442	30MHz -2GHz	Jun. 23, 2000	Radiation
Half-wave dipole antenna (Site 6)	EMCO	3121C	9705-1285	28 M - 1GHz	May 16, 2001	Radiation
Turn Table (site 6)	EMCO	2080	9711-2021	0 ~ 360 degree	N/A	Radiation
Antenna Mast (site 6)	EMCO	2075	9711-2115	1 m- 4 m	N/A	Radiation

※ Calibration Interval of instruments listed above is one year.

10. Uncertainty of Test Site

Uncertainty of Radiated Emission Measurement

Contribution	Probability Distribution	3m	10m
Antenna factor calibration	normal(k=2)	±1.6	±1.6
cable loss calibration	normal(k=2)	±0.3	±0.3
RCV/SPA specification	rectangular	±2.5	±2.5
Antenna Directivity	rectangular	±3	±0.5
Antenna Factor V.S. Height	rectangular	±2	±2
Antenna Factor Interpolation for Frequency	rectangular	±0.25	±0.25
site imperfection	rectangular	±2	±2
Mismatch Receiver VSWR $\Gamma_1=0.09$ Antenna VSWR $\Gamma_2=0.67$ Uncertainty= $20\log(1-\Gamma_1\Gamma_2)$	U-shaped	±0.54	±0.54
combined standard uncertainty Ue(y)	normal	±2.9	±2.4
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	normal (k=2)	±5.8	±4.8

$U = \sqrt{\{(1.6/2)^2 + (0.3/2)^2 + (3^2 + 0.5^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.4$ for 10m test distance

$U = \sqrt{\{(1.6/2)^2 + (0.3/2)^2 + (3^2 + 3^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.9$ for 3m test distance