

Straubing, January 18, 2001

TEST - REPORT

No. 50217-00696-2

for

Funkfernbedienung 868 MHz, Typ 765

Remote control receiver

Applicant: Bayerische Motorenwerke AG

Purpose of testing: To show compliance with

FCC Code of Federal Regulations,
Part 15 Subpart B Class B

I Canada Radio Standards
Specification RSS-210 Issue 2,
Section 6.1 (Category I Equipment)

Note:

The test data of this report relate only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

1.	Administrative Data	3
2.	Identification of Test Laboratory	4
3.	Summary of Test Results	5
4.	Operation Mode of EUT	6
5.	Configuration of EUT and Peripheral Devices	7
6.	Measuring Methods	8
6.1.	Antenna power conducted emissions (FCC §15.111)	12
6.2.	Radiated Emission 30 MHz - 1 GHz (FCC §15.109 / RSS-210 Sections 7.3)	8
6.3.	Radiated Emission 1 GHz - 4.5 GHz (FCC §15.109 / RSS-210 Sections 7.3)	10
7.	Equipment List	13
8.	Photographs Taken During Testing	15
9.	List of Measurements	18
9.1.	List of Measurements According To FCC Part 15 Subpart C	19
9.2.	List of Measurements According To Industry Canada RSS- 210 20	
10.	Test Results	22

1. Administrative Data

Equipment Under Test (EUT): Funkfernbedienung 868 MHz, Typ 765

Serial number(s): 00228

Type of equipment: Remote control receiver

Parts/accessories: ---

FCC-ID: ---

Applicant:
(full address) Bayerische Motorenwerke AG
Petuelring 130
D-80788 München

Contract identification: ---

Contact person: Mr. Hochleitner

Manufacturer: Bayerische Motorenwerke AG

Receipt of EUT: December 6, 2000

Date of test: December 2000 to January 2001

Note: ---

Responsible for testing: Rupert Kohlhäufel

Responsible for test report: Rupert Kohlhäufel (cj)

2. Identification of Test Laboratory

Test Laboratory: (full address):	Senton GmbH EMI/EMC Test Center Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
-------------------------------------	---

Contact person:	Mr. Johann Roidt
Communication:	Telephone (+49) 0 94 21 / 55 22-0 Fax (+49) 0 94 21 / 55 22-99 eMail: Office@senton.de

FCC registration number:	90926
Industry Canada file number:	IC 3050

3. Summary of Test Results

The tested sample complies with the limits forth in the Code of Regulations


FCC Part 15 Subpart B Class B
of the Federal Communication Commission (FCC).

and the

**Radio Standards Specification RSS-210 Issue 2, Section 6.1 for Low Power
Licence-Exempt Radiocommunication Devices of Industry Canada.**



Johann Roidt
Technical Manager



Rupert Kohlhäufel
Test Engineer

4. Operation Mode of EUT

Receiver in RX mode

5. Configuration of EUT and Peripheral Devices

Configuration of cables of EUT

Configuration of peripheral devices connected to EUT

6. Measuring Methods

6.1. Radiated Emission 30 MHz - 1 GHz (FCC §15.109 / RSS-210 Section 7.3)

Radiated emissions are measured over the frequency range from 30 MHz to 1 GHz. The bandwidth of the EMI-receiver is set to 120 kHz and the detector-function is set to CISPR quasi-peak.

The test setup is made in accordance with ANSI C63.4-1992.

Measurements are made in both the horizontal and vertical planes of polarization.

Preliminary scans are taken in a semi-anechoic room using a spectrum analyzer with the detector function set to peak. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

All tests are performed at a test-distance of 3 meters.

For final testing an open-area test-site is used. During the tests the EUT is rotated all around and the receiving-antenna is raised and lowered from 1 meter to 4 meters to find the maximum levels of emissions. The cables and equipment is placed and moved within the range of position likely to find their maximum emissions.

See figure 1 for the measurement setup.

Test equipment used (see equipment list for details):

01, 02, 05, 12, 38, 39, 40, 41, 58, 61, 64, 66

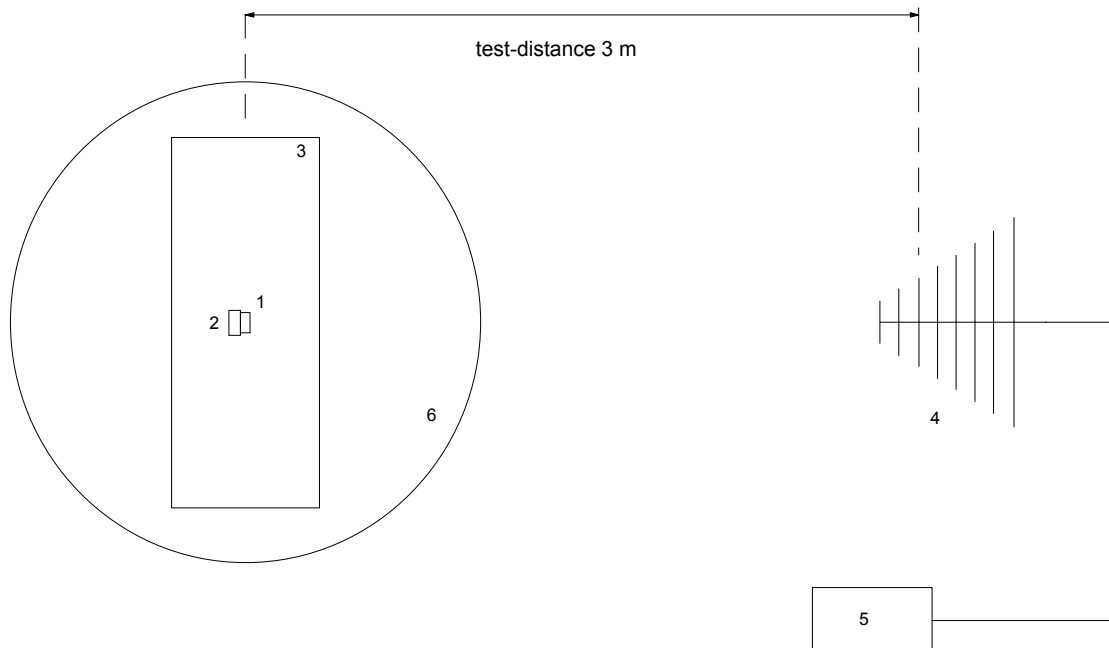


Figure 1: Measurement setup for radiated emission test below 1 GHz

- | | | | |
|---|--------------------------------|---|---------------|
| 1 | Receiver (EUT) | 5 | Test receiver |
| 2 | Wooden pedestal (if necessary) | 6 | Turn table |
| 3 | Wooden table | | |

6.2. Radiated Emission 1 GHz - 4.5 GHz (FCC §15.109 / RSS-210 Sections 7.3)

Radiated emissions are measured in the frequency range 1 GHz to 4.5 GHz. Resolution and video bandwidth of the spectrum analyzer are set to 1 MHz.

Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

Additional measurements are performed at critical frequencies with reduced span.

EUT is rotated all around and receiving antenna is raised and lowered to find the maximum levels of emission. The cables and equipment are placed and moved within the range of position likely to find their maximum emissions.

All tests are performed in a semi-anechoic chamber with a test-distance of 3 meters.

If possible preamplifiers are used for the whole frequency range. Special care is taken to avoid overload in transmit mode (using appropriate attenuators or filters if necessary).

See figure 2 for the measurement setup.

Test equipment used (see equipment list for details):

02, 13, 14, 16, ,42, 44, 45, 57, 64

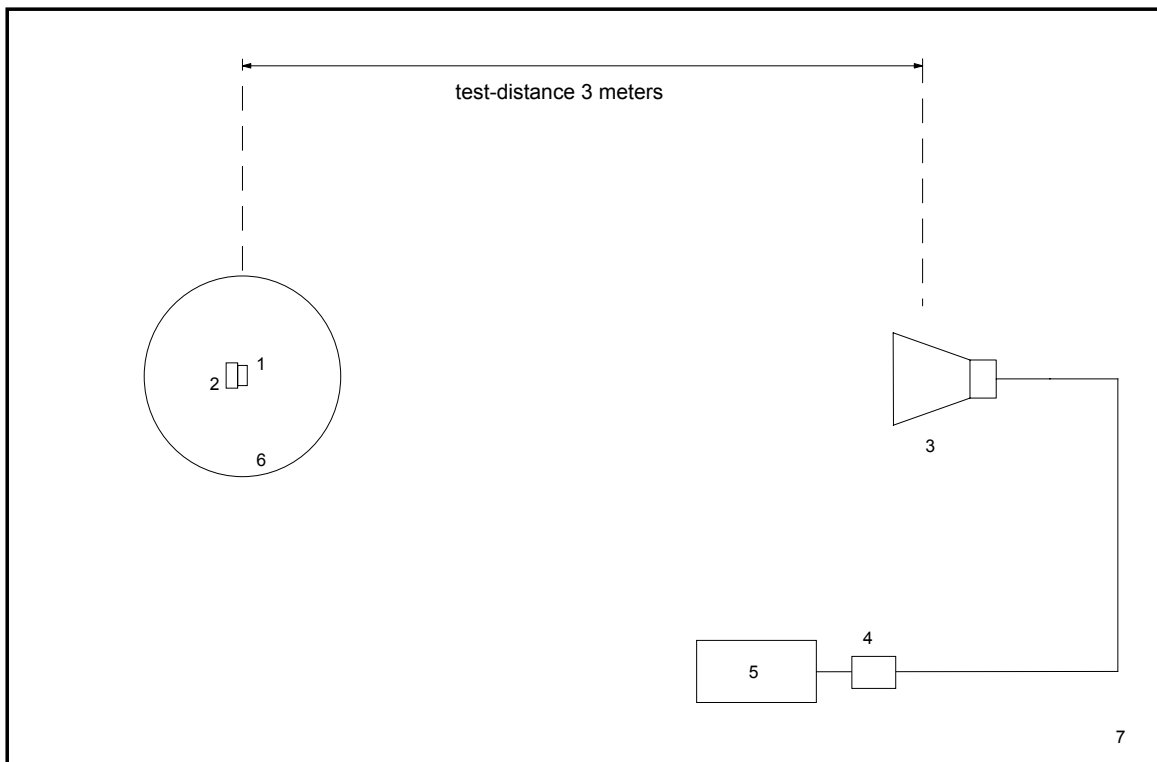


Figure 2: Measurement setup for radiated emission test above 1 GHz

- | | | | |
|---|--------------------------------|---|------------------------------|
| 1 | Receiver (EUT) | 3 | Measurement antenna |
| 2 | Wooden pedestal (if necessary) | 4 | Preamplifier (if applicable) |
| | | 5 | Spectrum analyzer |
| | | 6 | Turn table |
| | | 7 | Semi anechoic room |

6.3. Antenna power conducted emissions (FCC §15.111 / RSS-210 Section 7.2)

Antenna power conducted emissions were measured with a spectrum analyzer connected to the antenna connector (conducted measurement) while EUT operating in receive mode at the appropriate center frequency.

The spectrum analyzer was set to max hold (CISPR-bandwidths selected below 1 GHz) with:

9 kHz - 150 kHz:	RBW = 200 Hz, VBW = 1 kHz, sweep = auto
150 kHz - 30 MHz:	RBW = 10 kHz, VBW = 10 kHz, sweep = auto
30 MHz - 1 GHz:	RBW = 100 kHz, VBW = 100 kHz, sweep = auto
> 1GHz:	RBW = 1 MHz, VBW = 1 MHz, sweep = auto

See figure 3 for the measurement setup.

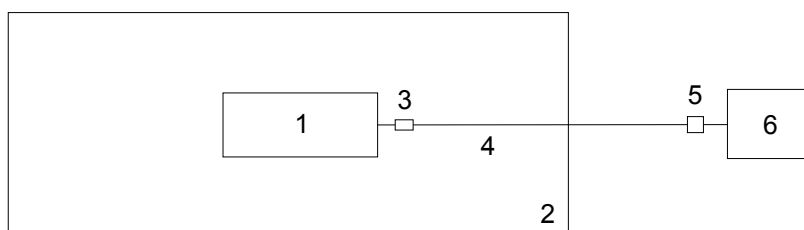


Figure 3: Measurement setup for testing on antenna connector

- | | |
|------------------|----------------------------|
| 1 Receiver (EUT) | 3 DC block |
| 2 Wooden table | 4 Test cable |
| | 5 Attenuator (if required) |
| | 6 Spectrum analyzer |

Test equipment used (see equipment list for details):
 02, 18, 57, 67, 68

7. Equipment List

To facilitate reference to test equipment used for related tests, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory.

No.	Type	Model	Serial Number	Manufacturer
01	Spectrum Analyzer	R 3271	05050023	Advantest
02	EMI Test Receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
03	Test Receiver	ESH 3	880112/032	Rohde & Schwarz
04	Test Receiver	ESHS 10	860043/016	Rohde & Schwarz
05	Test Receiver	ESV	881414/009	Rohde & Schwarz
06	Test Receiver	ESVP	881120/024	Rohde & Schwarz
07	Audio Analyzer	UPA	862954	Rohde & Schwarz
08	Power Meter	NRVS	836856/015	Rohde & Schwarz
09	Power Sensor	NRV-Z52	837901/030	Rohde & Schwarz
10	Power Sensor	NRV-Z4	863828/015	Rohde & Schwarz
11	Preamplifier	ESV-Z3	860907/004	Rohde & Schwarz
12	Preamplifier	R14601		Advantest
13	Preamplifier	ACX/080-3030	32640	CTT
14	Preamplifier	ACO/180-3530	32641	CTT
15	Signal Generator	SMS	872166/039	Rohde & Schwarz
16	Signal Generator	HP 8673 D	2930A00966	Hewlett Packard
17	Waveform Generator	HP 33120 A	US34005375	Hewlett Packard
18	Attenuator 20 dB	4776-20	9503	Narda
19	Attenuator 10 dB	4776-10	9412	Narda
20	Pulse Limiter	ESH 3-Z2	1144	Rohde & Schwarz
21	Pulse Limiter	11947 A	3107A00566	Hewlett Packard
22	V-Network	ESH 3-Z5	862770/018	Rohde & Schwarz
23	V-Network	ESH 3-Z5	894785/005	Rohde & Schwarz
24	V-Network	ESH 3-Z5	830952/025	Rohde & Schwarz
25	V-Network	ESH 3-Z6	830722/010	Rohde & Schwarz
26	V-Network	NSLK 8127	8127152	Schwarzbeck
27	V-Network	NNLA 8119	8119148	Schwarzbeck
28	V-Network	SE 01	01	Senton
29	T-Network	ESH 3-Z4	890602/011	Rohde & Schwarz
30	T-Network	ESH 3-Z4	890602/012	Rohde & Schwarz
31	High Impedance Probe	TK 9416	01	Schwarzbeck
32	High Impedance Probe	TK 9416	02	Schwarzbeck
33	Current Probe	ESH 2-Z1	863366/18	Rohde & Schwarz
34	Current Probe	ESV-Z1	862553/3	Rohde & Schwarz

No.	Type	Model	Serial Number	Manufacturer
35	Absorbing Clamp	MDS 21	80911	Lüthi
36	Absorbing Clamp	MDS 21	79690	Lüthi
37	Loop Antenna	HFH2-Z2	882964/1	Rohde & Schwarz
38	Biconical Antenna	HK 116	842204/001	Rohde & Schwarz
39	Biconical Antenna	HK 116	836239/02	Rohde & Schwarz
40	Log. Periodic Antenna	HL 223	841516/023	Rohde & Schwarz
41	Log. Periodic Antenna	HL 223	834408/12	Rohde & Schwarz
42	Horn Antenna	3115	9508-4553	Emco
43	Horn Antenna	3160-03	9112-1003	Emco
44	Horn Antenna	3160-04	9112-1001	Emco
45	Horn Antenna	3160-05	9112-1001	Emco
46	Horn Antenna	3160-06	9112-1001	Emco
47	Horn Antenna	3160-07	9112-1008	Emco
48	Horn Antenna	3160-08	9112-1002	Emco
49	Horn Antenna	3160-09	9403-1025	Emco
50	Digital multimeter	199	463386	Keithley
51	DC Power Supply	NGSM 32/10	203	Rohde & Schwarz
52	DC Power Supply	NGB	2455	Rohde & Schwarz
53	DC Power Supply	NGA	386	Rohde & Schwarz
54	Temperature Test Chamber	HT4010	07065550	Heraeus
55	Cable	RG214	1309	Senton
56	Cable	200CM_001	1357	Rosenberger
57	Cable	150CM_001	1479	Rosenberger
58	Cable Set EG1	RG214	1189 - 1191	Senton
59	Cable Set Cabine 1	RG214		Senton
60	Cable Set Cabine 2	RG214		Senton
61	Cable Set Cabine 3	RG214		Senton
62	Shielded Room	No. 1	1451	Senton
63	Shielded Room	No. 2	1452	Senton
64	Semi-anechoic Chamber	No. 3	1453	Siemens
65	Shielded Room	No. 4	1454	Euroshield
66	Open Area Test Site	EG 1		Senton
67	Test fixture			Senton

8. Photographs Taken During Testing

Photos No. 8.1 - 8.2

**Test setup for radiated emission pre-test 30 MHz - 1 GHz
and final test 1 GHz - 4.5 GHz
(semi anechoic room)**



Photos No. 8.3 - 8.4

**Test setup for radiated emission final test 30 MHz - 1 GHz
(open area test site)**



9. List of Measurements

9.1. List of Measurements According To FCC Part 15 Subpart B

FCC Part 15 Subpart B			
Section(s):	Test	Page(s)	Result
§15.107	Conducted emission test 450 kHz - 30 MHz		Not Applicable
§15.109	Radiated emission test 9 kHz - 30 MHz	---	Not Applicable (acc. to §15.33)
§15.109	Radiated emission test 30 MHz - 4.5 GHz		Passed
§15.111	Antenna power conducted emissions 9 kHz - 4.5 GHz		Passed

9.2. List of Measurements According To Industry Canada RSS-210

Industry Canada RSS-210 Issue 2			
Section(s):	Test	Page(s)	Result
7.4	Conducted emission test 450 kHz - 30 MHz		Not Applicable
7.3	Radiated emission test 30 MHz - 4.5 GHz		Passed
7.2	Antenna power conducted emissions 9 kHz - 4.5 GHz		Passed

10. Referenced Regulations

All tests were performed with reference to the following regulations and standards:

☒	FCC Part 15 Subpart A	Code of Regulations Part 15 (Radio Frequency Devices), Subpart A (General) of the Federal Communication Commission (FCC)	October 20, 1997
☒	FCC Part 15 Subpart B	Code of Regulations Part 15 (Radio Frequency Devices), Subpart B (Unintentional Radiators) of the Federal Communication Commission (FCC)	October 20, 1997
☐	FCC Part 15 Subpart C	Code of Regulations Part 15 (Radio Frequency Devices), Subpart C (Intentional Radiators) of the Federal Communication Commission (FCC)	October 20, 1997
☒	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz - 40 GHz	October, 1992
☒	RSS-210	Radio Standards Specification RSS-210 Issue 2 for Low Power Licence-Exempt Radiocommunication Devices of Industry Canada	February 24, 1996

11. Test Results

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart B

Model:
Funkfernbedienung 868 MHz, Typ 765

Serial no.:
00228

Applicant:
Bayerische Motorenwerke AG

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Horizontal Polarization

Date of test: 12/21/2000 Operator: R. Kohlhäufel


Test performed: automatically File name:

Mode:
Receiver in RX mode

External power supply: 12.0 V DC

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

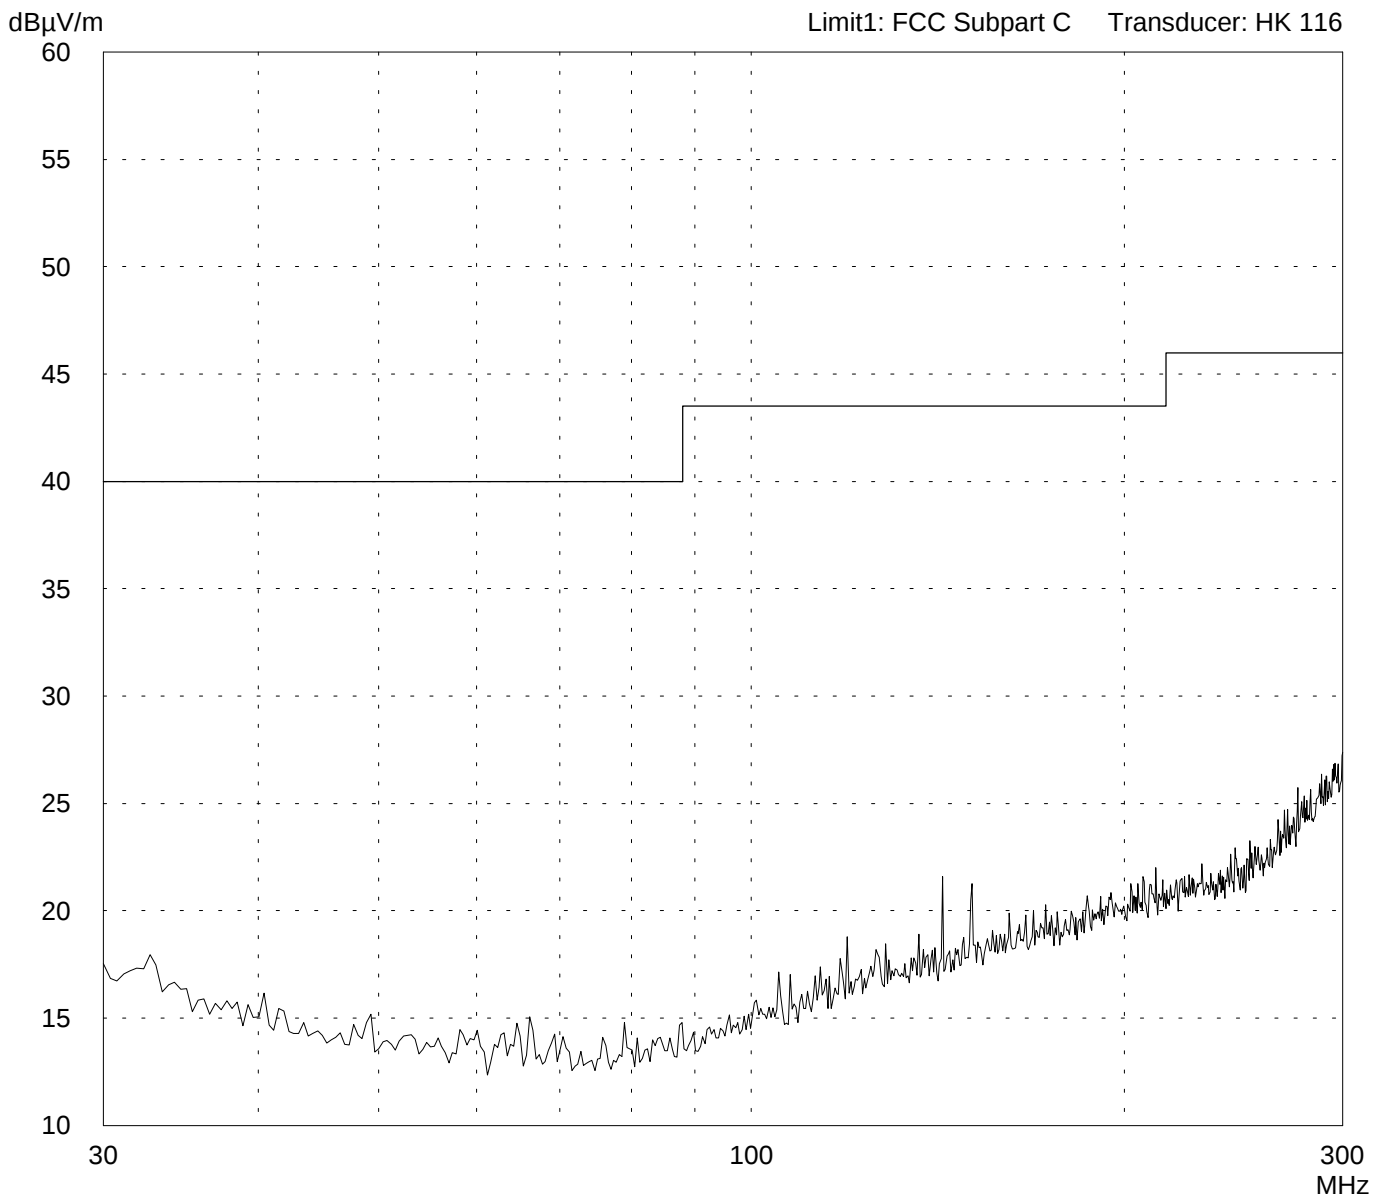

Result:
Prescan

Project file:
50217-00696-2

Page 23 of 35 Pages

Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart B

Model:
Funkfernbedienung 868 MHz, Typ 765

Serial no.:
00228

Applicant:
Bayerische Motorenwerke AG

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Horizontal Polarization

Date of test: 12/21/2000 Operator: R. Kohlhäufel


Test performed: automatically File name:

Mode:
Receiver in RX mode

External power supply: 12.0 V DC

Detector:
Peak

List of values:
Selected by hand

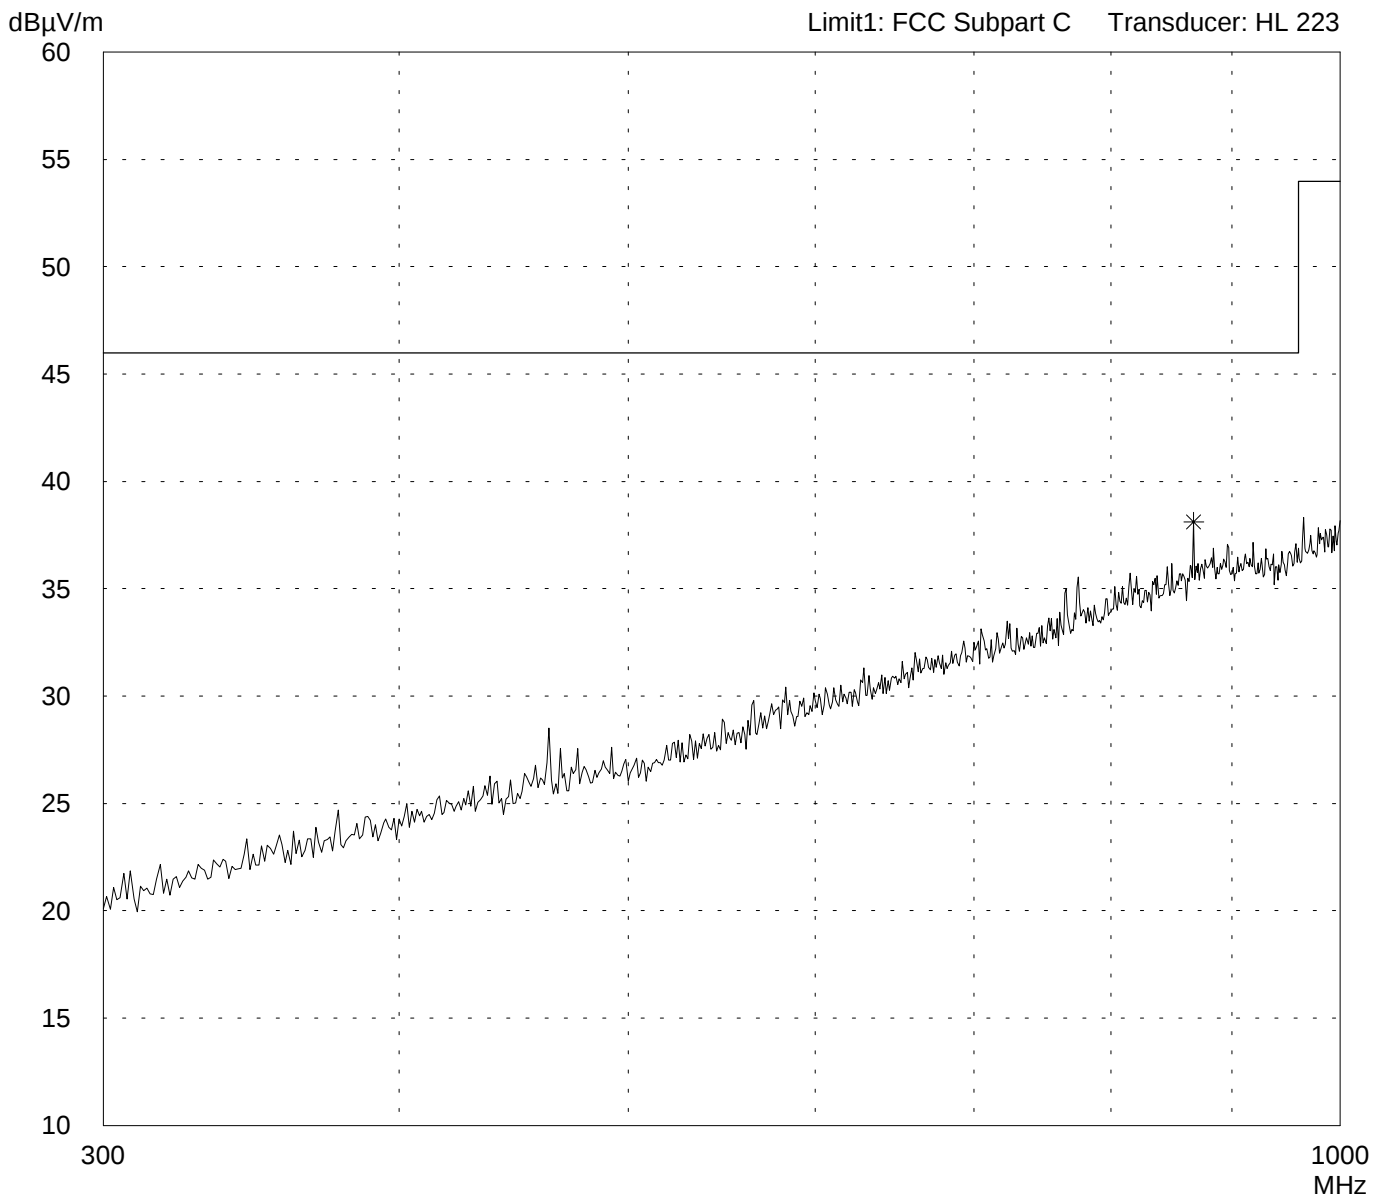

Result:
Prescan

Project file:
50217-00696-2

Page 24 of 35 Pages

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart B

Model:
Funkfernbedienung 868 MHz, Typ 765

Serial no.:
00228

Applicant:
Bayerische Motorenwerke AG

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Vertical Polarization

Date of test: 12/21/2000 Operator: R. Kohlhäufel


Test performed: automatically File name:

Mode:
Receiver in RX mode

External power supply: 12.0 V DC

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

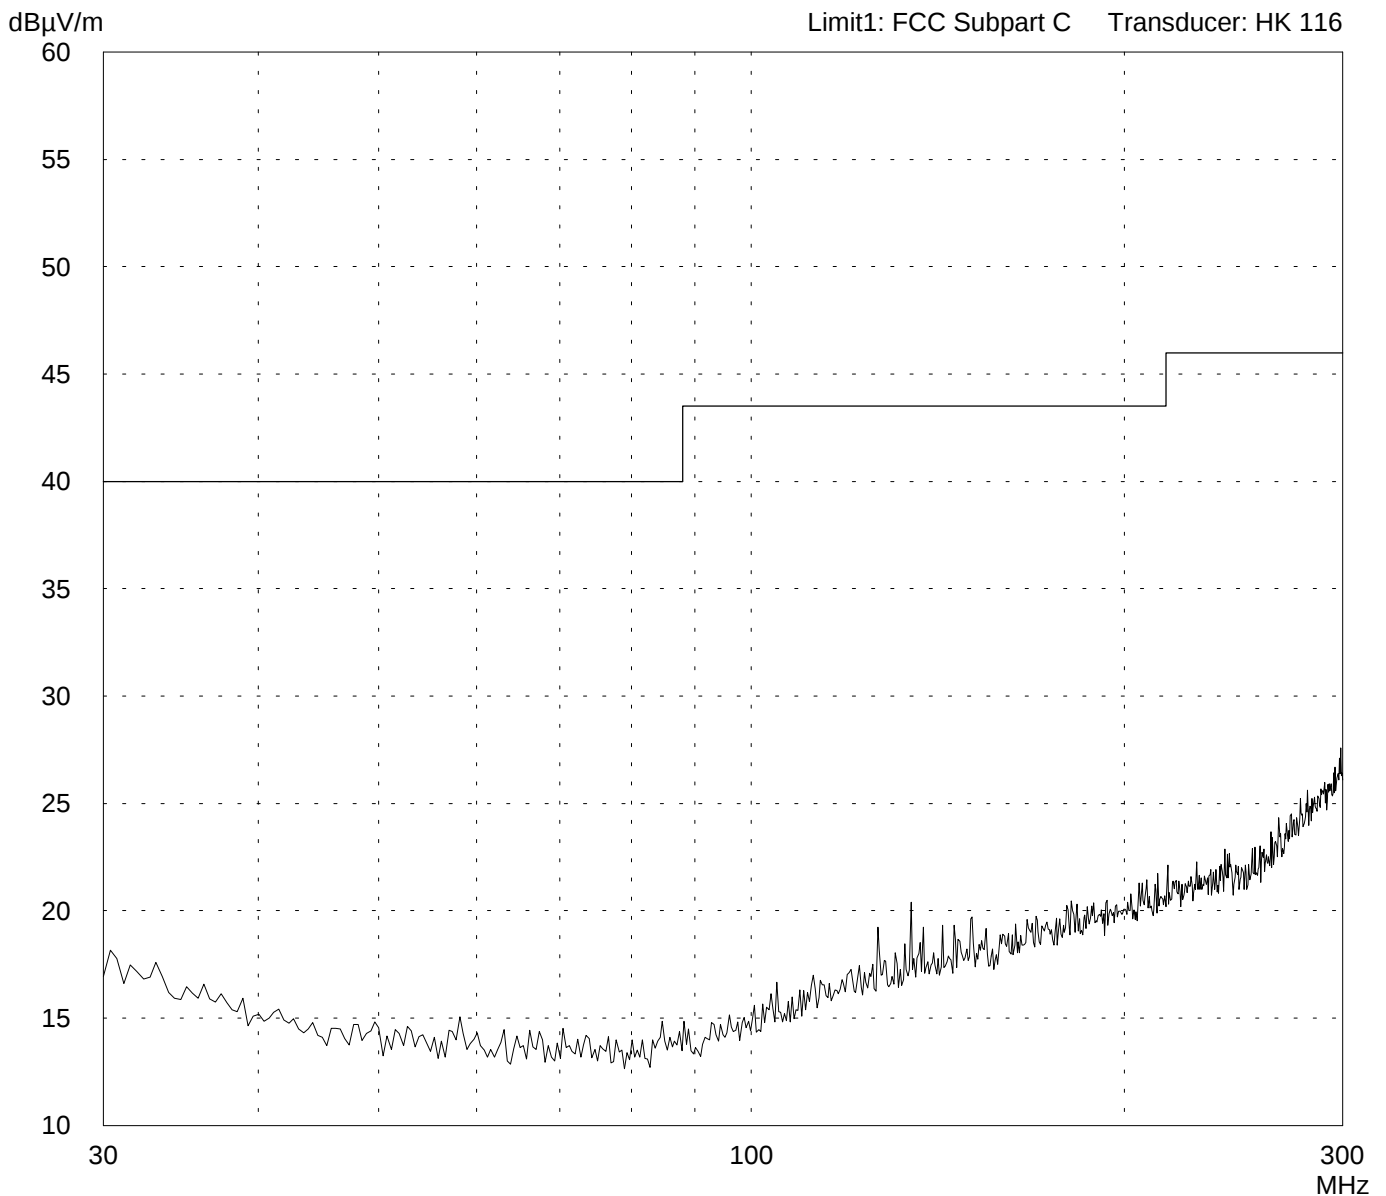

Result:
Prescan

Project file:
50217-00696-2

Page 25 of 35 Pages

Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart B

Model:
Funkfernbedienung 868 MHz, Typ 765

Serial no.:
00228

Applicant:
Bayerische Motorenwerke AG

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Vertical Polarization

Date of test: 12/21/2000 Operator: R. Kohlhäufel


Test performed: automatically File name:

Mode:
Receiver in RX mode

External power supply: 12.0 V DC

Detector:
Peak

List of values:
Selected by hand

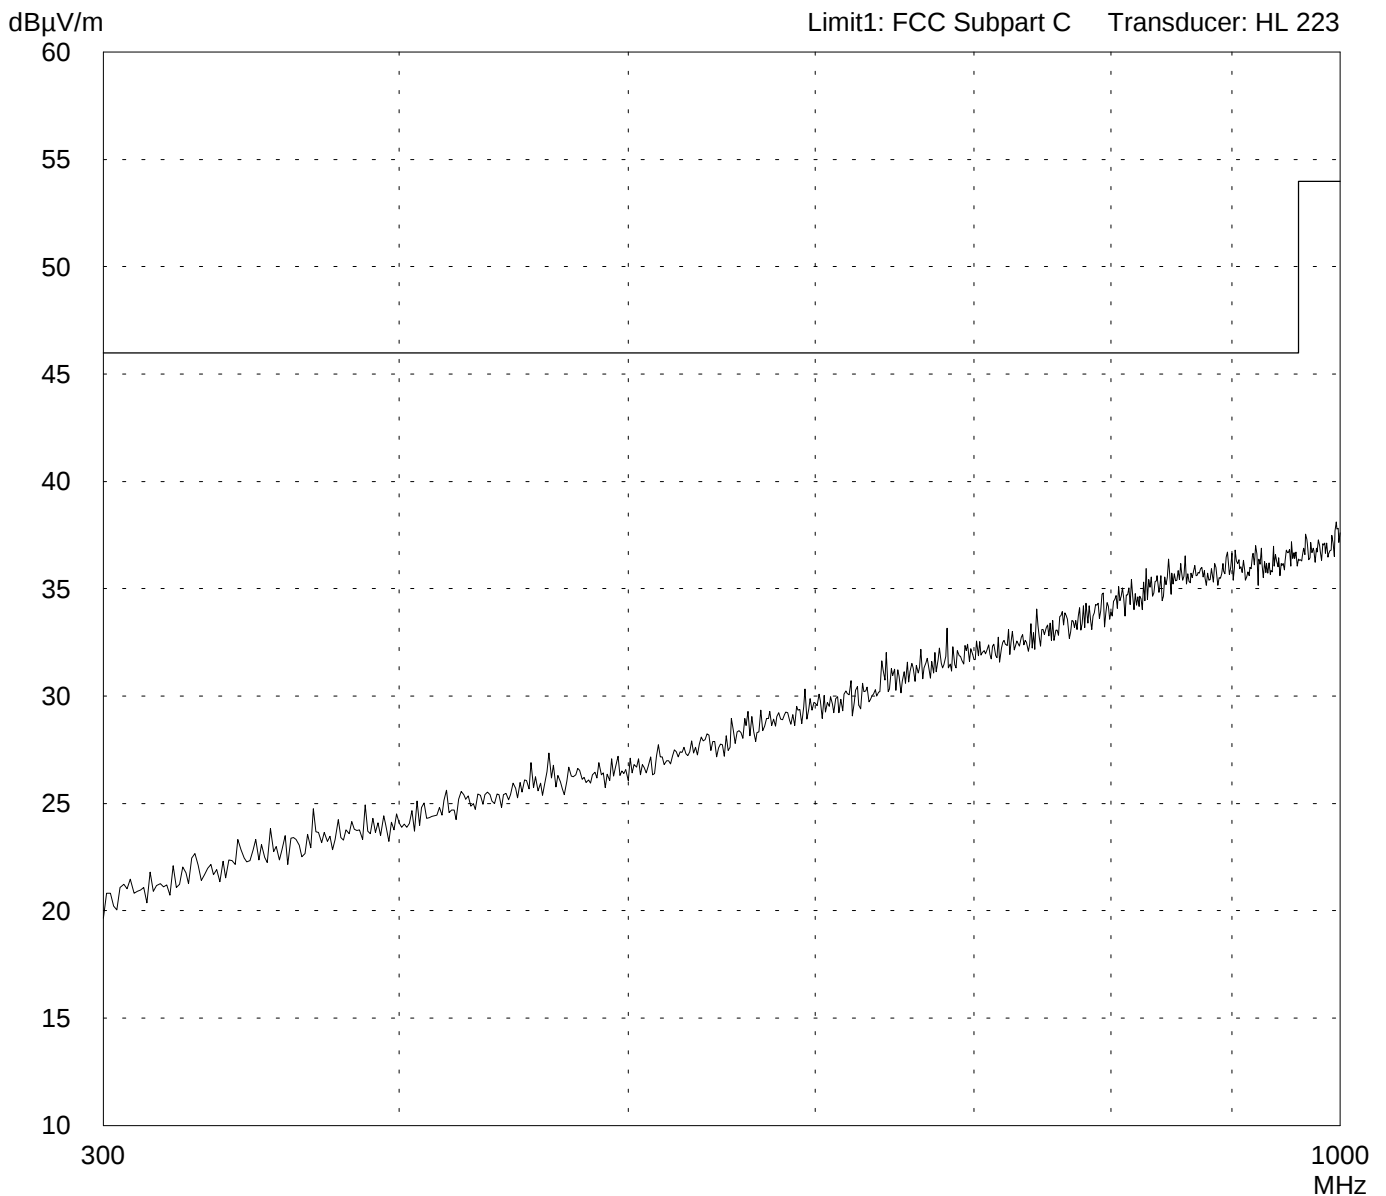

Result:
Prescan

Project file:
50217-00696-2

Page 26 of 35 Pages

Radiated Emission Test 30 MHz - 1 GHz according to FCC Part 15 Subpart B Class B

Model:
Funkfernbedienung 868 MHz, Typ 765

Serial no.:
00228

Applicant:
Bayerische Motorenwerke AG

Test site:
Open area test-site I

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test: 12/21/2000 Operator: R. Kohlhäufel


Test performed: by hand File name:

Mode:
Receiver in RX mode

External power supply: 12.0 V DC

Detector:
Quasi-Peak

List of values:
Selected by hand

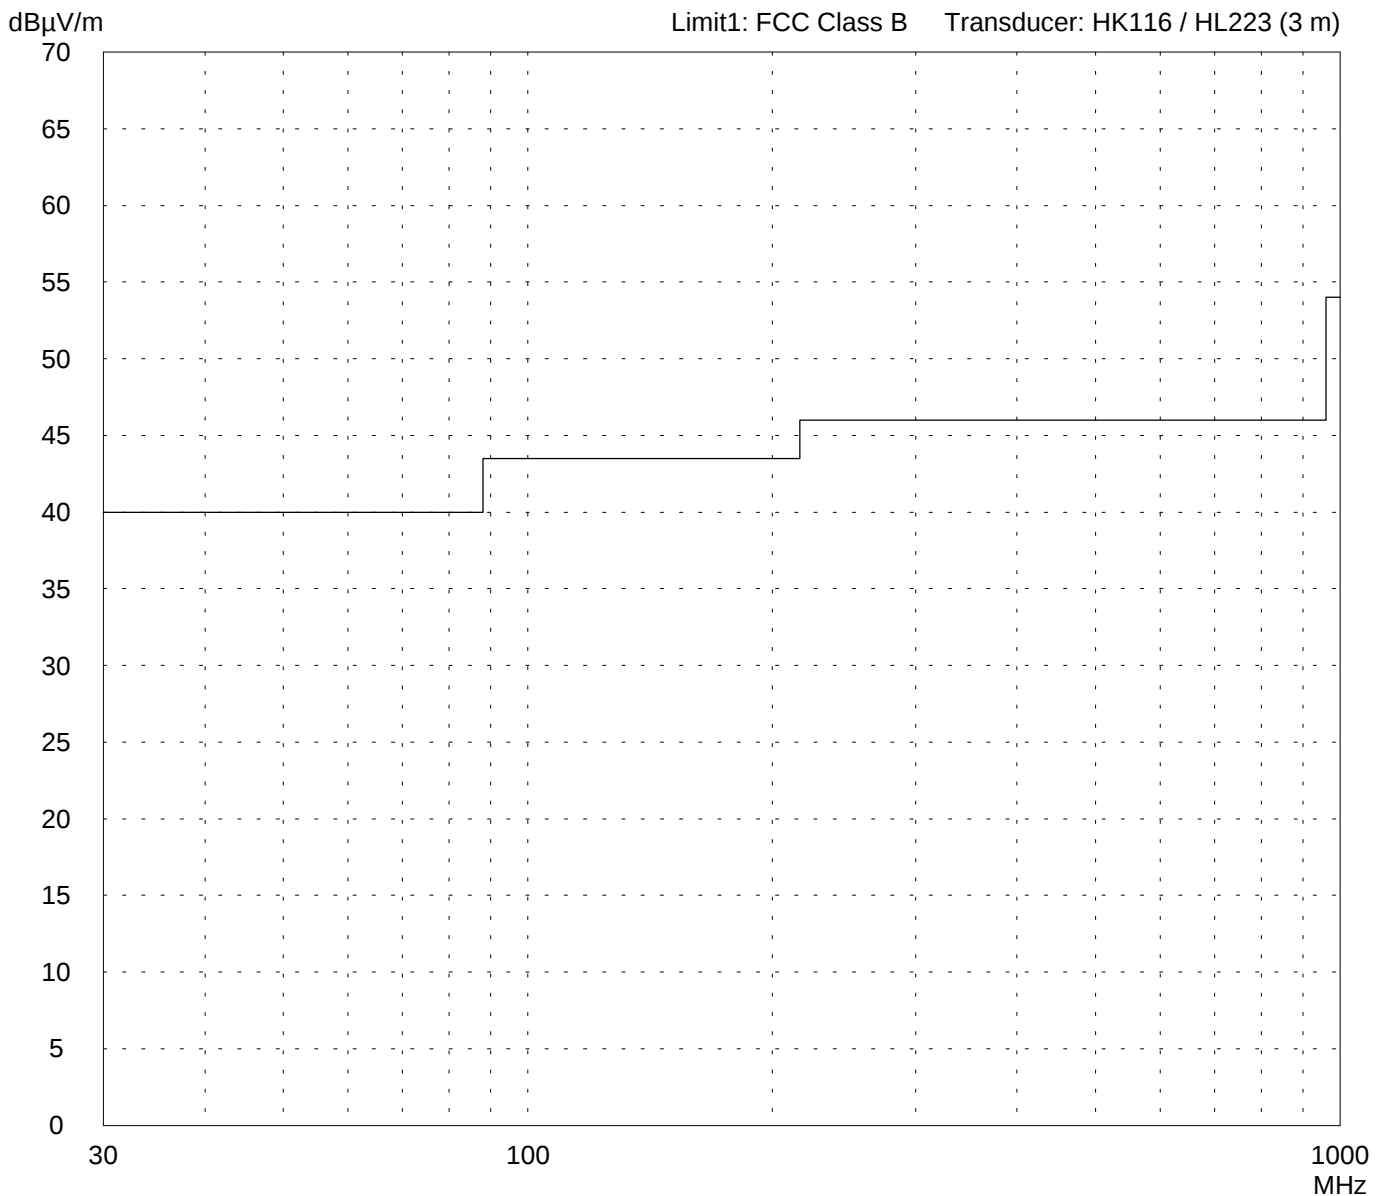

Result:
Limit kept

Project file:
50217-00696-2

Page 27 of 35 Pages

Radiated Emission Test 30 MHz - 1 GHz according to FCC Part 15 Subpart B Class B

Model:
Funkfernbedienung 868 MHz, Typ 765

Serial no.:
00228

Applicant:
Bayerische Motorenwerke AG

Test site:
Open area test-site I

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test: 12/21/2000 Operator: R. Kohlhäufel

Test performed: by hand File name:

Mode:
Receiver in RX mode

External power supply: 12.0 V DC

Detector:
Quasi-Peak

List of values:
Selected by hand

<i>Frequency MHz</i>	<i>Reading dBμV</i>	<i>Correction factor dB</i>	<i>Value dBμV/m</i>	<i>Limit dBμV/m</i>	<i>Limit exceeded</i>
no results					

Result:
Limit kept

Project file:
50217-00696-2

Page 28 of 35 Pages

Radiated Emission Test 30 MHz - 1 GHz according to FCC Part 15 Subpart B Class B

Model:
Funkfernbedienung 868 MHz, Typ 765

Serial no.:
00228

Applicant:
Bayerische Motorenwerke AG

Test site:
Open area test-site I

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test: 12/21/2000 Operator: R. Kohlhäufel


Test performed: by hand File name:

Mode:
Receiver in RX mode

External power supply: 12.0 V DC

Detector:
Quasi-Peak

List of values:
Selected by hand

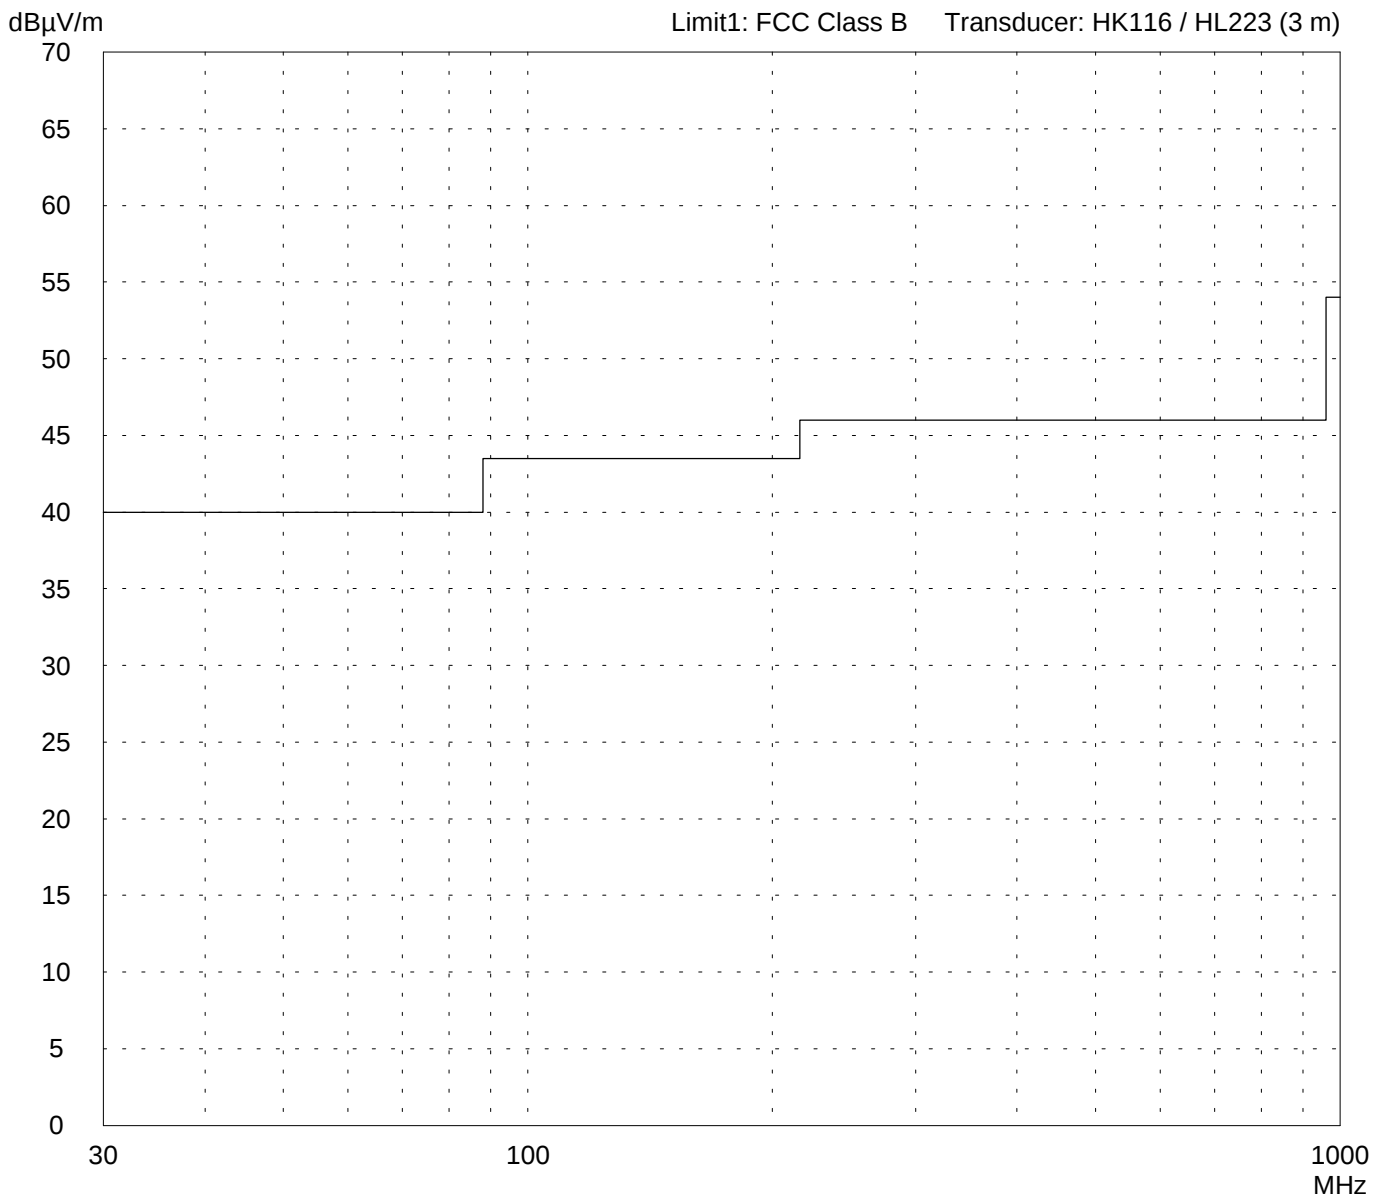

Result:
Limit kept

Project file:
50217-00696-2

Page 29 of 35 Pages

Radiated Emission Test 30 MHz - 1 GHz according to FCC Part 15 Subpart B Class B

Model:
Funkfernbedienung 868 MHz, Typ 765

Serial no.:
00228

Applicant:
Bayerische Motorenwerke AG

Test site:
Open area test-site I

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test: 12/21/2000 Operator: R. Kohlhäufel

Test performed: by hand File name:

Mode:
Receiver in RX mode

External power supply: 12.0 V DC

Detector:
Quasi-Peak

List of values:
Selected by hand

<i>Frequency MHz</i>	<i>Reading dBμV</i>	<i>Correction factor dB</i>	<i>Value dBμV/m</i>	<i>Limit dBμV/m</i>	<i>Limit exceeded</i>
no results					

Result:
Limit kept

Project file:
50217-00696-2

Page 30 of 35 Pages

Radiated emission test 1 - 4.5 GHz acc. to FCC Part 15 Subpart B

Model:
Funkfernbedienung 868 MHz, Typ 765

Serial No.:
00228

Applicant:
Bayerische Motorenwerke AG

Mode:
Receiver in RX mode


External power supply: 12.0 V DC

Channel A: Horizontal polarization
Channel B: Vertical polarization

Ref.Level 67.5 dB μ V/m
5 dB/Div.

ATT 0 dB

Ref. Offset -29.5 dB

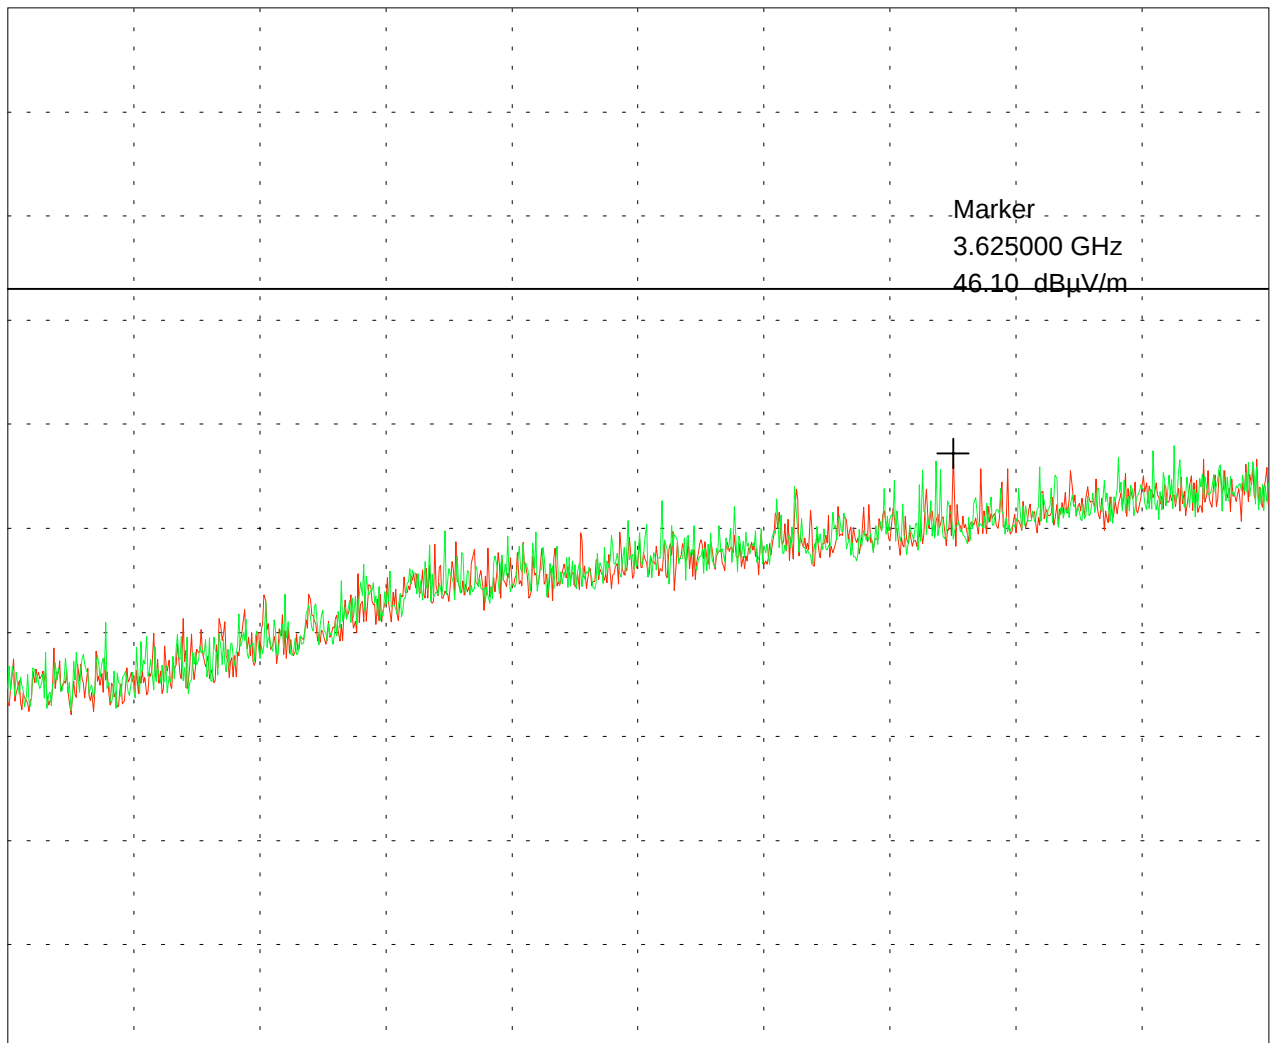

Start 1.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 4.500 GHz
SWP 20 ms

Tested by:
Rupert Kohlhäufel

Date:
12/21/2000

Project-No.:
50217-00696-2

Page 31 of 35 Pages

Antenna power conducted emissions acc. to FCC Part 15/B §15.111

Model:
Funkfernbedienung 868 MHz, Typ 765

Serial No.:
00228

Applicant:
Bayerische Motorenwerke AG


Mode:
Receiver in RX mode

External power supply: 12.0 V DC

Conducted measurement on
FM5 (FBD 315/343/868) antenna

Ref.Level -50 dBm
10 dB/Div.

ATT 10 dB

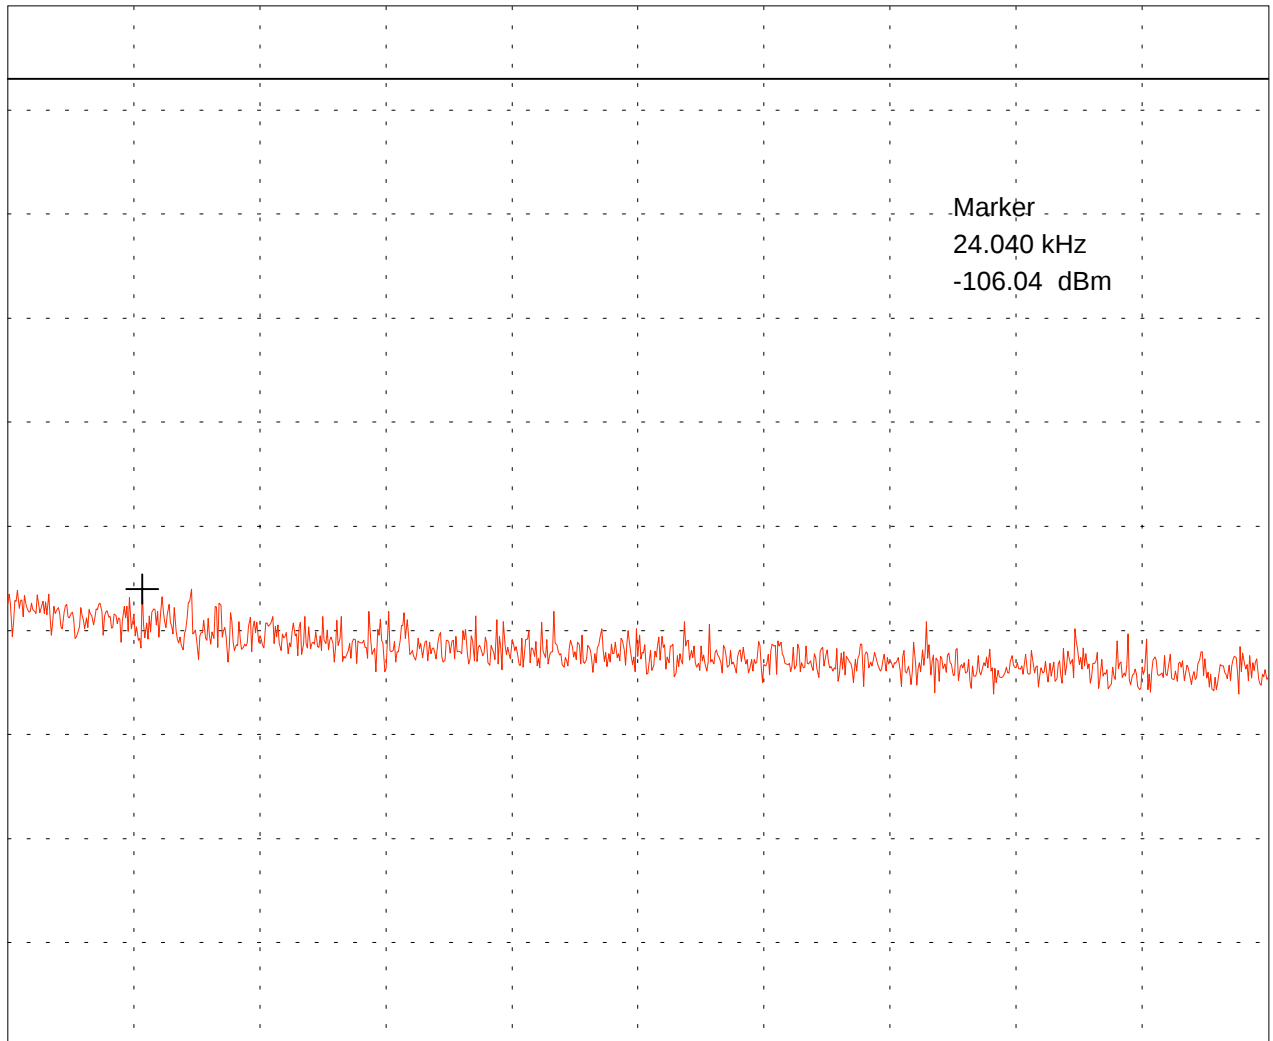

Start 9.000 kHz
RBW 196 Hz

VBW 1 kHz

Stop 150.000 kHz
SWP 11 s

Tested by:
Rupert Kohlhäufel

Date:
12/22/2000

Project-No.:
50217-00696-2

Page 32 of 35 Pages

Antenna power conducted emissions acc. to FCC Part 15/B §15.111

Model:
Funkfernbedienung 868 MHz, Typ 765

Serial No.:
00228

Applicant:
Bayerische Motorenwerke AG


Mode:
Receiver in RX mode

External power supply: 12.0 V DC

Conducted measurement on
FM5 (FBD 315/343/868) antenna

Ref.Level -50 dBm
10 dB/Div.

ATT 0 dB

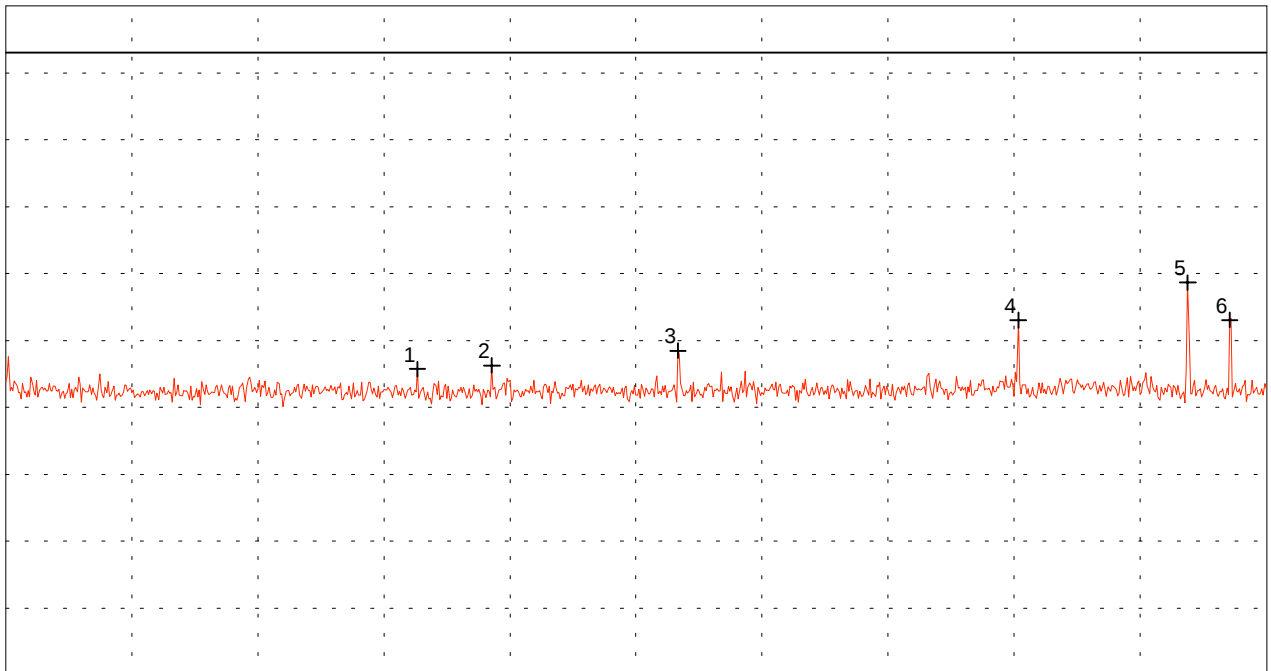

Start 150.000 kHz
RBW 10 kHz

VBW 10 kHz

Stop 30.000 MHz
SWP 900 ms

Multi Marker List

No. 1	9.901000 MHz	-104.26 dBm
No. 2	11.658833 MHz	-103.73 dBm
No. 3	16.070000 MHz	-101.52 dBm
No. 4	24.129500 MHz	-96.97 dBm
No. 5	28.142667 MHz	-91.34 dBm
No. 6	29.137667 MHz	-96.92 dBm

Tested by:
Rupert Kohlhäufel

Date:
12/22/2000

Project-No.:
50217-00696-2

Page 33 of 35 Pages

Antenna power conducted emissions acc. to FCC Part 15/B §15.111

Model:
Funkfernbedienung 868 MHz, Typ 765

Serial No.:
00228

Applicant:
Bayerische Motorenwerke AG


Mode:
Receiver in RX mode

External power supply: 12.0 V DC

Conducted measurement on
FM5 (FBD 315/343/868) antenna

Ref.Level -50 dBm
10 dB/Div.

ATT 0 dB

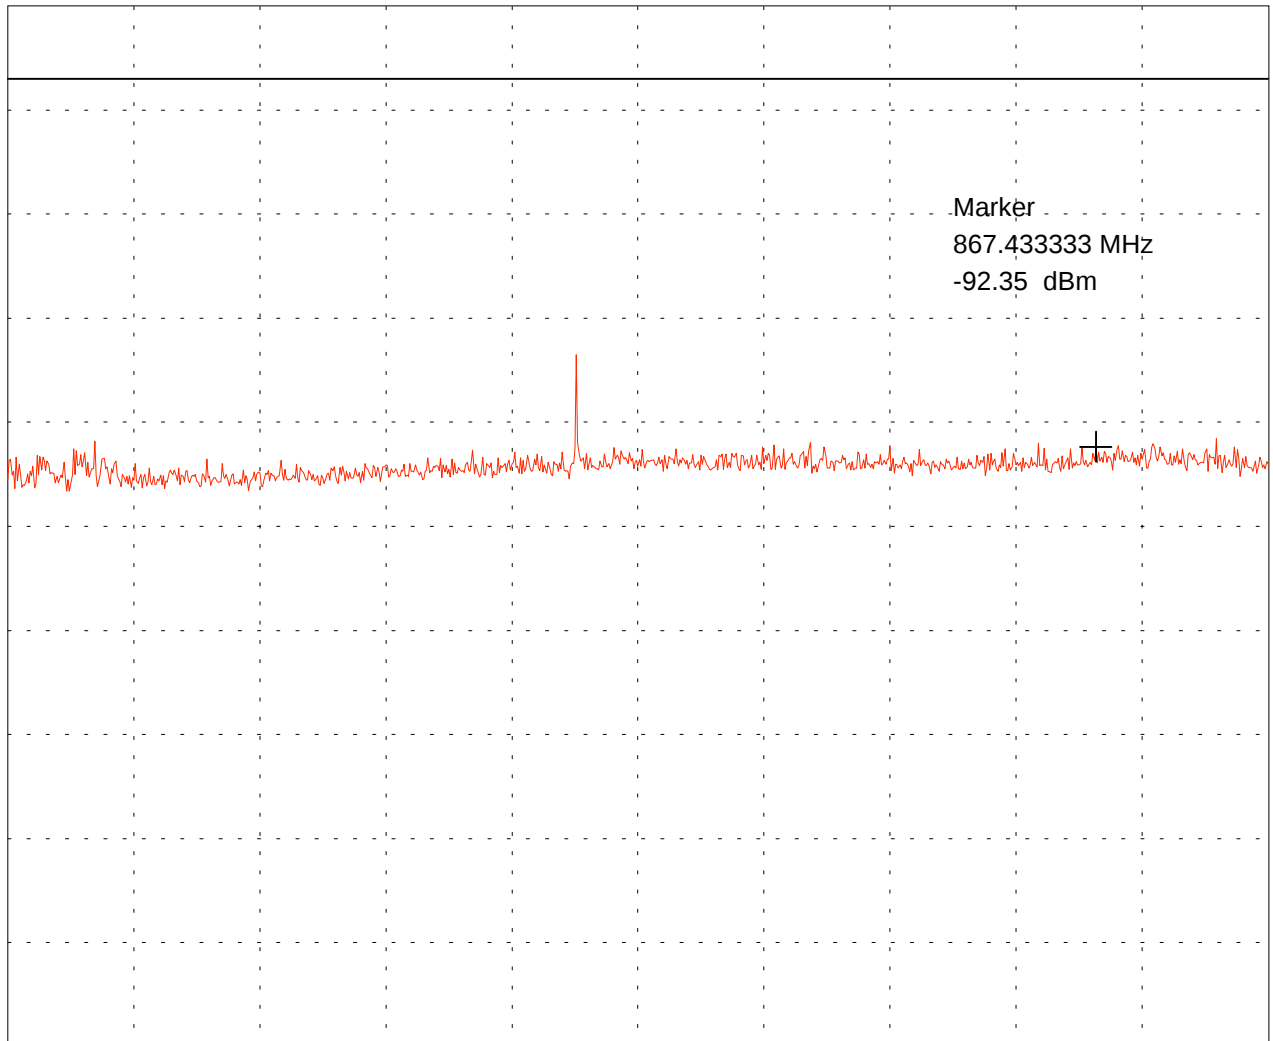

Start 30.000 MHz
RBW 100 kHz

VBW 100 kHz

Stop 1.000 GHz
SWP 300 ms

Tested by:
Rupert Kohlhäufel

Date:
12/22/2000

Project-No.:
50217-00696-2

Page 34 of 35 Pages

Antenna power conducted emissions acc. to FCC Part 15/B §15.111

Model:
Funkfernbedienung 868 MHz, Typ 765

Serial No.:
00228

Applicant:
Bayerische Motorenwerke AG


Mode:
Receiver in RX mode

External power supply: 12.0 V DC

Conducted measurement on
FM5 (FBD 315/343/868) antenna

Ref.Level -50 dBm
10 dB/Div.

ATT 0 dB

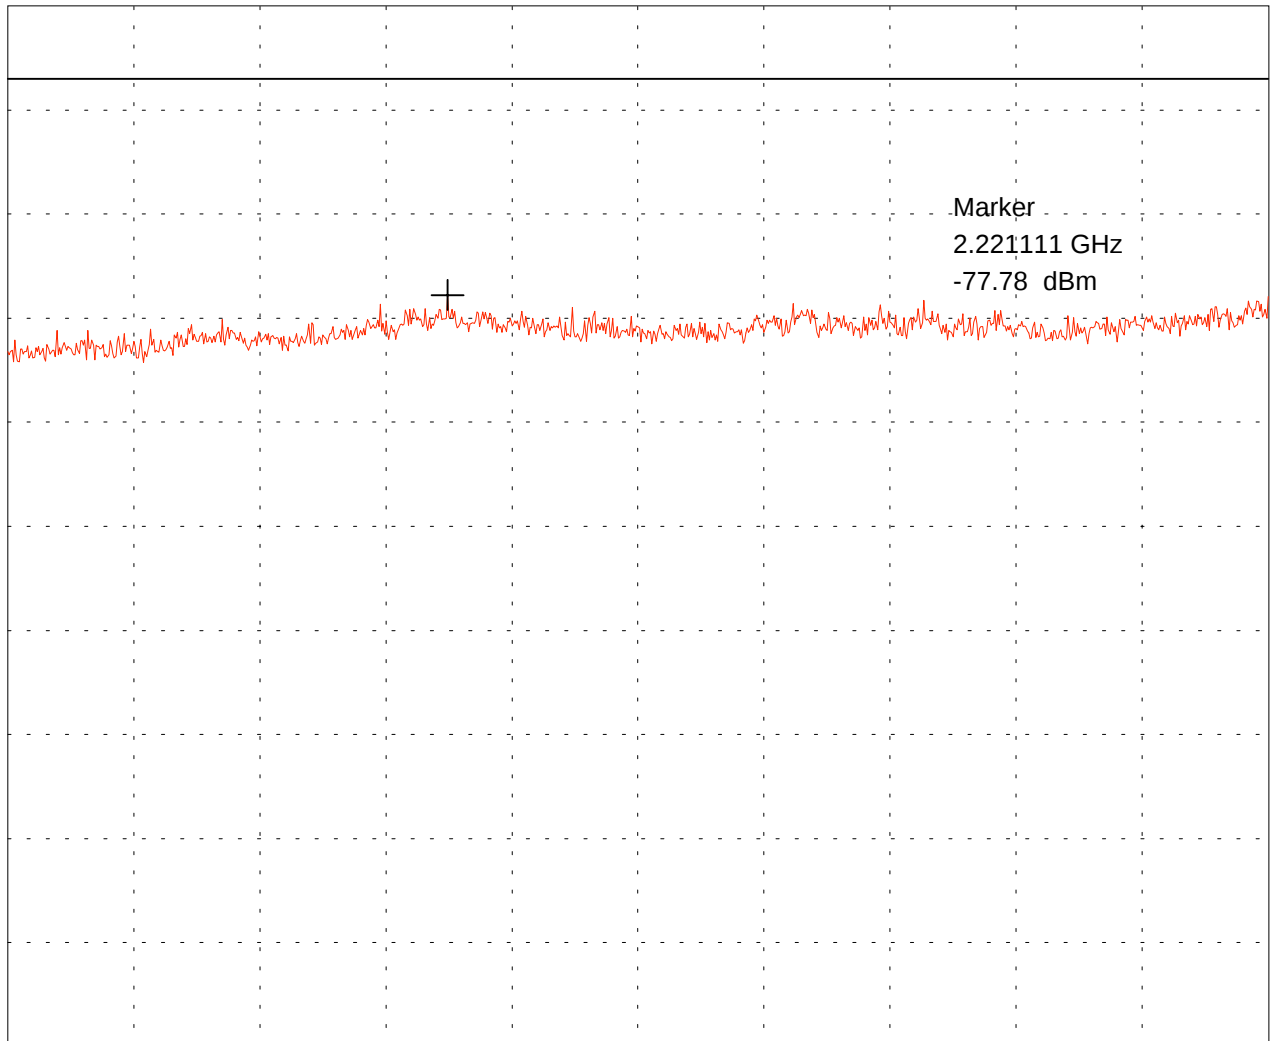

Start 1.000 GHz
RBW 1 MHz

VBW 1 MHz

Stop 4.500 GHz
SWP 20 ms

Tested by:
Rupert Kohlhäufel

Date:
12/22/2000

Project-No.:
50217-00696-2

Page 35 of 35 Pages