

Straubing, 06 February 2002

**TEST - REPORT**

**No. 50217-20081-2**

**for**

**FZV Receiver Typ 765 315 MHz**

**Remote Control Receiver Module**

**Applicant:** Bayerische Motoren Werke AG

**Purpose of testing:** To show compliance with

FCC Code of Federal Regulations,  
Part 15 Subpart B Class B

Industry Canada Radio Standards  
Specification RSS-210 Issue 2,  
Section 6.1 (Category I Equipment)

---

**Note:**

The test data of this report relate only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

---

## Table of Contents

1. Administrative Data .....	3
2. Identification of Test Laboratory .....	4
3. Summary of Test Results .....	5
4. Operation Mode of EUT .....	6
5. Configuration of EUT and Peripheral Devices .....	7
6. Measuring Methods .....	8
6.1. Conducted Emission 0.45 MHz - 30 MHz (§15.107) / RSS-210 Section 7.4) .....	8
6.2. Radiated Emission 30 MHz - 1 GHz (FCC §15.109 / RSS-210 Section 7.3) .....	10
6.3. Radiated Emission 1 GHz - 4.5 GHz (FCC §15.109 / RSS-210 Sections 7.3) .....	12
7. Equipment List .....	14
8. Photographs Taken During Testing .....	16
9. List of Measurements .....	19
9.1. List of Measurements According To FCC Part 15 Subpart B .....	20
9.2. List of Measurements According To Industry Canada RSS-210 .....	21
10. Referenced Regulations .....	22
11. Test Results .....	23

## 1. Administrative Data

Equipment Under Test (EUT): FZV Receiver Typ 765 315 MHz  
Serial number(s): 0001  
Type of equipment: Remote Control Receiver Module  
Parts/accessories:  
FCC-ID:

---

Applicant: Bayerische Motoren Werke AG  
(full address) Petuelring 130  
D-80788 Muenchen

---

Contract identification: ---  
Contact person: Mr. Hochleitner  
Manufacturer: Bayerische Motoren Werke AG

---

Receipt of EUT: 04 February 2002  
Date of test: 05 February 2002  
Note: ---

---

Responsible for testing: Johann Roidt  
Responsible for test report: Johann Roidt

## 2. Identification of Test Laboratory

Test Laboratory:  
(full address): Senton GmbH EMI/EMC Test Center  
Aeussere Fruehlingstrasse 45  
D-94315 Straubing  
Germany

---

Contact person: Mr. Johann Roidt  
Communication: Telephone (+49) 0 94 21 / 55 22-0  
Fax (+49) 0 94 21 / 55 22-99  
eMail: Office@senton.de

---

FCC registration number: 90926  
Industry Canada file number: IC 3050

### **3. Summary of Test Results**

The tested sample complies with the requirements set forth in the

**FCC Part 15 Subpart B Class B  
of the Federal Communication Commission (FCC).**

and the

**Radio Standards Specification RSS-210 Issue 2, Section 6.1 for Low Power  
Licence-Exempt Radiocommunication Devices of Industry Canada.**



Johann Roidt  
Technical Manager

**4. Operation Mode of EUT**

Not applicable

**5. Configuration of EUT and Peripheral Devices**

**Configuration of cables of EUT**

Not applicable

**Configuration of peripheral devices connected to EUT**

Not applicable

## 6. Measuring Methods

### 6.1. Conducted Emission 0.45 MHz - 30 MHz (§15.107) / RSS-210 Section 7.4)

Conducted emissions were measured in the frequency range 0.45 MHz to 30 MHz. The bandwidth of the EMI-Receiver was set to 9 kHz and the detector-function was set to CISPR quasi-peak.

The test setup was made in accordance with ANSI C63.4-1992.

Measurements were performed on phase and neutral lines of the power-cords of the tested system. Preliminary scans were taken with the detector-function of the EMI-receiver set to peak to determine the conducted EMI-profile of the EUT. At the final test the cables and equipment were placed and moved within the range of positions likely to find their maximum emissions.

See figure 1 for the measurement setup.

Test equipment used (see equipment list for details):  
04, 22, 23, 60, 63

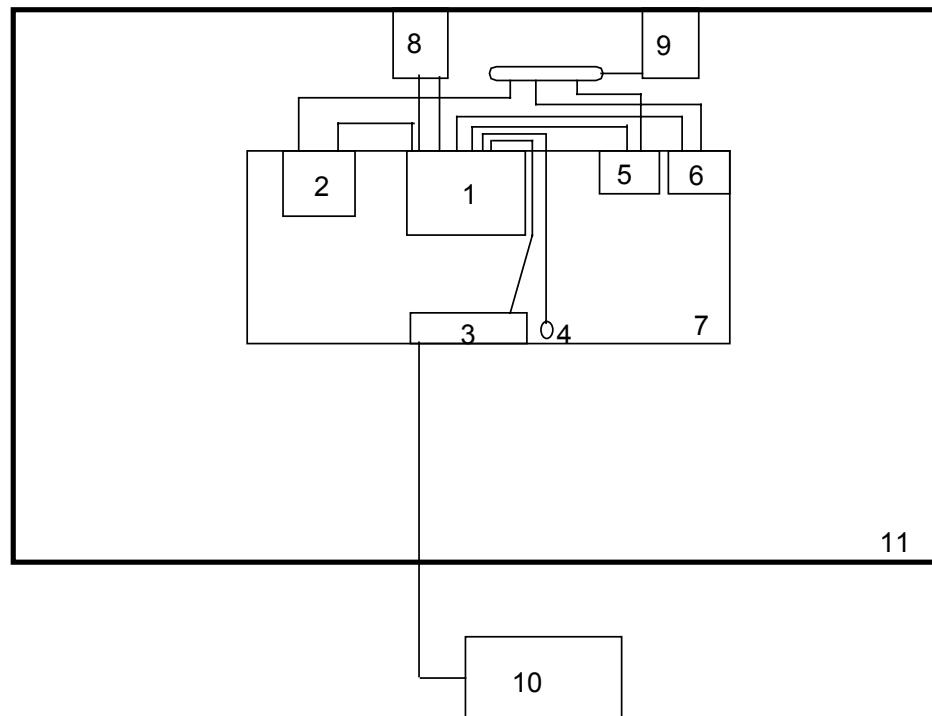


Figure 1: Example of measurement setup for conducted emission test

<b>1</b>	EUT	<b>8</b>	LISN for EUT
<b>2</b>	Monitor	<b>9</b>	LISN for peripheral device(s)
<b>3</b>	Keyboard	<b>10</b>	Test receiver
<b>4</b>	Mouse	<b>11</b>	Shielded room
<b>5</b>	Parallel Printer		
<b>6</b>	Serial Printer		
<b>7</b>	Wooden table		

## **6.2. Radiated Emission 30 MHz - 1 GHz (FCC §15.109 / RSS-210 Section 7.3)**

Radiated emissions are measured over the frequency range from 30 MHz to 1 GHz. The bandwidth of the EMI-receiver is set to 120 kHz and the detector-function is set to CISPR quasi-peak.

The test setup is made in accordance with ANSI C63.4-1992.

Measurements are made in both the horizontal and vertical planes of polarization.

Preliminary scans are taken in a semi-anechoic room using a spectrum analyzer with the detector function set to peak. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

All tests are performed at a test-distance of 3 meters.

For final testing an open-area test-site is used. During the tests the EUT is rotated all around and the receiving-antenna is raised and lowered from 1 meter to 4 meters to find the maximum levels of emissions. The cables and equipment is placed and moved within the range of position likely to find their maximum emissions.

See figure 2 for the measurement setup.

Test equipment used (see equipment list for details):

01, 02, 05, 12, 38, 39, 40, 41, 58, 61, 64, 66

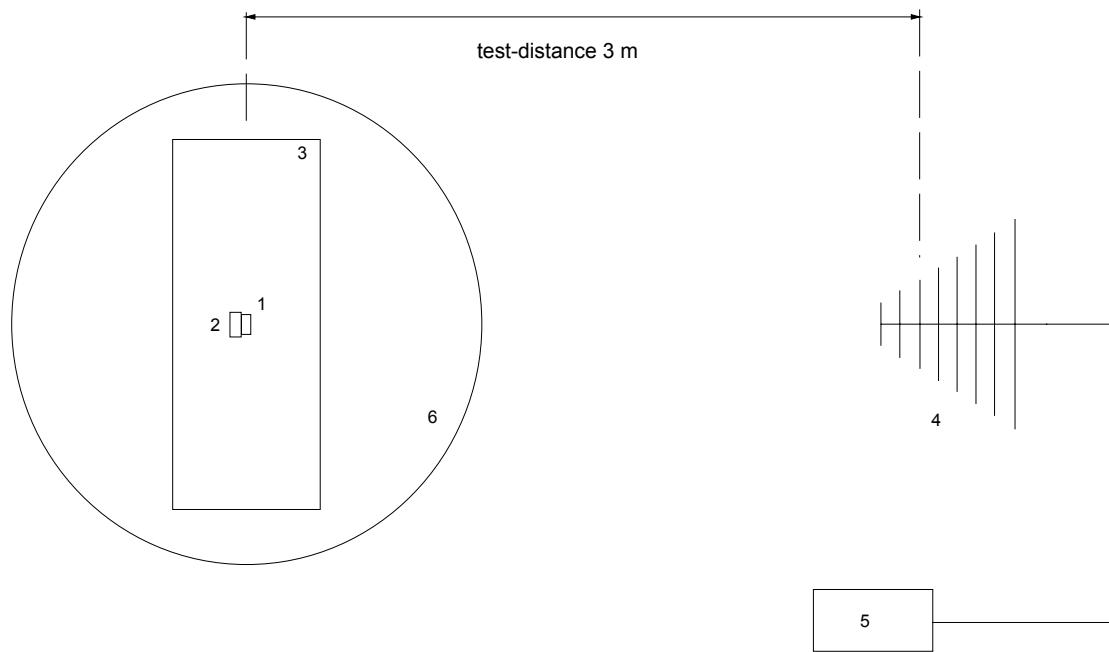


Figure 2: Measurement setup for radiated emission test below 1 GHz

1	Transmitter (EUT)	4	Measurement antenna
2	Wooden pedestal (if necessary)	5	Test receiver
3	Wooden table	6	Turn table

### **6.3. Radiated Emission 1 GHz - 4.5 GHz (FCC §15.109 / RSS-210 Sections 7.3)**

Radiated emissions are measured in the frequency range 1 GHz to 4.5 GHz. Resolution and video bandwidth of the spectrum analyzer are set to 1 MHz.

Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

Additional measurements are performed at critical frequencies with reduced span.

EUT is rotated all around and receiving antenna is raised and lowered to find the maximum levels of emission. The cables and equipment are placed and moved within the range of position likely to find their maximum emissions.

All tests are performed in a semi-anechoic chamber with a test-distance of 3 meters.

If possible preamplifiers are used for the whole frequency range. Special care is taken to avoid overload in transmit mode (using appropriate attenuators or filters if necessary).

See figure 3 for the measurement setup.

Test equipment used (see equipment list for details):

02, 13, 14, 16, ,42, 44, 45, 57, 64

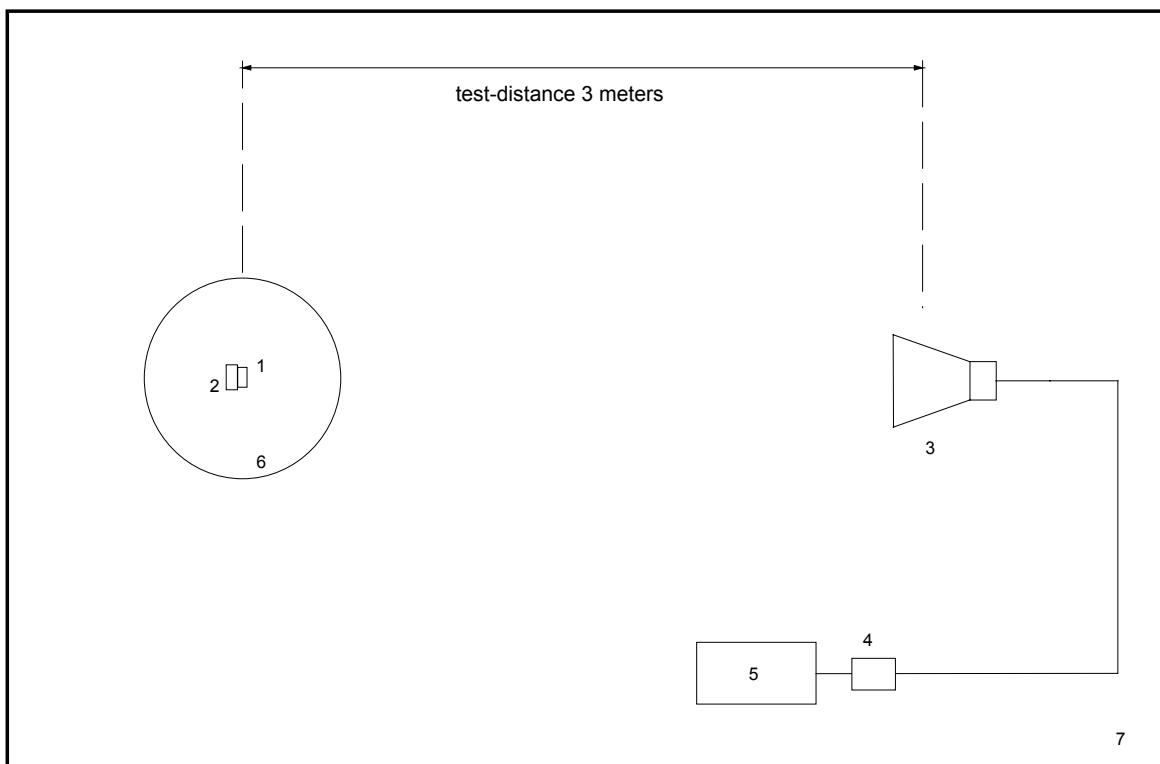


Figure 3: Measurement setup for radiated emission test above 1 GHz

1	Transmitter (EUT)	3	Measurement antenna
2	Wooden pedestal (if necessary)	4	Preamplifier (if applicable)
		5	Spectrum analyzer
		6	Turn table
		7	Semi anechoic room

## 7. Equipment List

To facilitate reference to test equipment used for related tests, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory.


No.	Type	Model	Serial Number	Manufacturer
01	Spectrum Analyzer	R 3271	05050023	Advantest
02	EMI Test Receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
03	Test Receiver	ESH 3	880112/032	Rohde & Schwarz
04	Test Receiver	ESHS 10	860043/016	Rohde & Schwarz
05	Test Receiver	ESV	881414/009	Rohde & Schwarz
06	Test Receiver	ESVP	881120/024	Rohde & Schwarz
07	Audio Analyzer	UPA	862954	Rohde & Schwarz
08	Power Meter	NRVS	836856/015	Rohde & Schwarz
09	Power Sensor	NRV-Z52	837901/030	Rohde & Schwarz
10	Power Sensor	NRV-Z4	863828/015	Rohde & Schwarz
11	Preamplifier	ESV-Z3	860907/004	Rohde & Schwarz
12	Preamplifier	R14601		Advantest
13	Preamplifier	ACX/080-3030	32640	CTT
14	Preamplifier	ACO/180-3530	32641	CTT
15	Signal Generator	SMS	872166/039	Rohde & Schwarz
16	Signal Generator	HP 8673 D	2930A00966	Hewlett Packard
17	Waveform Generator	HP 33120 A	US34005375	Hewlett Packard
18	Attenuator 20 dB	4776-20	9503	Narda
19	Attenuator 10 dB	4776-10	9412	Narda
20	Pulse Limiter	ESH 3-Z2	1144	Rohde & Schwarz
21	Pulse Limiter	11947 A	3107A00566	Hewlett Packard
22	V-Network	ESH 3-Z5	862770/018	Rohde & Schwarz
23	V-Network	ESH 3-Z5	894785/005	Rohde & Schwarz
24	V-Network	ESH 3-Z5	830952/025	Rohde & Schwarz
25	V-Network	ESH 3-Z6	830722/010	Rohde & Schwarz
26	V-Network	NSLK 8127	8127152	Schwarzbeck
27	V-Network	NNLA 8119	8119148	Schwarzbeck
28	V-Network	SE 01	01	Senton
29	T-Network	ESH 3-Z4	890602/011	Rohde & Schwarz
30	T-Network	ESH 3-Z4	890602/012	Rohde & Schwarz
31	High Impedance Probe	TK 9416	01	Schwarzbeck
32	High Impedance Probe	TK 9416	02	Schwarzbeck
33	Current Probe	ESH 2-Z1	863366/18	Rohde & Schwarz
34	Current Probe	ESV-Z1	862553/3	Rohde & Schwarz

No.	Type	Model	Serial Number	Manufacturer
35	Absorbing Clamp	MDS 21	80911	Lüthi
36	Absorbing Clamp	MDS 21	79690	Lüthi
37	Loop Antenna	HFH2-Z2	882964/1	Rohde & Schwarz
38	Biconical Antenna	HK 116	842204/001	Rohde & Schwarz
39	Biconical Antenna	HK 116	836239/02	Rohde & Schwarz
40	Log. Periodic Antenna	HL 223	841516/023	Rohde & Schwarz
41	Log. Periodic Antenna	HL 223	834408/12	Rohde & Schwarz
42	Horn Antenna	3115	9508-4553	Emco
43	Horn Antenna	3160-03	9112-1003	Emco
44	Horn Antenna	3160-04	9112-1001	Emco
45	Horn Antenna	3160-05	9112-1001	Emco
46	Horn Antenna	3160-06	9112-1001	Emco
47	Horn Antenna	3160-07	9112-1008	Emco
48	Horn Antenna	3160-08	9112-1002	Emco
49	Horn Antenna	3160-09	9403-1025	Emco
50	Digital multimeter	199	463386	Keithley
51	DC Power Supply	NGSM 32/10	203	Rohde & Schwarz
52	DC Power Supply	NGB	2455	Rohde & Schwarz
53	DC Power Supply	NGA	386	Rohde & Schwarz
54	Temperature Test Chamber	HT4010	07065550	Heraeus
55	Cable	RG214	1309	Senton
56	Cable	200CM_001	1357	Rosenberger
57	Cable	150CM_001	1479	Rosenberger
58	Cable Set EG1	RG214	1189 - 1191	Senton
59	Cable Set Cabine 1	RG214		Senton
60	Cable Set Cabine 2	RG214		Senton
61	Cable Set Cabine 3	RG214		Senton
62	Shielded Room	No. 1	1451	Senton
63	Shielded Room	No. 2	1452	Senton
64	Semi-anechoic Chamber	No. 3	1453	Siemens
65	Shielded Room	No. 4	1454	Euroshield
66	Open Area Test Site	EG 1		Senton
67	Test fixture			Senton

**8. Photographs Taken During Testing**

Photos No. 8.1 - 8.2

Test setup for radiated emission pre-test 30 MHz - 1 GHz  
(semi anechoic room)

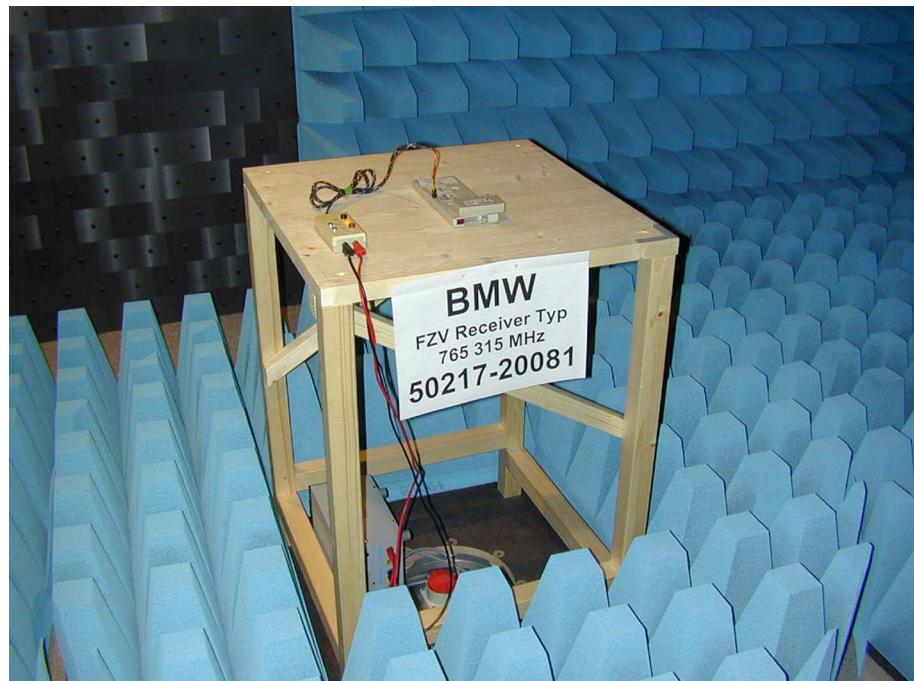

Photos No. 8.3 - 8.4

Test setup for radiated emission final test 30 MHz - 1 GHz  
(open area test site)



**9. List of Measurements**

**9.1. List of Measurements According To FCC Part 15 Subpart B**

<b>FCC Part 15 Subpart B</b>			
<b>Section(s):</b>	<b>Test</b>	<b>Page(s)</b>	<b>Result</b>
§15.107	Conducted emission test 450 kHz - 30 MHz	27 - 28	Not Applicable
§15.109	Radiated emission test 9 kHz - 30 MHz	---	Not Applicable (acc. to §15.33)
§15.109	Radiated emission test 30 MHz – 2.0 GHz	29-34	Passed
§15.111	Antenna power conducted emissions 9 kHz - 4.5 GHz	---	Passed

**9.2. List of Measurements According To Industry Canada RSS-210**

<b>Industry Canada RSS-210 Issue 2</b>			
<b>Section(s):</b>	<b>Test</b>	<b>Page(s)</b>	<b>Result</b>
<b>7.4</b>	Conducted emission test 450 kHz - 30 MHz	27-28	Not Applicable
<b>7.3</b>	Radiated emission test 30 MHz - 2 GHz	29-34	Passed
<b>7.2</b>	Antenna power conducted emissions 9 kHz - 4.5 GHz	---	Passed

## 10. Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	FCC Part 15 Subpart A	Code of Regulations Part 15 (Radio Frequency Devices), Subpart A (General) of the Federal Communication Commission (FCC)	October 20, 1997
<input checked="" type="checkbox"/>	FCC Part 15 Subpart B	Code of Regulations Part 15 (Radio Frequency Devices), Subpart B (Unintentional Radiators) of the Federal Communication Commission (FCC)	October 20, 1997
<input checked="" type="checkbox"/>	FCC Part 15 Subpart C	Code of Regulations Part 15 (Radio Frequency Devices), Subpart C (Intentional Radiators) of the Federal Communication Commission (FCC)	October 20, 1997
<input checked="" type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz - 40 GHz	October, 1992
<input checked="" type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 2 for Low Power Licence-Exempt Radiocommunication Devices of Industry Canada	February 24, 1996

**11. Test Results**

**Measurement of Conducted Emissions according to FCC Rules,  
Part 15, Subpart B, Section 15.109  
Frequency Band > 30 MHz**

Model: FZV Receiver Typ 765 315 MHz  
Type: Receiver  
Serial No. ---  
Applicant: Bayerische Motoren Werke AG  
Test Site: Shielded Room No. 2  
Distance: 3 Meter  
Date of Test: 05 February 2002

\*\*\* = No emissions above noise floor detected

Test equipment used (see equipment list for details):  
02, 13, 14, 16, 38, 40, 42, 57, 64, 67

**Charts taken during testing**


## Spurious emissions according to FCC Part 15 Subpart B ( Conducted)

Model: FZV Receiver Typ 765 315 MHz
Serial No.: Sample 1
Applicant: Bayerische Motorenwerke AG

Mode: - RX mode
- EUT DC supply mode 12.0 V
- Conducted emission at antenna jack

Ref.Level -30 dBm  
10 dB/Div.

ATT 10 dB

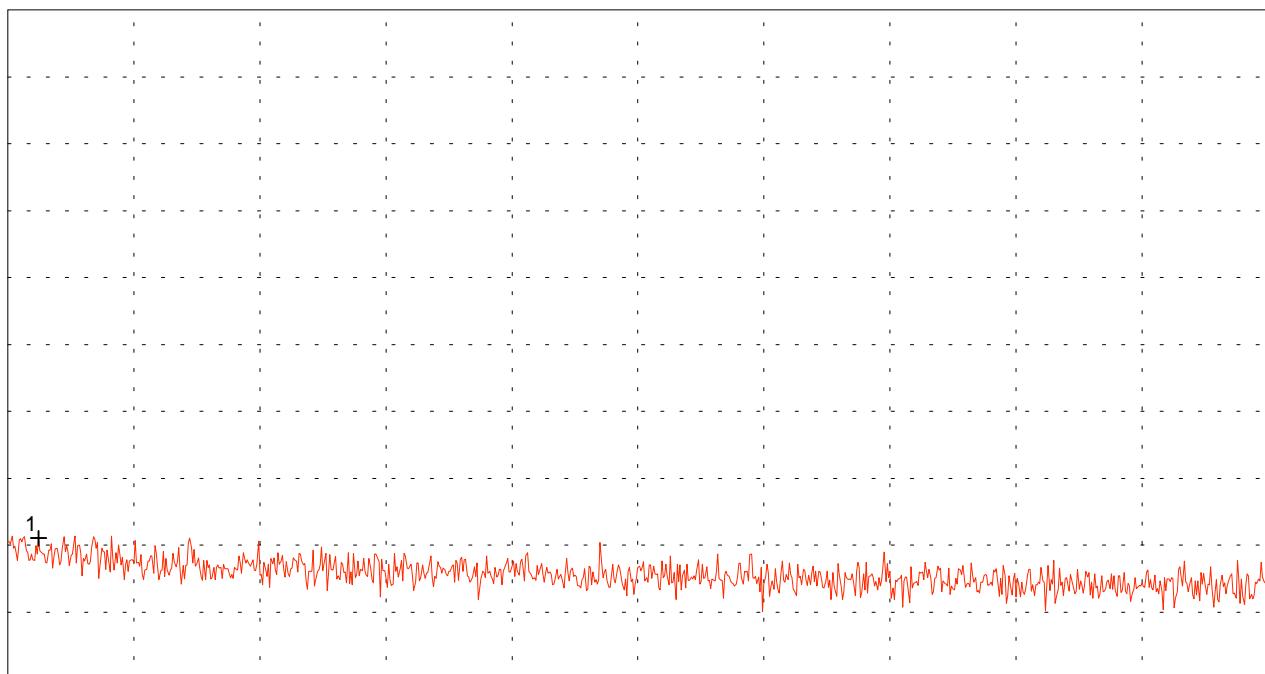

Start 9.000 kHz  
RBW 196 Hz

VBW 300 Hz

Stop 150.000 kHz  
SWP 11 s

### Multi Marker List

No. 1 12.447 kHz -108.97 dBm

Tested by: Thomas Eberl
Date: 02/06/2002

Project-No.:
50217-20081
Page of pages


## Spurious emissions according to FCC Part 15 Subpart B ( Conducted)

Model: FZV Receiver Typ 765 315 MHz
Serial No.: Sample 1
Applicant: Bayerische Motorenwerke AG

Mode: - RX mode
- EUT DC supply mode 12.0 V
- Conducted emission at antenna jack

Ref.Level -30 dBm  
10 dB/Div.

ATT 10 dB

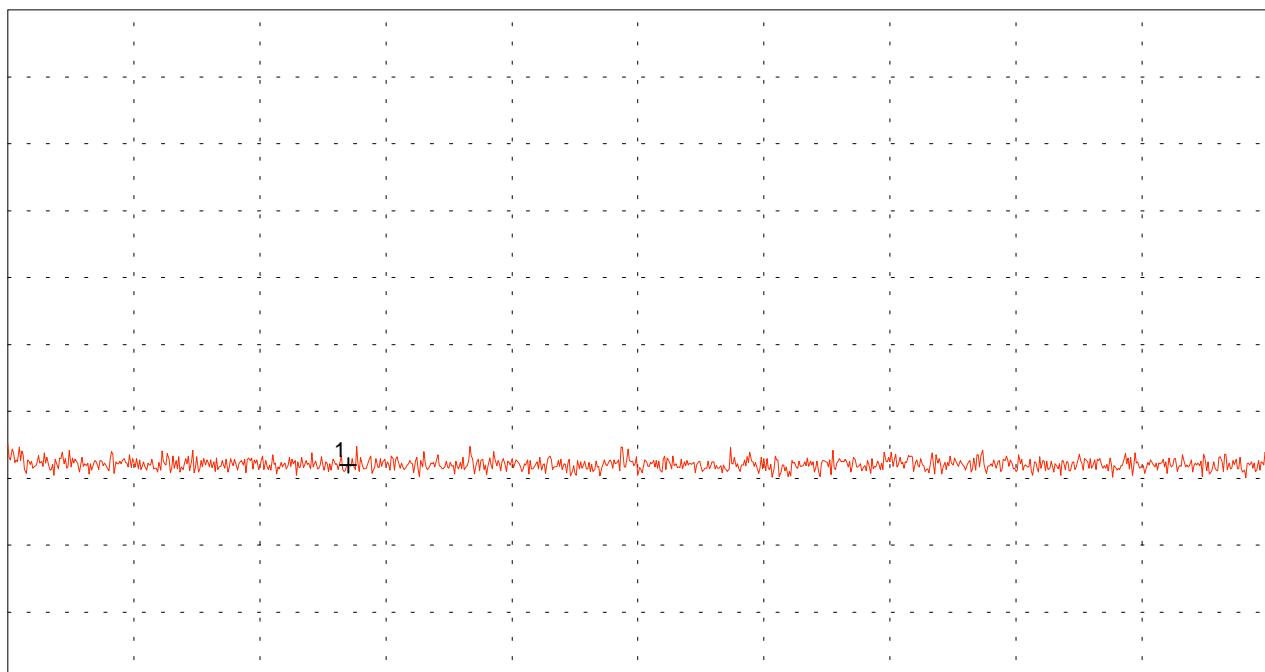

Start 150.000 kHz  
RBW 10 kHz

VBW 10 kHz

Stop 30.000 MHz  
SWP 900 ms

### Multi Marker List

No. 1      8.209500 MHz      -98.05 dBm

Tested by: Thomas Eberl
Date: 02/06/2002

Project-No.:
50217-20081
Page      of      pages


## Spurious emissions according to FCC Part 15 Subpart B ( Conducted)

Model: FZV Receiver Typ 765 315 MHz
Serial No.: Sample 1
Applicant: Bayerische Motorenwerke AG

Mode: - RX mode
- EUT DC supply mode 12.0 V
- Conducted emission at antenna jack

Ref.Level -30 dBm  
10 dB/Div.

ATT 10 dB

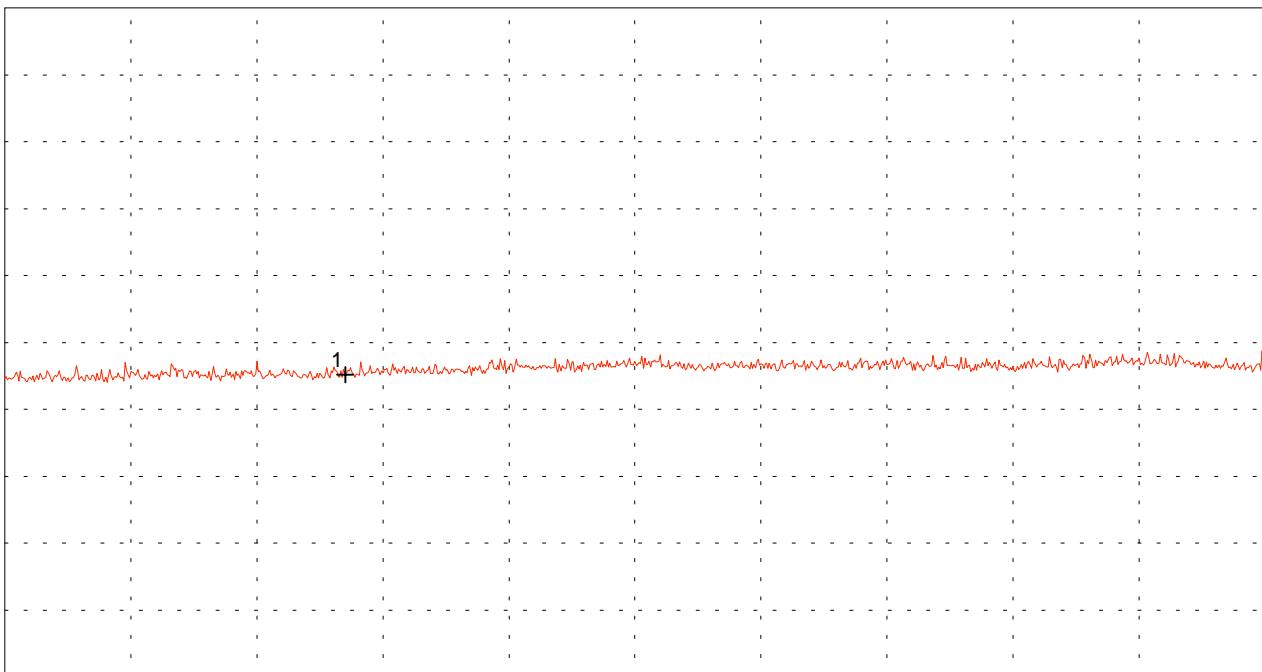

Start 30.000 MHz  
RBW 100 kHz

VBW 100 kHz

Stop 1.000 GHz  
SWP 300 ms

### Multi Marker List

No. 1      291.900000 MHz      -84.82 dBm

Tested by: Thomas Eberl
Date: 02/06/2002

Project-No.:
50217-20081
Page      of      pages

## Spurious emissions according to FCC Part 15 Subpart B ( Conducted)

Model:  
FZV Receiver Typ 765 315 MHz

Serial No.:  
Sample 1


Applicant:  
Bayerische Motorenwerke AG

Mode:

- RX mode
- EUT DC supply mode 12.0 V
- Conducted emission at antenna jack

Ref.Level -30 dBm  
10 dB/Div.

ATT 10 dB

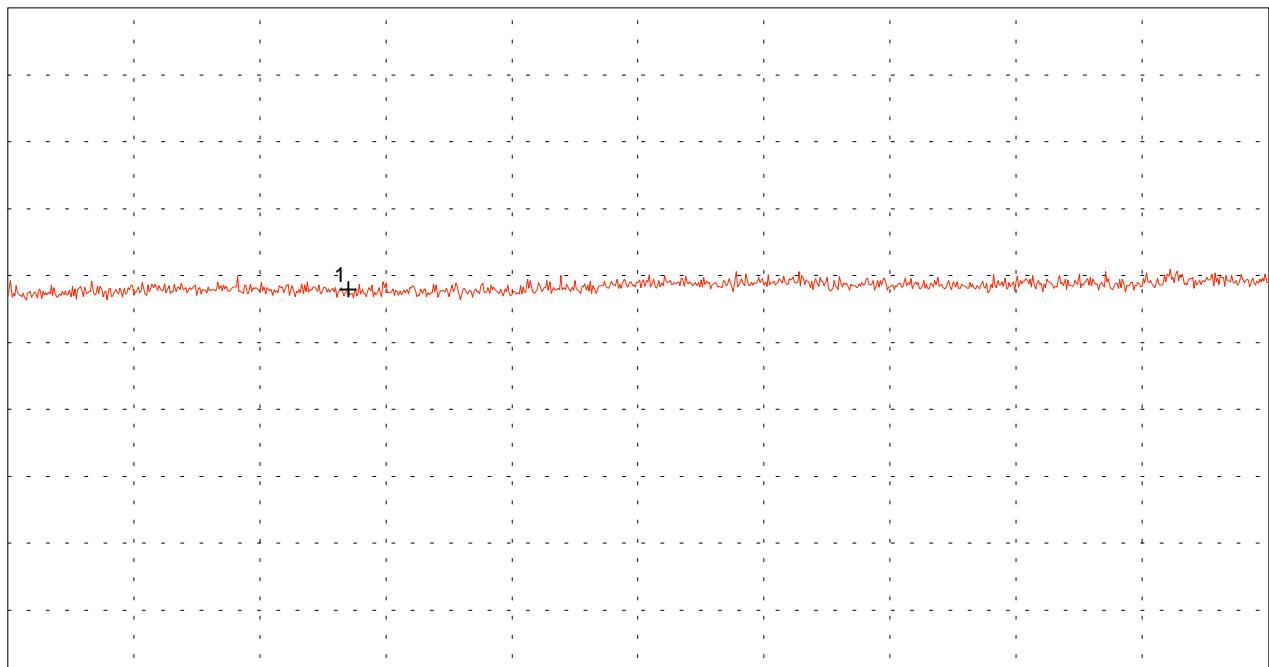

Start 1.000 GHz  
RBW 1 MHz

VBW 1 MHz

Stop 2.000 GHz  
SWP 20 ms

### Multi Marker List

No. 1 1.270000 GHz -72.07 dBm

Tested by:  
Thomas Eberl

Date:  
02/06/2002

Project-No.:  
50217-20081

Page of pages


# Radiated Emission Test 30 MHz - 200 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:		
FZV Receiver Typ 765 315 MHz		
Serial no.:		
Sample 1		
Applicant:		
Bayerische Motorenwerke AG		
Test site:		
Fully anechoic room		
Tested on:		
Test distance 3 metres		
Horizontal Polarization		
Date of test:	Operator:	
02/05/2002	T. Eberl	
Test performed:	File name:	
automatically	default.emi	

Comment:	
- RX mode	
- f = 315 MHz	
- EUT DC supply mode 12 V	

Detector:	
Peak	

List of values:	
10 dB Margin	50 Subranges

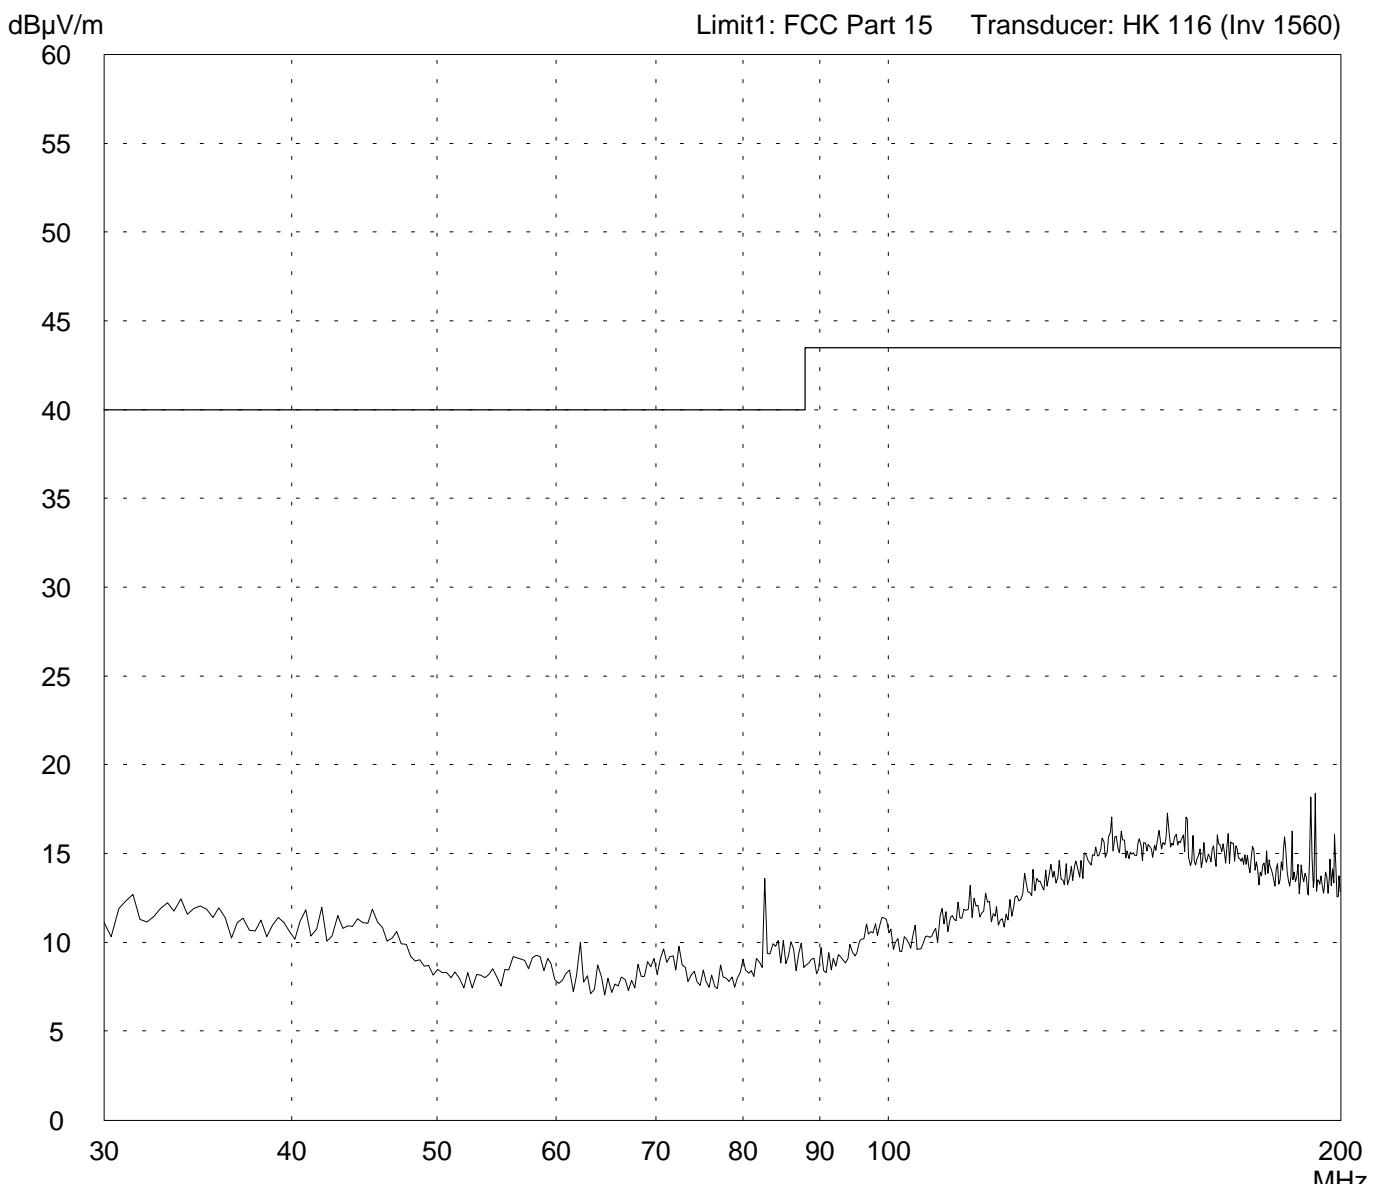

Result:	
Limit kept	

Project file:	
50217-20081-2	

Page    of    Pages


**Radiated Emission Test 30 MHz - 200 MHz  
acc. to FCC Part 15 (Fully Anechoic Chamber)**

Model:		
FZV Receiver Typ 765 315 MHz		
Serial no.:		
Sample 1		
Applicant:		
Bayerische Motorenwerke AG		
Test site:		
Fully anechoic room		
Tested on:		
Test distance 3 metres		
Vertical Polarization		
Date of test:	Operator:	
02/05/2002	T. Eberl	
Test performed:	File name:	
automatically	default.emi	

Comment:	
- RX mode	
- f = 315 MHz	
- EUT DC supply mode 12 V	

Detector:	
Peak	

List of values:	
10 dB Margin	50 Subranges

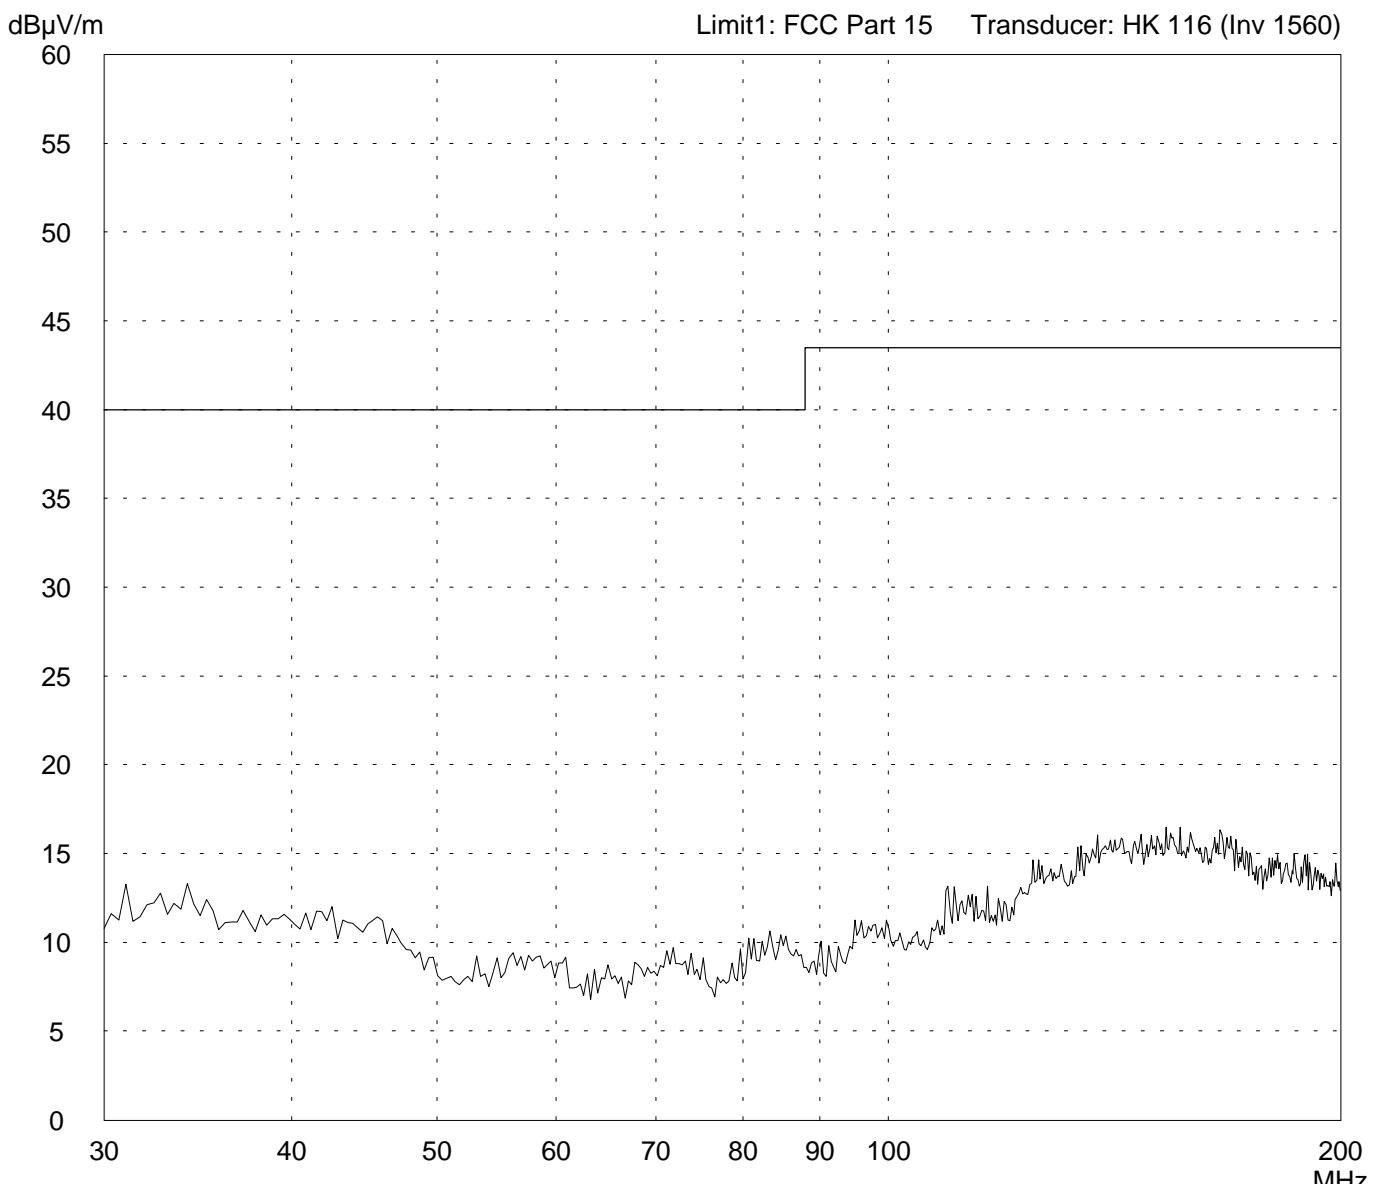

Result:	
Limit kept	

Project file:	
50217-20081-2	


Page    of    Pages

# Radiated Emission Test 200 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:		
FZV Receiver Typ 765 315 MHz		
Serial no.:		
Sample 1		
Applicant:		
Bayerische Motorenwerke AG		
Test site:		
Fully anechoic room		
Tested on:		
Test distance 3 metres		
Horizontal Polarization		
Date of test:	Operator:	
02/05/2002	T. Eberl	
Test performed:	File name:	
automatically	default.emi	

Comment:	
- RX mode	
- f = 315 MHz	
- EUT DC supply mode 12 V	

Detector:		List of values:
Peak		10 dB Margin      8 Subranges

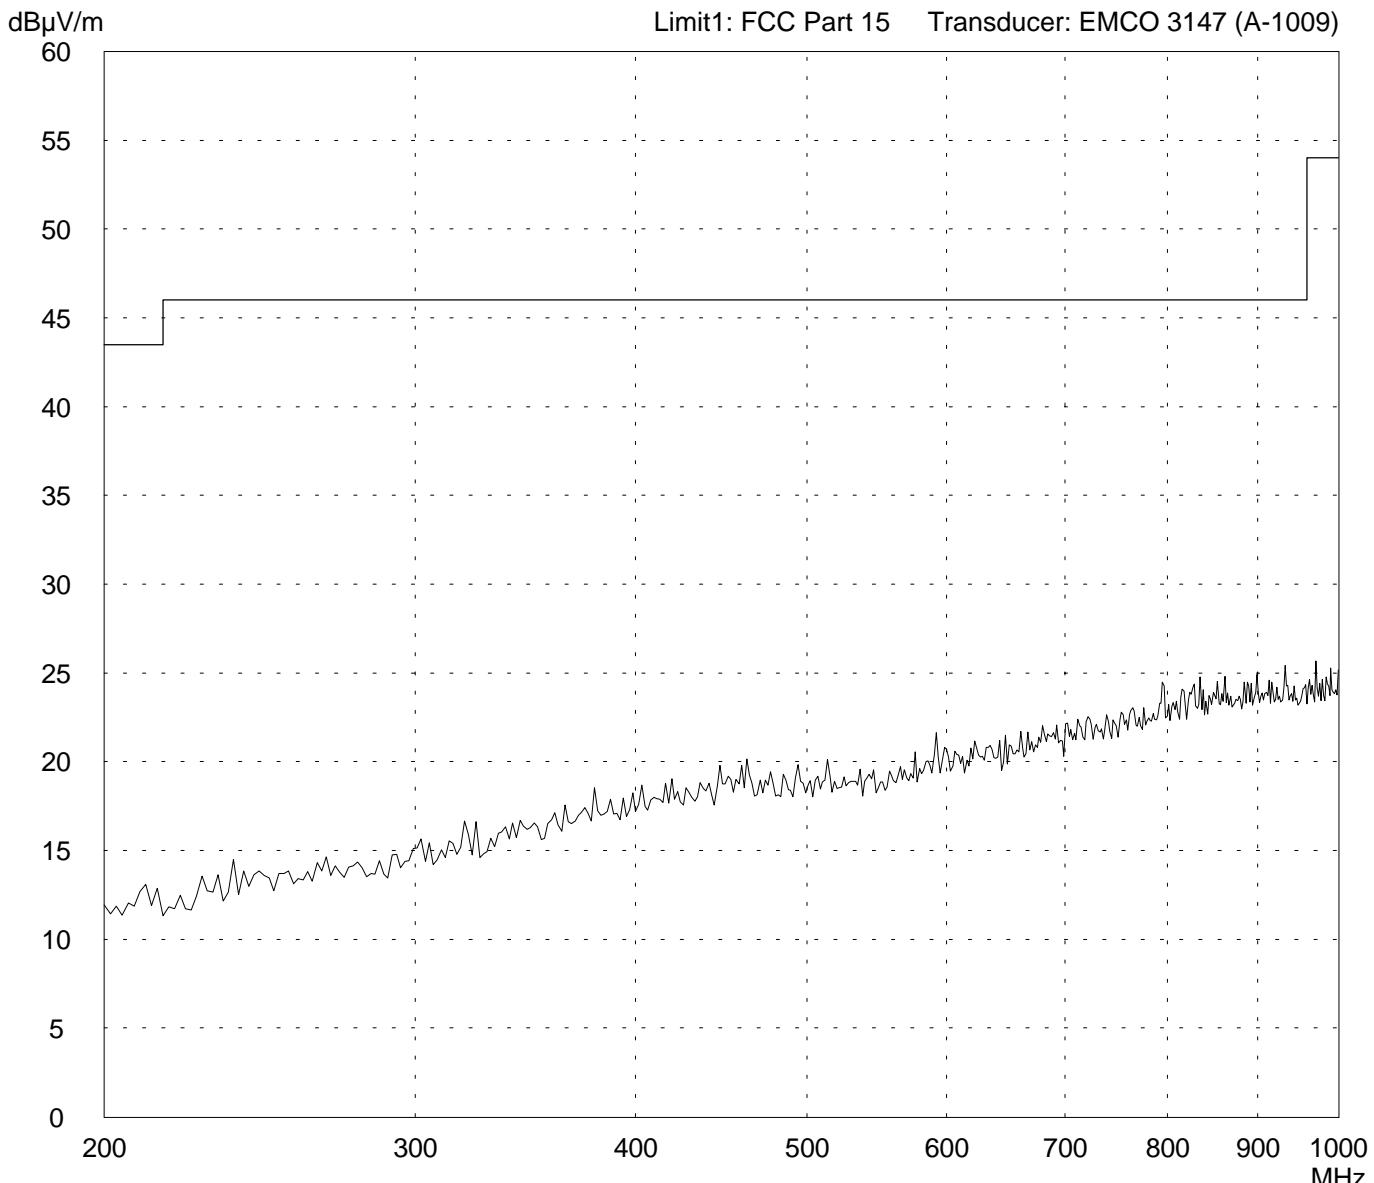

Result:	
Limit kept	

Project file:	
50217-20081-2	


Page      of      Pages

# Radiated Emission Test 200 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:		
FZV Receiver Typ 765 315 MHz		
Serial no.:		
Sample 1		
Applicant:		
Bayerische Motorenwerke AG		
Test site:		
Fully anechoic room		
Tested on:		
Test distance 3 metres		
Vertical Polarization		
Date of test:	Operator:	
02/05/2002	T. Eberl	
Test performed:	File name:	
automatically	default.emi	

Comment:	
- RX mode	
- f = 315 MHz	
- EUT DC supply mode 12 V	

Detector:		List of values:
Peak		10 dB Margin      8 Subranges

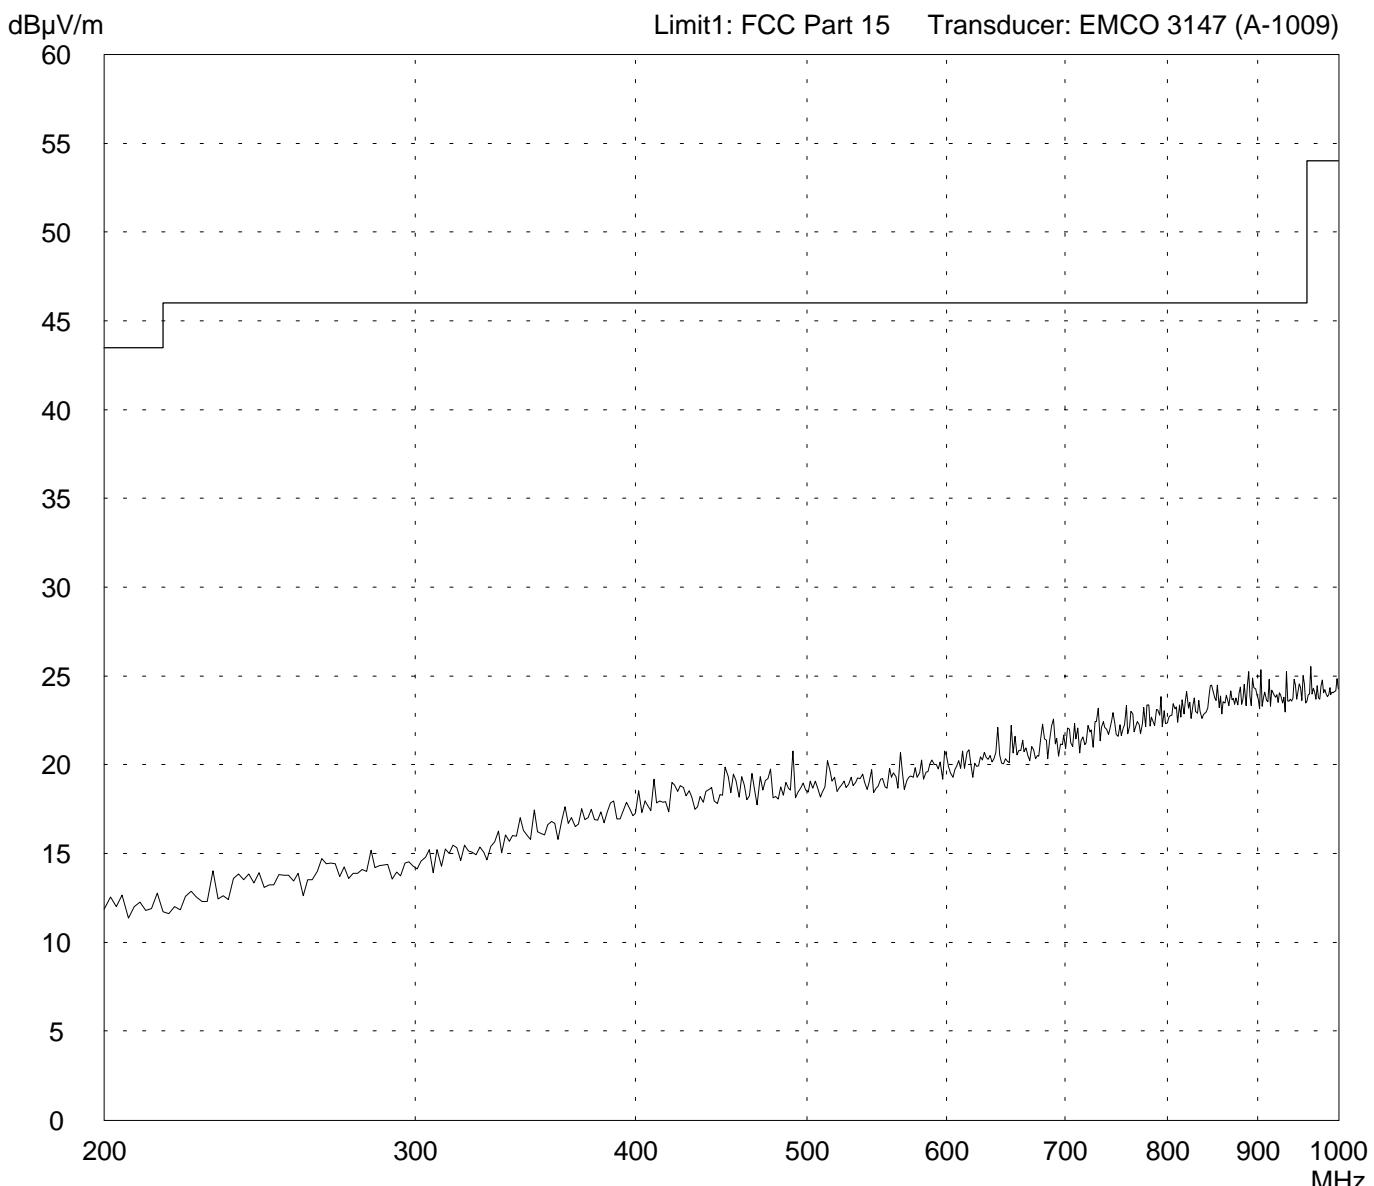


Result:			
Limit kept			

Project file:			
50217-20081-2			

Page      of      Pages

## Radiated Emission Test 1 GHz - 2 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)


Model: <b>FZV Receiver Typ 765 315 MHz</b>	Comment:
Serial no.: <b>Sample 1</b>	<ul style="list-style-type: none"><li>- RX mode</li></ul>
Applicant: <b>Bayerische Motorenwerke AG</b>	<ul style="list-style-type: none"><li>- f= 315 MHz</li></ul>
Test site: <b>Fully anechoic room</b>	<ul style="list-style-type: none"><li>- EUT DC supply mode 12 V</li></ul>
Tested on:  <b>Test distance 3 metres</b> <b>Horizontal Polarization</b>	
Date of test: <b>02/05/2002</b>	Operator: <b>T. Eberl</b>
Test performed: <b>automatically</b>	File name: <b>default.emi</b>
Detector: <b>Peak</b>	List of values: <b>10 dB Margin</b> <b>8 Subranges</b>

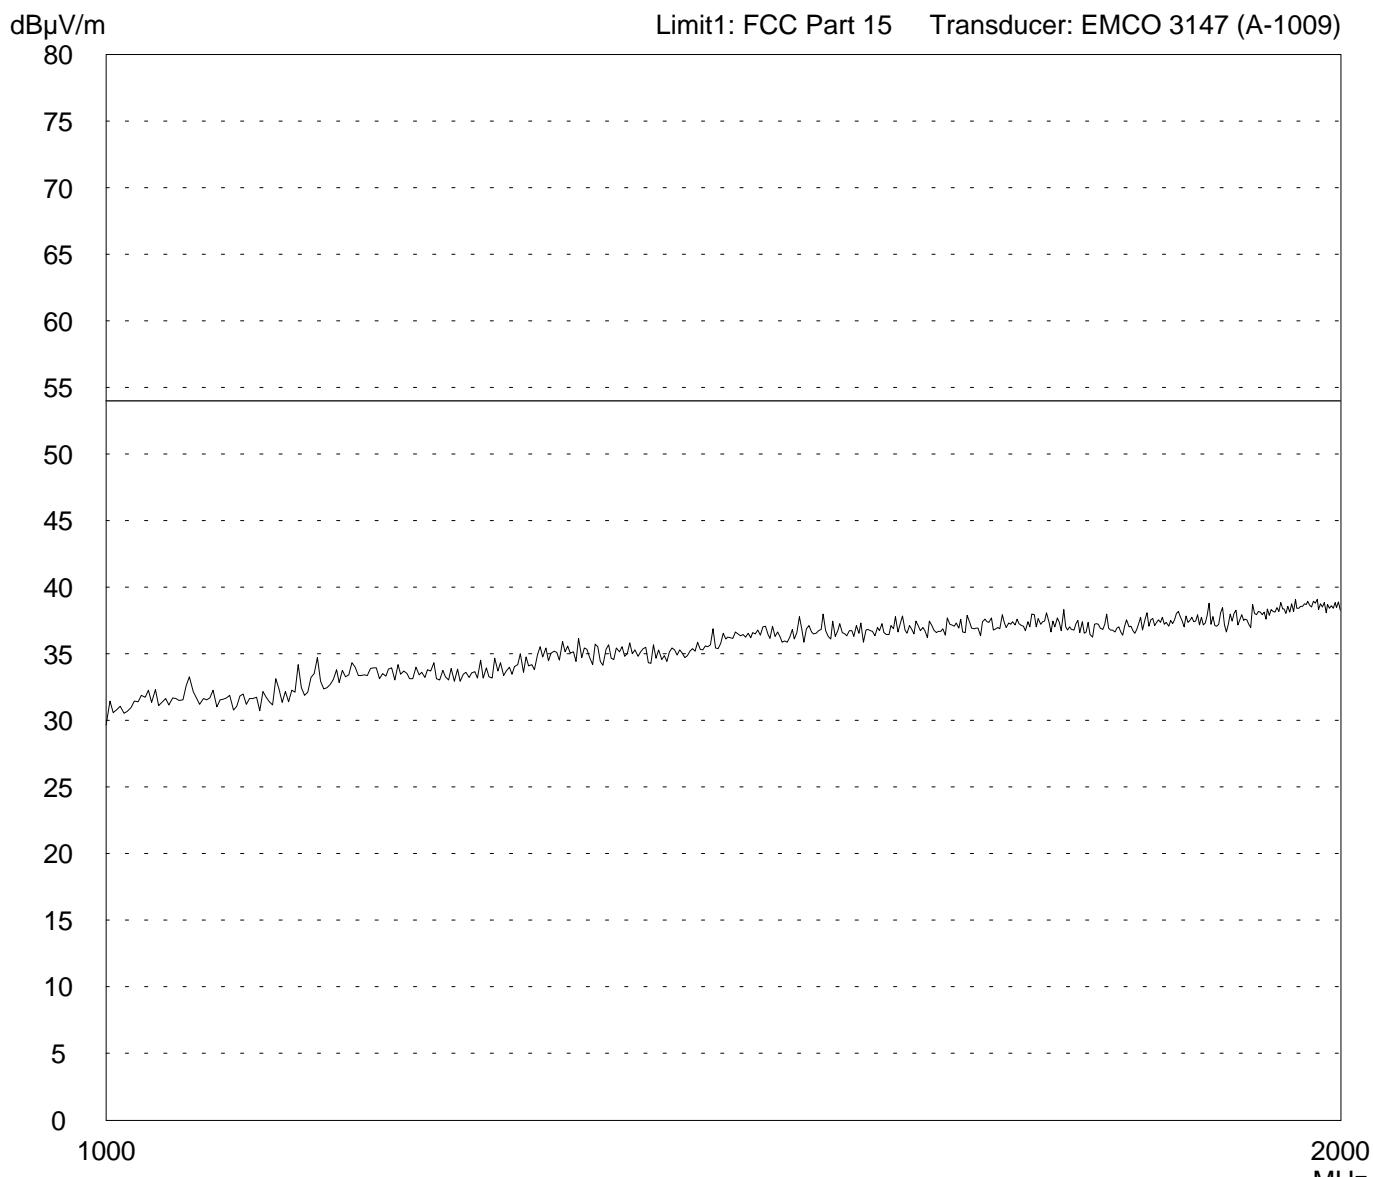

Result: Project file: Page of Pages  
Limit kept 50217-20081-2

## Radiated Emission Test 1 GHz - 2 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: <b>FZV Receiver Typ 765 315 MHz</b>	Comment:
Serial no.: <b>Sample 1</b>	<ul style="list-style-type: none"><li>- RX mode</li></ul>
Applicant: <b>Bayerische Motorenwerke AG</b>	<ul style="list-style-type: none"><li>- <math>f = 315</math> MHz</li></ul>
Test site: <b>Fully anechoic room</b>	<ul style="list-style-type: none"><li>- EUT DC supply mode 12 V</li></ul>
Tested on: <b>Test distance 3 metres</b> <b>Vertical Polarization</b>	
Date of test: <b>02/05/2002</b>	Operator: <b>T. Eberl</b>
Test performed: <b>automatically</b>	File name: <b>default.emi</b>
Detector: <b>Peak</b>	List of values: <b>10 dB Margin</b> <b>8 Subranges</b>

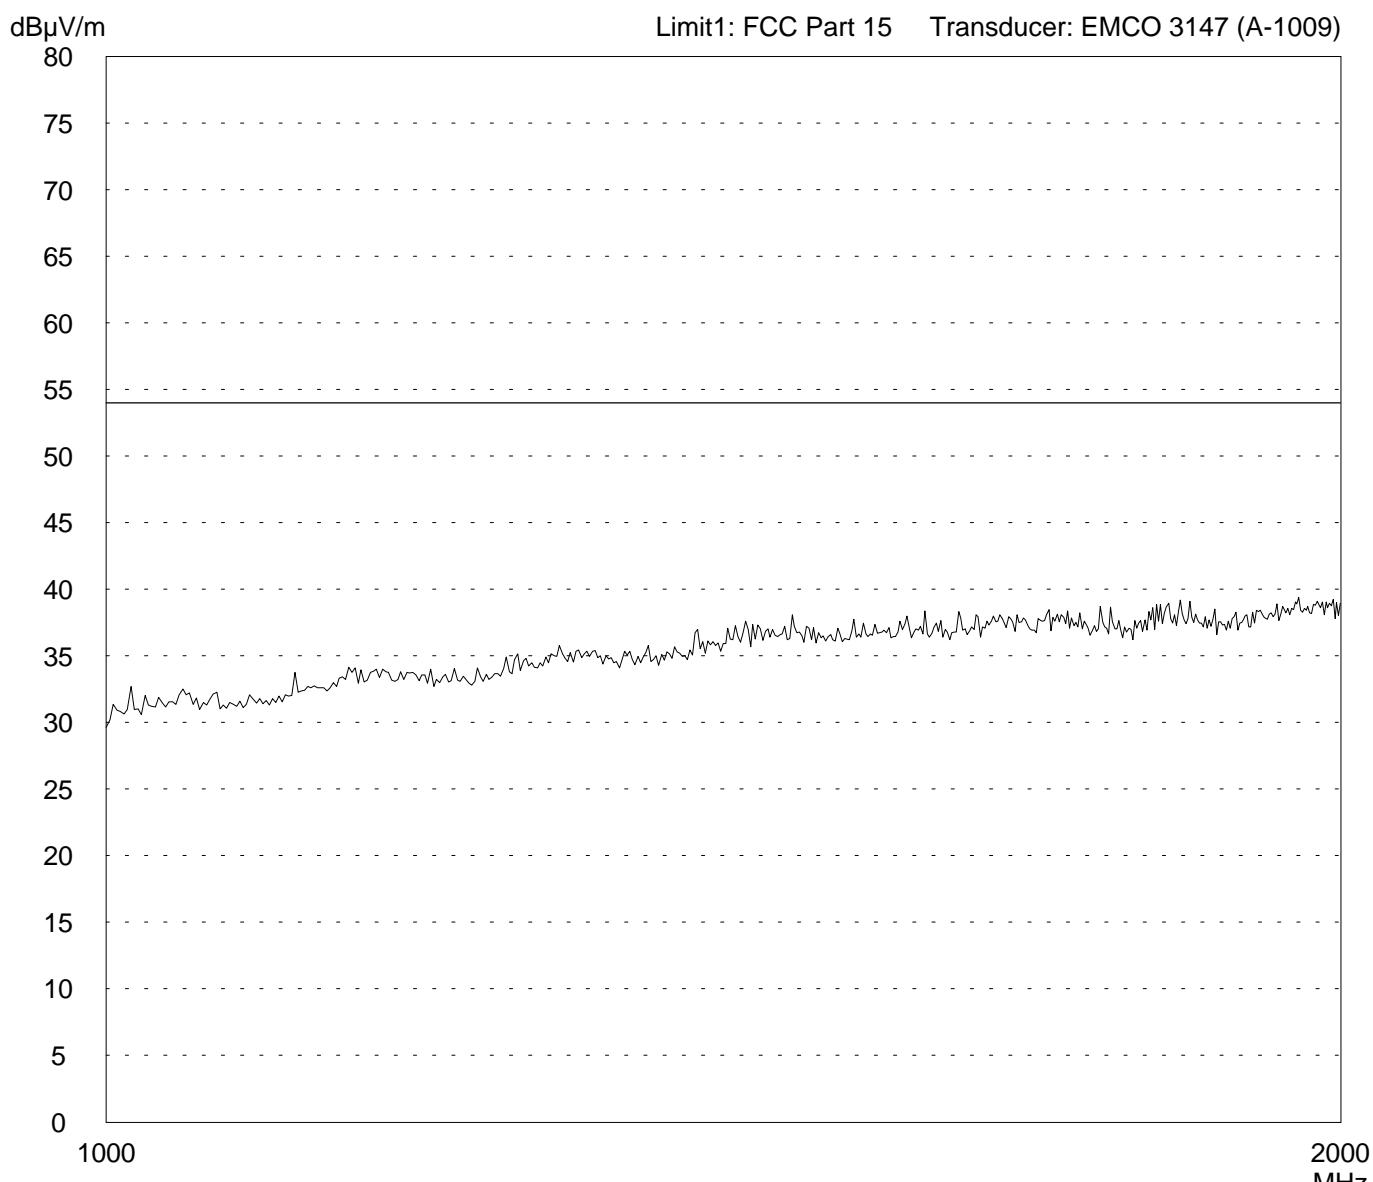

Result: Project file: Page of Pages  
Limit kept 50217-20081-2