

Recognized by the
Federal Communications Commission
Anechoic chamber registration no.: 90462 (FCC)
Anechoic chamber registration no.: 3463 (IC)
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number
TTI-P-G 081/94-D0



Independent ETSI
compliance test house



Accredited Bluetooth™ Test Facility (BQTF)

Test report no.: 5-4456-01-04c/04
FCC Part 15.247 / CANADA RSS-210
FCC ID:LYHW700-1-V1
IC:267AA-W700-V1

SCALANCE W744-1PRO/SCALANCE W788-1PRO

CETECOM – ICT Services GmbH
Untertürkheimerstr. 6-10
D-66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0
Fax: + 49 (0) 681 / 9075

BLUETOOTH is a trademark owned by Bluetooth SIG, Inc. and licensed to Cetecom

Table of contents

1. ADMINISTRATIVE DATA.....	3
1.1. ADMINISTRATIVE DATA OF THE TEST FACILITY	3
1.1.1 Identification of the testing laboratory	3
1.1.2 Organizational items	3
1.1.3 Applicant's details	4
1.2 ADMINISTRATIVE DATA OF MANUFACTURER / MEMBER	4
1.3 DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	5
1.3.1 EUT: Type, S/N etc.	5
1.3.2 If RF component testing only, description of additional used HW/SW	5
1.3.3 ADDITIONAL EUT INFORMATION	5
1.3.4 EUT operating modes	6
1.3.5 Extreme conditions testing values.....	6
2 TEST STANDARD & SUMMARY LIST OF ALL PERFORMED TEST CASES	7
3 RF MEASUREMENT TESTING	8
3.1 DESCRIPTION OF TEST SET-UP.....	8
3.1.1 Radiated measurements	8
3.1.2 Conducted measurements	8
3.1.3 AC-conducted measurements.....	8
3.2 REFERENCED DOCUMENTS	9
3.3 ADDITIONAL COMMENTS	9
3.4 ANTENNA GAIN	9
3.5 PEAK POWER SPECTRAL DENSITY (DSSS) §15.247(d).....	10
3.5 PEAK POWER SPECTRAL DENSITY (OFDM) §15.247(d).....	13
3.6 SPECTRUM BANDWIDTH OF A DSSS SYSTEM / 6 dB BANDWIDTH §15.247(A2).....	16
3.6 SPECTRUM BANDWIDTH OF A OFDM SYSTEM / 6 dB BANDWIDTH §15.247(A2).....	19
3.7 MAXIMUM OUTPUT POWER (CONDUCTED) (DSSS) §15.247 (B) (1)	22
3.7 MAXIMUM OUTPUT POWER (CONDUCTED) (OFDM) §15.247 (B) (1)	26
3.8 MAX. PEAK OUTPUT POWER (RADIATED) §15.247 (B) (1)	31
3.9 BAND-EDGE COMPLIANCE OF CONDUCTED EMISSIONS §15.247 (C).....	32
3.10 BAND-EDGE COMPLIANCE OF RADIATED EMISSIONS (DSSS) §15.205	34
3.11 BAND-EDGE COMPLIANCE OF RADIATED EMISSIONS (OFDM) §15.205	39
3.12 SPURIOUS EMISSIONS - CONDUCTED (TRANSMITTER) §15.247 (C).....	44
3.13 SPURIOUS EMISSIONS - RADIATED (TRANSMITTER) (ANTENNA 1) §15.209.....	48
3.14 SPURIOUS EMISSIONS - RADIATED (TRANSMITTER) (ANTENNA 2) §15.209.....	56
3.15 SPURIOUS EMISSIONS - RADIATED (RECEIVER) (ANTENNA 1) §15.109 / 209	64
3.16 SPURIOUS EMISSIONS - RADIATED (RECEIVER) (ANTENNA 2) §15.109 / 209	68
3.17 SPURIOUS EMISSIONS - RADIATED <30 MHz (VALID FOR BOTH ANTENNA TYPES) §15.109.....	72
3.15 CONDUCTED EMISSIONS <30 MHz §15.107/207.....	73
4 PHOTOGRAPHS	78
7 ANNEX 1:.....	93

ANNEX 1: TECHNICAL PRODUCT DESCRIPTION

1. Administrative data

1.1. Administrative data of the test facility

1.1.1 Identification of the testing laboratory

Company name:	Cetecom ICT Services GmbH
Address:	Untertürkheimerstr. 6-10 D-66117 Saarbruecken Germany
Laboratory accreditation:	DAR-Registration No. TTI-P-G166/98 Bluetooth Qualification Test Facility (BQTF)
Responsible for testing laboratory:	Harro Ames, Michael Berg Phone: +49 681 598 0 Fax: +49 681 598 9075 email: info@ict.cetecom.de

 / 
.....
Responsible for testing laboratory
(Harro Ames, Michael Berg)

1.1.2 Organizational items

Reference No.:	5-4456-01-04c/04
Order No.:	
Responsible for test report and project leader:	Harro Ames, Michael Berg
Receipt of EUT:	2004-03-16
Date(s) of test:	2004-03-16 to 2004-04-27
Date of report:	2004-04-27
Number of report pages:	95
Number of diagram pages (annex):	
Version of template:	1.2

 / 
.....
Responsible for test report
(Harro Ames, Michael Berg)

Note:

The test results of this test report relate exclusively to the item tested as specified in this report. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

During the test no hardware and software changes are allowed to be performed at the EUT.

1.1.3 Applicant's details

Applicant's name:	Siemens AG A&D PT2
Address:	Gleiwitzer Strasse 555 D-90475 Nürnberg Germany
Contact person:	Mr. Dietmar Herian Phone: +49 (0) 911 895 4098 Fax: email: Dietmar.Herian@siemens.com

1.2 Administrative data of manufacturer / member

Manufacturer's name:	- applicant -
Address:	

1.3 Description of the Equipment under test (EUT)

1.3.1 EUT: Type, S/N etc.

Product name	Product ID	Description	S/N serial number	HW hardware status	SW software status
SCALANCE	W744-1 Pro	WLAN client			T1.07
W700 V1	W788-1 Pro	WLAN AP			
Frequency Band [MHz]	Type of Modulation	Number of channels	Antenna	Power Supply	Temperature Range
ISM 2.400 - 2.483,5	DSSS / OFDM	11	2 external	24 V DC	-20°C - +55°C

FCC ID: LYHW700-1-V1
IC: 267AA-W700-V1

1.3.2 If RF component testing only, description of additional used HW/SW

	Product name	Product ID	Description	S/N serial number	HW hardware status	SW software status
1						
2						

1.3.3 Additional EUT information

The Siemens A&D PT2 Wireless LAN Product Family „SCALANCE W700 V1“ consists of three variants, namely

- SCALANCE W744-1PRO, 1 WLAN card inside
- SCALANCE W788-1PRO, 1 WLAN card inside
- SCALANCE W788-2PRO, 2 WLAN cards inside

The SCALANCE W788-2PRO is the superset of all variants and include the whole functionality of all three products. This functionality can be divided into

- Simple WLAN client functionality, i.e. the device can bridge Ethernet traffic to a wireless LAN
- Single Access Point functionality
- Access Point functionality supporting two WLAN cells in parallel using two radio interfaces

The SCALANCE W744-1PRO only supports the client functionality. The SCALANCE W788-1PRO includes the single access point functionality and the client mode. The SCALANCE W788-2PRO additionally allows operating two WLAN cells in parallel, since it is fitted with two WLAN radio cards.

All variants are based on the same WLAN chipset (ATHEROS AR5212 + AR5112) and even on the same WLAN minipCI module from Alpha-Networks.

PCB-boards, layout, parts and housing are identical on all three variants, only the SCALANCE W788-2PRO has two additional antenna ports.

The test was performed with two different antennas.

The first antenna, here called antenna 1 is a dualband rod antenna for mounting directly on the housing.

The second antenna, here called antenna 2 is a „high gain“ dualband antenna to mount separately from the access point, connected with reverse sma connectors and a dedicated 5m coax cable.

1.3.4 EUT operating modes

EUT operating mode no.*)	Description of operating modes	Additional information
Op. 0	Normal mode	Normal temperature and power source conditions
Op. 1		low temperature, low power source conditions
Op. 3		low temperature, high power source conditions
Op. 4		high temperature, low power source conditions
Op. 5		high temperature, high power source conditions

*) EUT operating mode no. is used to simplify the test report.

1.3.5 Extreme conditions testing values

Description	Shortcut	Unit	Value
Nominal Temperature / humidity	T _{nom}	°C / %	22°C / 33%
Low Temperature	T _{low}	°C	-20°C
High Temperature	T _{high}	°C	55°C
Nominal Power Source	V _{nom}	V	24
Low Power Source	V _{low}	V	20
High Power Source	V _{high}	V	28

Type of powersource: External DC power supply from our house

2 Test standard & summary list of all performed test cases

TC identifier	Description	verdict	date	Remark
RF-Testing	FCC Part 15 §15.247 - CANADA RSS-210			

Test Specification Clause	Test Case	Pass	Fail	Not applicable	Not performed
None	Antenna Gain	Yes			
§15.247 (d)	Peak power spectral density	Yes			
§15.247(a2)	Spectrum Bandwidth of a DSSS /OFDMSystem 6dB BW	Yes			
§ 15.247 (b) (3)	Maximum output power (conducted)	Yes			
§ 15.247 (b) (3)	Max. peak output power (radiated)	Yes			
§15.247 (c)	Band-edge compliance of conducted emissions	Yes			
§15.205	Band-edge compliance of radiated emissions	Yes			
§15.247 (c)	Spurious Emission - conducted (Transmitter)	Yes			
§ 15.209	Spurious Emission -radiated (Transmitter)	Yes			
§ 15.247 (c)	Spurious Emissions-radiated (Receiver)	Yes			
§ 15.109	Spurious Emissions-radiated <30 MHz	Yes			
§ 15.107/207	Conducted Emissions <30 MHz	Yes			

3 RF measurement testing

3.1 Description of test set-up

3.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-1992 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-1992 clause 4.2.

Antennas conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.


30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

>1GHz: Average, RBW 1MHz, VBW 10 MHz, waveguide horn with lownoise preamp

3.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is connected to the spectrum analyzer. The specific losses for signal paths are first checked within a calibration. The measurement readings on the spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signaling unit and the spectrum analyzer are impedance matched on 50 Ohm.

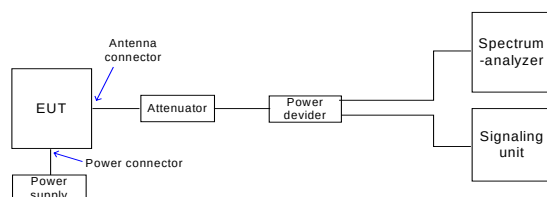

3.1.3 AC-conducted measurements

As the product is sold without any power supply, we used a power supply from our company to show compliance with AC-conducted requirements.

3.2 Referenced Documents

none

3.3 Additional comments

Hardware / software changes during testing

Setup revision	Description of change	Change referenced to setup revision	Already perf. testcases influenced yes (reaped) / no
1.0	Start setup	-	-

3.4 Antenna gain

The antenna gain for both used antennas was measured in a so called “compact range” in our house (see results on annex 1)

Antenna 1: “Joymax” TMX 614RSXXX-403 (for direct connection on the housing)

-Max gain at 2,4 GHz = 0,6 dBi

Antenna 2: “Joymax” FG102 (delivered with a 5m fix mounted coax cable)


-Max gain at 2,4 GHz = 6.0 dBi – 3.7 dB cable loss = 2.3 dBi

Antenna diagrams and data sheet see Annex 1:

3.5 Peak Power Spectral density (DSSS)

§15.247(d)

Plot 1: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

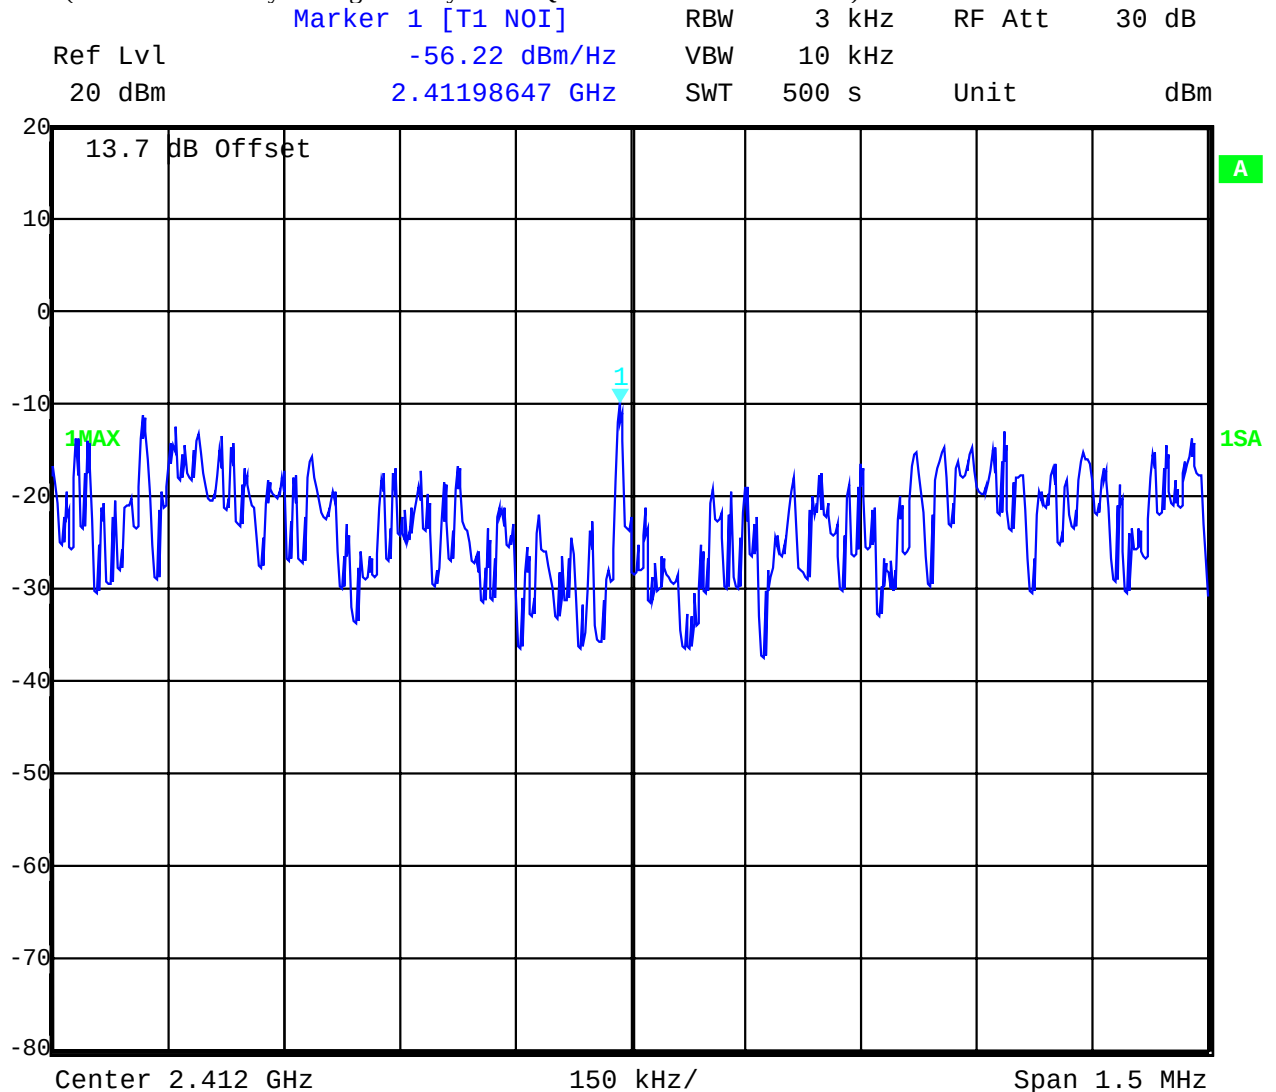

Date: 13.MAY.2004 08:11:26

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 5-4456-01-04c/04

Date: 2004-04-27


Page 11 of 95

Plot 2: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

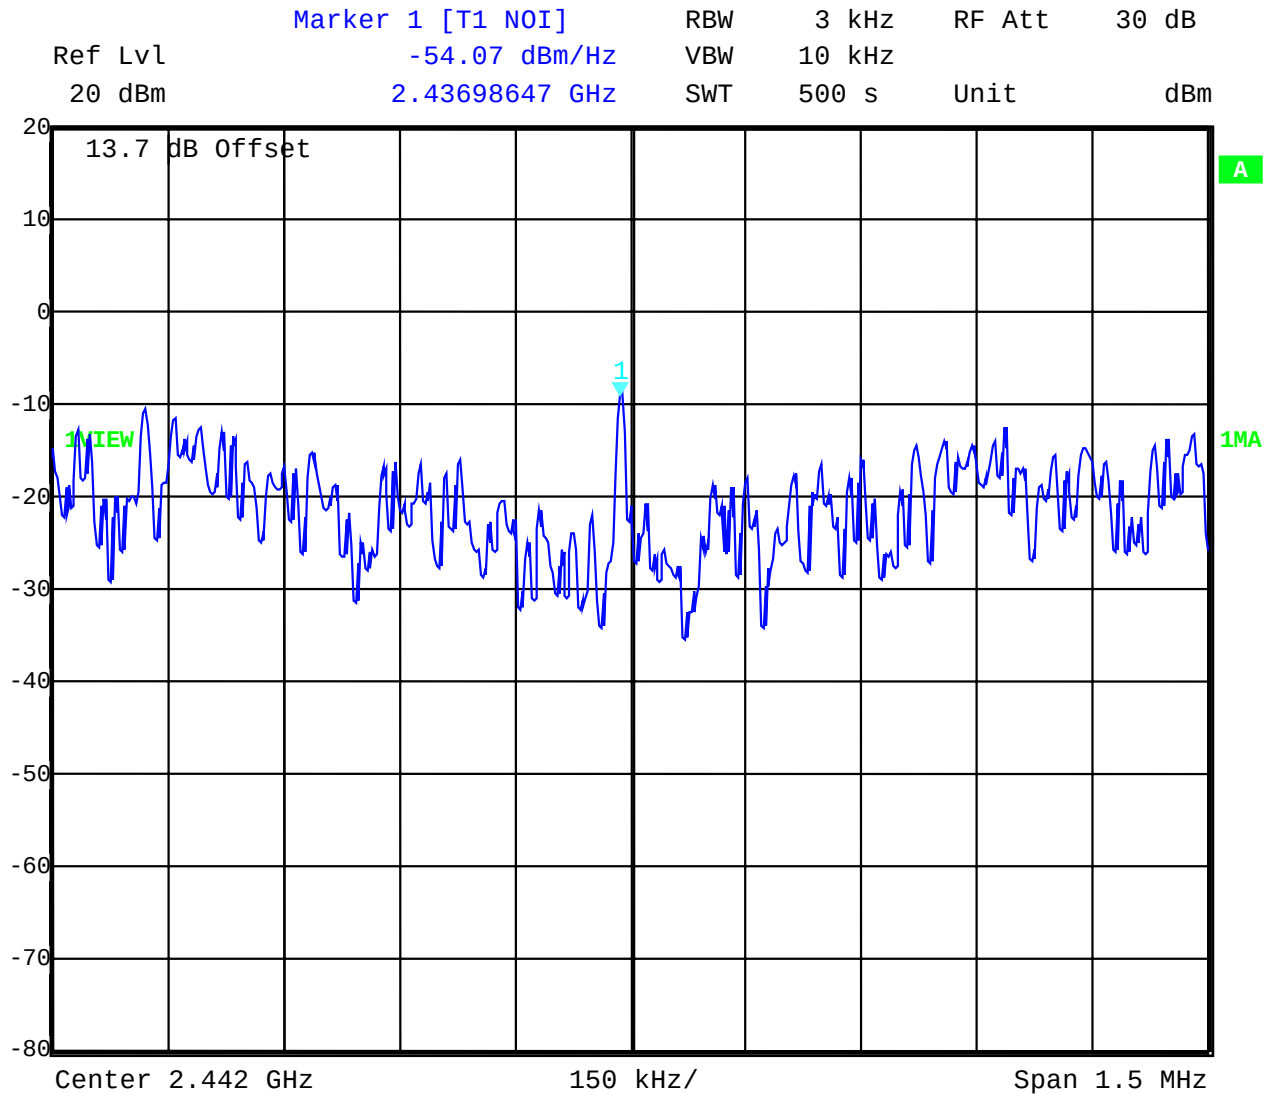

Date: 13.MAY.2004 08:14:20

Plot 3: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

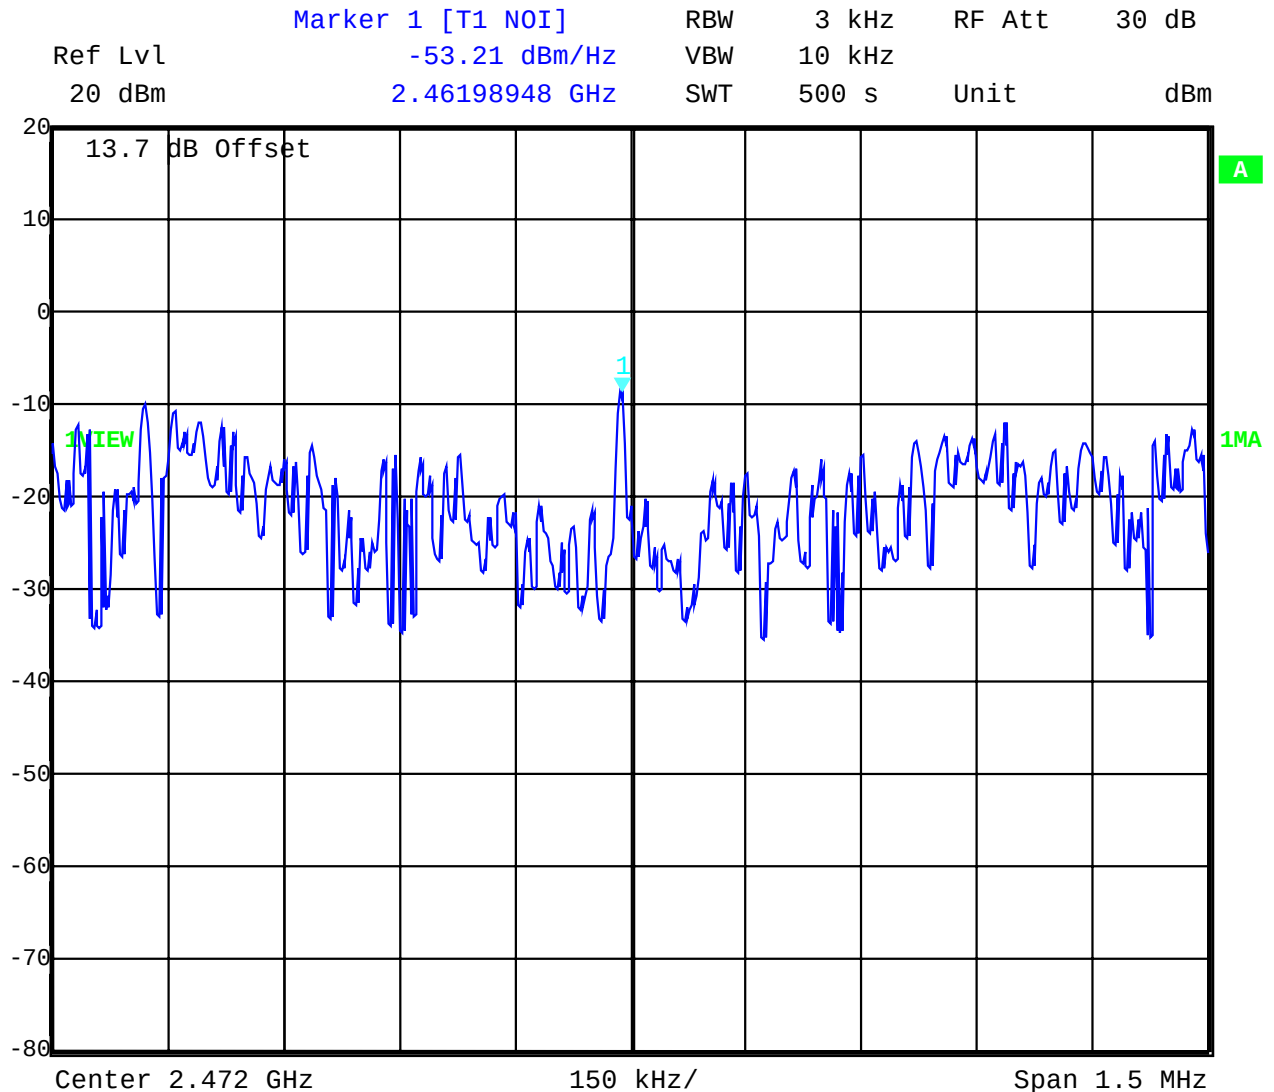

Date: 13.MAY.2004 08:35:48

Results: Plot 1: Power density : - 56.22 dBm/Hz = - 21.42 dBm / 3 KHz
 Plot 2: Power density : - 54.07 dBm/Hz = - 19.27 dBm / 3 KHz
 Plot 3: Power density : - 53.21 dBm/Hz = - 18.41 dBm / 3 KHz

Correction factor from dBm/Hz to dBm/3KHz is +34,8 dB


Limits :

Under normal test conditions only	For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmission
-----------------------------------	---

3.5 Peak Power Spectral density (OFDM)

§15.247(d)

Plot 1: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

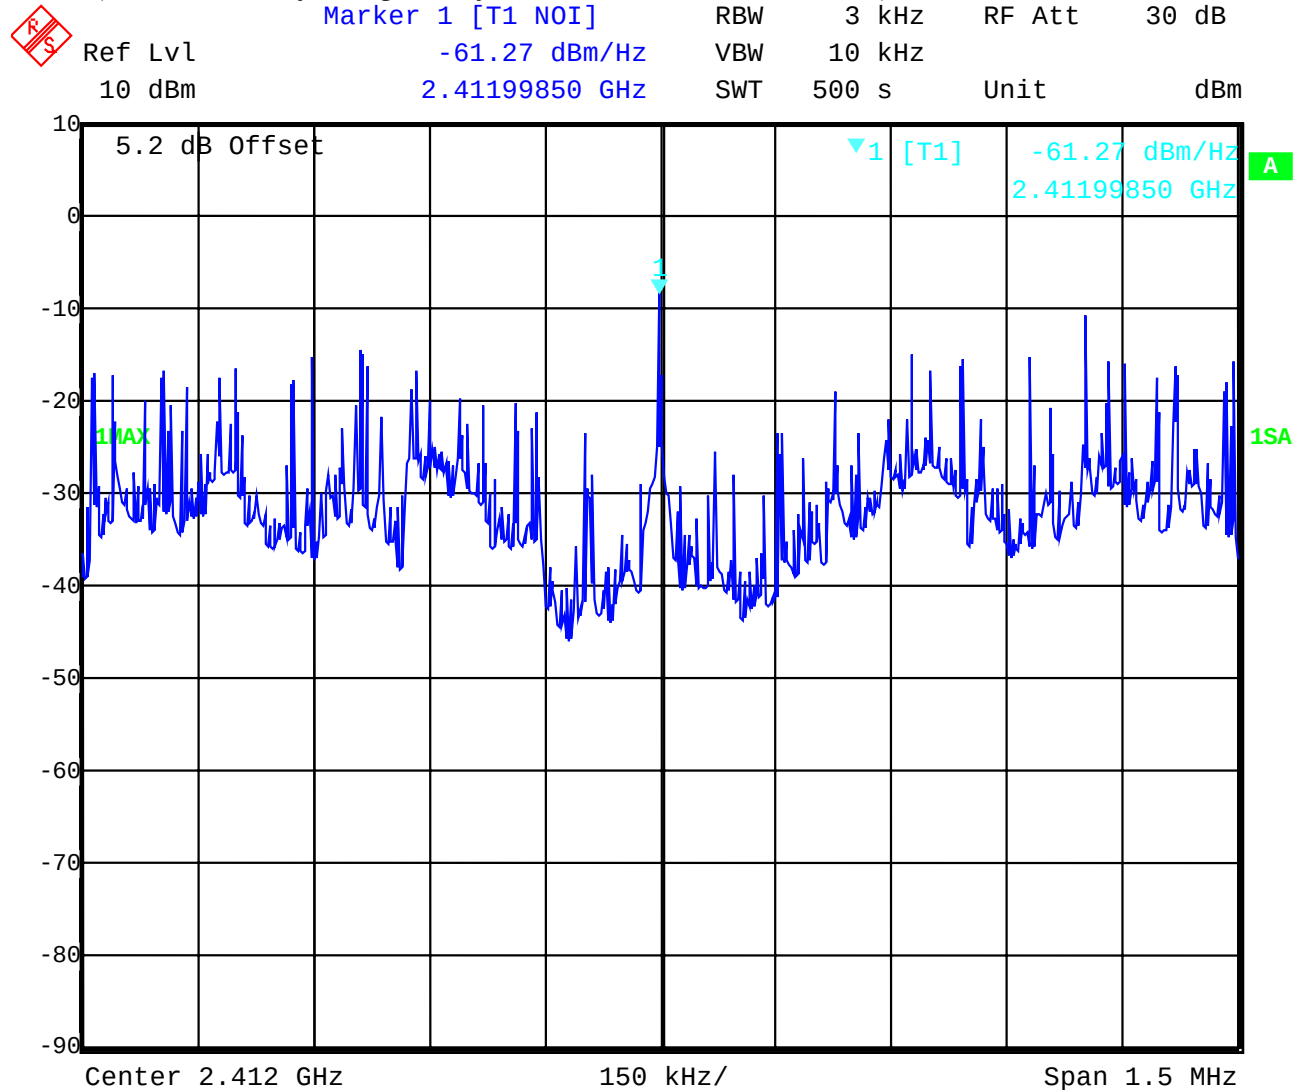

Date: 25.MAR.2004 14:24:37

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 14 of 95

Plot 2: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

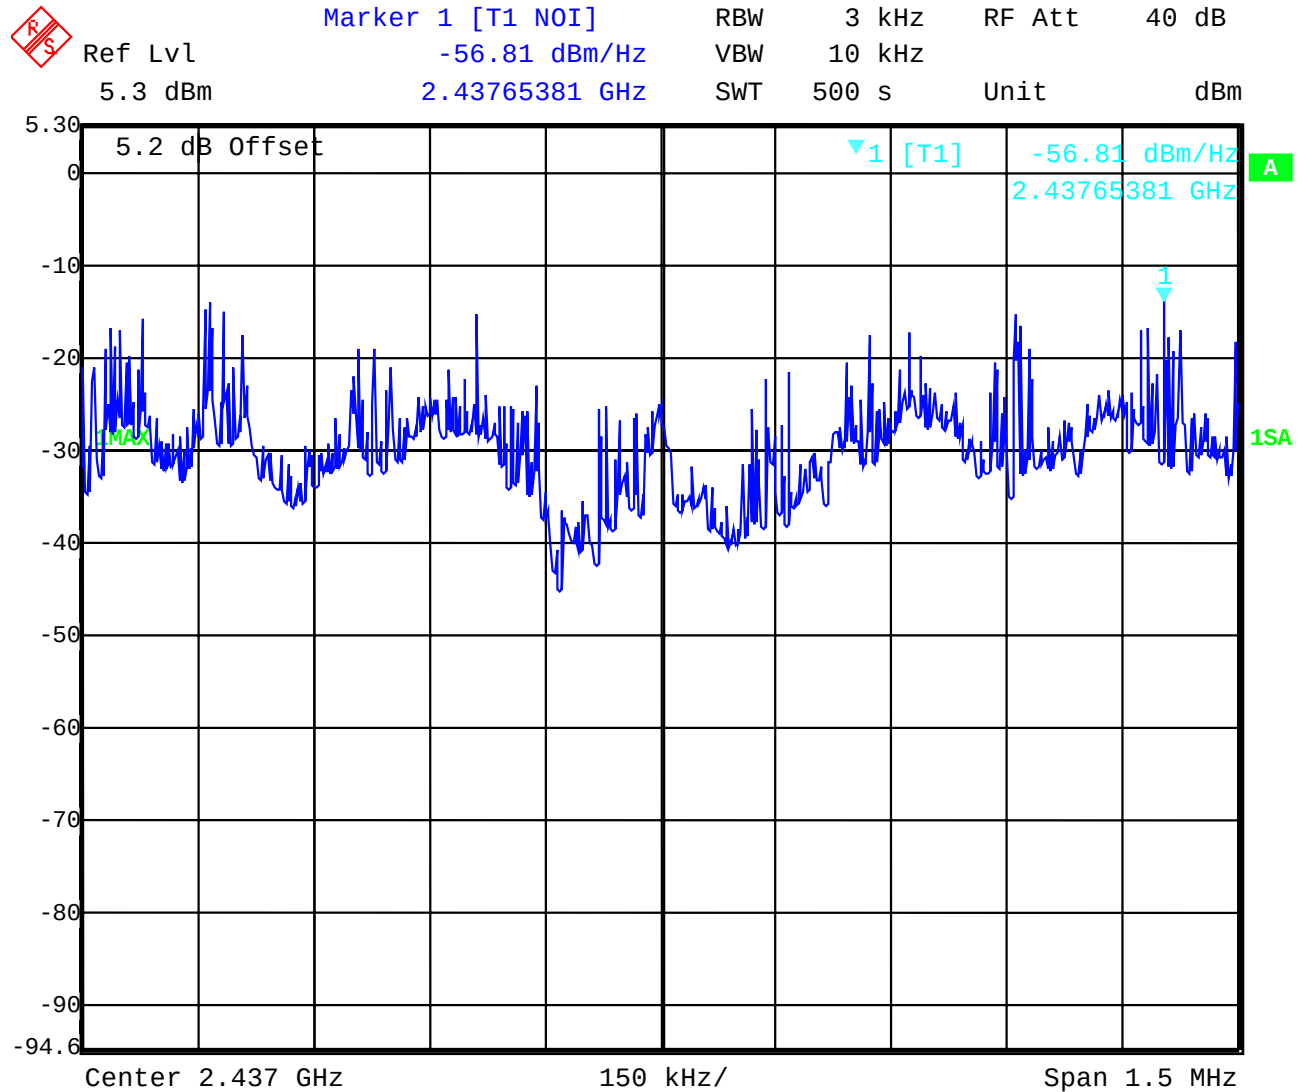

Date: 25.MAR.2004 14:33:01

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 15 of 95

Plot 3: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

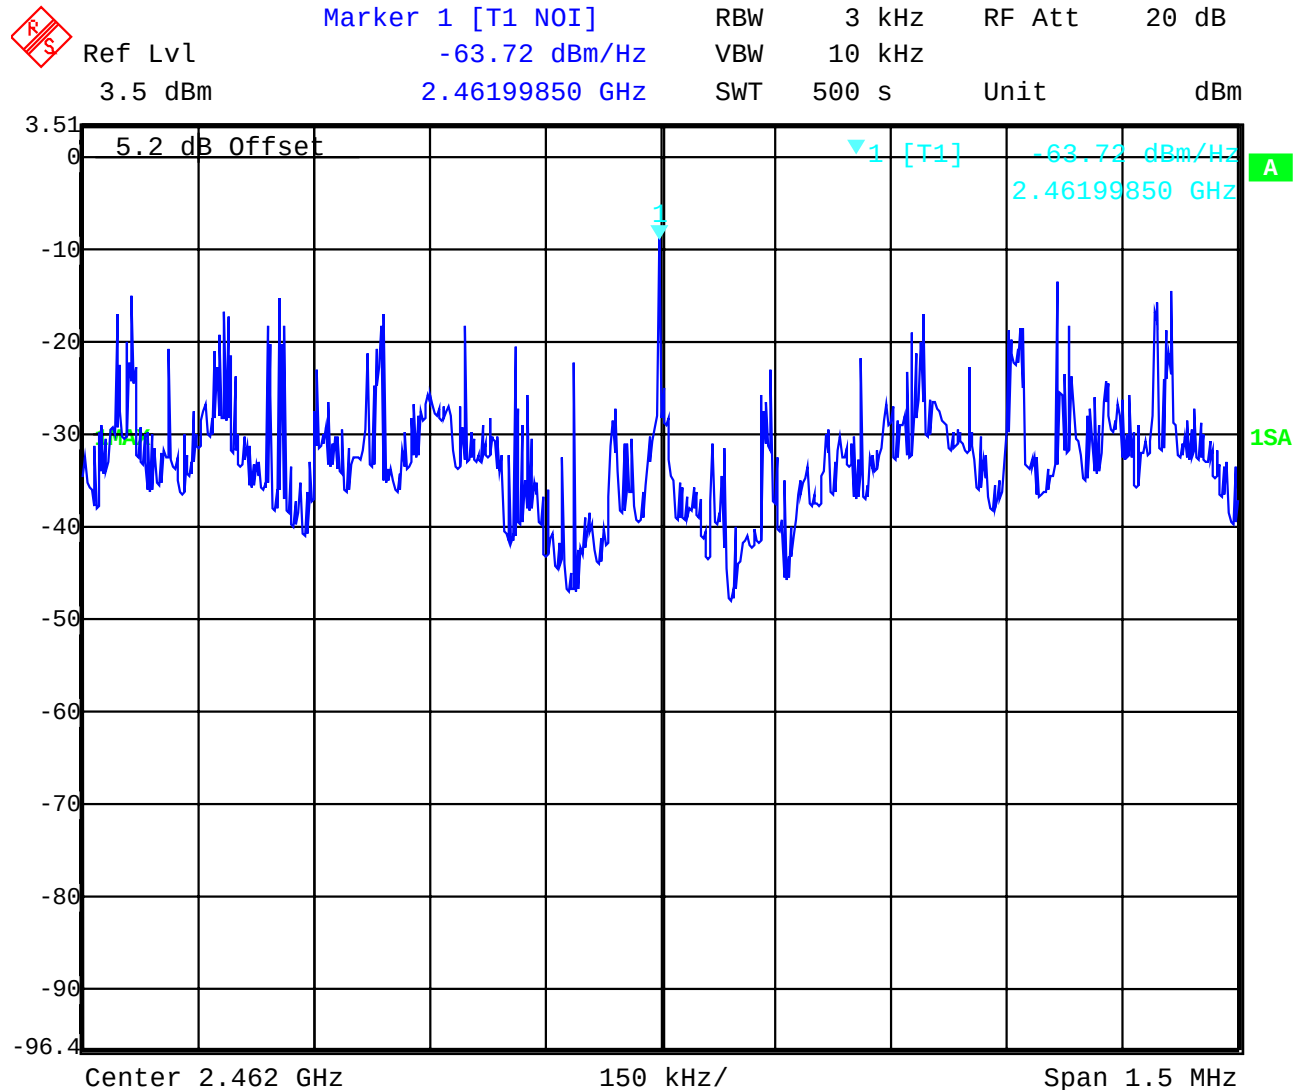

Date: 25.MAR.2004 14:49:17

Results: Plot 1: Power density : - 61.27 dBm/Hz = - 26.47dBm / 3 KHz
Plot 2: Power density : - 56.81 dBm/Hz = - 22.01 dBm / 3 KHz
Plot 3: Power density : - 63.72 dBm/Hz = - 28.92 dBm / 3 KHz


Correction factor from dBm/Hz to dBm/3KHz is +34,8 dB

Limits :

Under normal test conditions only	For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmission
-----------------------------------	---

3.6 Spectrum Bandwidth of a DSSS System / 6 dB Bandwidth §15.247(a2)

Plot 1 :

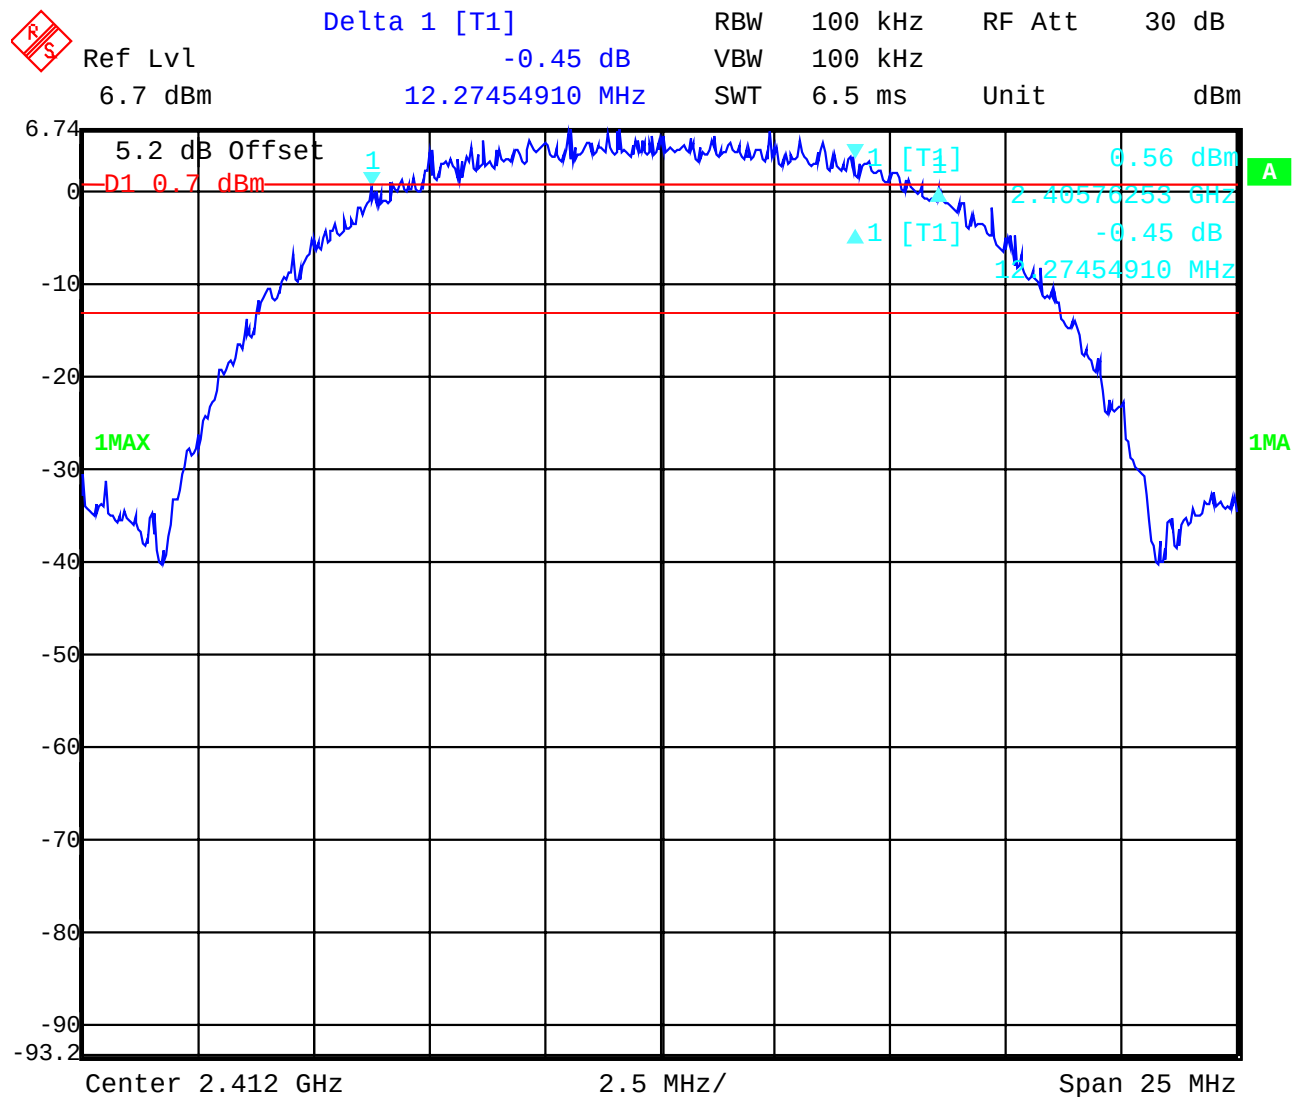


Date: 25.MAR.2004 13:18:43

Test report No.: 5-4456-01-04c/04

Date: 2004-04-27


Page 17 of 95

Plot 2:

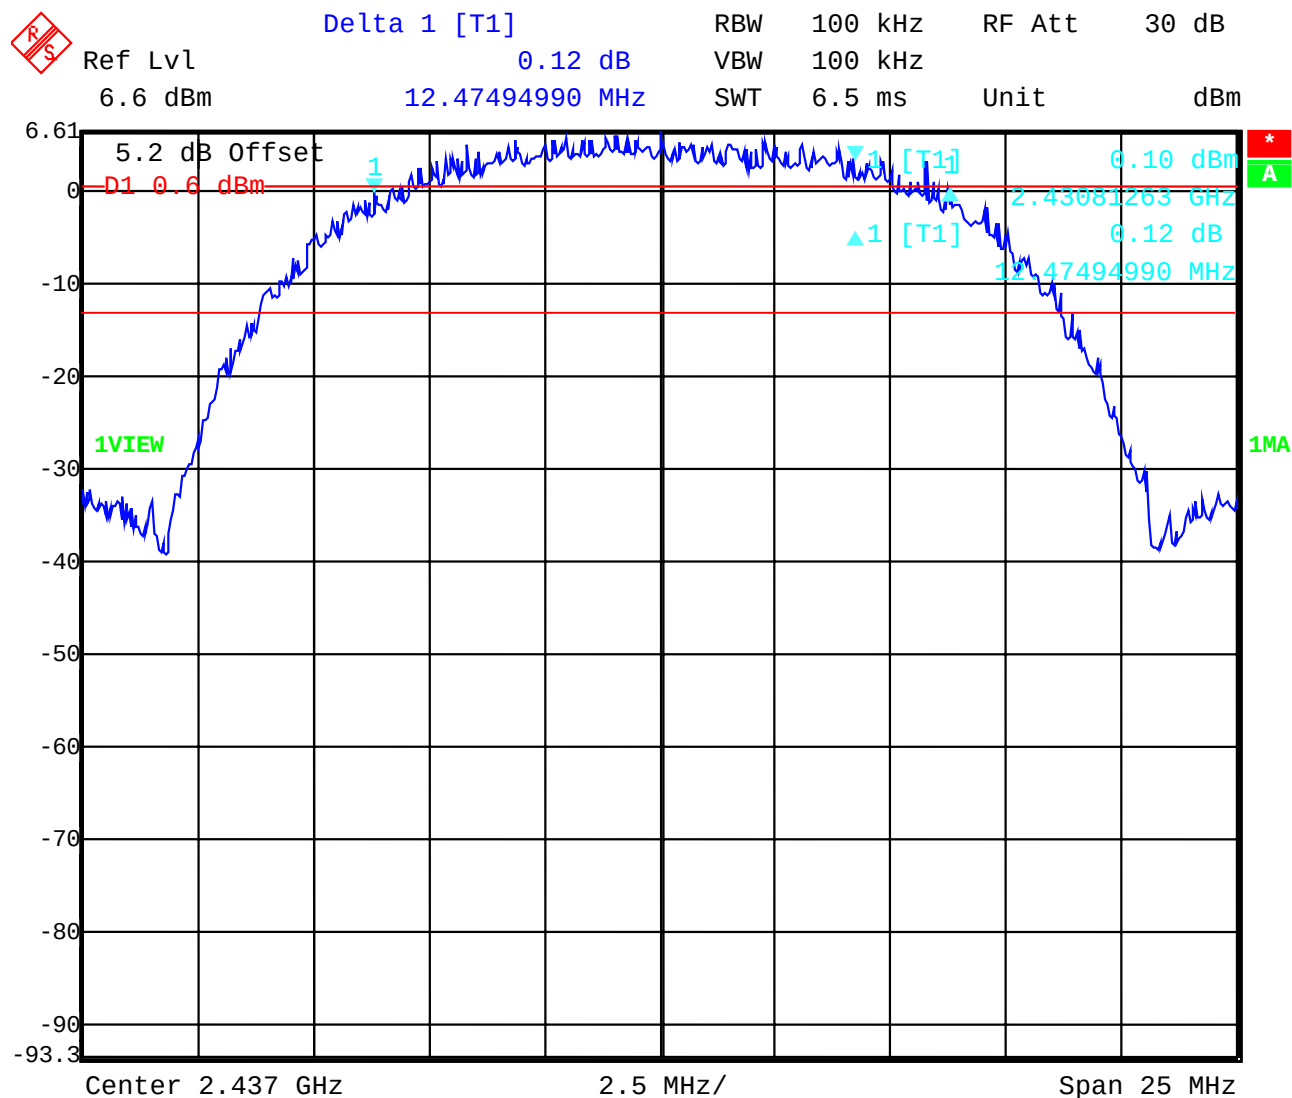

Date: 25.MAR.2004 13:27:24

Plot 3:

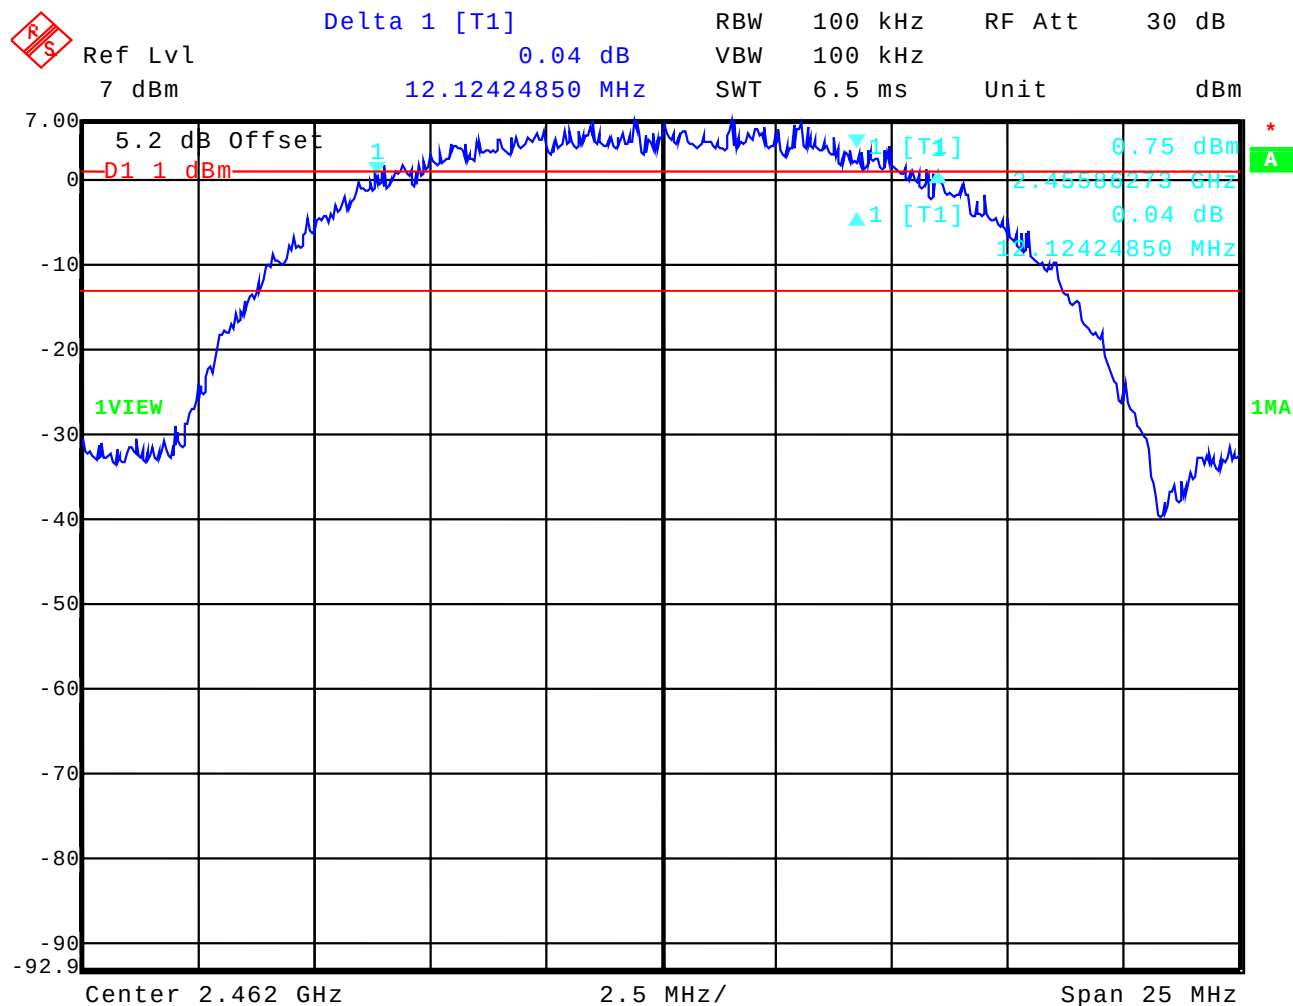

Date: 25.MAR.2004 13:24:06

Results:

Test conditions		BANDWIDTH [MHz]		
		2412	2437	2462
Frequency [MHz]				
	6 dB	12.275	12.475	12.124
	20 dB	17.614	17.645	17.544
Measurement uncertainty		±1kHz		

RBW: 100 kHz / VBW 100 kHz

Limits :

Under normal test conditions only	> 500 KHz
-----------------------------------	-----------


Date: 25.MAR.2004 14:20:26

Test report No.: 5-4456-01-04c/04

Date: 2004-04-27


Page 20 of 95

Plot 2:

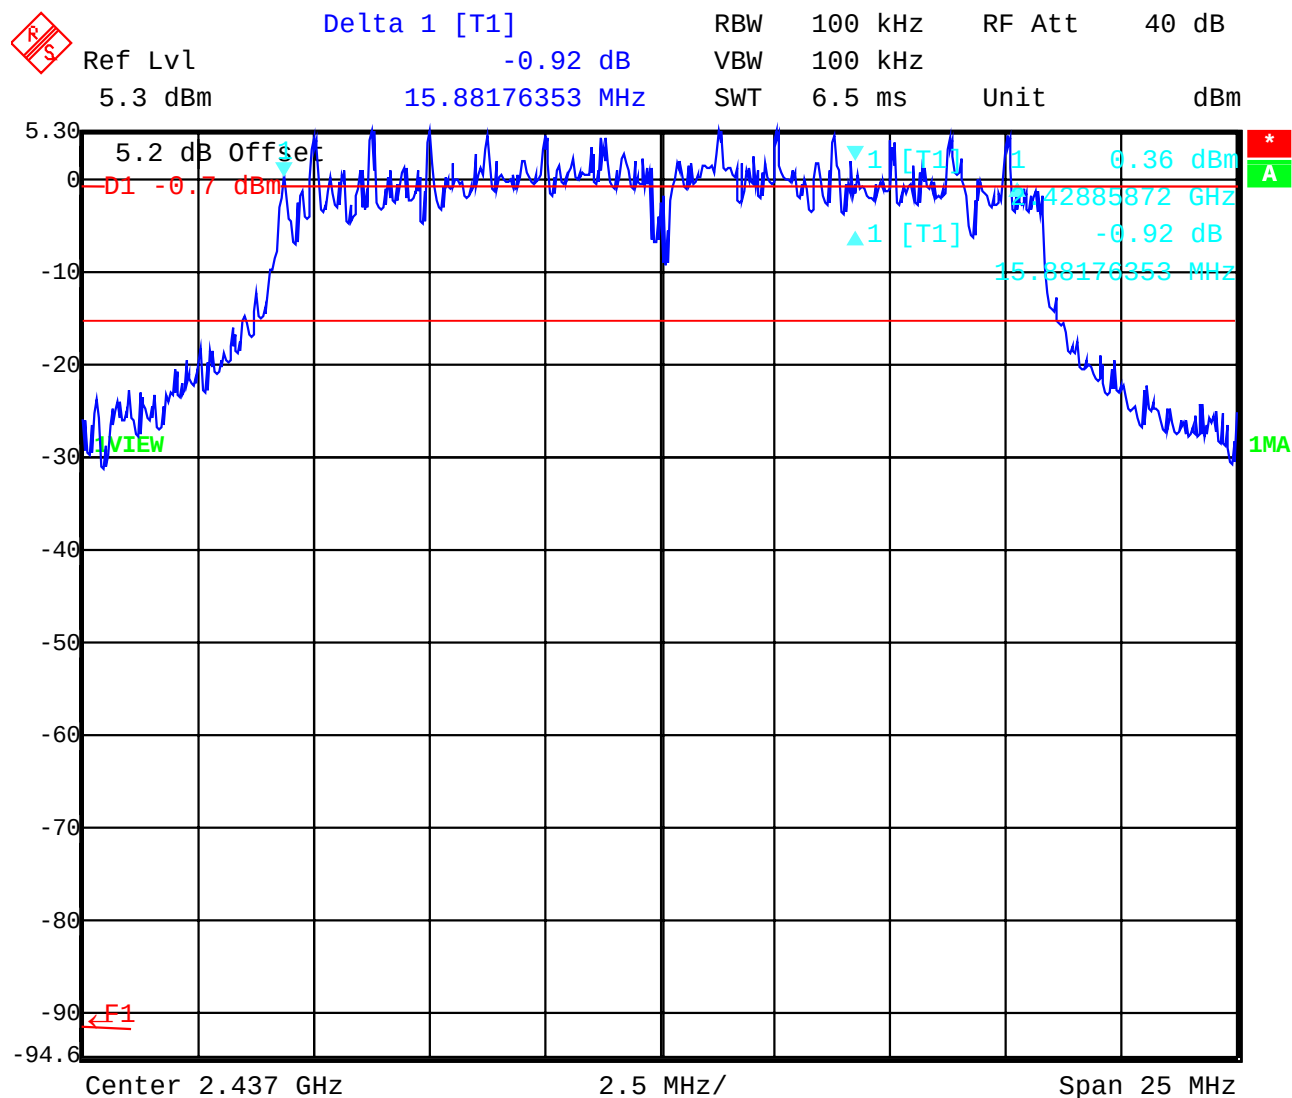

Date: 25.MAR.2004 14:31:13

Plot 3:

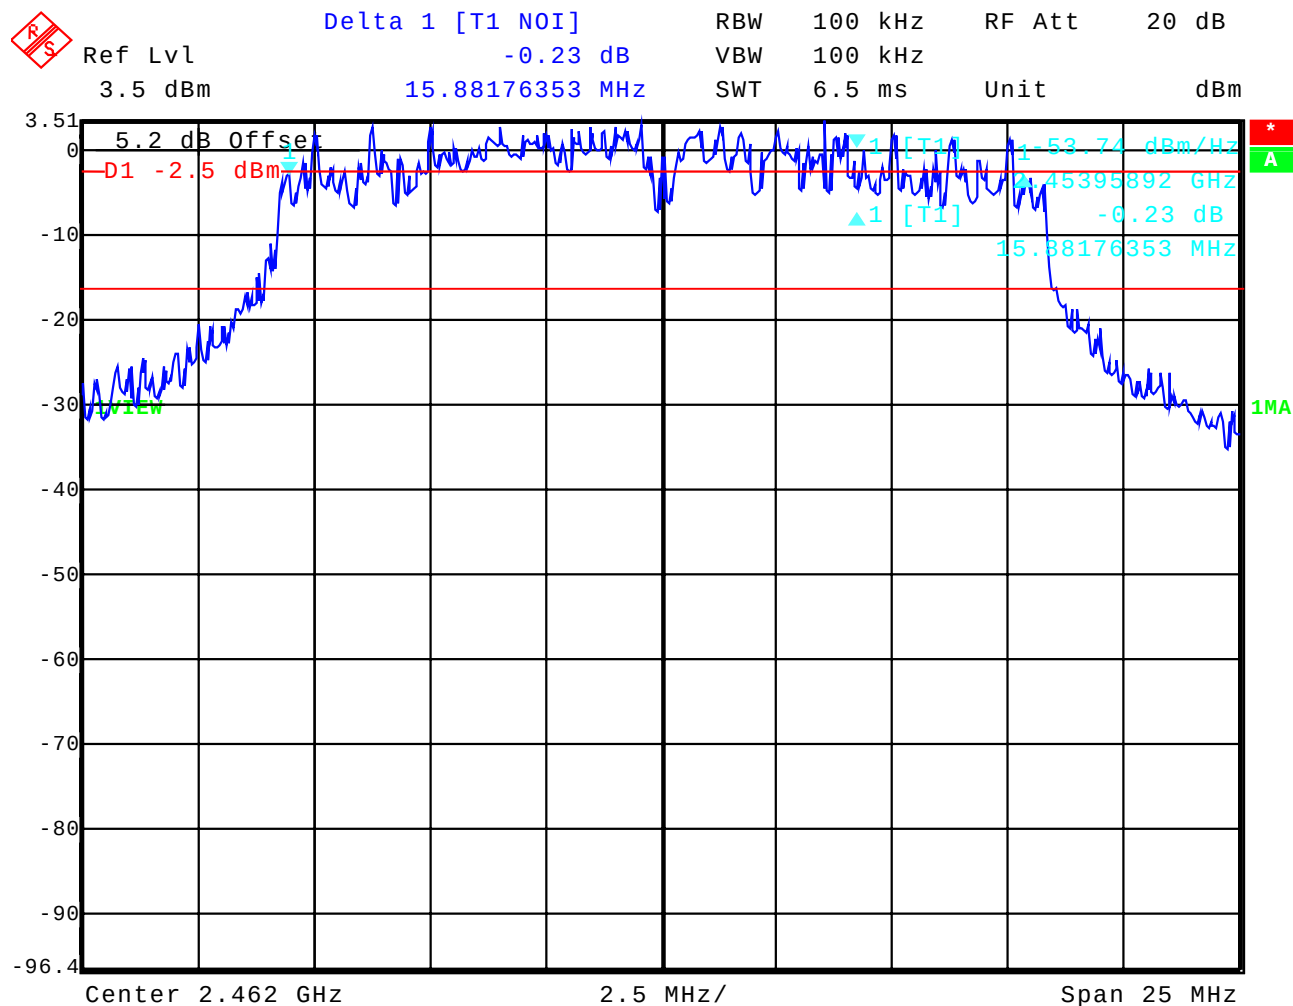

Date: 25.MAR.2004 14:46:48

Results:

Test conditions		6 dB BANDWIDTH [MHz]		
Frequency [MHz]		2412	2437	2462
	6 dB	16.132	15.881	15.881
	20 dB	17.443	17.725	17.388
Measurement uncertainty		±1kHz		

RBW: 100 kHz / VBW 100 kHz


Limits :

Under normal test conditions only	> 500 KHz
-----------------------------------	-----------

3.7 Maximum output power (conducted) (DSSS)

§15.247 (b) (1)

Plot 1:

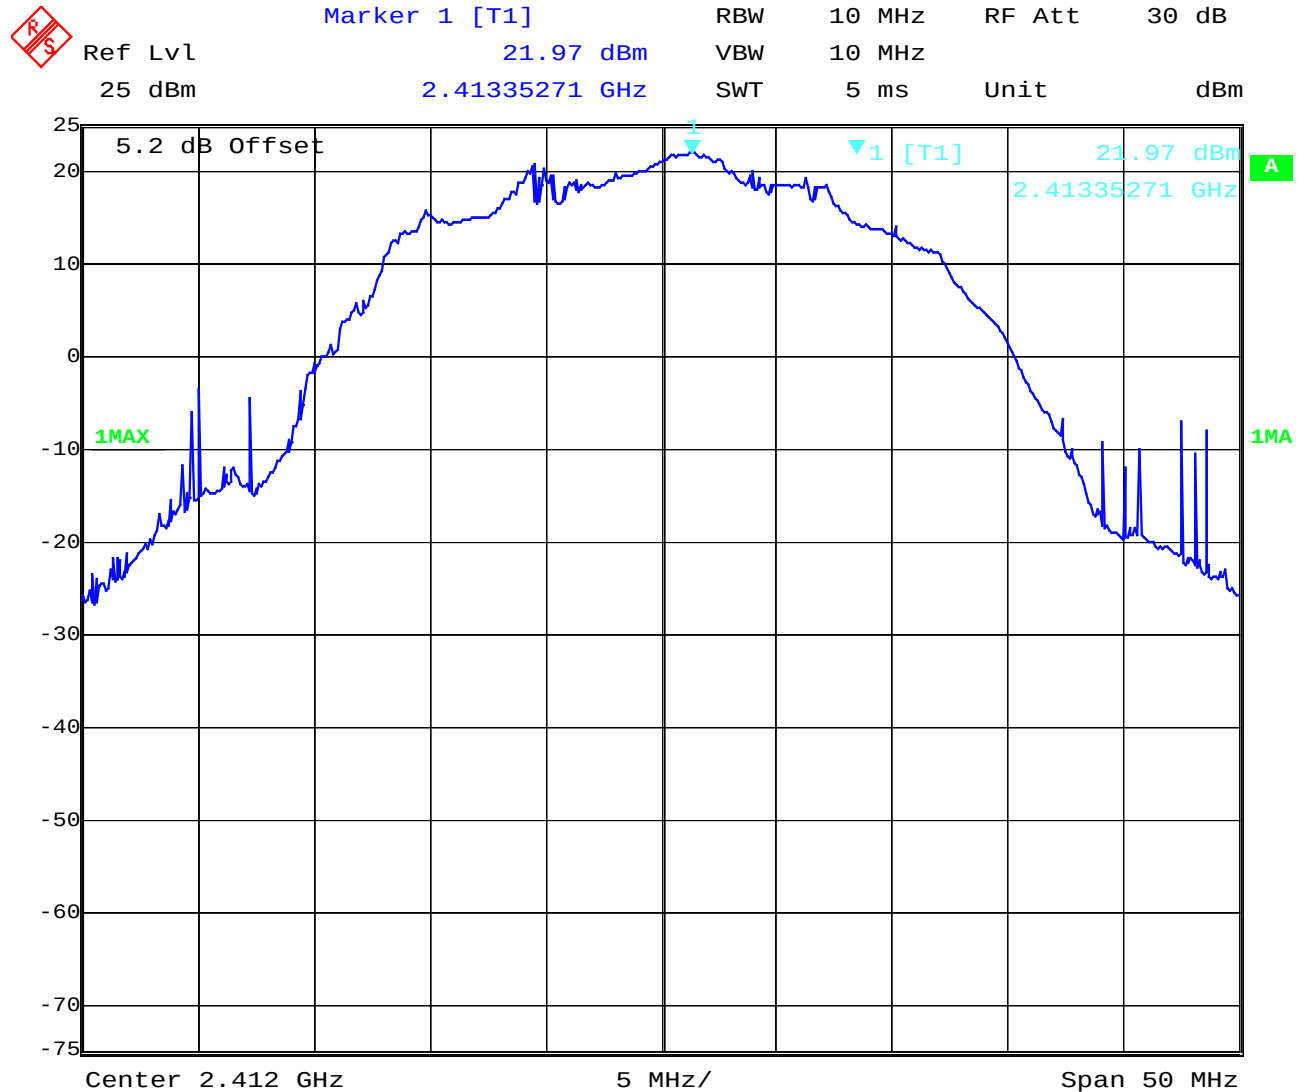

Date: 25.MAR.2004 13:35:55
 RBW / VBW : 10 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 23 of 95


Plot 2:

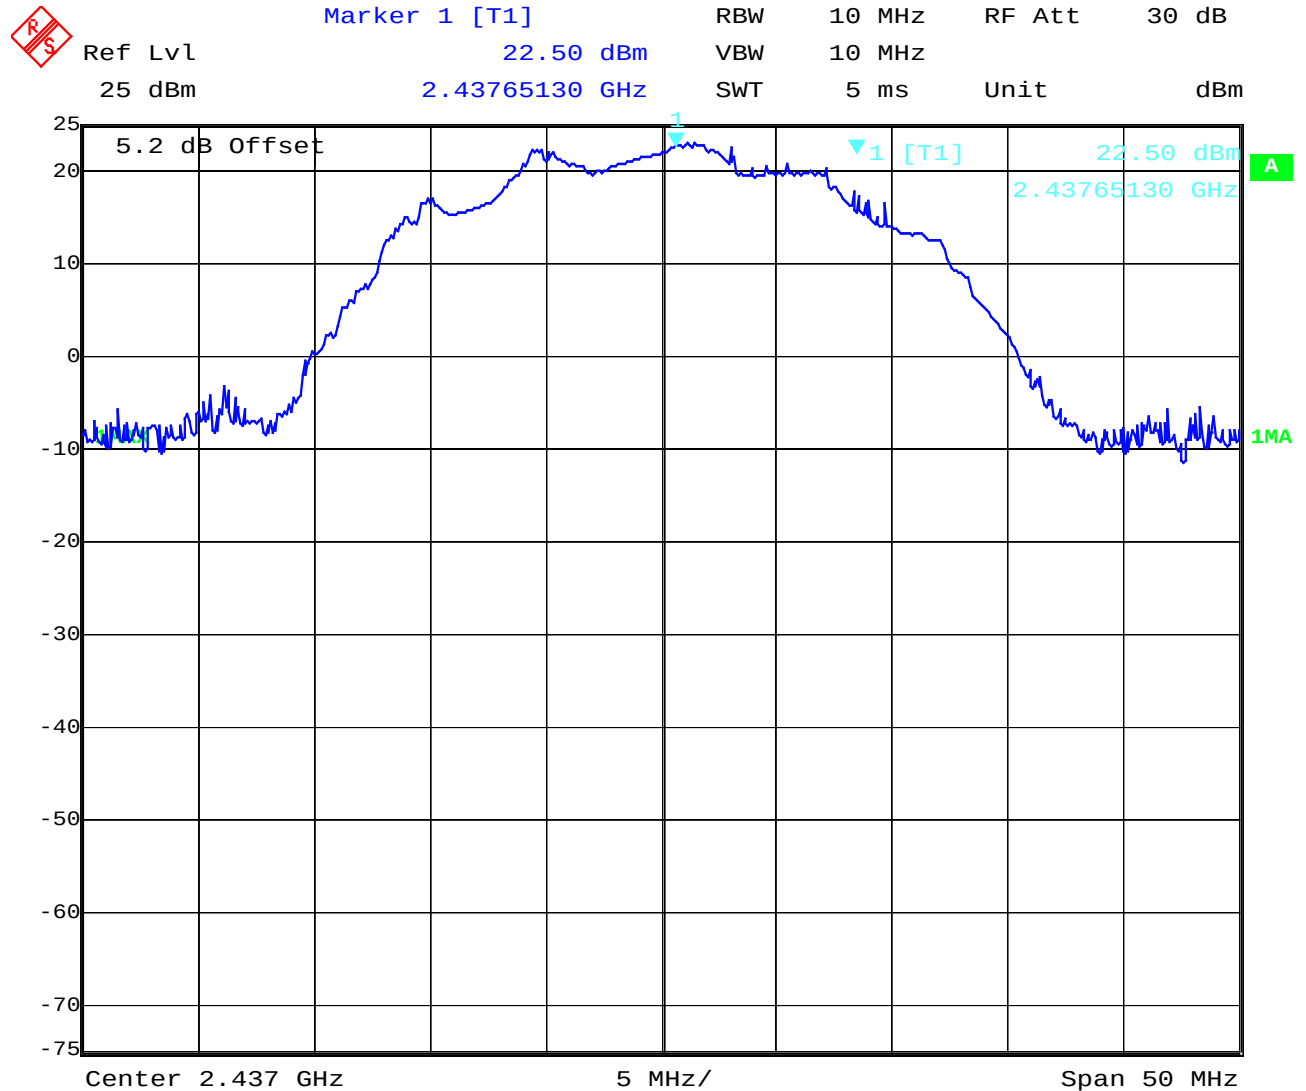

Date: 25.MAR.2004 13:30:44

RBW / VBW : 10 MHz

Plot 3:

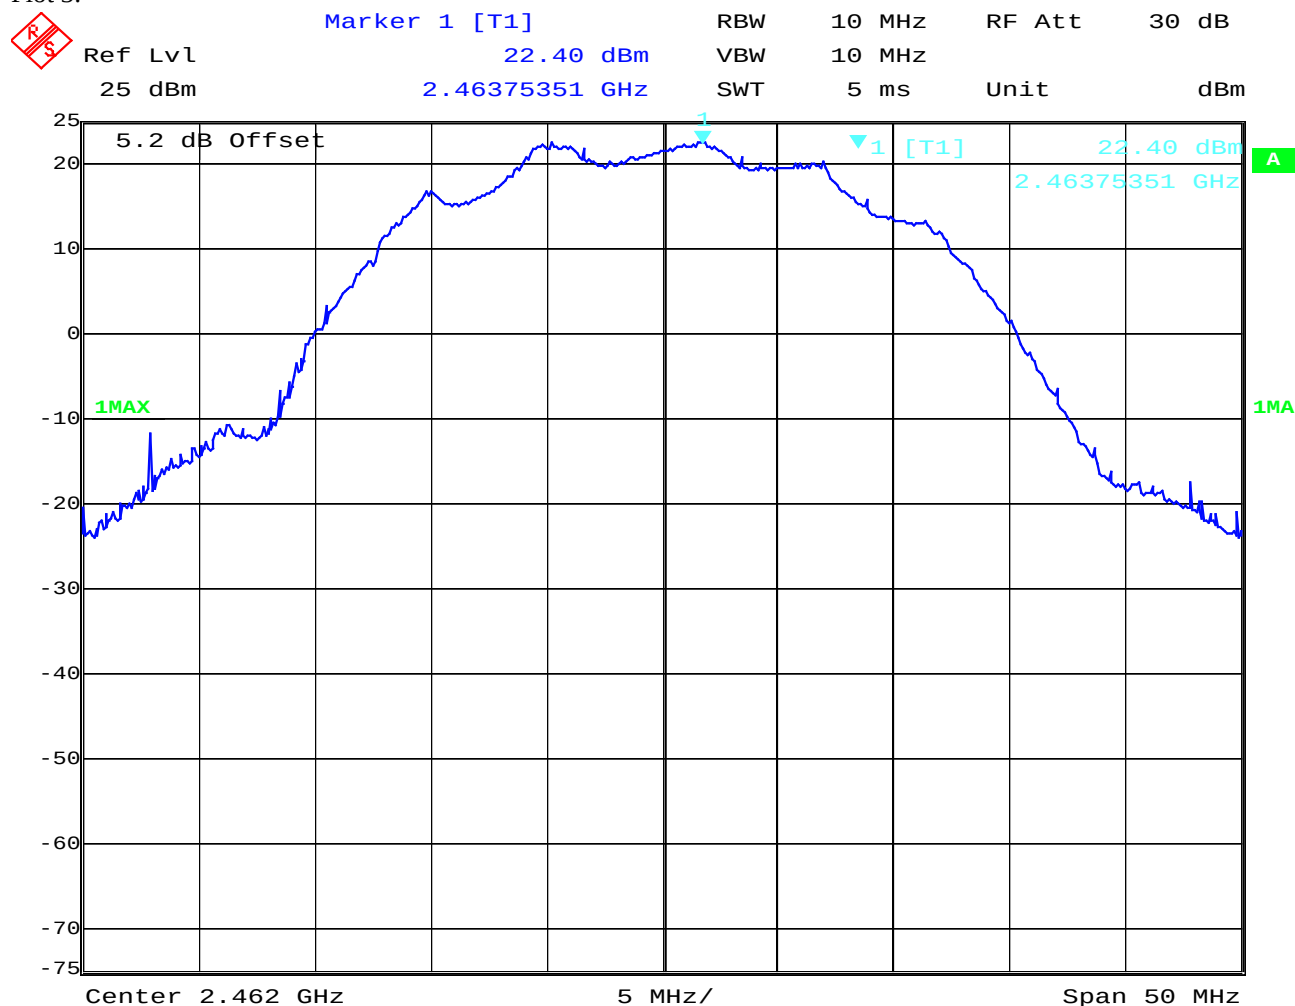

Date: 25.MAR.2004 13:37:42

RBW / VBW : 10 MHz

Results: with correction factor $10 \cdot \log(6\text{dB BW} / \text{used BW})$, here **0.9 dB**

Test conditions		Max. peak output power [dBm]			
Frequency [MHz]		2412		2437	2462
T _{nom}	V _{nom}	PK	21.97	22.50	22.40
		PK corrected	22.87	23.40	23.30
Average		16.11		16.86	16.85
Measurement uncertainty		±3dB			

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 25 of 95

Remark:

The correction factor is calculated by $10 \times \log (\text{measured BW} / \text{used BW})$ [dB]


Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt / 30 dBm
---	------------------------

3.7 Maximum output power (conducted) (OFDM)

§15.247 (b) (1)

Plot 1:

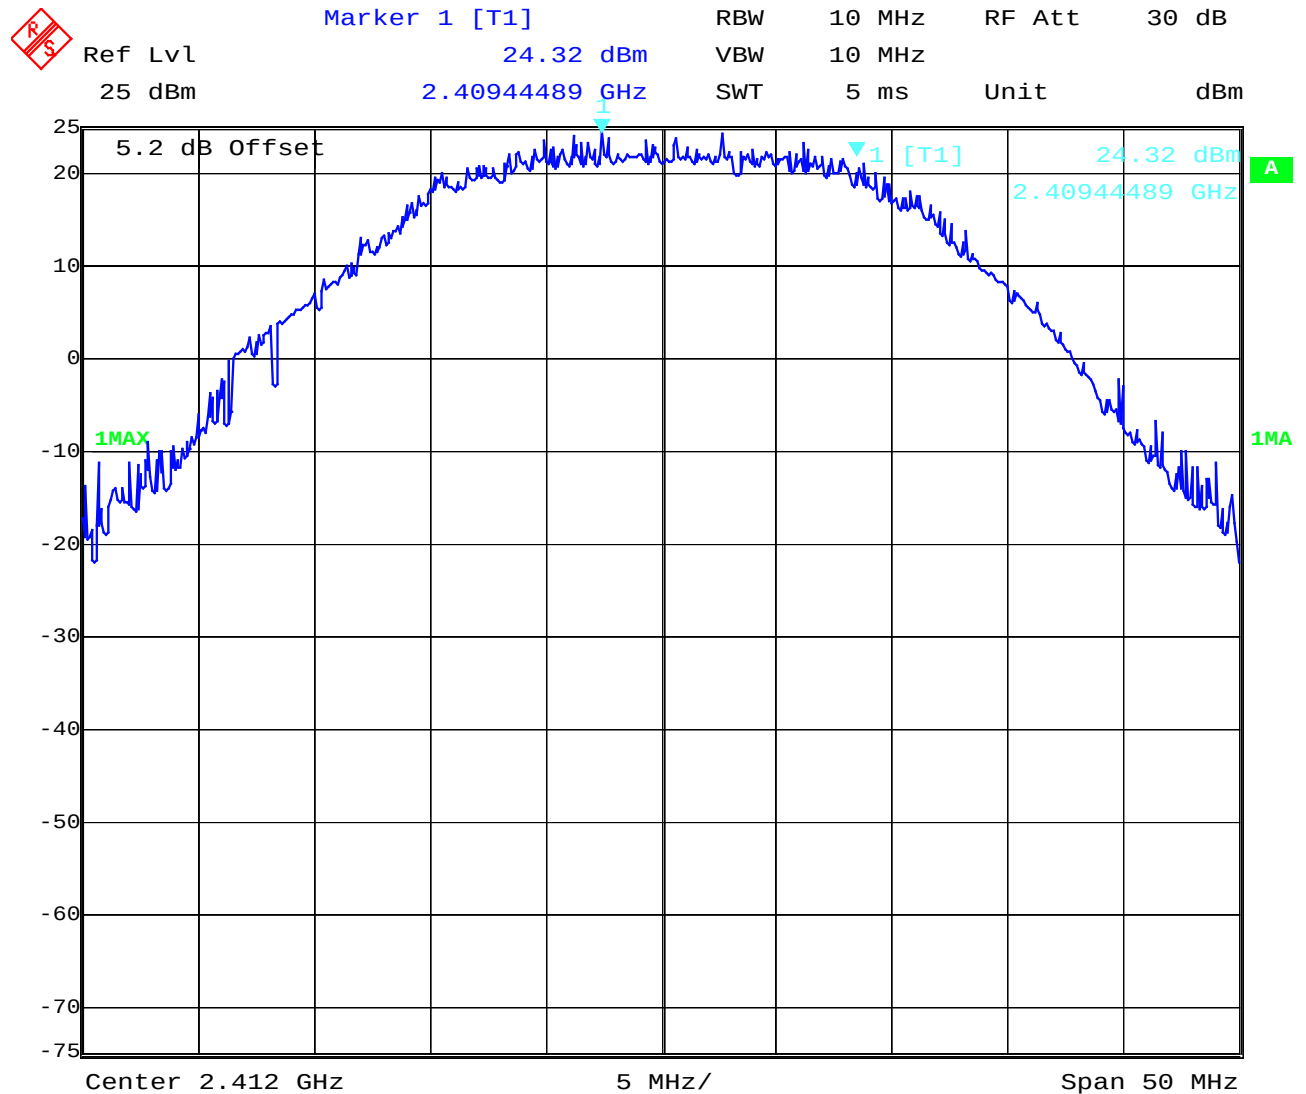

Date: 25.MAR.2004 14:17:32

RBW / VBW : 10 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 27 of 95


Plot 2:

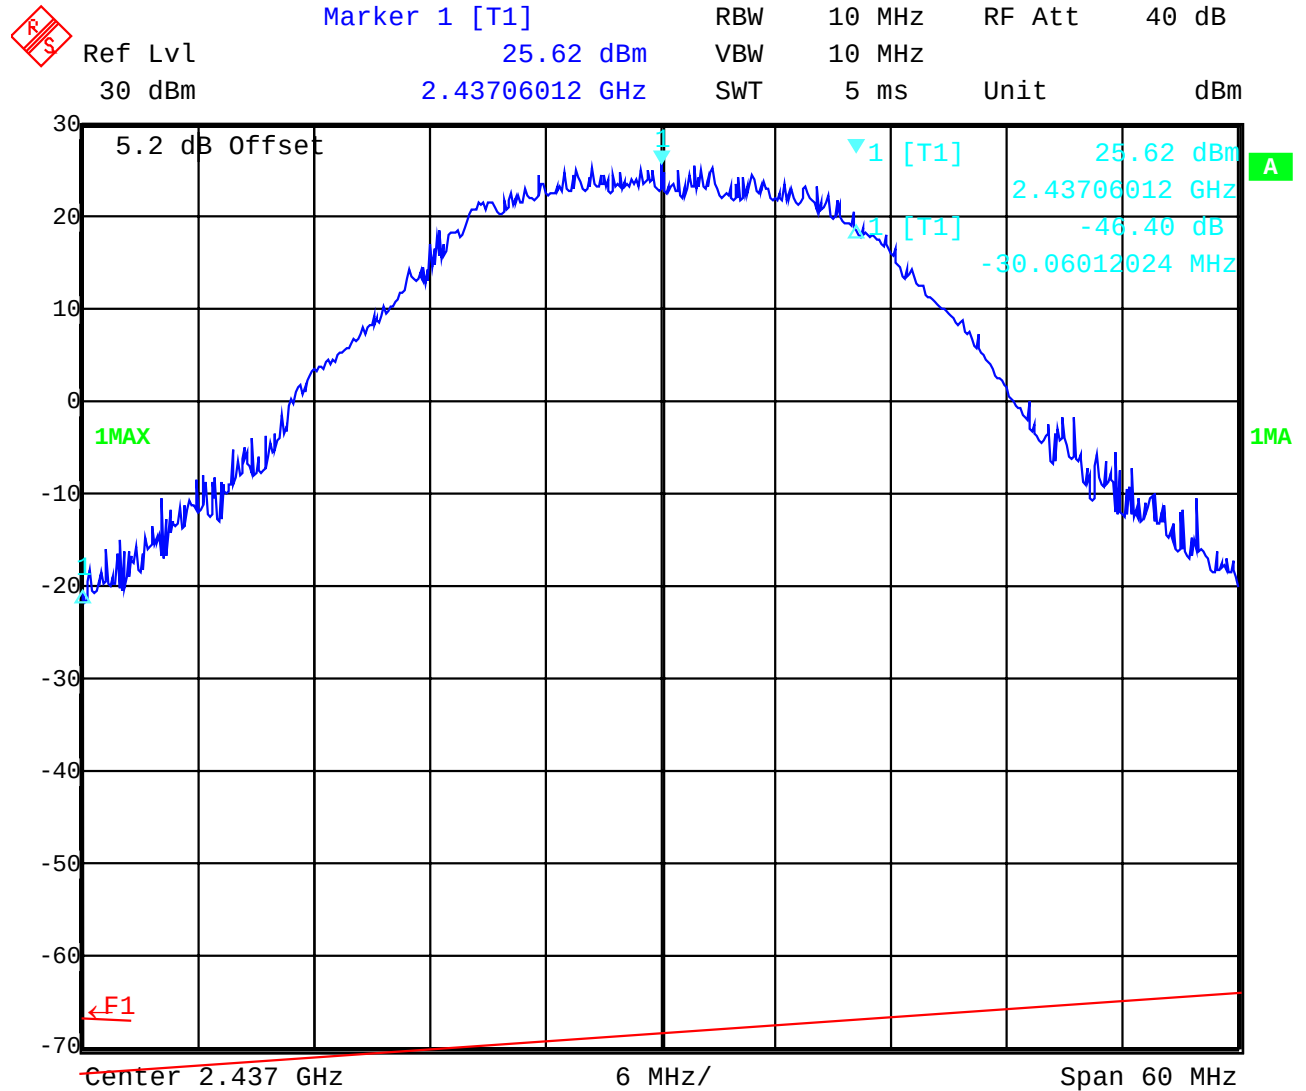

Date: 25.MAR.2004 14:29:31

RBW / VBW : 10 MHz

Plot 3:

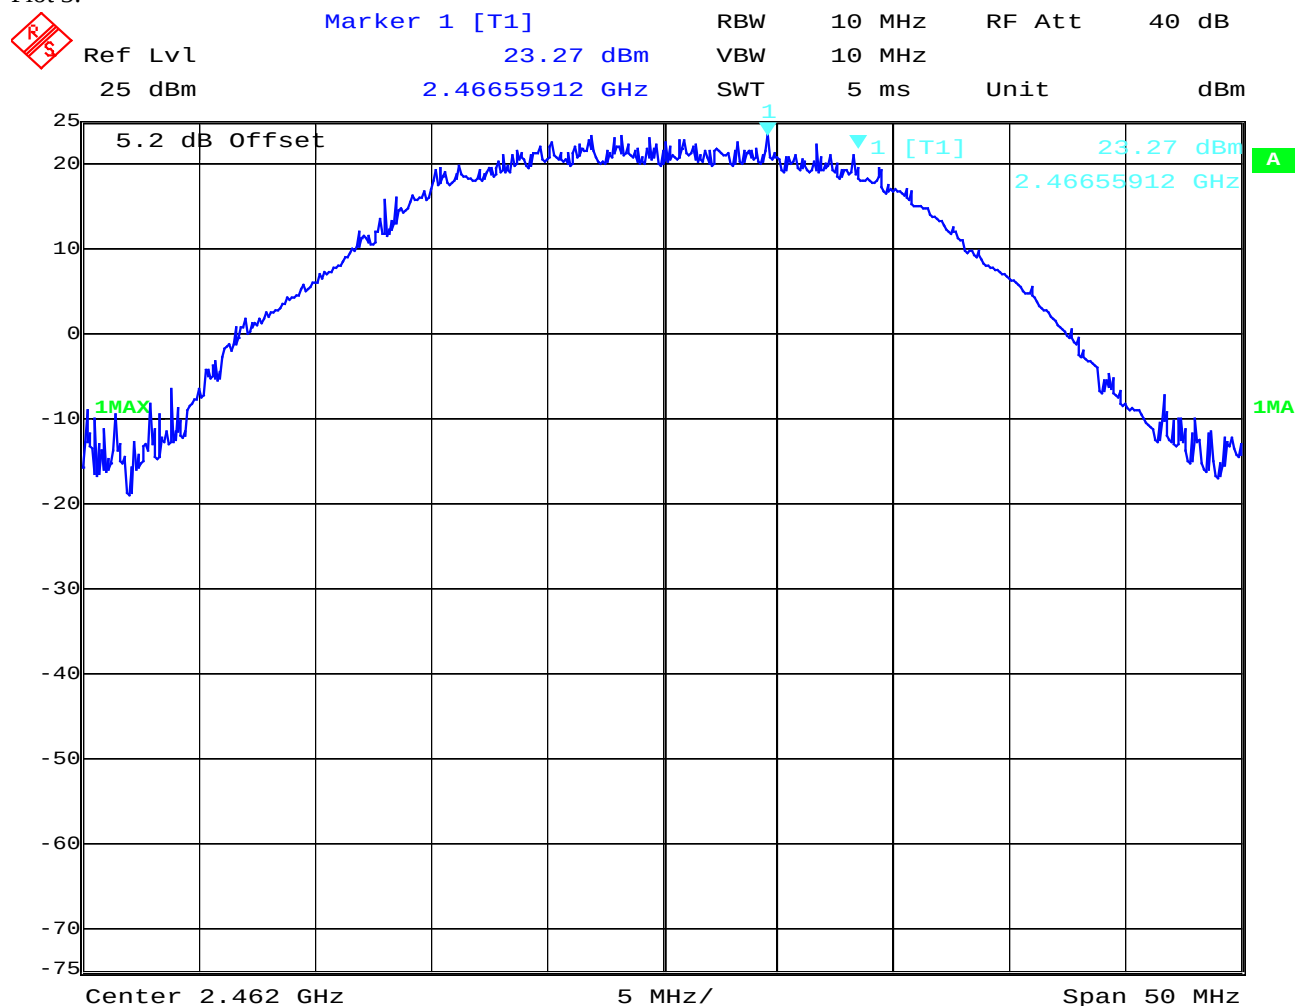

Date: 25.MAR.2004 14:50:55

RBW / VBW : 10 MHz

Results: with correction factor $10 \cdot \log(6\text{dB BW} / \text{used BW})$, here **2.0 dB**

Test conditions		Max. peak output power [dBm]			
Frequency [MHz]		2412		2437	2462
T _{nom}	V _{nom}	PK	24.32	25.62	23.27
		PK corrected	26.32	27.62	25.27
Average		16.31		16.88	15.47
Measurement uncertainty		±3dB			

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 29 of 95

Remark:

The correction factor is calculated by $10 \times \log (\text{measured BW} / \text{used BW})$ [dB]

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt / 30 dBm
---	------------------------

MPE calculation

These equations are generally accurate in the far field of an antenna but will over predict power density in the near field, where they could be used for making a “worst case” prediction.

$$S = PG/4\pi R^2$$

where S = power density (in appropriate units, e.g. mW/cm²)
P = power input to the antenna (in appropriate units e.g. mW)
G = power gain of the antenna in the direction of interest relative to the isotropic radiator
R = distance to the center of radiation of the antenna (appropriate units e.g. cm)

Or

$$S = EIRP/4\pi R^2$$

where EIRP = equivalent isotropically radiated power

Calculation:

(Calculated for max. EIRP)

EIRP: 29.92 dBm = 981 mW

calculated at distance of 20 cm:

power density = $981 / 4\pi 20^2 = 0.195 \text{ mW/ cm}^2$

Limit:

1mW/ cm ² is the reference level for general public exposure according to the OET Bulletin 65, Edition 97-01 Table 1.

3.8 Max. peak output power (radiated) §15.247 (b) (1)

Results:

Test conditions		Max. peak output power EIRP [dBm]		
Antenna 1 (gain 0.6 dBi) Frequency [MHz]		2412	2437	2462
T_{nom}	V_{nom}	22.87 cond	23.40 cond	23.30 cond
DSSS		23.47 rad	24.00 rad	23.90 rad
T_{nom}	V_{nom}	26.32 cond	27.62 cond	25.27 cond
OFDM		26.92 rad	28.32 rad	25.87 rad
Measurement uncertainty		±3dB		

RBW / VBW : 10 MHz


Test conditions		Max. peak output power EIRP [dBm]		
Antenna 2 (gain 2.3 dBi) Frequency [MHz]		2412	2437	2462
T_{nom}	V_{nom}	22.87 cond	23.40 cond	23.30 cond
DSSS		25.17 rad	25.70 rad	25.60 rad
T_{nom}	V_{nom}	26.32 cond	27.62 cond	25.27 cond
OFDM		28.62 rad	29.92 rad	27.57 rad
Measurement uncertainty		±3dB		

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt / 30 dBm
--	------------------------

3.9 Band-edge compliance of conducted emissions §15.247 (c)


Plot 1, lowest channel

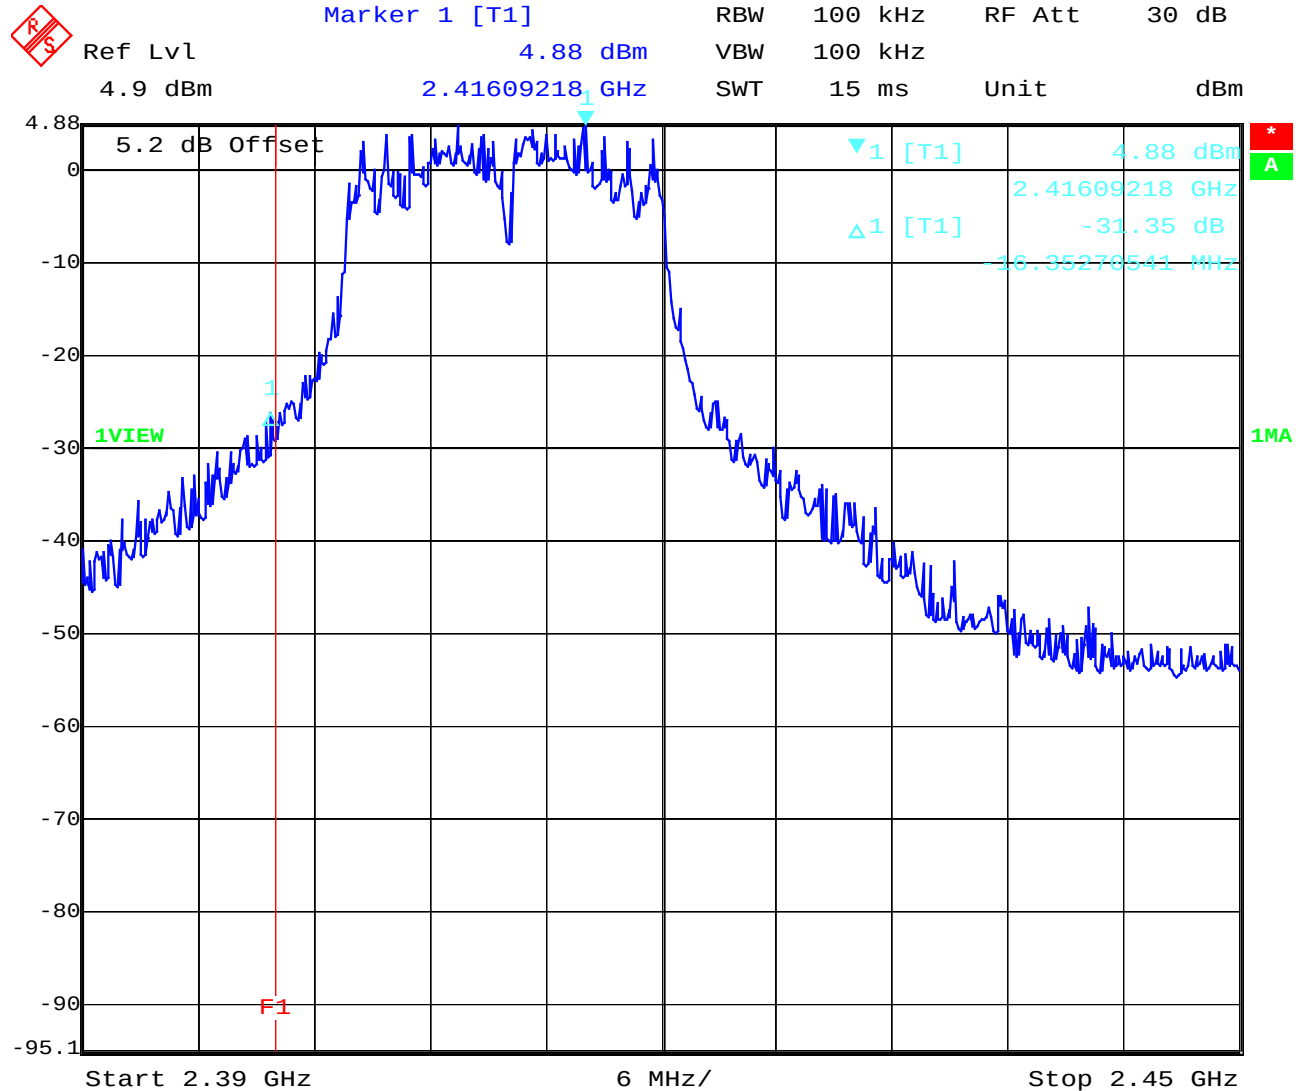

Date: 25.MAR.2004 14:26:32

We used OFDM modulation as this is the worst case regarding used BW.

Plot 2, highest channel

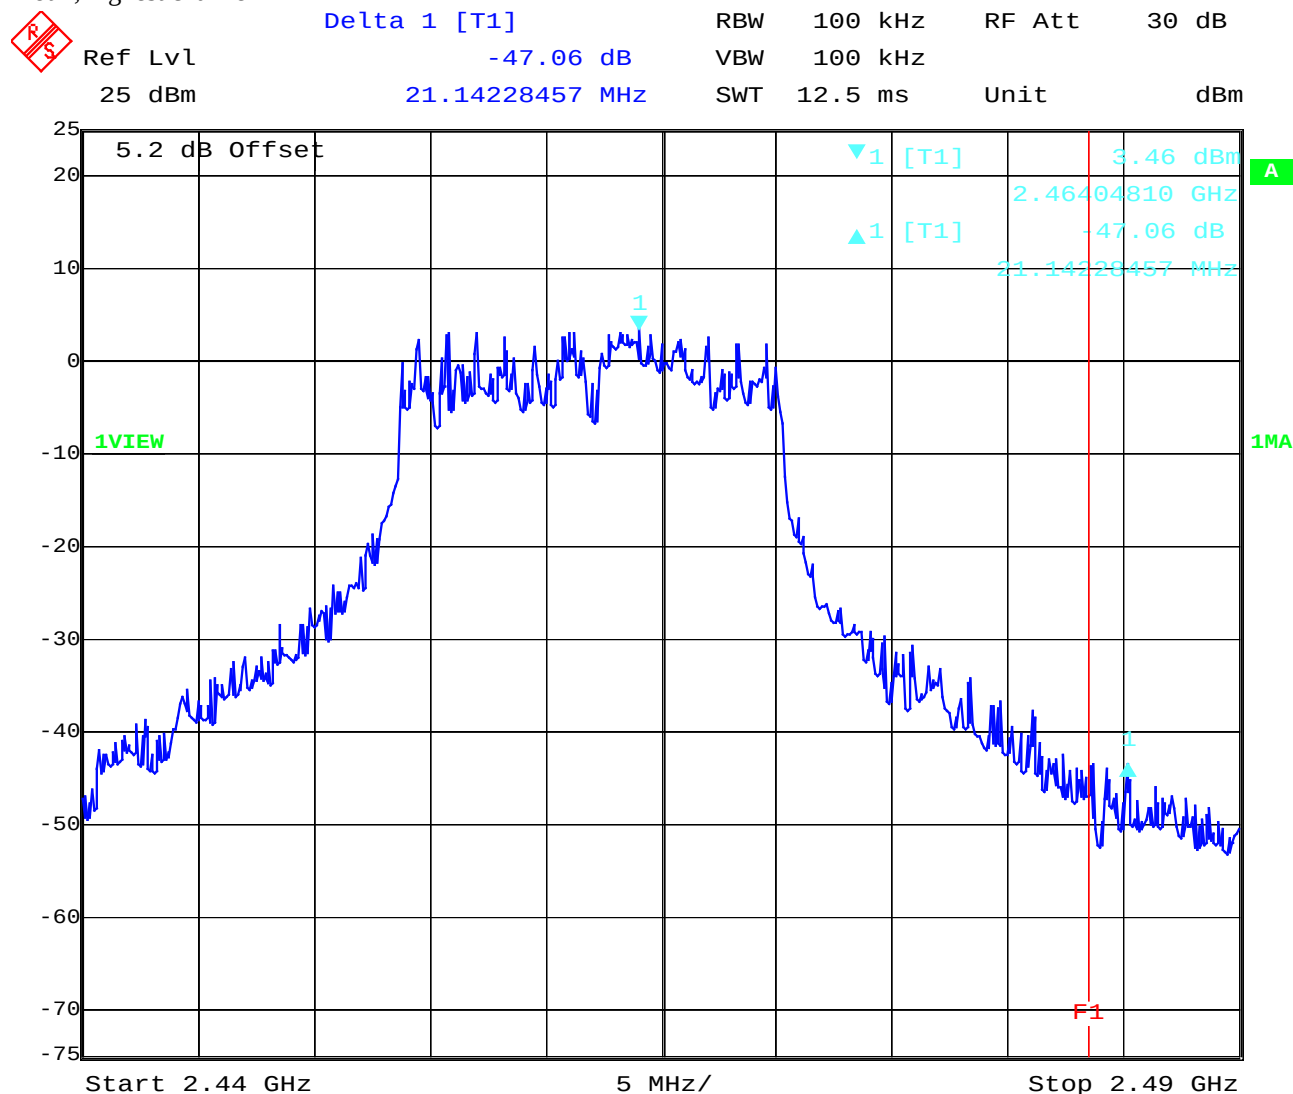

Date: 25.MAR.2004 14:53:52

We used OFDM modulation as this is the worst case regarding used BW.


Limits:

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
-----------------------------------	--

3.10 Band-edge compliance of radiated emissions (DSSS)


§15.205

Plot 1: Low channel 2412 MHz

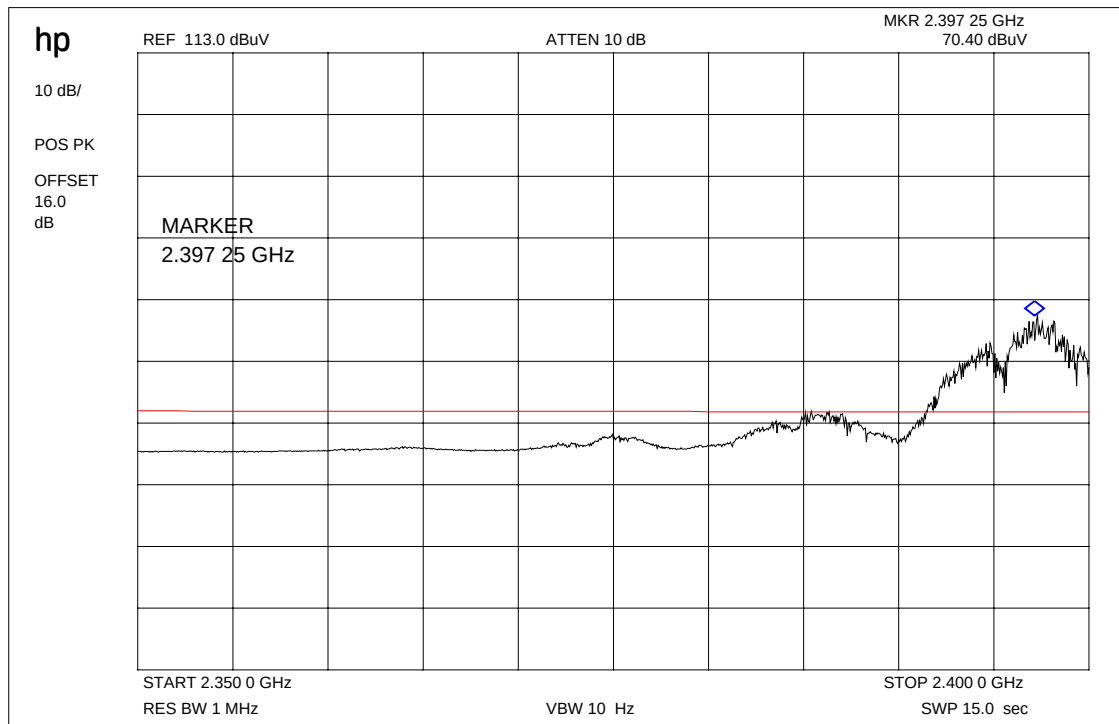

Max value > 20 dBc.

Plot 2 : Max field strength in 3m distance (single frequency) peak

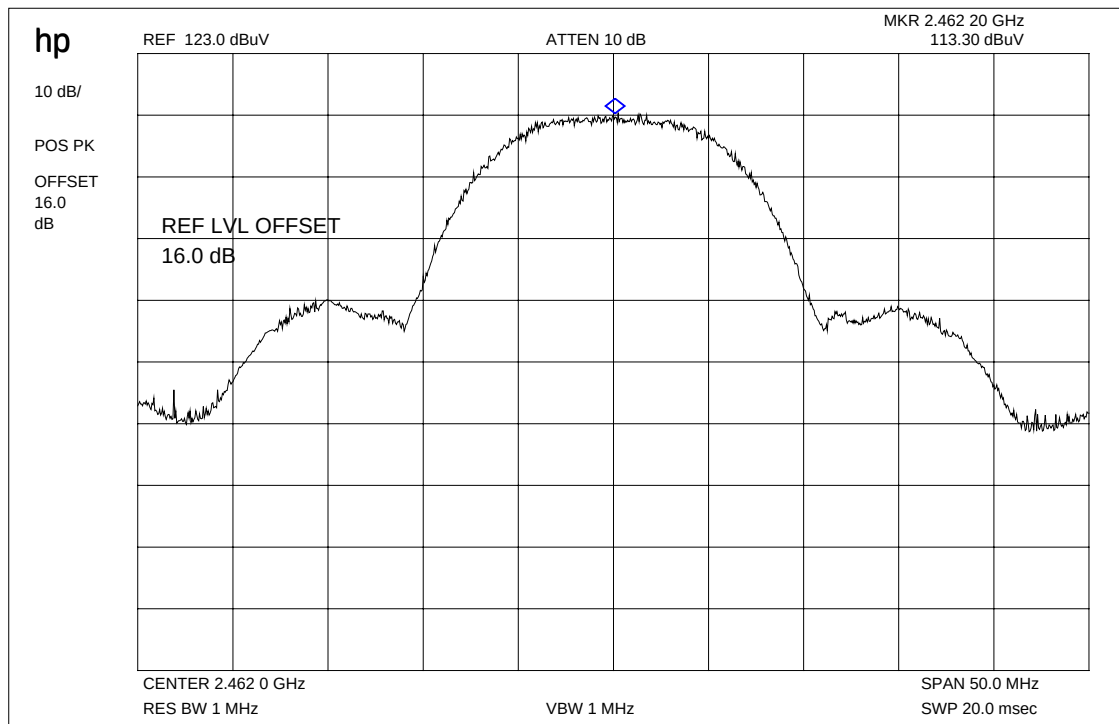

Result:

Frequency		Cable loss	Antenna factor	Results
2462 MHz		22.8 dB	-6.8	113.3 dB μ V/m at 3m

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 36 of 95


Plot 3 : Max field strength in 3m distance (single frequency) average

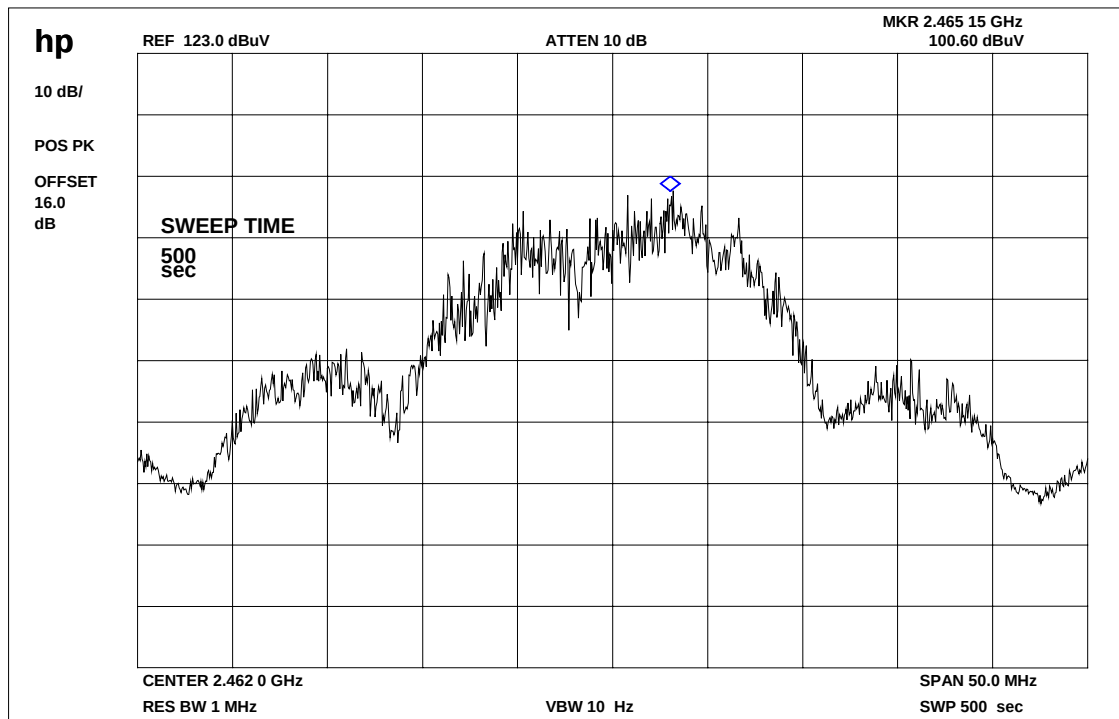

Result:

Frequency	Meter reading	Cable loss	Antenna factor	Results
2462 MHz		22.8 dB	-6.8	100.6 dB μ V/m at 3m

Plot 4: Marker-Delta Method RBW/VBW = 1% of span

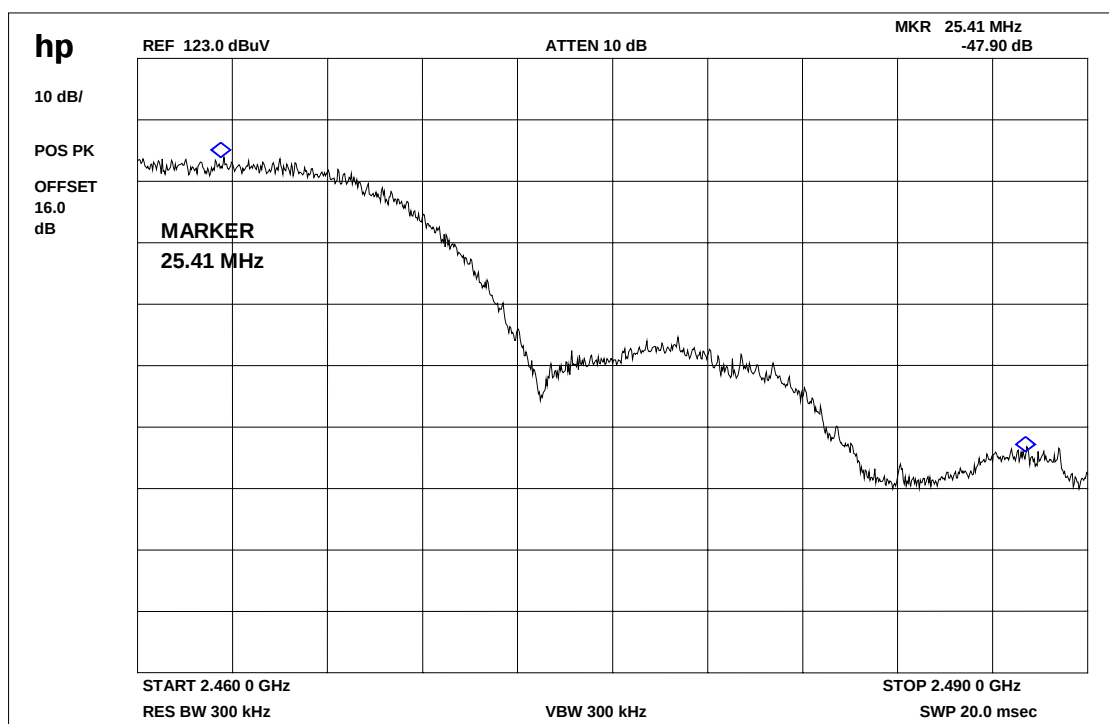

Result:

Marker-Delta-Value : 47.9 dB

This measurement was made to show that the behavior of the system is conform to FCC 15.205 (restricted bands)

Results & Limits:

Radiated field strength


The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

high channel	setup	measured value (3m)	correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW 1 MHz VBW	97.3 dB μ V/m	+16 dB	113.3 dB μ V/m
Max. average value	1 MHz RBW 10 Hz VBW	84.6 dB μ V/m	+16 dB	100.6 dB μ V/m
Delta value	Peak 300 kHz RBW/VBW	47.9 dB		
Value at band edge	limit 54 dB μ V/m			52.7 dB μ V/m
Statement:				Complies

3.11 Band-edge compliance of radiated emissions (OFDM)


§15.205

Plot 1: Low channel 2412 MHz

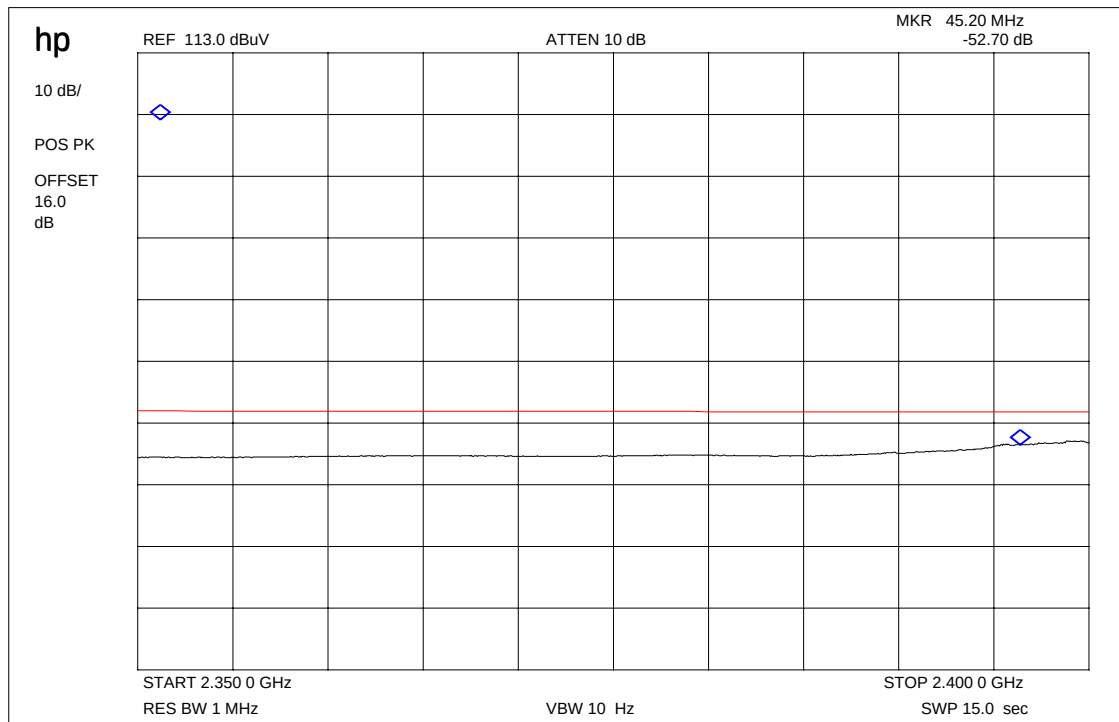

Max value > 20 dBc.


Plot 2 : Max field strength in 3m distance (single frequency) peak

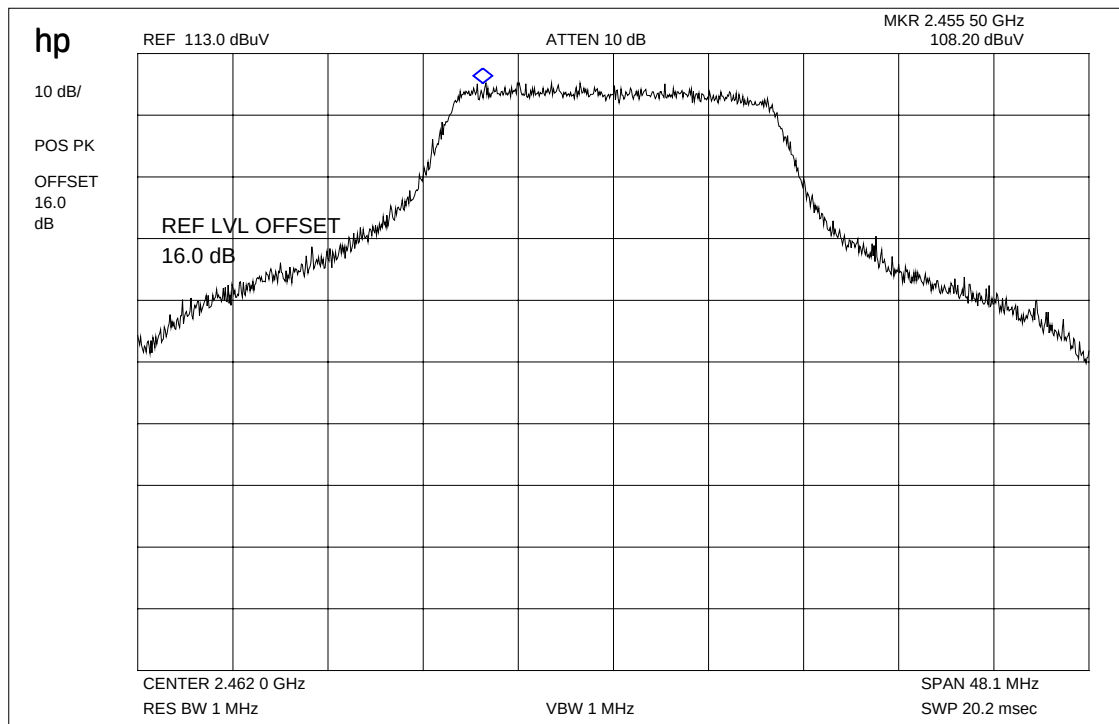

Result:

Frequency		Cable loss	Antenna factor	Results
2462 MHz		22.8 dB	-6.8	108.2 dB μ V/m at 3m


Plot 3 : Max field strength in 3m distance (single frequency) average

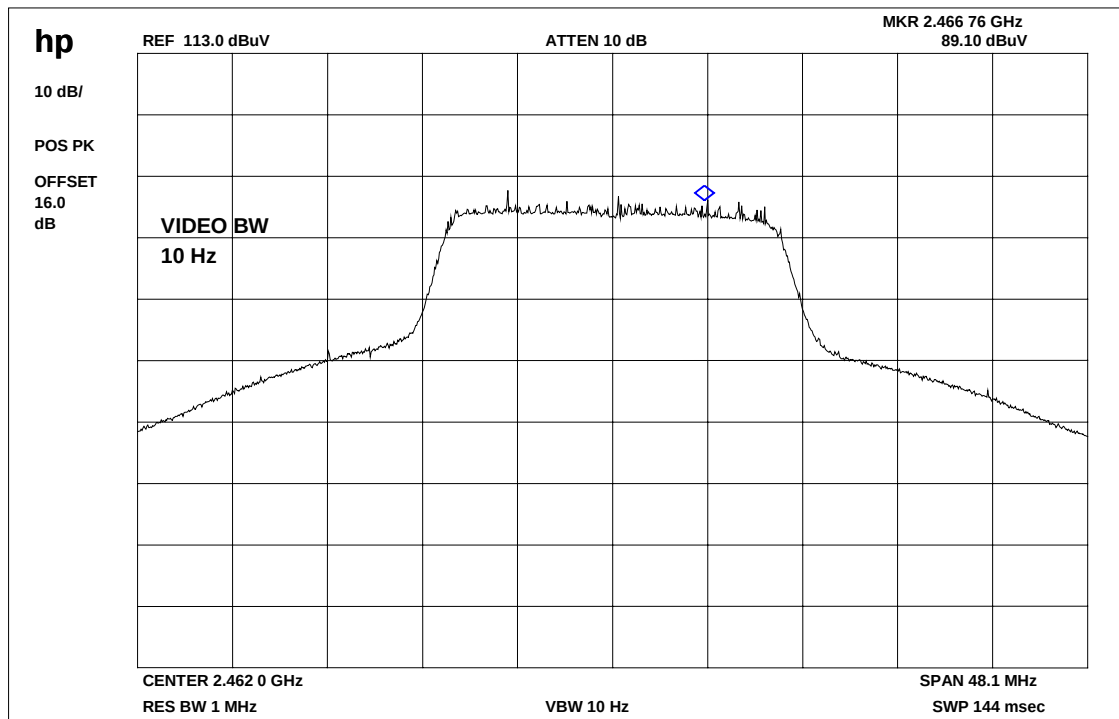

Result:

Frequency	Meter reading	Cable loss	Antenna factor	Results
2462 MHz		22.8 dB	-6.8	89.1 dB μ V/m at 3m

Plot 4: Marker-Delta Method RBW/VBW = 1% of span

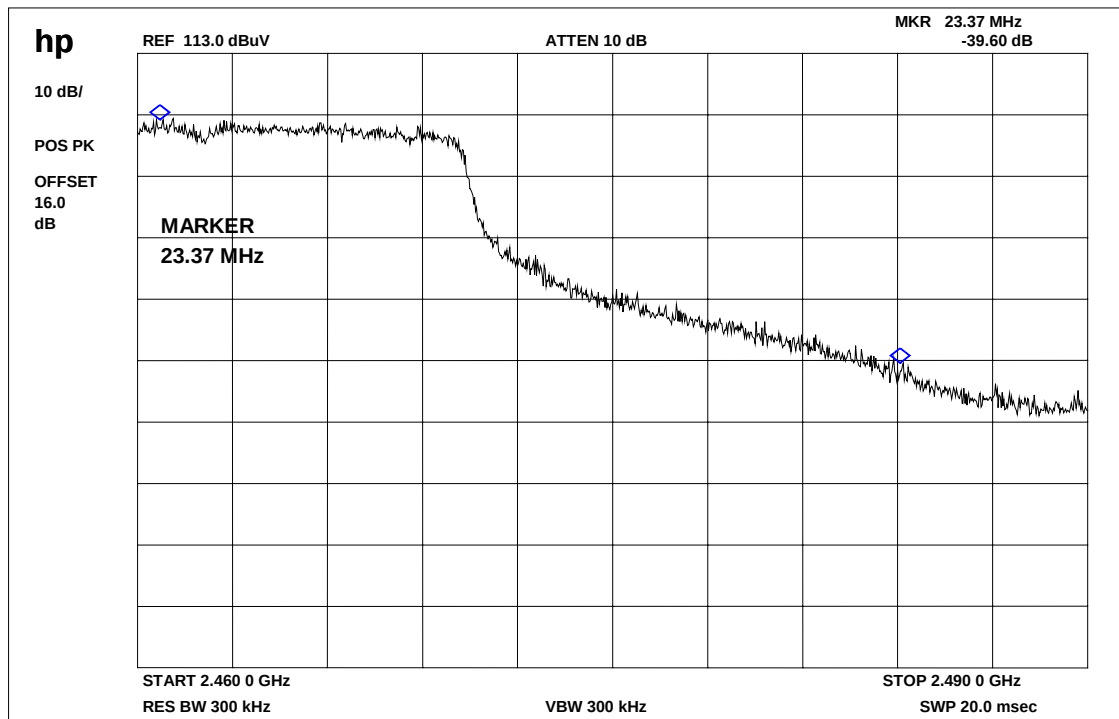

Result:

Marker-Delta-Value : 39.6 dB

This measurement was made to show that the behavior of the system is conform to FCC 15.205 (restricted bands)

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 43 of 95

Results & Limits:

Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

high channel	setup	measured value (3m)	correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW 1 MHz VBW	92.2 dB μ V/m	+16 dB	108.2 dB μ V/m
Max. average value	1 MHz RBW 10 Hz VBW	73.1 dB μ V/m	+16 dB	89.1 dB μ V/m
Delta value	Peak 300 kHz RBW/VBW	39.6 dB		
Value at band edge	limit 54 dB μ V/m			49.5 dB μ V/m
Statement:				Complies

3.12 Spurious Emissions - conducted (Transmitter)

§15.247 (c)

Result & Limits for OFDM (worst case)

Emission Limitations					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emmission power	actual attenuation below frequency of operation [dB]	results
2412		24.32	30 dBm	-	Operating frequency
250.5		-52.1	-20 dBc	76.4	pass
2104.2		-43.5		67.8	pass
2655.3		-33.0		57.3	pass
4809.6		-47.9		72.7	pass
2437		25.72	30 dBm		Operating frequency
2163.4		-36.8	-20 dBc	62.5	pass
2655.3		-38.8		64.5	pass
4859.7		-45.2		70.9	pass
2462		23.72	30 dBm		Operating frequency
2213.5		-44.8	-20 dBc	68.5	pass
2655.3		-43.4		67.1	pass
4909.8		-42.8		66.5	pass
Measurement uncertainty		± 3dB			

RBW : 100 kHz VBW: 100 kHz

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
-----------------------------------	--

Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 45 of 95

2412 MHz OFDM (worst case)

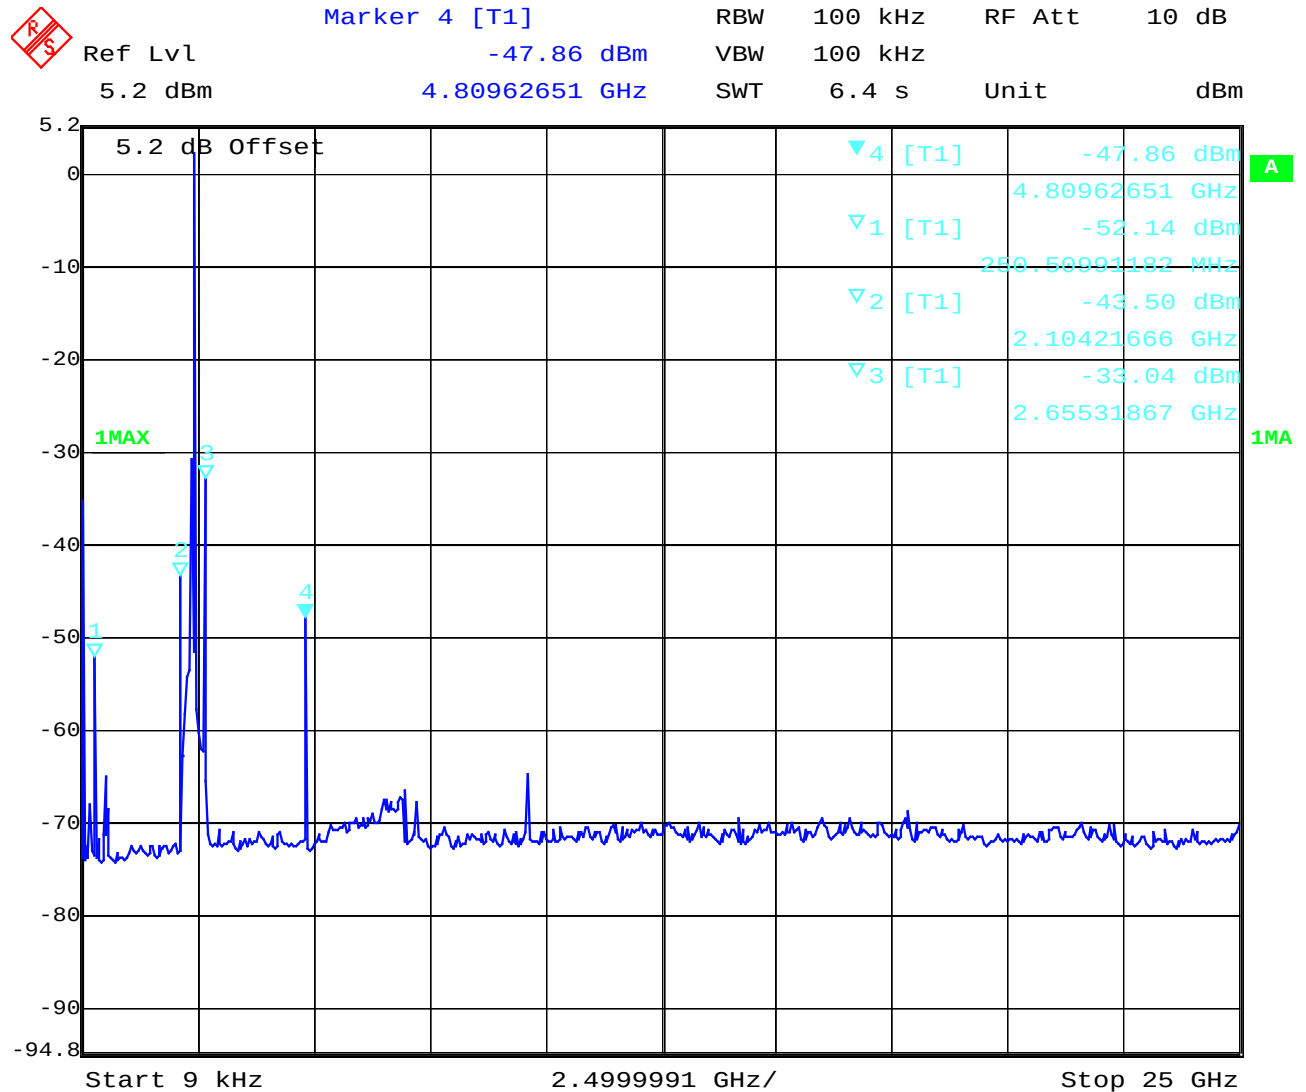

Date: 25.MAR.2004 14:10:12

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 46 of 95

2437 MHz OFDM (worst case)

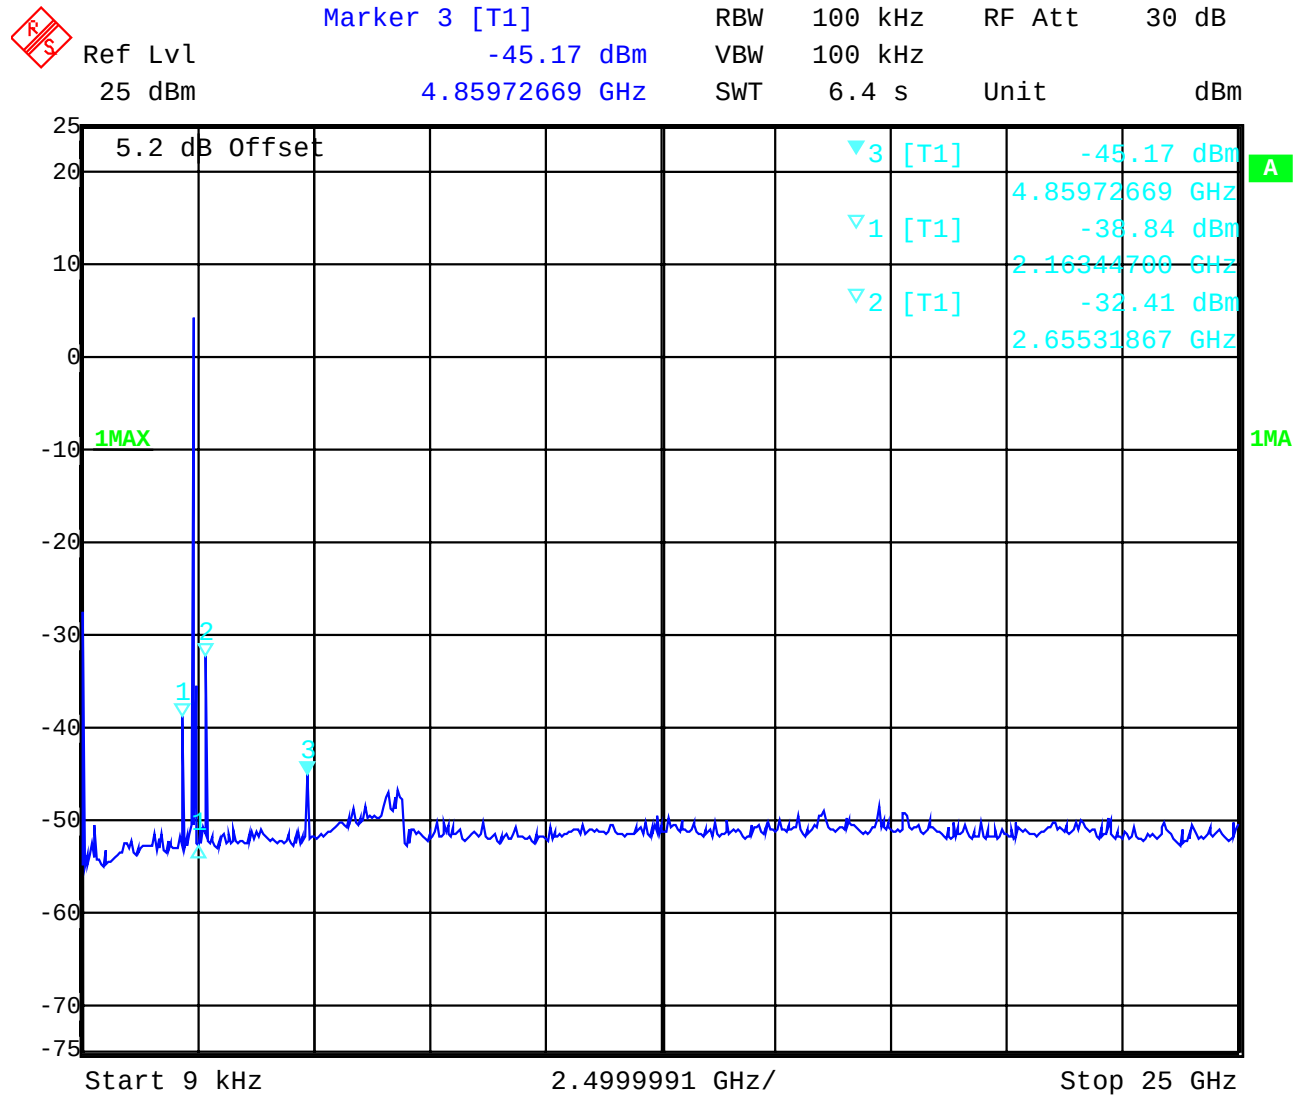

Date: 25.MAR.2004 15:20:53

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 47 of 95

2462 MHz OFDM (worst case)

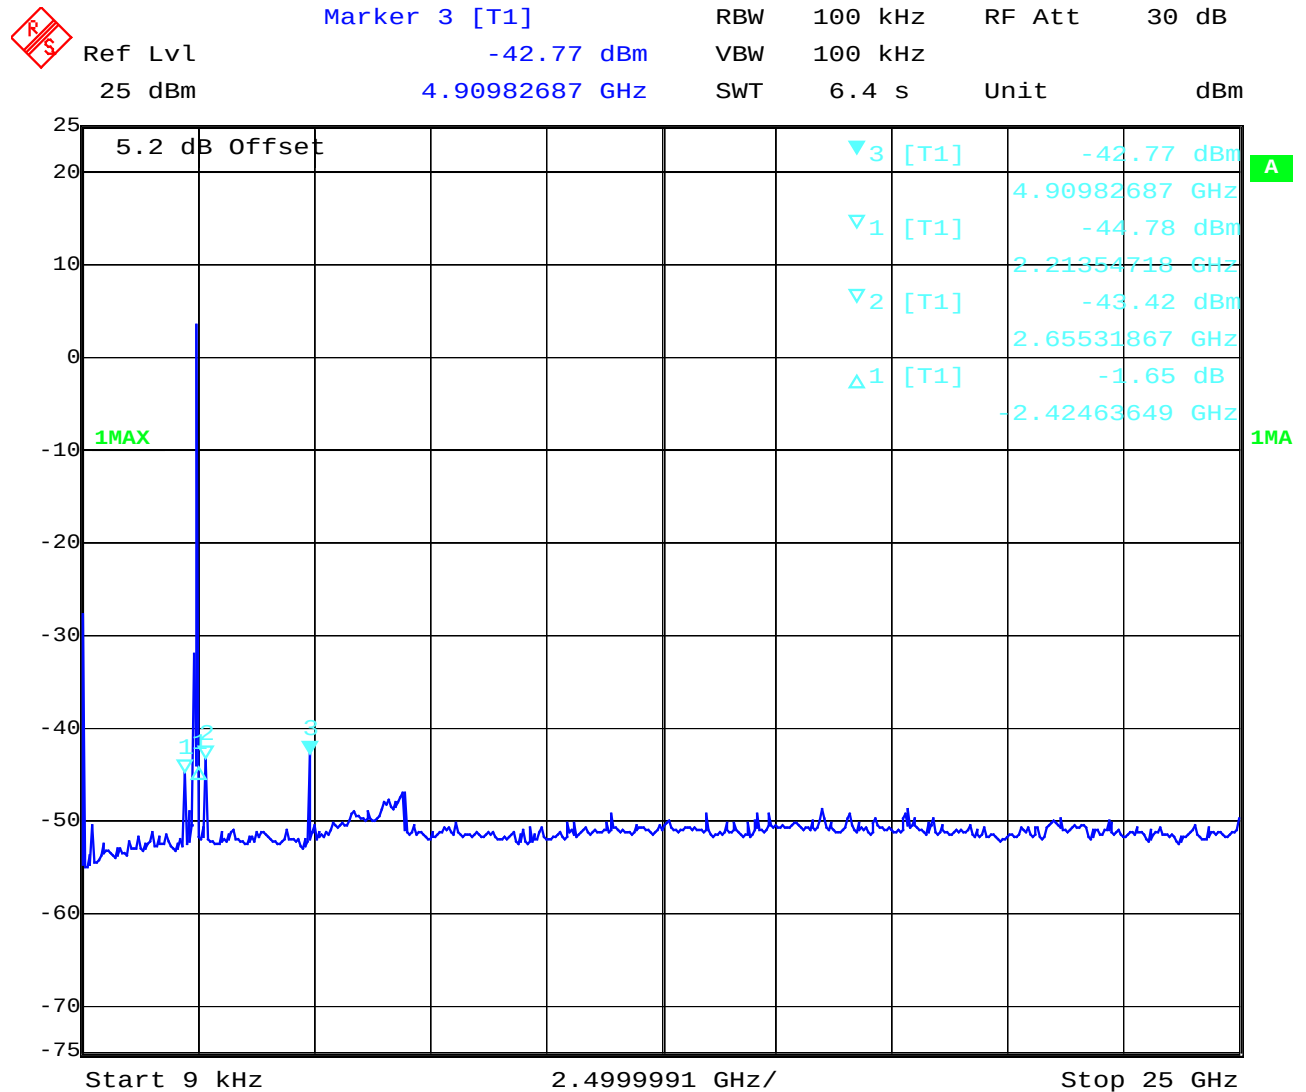


Date: 25.MAR.2004 15:25:11

3.13 Spurious Emissions - radiated (Transmitter) (Antenna 1)

§15.209

Measurements were made in OFDM mode (worst case)

Plot 1: 0.03 - 4 GHz vertical / horizontal (lowest channel)

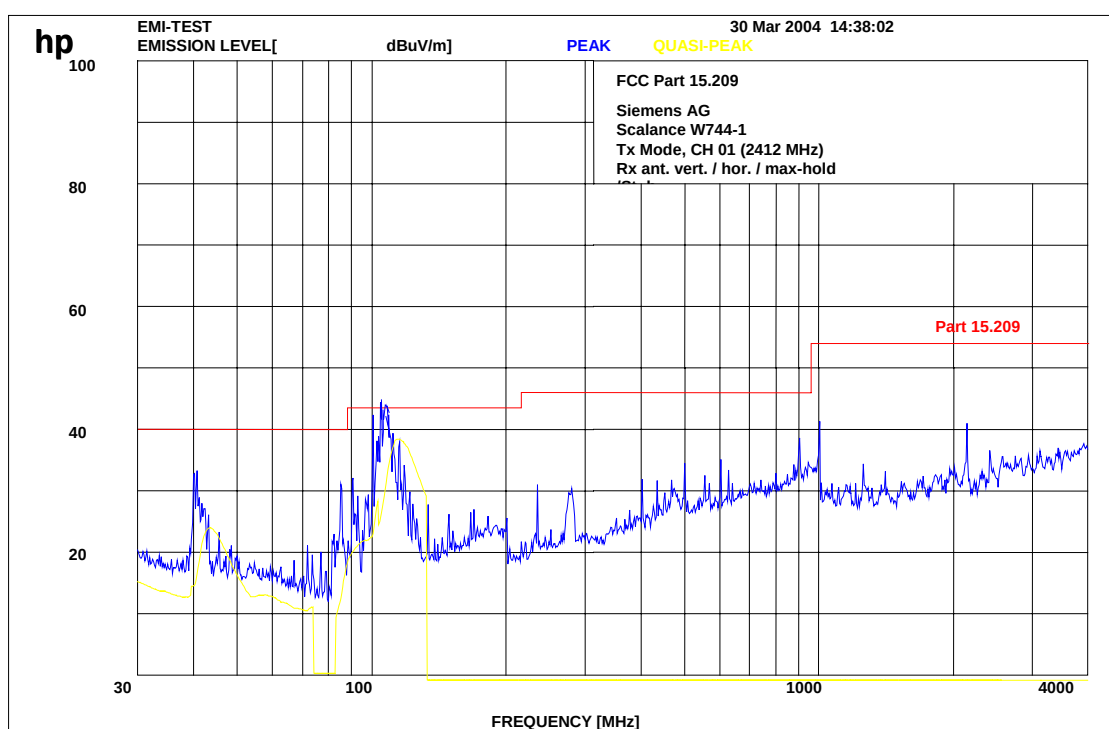

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 5-4456-01-04c/04


Date: 2004-04-27

Page 49 of 95


Plot 2: 4- 12 GHz (lowest channel)

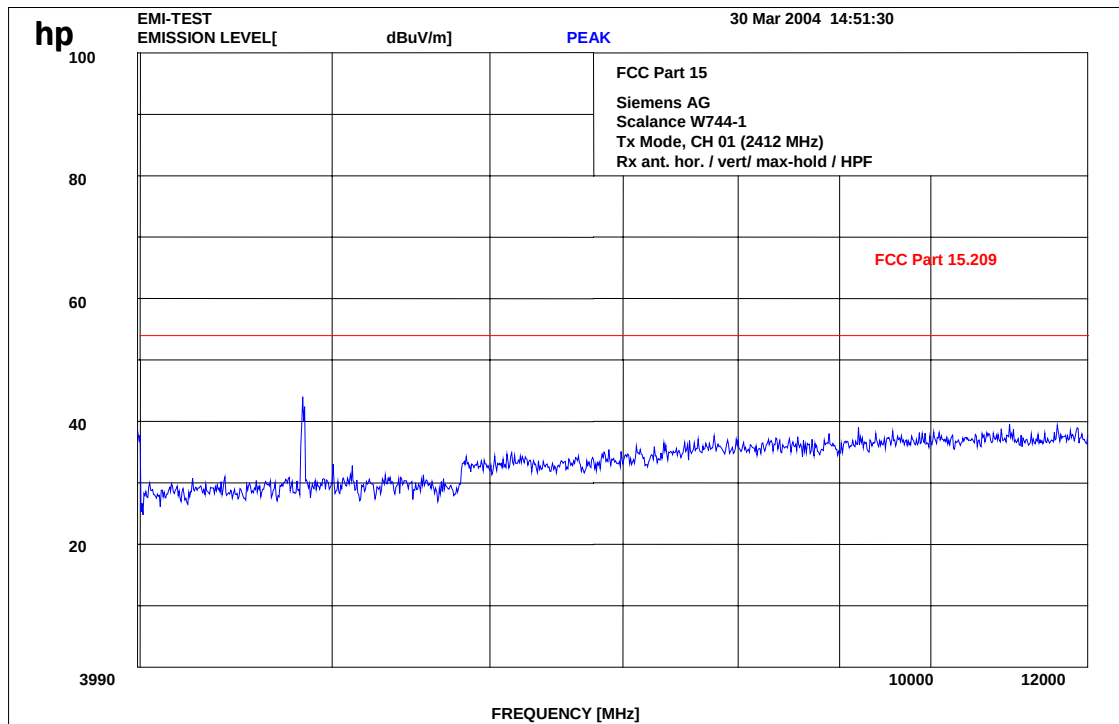

Plot 3: 12 – 25 GHz horizontal / vertical (valid for all three channels)

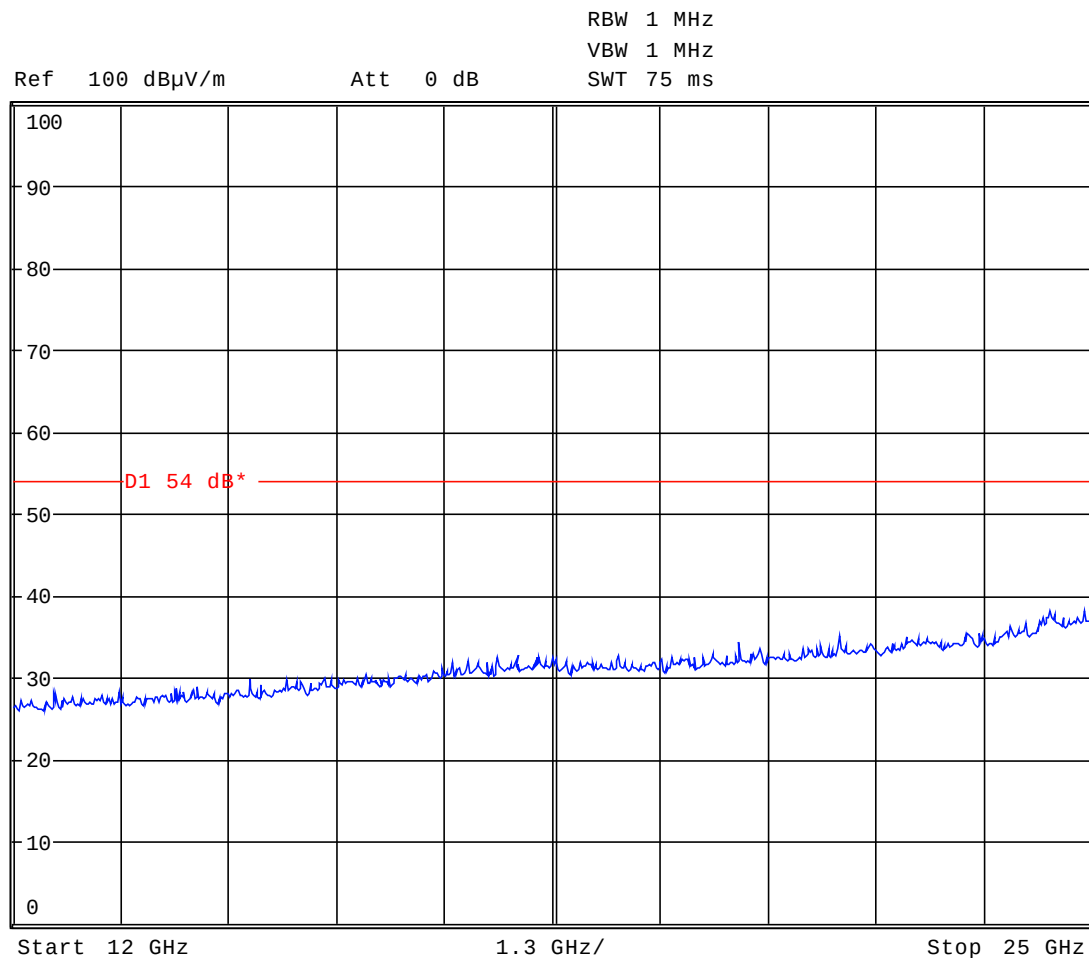

Plot 4: 0.03 - 4 GHz vertical / horizontal (middle channel)

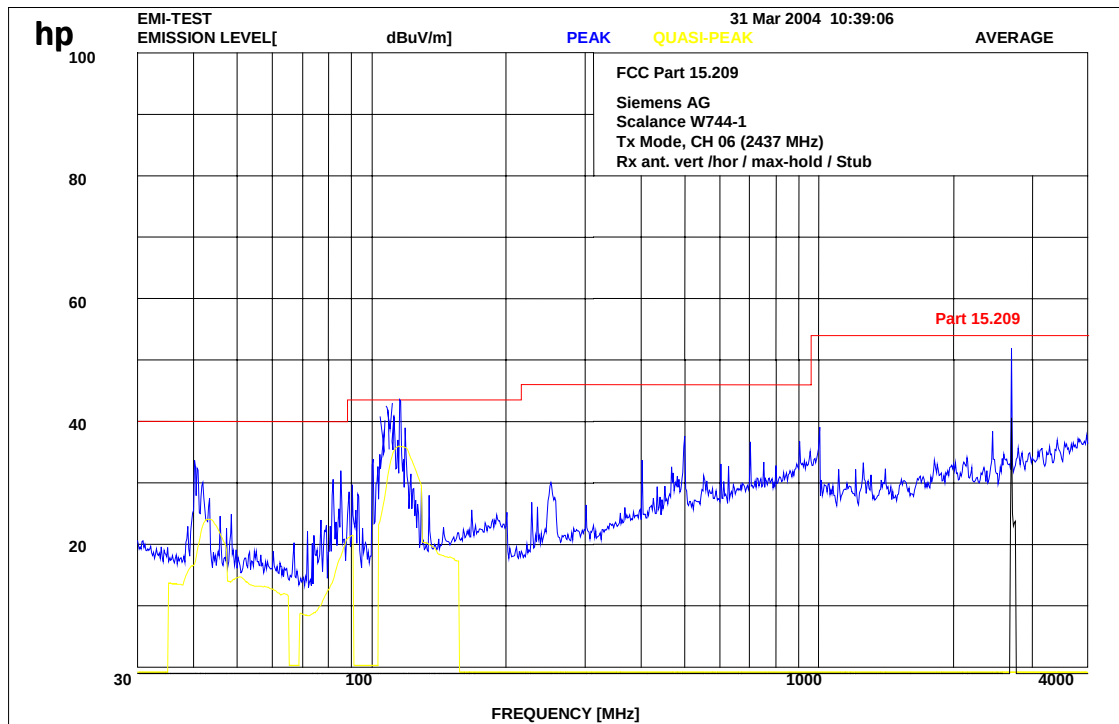

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 5-4456-01-04c/04


Date: 2004-04-27

Page 52 of 95

Plot 5: 4- 12 GHz (middle channel)

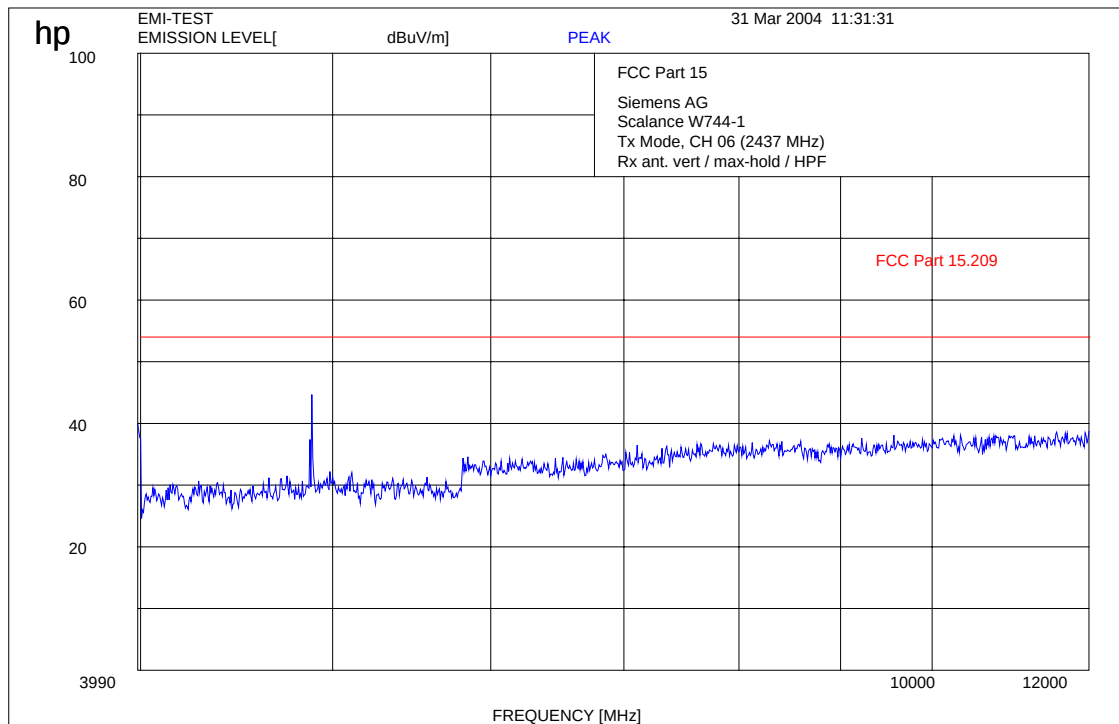

Plot 6: 0.03 - 4 GHz vertical / horizontal (highest channel)

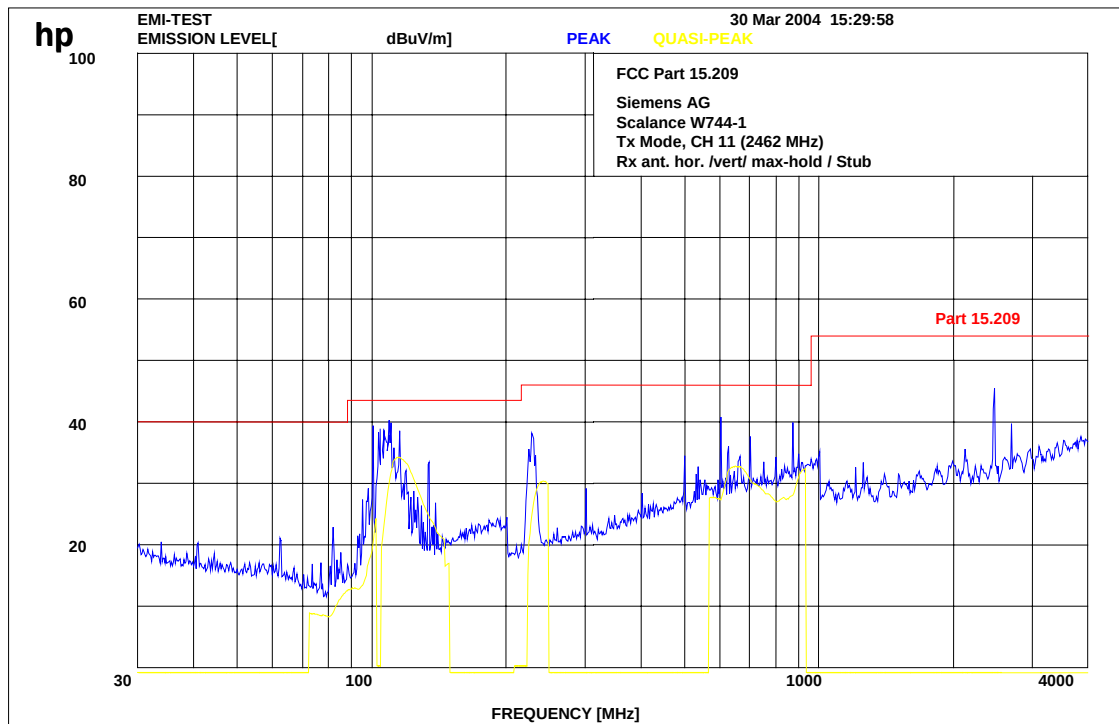

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 54 of 95

Plot 7: 4- 12 GHz (highest channel)

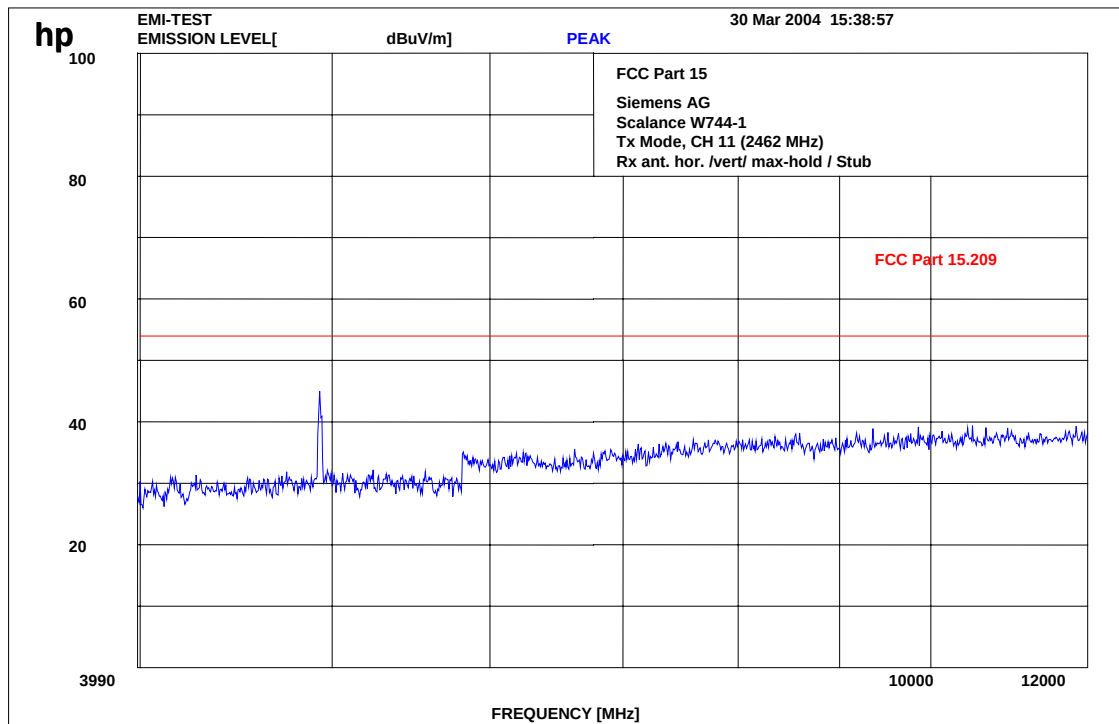

Results: (yellow line on the plots)

SPURIOUS EMISSIONS LEVEL §15.209								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
100.8	QP	24.3	100.8	QP	24.3	100.8	QP	24.3
107.4	QP	34.2	107.4	QP	34.2	107.4	QP	34.2
228.0	QP	30.4	228.0	QP	30.4	228.0	QP	30.4
603.3	QP	32.8	603.3	QP	32.8	603.3	QP	32.8
4824	Peak	43.6	4874	Peak	47.0	4924.0	Peak	46.2
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Limits: § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limits: § 15.209


Frequency [MHz]	Field strength [µV/m]	Measurement distance (m)
30 - 88	100 (40 dBµV/m)	3
88 - 216	150 (43.5 dBµV/m)	3
216 - 960	200 (46 dBµV/m)	3
above 960	500 (54 dBµV/m)	3

3.14 Spurious Emissions - radiated (Transmitter) (Antenna 2)

§15.209


Measurements were made in OFDM mode (worst case)

Plot 1: 0.03 - 4 GHz vertical / horizontal (lowest channel)

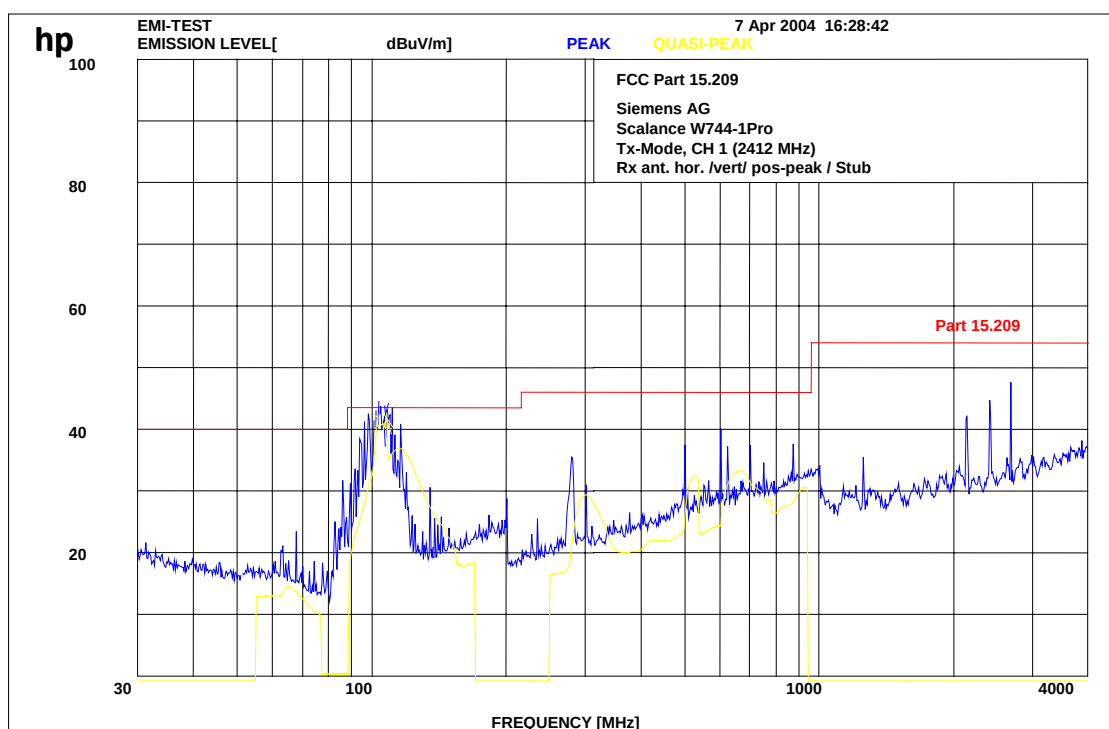


Carrier suppressed with a tunable filter to avoid overload of the preamp.


Plot 2: 4- 12 GHz (lowest channel)

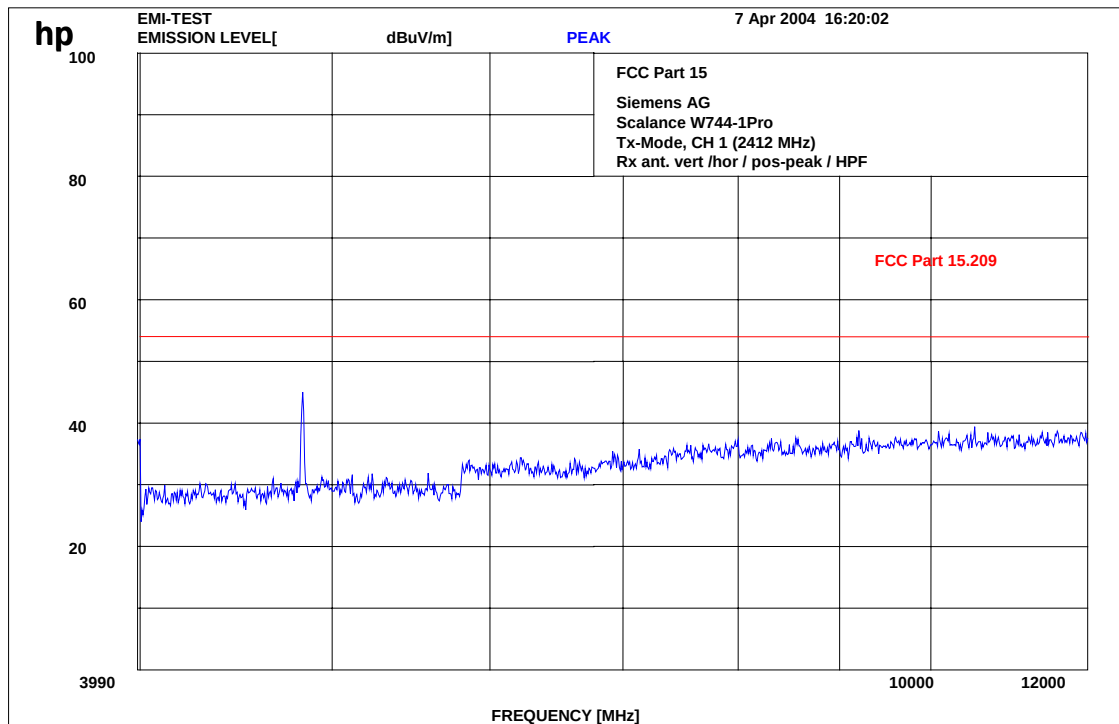

Plot 3: 12 – 25 GHz horizontal / vertical (valid for all three channels)

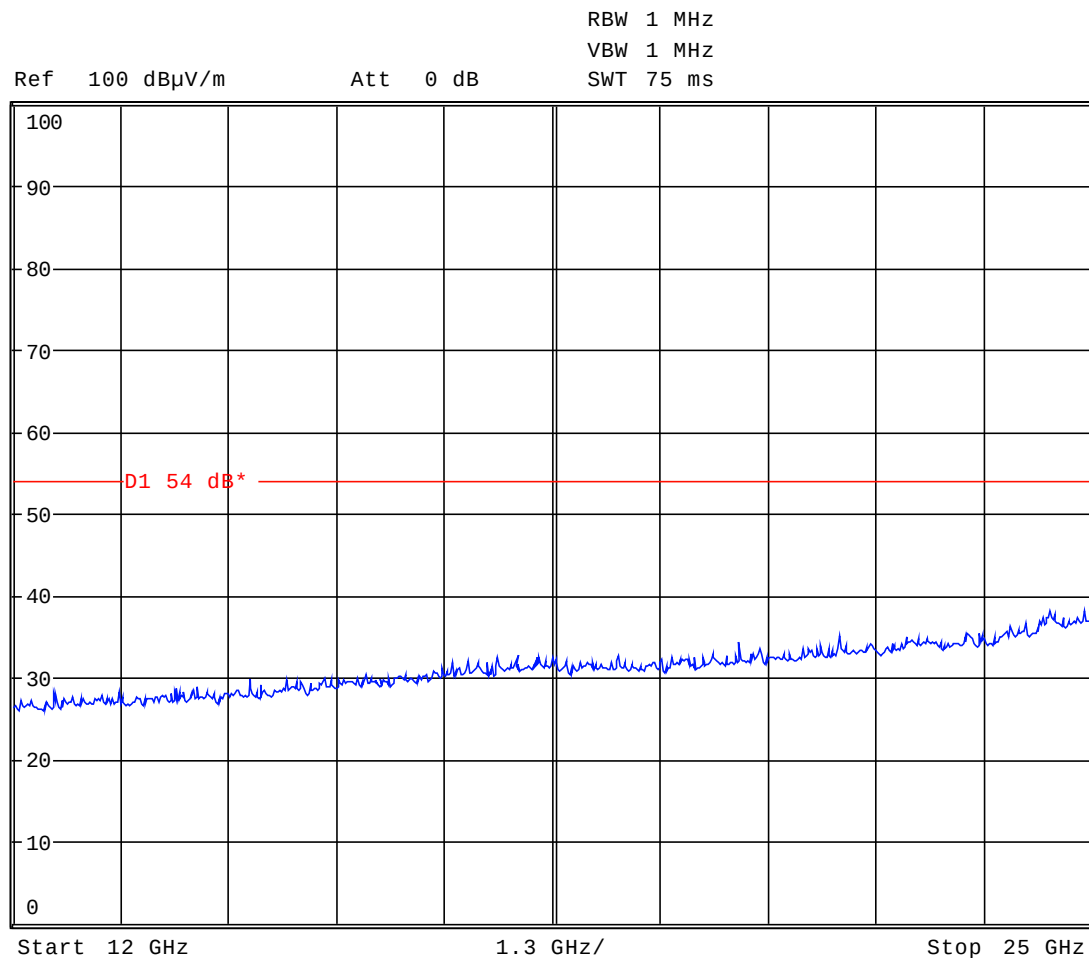

Plot 4: 0.03 - 4 GHz vertical / horizontal (middle channel)

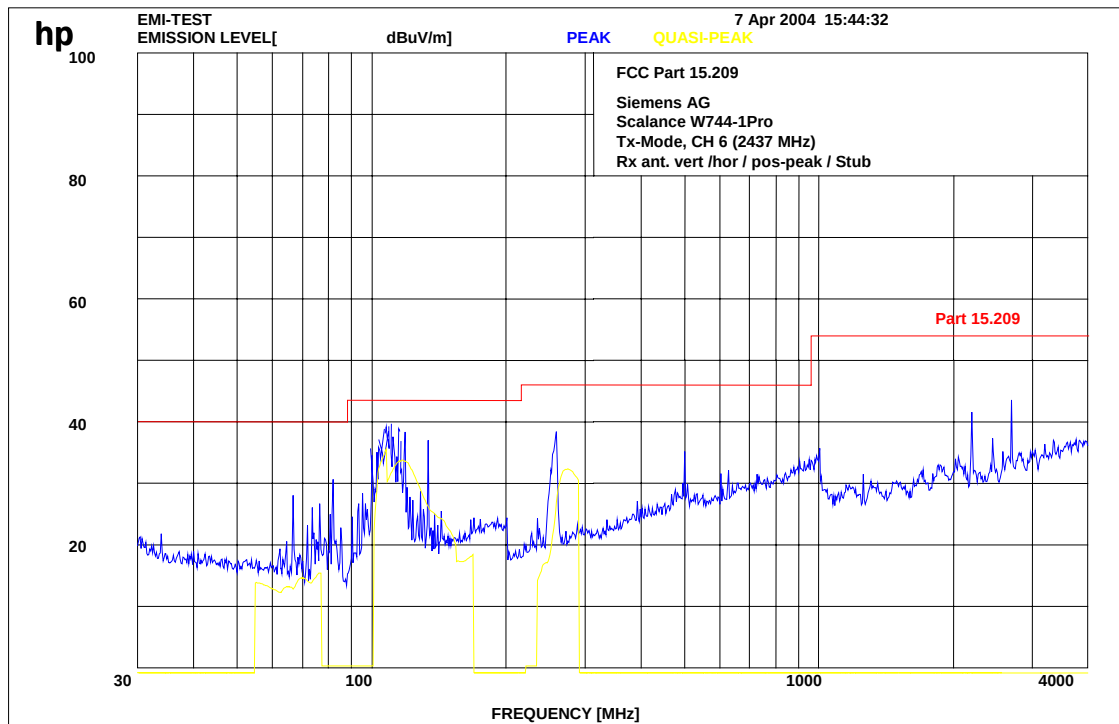

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 5-4456-01-04c/04


Date: 2004-04-27

Page 60 of 95

Plot 5: 4- 12 GHz (middle channel)

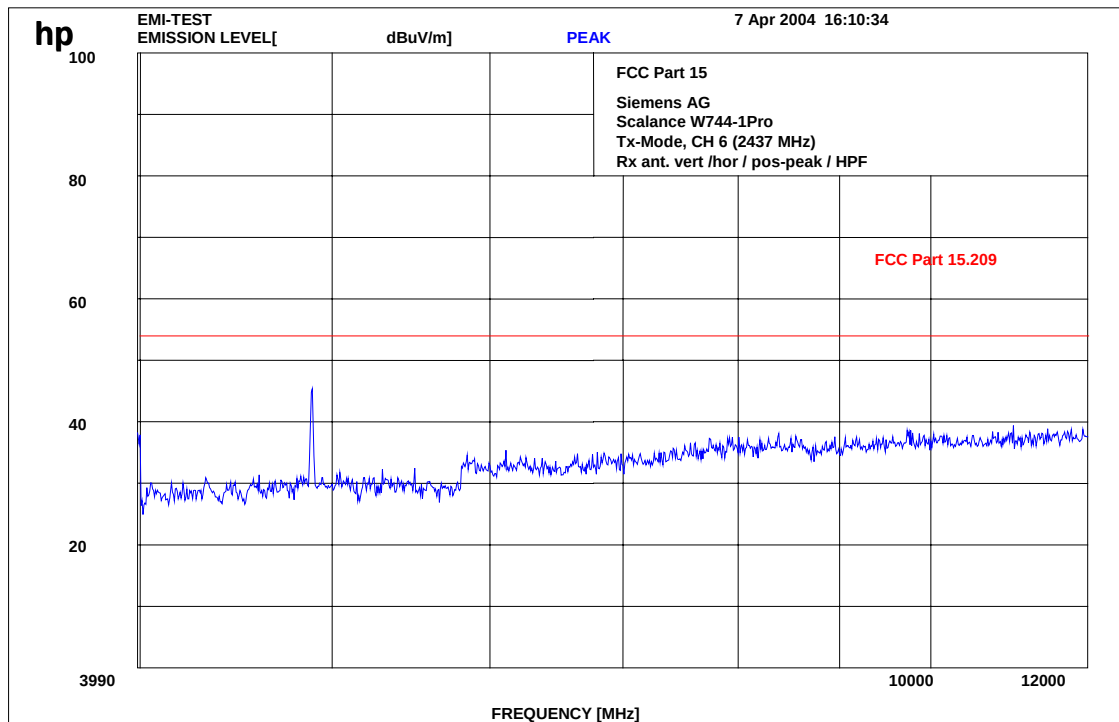

Plot 6: 0.03 - 4 GHz vertical / horizontal (highest channel)

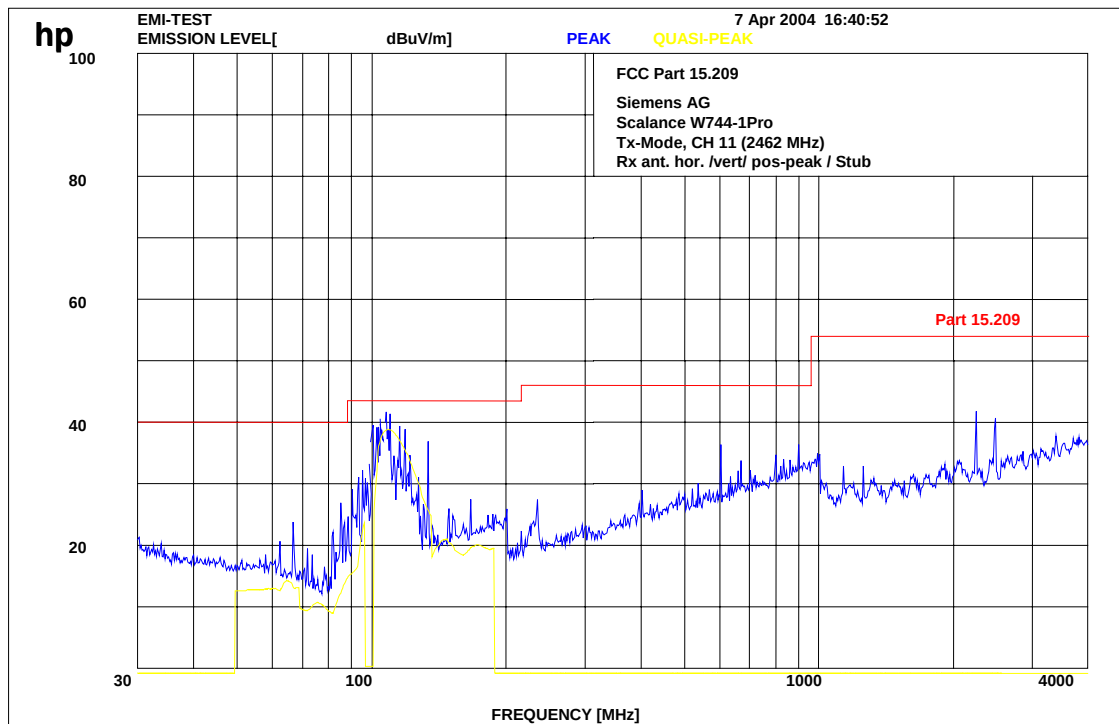

Carrier suppressed with a tunable filter to avoid overload of the preamp.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 62 of 95

Plot 7: 4- 12 GHz (highest channel)

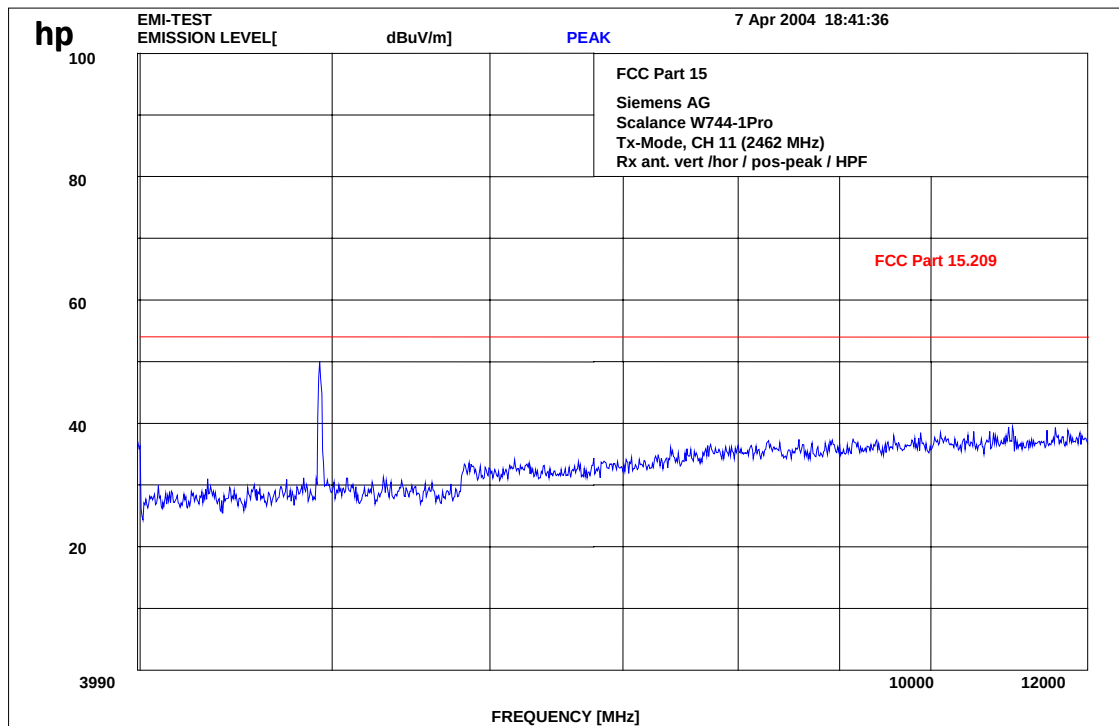

Results: (yellow line on the plots)

SPURIOUS EMISSIONS LEVEL §15.209								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
100.8	QP	40.1	100.8	QP	35.2			
107.4	QP	42.4	107.4	QP	34.6	107.4	QP	38.6
276.0	QP	36.2	276.0	QP	33.4			
603.3	QP	33.2				603.3	QP	30.8
4824	Peak	45.8	4874	Peak	46.3	4924.0	Peak	50.4
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Limits: § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limits: § 15.209


Frequency [MHz]	Field strength [µV/m]	Measurement distance (m)
30 - 88	100 (40 dBµV/m)	3
88 - 216	150 (43.5 dBµV/m)	3
216 - 960	200 (46 dBµV/m)	3
above 960	500 (54 dBµV/m)	3

3.15 Spurious Emissions - radiated (Receiver) (Antenna 1)

§15.109 / 209

Measurements were made in OFDM mode (worst case)

Plot 1: 0.03 - 4 GHz vertical / horizontal (receiver)

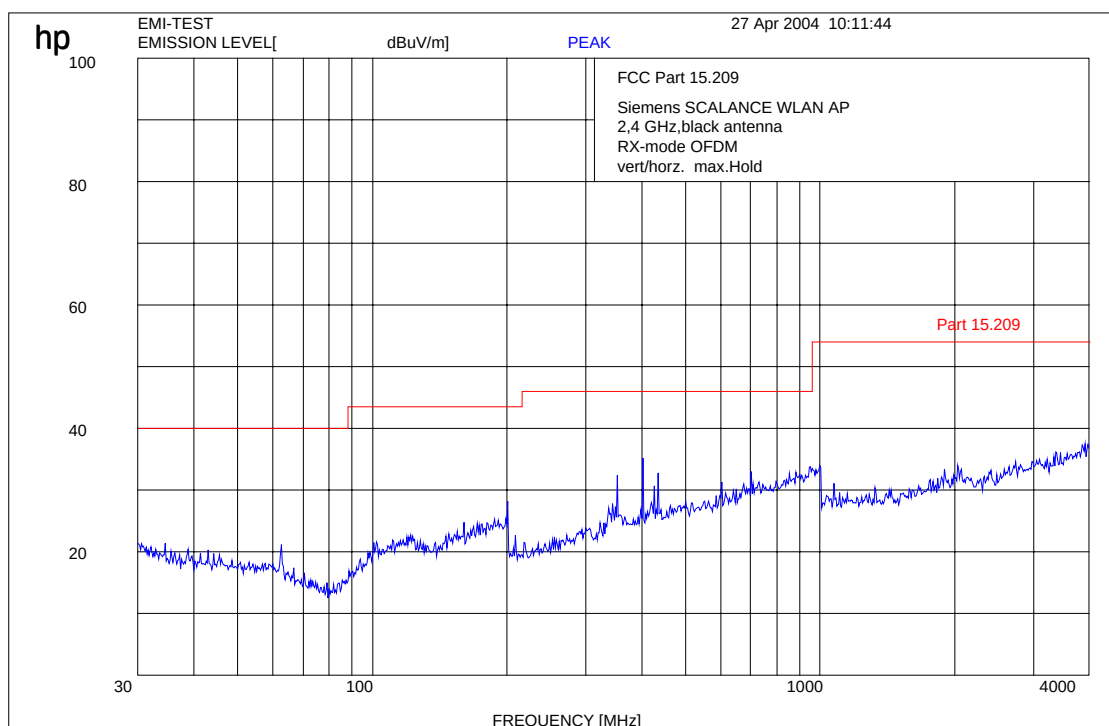

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 65 of 95

Plot 2: 4- 12 GHz (receiver)

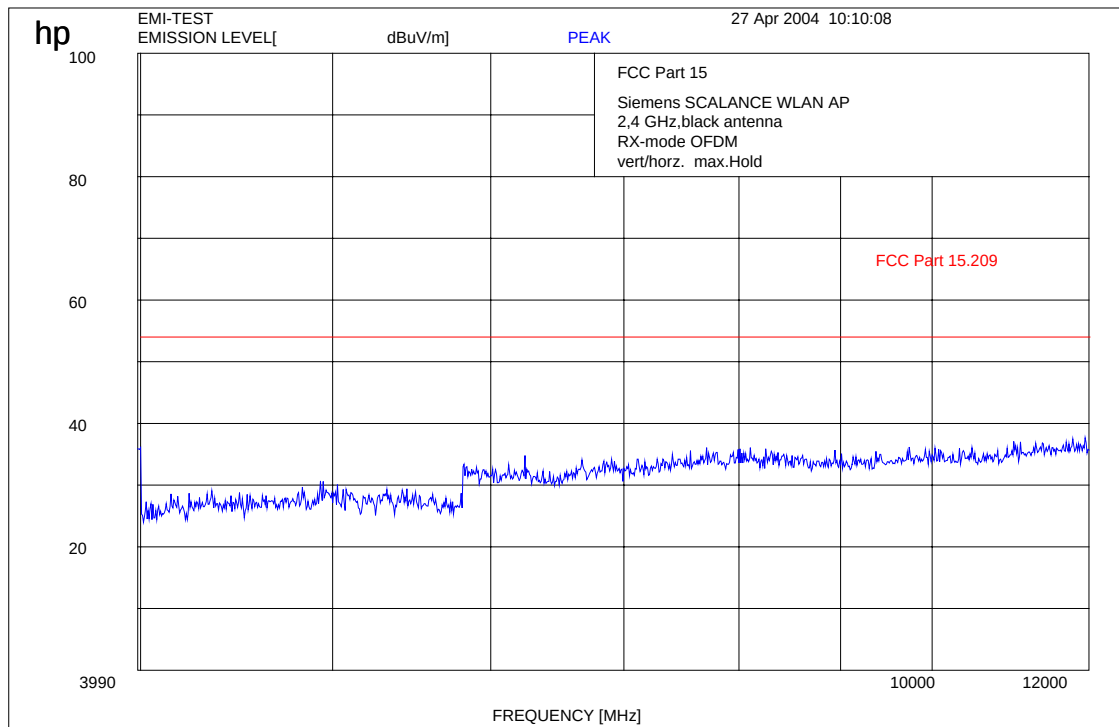

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 66 of 95

Plot 3: 12- 25 GHz (receiver)

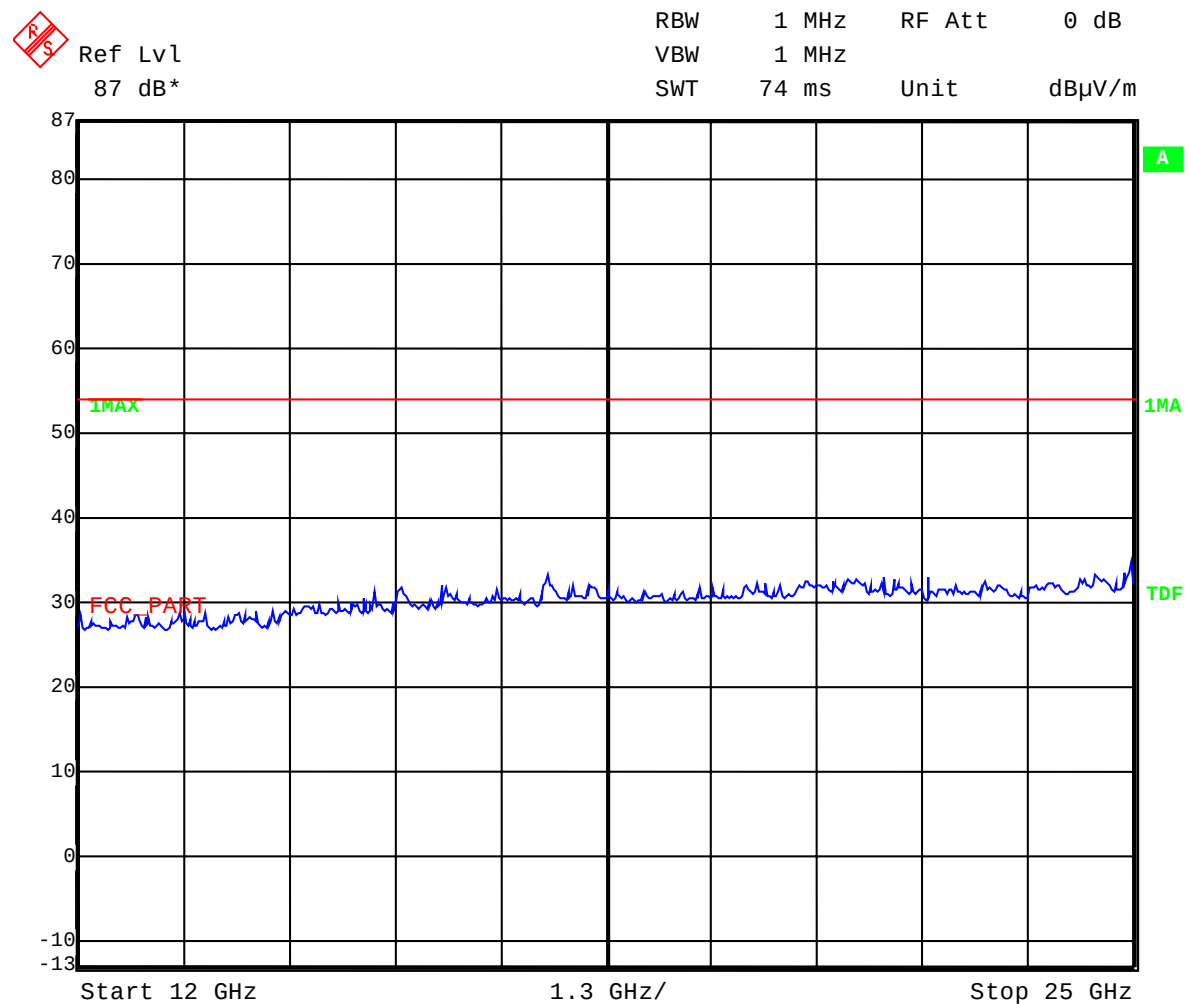

Results:

Spurious Emissions level [$\mu\text{V/m}$]								
CH 1 / 2 / 3								
f[MHz]	Detector	Level [$\mu\text{V/m}$]	f[MHz]	Detector	Level [$\mu\text{V/m}$]	f[MHz]	Detector	Level [$\mu\text{V/m}$]
no	peaks	found	< 15 dB	below	limit			
Measurement uncertainty			± 3 dB					

f < 1 GHz : RBW/VBW: 100 kHz
see above plots

f $\geq$ 1GHz : RBW/VBW: 1 MHz

Measurement distance see table

Limits : § 15.109 / 209


Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
30 - 88	100 (40 dB $\mu\text{V/m}$)	3
88 - 216	150 (43.5 dB $\mu\text{V/m}$)	3
216 - 960	200 (46 dB $\mu\text{V/m}$)	3
above 960	500 (54 dB $\mu\text{V/m}$)	3

3.16 Spurious Emissions - radiated (Receiver) (Antenna 2)

§15.109 / 209

Measurements were made in OFDM mode (worst case)

Plot 1: 0.03 - 4 GHz vertical / horizontal (receiver)

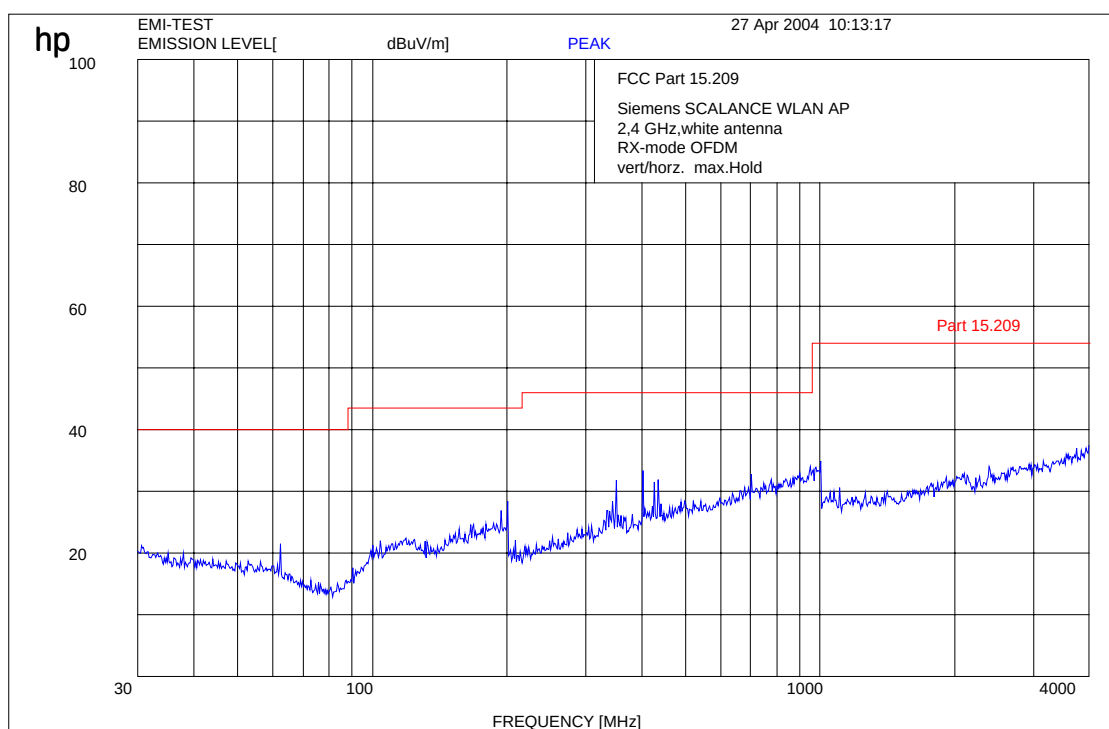

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 69 of 95

Plot 2: 4- 12 GHz (receiver)

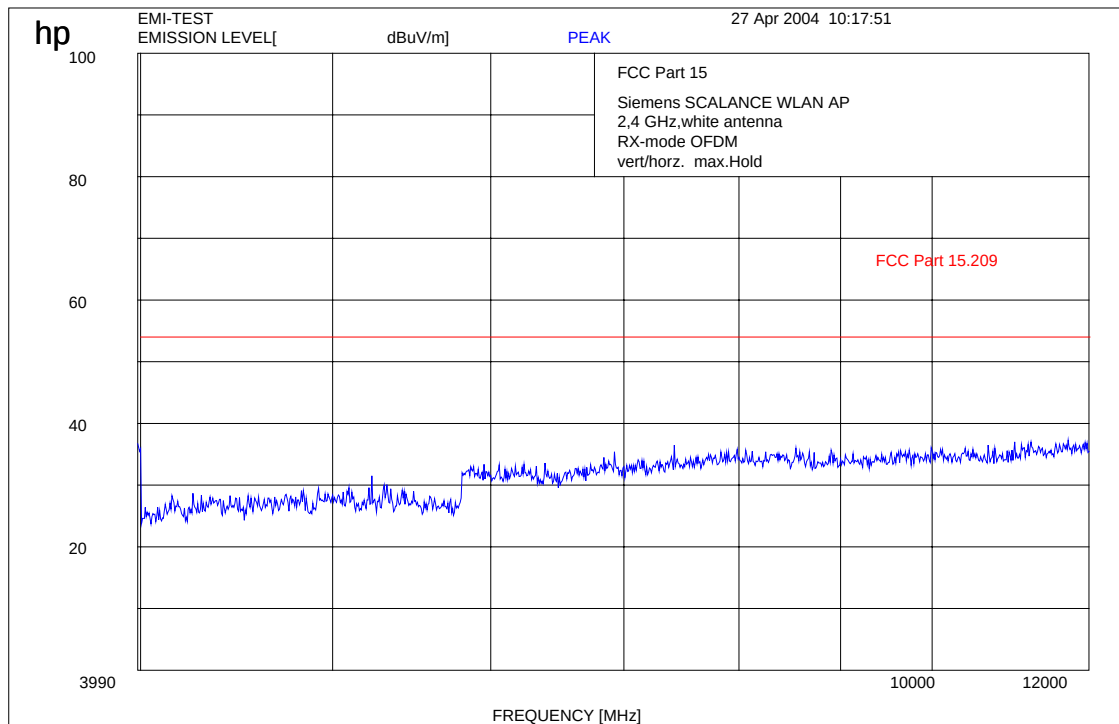

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 70 of 95

Plot 3: 12- 25 GHz (receiver)

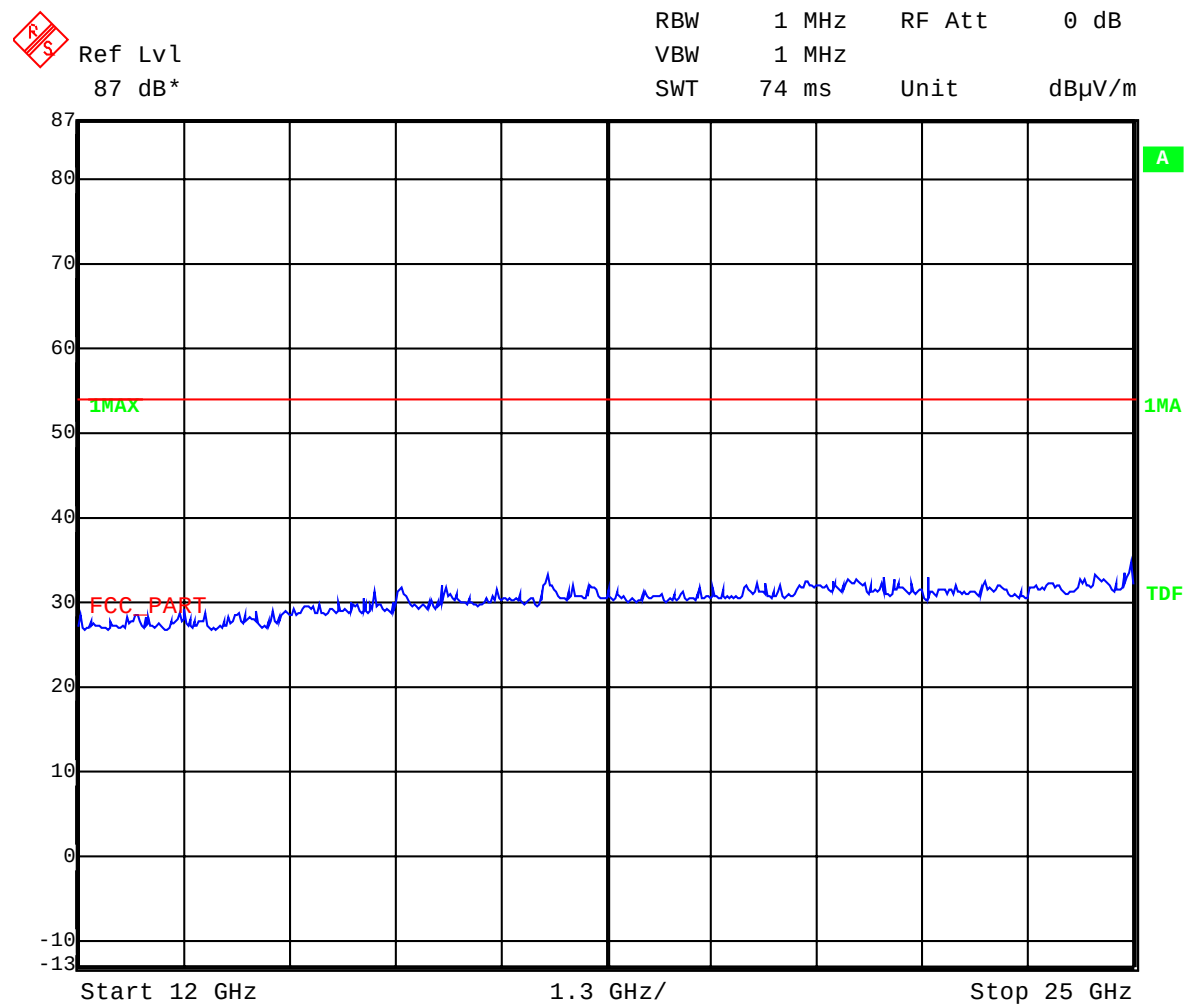

Results:

Spurious Emissions level [$\mu\text{V/m}$]								
CH 1 / 2 / 3								
f[MHz]	Detector	Level [$\mu\text{V/m}$]	f[MHz]	Detector	Level [$\mu\text{V/m}$]	f[MHz]	Detector	Level [$\mu\text{V/m}$]
no	peaks	found	< 15 dB	below	limit			
Measurement uncertainty			$\pm 3 \text{ dB}$					

f < 1 GHz : RBW/VBW: 100 kHz
see above plots

f $\geq$ 1GHz : RBW/VBW: 1 MHz

Measurement distance see table

Limits : § 15.109 / 209


Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
30 - 88	100 (40 dB $\mu\text{V/m}$)	3
88 - 216	150 (43.5 dB $\mu\text{V/m}$)	3
216 - 960	200 (46 dB $\mu\text{V/m}$)	3
above 960	500 (54 dB $\mu\text{V/m}$)	3

3.17 Spurious Emissions - radiated <30 MHz (valid for both antenna types) §15.109 (measured with a 110V AC power supply from our house as the product is delivered without any power supply.)

Measured at 3 m distance.

Values recalculated with 40 dB/decade according to FCC rules.

Plot 1:

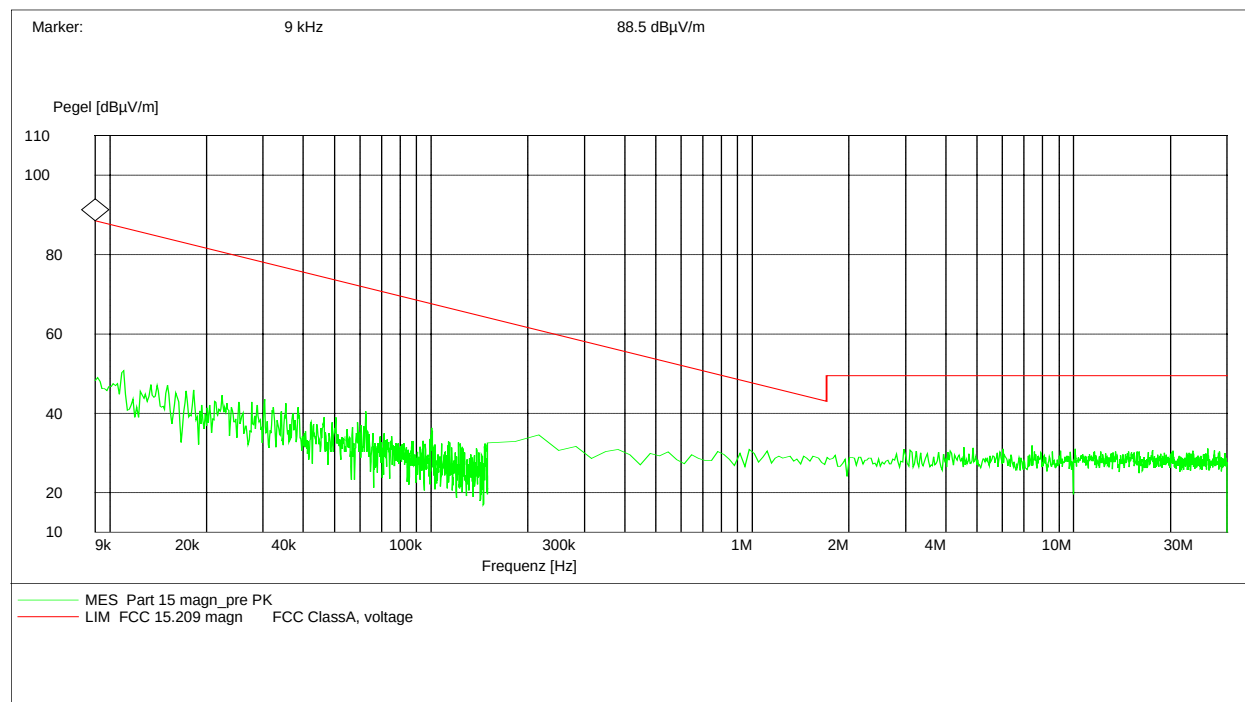

Limits:


Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30
30 - 88	100 / 40 dBµV/m	3
88 - 216	150 / 43.5 dBµV/m	3
216 - 960	200 / 46 dBµV/m	3
above 960	54 dBµV/m	3

3.15 Conducted Emissions <30 MHz

§15.107/207

(measured with a 110V AC power supply from our house as the product is delivered without any power supply.)

Plot 1: CISPR 22

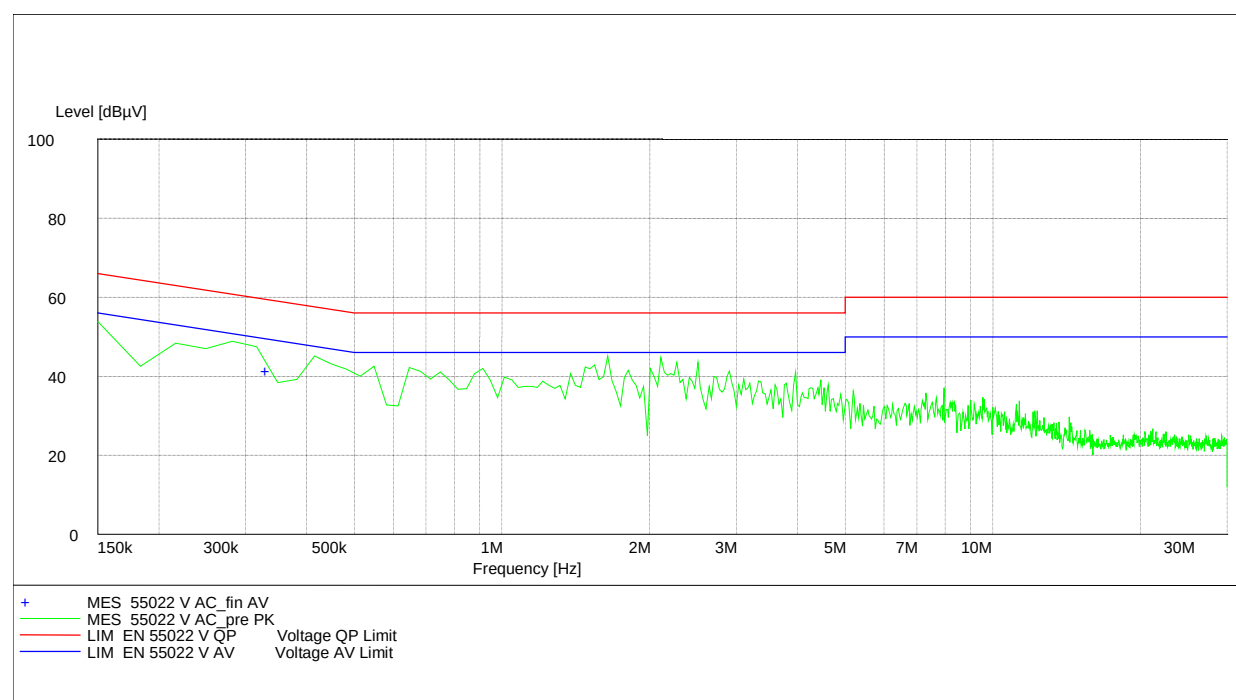

We measured in TX and RX mode, L1 and N floating and grounded, max value was hold.

Limits :

Under normal test conditions only	See plots
-----------------------------------	-----------

3.16 Used Testequipment

Anaechoic chamber C:

Device	Manufacturer	Type	S/N Number	Inv. No. Cetecom
Spektrum Analyser	HP	8566B	2747A05306	300001000
Spektrum Analyser Display	HP	85662A	2816A16541	300002297
Quasi-Peak-Adapter	HP	85650A	2811A01131	300000999
Power Dupply	HP	6032A	2818A03450	300001040
Power Attenuator	Byrd	8325	1530	300001595
Bikonical Antenna	EMCO	3104	3758	300001602
Log. Period. Antenna	EMCO	3146	2130	300001603
Double Ridged Antenna	EMCO	HP 3115P	3088	300001032
Active Loop Antenna	EMCO	6502	2210	300001015
Antenna VDE/FCC		HP11965B		300002298
SRM-Drive	HP	9144A	2823e46556	300001044
Software	HP	EMI		300000983
Busisolator	Kontron			300001056
Absorberhalle	MWB		87400/02	300000996
Salzsäule	Kontron			300001055
Antenna	R&S	HMO20	832211/003	300002243
Indukt. Tast Antenna	R&S	HFH 2 Z4	881468/026	300001464
System-Rack	HP I.V.	85900	*	300000222
Spectrum Analyzer	HP	8566B	2747A05275	300000219
Quasi-Peak-Adapter	HP	85650A	2811A01135	300000216
RF-Preselector	HP	85685A	2837A00779	300000218
Rahmen Antenne	R&S	HFH2-Z2	891847-35	300001169
Leitungsteiler	HP	11850C		300000997
Breitband-Hornantenne EMI	HP	35155P		300002300
PC	HP	Vectra VL		300001688
VHF Meßantenne	Schwarzbeck	VHA 9103		300001778
Spectrum Analyzer Display	HP	85662A	2816A16497	300001690
VHF Meßantenna	Schwarzbeck	VHA 9103		300001780
Biconical Antenna	EMCO	3104 C	9909-4868	300002590

SRD Laboratory:

Device	300001207	Type	S/N Number	Inv. No. Cetecom
Spectrum Analyzer	300001208	494AP	B010241	300000863
Spectrum Analyzer	HP	71210A (70000)	2731A02347	300000321
Spectrum Analyzer Display	HP	70206A	2840A01553	300002017
Reference Frequency	HP	70310A	2736A00707	300002018
Local Oscillator	HP	70900A	2842A02221	300002019
ZF-Modul 10Hz-300 kHz	HP	70902A	2840A02145	300002020
ZF-Modul 100 kHz-3 MHz	HP	70903A	2835A01069	300002021
HF-Teil für 71210A 100Hz- 22GHz	HP	70908A		300002022
Spectrum Analyzer 2	HP	85660B	3138A07614	
Spectrum Analyzer Display 2	HP	85662A	3144A20627	

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 75 of 95

Signal Generator DC-600 KHz	HP	8904A	2822A01213	300001157
Signal Generator DC-600 KHz	HP	8904A	2822A01214	300001158
Powersupply	HP	6038A	3122A11097	300001204
Netznachbildung	R&S	ESH3-Z5	828576/020	300001210
Amplituden Controller	R&S	SMDU-Z2	871829/051	300002309
Trenntrafo	Erfi	913501		300001205
Trenntrafo	Grundig	RT5A	9242	300001627
Relais Matrix	HP	3488A	2719A15013	300001156
Multimeter	Siemens	Multizet		300001102
Peak Power Calibrator	HP	8900B		300001084
Schallgeber	Schomandl	SG 1	10159	300001209
Schallgeber	Schomandl	SG 2	10176	300002473
Filter	FSY Microwave			300001206
Attenuatorer	Pro Nova			300002476
Klimaschrank	Heraeus Voetsch	VUK04/500		300001012
Spectrum Analyzer 3	HP	8566A	1925A00257	300001098
Spectrum Analyzer Display 3	HP	85662	1925A00860	300002306
Oszilloscope	Tektronix	2432	110261	300001165
Radiocom. Analyzer	R&S	CMTA 54	894043/010	300001175
Powersupply	HP	6038A	2848A07027	300001174
Signal Generator 0.01-1280 MHz	HP	8662A	2224A01012	300001110
Signal Generator (Funktionen)	R&S	AFGU	862490/032	300001201
Trenntrafo	Erfi	MPL	91350	300001155
Relais Matrix	R&S	PSU	893285/020	300001173
Power Meter	HP	436A	2101A12378	300001136
Powersensor	HP	8484A	2237A10156	300001140
Powersensor	HP	8482A	2237A06016	300001139
Relais Matrix	R&S	PSU	282628/004	300001214
Powersupply	Zentro		2007	300001109
Oszilloscope	Tektronix	7633		300001111
Klimaschrank	Heraeus Voetsch	VUK04/500	32926	300001500
Quasi-Peak Adapter	HP	85650A	2811A01204	300002308
Radiocom. Analyzer	R&S	CMTA 84	894199/012	300001176
Oszilloscope	HP	54510A	3022A02062	300001202
Funkmeßplatz	Schomandl	FD1000	34982	300001115
Signal Generator	R&S	SMPC	882416/019	300001162
Frequency counter	HP	5340A	2116A08138	300001104
Power Meter	HP	436A	2031U01461	300001105
Powersensor	HP	8482A		300001106
Powersensor	HP	8484A		300001107
Powersensor	HP	8485A		300001108
Powersupply	HP	6038A	2752A04866	300001161
Reflectionsmeter	R&S	NAP	879191	300001132
Signal Generator NF	R&S	SPN	880139/068	300001142
Trenntrafo	Erfi	MPL	91350	300001151
Attenuator	JFW	30 db	1350h/104	300001703
Attenuator	JFW	10 db	1350h/103	300001704
Attenuator	JFW	20 db	1350h/106	300001705
Attenuator	JFW	20 db	1350h/105	300001766
Filter	Spinner	153755		300001791

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 76 of 95

Powersensor	HP	8484A	2237A10494	300001666
Powersupply	HP	6038A	3122A11097	300001204
Netznachbildung	R&S	ESH3-Z5	828576/020	300001210
Amplituden Controller	R&S	SMDU-Z2	871829/051	300002309
Trenntrafo	Erfi	913501		300001205
Trenntrafo	Grundig	RT5A	9242	300001627
Relais Matrix	HP	3488A	2719A15013	300001156
Multimeter	Siemens	Multizet		300001102
Peak Power Calibrator	HP	8900B		300001084
Schallgeber	Schomandl	SG 1	10159	300001209
Schallgeber	Schomandl	SG 2	10176	300002473
Filter	FSY Microwave			300001206
Attenuatorer	Pro Nova			300002476
Klimaschrank	Heraeus Voetsch	VUK04/500		300001012
Spectrum Analyzer 3	HP	8566A	1925A00257	300001098
Spectrum Analyzer Display 3	HP	85662	1925A00860	300002306
Oszilloscope	Tektronix	2432	110261	300001165
Radiocom. Analyzer	R&S	CMTA 54	894043/010	300001175
Powersupply	HP	6038A	2848A07027	300001174
Signal Generator 0.01-1280 MHz	HP	8662A	2224A01012	300001110
Signal Generator (Funktionen)	R&S	AFGU	862490/032	300001201
Trenntrafo	Erfi	MPL	91350	300001155
Relais Matrix	R&S	PSU	893285/020	300001173
Power Meter	HP	436A	2101A12378	300001136
Powersensor	HP	8484A	2237A10156	300001140
Powersensor	HP	8482A	2237A06016	300001139
Relais Matrix	R&S	PSU	282628/004	300001214
Powersupply	Zentro		2007	300001109
Oszilloscope	Tektronix	7633		300001111
Klimaschrank	Heraeus Voetsch	VUK04/500	32926	300001500
Quasi-Peak Adapter	HP	85650A	2811A01204	300002308
Radiocom. Analyzer	R&S	CMTA 84	894199/012	300001176
Oszilloscope	HP	54510A	3022A02062	300001202
Funkmeßplatz	Schomandl	FD1000	34982	300001115
Signal Generator	R&S	SMPC	882416/019	300001162
Frequency counter	HP	5340A	2116A08138	300001104
Power Meter	HP	436A	2031U01461	300001105
Powersensor	HP	8482A		300001106
Powersensor	HP	8484A		300001107
Powersensor	HP	8485A		300001108
Powersupply	HP	6038A	2752A04866	300001161
Reflectionsmeter	R&S	NAP	879191	300001132
Signal Generator NF	R&S	SPN	880139/068	300001142
Trenntrafo	Erfi	MPL	91350	300001151
Attenuator	JFW	30 db	1350h/104	300001703
Attenuator	JFW	10 db	1350h/103	300001704
Attenuator	JFW	20 db	1350h/106	300001705
Attenuator	JFW	20 db	1350h/105	300001766
Filter	Spinner	153755		300001791
Powersensor	HP	8484A	2237A10494	300001666

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 5-4456-01-04c/04


Date: 2004-04-27

Page 77 of 95

Powersensor	HP	8485A	2238A00849	300001668
Bandfilter	Telonic	TTF7255EE	20293-11	300001300
Bandfilter	Telonic	TTF12555EE	20292-6	300001302
Bandfilter	Telonic	TTF25055EE	20291-8	300001304
Bandfilter	Telonic	TTF50055EE	20290-7	300001305
Bandfilter	Telonic	TTF100055EE	20289-7	300001307
Bandfilter	Telonic	TTA300055EESN	20370-2	300001312
Bandstop	Telonic	TTR3753EE1	30013-1	300001314
Bandstop	Telonic	TTR723EE	20417-2	300001316
Bandstop	Telonic	TTR95-3EE	20372-4	300001318
Bandstop	Telonic	TTR1903EE	30036-4	300001320
Bandstop	Telonic	TTR3753EE	20369-5	300001321
Bandstop	Telonic	TTR750-3EE1	90177-1	300002387
Highpass	Pro Nova	HDP120-6GG	ohne	300001348
Highpass	Pro Nova	HMC500-6AA	HJ67-01?	300001350
Highpass	Narda	NHP 9000	0004	300001362
Highpass	Narda	HDP16-6GH	JV70-01	300001364
Highpass	RSD	HDP50-6GH, HDP200-6GG		300001371
Highpass	RSD	2099-02-01		300000370
Signal Generator 0.1-2060 MHz	HP	8657A	2838U00736	300001009
Radio Code Analyzer	Schlumberger	SL4922		300001038
Signal Analyzer	B&K	2033		300001047
Frequency counter	HP	5386A	2704A01243	300000998
Laufzeitelement	WR-Elektronik			300001036
Powersupply Stromversorgung	Systron	M5P 40/15A	828233	300001291
Powersupply	Heiden	1108-32	1701	300001392
Powersupply	Heiden	1108-32	1802	300001383
Powersupply	Heiden	1108-32	003202	300001187
Powersupply	Zentro	LA 2x30/5GB1	2011	300001276
Powersupply	Zentro	LA 2x30/5GB2	2012	300001275
Powersupply	Zentro	LA 30/5GA	2041,2042	300001287
Trenntrafo	Grundig	RT5A	8781	300001277
Trenntrafo	Grundig	RT5A	9242	300001263
Multimeter	Goerz Elektro	Unigor 6e P	911 355	300001625
Multimeter	Goerz Elektro	Unigor 6e P	911 391	300001281
Climatic Box	Heraeus Voetsch	VUK04/500	32679	300000299
Powersensor + Att.	HP	8482B	2703A02586	300001492
Attenuator 30 dB	HP	8498A	1801A02445	300001475
Signal Generator NF	HP		2822A01203	300001004
Attenuator	Spinner	BN 534171 D	51881	300001516
Attenuator coaxial	Bird	8325	2429	300001513
Impulsbegrenzer	R&S	ESH 3 Z2		300001460
4Port Box	R&S	4Port Box	860457/005	300001472
Signal Generator 0.1-4200 MHz	HP	8665A	2833A0011	300002299
NF-Spektrumanalyzer	B&K	2033A		300002301
Swissphone Freifeld-Messbox	Swissphone Schweiz			300002302
Trenntrafo regelbar	Grundig	RT5H	9242	300001628
Signal Generator	HP	8111A	2215G00867	300001117

4 Photographs


Test site: Antenna 1

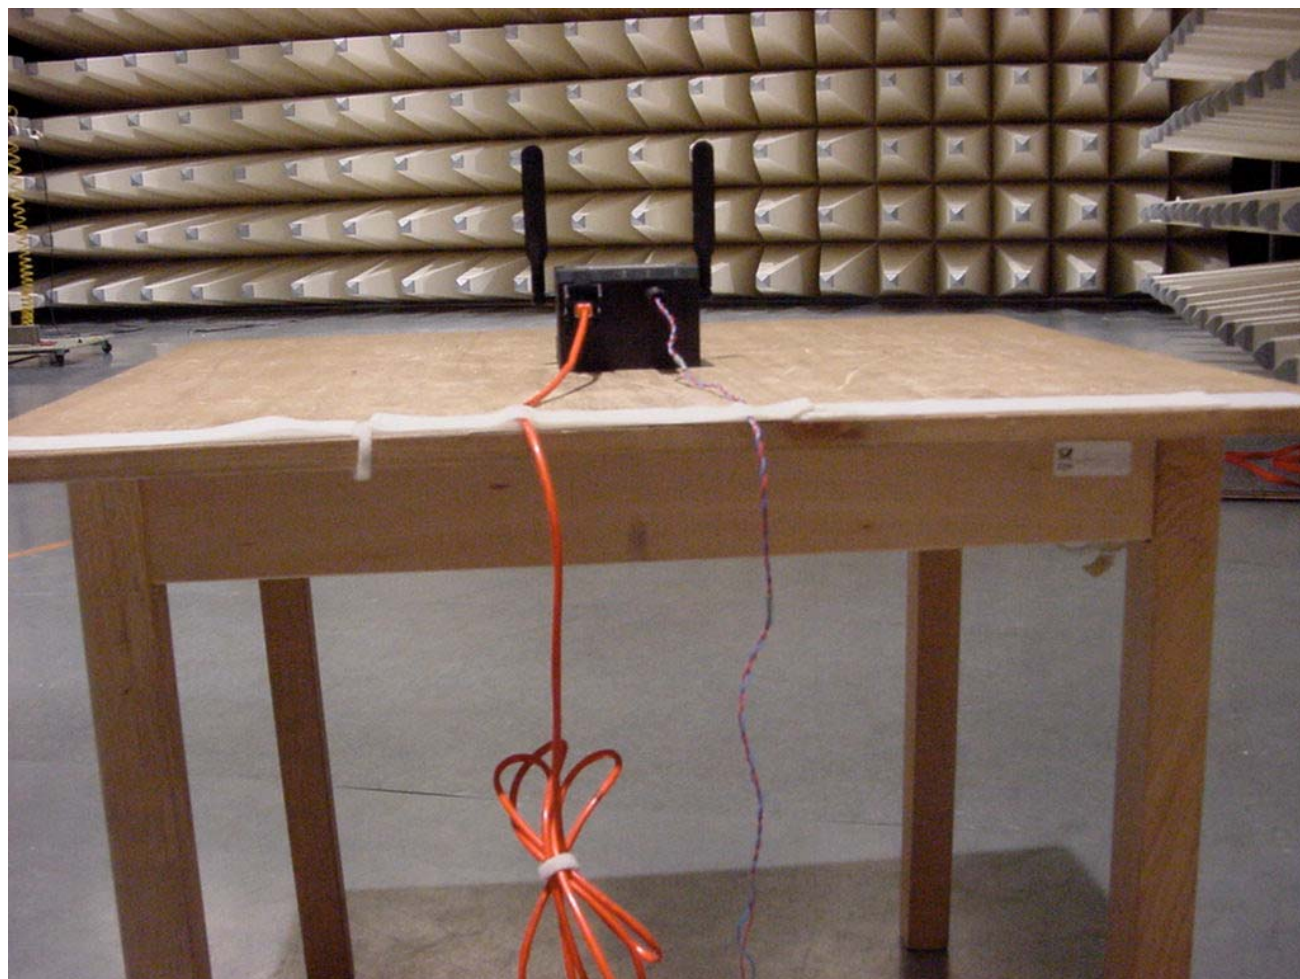


Test site: Antenna 1



Test site: Antenna 2

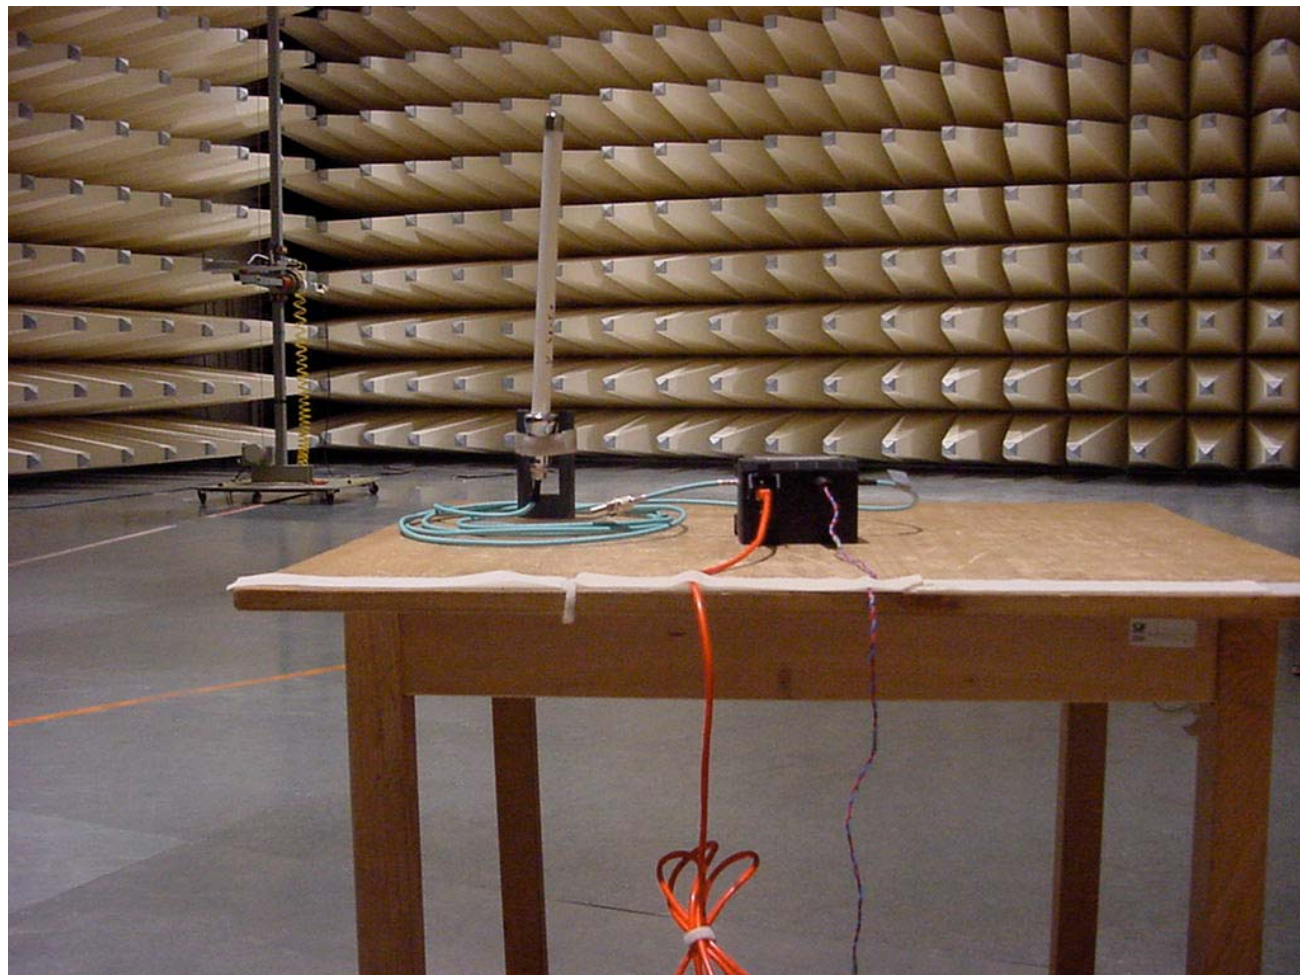


AC-conducted:

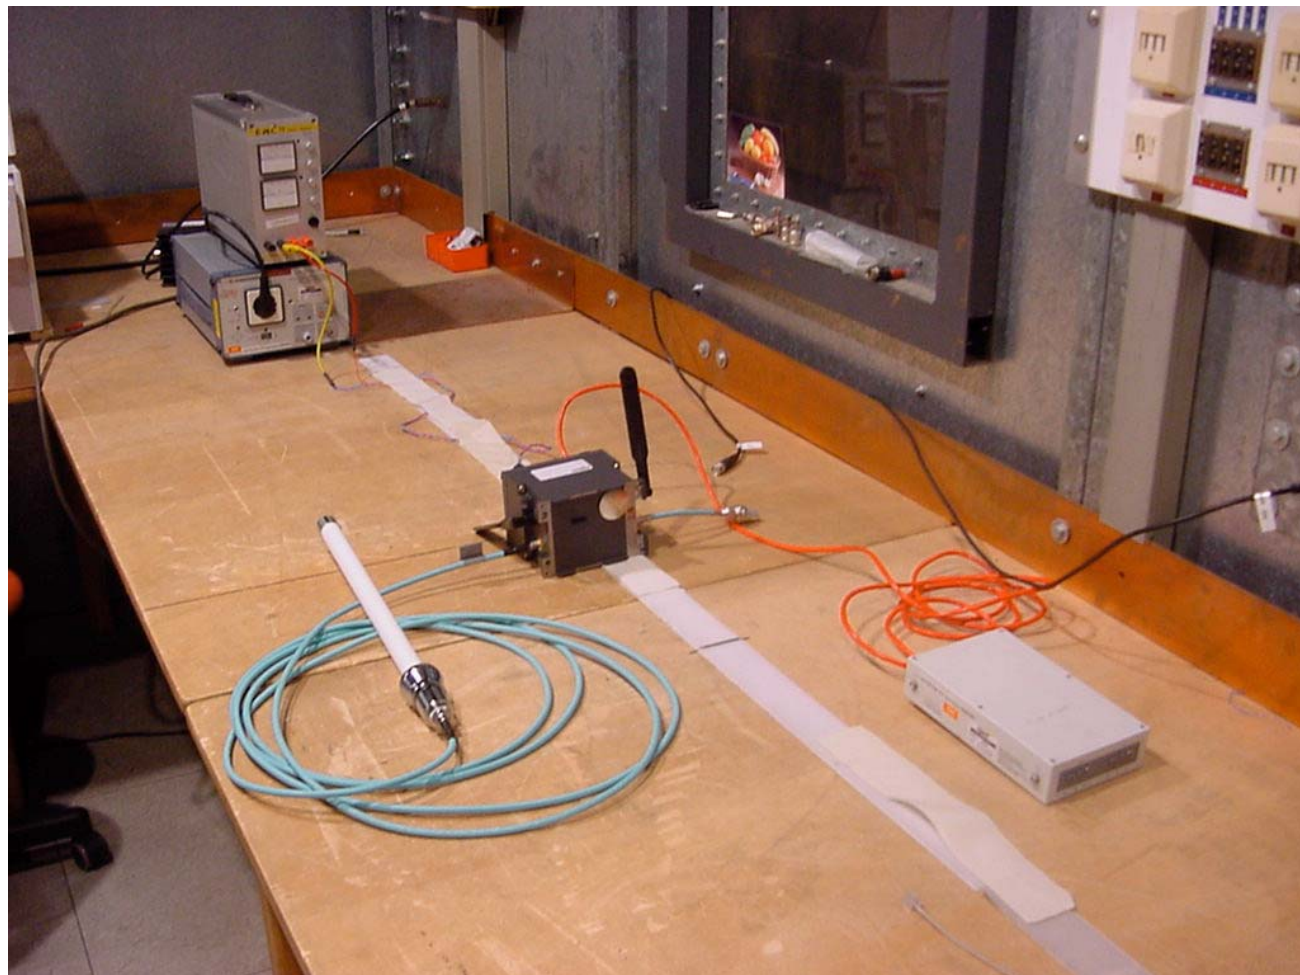

Test sample:



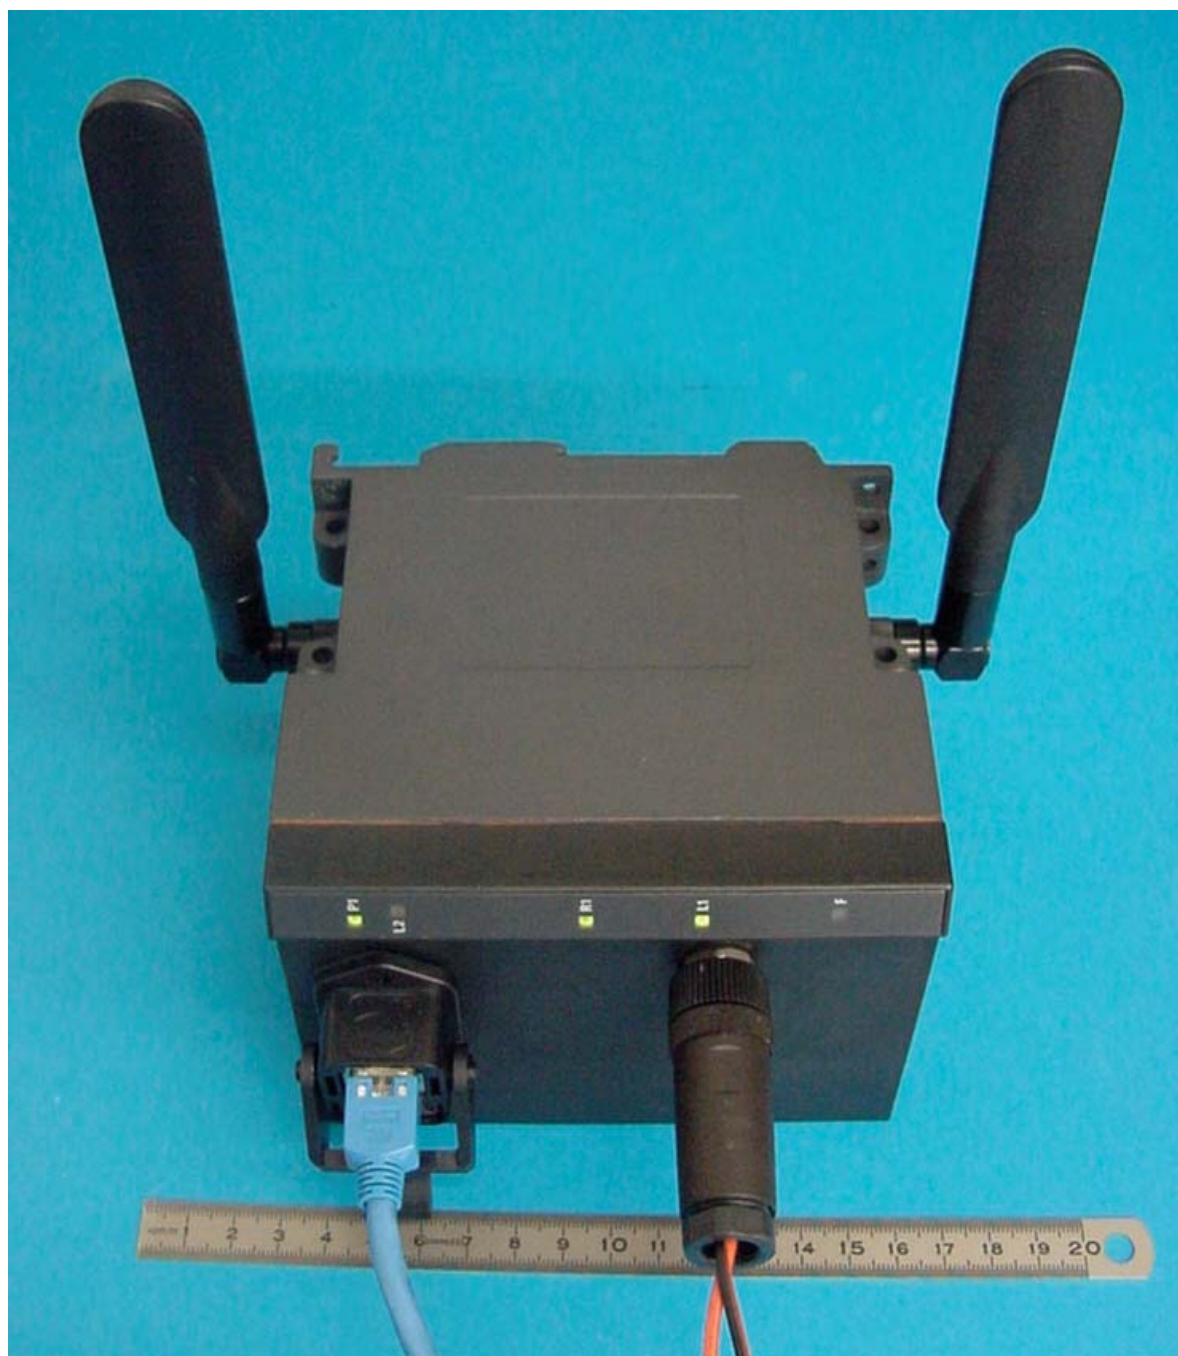

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 84 of 95

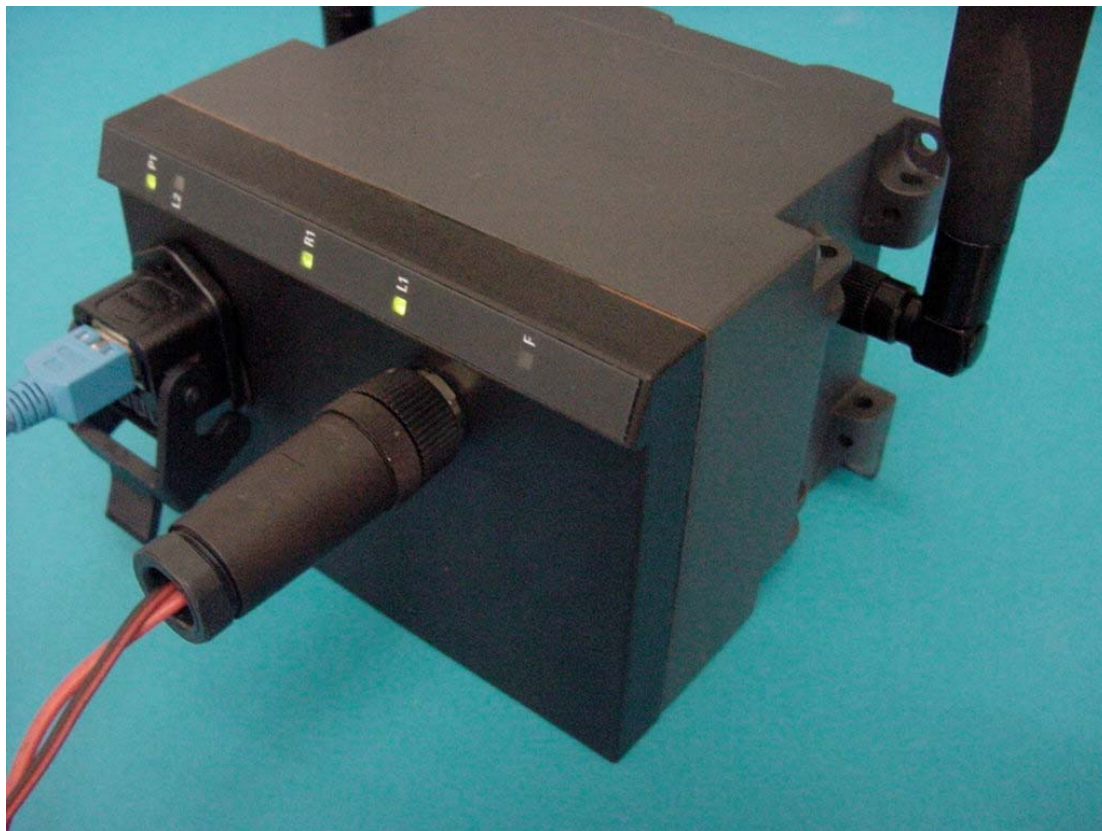

SRD-Testreport



CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 85 of 95

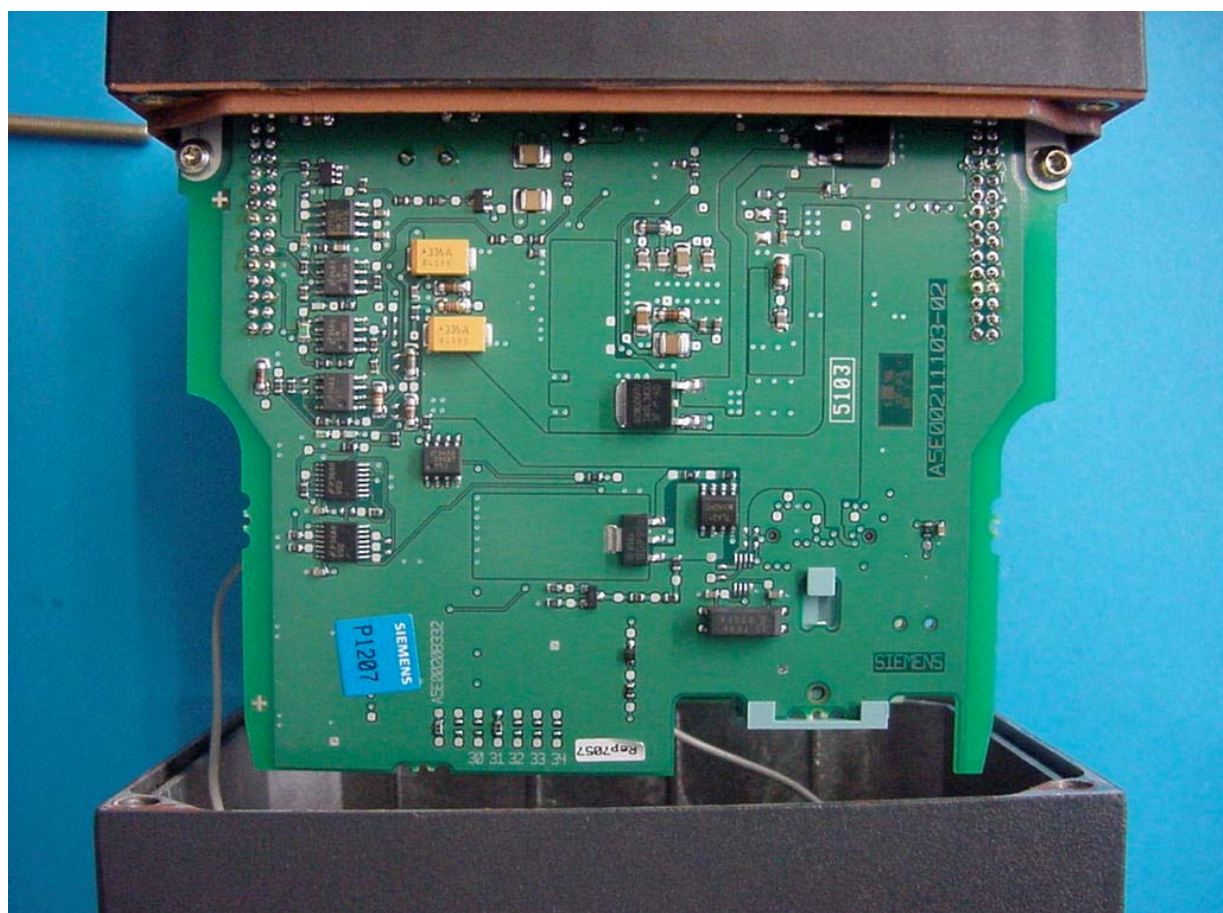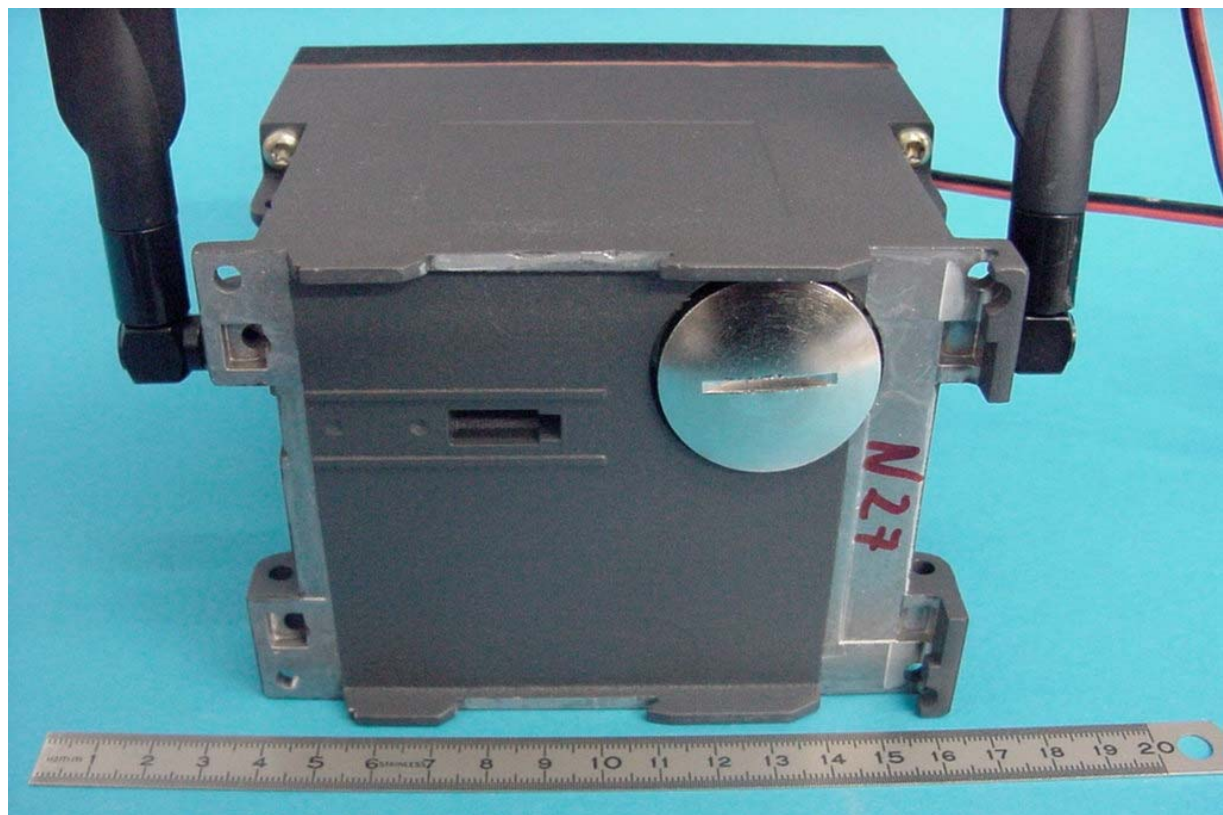

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 86 of 95

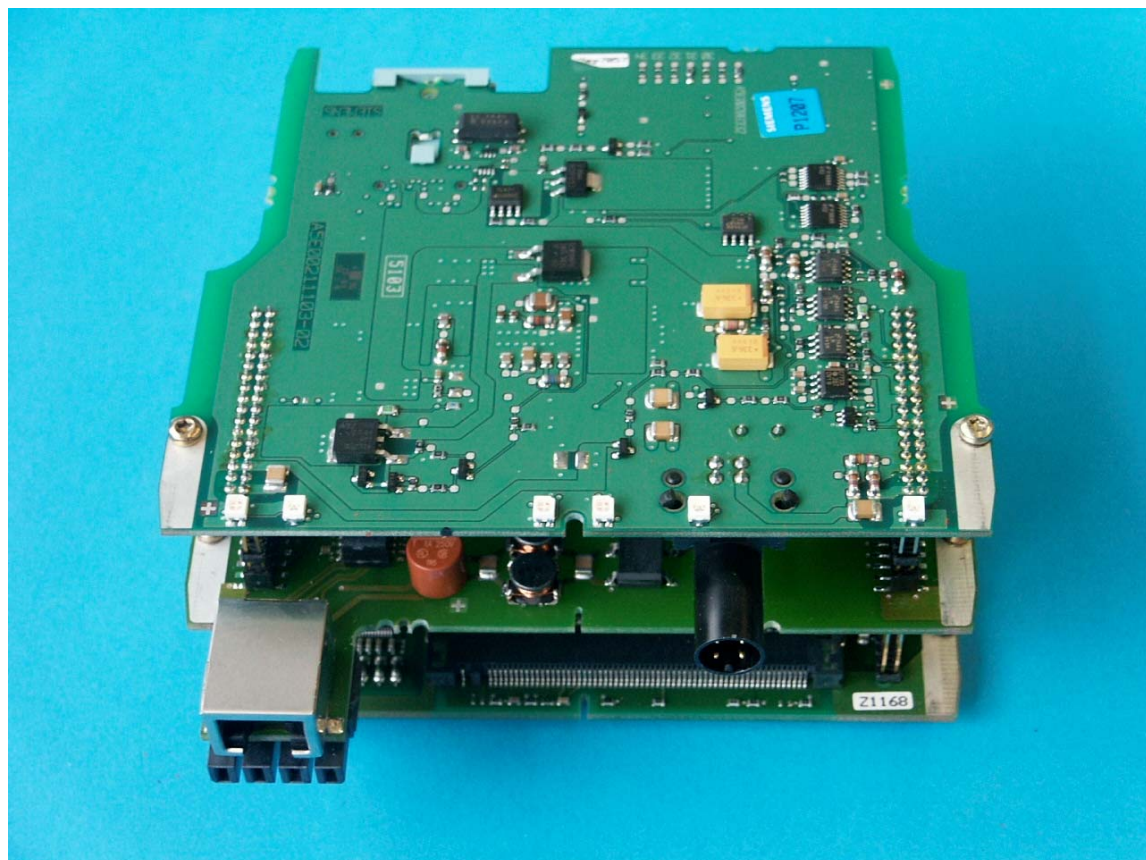

SRD-Testreport



CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 87 of 95

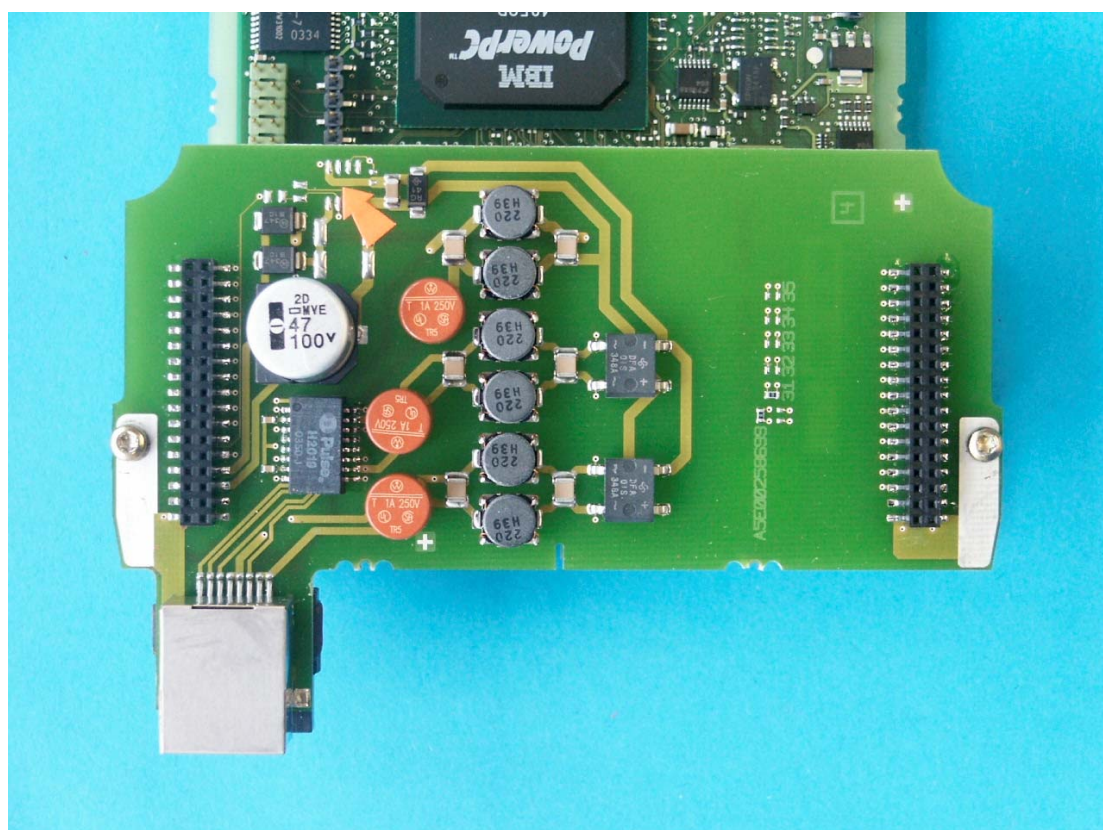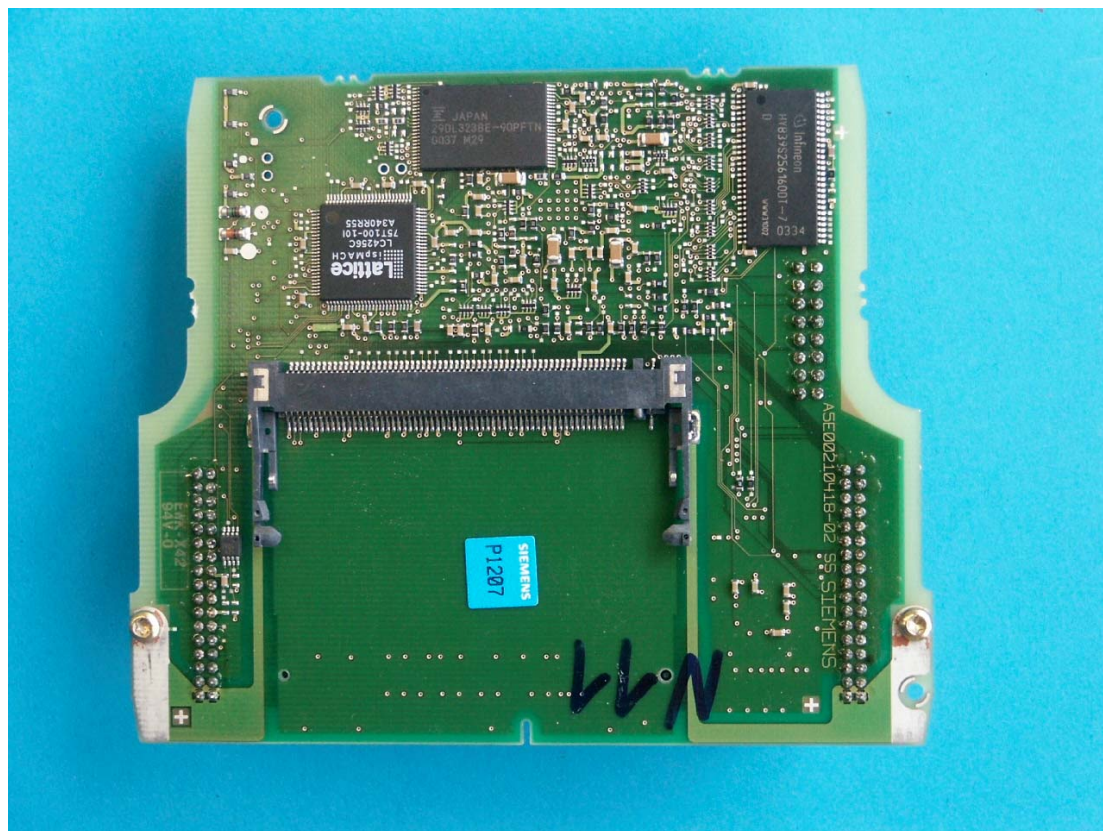

SRD-Testreport



CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 88 of 95

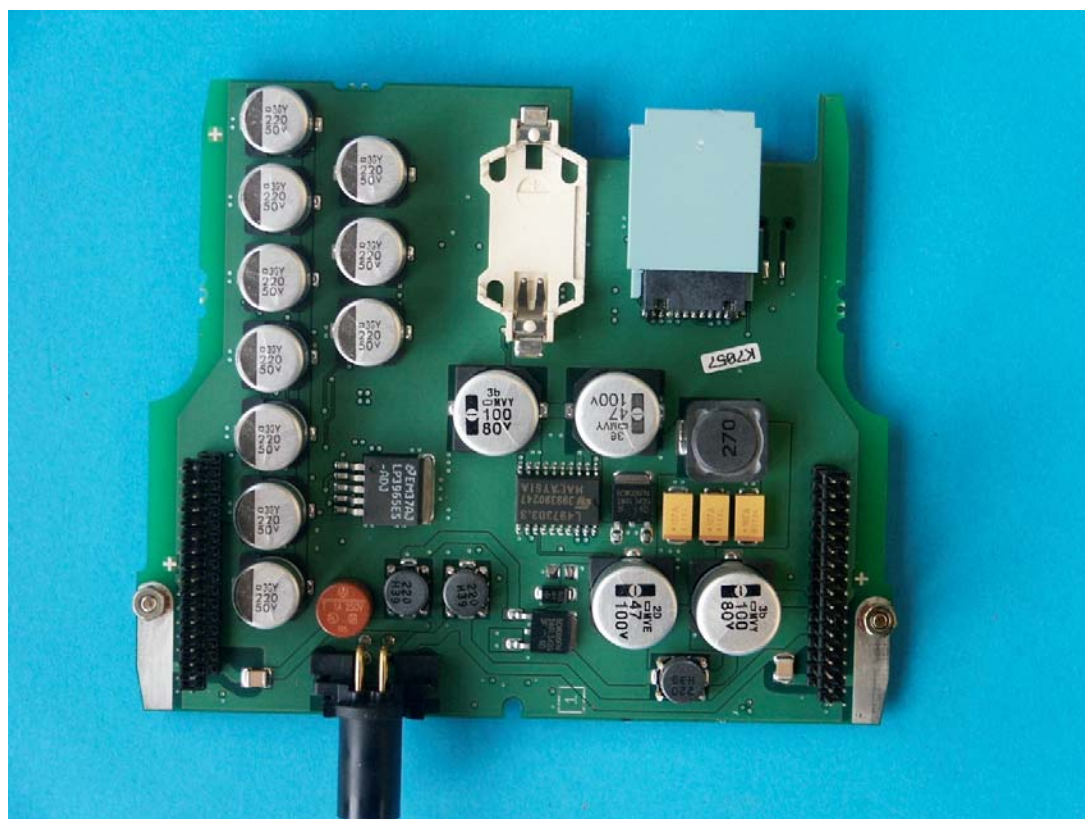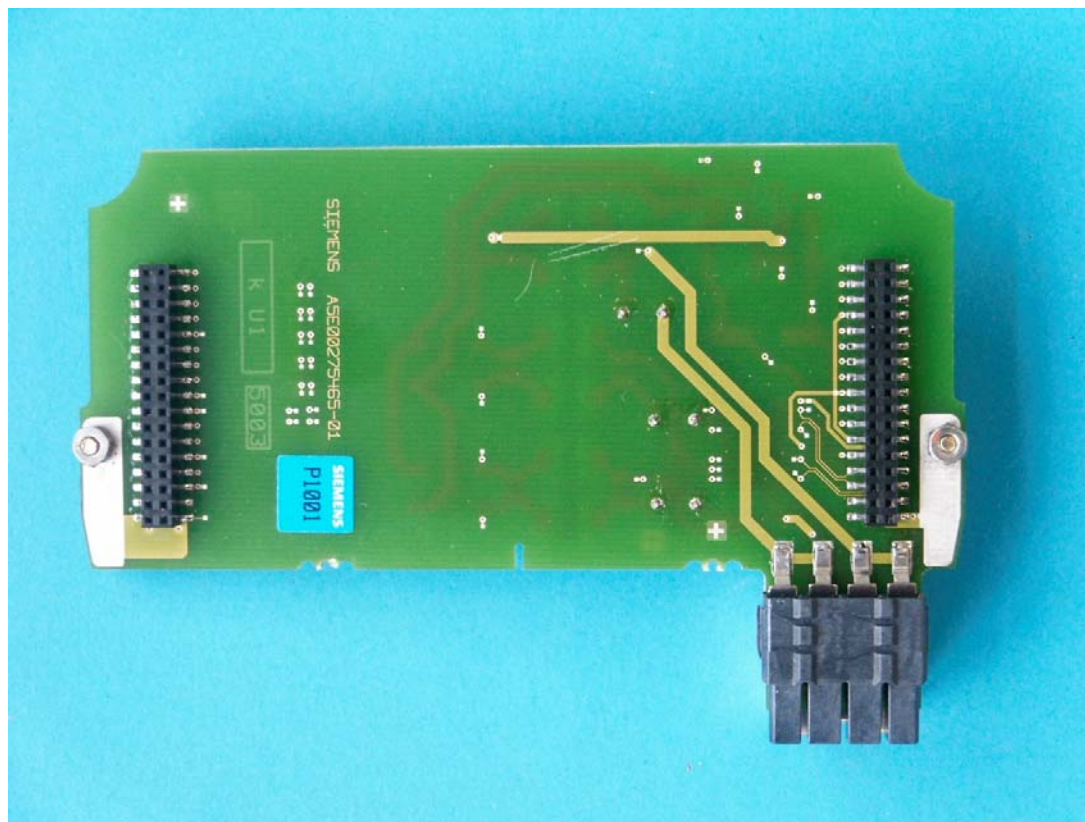

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 89 of 95

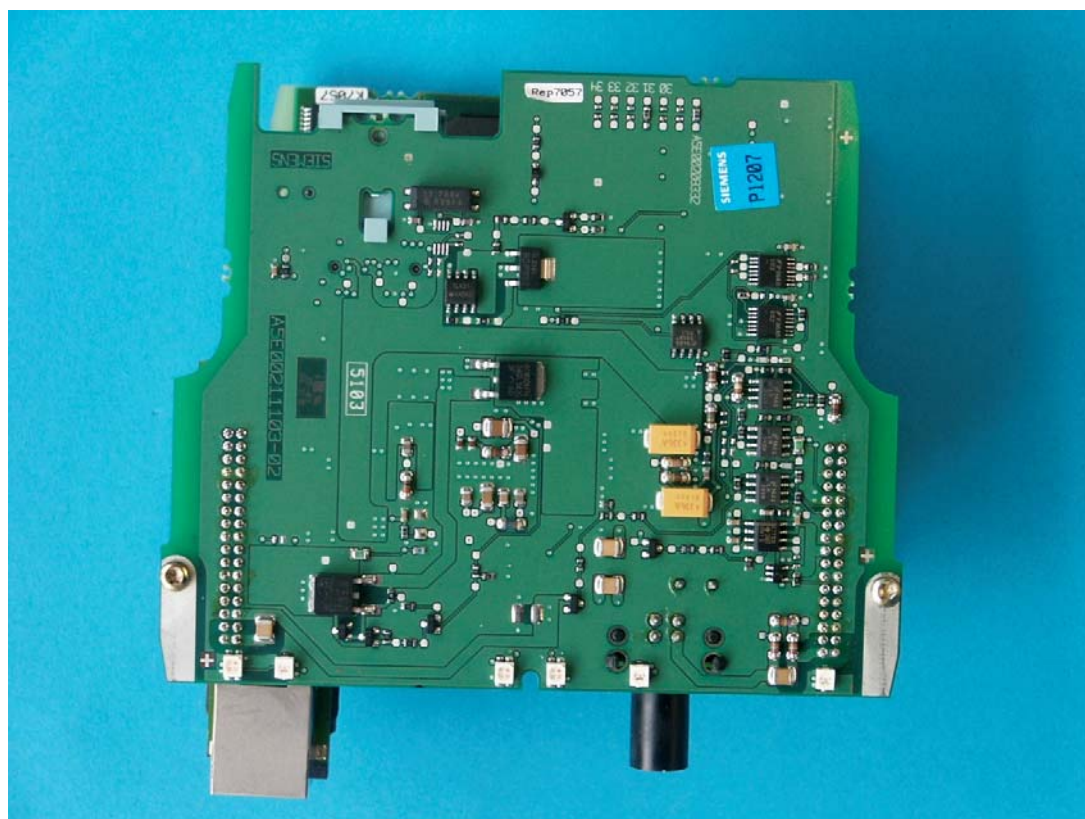

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 90 of 95

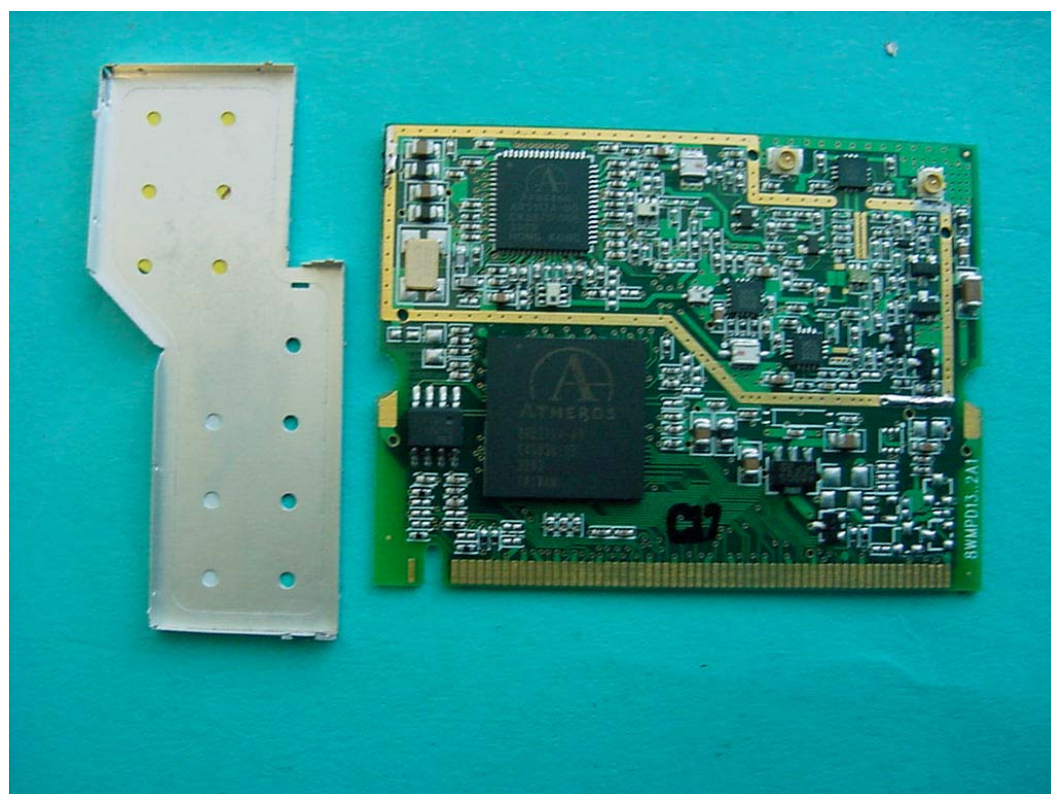



SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 5-4456-01-04c/04

Date: 2004-04-27

Page 92 of 95

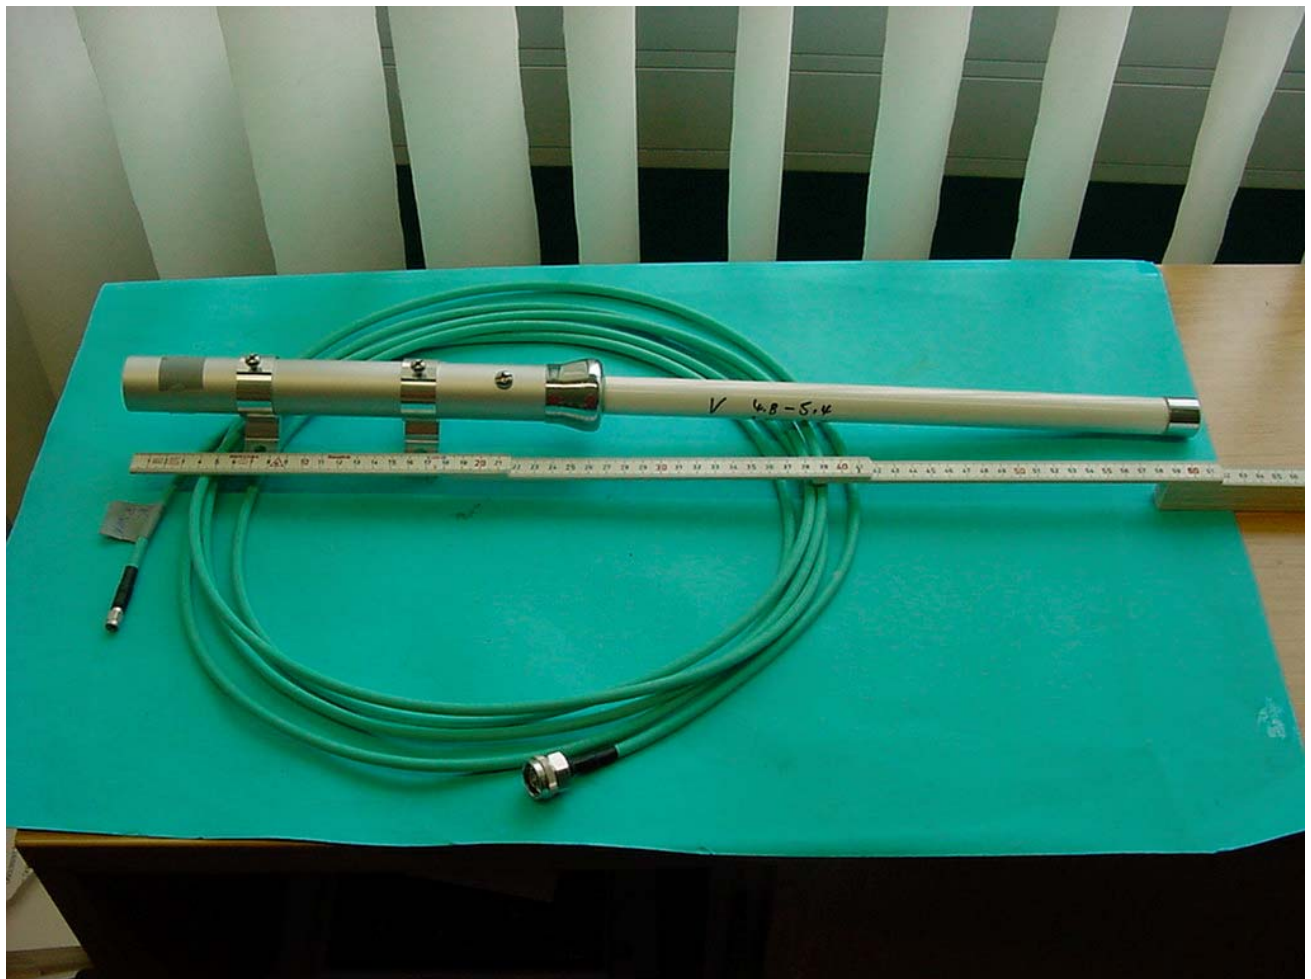

7 Annex 1:

Antenna 1: Joymax TMX-614RS Antenna pattern:


(measured in our compact range, only vertical polarisation, without cable)

black rod antenna	Gain bei f1 in dBi	Gain bei f2 in dBi	Gain bei f3 (f2) in dBi	Gain bei f4 in dBi	Gain bei f5(f3) in dBi
	2.3	2.4	2.5	2.6	2.7
V	-11+7= -3 dBi	-4,5+4 = -0,5 dBi	-1,5+2,1= 0,6 dBi	-2,6+1,7= -0,9 dBi	-8,3+3= -5,3 dBi

black rod antenna 2.3-2.7 GHz

89vgain.rep

A: GATED VV (i)

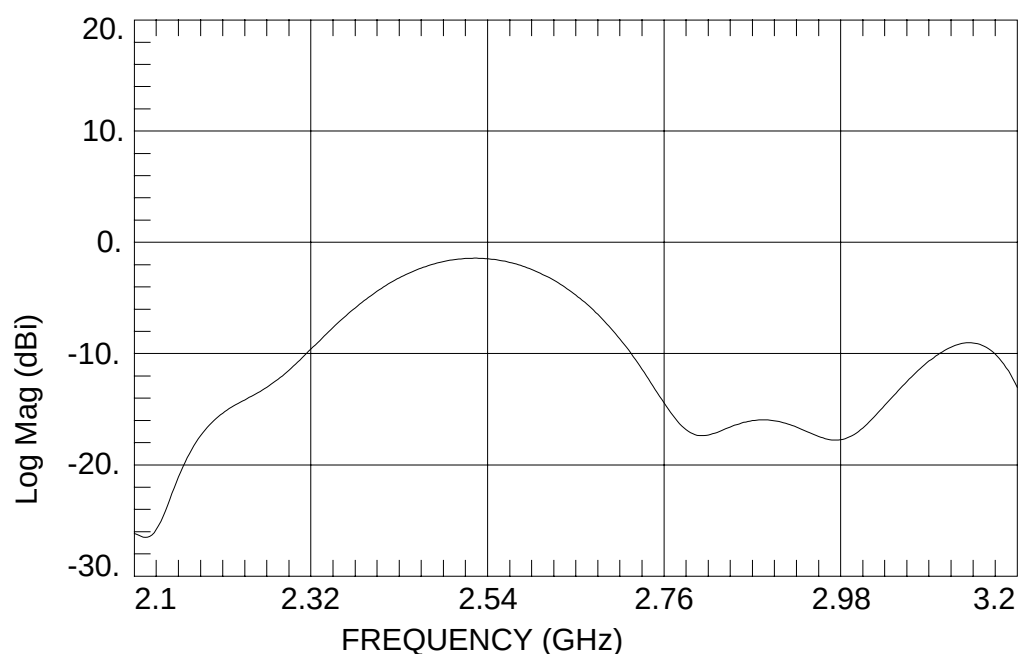


black rod antenna 2.3-2.7 GHz list

89vv180.rep

A: VV (n)


FREQ LIST INDEX = 1 #

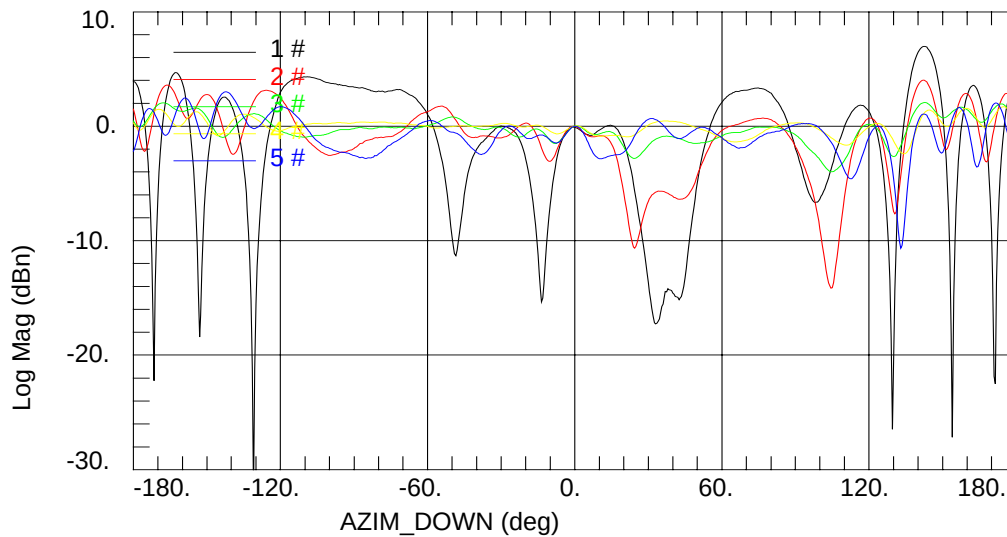


89vv180.rep

B: VV (n)

FREQ LIST INDEX = 1 #

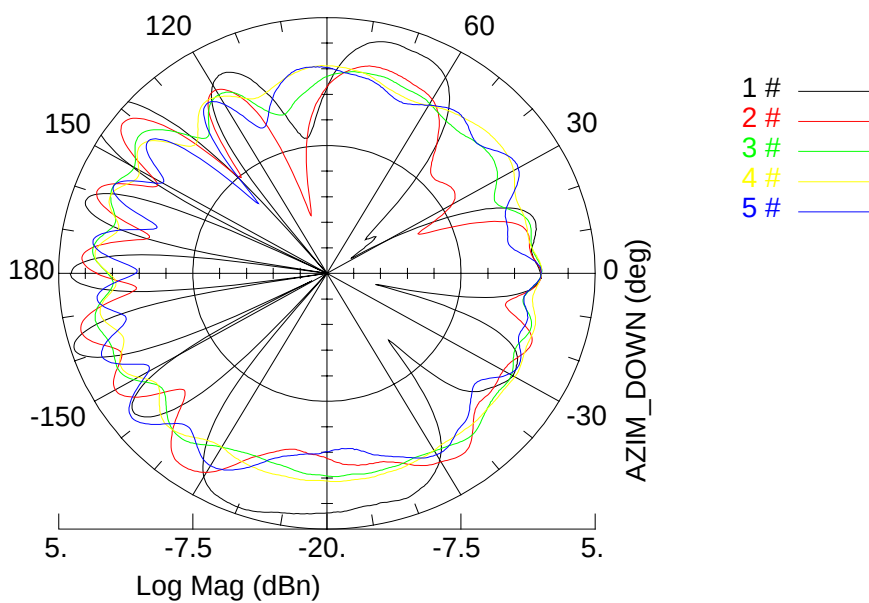

Antenna 2: Joymax FG-102 Antenna pattern

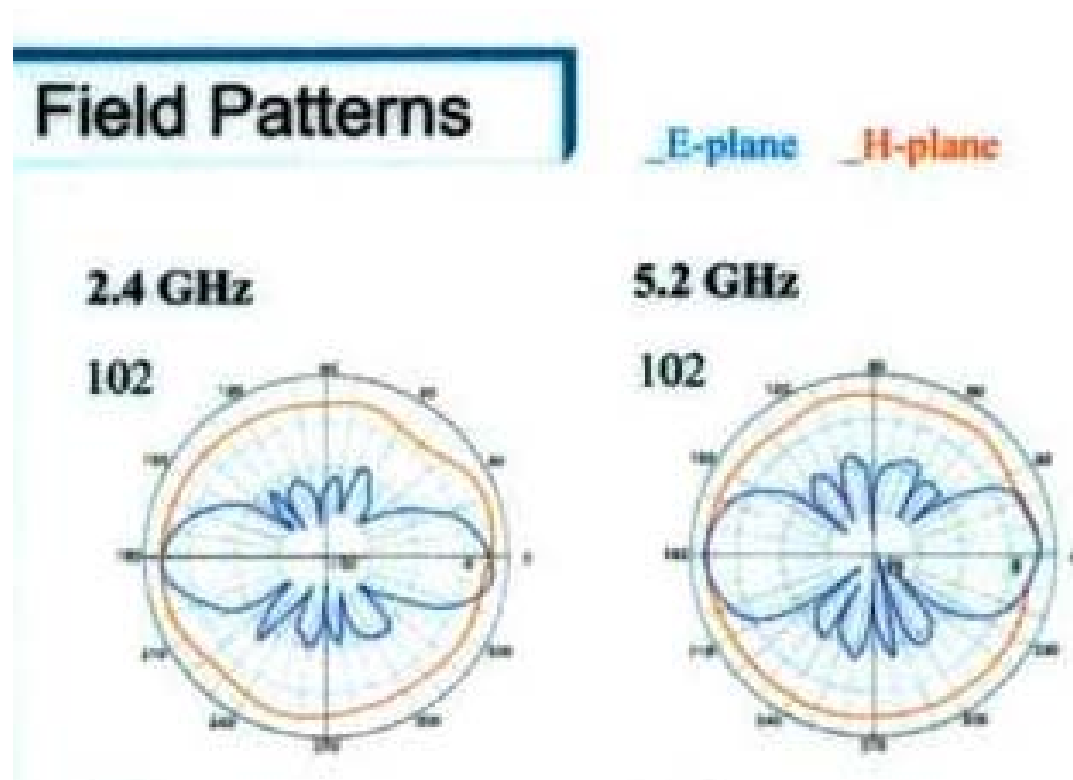

Gain according to data sheet:

2.4 GHz:	6.0 dBi
5.2 GHz:	6.5 dBi