

## Test Report

Prepared for: Hitachi Kokusai Electric Comark

Model: EC702MP Exact V2 Exciter

Description: Broadcast Transmitter

FCC ID: LYIEC702MP

To

FCC Part 74

Date of Issue: January 20, 2021

On the behalf of the applicant: Hitachi Kokusai Electric Comark  
104 Feeding Hills Rd  
Southwick, MA 0107701077

Attention of: Thomas Barbeau, VP of Engineering  
Ph: (413)998-1124  
E-Mail: tbarbeau@comarktv.comtbarbeau@comarktv.com

Prepared By  
Compliance Testing, LLC  
1724 S. Nevada Way  
Mesa, AZ 85204  
(480) 926-3100 phone / (480) 926-3598 fax  
[www.compliancetesting.com](http://www.compliancetesting.com)  
Project No: p20b0005



Greg Corbin  
Project Test Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing.  
All results contained herein relate only to the sample tested.



### Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	October 6, 2020	Greg Corbin	Original Document
2.0	February 1, 2021	Greg Corbin	Corrected typo for rule section in test summary table on page 8

## Table of Contents

<u>Description</u>	<u>Page</u>
Standard Test Conditions and Engineering Practices	6
Test Result Summary	8
Power Limitations (Output Power)	9
Emission Mask	11
Occupied Bandwidth	13
Conducted Spurious Emissions	15
Field Strength of Spurious Radiation	19
Frequency Stability (Temperature Variation)	20
Measurement Uncertainty	22
Test Equipment Utilized	23

## ANAB

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



**FCC Site Reg. #349717**

**IC Site Reg. #2044A-2**

### Non-accredited tests contained in this report:

**N/A**

## Test and Measurement Data

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II, Part 2, Subpart J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, and the following individual Parts: FCC Part 74.

## Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing.

In accordance with ANSI/TIA 603C, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F) unless the particular equipment requirements specified testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Environmental Conditions		
Temp (°C)	Humidity (%)	Pressure (mbar)
23.5 – 27.2	13 – 21	962.2 – 964.7

Measurement results, unless otherwise noted, are worst-case measurements.

### EUT Description

**Model:** EC 702MP, Exact V2 Exciter

**Description:** Broadcast Transmitter

### Additional Information:

The EC-702MP digital transmitter system is an up to 170W average power (when using ATSC 1.0 8VSB modulation), 150W average power (when using ATSC 3.0 COFDM modulation) that consists of a Hitachi Kokusai Electric Comark Exact V2 digital exciter, Hitachi Kokusai Electric Linear CM-8001 Drive controller, one (1) GV40033 Amplifier, a passive hybrid combining system, a 40243 Low pass filter, and a Com-Tech FC6D60C 6 Pole Mask Filter (or equivalent or more stringent filter). This system is used to provide an ATSC 1.0 or ATSC 3.0 modulated signal over the UHF channels 14 through 36 in a manner consistent with FCC Part 74.

### EUT Operation during Tests

Conducted RF measurements were recorded after the 6 pole mask filter, via a RF coupler attached to the filter output. The coupler thru port was connected to a 10000 watt 50 ohm load.

The EUT has 2 types of modulation, ATSC1.0 (8VSB) and ATSC 3.0 (OFDM).

The system was tested with the manufacturer supplied Stringent Mask filter was tuned to 491 MHz (CH 17).

All tests were performed with the tuned frequency set to 491 MHz.

AC power is 230 VAC at 60 Hz.

Model		
Modulation	ATSC 1.0	ATSC 3.0
Output Power (watts)	170	150

### EC704MP System components

Description	Model	S/N
System	EC702MP	EAHO-0270
CM8001 Control Module	MOD GV 40056A	GAOK0166
Exact V2 High End TV Exciter	XTTR-VX20-3002	00243
PA702MP Power Amplifier	GV40033	GANQ0255/19
Low Pass Filter	40243	N/A
6-Pole Stringent Mask Filter	6PPXX80E	93731
Ethernet Switch	DES-1024D	N/A

### Accessories:

Qty	Description	Manufacturer	Model	S/N
1	Precision RF Coupler	Dielectric	N/A	N/A

### Cables:

Qty	Description	Length (M)	Shielding Y/N	Shielded Hood Y/N	Termination
1	manufacturer supplied cable set	N/A	N/A	N/A	N/A

### Modifications: None

**Test Result Summary**

Specification	Test Name	Pass, Fail, N/A	Comments
74.735 2.1046	Power Limitations(Output Power)	Pass	
2.1047	Modulation Characteristics	Pass	Refer to page 5
74.794(a)(ii) 2.1051	Emission Masks (Stringent Mask)	Pass	Manufacturer supplied a stringent mask filter
2.1049	Occupied Bandwidth	Pass	
74.794(a)(ii) 74.975(b)(2) 2.1051	Digital Emissions (Conducted Spurious)	Pass	
74.794(b) 2.1051	Spurious Emissions, GPS bands	Pass	
74.794(b) 2.1053	Field Strength of Spurious Radiation	Pass	
74.794(b)(4) 2.1055	Frequency Stability (Temperature Variation)	Pass	
74.794(b)(4) 2.1055	Frequency Stability (Voltage Variation)	Pass	

Statements of conformity are reported as:

- Pass - the measured value is below the acceptance limit, *acceptance limit = test limit*.
- Fail - the measured value is above the acceptance limit, *acceptance limit = test limit*.

## Power Limitations (Output Power)

Engineer: Greg Corbin


Test Date: 1/19/2021

### Measurement Procedure

The Equipment Under Test (EUT) was connected to a spectrum analyzer through a 37 dB Precision RF coupler. All cable and coupler losses were input into the spectrum analyzer as a reference level offset to ensure accurate readings were obtained.

The channel power measurement tool on the spectrum analyzer was used to record the output power. Output power for both modulations (ATSC 1.0 and ATSC 3.0) were recorded.


### Test Setup

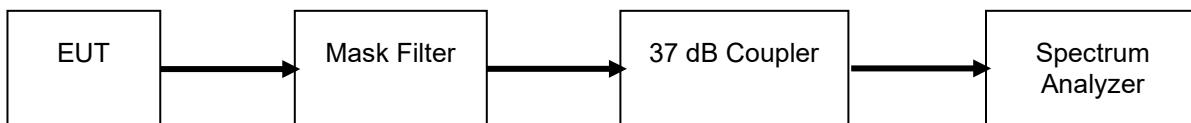


### High Power Transmitter Peak Output Power

Modulation	Tuned Frequency (MHz)	Recorded Measurement (watt)	Limit (watt)	Result
ATSC 1.0	491	170.4	15000	Pass
ATSC 3.0	491	150.1	15000	Pass

### Output Power\_ATSC 1.0 modulation

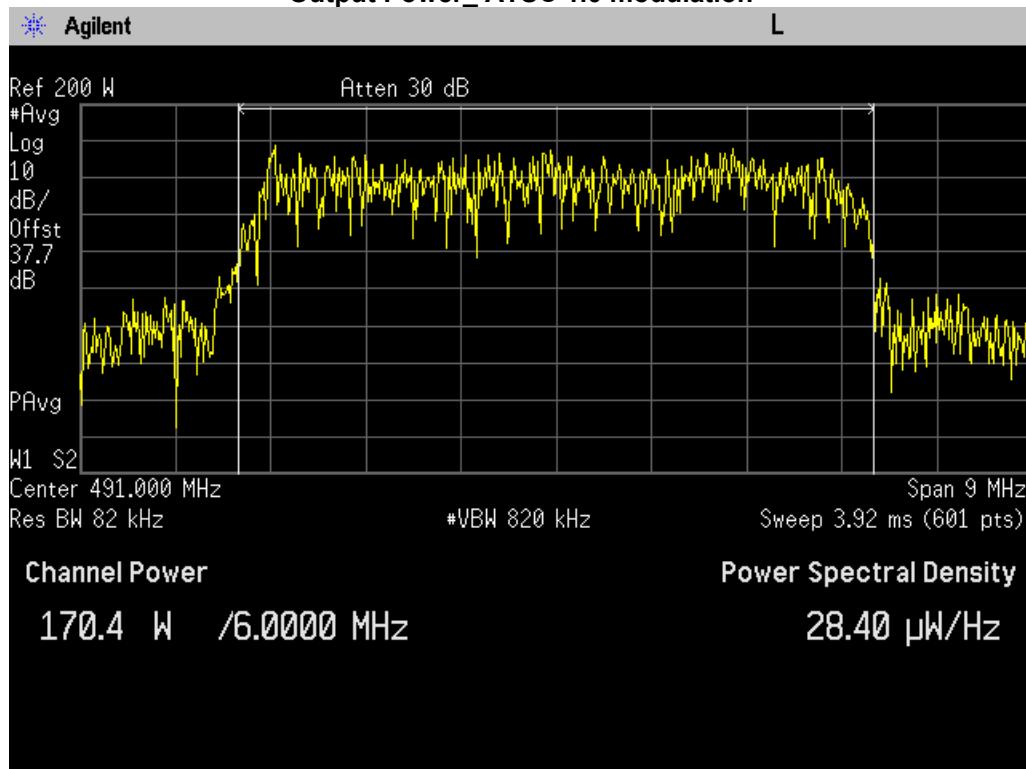

### Output Power\_ATSC 3.0 modulation

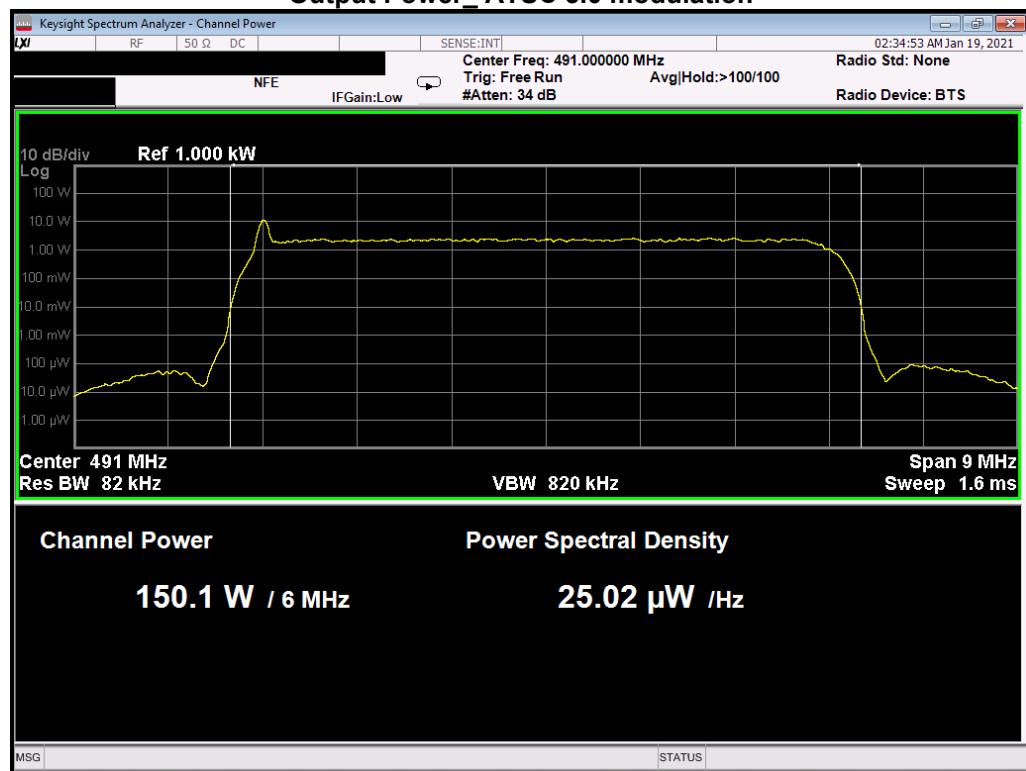

## Emission Mask

**Engineer:** Greg Corbin

**Test Date:** 1/18/2021

## Measurement Procedure

The EUT was connected as shown in the Test Set-up below.


The EUT uses a stringent mask filter.

The EUT was set to maximum power and the Out of Band emissions were recorded using the stringent mask limit per FCC Part 74.794(a)(ii).

The Out of Band emissions were recorded for modulations (ATSC 1.0 and ATSC 3.0).

RBW = 510 kHz

VBW = 1.5 MHz

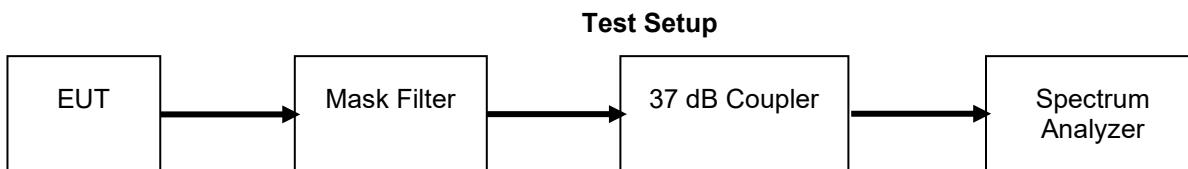

## Emission Mask\_ATSC 1.0



## Emission Mask ATSC 3.0



## Occupied Bandwidth

Engineer: Greg Corbin

Test Date: 1/18/21


## Measurement Procedure

The EUT was connected as shown in the Test Set-up below.


The EUT was set to maximum power and the Occupied Bandwidth was recorded using the spectrum analyzer occupied bandwidth tool.

The occupied bandwidth was recorded for both modulations (ATSC 1.0 and ATSC 3.0).


### Test Setup

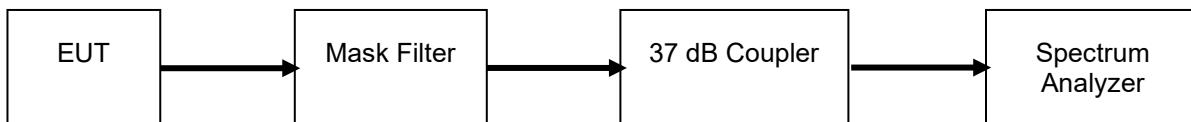

### Occupied Bandwidth\_ ATSC 1.0 modulation

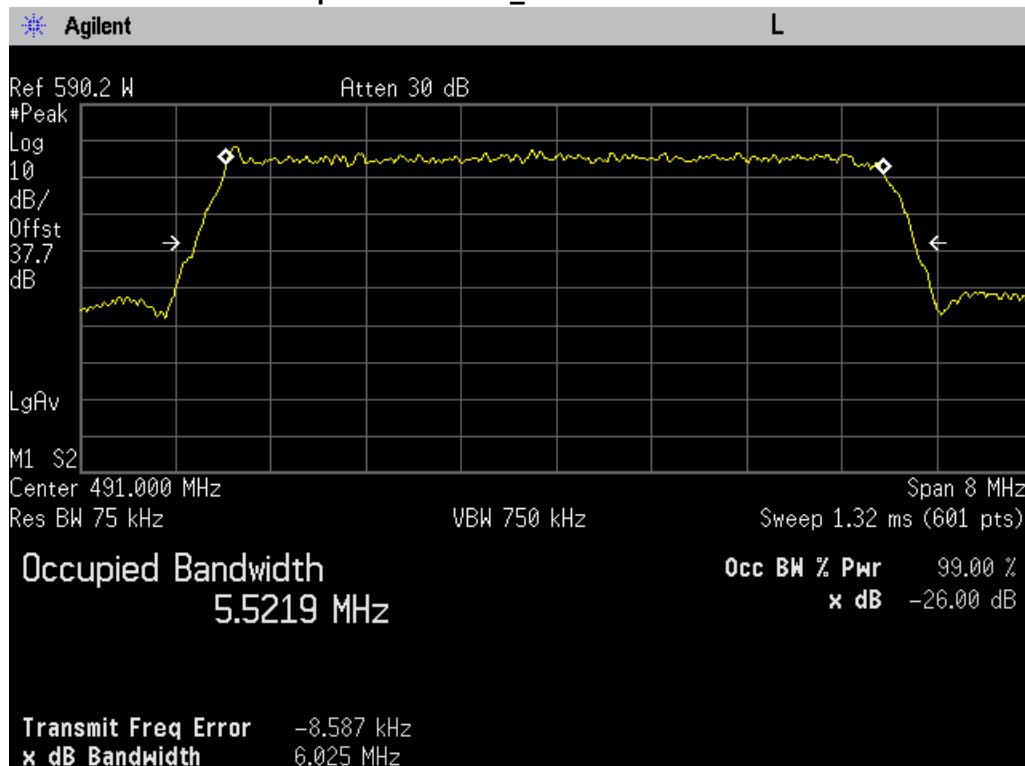

### Occupied Bandwidth\_ ATSC 3.0 modulation

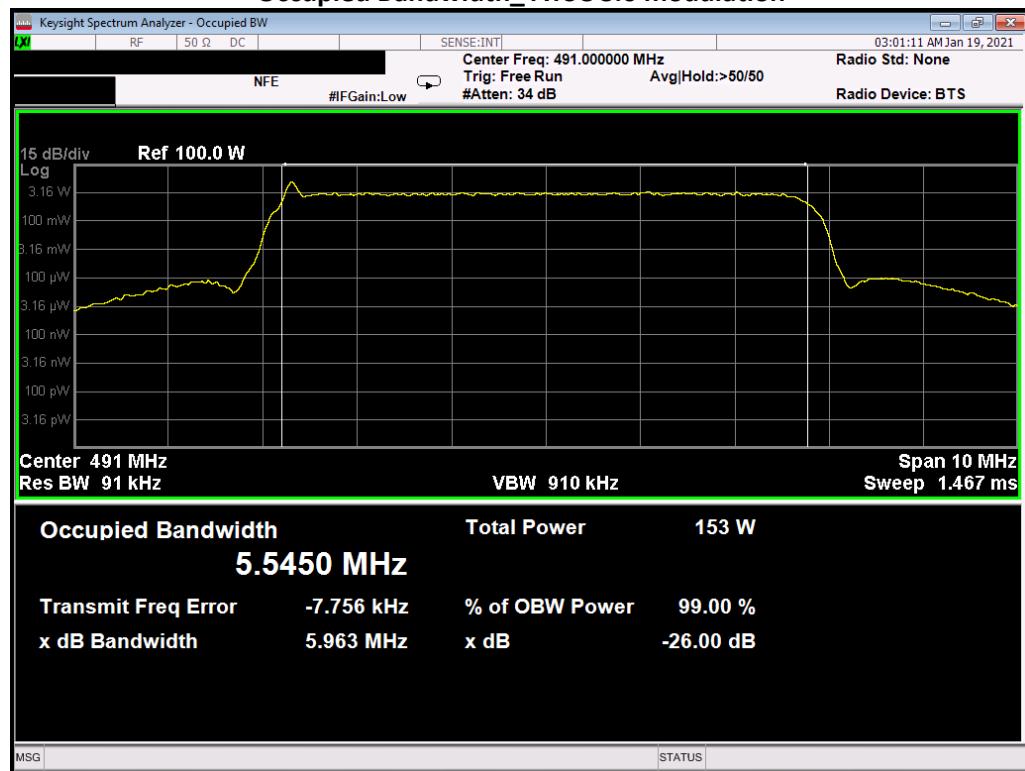

## Conducted Spurious Emissions

Engineer: Greg Corbin

Test Date: 1/19/2021

### Test Procedure

The EUT was setup as shown below.

For measurements above 1 GHz, a high pass filter was installed at the spectrum analyzer input.


Conducted spurious emissions from 30 MHz to the 10<sup>th</sup> harmonic of the fundamental transmitter were recorded and compared to the 75 dBc limit.

In addition, the GPS bands (1164 – 1610 MHz) were measured separately and compared to the 85 dBc limit.

Conducted spurious emissions were recorded for ATSC 1.0 and ATSC 3.0 modulations.

RBW was set to 100 kHz for 30 – 1000 MHz and 1 MHz from 1 – 7 GHz.

### Test Setup

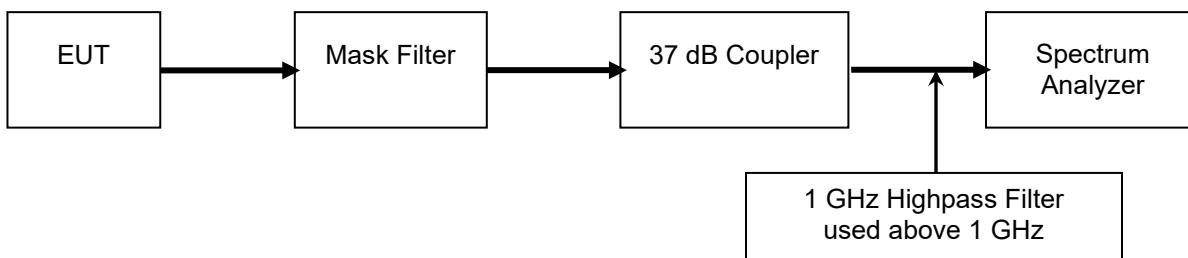


### Conducted Spurious Emissions Summary Test Table


Frequency Range (MHz)	Modulation (N/A)	fundamental Power (dBm)	Spurious Frequency (MHz)	Measured Spurious Level		Specification Limit (dBc)	Margin (dB)
30 - 1000	ATSC 1.0	52.31	549.40	-44.65	-96.96	75	-21.9
30 - 1000	ATSC 3.0	51.76	980.60	-56.12	-107.68	75	-32.7
1000 - 7000	ATSC 1.0	52.31	2933.8	-37.82	-90.13	75	-15.1
1000 - 7000	ATSC 3.0	51.76	3946	-42.65	-94.41	75	-19.41
1164 - 1610	ATSC 1.0	52.31	1272.63	-44.42	-96.73	85	-11.7
1164 - 1610	ATSC 3.0	51.76	1206.15	-54.43	-106.19	85	-21.2



## Conducted Spurious Emission Test Data

## Conducted Spurious\_ATSC 1.0\_30 - 1000 MHz

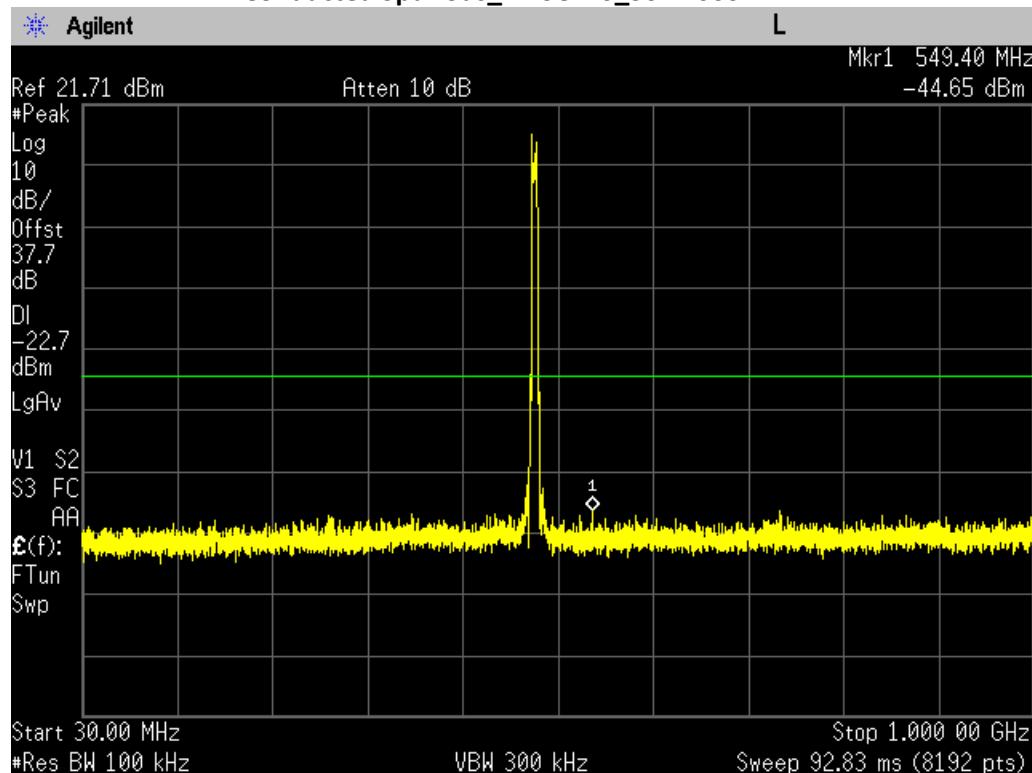


## Conducted Spurious\_ATSC 1.0\_1 - 7 GHz

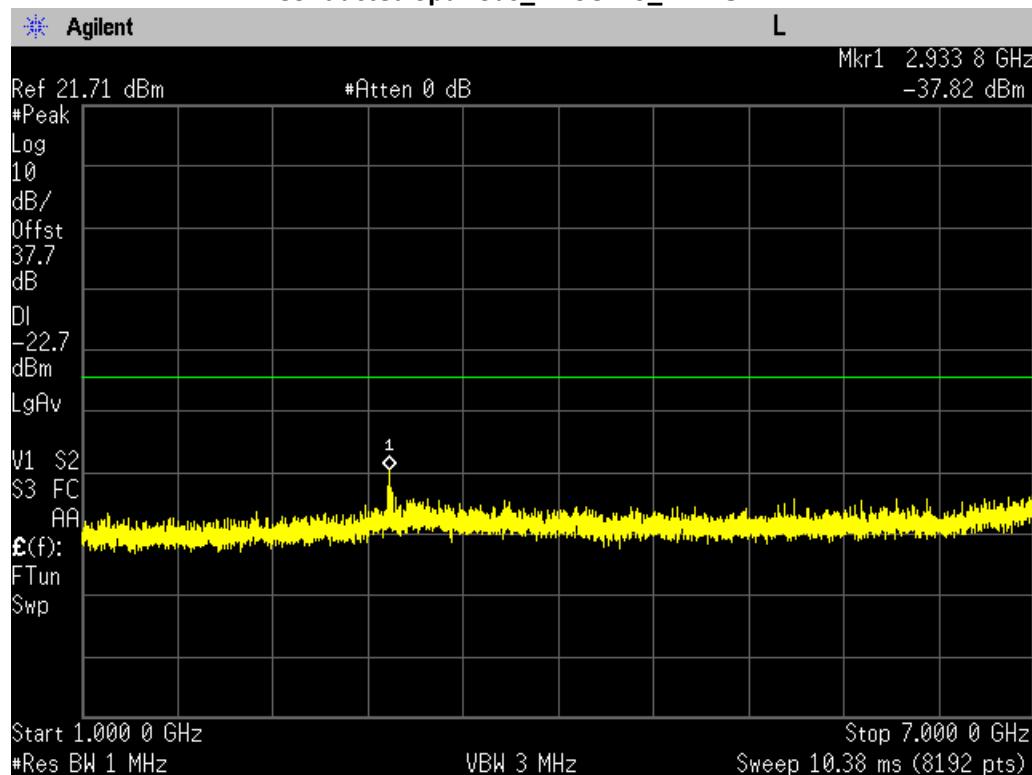


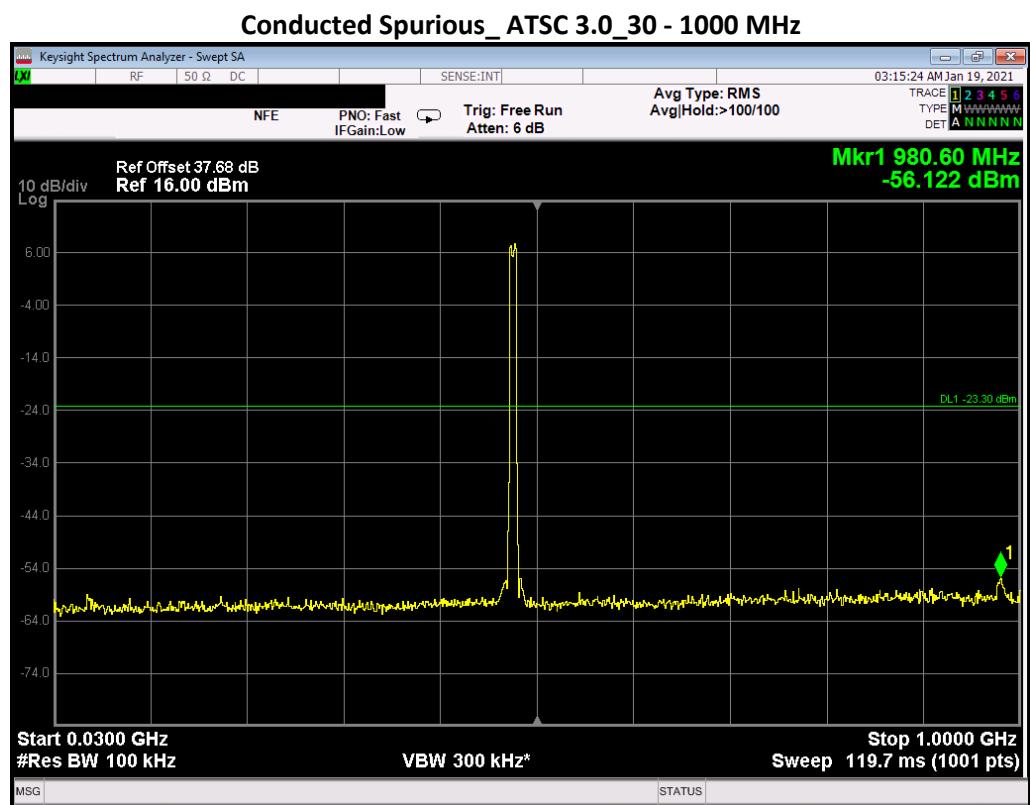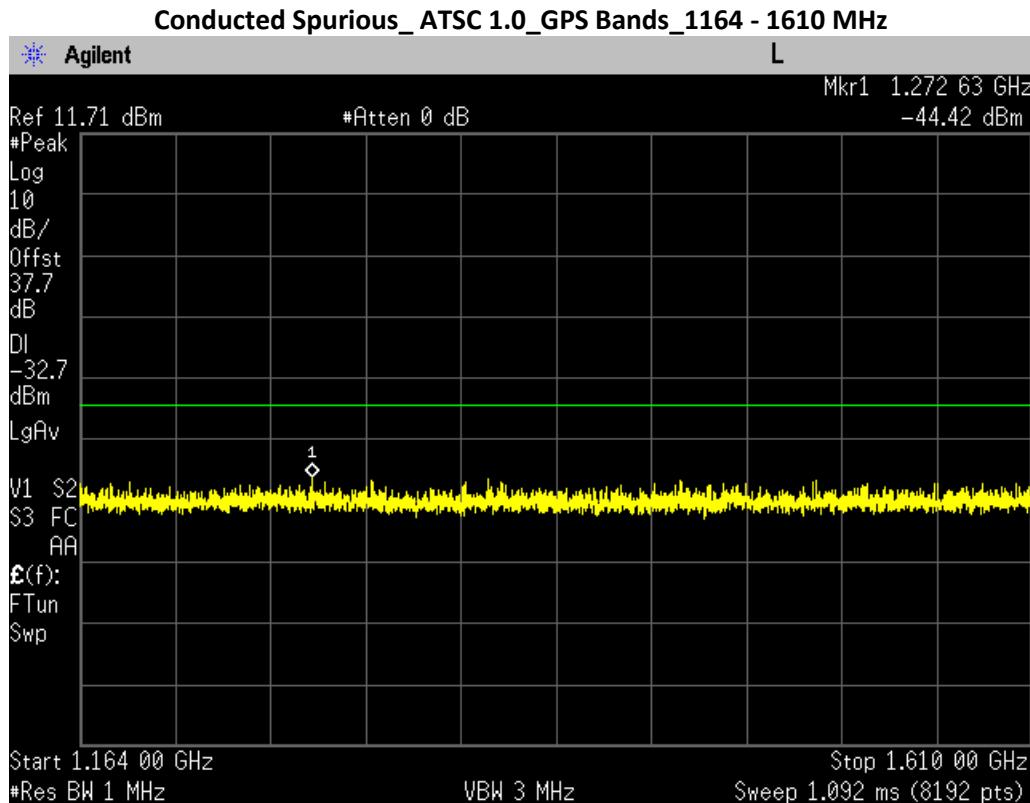

### Conducted Spurious ATSC 3.0 1 - 7 GHz

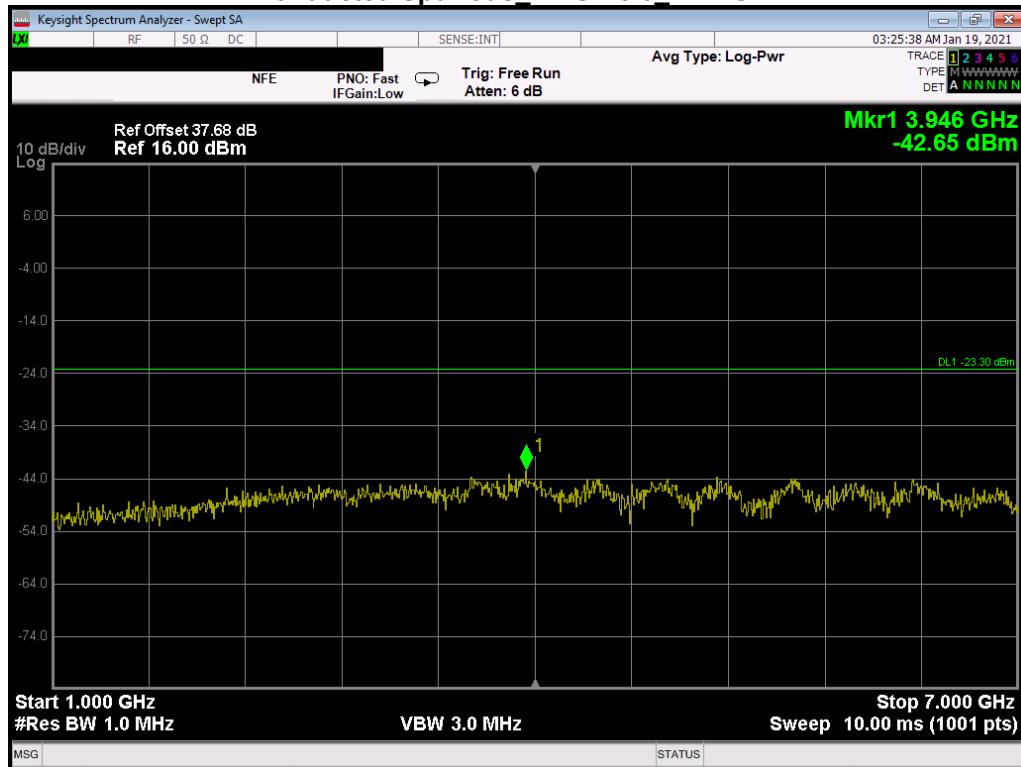

### Conducted Spurious ATSC 3.0 GPS Bands 1164 - 1610 MHz

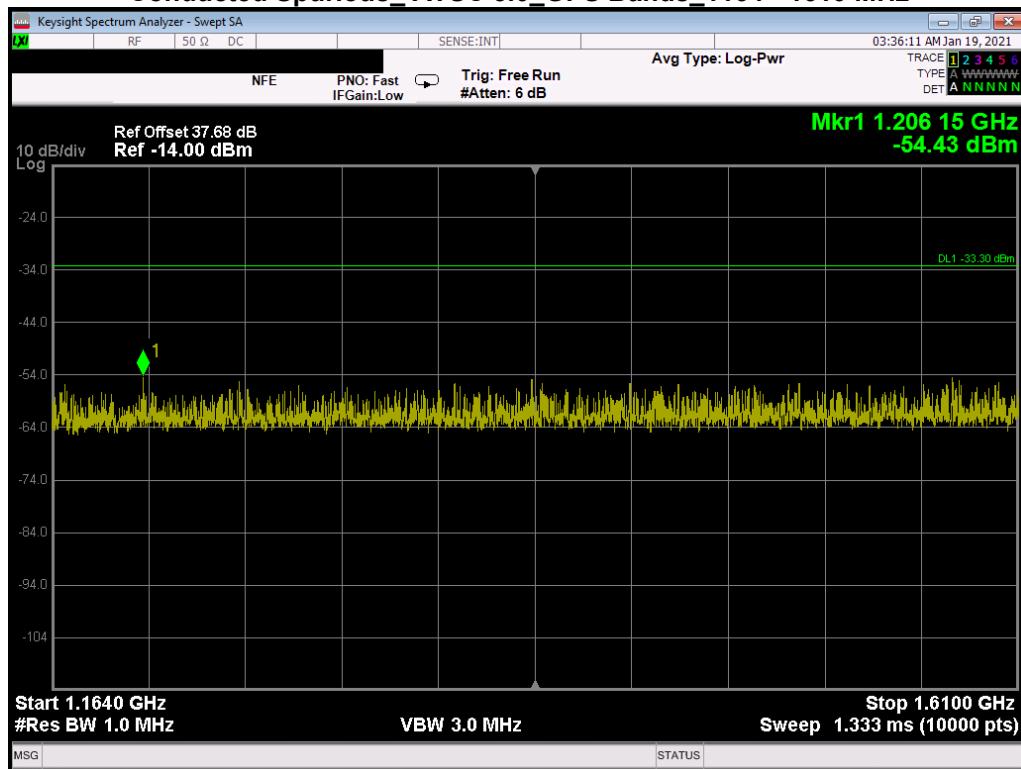


## Field Strength of Spurious Radiation

Engineer: Greg Corbin

Test Date: 1-19/2021

### Test Setup

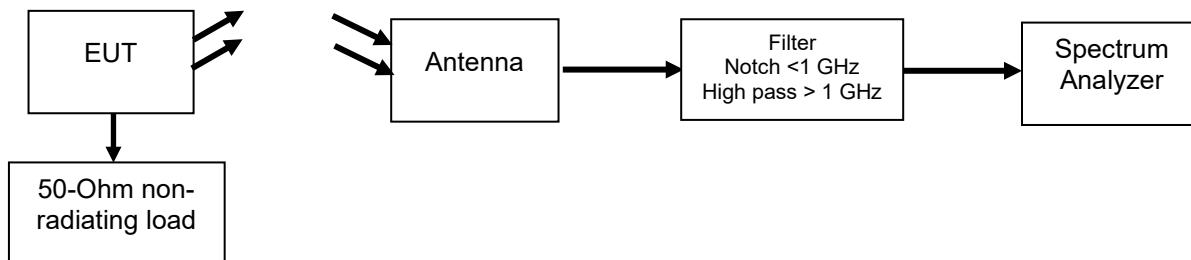

### Test Procedure

The EUT was tested in a semi-anechoic chamber with the turntable set 3m from the receiving antenna.

The EUT output was terminated into 50 ohm non-radiating termination.

Spurious emissions were recorded for ATSC 1.0 and ATSC 3.0 modulations.

The EUT was tested by rotating it 360 degrees with the antenna in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure that the signal levels were maximized.

The radiated spurious emissions were measured from 30 MHz to 7 GHz.

From 30 – 1000 MHz, the 3m chamber pre-amplifier was bypassed and a notch filter (tuned to 491 MHz) was used at the receive antenna output.

From 1 – 7 GHz, a high pass filter (cutoff freq = 1 GHz) was used at the receive antenna output.

All cable and antenna correction factors were input into the spectrum analyzer before recording spurious measurement.

There is no limit for radiated emissions.

The spurious emissions limit is a conducted limit measured at the output of the transmitter after the mask filter.

Per FCC 74.795 (b)(2), Emissions on frequencies outside the authorized channel, measured at the output terminals of the transmitter (including any filters that may be employed), shall meet the requirements of §74.794, as applicable.

Spectrum analyzer plots are provided for reference only.

Note: The transmitter is not marketed with an antenna so the antenna gain = 0 dBi (numerical gain = 1)

Refer to Annex A for Radiated Spurious Emission plots.

## Frequency Stability (Temperature Variation)

Engineer: Greg Corbin

Test Date: 10/6/2020

### Measurement Procedure

The Exact V2 digital exciter contains the frequency determining electronics and was tested for frequency stability. The exciter was placed in an environmental test chamber and the RF output was connected directly to a spectrum analyzer.

The temperature was varied from 0°C to 40°C in 10°C increments.

After a sufficient time for temperature stabilization the RF output frequency was measured.

At 20°C the power supply voltage to the EUT was varied from 85% to 115% of the nominal value and the RF output frequency was measured.


### Measurement Setup



### Frequency Stability vs Temperature

Tuned Frequency (MHz)	Temperature (deg C)	Tolerance (Hz)	Measured Frequency (MHz)	Upper Limit (MHz)	Lower Limit (MHz)	Upper Margin (MHz)	Lower Margin (MHz)
491	0	10000	490,999,979	491,010,000	490,990,000	-10,022	9,979
491	10	10000	490,999,978	491,010,000	490,990,000	-10,022	9,978
491	20	10000	490,999,977	491,010,000	490,990,000	-10,023	9,977
491	30	10000	490,999,975	491,010,000	490,990,000	-10,025	9,975
491	40	10000	490,999,977	491,010,000	490,990,000	-10,023	9,977


### Frequency Stability vs. Temperature

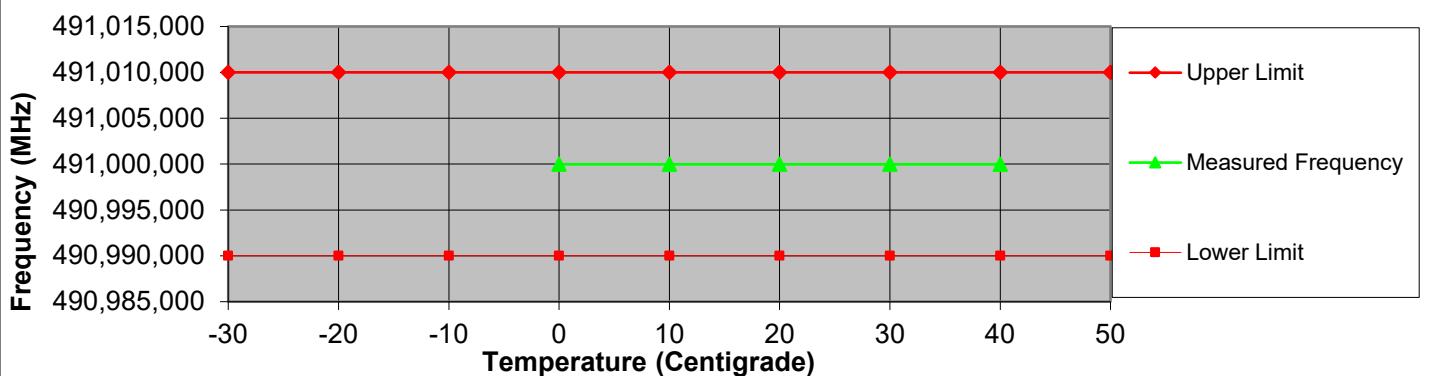

### Frequency Stability vs. Voltage

Tuned Frequency (MHz)	Tolerance (PPM)	Voltage (PPM)	Measured Frequency (MHz)	Upper Limit (MHz)	Lower Limit (MHz)	Upper Margin (MHz)	Lower Margin (MHz)
491	10000	102	490,999,976	491,010,000	490,990,000	-10,024	9,976
491	10000	120	490,999,977	491,010,000	490,990,000	-10,023	9,977
491	10000	138	490,999,976	491,010,000	490,990,000	-10,024	9,976

### Frequency Stability vs. Voltage

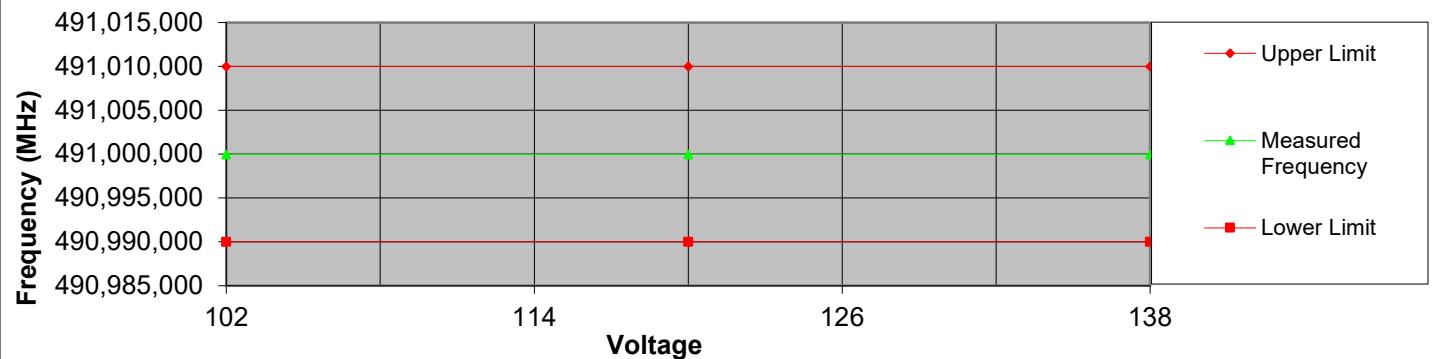

## Measurement Uncertainty

Measurement Uncertainty for Compliance Testing is listed in the table below.

The reported expanded uncertainty has been estimated at a 95% confidence level (k=2)

Measurement Type	Expanded Uncertainty
Conducted Emissions, AC Powerline	± 3.28 dB
Radiated Emissions_30 – 1000 MHz	± 4.82 dB
Radiated Emissions_1 – 18 GHz	± 5.73 dB
Frequency Error	± 22 Hz
Conducted RF Power	± 0.98 dB
Conducted Spurious Emission	± 2.49 dB
AC Voltage	± 2.3 %
DC Voltage	± 0.12 %
Temperature	± 1.0 deg C
Humidity	± 4.32 %

### Test Equipment Utilized

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
Tunable Notch Filter	Eagle	TNF-1-(250-850MHz)	i00124	Verified on 1/19/2021	
Bi-Log Antenna	Chase	CBL6111C	i00267	8/28/20	8/28/22
Horn Antenna	ARA	DRG-118/A	i00271	8/3/20	8/3/21
Humidity / Temp Meter	Newport	IBTHX-W-5	i00282	8/28/20	8/28/21
EMI Analyzer	Agilent	E7405A	i00379	12/29/20	12/29/21
Highpass Filter (1 GHz)	K&L	7IH40-980/T6000-O/O	i00432	Verified on 1/19/2021	
PSA Spectrum Analyzer	Agilent	E4445A	i00471	12/23/20	12/23/21
Voltmeter	Fluke	179	i00488	5/18/20	5/18/21
MXE EMI receiver	Keysight	N9038A	i00552	1/12/21	1/12/22
Coaxial Resistor (10 kw load)	Termaline	8936-115	i01547	N/A	N/A

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT