

**Amber Helm Development L.C.**

92723 Michigan Hwy-152

Sister Lakes, Michigan 49047 USA

Tel: 888-847-8027

**EMC Test Report**

**CON01-WR2004TX**  
Issued: February 22, 2020

regarding

**USA: CFR Title 47, Part 15.231 (Emissions)**

**Canada: IC RSS-210v10/GENv5 (Emissions)**

for



**A3C054338 Series**

**Category: RKE Transmitter**

Judgments:

**15.231 / RSS-210v10 Compliant**

Testing Completed: February 22, 2020



Prepared for:


**Continental Automotive**

4685 Investment Drive, Troy Michigan 48098 USA


Phone: +1 (248) 764-6783, Fax: +1 (248) 764-7281

Contact: Charles Muma, Charles.Muma@continental-corporation.com

Data Recorded by:

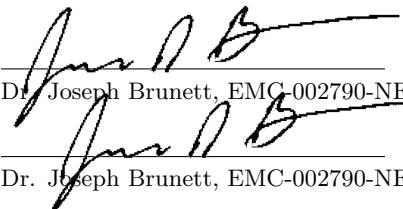  
Dr. Joseph Brunett, EMC-002790-NE

Prepared by:

  
Dr. Joseph Brunett, EMC-002790-NE

Reviewed by:

  
Gordon Helm, EMC-002401-NE

Date of Issue: February 22, 2020

## Revision History

Rev. No.	Date	Details	Revised By
r0	February 22, 2020	Initial Release.	J. Brunett
r1	March 2, 2020	Clarify samples description.	J. Brunett
r2	March 3, 2020	Frequency typo in data tables.	J. Brunett

## Contents

<b>Revision History</b>	<b>2</b>
<b>Table of Contents</b>	<b>2</b>
<b>1 Test Report Scope and Limitations</b>	<b>4</b>
1.1 Laboratory Authorization . . . . .	4
1.2 Report Retention . . . . .	4
1.3 Subcontracted Testing . . . . .	4
1.4 Limitation of Results . . . . .	4
1.5 Copyright . . . . .	4
1.6 Endorsements . . . . .	4
1.7 Test Location . . . . .	5
1.8 Traceability and Equipment Used . . . . .	5
<b>2 Test Specifications and Procedures</b>	<b>6</b>
2.1 Test Specification and General Procedures . . . . .	6
<b>3 Configuration and Identification of the Equipment Under Test</b>	<b>7</b>
3.1 Description and Declarations . . . . .	7
3.1.1 EUT Configuration . . . . .	8
3.1.2 Modes of Operation . . . . .	8
3.1.3 Variants . . . . .	8
3.1.4 Test Samples . . . . .	8
3.1.5 Functional Exerciser . . . . .	8
3.1.6 Modifications Made . . . . .	8
3.1.7 Production Intent . . . . .	8
3.1.8 Declared Exemptions and Additional Product Notes . . . . .	8
<b>4 Emissions</b>	<b>9</b>
4.1 General Test Procedures . . . . .	9
4.1.1 Radiated Test Setup and Procedures . . . . .	9
4.1.2 Conducted Emissions Test Setup and Procedures . . . . .	11
4.1.3 Power Supply Variation . . . . .	11
4.2 Intentional Emissions . . . . .	12
4.2.1 Fundamental Emission Pulsed Operation . . . . .	12
4.2.2 Fundamental Emission Bandwidth . . . . .	15
4.2.3 Fundamental Emission Field Strength . . . . .	17
4.3 Unintentional Emissions . . . . .	18
4.3.1 Transmit Chain Spurious Emissions . . . . .	18
4.3.2 Radiated Digital Spurious . . . . .	19
<b>5 Measurement Uncertainty and Accreditation Documents</b>	<b>20</b>

## List of Tables

1	Test Site List. . . . .	5
2	Equipment List. . . . .	5
3	EUT Declarations. . . . .	7
4	Fundamental Emission Pulsed Operation. . . . .	12
5	Fundamental Emission Bandwidth. . . . .	15
6	Fundamental Emission Field Strength. . . . .	17
7	Transmit Chain Spurious Emissions. . . . .	18
8	Measurement Uncertainty. . . . .	20

## List of Figures

1	Photos of EUT. . . . .	7
2	EUT Test Configuration Diagram. . . . .	8
3	Radiated Emissions Diagram of the EUT. . . . .	9
4	Radiated Emissions Test Setup Photograph(s). . . . .	10
5	Fundamental Emission Pulsed Operation. . . . .	13
5	Fundamental Emission Pulsed Operation. . . . .	14
6	Fundamental Emission Bandwidth. . . . .	16
7	Accreditation Documents . . . . .	20

## 1 Test Report Scope and Limitations

### 1.1 Laboratory Authorization

Test Facility description and attenuation characteristics are on file with the FCC Laboratory, Columbia, Maryland (FCC Reg. No: US5348 and US5356) and with ISED Canada, Ottawa, ON (File Ref. No: 3161A and 24249).

### 1.2 Report Retention

For equipment verified to comply with the regulations herein, the manufacturer is obliged to retain this report with the product records for the life of the product, and no less than ten years. A copy of this Report will remain on file with this laboratory until March 2030.

### 1.3 Subcontracted Testing

This report does not contain data produced under subcontract.

### 1.4 Limitation of Results

The test results contained in this report relate only to the item(s) tested. Any electrical or mechanical modification made to the test item subsequent to the test date shall invalidate the data presented in this report. Any electrical or mechanical modification made to the test item subsequent to this test date shall require reevaluation.

### 1.5 Copyright

This report shall not be reproduced, except in full, without the written approval of Amber Helm Development L.C.

### 1.6 Endorsements

This report shall not be used to claim product endorsement by any accrediting, regulatory, or governmental agency.

## 1.7 Test Location

The EUT was fully tested by **Amber Helm Development L.C.**, headquartered at 92723 Michigan Hwy-152, Sister Lakes, Michigan 49047 USA. Table 1 lists all sites employed herein. Specific test sites utilized are also listed in the test results sections of this report where needed.

Table 1: Test Site List.

Description	Location	Quality Num.
OATS (3 meter)	3615 E Grand River Rd., Williamston, Michigan 48895	OATSC

## 1.8 Traceability and Equipment Used

Pertinent test equipment used for measurements at this facility is listed in Table 2. The quality system employed at Amber Helm Development L.C. has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to the SI through NIST, other recognized national laboratories, accepted fundamental or natural physical constants, ratio type of calibration, or by comparison to consensus standards.

Table 2: Equipment List.

Description	Manufacturer/Model	SN	Quality Num.	Cal/Ver By / Date Due
Biconical	EMCO / 93110B	9802-3039	BICEMCO01	Keysight / Aug-2020
Log Periodic Antenna	EMCO / 3146	9305-3614	LOGEMCO01	Keysight / Aug-2020
BNC-BNC Coax	WRTL / RG58/U	001	CAB001-BLACK	AHD / Jul-2020
3.5-3.5MM Coax	PhaseFlex / PhaseFlex	001	CAB015-PURP	AHD / Jul-2020
Spectrum Analyzer	R & S / FSV30	101660	RSFSV30001	RS / Apr-2021
Spectrum Analyzer	R & S / FPC1000	101060	RSFPC1K01	RS / Jan-2021
Quad Ridge Horn	Singer / A6100	C35200	HQR1TO18S01	Keysight / Aug-2020

## 2 Test Specifications and Procedures

### 2.1 Test Specification and General Procedures

The goal of Continental Automotive is to demonstrate that the Equipment Under Test (EUT) complies with the Rules and/or Directives below. Detailed in this report are the results of testing the Continental Automotive A3C054338 Series for compliance to:

Country/Region	Rules or Directive	Referenced Section(s)
United States	Code of Federal Regulations	CFR Title 47, Part 15.231
Canada	ISED Canada	IC RSS-210v10/GENv5

It has been determined that the equipment under test is subject to the rules and directives above at the date of this testing. In conjunction with these rules and directives, the following specifications and procedures are followed herein to demonstrate compliance (in whole or in part) with these regulations.

ANSI C63.4:2014	”Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz”
ANSI C63.10:2013	”American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices”
TP0102RA	”AHD Internal Document TP0102 - Radiated Emissions Test Procedure”
TP0106RC	”AHD Internal Document TP0106 - Emissions Measurement Procedures (above 40 GHz)”
ISED Canada	”The Measurement of Occupied Bandwidth”

### 3 Configuration and Identification of the Equipment Under Test

#### 3.1 Description and Declarations

The equipment under test is a Remote Keyless Entry transmitter. The EUT is approximately 8 x 4 x 1.5 cm in dimension, and is depicted in Figure 1. It is powered by 3 VDC Lithium cell battery. In use, this device is a transmitter intended for remote control of automobile door locks, trunk, and remote start functionality. Table 3 outlines provider declared EUT specifications.



Figure 1: Photos of EUT.

Table 3: EUT Declarations.

#### General Declarations

Equipment Type:	RKE Transmitter
Country of Origin:	USA
Nominal Supply:	3 VDC
Oper. Temp Range:	-40°C to +85°C
Frequency Range:	314.95 MHz
Antenna Dimension:	Not Declared
Antenna Type:	PCB Trace
Antenna Gain:	Integral
Number of Channels:	1
Channel Spacing:	N/A
Alignment Range:	Not Declared
Type of Modulation:	ASK, FSK

#### United States

FCC ID Number:	M3N-A3C054388
Classification:	DSC

#### Canada

IC Number:	7812A-A3C054338
Classification:	Remote Control Device, Vehicular Device

### 3.1.1 EUT Configuration

The EUT is configured for testing as depicted in Figure 2.



Figure 2: EUT Test Configuration Diagram.

### 3.1.2 Modes of Operation

This EUT is capable of transmitting in manual activated mode (normal button press) or when automatically activated (Passive Entry Passive Start / Comfort) wherein it responds to detection of an LF encoded signal. Both modes are evaluated herein, with the worst case (greatest) on-time demonstrated to be in the LF automatic response mode. The EUT is also tested with and without its removable key.

### 3.1.3 Variants

There are ten (10) minor housing variants of the EUT. All variants employ identical PCBs and circuitry, but the housings vary based on vehicle logo and the number of buttons populated in the housing. Two worst case variants were determined in pretesting, those being the 4-BTN chrome button variant (HVIN: A3C039099) and the 3-BTN plastic button variant (HVIN: A3C054334).

### 3.1.4 Test Samples

Four samples of the EUT were provided, including one normal operating sample of each button variant (4-BTN and 3-BTN) as well as two samples of the same button variants with CW software.

### 3.1.5 Functional Exerciser

Normal operating EUT functionality was verified by observation of transmitted signal.

### 3.1.6 Modifications Made

There were no modifications made to the EUT by this laboratory, however pretesting was performed after which the manufacturer selected the final power setting for the device (x09).

### 3.1.7 Production Intent

The EUT appears to be a production ready sample.

### 3.1.8 Declared Exemptions and Additional Product Notes

None.

## 4 Emissions

## 4.1 General Test Procedures

#### 4.1.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are first pre-scanned in our screen room. Spectrum and modulation characteristics of all emissions are recorded. Instrumentation, including spectrum analyzers and other test equipment as detailed in Section 1.7 are employed. After pre-scan, emission measurements are made on the test site of record. If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in relevant test standards are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 3. All intentionally radiating elements that are not fixed-mounted in use are placed on the test table lying flat, on their side, and on their end (3-axes) and the resulting worst case emissions are recorded. If the EUT is fixed-mounted in use, measurements are made with the device oriented in the manner consistent with installation and then emissions are recorded. If the EUT exhibits spurious emissions due to internal receiver circuitry, such emissions are measured with an appropriate carrier signal applied.

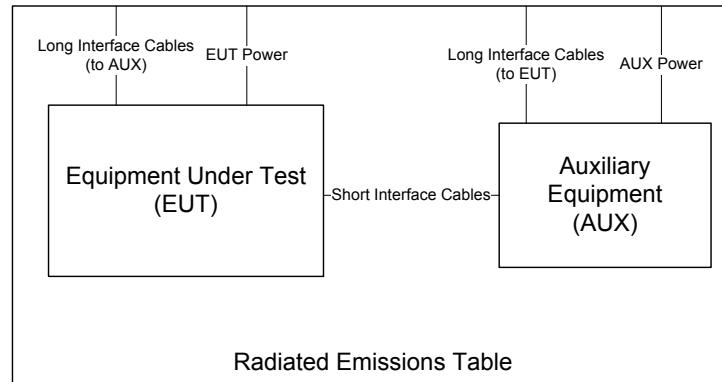


Figure 3: Radiated Emissions Diagram of the EUT.

For devices with intentional emissions below 30 MHz, a shielded loop antenna and/or E-field and H-Field broadband probes are used depending on the regulations. Shielded loops are placed at a 1 meter receive height at the desired measurement distance. For exposure in this band, the broadband probes employed are 10cm diameter single-axis shielded transducers and measurements are repeated and summed over three axes.

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. For both horizontal and vertical polarizations, the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected. The EUT is then rotated through 360° in azimuth until the highest emission is detected. The test antenna is then raised and lowered one last time from 1 to 4 m and the worst case value is recorded. Emissions above 1 GHz are characterized using standard gain or broadband ridge-horn antennas on our OATS with a 4 × 5 m rectangle of ECCOSORB absorber covering the OATS ground screen and a 1.5m table height. Care is taken to ensure that test receiver resolution and video bandwidths meet the regulatory requirements, and that the emission bandwidth of the EUT is not reduced. Photographs of the test setup employed are depicted in Figure 4.

Where regulations allow for direct measurement of field strength, power values (dBm) measured on the test receiver / analyzer are converted to  $\text{dB}\mu\text{V/m}$  at the regulatory distance, using

$$E_{dist} = 107 + P_R + K_A - K_G + K_E - C_F$$

where  $P_R$  is the power recorded on spectrum analyzer, in dBm,  $K_A$  is the test antenna factor in dB/m,  $K_G$  is the combined pre-amplifier gain and cable loss in dB,  $K_E$  is duty correction factor (when applicable) in dB, and  $C_F$  is a distance conversion (employed only if limits are specified at alternate distance) in dB. This field strength value is then compared with the regulatory limit. If effective isotropic radiated power (EIRP) is computed, it is computed as

$$EIRP(dBm) = E_{3m}(dB\mu V/m) - 95.2.$$

When presenting data at each frequency, the highest measured emission under all possible EUT orientations (3-axes) is reported.

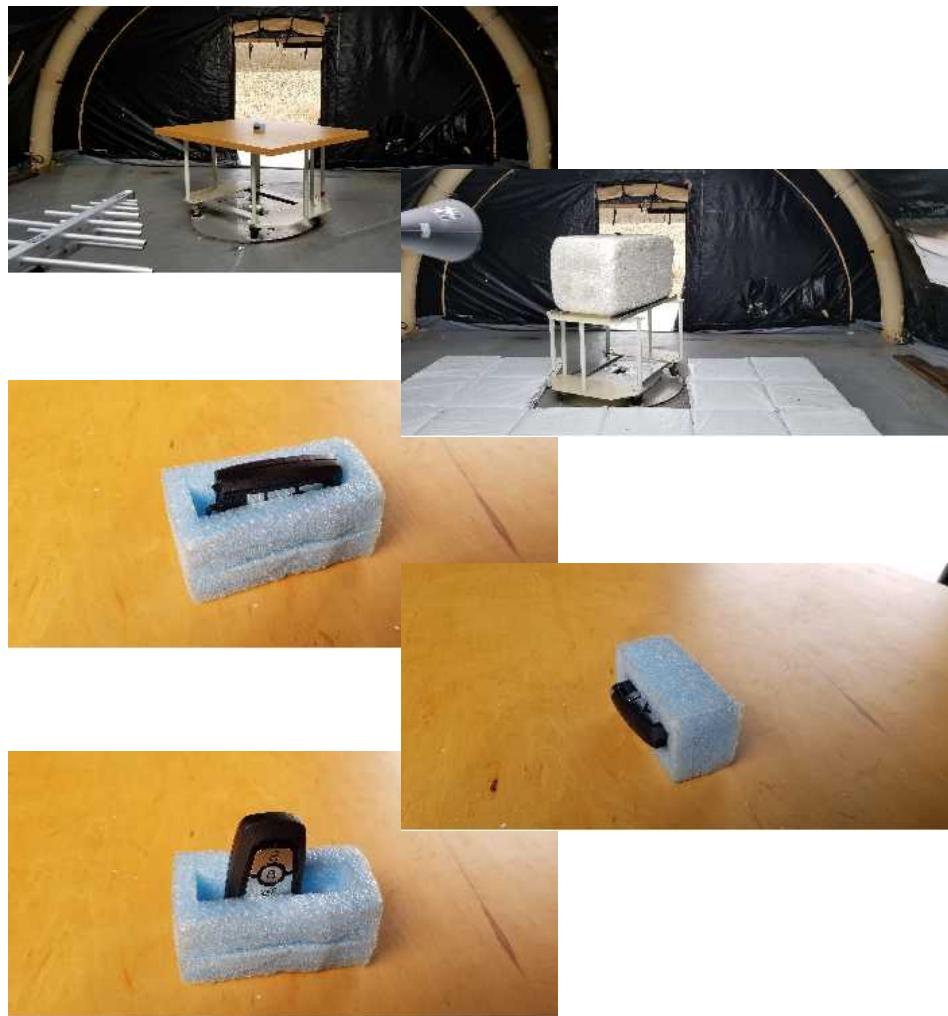


Figure 4: Radiated Emissions Test Setup Photograph(s).

#### **4.1.2 Conducted Emissions Test Setup and Procedures**

The EUT is not subject to measurement of power line conducted emissions as it is powered solely by its internal battery.

#### **4.1.3 Power Supply Variation**

Tests at extreme supply voltages are made if required by the procedures specified in the test standard, and results of this testing are detailed in this report.

In the case the EUT is designed for operation from a battery power source, the extreme test voltages are evaluated over the range specified in the test standard; no less than  $\pm 10\%$  of the nominal battery voltage declared by the manufacturer. For all battery operated equipment, worst case intentional and spurious emissions are re-checked employing a new (fully charged) battery.

## 4.2 Intentional Emissions

### 4.2.1 Fundamental Emission Pulsed Operation

**Test Setup & Procedure** The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. Duty cycle is reported for all relevant modes of operation. The test equipment employed includes RSFPC1K01, LOGEMCO01.

**Measurement Results** The details and results of testing the EUT are summarized in Table 4. Plots showing the measurements made to obtain these values are provided in Figure 5.

Table 4: Fundamental Emission Pulsed Operation.

Detector Pk	Span 0	IF Bandwidth 1 MHz	Video Bandwidth 3 MHz	Internal Frame Characteristics				Test Date: 21-Feb-20	Test Engineer: J. Brunett	EUT: Conti A3C054338 SERIES	EUT Mode: See below.	Meas. Distance: 10 cm
				Min. Repetition Rate (sec)	Max. No. of Frames	Total Transmission Length (sec)	Max. Frame Length (ms)	Min. Frame Period (ms)	Frame Encoding			
R0	Test Freq. (MHz)	EUT Test Mode*	Overall Transmission									
R1	314.95	Manual Activated RKE (subfigure 5(a))	Min. Repetition Rate (sec)	single	6	0.560	50.56	101.0	The EUT can transmit 6 OOK frames. Each frame has a maximum length of 50.56ms with a 50% manchester duty cycle and greater than 100ms frame period.	25.3	-11.9	
R2	314.95	Auto Activated, PEPS (subfigure 5(b))	Max. No. of Frames	single	2	0.029	13.60	-	In the worse case, the EUT transmits two (2) 13.6 ms long FSK frames, both occurring within the first 100 ms window.	27.2	<b>-11.3</b>	
R3			Total Transmission Length (sec)									
#	C1	C2	C3	C4	C5	C6	C7		C8	C9	C10	FCC/IC

Example Calculation: Lowest Duty (%) =  $(2 \times 13.60 \text{ ms}) / 100 \text{ ms} = 27.2 \text{ % on-time.}$



Figure 5(a): Fundamental Emission Pulsed Operation.



Figure 5(b): Fundamental Emission Pulsed Operation.

#### 4.2.2 Fundamental Emission Bandwidth

**Test Setup & Procedure** The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. Emission bandwidth (EBW) of the EUT is measured with the device placed in the test mode(s) with the shortest available frame length and minimum frame spacing. The 20 dB EBW is measured as the max-held peak-detected signal when the IF bandwidth is greater than or equal to 1% of the receiver span. For complex modulations other than ASK and FSK, the 99% emission bandwidth per IC test procedures has a different result, and is also reported. The test equipment employed includes RSFSV30001, LOGEMCO01.

**Measurement Results** The details and results of testing the EUT are summarized in Table 5. Plots showing the measurements made to obtain these values are provided in Figure 6.

Table 5: Fundamental Emission Bandwidth.

Detector	IF Bandwidth	Video Bandwidth	Test Date:	21-Feb-20
	Pk	10 kHz	Test Engineer:	J. Brunett
		30 kHz	EUT:	Conti A3C054338 SERIES
			EUT Mode:	FSK Modulated
			Meas. Distance:	10 cm
			FCC/IC	
R0	Mode	Center Frequency (MHz)	20 dB EBW (MHz)	EBW Limit (MHz)
R1	RKE (OOK)	314.95	0.080	0.787
R2	PEPS (FSK)	314.95	0.078	0.787
R3				0.394
#	C1	C2	C3	C4
				C5
				C7
				C8

(ROW) (COLUMN) NOTE:

R0 C8 Per KDB 926416, for FCC 15.231 non-sweeping devices, total bandwidth is sum of the individual occupied 20 dB bandwidths. At most the manuf. uses 3 channels. Device bandwidth is restricted to 0.0025 (.25%) of the center frequency. Three Maximum 20dB EBWs summation is 0.064 MHz + 0.064 MHz + 0.066 MHz = 0.194 MHz

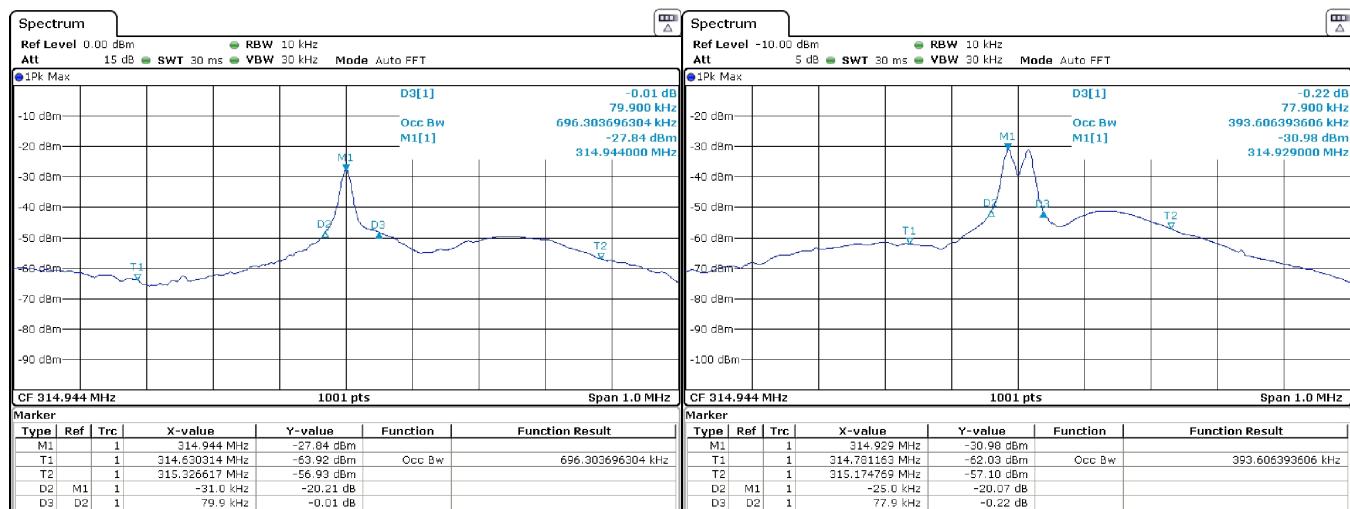


Figure 6: Fundamental Emission Bandwidth.

#### 4.2.3 Fundamental Emission Field Strength

**Test Setup & Procedure** The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. Fundamental emissions are measured at the regulatory distance on our OATS. The test equipment employed includes RSFSV30001, LOGEMCO01.

**Measurement Results** The details and results of testing the EUT are summarized in Table 6.

Table 6: Fundamental Emission Field Strength.

		EUT Modes:		a1		4BTN CHROME, CW (x09), Key In		a5																					
		a2		4BTN CHROME, CW (x09), Key Out				a6																					
Test Date(s):		2/		a3		3BTN PLAST, CW (x09), Key In		a7																					
Test Engineer:		J. Burnett		a4		3 BTN PLAST, CW (x09), Key Out		a8																					
#	Frequency	Start	Stop	Temp.	Table	MR	DR	N/F	CF	EUT	Test Antenna	Cable	Receiver	Field Strength @ DR	EIRP	Details													
		MHz	MHz	(C)	Hum.	%	deg	m	dB	Mode	Volt.	Dim.	Ka	Kg	Rx Power	Bandwidth													
				see table						H/V	Height			Pk	Avg	RBW	VBW	Meas.											
										m	cm	cm	dB/m	dB	dBm	MHz		USA	CAN	Avg									
																		USA	CAN	Limit									
																		USA	CAN	Calc.									
																		dBm											
R0	SETUP			OATSC		A3C054338 SERIES		EMCOLOG		CAB001		RSFSV30001		NOTES: H-POL - FLAT, V-POL SIDE Worst Case Orient															
R1	314.95	314.95	3 / 53	0.0	3.0	3.0		0.0	a1	3.0	8.0	H	1.0	100.0	14.1	-0.1		0.12	0.30	84.3	95.6	95.6	73.0	75.6	75.6	-10.8	2.6		
R2	314.95	314.95	3 / 53	90.0	3.0	3.0		0.0	a1	3.0	8.0	V	2.0	100.0	14.1	-0.1		0.12	0.30	82.3	95.6	95.6	71.0	75.6	75.6	-12.8	4.6		
R3	314.95	314.95	3 / 53	90.0	3.0	3.0		0.0	a1	3.0	8.0																		
R4	SETUP			OATSC		A3C054338 SERIES		EMCOLOG		CAB001		RSFSV30001		NOTES: H-POL - FLAT, V-POL SIDE Worst Case Orient															
R5	314.95	314.95	3 / 53	0.0	3.0	3.0		0.0	a2	3.0	8.0	H	1.0	100.0	14.1	-0.1		0.12	0.30	86.1	95.6	95.6	74.8	75.6	75.6	-9.0	.8		
R6	314.95	314.95	3 / 53	90.0	3.0	3.0		0.0	a2	3.0	8.0	V	2.0	100.0	14.1	-0.1		0.12	0.30	84.0	95.6	95.6	72.7	75.6	75.6	-11.1	2.9		
R7																													
R8	SETUP			OATSC		A3C054338 SERIES		EMCOLOG		CAB001		RSFSV30001		NOTES: H-POL - FLAT, V-POL SIDE Worst Case Orient															
R9	314.95	314.95	3 / 53	0.0	3.0	3.0		0.0	a3	3.0	8.0	H	1.0	100.0	14.1	-0.1		0.12	0.30	85.9	95.6	95.6	74.6	75.6	75.6	-9.2	1.0		
R10	314.95	314.95	3 / 53	90.0	3.0	3.0		0.0	a3	3.0	8.0	V	2.0	100.0	14.1	-0.1		0.12	0.30	84.0	95.6	95.6	72.7	75.6	75.6	-11.1	2.9		
R11	SETUP			OATSC		A3C054338 SERIES		EMCOLOG		CAB001		RSFSV30001		NOTES: H-POL - FLAT, V-POL SIDE Worst Case Orient															
R12	314.95	314.95	3 / 53	0.0	3.0	3.0		0.0	a4	3.0	8.0	H	1.0	100.0	14.1	-0.1		0.12	0.30	83.1	95.6	95.6	71.8	75.6	75.6	-12.0	3.8		
R13	314.95	314.95	3 / 53	90.0	3.0	3.0		0.0	a4	3.0	8.0	V	2.0	100.0	14.1	-0.1		0.12	0.30	81.2	95.6	95.6	69.9	75.6	75.6	-13.9	5.7		
R14																													
R15																													
R16																													
R17																													
R18																													
R19																													
R20																													
R21																													
R22																													
R23																													
R24																													
R25																													
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16	C17	C18	C19	C20	C21	C22	C23	C24	C25	C26	C27	C28	C29
(ROW)	(COLUMN)	NOTE:																											
R0	C5	MR is Measurement Range, which is reduced from DR to achieve necessary SNR.																											
R0	C6	DR is the regulatory Desired Range measurement distance.																											
R0	C7	N/F is Near-Field / Far-Field distance computed for max of EUT Antenna Dimension (C10) when applicable.																											
R0	C8	CF is computed using a 20 dB/decade Decay Rate.																											
R0	C18/19	When E-field or EIRP is reported directly from Spectrum Analyzer, Antenna Factors and Cable losses are included directly in SA settings and Pr is not reported.																											

### 4.3 Unintentional Emissions

### 4.3.1 Transmit Chain Spurious Emissions

**Test Setup & Procedure** The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. Spurious radiated emissions measurements are performed to 10 times the highest fundamental operating frequency. The test equipment employed includes RSFSV30001, LOGEMCO01, HQR1TO18S01.

**Measurement Results** The details and results of testing the EUT are summarized in Table 7.

Table 7: Transmit Chain Spurious Emissions.

EUT Modes: a1										a5																			
a2										a6																			
Test Date(s): 12/12/16/2019					a3					4BTN CHROME, CW (x09), Key Out					a7														
Test Engineer: J. Brunett					a4					a8																			
Frequency		Site		EUT		Test Antenna		Cable		Receiver		Field Strength @ DR		EIRP		Details													
Start	Stop	Temp. (C)	Angle	MR	DR	N/F	CF	Mode see table	Volt.	Dim.	Pol.	Ant.	Dim.	Ka	Kg	Rx Power Pk	Bandwidth RBW	Qpk / Avg	EIRP Calc.										
MHz	MHz	Hum. %	deg	m				(V)	cm	H/V	m	cm	cm	dB/m	dB	dBm	MHz	Limit	USA CAN	dBm									
R1	SETUP		OATSC		A3C054338 SERIES		EMCOLOG		CAB001		RSFSV30001		NOTES: H-POL - FLAT, V-POL END Worst Case Orient																
R2	629.9	629.9	3 / 53	0.0	3.0	3.0	0.0	a2	3.0	8.0	H	1.2	100.0	10.5	-0.1		0.12	0.30	39.2	75.6	75.6	27.9	55.6	-56.0	27.7				
R3	629.9	629.9	3 / 53	90.0	3.0	3.0	0.0	a2	3.0	8.0	V	1.4	100.0	10.5	-0.1		0.12	0.30	33.7	75.6	75.6	22.4	55.6	55.6	-61.5	33.2			
R4	944.9	944.9	3 / 53	0.0	3.0	3.0	0.0	a2	3.0	8.0	H	1.0	100.0	16.7	-0.2		0.12	0.30	28.7	75.6	75.6	17.4	55.6	55.6	-66.5	38.2			
R5	944.9	944.9	3 / 53	90.0	3.0	3.0	0.0	a2	3.0	8.0	V	1.1	100.0	16.7	-0.2		0.12	0.30	30.2	75.6	75.6	18.9	55.6	55.6	-65.0	36.7			
R6																													
R7	SETUP		OATSC		A3C054338 SERIES		HQR1TO18S01		CAB015		RSFSV30001		NOTES: Max all EUT orientations and test antenna polarizations.																
R8	1259.8	1259.8	3 / 53	all	3.0	3.0	0.2	0.0	a2	3.0	8.0	H/V	all	15.0	21.5	-0.2		1.00	3.00	41.2	74.0	74.0	29.9	54.0	54.0	-54.0	24.1		
R9	1574.8	1574.8	3 / 53	all	3.0	3.0	0.2	0.0	a2	3.0	8.0	H/V	all	15.0	25.2	-0.2		1.00	3.00	41.2	74.0	74.0	29.9	54.0	54.0	-54.0	24.1		
R10	1889.7	1889.7	3 / 53	all	3.0	3.0	0.3	0.0	a2	3.0	8.0	H/V	all	15.0	27.9	-0.2		1.00	3.00	46.8	74.0	74.0	35.5	54.0	54.0	-48.4	18.5		
R11	2204.7	2204.7	3 / 53	all	3.0	3.0	0.3	0.0	a2	3.0	8.0	H/V	all	15.0	29.7	-0.3		1.00	3.00	53.4	74.0	74.0	42.1	54.0	54.0	-41.8	11.9		
R12	2519.6	2519.6	3 / 53	all	3.0	3.0	0.4	0.0	a2	3.0	8.0	H/V	all	15.0	30.9	-0.3		1.00	3.00	46.8	74.0	74.0	35.5	54.0	54.0	-48.4	18.5		
R13	2834.6	2834.6	3 / 53	all	3.0	3.0	0.4	0.0	a2	3.0	8.0	H/V	all	15.0	31.6	-0.3		1.00	3.00	47.7	74.0	74.0	36.4	54.0	54.0	-47.5	17.6		
R14	3149.5	3149.5	3 / 53	all	3.0	3.0	0.5	0.0	a2	4.0	8.0	H/V	all	15.0	31.8	-0.3		1.00	3.00	49.7	74.0	74.0	38.4	54.0	54.0	-45.5	15.6		
R15																													
R16	SETUP		OATSC		AM83VLT		EMCOLOG		CAB001		RSFSV30001		NOTES: H-POL - FLAT, V-POL END Worst Case Orient																
R17	629.9	629.9	3 / 53	0.0	3.0	3.0	0.0	a3	3.0	8.0	H	1.2	100.0	19.5	-0.1		0.12	0.30	38.9	75.6	75.6	27.6	55.6	55.6	-60.4	28.0			
R18	629.9	629.9	3 / 53	90.0	3.0	3.0	0.0	a3	3.0	8.0	V	1.4	100.0	19.5	-0.1		0.12	0.30	37.2	75.6	75.6	25.9	55.6	55.6	-62.1	29.7			
R19	944.9	944.9	3 / 53	0.0	3.0	3.0	0.0	a3	3.0	8.0	H	1.0	100.0	23.2	-0.2		0.12	0.30	29.8	75.6	75.6	18.5	55.6	55.6	-65.4	37.1			
R20	944.9	944.9	3 / 53	90.0	3.0	3.0	0.0	a3	3.0	8.0	H	1.1	100.0	23.2	-0.2		0.12	0.30	25.7	75.6	75.6	14.4	55.6	55.6	-69.5	41.2			
R21																													
R22	SETUP		OATSC		AM83VLT		HQR1TO18S01		CAB015		RSFSV30001		NOTES: Max all EUT orientations and test antenna polarizations.																
R23	1259.8	1259.8	3 / 53	all	3.0	3.0	0.2	0.0	a3	3.0	8.0	H/V	all	15.0	21.5	-0.2		1.00	3.00	46.1	74.0	74.0	34.8	54.0	54.0	-49.1	19.2		
R24	1574.8	1574.8	3 / 53	all	3.0	3.0	0.2	0.0	a3	3.0	8.0	H/V	all	15.0	25.2	-0.2		1.00	3.00	42.0	74.0	74.0	30.7	54.0	54.0	-53.2	23.3		
R25	1889.7	1889.7	3 / 53	all	3.0	3.0	0.3	0.0	a3	3.0	8.0	H/V	all	15.0	27.9	-0.2		1.00	3.00	44.9	74.0	74.0	33.6	54.0	54.0	-50.3	20.4		
R26	2204.7	2204.7	3 / 53	all	3.0	3.0	0.3	0.0	a3	3.0	8.0	H/V	all	15.0	29.7	-0.3		1.00	3.00	51.5	74.0	74.0	40.2	54.0	54.0	-43.7	13.8		
R27	2519.6	2519.6	3 / 53	all	3.0	3.0	0.4	0.0	a3	3.0	8.0	H/V	all	15.0	30.9	-0.3		1.00	3.00	49.2	74.0	74.0	37.9	54.0	54.0	-46.0	16.7		
R28	2834.6	2834.6	3 / 53	all	3.0	3.0	0.4	0.0	a3	4.0	8.0	H/V	all	15.0	31.6	-0.3		1.00	3.00	49.7	74.0	74.0	38.4	54.0	54.0	-45.5	15.6		
R29	3149.5	3149.5	3 / 53	all	3.0	3.0	0.5	0.0	a3	4.0	8.0	H/V	all	15.0	31.8	-0.3		1.00	3.00	52.5	74.0	74.0	41.2	54.0	54.0	-42.7	12.8		
R30																													
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16	C17	C18	C19	C20	C21	C22	C23	C24	C25	C26	C27	C28	C29
(ROW)		(COLUMN)		NOTE:																									
R0	C5		MR is Measurement Range, which is reduced from DR to achieve necessary SNR.																										
R0	C6		DR is the regulatory Desired Range measurement distance.																										
R0	C7		N/F is Near-Field / Far-Field distance computed for max of EUT Antenna Dimension (C10) and Test Antenna dimension (C12), where applicable.																										
R0	C8		CF is computed using a 20 dB/decade Decay Rate.																										
R0	C18/19		When E-field or EIRP is reported directly from Spectrum Analyzer, Antenna Factors and Cable losses are included directly in S-A settings and PdB is not reported.																										

#### 4.3.2 Radiated Digital Spurious

The results for the measurement of digital spurious emissions are not reported herein as all digital emissions were greater than 20 dB below the regulatory limit. Radiation from digital components was measured to 4 GHz, or to five times the maximum digital component operating frequency, whichever is greater.

## 5 Measurement Uncertainty and Accreditation Documents

The maximum values of measurement uncertainty for the laboratory test equipment and facilities associated with each test are given in the table below. This uncertainty is computed for a 95.45% confidence level based on a coverage factor of  $k = 2$ .

Table 8: Measurement Uncertainty.

Measured Parameter	Measurement Uncertainty <sup>†</sup>
Radio Frequency Conducted Emm. Amplitude	$\pm(f_{Mkr}/10^7 + RBW/10 + (SPN/(PTS - 1))/2 + 1 \text{ Hz})$ $\pm1.9 \text{ dB}$
Radiated Emm. Amplitude (30 – 200 MHz)	$\pm4.0 \text{ dB}$
Radiated Emm. Amplitude (200 – 1000 MHz)	$\pm5.2 \text{ dB}$
Radiated Emm. Amplitude ( $f > 1000 \text{ MHz}$ )	$\pm3.7 \text{ dB}$

<sup>†</sup>Ref: CISPR 16-4-2:2011+A1:2014



Figure 7: Accreditation Documents