



EXHIBIT C – Conducted Emissions Test Data


FCC ID M4D1010

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets				Rev 3.3 10/09/99
EUT: LCS-TX	Serial Number: N/A	Job Number: CARD0026	Date: 11/09/00	
Manufacturer: Cardio Theater	Test Engineer: Greg Kiemel	Job Site: EV01		
Customer Reference Number:	Software:	Power: 120V/60Hz		
Comments:	4 audio devices to inputs, Low transmit band			
		Temperature (°C): 21	% Humidity: 42	


FCC Part 15 Class B Conducted Emissions Limits - High Line

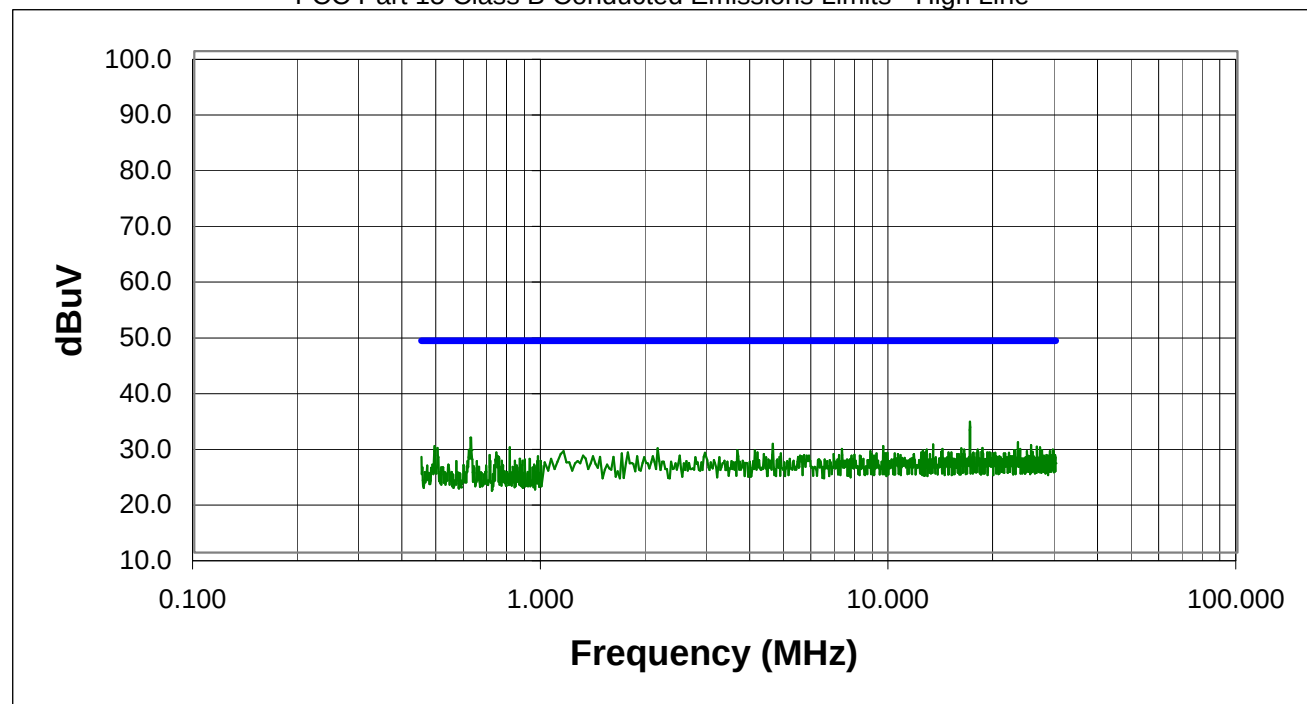


Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
17.010	12.3	Peak	21.2	33.5	48.0	-14.5
0.623	10.6	Peak	20.0	30.6	48.0	-17.4
23.350	8.6	Peak	21.2	29.8	48.0	-18.2
4.615	8.6	Peak	20.9	29.5	48.0	-18.5
13.317	8.3	Peak	21.1	29.4	48.0	-18.6
25.482	8.0	Peak	21.3	29.3	48.0	-18.7
0.491	9.1	Peak	20.0	29.1	48.0	-18.9
9.570	8.1	Peak	21.0	29.1	48.0	-18.9
26.497	7.7	Peak	21.3	29.0	48.0	-19.0
27.030	7.6	Peak	21.3	28.9	48.0	-19.1
0.808	8.9	Peak	20.0	28.9	48.0	-19.1
18.492	7.6	Peak	21.2	28.8	48.0	-19.2
0.501	8.8	Peak	20.0	28.8	48.0	-19.2
2.149	8.0	Peak	20.7	28.7	48.0	-19.3
16.080	7.5	Peak	21.2	28.7	48.0	-19.3
7.285	7.6	Peak	21.0	28.6	48.0	-19.4
23.706	7.4	Peak	21.2	28.6	48.0	-19.4
14.171	7.5	Peak	21.1	28.6	48.0	-19.4
29.440	7.2	Peak	21.3	28.5	48.0	-19.5
0.618	8.5	Peak	20.0	28.5	48.0	-19.5

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets				Rev 3.3 10/09/99
EUT: LCS-TX	Serial Number: N/A	Job Number: CARD0026	Date: 11/09/00	
Manufacturer: Cardio Theater	Test Engineer: Greg Kiemel	Job Site: EV01		
Customer Reference Number:	Software:	Power: 120V/60Hz		
Comments:	4 audio devices to inputs, Low transmit band			
		Temperature (°C): 21	% Humidity: 42	


FCC Part 15 Class B Conducted Emissions Limits - Low Line

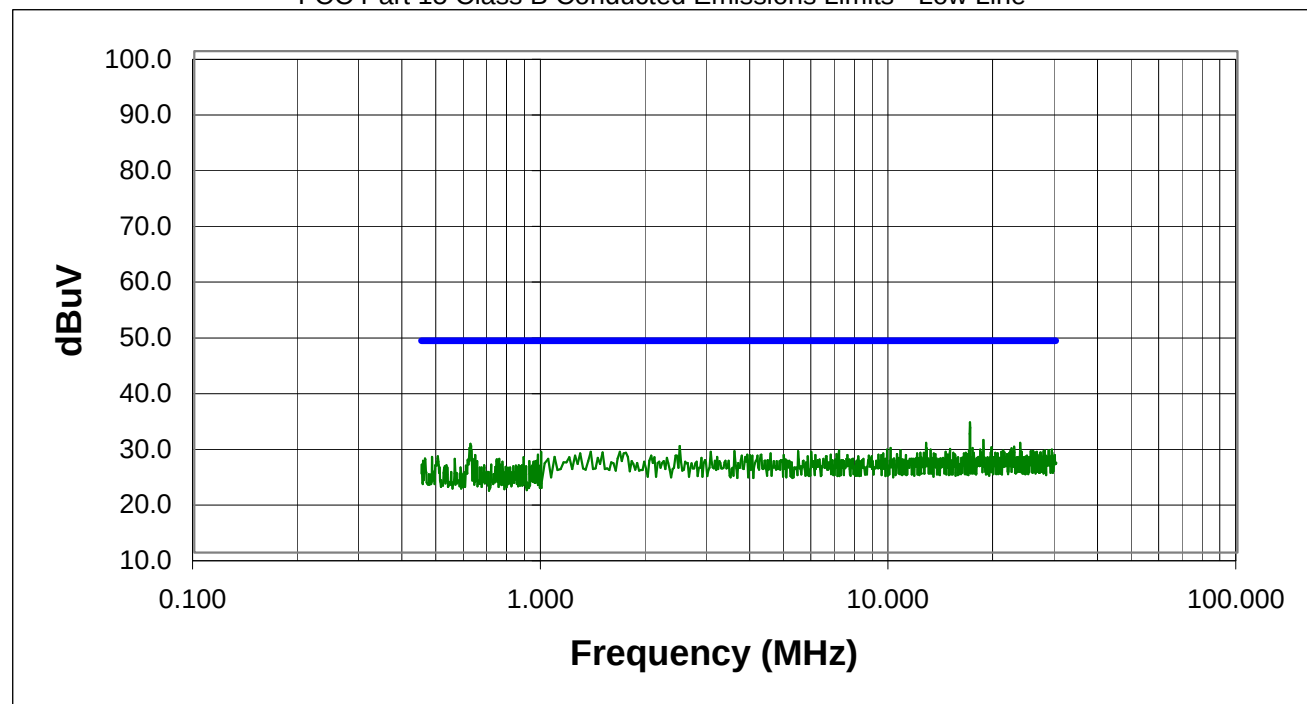


Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
17.010	12.2	Peak	21.2	33.4	48.0	-14.6
18.593	9.0	Peak	21.2	30.2	48.0	-17.8
12.714	8.6	Peak	21.1	29.7	48.0	-18.3
23.731	8.5	Peak	21.2	29.7	48.0	-18.3
0.622	9.5	Peak	20.0	29.5	48.0	-18.5
2.488	8.4	Peak	20.7	29.1	48.0	-18.9
22.792	7.8	Peak	21.2	29.0	48.0	-19.0
19.598	7.7	Peak	21.2	28.9	48.0	-19.1
17.286	7.6	Peak	21.2	28.8	48.0	-19.2
0.619	8.8	Peak	20.0	28.8	48.0	-19.2
10.050	7.8	Peak	21.0	28.8	48.0	-19.2
22.411	7.5	Peak	21.2	28.7	48.0	-19.3
14.900	7.5	Peak	21.1	28.6	48.0	-19.4
9.819	7.5	Peak	21.0	28.5	48.0	-19.5
18.216	7.3	Peak	21.2	28.5	48.0	-19.5
29.237	7.2	Peak	21.3	28.5	48.0	-19.5
13.116	7.4	Peak	21.1	28.5	48.0	-19.5
10.729	7.3	Peak	21.1	28.4	48.0	-19.6
28.628	7.1	Peak	21.3	28.4	48.0	-19.6
16.910	7.1	Peak	21.2	28.3	48.0	-19.7

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets				Rev 3.3 10/09/99
EUT: LCS-TX	Serial Number: N/A	Job Number: CARD0026	Date: 11/09/00	
Manufacturer: Cardio Theater	Test Engineer: Greg Kiemel	Job Site: EV01		
Customer Reference Number:	Software:	Power: 120V/60Hz		
Comments:	4 audio devices to inputs, Mid transmit band			
		Temperature (°C): 21	% Humidity: 42	


FCC Part 15 Class B Conducted Emissions Limits - High Line

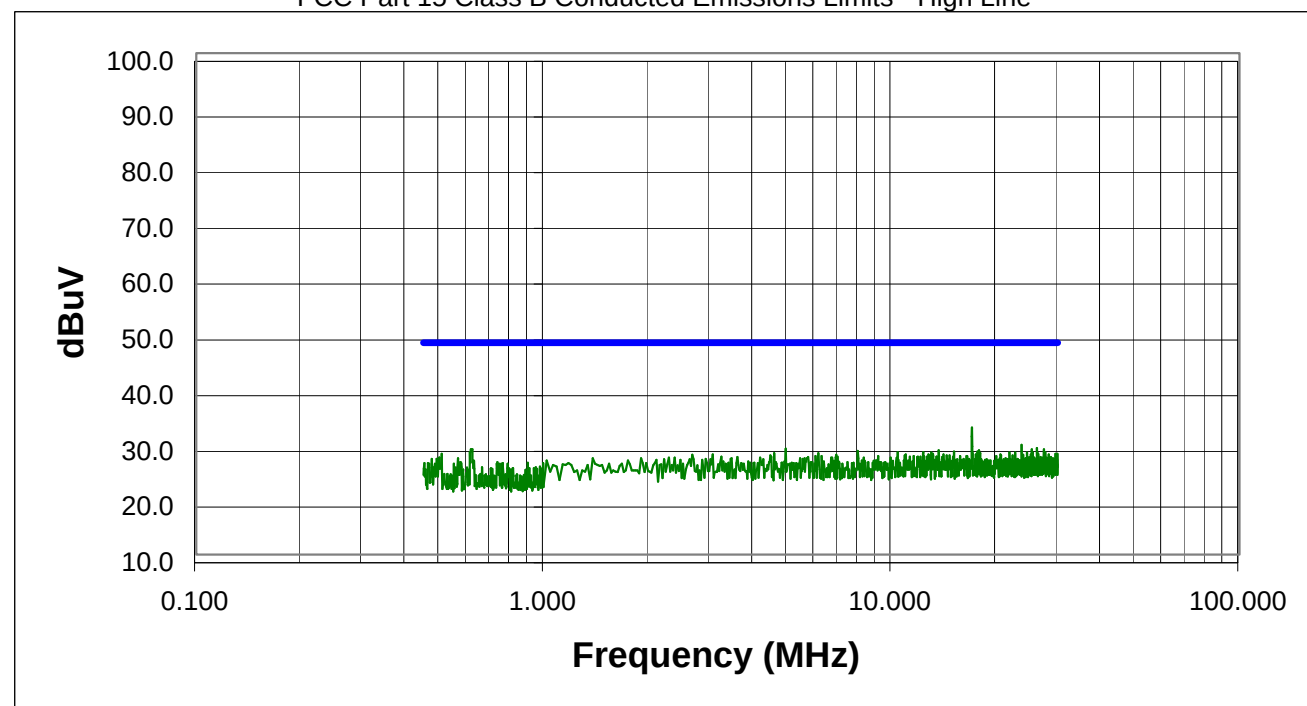


Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
17.010	11.6	Peak	21.2	32.8	48.0	-15.2
23.629	8.5	Peak	21.2	29.7	48.0	-18.3
26.167	7.8	Peak	21.3	29.1	48.0	-18.9
4.955	8.1	Peak	20.9	29.0	48.0	-19.0
27.385	7.6	Peak	21.3	28.9	48.0	-19.1
0.616	8.9	Peak	20.0	28.9	48.0	-19.1
0.622	8.9	Peak	20.0	28.9	48.0	-19.1
25.253	7.6	Peak	21.3	28.9	48.0	-19.1
17.839	7.5	Peak	21.2	28.7	48.0	-19.3
13.643	7.6	Peak	21.1	28.7	48.0	-19.3
7.986	7.6	Peak	21.0	28.6	48.0	-19.4
17.638	7.3	Peak	21.2	28.5	48.0	-19.5
15.101	7.4	Peak	21.1	28.5	48.0	-19.5
12.337	7.3	Peak	21.1	28.4	48.0	-19.6
10.402	7.3	Peak	21.1	28.4	48.0	-19.6
27.639	7.1	Peak	21.3	28.4	48.0	-19.6
0.612	8.4	Peak	20.0	28.4	48.0	-19.6
22.665	7.1	Peak	21.2	28.3	48.0	-19.7
21.802	7.1	Peak	21.2	28.3	48.0	-19.7
25.456	7.0	Peak	21.3	28.3	48.0	-19.7

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets				Rev 3.3 10/09/99
EUT: LCS-TX	Serial Number: N/A	Job Number: CARD0026	Date: 11/09/00	
Manufacturer: Cardio Theater	Test Engineer: Greg Kiemel	Job Site: EV01		
Customer Reference Number:	Software:	Power: 120V/60Hz		
Comments:	4 audio devices to inputs, Mid transmit band			
		Temperature (°C): 21	% Humidity: 42	


FCC Part 15 Class B Conducted Emissions Limits - Low Line

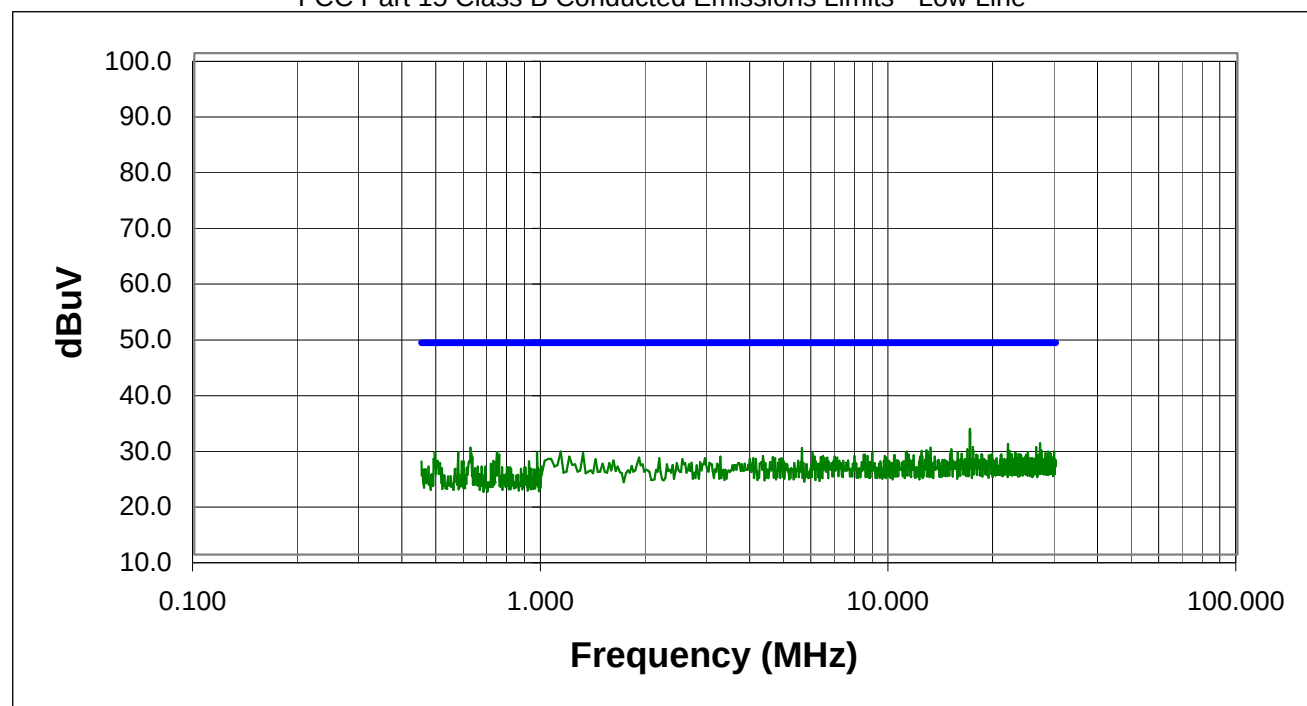


Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
17.010	11.4	Peak	21.2	32.6	48.0	-15.4
27.055	8.7	Peak	21.3	30.0	48.0	-18.0
21.879	8.7	Peak	21.2	29.9	48.0	-18.1
17.337	8.1	Peak	21.2	29.3	48.0	-18.7
26.370	8.0	Peak	21.3	29.3	48.0	-18.7
13.116	8.1	Peak	21.1	29.2	48.0	-18.8
0.623	9.2	Peak	20.0	29.2	48.0	-18.8
5.588	8.2	Peak	20.9	29.1	48.0	-18.9
15.050	7.8	Peak	21.1	28.9	48.0	-19.1
16.734	7.7	Peak	21.2	28.9	48.0	-19.1
17.387	7.6	Peak	21.2	28.8	48.0	-19.2
12.739	7.6	Peak	21.1	28.7	48.0	-19.3
27.258	7.4	Peak	21.3	28.7	48.0	-19.3
12.362	7.5	Peak	21.1	28.6	48.0	-19.4
22.132	7.4	Peak	21.2	28.6	48.0	-19.4
12.864	7.4	Peak	21.1	28.5	48.0	-19.5
11.206	7.4	Peak	21.1	28.5	48.0	-19.5
1.131	8.0	Peak	20.5	28.5	48.0	-19.5
28.527	7.2	Peak	21.3	28.5	48.0	-19.5
29.669	7.2	Peak	21.3	28.5	48.0	-19.5

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets				Rev 3.3 10/09/99
EUT: LCS-TX	Serial Number: N/A	Job Number: CARD0026	Date: 11/09/00	
Manufacturer: Cardio Theater	Test Engineer: Greg Kiemel	Job Site: EV01		
Customer Reference Number:	Software:	Power: 120V/60Hz		
Comments:	4 audio devices to inputs, High transmit band			
		Temperature (°C): 21	% Humidity: 42	


FCC Part 15 Class B Conducted Emissions Limits - High Line

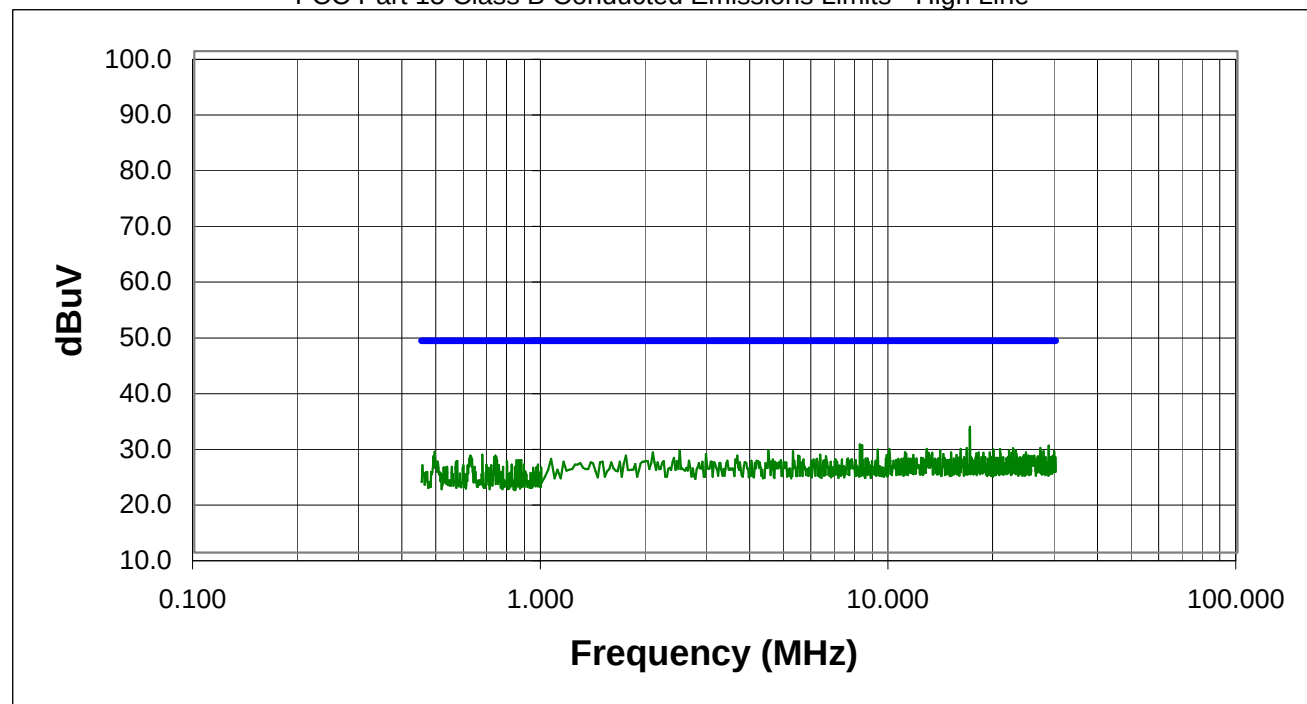

Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
17.010	11.4	Peak	21.2	32.6	48.0	-15.4
8.213	8.4	Peak	21.0	29.4	48.0	-18.6
8.326	8.3	Peak	21.0	29.3	48.0	-18.7
28.628	7.9	Peak	21.3	29.2	48.0	-18.8
16.658	7.6	Peak	21.2	28.8	48.0	-19.2
27.106	7.5	Peak	21.3	28.8	48.0	-19.2
22.640	7.5	Peak	21.2	28.7	48.0	-19.3
9.975	7.6	Peak	21.0	28.6	48.0	-19.4
20.762	7.4	Peak	21.2	28.6	48.0	-19.4
15.980	7.4	Peak	21.2	28.6	48.0	-19.4
12.789	7.5	Peak	21.1	28.6	48.0	-19.4
9.231	7.5	Peak	21.0	28.5	48.0	-19.5
19.899	7.3	Peak	21.2	28.5	48.0	-19.5
13.970	7.3	Peak	21.1	28.4	48.0	-19.6
4.479	7.5	Peak	20.9	28.4	48.0	-19.6
23.020	7.1	Peak	21.2	28.3	48.0	-19.7
22.031	7.1	Peak	21.2	28.3	48.0	-19.7
2.488	7.6	Peak	20.7	28.3	48.0	-19.7
9.955	7.3	Peak	21.0	28.3	48.0	-19.7
5.271	7.3	Peak	20.9	28.2	48.0	-19.8

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets				Rev 3.3 10/09/99
EUT: LCS-TX	Serial Number: N/A	Job Number: CARD0026	Date: 11/09/00	
Manufacturer: Cardio Theater	Test Engineer: Greg Kiemel	Job Site: EV01		
Customer Reference Number:	Software:	Power: 120V/60Hz		
Comments:	4 audio devices to inputs, High transmit band			
		Temperature (°C): 21	% Humidity: 42	

FCC Part 15 Class B Conducted Emissions Limits - Low Line

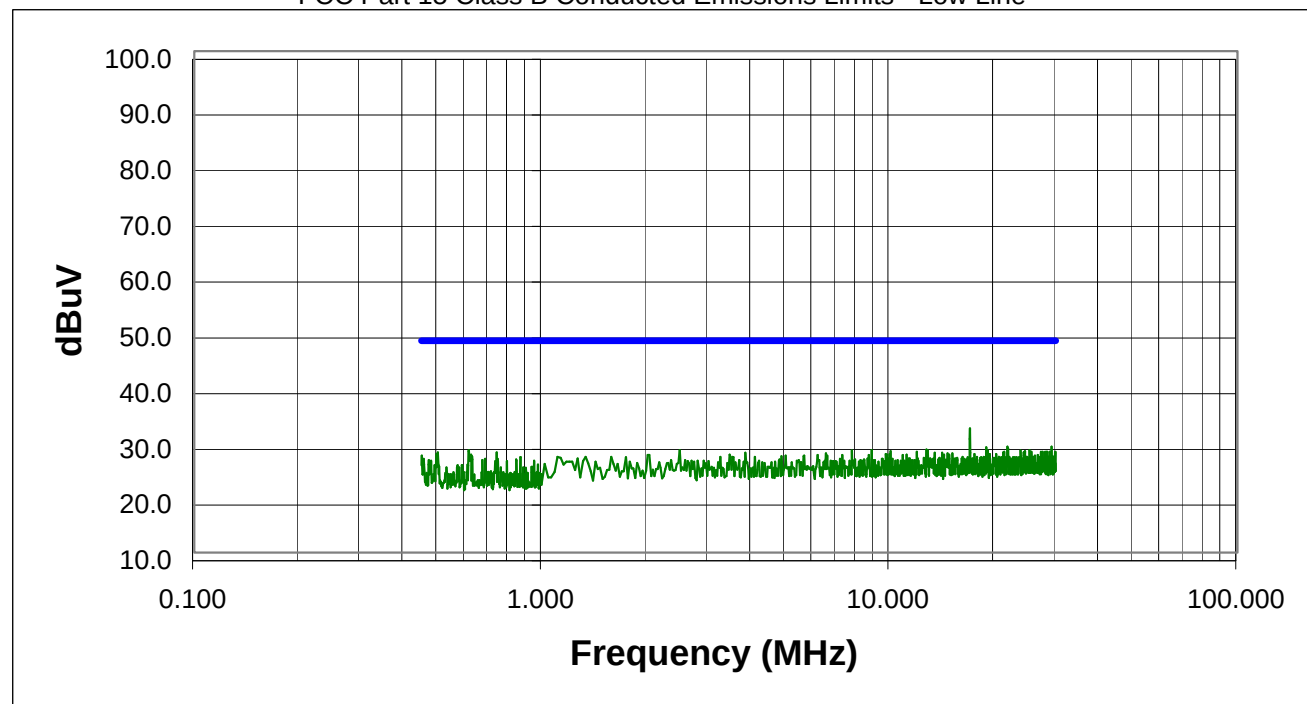

Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
17.010	11.1	Peak	21.2	32.3	48.0	-15.7
21.777	7.8	Peak	21.2	29.0	48.0	-19.0
29.212	7.7	Peak	21.3	29.0	48.0	-19.0
18.945	7.7	Peak	21.2	28.9	48.0	-19.1
21.904	7.5	Peak	21.2	28.7	48.0	-19.3
12.739	7.4	Peak	21.1	28.5	48.0	-19.5
12.864	7.3	Peak	21.1	28.4	48.0	-19.6
2.488	7.7	Peak	20.7	28.4	48.0	-19.6
0.616	8.4	Peak	20.0	28.4	48.0	-19.6
25.228	7.1	Peak	21.3	28.4	48.0	-19.6
8.869	7.4	Peak	21.0	28.4	48.0	-19.6
19.146	7.1	Peak	21.2	28.3	48.0	-19.7
23.782	7.1	Peak	21.2	28.3	48.0	-19.7
7.783	7.3	Peak	21.0	28.3	48.0	-19.7
10.050	7.2	Peak	21.0	28.2	48.0	-19.8
24.467	6.9	Peak	21.3	28.2	48.0	-19.8
11.960	7.0	Peak	21.1	28.1	48.0	-19.9
21.320	6.9	Peak	21.2	28.1	48.0	-19.9
29.923	6.8	Peak	21.3	28.1	48.0	-19.9
27.512	6.8	Peak	21.3	28.1	48.0	-19.9