

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Product Name: Transmitter of car alarm system

Brand Name: N/A

Model Name: TX605

Model Difference: N/A

FCC ID: M65T605

Report No.: ER/2006/90019

Issue Date: Oct. 24, 2006

FCC Rule Part: §15.231

Prepared for Super Nova Corp.

No. 34, Wu-Chuan 6 Rd., Wu-Ku
Industrial Zone, Wu-Ku Hsiang Taipei
Taiwan R.O.C.

Prepared by SGS Taiwan Ltd.

No. 134, Wu Kung Rd., Wuku Industrial
Zone, Taipei County, Taiwan.



Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竊改皆屬非法，違犯者將會被依法追訴。

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan. / 台北縣五股工業區五工路134號
台灣檢驗科技股份有限公司 t (886-2) 2299-3939 f (886-2) 2298-2698 www.sgs.com.tw

VERIFICATION OF COMPLIANCE

Applicant: Super Nova Corp.
No. 34, Wu-Chuan 6 Rd., Wu-Ku Industrial Zone, Wu-Ku Hsiang
Taipei Taiwan R.O.C.

Product Description: Transmitter of car alarm system

Brand Name: N/A

Model No.: TX605

FCC ID: M65T605

Model Difference: N/A

File Number: ER/2006/80031

Date of test: Sep. 01, 2006 ~ Oct. 23, 2006

Date of EUT received: Aug. 31, 2006

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.231.

The test results of this report relate only to the tested sample identified in this report.

Test By:




Date

Oct. 24, 2006

Jason Wu / Sr. Engineer

Prepared By:

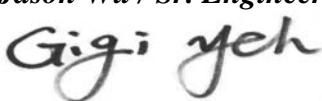

Date

Oct. 24, 2006

Gigi Yeh / Clerk

Approved By:



Date

Oct. 24, 2006

Vincent Su / Manager

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

Version

| Version No. | Date |
|-------------|---------------|
| 00 | Oct. 24, 2006 |
| | |
| | |

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

Table of Contents

| | | |
|-----------|---|-----------|
| 1. | GENERAL INFORMATION | 6 |
| 1.1 | PRODUCT DESCRIPTION | 6 |
| 1.2 | RELATED SUBMITTAL(S) / GRANT (S) | 6 |
| 1.3 | TEST METHODOLOGY..... | 6 |
| 1.4 | TEST FACILITY | 6 |
| 2. | SYSTEM TEST CONFIGURATION | 7 |
| 2.1 | EUT CONFIGURATION..... | 7 |
| 2.2 | EUT EXERCISE | 7 |
| 2.3 | TEST PROCEDURE..... | 7 |
| 2.4 | LIMITATION | 8 |
| 2.5 | CONFIGURATION OF TESTED SYSTEM | 10 |
| 3. | SUMMARY OF TEST RESULTS | 11 |
| 4. | DESCRIPTION OF TEST MODES | 11 |
| 5. | CONDUCTED EMISSIONS TEST (NOT APPLY IN THE REPORT) | 12 |
| 5.1 | MEASUREMENT PROCEDURE: | 12 |
| 5.2 | TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) | 12 |
| 5.3 | MEASUREMENT EQUIPMENT USED: | 12 |
| 5.4 | MEASUREMENT RESULT: | 12 |
| 6. | RADIATED EMISSION TEST | 13 |
| 6.1 | MEASUREMENT PROCEDURE..... | 13 |
| 6.2 | TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) | 13 |
| 6.3 | MEASUREMENT EQUIPMENT USED: | 14 |
| 6.4 | FIELD STRENGTH CALCULATION | 14 |
| 6.5 | MEASUREMENT RESULT | 15 |
| 7. | OCCUPIED BANDWIDTH..... | 19 |
| 7.1 | MEASUREMENT PROCEDURE..... | 19 |
| 7.2 | TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) | 19 |
| 7.3 | MEASUREMENT EQUIPMENT USED: | 19 |
| 7.4 | MEASUREMENT RESULTS..... | 19 |

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面, 亦可在www.sgs.com中查閱。將本公司之義務, 免責, 管轄權皆明確規範之。除非另有說明, 此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可, 不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法, 違犯者將會被依法追訴。

| | | |
|--|--|-----------|
| 8. | DUTY CYCLE MEASUREMENT | 21 |
| 8.1 | MEASUREMENT PROCEDURE..... | 21 |
| 8.2 | TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) | 21 |
| 8.3 | MEASUREMENT EQUIPMENT USED: | 21 |
| 8.4 | MEASUREMENT RESULTS:..... | 21 |
| 9. | RELEASE TIME MEASUREMENT: | 21 |
| 9.1 | MEASUREMENT PROCEDURE..... | 22 |
| 9.2 | TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) | 22 |
| 9.3 | MEASUREMENT EQUIPMENT USED: | 22 |
| 9.4 | MEASUREMENT RESULTS..... | 22 |
| APPENDIX 1 PHOTOGRPHS OF SET UP | | 24 |
| APPENDIX 2 PHOTOGRPHS OF EUT | | 26 |

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面, 亦可在www.sgs.com中查閱。將本公司之義務, 免責, 管轄權皆明確規範之。除非另有說明, 此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可, 不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法, 違犯者將會被依法追訴。

1. GENERAL INFORMATION

1.1 Product Description

The Super Nova Corp., Model: TX605 (referred to as the EUT in this report) is Transmitter of car alarm system.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 433.92 MHz
- B). Modulation: Amplitude Modulation (AM)
- C). Antenna Designation: Non-User Replaceable (Fixed)
- D). Power Supply: TX: 12Vdc from battery*1

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: M65T605** filing to comply with Section 15.231 of the FCC Part 15, Subpart C Rules.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 and CISPR 22/EN 55022 requirements. Site No. 1(3 &10 meters) Registration Number: 94644, Both OATS and Anechoic chamber (3 meters) was accredited by TAF (0513).

1.5 Special Accessories

Not available for this EUT intended for grant.

1.6 Equipment Modifications

Not available for this EUT intended for grant.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法,違犯者將會被依法追訴。

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions (Not apply in the report)

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 & 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8 & 13 of ANSI C63.4-2003.

2.4 Limitation

(1) Conducted Emission (Not applicable in this report)

According to section 15.207(a) Conducted Emission Limits is as following.

| Frequency range MHz | Limits dB (uV) | |
|------------------------|-------------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

Note

- 1.The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

(2) Radiated Emission

According to 15.231(b), the field strength of emissions from Intentional Radiators operated under this section shall not exceed the following:

| Fundamental Frequency (MHz) | Field Strength of Fundamental | | Field Strength of Spurious | |
|-----------------------------|-------------------------------|------------------|----------------------------|--------------|
| | (dBuV/m) | (uV/m) | (dBuV/m) | (uV/m) |
| 40.66 - 40.70 | 67.04 | 2,250 | 40 | 100 |
| 70 - 130 | 61.94 | 1,250 | 34 | 50 |
| 130 - 174 | * 61.94 - 71.48 | * 1,250 - 3,750 | * 34 - 43.5 | * 50 to 150 |
| 174 - 260 | 71.48 | 3,750 | 43.5 | 150 |
| 260 - 470 | * 71.48 - 81.94 | * 3,750 - 12,500 | * 43.5 - 54 | * 150 to 500 |
| above 470 | 81.94 | 12,500 | 74 | 500 |

Remark: 1. Emission level in dBuV/m = $20 \log (\text{uV/m})$

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ξ 15.205
4. Emission spurious frequency which appearing within the Restricted Bands specified in provision of ξ 15.205, then the general radiated emission limits in ξ 15.209 apply.
5. For the band 130-174MHz, uV/m at 3meters = 56.81818(F) - 6136.3636;
For the band 260-470MHz uV/m at 3meters = 41.6667(F) - 7083.3333;
Where F is the frequency in MHz.
6. 433.92MHz limit = $20 \log(41.6667 * 433.92 - 7083.3333) = 10996.681 \text{ uV/m} = 80.8 \text{ dBuV/m}$

2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System (TX)




Table 2-1 Equipment Used in Tested System

| Item | Equipment | Mfr/Brand | Model/ Type No. | FCC ID | Series No. | Data Cable | Power Cord |
|------|-----------|-----------|--------------------|--------|------------|------------|---------------|
| 1. | N/A | | | | | | |

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

3. Summary Of Test Results

| FCC Rules | Description Of Test | Result |
|---------------|------------------------------------|-----------|
| §15.207 | Conducted Emission | N/A |
| §15.231 | Radiated Emission | Compliant |
| §15.231(c) | 20dB Bandwidth | Compliant |
| | Duty Cycle Test (Pulse Modulation) | N/A |
| §15.231(a)(1) | Release Time Measurement | Compliant |

4. Description of test modes

The EUT has been tested under engineering test mode condition. and the EUT staying in continuous transmitting mode.

The Frequency 433.92MHz is chosen for testing.


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

5. Conducted Emissions Test (Not apply in the report)

5.1 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

5.2 Test SET-UP (Block Diagram of Configuration)

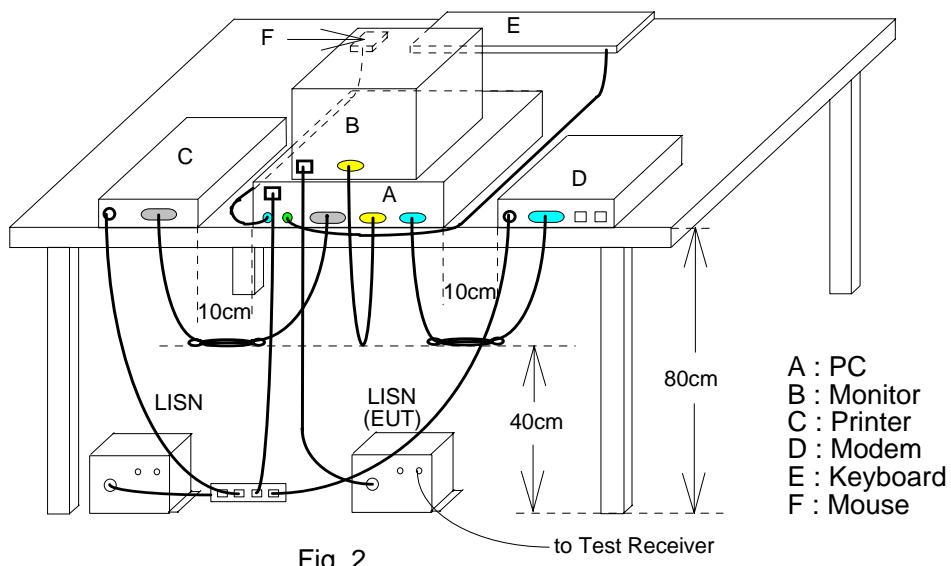

5.3 Measurement Equipment Used:

| Conducted Emission Test Site | | | | | |
|------------------------------|------------|--------------|---------------|------------|------------|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. |
| EMC Analyzer | HP | 8594EM | 3624A00203 | 12/31/2005 | 12/30/2006 |
| EMI Test Receiver | R&S | ESCS30 | 828985/004 | 01/15/2006 | 01/14/2007 |
| LISN | Rolf-Heine | NNB-2/16Z | 99012 | 12/30/2005 | 12/29/2006 |
| LISN | Rolf-Heine | NNB-2/16Z | 99013 | 11/06/2005 | 11/05/2006 |

5.4 Measurement Result:

N/A. Powered by 12Vdc Battery

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，義務，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、篡改皆屬非法，違犯者將會被依法追訴。


6. Radiated Emission Test

6.1 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

6.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

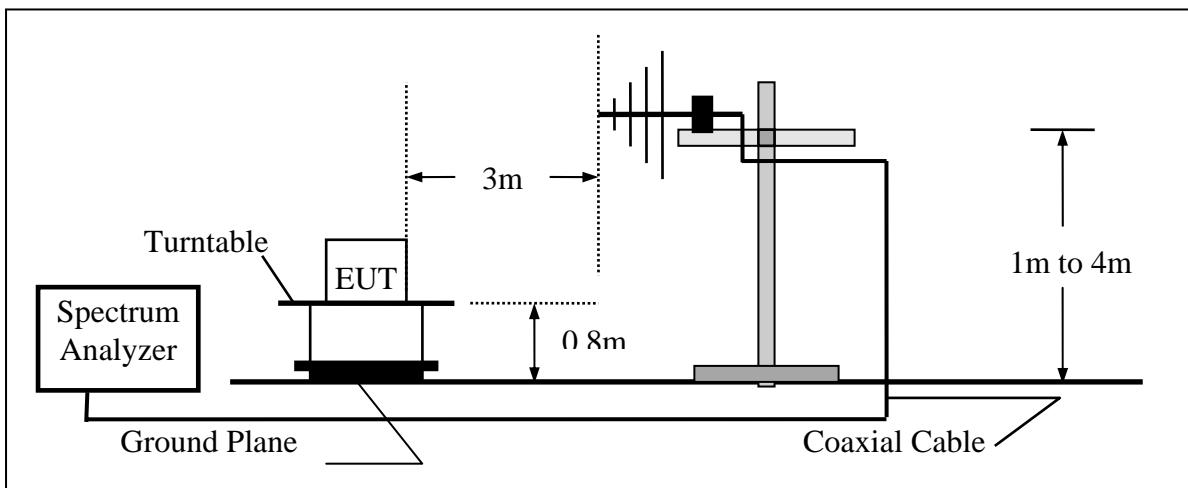

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

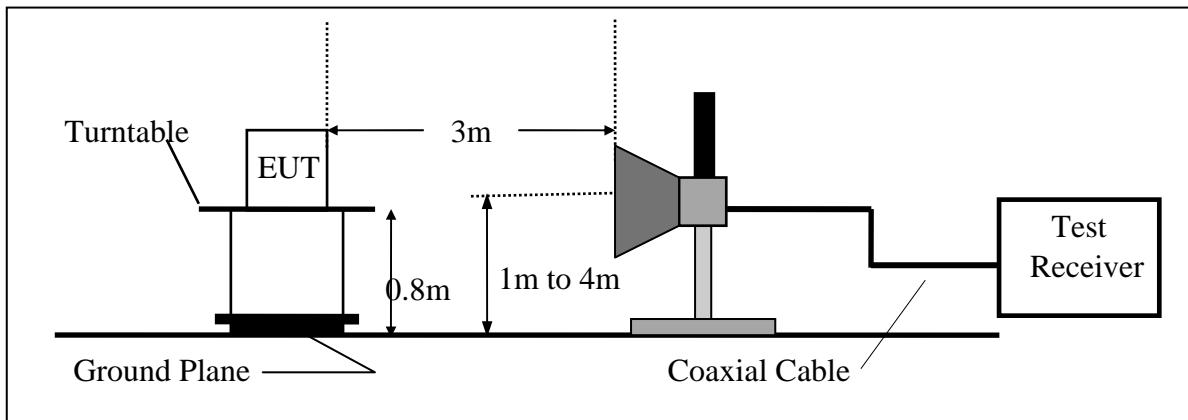

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面, 亦可在www.sgs.com中查閱。將本公司之義務, 免責, 管轄權皆明確規範之。除非另有說明, 此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可, 不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法, 違犯者將會被依法追訴。

6.3 Measurement Equipment Used:

| 966 Chamber | | | | | |
|-------------------|---------------|---------------------|---------------|------------|------------|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. |
| Spectrum Analyzer | R&S | FSP 40 | 100034 | 05/27/2006 | 05/26/2007 |
| Spectrum Analyzer | Agilent | E7405A | US41160416 | 08/27/2006 | 08/27/2007 |
| Bilog Antenna | SCHWAZBECK | VULB9163 | 152 | 06/03/2006 | 06/02/2007 |
| Bilog Antenna | SCHWAZBECK | VULB9160 | | 06/03/2006 | 06/02/2007 |
| Horn Antenna | SCHWAZBECK | BBHA 9120D | 309/320 | 08/16/2006 | 08/15/2007 |
| Pre-Amplifier | HP | 8447D | 2944A09469 | 07/19/2006 | 07/18/2007 |
| Pre-Amplifier | HP | 8449B | 3008A00578 | 02/26/2006 | 02/25/2007 |
| Turn Table | HD | DT420 | N/A | N.C.R | N.C.R |
| Antenna Tower | HD | MA240-N | 240/657 | N.C.R | N.C.R |
| Controller | HD | HD100 | N/A | N.C.R | N.C.R |
| Low Loss Cable | HUBER+SUHNE R | SUCOFLEX 104PEA-10M | 10m | 10/09/2006 | 10/08/2007 |
| Low Loss Cable | HUBER+SUHNE R | SUCOFLEX 104PEA-3M | 3m | 10/09/2006 | 10/08/2007 |
| Site NSA | SGS | 966 chamber | N/A | 11/17/2005 | 11/16/2006 |
| Site NSA | SGS | 10m Open-Site | N/A | 10/02/2006 | 10/01/2007 |

6.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Average Value = Peak Value + 20 Log (Ton/Tp) Pulse Modulation

| | | |
|-------|------------------------|--|
| Where | FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| | RA = Reading Amplitude | AG = Amplifier Gain |
| | AF = Antenna Factor | |

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

6.5 Measurement Result

Operation Mode: Transmitting Mode (TX X)
Fundamental Frequency: 433.92 MHz
Temperature : 25 °C
Humidity : 65 %

Test Date: Oct. 12, 2006
Test By: Jason
Pol: Vertical

| Freq. (MHz) | F /S | Ant.Pol. (H/V) | Peak | AV | Reading CF(dB) | Peak | AV | Peak | AV | Margin (dB) |
|----------------|---------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|----------------|
| | | | Reading (dBuV) | Ant./CL (dBuV) | | Level (dBuV/m) | Level (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | |
| 433.9 | F | V | 59.54 | -- | -9.04 | 50.50 | -- | 100.80 | 80.80 | -30.30 PK |
| 867.8 | S | V | 36.12 | -- | -8.43 | 27.69 | -- | 80.80 | 60.80 | -33.11 PK |
| 1301.8 | *S | V | 44.95 | -- | -6.79 | 38.16 | -- | 74.00 | 54.00 | -15.84 PK |
| 1735.7 | S | V | 40.53 | -- | -4.79 | 35.74 | -- | 80.80 | 60.80 | -25.06 PK |
| 2169.6 | S | V | 40.19 | -- | -2.6 | 37.59 | -- | 80.80 | 60.80 | -23.21 PK |
| 2603.5 | S | V | -- | -- | -- | -- | -- | 80.80 | 60.80 | |
| 3037.4 | S | V | -- | -- | -- | -- | -- | 80.80 | 60.80 | |
| 3471.4 | S | V | 44.18 | -- | 1.97 | 46.15 | -- | 80.80 | 60.80 | -14.65 PK |
| 3905.3 | *S | V | 37.02 | -- | 3.38 | 40.40 | -- | 74.00 | 54.00 | -13.60 PK |
| 4339.2 | *S | V | -- | -- | -- | -- | -- | 74.00 | 54.00 | |
| 32.9 | S | V | 49.27 | -- | -14.73 | 34.54 | -- | 80.80 | 60.80 | -26.26 PK |
| 102.8 | S | V | 39.57 | -- | -16.78 | 22.79 | -- | 80.80 | 60.80 | -38.01 PK |
| 505.3 | S | V | 42.14 | -- | -8.43 | 33.71 | -- | 80.80 | 60.80 | -27.09 PK |

Remark :

- (1) + F/S F : denotes Fundamental Frequency ; S : denotes Spurious Frequency
- (2) EUT Orthogonal Axes : X denotes Laid on Table ; Y denotes Vertical Stand .
- (3) Measuring frequencies from 30 MHz to the 10th harmonic of fundamental frequency of 433.92 MHz .
- (4) Dates of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) * Denotes spurious frequency, which falls within the Restricted Bands specified in provision of ξ15.205, then the general radiated emission limits in ξ 15.209 apply.
- (6) Peak Setting: 30MHz – 1000MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
1GHz- 5GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法,違犯者將會被依法追訴。

Operation Mode: Transmitting Mode (TX X)
Fundamental Frequency: 433.92 MHz
Temperature : 25 °C
Humidity : 65 %

Test Date: Oct. 12, 2006
Test By: Jason
Pol: Horizontal

| Freq. (MHz) | F /S | Ant.Pol. (H/V) | Peak | AV | Ant./CL CF(dB) | Peak | AV | Peak | AV | Margin (dB) | |
|----------------|---------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|----------------|----|
| | | | Reading (dBuV) | Reading (dBuV) | | Level (dBuV/m) | Level (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | | |
| 433.9 | F | H | 74.76 | -- | -9.04 | 65.72 | -- | 100.80 | 80.80 | -15.08 | PK |
| 867.8 | S | H | 47.90 | -- | -1.65 | 46.25 | -- | 80.80 | 60.80 | -14.55 | PK |
| 1301.8 | *S | H | 42.34 | -- | -6.79 | 35.55 | -- | 74.00 | 54.00 | -18.45 | PK |
| 1735.7 | S | H | 56.00 | -- | -4.79 | 51.21 | -- | 80.80 | 60.80 | -9.59 | PK |
| 2169.6 | S | H | -- | -- | -- | -- | -- | 80.80 | 60.80 | | |
| 2603.5 | S | H | 40.11 | -- | -0.63 | 39.48 | -- | 80.80 | 60.80 | -21.32 | PK |
| 3037.4 | S | H | 53.52 | -- | 1.97 | 55.49 | -- | 80.80 | 60.80 | -5.31 | PK |
| 3471.4 | S | H | -- | -- | -- | -- | -- | 80.80 | 60.80 | | |
| 3905.3 | *S | H | -- | -- | -- | -- | -- | 74.00 | 54.00 | | |
| 4339.2 | *S | H | -- | -- | -- | -- | -- | 74.00 | 54.00 | | |
| 30.0 | S | H | 42.22 | -- | -14.97 | 27.25 | -- | 80.80 | 60.80 | -33.55 | PK |
| 54.3 | S | H | 36.93 | -- | -14.51 | 22.42 | -- | 80.80 | 60.80 | -38.38 | PK |

Remark :

- (1) + F/S F : denotes Fundamental Frequency ; S : denotes Spurious Frequency
- (2) EUT Orthogonal Axes : X denotes Laid on Table ; Y denotes Vertical Stand .
- (3) Measuring frequencies from 30 MHz to the 10th harmonic of fundamental frequency of 433.92 MHz .
- (4) Dates of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) * Denotes spurious frequency, which falls within the Restricted Bands specified in provision of $\xi 15.205$, then the general radiated emission limits in $\xi 15.209$ apply.
- (6) Peak Setting: 30MHz – 1000MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
1GHz- 5GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面, 亦可在www.sgs.com中查閱。將本公司之義務, 免責, 管轄權皆明確規範之。除非另有說明, 此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可, 不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法, 違犯者將會被依法追訴。

Operation Mode: Transmitting Mode (TX Y)
Fundamental Frequency: 433.92 MHz
Temperature : 25 °C
Humidity : 65 %

Test Date: Oct. 12, 2006
Test By: Jason
Pol: Vertical

| Freq. (MHz) | F /S | Ant.Pol. (H/V) | Peak | AV | Peak | AV | Peak | AV | Margin (dB) | |
|----------------|---------|-------------------|-------------------|-------------------|---------------------|-------------------|-------------------|-------------------|----------------|-----------|
| | | | Reading (dBuV) | Reading CF(dB) | Ant./CL (dBuV/m) | Level (dBuV/m) | Level (dBuV/m) | Limit (dBuV/m) | | |
| 433.9 | F | V | 73.08 | -- | -9.04 | 64.04 | -- | 100.80 | 80.80 | -16.76 PK |
| 867.8 | S | V | 46.63 | -- | -1.65 | 44.98 | -- | 80.80 | 60.80 | -15.82 PK |
| 1301.8 | *S | V | 44.78 | -- | -6.79 | 37.99 | -- | 74.00 | 54.00 | -16.01 PK |
| 1735.7 | S | V | 44.70 | -- | -4.79 | 39.91 | -- | 80.80 | 60.80 | -20.89 PK |
| 2169.6 | S | V | -- | -- | -- | -- | -- | 80.80 | 60.80 | |
| 2603.5 | S | V | 39.22 | -- | -0.6 | 38.62 | -- | 80.80 | 60.80 | -22.18 PK |
| 3037.4 | S | V | -- | -- | -- | -- | -- | 80.80 | 60.80 | |
| 3471.4 | S | V | 50.95 | -- | 1.97 | 52.92 | -- | 80.80 | 60.80 | -7.88 PK |
| 3905.3 | *S | V | -- | -- | -- | -- | -- | 74.00 | 54.00 | |
| 4339.2 | *S | V | -- | -- | -- | -- | -- | 74.00 | 54.00 | |
| 34.9 | S | V | 48.57 | -- | -14.58 | 33.99 | -- | 80.80 | 60.80 | -26.81 PK |
| 102.8 | S | V | 40.44 | -- | -16.78 | 23.66 | -- | 80.80 | 60.80 | -37.14 PK |
| 505.3 | S | V | 54.95 | -- | -8.43 | 46.52 | -- | 80.80 | 60.80 | -14.28 PK |

Remark :

- (1) + F/S F : denotes Fundamental Frequency ; S : denotes Spurious Frequency
- (2) EUT Orthogonal Axes : X denotes Laid on Table ; Y denotes Vertical Stand .
- (3) Measuring frequencies from 30 MHz to the 10th harmonic of fundamental frequency of 433.92 MHz °
- (4) Dates of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) * Denotes spurious frequency, which falls within the Restricted Bands specified in provision of ξ15.205, then the general radiated emission limits in ξ 15.209 apply.
- (6) Peak Setting: 30MHz – 1000MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
1GHz- 5GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面, 亦可在www.sgs.com中查閱。將本公司之義務, 免責, 管轄權皆明確規範之。除非另有說明, 此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可, 不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法, 違犯者將會被依法追訴。

Operation Mode: Transmitting Mode (TX Y)
Fundamental Frequency: 433.92 MHz
Temperature : 25 °C
Humidity : 65 %

Test Date: Oct. 12, 2006
Test By: Jason
Pol: Horizontal

| Freq. (MHz) | F /S | Ant.Pol. (H/V) | Peak | AV | Ant./CL CF(dB) | Peak | AV | Peak | AV | Margin (dB) | |
|----------------|---------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|----------------|----|
| | | | Reading (dBuV) | Reading (dBuV) | | Level (dBuV/m) | Level (dBuV/m) | Limit (dBuV/m) | Limit (dBuV/m) | | |
| 433.9 | F | H | 67.58 | -- | -9.04 | 58.54 | -- | 100.80 | 80.80 | -22.26 | PK |
| 867.8 | S | H | 43.93 | -- | -1.65 | 42.28 | -- | 80.80 | 60.80 | -18.52 | PK |
| 1301.8 | *S | H | 48.03 | -- | -6.79 | 41.24 | -- | 74.00 | 54.00 | -12.76 | PK |
| 1735.7 | S | H | -- | -- | -- | -- | -- | 80.80 | 60.80 | | |
| 2169.6 | S | H | -- | -- | -- | -- | -- | 80.80 | 60.80 | | |
| 2603.5 | S | H | -- | -- | -- | -- | -- | 80.80 | 60.80 | | |
| 3037.4 | S | H | -- | -- | -- | -- | -- | 80.80 | 60.80 | | |
| 3471.4 | S | H | 49.12 | -- | 1.97 | 51.09 | -- | 80.80 | 60.80 | -9.71 | PK |
| 3905.3 | *S | H | 36.97 | -- | 3.38 | 40.35 | -- | 74.00 | 54.00 | -13.65 | PK |
| 4339.2 | *S | H | -- | -- | -- | -- | -- | 74.00 | 54.00 | | |
| 30.0 | S | H | 41.78 | -- | -14.97 | 26.81 | -- | 80.80 | 60.80 | -33.99 | PK |
| 54.3 | S | H | 36.54 | -- | -14.51 | 22.03 | -- | 80.80 | 60.80 | -38.77 | PK |
| 505.3 | S | H | 48.50 | -- | -8.43 | 40.07 | -- | 80.80 | 60.80 | -20.73 | PK |

Remark :

- (1) + F/S F : denotes Fundamental Frequency ; S : denotes Spurious Frequency
- (2) EUT Orthogonal Axes : X denotes Laid on Table ; Y denotes Vertical Stand .
- (3) Measuring frequencies from 30 MHz to the 10th harmonic of fundamental frequency of 433.92 MHz .
- (4) Dates of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) * Denotes spurious frequency, which falls within the Restricted Bands specified in provision of ξ15.205, then the general radiated emission limits in ξ 15.209 apply.
- (6) Peak Setting: 30MHz – 1000MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
1GHz- 5GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法,違犯者將會被依法追訴。

7. Occupied Bandwidth

7.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation
3. Set SPA Center Frequency = fundamental frequency, RBW, VBW= 10KHz, Span =100KHz.
4. Set SPA Max hold. Mark peak, -20dB.

7.2 Test SET-UP (Block Diagram of Configuration)

Same as 6.3 Radiated Emission Measurement.

7.3 Measurement Equipment Used:

Same as 6.3 Radiated Emission Measurement.

7.4 Measurement Results

Refer to attached data chart.

The center frequency f_c is 433.92Mhz, according to the Rules, section 15.231(C), the Bandwidth

of Center Frequency at-20dB should be calculated as following:

$$433.92 \times 0.0025 = 1.0848(\text{MHz})$$


So, the Up/Lower frequencies limit should be specified as:

$$f_{(U)} = f_c + \Delta f/2 = 433.92 + (1.0848/2) = 434.4624(\text{MHz})$$

$$f_{(L)} = f_c - \Delta f/2 = 433.92 - (1.0848/2) = 433.3776 (\text{MHz})$$

-20dB bandwidth = 40.2 kHz within allowed frequency range.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

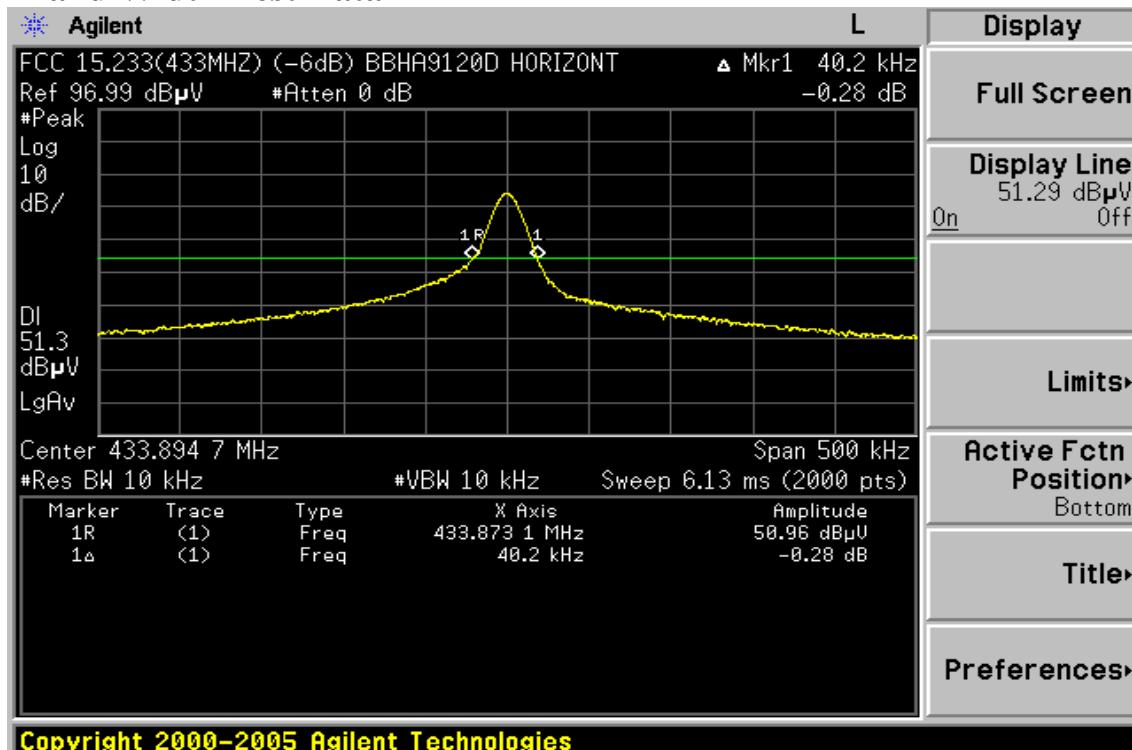20dB Band Width Test Data

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面, 亦可在www.sgs.com中查閱。將本公司之義務, 免責, 管轄權皆明確規範之。除非另有說明, 此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可, 不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法, 違犯者將會被依法追訴。

8. Duty Cycle Measurement

8.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set ETU normal operating mode.
3. Set SPA Center Frequency = fundamental frequency, RBW, VBW= 100KHz, Span =0 Hz. Adjacent sweep.
4. Set SPA View. Mark delta.

8.2 Test SET-UP (Block Diagram of Configuration)

Same as 6.3 Radiated Emission Measurement.

8.3 Measurement Equipment Used:

Same as 6.3 Radiated Emission Measurement.

8.4 Measurement Results:

N/A.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

9. Release Time Measurement:

15.231 (a) (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

9.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set SPA Center Frequency = fundamental frequency, RBW, VBW= 100KHz, Span =0Hz. Sweep Time= 5s.
3. Set EUT as normal operation and press Transmitter bottom for 2 s.
4. Set SPA Max hold. Delta Mark.

9.2 Test SET-UP (Block Diagram of Configuration)

Same as 6.3 Radiated Emission Measurement.

9.3 Measurement Equipment Used:


Same as 6.3 Radiated Emission Measurement.

9.4 Measurement Results

The release time less than 5 s. Refer to attached data chart.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

Release Time

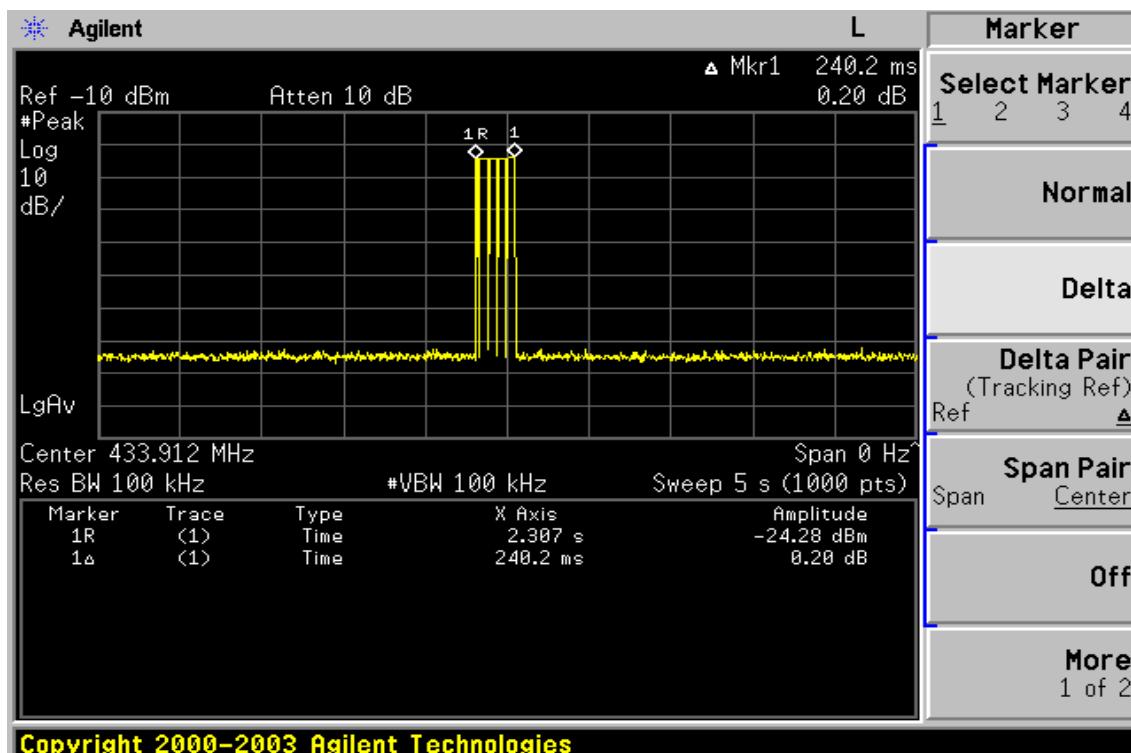

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面, 亦可在www.sgs.com中查閱。將本公司之義務, 免責, 管轄權皆明確規範之。除非另有說明, 此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可, 不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法, 違犯者將會被依法追訴。