

MEASUREMENT/TECHNICAL REPORT

APPLICANT: Sparkle Computer Co., Ltd.

MODEL NO.: SP7100M273V064TV;SP7100M273X032PU;

SP7100M273X032TV;SP7100M273V064PU

FCC ID: M697100P73

This report concerns (check one) : **Original Grant** **Class II Change**

Equipment type: VGA Card

Deferred grant requested per 47CFR 0.457(d)(1)(ii)?

Yes No If yes, defer until: _____ (date)

We, the undersigned, agree to notify the Commission by (date) _____ / _____ / _____ of the intended date of announcement of the product so that the grant can be issued on that date.

Transiyion Rules Request per 15.37? Yes No

If no, assumed Part 15, Subpart B for unintentional radiator the new 47 CFR (10-1-90 Edition) provision.


Report Prepared

by Testing House : Neutron Engineering Inc.

for Company Name: Sparkle Computer Co., Ltd.

Address: 13F, No. 2, Sec. 1, Fu Hsing S. Rd., Taipei, Taiwan, R.O.C.

Applicant Signature :





Jeffrey Lien/ Manager

CERTIFICATION

We hereby certify that:

The test data , data evaluation , test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (1992)/ CISPR22(1997) and the energy emitted by the sample EUT tested as described in this report is in compliance with CLASS B conducted and radiated emission limits of FCC Rules Part 15, Subpart B/ CISPR22(1996).

Prepared by : Lydia Chiang**Reviewed by :** Andy Chiu**Approved by :** George Yao**Issued Date :** Oct. 30,2002**Report No. :** NEI-FCCB-02145**Company Stamp :****NEUTRON ENGINEERING INC.**

No. 132-1, Lane 329, Sec. 2, Palain Rd.,
Shijr Jen, Taipei, Taiwan
TEL : (02) 2646-5426 FAX : (02) 2646-6815

Table of Contents

1. General Information.....	
1-1 Product Description.....	4
1-2 Related Submittal(s)/Grant(s).....	4
1-3 Tested System Details.....	5
1-4 Test Methodology.....	6
1-5 Test Facility.....	6
2. Product Labeling.....	
Figure 2-1 FCC ID Label.....	7
Figure 2-2 Location of Label on EUT.....	7
3. System Test Configuration.....	
3-1 Justification.....	8
3-2 EUT Exercise Software.....	8
3-3 Special Accessories.....	9
3-4 Equipment Modifications.....	9
3-5 Configuration of Tested System.....	10
Figure 3-1 Configuration of Tested System.....	12
4. Block Diagram(s).....	14
5. Conducted and Radiated Measurement Photos.....	
Figure 5-1 Conducted Measurement Photos.....	15
Figure 5-2 Radiated Measurement Photos.....	16
6. Conducted Emission Datas.....	17
7. Radiated Emission Datas	
7-1 Radiated Emission Data.....	20
7-2 Field Strength Calculation.....	23
7-3 Correction Factor Table VS Frequency.....	24
8. Attachment.....	
Photos of Tested EUT.....	25
User's Manual.....	26

1. GENERAL INFORMATION

1-1. Product Description

The Sparkle Computer Co., Ltd. Model: SP7100M273V064TV;SP7100M273X032PU;SP7100M273X032TV;SP7100M273V064PU (referred to as the EUT in this report) is a VGA Card (AGP Bus). The summarized feature of EUT as following:

- Windows XP, Windows 2000, Windows Me, Windows 98 and Linux

A more detailed and/or technical description of EUT is attached in **User's Manual**

1-2. Related Submittal(s) / Grant (s)

1-2-1. Models Covered

Models covering in this test report is :

SP7100M273V064TV;SP7100M273X032PU;SP7100M273X032TV;SP7100M273V064PU

1-2-2. Models Difference

There are four models based on similar electrical circuit, layout and chipset except the difference of list table.

Brand	Model NO.	Memory	I/O Ports
SPARKLE	SP7100M273X032PU	4MX16X4PCS, 32(MB)	DB-15
SPARKLE	SP7100M273X032TV	4MX16X4PCS, 32(MB)	DB-15 + S-VIDEO
SPARKLE	SP7100M273V064PU	8MX16X4PCS, 64(MB)	DB-15
SPARKLE	SP7100M273V064TV	8MX16X4PCS, 64(MB)	DB-15 + S-VIDEO

All the above models were tested, and the model no. SP7100M273V064TV was found to be the worst case during the pr-scanning test. This model of the worst case was used for final testing and collecting test data included in this report.

1-3. Tested System Details

The FCC IDs for all equipment, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

Model No.	FCC ID	Equipment	Cable
SP7100M273V064TV	M697100P73	VGA Card (1)	Add-On Card , Shielded Data Cable
CM753ET	N/A (3)	Monitor	Shielded Data Cable ⁽²⁾ Un-Shielded Power Cord
444	N/A (3)	PC	Un-Shielded Power Cord.
DPU-414	N/A (3)	Printer	Shielded Serial Data Cable Un-Shielded Power Cord
DM-1414V	N/A (3)	Modem	Shielded Parallel Data Cable Un-Shielded Power Cord
5181	N/A (3)	Keyboard	Shielded Data Cable
P8131	N/A (3)	Mouse	Shielded Data Cable
CM-10DXA	N/A (3)	TV	Shielded Data Cable ⁽²⁾ Un-Shielded Power Cord
DVD711	N/A (3)	DVD Player	Shielded Data Cable ⁽²⁾ Un-Shielded Power Cord

Notes:

- (1) EUT submitted for grant.
- (2) Monitor' s attached video cable without ferrite core.
- (3) The support equipment was authorized by Declaration of Conformity.

1-4. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (1992)/CISPR 22(1997). Radiated testing was performed at an antenna to EUT distance 10 meters.

1-5. Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of No. 132-1, Lane 329, Sec. 2, Palain Road, Shijr 221, Taipei, Taiwan, R.O.C. of NEUTRON ENGINEERING INC. This site has been fully described in report dated Jun. 25, 1999 Submitted to your office, and accepted in a letter dated Sep. 02, 1999 (Reg. No. 95335).

3. System Test Configuration

3-1. Justification

The system was configured for testing in a typical fashion (as a customer would normally use it). The EUT (VGA Card) was Added-On to a support equipment-Personal Computer. Peripherals of PC, such as monitor, keyboard, modem and printer were contained in this system in order to comply with the ANSI C63.4/CISPR 22 Rules requirement.

The system was investigated/evaluated by pre-scanning the pixel resolution in follows mode(s):

- (1)1600x1200/85Hz/106KHz(Monitor)
- (2)1024x768/85Hz/69KHz(TV and Monitor)
- (3)640x480/85Hz/43KHz(TV and Monitor)

3-2. EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software, contained on a 3-1/2 inch disk, was inserted into driver A and is auto-starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is:

1. Read(write) from(to) mass storage device (Disk).
2. Send "H" pattern to video port device (Monitor).
3. Send "H" pattern to video port device (TV)
4. Send " H " pattern to parallel port device (Printer).
5. Send " H " pattern to serial port device (Modem).
6. Repeated from 2 to 5 continuously.

As the keyboard and mouse are strictly input devices, no data is transmitted to (from) them during test. They are, however, continuously scanned for data input activity.


3-3. Special Accessories

Not available for this EUT intended for grant.

3-4. Equipment Modifications

Not available for this EUT intended for grant.

Applicant Signature :



Date:

Oct. 30,2002

Type/Printed Name:

Jeffrey Lien

Position:

Manager

3.5 Configuration of Tested System

The configuration of tested system is described as the block diagram shown in next page Figure 3.1 and details information of I/O cable and power cord connection are tabulated as Table A and B. The monitor is powered from a floor mounted receptacle (referred to as the wall outlet in the previous described) was tested.

TABLE A - Test Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Port Connected	FCC ID	Series No.	Note
E-1	VGA Card	Sparkle	SP7100M273V0 64TV	Card Slot	N/A(3)	N/A	EUT
E-2	Monitor	Hitachi	CM753ET	VGA Port	N/A(3)	T8L000003	
E-3	PC	IBM	444		N/A(3)	AAD13M3	
E-4	Printer	SII	DPU-414	Com Port	N/A(3)	1045105A	
E-5	Modem	ACEEX	DM-1414V	Com Port	N/A(3)	8041708	
E-6	Keyboard	HP	5181	PS/2 Port	N/A(3)	N/A	
E-7	Mouse	HP	P8131	PS/2 Port	N/A(3)	5185-1212	
E-8	TV	TVS	CM-10DXA	S-Video Port	N/A	BAZB8A507803	

Remark:

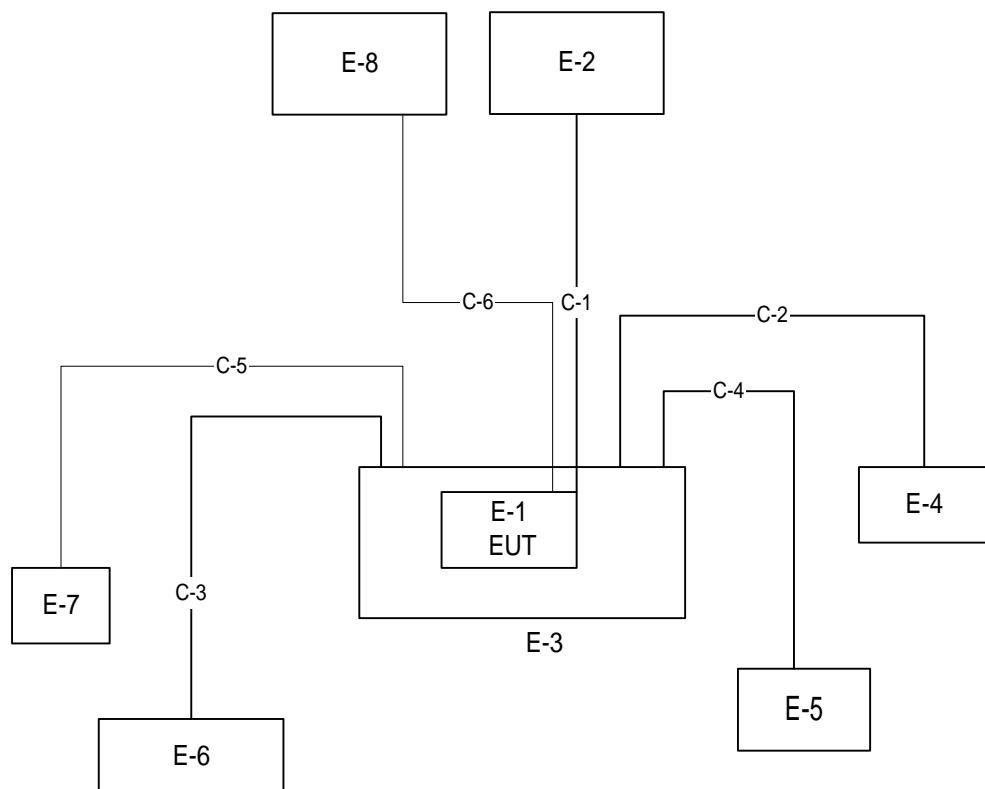
- (1) Unless otherwise denoted as EUT in "Remark" column, device(s) used in tested system is a support equipment.
- (2) Unless otherwise marked as in "Remark" column, Neutron consigns the supporting equipment(s) to the tested system.
- (3) The support equipment was authorized by Declaration of Conformity.

Table B. - Informations Cable Information

Item	I/O Cable	Device Connected	Shielded Type	Ferrite Core	Length	Note
C-1	Video Cable	EUT-Monitor	Yes	No	150 cm	
C-2	Centronics Cable	PC-Printer	Yes	No	200 cm	
C-3	Keyboard Cable	PC-Keyboard	Yes	No	200 cm	
C-4	RS-232 Cable	PC-Modem	Yes	No	175 cm	
C-5	Mouse Cable	PC-Mouse	Yes	No	280cm	
C-6	Video Cable	PC-TV Set	Yes	No	200 cm	

Note:

(1) Unless otherwise marked as in (Remark) column, Neutron consigns the supporting equipment(s) to the tested system.

Figure 3.1 Configuration of Tested System

3-2 Test Equipment

1	LISN	EMCO	3825/2	9605-2539	2002-05-20	2003-05-19	✓
2	LISN	Rolf Heine	NNB-2/16Z	98083	2002-10-20	2003-10-19	✓
3	LISN	Rolf Heine	NNB-2/16Z	98053	2001-11-22	2002-11-21	
4	Pulse Limiter	Electro-Metrics	EM-7600	112644	2001-12-10	2002-12-19	✓
5	50 Terminator	N/A	N/A	N/A	2002-05-10	2003-05-09	✓
6	Test Cable	N/A	C01	N/A	2001-12-08	2002-12-07	✓
7	Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9160	3058	2002-10-27	2003-10-26	
8	Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9160	3060	2002-10-20	2003-10-19	✓
9	Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9161	4022	2002-07-23	2003-07-24	
10	Test Cable	N/A	10M_OS01	N/A	2001-12-08	2002-12-07	
11	Test Cable	N/A	OS01-1/-2	N/A	2001-12-08	2002-12-07	
12	Test Cable	N/A	10M_OS02	N/A	2001-12-08	2002-12-07	✓
13	Test Cable	N/A	OS02-1/-2/-3	N/A	2001-12-08	2002-12-07	✓
14	RF Switch	Anritsu	MP59B	M65982	2001-12-10	2002-12-09	
15	Quasi-Peak Adapter	HP	85650A	2521A00844	2002-10-07	2003-04-08	✓
16	RF Pre-Selector	HP	85685A	2648A00417	2002-10-07	2003-04-08	✓
17	Spectrum Analyzer	HP	85680B	2634A03025	2002-10-07	2003-04-08	✓
18	Spectrum Monitor	HP	85662B	2648A13616	2002-10-07	2003-04-08	✓
19	Pre-Amplifier	Anritsu	MH648A	M09961	2001-12-10	2002-12-09	
20	Spectrum Analyzer	ADVANTEST	R3261C	81720298	2002-08-14	2003-08-13	
21	Test Receiver	R&S	ESH3	860156/018	2002-10-23	2003-10-22	
22	Test Receiver	R&S	ESVP	860687/009	2002-10-23	2003-10-22	
23	Test Receiver	MEB	SMV41	130	2001-12-05	2002-12-04	✓
24	Test Receiver	PMM	PMM 9000	4310J01002	2001-12-31	2002-12-30	
25	Horn Antenna	EMCO	3115	9605-4803	2002-05-09	2003-05-08	
26	Test Receiver	R&S	ESMI	843977/005	2001-11-19	2002-11-18	
27	Pre-Amplifier	R&S	ESMI-Z7	1045.5020	2002-05-20	2003-05-19	
28	Absorbing Clamp	R&S	MDS-21	841077/011	2002-08-23	2003-08-22	
29	Voltage Probe	R&S	ESH2-Z3	841.800/023	2002-08-28	2003-08-27	
30	Signal Generator	HP	8648A	3426A01034	2001-10-09	2003-10-08	
31	Antenna Mast	Chance Most	CMTB-1.5	N/A	N/A	N/A	✓
32	Turn Table	Chance Most	CMTB-1.5	N/A	N/A	N/A	✓

Remark :

- (1) ✓ indicates the instrument used in Test Report.
- (2) N/A denotes No Model No. / Serial No. and No Calibration specified.

4. Block Diagram(s)

Figure 4.1 Block diagram of system, Page 13.A

6. Conducted Emission Datas

6.1 The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Judgement: Passed by **-4.37 dB** in mode of **Line** terminal **0.63 MHz**
 Test Mode: 1600x1200/85Hz/106KHz

Freq. (MHz)	Terminal	Measured(dBuV)		Limits(dBuV)		(dBuV)	Safe Margins Note
		L/N	QP-Mode	AV-Mode	QP-Mode	AV-Mode	
0.31	Line		47.61	39.52	59.92	49.92	-10.40 (AV)
0.63	Line		44.21	41.63	56.00	46.00	-4.37 (AV)
3.47	Line		49.62	*	56.00	46.00	-6.38 (QP)
5.14	Line		47.53	*	60.00	50.00	-12.47 (QP)
6.32	Line		45.28	*	60.00	50.00	-14.72 (QP)
19.85	Line		43.99	*	60.00	50.00	-16.01 (QP)
0.24	Neutral		48.21	*	62.03	52.03	-13.82 (QP)
0.31	Neutral		46.01	*	59.92	49.92	-13.91 (QP)
0.56	Neutral		41.41	*	56.00	46.00	-14.59 (QP)
0.63	Neutral		43.61	*	56.00	46.00	-12.39 (QP)
3.47	Neutral		49.63	40.53	56.00	46.00	-5.47 (AV)
5.17	Neutral		47.74	*	60.00	50.00	-12.26 (QP)

Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=100KHz,VBW =100KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of **Note**. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

Review:

Andy Liu

Test Engr.:

Carly

Test Date :

Oct. 28, 2002

6. Conducted Emission Data

6.1 The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Judgement: Passed by **-4.03 dB** in mode of **Neutral** terminal **3.47 MHz**
 Test Mode: 1024x768/85Hz/69KHz

Freq. (MHz)	Terminal	Measured(dBuV)		Limits(dBuV)		Safe Margins (dBuV)	Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.26	Line	47.81	*	61.46	51.46	-13.65	(QP)
0.31	Line	47.61	*	59.92	49.92	-12.31	(QP)
0.63	Line	44.21	40.15	56.00	46.00	-5.85	(AV)
3.47	Line	50.09	41.53	56.00	46.00	-4.47	(AV)
5.14	Line	47.53	*	60.00	50.00	-12.47	(QP)
6.32	Line	45.28	*	60.00	50.00	-14.72	(QP)
0.24	Neutral	48.21	*	62.03	52.03	-13.82	(QP)
0.31	Neutral	46.01	*	59.92	49.92	-13.91	(QP)
0.63	Neutral	43.61	*	56.00	46.00	-12.39	(QP)
0.70	Neutral	41.41	*	56.00	46.00	-14.59	(QP)
3.47	Neutral	49.69	41.97	56.00	46.00	-4.03	(AV)
5.17	Neutral	47.74	*	60.00	50.00	-12.26	(QP)

Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=100KHz,VBW =100KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of **«Note»**. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

Review: Andy Chiu Test Engr.: Cary Test Date : Oct. 28, 2002

6. Conducted Emission Data

6.1 The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Judgement: Passed by **-4.18 dB** in mode of **Line** terminal **3.47 MHz**
 Test Mode: 640x480/85Hz/43KHz

Freq. (MHz)	Terminal	Measured(dBuV)		Limits(dBuV)		Safe Margins (dBuV)	Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.26	Line	47.81	*	61.46	51.46	-13.65	(QP)
0.31	Line	45.61	*	59.92	49.92	-14.31	(QP)
0.63	Line	44.21	40.15	56.00	46.00	-5.85	(AV)
3.47	Line	50.73	41.82	56.00	46.00	-4.18	(AV)
5.14	Line	47.53	*	60.00	50.00	-12.47	(QP)
6.32	Line	45.28	*	60.00	50.00	-14.72	(QP)
0.24	Neutral	48.21	*	62.03	52.03	-13.82	(QP)
0.31	Neutral	46.01	*	59.92	49.92	-13.91	(QP)
0.63	Neutral	40.61	*	56.00	46.00	-15.39	(QP)
3.47	Neutral	50.42	39.48	56.00	46.00	-5.58	(QP)
5.17	Neutral	47.74	*	60.00	50.00	-12.26	(QP)
6.32	Neutral	47.08	*	60.00	50.00	-12.92	(QP)

Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=100KHz,VBW =100KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of **«Note»**. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

Review:

Andy Liu

Test Engr.:

Carly

Test Date :

Oct. 28, 2002

7. Radiated Emission Data

7.1 The following data lists the significant emission frequencies, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, as well as the limit. Explanation of the Correction Factor is given in paragraph 7.2.

Judgement: Passed by **-3.25 dB** in polarity of **Horizontal 459.02 MHz**
Test Mode :1600x1200/85Hz/106KHz

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
45.89	V	42.15	- 15.57	26.58	30.00	-	3.42
137.66	H	34.67	- 13.33	21.34	30.00	-	8.66
137.69	V	36.75	- 13.33	23.42	30.00	-	6.58
160.67	V	35.97	- 12.75	23.22	30.00	-	6.78
160.74	H	35.65	- 12.76	22.89	30.00	-	7.11
183.66	H	38.30	- 14.84	23.46	30.00	-	6.54
298.34	V	42.32	- 11.41	30.91	37.00	-	6.09
321.36	V	44.17	- 10.96	33.21	37.00	-	3.79
344.26	H	37.27	- 10.47	26.80	37.00	-	10.20
367.21	V	39.67	- 9.48	30.19	37.00	-	6.81
390.16	H	36.37	- 8.84	27.53	37.00	-	9.47
459.02	H	40.20	- 6.45	33.75	37.00	-	3.25

Remark :

- (1) Test Receiver or Spectrum Analyzer measurement condition setting are Res. BW=100KHz, Video BW =100KHz , Sweep. Time = 0.2 sec./MHz
- (2) All readings are Peak unless otherwise stated QP in column of **『Note』**
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.
- (5) If the peak scan value lower limit less than 20dB, then this signal data will be listed. But if these signal data more than 10 frequencies, then only the Top 10 be listed.

Review:

Andy Shiu

Test Engr.:

Carry

Test Date :

Oct. 28, 2002

7. Radiated Emission Data

7.1 The following data lists the significant emission frequencies, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, as well as the limit. Explanation of the Correction Factor is given in paragraph 7.2.

Judgement: Passed by **-3.91 dB** in polarity of **Vertical 141.78 MHz**
 Test Mode : 1024x768/85Hz/69KHz

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
66.15	H	37.82	- 16.62	21.20	30.00	- 8.80	
122.49	H	38.10	- 15.81	22.29	30.00	- 7.71	
122.87	V	40.67	- 14.59	26.08	30.00	- 3.92	
131.97	H	36.35	- 13.83	22.52	30.00	- 7.48	
141.78	V	39.20	- 13.11	26.09	30.00	- 3.91	
153.61	V	38.30	- 12.70	25.60	30.00	- 4.40	
207.90	H	40.87	- 15.48	25.39	30.00	- 4.61	
217.36	H	38.17	- 15.13	23.04	30.00	- 6.96	
225.26	V	40.60	- 14.60	26.00	30.00	- 4.00	
235.34	V	47.07	- 14.13	32.94	37.00	- 4.06	
440.87	V	39.27	- 7.06	32.21	37.00	- 4.79	
661.51	H	32.80	- 1.31	31.49	37.00	- 5.51	

Remark :

- (1) Test Receiver or Spectrum Analyzer measurement condition setting are Res. BW=1 MHz, Video BW =1MHz , Sweep. Time = 0.2 sec./MHz
- (2) All readings are Peak unless otherwise stated QP in column of "Note"
- (3) Measuring frequency range from 1GHz to 2GHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.
- (5) If the peak scan value lower limit less than 20dB, then this signal data will be listed. But if these signal data more than 10 frequencies, then only the Top 10 be listed.

Review: Andy Liu Test Engr.: Carry Test Date : Oct. 28, 2002

7. Radiated Emission Data

7.1 The following data lists the significant emission frequencies, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, as well as the limit. Explanation of the Correction Factor is given in paragraph 7.2.

Judgement: Passed by **-3.67 dB** in polarity of **Horizontal 430.72 MHz**
 Test Mode : 640x480/85Hz/43KHz

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
118.67	H	36.45	- 15.05	21.40	30.00	- 8.60	
118.79	V	36.95	- 15.03	21.92	30.00	- 8.08	
129.04	H	35.60	- 14.07	21.53	30.00	- 8.47	
129.30	V	38.10	- 14.05	24.05	30.00	- 5.95	
184.20	H	37.25	- 14.89	22.36	30.00	- 7.64	
184.31	V	37.32	- 14.89	22.43	30.00	- 7.57	
207.99	V	37.72	- 15.48	22.24	30.00	- 7.76	
216.29	H	34.72	- 15.17	19.55	30.00	- 10.45	
216.30	V	37.50	- 15.17	22.33	30.00	- 7.67	
235.31	H	44.62	- 14.13	30.49	37.00	- 6.51	
235.33	V	42.30	- 14.13	28.17	37.00	- 8.83	
430.72	H	40.77	- 7.44	33.33	37.00	- 3.67	

Remark:

- (1) Test Receiver or Spectrum Analyzer measurement condition setting are Res. BW=100KHz, Video BW=100KHz, Sweep. Time = 0.2 sec./MHz
- (2) All readings are Peak unless otherwise stated QP in column of "Note".
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.
- (5) If the peak scan value lower limit less than 20dB, then this signal data will be listed. But if these signal data more than 10 frequencies, then only the Top 10 be listed.

Review:

Andy Liu

Test Engr.:

Carly

Test Date :

Oct. 28, 2002

7-2. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$\mathbf{FS = RA + AF + CL - AG}$$

Where **FS = Field Strength**

RA = Receiver Amplitude

AF = Antenna Factor (1)

CL = Cable Attenuation Factor (1)

AG = Amplifier Gain (1) (2)

Remark :

(1) The Correction Factor = AF + CL - AG, as shown in the data tables' Correction Factor column.

(2) AG is not available for Neutron's Open Site Facility

Example of Calculation:

Assume a Receiver Reading of 23.7 dBuV is obtained with an Antenna Factor of 7.2 dB and a Cable Factor of 1.1 dB. Then:

1. The Correction Factor will be calculated by

$$\mathbf{Correction Factor = AF + CL - AG = 7.2 + 1.1 - 0 = 8.3 (dB)}$$

as shown in the data tables' Correction Factor column.

2. The Field Strength will be calculated by

$$\mathbf{FS = RA + Correction Factor = 23.7 + 8.3 = 32 (dBuV/m).}$$

FS is the value shown in the data tables' Corrected Reading column and RA is the value shown in

the data tables' Receiver Reading column. The 32 dBuV/m value was mathematically converted

to its corresponding level in uV/m as:

$$\mathbf{Log^{-1}\{(32.0dBuV/m)/20\} = 39.8 (uV/m)}$$

7-3. Correction Factor VS Frequency

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30.00	11.10	0.90
35.00	10.80	0.50
40.00	11.20	1.00
45.00	11.50	0.80
50.00	11.30	1.00
55.00	10.50	1.30
60.00	9.90	1.00
65.00	8.70	1.50
70.00	7.60	1.20
75.00	6.40	1.40
80.00	6.10	1.30
85.00	7.00	1.40
90.00	8.00	1.70
95.00	10.00	1.50
100.00	11.20	1.90
110.00	12.60	2.00
120.00	13.00	1.80
130.00	12.50	1.80
140.00	12.00	2.00
150.00	12.00	2.20
160.00	13.20	2.40
170.00	14.80	2.50
180.00	16.30	2.50
190.00	17.00	2.50
200.00	17.30	2.40
225.00	10.50	2.70
250.00	11.70	3.10
275.00	12.80	3.70
300.00	14.50	4.00
325.00	14.00	4.50
350.00	14.20	4.50
375.00	14.60	4.60
400.00	15.10	4.80
450.00	16.20	5.40
500.00	17.60	6.50
550.00	17.80	7.00
600.00	18.40	7.10
650.00	19.50	7.10
700.00	20.80	7.20
750.00	20.50	7.50
800.00	21.10	8.00
850.00	22.40	8.60
900.00	23.50	8.90
950.00	24.00	9.70
1000.00	24.80	10.30

8. Photos of Tested EUT:

- 1. Photo # 1 Front View, Rear View**
- 2. Photo # 2 Side View**
- 3. Photo # 3-5 Front View, Rear View**

Attachment

User's Manual