



FCC TEST REPORT

REPORT NO.: F910724A09

MODEL NO.: NL2501

RECEIVED: July 24, 2002

TESTED: August 2, 2002

APPLICANT: NPG Display LTD., Taiwan Branch

ADDRESS: 2FL-1, No. 8, Tunhua N. Rd., Taipei,
Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 24 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



0528
ILAC MRA



Lab Code: 200102-0

Table of Contents

1	CERTIFICATION.....	3
2	SUMMARY OF TEST RESULTS	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF TEST MODES	5
3.3	DESCRIPTION OF SUPPORT UNITS	6
4	EMISSION TEST	7
4.1	CONDUCTED EMISSION MEASUREMENT.....	7
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	7
4.1.2	TEST INSTRUMENTS.....	7
4.1.3	TEST PROCEDURE.....	8
4.1.4	DEVIATION FROM TEST STANDARD.....	8
4.1.5	TEST SETUP.....	8
4.1.6	EUT OPERATING CONDITIONS	9
4.1.7	TEST RESULTS (A).....	10
4.1.8	TEST RESULTS (B).....	12
4.2	RADIATED EMISSION MEASUREMENT.....	14
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.2.2	TEST INSTRUMENTS.....	15
4.2.3	TEST PROCEDURE.....	15
4.2.4	DEVIATION FROM TEST STANDARD.....	16
4.2.5	TEST SETUP.....	17
4.2.6	EUT OPERATING CONDITIONS	17
4.2.7	TEST RESULTS (A).....	18
4.2.8	TEST RESULTS (B).....	20
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	22
6	APPENDIX - INFORMATION ON THE TESTING LABORATORIES	24



1 CERTIFICATION

PRODUCT: 15" LCD Monitor
BRAND NAME: NEC, Mitsubishi
MODEL NO: NL2501
TEST ITEM: ENGINEERING SAMPLE
APPLICANT: NPG Display LTD., Taiwan Branch
STANDARDS: FCC Part 15, Subpart B, Class B
CISPR 22: 1997, Class B
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility on July 29, 2002. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY: Emily Lai, **DATE:** August 7, 2002
(Emily Lai)

APPROVED BY: Fred Chen, **DATE:** August 7, 2002
(Fred Chen/ Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Remarks
FCC Part 15, Subpart B, Class B / CISPR 22: 1997, Class B	Conducted Test	PASS	Meets Class B Limit Minimum passing margin is -8.42 dB at 0.271 MHz
	Radiated Test	PASS	Meets Class B Limit Minimum passing margin is -3.30 dB at 910.00 MHz

NOTE: For conducted emission test, the test limit used is according to FCC Part 15.107. In this part, conducted emission test for telecom port is not mentioned and therefore this item is not tested.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	15" LCD Monitor
MODEL NO.	NL2501
POWER SUPPLY	Switching Power Cord: Nonshielded, 3 pin, AC (1.8m)
DATA CABLE	Shielded DVI cable (1.8m) with two ferrite cores Shielded D-SUB cable (1.8m) with two ferrite cores

NOTE: The EUT is a 15" LCD Monitor with resolution up to 1024x768.

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

3.2 DESCRIPTION OF TEST MODES

The EUT was pre-tested under the following conditions in electromagnetic interference:

CONDITION	CONFIGURATION
1	1024X768 (60kHz)
2	800x600 (48kHz)
3	640x480 (31kHz)

Since the worst emission levels were found when the EUT was tested under 1024X768 (60kHz) resolution, both DVI and D-Sub Mode. So Condition 1 is adopted for the final test.



3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER	HP	DTPC 27	21402951	FCC DoC Approved
2	MODEM	ACEEX	1414	980020502	IFAXDM1414
3	PRINTER	EPSON	LQ-300+	DCGY017081	FCC DoC Approved
4	PS/2 KEYBOARD	BTC	5121W	A00801372	E5XKB5121WTH01 10
5	PS/2 MOUSE	LOGITECH	M-S61	HCA12605710	JNZ211403
6	VGA Card	Matrox	G550	-	-

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A
2	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
3	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
4	1.6 m foil shielded wire, terminated with PS/2 connector via metallic frame, w/o core.
5	1.8 mNon shielded wire, terminated with PS/2 connector via drain wire, w/o core.
6	N/A

NOTE: All power cords of the above support units are non shielded (1.8m).

4 EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTES: (1) The lower limit shall apply at the transition frequencies.

- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 4, 2003
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 3, 2003
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Dec. 2, 2002
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Dec. 2, 2002
EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	July 3, 2003
Software	Cond-V2M1	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C02.01	July 5, 2003
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 20, 2003
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 20, 2003

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. “*”: These equipment are used for conducted telecom port test only (if tested).
4. The test was performed in ADT Shielded Room No. 2.
5. The VCCI Site Registration No. is C-240.


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

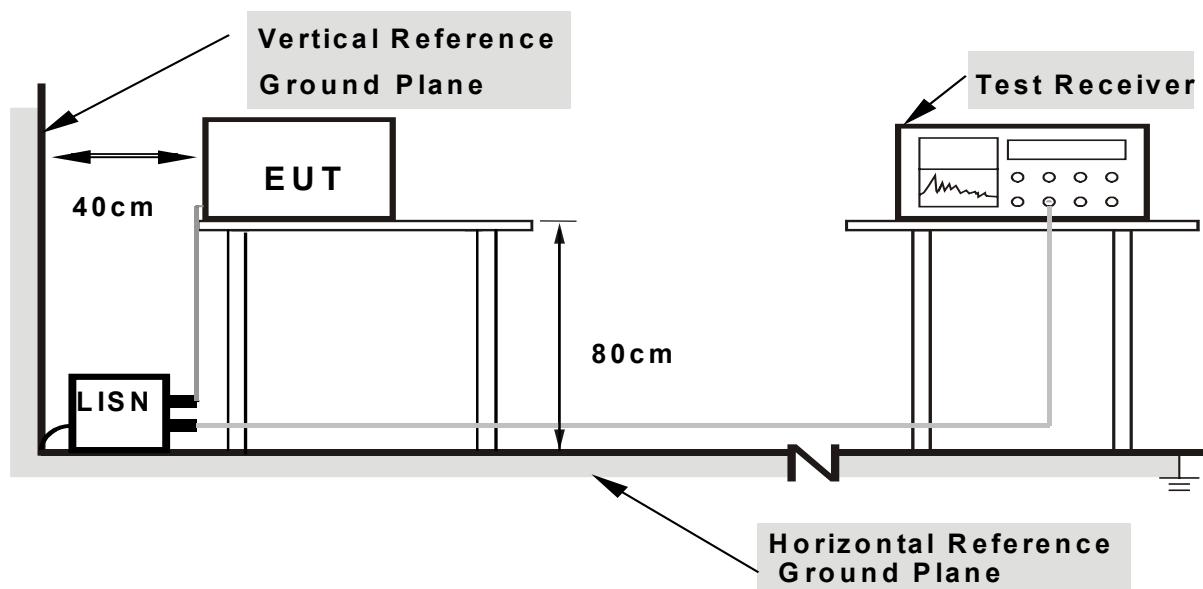

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. EUT ran a test program to enable all functions.
- b. PC ran a test program to enable all functions.
- c. PC read and wrote messages from FDD and HDD.
- d. PC sent "H" messages to Color Monitor (EUT) and it displayed "H" patterns on screen.
- e. EUT sent "H" messages to printer and printer printed them out on paper.
- f. EUT sent messages to modem.
- g. Steps b-g were repeated.


4.1.7 TEST RESULTS (A)

EUT	15" LCD Monitor	MODEL	NL2501
MODE	D-Sub (1024X768, 60kHz)	6dB BANDWIDTH	9 kHz
INPUT POWER	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 55 % RH, 1004 hPa	TESTED BY:	JN Chen

No	Freq. Factor	Corr. [MHz]	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.267	0.10	51.47	41.07	51.57	41.17	61.22	51.22	-9.65	-10.05
2	0.543	0.10	45.49	-	45.59	-	56.00	46.00	-10.41	-
3	0.828	0.10	45.65	-	45.75	-	56.00	46.00	-10.25	-
4	1.089	0.10	44.40	-	44.50	-	56.00	46.00	-11.50	-
5	1.977	0.10	41.29	-	41.39	-	56.00	46.00	-14.61	-
6	3.799	0.28	40.38	-	40.66	-	56.00	46.00	-15.34	-
7	7.604	0.48	47.84	-	48.32	-	60.00	50.00	-11.68	-
8	14.285	0.86	45.75	-	46.61	-	60.00	50.00	-13.39	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

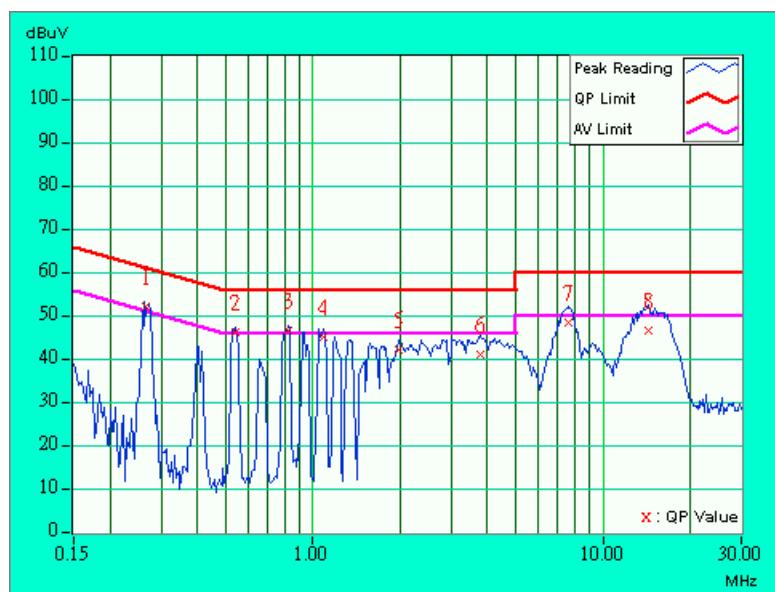

EUT	15" LCD Monitor	MODEL	NL2501
TEST MODE	D-Sub (1024X768, 60kHz)	6dB BANDWIDTH	9 kHz
INPUT POWER	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 55 % RH, 1004 hPa		TESTED BY: JN Chen

No	Freq. Factor	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.271	0.10	52.57	41.01	52.67	41.11	61.09	51.09	-8.42	-9.98
2	0.537	0.10	44.09	-	44.19	-	56.00	46.00	-11.81	-
3	0.825	0.10	42.60	-	42.70	-	56.00	46.00	-13.30	-
4	0.966	0.10	42.77	-	42.87	-	56.00	46.00	-13.13	-
5	3.891	0.29	40.04	-	40.33	-	56.00	46.00	-15.67	-
6	7.517	0.36	47.82	-	48.18	-	60.00	50.00	-11.82	-
7	14.459	0.67	49.57	34.67	50.24	35.34	60.00	50.00	-9.76	-14.66

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and


measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against
the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

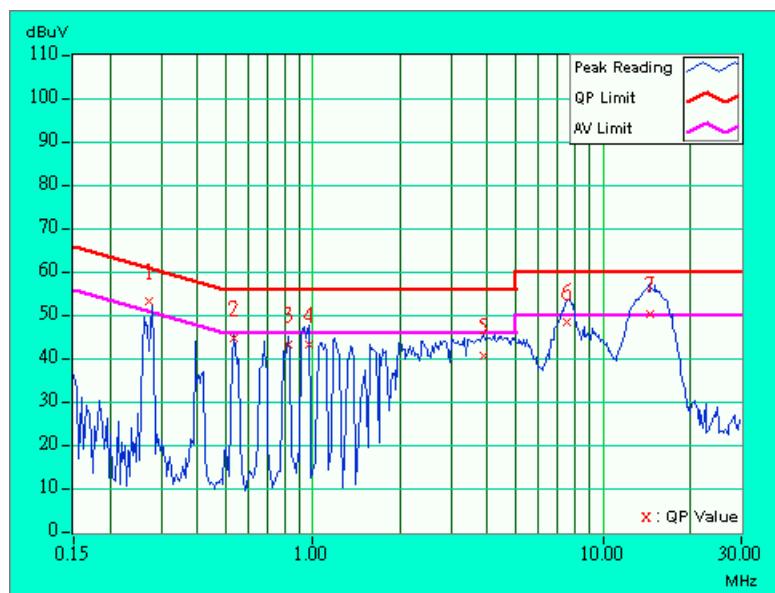

4.1.8 TEST RESULTS (B)

EUT	15" LCD Monitor	MODEL	NL2501
TEST MODE	DVI (1024X768, 60kHz)	6dB BANDWIDTH	9 kHz
INPUT POWER	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 55 % RH, 1004 hPa	TESTED BY:	JN Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.267	0.10	50.17	-	50.27	-	61.21	51.21	-10.94	-
2	0.552	0.10	46.40	32.80	46.50	32.90	56.00	46.00	-9.50	-13.10
3	0.945	0.10	43.93	-	44.03	-	56.00	46.00	-11.97	-
4	3.846	0.28	40.58	-	40.86	-	56.00	46.00	-15.14	-
5	7.736	0.49	47.00	-	47.49	-	60.00	50.00	-12.51	-
6	15.413	0.92	47.40	-	48.32	-	60.00	50.00	-11.68	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

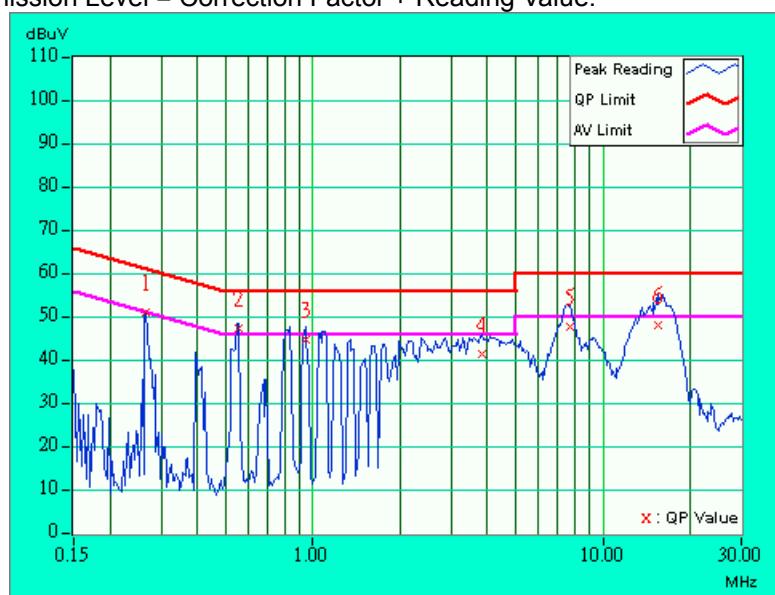

EUT	15" LCD Monitor	MODEL	NL2501
TEST MODE	DVI (1024X768, 60kHz)	6dB BANDWIDTH	9 kHz
INPUT POWER	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 55 % RH, 1004 hPa		TESTED BY: JN Chen

No	Freq. Factor	Corr. [MHz]	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.276	0.10	51.34	37.94	51.44	38.04	60.94	50.94	-9.50	-12.90
2	0.546	0.10	45.17	-	45.27	-	56.00	46.00	-10.73	-
3	0.921	0.10	45.65	-	45.75	-	56.00	46.00	-10.25	-
4	3.831	0.28	40.58	-	40.86	-	56.00	46.00	-15.14	-
5	7.487	0.36	48.32	-	48.68	-	60.00	50.00	-11.32	-
6	14.657	0.68	48.48	-	49.16	-	60.00	50.00	-10.84	-
7	16.169	0.77	50.71	34.93	51.48	35.70	60.00	50.00	-8.52	-14.30

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and


measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

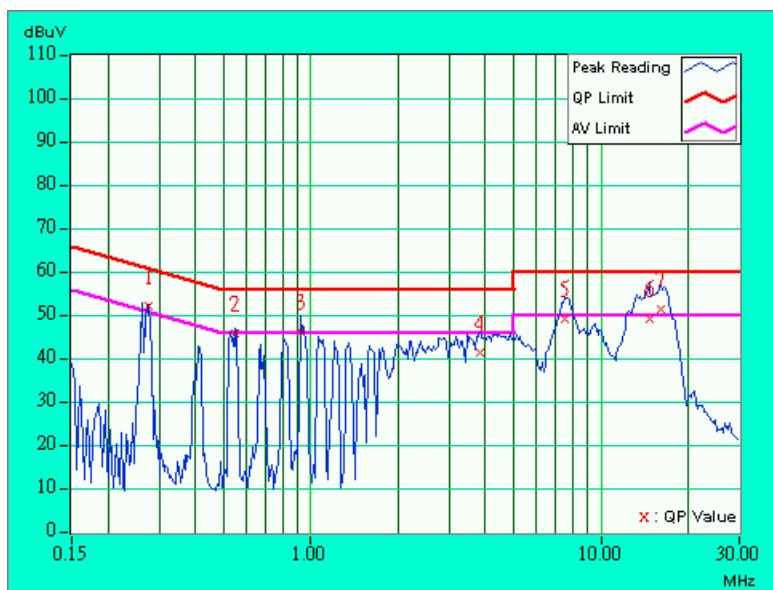

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT FOR FREQUENCY BELOW 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 10m)	
	dBuV/m		dBuV/m	
30 – 230	40		30	
230 - 1000	47		37	

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

Note: (1) The lower limit shall apply at the transition frequencies.
 (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
 (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8594A	3144A00308	Aug. 22, 2002
HP Preamplifier	8447D	2944A08119	July. 15, 2003
* HP Preamplifier	8449B	3008A01201	Dec. 06, 2002
* HP Preamplifier	8449B	3008A01292	Aug. 21, 2002
ROHDE & SCHWARZ TEST RECEIVER	ESCS 30	838251/021	Jan. 15, 2003
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2002
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 27, 2003
* CHASE Bilog Antenna	CBL6112A	2329	May 10, 2003
* SCHWARZBECK Horn Antenna	BBHA9120 -D1	D130	July 3, 2003
* EMCO Horn Antenna	3115	9312-4192	April 9, 2003
* EMCO Turn Table	1060	1195	NA
* EMCO Tower	1051	1163	NA
* Software	AS61D4	NA	NA
* ANRITSU RF Switches	MP59B	E10124	May 9, 2003
* TIMES RF cable	LMR-600	CABLE-ST2-01	May 9, 2003

NOTE:

1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
3. “*” = These equipment are used for the final measurement.
4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
5. The test was performed in ADT Open Site No. 2.
6. The VCCI Site Registration No. is R-237.

4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field



strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.
3. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the interference antenna.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

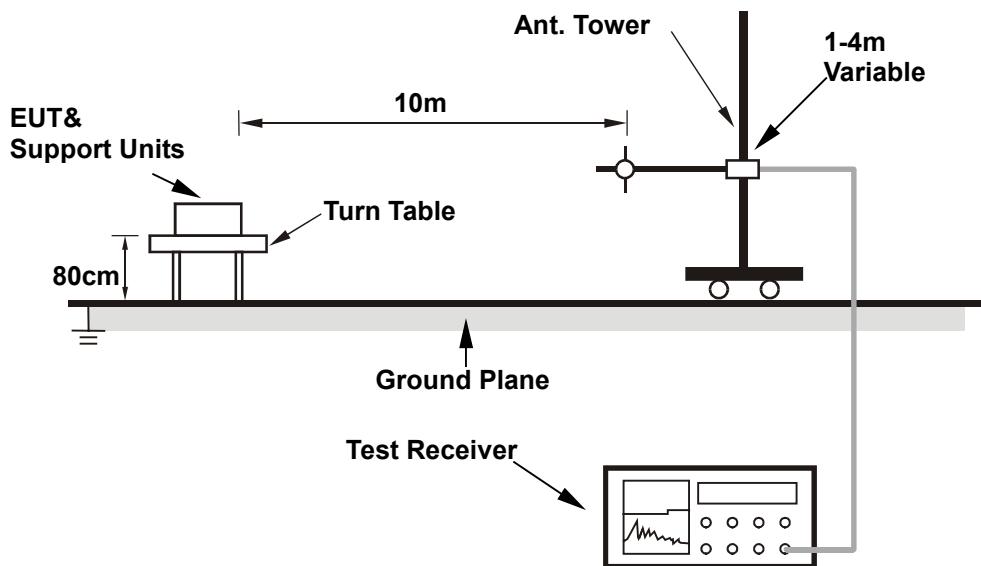

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6


4.2.7 TEST RESULTS (A)

EUT	15" LCD Monitor	MODEL	NL2501
TEST MODE	D-Sub (1024X768, 60kHz)	FREQUENCY RANGE	30-1000 MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 50 % RH, 1004 hPa	TESTED BY: JN Chen	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	108.70	18.0 QP	30.00	-12.00	4.00H	248	5.63	10.97	1.40	0.00	-12.37
2	130.00	18.2 QP	30.00	-11.80	4.00H	17	5.28	11.38	1.54	0.00	-12.93
3	175.00	17.4 QP	30.00	-12.60	4.00H	349	6.63	8.91	1.86	0.00	-10.78
4	195.00	19.3 QP	30.00	-10.70	4.00H	110	8.46	8.84	2.00	0.00	-10.85
5	781.00	29.2 QP	37.00	-7.80	1.28H	297	5.41	19.17	4.62	0.00	-23.80
6	846.20	27.6 QP	37.00	-9.40	1.18H	316	2.64	19.90	5.07	0.00	-24.97
7	910.00	33.0 QP	37.00	-4.00	1.01H	144	8.32	19.65	5.03	0.00	-24.69
8	976.00	30.0 QP	37.00	-7.00	1.01H	212	4.80	19.88	5.32	0.00	-25.21

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
4. The other emission levels were very low against the limit.
5. Margin value = Emission level – Limit value.

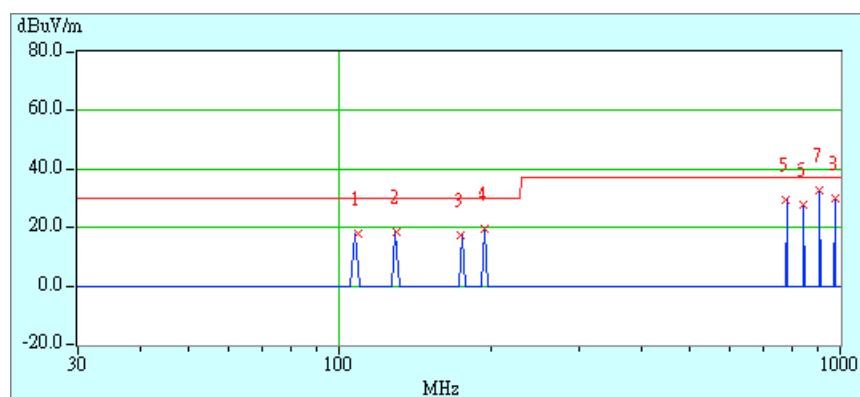


EUT	15" LCD Monitor	MODEL	NL2501
TEST MODE	D-Sub (1024X768, 60kHz)	FREQUENCY RANGE	30-1000 MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 50 % RH, 1004 hPa	TESTED BY: JN Chen	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	129.90	18.4 QP	30.00	-11.60	1.01V	112	5.48	11.38	1.54	0.00	-12.92
2	175.46	17.2 QP	30.00	-12.80	1.01V	222	6.45	8.91	1.86	0.00	-10.77
3	194.90	23.9 QP	30.00	-6.10	1.01V	34	13.06	8.84	2.00	0.00	-10.85
4	214.46	20.2 QP	30.00	-9.80	1.01V	199	8.39	9.65	2.15	0.00	-11.82
5	260.00	28.2 QP	37.00	-8.80	1.01V	336	13.61	12.15	2.44	0.00	-14.59
6	846.20	28.0 QP	37.00	-9.00	1.93V	334	3.04	19.90	5.07	0.00	-24.97
7	910.00	31.8 QP	37.00	-5.20	1.62V	42	7.12	19.65	5.03	0.00	-24.69
8	976.00	28.2 QP	37.00	-8.80	1.60V	350	3.00	19.88	5.32	0.00	-25.21

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
4. The other emission levels were very low against the limit.
5. Margin value = Emission level – Limit value.

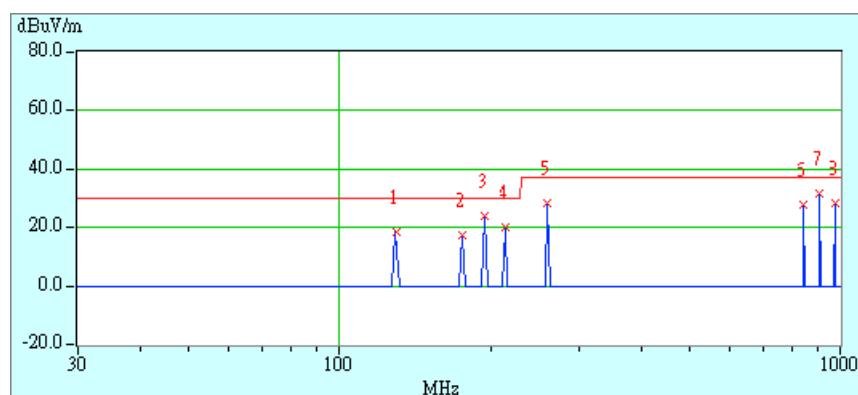


4.2.8 TEST RESULTS (B)

EUT	15" LCD Monitor	MODEL	NL2501
TEST MODE	DVI (1024X768, 60kHz)	FREQUENCY RANGE	30-1000 MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 50 % RH, 1004 hPa		TESTED BY: JN Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	108.80	20.0 QP	30.00	-10.00	4.00H	169	7.63	10.97	1.40	0.00	-12.37
2	130.00	17.0 QP	30.00	-13.00	4.00H	186	4.08	11.38	1.54	0.00	-12.92
3	168.00	18.0 QP	30.00	-12.00	4.00H	254	6.84	9.31	1.85	0.00	-11.16
4	175.43	18.8 QP	30.00	-11.20	4.00H	134	8.01	8.91	1.86	0.00	-10.77
5	195.00	20.0 QP	30.00	-10.00	4.00H	336	9.16	8.84	2.00	0.00	-10.84
6	781.00	28.4 QP	37.00	-8.60	1.09H	223	4.61	19.17	4.62	0.00	-23.79
7	846.00	31.5 QP	37.00	-5.50	1.12H	10	6.60	19.86	5.04	0.00	-24.91
8	910.00	33.7 QP	37.00	-3.30	1.00H	345	9.02	19.65	5.03	0.00	-24.68
9	975.00	31.1 QP	37.00	-5.90	1.04H	126	5.90	19.88	5.32	0.00	-25.20

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
4. The other emission levels were very low against the limit.
5. Margin value = Emission level – Limit value.

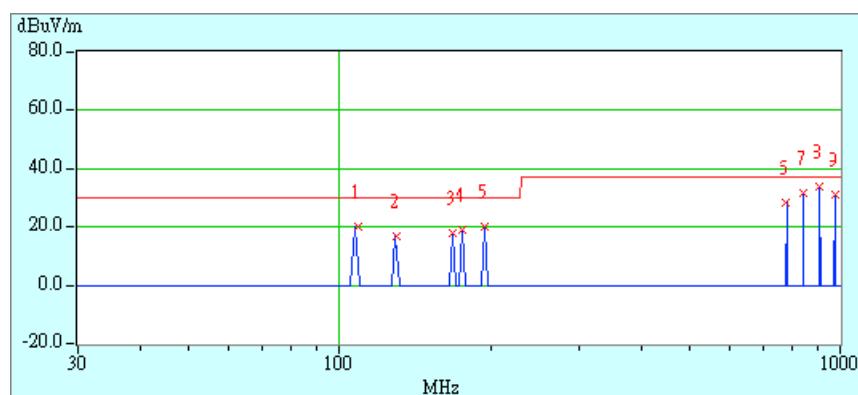


EUT	15" LCD Monitor	MODEL	NL2501
TEST MODE	DVI (1024X768, 60kHz)	FREQUENCY RANGE	30-1000 MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 50 % RH, 1004 hPa	TESTED BY: JN Chen	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	43.50	19.0 QP	30.00	-11.00	1.00V	315	7.48	10.57	0.95	0.00	-11.52
2	108.77	20.6 QP	30.00	-9.40	1.00V	144	8.23	10.97	1.40	0.00	-12.37
3	130.00	21.0 QP	30.00	-9.00	1.00V	2	8.08	11.38	1.54	0.00	-12.92
4	175.40	18.6 QP	30.00	-11.40	1.00V	58	7.83	8.91	1.86	0.00	-10.77
5	181.90	19.0 QP	30.00	-11.00	1.00V	226	8.41	8.69	1.89	0.00	-10.59
6	194.90	25.3 QP	30.00	-4.70	1.00V	14	14.46	8.84	2.00	0.00	-10.85
7	214.50	20.2 QP	30.00	-9.80	1.00V	352	8.39	9.65	2.15	0.00	-11.82
8	260.00	31.0 QP	37.00	-6.00	1.00V	339	16.41	12.15	2.44	0.00	-14.59
9	846.00	27.0 QP	37.00	-10.00	2.34V	156	2.10	19.86	5.04	0.00	-24.90
10	846.00	27.0 QP	37.00	-10.00	1.60V	283	2.10	19.86	5.04	0.00	-24.90
11	910.00	31.7 QP	37.00	-5.30	2.36V	205	7.02	19.65	5.03	0.00	-24.68

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
4. The other emission levels were very low against the limit.
5. Margin value = Emission level – Limit value.

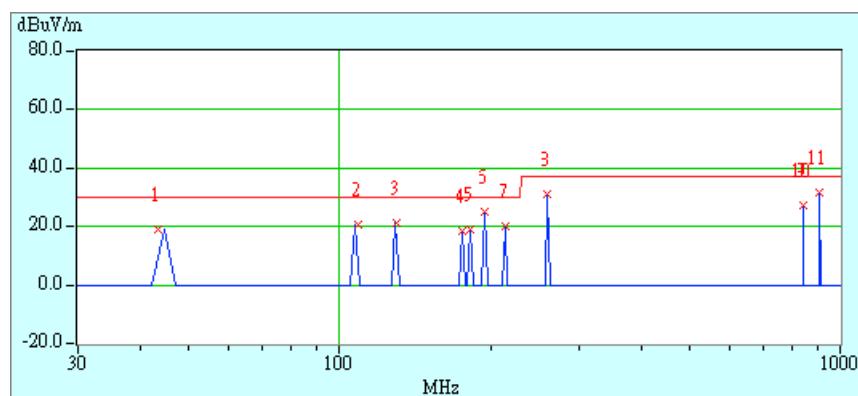

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST



6 APPENDIX - INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
Canada	INDUSTRY CANADA
R.O.C.	CNLA, BSMI

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC Lab:
Tel: 886-35-935343
Fax: 886-35-935342

Lin Kou Safety Lab:
Tel: 886-2-26093195
Fax: 886-2-26093184

Lin Kou RF & Telecom Lab.
Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.