


Installation

1.1 THE V.GIS DECODER SYSTEM

Your V.gis decoder system includes a V.gis control box, a 120 V power adapter, and a remote control unit with 2 AAA batteries. The remote control unit can only be used with Tri-Vision's V.gis decoder box.

1.2 CONNECTING THE POWER CORD

The power adapter connects at the rear of the V.gis box, by inserting the point of the AC adapter into the power socket of the V.gis control box. The AC adapter is then plugged into a 120V power outlet.

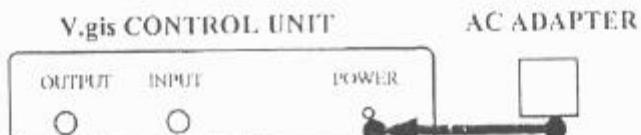

1.3 CONNECTING YOUR DECODER BOX

