

Company: Polycom Inc.

Test of: RealPresence Trio 8500

To: FCC Part 15.247 (DTS) & IC RSS-247

Report No.: POLY35-U6 Rev A FHSS

**COMPLETE TEST REPORT**





Test of: Polycom Inc. RealPresence Trio 8500

to

To: FCC Part 15.247 (DTS) & IC RSS-247

Test Report Serial No.: POLY35-U6 Rev A FHSS

This report supersedes: NONE

Applicant: Polycom Inc.  
6001 America Center Dr.  
San Jose, California 95002  
USA

Product Function: Conference Phone/Video Conference

Issue Date: 20th July 2017

**This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
575 Boulder Court  
Pleasanton California 94566  
USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

## Table of Contents

<b>1. ACCREDITATION, LISTINGS &amp; RECOGNITION</b> .....	<b>5</b>
1.1. TESTING ACCREDITATION.....	5
1.2. RECOGNITION .....	6
1.3. PRODUCT CERTIFICATION .....	7
<b>2. DOCUMENT HISTORY</b> .....	<b>8</b>
<b>3. TEST RESULT CERTIFICATE</b> .....	<b>9</b>
<b>4. REFERENCES AND MEASUREMENT UNCERTAINTY</b> .....	<b>10</b>
4.1. Normative References .....	10
4.2. Test and Uncertainty Procedure .....	11
<b>5. PRODUCT DETAILS AND TEST CONFIGURATIONS</b> .....	<b>12</b>
5.1. Technical Details .....	12
5.2. Scope Of Test Program .....	13
5.3. Equipment Model(s) and Serial Number(s) .....	14
5.4. Power Over Ethernet (POE) Power Adaptor .....	14
5.5. Antenna Details .....	14
5.6. Cabling and I/O Ports .....	14
5.7. Test Configurations.....	15
5.8. Equipment Modifications .....	15
5.9. Deviations from the Test Standard .....	15
<b>6. TEST SUMMARY</b> .....	<b>16</b>
<b>7. TEST EQUIPMENT CONFIGURATION(S)</b> .....	<b>17</b>
7.1. RF Conducted.....	17
7.2. Radiated Emissions - 3m Chamber.....	19
7.3. AC Wireline Emissions .....	22
<b>8. MEASUREMENT AND PRESENTATION OF TEST DATA</b> .....	<b>23</b>
<b>9. TEST RESULTS</b> .....	<b>24</b>
9.1. 20 dB & 99% Bandwidth .....	24
9.2. Frequency Hopping Tests .....	27
9.2.1. <i>Number of Hopping Channels</i> .....	28
9.2.2. <i>Channel Separation</i> .....	29
9.2.3. <i>Dwell Time &amp; Channel Occupancy</i> .....	30
9.3. Output Power.....	31
9.4. Emissions .....	34
9.4.1. <i>Conducted Emissions</i> .....	34
9.4.1.1. Conducted Unwanted Spurious Emissions .....	35
9.4.1.2. Conducted Band-Edge Emissions .....	37
9.4.2. <i>Radiated Emissions</i> .....	45
9.4.2.3. TX Spurious & Restricted Band Emissions .....	48
9.4.2.4. Restricted Edge & Band-Edge Emissions.....	51
9.4.3. <i>Digital Emissions (0.03 - 1 GHz)</i> .....	58
9.4.4. <i>AC Wireline Emissions</i> .....	61
<b>A. APPENDIX - GRAPHICAL IMAGES</b> .....	<b>65</b>
A.1. 20 dB & 99% Bandwidth .....	66
A.2. Frequency Hopping Tests .....	72
A.2.1. <i>Number of Hopping Channels</i> .....	72
A.2.2. <i>Channel Separation</i> .....	78
A.2.3. <i>Dwell Time &amp; Channel Occupancy</i> .....	80
A.3. Emissions .....	84

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

A.3.1. <i>Conducted Emissions</i> .....	84
A.3.1.1. Conducted Unwanted Spurious Emissions.....	84
A.3.1.2. Conducted Band-Edge Emissions .....	90
A.3.2. <i>Radiated Emissions</i> .....	98
A.3.2.3. Restricted Edge & Band-Edge Emissions .....	98

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## **1. ACCREDITATION, LISTINGS & RECOGNITION**

### **1.1. TESTING ACCREDITATION**

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication) VCCI	CAB	APEC MRA 2	RCB 210
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

### **1.3. PRODUCT CERTIFICATION**

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)  
Industry Canada – Certification Body, CAB Identifier – US0159  
Europe – Notified Body (NB), NB Identifier - 2280  
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	11 <sup>th</sup> July 2017	Draft report for client review
Rev A	20 <sup>th</sup> July 2017	Initial release
.		
.		
.		
.		
.		

In the above table the latest report revision will replace all earlier versions.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### **3. TEST RESULT CERTIFICATE**

**Manufacturer:** Polycom Inc.  
6001 America Center Dr.  
San Jose  
California 95002 USA

**Tested By:** MiCOM Labs, Inc.  
575 Boulder Court  
Pleasanton  
California 94566 USA

**Model:** RealPresence Trio 8500

**Telephone:** +1 925 462 0304

**Type Of Equipment:** Conference Phone/Video Conference

**Fax:** +1 925 462 0306

**S/N's:** 64617F1D0306

**Website:** [www.micomlabs.com](http://www.micomlabs.com)

**Test Date(s):** 28<sup>th</sup> June 2017

#### **STANDARD(S)**

FCC Part 15.247 (DTS) & IC RSS-247

#### **TEST RESULTS**

EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.


#### **Notes:**


1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

**Approved & Released for MiCOM Labs, Inc. by:**



TESTING CERT #2381.01

  
Graeme Grieve  
Quality Manager MiCOM Labs, Inc.

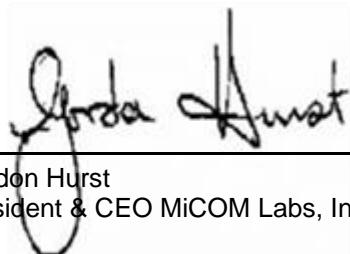  
Gordon Hurst  
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 4. REFERENCES AND MEASUREMENT UNCERTAINTY

### 4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	FCC 47 CFR Part 15.247	2016	Radio Frequency Devices; Subpart C – Intentional Radiators
II	FCC Public Notice DA 00-705	March 2000	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
III	RSS-247 Issue 2	Feb 2017	Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices
IV	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
V	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
VI	CISPR 32	2012	Electromagnetic compatibility of multimedia equipment - Emission requirements
VII	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
VIII	FCC 47 CFR Part 15, Subpart B	2014	Title 47: Telecommunication PART 15—RADIO FREQUENCY DEVICES, SubPart B; Unintentional Radiators
IX	ICES-003	Issue 6 Jan 2016	Spectrum Management and Telecommunications; Interference-Causing Equipment Standard. Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement.
X	M 3003	Edition 3 Nov.2012	Expression of Uncertainty and Confidence in Measurements
XI	RSS-Gen Issue 4	November 2014	General Requirements and Information for the Certification of Radiocommunication Equipment
XII	FCC 47 CFR Part 2.1033	2016	FCC requirements and rules regarding photographs and test setup diagrams.
XIII	A2LA	June 2015	R105 - Requirement's When Making Reference to A2LA Accreditation Status

#### **4.2. Test and Uncertainty Procedure**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

## 5. PRODUCT DETAILS AND TEST CONFIGURATIONS

### 5.1. Technical Details

Details	Description
Purpose:	Test of the Polycom Inc. RealPresence Trio 8500 to FCC Part 15.247 (DTS) & IC RSS-247 tested in FHSS mode.
Applicant:	Polycom Inc. 6001 America Center Drive San Jose California 95002 USA
Manufacturer:	Polycom Inc.
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	POLY35-U6 Rev A FHSS
Date EUT received:	26 <sup>th</sup> June 2017
Standard(s) applied:	FCC Part 15.247 (DTS) & IC RSS-247
Dates of test (from - to):	28 <sup>th</sup> June 2017
No of Units Tested:	1
Product Family Name:	RealPresence Trio 8500
Model(s):	RealPresence Trio 8500
Location for use:	Indoors
Declared Frequency Range(s):	2400 - 2483.5 MHz;
Type of Modulation:	GFSK, FHSS
EUT Modes of Operation:	BLE, DH1 and DH5
Declared Nominal Output Power (dBm):	DH1: 8.50 dBm DH5: 8.50 dBm
Transmit/Receive Operation:	1
Rated Input Voltage and Current:	POE (POE adaptor sold with unit) 56Vdc
Operating Temperature Range:	Declared Range 0°C to 40°C
ITU Emission Designator:	1M1G1D
Equipment Dimensions:	450 x 150 x 150 mm
Weight:	1kg
Firmware Version	5.5.2.9007
Software Version:	5.5.2.9007
Hardware Version:	Rev. 1

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 5.2. Scope Of Test Program

### Polycom Inc. RealPresence Trio 8500

The scope of the test program was to test the Polycom Inc. RealPresence Trio 8500 in the frequency ranges 2400 - 2483.5 MHz; in FHSS mode for compliance against the following specifications:

#### FCC CFR 47 Part 15 Subpart C 15.247 (DTS)

Radio Frequency Devices; Subpart C – Intentional Radiators

#### Industry Canada RSS-247

Digital Transmission Systems (DTS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LEN) Devices.

### Polycom Inc. RealPresence Trio 8500



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### 5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Manufacturer	Model No.	Serial No.
EUT	EUT - Conducted Unit	Polycom Inc.	RealPresence Trio 8500	00:04:F2:FC:FD:3A

### 5.4. Power Over Ethernet (POE) Power Adaptor

The following POE model is an optional item and can be ordered and supplied if required.

POE AC Adaptor
Phihong Model; POE29U-1AT(PL) 100 – 240 Vac 0.8A MAX, 50-60 Hz +56 Vdc 0.536A

### 5.5. Antenna Details

Type	Manufacturer	Model	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
Integral Chip Antenna	Unictron Technologies Corporation	H2U84W1H1S0100	1.4	NA	360	No	2400 - 2500

BF Gain - Beamforming Gain  
 Dir BW - Directional BeamWidth  
 X-Pol - Cross Polarization

### 5.6. Cabling and I/O Ports

Port Type	Max Cable Length	# Of Ports	Screened	Conn Type	Data Type
4-Wire Microphone	15ft	2	No	RJ-11	Analogue
Ethernet	100m (POE In)	1	Yes	RJ-45	Packet Data
USB	15m	1	Yes	USB	Digital
USB (Micro Port)	15m	1	Yes	USB	Digital

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 5.7. Test Configurations

Results for the following configurations are provided in this report:

<b>Operational Mode(s)</b>	<b>Data Rate with Highest Power MBit/s</b>	<b>Channel Frequency (MHz)</b>		
		<b>Low</b>	<b>Mid</b>	<b>High</b>
<b>2400 - 2483.5 MHz</b>				
DH1	1.00	2,402.00	2,440.00	2,480.00
DH5	1.00	2,402.00	2,440.00	2,480.00

## 5.8. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

## 5.9. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

## 6. TEST SUMMARY

### List of Measurements


Test Header	Result	Data Link
20 dB & 99% Bandwidth	Complies	<a href="#">View Data</a>
Frequency Hopping Tests	Complies	-
Number of Hopping Channels	Complies	<a href="#">View Data</a>
Channel Separation	Complies	<a href="#">View Data</a>
Dwell Time	Complies	<a href="#">View Data</a>
Channel Occupancy	Complies	<a href="#">View Data</a>
Output Power	Complies	<a href="#">View Data</a>
Emissions	Complies	-
(1) Conducted Emissions	Complies	-
(i) Conducted Unwanted Spurious Emissions	Complies	<a href="#">View Data</a>
(ii) Conducted Band-Edge Emissions	Complies	<a href="#">View Data</a>
(2) Radiated Emissions	Complies	-
(i) TX Spurious & Restricted Band Emissions	Complies	<a href="#">View Data</a>
(ii) Restricted Edge & Band-Edge Emissions	Complies	<a href="#">View Data</a>
(3) Digital Emissions (0.03 - 1 GHz)	Complies	<a href="#">View Data</a>
(4) AC Wireline Emissions	Complies	<a href="#">View Data</a>

## 7. TEST EQUIPMENT CONFIGURATION(S)

### 7.1. RF Conducted

The following tests were performed using the conducted test set-up shown in the diagram below.

1. 20 dB & 99% Bandwidth
2. Number of Hopping Channels
3. Channel Separation
4. Dwell Time
5. Channel Occupancy
6. Conducted Output Power
7. Power Spectral Density
8. Spurious Emissions
9. Band-Edge Emissions

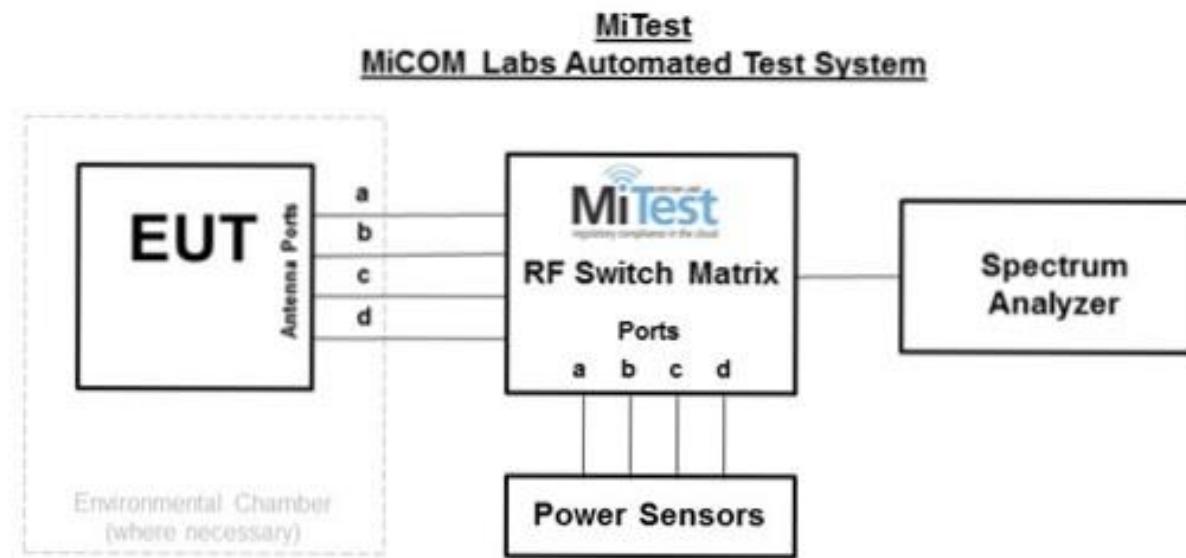

### Conducted Test Measurement Setup


A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
#3 SA	MiTest Box to SA	Fairview Microwave	SCA1814-0101-72	#3 SA	2 Oct 2017
#3P1	EUT to MiTest box port 1	Fairview Microwave	SCA1814-0101-72	#3P1	2 Oct 2017
#3P2	EUT to MiTest box port 2	Fairview Microwave	SCA1814-0101-72	#3P2	2 Oct 2017
#3P3	EUT to MiTest box port 3	Fairview Microwave	SCA1814-0101-72	#3P3	2 Oct 2017
#3P4	EUT to MiTest box port 4	Fairview Microwave	SCA1812-0101-72	#3P4	2 Oct 2017
158	Barometer/Thermometer	Control Company	4196	E2846	30 Nov 2017
249	Resistance Thermometer	Thermotronics	GR2105-02	9340 #2	23 Oct 2017
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	2 May 2018
361	Desktop for RF#1, Labview Software installed	Dell	Vostro 220	WS RF#1	Not Required
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	4 Aug 2017
390	USB Power Head 50MHz - 24GHz -60 to +20dBm	Agilent	U2002A	MY50000103	17 Oct 2017
398	MiTest RF Conducted Test Software	MiCOM	MiTest ATS	Version 4.1	Not Required
405	DC Power Supply 0-60V	Agilent	6654A	MY4001826	Cal when used
408	USB to GPIB interface	National Instruments	GPIB-USB HS	14C0DE9	Not Required
435	USB Wideband Power Sensor	Boonton	55006	8730	31 Jul 2017
436	USB Wideband Power Sensor	Boonton	55006	8731	14 Sep 2017
441	USB Wideband Power Sensor	Boonton	55006	9179	25 Sep 2017
443	4x4 RF Switch Box	MiCOM Labs	MiTest 4X4 RF Switch Box	MIC003	2 Oct 2017
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
461	Spectrum Analyzer	Agilent	E4440A	MY46185537	13 Aug 2017
75	Environmental Chamber	Thermatron	SE-300-2-2	27946	24 Nov 2017

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 7.2. Radiated Emissions - 3m Chamber

The following tests were performed using the radiated test set-up shown in the diagram below. Radiated emissions below 1GHz. Radiated Emissions above 1GHz.

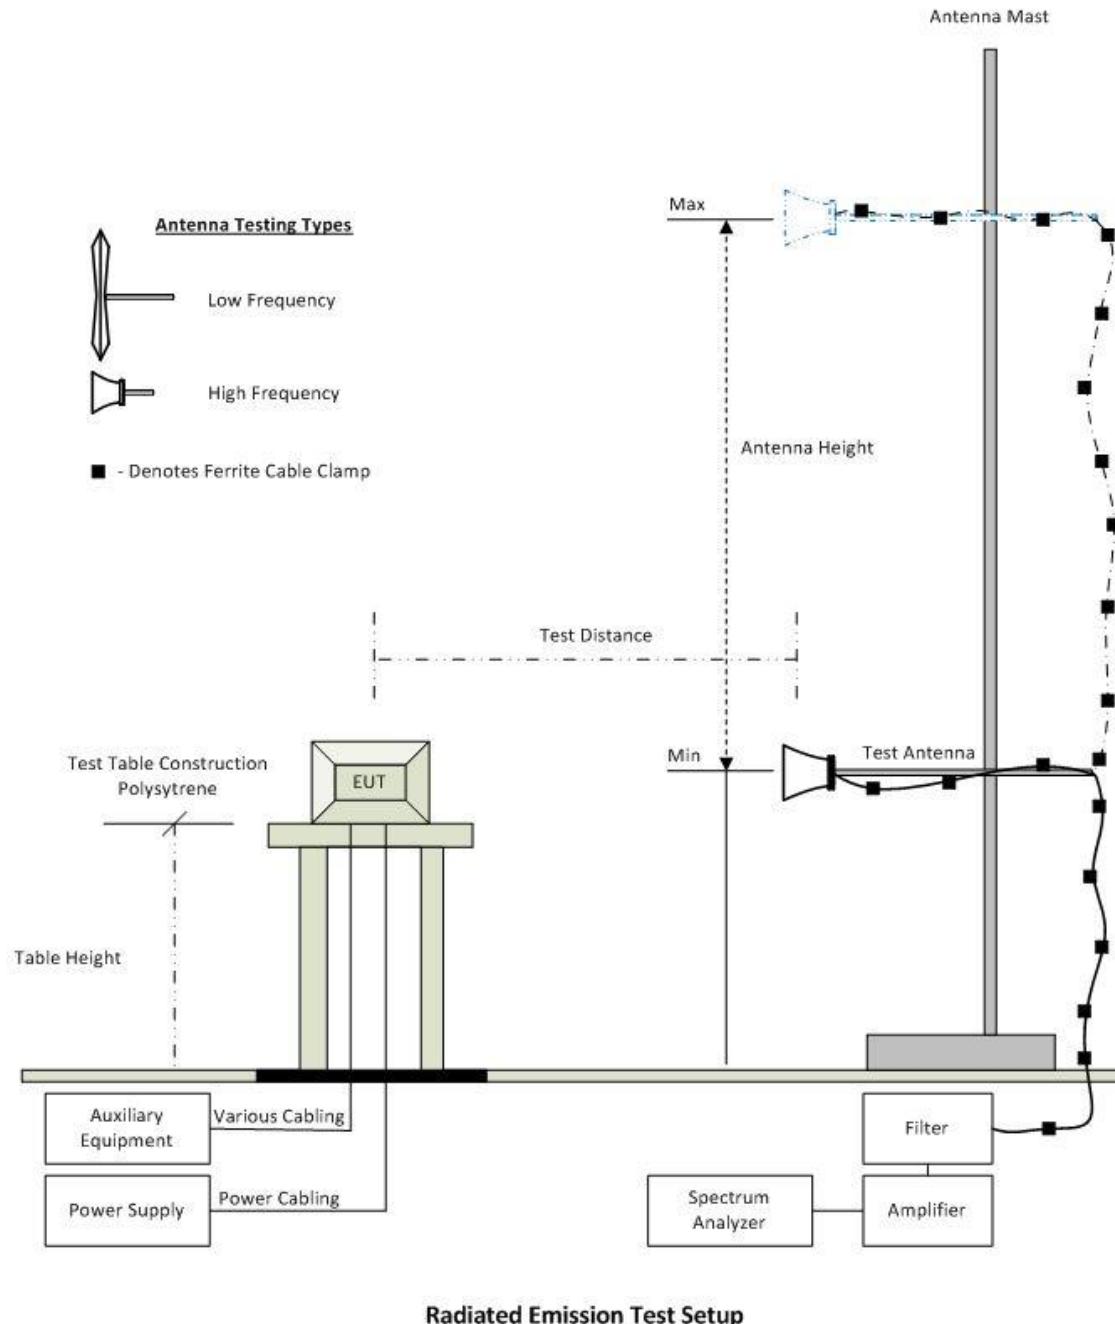

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Polycom Inc. RealPresence Trio 8500  
**To:** FCC Part 15.247 (DTS) & IC RSS-247  
**Serial #:** POLY35-U6 Rev A FHSS  
**Issue Date:** 20<sup>th</sup> July 2017  
**Page:** 20 of 104

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	30 Nov 2017
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	2 May 2018
301	5470 to 5725 MHz Notch Filter	Microtronics	RBC50704	001	16 Aug 2017
302	5150 to 5350 MHz Notch Filter	Microtronics	BRC50703	002	16 Aug 2017
303	5725 to 5875 MHz Notch filter	Microtronics	BRC50705	003	16 Aug 2017
330	Variac 0-280 Vac	Staco Energy Co	3PN1020B	0546	Cal when used
336	Active loop Ant 10kHz to 30 MHz	EMCO	EMCO 6502	00060498	26 Sep 2017
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	15 Aug 2017
341	900MHz Notch Filter	EWT	EWT-14-0199	H1	16 Aug 2017
342	2.4 GHz Notch Filter	EWT	EWT-14-0203	H1	16 Aug 2017
343	5.15 GHz Notch Filter	EWT	EWT-14-0200	H1	16 Aug 2017
344	5.35 GHz Notch Filter	EWT	EWT-14-0201	H1	16 Aug 2017
345	5.46 GHz Notch Filter	EWT	EWT-14-0202	H1	16 Aug 2017
346	1.6 TO 10GHz High Pass Filter	EWT	EWT-57-0112	H1	16 Aug 2017
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	26 Oct 2017
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	16 Aug 2017
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	4 Aug 2017
393	DC - 1050 MHz Low Pass Filter	Microcircuits	VLFX-1050	N/A	16 Aug 2017
396	2.4 GHz Notch Filter	Microtronics	BRM50701	001	16 Aug 2017
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	9 Oct 2017
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	10 Oct 2017
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	9 Oct 2017
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable	Sunol Sciences	SC98V	060199-1D	Not Required


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

	Controller				
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	16 Aug 2017
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	16 Aug 2017
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	16 Aug 2017
465	Low Pass Filter DC-1000 MHz	Mini-Circuits	NLP-1200+	VUU01901402	16 Aug 2017
466	Low Pass Filter DC-1500 MHz	Mini-Circuits	NLP-1750+	VUU10401438	16 Aug 2017
467	2495 to 2650 MHz notch filter	MicroTronics	BRM50709	011	16 Aug 2017
468	Low pass filter	Mini Circuits	SLP-550	None	16 Aug 2017
469	Low pass filter	Mini Circuit	SLP-1000	None	16 Aug 2017
470	High Pass filter	Mini Circuits	SHP-700	None	16 Aug 2017
476	Low Pass dc-2200MHz filter	Mini Circuits	15542 NLP-2400+	VUU13801345	16 Aug 2017
480	Cable - Bulkhead to Amp	SRC Haverhill	157-157-3050360	480	16 Aug 2017
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-151-3050787	481	16 Aug 2017
482	Cable - Amp to Antenna	SRC Haverhill	157-157-3051574	482	16 Aug 2017
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
VLF-1700	Low pass filter DC-1700 MHz	Mini Circuits	VLF-1700	None	16 Aug 2017

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### 7.3. AC Wireline Emissions

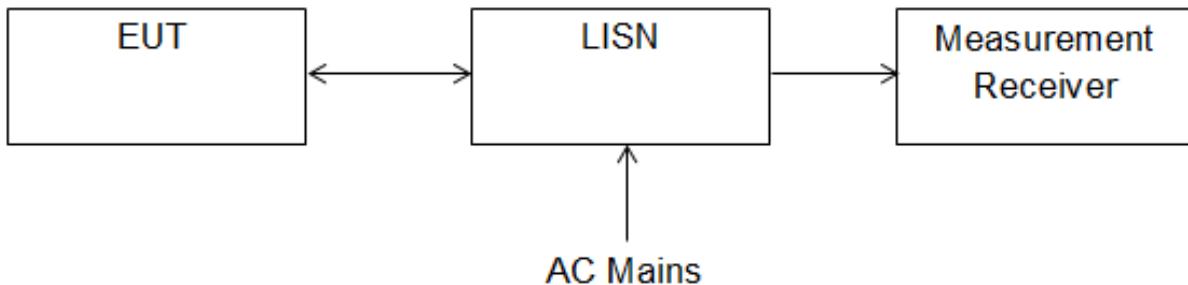

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	30 Nov 2017
184	Pulse Limiter	Rhode & Schwarz	ESH3Z2	357.8810.52	6 Oct 2017
190	LISN (two-line V-network)	Rhode & Schwarz	ESH3Z5	836679/006	29 Oct 2017
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	2 May 2018
307	BNC-CABLE	Megaphase	1689 1GVT4	15F50B002	6 Oct 2017
316	Dell desktop computer workstation	Dell	Desktop	WS04	Not Required
372	AC Variable PS	California Instruments	1251P	L06951	Cal when used
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	4 Aug 2017
388	LISN (3 Phase) 9kHz - 30MHz	Rhode & Schwarz	ESH2-Z5	892107/022	30 Oct 2017
496	MiTest Conducted Emissions test software.	MiCOM	Conducted Emissions Test Software Version 1.0	496	Not Required

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 9. TEST RESULTS

### 9.1. 20 dB & 99% Bandwidth

Conducted Test Conditions for 20 dB and 99% Bandwidth			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	20 dB and 99 % Bandwidth	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (a)(1)(i)/(ii)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for 20 dB and 99% Bandwidth Measurement

The bandwidth at 20 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

#### Limits for 20 dB and 99% Bandwidth

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(ii) Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

**Equipment Configuration for 20 dB 99% Bandwidth**

<b>Variant:</b>	DH1	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>	None		

**Test Measurement Results**

<b>Test Frequency</b>	<b>Measured 20 dB Bandwidth (MHz)</b>				<b>20 dB Bandwidth (MHz)</b>		<b>Limit</b>	<b>Lowest Margin</b>
	<b>Port(s)</b>				<b>Highest</b>	<b>Lowest</b>		
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>				
2402.0	1.018	--	--	--	1.018	1.018	--	--
2440.0	1.018	--	--	--	1.018	1.018	--	--
2480.0	1.018	--	--	--	1.018	1.018	--	--

<b>Test Frequency</b>	<b>Measured 99% Bandwidth (MHz)</b>				<b>Maximum 99% Bandwidth (MHz)</b>		
	<b>Port(s)</b>						
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>			
2402.0	0.918	--	--	--	0.918		
2440.0	0.926	--	--	--	0.926		
2480.0	0.922	--	--	--	0.922		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

**Equipment Configuration for 20 dB 99% Bandwidth**

<b>Variant:</b>	DH5	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>	None		

**Test Measurement Results**

<b>Test Frequency</b>	<b>Measured 20 dB Bandwidth (MHz)</b>				<b>20 dB Bandwidth (MHz)</b>		<b>Limit</b>	<b>Lowest Margin</b>
	<b>Port(s)</b>				<b>Highest</b>	<b>Lowest</b>		
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>			<b>MHz</b>	<b>MHz</b>
2402.0	0.733	--	--	--	0.733	0.733	--	--
2440.0	0.729	--	--	--	0.729	0.729	--	--
2480.0	0.729	--	--	--	0.729	0.729	--	--

<b>Test Frequency</b>	<b>Measured 99% Bandwidth (MHz)</b>				<b>Maximum 99% Bandwidth (MHz)</b>		
	<b>Port(s)</b>						
<b>MHz</b>	<b>a</b>	<b>b</b>	<b>c</b>	<b>d</b>			
2402.0	0.866	--	--	--	0.866		
2440.0	0.870	--	--	--	0.870		
2480.0	0.866	--	--	--	0.866		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 9.2. Frequency Hopping Tests

Conducted Test Conditions for Frequency Hopping Measurements			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Frequency Hopping Tests	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (a)(1)(i)/(ii)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References, FCC Public Notice DA 00-705		

### Test Procedure for Frequency Hopping Measurements

These tests cover the following measurements:

- i) channel separation
- ii) channel occupancy
- iii) dwell time
- iv) number of hopping frequencies

Frequency hopping testing was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency or hopping mode.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

### Limits for Frequency Hopping Measurements

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(ii) Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### 9.2.1. Number of Hopping Channels

Equipment Configuration for Number of Hopping Channels			
<b>Variant:</b>	DH1	<b>Antenna:</b>	Not Applicable
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>Duty Cycle (%):</b>	99.0	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>	None		

#### Test Measurement Results

Frequency Range (MHz)	Number of Hopping Channels	Limit	Pass / Fail
2400.0-2428.0	<a href="#">27</a>	--	--
2428.0-2456.0	<a href="#">28</a>	--	--
2456.0-2483.5	<a href="#">24</a>	--	--
<b>Total number of Hops</b>	<b>79</b>	<b>15</b>	<b>Pass</b>

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Number of Hopping Channels			
<b>Variant:</b>	DH5	<b>Antenna:</b>	Not Applicable
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>Duty Cycle (%):</b>	99.0	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>	None		

#### Test Measurement Results

Frequency Range (MHz)	Number of Hopping Channels	Limit	Pass / Fail
2400.0-2428.0	<a href="#">27</a>	--	--
2428.0-2456.0	<a href="#">28</a>	--	--
2456.0-2483.5	<a href="#">24</a>	--	--
<b>Total number of Hops</b>	<b>79</b>	<b>15</b>	<b>Pass</b>

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

### 9.2.2. Channel Separation

#### Equipment Configuration for Channel Separation

<b>Variant:</b>	DH1	<b>Antenna:</b>	Not Applicable
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>Duty Cycle (%):</b>	99.0	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>	None		

#### Test Measurement Results

Center Frequency (MHz)	Chan Separation (MHz)	Limit (MHz)	Pass / Fail
2440.0	<a href="#">1.012</a>	0.679	Pass

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

#### Equipment Configuration for Channel Separation

<b>Variant:</b>	DH5	<b>Antenna:</b>	Not Applicable
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>Duty Cycle (%):</b>	99.0	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>	None		

#### Test Measurement Results

Center Frequency (MHz)	Chan Separation (MHz)	Limit (MHz)	Pass / Fail
2440.0	<a href="#">1.018</a>	0.481	Pass

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

### 9.2.3. Dwell Time & Channel Occupancy

#### Equipment Configuration for Channel Occupancy

<b>Variant:</b>	DH1	<b>Antenna:</b>	Not Applicable
<b>Data Rate:</b>	3.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>Duty Cycle (%):</b>	99.0	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>	None		

#### Test Measurement Results

Channel Frequency(MHz)	Dwell Time (Single Burst) (mS)	Channel Occupancy (mS)	Observation Period (mS)	Channel Occupancy Limit (mS)	Pass / Fail
2440.00	<a href="#">0.170</a>	<a href="#">0.680</a>	400.00	400.000	Pass

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

#### Equipment Configuration for Channel Occupancy

<b>Variant:</b>	DH5	<b>Antenna:</b>	Not Applicable
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>Duty Cycle (%):</b>	99.0	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>	None		

#### Test Measurement Results

Channel Frequency(MHz)	Dwell Time (Single Burst) (ms)	Channel Occupancy (mS)	Observation Period (ms)	Channel Occupancy Limit (mS)	Pass / Fail
2440.00	<a href="#">0.170</a>	<a href="#">0.340</a>	400.00	400.000	Pass

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

### 9.3. Output Power

Conducted Test Conditions for Fundamental Emission Output Power			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Output Power	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (a)(1), (b)(1)/(2)/(3)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Fundamental Emission Output Power Measurement

In the case of average power measurements an average power sensor was utilized.

For peak power measurements the spectrum analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.

Testing was performed under ambient conditions, nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured, summed ( $\Sigma$ ) and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.  
 Supporting Information

Calculated Power =  $A + G + Y + 10 \log (1/x) \text{ dBm}$

$A$  = Total Power  $[10^{\text{Log10}} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$

$G$  = Antenna Gain

$Y$  = Beamforming Gain

$x$  = Duty Cycle (average power measurements only)

#### Limits for Fundamental Emission Output Power

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following for frequency hopping systems:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.



**Title:** Polycom Inc. RealPresence Trio 8500  
**To:** FCC Part 15.247 (DTS) & IC RSS-247  
**Serial #:** POLY35-U6 Rev A FHSS  
**Issue Date:** 20<sup>th</sup> July 2017  
**Page:** 33 of 104

#### Equipment Configuration for Output Power Peak

<b>Variant:</b>	DH1	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	1.40
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>	None		

#### Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
2402.0	6.56	--	--	--	6.56	30.00	-23.44	9.00
2440.0	6.68	--	--	--	6.68	30.00	-23.32	9.00
2480.0	6.97	--	--	--	6.97	30.00	-23.03	9.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

#### Equipment Configuration for Output Power Peak

<b>Variant:</b>	DH5	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	1.40
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>	None		

#### Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
2402.0	6.75	--	--	--	6.75	30.00	-23.25	9.00
2440.0	7.27	--	--	--	7.27	30.00	-22.73	9.00
2480.0	7.41	--	--	--	7.41	30.00	-22.59	9.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 9.4. Emissions

### 9.4.1. Conducted Emissions

Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Transmitter Conducted Spurious and Band-Edge Emissions	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (d)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement

Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 30 dBc (average detector) or 20 dBc (peak detector) below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

#### Limits Transmitter Conducted Spurious and Band-Edge Emissions

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### 9.4.1.1. Conducted Unwanted Spurious Emissions

##### Equipment Configuration for Unwanted Emissions Peak

<b>Variant:</b>	DH1	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>	None		

##### Test Measurement Results

<b>Test Frequency</b>	<b>Frequency Range</b>	<b>Unwanted Emissions Peak (dBm)</b>							
		<b>Port a</b>		<b>Port b</b>		<b>Port c</b>		<b>Port d</b>	
<b>MHz</b>	<b>MHz</b>	<b>SE</b>	<b>Limit</b>	<b>SE</b>	<b>Limit</b>	<b>SE</b>	<b>Limit</b>	<b>SE</b>	<b>Limit</b>
<b>2402.0</b>	30.0 - 26000.0	<a href="#">-40.346</a>	-24.32	--	--	--	--	--	--
<b>2440.0</b>	30.0 - 26000.0	<a href="#">-40.990</a>	-20.23	--	--	--	--	--	--
<b>2480.0</b>	30.0 - 26000.0	<a href="#">-41.497</a>	-20.73	--	--	--	--	--	--

##### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).



**Title:** Polycom Inc. RealPresence Trio 8500  
**To:** FCC Part 15.247 (DTS) & IC RSS-247  
**Serial #:** POLY35-U6 Rev A FHSS  
**Issue Date:** 20<sup>th</sup> July 2017  
**Page:** 36 of 104

#### Equipment Configuration for Unwanted Emissions Peak

<b>Variant:</b>	DH5	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>	None		

#### Test Measurement Results

Test Frequency	Frequency Range	Unwanted Emissions Peak (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
2402.0	30.0 - 26000.0	-40.350	-31.25	--	--	--	--	--	--
2440.0	30.0 - 26000.0	-40.496	-29.83	--	--	--	--	--	--
2480.0	30.0 - 26000.0	-41.039	-31.77	--	--	--	--	--	--

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

#### 9.4.1.2. Conducted Band-Edge Emissions

##### Equipment Configuration for Conducted Low Band-Edge Emissions (Hopping) Peak

<b>Variant:</b>	DH1	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>	None		

##### Test Measurement Results

<b>Channel Frequency:</b>	2402.0 MHz				
<b>Band-Edge Frequency:</b>	2400.0 MHz				
<b>Test Frequency Range:</b>	2350.0 - 2405.0 MHz				
<b>Port(s)</b>	<b>Band-Edge Markers and Limit</b>			<b>Revised Limit</b>	
	<b>M1 Amplitude (dBm)</b>	<b>Plot Limit (dBm)</b>	<b>M2 Frequency (MHz)</b>	<b>Amplitude (dBm)</b>	<b>M2A Frequency (MHz)</b>
a	<a href="#">-46.41</a>	-13.97	2401.40	--	--
					(MHz)

##### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Polycom Inc. RealPresence Trio 8500  
**To:** FCC Part 15.247 (DTS) & IC RSS-247  
**Serial #:** POLY35-U6 Rev A FHSS  
**Issue Date:** 20<sup>th</sup> July 2017  
**Page:** 38 of 104

**Equipment Configuration for Conducted Low Band-Edge Emissions (Hopping) Peak**

<b>Variant:</b>	DH5	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>	None		

**Test Measurement Results**

<b>Channel Frequency:</b>	2402.0 MHz				
<b>Band-Edge Frequency:</b>	2400.0 MHz				
<b>Test Frequency Range:</b>	2350.0 - 2405.0 MHz				
<b>Port(s)</b>	<b>Band-Edge Markers and Limit</b>			<b>Revised Limit</b>	<b>Margin</b>
	<b>M1 Amplitude (dBm)</b>	<b>Plot Limit (dBm)</b>	<b>M2 Frequency (MHz)</b>	<b>Amplitude (dBm)</b>	<b>M2A Frequency (MHz)</b>
a	<a href="#">-46.78</a>	-13.46	2401.60	--	--
					-1.600

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Polycom Inc. RealPresence Trio 8500  
**To:** FCC Part 15.247 (DTS) & IC RSS-247  
**Serial #:** POLY35-U6 Rev A FHSS  
**Issue Date:** 20<sup>th</sup> July 2017  
**Page:** 39 of 104

**Equipment Configuration for Conducted Low Band-Edge Emissions (Static) Peak**

<b>Variant:</b>	DH1	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>	None		

**Test Measurement Results**

<b>Channel Frequency:</b>	2402.0 MHz				
<b>Band-Edge Frequency:</b>	2400.0 MHz				
<b>Test Frequency Range:</b>	2350.0 - 2405.0 MHz				
<b>Port(s)</b>	<b>Band-Edge Markers and Limit</b>			<b>Revised Limit</b>	<b>Margin</b>
	<b>M1 Amplitude (dBm)</b>	<b>Plot Limit (dBm)</b>	<b>M2 Frequency (MHz)</b>	<b>Amplitude (dBm)</b>	<b>M2A Frequency (MHz)</b>
a	<a href="#"><u>-47.22</u></a>	-13.45	2401.40	--	--
					-1.400

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Polycom Inc. RealPresence Trio 8500  
**To:** FCC Part 15.247 (DTS) & IC RSS-247  
**Serial #:** POLY35-U6 Rev A FHSS  
**Issue Date:** 20<sup>th</sup> July 2017  
**Page:** 40 of 104

**Equipment Configuration for Conducted Low Band-Edge Emissions (Static) Peak**

<b>Variant:</b>	DH5	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	2402.0 MHz				
<b>Band-Edge Frequency:</b>	2400.0 MHz				
<b>Test Frequency Range:</b>	2350.0 - 2405.0 MHz				
<b>Port(s)</b>	<b>Band-Edge Markers and Limit</b>			<b>Revised Limit</b>	<b>Margin</b>
	<b>M1 Amplitude (dBm)</b>	<b>Plot Limit (dBm)</b>	<b>M2 Frequency (MHz)</b>	<b>Amplitude (dBm)</b>	<b>M2A Frequency (MHz)</b>
a	<a href="#">-47.25</a>	-13.40	2401.40	--	--
					-1.400

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Polycom Inc. RealPresence Trio 8500  
**To:** FCC Part 15.247 (DTS) & IC RSS-247  
**Serial #:** POLY35-U6 Rev A FHSS  
**Issue Date:** 20<sup>th</sup> July 2017  
**Page:** 41 of 104

**Equipment Configuration for Conducted Upper Band-Edge Emissions (Hopping) Peak**

<b>Variant:</b>	DH1	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	3.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	2480.0 MHz				
<b>Band-Edge Frequency:</b>	2483.5 MHz				
<b>Test Frequency Range:</b>	2478.0 - 2534.0 MHz				
<b>Port(s)</b>	<b>Band-Edge Markers and Limit</b>			<b>Revised Limit</b>	<b>Margin</b>
	<b>M3 Amplitude (dBm)</b>	<b>Plot Limit (dBm)</b>	<b>M2 Frequency (MHz)</b>	<b>Amplitude (dBm)</b>	<b>M2A Frequency (MHz)</b>
a	<a href="#"><u>-47.26</u></a>	-13.04	2480.60	--	--
					-2.900

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

**Equipment Configuration for Conducted Upper Band-Edge Emissions (Hopping) Peak**

<b>Variant:</b>	DH5	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	2480.0 MHz				
<b>Band-Edge Frequency:</b>	2483.5 MHz				
<b>Test Frequency Range:</b>	2478.0 - 2534.0 MHz				
<b>Port(s)</b>	<b>Band-Edge Markers and Limit</b>			<b>Revised Limit</b>	<b>Margin</b>
	<b>M3 Amplitude (dBm)</b>	<b>Plot Limit (dBm)</b>	<b>M2 Frequency (MHz)</b>	<b>Amplitude (dBm)</b>	<b>M2A Frequency (MHz)</b>
a	<a href="#">-47.22</a>	-13.15	2480.50	--	--
					-3.000

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS	
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB	

Note: click the links in the above matrix to view the graphical image (plot).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Polycom Inc. RealPresence Trio 8500  
**To:** FCC Part 15.247 (DTS) & IC RSS-247  
**Serial #:** POLY35-U6 Rev A FHSS  
**Issue Date:** 20<sup>th</sup> July 2017  
**Page:** 43 of 104

#### Equipment Configuration for Conducted Upper Band-Edge Emissions (Static) Peak

<b>Variant:</b>	DH1	<b>Duty Cycle (%):</b>	13.6
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Channel Frequency:</b>	2480.0 MHz				
<b>Band-Edge Frequency:</b>	2483.5 MHz				
<b>Test Frequency Range:</b>	2478.0 - 2533.0 MHz				
<b>Port(s)</b>	<b>Band-Edge Markers and Limit</b>			<b>Revised Limit</b>	<b>Margin</b>
	<b>M3 Amplitude (dBm)</b>	<b>Plot Limit (dBm)</b>	<b>M2 Frequency (MHz)</b>	<b>Amplitude (dBm)</b>	<b>M2A Frequency (MHz)</b>
a	<a href="#">-47.79</a>	-12.89	2480.50	--	--
					-3.000

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Polycom Inc. RealPresence Trio 8500  
**To:** FCC Part 15.247 (DTS) & IC RSS-247  
**Serial #:** POLY35-U6 Rev A FHSS  
**Issue Date:** 20<sup>th</sup> July 2017  
**Page:** 44 of 104

#### Equipment Configuration for Conducted Upper Band-Edge Emissions (Static) Peak

<b>Variant:</b>	DH5	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	FHSS	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	CC
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Channel Frequency:</b>	2480.0 MHz				
<b>Band-Edge Frequency:</b>	2483.5 MHz				
<b>Test Frequency Range:</b>	2478.0 - 2533.0 MHz				
<b>Port(s)</b>	<b>Band-Edge Markers and Limit</b>			<b>Revised Limit</b>	<b>Margin</b>
	<b>M3 Amplitude (dBm)</b>	<b>Plot Limit (dBm)</b>	<b>M2 Frequency (MHz)</b>	<b>Amplitude (dBm)</b>	<b>M2A Frequency (MHz)</b>
a	<a href="#">-47.33</a>	-12.79	2480.50	--	--
					-3.000

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

#### 9.4.2. Radiated Emissions

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions (Restricted Bands)			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	20.0 - 24.5
<b>Test Heading:</b>	Radiated Spurious and Band-Edge Emissions	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.205, 15.209	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

##### Test Procedure for Radiated Spurious and Band-Edge Emissions (Restricted Bands)

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

##### Limits for Restricted Bands

Peak emission: 74 dBuV/m

Average emission: 54 dBuV/m

##### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

##### Example:

Given receiver input reading of 51.5 dBmV; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength (FS) of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

$$\text{Level (dBmV/m)} = 20 * \log(\text{level (mV/m)})$$

$$40 \text{ dBmV/m} = 100 \text{ mV/m}$$

$$48 \text{ dBmV/m} = 250 \text{ mV/m}$$

##### Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of subparts D or F of this part.
- (7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

#### 9.4.2.3. TX Spurious & Restricted Band Emissions


##### Equipment Configuration for Restricted Band Spurious Emissions

<b>Antenna:</b>	Integral	<b>Variant:</b>	FHSS
<b>Antenna Gain (dBi):</b>	1.40	<b>Modulation:</b>	DH1
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2402.00	<b>Data Rate:</b>	1 MBit/s
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

##### Test Measurement Results



Variant: FHSS DH5, Test Freq: 2402.00 MHz, Power Setting: Max, Duty Cycle (%): 99

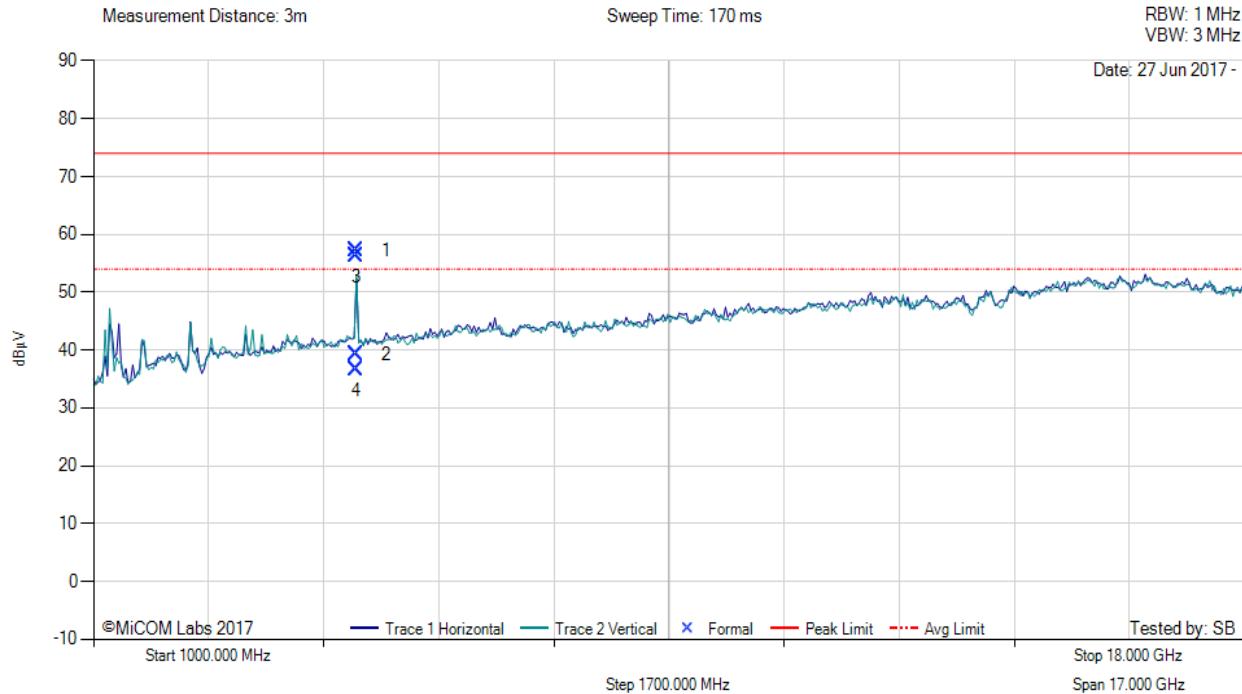

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	4882.06	64.90	3.63	-11.26	57.27	Max Peak	Vertical	122	298	74.0	-16.7	Pass	
2	4882.06	46.93	3.63	-11.26	39.30	Max Avg	Vertical	122	298	54.0	-14.7	Pass	
3	4882.39	63.87	3.63	-11.26	56.24	Max Peak	Horizontal	117	61	74.0	-17.8	Pass	
4	4882.39	44.22	3.63	-11.26	36.59	Max Avg	Horizontal	117	61	54.0	-17.4	Pass	

**Test Notes:** PSU:POE29U-1AT(PL) 56VDC

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


**Equipment Configuration for Restricted Band Spurious Emissions**

<b>Antenna:</b>	Integral	<b>Variant:</b>	FHSS
<b>Antenna Gain (dBi):</b>	1.40	<b>Modulation:</b>	DH1
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2442.00	<b>Data Rate:</b>	1 MBit/s
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

**Test Measurement Results**



Variant: FHSS DH5, Test Freq: 2442.00 MHz, Power Setting: Max, Duty Cycle (%): 99

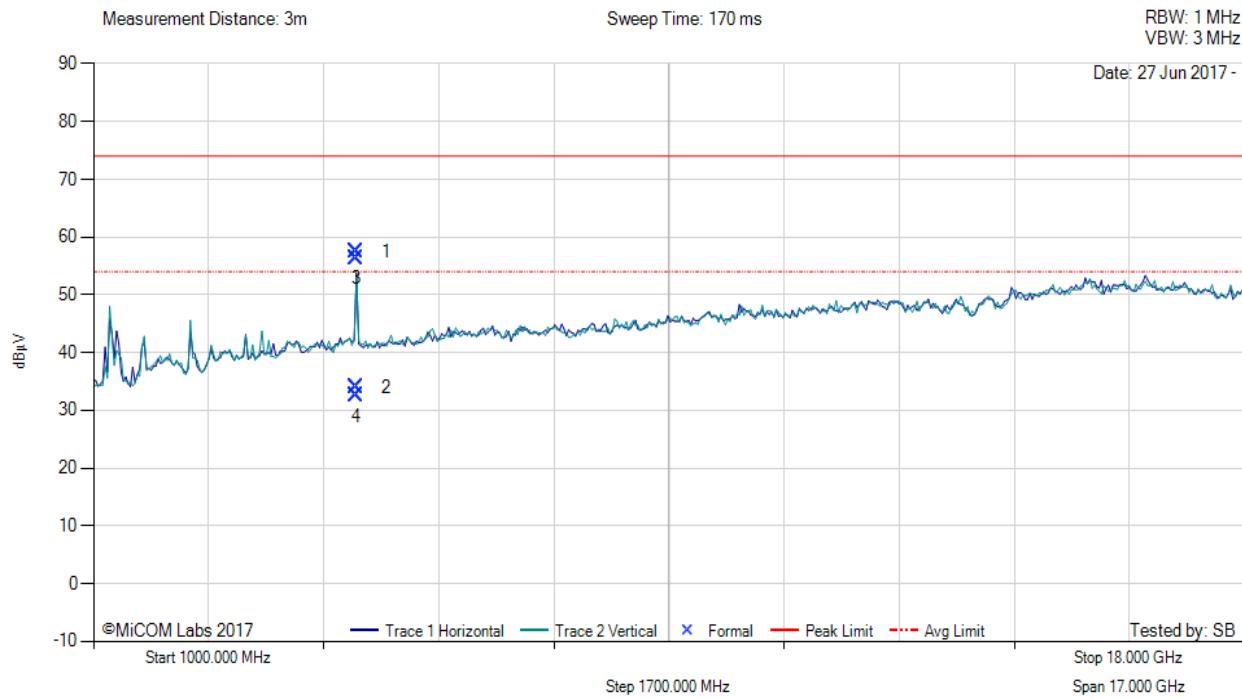

**1000.00 - 18000.00 MHz**

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	4882.17	65.16	3.63	-11.26	57.53	Max Peak	Vertical	108	296	74.0	-16.5	Pass
2	4882.17	41.58	3.63	-11.26	33.95	Max Avg	Vertical	108	296	54.0	-20.1	Pass
3	4882.39	64.00	3.63	-11.26	56.37	Max Peak	Horizontal	98	59	74.0	-17.6	Pass
4	4882.39	40.16	3.63	-11.26	32.53	Max Avg	Horizontal	98	59	54.0	-21.5	Pass

**Test Notes:** PSU:POE29U-1AT(PL) 56VDC

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


Equipment Configuration for Restricted Band Spurious Emissions

<b>Antenna:</b>	Integral	<b>Variant:</b>	FHSS
<b>Antenna Gain (dBi):</b>	1.40	<b>Modulation:</b>	DH1
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2480.00	<b>Data Rate:</b>	1 MBit/s
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

Test Measurement Results



Variant: FHSS DH5, Test Freq: 2480.00 MHz, Power Setting: Max, Duty Cycle (%): 99

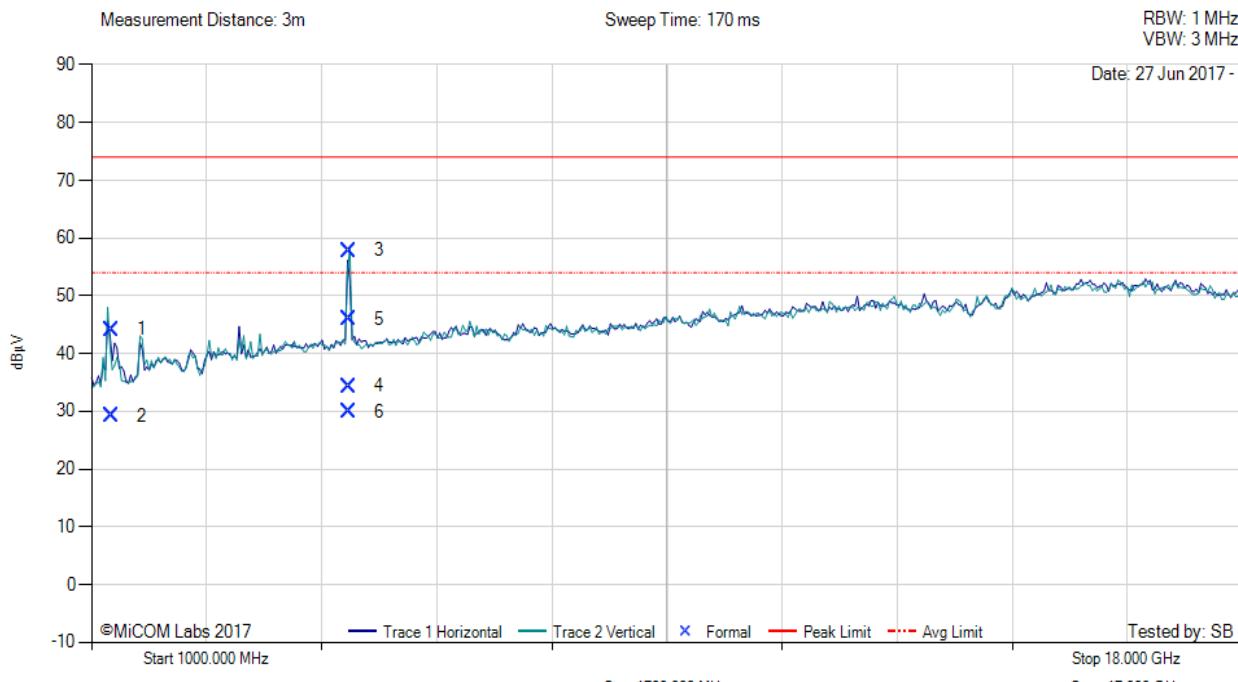

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
1	1300.88	56.70	2.21	-14.75	44.16	Max Peak	Vertical	101	38	74.0	-29.8	Pass
2	1300.88	41.80	2.21	-14.75	29.26	Max Avg	Vertical	101	38	54.0	-24.7	Pass
3	4803.83	65.42	3.51	-11.12	57.81	Max Peak	Horizontal	108	58	74.0	-16.2	Pass
4	4803.83	41.94	3.51	-11.12	34.33	Max Avg	Horizontal	108	58	54.0	-19.7	Pass
5	4805.31	53.63	3.50	-11.12	46.01	Max Peak	Vertical	98	22	74.0	-28.0	Pass
6	4805.31	37.52	3.50	-11.12	29.90	Max Avg	Vertical	98	22	54.0	-24.1	Pass

Test Notes: PSU:POE29U-1AT(PL) 56VDC

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

#### 9.4.2.4. Restricted Edge & Band-Edge Emissions

2390 – 2483.5 MHz

HPE Metal Sheet		Band-Edge Freq	Limit 74.0dB $\mu$ V/m	Limit 54.0dB $\mu$ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB $\mu$ V/m	dB $\mu$ V/m	
FHSS	2402.00	2390.00	<a href="#">59.60</a>	<a href="#">51.15</a>	Max
FHSS	2480.00	2483.50	<a href="#">60.55</a>	<a href="#">51.67</a>	Max
DH1	2402.00	2390.00	<a href="#">59.78</a>	<a href="#">46.15</a>	Max
DH1	2480.00	2483.50	<a href="#">60.19</a>	<a href="#">50.62</a>	Max
DH5	2402.00	2390.00	<a href="#">59.41</a>	<a href="#">51.72</a>	Max
DH5	2480.00	2483.50	<a href="#">58.36</a>	<a href="#">50.63</a>	Max

Click on the links to view the data.



**Title:** Polycom Inc. RealPresence Trio 8500  
**To:** FCC Part 15.247 (DTS) & IC RSS-247  
**Serial #:** POLY35-U6 Rev A FHSS  
**Issue Date:** 20<sup>th</sup> July 2017  
**Page:** 52 of 104

Equipment Configuration for 2390 MHz Radiated Band-Edge Emissions

<b>Antenna:</b>	Integral	<b>Variant:</b>	FHSS
<b>Antenna Gain (dBi):</b>	Not Applicable	<b>Modulation:</b>	
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2402-2480	<b>Data Rate:</b>	1 MBit/s
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

Test Measurement Results

2310.00 - 2420.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2377.01	16.52	2.70	31.93	51.15	Max Avg	Vertical	103	356	54.0	-2.9	Pass	
#2	2389.43	24.88	2.68	32.04	59.60	Max Peak	Vertical	103	356	74.0	-14.4	Pass	
#3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

Test Notes: PSU:POE29U-1AT(PL) 56VDC

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Polycom Inc. RealPresence Trio 8500  
**To:** FCC Part 15.247 (DTS) & IC RSS-247  
**Serial #:** POLY35-U6 Rev A FHSS  
**Issue Date:** 20<sup>th</sup> July 2017  
**Page:** 53 of 104

**Equipment Configuration for 2483.5 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	Integral	<b>Variant:</b>	FHSS
<b>Antenna Gain (dBi):</b>	Not Applicable	<b>Modulation:</b>	
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2402-2480	<b>Data Rate:</b>	1 MBit/s
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

**Test Measurement Results**

2450.00 - 2520.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#2	2496.99	16.54	2.74	32.39	51.67	Max Avg	Horizontal	103	356	54.0	-2.3	Pass	
#3	2503.85	25.41	2.73	32.41	60.55	Max Peak	Horizontal	103	356	74.0	-13.5	Pass	
#1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

Test Notes: PSU:POE29U-1AT(PL) 56VDC

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Polycom Inc. RealPresence Trio 8500  
**To:** FCC Part 15.247 (DTS) & IC RSS-247  
**Serial #:** POLY35-U6 Rev A FHSS  
**Issue Date:** 20<sup>th</sup> July 2017  
**Page:** 54 of 104

Equipment Configuration for 2390 MHz Radiated Band-Edge Emissions

<b>Antenna:</b>	Integral	<b>Variant:</b>	DH1
<b>Antenna Gain (dBi):</b>	Not Applicable	<b>Modulation:</b>	
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2402	<b>Data Rate:</b>	1 MBit/s
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

Test Measurement Results

2310.00 - 2420.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2388.92	25.06	2.68	32.04	59.78	Max Peak	Horizontal	150	356	74.0	-14.2	Pass	
#2	2389.14	11.43	2.68	32.04	46.15	Max Avg	Horizontal	150	356	54.0	-7.9	Pass	
#3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

Test Notes: PSU:POE29U-1AT(PL) 56VDC

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Polycom Inc. RealPresence Trio 8500  
**To:** FCC Part 15.247 (DTS) & IC RSS-247  
**Serial #:** POLY35-U6 Rev A FHSS  
**Issue Date:** 20<sup>th</sup> July 2017  
**Page:** 55 of 104

**Equipment Configuration for 2483.5 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	Integral	<b>Variant:</b>	DH1
<b>Antenna Gain (dBi):</b>	Not Applicable	<b>Modulation:</b>	
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2480	<b>Data Rate:</b>	1 MBit/s
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

**Test Measurement Results**

2450.00 - 2520.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#2	2485.35	15.52	2.73	32.37	50.62	Max Avg	Horizontal	150	97	54.0	-3.4	Pass	
#3	2497.70	25.06	2.74	32.39	60.19	Max Peak	Horizontal	150	97	74.0	-13.8	Pass	
#1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

Test Notes: PSU:POE29U-1AT(PL) 56VDC

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Polycom Inc. RealPresence Trio 8500  
**To:** FCC Part 15.247 (DTS) & IC RSS-247  
**Serial #:** POLY35-U6 Rev A FHSS  
**Issue Date:** 20<sup>th</sup> July 2017  
**Page:** 56 of 104

Equipment Configuration for 2390 MHz Radiated Band-Edge Emissions

<b>Antenna:</b>	Integral	<b>Variant:</b>	DH5
<b>Antenna Gain (dBi):</b>	Not Applicable	<b>Modulation:</b>	
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2402	<b>Data Rate:</b>	1 MBit/s
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

Test Measurement Results

2310.00 - 2420.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2387.60	17.01	2.68	32.03	51.72	Max Avg	Vertical	150	11	54.0	-2.3	Pass	
#2	2389.58	24.68	2.69	32.04	59.41	Max Peak	Vertical	150	11	74.0	-14.6	Pass	
#3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

Test Notes: PSU:POE29U-1AT(PL) 56VDC

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Polycom Inc. RealPresence Trio 8500  
**To:** FCC Part 15.247 (DTS) & IC RSS-247  
**Serial #:** POLY35-U6 Rev A FHSS  
**Issue Date:** 20<sup>th</sup> July 2017  
**Page:** 57 of 104

**Equipment Configuration for 2483.5 MHz Radiated Band-Edge Emissions**

<b>Antenna:</b>	Integral	<b>Variant:</b>	DH5
<b>Antenna Gain (dBi):</b>	Not Applicable	<b>Modulation:</b>	
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2480	<b>Data Rate:</b>	1 MBit/s
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

**Test Measurement Results**

2450.00 - 2520.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#2	2483.95	23.26	2.73	32.37	58.36	Max Peak	Vertical	150	13	74.0	-15.6	Pass	
#3	2485.91	15.53	2.73	32.37	50.63	Max Avg	Vertical	150	13	54.0	-3.4	Pass	
#1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

Test Notes: PSU:POE29U-1AT(PL) 56VDC

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

#### 9.4.3. Digital Emissions (0.03 - 1 GHz)

Radiated Test Conditions for Radiated Digital Emissions (0.03 – 1 GHz)			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	20.0 - 24.5
<b>Test Heading:</b>	Digital Emissions	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.209	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Radiated Digital Emissions (0.03 – 1 GHz)

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dBmV; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are done as:

$$\text{Level (dBmV/m)} = 20 * \text{Log (level (mV/m))}$$

$$40 \text{ dBmV/m} = 100\text{mV/m}$$

$$48 \text{ dBmV/m} = 250\text{mV/m}$$

#### Limits for Radiated Digital Emissions (0.03 – 1 GHz)

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Frequency (MHz)	Field Strength		Measurement Distance (m)
	µV/m (microvolts/meter)	dBµV/m (dB microvolts/meter)	
0.009-0.490	2400/F(kHz)	--	300
0.490-1.705	24000/F(kHz)	--	30
1.705-30.0	30	29.5	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46.0	3
Above 960	500	54.0	3

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241. (b) In the emission table above, the tighter limit applies at the band edges. (c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. (d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. (e) The provisions in §§15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part. (f) In accordance with §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in §15.109 that are applicable to the incorporated digital device. (g) Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.


**Equipment Configuration for Radiated Digital Emissions**

<b>Antenna:</b>	Integral	<b>Variant:</b>	BLE
<b>Antenna Gain (dBi):</b>	1.40	<b>Modulation:</b>	
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2442.00	<b>Data Rate:</b>	1 mbit/s
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

**Test Measurement Results**



Variant: BLE, Test Freq: 2442.00 MHz, Power Setting: Max, Duty Cycle (%): 99

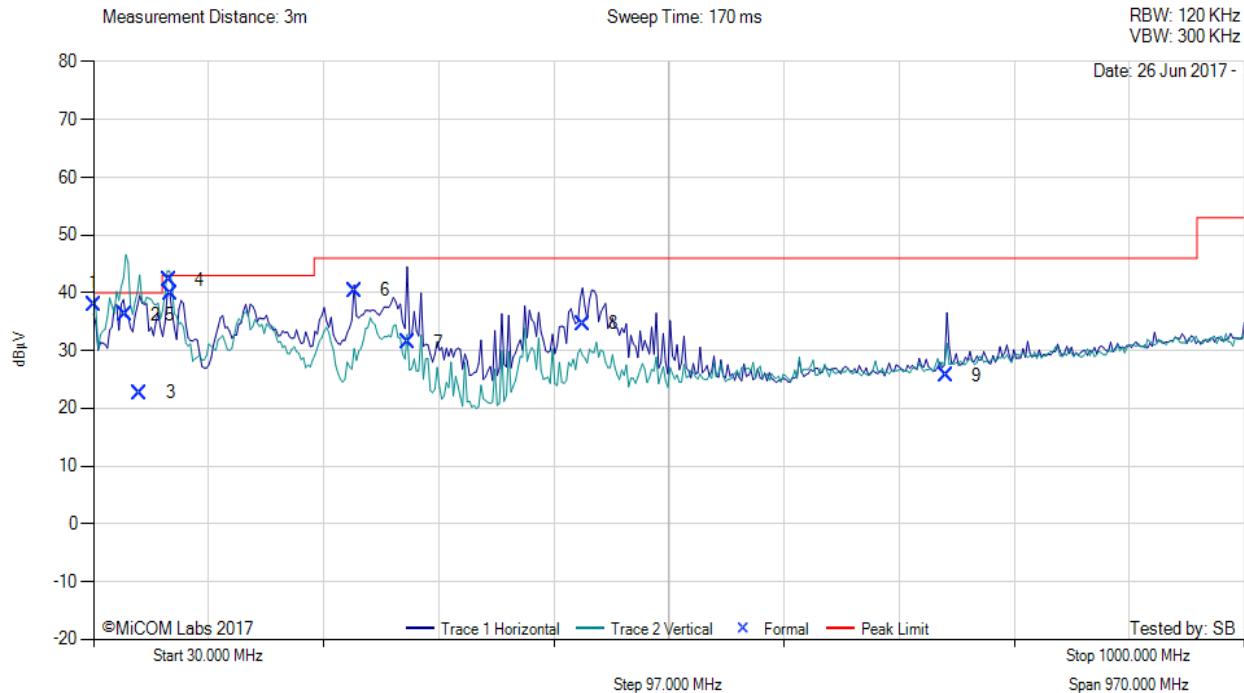

30.00 - 1000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	30.15	45.17	3.43	-10.61	37.99	MaxQP	Vertical	102	75	40.0	-2.0	Pass	
2	56.39	56.78	3.62	-24.22	36.18	MaxQP	Vertical	115	51	40.0	-3.8	Pass	
3	69.29	42.19	3.70	-23.19	22.70	MaxQP	Horizontal	235	184	40.0	-17.3	Pass	
4	93.85	61.37	3.84	-23.03	42.18	Peak (NRB)	Vertical	100	0	--	--	Pass	
5	94.67	58.68	3.85	-22.74	39.79	MaxQP	Vertical	111	116	43.0	-3.2	Pass	
6	250.02	54.92	4.53	-19.02	40.43	MaxQP	Horizontal	113	142	46.0	-5.6	Pass	
7	295.03	44.03	4.69	-17.29	31.43	MaxQP	Horizontal	101	281	46.0	-14.6	Pass	
8	442.45	43.62	5.16	-14.10	34.68	MaxQP	Horizontal	232	164	46.0	-11.3	Pass	
9	748.90	29.08	5.99	-9.46	25.61	MaxQP	Horizontal	127	73	46.0	-20.4	Pass	

**Test Notes:** PHIHONG POE29U-1AT(PL) with DC blocking caps

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

#### 9.4.4. AC Wireline Emissions

Test Conditions for ac Wireline Emissions (0.15 – 30 MHz)			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Conducted (ac Wireline Emissions)	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.207	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

##### Test Procedure for ac Wireline Emissions (0.15 – 30 MHz)

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Test configuration and setup for ac Wireline Emission Measurement were per the ac Wireline Test Set-up specified in this document.

##### Limits for ac Wireline Emissions

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBmV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency

The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

- (1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.
- (2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.
- (3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Polycom Inc. RealPresence Trio 8500  
**To:** FCC Part 15.247 (DTS) & IC RSS-247  
**Serial #:** POLY35-U6 Rev A FHSS  
**Issue Date:** 20<sup>th</sup> July 2017  
**Page:** 62 of 104

---

battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


**Equipment Configuration for AC Wireline Emissions**

<b>Antenna:</b>	Integral	<b>Variant:</b>	FHSS
<b>Antenna Gain (dBi):</b>	1.40	<b>Modulation:</b>	DH1/5
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	2402.00	<b>Data Rate:</b>	1 mbit/s
<b>Power Setting:</b>	Max	<b>Tested By:</b>	OC

**Test Measurement Results**



Variant: AC Wireline, Test Freq: 0.15 - 30 MHz

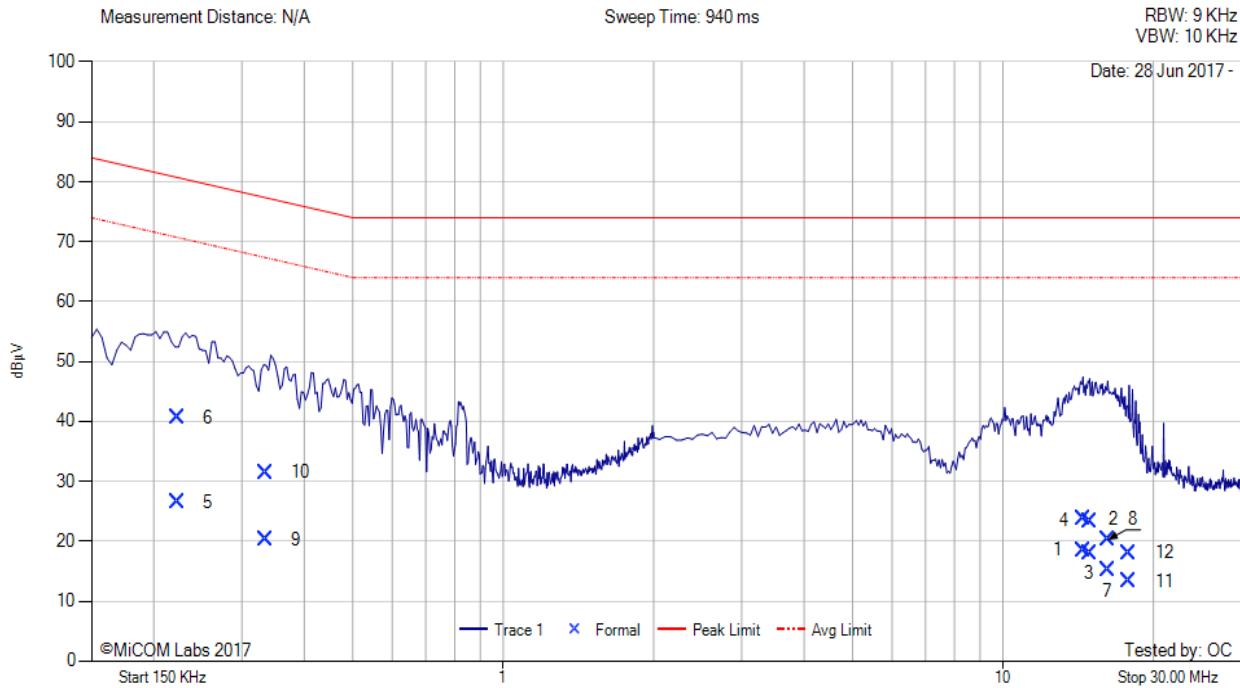

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	Factor dB	Total Correction dB $\mu$ V	Corrected Value dB $\mu$ V	Measurement Type	Line	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
1	14.491	8.47	0.50	9.56	10.06	18.53	Max Avg	Telecom	64.0	-45.5	Pass
2	14.491	13.66	0.50	9.56	10.06	23.72	Max Qp	Telecom	74.0	-50.3	Pass
3	14.898	7.93	0.52	9.57	10.09	18.02	Max Avg	Telecom	64.0	-46.0	Pass
4	14.898	13.33	0.52	9.57	10.09	23.42	Max Qp	Telecom	74.0	-50.6	Pass
5	0.223	16.42	0.06	10.00	10.06	26.48	Max Avg	Telecom	71.9	-45.4	Pass
6	0.223	30.53	0.06	10.00	10.06	40.59	Max Qp	Telecom	81.9	-41.3	Pass
7	16.179	5.03	0.55	9.61	10.16	15.19	Max Avg	Telecom	64.0	-48.8	Pass
8	16.179	10.04	0.55	9.61	10.16	20.20	Max Qp	Telecom	74.0	-53.8	Pass
9	0.334	10.25	0.04	9.99	10.03	20.28	Max Avg	Telecom	68.7	-48.5	Pass

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Polycom Inc. RealPresence Trio 8500  
**To:** FCC Part 15.247 (DTS) & IC RSS-247  
**Serial #:** POLY35-U6 Rev A FHSS  
**Issue Date:** 20<sup>th</sup> July 2017  
**Page:** 64 of 104

---

10	0.334	21.41	0.04	9.99	10.03	31.44	Max Qp	Telecom	78.7	-47.3	Pass
11	17.896	3.17	0.55	9.66	10.21	13.38	Max Avg	Telecom	64.0	-50.6	Pass
12	17.896	7.87	0.55	9.66	10.21	18.08	Max Qp	Telecom	74.0	-55.9	Pass

**Test Notes:** Model: RealPresence Trio 8500.S/N: 64167F1D02FA. PoE powered configuration 120V 60Hz. AC Mains

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Polycom Inc. RealPresence Trio 8500  
**To:** FCC Part 15.247 (DTS) & IC RSS-247  
**Serial #:** POLY35-U6 Rev A FHSS  
**Issue Date:** 20<sup>th</sup> July 2017  
**Page:** 65 of 104


---

## **A. APPENDIX - GRAPHICAL IMAGES**

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


### A.1. 20 dB & 99% Bandwidth

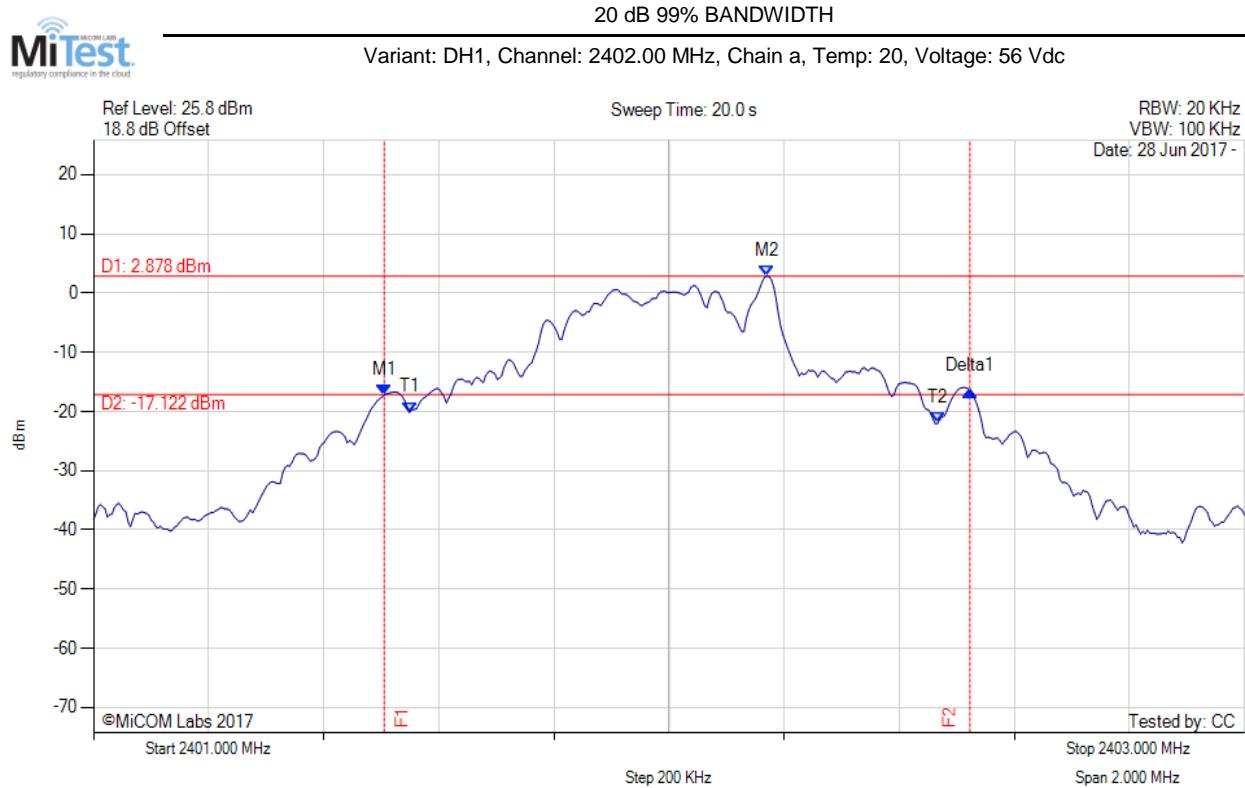

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2401.505 MHz : -17.212 dBm M2 : 2402.170 MHz : 2.878 dBm Delta1 : 1.018 MHz : 0.710 dB T1 : 2401.549 MHz : -20.144 dBm T2 : 2402.467 MHz : -21.991 dBm OBW : 918 KHz	Measured 20 dB Bandwidth: 1.018 MHz Limit: kHz Margin: #VALUE! MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

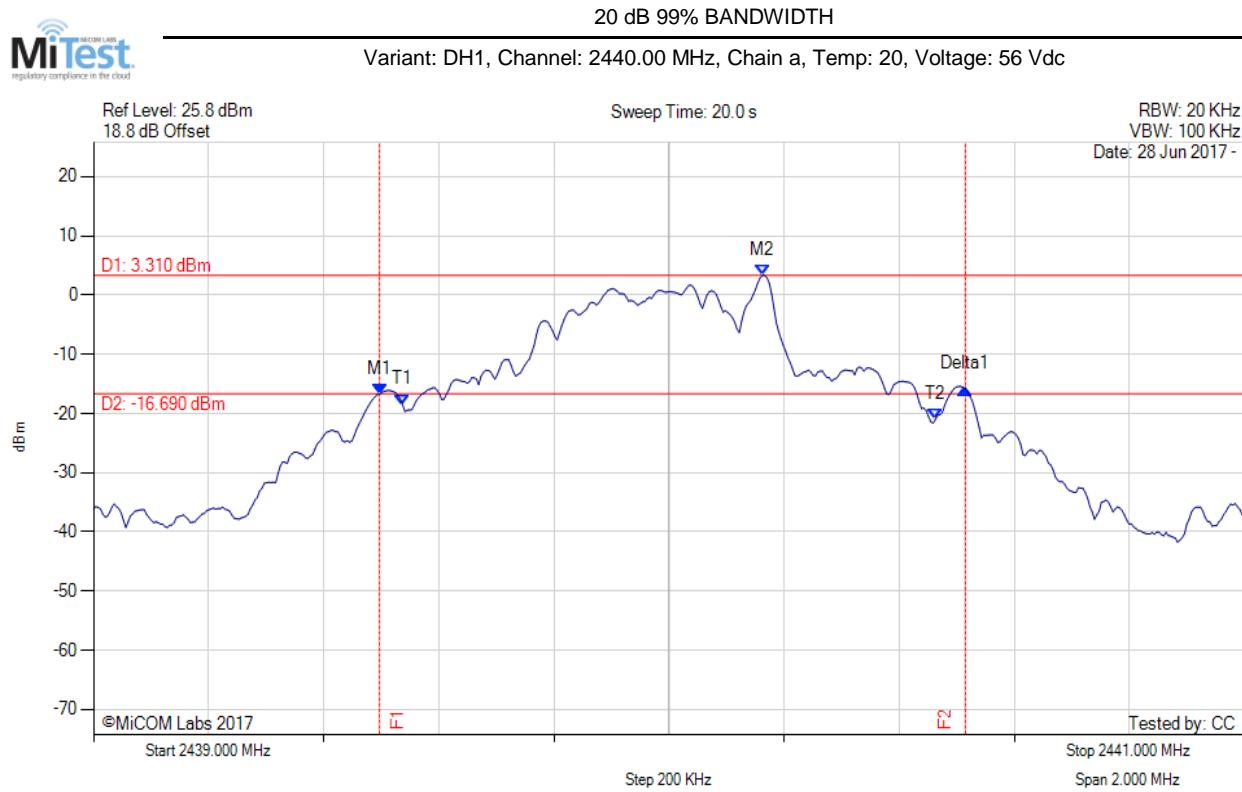

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2439.497 MHz : -16.709 dBm M2 : 2440.162 MHz : 3.311 dBm Delta1 : 1.018 MHz : 0.879 dB T1 : 2439.537 MHz : -18.521 dBm T2 : 2440.463 MHz : -21.025 dBm OBW : 926 KHz	Measured 20 dB Bandwidth: 1.018 MHz Limit: kHz Margin: #VALUE! MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

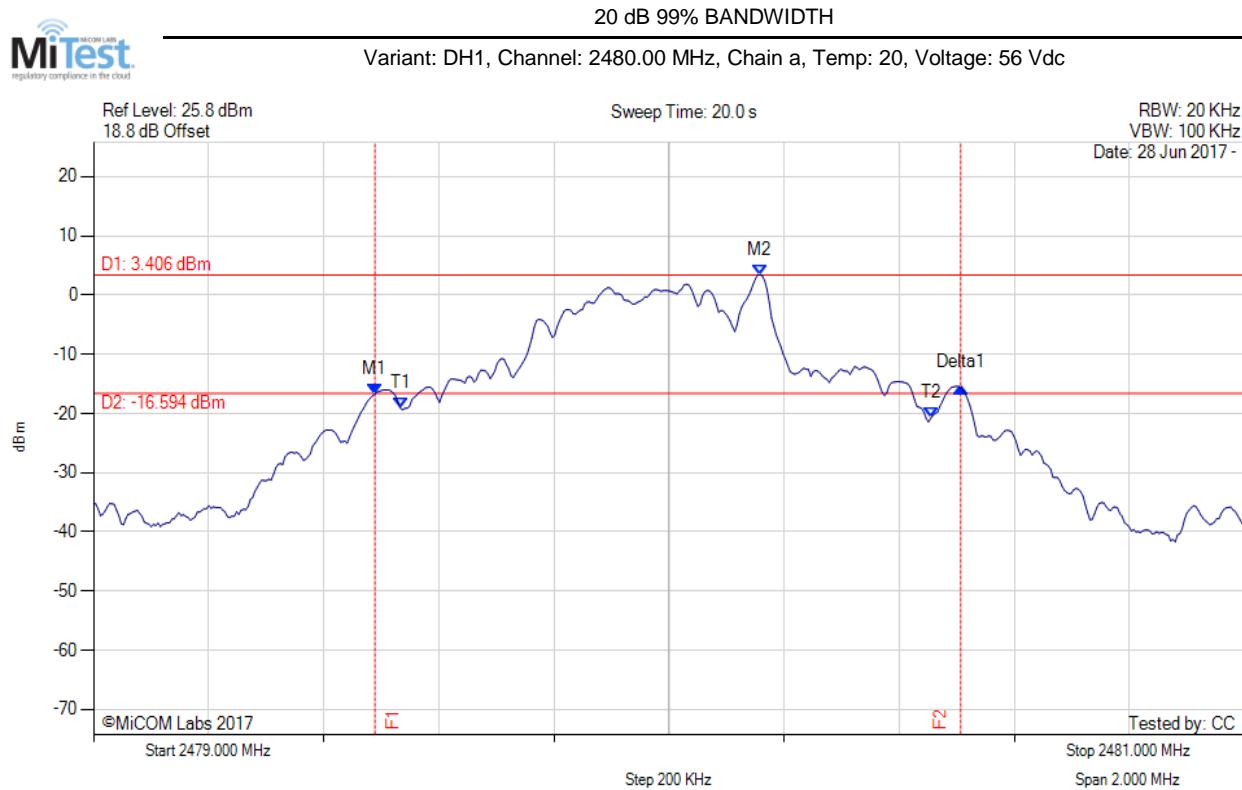

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2479.489 MHz : -16.677 dBm M2 : 2480.158 MHz : 3.406 dBm Delta1 : 1.018 MHz : 1.009 dB T1 : 2479.533 MHz : -19.081 dBm T2 : 2480.455 MHz : -20.781 dBm OBW : 922 KHz	Measured 20 dB Bandwidth: 1.018 MHz Limit: KHz Margin: #VALUE! MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



20 dB 99% BANDWIDTH


Variant: DH5, Channel: 2402.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

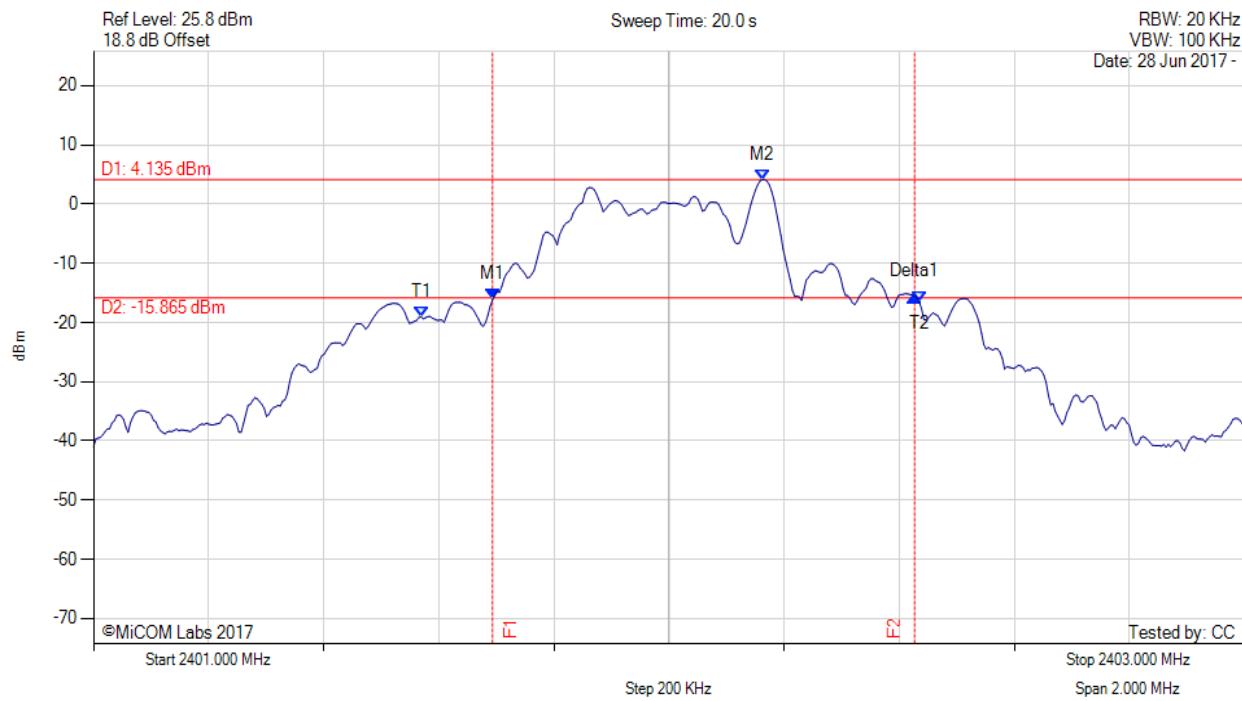

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2401.693 MHz : -16.146 dBm M2 : 2402.162 MHz : 4.135 dBm Delta1 : 733 KHz : 0.624 dB T1 : 2401.569 MHz : -19.034 dBm T2 : 2402.435 MHz : -16.543 dBm OBW : 866 KHz	Measured 20 dB Bandwidth: 0.733 MHz Limit: KHz Margin: #VALUE! MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

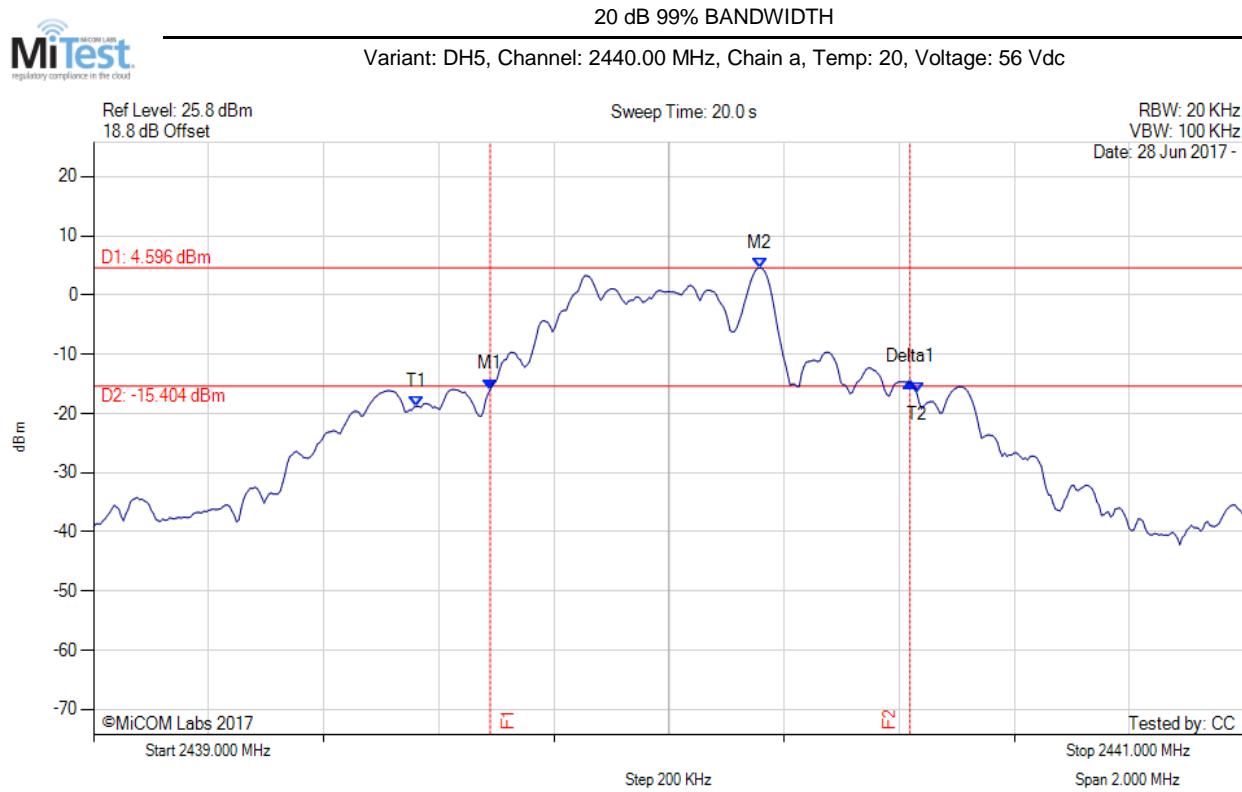

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2439.689 MHz : -15.945 dBm M2 : 2440.158 MHz : 4.596 dBm Delta1 : 729 KHz : 1.214 dB T1 : 2439.561 MHz : -18.808 dBm T2 : 2440.431 MHz : -16.622 dBm OBW : 870 KHz	Measured 20 dB Bandwidth: 0.729 MHz Limit: KHz Margin: #VALUE! MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



20 dB 99% BANDWIDTH

Variant: DH5, Channel: 2480.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

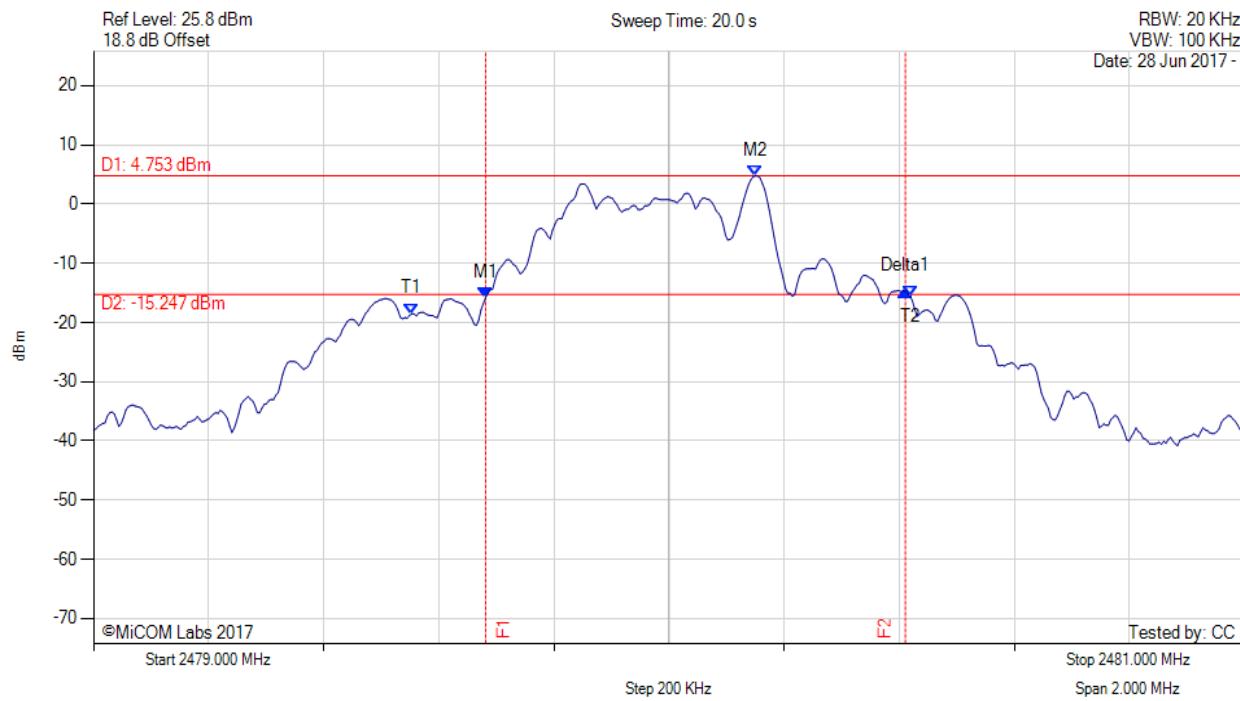


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2479.681 MHz : -15.768 dBm M2 : 2480.150 MHz : 4.753 dBm Delta1 : 729 KHz : 1.035 dB T1 : 2479.553 MHz : -18.530 dBm T2 : 2480.419 MHz : -15.520 dBm OBW : 866 KHz	Measured 20 dB Bandwidth: 0.729 MHz Limit: KHz Margin: #VALUE! MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## A.2. Frequency Hopping Tests

### A.2.1. Number of Hopping Channels

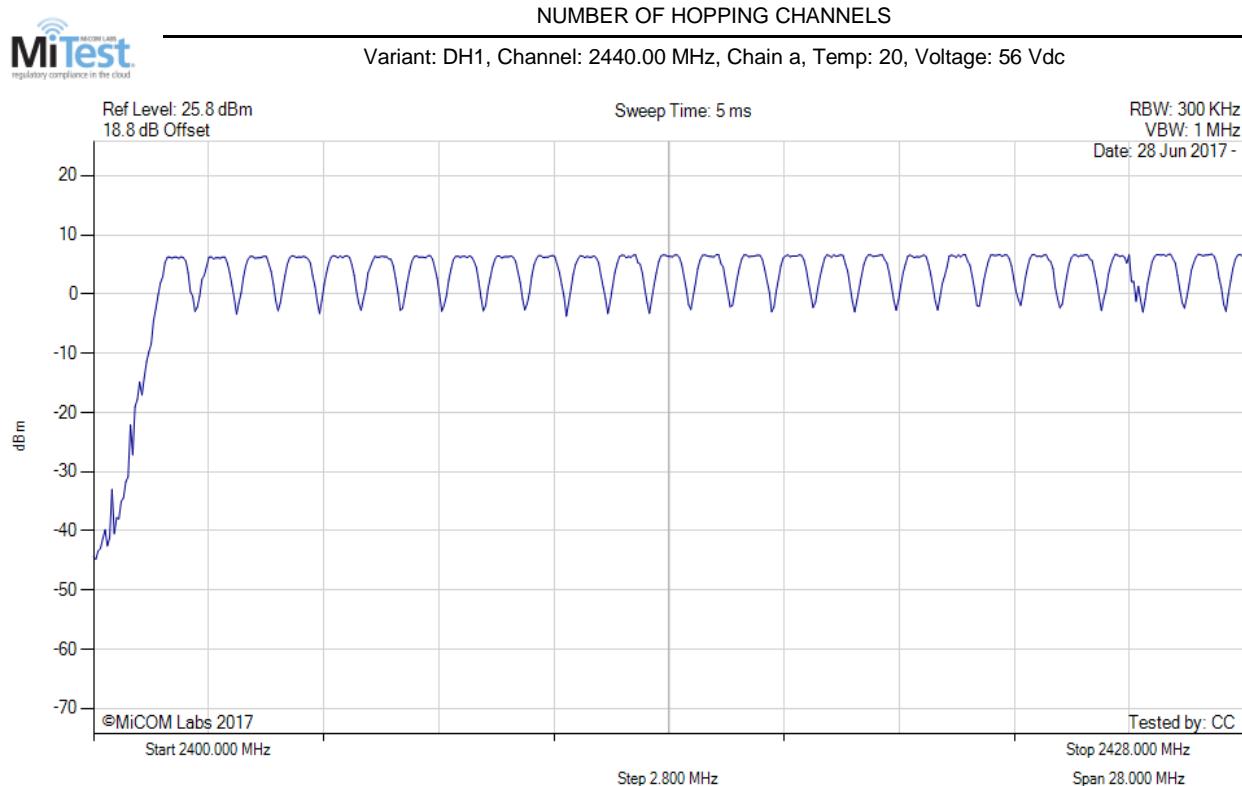

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW		Channel Frequency: 2440.00 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### NUMBER OF HOPPING CHANNELS

Variant: DH1, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

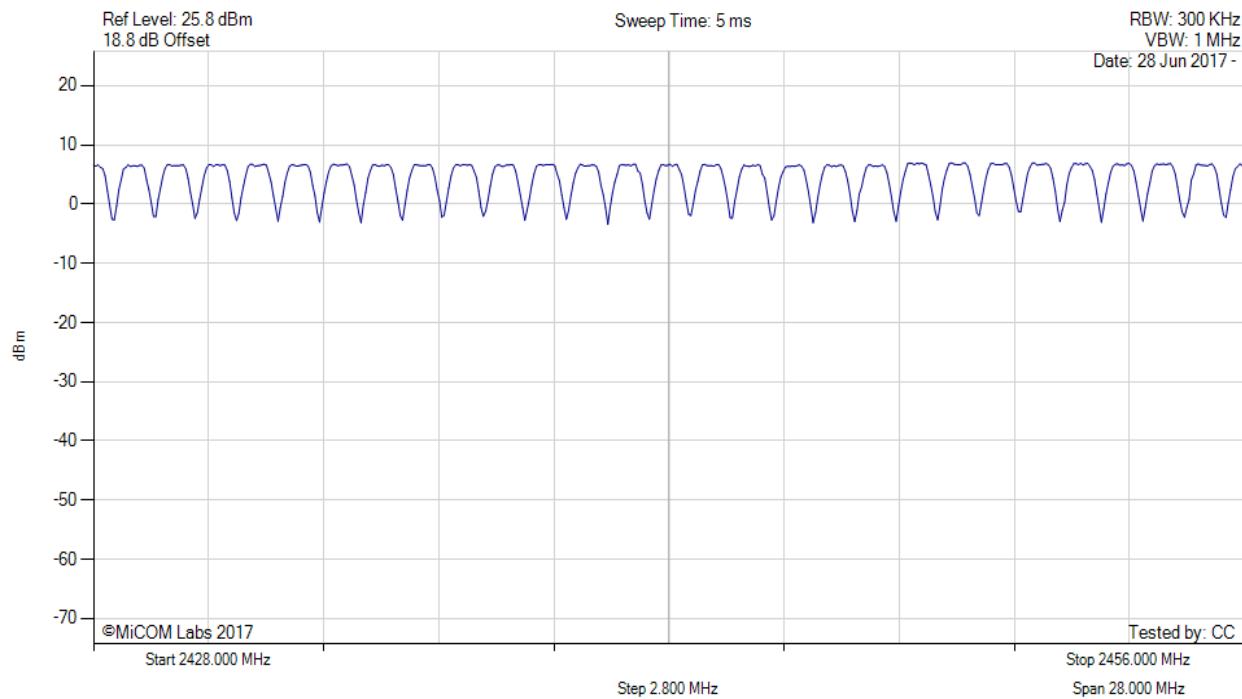

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW		Channel Frequency: 2440.00 MHz

[back to matrix](#)


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### NUMBER OF HOPPING CHANNELS

Variant: DH1, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

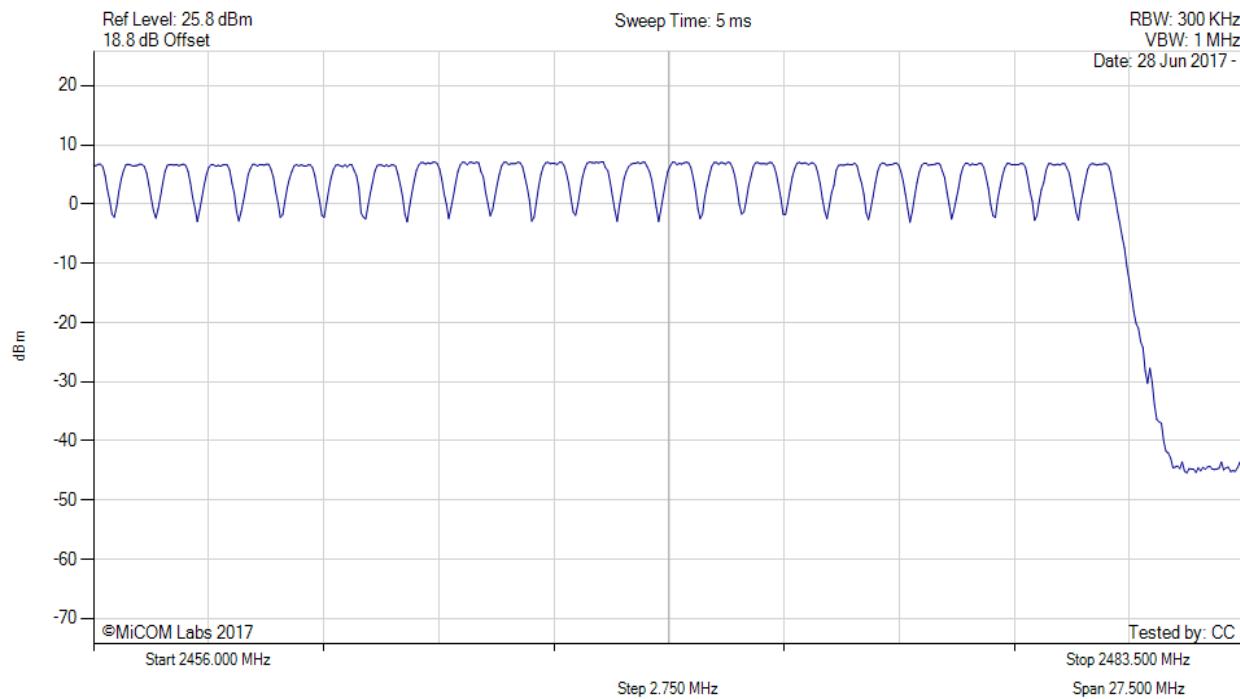

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW		Channel Frequency: 2440.00 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### NUMBER OF HOPPING CHANNELS

Variant: DH5, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

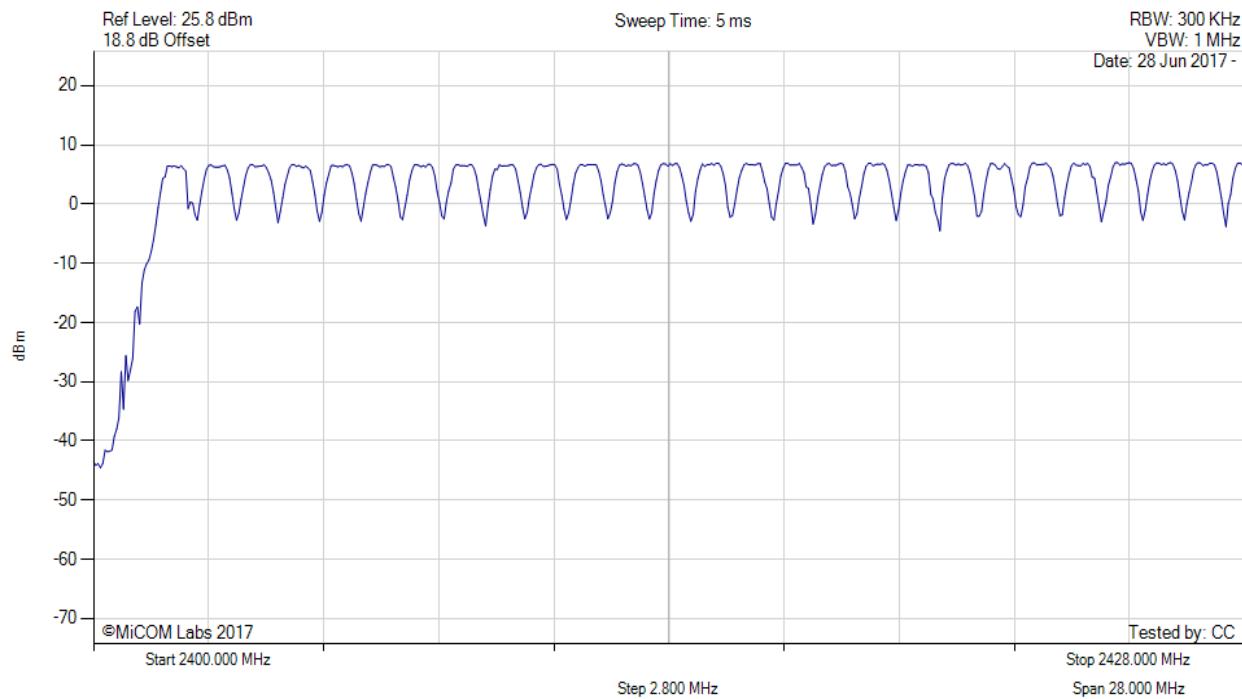

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW		Channel Frequency: 2440.00 MHz

[back to matrix](#)


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### NUMBER OF HOPPING CHANNELS

Variant: DH5, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

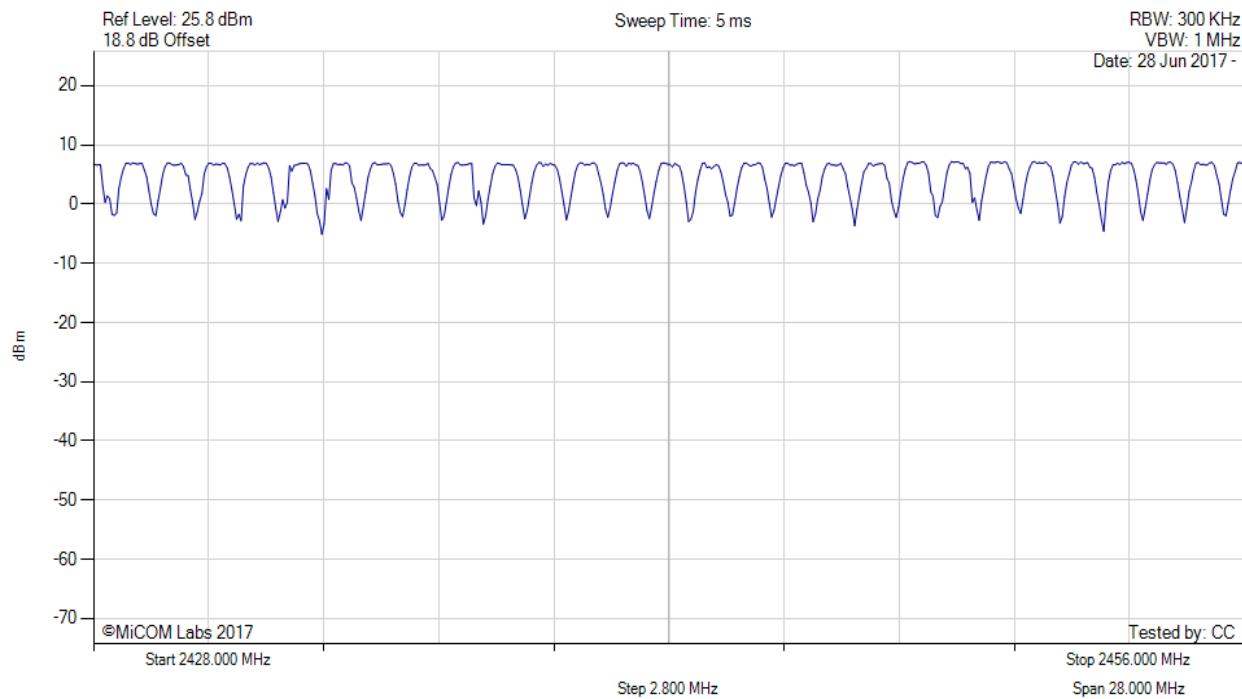

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW		Channel Frequency: 2440.00 MHz

[back to matrix](#)


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### NUMBER OF HOPPING CHANNELS

Variant: DH5, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

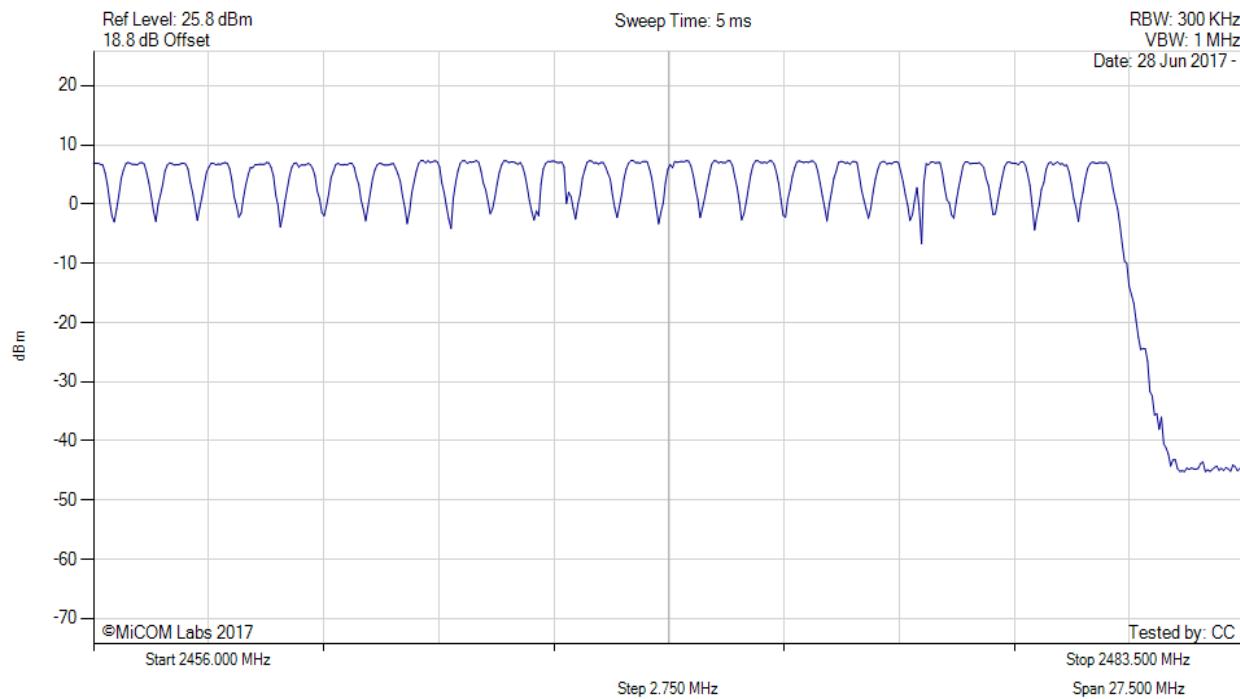


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW		Channel Frequency: 2440.00 MHz

[back to matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### A.2.2. Channel Separation

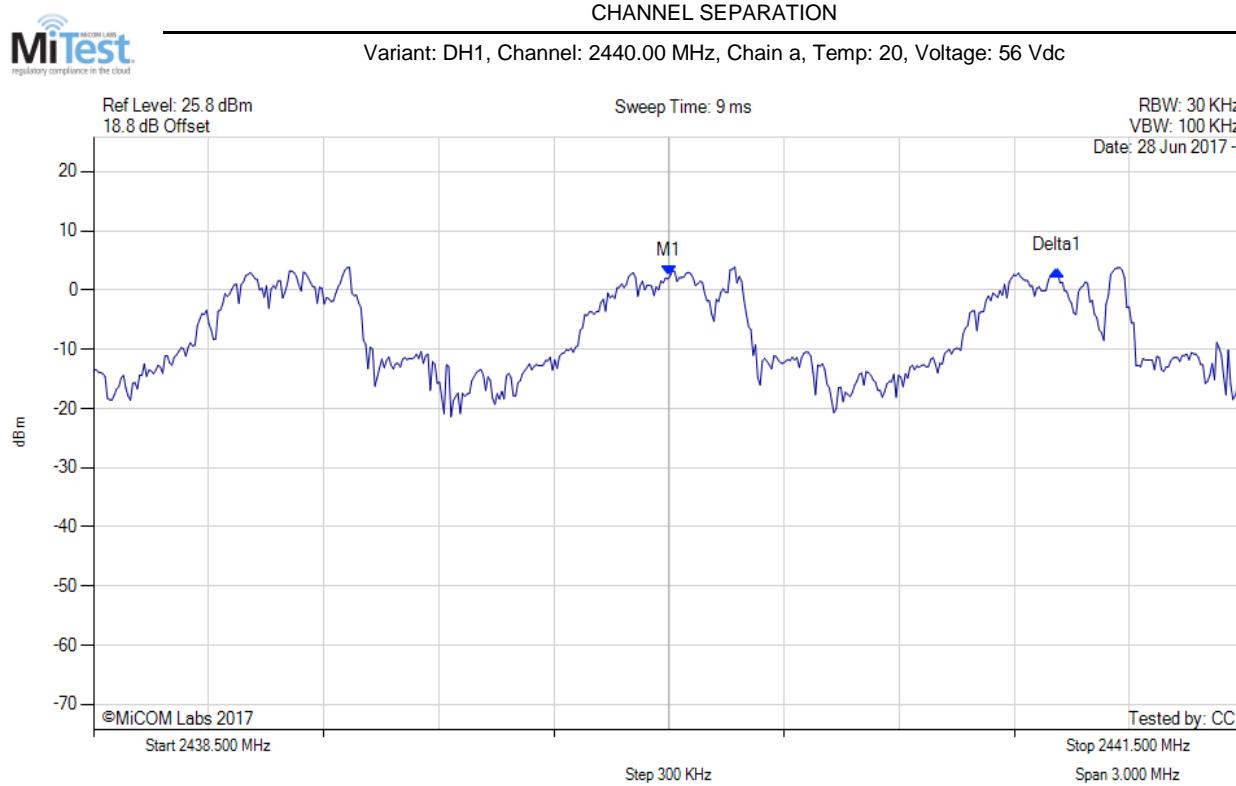

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2440.000 MHz : 2.347 dBm Delta1 : 1.012 MHz : 0.954 dB	Channel Frequency: 2440.00 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### CHANNEL SEPARATION

Variant: DH5, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

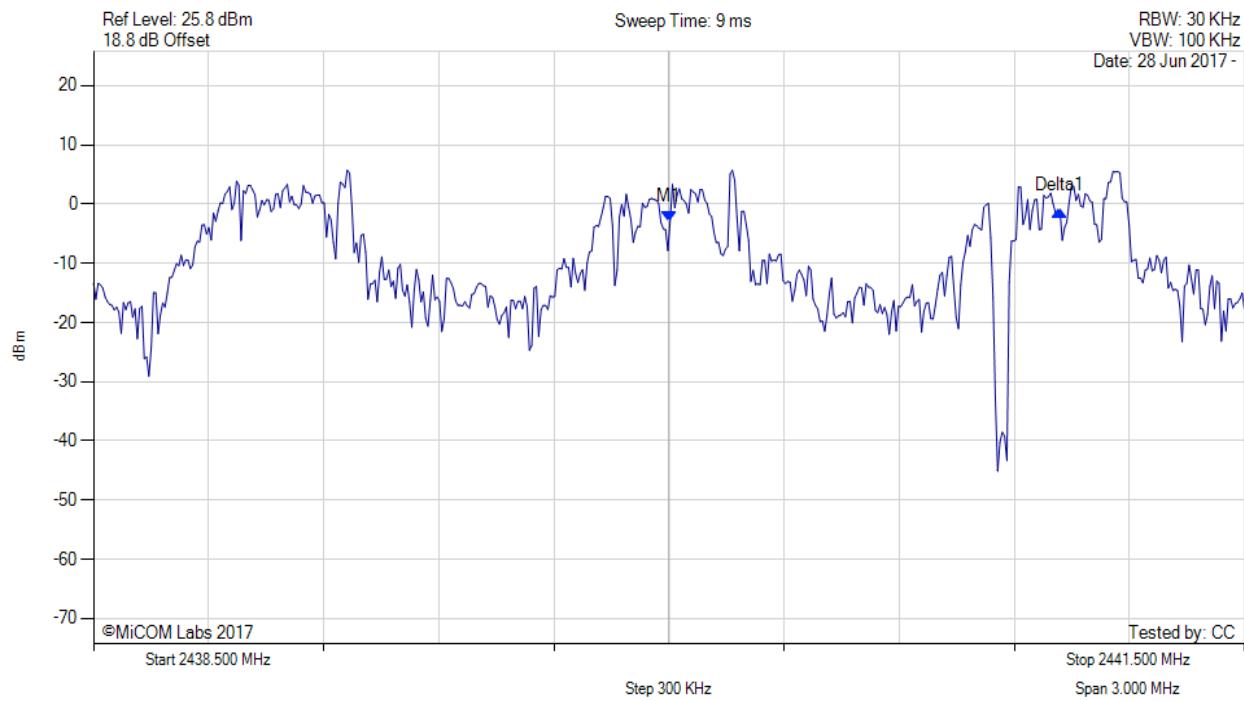


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2440.000 MHz : -2.902 dBm Delta1 : 1.018 MHz : 1.875 dB	Channel Frequency: 2440.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### A.2.3. Dwell Time & Channel Occupancy

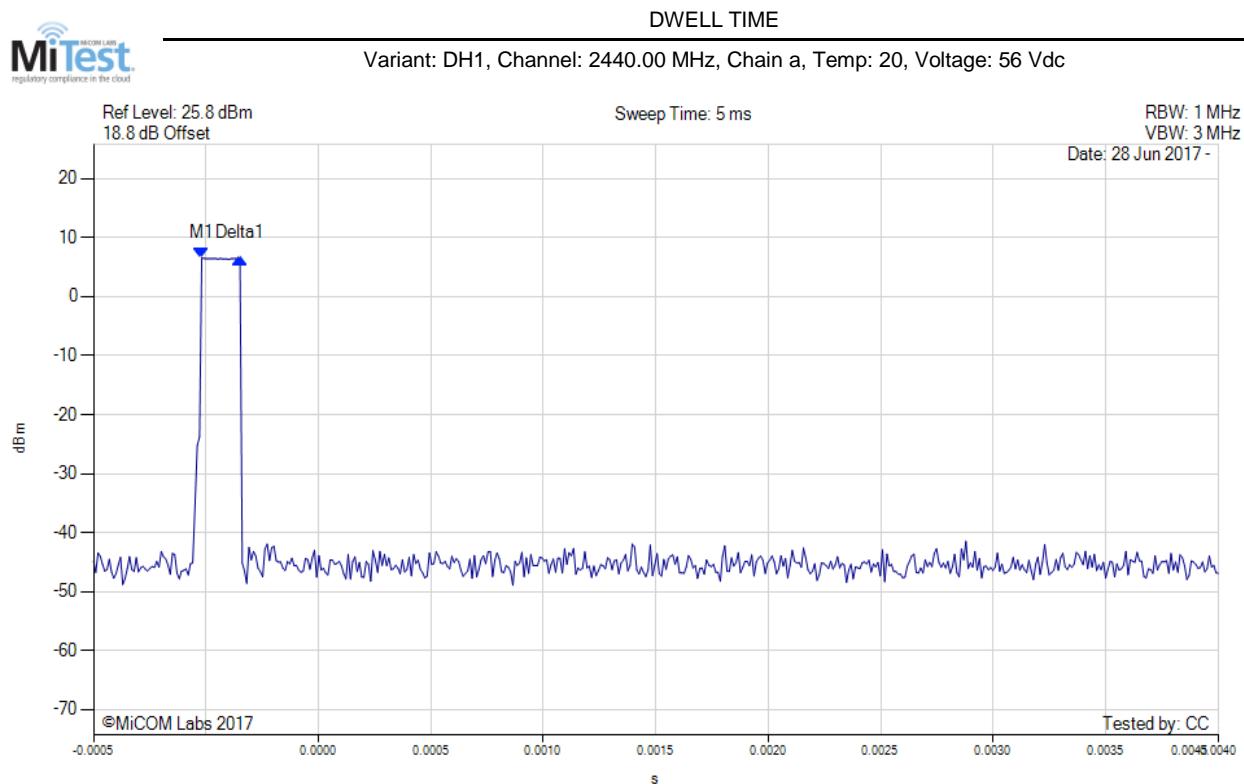


Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1(2440.00 MHz) : 0.000 s : 6.502 dBm Delta1(2440.00 MHz) : 0.170 ms : -0.065 dB	Channel Frequency: 2440.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### CHANNEL OCCUPANCY

Variant: DH1, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

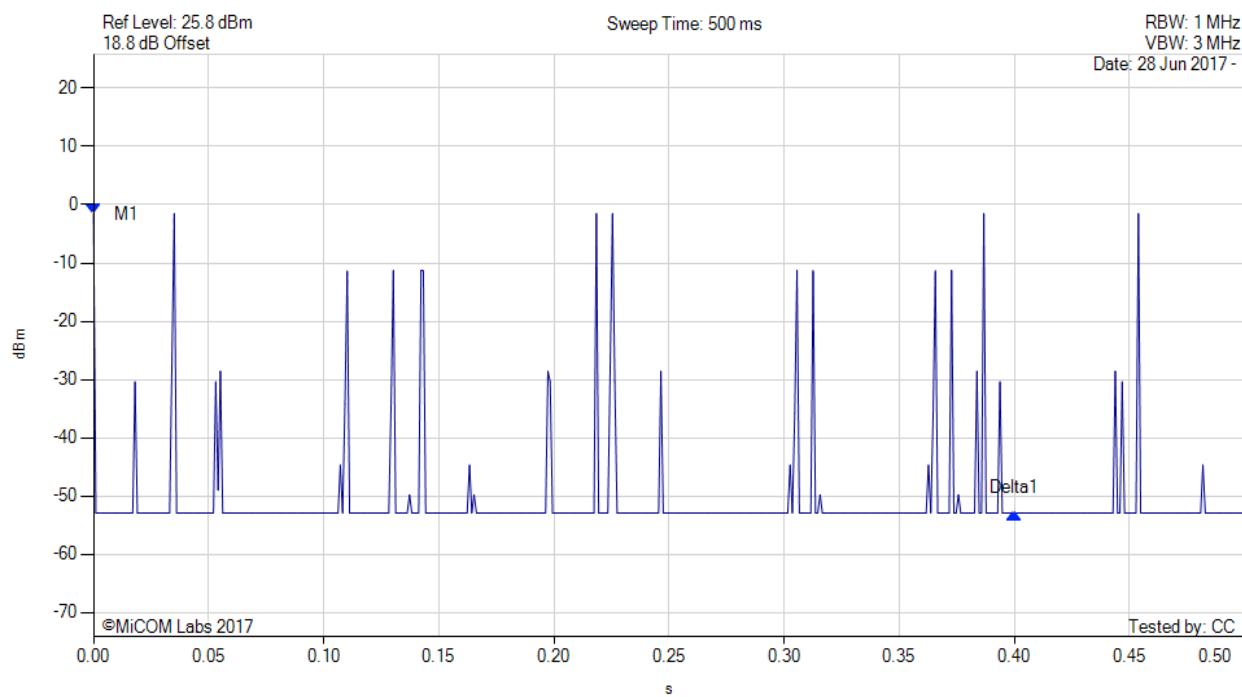

Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1(2440.00 MHz) : 0.000 s : -1.563 dBm Delta1(2440.00 MHz) : 0.400 s : -51.300 dB	Channel Frequency: 2440.00 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### DWELL TIME

Variant: DH5, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

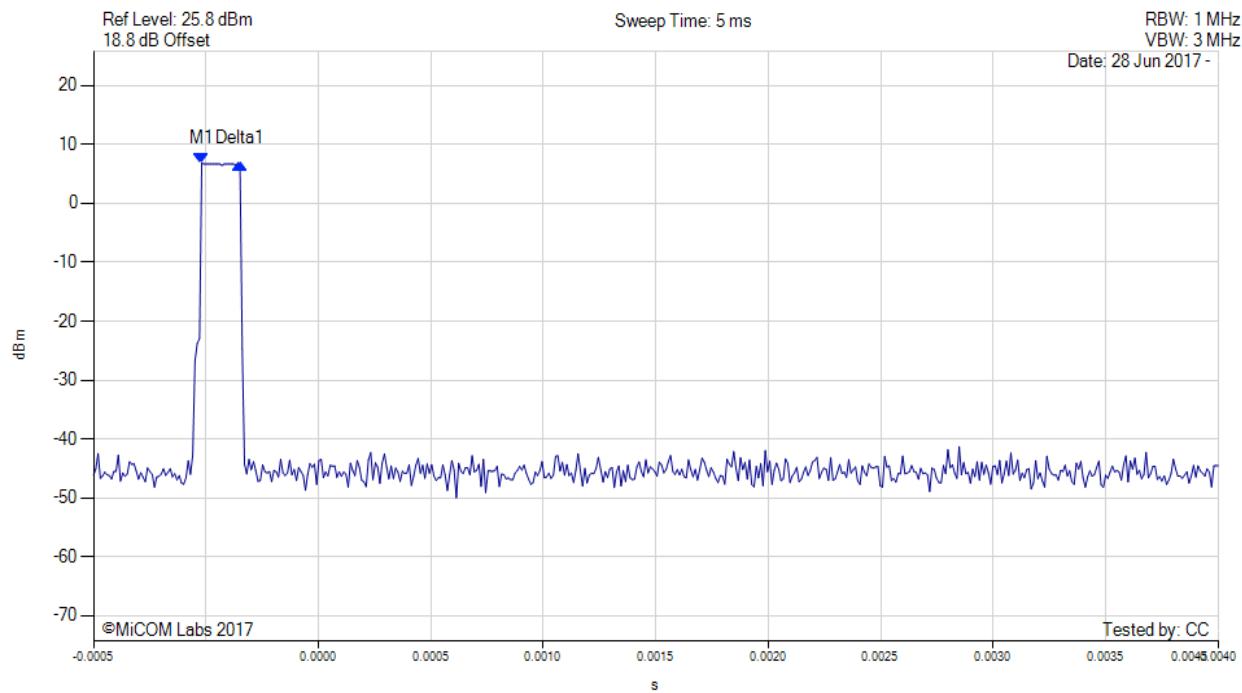

Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1(2440.00 MHz) : 0.000 s : 6.815 dBm Delta1(2440.00 MHz) : 0.170 ms : -0.134 dB	Channel Frequency: 2440.00 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### CHANNEL OCCUPANCY

Variant: DH5, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

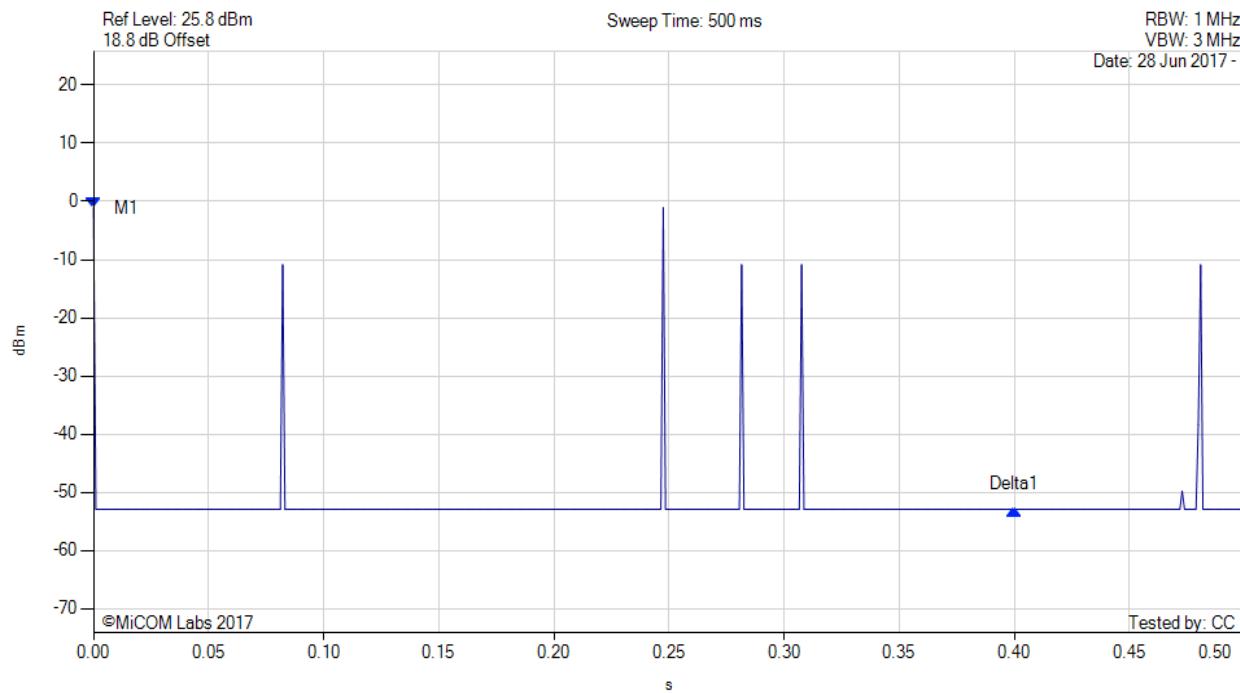

Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1(2440.00 MHz) : 0.000 s : -1.096 dBm Delta1(2440.00 MHz) : 0.400 s : -51.767 dB	Channel Frequency: 2440.00 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### A.3. Emissions

#### A.3.1. Conducted Emissions

##### A.3.1.1. Conducted Unwanted Spurious Emissions

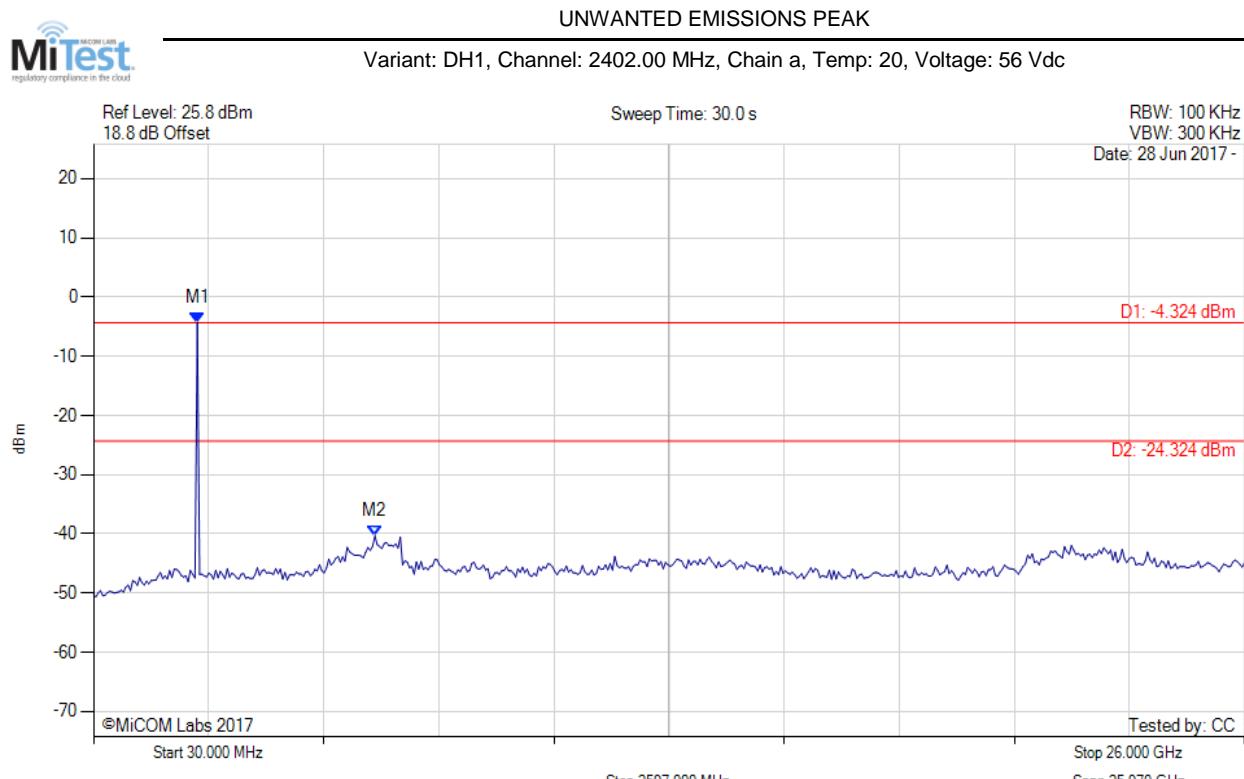

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2371.984 MHz : -4.324 dBm M2 : 6379.379 MHz : -40.346 dBm	Limit: -24.32 dBm Margin: -16.03 dB


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### UNWANTED EMISSIONS PEAK

Variant: DH1, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

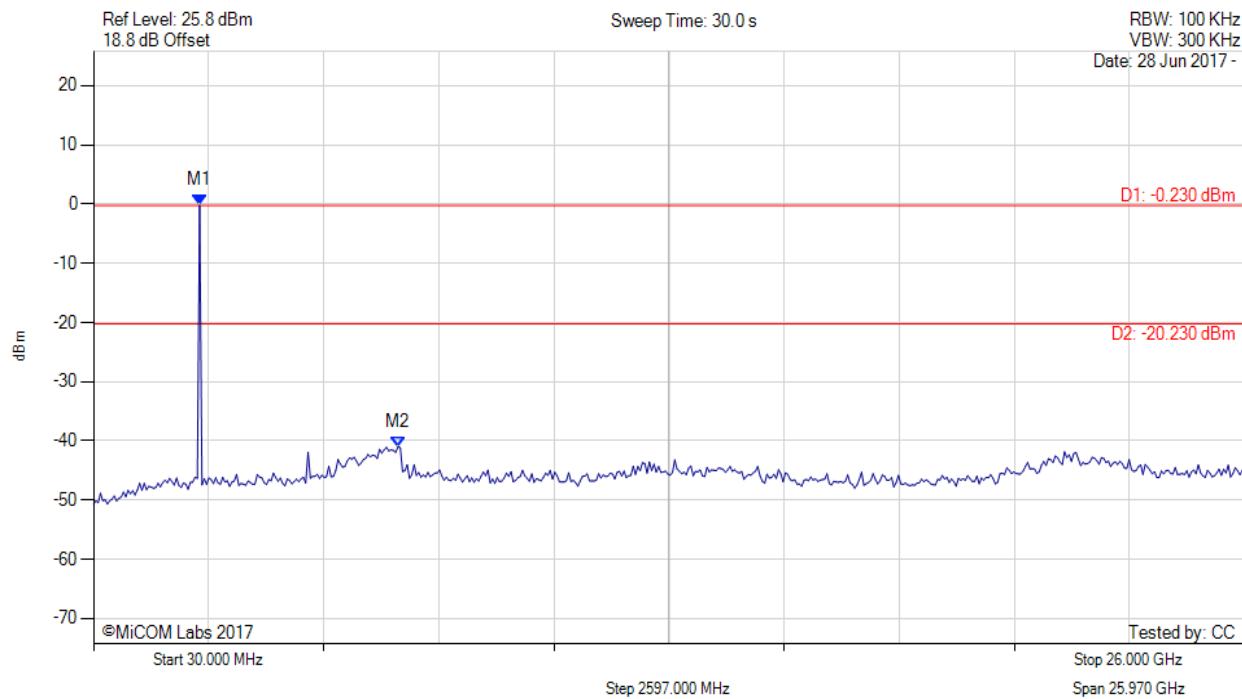

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -0.230 dBm M2 : 6899.820 MHz : -40.990 dBm	Limit: -20.23 dBm Margin: -20.76 dB


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### UNWANTED EMISSIONS PEAK

Variant: DH1, Channel: 2480.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

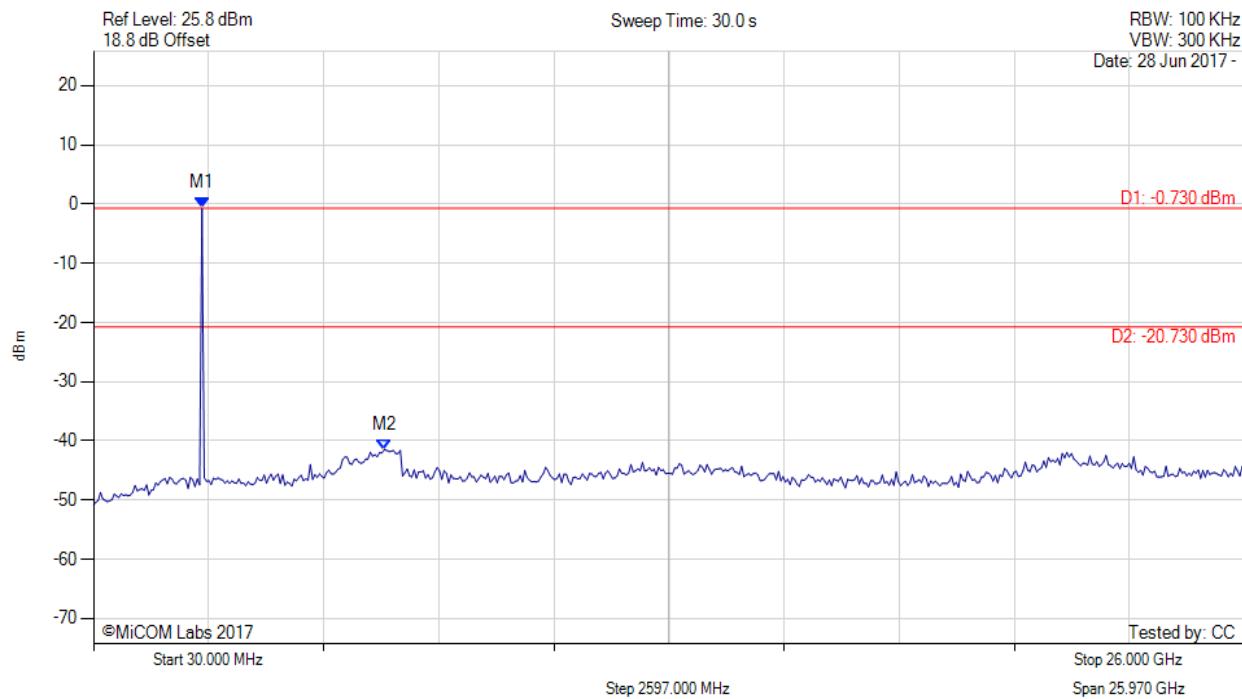

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2476.072 MHz : -0.730 dBm M2 : 6587.555 MHz : -41.497 dBm	Limit: -20.73 dBm Margin: -20.77 dB


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### UNWANTED EMISSIONS PEAK

Variant: DH5, Channel: 2402.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

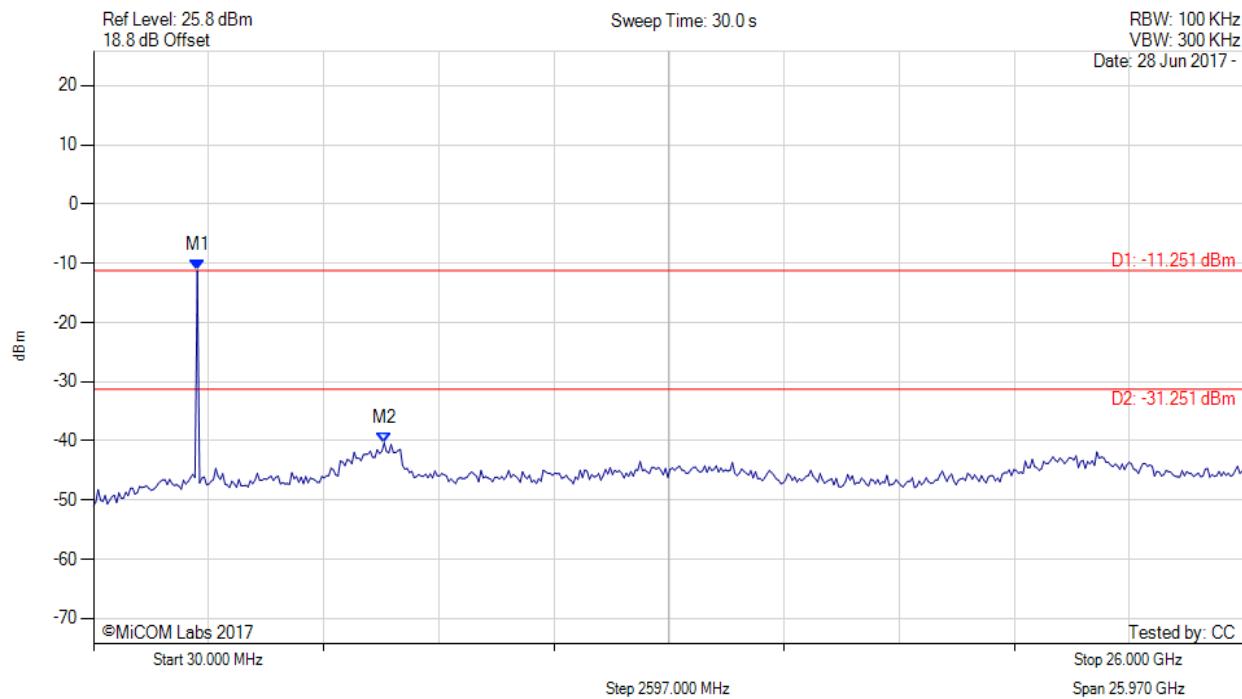

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2371.984 MHz : -11.251 dBm M2 : 6587.555 MHz : -40.350 dBm	Limit: -31.25 dBm Margin: -9.10 dB


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### UNWANTED EMISSIONS PEAK

Variant: DH5, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

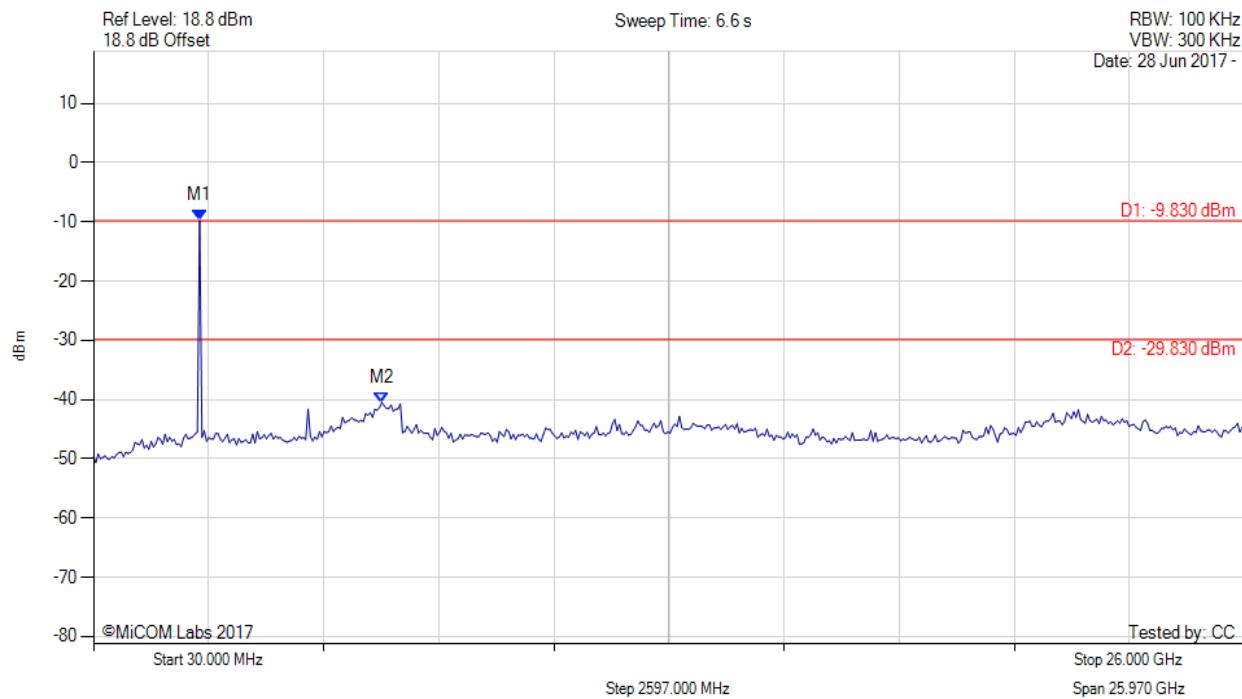

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.028 MHz : -9.827 dBm M2 : 6535.511 MHz : -40.496 dBm	Limit: -29.83 dBm Margin: -10.67 dB


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### UNWANTED EMISSIONS PEAK

Variant: DH5, Channel: 2480.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

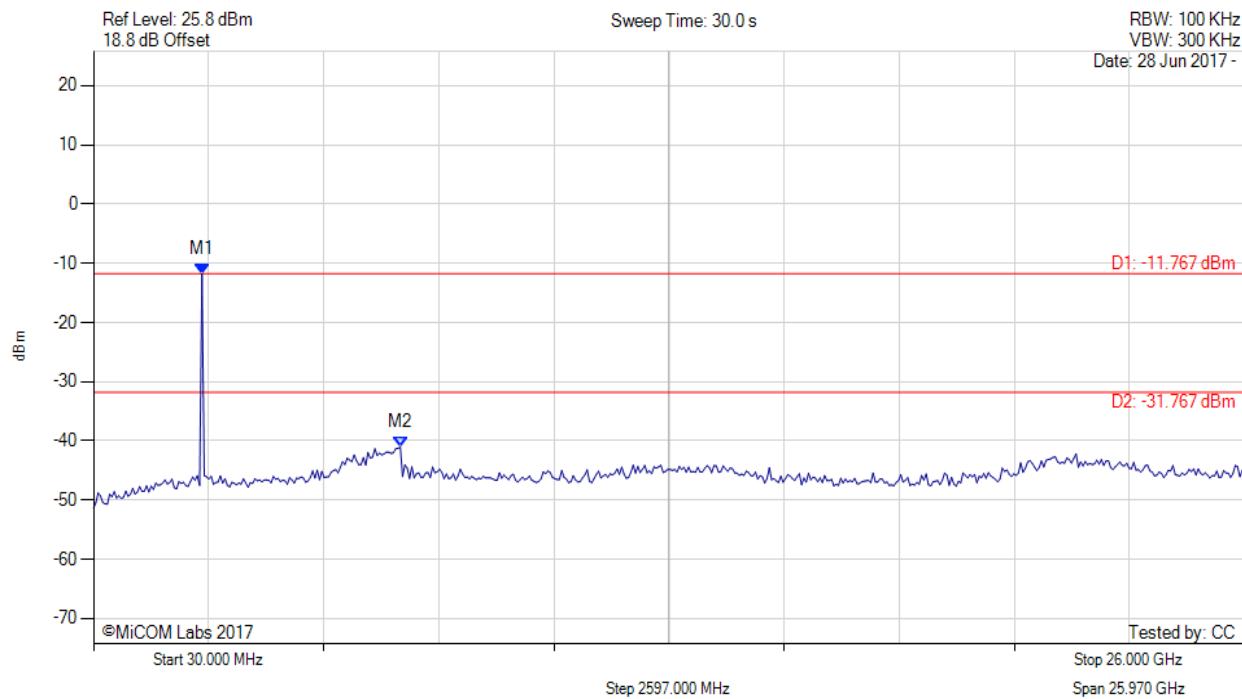


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2476.072 MHz : -11.767 dBm M2 : 6951.864 MHz : -41.039 dBm	Limit: -31.77 dBm Margin: -9.27 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### A.3.1.2. Conducted Band-Edge Emissions

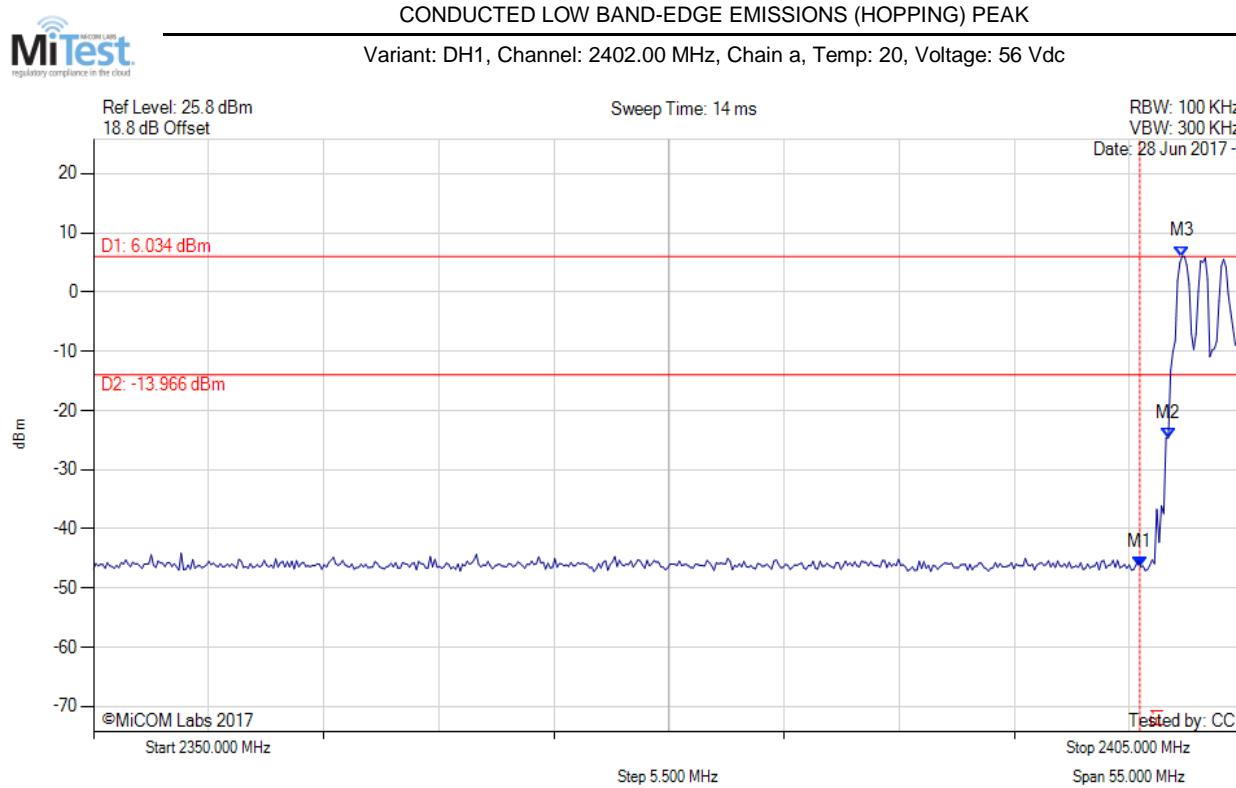

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2400.000 MHz : -46.414 dBm M2 : 2401.363 MHz : -24.635 dBm M3 : 2402.024 MHz : 6.034 dBm	Channel Frequency: 2402.00 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED LOW BAND-EDGE EMISSIONS (HOPPING) PEAK

Variant: DH5, Channel: 2402.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

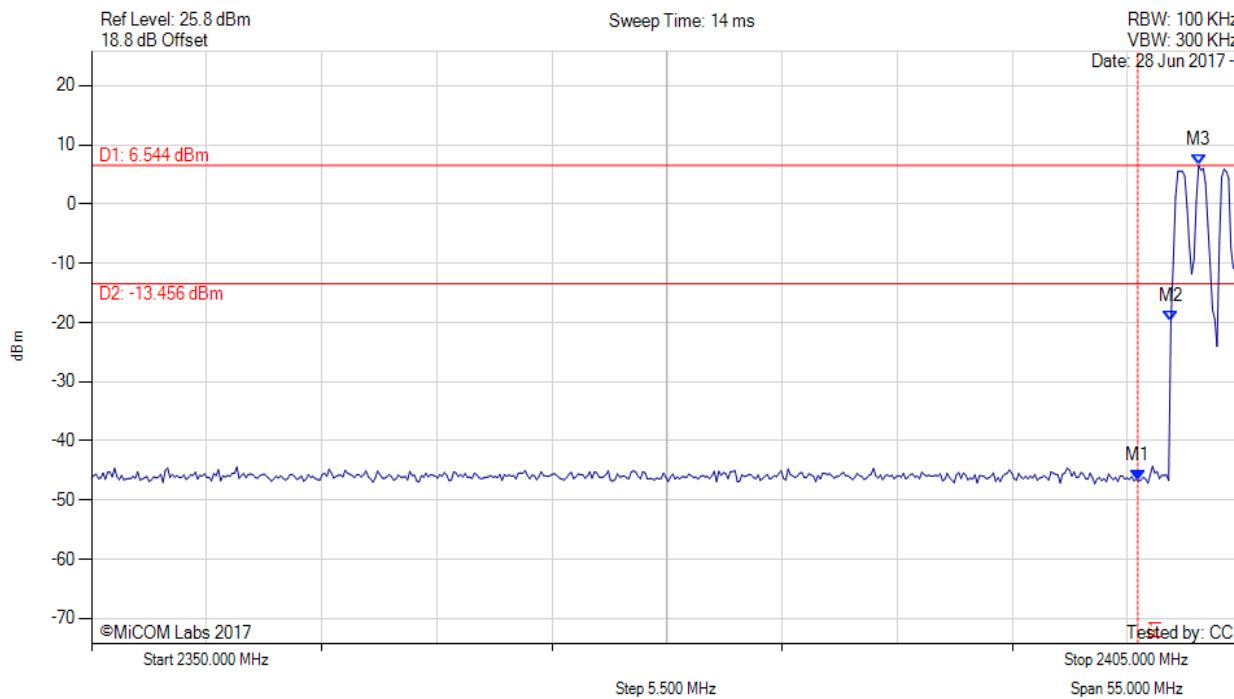

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2400.000 MHz : -46.778 dBm M2 : 2401.583 MHz : -19.817 dBm M3 : 2402.906 MHz : 6.544 dBm	Channel Frequency: 2402.00 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED LOW BAND-EDGE EMISSIONS (STATIC) PEAK

Variant: DH1, Channel: 2402.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

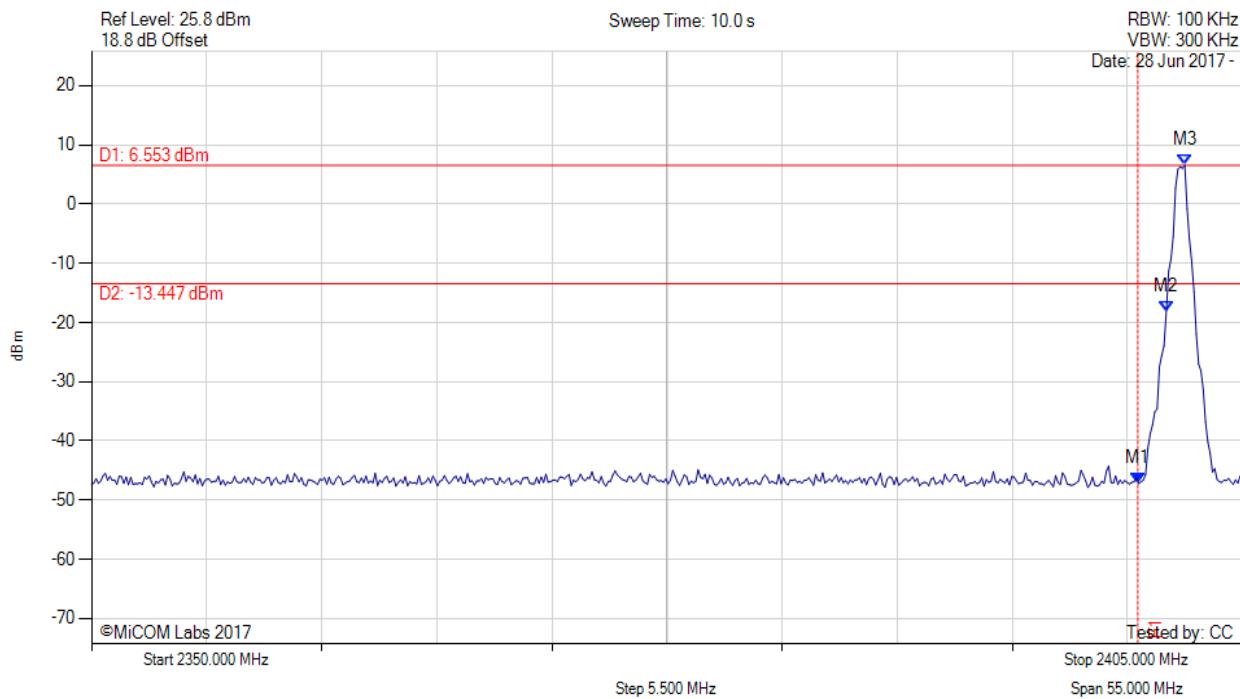

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2400.000 MHz : -47.218 dBm M2 : 2401.363 MHz : -18.096 dBm M3 : 2402.244 MHz : 6.553 dBm	Channel Frequency: 2402.00 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED LOW BAND-EDGE EMISSIONS (STATIC) PEAK

Variant: DH5, Channel: 2402.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

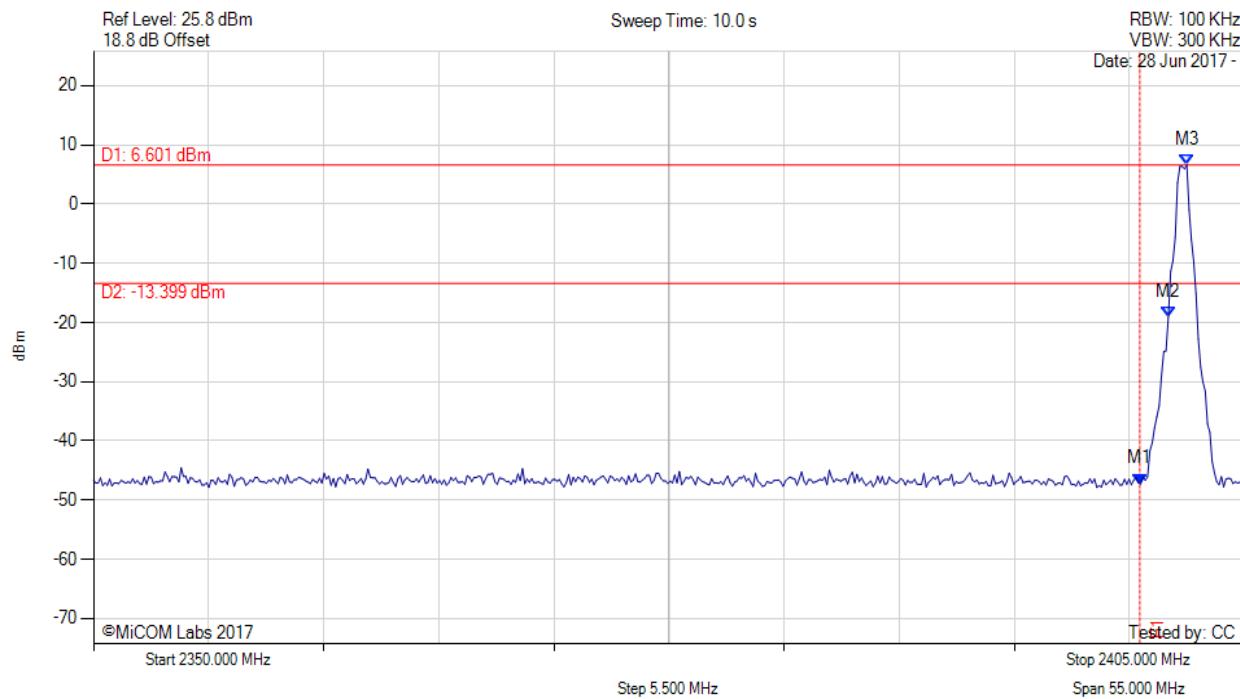

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2400.000 MHz : -47.254 dBm M2 : 2401.363 MHz : -19.154 dBm M3 : 2402.244 MHz : 6.601 dBm	Channel Frequency: 2402.00 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

CONDUCTED UPPER BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: DH1, Channel: 2480.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

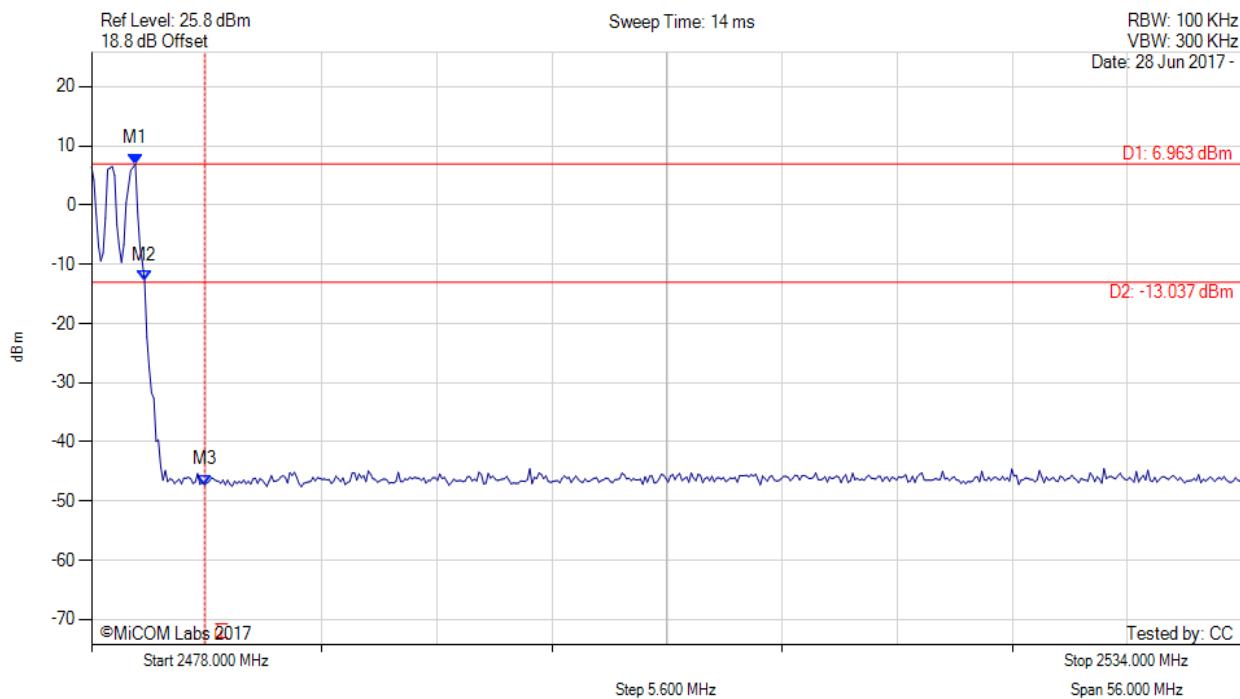


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2480.132 MHz : 6.963 dBm M2 : 2480.581 MHz : -12.805 dBm M3 : 2483.500 MHz : -47.262 dBm	Channel Frequency: 2480.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

CONDUCTED UPPER BAND-EDGE EMISSIONS (HOPPING) PEAK

Variant: DH5, Channel: 2480.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

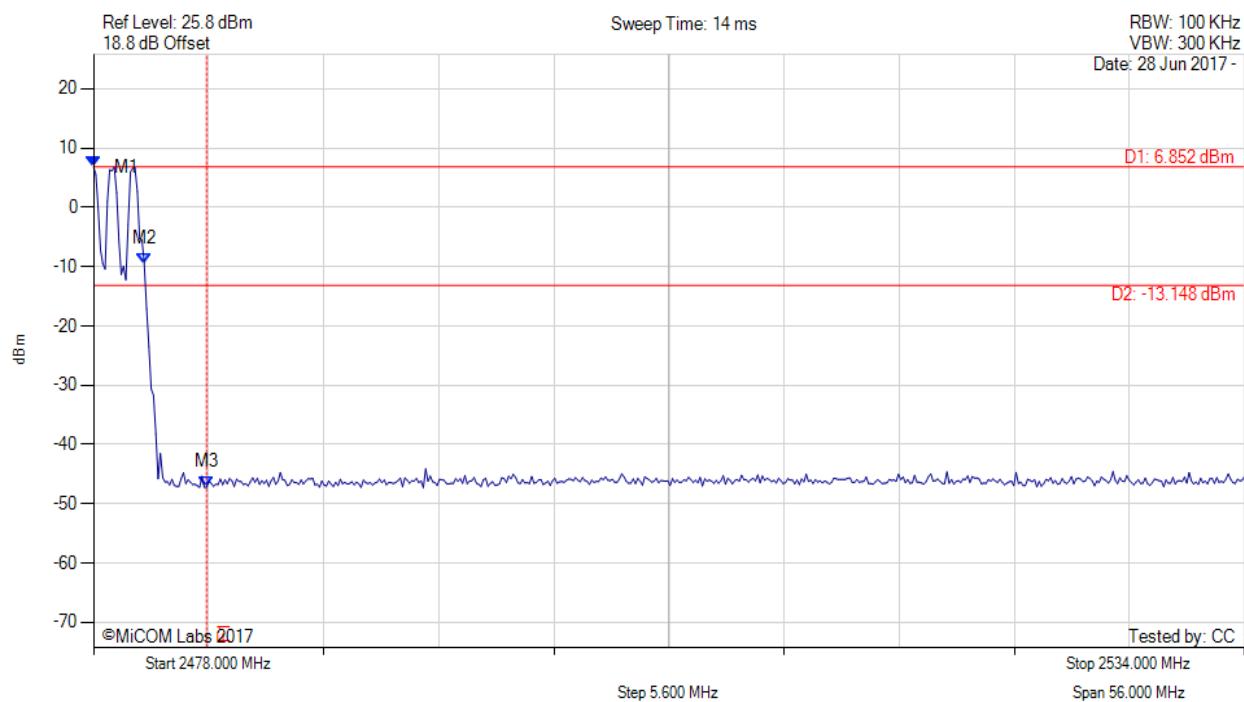

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2478.000 MHz : 6.852 dBm M2 : 2480.469 MHz : -9.551 dBm M3 : 2483.500 MHz : -47.218 dBm	Channel Frequency: 2480.00 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED UPPER BAND-EDGE EMISSIONS (STATIC) PEAK

Variant: DH1, Channel: 2480.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

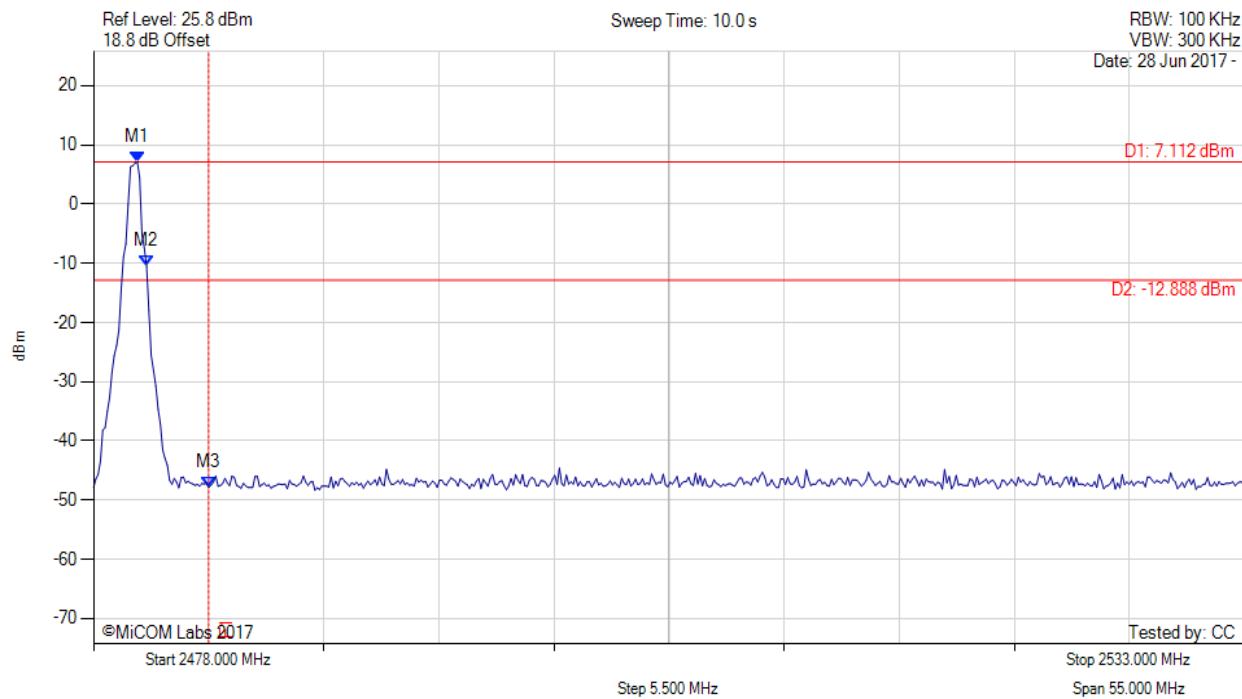

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2480.094 MHz : 7.112 dBm M2 : 2480.535 MHz : -10.537 dBm M3 : 2483.500 MHz : -47.789 dBm	Channel Frequency: 2480.00 MHz


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED UPPER BAND-EDGE EMISSIONS (STATIC) PEAK

Variant: DH5, Channel: 2480.00 MHz, Chain a, Temp: 20, Voltage: 56 Vdc

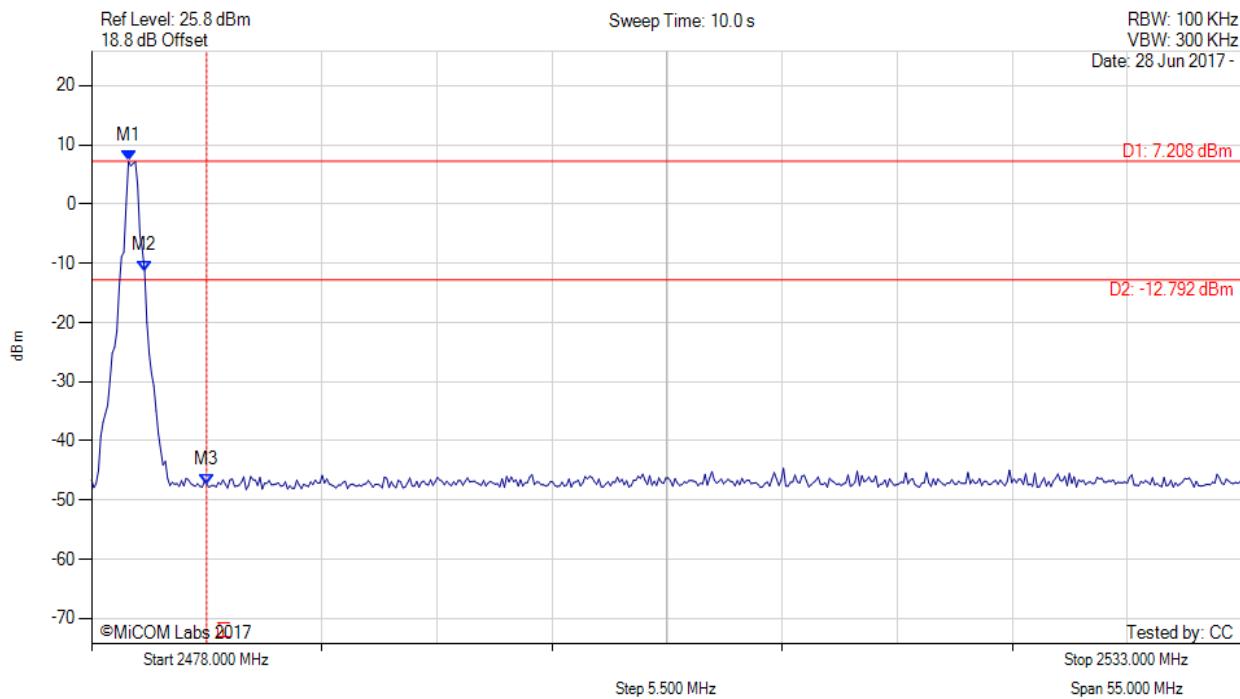

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2479.764 MHz : 7.208 dBm M2 : 2480.535 MHz : -11.273 dBm M3 : 2483.500 MHz : -47.329 dBm	Channel Frequency: 2480.00 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### A.3.2. Radiated Emissions

#### A.3.2.3. Restricted Edge & Band-Edge Emissions



Variant: 2402-2480.00, Power Setting: Max, Duty Cycle (%): 99

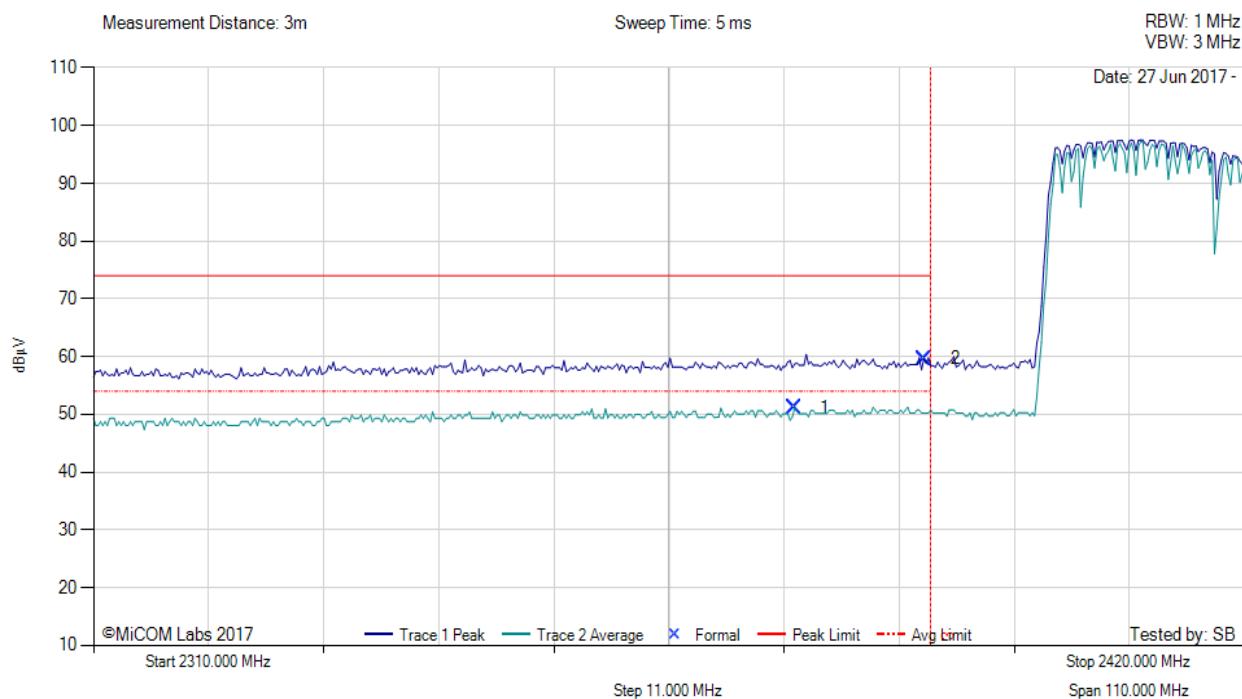


2310.00 - 2420.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	2377.01	16.52	2.70	31.93	51.15	Max Avg	Vertical	103	356	54.0	-2.9	Pass	
2	2389.43	24.88	2.68	32.04	59.60	Max Peak	Vertical	103	356	74.0	-14.4	Pass	
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

**Test Notes:** PSU:POE29U-1AT(PL) 56VDC

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

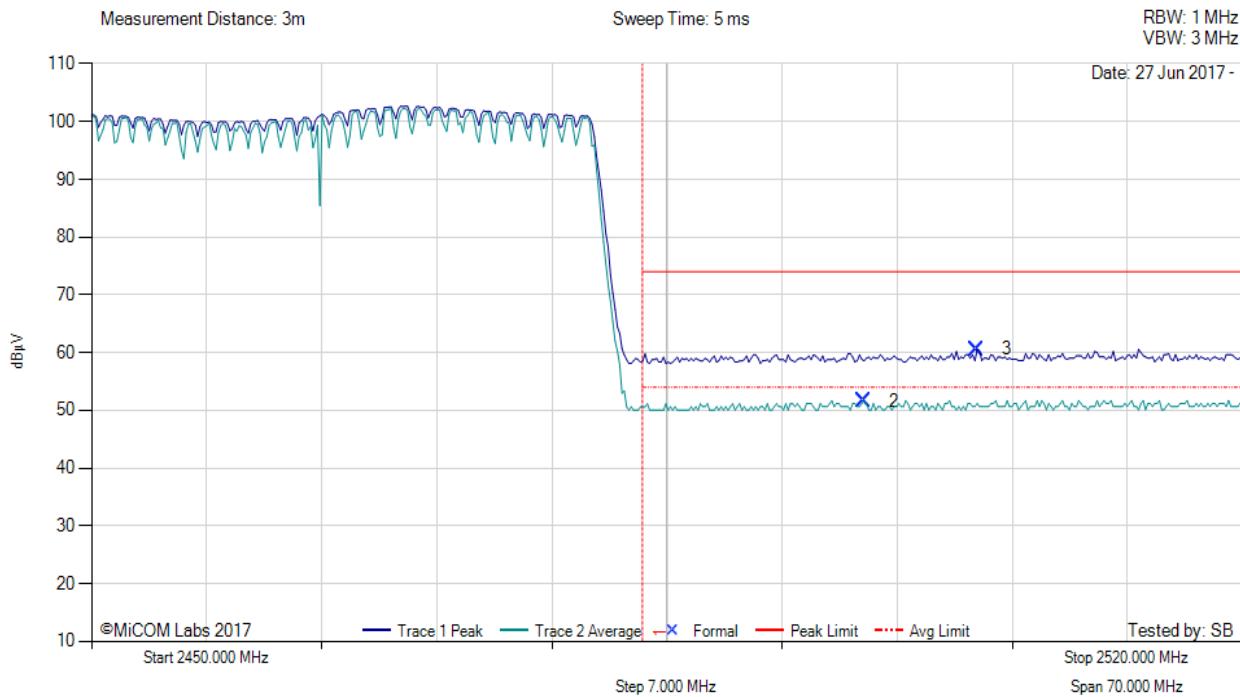


2450.00 - 2520.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
2	2496.99	16.54	2.74	32.39	51.67	Max Avg	Horizontal	103	356	54.0	-2.3	Pass	
3	2503.85	25.41	2.73	32.41	60.55	Max Peak	Horizontal	103	356	74.0	-13.5	Pass	
1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

**Test Notes:** PSU:POE29U-1AT(PL) 56VDC

[back to matrix](#)



Variant: , DH1 Test Freq: 2402.00 MHz, Power Setting: Max, Duty Cycle (%): 99

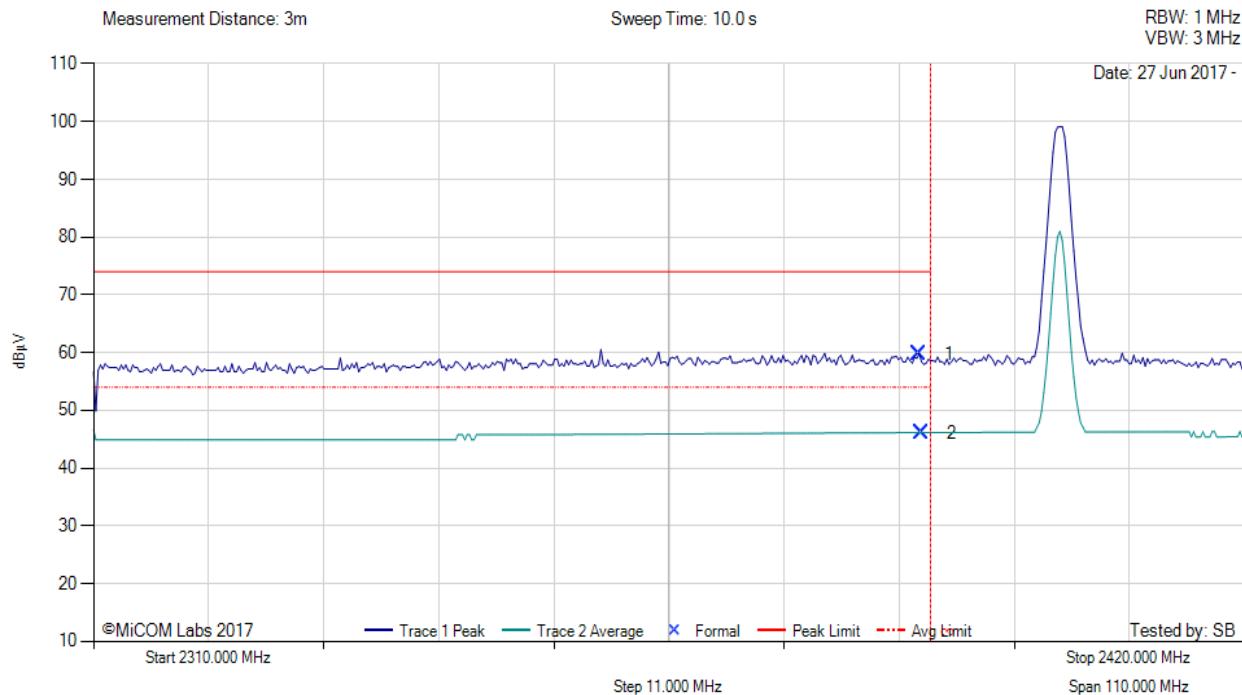

2310.00 - 2420.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	2388.92	25.06	2.68	32.04	59.78	Max Peak	Horizontal	150	356	74.0	-14.2	Pass	
2	2389.14	11.43	2.68	32.04	46.15	Max Avg	Horizontal	150	356	54.0	-7.9	Pass	
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--	


**Test Notes:** PSU:POE29U-1AT(PL) 56VDC

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Variant: , DH1 Test Freq: 2480.00 MHz, Power Setting: Max, Duty Cycle (%): 99

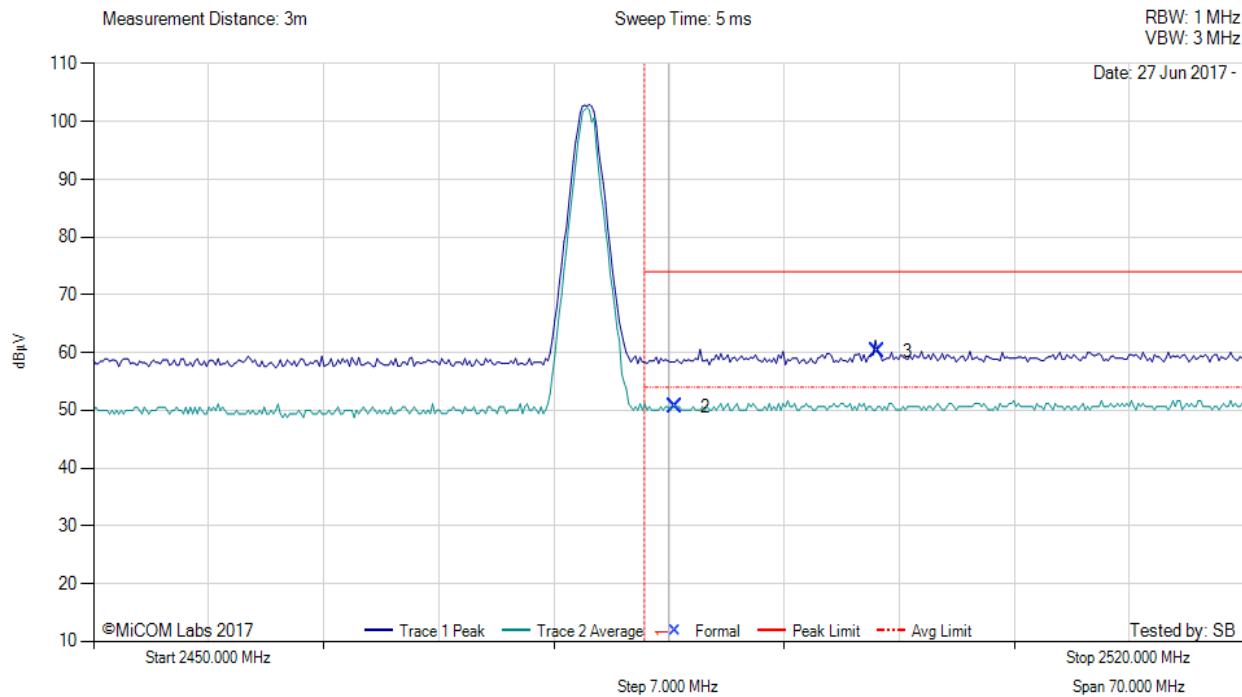

2450.00 - 2520.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
2	2485.35	15.52	2.73	32.37	50.62	Max Avg	Horizontal	150	97	54.0	-3.4	Pass	
3	2497.70	25.06	2.74	32.39	60.19	Max Peak	Horizontal	150	97	74.0	-13.8	Pass	
1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--	


**Test Notes:** PSU:POE29U-1AT(PL) 56VDC

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Variant: , DH5 Test Freq: 2402.00 MHz, Power Setting: Max, Duty Cycle (%): 99

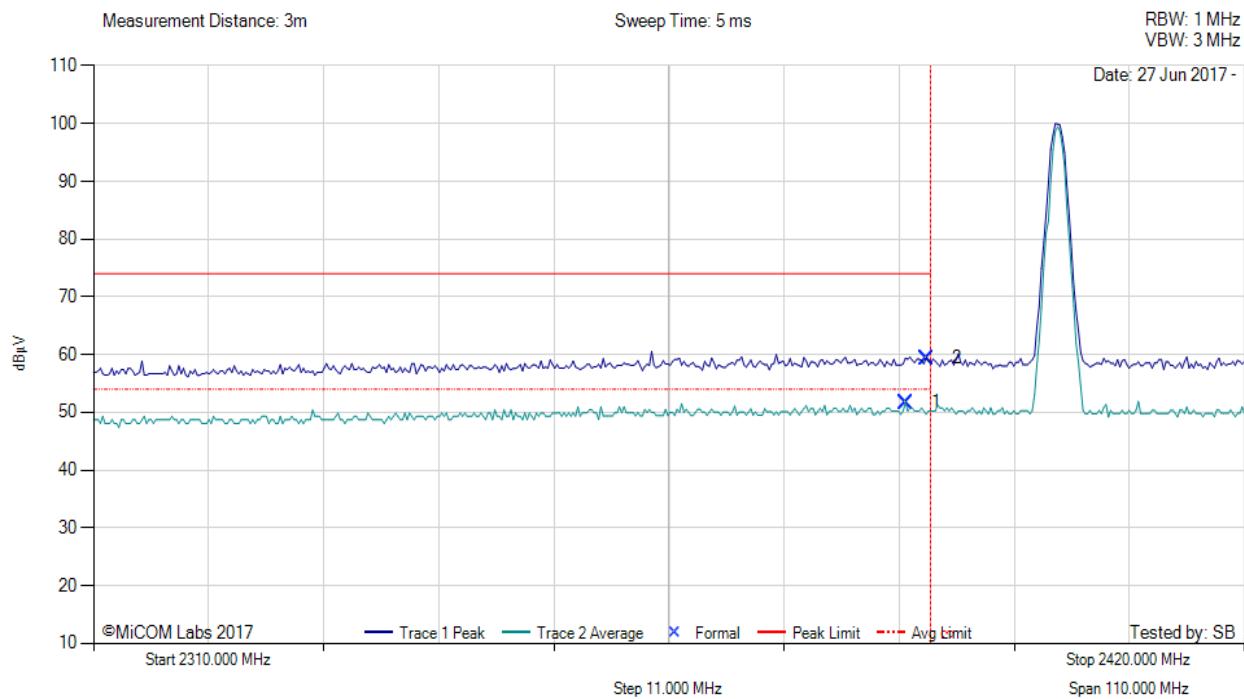

2310.00 - 2420.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	2387.60	17.01	2.68	32.03	51.72	Max Avg	Vertical	150	11	54.0	-2.3	Pass	
2	2389.58	24.68	2.69	32.04	59.41	Max Peak	Vertical	150	11	74.0	-14.6	Pass	
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--	


**Test Notes:** PSU:POE29U-1AT(PL) 56VDC

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Variant: , DH5 Test Freq: 2480.00 MHz, Power Setting: Max, Duty Cycle (%): 99

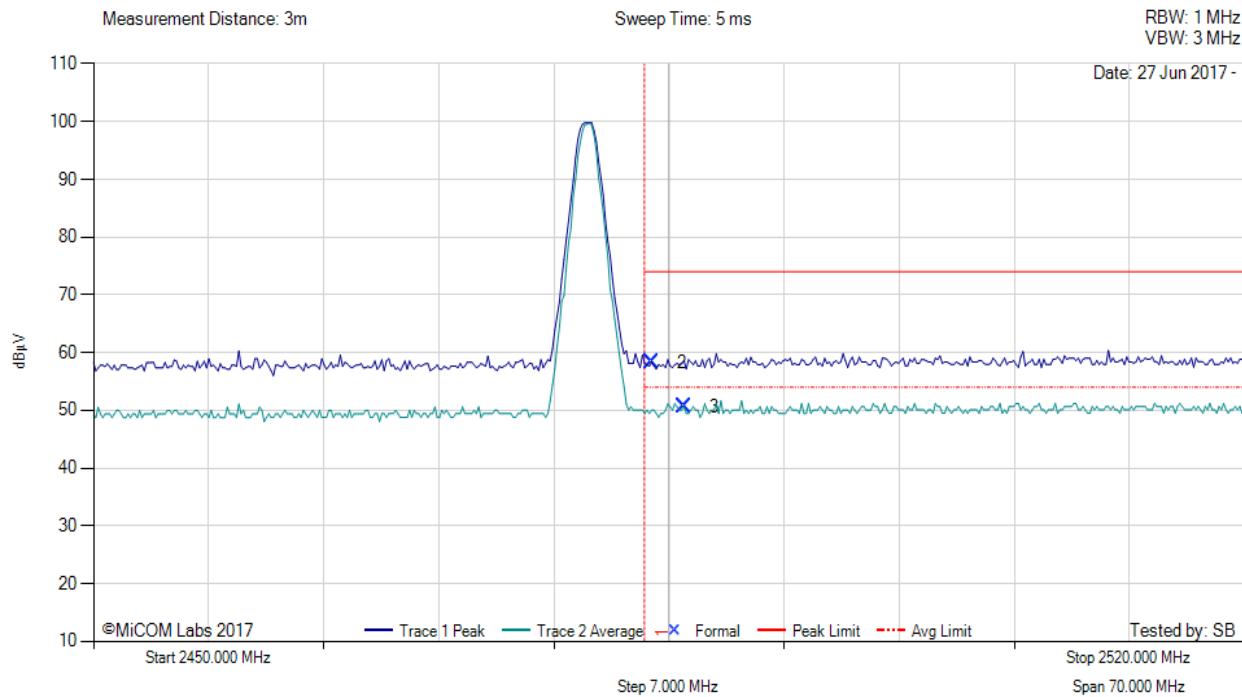

2450.00 - 2520.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
2	2483.95	23.26	2.73	32.37	58.36	Max Peak	Vertical	150	13	74.0	-15.6	Pass	
3	2485.91	15.53	2.73	32.37	50.63	Max Avg	Vertical	150	13	54.0	-3.4	Pass	
1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

**Test Notes:** PSU:POE29U-1AT(PL) 56VDC

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court  
Pleasanton, California 94566, USA  
Tel: +1 (925) 462 0304  
Fax: +1 (925) 462 0306  
[www.micomlabs.com](http://www.micomlabs.com)