



HEADQUARTERS: 914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230 • PHONE (410) 354-3300 • FAX (410) 354-3313

08/29/2025

HP Inc.  
Tony Griffiths  
1501 Old Page Mill Rd.  
Palo Alto, CA 94304-1126  
USA

Dear Tony Griffiths,

Enclosed is the EMC Wireless test report for compliance testing of the model P033 as tested to the requirements of FCC 15.247 and RSS-247 Issue 3 for Intentional Radiators.

Thank you for using the services of Eurofins MET Labs. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
EUROFINS MET LABS

A handwritten signature in blue ink that reads "Nancy LaBrecque".

Nancy LaBrecque  
Documentation Department

Reference: WIRA135001 – FCC247 RSS247 2.4GHz WiFi\_R1

Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins MET Labs.

*The Nation's First Licensed Nationally Recognized Testing Laboratory*

**Maryland | California | Texas**  
[www.metlabs.com](http://www.metlabs.com)

## 2.4GHz WiFi Test Report

for the


HP Inc.  
P033

**Tested under**

FCC 15.247 and RSS-247 Issue 3  
For Intentional Radiators



Bryan Taylor, Wireless Team Lead  
Electromagnetic Compatibility Lab



Nancy LaBrecque  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Part 15.247 under normal use and maintenance.



Matthew Hinojosa  
EMC Manager, Austin Electromagnetic Compatibility Lab

## Report Status Sheet

Revision	Report Date	Reason for Revision
∅	May 8, 2025	Initial Issue.
1	08/29/2025	TCB Review Comments

## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>8</b>
A.	Purpose of Test .....	9
B.	Executive Summary .....	9
<b>II.</b>	<b>Equipment Configuration .....</b>	<b>10</b>
A.	Overview.....	11
B.	References.....	12
C.	Test Site .....	13
D.	Measurement Uncertainty .....	13
E.	Description of Test Sample.....	13
F.	Equipment Configuration.....	14
G.	Support Equipment .....	14
H.	Ports and Cabling Information.....	14
I.	Mode of Operation.....	15
J.	Method of Monitoring EUT Operation .....	15
K.	Modifications .....	15
a)	Modifications to EUT .....	15
b)	Modifications to Test Standard.....	15
L.	Disposition of EUT .....	15
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators.....</b>	<b>16</b>
	§ 15.203 Antenna Requirement .....	17
	§ 15.247(a)(a) 6 dB and 99% Bandwidth .....	18
	RSS-GEN (6.7) 99% Bandwidth .....	19
	§ 15.247(b) Peak Power Output .....	28
	§ 15.247(e) Peak Power Spectral Density .....	35
	§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge.....	41
<b>IV.</b>	<b>Test Equipment .....</b>	<b>45</b>

## List of Tables

Table 1. Executive Summary .....	9
Table 2. References .....	12
Table 3. Uncertainty Calculations Summary.....	13
Table 4. Support Equipment.....	14
Table 5. Ports and Cabling Information .....	14
Table 6. Test Channels Utilized .....	15
Table 7. Output Power Requirements from §15.247(b) .....	28
Table 8. Restricted Bands of Operation.....	41
Table 9. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a) .....	42
Table 10. Test Equipment List .....	46

## List of Figures

Figure 1. EUT List .....	11
Figure 2. Block Diagram of Test Configuration.....	14
Figure 3. Block Diagram, Occupied Bandwidth Test Setup.....	19
Figure 4. 99% and 6 dB Occupied Bandwidth, Test Results.....	19
Figure 5. Peak Power Output Test Setup.....	29
Figure 6. Conducted Power Output, Test Results (SISO Modes) .....	29
Figure 7. EIRP, Test Results (SISO Modes) .....	29
Figure 8. Conducted Power Output, Test Results (MIMO Modes) .....	30
Figure 9. EIRP, Test Results (MIMO Modes).....	30
Figure 10. Block Diagram, Peak Power Spectral Density Test Setup .....	35
Figure 11. Peak Power Spectral Density, Test Results.....	36
Figure 16. Worst Case Cabinet Radiation, Below 30MHz.....	43
Figure 17. Worst Case Cabinet Radiation, 30MHz – 1GHz.....	43
Figure 18. Worst Case Cabinet Radiation, Above 1GHz .....	43

## List of Terms and Abbreviations

<b>AC</b>	Alternating Current
<b>ACF</b>	Antenna Correction Factor
<b>Cal</b>	Calibration
<i>d</i>	Measurement Distance
<b>dB</b>	Decibels
<b>dB<sub>μ</sub>A</b>	Decibels above one <b>microamp</b>
<b>dB<sub>μ</sub>V</b>	Decibels above one <b>microvolt</b>
<b>dB<sub>μ</sub>A/m</b>	Decibels above one <b>microamp per meter</b>
<b>dB<sub>μ</sub>V/m</b>	Decibels above one <b>microvolt per meter</b>
<b>DC</b>	Direct Current
<b>E</b>	Electric Field
<b>DSL</b>	Digital Subscriber Line
<b>ESD</b>	Electrostatic Discharge
<b>EUT</b>	Equipment Under Test
<i>f</i>	Frequency
<b>FCC</b>	Federal Communications Commission
<b>GRP</b>	Ground Reference Plane
<b>H</b>	Magnetic Field
<b>HCP</b>	Horizontal Coupling Plane
<b>Hz</b>	Hertz
<b>IEC</b>	International Electrotechnical Commission
<b>kHz</b>	kilohertz
<b>kPa</b>	kilopascal
<b>kV</b>	kilovolt
<b>LISN</b>	Line Impedance Stabilization Network
<b>MHz</b>	Megahertz
<b>μH</b>	microhenry
<b>μ</b>	microfarad
<b>μs</b>	microseconds
<b>NEBS</b>	Network Equipment-Building System
<b>PRF</b>	Pulse Repetition Frequency
<b>RF</b>	Radio Frequency
<b>RMS</b>	Root-Mean-Square
<b>TWT</b>	Traveling Wave Tube
<b>V/m</b>	Volts per meter
<b>VCP</b>	Vertical Coupling Plane

## I. Executive Summary

## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the model P033, with the requirements of FCC 15.247 and RSS-247 Issue 3. HP, Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the model P033, has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC 15.247 and RSS-247 Issue 3, in accordance with HP, Inc. purchase order number 9100415812. All tests were conducted using measurement procedures ANSI C63.4-2014 and ANSI C63.10-2013.

FCC Reference 47 CFR Part 15.247:2005	IC Reference RSS-247 Issue 3: 2017; RSS-GEN Issue 5: 2018	Description	Compliance
Title 47 of the CFR, Part 15 §15.203	---	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	RSS-GEN(8.8)	Conducted Emission Limits	Note <sup>1</sup>
Title 47 of the CFR, Part 15 §15.247(a)(2)	RSS-247 (5.2)	6dB Occupied Bandwidth	Compliant
---	RSS-GEN(6.7)	99% Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(b)	RSS-247(5.4)	Peak Power Output	Compliant
Title 47 of the CFR, Part 15 §15.247(d); §15.209; §15.205	RSS-GEN (6.13), (8.9), & (8.10)	Radiated Spurious Emissions Requirements	Compliant <sup>2</sup>
Title 47 of the CFR, Part 15 §15.247(d)	RSS-247(5.5)	RF Conducted Spurious Emissions Requirements	Note <sup>1</sup>
Title 47 of the CFR, Part 15; §15.247(e)	RSS-247(5.2)	Peak Power Spectral Density	Compliant

Table 1. Executive Summary

<sup>1</sup> This test was not performed as part of the permissive change application.

<sup>2</sup> Testing was limited to the center channel of the worst case operating mode as part of the permissive change application.

## II. Equipment Configuration

## A. Overview

Eurofins MET Labs was contracted by HP, Inc. to perform testing on the model P033 under HP, Inc.'s purchase order number 9100415812.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the model P033. The results obtained relate only to the item(s) tested.

<b>Product Marketing Name Tested:</b>	Poly Studio X52	
<b>Model Number Tested:</b>	P033	
<b>FCCID:</b>	M72-P033	
<b>ICID:</b>	1849C-P033	
<b>EUT Specifications:</b>	Primary Power: 100 – 230VAC	
	Frequency Range: 50Hz / 60Hz	
	Type of Modulations:	802.11b, 802.11g, 802.11n (20MHz Channels), 802.11 (40MHz Channels)
	Equipment Code:	DTS
	Peak RF Output Power:	12.52dBm
	EUT Frequency Ranges:	2412-2462 MHz
	Antenna Gain (declared by HP, Inc.)	4.07dBi (Antenna Path 1) 4.09dBi (Antenna Path 2) Directional Gain = $10\log[(10^{4.07/20} + 10^{4.09/20})^2 / 2] = 7.08\text{dBi}$ Note: the array gain was calculated per KDB 662911 D01 Section F.2.d.(i) for correlated signals with unequal antenna gains.
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.	
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
<b>Evaluated by:</b>	Bryan Taylor	
<b>Report Date(s):</b>	08/29/2025	

Description	Model Number	Part Number	Serial Number	Rev #
Power Supply	065-1A120500B3	SM00754DG	1GBBL003T	N.A.
Poly Studio X52	OBAN50	2201-8749-001	822238671543FM	N.A.

**Figure 1. EUT List**

## B. References

<b>CFR 47, Part 15, Subpart C</b>	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
<b>RSS-247, Issue 3, August 2023</b>	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
<b>RSS-GEN, Issue 5, March 2019</b>	General Requirements and Information for the Certification of Radio Apparatus
<b>ANSI C63.4:2014</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ISO/IEC 17025:2017</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>ANSI C63.10-2013</b>	American National Standard for Testing Unlicensed Wireless Devices

**Table 2. References**

### C. Test Site

All testing was performed at Eurofins MET Labs, 13501 McCallen Pass, Austin, TX 78753. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

**ISED Lab Info:**

CAB Identifier: US0004  
 Company Number: 2043D

**FCC Lab Info:**

Designation Number: US1127


### D. Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
Occupied Bandwidth Measurements	±4.52 Hz	2	95%
Conducted Power Measurements	±2.74 dB	2	95%
Power Spectral Density Measurements	±2.74 dB	2	95%
Conducted Spurious Emissions	±2.80 dB	2	95%
Conducted Emissions (Mains)	±2.97 dB	2	95%
Radiated Spurious Emissions (9kHz – 1GHz)	±2.95 dB	2	95%
Radiated Spurious Emissions (1GHz - 40GHz)	±3.54 dB	2	95%

**Table 3. Uncertainty Calculations Summary**

### E. Description of Test Sample

The HP Inc. model P033 (marketed as Poly Studio X52), is a video conferencing bar designed to act as a Video endpoint over LAN network. The device is powered an AC/DC mains adapter and contains 2.4GHz / 5GHz WiFi and Bluetooth radio interfaces.

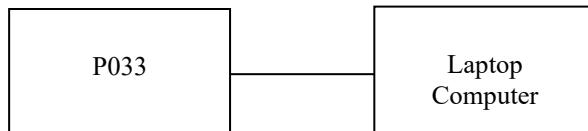
**Figure 2. Block Diagram of Test Configuration**

## F. Equipment Configuration

The EUT was set up as outlined in Figure 2, Block Diagram of Test Setup. The laptop computer was used to send test commands to force the transmitters to operate in the appropriate test mode.

## G. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Name/Description	Manufacturer	Model Number	Customer Supplied Calibration Data
4k Monitors	hp	1B9T0AA	N/A
4k Monitors	hp	1B9T0AA	N/A
BT Remote	Poly/ Remotec	BW7640UN	N/A
USB keyboard	hp	KU-0316	N/A
USB mouse	hp	672652-001	N/A
Laptop for content and pings	Dell	XPS 14	N/A
Router Cisco gigabit router	Cisco	RN042G	N/A
WIFI access point Cisco AIR Lap	Cisco	1142N-A-K9	N/A

**Table 4. Support Equipment**

## H. Ports and Cabling Information

Port Name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length (m)	Shielded? (Y/N)	Termination Box ID & Port Name
DC Power	DC Power Cable	1	2m	2m	No	AC/DC Power Adapter
USB-C	USB-C	1	10m	10m	Yes	Laptop Computer

**Table 5. Ports and Cabling Information**

## I. Mode of Operation

The support laptop provided a direct means of controlling transmitter parameters. Unless otherwise stated or shown, all tests were performed at worst-case modulation and data rates on the following channels.

Transmit Band	Operating Mode	Worst Case Transmission Bandwidth	Channel Numbers Tested	Channel Frequencies Tested	Test Tool Power Setting	Test Tool Name
2400 – 2483.5MHz	802.11b	20MHz	1 / 6 / 11	2412MHz / 2437MHz / 2462MHz	12.0dBm	WiFi_BT_DEBUG TOOL_v0.0.1.6
	802.11g	20MHz	1 / 6 / 11	2412MHz / 2437MHz / 2462MHz	10.5dBm	
	802.11n	20MHz	1 / 6 / 11	2412MHz / 2437MHz / 2462MHz	10.5dBm	
	802.11n (40)	40MHz	3 / 6 / 9	2422MHz / 2437MHz / 2452MHz	10.5dBm	

Table 6. Test Channels Utilized

## J. Method of Monitoring EUT Operation

A spectrum analyzer was used to confirm proper transmitter operation.

## K. Modifications

### a) Modifications to EUT

No modifications were made to the EUT.

### b) Modifications to Test Standard

No modifications were made to the test standard.

## L. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to HP, Inc. upon completion of testing.

### III. Electromagnetic Compatibility Criteria for Intentional Radiators

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203 Antenna Requirement

**Test Requirement:**

**§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:** The EUT as tested is compliant the criteria of §15.203. The TX antenna is not accessible by the end user.

**Test Engineer(s):** Bryan Taylor

**Test Date(s):** 2/14/2025

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(a)(2) 6 dB Bandwidth

**Test Requirements:** **§ 15.247(a)(2):** Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

**Test Procedure:** The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately 1% of the total emission bandwidth, and the VBW > RBW. The 6 dB Bandwidth was measured and recorded. The measurements were performed on the low, mid and high channels.

**Test Results** The EUT was compliant with § 15.247 (a)(2).

The 6 dB Bandwidth was determined from the plots on the following pages.

**Test Engineer(s):** Bryan Taylor

**Test Date(s):** 3/26/2025

## Electromagnetic Compatibility Criteria for Intentional Radiators

### RSS-GEN (6.7) 99% Bandwidth

**Test Requirements:** The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

**Test Procedure:** The transmitter was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, and the VBW > RBW. The 99% Bandwidth was measured and recorded.

**Test Results** The 99% Bandwidth determined from the plots on the following pages.

**Test Engineer(s):** Bryan Taylor

**Test Date(s):** 3/26/2025





Figure 3. Block Diagram, Occupied Bandwidth Test Setup


Channel and Mode	-6dB BW (Port 1) (MHz)	99% BW (Port 1) (MHz)	-6dB BW (Port 2) (MHz)	99% BW (Port 2) (MHz)
WIFI_Low Ch_2412MHz_20MHz BW_b-mode	7.185	13.049	7.658	12.911
WIFI_Mid Ch_2437MHz_20MHz BW_b-mode	7.191	12.924	8.527	12.889
WIFI_High Ch_2462MHz_20MHz BW_b-mode	8.183	12.970	8.123	13.153
WIFI_Low Ch_2412MHz_20MHz BW_g-mode	16.297	16.520	15.921	16.474
WIFI_Mid Ch_2437MHz_20MHz BW_g-mode	16.404	16.513	16.271	16.431
WIFI_High Ch_2462MHz_20MHz BW_g-mode	16.358	16.494	15.778	16.531
WIFI_Low Ch_2412MHz_20MHz BW_n-mode	17.434	17.642	16.012	17.539
WIFI_Mid Ch_2437MHz_20MHz BW_n-mode	15.881	17.618	17.352	17.583
WIFI_High Ch_2462MHz_20MHz BW_n-mode	17.097	17.636	16.466	17.577
WIFI_Low Ch_2422MHz_40MHz BW_n-mode	35.253	36.048	31.710	35.819
WIFI_Mid Ch_2437MHz_40MHz BW_n-mode	35.276	36.026	31.939	35.706
WIFI_High Ch_2452MHz_40MHz BW_n-mode	35.650	36.035	35.786	36.035


Figure 4. 99% and 6 dB Occupied Bandwidth, Test Results


## Occupied Bandwidth Test Results

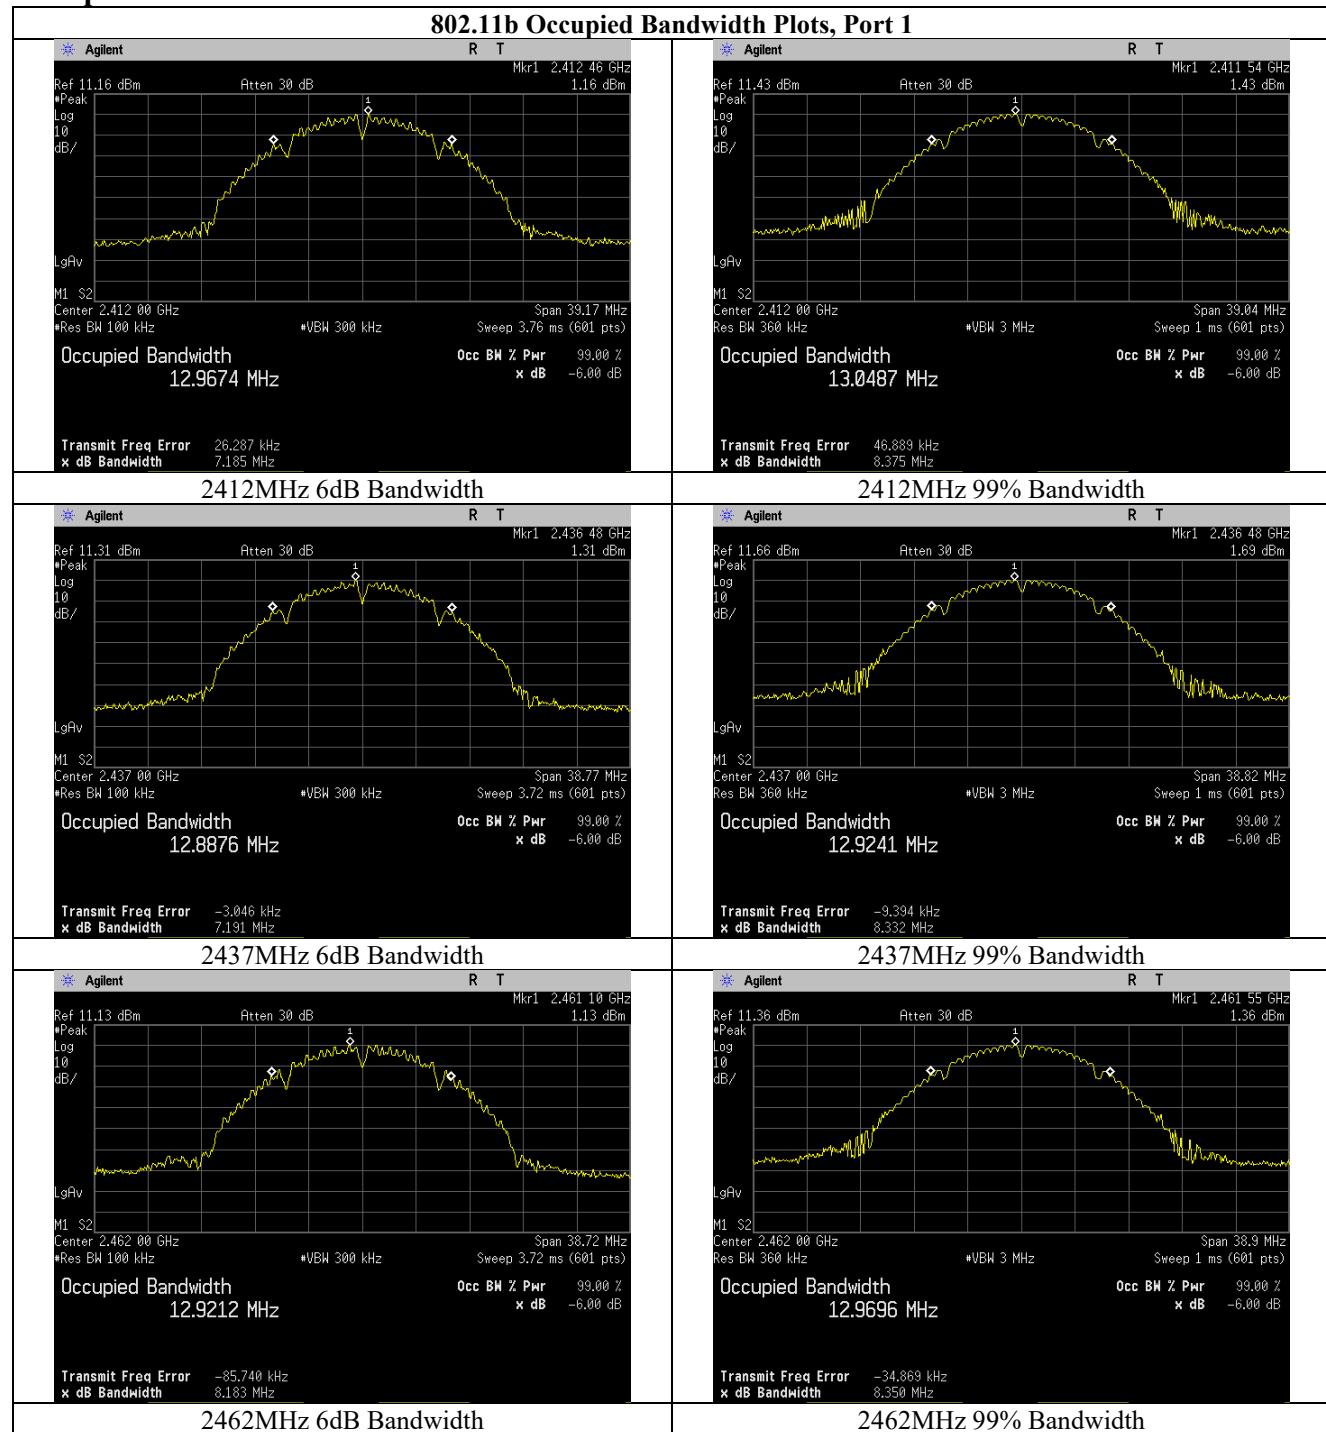



Z

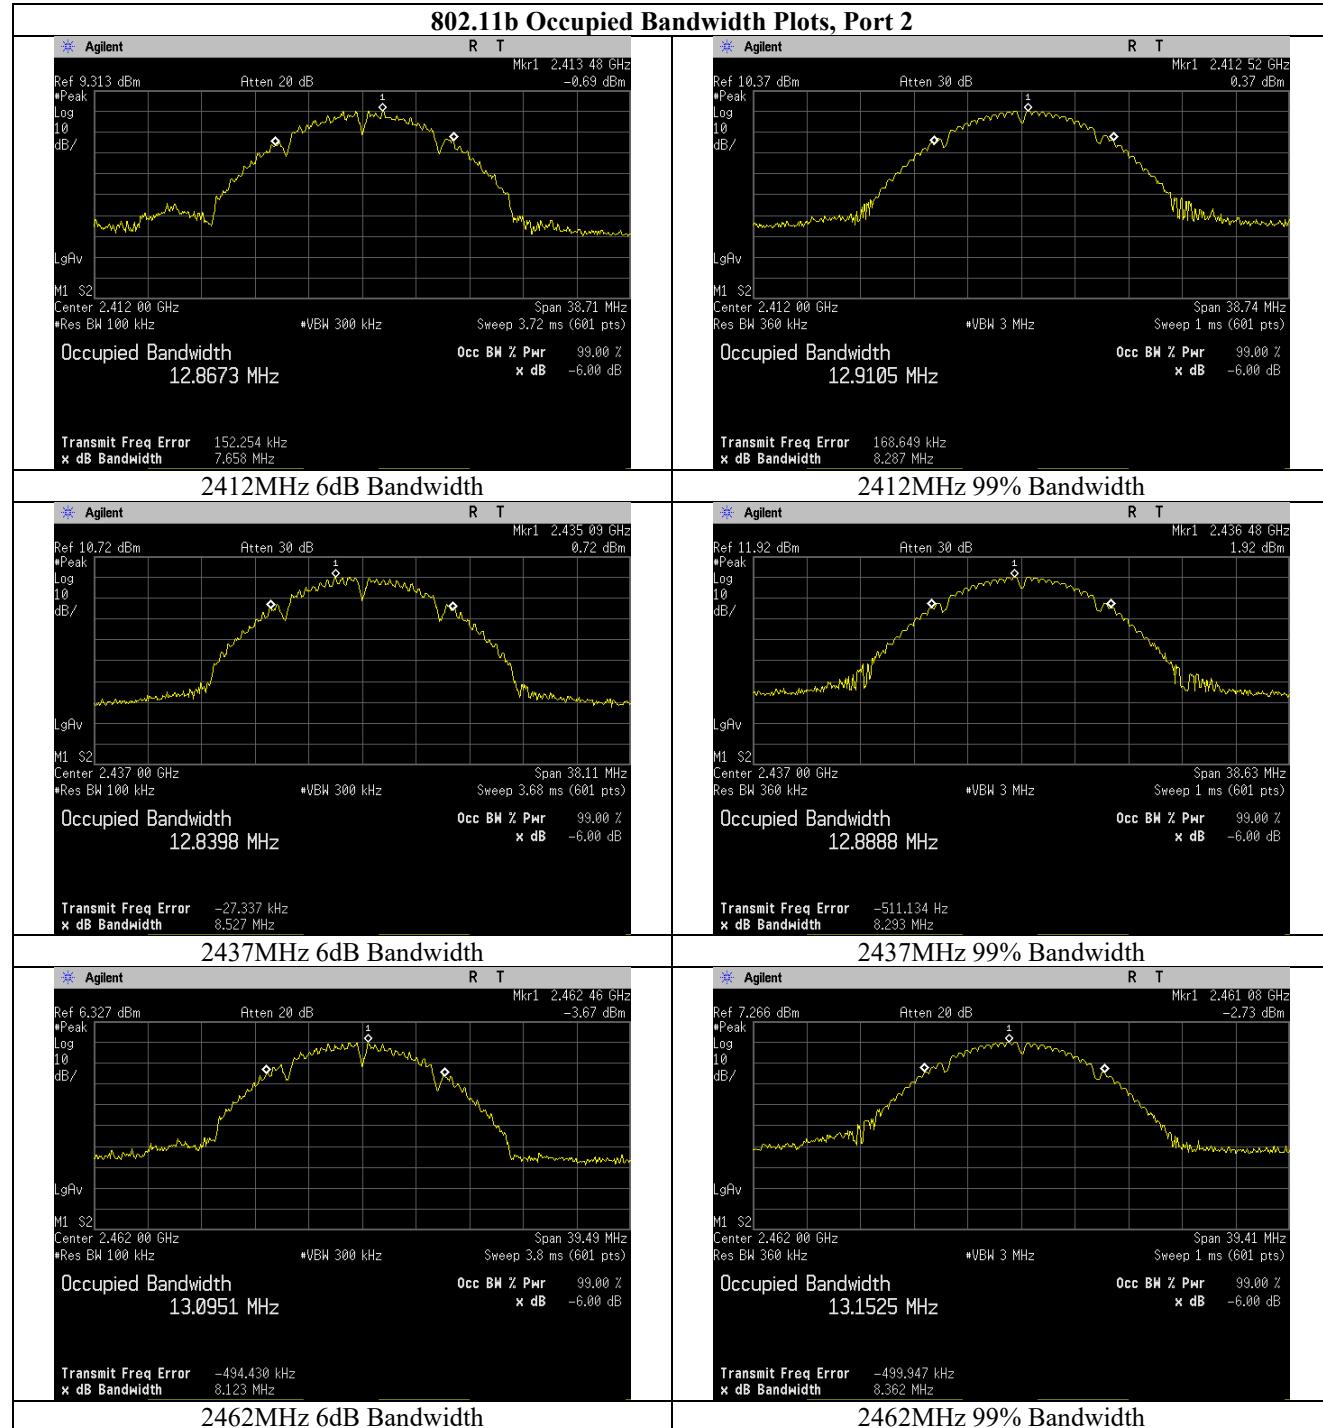
**802.11b Occupied Bandwidth Plots, Port 2**

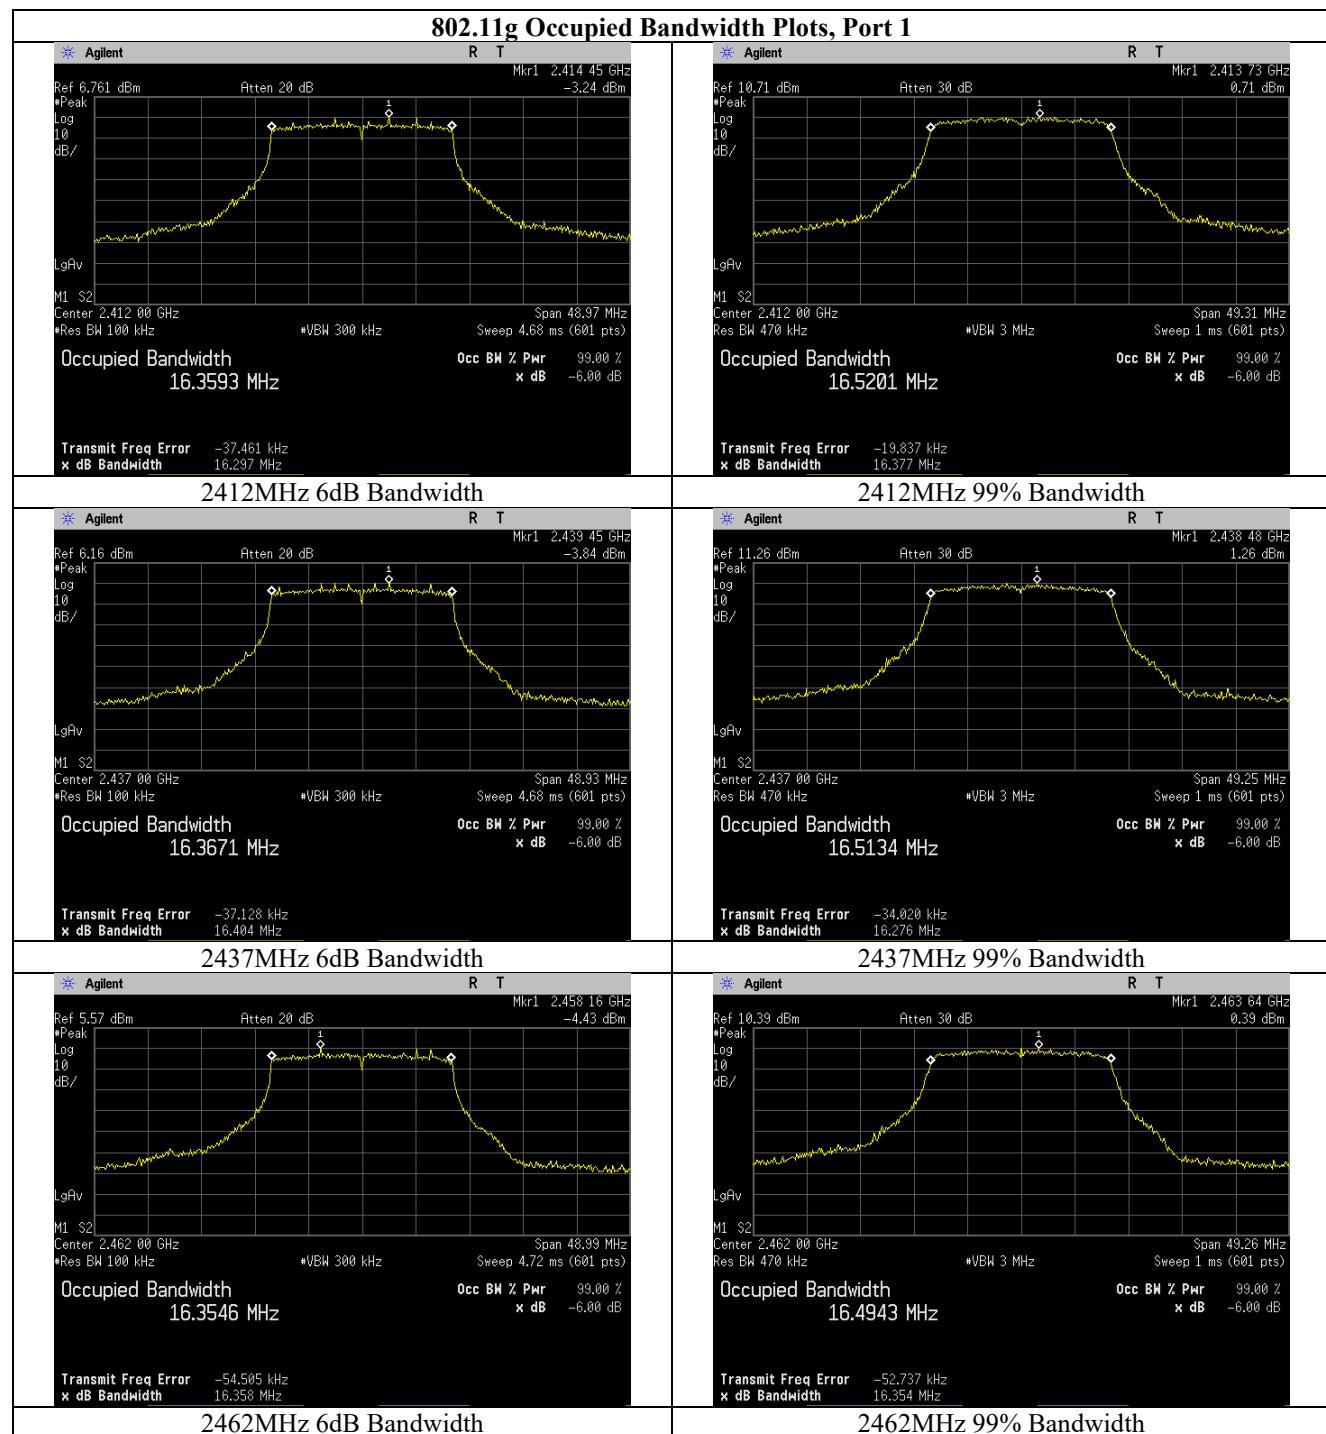
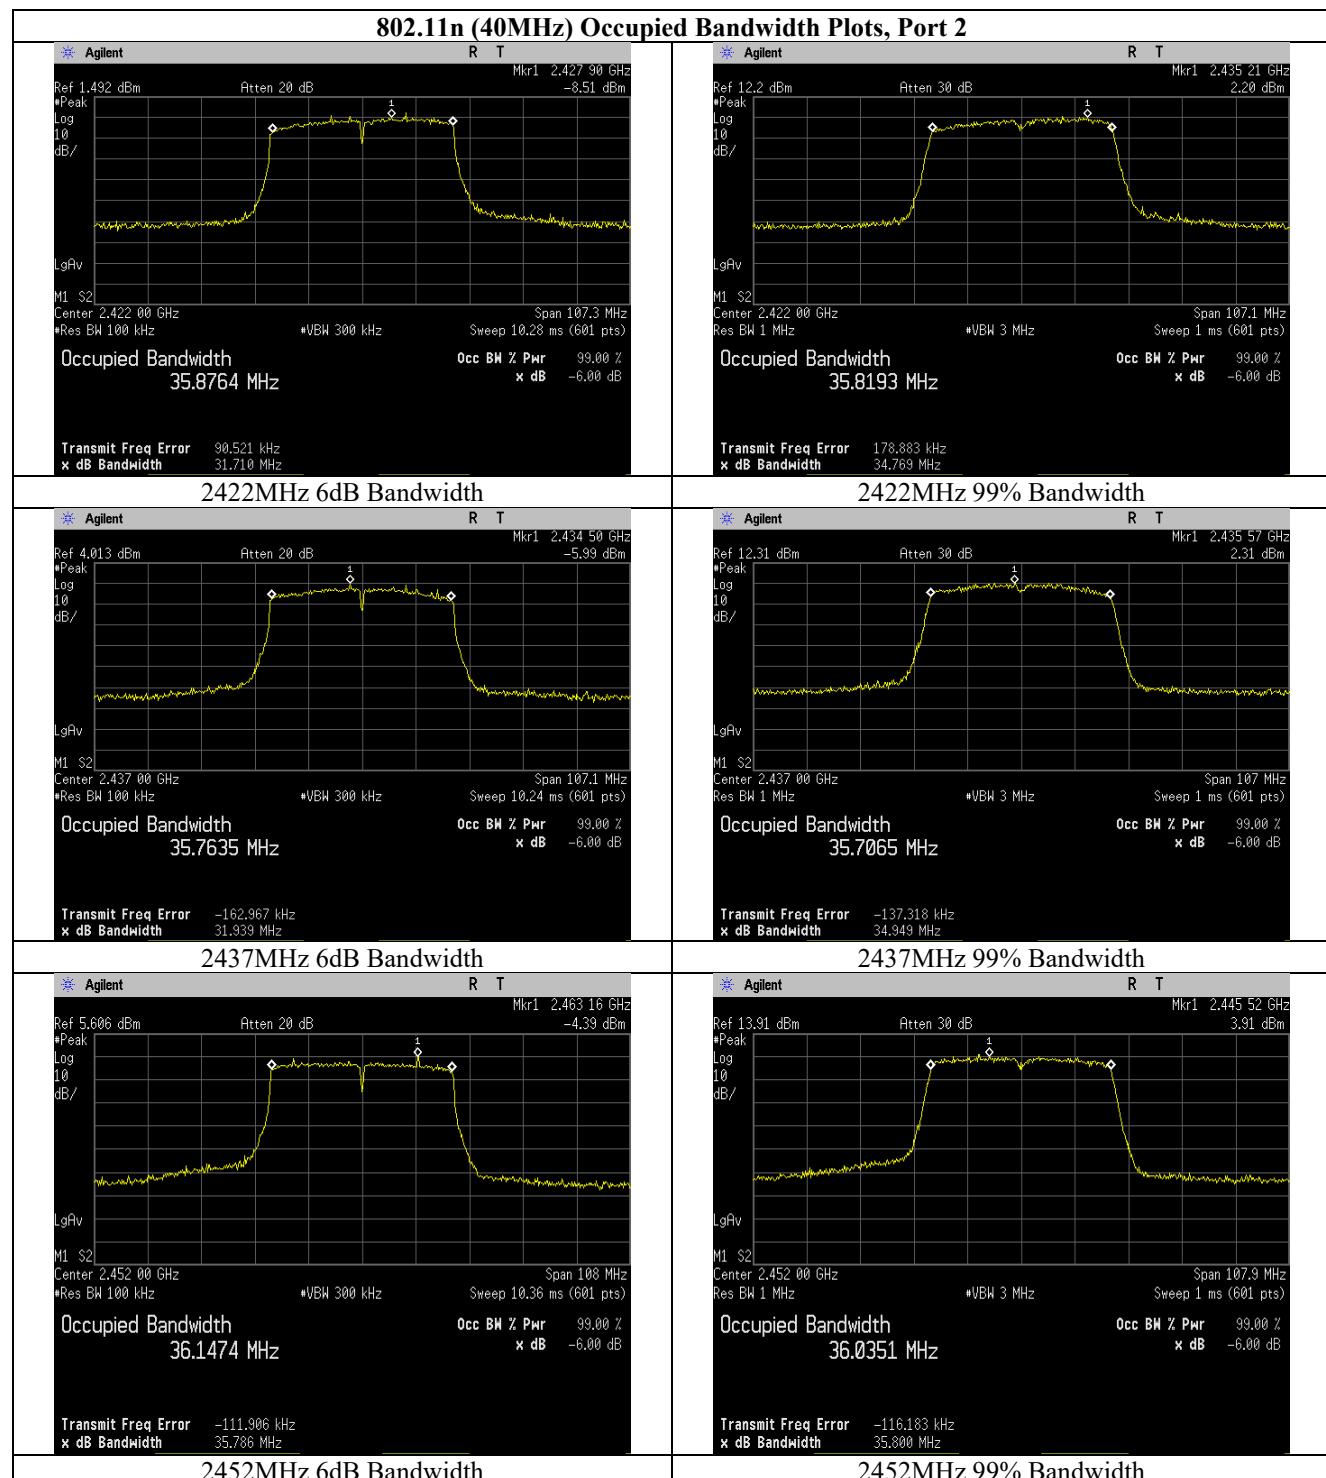


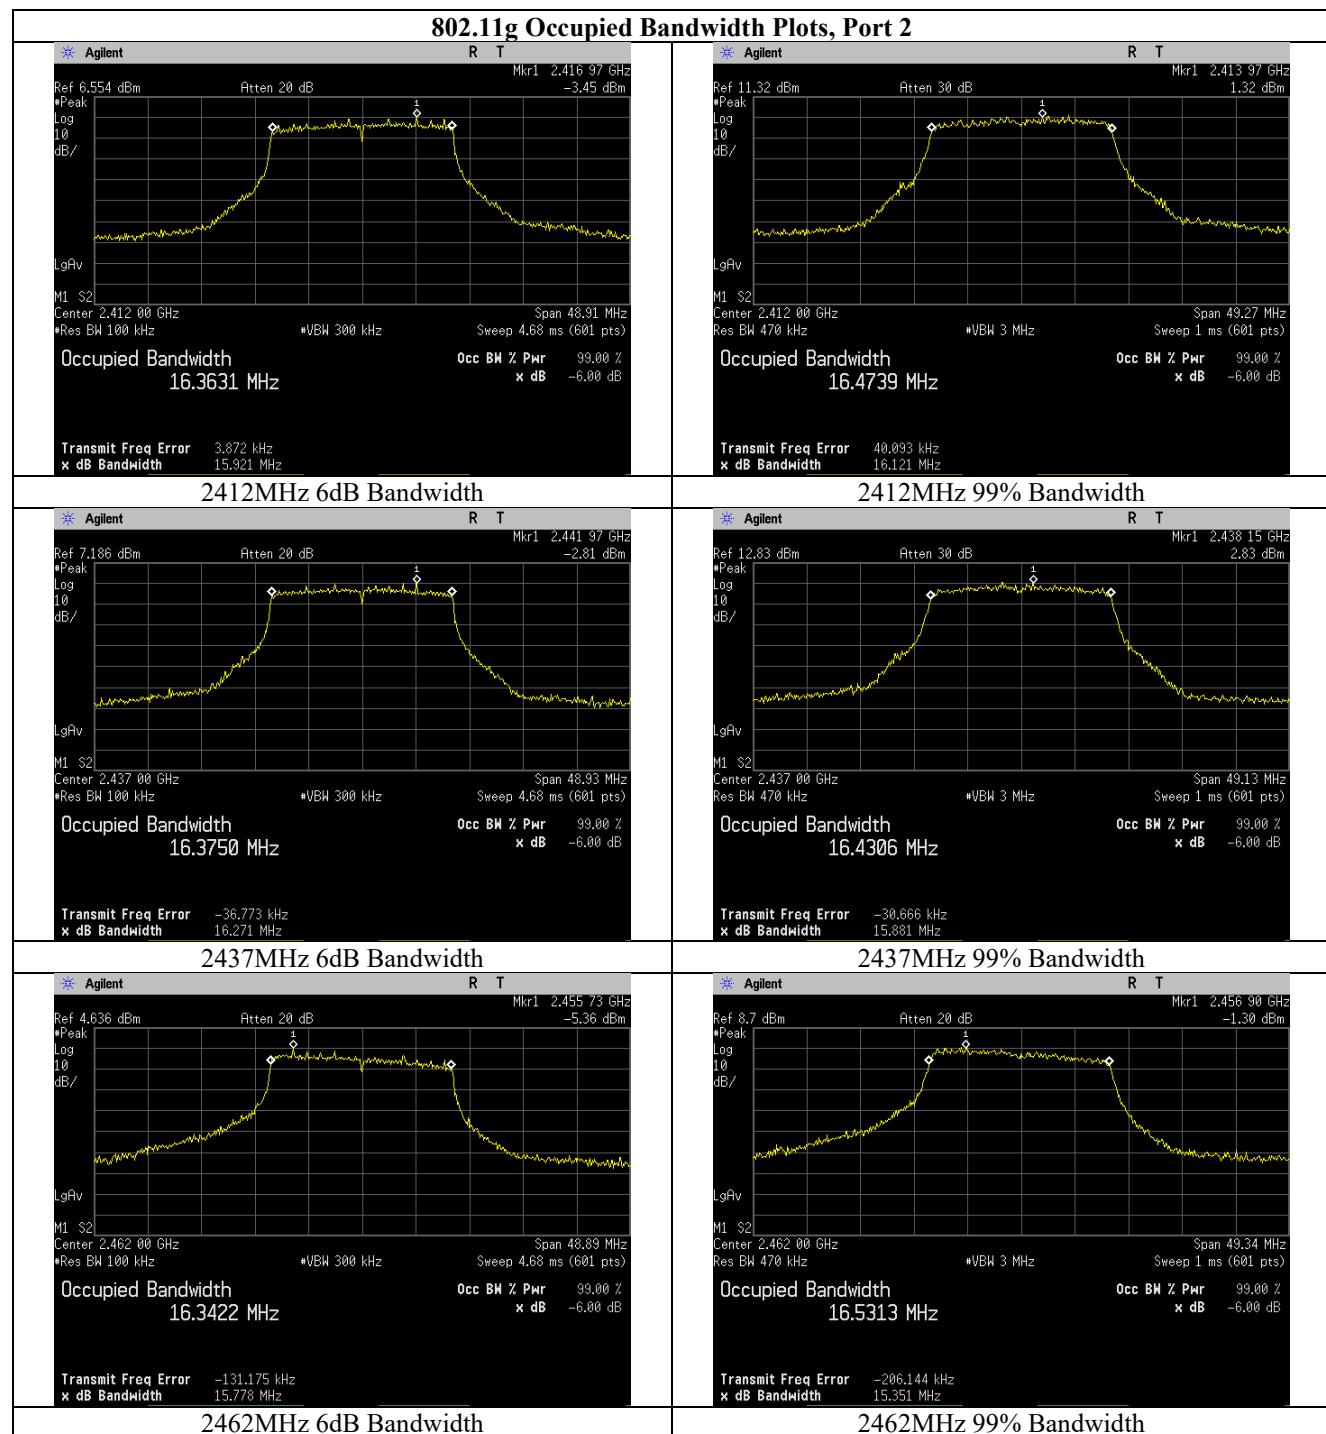

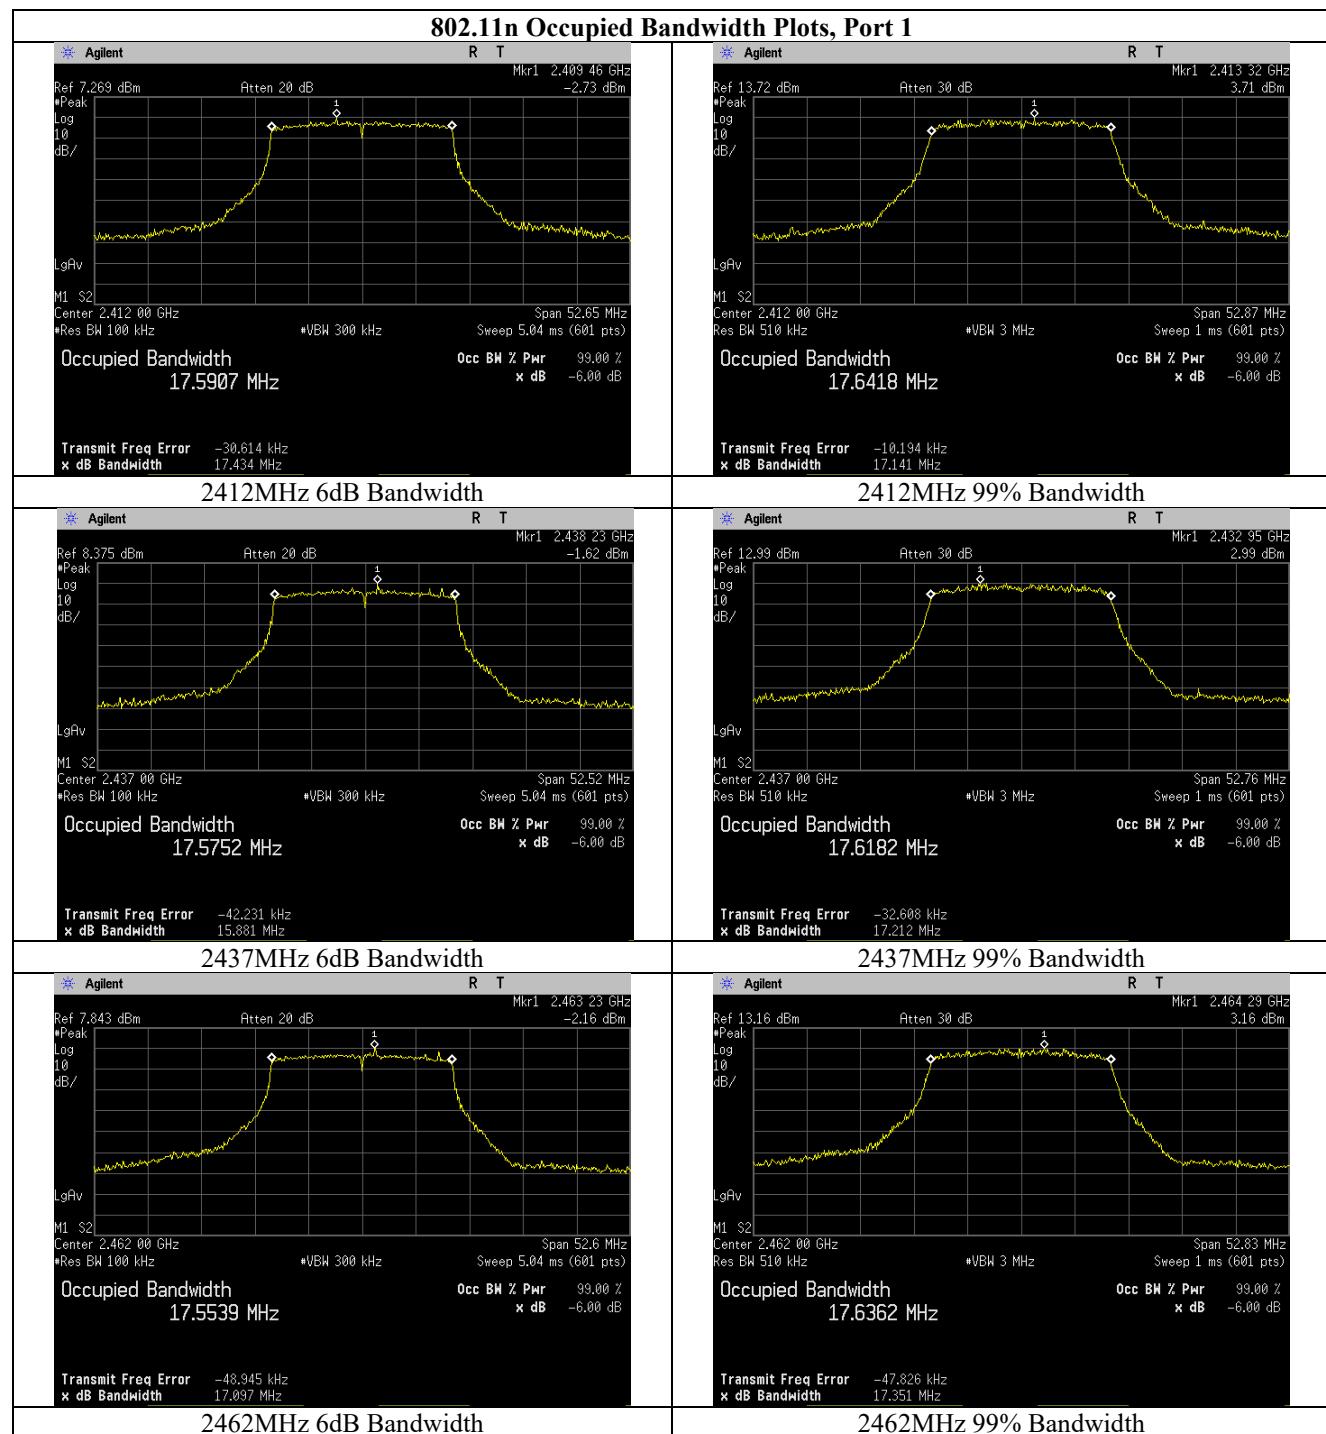

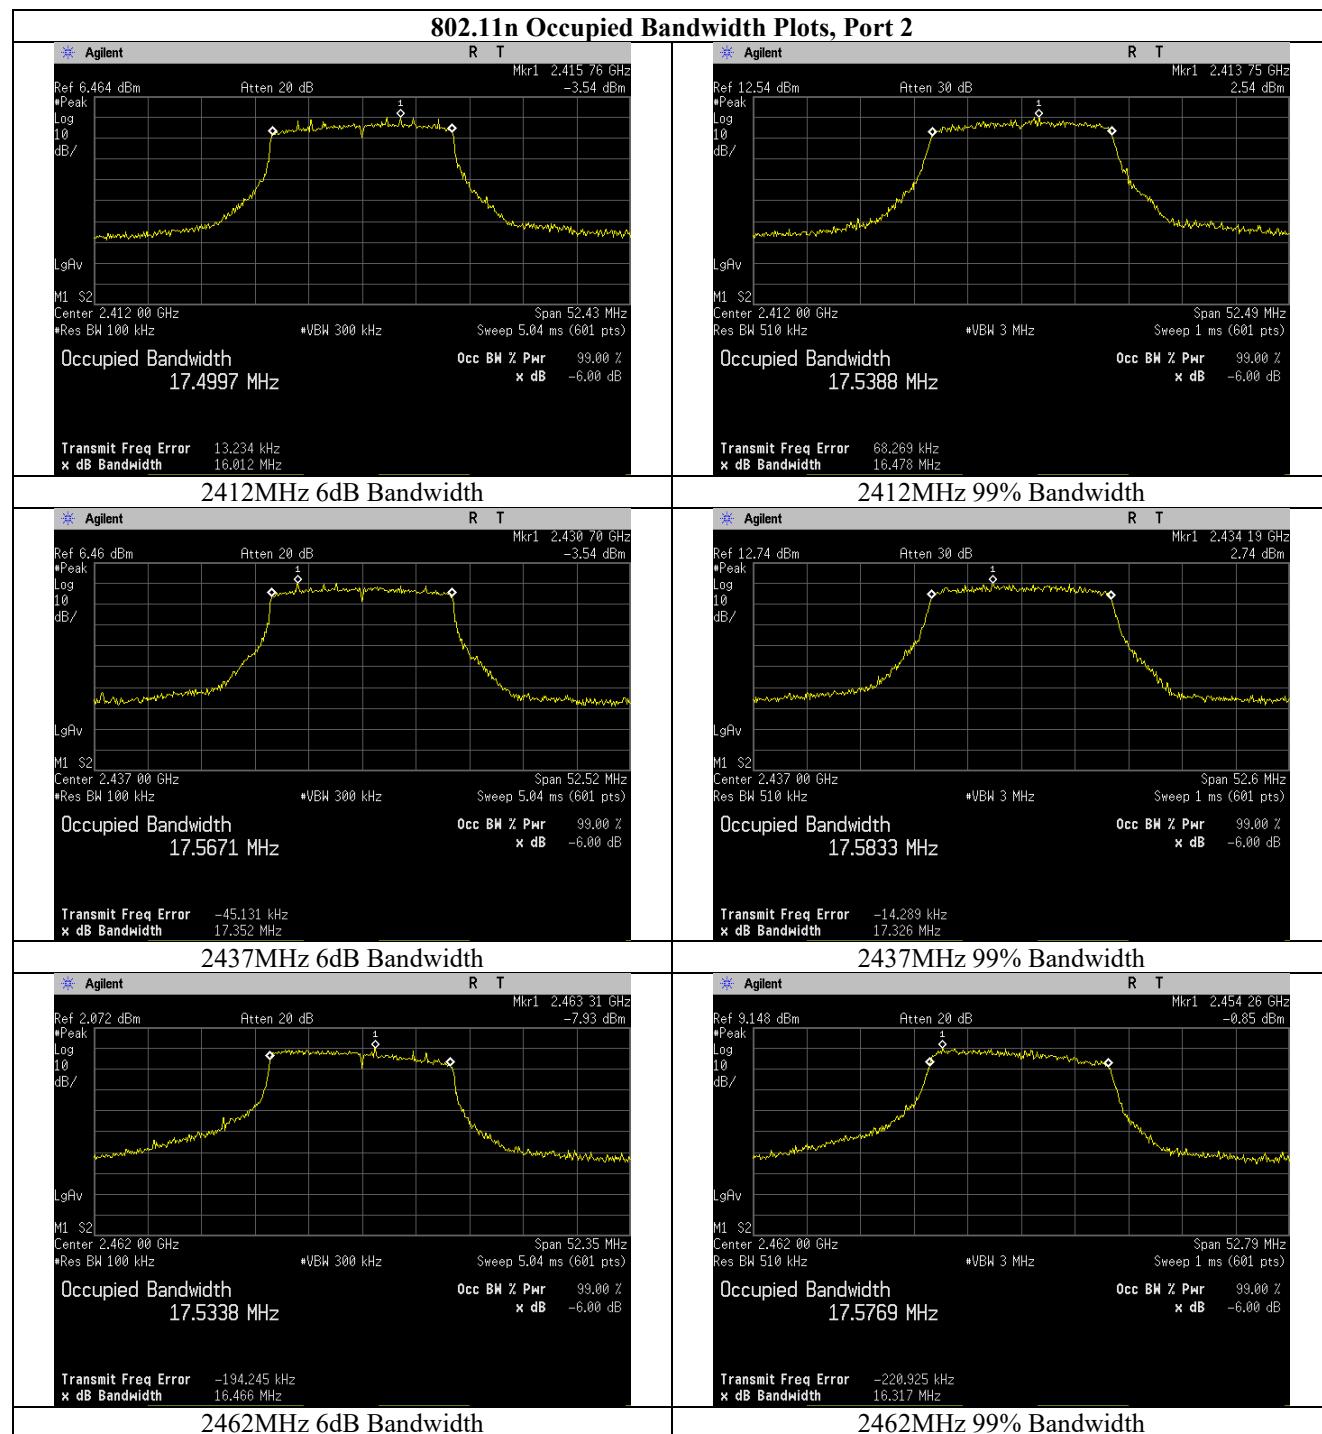

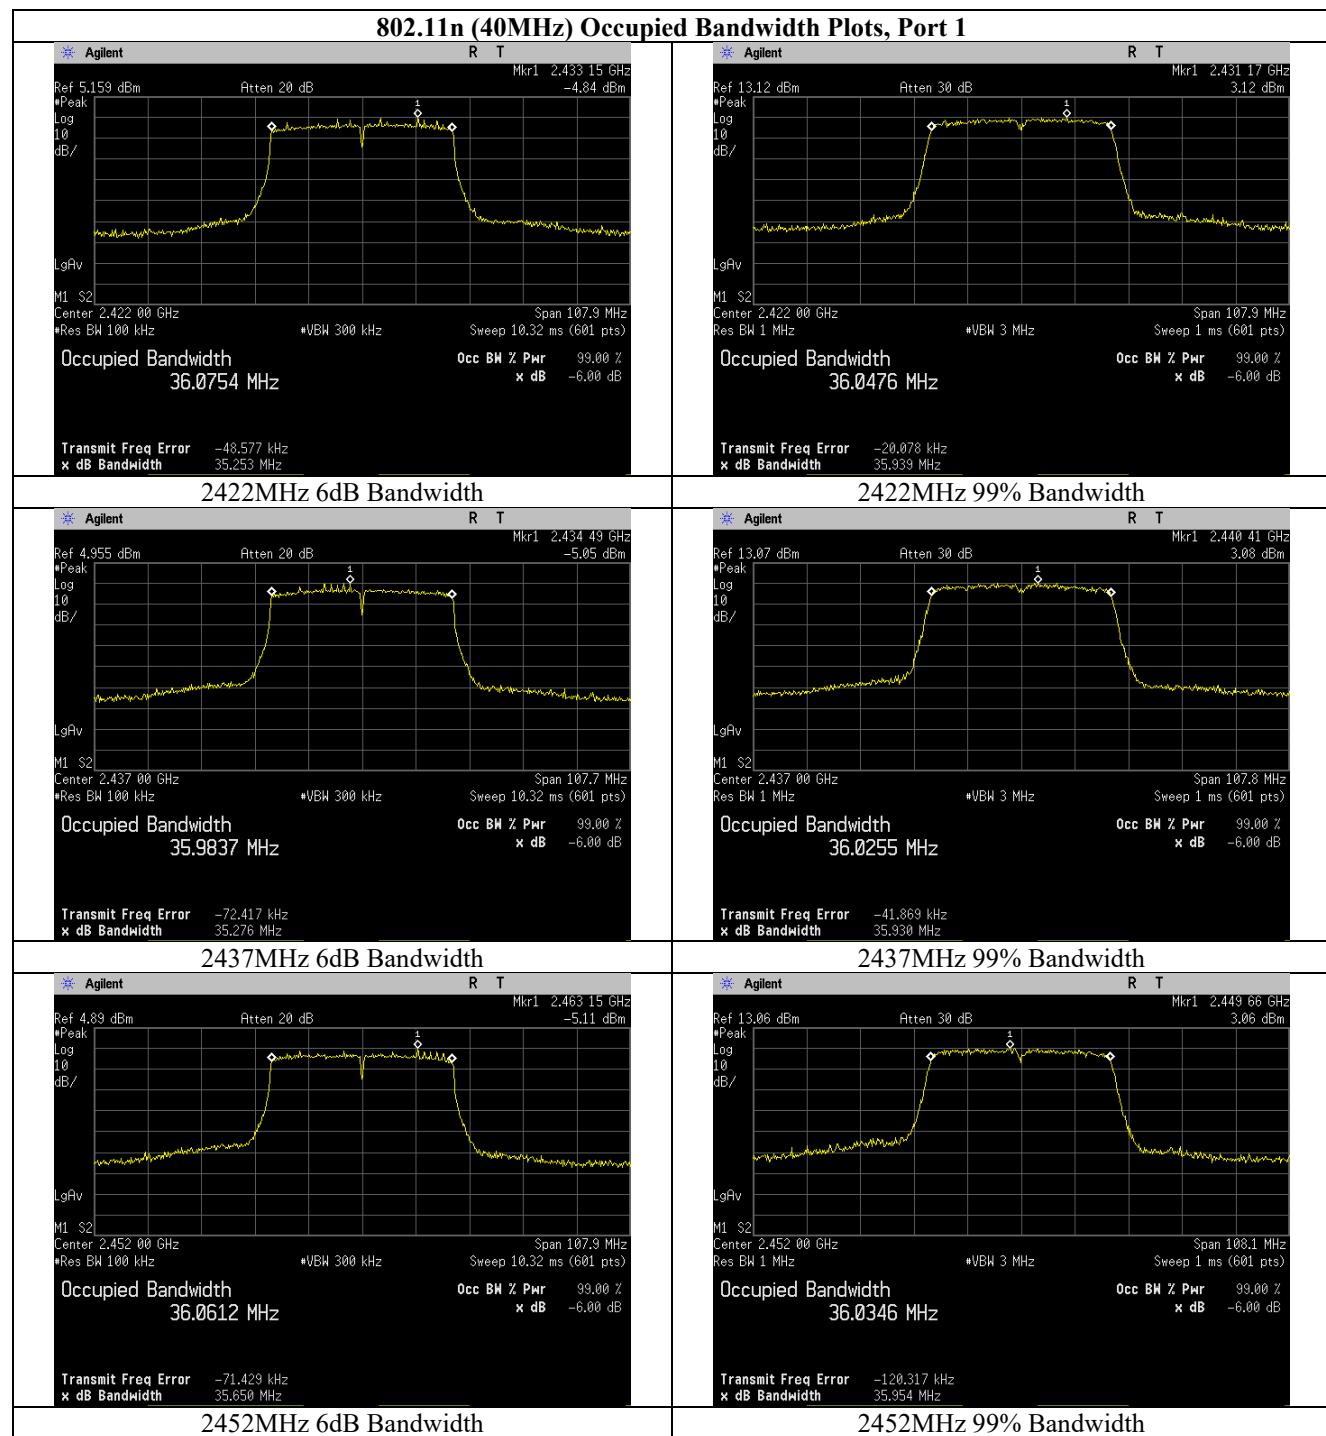



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(b) Conducted Output Power

**Test Requirements:** **§15.247(b):** The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400-2483.5	1.000
5725- 5850	1.000

**Table 7. Output Power Requirements from §15.247(b)**

**§15.247(c):** if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 7, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band and using a point to point application may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, Omni-directional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

**RSS-247 EIRP Limit:** For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

**Test Procedure:** The transmitter was connected to a calibrated spectrum analyzer. The analyzer reference level was offset by cable loss connecting to the test sample. The peak power was measured at the low, mid and high channels of each band at the maximum power level.

**Test Results:** The EUT was compliant with the Peak Power Output limits of **§15.247(b)**.

**Test Engineer(s):** Bryan Taylor

**Test Date(s):** 3/25/2025




Figure 5. Peak Power Output Test Setup

## Test Results

Channel and Mode	Port 1 (dBm)	Port 2 (dBm)	Limit (dBm)	Port 1 Margin (dB)	Port 2 Margin (dB)
WIFI_Low Ch_2412MHz_20MHz BW_b-mode	9.12	7.61	30	20.88	22.39
WIFI_Mid Ch_2437MHz_20MHz BW_b-mode	10.47	9.54	30	19.53	20.46
WIFI_High Ch_2462MHz_20MHz BW_b-mode	9.03	4.74	30	20.97	25.26
WIFI_Low Ch_2412MHz_20MHz BW_g-mode	7.60	7.14	30	22.4	22.86
WIFI_Mid Ch_2437MHz_20MHz BW_g-mode	8.77	8.22	30	21.23	21.78
WIFI_High Ch_2462MHz_20MHz BW_g-mode	6.79	4.79	30	23.21	25.21

Figure 6. Conducted Power Output, Test Results (SISO Modes)

Channel and Mode	Transmit Port	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
WIFI_Low Ch_2412MHz_20MHz BW_b-mode	1	9.12	4.07	13.19	36	22.81
WIFI_Mid Ch_2437MHz_20MHz BW_b-mode	1	10.47	4.07	14.54	36	21.46
WIFI_High Ch_2462MHz_20MHz BW_b-mode	1	9.03	4.07	13.1	36	22.9
WIFI_Low Ch_2412MHz_20MHz BW_g-mode	1	7.60	4.07	11.67	36	24.33
WIFI_Mid Ch_2437MHz_20MHz BW_g-mode	1	8.77	4.07	12.84	36	23.16
WIFI_High Ch_2462MHz_20MHz BW_g-mode	1	6.79	4.07	10.86	36	25.14
WIFI_Low Ch_2412MHz_20MHz BW_b-mode	2	7.61	4.09	11.7	36	24.3
WIFI_Mid Ch_2437MHz_20MHz BW_b-mode	2	9.54	4.09	13.63	36	22.37
WIFI_High Ch_2462MHz_20MHz BW_b-mode	2	4.74	4.09	8.83	36	27.17
WIFI_Low Ch_2412MHz_20MHz BW_g-mode	2	7.14	4.09	11.23	36	24.77
WIFI_Mid Ch_2437MHz_20MHz BW_g-mode	2	8.22	4.09	12.31	36	23.69
WIFI_High Ch_2462MHz_20MHz BW_g-mode	2	4.79	4.09	8.88	36	27.12

Figure 7. EIRP, Test Results (SISO Modes)


Channel and Mode	Port 1 (dBm)	Port 2 (dBm)	Sum (dBm)	Limit (dBm)	Margin (dB)
WIFI_Low Ch_2412MHz_20MHz BW_n-mode	8.58	6.71	10.75	30.00	19.25
WIFI_Mid Ch_2437MHz_20MHz BW_n-mode	8.63	7.93	11.30	30.00	18.70
WIFI_High Ch_2462MHz_20MHz BW_n-mode	8.70	4.46	10.09	30.00	19.91
WIFI_Low Ch_2422MHz_40MHz BW_n-mode	8.64	7.25	11.01	30.00	18.99
WIFI_Mid Ch_2437MHz_40MHz BW_n-mode	8.95	7.67	11.37	30.00	18.63
WIFI_High Ch_2452MHz_40MHz BW_n-mode	9.01	9.95	12.52	30.00	17.48


Figure 8. Conducted Power Output, Test Results (MIMO Modes)


Channel and Mode	Conducted Power Sum (dBm)	Antenna Array gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
WIFI_Low Ch_2412MHz_20MHz BW_n-mode	10.75	7.08	17.83	36	18.17
WIFI_Mid Ch_2437MHz_20MHz BW_n-mode	11.30	7.08	18.38	36	17.62
WIFI_High Ch_2462MHz_20MHz BW_n-mode	10.09	7.08	17.17	36	18.83
WIFI_Low Ch_2422MHz_40MHz BW_n-mode	11.01	7.08	18.09	36	17.91
WIFI_Mid Ch_2437MHz_40MHz BW_n-mode	11.37	7.08	18.45	36	17.55
WIFI_High Ch_2452MHz_40MHz BW_n-mode	12.52	7.08	19.6	36	16.4


Figure 9. EIRP, Test Results (MIMO Modes)

## Peak Power Output Test Results

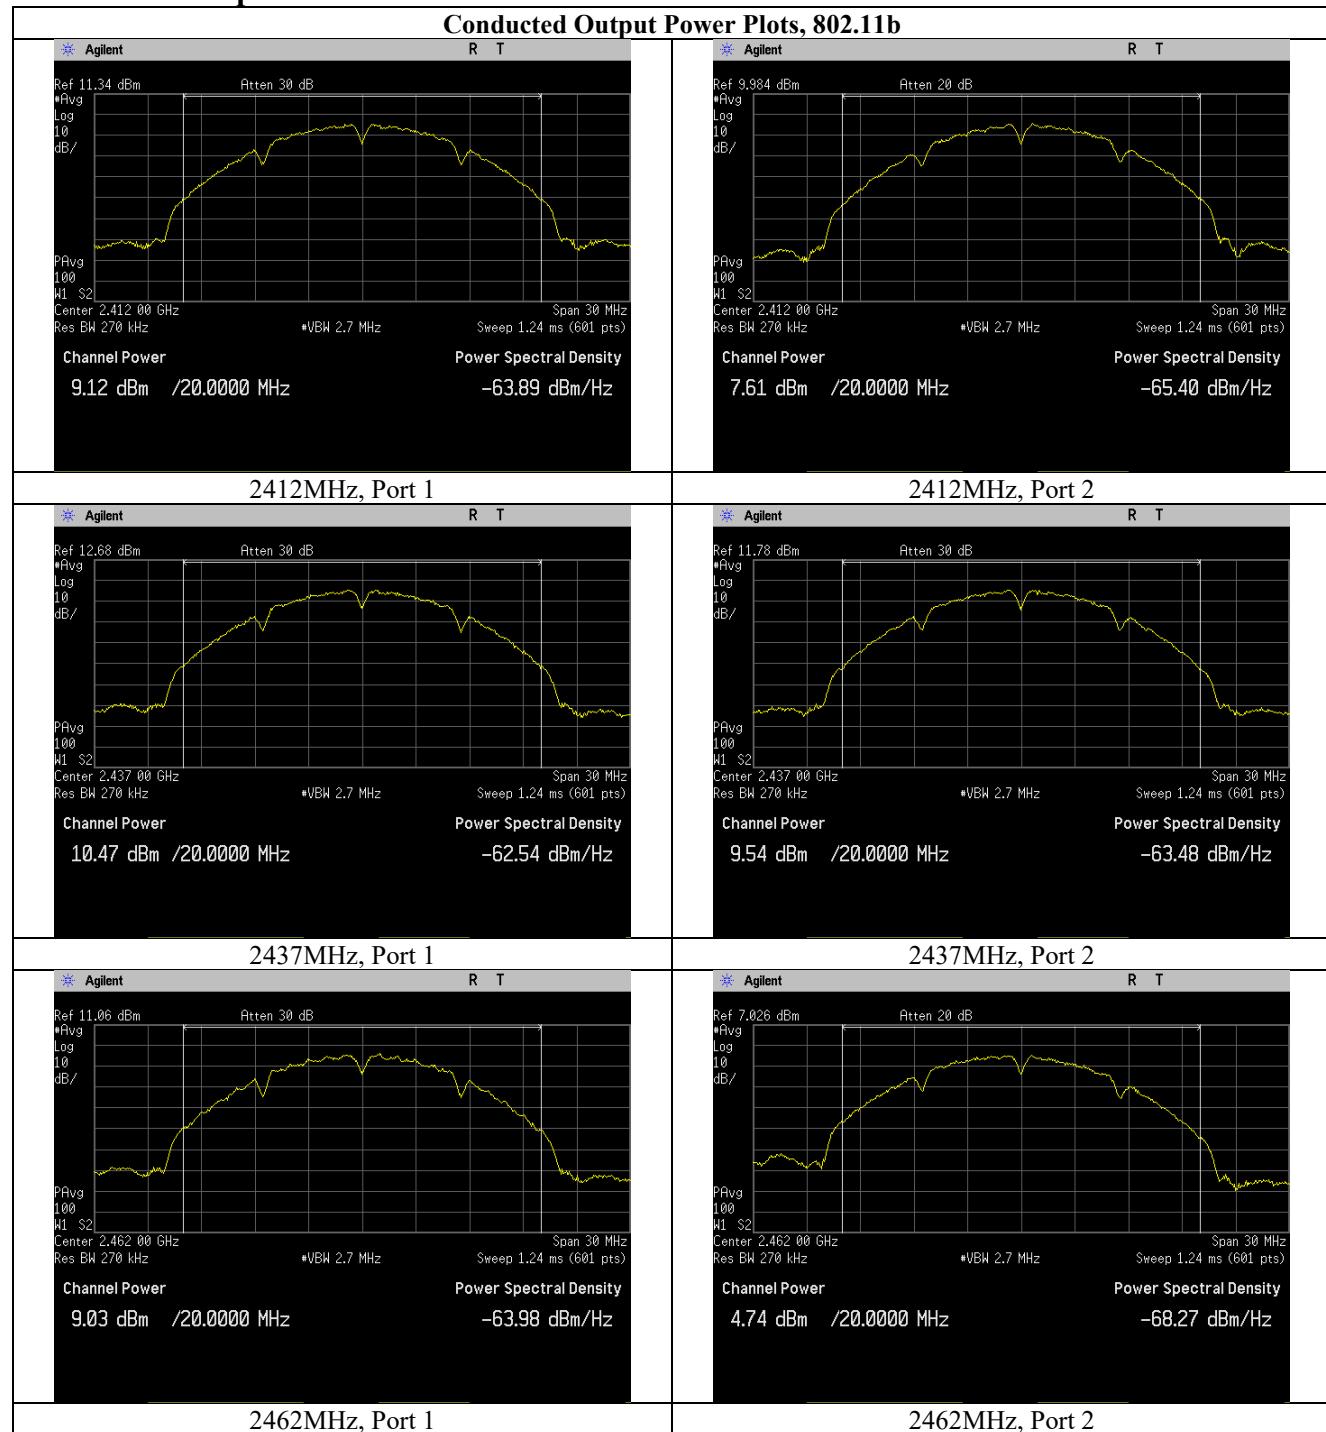

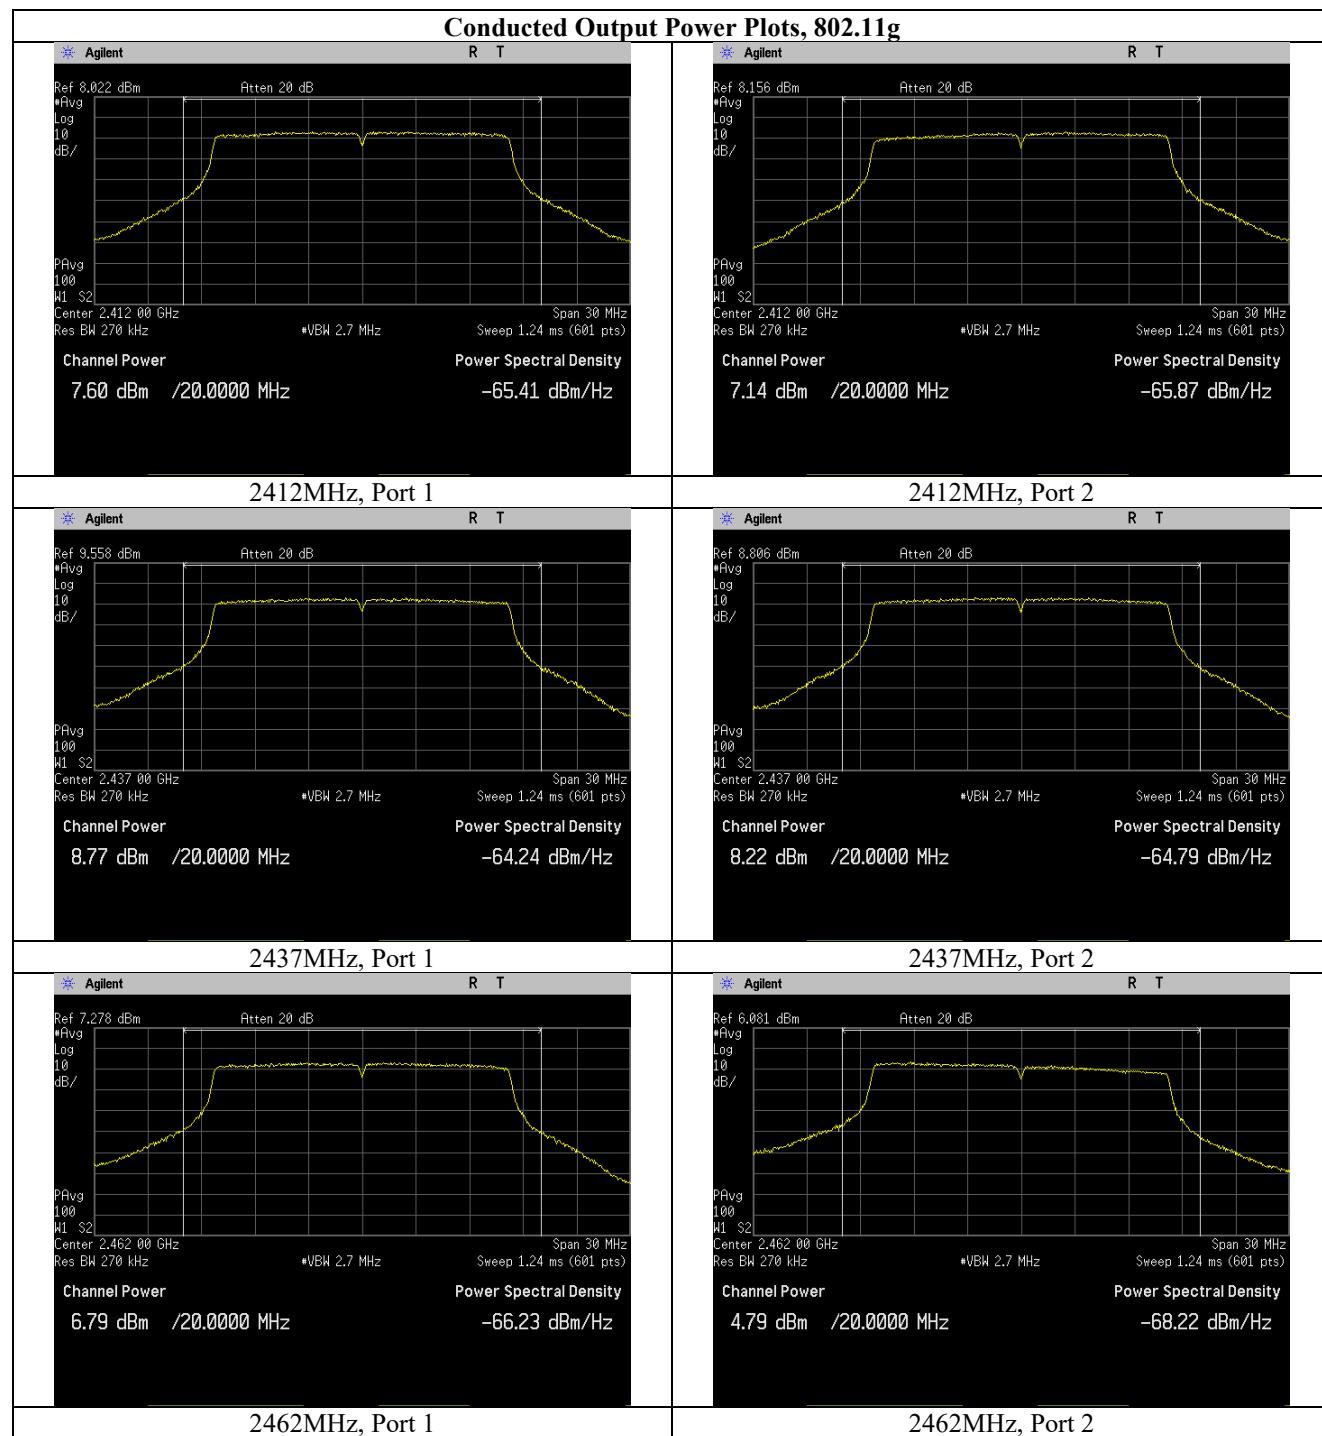

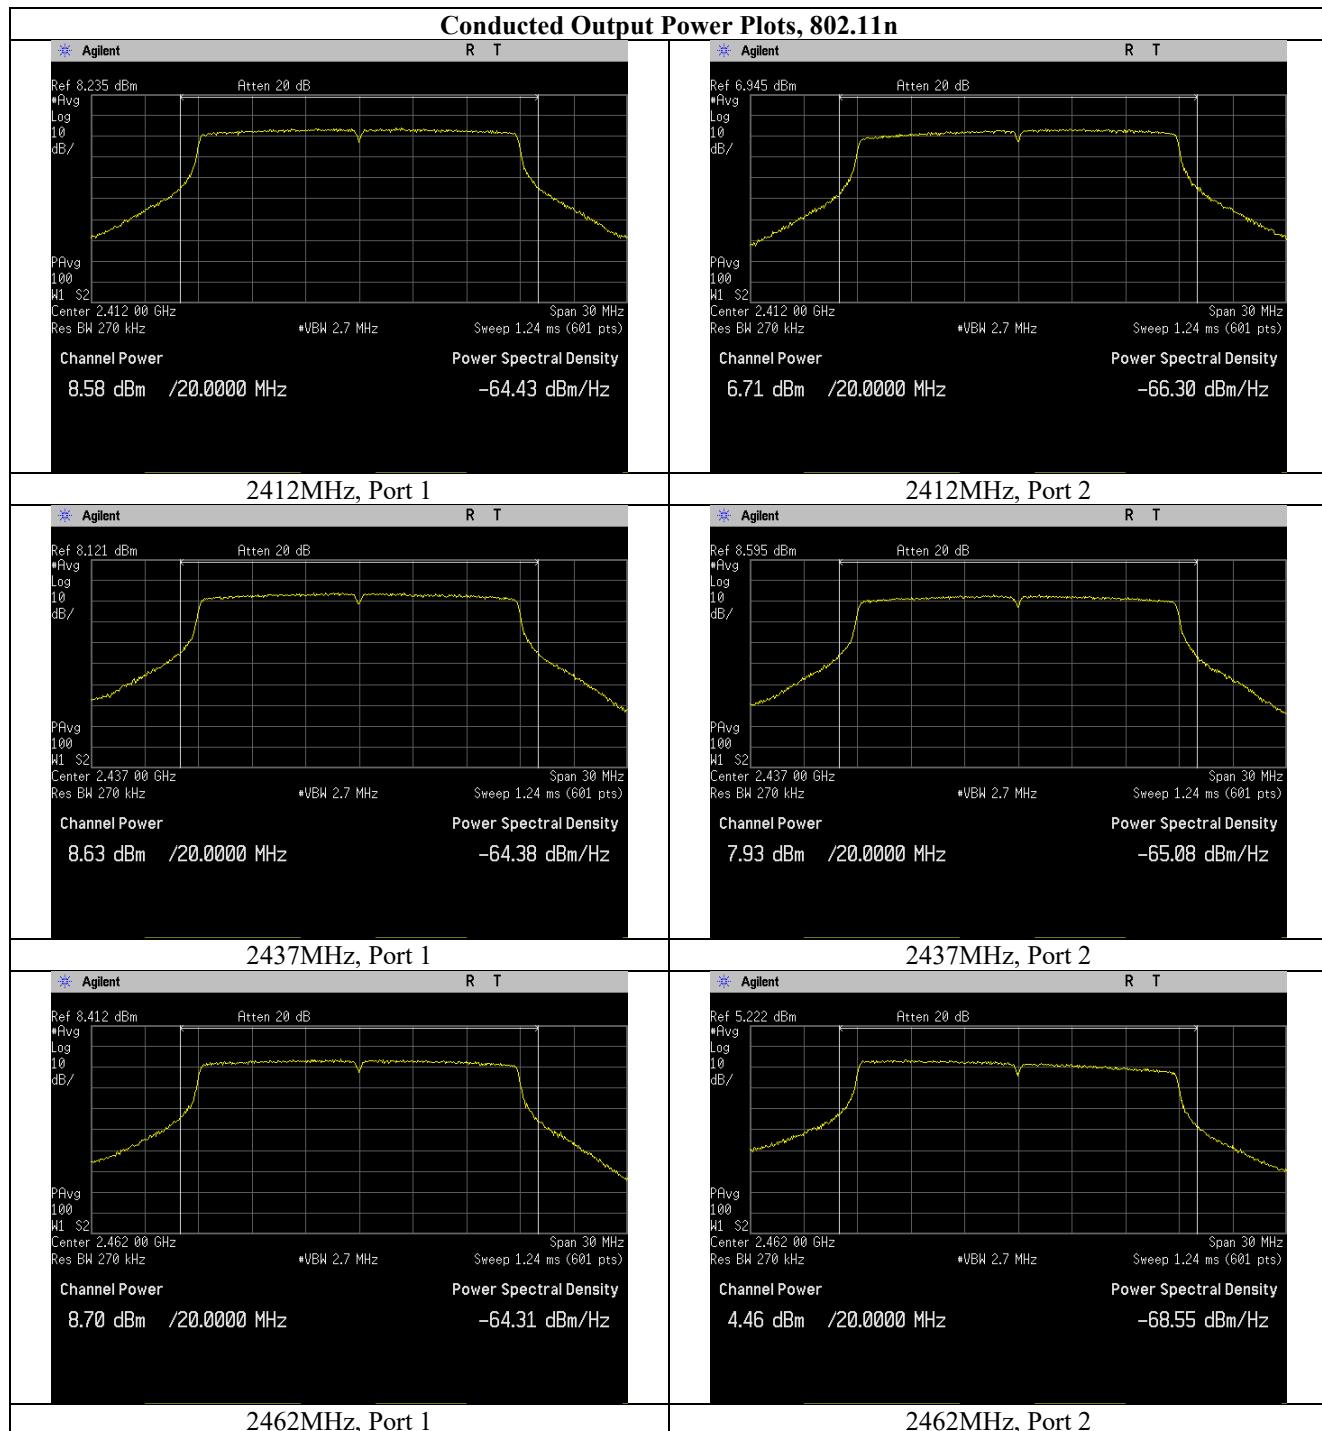

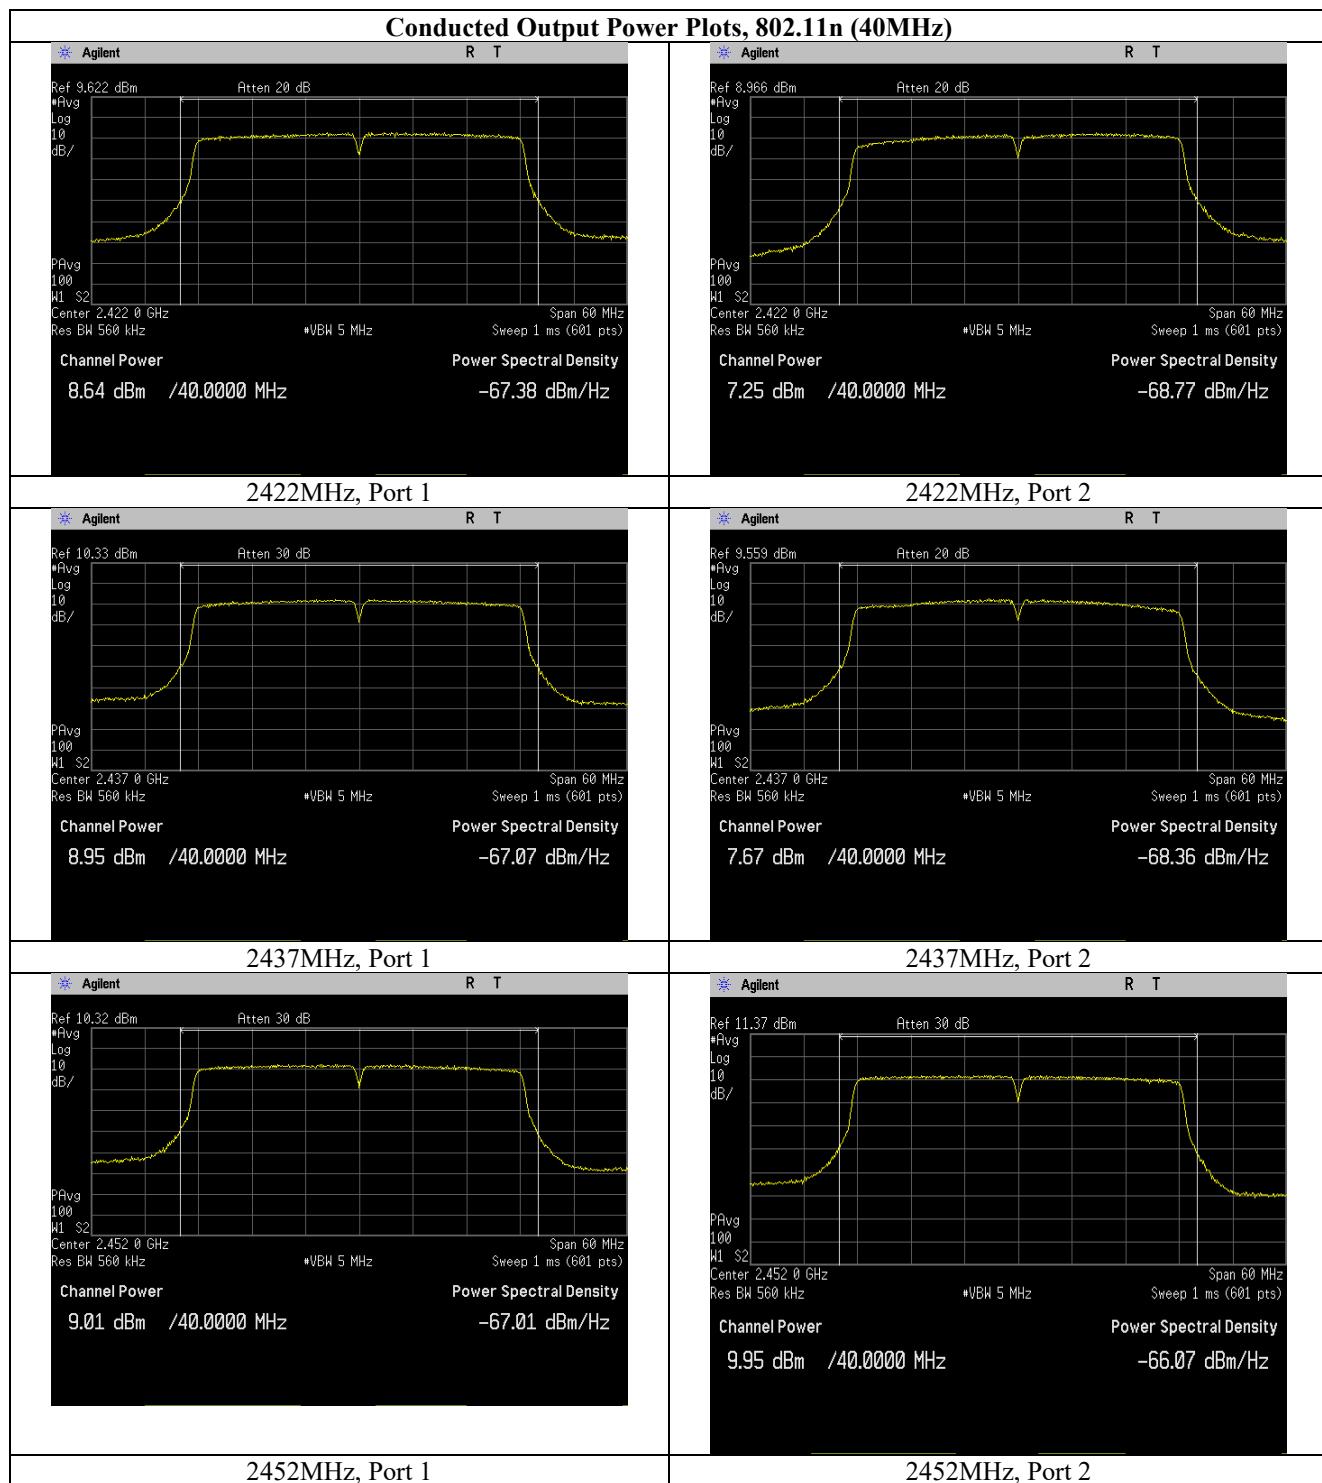

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(e) Peak Power Spectral Density

**Test Requirements:** **§15.247(e):** For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.


**Test Procedure:** The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level. The RBW was set between 3kHz and 100 kHz. The VBW was set to 3x the RBW. The spectrum analyzer was set to an auto sweep time and a peak detector was used. Measurements were carried out at the low, mid and high channels.

**Test Results:** The EUT was compliant with the peak power spectral density limits of **§ 15.247 (e)**.

The peak power spectral density was determined from plots on the following page(s).

**Test Engineer:** Bryan Taylor


**Test Date:** 3/25/2025

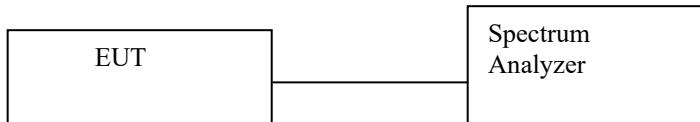



**Figure 10. Block Diagram, Peak Power Spectral Density Test Setup**


Channel and mode	Port 1 (mW)	Port 2 (mW)	Port 1 (dBm)	Port 2 (dBm)	Sum (dBm)	Limit (dBm)	Margin dB
WIFI_Low Ch_2412MHz_20MHz BW_b-mode	0.1264	0.0938	-8.98	-10.28	-6.57	8	14.57
WIFI_Mid Ch_2437MHz_20MHz BW_b-mode	0.1553	0.1502	-8.09	-8.23	-5.15	8	13.15
WIFI_High Ch_2462MHz_20MHz BW_b-mode	0.8978	0.0447	-0.47	-13.50	-0.26	8	8.26
WIFI_Low Ch_2412MHz_20MHz BW_g-mode	0.0453	0.0736	-13.44	-11.33	-9.25	8	17.25
WIFI_Mid Ch_2437MHz_20MHz BW_g-mode	0.0599	0.0660	-12.23	-11.80	-9.00	8	17.00
WIFI_High Ch_2462MHz_20MHz BW_g-mode	0.0562	0.0369	-12.51	-14.33	-10.31	8	18.31
WIFI_Low Ch_2412MHz_20MHz BW_n-mode	0.0507	0.0483	-12.95	-13.16	-10.05	8	18.05
WIFI_Mid Ch_2437MHz_20MHz BW_n-mode	0.0473	0.0564	-13.25	-12.49	-9.84	8	17.84
WIFI_High Ch_2462MHz_20MHz BW_n-mode	0.0577	0.0263	-12.39	-15.80	-10.75	8	18.75
WIFI_Low Ch_2422MHz_40MHz BW_n-mode	0.0352	0.0219	-14.53	-16.59	-12.43	8	20.43
WIFI_Mid Ch_2437MHz_40MHz BW_n-mode	0.0365	0.0207	-14.37	-16.83	-12.42	8	20.42
WIFI_High Ch_2452MHz_40MHz BW_n-mode	0.0277	0.0351	-15.58	-14.55	-12.02	8	20.02

Figure 11. Peak Power Spectral Density, Test Results

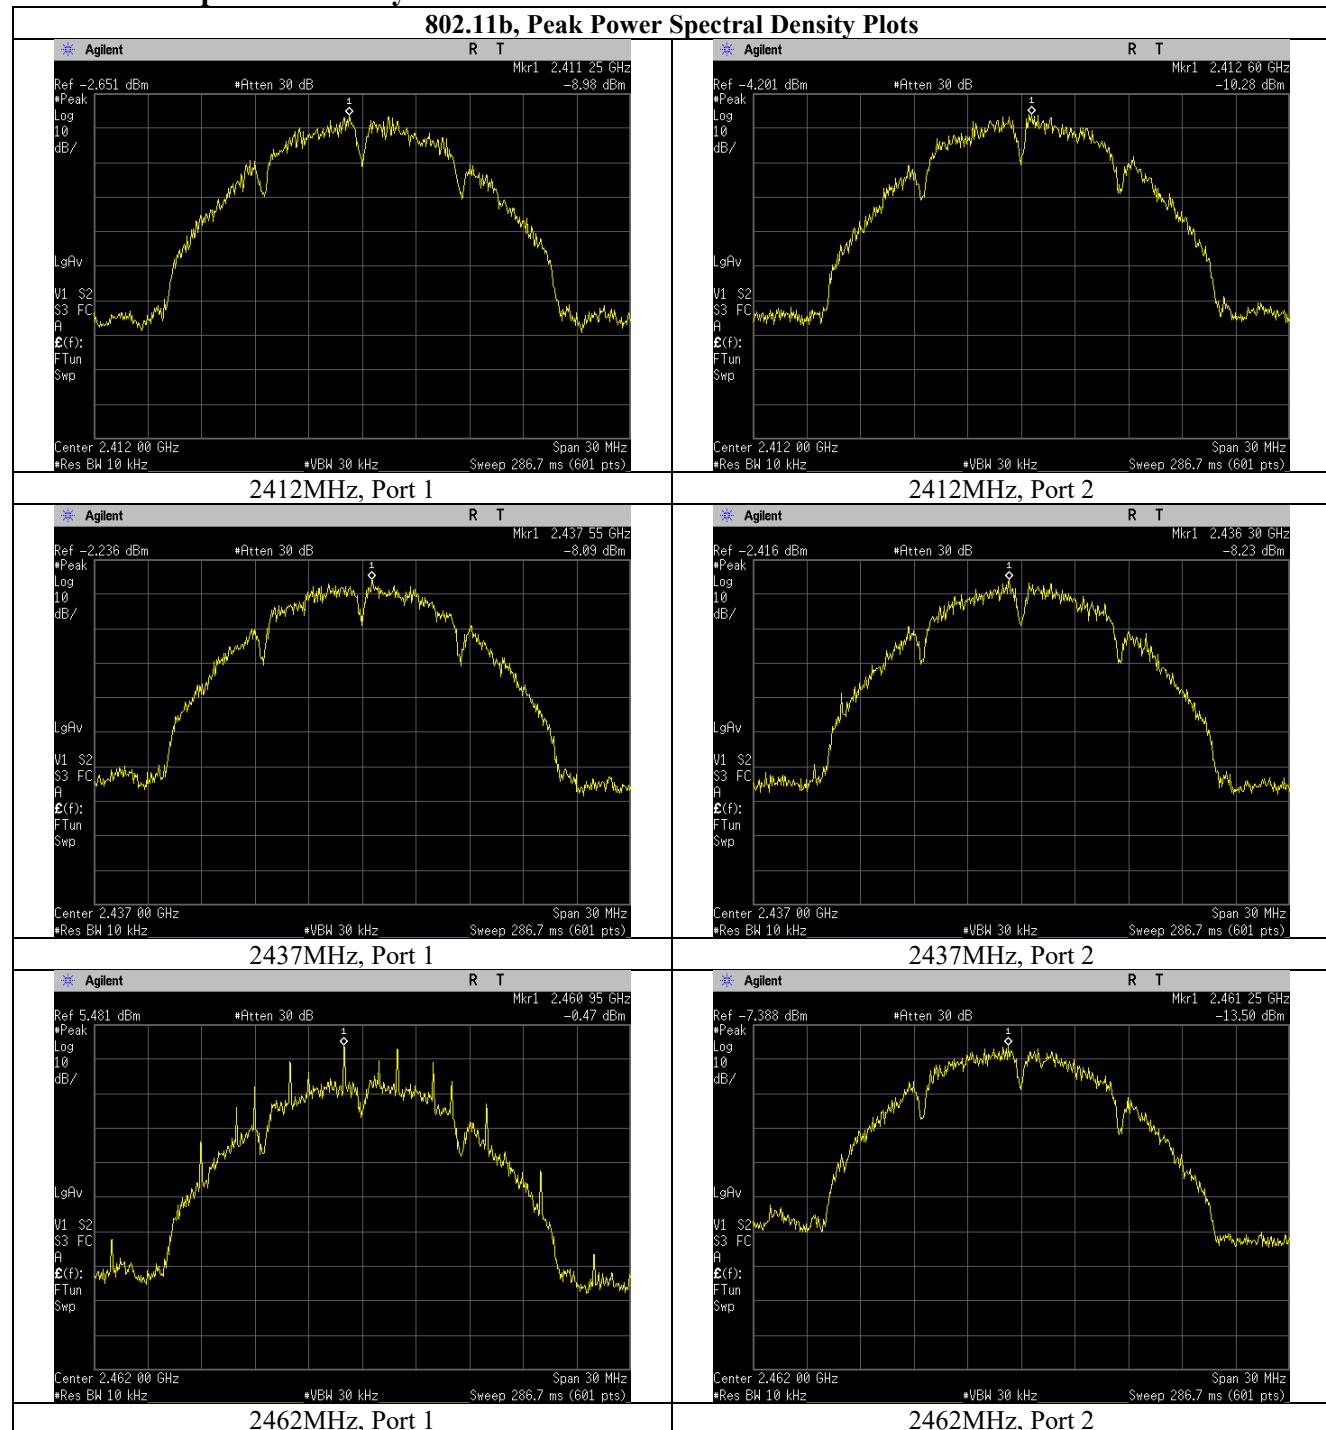**Peak Power Spectral Density**

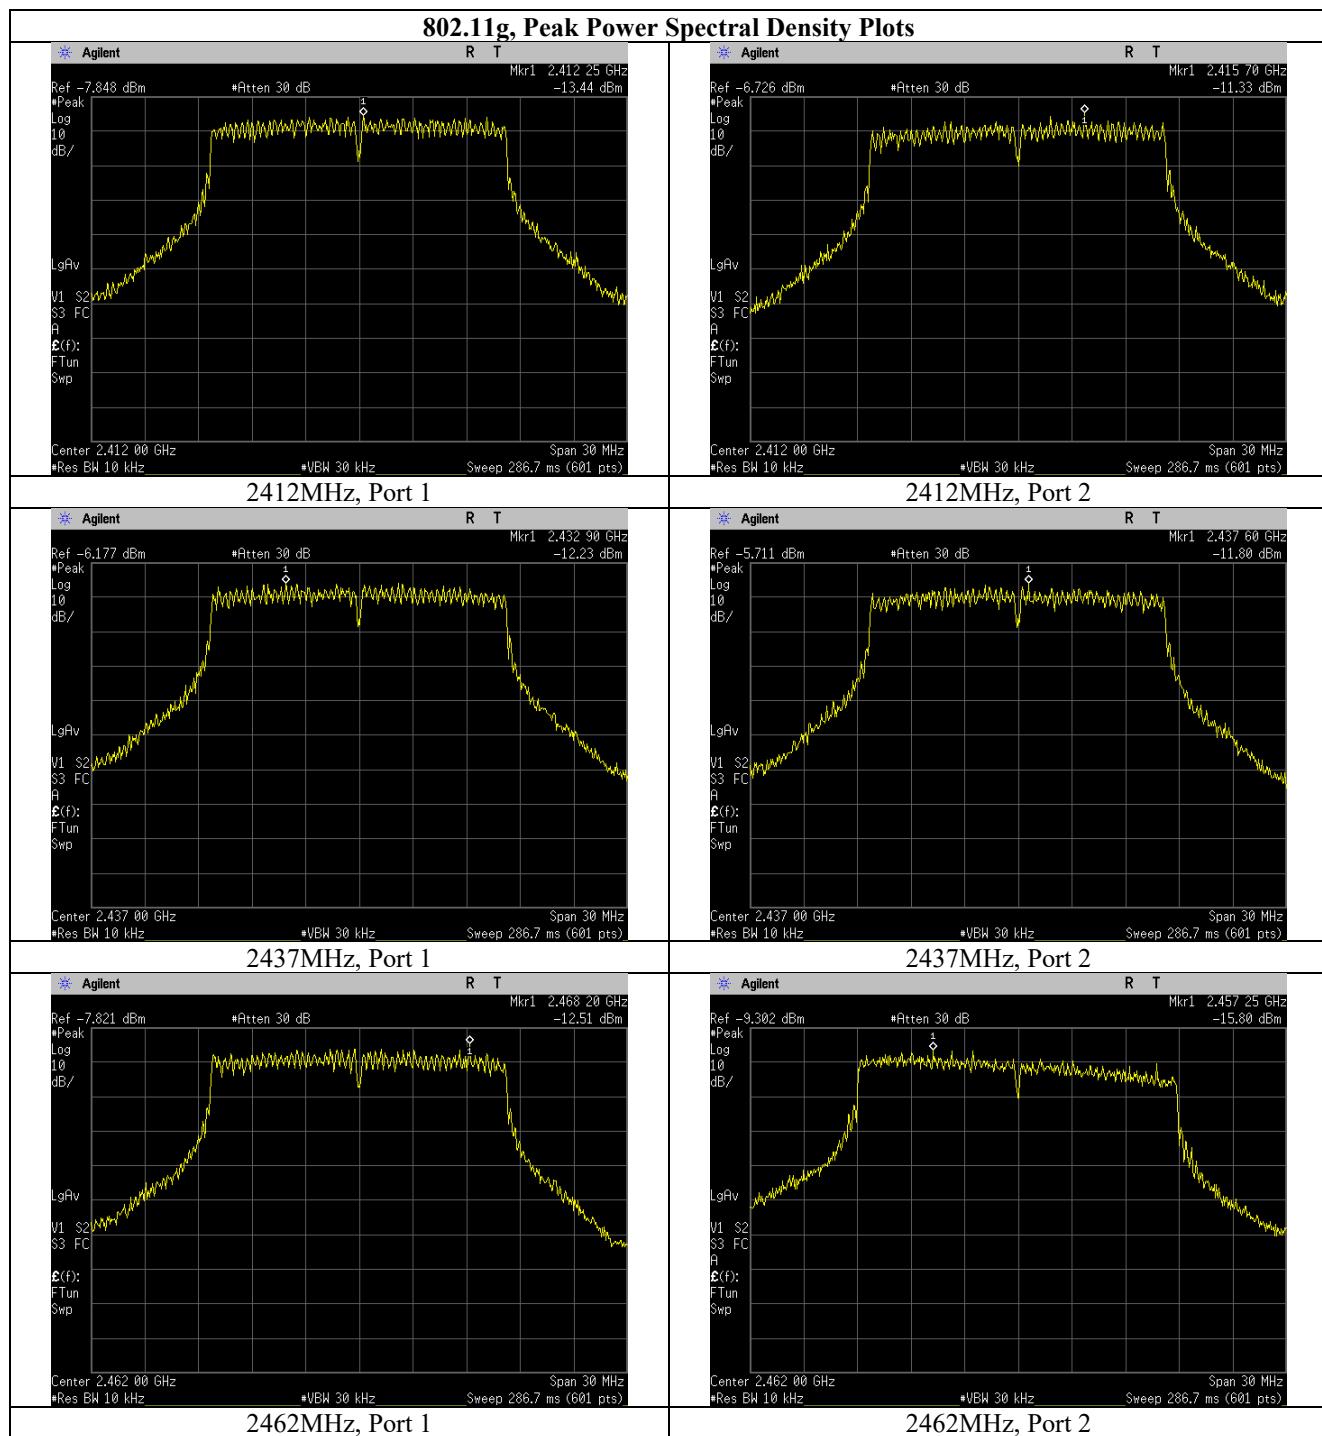

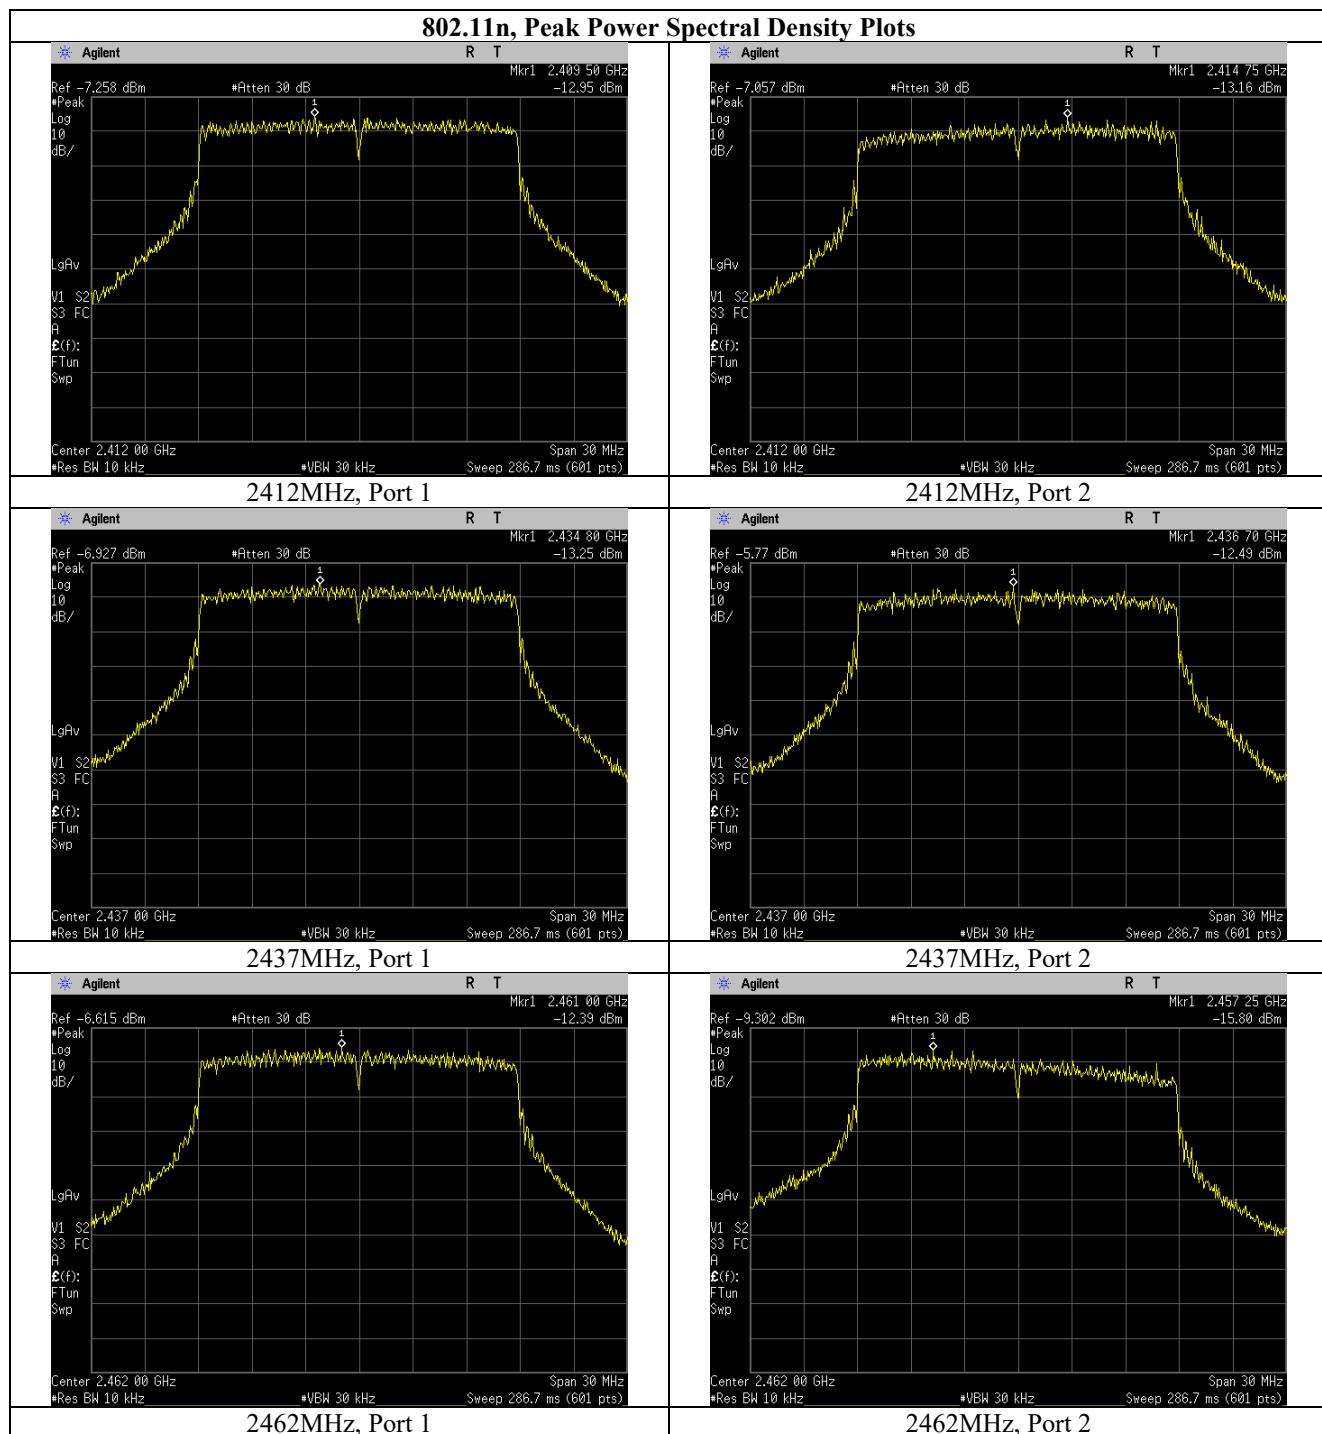

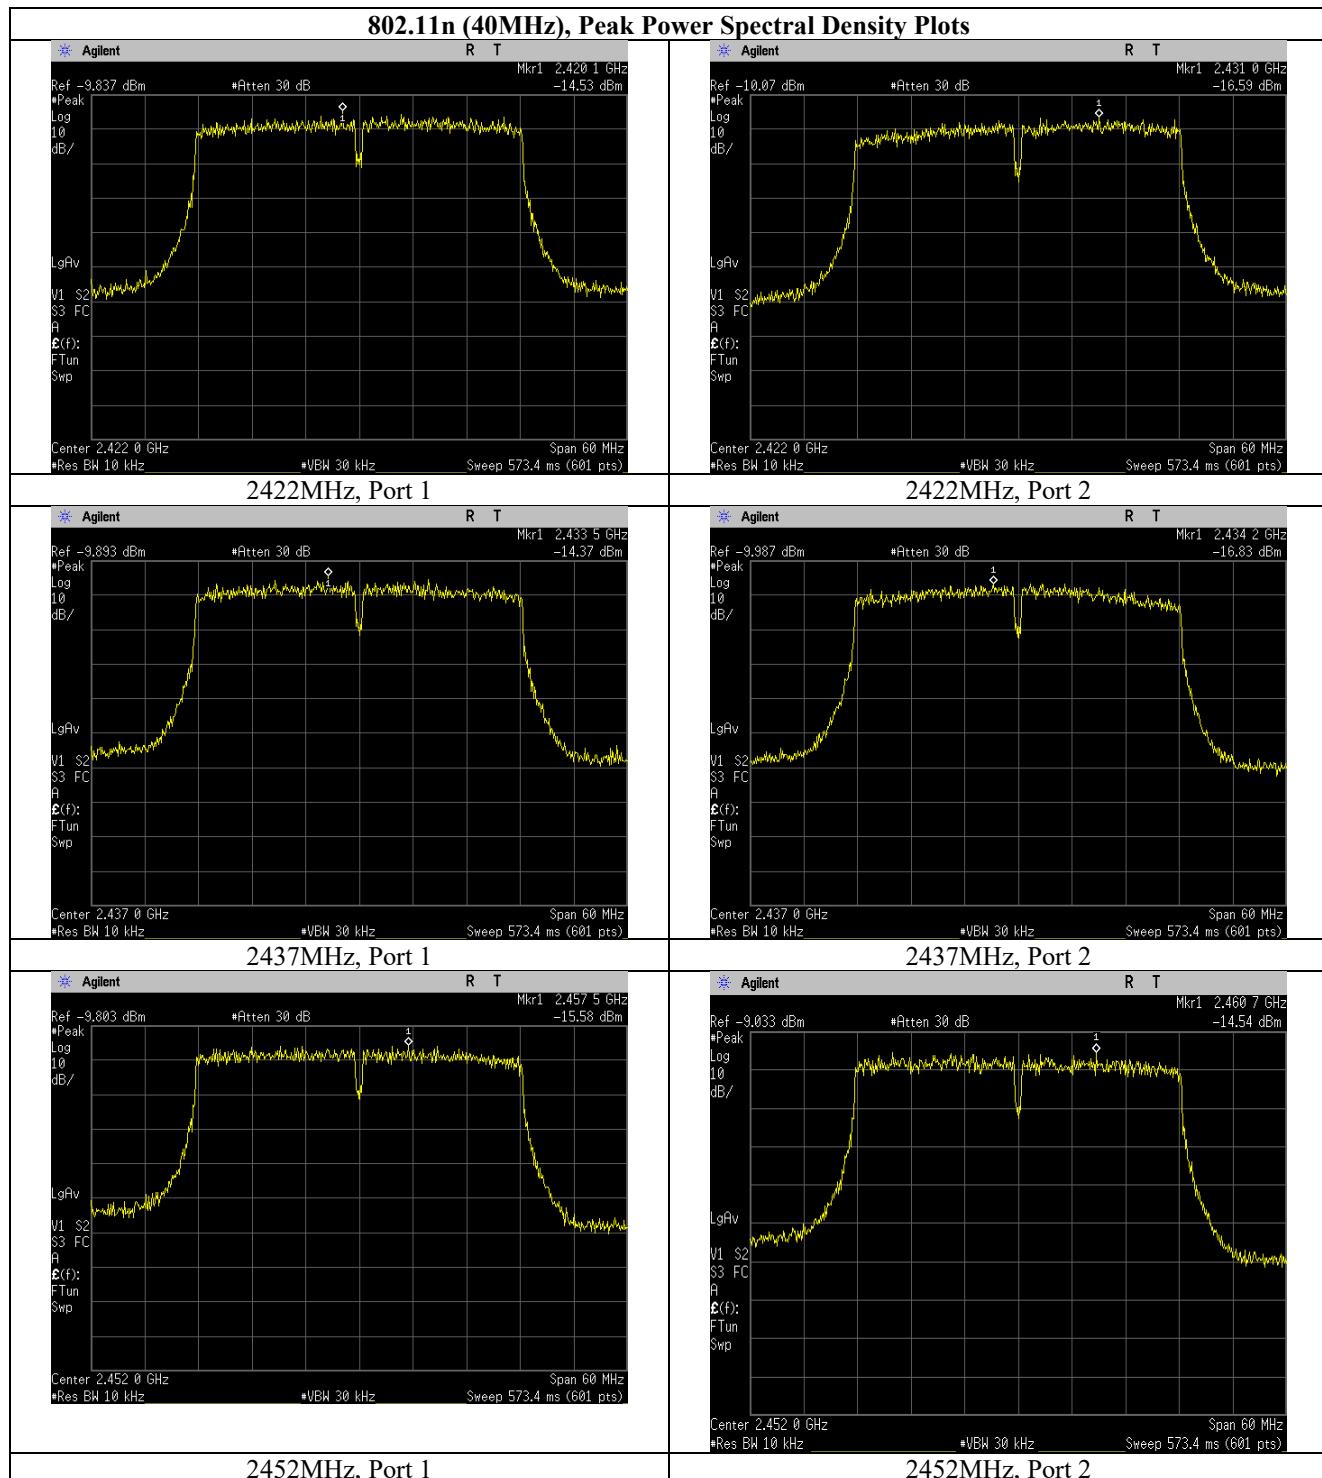


## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) Radiated Spurious Emissions Requirements

**Test Requirements:** §15.247(d); §15.205: Emissions outside the frequency band.

**§15.247(d):** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

**§15.205(a):** Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
<sup>1</sup> 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358.36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	( <sup>2</sup> )

**Table 8. Restricted Bands of Operation**

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

<sup>2</sup> Above 38.6

**Test Requirement(s):** **§ 15.209 (a):** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 9.

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dB $\mu$ V) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

**Table 9. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)**

**Test Procedures:** The antenna-port methodology form ANSI C63.10: 2013 Section 11.12.2 was utilized as an alternative to radiated emissions in the restricted bands.

The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level. For frequencies below 1GHz, the RBW was set to 100 kHz and the VBW was set to 3x the RBW. For frequencies above 1GHz the RBW was set to 1MHz and the VBW was set to 3x the RBW. The spectrum analyzer was set to an auto sweep time and a peak detector was used. The maximum antenna gain was added to the measurement trace as was the appropriate maximum ground reflection factor as outlined in section 11.12.2 of ANSI C63.10. The resultant EIRP was then converted to an equivalent electric field strength which is shown on the graphical plots which follow. Measurements were carried out at the low, mid and high channels.

In order to assess the cabinet radiated spurious emissions, a radiated scan was performed with the antenna of proper impedance installed. The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes if multiple mounting orientations are supported. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line.

Radiated measurements below 30MHz were performed in a semi-anechoic chamber that has been correlated to an open area site.

**Test Results:** The EUT was compliant with the Radiated Spurious Emission limits of § 15.247(d).

A table is presented showing the worst-case restricted band edge measurements for transmissions adjacent to the restricted bands with the directional array gain included.

**Test Engineer(s):** An Dang

**Test Date(s):** 2/14/2025

**Worst Case Cabinet Spurious Emissions**

Frequency [MHz]	PK+ Level [dB $\mu$ V/m]	PK+ Limit [dB $\mu$ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
0.093	41.13	108.26	67.13	11.61	H	106.7	1	0.200	Pass
0.094	41.76	108.17	66.41	11.56	V	177.4	1	0.200	Pass
0.098	41.84	107.78	65.95	11.36	H	275.4	1	0.200	Pass
0.108	42.36	106.96	64.60	11.35	V	345.2	1	0.200	Pass
0.506	46.75	73.62	26.87	11.31	H	65.3	1	9.000	Pass
0.510	46.39	73.54	27.15	11.35	V	156.2	1	9.000	Pass


**Figure 12. Worst Case Cabinet Radiation, Below 30MHz**

Frequency [MHz]	QPK Level [dB $\mu$ V/m]	QPK Limit [dB $\mu$ V/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
37.800	7.84	29.55	21.71	-5.89	H	257	3.5	120.000	Pass
73.710	2.00	29.55	27.55	-12.51	H	183.8	3.87	120.000	Pass
120.000	17.05	33.07	16.02	-6.37	H	26.6	3.53	120.000	Pass
120.000	17.86	33.07	15.21	-6.77	V	74.1	1.04	120.000	Pass
166.890	12.44	33.07	20.63	-8.26	V	16.4	1.13	120.000	Pass
240.030	21.74	35.57	13.83	-7.36	V	269.8	1.19	120.000	Pass

**Figure 13. Worst Case Cabinet Radiation, 30MHz – 1GHz**

Frequency [MHz]	PK+ Level [dB $\mu$ V/m]	PK+ Limit [dB $\mu$ V/m]	PK+ Margin [dB]	Avg Level [dB $\mu$ V/m]	Avg Limit [dB $\mu$ V/m]	Avg Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Result
4,874.000	45.31	74.00	28.69	36.78	54.00	17.22	-3.45	H	135.4	2.42	Pass
4,874.000	43.32	74.00	30.68	32.44	54.00	21.56	-3.45	V	208.5	3.46	Pass
7,310.000	43.08	74.00	30.92	30.70	54.00	23.30	-2.85	H	95.8	3.5	Pass
7,310.000	43.27	74.00	30.73	30.19	54.00	23.81	-2.85	V	12.2	1	Pass
12,185.000	44.35	74.00	29.65	31.93	54.00	22.07	-1.80	H	193.1	2.71	Pass
12,185.000	45.77	74.00	28.23	31.97	54.00	22.03	-1.80	V	91.1	3.5	Pass
19,434.125	52.30	74.00	21.70	40.80	54.00	13.20	12.35	H	121.7	2.5	Pass
22,030.125	51.03	74.00	22.97	39.10	54.00	14.90	13.07	H	347.7	3.99	Pass
22,852.375	51.29	74.00	22.71	39.35	54.00	14.65	13.94	V	99.5	3.5	Pass
23,869.875	51.13	74.00	22.87	39.87	54.00	14.13	14.43	H	137.7	3.49	Pass
31,412.438	54.26	74.00	19.74	42.68	54.00	11.32	16.60	V	257.9	1.01	Pass
31,525.188	53.95	74.00	20.05	42.48	54.00	11.52	16.79	H	212.7	3.1	Pass

**Figure 14. Worst Case Cabinet Radiation, Above 1GHz**

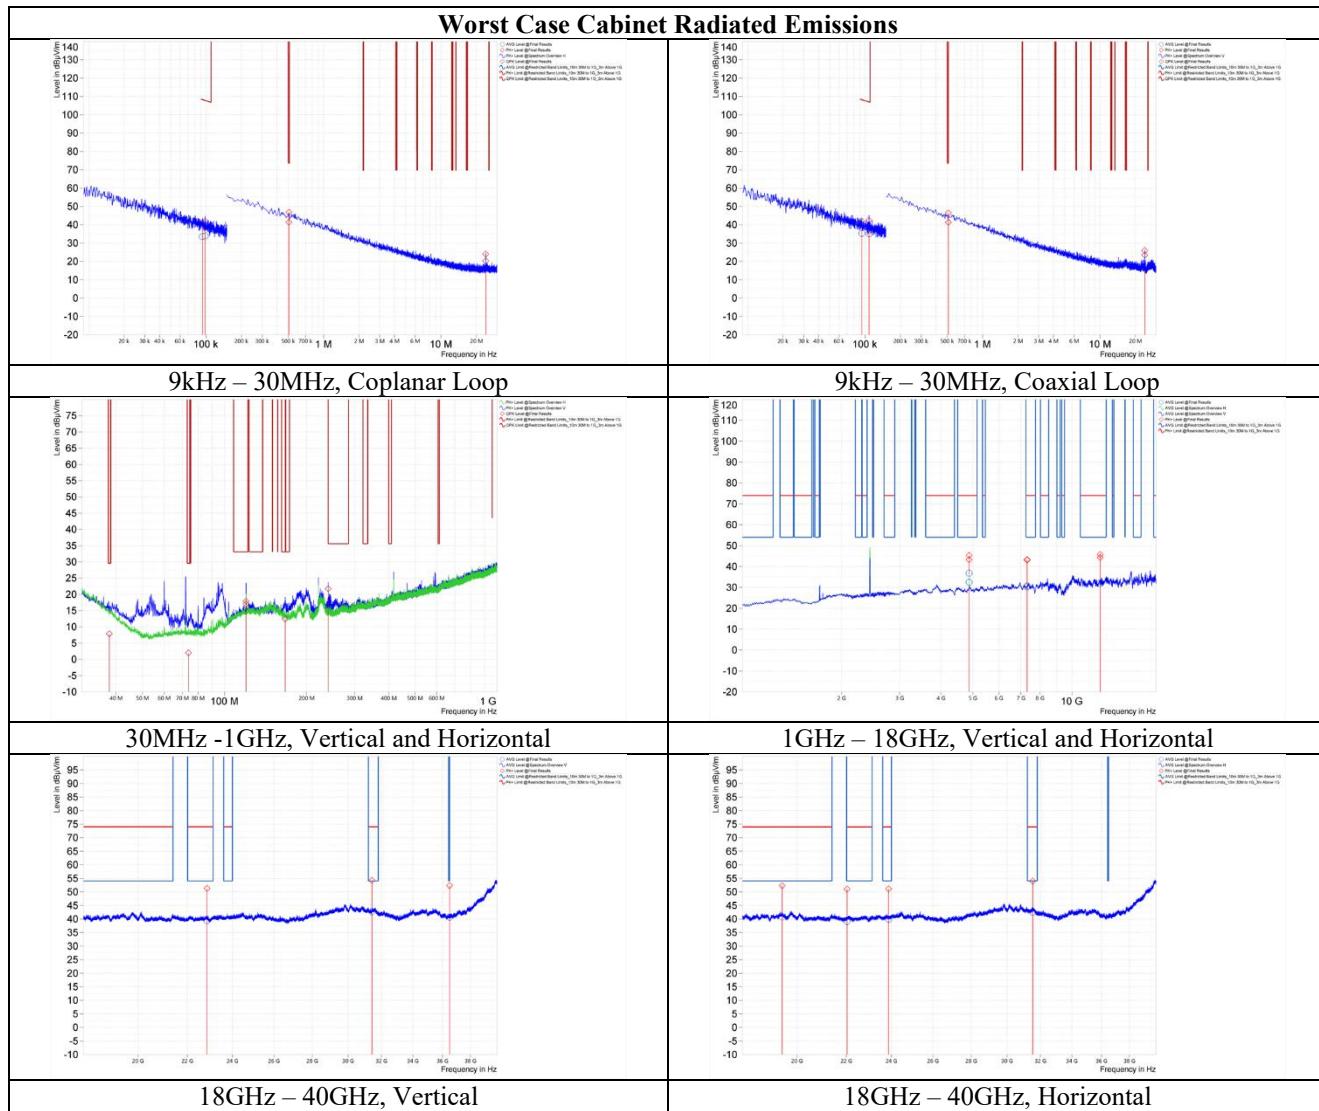

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

MET Asset #	Description	Manufacturer	Model	Last Cal Date	Cal Due Date
MY46180897	Spectrum Analyzer	Keysight	E4448A	08/28/2024	08/28/2025
1A1250	Receiver	Rohde & Schwarz	ESW44	04/08/2024	04/08/2025
1A1176	Active Loop Antenna (9KHz-30MHz)	ETS-Lindgren	6502	08/22/2024	08/22/2026
1A1147	Bi-Log Antenna	Suno Sciences Corp	JB3	04/06/2023	04/06/2025
1A1047	Horn Antenna	ETS - Lindgren	3117	06/26/2024	06/26/2025
1A1161	Horn Antenna (18GHz – 40GHz)	ETS Lindgren	3116C	08/01/2024	08/01/2026
1A1099	Generator	Com-Power	CGO-51000	See Note	
1A1088	Preamplifier	Rohde & Schwarz	TS-PR1	See Note	
1A1044	Generator	Com-Power	CG-520	See Note	
1A1073	Multi Device Controller	ETS	2090	See Note	
1A1074	System Controller	Panasonic	WV-CU101	See Note	
1A1080	Multi-Device	ETS	2090	See Note	
1A1180	Preamplifier	Miteq	AMF-7D-01001800-22-10P	See Note	

**Table 10. Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

## End of Report