

# RF Exposure Lab

802 N. Twin Oaks Valley Road, Suite 105 • San Marcos, CA 92069 • U.S.A.  
TEL (760) 471-2100 • FAX (760) 471-2121  
<http://www.rfexposurelab.com>

## CERTIFICATE OF COMPLIANCE SAR EVALUATION

Polycom Inc.  
4750 Willow Road  
Pleasanton, CA 94588


Dates of Test: May 13-15, 2011  
Test Report Number: SAR.20110503  
Revision A

FCC ID:	M72-PS8450
IC Certificate:	1849C-PS8450
Model(s):	PS8450
Test Sample:	Engineering Unit Same as Production
Serial No.:	610859572
Equipment Type:	Wireless VoIP Handset
Classification:	Portable Transmitter Next to Head and Body
TX Frequency Range:	2412 – 2462 MHz; 5180 – 5320 MHz; 5500 – 5700 MHz; 5745 – 5825 MHz
Frequency Tolerance:	± 2.5 ppm
Maximum RF Output:	2450 MHz (b) – 17.79 dB, 2450 MHz (g) – 17.45 dB, 2450 MHz (n20) – 17.21 dB, 5250 MHz (a) – 15.42 dB, 5250 MHz (n20) – 15.59 dB, 5600 MHz (a) – 16.39 dB, 5600 MHz (n20) – 16.21 dB, 5800 MHz (a) – 19.21 dB, 5800 MHz (n20) – 19.19 dB
Conducted	
Signal Modulation:	DSSS, OFDM
Antenna Type:	Plated Antenna on PCB, 2.5 dBi Gain in 2.4 GHz Band, 5.51 dBi Gain in 5 GHz Bands
Application Type:	Certification
FCC Rule Parts:	Part 2, 15C, 15E
KDB Test Methodology:	KDB 447498, KDB 248227, KDB 648474
Industry Canada:	RSS-102, Safety Code 6
Maximum SAR Value:	0.627 W/kg Head, 1.187 Body
Separation Distance:	0 mm for Body

This wireless mobile and/or portable device has been shown to be compliant for localized specific absorption rate (SAR) for uncontrolled environment/general exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in IEEE 1528-2003, and OET Bulletin 65 Supp. C (See test report).

I attest to the accuracy of the data. All measurements were performed by myself or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RF Exposure Lab, LLC certifies that no party to this application is subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

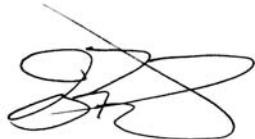

Jay M. Moulton  
Vice President



Certificate # 2387.01

## Table of Contents

1. Introduction .....	3
SAR Definition [5].....	3
2. SAR Measurement Setup .....	4
Robotic System.....	4
System Hardware .....	4
System Description .....	4
E-Field Probe .....	5
3. Robot Specifications .....	7
4. Probe and Dipole Calibration .....	8
5. Phantom & Simulating Tissue Specifications .....	9
SAM Phantom.....	9
Head & Body Simulating Mixture Characterization .....	9
Device Holder .....	9
6. Definition of Reference Points.....	10
Ear Reference Point.....	10
Device Reference Points .....	10
7. Test Configuration Positions .....	11
Positioning for Cheek/Touch [5].....	11
Positioning for Ear / 15° Tilt [5].....	12
Body Worn Configurations .....	13
8. ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2].....	14
Uncontrolled Environment.....	14
Controlled Environment .....	14
9. Measurement Uncertainty .....	15
10. System Validation .....	16
Tissue Verification.....	16
Test System Verification .....	16
11. SAR Test Data Summary .....	18
Procedures Used To Establish Test Signal.....	18
Device Test Condition .....	18
SAR Data Summary – 2450 MHz Head 802.11b.....	21
SAR Data Summary – 2450 MHz Body 802.11b .....	22
SAR Data Summary – 5250 MHz Head 802.11a.....	23
SAR Data Summary – 5250 MHz Body 802.11a .....	24
SAR Data Summary – 5600 MHz Head 802.11a.....	25
SAR Data Summary – 5600 MHz Body 802.11a .....	26
SAR Data Summary – 5800 MHz Head 802.11a.....	27
SAR Data Summary – 5800 MHz Body 802.11a .....	28
12. Test Equipment List .....	29
13. Conclusion .....	30
14. References .....	31
Appendix A – System Validation Plots and Data .....	32
Appendix B – SAR Test Data Plots.....	60
Appendix C – SAR Test Setup Photos .....	123
Appendix D – Probe Calibration Data Sheets .....	129
Appendix E – Dipole Calibration Data Sheets .....	210
Appendix F – Phantom Calibration Data Sheets .....	253

## 1. Introduction

This measurement report shows compliance of the Polycom Inc. Model PS8450 FCC ID: M72-PS8450 with FCC Part 2, 1093, ET Docket 93-62 Rules for mobile and portable devices and IC Certificate: 1849C-PS8450 with RSS102 & Safety Code 6. The FCC have adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on August 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC regulated portable devices. [1], [6]

The test procedures, as described in ANSI C95.1 – 1999 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [2], ANSI C95.3 – 2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields [3], FCC OET Bulletin 65 Supp. C – 2001 [4], IEEE Std.1528 – 2003 Recommended Practice [5], and Industry Canada Safety Code 6 Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz were employed.

## SAR Definition [5]

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dV$ ) of a given density ( $\rho$ ).

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

$\sigma$  = conductivity of the tissue (S/m)

$\rho$  = mass density of the tissue (kg/m<sup>3</sup>)

$E$  = rms electric field strength (V/m)

## 2. SAR Measurement Setup

### Robotic System

The measurements are conducted utilizing the ALSAS-10-U automated dosimetric assessment system. The ALSAS-10-U is designed and manufactured by Aprel Laboratories in Nepean, Ontario, Canada. The system utilizes a Robcomm 3 robot manufactured by ThermoCRS located in Michigan USA.

### System Hardware

The system consists of a six axis articulated arm, controller for precise probe positioning (0.05 mm repeatability), a power supply, a teach pendent for teaching area scans, near field probe, an IBM Pentium 4™ 2.66 GHz PC with Windows XP Pro™, and custom software developed to enable communications between the robot controller software and the host operating system.

An amplifier is located on the articulated arm, which is isolated from the custom designed end effector and robot arm. The end effector provides the mechanical touch detection functionality and probe connection interface. The amplifier is functionally validated within the manufacturer's site and calibrated at NCL Calibration Laboratories. A Data Acquisition Card (DAC) is used to collect the signal as detected by the isotropic e-field probe. The DAC manufacturer calibrates the DAC to NIST standards. A formal validation is executed using all mechanical and electronic components to prove conformity of the measurement platform as a whole.

### System Description

The ALSAS-10-U has been designed to measure devices within the compliance environment to meet all recognized standards. The system also conforms to standards, which are currently being developed by the scientific and manufacturing community.

The course scan resolution is defined by the operator and reflects the requirements of the standard to which the device is being tested. Precise measurements are made within the predefined course scan area and the values are logged.

The user predefines the sample rate for which the measurements are made so as to ensure that the full duty-cycle of a pulse modulation device is covered during the sample. The following algorithm is an example of the function used by the system for linearization of the output for the probe.

$$V_i = U_i + U_i^2 \bullet \frac{cf}{dcp_i}$$



The Aprel E-Field probe is evaluated to establish the diode compression point.

A complex algorithm is then used to calculate the values within the measured points down to a resolution of 1mm. The data from this process is then used to provide the co-ordinates from which the cube scan is created for the determination of the 1 g and 10 g averages.

Cube scan averaging consists of a number of complex algorithms, which are used to calculate the one, and ten gram averages. The basis for the cube scan process is centered on the location where the maximum measured SAR value was found. When a secondary peak value is found which is within 60% of the initial peak value, the system will report this back to the operator who can then assess the need for further analysis of both the peak values prior to the one and ten-gram cube scan averaging process. The algorithm consists of 3D cubic Spline, and Lagrange extrapolation to the surface, which form the matrix for calculating the measurement output for the one and ten gram average values. The resolution for the physical scan integral is user defined with a final calculated resolution down to 1mm.

In-depth analysis for the differential of the physical scanning resolution for the cube scan analysis has been carried out, to identify the optimum setting for the probe positioning steps, and this has been determined at 8mm increments on the X, & Y planes. The reduction of the physical step increment increased the time taken for analysis but did not provide a better uncertainty or return on measured values.

The final output from the system provides data for the area scan measurements, physical and splined (1mm resolution) cube scan with physical and calculated values (1mm resolution).

The overall uncertainty for the methodology and algorithms the ALSAS-10-U used during the SAR calculation was evaluated using the data from IEEE 1528 f3 algorithm:

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \left( e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

The probe used during the measurement process has been assessed to provide values for diode compression. These values are calculated during the probe calibration exercise and are used in the mathematical calculations for the assessment of SAR.

## E-Field Probe

The E-field probe used by RF Exposure Lab, LLC, has been fully calibrated and assessed for isotropic, and boundary effect. The probe utilizes a triangular sensor arrangement as detailed in the diagram below right.



The SAR is assessed with the probe which moves at a default height of 4mm from the center of the diode, which is mounted to the sensor, to the phantom surface (Z height). The diagram above right shows how the center of the sensor is defined with the location of the diode placed at the center of the dipole. The 4mm default in the Z axis is the optimum height for assessing SAR where the boundary effect is at its least, with the probe located closest to the phantom surface (boundary).

The manufacturer specified precision of the robot is  $\pm 0.05$  mm and the precision of the APREL bottom detection device is  $\pm 0.1$  mm. These precisions are calibrated and tested in the manufacturing process of the bottom detection device. A constant distance is maintained because the surface of the phantom is dynamically detected for each point. The surface detection algorithm corrects the position of the robot so that the probe rests on the surface of the phantom. The probe is then moved to the measurement location 2.44 mm above the phantom surface resulting in the probe center location to be at 4.0 mm above the phantom surface. Therefore, the probe sensor will be at 4.0 mm above the phantom surface  $\pm 0.1$  mm for each SAR location for frequencies below 3 GHz. The probe is moved to the measurement location 1.44 mm above the phantom surface resulting in the probe center location to be at 2.0 mm above the phantom surface. Therefore, the probe sensor will be at 2.0 mm above the phantom surface  $\pm 0.1$  mm for each SAR location for frequencies above 3 GHz.

The probe boundary effect compensation cannot be disabled in the ALSAS-10U testing system. The probe tip will always be at least half a probe tip diameter from the phantom surface. For frequencies up to 3 GHz, the probe diameter is 5 mm. With the sensor offset set at 1.54 mm (default setting), the sensor to phantom gap will be 4.0 mm which is greater than half the probe tip diameter. For frequencies greater than 3 GHz, the probe diameter is 3 mm. With the sensor offset set at 0.56 mm (default setting), the sensor to phantom gap will be 3.0 mm which is greater than half the probe tip diameter.

The separation of the first 2 measurement points in the zoom scan is specified in the test setup software. For frequencies below 3 GHz, the user must specify a zoom scan resolution of less than 6 mm in the z-axis to have the first two measurements within 1 cm of the surface. The z-axis is set to 4 mm as shown on each of the data sheets in Appendix B. For frequencies above 3 GHz, the user must specify a zoom scan resolution of less than 3 mm in the z-axis to have the first two measurements within 5 mm of the surface. The z-axis is set to 2 mm as shown on each of the data sheets in Appendix B.

The zoom scan volume for devices  $\leq 3$  GHz with a cube scan of 5x5x8 yields a volume of  $32 \times 32 \times 28$  mm<sup>3</sup>. For devices  $> 3$  GHz and  $< 4.5$  GHz, the cube scan of 9x9x9 yields a volume of  $32 \times 32 \times 24$  mm<sup>3</sup>. For devices  $\geq 4.5$  GHz, the cube scan of 7x7x12 yields a volume of  $24 \times 24 \times 22$  mm<sup>3</sup>.

### 3. Robot Specifications

#### Specifications

Positioner:	ThermoCRS, Robot Model: Robocomm 3
Repeatability:	0.05 mm
No. of axis:	6

#### Data Acquisition Card (DAC) System

#### Cell Controller

Processor:	Pentium 4™
Clock Speed:	2.66 GHz
Operating System:	Windows XP Pro™

#### Data Converter

Features:	Signal Amplifier, End Effector, DAC
Software:	ALSAS 10-U Software

#### E-Field Probe

Model:	Various See Probe Calibration Sheet
Serial Number:	Various See Probe Calibration Sheet
Construction:	Triangular Core Touch Detection System
Frequency:	10MHz to 6GHz

#### Phantom

Phantom:	Uniphantom, Right Phantom, Left Phantom
----------	---



## 4. Probe and Dipole Calibration

See Appendix D and E.

## 5. Phantom & Simulating Tissue Specifications

### SAM Phantom



The Aprel system utilizes three separate phantoms. Each phantom for SAR assessment testing is a low loss dielectric shell, with shape and dimensions derived from the anthropomorphic data of the 90<sup>th</sup> percentile adult male head dimensions as tabulated by the US Army. The SAM phantom shell is bisected along the mid sagittal plane into right and left halves. The perimeter sidewalls of each phantom half is extended to allow filling with liquid to a depth of 15 cm that is sufficient to minimize reflections from the upper surface [5]. The Uni-Phantom is used to conduct body measurements and head to face measurements. The depth of the phantom allows for 15 cm of tissue material to be filled within the phantom. See photos in Appendix C.

### Head & Body Simulating Mixture Characterization

The head and body mixtures consist of the material based on the table listed below. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. Body tissue parameters that have not been specified in P1528 are derived from the issue dielectric parameters computed from the 4-Cole-Cole equations.

**Table 5.1 Typical Composition of Ingredients for Tissue**

Ingredients	Simulating Tissue							
	2450 MHz Head	2450 MHz Body	5250 MHz Head	5250 MHz Body	5600 MHz Head	5600 MHz Body	5785 MHz Head	5785 MHz Body
Mixing Percentage								
Water	71.88	73.20	68.70	70.00	71.10	74.20	73.90	76.50
Sugar	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Salt	0.16	0.04	1.70	1.50	1.70	1.50	1.70	1.50
HEC	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Bactericide	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
DGBE	7.99	26.70	8.80	26.70	8.40	24.30	8.20	22.00
Triton X-100	19.97	0.00	20.80	0.00	18.80	0.00	16.2	0.00
Dielectric Constant	Target	39.20	52.70	35.93	48.95	35.53	48.47	35.32
Conductivity (S/m)	Target	1.80	1.95	4.71	5.36	5.07	5.77	5.25
								5.98

### Device Holder



In combination with the SAM phantom, the mounting device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can easily, accurately, and repeatably be positioned according to the FCC specifications. The device holder can be locked at different phantom locations (left head, right head, and uni-phantom).

## 6. Definition of Reference Points

### Ear Reference Point

Figure 6.2 shows the front, back and side views of the SAM Phantom. The point "M" is the reference point for the center of the mouth, "LE" is the left ear reference point (ERP), and "RE" is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 6.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 6.1 Close-up side view of ERP's



Figure 6.2 Front, back and side view of SAM

### Device Reference Points

Two imaginary lines on the device need to be established: the vertical centerline and the horizontal line. The test device is placed in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point" (See Fig. 6.3). The "test device reference point" is then located at the same level as the center of the ear reference point. The test device is positioned so that the "vertical centerline" is bisecting the front surface of the device at its top and bottom edges, positioning the "ear reference point" on the outer surface of both the left and right head phantoms on the ear reference point [5].


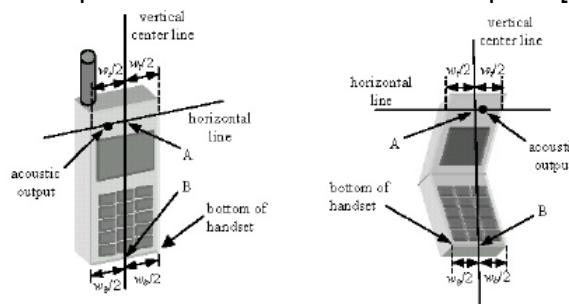


Figure 6.3 Handset Vertical Center & Horizontal Line Reference Points

## 7. Test Configuration Positions


### Positioning for Cheek/Touch [5]

1. Position the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 7.1), such that the plane defined by the vertical center line and the horizontal line of the device is approximately parallel to the sagittal plane of the phantom.

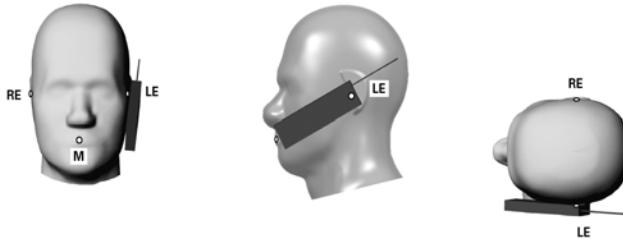

**Figure 7.1 Front, Side and Top View of Cheek/Touch Position**

2. Translate the device towards the phantom along the line passing through RE and LE until the device touches the ear.
3. While maintaining the device in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
4. Rotate the device around the vertical centerline until the device (horizontal line) is symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE and maintaining the device contact with the ear, rotate the device about the line NF until any point on the device is in contact with a phantom point below the ear (cheek). See Figure 7.2.




**Figure 7.2 Side view w/ relevant markings**

## Positioning for Ear / 15° Tilt [5]

With the test device aligned in the Cheek/Touch Position":

1. While maintaining the orientation of the device, retracted the device parallel to the reference plane far enough to enable a rotation of the device by 15 degrees.
2. Rotate the device around the horizontal line by 15 degrees.
3. While maintaining the orientation of the device, move the device parallel to the reference plane until any part of the device touches the head. (In this position, point A is located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, the angle of the device shall be reduced. The tilted position is obtained when any part of the device is in contact with the ear as well as a second part of the device is in contact with the head (see Figure 7.3).

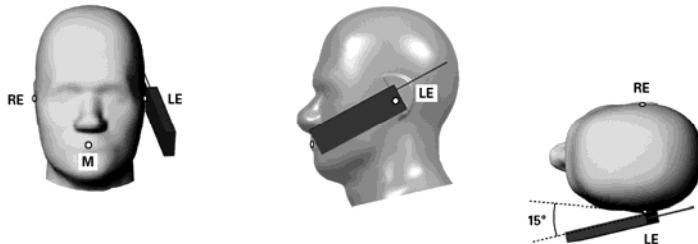

**Figure 7.3 Front, Side and Top View of Ear/15° Tilt Position**

## Body Worn Configurations

Body-worn operating configurations are tested with the accessories attached to the device and positioned against a flat phantom in a normal use configuration. A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then, when multiple accessories that contain metallic components are supplied with the device, the device is tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration where a separation distance between the back of the device and the flat phantom is used. All test position spacings are documented.

In all cases SAR measurements are performed to investigate the worst-case positioning. Worst-case positioning is then documented and used to perform Body SAR testing.

In order for users to be aware of the body-worn operating requirements for meeting RF exposure compliance, operating instructions and cautions statements are included in the user's guide.

## 8. ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2]

### Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 8.1 Human Exposure Limits**

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR <sup>1</sup> Head	1.60	8.00
SPATIAL AVERAGE SAR <sup>2</sup> Whole Body	0.08	0.40
SPATIAL PEAK SAR <sup>3</sup> Hands, Feet, Ankles, Wrists	4.00	20.00

<sup>1</sup> The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

<sup>2</sup> The Spatial Average value of the SAR averaged over the whole body.

<sup>3</sup> The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

## 9. Measurement Uncertainty

### Exposure Assessment Measurement Uncertainty

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	$c_i^1 (1-g)$	$c_i^1 (10-g)$	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %	$v_i$
Measurement System								
Probe Calibration	3.5	normal	1	1	1	3.5	3.5	$\infty$
Axial Isotropy	3.7	rectangular	$\sqrt{3}$	0.7	0.7	1.5	1.5	$\infty$
Hemispherical Isotropy	10.9	rectangular	$\sqrt{3}$	0.7	0.7	4.4	4.4	$\infty$
Boundary Effect	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
Linearity	4.7	rectangular	$\sqrt{3}$	1	1	2.7	2.7	$\infty$
Detection Limit	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
Readout Electronics	1.0	normal	1	1	1	1.0	1.0	$\infty$
Response Time	0.8	rectangular	$\sqrt{3}$	1	1	0.5	0.5	$\infty$
Integration Time	1.7	rectangular	$\sqrt{3}$	1	1	1.0	1.0	$\infty$
RF Ambient Condition	3.0	rectangular	$\sqrt{3}$	1	1	1.7	1.7	$\infty$
Probe Positioner Mech. Restriction	0.4	rectangular	$\sqrt{3}$	1	1	0.2	0.2	$\infty$
Probe Positioning with respect to Phantom Shell	2.9	rectangular	$\sqrt{3}$	1	1	1.7	1.7	$\infty$
Extrapolation and Integration	3.7	rectangular	$\sqrt{3}$	1	1	2.1	2.1	$\infty$
Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0	7
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0	2
Drift of Output Power	4.2	rectangular	$\sqrt{3}$	1	1	2.4	2.4	$\infty$
Phantom and Setup								
Phantom Uncertainty (shape & thickness tolerance)	3.4	rectangular	$\sqrt{3}$	1	1	2.0	2.0	$\infty$
Liquid Conductivity (target)	5.0	rectangular	$\sqrt{3}$	0.7	0.5	2.0	1.4	$\infty$
Liquid Conductivity (meas.)	0.5	normal	1	0.7	0.5	0.4	0.3	5
Liquid Permittivity (target)	5.0	rectangular	$\sqrt{3}$	0.6	0.5	1.7	1.4	$\infty$
Liquid Permittivity (meas.)	1.0	normal	1	0.6	0.5	0.6	0.5	5
Combined Uncertainty		RSS				9.6	9.4	>500
Combined Uncertainty (coverage factor=2)		Normal (k=2)				19.1	18.8	>500

## 10. System Validation

### Tissue Verification

**Table 10.1 Measured Tissue Parameters**

		2450 MHz Head		2450 MHz Body		5250 MHz Head	
Date(s)		May 13, 2011		May 13, 2011		May 14, 2011	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: $\epsilon$		39.20	38.97	52.70	51.96	35.93	35.27
Conductivity: $\sigma$		1.80	1.85	1.95	1.97	4.71	4.72
		5250 MHz Body		5600 MHz Head		5600 MHz Body	
Date(s)		May 14, 2011		May 15, 2011		May 15, 2011	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: $\epsilon$		48.95	48.63	35.53	35.29	48.47	48.32
Conductivity: $\sigma$		5.36	5.43	5.07	5.11	5.77	5.80
		5785 MHz Head		5785 MHz Body			
Date(s)		May 13, 2011		May 13, 2011			
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured		
Dielectric Constant: $\epsilon$		35.32	35.06	48.22	47.92		
Conductivity: $\sigma$		5.25	5.31	5.98	6.02		

See Appendix A for data printout.


### Test System Verification

Prior to assessment, the system is verified to the  $\pm 10\%$  of the specifications at the test frequency by using the system kit. Power is normalized to 1 watt. (Graphic Plots Attached)

**Table 10.2 System Dipole Validation Target & Measured**

	Test Frequency	Targeted SAR <sub>1g</sub> (W/kg)	Measure SAR <sub>1g</sub> (W/kg)	Tissue Used for Verification	Deviation (%)
13-May-2011	2450 MHz	53.10	54.01	Head	+ 1.71
13-May-2011	2450 MHz	51.50	52.68	Body	+ 2.29
14-May-2011	5250 MHz	61.66	62.28	Head	+ 1.01
14-May-2011	5250 MHz	59.81	61.05	Body	+ 2.07
15-May-2011	5600 MHz	65.03	65.21	Head	+ 0.28
15-May-2011	5600 MHz	63.10	64.26	Body	+ 1.84
13-May-2011	5800 MHz	63.43	64.42	Head	+ 1.56
13-May-2011	5800 MHz	61.36	62.27	Body	+ 1.48

See Appendix A for data plots.

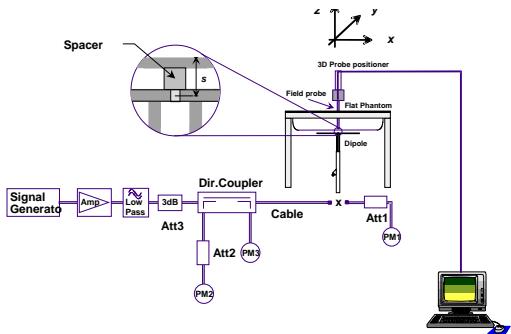**Figure 10.1 Dipole Validation Test Setup**

Note: KDB 450824 was applied for probe calibration frequencies greater than or equal to 50 MHz of the DUT frequencies.

## 11. SAR Test Data Summary

### See Measurement Result Data Pages

See Appendix B for SAR Test Data Plots.

See Appendix C for SAR Test Setup Photos.

### Procedures Used To Establish Test Signal

The device was either placed into simulated transmit mode using the manufacturer's test codes or the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.


### Device Test Condition

Due to the requirement to disassemble the unit and disconnect the antenna, the conducted output power measurements were performed after the completion of all SAR measurements. The power drift of each test is measured at the start of the test and again at the end of the test. The drift percentage is calculated by the formula  $((\text{end/start})-1)*100$  and rounded to three decimal places. The drift percentage is calculated into the resultant SAR value on the data sheet for each test.

The data rates used when evaluating the WiFi transmitter were the lowest data rates for each mode. The device was operating at its maximum output power at the lowest data rate for all measurements. The maximum duty cycle the device could be programmed to transmit at was 99.9% duty cycle.

Bluetooth operation was not evaluated as the power level of the BT transmitter was 5 mW which is  $\leq P_{\text{Ref}}$  for 2.4 GHz. Based on KDB 648474, stand-alone SAR is not required for an unlicensed transmitter with output power  $\leq P_{\text{Ref}}$  mW when either the output power or 1-g SAR for each of the other antennas within 2.5 cm of that unlicensed transmitting antenna is  $\leq P_{\text{Ref}}$  mW or  $< 1.2$  W/kg.

The device was using the Polycom test utility Version fcc-1.14.

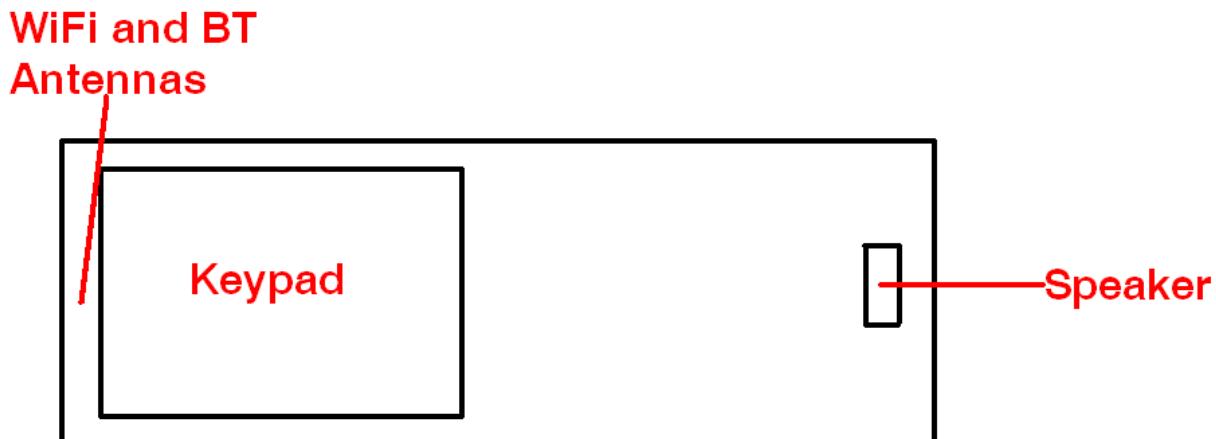**SAR Antenna Location Diagram**

802.11b						2450 GHz n HT20				
Freq	Channel	Data Rate	Antenna	Power		Freq	Channel	Data Rate	Antenna	Power
2412	1	1	Main	16.41		2412	1	6	Main	16.26
2437	6	1	Main	17.79		2437	6	6	Main	17.21
2462	11	1	Main	17.56		2462	11	6	Main	17.13
802.11g										
Freq	Channel	Data Rate	Antenna	Power						
2412	1	6	Main	16.32						
2437	6	6	Main	17.45						
2462	11	6	Main	17.36						

802.11a 5.18-5.24 GHz					802.11 n20 5.18-5.24 GHz				
Freq	Channel	Data Rate	Antenna	Power	Freq	Channel	Data Rate	Antenna	Power
5.18	36	6	Main	14.72	5.18	36	6	Main	14.80
5.20	40	6	Main	14.69	5.20	40	6	Main	14.76
5.22	44	6	Main	14.78	5.22	44	6	Main	14.72
5.24	48	6	Main	14.71	5.24	48	6	Main	14.83
802.11 n20 5.24-5.32 GHz					802.11a 5.24-5.32 GHz				
Freq	Channel	Data Rate	Antenna	Power	Freq	Channel	Data Rate	Antenna	Power
5.26	52	6	Main	15.41	5.26	52	6	Main	15.31
5.28	56	6	Main	15.59	5.28	56	6	Main	15.42
5.30	60	6	Main	15.52	5.30	60	6	Main	15.34
5.32	64	6	Main	15.45	5.32	64	6	Main	15.26

802.11a 5.6 GHz					802.11 n20 5.6 GHz				
Freq	Channel	Data Rate	Antenna	Power	Freq	Channel	Data Rate	Antenna	Power
5.50	100	6	Main	16.12	5.50	100	6	Main	16.03
5.52	104	6	Main	16.10	5.52	104	6	Main	16.08
5.54	108	6	Main	16.21	5.54	108	6	Main	15.97
5.56	112	6	Main	16.26	5.56	112	6	Main	16.03
5.58	116	6	Main	16.39	5.58	116	6	Main	15.92
5.60	120	6	Main	16.24	5.60	120	6	Main	16.21
5.62	124	6	Main	16.28	5.62	124	6	Main	16.11
5.64	128	6	Main	16.32	5.64	128	6	Main	16.15
5.66	132	6	Main	16.30	5.66	132	6	Main	16.07
5.68	136	6	Main	16.29	5.68	136	6	Main	16.05
5.70	140	6	Main	16.28	5.70	140	6	Main	16.20
802.11a 5.8 GHz					802.11 n20 5.8 GHz				
Freq	Channel	Data Rate	Antenna	Power	Freq	Channel	Data Rate	Antenna	Power
5.745	149	6	Main	19.13	5.745	149	6	Main	19.15
5.765	153	6	Main	19.16	5.765	153	6	Main	19.19
5.785	157	6	Main	19.21	5.785	157	6	Main	19.08
5.805	161	6	Main	19.11	5.805	161	6	Main	19.12
5.825	165	6	Main	18.95	5.825	165	6	Main	18.76

## SAR Data Summary – 2450 MHz Head 802.11b

MEASUREMENT RESULTS						
Head	Position	Frequency		Modulation	End Power (dBm)	SAR (W/kg) Measured
		MHz	Ch.			
Right	Touch	2437	6	DSSS	17.79	0.308
	Tilt	2437	6	DSSS	17.79	0.134
Left	Touch	2437	6	DSSS	17.79	0.239
	Tilt	2437	6	DSSS	17.79	0.154

**Body**  
**1.6 W/kg (mW/g)**  
averaged over 1 gram

1. Battery is fully charged for all tests.

Power Measured	<input checked="" type="checkbox"/> Conducted	<input type="checkbox"/> ERP	<input type="checkbox"/> EIRP
----------------	---	------------------------------	-------------------------------

2. SAR Measurement

Phantom Configuration	<input checked="" type="checkbox"/> Left Head	<input type="checkbox"/> Uniphantom	<input checked="" type="checkbox"/> Right Head
SAR Configuration	<input checked="" type="checkbox"/> Head	<input type="checkbox"/> Body	

3. Test Signal Call Mode

<input checked="" type="checkbox"/> Test Code	<input type="checkbox"/> Base Station Simulator	<input type="checkbox"/> Without Belt Clip	<input checked="" type="checkbox"/> N/A
---	---	--	---

4. Test Configuration

<input type="checkbox"/> With Belt Clip	<input type="checkbox"/> Without Belt Clip	<input checked="" type="checkbox"/> N/A
---	--	---

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
Vice President

Note: SAR Tested on the Highest output power channel. When the measured channel is 3 dB or more below the limit the remaining channels are not required to be tested per KDB 447498 section 1) e). SAR is not required for 802.11g/HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured in the 802.11b. All testing was conducted per KDB 447498, 248227, 648474 and OET Bulletin 65. See the photo in Appendix C for a pictorial of the setup and labeling of the test locations.

## SAR Data Summary – 2450 MHz Body 802.11b

MEASUREMENT RESULTS						
Gap	Position	Frequency		Modulation	End Power (dBm)	SAR (W/kg) Measured
		MHz	Ch.			
0 mm	Back	2437	6	DSSS	17.79	0.623
<b>Body</b> <b>1.6 W/kg (mW/g)</b> averaged over 1 gram						

1. Battery is fully charged for all tests.

Power Measured  Conducted  ERP  EIRP

2. SAR Measurement

Phantom Configuration  Left Head  Uniphantom  Right Head

SAR Configuration  Head  Body

3. Test Signal Call Mode

Test Code  Base Station Simulator

4. Test Configuration

With Belt Clip  Without Belt Clip  N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
Vice President

Note: SAR Tested on the Highest output power channel. When the measured channel is 3 dB or more below the limit the remaining channels are not required to be tested per KDB 447498 section 1) e). SAR is not required for 802.11g/HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured in the 802.11b. All testing was conducted per KDB 447498, 248227, 648474 and OET Bulletin 65. See the photo in Appendix C for a pictorial of the setup and labeling of the test locations.

## SAR Data Summary – 5250 MHz Head 802.11a

MEASUREMENT RESULTS						
Head	Position	Frequency		Modulation	End Power (dBm)	SAR (W/kg) Measured
		MHz	Ch.			
Right	Touch	5220	44	OFDM	14.78	0.268
	Tilt	5220	44	OFDM	14.78	0.234
Left	Touch	5220	44	OFDM	14.78	0.181
	Tilt	5220	44	OFDM	14.78	0.225
Right	Touch	5280	56	OFDM	15.42	0.281
	Tilt	5280	56	OFDM	15.42	0.199
Left	Touch	5280	56	OFDM	15.42	0.188
	Tilt	5280	56	OFDM	15.42	0.215

**Body**  
**1.6 W/kg (mW/g)**  
averaged over 1 gram

1. Battery is fully charged for all tests.

Power Measured Conducted ERP EIRP

2. SAR Measurement

Phantom Configuration Left Head Uniphantom Right Head

SAR Configuration Head Body

3. Test Signal Call Mode

Test Code Base Station Simulator

4. Test Configuration

With Belt Clip Without Belt Clip N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
Vice President

Note: SAR Tested on the Highest output power channel. When the measured channel is 3 dB or more below the limit the remaining channels are not required to be tested per KDB 447498 section 1) e). SAR is not required for 802.11 HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured in the 802.11a. All testing was conducted per KDB 447498, 248227, 648474 and OET Bulletin 65. See the photo in Appendix C for a pictorial of the setup and labeling of the test locations.

## SAR Data Summary – 5250 MHz Body 802.11a

MEASUREMENT RESULTS					
Gap	Position	Frequency		Modulation	End Power (dBm)
		MHz	Ch.		
0 mm	Back	5220	44	OFDM	14.78
		5280	56	OFDM	15.42
<b>Body</b> <b>1.6 W/kg (mW/g)</b> averaged over 1 gram					

1. Battery is fully charged for all tests.  
Power Measured  Conducted  ERP  EIRP
2. SAR Measurement  
Phantom Configuration  Left Head  Uniphantom  Right Head  
SAR Configuration  Head  Body
3. Test Signal Call Mode  Test Code  Base Station Simulator
4. Test Configuration  With Belt Clip  Without Belt Clip  N/A
5. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
Vice President


Note: SAR Tested on the Highest output power channel. When the measured channel is 3 dB or more below the limit the remaining channels are not required to be tested per KDB 447498 section 1) e). SAR is not required for 802.11 HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured in the 802.11a. All testing was conducted per KDB 447498, 248227, 648474 and OET Bulletin 65. See the photo in Appendix C for a pictorial of the setup and labeling of the test locations.

## SAR Data Summary – 5600 MHz Head 802.11a

MEASUREMENT RESULTS						
Head	Position	Frequency		Modulation	End Power (dBm)	SAR (W/kg) Measured
		MHz	Ch.			
Right	Touch	5580	116	OFDM	16.39	0.330
	Tilt	5580	116	OFDM	16.39	0.143
Left	Touch	5580	116	OFDM	16.39	0.269
	Tilt	5580	116	OFDM	16.39	0.187

**Body**  
**1.6 W/kg (mW/g)**  
averaged over 1 gram

1. Battery is fully charged for all tests.  
 Power Measured  Conducted  ERP  EIRP
2. SAR Measurement  
 Phantom Configuration  Left Head  Uniphantom  Right Head  
 SAR Configuration  Head  Body
3. Test Signal Call Mode  Test Code  Base Station Simulator
4. Test Configuration  With Belt Clip  Without Belt Clip  N/A
5. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
Vice President

Note: SAR Tested on the Highest output power channel. When the measured channel is 3 dB or more below the limit the remaining channels are not required to be tested per KDB 447498 section 1) e). SAR is not required for 802.11 HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured in the 802.11a. All testing was conducted per KDB 447498, 248227, 648474 and OET Bulletin 65. See the photo in Appendix C for a pictorial of the setup and labeling of the test locations.

## SAR Data Summary – 5600 MHz Body 802.11a

MEASUREMENT RESULTS						
Gap	Position	Frequency		Modulation	End Power (dBm)	SAR (W/kg) Measured
		MHz	Ch.			
0 mm	Back	5580	116	OFDM	16.39	0.647
<b>Body</b> <b>1.6 W/kg (mW/g)</b> averaged over 1 gram						

1. Battery is fully charged for all tests.

Power Measured Conducted ERP EIRP

2. SAR Measurement

Phantom Configuration Left Head Uniphantom Right Head

SAR Configuration Head Body

3. Test Signal Call Mode

Test Code Base Station Simulator

4. Test Configuration

With Belt Clip Without Belt Clip N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
Vice President

Note: SAR Tested on the Highest output power channel. When the measured channel is 3 dB or more below the limit the remaining channels are not required to be tested per KDB 447498 section 1) e). SAR is not required for 802.11 HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured in the 802.11a. All testing was conducted per KDB 447498, 248227, 648474 and OET Bulletin 65. See the photo in Appendix C for a pictorial of the setup and labeling of the test locations.

## SAR Data Summary – 5800 MHz Head 802.11a

MEASUREMENT RESULTS						
Head	Position	Frequency		Modulation	End Power (dBm)	SAR (W/kg) Measured
		MHz	Ch.			
Right	Touch	5785	157	OFDM	19.21	0.614
	Tilt	5785	157	OFDM	19.21	0.221
Left	Touch	5785	157	OFDM	19.21	0.450
	Tilt	5785	157	OFDM	19.21	0.214

**Body**  
**1.6 W/kg (mW/g)**  
averaged over 1 gram

1. Battery is fully charged for all tests.
2. SAR Measurement
3. Test Signal Call Mode
4. Test Configuration
5. Tissue Depth is at least 15.0 cm

Power Measured	<input checked="" type="checkbox"/> Conducted	<input type="checkbox"/> ERP	<input type="checkbox"/> EIRP
Phantom Configuration	<input checked="" type="checkbox"/> Left Head	<input type="checkbox"/> Uniphantom	<input checked="" type="checkbox"/> Right Head
SAR Configuration	<input checked="" type="checkbox"/> Head	<input type="checkbox"/> Body	
	<input checked="" type="checkbox"/> Test Code	<input type="checkbox"/> Base Station Simulator	
	<input type="checkbox"/> With Belt Clip	<input type="checkbox"/> Without Belt Clip	<input checked="" type="checkbox"/> N/A



Jay M. Moulton  
Vice President

Note: SAR Tested on the Highest output power channel. When the measured channel is 3 dB or more below the limit the remaining channels are not required to be tested per KDB 447498 section 1) e). SAR is not required for 802.11 HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured in the 802.11a. All testing was conducted per KDB 447498, 248227, 648474 and OET Bulletin 65. See the photo in Appendix C for a pictorial of the setup and labeling of the test locations.

## SAR Data Summary – 5800 MHz Body 802.11a

MEASUREMENT RESULTS						
Gap	Position	Frequency		Modulation	End Power (dBm)	SAR (W/kg) Measured
		MHz	Ch.			
0 mm	Back	5745	149	OFDM	19.13	0.767
		5785	157	OFDM	19.21	1.187
		5825	165	OFDM	18.95	0.877

**Body**  
**1.6 W/kg (mW/g)**  
averaged over 1 gram

1. Battery is fully charged for all tests.  
Power Measured  Conducted  ERP  EIRP
2. SAR Measurement  
Phantom Configuration  Left Head  Uniphantom  Right Head  
SAR Configuration  Head  Body
3. Test Signal Call Mode  Test Code  Base Station Simulator
4. Test Configuration  With Belt Clip  Without Belt Clip  N/A
5. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
Vice President

Note: SAR Tested on the Highest output power channel. When the measured channel is 3 dB or more below the limit the remaining channels are not required to be tested per KDB 447498 section 1) e). SAR is not required for 802.11 HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured in the 802.11a. All testing was conducted per KDB 447498, 248227, 648474 and OET Bulletin 65. See the photo in Appendix C for a pictorial of the setup and labeling of the test locations.

## 12. Test Equipment List

Table 11.1 Equipment Specifications

Type	Calibration Due Date	Serial Number
ThermoCRS Robot	N/A	RAF0338198
ThermoCRS Controller	N/A	RCF0338224
ThermoCRS Teach Pendant (Joystick)	N/A	STP0334405
IBM Computer, 2.66 MHz P4	N/A	8189D8U KCPR08N
Aprel E-Field Probe ALS-E020	09/22/2011	RFE-215
Aprel E-Field Probe ALS-E030	07/14/2011	E030-001
Aprel Dummy Probe	N/A	023
Aprel Left Phantom	N/A	RFE-267
Aprel Right Phantom	N/A	RFE-268
Aprel UniPhantom	N/A	RFE-273
Aprel Validation Dipole ALS-D-450-S-2 Head	01/12/2012	RFE-362
Aprel Validation Dipole ALS-D-450-S-2 Body	01/19/2012	RFE-362
Aprel Validation Dipole ALS-D-750-S-2 Head	01/14/2012	177-00501
Aprel Validation Dipole ALS-D-750-S-2 Body	11/15/2011	177-00501
Aprel Validation Dipole ALS-D-835-S-2 Head	01/14/2012	180-00561
Aprel Validation Dipole ALS-D-835-S-2 Body	11/16/2011	180-00561
Aprel Validation Dipole ALS-D-900-S-2 Head	01/12/2012	RFE-275
Aprel Validation Dipole ALS-D-900-S-2 Body	11/19/2011	RFE-275
Aprel Validation Dipole ALS-D-1900-S-2 Head	01/15/2012	210-00713
Aprel Validation Dipole ALS-D-1900-S-2 Body	11/16/2011	210-00713
Aprel Validation Dipole ALS-D-2450-S-2 Head	01/12/2012	RFE-278
Aprel Validation Dipole ALS-D-2450-S-2 Body	11/18/2011	RFE-278
Aprel Validation Dipole RFE-D-2600-S-2 Body	01/18/2012	RFE-121
Aprel Validation Dipole RFE-D-BB-S-2 Head	01/12/2012	235-00801
Aprel Validation Dipole RFE-D-BB-S-2 Body	02/09/2012	235-00801
Agilent (HP) 437B Power Meter	03/30/2012	3125U08837
Agilent (HP) 8481B Power Sensor	03/30/2012	3318A05384
Agilent N1911A Power Meter	03/30/2012	GB45100254
Agilent N1922A Power Sensor	03/30/2012	MY45240464
Advantest R3261A Spectrum Analyzer	03/30/2012	31720068
Agilent (HP) 8350B Signal Generator	03/31/2012	2749A10226
Agilent (HP) 83525A RF Plug-In	03/31/2012	2647A01172
Agilent (HP) 8753C Vector Network Analyzer	03/30/2012	3135A01724
Agilent (HP) 85047A S-Parameter Test Set	03/31/2012	2904A00595
Agilent (HP) 8960 Base Station Sim.	03/25/2012	MY48360364
R&S CMW500 Wideband Radio Comm. Box	08/14/2011	101383
Aprel Dielectric Probe Assembly	N/A	0011
Head Equivalent Matter (450 MHz)	N/A	N/A
Head Equivalent Matter (835/900 MHz)	N/A	N/A
Head Equivalent Matter (1900 MHz)	N/A	N/A
Head Equivalent Matter (2450 MHz)	N/A	N/A
Head Equivalent Matter (5800 MHz)	N/A	N/A
Body Equivalent Matter (450 MHz)	N/A	N/A
Body Equivalent Matter (750 MHz)	N/A	N/A
Body Equivalent Matter (835/900 MHz)	N/A	N/A
Body Equivalent Matter (1900 MHz)	N/A	N/A
Body Equivalent Matter (2450 MHz)	N/A	N/A
Body Equivalent Matter (2600 MHz)	N/A	N/A
Body Equivalent Matter (5200 MHz)	N/A	N/A
Body Equivalent Matter (5800 MHz)	N/A	N/A

### 13. Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body is a very complex phenomena that depends on the mass, shape, and size of the body; the orientation of the body with respect to the field vectors; and, the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

## 14. References

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio Frequency Radiation, August 1996
- [2] ANSI/IEEE C95.1 – 1992, American National Standard Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 300kHz to 100GHz, New York: IEEE, 1992.
- [3] ANSI/IEEE C95.3 – 1992, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, 1992.
- [4] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields, June 2001.
- [5] IEEE Standard 1528 – 2003, IEEE Recommended Practice for Determining the Peak-Spatial Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, October 2003.
- [6] Industry Canada, RSS – 102e, Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), March 2010.
- [7] Health Canada, Safety Code 6, Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz, 2009.

## Appendix A – System Validation Plots and Data

```
*****
Test Result for UIM Dielectric Parameter
Fri 13/May/2011 07:01:44
Freq Frequency(GHz)
FCC_eH      FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sH      FCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e      Epsilon of UIM
Test_s      Sigma of UIM
*****
Freq      FCC_eH      FCC_sH      Test_e      Test_s
2.4100    39.26      1.76       39.09      1.78
2.4200    39.25      1.77       39.06      1.80
2.4300    39.24      1.78       39.04      1.82
2.4400    39.22      1.79       39.00      1.83
2.4500    39.20      1.80       38.97      1.85
2.4600    39.19      1.81       38.94      1.87
2.4700    39.17      1.82       38.91      1.88
```

```
*****
Test Result for UIM Dielectric Parameter
Fri 13/May/2011 07:08:11
Freq Frequency(GHz)
FCC_eH      FCC Bulletin 65 Supplement C ( June 2001) Limits for Head Epsilon
FCC_sH      FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
FCC_eB      FCC Limits for Body Epsilon
FCC_sB      FCC Limits for Body Sigma
Test_e      Epsilon of UIM
Test_s      Sigma of UIM
*****
Freq      FCC_eB      FCC_sB      Test_e      Test_s
2.4100    52.75      1.91       52.07      1.92
2.4200    52.74      1.92       52.04      1.93
2.4300    52.73      1.93       52.01      1.95
2.4400    52.71      1.94       51.99      1.97
2.4500    52.70      1.95       51.96      1.99
2.4600    52.69      1.96       51.94      2.00
2.4700    52.67      1.98       51.91      2.02
```

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Sat 14/May/2011 06:07:00

Freq Frequency (GHz)

FCC\_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon

FCC\_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eH	FCC_sH	Test_e	Test_s
5.1800	36.01	4.63	35.42	4.61
5.1900	36.00	4.64	35.39	4.63
5.2000	35.99	4.65	35.38	4.65
5.2100	35.97	4.67	35.36	4.66
5.2200	35.96	4.68	35.34	4.67
5.2300	35.95	4.69	35.31	4.69
5.2400	35.94	4.70	35.29	4.71
<b>5.2500</b>	<b>35.93</b>	<b>4.71</b>	<b>35.27</b>	<b>4.72</b>
5.2600	35.92	4.72	35.25	4.74
5.2700	35.91	4.73	35.24	4.75
5.2800	35.89	4.74	35.21	4.77
5.2900	35.88	4.75	35.19	4.79
5.3000	35.87	4.76	35.16	4.80
5.3100	35.86	4.77	35.14	4.82
5.3200	35.85	4.78	35.12	4.84

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Sat 14/May/2011 06:21:17

Freq Frequency (GHz)

FCC\_eH FCC Bulletin 65 Supplement C ( June 2001) Limits for Head Epsilon

FCC\_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC\_eB FCC Limits for Body Epsilon

FCC\_sB FCC Limits for Body Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
5.1800	49.04	5.28	48.80	5.29
5.1900	49.03	5.29	48.78	5.31
5.2000	49.01	5.30	48.76	5.33
5.2100	49.00	5.31	48.74	5.35
5.2200	48.99	5.32	48.71	5.36
5.2300	48.97	5.33	48.69	5.38
5.2400	48.96	5.35	48.67	5.41
<b>5.2500</b>	<b>48.95</b>	<b>5.36</b>	<b>48.63</b>	<b>5.43</b>
5.2600	48.93	5.37	48.60	5.45
5.2700	48.92	5.38	48.58	5.47
5.2800	48.91	5.39	48.56	5.50
5.2900	48.89	5.40	48.54	5.52
5.3000	48.88	5.42	48.52	5.54
5.3100	48.87	5.43	48.50	5.56
5.3200	48.85	5.44	48.47	5.59

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Sun 15/May/2011 06:58:41

Freq Frequency(GHz)

FCC\_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon

FCC\_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eH	FCC_sH	Test_e	Test_s
5.5000	35.64	4.96	35.44	4.96
5.5200	35.62	4.98	35.41	4.99
5.5400	35.60	5.00	35.39	5.01
5.5600	35.57	5.02	35.35	5.04
5.5800	35.55	5.04	35.32	5.07
<b>5.6000</b>	<b>35.53</b>	<b>5.07</b>	<b>35.29</b>	<b>5.11</b>
5.6200	35.51	5.09	35.26	5.14
5.6400	35.48	5.11	35.22	5.17
5.6600	35.46	5.13	35.20	5.20
5.6800	35.44	5.15	35.17	5.22
5.7000	35.41	5.17	35.12	5.24

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Sun 15/May/2011 07:31:56

Freq Frequency(GHz)

FCC\_eH FCC Bulletin 65 Supplement C ( June 2001) Limits for Head Epsilon

FCC\_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC\_eB FCC Limits for Body Epsilon

FCC\_sB FCC Limits for Body Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
5.5000	48.61	5.65	48.51	5.64
5.5200	48.58	5.67	48.47	5.67
5.5400	48.55	5.70	48.44	5.70
5.5600	48.53	5.72	48.40	5.73
5.5800	48.50	5.74	48.36	5.76
<b>5.6000</b>	<b>48.47</b>	<b>5.77</b>	<b>48.32</b>	<b>5.80</b>
5.6200	48.44	5.79	48.28	5.83
5.6400	48.42	5.81	48.25	5.85
5.6600	48.39	5.84	48.22	5.88
5.6800	48.36	5.86	48.18	5.91
5.7000	48.34	5.88	48.15	5.95

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Fri 13/May/2011 02:09:40

Freq Frequency(GHz)

FCC\_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon

FCC\_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eH	FCC_sH	Test_e	Test_s
5.7450	35.36	5.21	35.15	5.37
5.7550	35.35	5.22	35.13	5.35
5.7650	35.34	5.23	35.11	5.34
5.7750	35.33	5.24	35.08	5.32
<b>5.7850</b>	<b>35.32</b>	<b>5.25</b>	<b>35.06</b>	<b>5.31</b>
5.7950	35.31	5.26	35.04	5.29
5.8050	35.29	5.28	35.01	5.28
5.8150	35.28	5.29	34.99	5.27
5.8250	35.27	5.30	34.96	5.25

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Fri 13/May/2011 02:17:06

Freq Frequency(GHz)

FCC\_eH FCC Bulletin 65 Supplement C ( June 2001) Limits for Head Epsilon

FCC\_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC\_eB FCC Limits for Body Epsilon

FCC\_sB FCC Limits for Body Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
5.7450	48.27	5.94	48.01	5.93
5.7550	48.26	5.95	47.99	5.95
5.7650	48.25	5.96	47.97	5.98
5.7750	48.23	5.97	47.94	6.00
<b>5.7850</b>	<b>48.22</b>	<b>5.98</b>	<b>47.92</b>	<b>6.02</b>
5.7950	48.21	5.99	47.90	6.04
5.8050	48.19	6.01	47.87	6.06
5.8150	48.18	6.02	47.85	6.09
5.8250	48.17	6.03	47.82	6.11

**SAR Test Report**

By Operator : Jay  
Measurement Date : 13-May-2011  
Starting Time : 13-May-2011 07:04:38 AM  
End Time : 13-May-2011 07:17:36 AM  
Scanning Time : 778 secs

## Product Data

Device Name : Validation  
Serial No. : 2450  
Type : Dipole  
Model : ALS-D-2450-S-2  
Frequency : 2450.00 MHz  
Max. Transmit Pwr : 0.1 W  
Drift Time : 0 min(s)  
Length : 51.5 mm  
Width : 3.6 mm  
Depth : 30.4 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 5.255 W/kg  
Power Drift-Finish: 5.385 W/kg  
Power Drift (%) : 2.475

## Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

## Tissue Data

Type : HEAD  
Serial No. : 2450  
Frequency : 2450.00 MHz  
Last Calib. Date : 13-May-2011  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 45.00 RH%  
Epsilon : 38.97 F/m  
Sigma : 1.85 S/m  
Density : 1000.00 kg/cu. M

## Probe Data


Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 22-Sep-2010  
Frequency : 2450.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.37  
Probe Sensitivity: 1.20 1.20 1.20  $\mu$ V/ (V/m)<sup>2</sup>  
Compression Point: 95.00 mV  
Offset : 1.56 mm

## Measurement Data


Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 13-May-2011  
Set-up Time : 7:40:13 AM  
Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

## Other Data

DUT Position : Touch  
Separation : 10 mm  
Channel : Mid

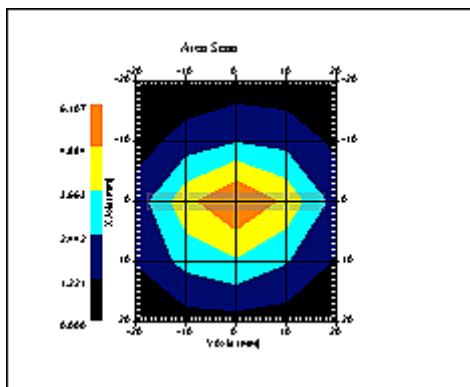

1 gram SAR value : 5.401 W/kg  
10 gram SAR value : 2.484 W/kg  
Area Scan Peak SAR : 6.107 W/kg  
Zoom Scan Peak SAR : 10.990 W/kg

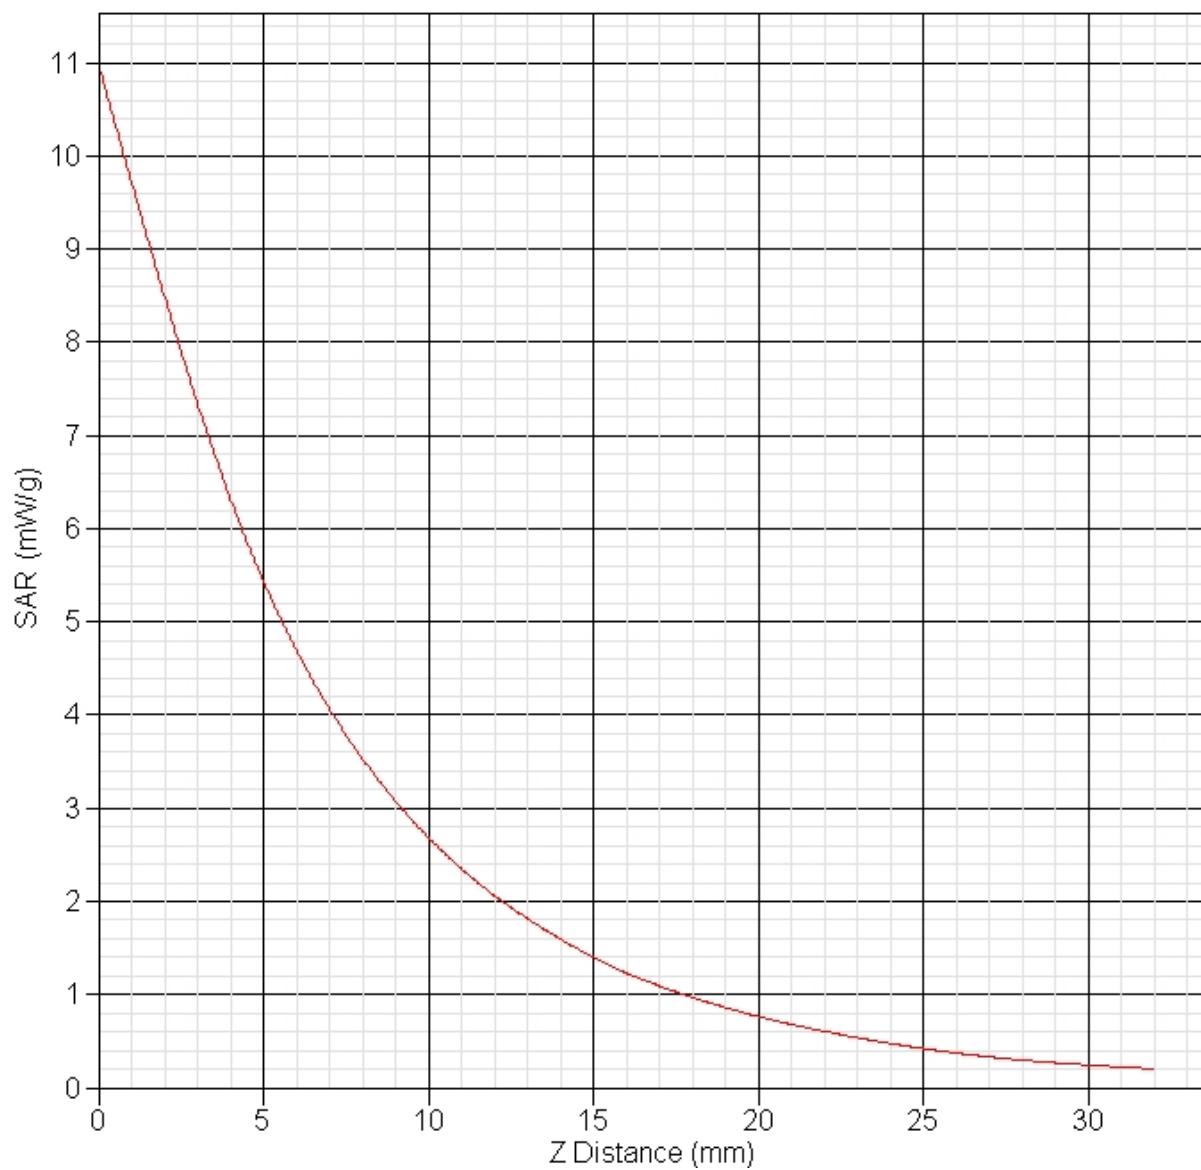**SAR-Z Axis**  
at Hotspot x:0.30 y:-0.18

**SAR Test Report**

By Operator : Jay  
Measurement Date : 13-May-2011  
Starting Time : 13-May-2011 07:43:46 AM  
End Time : 13-May-2011 07:56:56 AM  
Scanning Time : 790 secs

## Product Data

Device Name : Validation  
Serial No. : 2450  
Type : Dipole  
Model : ALS-D-2450-S-2  
Frequency : 2450.00 MHz  
Max. Transmit Pwr : 0.1 W  
Drift Time : 0 min(s)  
Length : 51.5 mm  
Width : 3.6 mm  
Depth : 30.4 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 6.188 W/kg  
Power Drift-Finish: 6.204 W/kg  
Power Drift (%) : 0.260

## Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

## Tissue Data

Type : BODY  
Serial No. : 2450  
Frequency : 2450.00 MHz  
Last Calib. Date : 13-May-2011  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 45.00 RH%  
Epsilon : 51.96 F/m  
Sigma : 1.97 S/m  
Density : 1000.00 kg/cu. M

## Probe Data


Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 22-Sep-2010  
Frequency : 2450.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.5  
Probe Sensitivity: 1.20 1.20 1.20  $\mu$ V/ (V/m)<sup>2</sup>  
Compression Point: 95.00 mV  
Offset : 1.56 mm

## Measurement Data


Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 13-May-2011  
Set-up Time : 7:40:13 AM  
Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

## Other Data

DUT Position : Touch  
Separation : 10 mm  
Channel : Mid

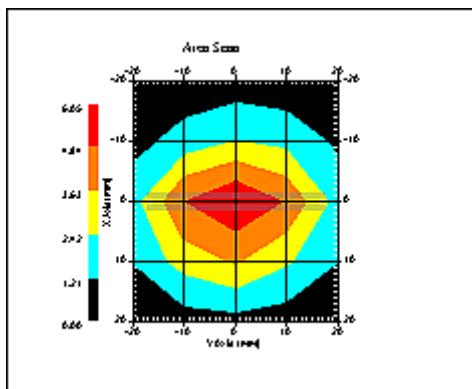

1 gram SAR value : 5.268 W/kg  
10 gram SAR value : 2.367 W/kg  
Area Scan Peak SAR : 6.049 W/kg  
Zoom Scan Peak SAR : 11.090 W/kg

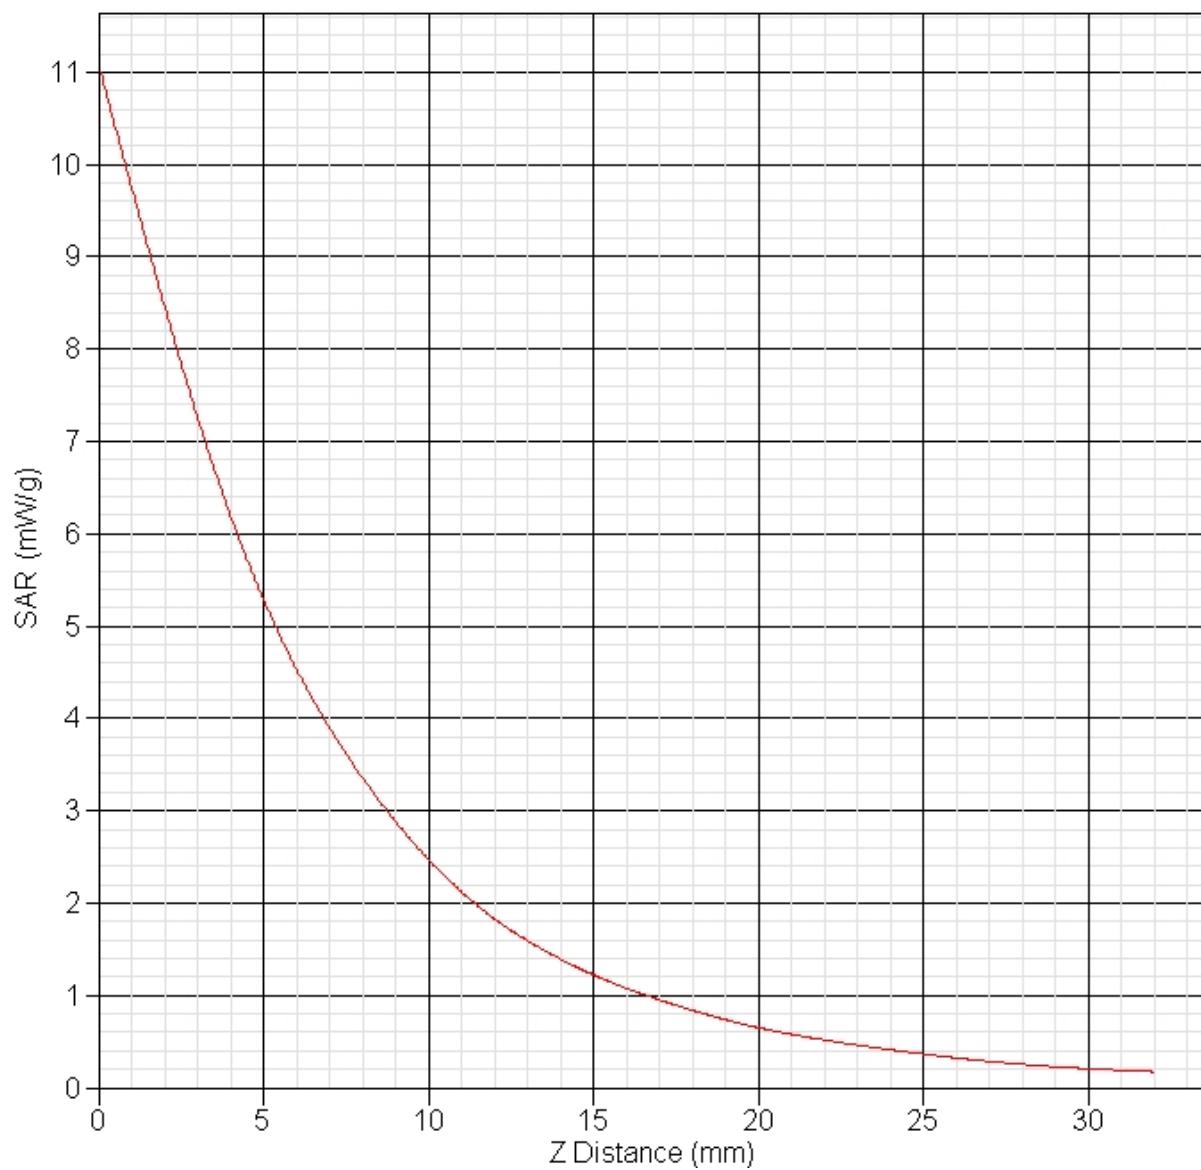**SAR-Z Axis**  
at Hotspot x:0.22 y:-0.14

**SAR Test Report**

By Operator : Jay  
Measurement Date : 14-May-2011  
Starting Time : 14-May-2011 06:11:39 AM  
End Time : 14-May-2011 06:34:27 AM  
Scanning Time : 1368 secs

## Product Data

Device Name : Validation  
Serial No. : 5250  
Type : Dipole  
Model : ALS-D-BB-S-2  
Frequency : 5250.00 MHz  
Max. Transmit Pwr : 0.1 W  
Drift Time : 0 min(s)  
Length : 23.1 mm  
Width : 3.6 mm  
Depth : 20.7 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 8.011 W/kg  
Power Drift-Finish: 8.090 W/kg  
Power Drift (%) : 0.984

## Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

## Tissue Data

Type : HEAD  
Serial No. : 5250  
Frequency : 5250.00 MHz  
Last Calib. Date : 14-May-2011  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 50.00 RH%  
Epsilon : 35.27 F/m  
Sigma : 4.72 S/m  
Density : 1000.00 kg/cu. M

## Probe Data


Name : Probe E030-001 - RFEL  
Model : E030  
Type : E-Field Triangle  
Serial No. : E030-001  
Last Calib. Date : 11-Jul-2010  
Frequency : 5200.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.8  
Probe Sensitivity: 1.20 1.20 1.20  $\mu$ V/ (V/m)<sup>2</sup>  
Compression Point: 95.00 mV  
Offset : 1.06 mm

## Measurement Data


Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 14-May-2011  
Set-up Time : 8:54:57 AM  
Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x10 : Measurement x=4mm, y=4mm, z=2.5mm

## Other Data

DUT Position : Touch  
Separation : 10 mm  
Channel : Mid

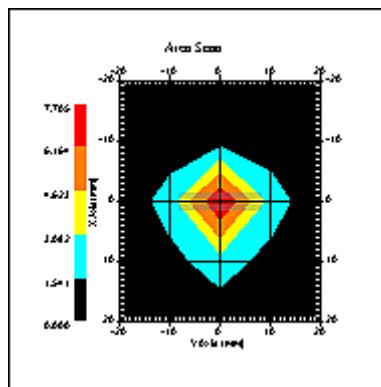

1 gram SAR value : 6.228 W/kg  
10 gram SAR value : 1.856 W/kg  
Area Scan Peak SAR : 7.705 W/kg  
Zoom Scan Peak SAR : 22.217 W/kg

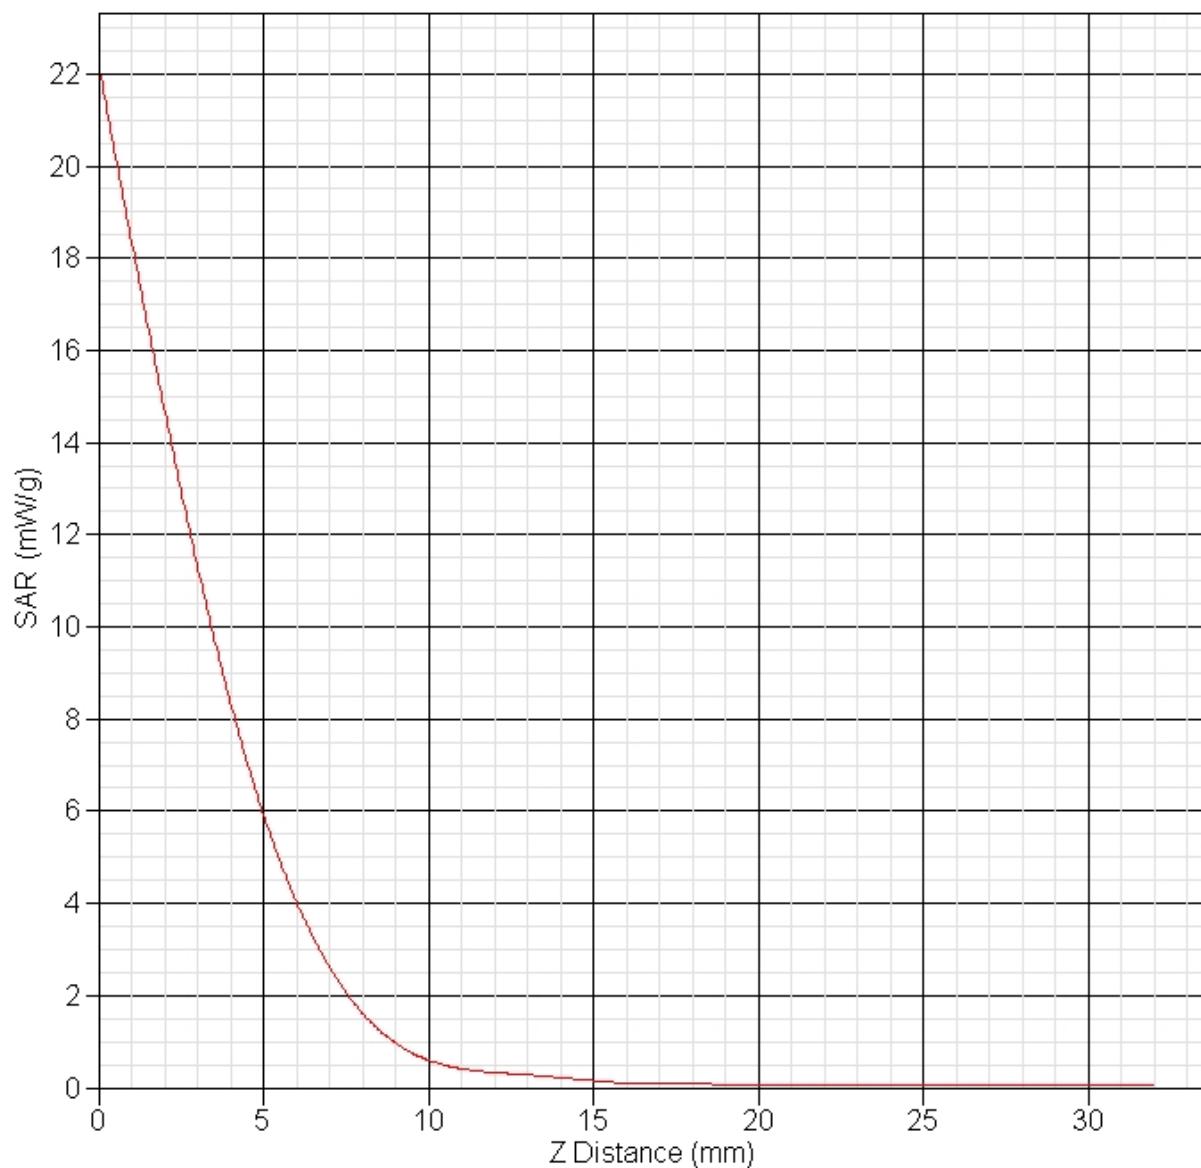**SAR-Z Axis**  
at Hotspot x:0.35 y:-0.18

**SAR Test Report**

By Operator : Jay  
Measurement Date : 14-May-2011  
Starting Time : 14-May-2011 06:52:16 AM  
End Time : 14-May-2011 07:15:05 AM  
Scanning Time : 1369 secs

## Product Data

Device Name : Validation  
Serial No. : 5250  
Type : Dipole  
Model : ALS-D-BB-S-2  
Frequency : 5250.00 MHz  
Max. Transmit Pwr : 0.1 W  
Drift Time : 0 min(s)  
Length : 23.1 mm  
Width : 3.6 mm  
Depth : 20.7 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 8.115 W/kg  
Power Drift-Finish: 8.132 W/kg  
Power Drift (%) : 0.214

## Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

## Tissue Data

Type : BODY  
Serial No. : 5250  
Frequency : 5250.00 MHz  
Last Calib. Date : 14-May-2011  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 50.00 RH%  
Epsilon : 48.63 F/m  
Sigma : 5.43 S/m  
Density : 1000.00 kg/cu. m

## Probe Data


Name : Probe E030-001 - RFEL  
Model : E030  
Type : E-Field Triangle  
Serial No. : E030-001  
Last Calib. Date : 11-Jul-2010  
Frequency : 5200.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.4  
Probe Sensitivity: 1.20 1.20 1.20  $\mu$ V/ (V/m)<sup>2</sup>  
Compression Point: 95.00 mV  
Offset : 1.06 mm

## Measurement Data


Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 14-May-2011  
Set-up Time : 8:54:57 AM  
Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x10 : Measurement x=4mm, y=4mm, z=2.5mm

## Other Data

DUT Position : Touch  
Separation : 10 mm  
Channel : Mid

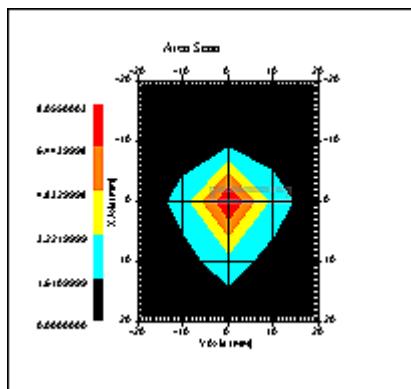

1 gram SAR value : 6.105 W/kg  
10 gram SAR value : 1.664 W/kg  
Area Scan Peak SAR : 8.055 W/kg  
Zoom Scan Peak SAR : 21.917 W/kg

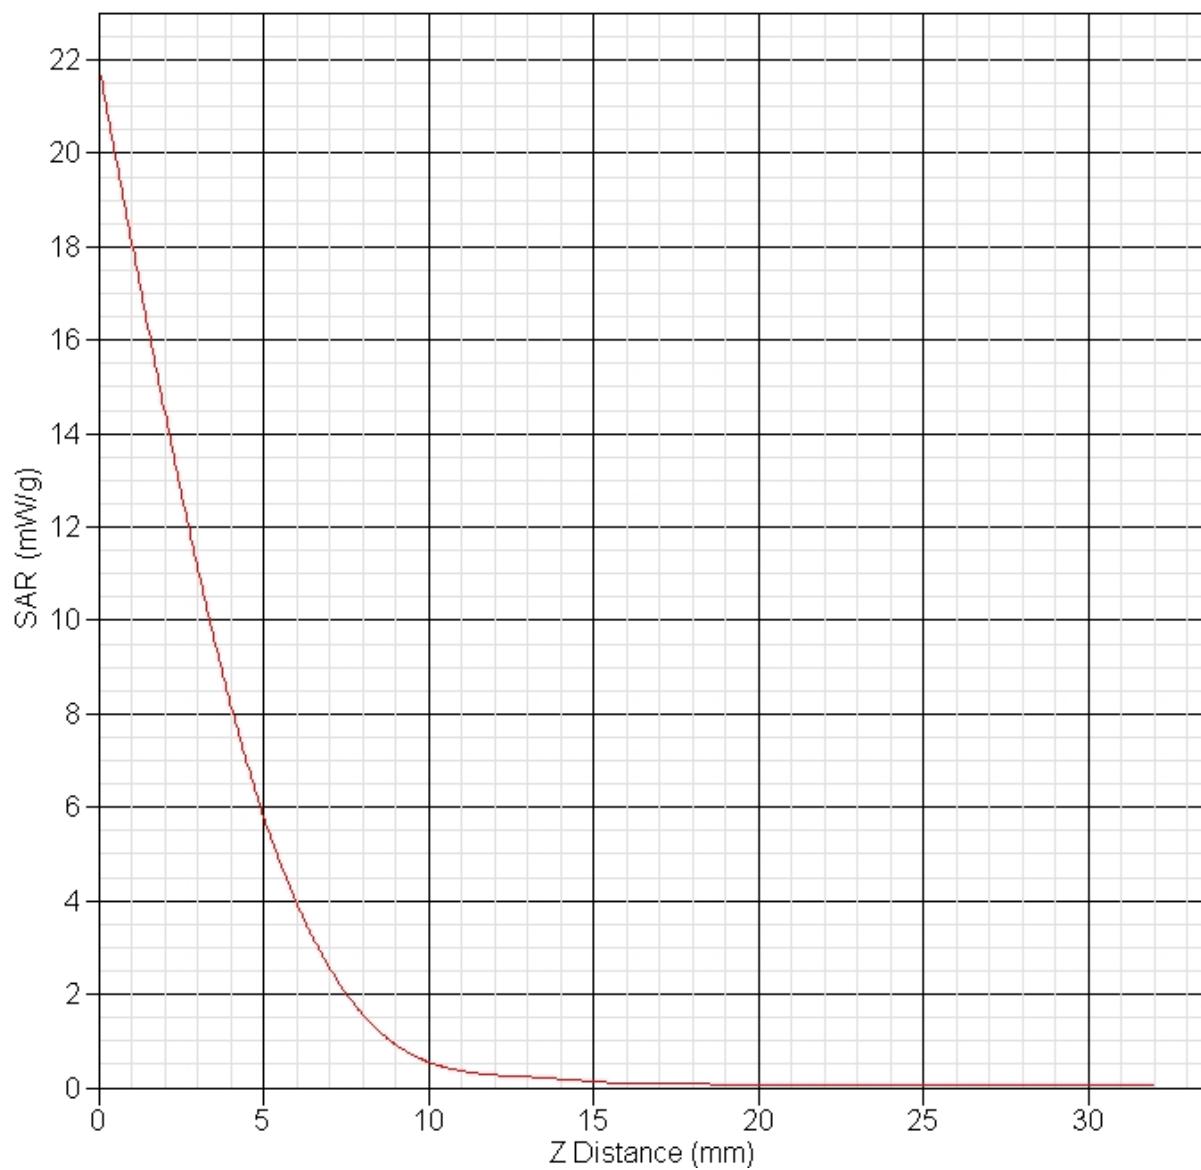**SAR-Z Axis**  
at Hotspot x:0.30 y:-0.16

**SAR Test Report**

By Operator : Jay  
Measurement Date : 15-May-2011  
Starting Time : 15-May-2011 07:02:41 AM  
End Time : 15-May-2011 07:25:44 AM  
Scanning Time : 1383 secs

## Product Data

Device Name : Validation  
Serial No. : 5600  
Type : Dipole  
Model : ALS-D-BB-S-2  
Frequency : 5600.00 MHz  
Max. Transmit Pwr : 0.1 W  
Drift Time : 0 min(s)  
Length : 23.1 mm  
Width : 3.6 mm  
Depth : 20.7 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 8.980 W/kg  
Power Drift-Finish: 8.903 W/kg  
Power Drift (%) : -0.855

## Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

## Tissue Data

Type : BODY  
Serial No. : 5600  
Frequency : 5600.00 MHz  
Last Calib. Date : 15-May-2011  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 50.00 RH%  
Epsilon : 35.29 F/m  
Sigma : 5.11 S/m  
Density : 1000.00 kg/cu. m

## Probe Data


Name : Probe E030-001 - RFEL  
Model : E030  
Type : E-Field Triangle  
Serial No. : E030-001  
Last Calib. Date : 11-Jul-2010  
Frequency : 5600.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.3  
Probe Sensitivity: 1.20 1.20 1.20  $\mu$ V/ (V/m)<sup>2</sup>  
Compression Point: 95.00 mV  
Offset : 1.06 mm

## Measurement Data

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 15-May-2011  
Set-up Time : 9:00:47 AM  
Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x10 : Measurement x=4mm, y=4mm, z=2.5mm


## Other Data

DUT Position : Touch  
Separation : 10 mm  
Channel : Mid

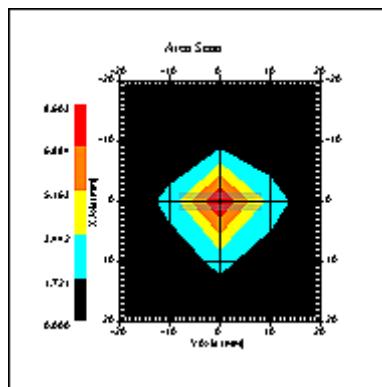

1 gram SAR value : 6.521 W/kg  
10 gram SAR value : 1.643 W/kg  
Area Scan Peak SAR : 8.603 W/kg  
Zoom Scan Peak SAR : 24.619 W/kg

SAR-Z Axis  
at Hotspot x:0.31 y:-0.10

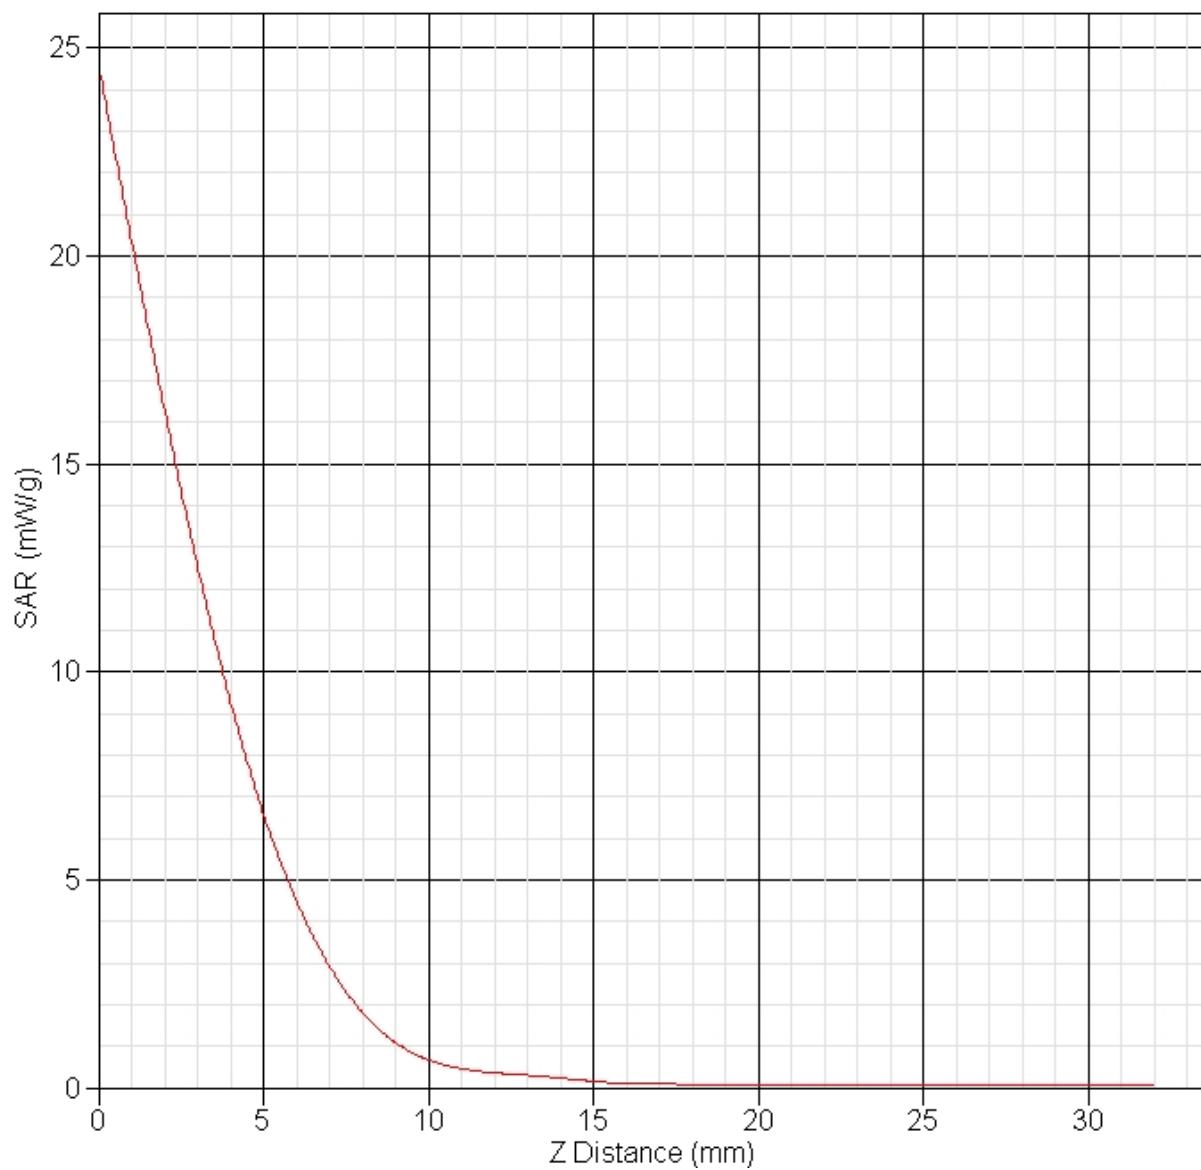

**SAR Test Report**

By Operator : Jay  
Measurement Date : 15-May-2011  
Starting Time : 15-May-2011 07:43:50 AM  
End Time : 15-May-2011 08:06:49 AM  
Scanning Time : 1379 secs

## Product Data

Device Name : Validation  
Serial No. : 5600  
Type : Dipole  
Model : ALS-D-BB-S-2  
Frequency : 5600.00 MHz  
Max. Transmit Pwr : 0.1 W  
Drift Time : 0 min(s)  
Length : 23.1 mm  
Width : 3.6 mm  
Depth : 20.7 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 9.020 W/kg  
Power Drift-Finish: 9.076 W/kg  
Power Drift (%) : 0.614

## Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

## Tissue Data

Type : BODY  
Serial No. : 5600  
Frequency : 5600.00 MHz  
Last Calib. Date : 15-May-2011  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 50.00 RH%  
Epsilon : 48.32 F/m  
Sigma : 5.80 S/m  
Density : 1000.00 kg/cu. m

## Probe Data


Name : Probe E030-001 - RFEL  
Model : E030  
Type : E-Field Triangle  
Serial No. : E030-001  
Last Calib. Date : 11-Jul-2010  
Frequency : 5600.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4  
Probe Sensitivity: 1.20 1.20 1.20  $\mu$ V/ (V/m)<sup>2</sup>  
Compression Point: 95.00 mV  
Offset : 1.06 mm

## Measurement Data


Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 15-May-2011  
Set-up Time : 9:00:47 AM  
Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x10 : Measurement x=4mm, y=4mm, z=2.5mm

## Other Data

DUT Position : Touch  
Separation : 10 mm  
Channel : Mid

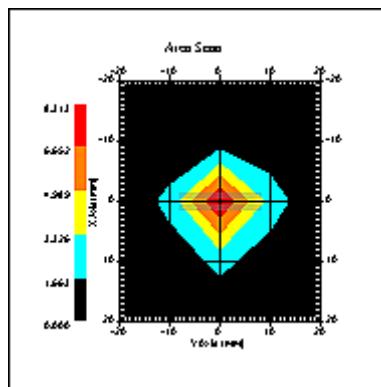

1 gram SAR value : 6.426 W/kg  
10 gram SAR value : 1.642 W/kg  
Area Scan Peak SAR : 8.313 W/kg  
Zoom Scan Peak SAR : 23.919 W/kg

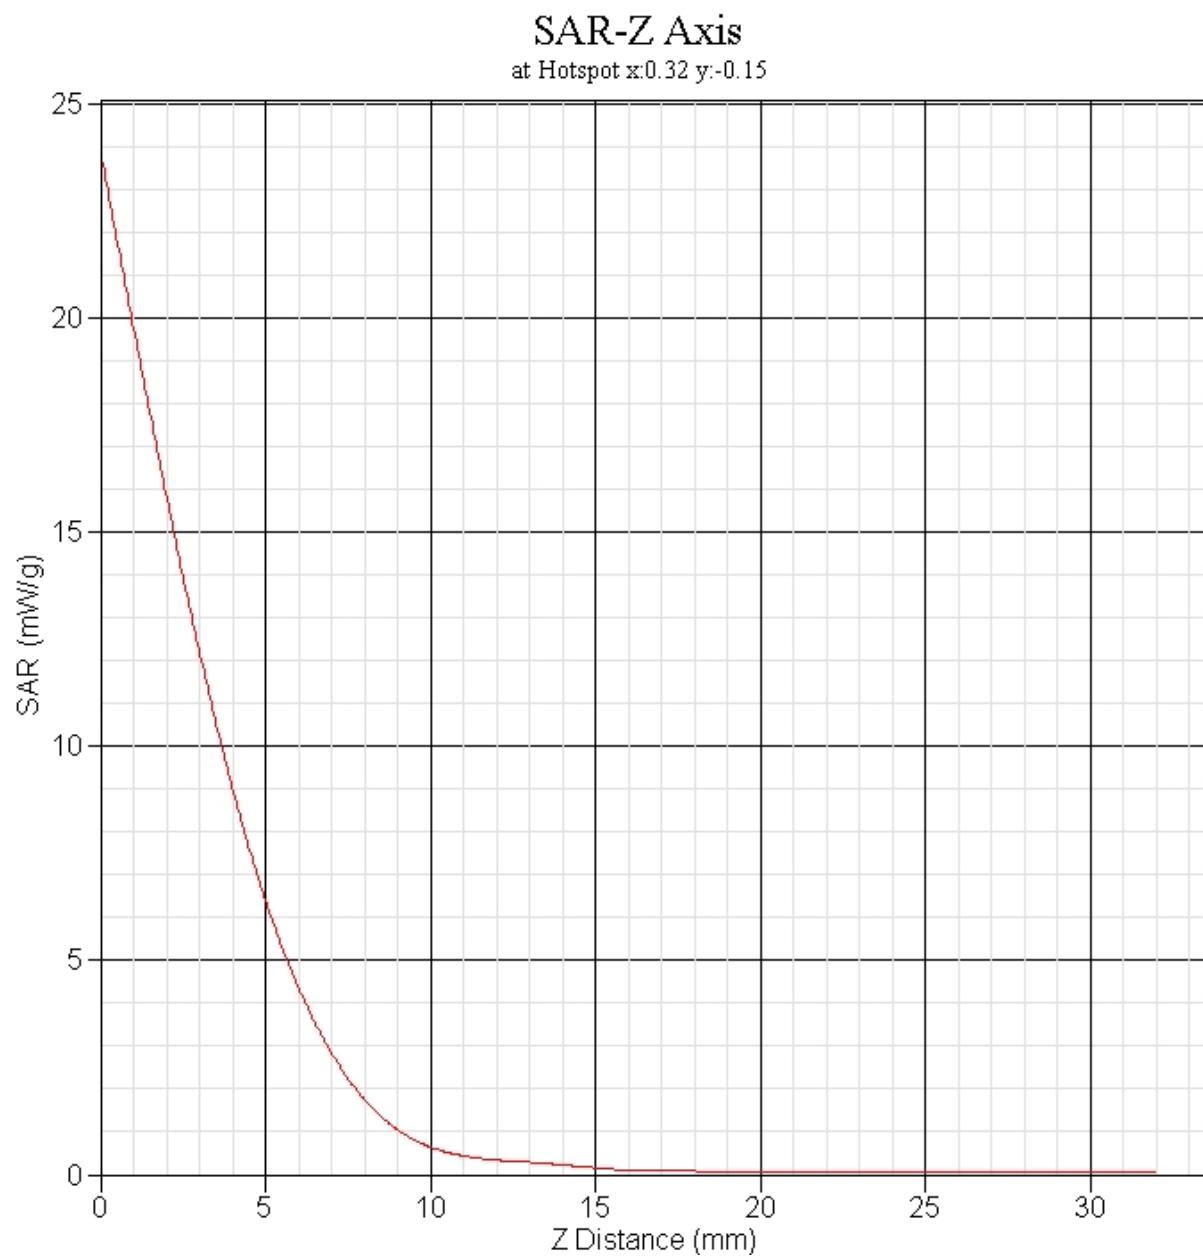

**SAR Test Report**

By Operator : Jay  
Measurement Date : 13-May-2011  
Starting Time : 13-May-2011 02:37:38 PM  
End Time : 13-May-2011 03:00:36 PM  
Scanning Time : 1378 secs

## Product Data

Device Name : Validation  
Serial No. : 5800  
Type : Dipole  
Model : ALS-D-BB-S-2  
Frequency : 5800.00 MHz  
Max. Transmit Pwr : 0.1 W  
Drift Time : 0 min(s)  
Length : 23.1 mm  
Width : 3.6 mm  
Depth : 20.7 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 8.510 W/kg  
Power Drift-Finish: 8.512 W/kg  
Power Drift (%) : 0.031

## Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

## Tissue Data

Type : HEAD  
Serial No. : 5800  
Frequency : 5785.00 MHz  
Last Calib. Date : 13-May-2011  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 50.00 RH%  
Epsilon : 35.06 F/m  
Sigma : 5.31 S/m  
Density : 1000.00 kg/cu. m

## Probe Data


Name : Probe E030-001 - RFEL  
Model : E030  
Type : E-Field Triangle  
Serial No. : E030-001  
Last Calib. Date : 11-Jul-2010  
Frequency : 5800.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.6  
Probe Sensitivity: 1.20 1.20 1.20  $\mu$ V/ (V/m)<sup>2</sup>  
Compression Point: 95.00 mV  
Offset : 1.06 mm

## Measurement Data


Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 13-May-2011  
Set-up Time : 8:54:57 AM  
Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x10 : Measurement x=4mm, y=4mm, z=2.5mm

## Other Data

DUT Position : Touch  
Separation : 10 mm  
Channel : Mid

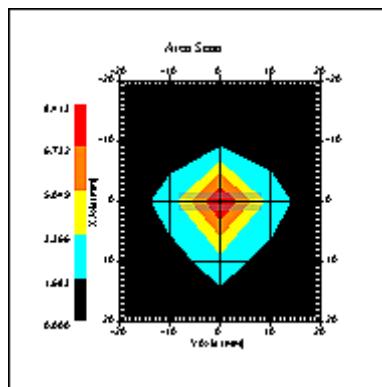

1 gram SAR value : 6.442 W/kg  
10 gram SAR value : 1.737 W/kg  
Area Scan Peak SAR : 8.413 W/kg  
Zoom Scan Peak SAR : 23.318 W/kg

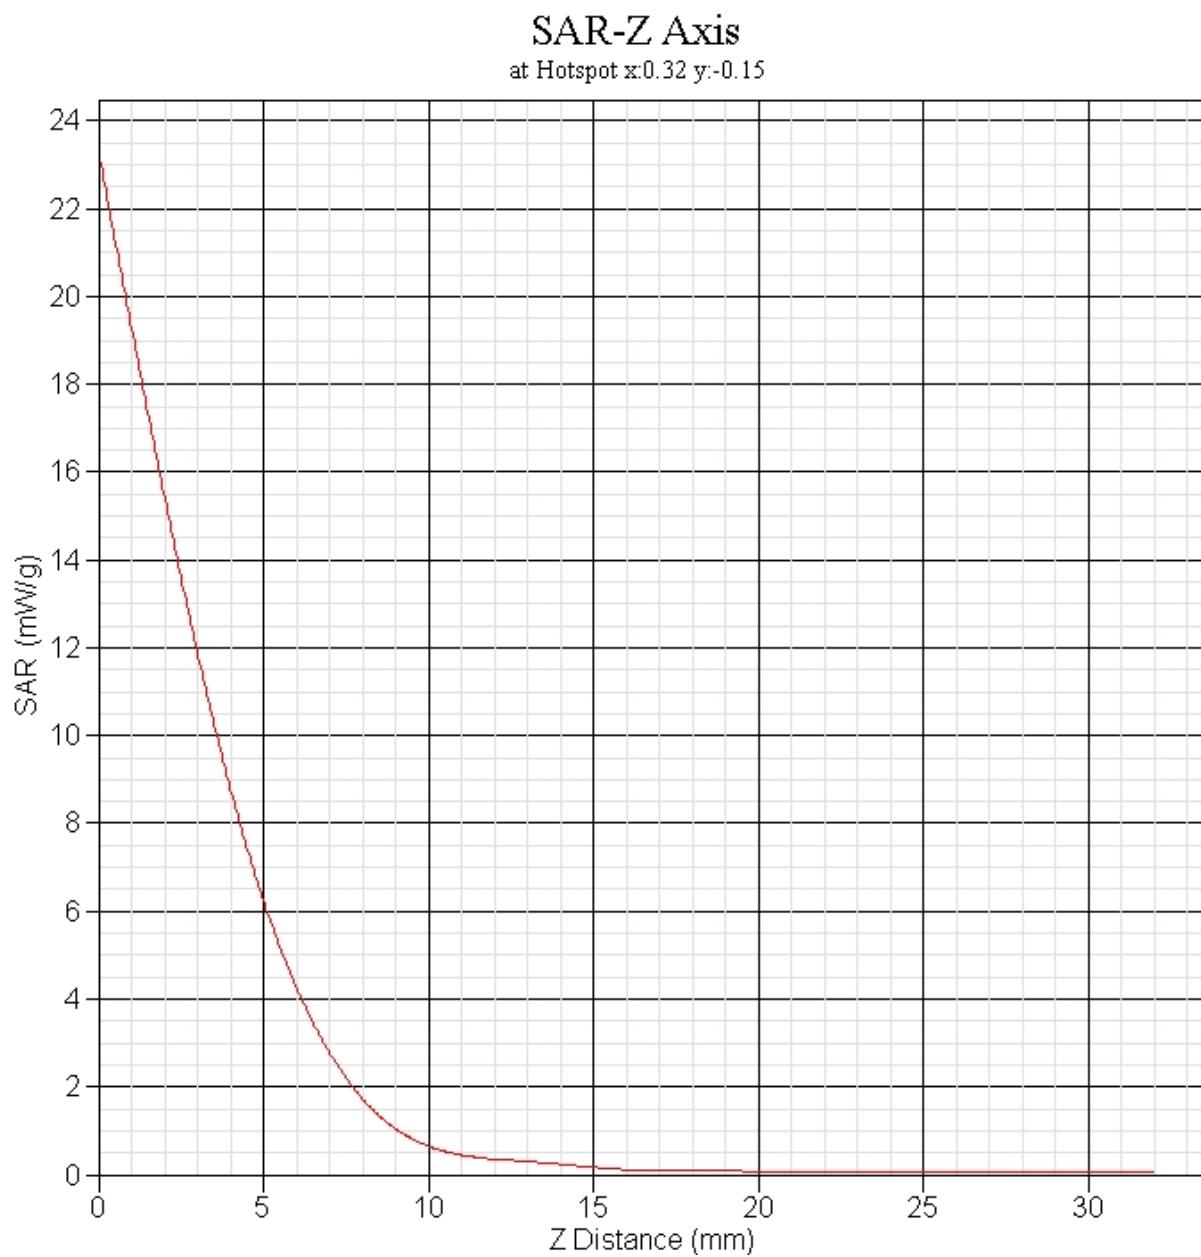

**SAR Test Report**

By Operator : Jay  
Measurement Date : 13-May-2011  
Starting Time : 13-May-2011 03:19:43 PM  
End Time : 13-May-2011 03:42:59 PM  
Scanning Time : 1396 secs

## Product Data

Device Name : Validation  
Serial No. : 5800  
Type : Dipole  
Model : ALS-D-BB-S-2  
Frequency : 5800.00 MHz  
Max. Transmit Pwr : 0.1 W  
Drift Time : 0 min(s)  
Length : 23.1 mm  
Width : 3.6 mm  
Depth : 20.7 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 8.662 W/kg  
Power Drift-Finish: 8.729 W/kg  
Power Drift (%) : 0.776

## Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

## Tissue Data

Type : BODY  
Serial No. : 5800  
Frequency : 5800.00 MHz  
Last Calib. Date : 13-May-2011  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 50.00 RH%  
Epsilon : 47.92 F/m  
Sigma : 6.02 S/m  
Density : 1000.00 kg/cu. m

## Probe Data


Name : Probe E030-001 - RFEL  
Model : E030  
Type : E-Field Triangle  
Serial No. : E030-001  
Last Calib. Date : 11-Jul-2010  
Frequency : 5800.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.2  
Probe Sensitivity: 1.20 1.20 1.20  $\mu$ V/ (V/m)<sup>2</sup>  
Compression Point: 95.00 mV  
Offset : 1.06 mm

## Measurement Data

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 13-May-2011  
Set-up Time : 9:00:47 AM  
Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x10 : Measurement x=4mm, y=4mm, z=2.5mm


## Other Data

DUT Position : Touch  
Separation : 10 mm  
Channel : Mid

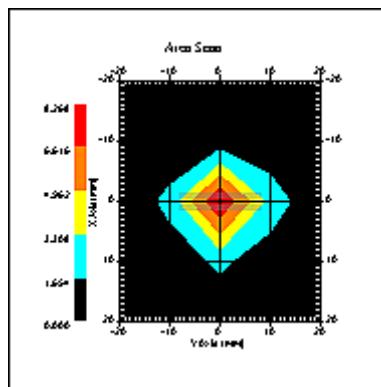

1 gram SAR value : 6.227 W/kg  
10 gram SAR value : 1.983 W/kg  
Area Scan Peak SAR : 8.268 W/kg  
Zoom Scan Peak SAR : 23.318 W/kg

SAR-Z Axis  
at Hotspot x:0.41 y:-0.22

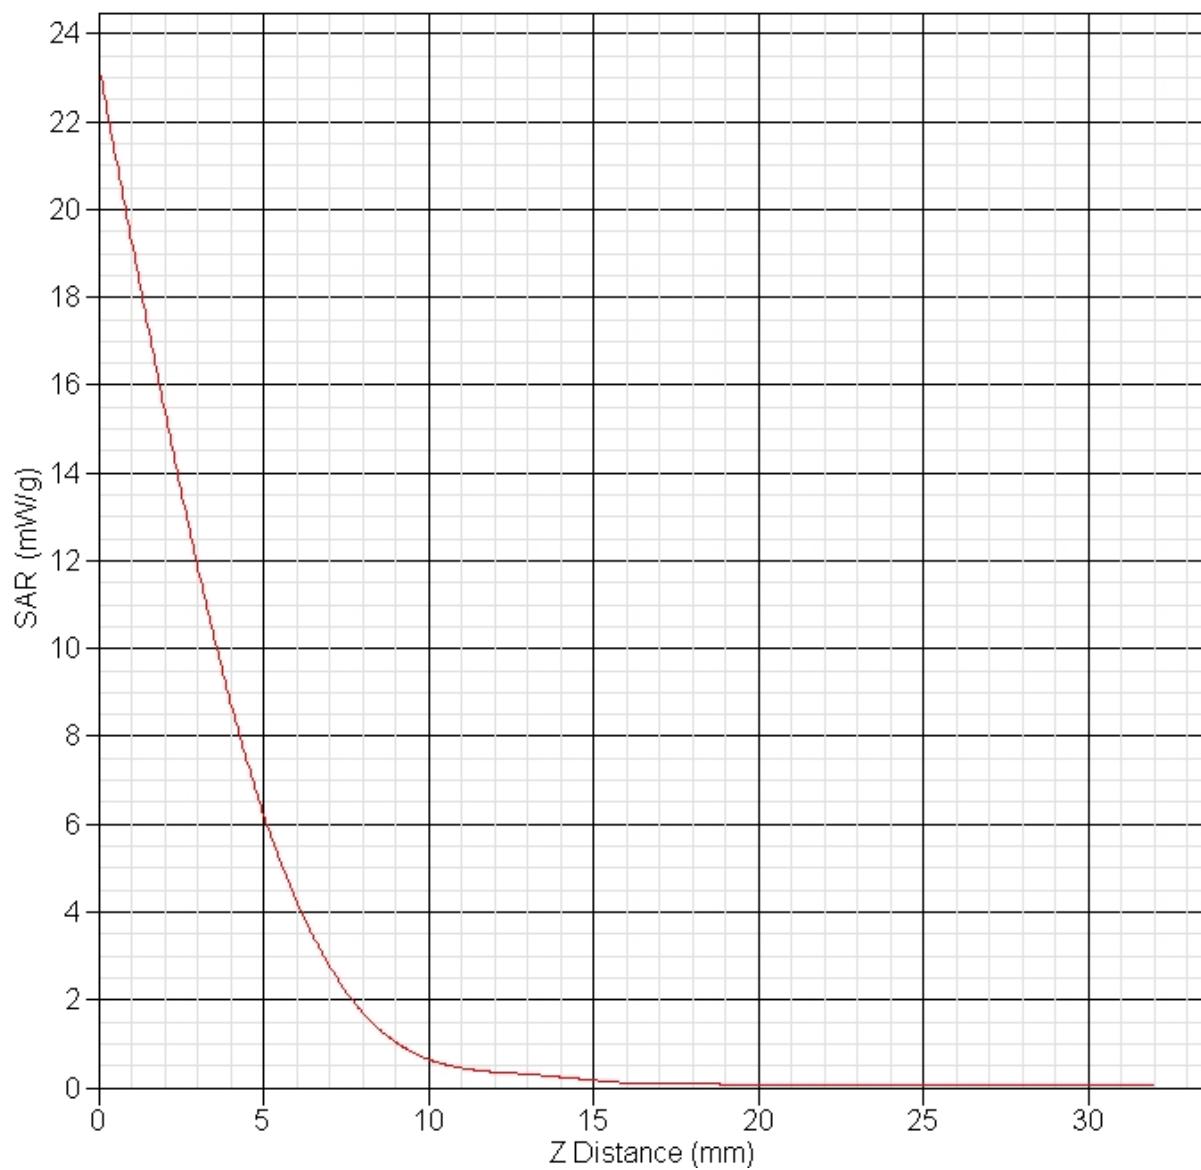

## Appendix B – SAR Test Data Plots

**Note:** In all data sheets in Appendix B, the frequency noted in the ‘Product Data’ section is the frequency band which the device was transmitting. This frequency does not refer to the actual frequency and channel of the test. The channel is listed in the ‘Other Data’ section of the data sheet as Low, Mid or High. The actual test frequency is listed in Section 10 in each of the data summary sheets.

**SAR Test Report**

By Operator : Jay  
Measurement Date : 13-May-2011  
Starting Time : 13-May-2011 12:20:22 PM  
End Time : 13-May-2011 12:40:37 PM  
Scanning Time : 1215 secs

## Product Data

Device Name : Polycom Inc.  
Serial No. : 610859572  
Mode : 802.11b  
Model : PS8450  
Frequency : 2450.00 MHz  
Max. Transmit Pwr : 0.059 W  
Drift Time : 0 min(s)  
Length : 145 mm  
Width : 54 mm  
Depth : 23 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.112 W/kg  
Power Drift-Finish: 0.114 W/kg  
Power Drift (%) : 2.233

## Phantom Data

Name : APREL-SAM Right Ear  
Type : SAM-Right  
Size (mm) : 280 x 280 x 280  
Serial No. : User Define  
Location : Right  
Description : Polygon Right

## Tissue Data

Type : HEAD  
Serial No. : 2450  
Frequency : 2450.00 MHz  
Last Calib. Date : 13-May-2011  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 46.00 RH%  
Epsilon : 38.97 F/m  
Sigma : 1.85 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 22-Sep-2010  
Frequency : 2450.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.37  
Probe Sensitivity: 1.20 1.20 1.20  $\mu$ V/ (V/m)<sup>2</sup>  
Compression Point: 95.00 mV  
Offset : 1.56 mm


## Measurement Data

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 13-May-2011  
Set-up Time : 1:39:03 PM  
Area Scan : 10x6x1 : Measurement x=15mm, y=15mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm


## Other Data

DUT Position : Touch  
Separation : 0 mm  
Channel : Mid

Area Scan

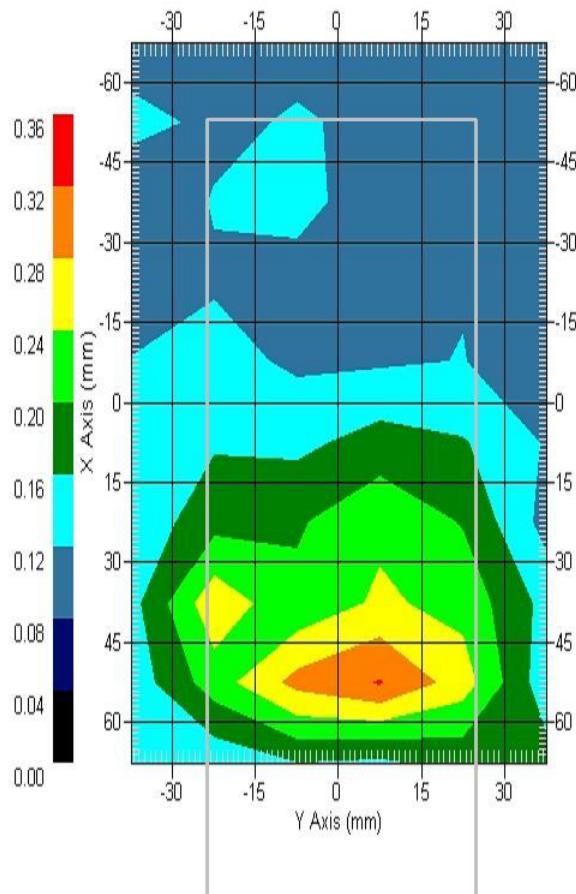

1 gram SAR value : 0.308 W/kg  
10 gram SAR value : 0.212 W/kg  
Area Scan Peak SAR : 0.322 W/kg  
Zoom Scan Peak SAR : 0.500 W/kg

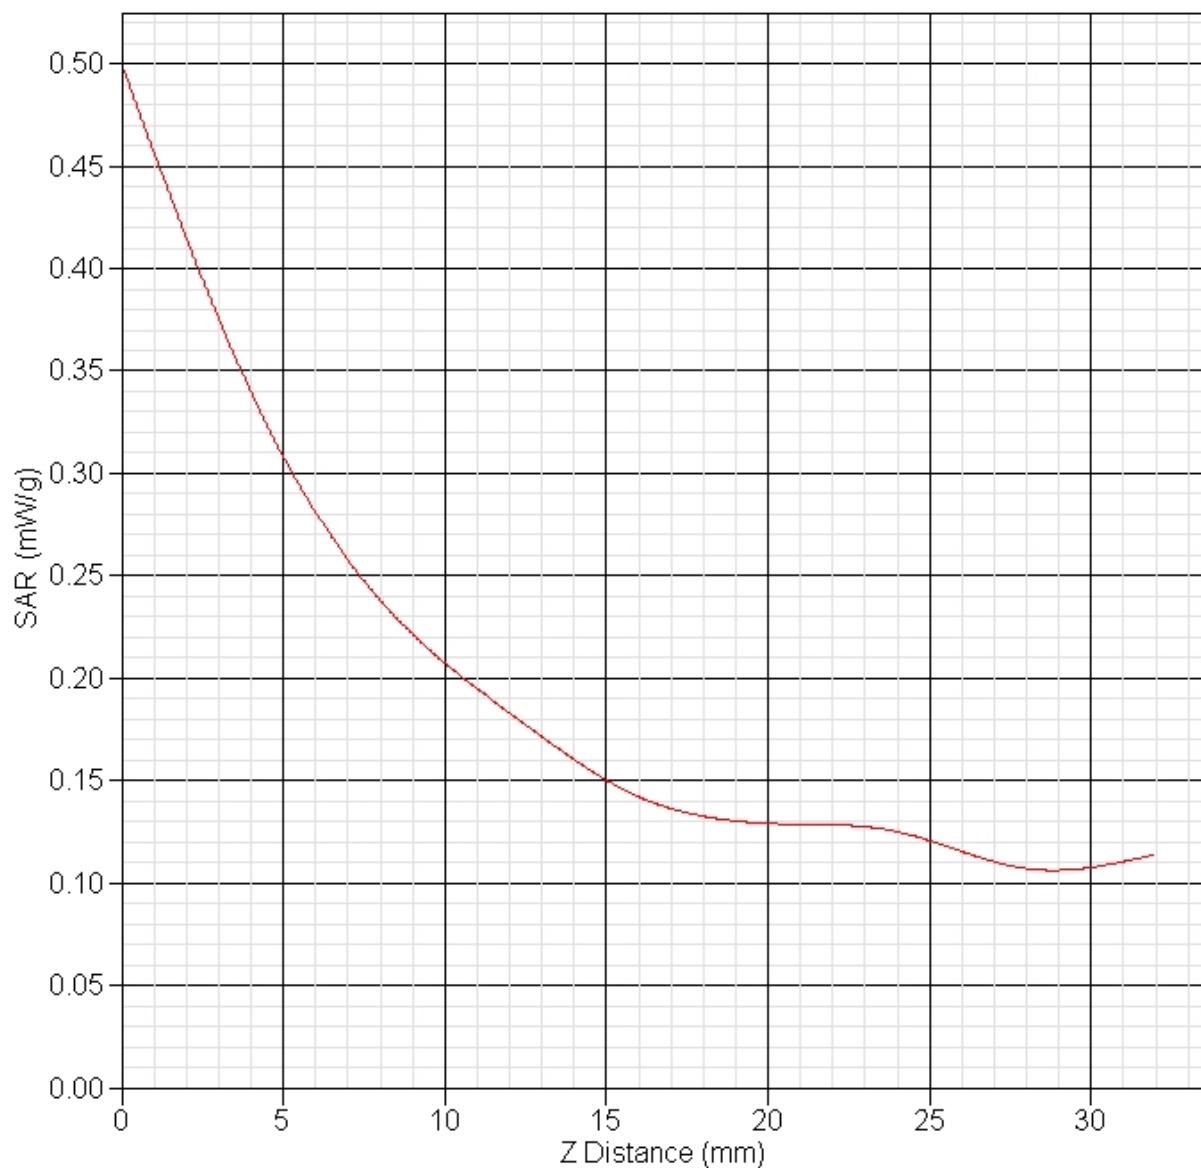**SAR-Z Axis**  
at Hotspot x:100.09 y:8.01

**SAR Test Report**

By Operator : Jay  
Measurement Date : 13-May-2011  
Starting Time : 13-May-2011 12:44:17 PM  
End Time : 13-May-2011 01:12:22 PM  
Scanning Time : 1685 secs

## Product Data

Device Name : Polycom Inc.  
Serial No. : 610859572  
Mode : 802.11b  
Model : PS8450  
Frequency : 2450.00 MHz  
Max. Transmit Pwr : 0.059 W  
Drift Time : 0 min(s)  
Length : 145 mm  
Width : 54 mm  
Depth : 23 mm  
Antenna Type : Internal  
Orientation : 15° Tilt  
Power Drift-Start : 0.145 W/kg  
Power Drift-Finish: 0.142 W/kg  
Power Drift (%) : -2.068

## Phantom Data

Name : APREL-SAM Right Ear  
Type : SAM-Right  
Size (mm) : 280 x 280 x 280  
Serial No. : User Define  
Location : Right  
Description : Polygon Right

## Tissue Data

Type : HEAD  
Serial No. : 2450  
Frequency : 2450.00 MHz  
Last Calib. Date : 13-May-2011  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 46.00 RH%  
Epsilon : 38.97 F/m  
Sigma : 1.85 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 22-Sep-2010  
Frequency : 2450.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.37  
Probe Sensitivity: 1.20 1.20 1.20  $\mu$ V/ (V/m)<sup>2</sup>  
Compression Point: 95.00 mV  
Offset : 1.56 mm


## Measurement Data

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 13-May-2011  
Set-up Time : 1:39:03 PM  
Area Scan : 10x6x1 : Measurement x=15mm, y=15mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

## Other Data

DUT Position : 15° Tilt  
Separation : 0 mm  
Channel : Mid

Area Scan

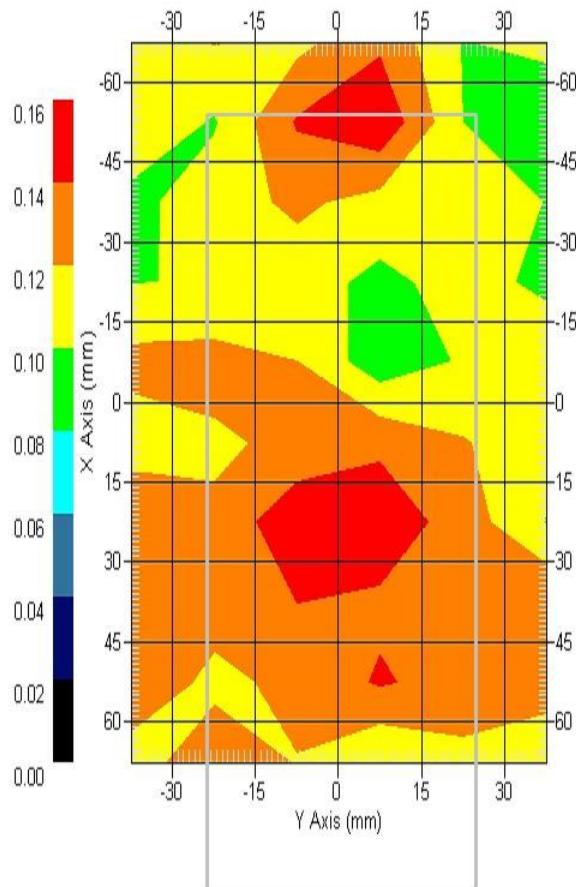

1 gram SAR value : 0.134 W/kg  
10 gram SAR value : 0.117 W/kg  
Area Scan Peak SAR : 0.156 W/kg  
Zoom Scan Peak SAR : 0.190 W/kg

**SAR Test Report**

By Operator : Jay  
Measurement Date : 13-May-2011  
Starting Time : 13-May-2011 11:29:19 AM  
End Time : 13-May-2011 11:49:38 PM  
Scanning Time : 1219 secs

## Product Data

Device Name : Polycom Inc.  
Serial No. : 610859572  
Mode : 802.11b  
Model : PS8450  
Frequency : 2450.00 MHz  
Max. Transmit Pwr : 0.059 W  
Drift Time : 0 min(s)  
Length : 145 mm  
Width : 54 mm  
Depth : 23 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.118 W/kg  
Power Drift-Finish: 0.120 W/kg  
Power Drift (%) : 1.690

## Phantom Data

Name : APREL-SAM Left Ear  
Type : SAM-Left  
Size (mm) : 280 x 280 x 280  
Serial No. : User Define  
Location : Left  
Description : Polygon Left

## Tissue Data

Type : HEAD  
Serial No. : 2450  
Frequency : 2450.00 MHz  
Last Calib. Date : 13-May-2011  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 46.00 RH%  
Epsilon : 38.97 F/m  
Sigma : 1.85 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 22-Sep-2010  
Frequency : 2450.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.37  
Probe Sensitivity: 1.20 1.20 1.20  $\mu$ V/ (V/m)<sup>2</sup>  
Compression Point: 95.00 mV  
Offset : 1.56 mm


## Measurement Data

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 13-May-2011  
Set-up Time : 1:39:03 PM  
Area Scan : 10x6x1 : Measurement x=15mm, y=15mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

## Other Data

DUT Position : Touch  
Separation : 0 mm  
Channel : Mid

Area Scan

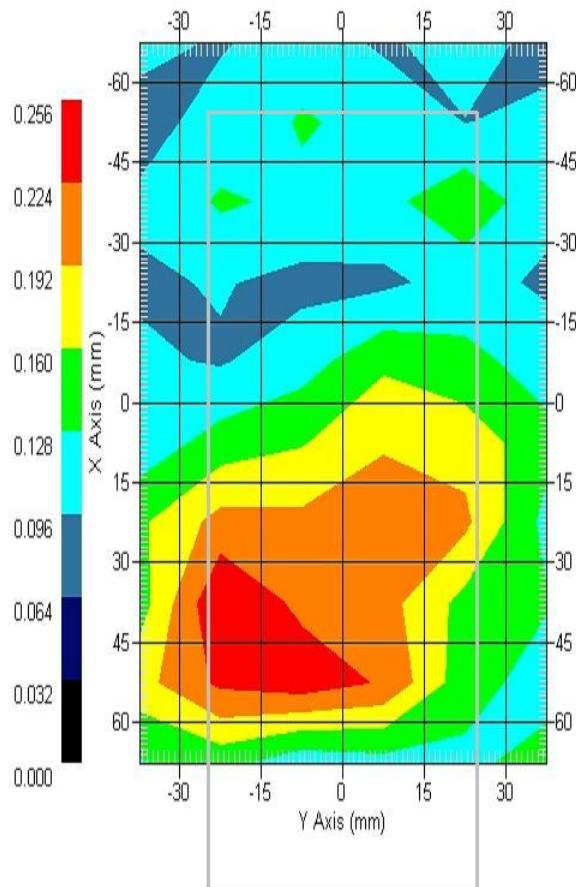

1 gram SAR value : 0.239 W/kg  
10 gram SAR value : 0.185 W/kg  
Area Scan Peak SAR : 0.255 W/kg  
Zoom Scan Peak SAR : 0.320 W/kg

**SAR Test Report**

By Operator : Jay  
Measurement Date : 13-May-2011  
Starting Time : 13-May-2011 11:52:38 AM  
End Time : 13-May-2011 12:12:36 PM  
Scanning Time : 1198 secs

## Product Data

Device Name : Polycom Inc.  
Serial No. : 610859572  
Mode : 802.11b  
Model : PS8450  
Frequency : 2450.00 MHz  
Max. Transmit Pwr : 0.059 W  
Drift Time : 0 min(s)  
Length : 145 mm  
Width : 54 mm  
Depth : 23 mm  
Antenna Type : Internal  
Orientation : 15° Tilt  
Power Drift-Start : 0.150 W/kg  
Power Drift-Finish: 0.145 W/kg  
Power Drift (%) : -3.338

## Phantom Data

Name : APREL-SAM Left Ear  
Type : SAM-Left  
Size (mm) : 280 x 280 x 280  
Serial No. : User Define  
Location : Left  
Description : Polygon Left

## Tissue Data

Type : HEAD  
Serial No. : 2450  
Frequency : 2450.00 MHz  
Last Calib. Date : 13-May-2011  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 46.00 RH%  
Epsilon : 38.97 F/m  
Sigma : 1.85 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 22-Sep-2010  
Frequency : 2450.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.37  
Probe Sensitivity: 1.20 1.20 1.20  $\mu$ V/ (V/m)<sup>2</sup>  
Compression Point: 95.00 mV  
Offset : 1.56 mm


## Measurement Data

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 13-May-2011  
Set-up Time : 1:39:03 PM  
Area Scan : 10x6x1 : Measurement x=15mm, y=15mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

## Other Data

DUT Position : 15° Tilt  
Separation : 0 mm  
Channel : Mid

Area Scan

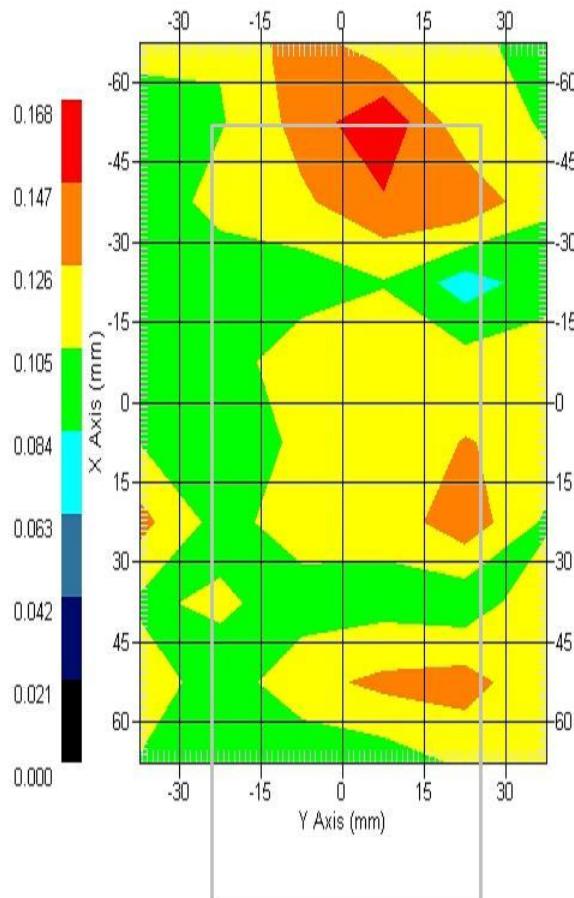

1 gram SAR value : 0.154 W/kg  
10 gram SAR value : 0.125 W/kg  
Area Scan Peak SAR : 0.164 W/kg  
Zoom Scan Peak SAR : 0.210 W/kg

**SAR Test Report**

By Operator : Jay  
Measurement Date : 13-May-2011  
Starting Time : 13-May-2011 01:29:50 PM  
End Time : 13-May-2011 01:51:00 PM  
Scanning Time : 1270 secs

## Product Data

Device Name : Polycom Inc.  
Serial No. : 610859572  
Mode : 802.11b  
Model : PS8450  
Frequency : 2450.00 MHz  
Max. Transmit Pwr : 0.059 W  
Drift Time : 0 min(s)  
Length : 54 mm  
Width : 145 mm  
Depth : 23 mm  
Antenna Type : Internal  
Orientation : Back of Device  
Power Drift-Start : 0.130 W/kg  
Power Drift-Finish: 0.133 W/kg  
Power Drift (%) : 2.754

## Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

## Tissue Data

Type : BODY  
Serial No. : 2450  
Frequency : 2450.00 MHz  
Last Calib. Date : 13-May-2011  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 46.00 RH%  
Epsilon : 51.96 F/m  
Sigma : 1.97 S/m  
Density : 1000.00 kg/cu. m

## Probe Data


Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 22-Sep-2010  
Frequency : 2450.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.5  
Probe Sensitivity: 1.20 1.20 1.20  $\mu$ V/ (V/m)<sup>2</sup>  
Compression Point: 95.00 mV  
Offset : 1.56 mm

## Measurement Data


Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 13-May-2011  
Set-up Time : 1:39:03 PM  
Area Scan : 6x11x1 : Measurement x=15mm, y=15mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

## Other Data

DUT Position : Back of Device  
Separation : 0 mm  
Channel : Mid

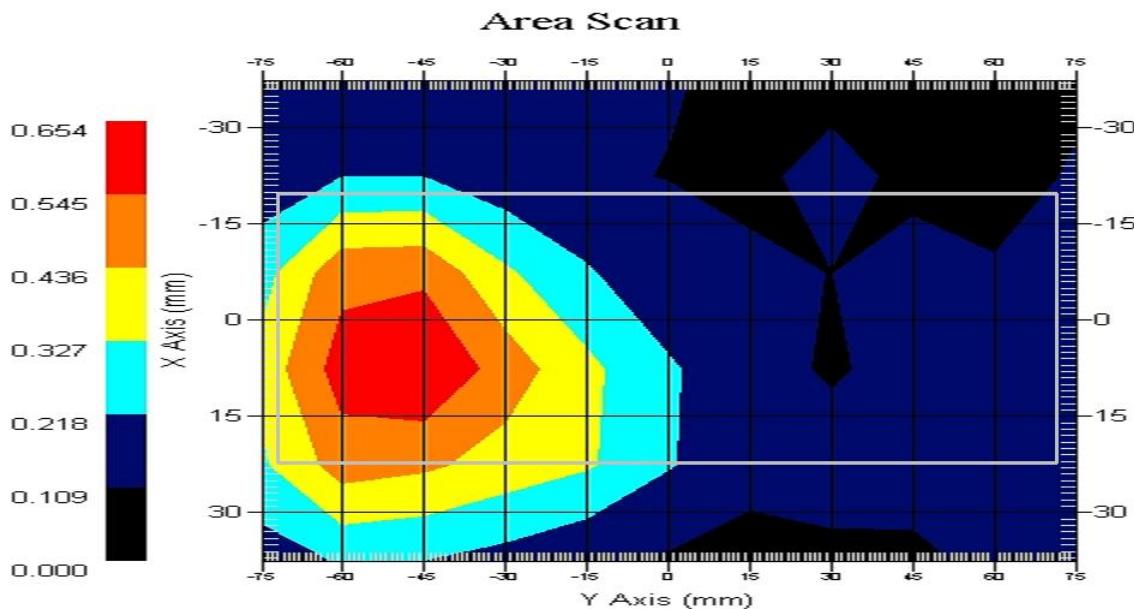

1 gram SAR value : 0.623 W/kg  
10 gram SAR value : 0.380 W/kg  
Area Scan Peak SAR : 0.651 W/kg  
Zoom Scan Peak SAR : 0.940 W/kg

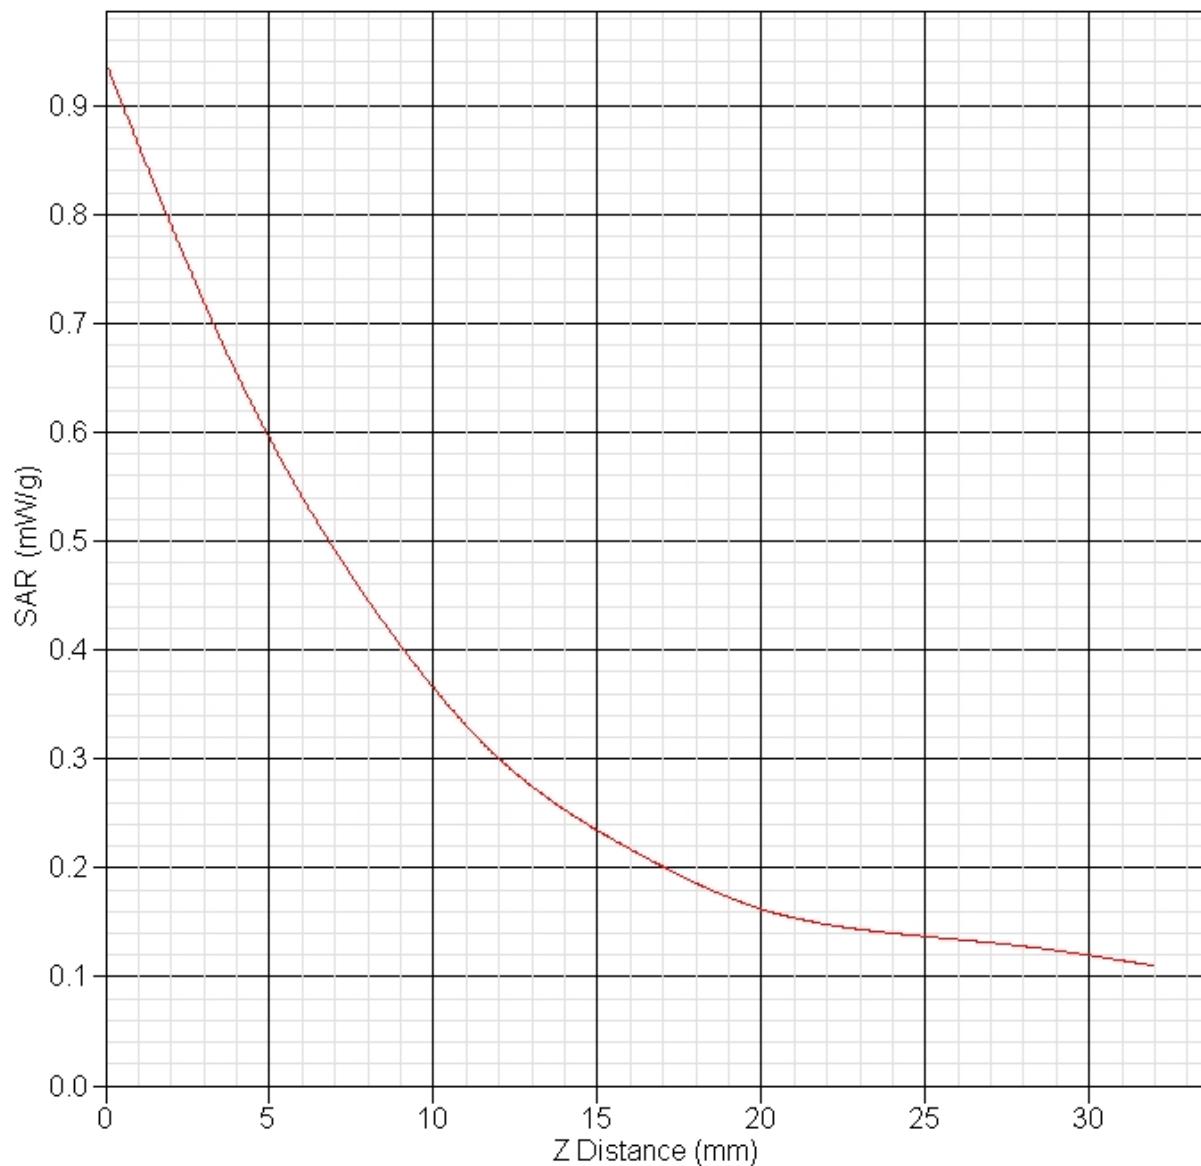**SAR-Z Axis**  
at Hotspot x:15.21 y:-44.94

**SAR Test Report**

By Operator : Jay  
Measurement Date : 14-May-2011  
Starting Time : 14-May-2011 09:38:54 AM  
End Time : 14-May-2011 10:07:51 AM  
Scanning Time : 1737 secs

Product Data  
Device Name : Polycom Inc.  
Serial No. : 610859572  
Mode : 802.11a - UNII Low Band  
Model : PS8450  
Frequency : 5200.00 MHz  
Max. Transmit Pwr : 0.032 W  
Drift Time : 0 min(s)  
Length : 145 mm  
Width : 54 mm  
Depth : 23 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.089 W/kg  
Power Drift-Finish: 0.092 W/kg  
Power Drift (%) : 3.371

Phantom Data  
Name : APREL-SAM Right Ear  
Type : SAM-Right  
Size (mm) : 280 x 280 x 280  
Serial No. : User Define  
Location : Right  
Description : Polygon Right

Tissue Data  
Type : HEAD  
Serial No. : 5250  
Frequency : 5250.00 MHz  
Last Calib. Date : 14-May-2011  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 46.00 RH%  
Epsilon : 35.29 F/m  
Sigma : 5.11 S/m  
Density : 1000.00 kg/cu. m

Probe Data  
Name : Probe E030-001 - RFEL  
Model : E030  
Type : E-Field Triangle  
Serial No. : E030-001  
Last Calib. Date : 11-Jul-2010  
Frequency : 5200.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.8  
Probe Sensitivity: 1.20 1.20 1.20  $\mu$ V/ (V/m)<sup>2</sup>  
Compression Point: 95.00 mV  
Offset : 1.06 mm


## Measurement Data

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 14-May-2011  
Set-up Time : 8:04:56 AM  
Area Scan : 10x6x1 : Measurement x=15mm, y=15mm, z=4mm  
Zoom Scan : 7x7x10 : Measurement x=4mm, y=4mm, z=2.5mm

## Other Data

DUT Position : Touch  
Separation : 0 mm  
Channel : Mid

Area Scan

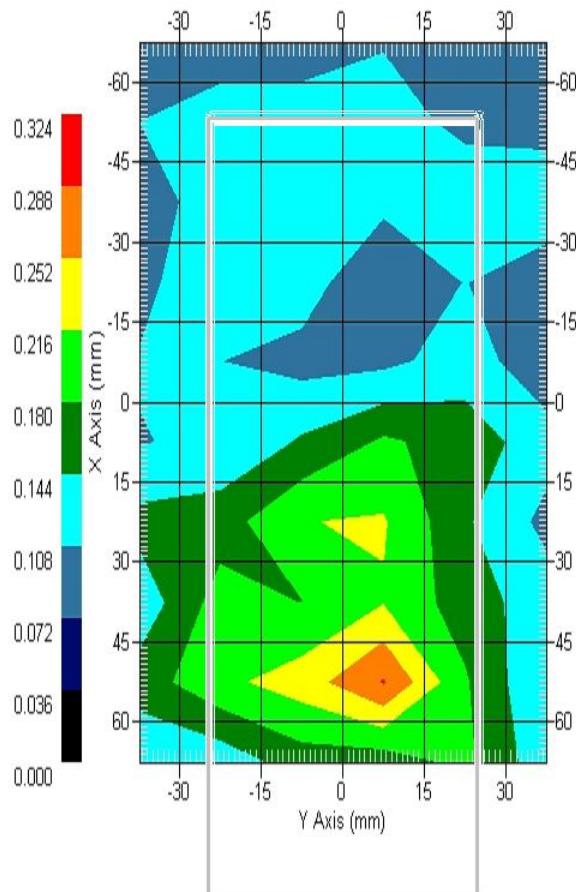

1 gram SAR value : 0.268 W/kg  
10 gram SAR value : 0.195 W/kg  
Area Scan Peak SAR : 0.290 W/kg  
Zoom Scan Peak SAR : 0.410 W/kg

**SAR Test Report**

By Operator : Jay  
Measurement Date : 14-May-2011  
Starting Time : 14-May-2011 10:10:36 AM  
End Time : 14-May-2011 10:51:14 AM  
Scanning Time : 2438 secs

Product Data  
Device Name : Polycom Inc.  
Serial No. : 610859572  
Mode : 802.11a - UNII Low Band  
Model : PS8450  
Frequency : 5200.00 MHz  
Max. Transmit Pwr : 0.032 W  
Drift Time : 0 min(s)  
Length : 145 mm  
Width : 54 mm  
Depth : 23 mm  
Antenna Type : Internal  
Orientation : 15° Tilt  
Power Drift-Start : 0.227 W/kg  
Power Drift-Finish: 0.224 W/kg  
Power Drift (%) : -1.329

Phantom Data  
Name : APREL-SAM Right Ear  
Type : SAM-Right  
Size (mm) : 280 x 280 x 280  
Serial No. : User Define  
Location : Right  
Description : Polygon Right

Tissue Data  
Type : HEAD  
Serial No. : 5250  
Frequency : 5250.00 MHz  
Last Calib. Date : 14-May-2011  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 46.00 RH%  
Epsilon : 35.29 F/m  
Sigma : 5.11 S/m  
Density : 1000.00 kg/cu. m

Probe Data  
Name : Probe E030-001 - RFEL  
Model : E030  
Type : E-Field Triangle  
Serial No. : E030-001  
Last Calib. Date : 11-Jul-2010  
Frequency : 5200.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.8  
Probe Sensitivity: 1.20 1.20 1.20  $\mu$ V/ (V/m)<sup>2</sup>  
Compression Point: 95.00 mV  
Offset : 1.06 mm