

*EMC Test Report**Application for Grant of Equipment Authorization**FCC Part 15 Subpart C**Model: TX-Znode Zigbee Repeater*

FCC ID: M74TX-ZNODE

APPLICANT: Long Range Systems
4550 Excel Parkway, Suite 200
Addison, TX 75001TEST SITE(S): National Technical Systems - Plano
1701 E Plano Pkwy #150
Plano, TX 75074

REPORT DATE: March 4, 2014

REISSUE DATE: March 11, 2014

FINAL TEST DATES: February 25 and 26, March 3 and 5, 2014

TOTAL NUMBER OF PAGES: 45

PROGRAM MGR /
TECHNICAL REVIEWER:David W. Bare
Chief EngineerQUALITY ASSURANCE DELEGATE /
FINAL REPORT PREPARER:David Guidotti
Senior Technical Writer

This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

REVISION HISTORY

Rev#	Date	Comments	Modified By
	March 4, 2014	First release	
1	March 5, 2014	Reissued to add procedure notes in test data, new conducted spurious emissions test results and statement about duty cycle under EUT operation section.	Dave Guidotti David Bare
2	March 11, 2014	Reissued with new test results and changed standard reference from C63.4 to C63.10	Dave Guidotti David Bare

TABLE OF CONTENTS

REVISION HISTORY	2
TABLE OF CONTENTS	3
SCOPE.....	4
OBJECTIVE.....	5
STATEMENT OF COMPLIANCE.....	5
DEVIATIONS FROM THE STANDARDS.....	5
TEST RESULTS SUMMARY	6
DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHZ).....	6
GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS.....	6
MEASUREMENT UNCERTAINTIES.....	6
EQUIPMENT UNDER TEST (EUT) DETAILS.....	7
GENERAL.....	7
ANTENNA SYSTEM	7
ENCLOSURE.....	7
MODIFICATIONS.....	7
SUPPORT EQUIPMENT.....	7
EUT INTERFACE PORTS	7
EUT OPERATION	7
TEST SITE.....	8
GENERAL INFORMATION.....	8
CONDUCTED EMISSIONS CONSIDERATIONS	8
RADIATED EMISSIONS CONSIDERATIONS	8
MEASUREMENT INSTRUMENTATION	9
RECEIVER SYSTEM	9
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	9
FILTERS/ATTENUATORS	10
ANTENNAS.....	10
ANTENNA MAST AND EQUIPMENT TURNTABLE	10
INSTRUMENT CALIBRATION.....	10
TEST PROCEDURES	11
EUT AND CABLE PLACEMENT	11
CONDUCTED EMISSIONS.....	11
RADIATED EMISSIONS	12
CONDUCTED EMISSIONS FROM ANTENNA PORT	15
BANDWIDTH MEASUREMENTS	15
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS	16
CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(A), RSS GEN	16
GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS	17
RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS	17
OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS	18
TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS AND DTS SYSTEMS.....	18
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	18
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	18
SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION.....	19
APPENDIX A TEST DATA AND EQUIPMENT LIST	20
END OF REPORT	45

SCOPE

An electromagnetic emissions test has been performed on the Long Range Systems model TX-Znode Zigbee Repeater, pursuant to the following rules:

FCC Part 15 Subpart C

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in National Technical Systems - Silicon Valley test procedures:

ANSI C63.10-2009

FCC DTS Measurement Guidance KDB 558074

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer's declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

STATEMENT OF COMPLIANCE

The tested sample of Long Range Systems model TX-Znode Zigbee Repeater complied with the requirements of the following regulations:

FCC Part 15 Subpart C

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

The test results recorded herein are based on a single type test of Long Range Systems model TX-Znode Zigbee Repeater and therefore apply only to the tested sample. The sample was selected and prepared by Mike Williams of Long Range Systems.

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS SUMMARY**DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHz)**

FCC Rule Part		Description	Measured Value / Comments	Limit / Requirement	Result
15.247(a)		Digital Modulation	System uses DSSS techniques	System must utilize a digital transmission technology	Complies
15.247 (a) (2)		Minimum 6dB Bandwidth	1.57 MHz	>500kHz	Complies
15.247 (b) (3)		Output Power (multipoint systems)	17.4 dBm (0.055 Watts) EIRP = 0.089 W ^{Note 1}	1Watt, EIRP limited to 4 Watts.	Complies
15.247(d)		Power Spectral Density	7.3 dBm / 3kHz	8dBm/3kHz	Complies
15.247(c)		Antenna Port Spurious Emissions 30MHz – 25 GHz	All emissions < -20 dBc	< -20dBc ^{Note 2}	Complies
15.247(c) / 15.209		Radiated Spurious Emissions 30MHz – 25 GHz	53.9 dBuV/m @ 2493.95 MHz (-0.1dB)	15.207 in restricted bands, all others < -20dBc ^{Note 2}	Complies

Note 1: EIRP calculated using antenna gain of 2.1 dBi for the highest EIRP system.
Note 2: Limit of -20dBc used because the power was measured peak.

GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS

FCC Rule Part		Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.203		RF Connector	Reverse SMA	Unique or integral antenna required	Complies
15.207		AC Conducted Emissions	28.2 dBuV @ 0.535 MHz (-17.8 dB)	Refer to page 16	Complies
15.247 (b) (5) 15.407 (f)		RF Exposure Requirements	Refer to MPE calculations in separate Exhibit, and User Manual statements.	Refer to OET 65, FCC Part 1	Complies

MEASUREMENT UNCERTAINTIES

The measurement of uncertainty is not included with the data in this test report

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Long Range Systems model TX-Znode Zigbee Repeater ZigBee repeater operating on 2405-2475MHz band. The electrical rating of the EUT is 5VDC via AC/DC Adapter

The sample was received on February 24, 2014 and tested on February 25 and 26, March 3 and 5, 2014. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
Long Range Systems	TX-Znode Zigbee Repeater	Zigbee Repeater	None	M74TX-ZNODE
Condor	3A-154WP05	AC//DC Adapter	None	-

ANTENNA SYSTEM

The antenna system consists of a Dig-International AN-A1-XOC ¼ swivel dipole. The antenna connector is a reverse polarity SMA.

ENCLOSURE

The EUT enclosure measures approximately 9 by 6 by 2.5 centimeters. It is primarily constructed of coated plastic.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at NTS Plano.

SUPPORT EQUIPMENT

No support equipment was used during testing.

EUT INTERFACE PORTS

The I/O cabling configuration during testing was as follows:

Port	Connected To	Description	Cable(s) Shielded or Unshielded	Length(m)
DC power Port	AC/DC adapter	2 wire	unshielded	1.5

EUT OPERATION

During testing, the EUT was set to continuously transmit on selected frequency at maximum power. The duty cycle was greater than 98%.

TEST SITE**GENERAL INFORMATION**

Final test measurements were taken at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules, construction, calibration, and equipment data has been filed with the Commission.

Site	Designation/Registration Numbers FCC	Location
Chamber 1	US1007	1701 E Plano Pkwy #150, Plano, TX 75074

ANSI C63.4 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement. The test site(s) contain separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.10. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4.

MEASUREMENT INSTRUMENTATION**RECEIVER SYSTEM**

A spectrum analyzer compliant with CISPR 16-1-1 is used for emissions measurements. The analyzer used can measure over the frequency range of 9 kHz up to 3000 MHz. The analyzer allows both ease of measurement and high accuracy to be achieved. The analyzer has Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The analyzer automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.4 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor as specified in ANSI C63.4. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES

EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

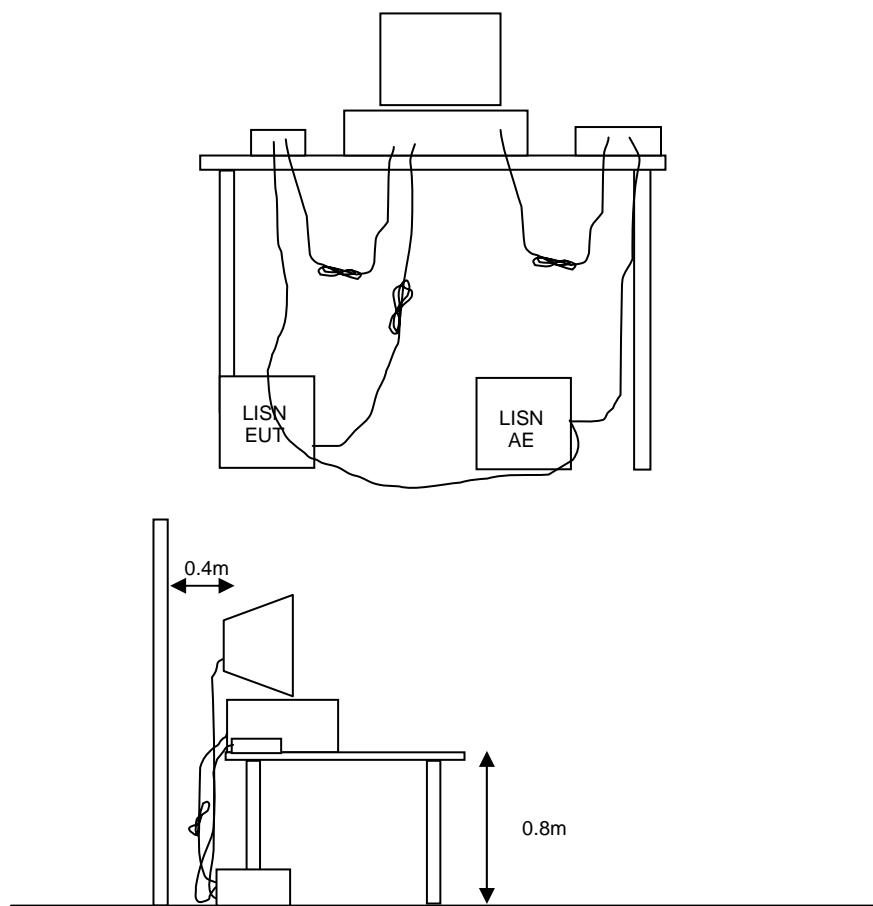


Figure 1 Typical Conducted Emissions Test Configuration


RADIATED EMISSIONS

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.


When testing above 18 GHz, the receive antenna is located at 1meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

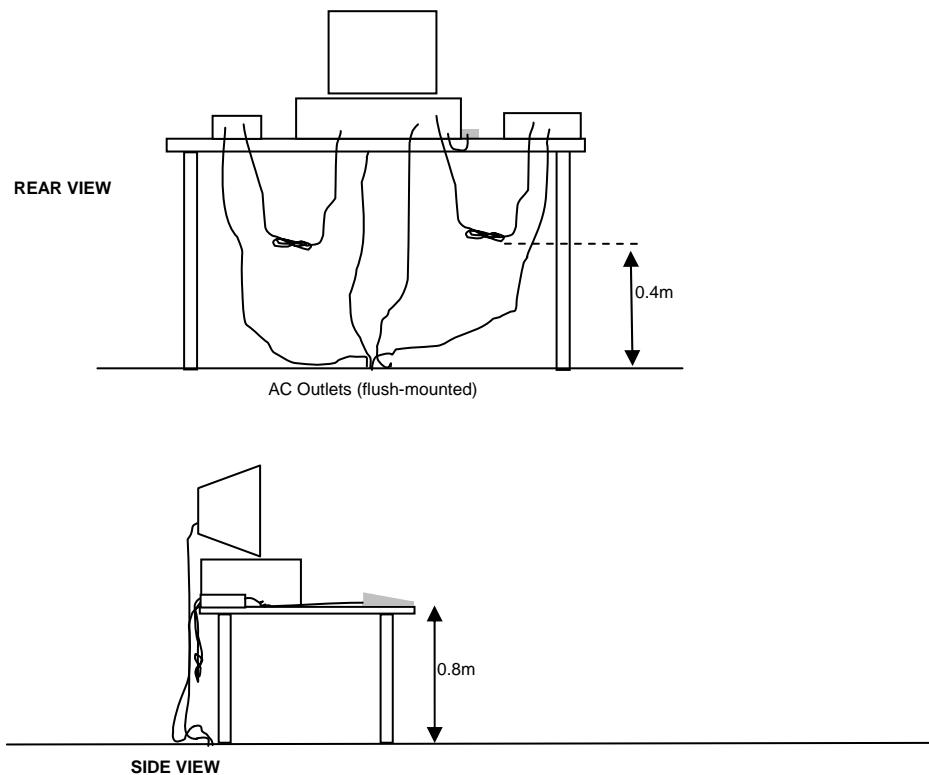


Typical Test Configuration for Radiated Field Strength Measurements

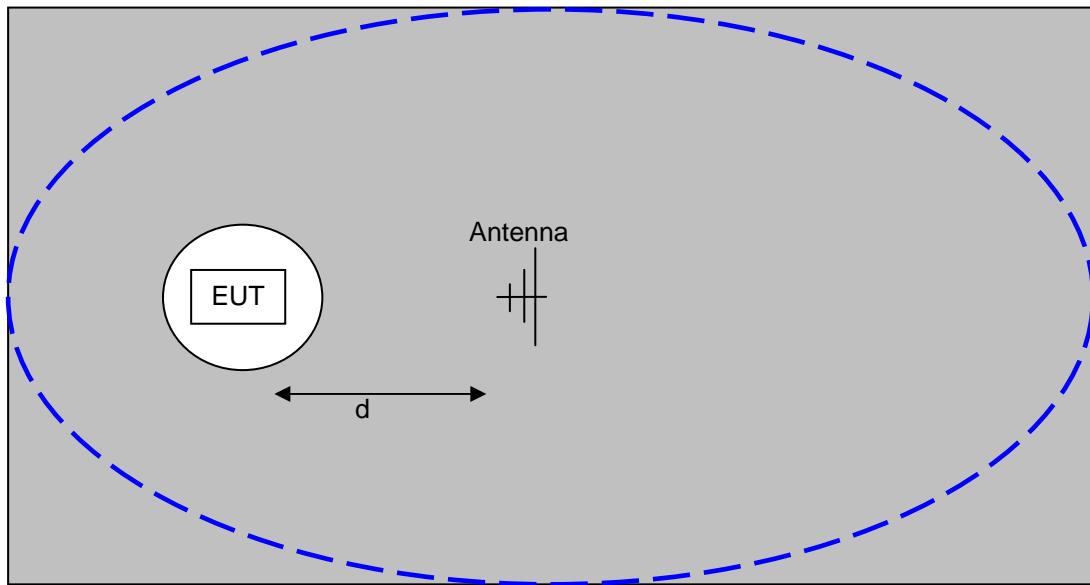

The ground plane extends beyond the ellipse defined in CISPR 16 / CISPR 22 / ANSI C63.4 and is large enough to accommodate test distances (d) of 3m and 10m. Refer to the test data tables for the actual measurement distance.

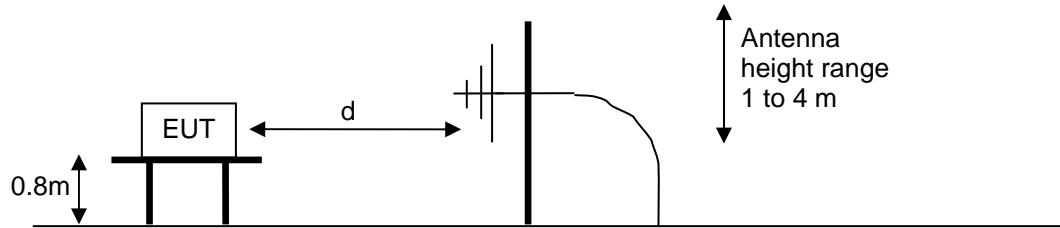


Test Configuration for Radiated Field Strength Measurements
OATS- Plan and Side Views

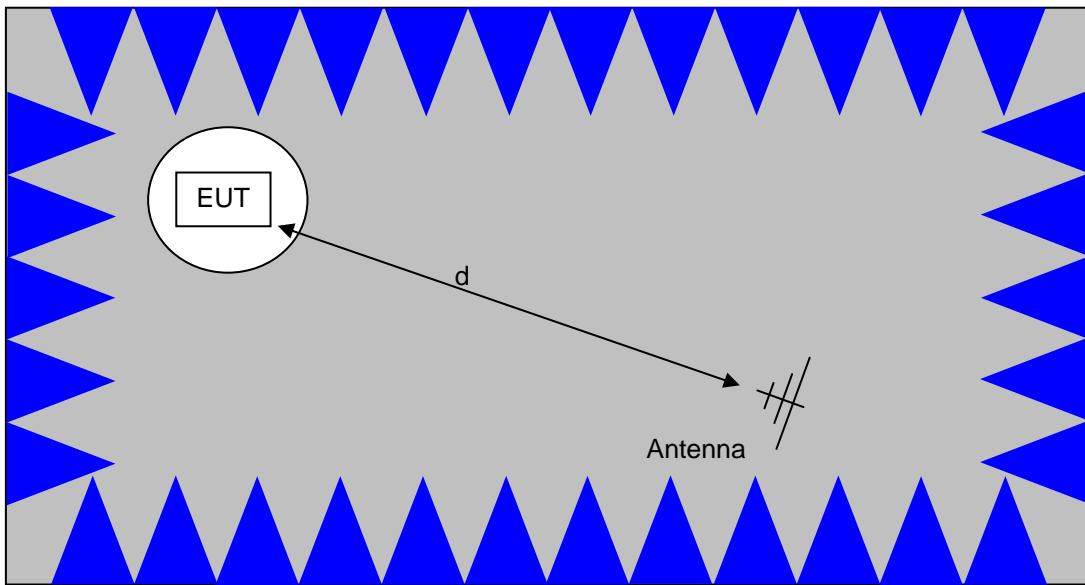

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.


Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

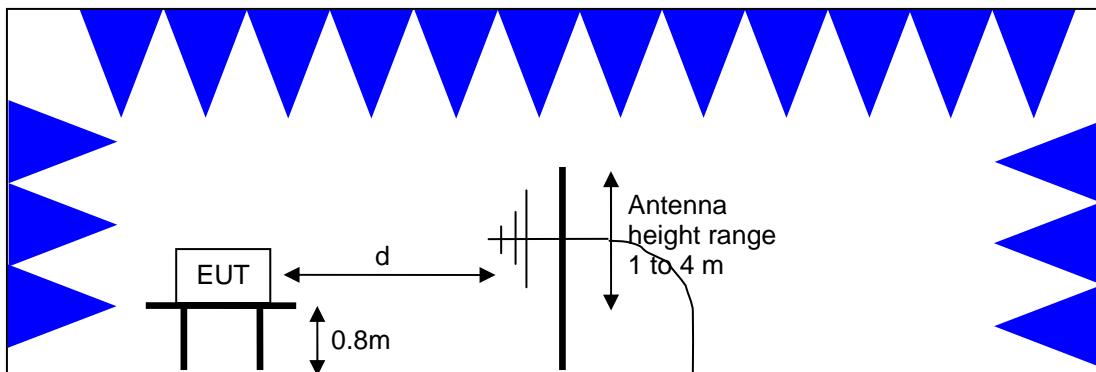

Test Configuration for Radiated Field Strength Measurements
Semi-Anechoic Chamber, Plan and Side Views

CONDUCTED EMISSIONS FROM ANTENNA PORT

Direct measurements of power, bandwidth and power spectral density are performed, where possible, with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

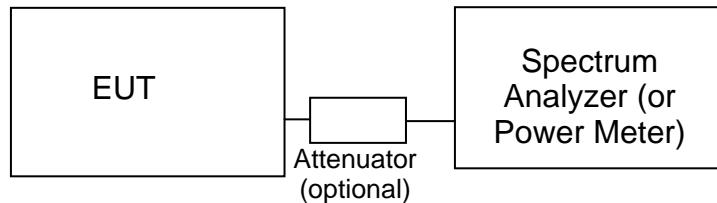**Test Configuration for Antenna Port Measurements**

Measurement bandwidths (video and resolution) are set in accordance with the relevant standards and NTS Silicon Valley's test procedures for the type of radio being tested. When power measurements are made using a resolution bandwidth less than the signal bandwidth the power is calculated by summing the power across the signal bandwidth using either the analyzer channel power function or by capturing the trace data and calculating the power using software. In both cases the summed power is corrected to account for the equivalent noise bandwidth (ENBW) of the resolution bandwidth used.

If power averaging is used (typically for certain digital modulation techniques), the EUT is configured to transmit continuously. Power averaging is performed using either the built-in function of the analyzer or, if the analyzer does not feature power averaging, using external software. In both cases the average power is calculated over a number of sweeps (typically 100). When the EUT cannot be configured to continuously transmit then either the analyzer is configured to perform a gated sweep to ensure that the power is averaged over periods that the device is transmitting or power averaging is disabled and a max-hold feature is used.

If a power meter is used to make output power measurements the sensor head type (peak or average) is stated in the test data table.

BANDWIDTH MEASUREMENTS

The 6dB, 20dB, 26dB and/or 99% signal bandwidth are measured using the bandwidths recommended by ANSI C63.10 and RSS GEN.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(a), RSS GEN

The table below shows the limits for the emissions on the AC power line from an intentional radiator and a receiver.

Frequency (MHz)	Average Limit (dBuV)	Quasi Peak Limit (dBuV)
0.150 to 0.500	Linear decrease on logarithmic frequency axis between 56.0 and 46.0	Linear decrease on logarithmic frequency axis between 66.0 and 56.0
0.500 to 5.000	46.0	56.0
5.000 to 30.000	50.0	60.0

GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands¹ (with the exception of transmitters operating under FCC Part 15 Subpart D and RSS 210 Annex 9), the limits for all emissions from a low power device operating under the general rules of RSS 310 (tables 3 and 4), RSS 210 (table 2) and FCC Part 15 Subpart C section 15.209.

Frequency Range (MHz)	Limit (uV/m)	Limit (dBuV/m @ 3m)
0.009-0.490	2400/F _{KHz} @ 300m	67.6-20*log ₁₀ (F _{KHz}) @ 300m
0.490-1.705	24000/F _{KHz} @ 30m	87.6-20*log ₁₀ (F _{KHz}) @ 30m
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from receivers as detailed in FCC Part 15.109, RSS 210 Table 2, RSS GEN Table 1 and RSS 310 Table 3. Note that receivers operating outside of the frequency range 30 MHz – 960 MHz are exempt from the requirements of 15.109.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

¹ The restricted bands are detailed in FCC 15.203, RSS 210 Table 1 and RSS 310 Table 2

OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
902 – 928	1 Watt (30 dBm)	8 dBm/3kHz
2400 – 2483.5	1 Watt (30 dBm)	8 dBm/3kHz
5725 – 5850	1 Watt (30 dBm)	8 dBm/3kHz

The maximum permitted output power is reduced by 1dB for every dB the antenna gain exceeds 6dBi. Fixed point-to-point applications using the 5725 – 5850 MHz band are not subject to this restriction.

TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS and DTS SYSTEMS

The limits for unwanted (spurious) emissions from the transmitter falling in the restricted bands are those specified in the general limits sections of FCC Part 15 and RSS 210. All other unwanted (spurious) emissions shall be at least 20dB below the level of the highest in-band signal level (30dB if the power is measured using the sample detector/power averaging method).

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_f - S = M$$

where:

R_f = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \text{LOG10} (D_m / D_s)$$

where:

F_d = Distance Factor in dB

D_m = Measurement Distance in meters

D_S = Specification Distance in meters

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG10} (D_m / D_S)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_C = R_r + F_d$$

and

$$M = R_C - L_S$$

where:

R_r = Receiver Reading in dBuV/m

F_d = Distance Factor in dB

R_C = Corrected Reading in dBuV/m

L_S = Specification Limit in dBuV/m

M = Margin in dB Relative to Spec

SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp), or where a field strength measurement of output power is made in lieu of a direct measurement, the following formula is used to convert between eirp and field strength at a distance of d (meters) from the equipment under test:

$$E = \frac{1000000 \sqrt{30} P}{d} \text{ microvolts per meter}$$

where P is the eirp (Watts)

For a measurement at 3m the conversion from a logarithmic value for field strength (dBuV/m) to an eirp power (dBm) is -95.3dB.

Appendix A Test Data and Equipment List

Power and Channel Configuration

Channel	Frequency (MHz)	Power Setting
11	2405	-6
12	2410	-6
13	2415	-6
14	2420	-6
15	2425	-6
16	2430	-6
17	2435	-6
18	2440	-6
19	2445	-6
20	2450	-6
21	2455	-6
22	2460	-8
23	2465	-8
24	2470	-8
25	2475	-14

EUT Power Settings were as listed above

Highest frequency in digital circuitry: 25MHz

EUT was transmitting continuously with duty cycle > 98%

Test Equipment Used

Equipment	Asset Number	Calibration Due	Manufacturer	Model	Note
PreAmp	E1260P	5/3/2014	N/A	N/A	Built in-house
PreAmp	E1279P	2/8/2015	N/A	N/A	Built in-house
Spectrum Analyzer	E1508P	3/19/2014	Agilent	E4440A PSA	
Spectrum Analyzer	E1529P	2/14/2015	Agilent	E4446A PSA	
Spectrum Analyzer	E1318P	3/22/2014	R&S	FSP	
LISN	E1354P	10/15/2014	R&S	ESH3-Z5	
Horn Antenna	E1149P	11/25/2014	EMCO	Double Ridge Guide Cat#3115	
Biconical Antenna	E1288P	3/6/2014	ETS-Lindgren	3142C	

AC Line Conducted Emissions (15.207)

Transmitting on 2440MHz


Date: Feb-26-2014

Tested by: Yunus Faziloglu

Note: No significant difference observed with channel selection. 2440MHz was selected for final testing.

Line 150kHz-30MHz

PreScan Plot

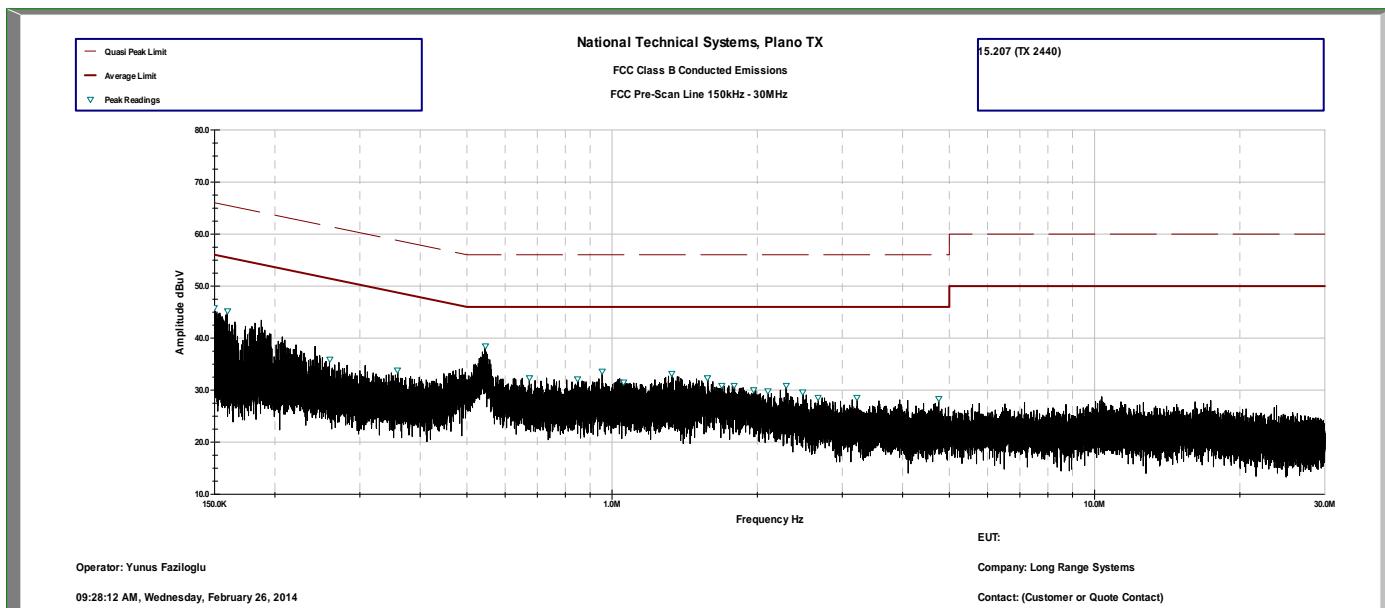


Final Measurements

Frequency MHz	QP		AVE		AVE		QP Margin dB
	Limit dBuV	AVE Limit dBuV	Readings dBuV	Margin dB	Readings dBuV		
0.15	66	56	29.719	-26.281	42.876	-23.124	
0.159	65.736	55.736	28.441	-27.295	40.409	-25.327	
0.545	56	46	28.266	-17.734	34.095	-21.905	
0.954	56	46	21.709	-24.291	27.232	-28.768	
1.33	56	46	20.664	-25.336	26.013	-29.987	
1.579	56	46	21.169	-24.831	26.442	-29.558	

Neutral 150kHz-30MHz

PreScan Plot

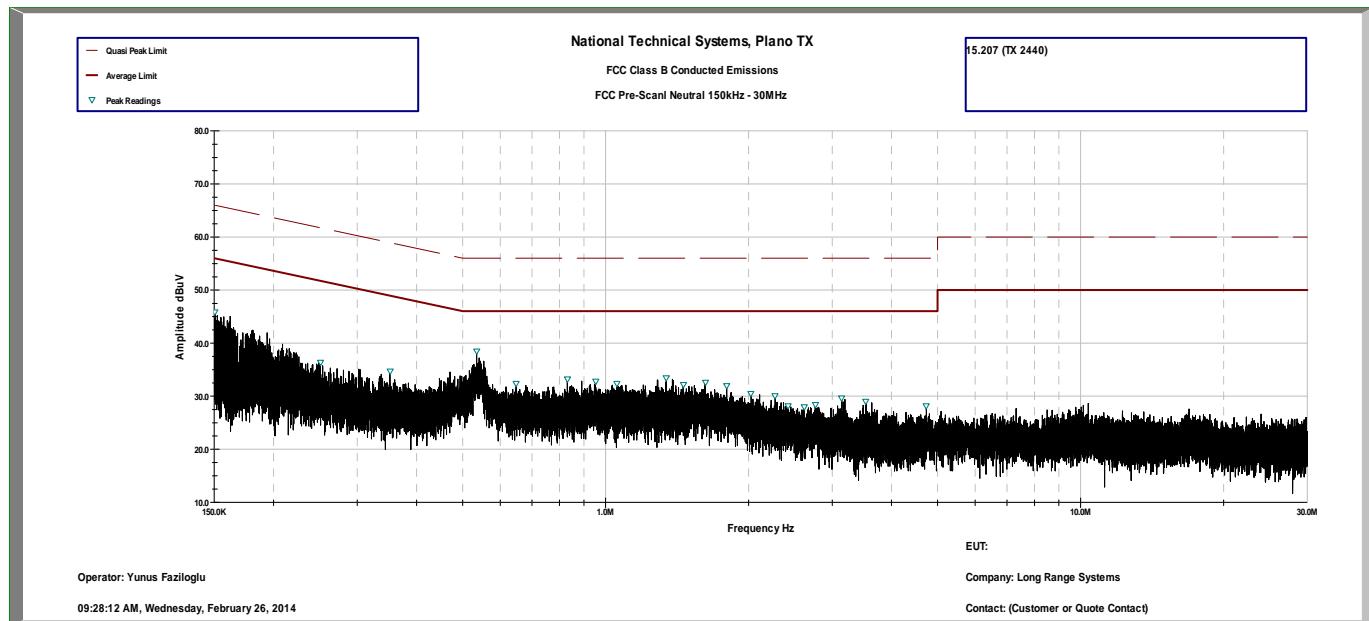

Final Measurements

Frequency MHz	QP		AVE		AVE		QP
	Limit dBuV	AVE Limit dBuV	Readings dBuV	Margin dB	Readings dBuV	QP Margin dB	
0.151	65.981	55.981	30.136	-25.845	42.597	-23.385	
0.535	56	46	28.23	-17.77	33.6	-22.4	
0.831	56	46	20.714	-25.286	26.054	-29.946	
0.952	56	46	22.322	-23.678	27.623	-28.377	
1.343	56	46	20.757	-25.243	26.261	-29.739	
1.62	56	46	20.863	-25.137	26.159	-29.841	

6dB Bandwidth and 99% Occupied Bandwidth

Tested in accordance with,

FCC KDB 558074 D01 DTS Meas Guidance v03r01 Section 8.1



Industry Canada RSS-Gen Issue 3 Section 4.6.1

Frequency (MHz)	6dB Bandwidth (kHz)	99% OBW (kHz)
2405	1601	2405
2440	1573	2360
2470	1595	2396
2475	1633	2437



Date: Mar 10, 2014

Tested by: Yunus Faziloglu



Ch 11 (2405MHz)

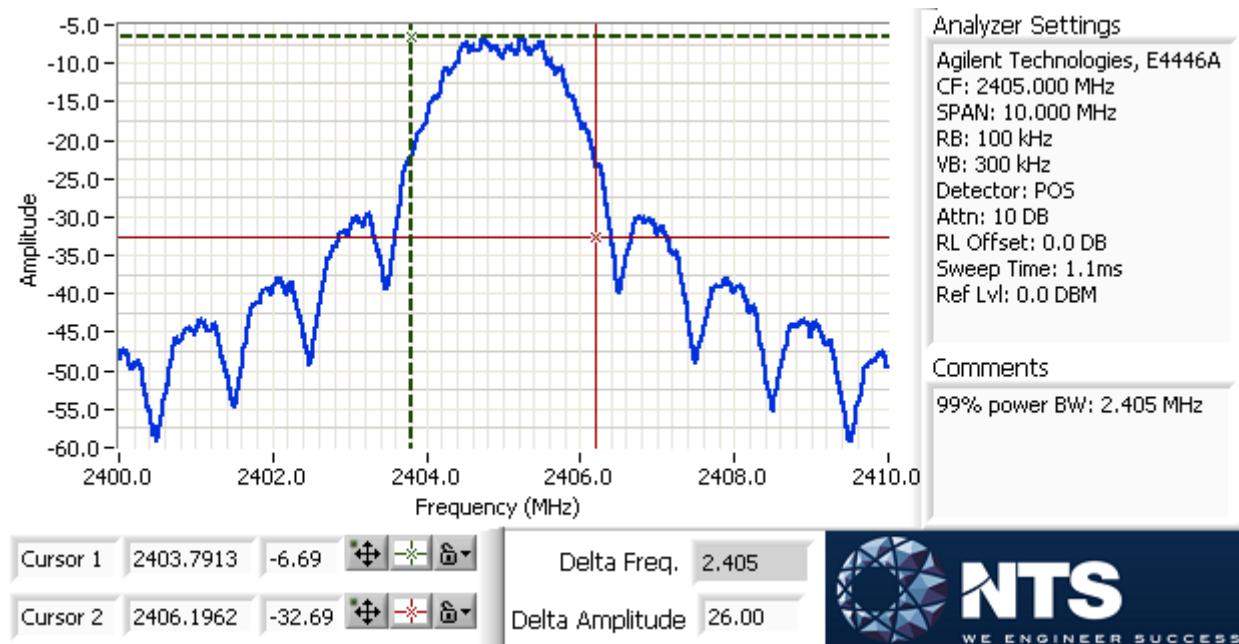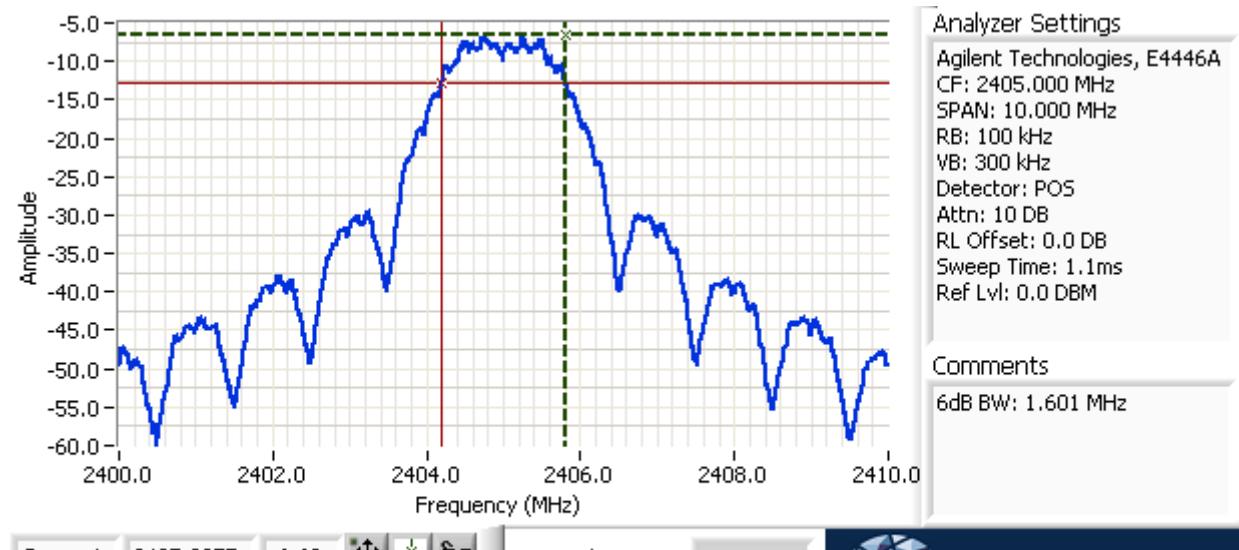



Ch 18 (2440MHz)

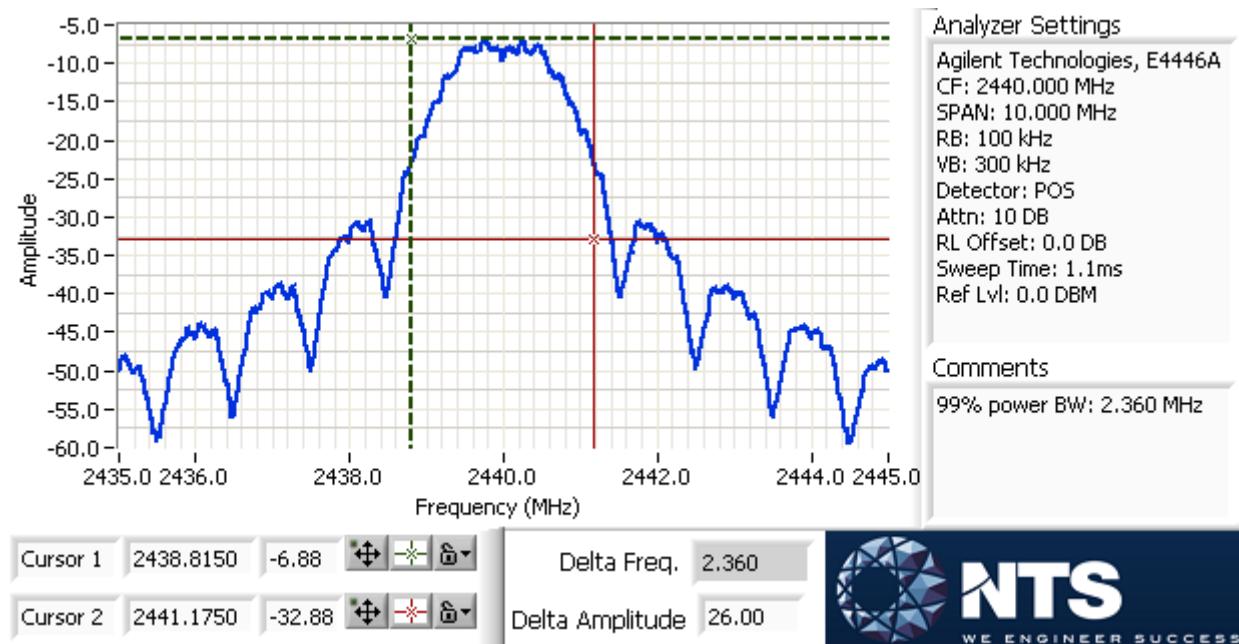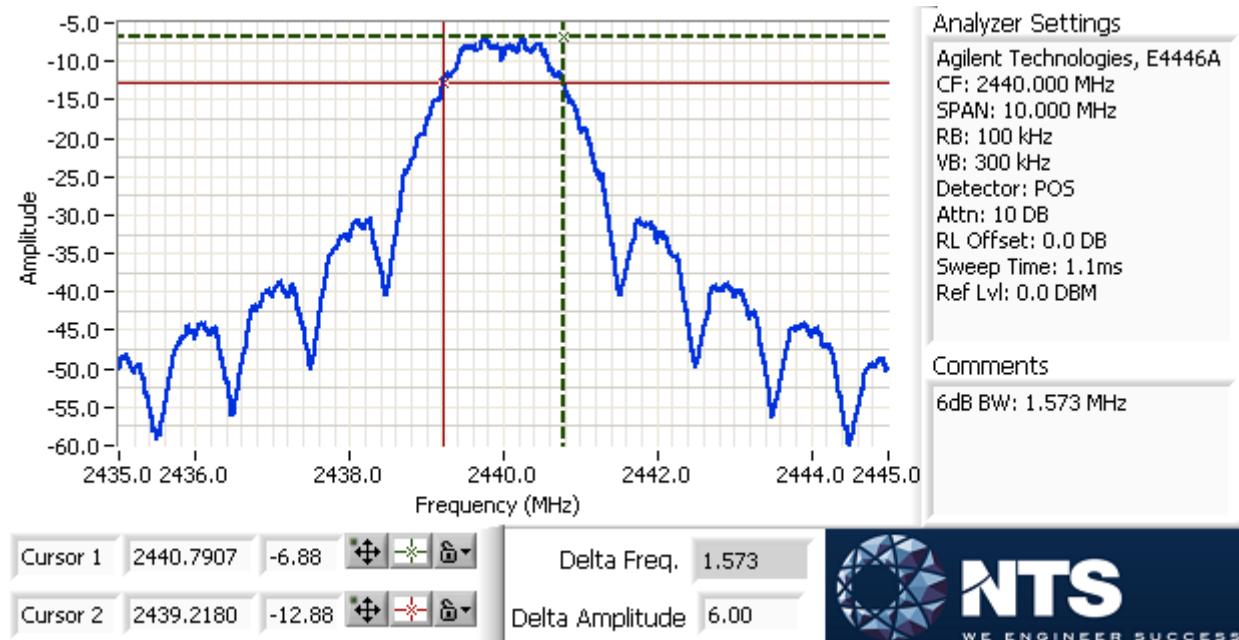

Ch 24 (2470MHz)

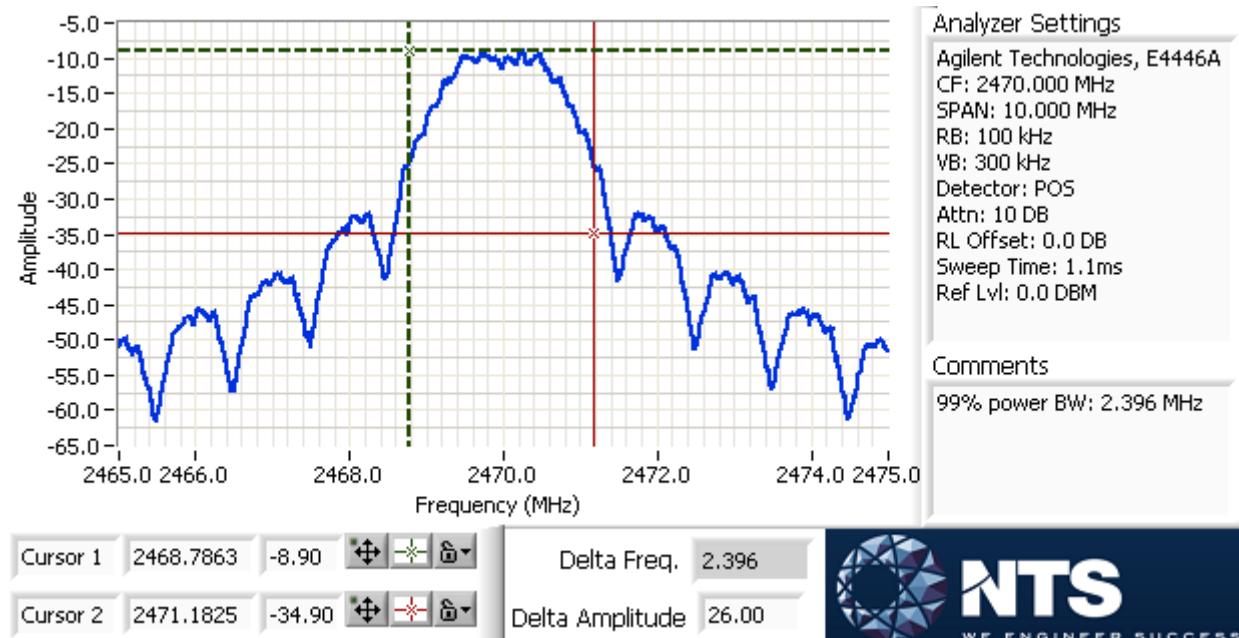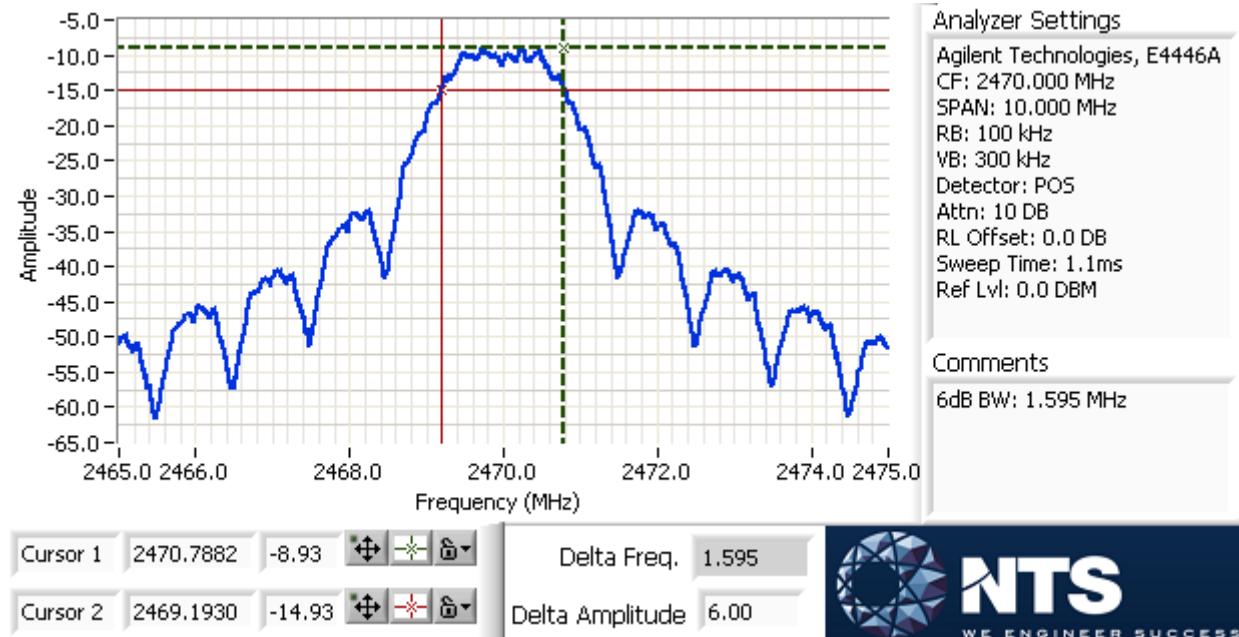

Ch 25 (2475MHz)

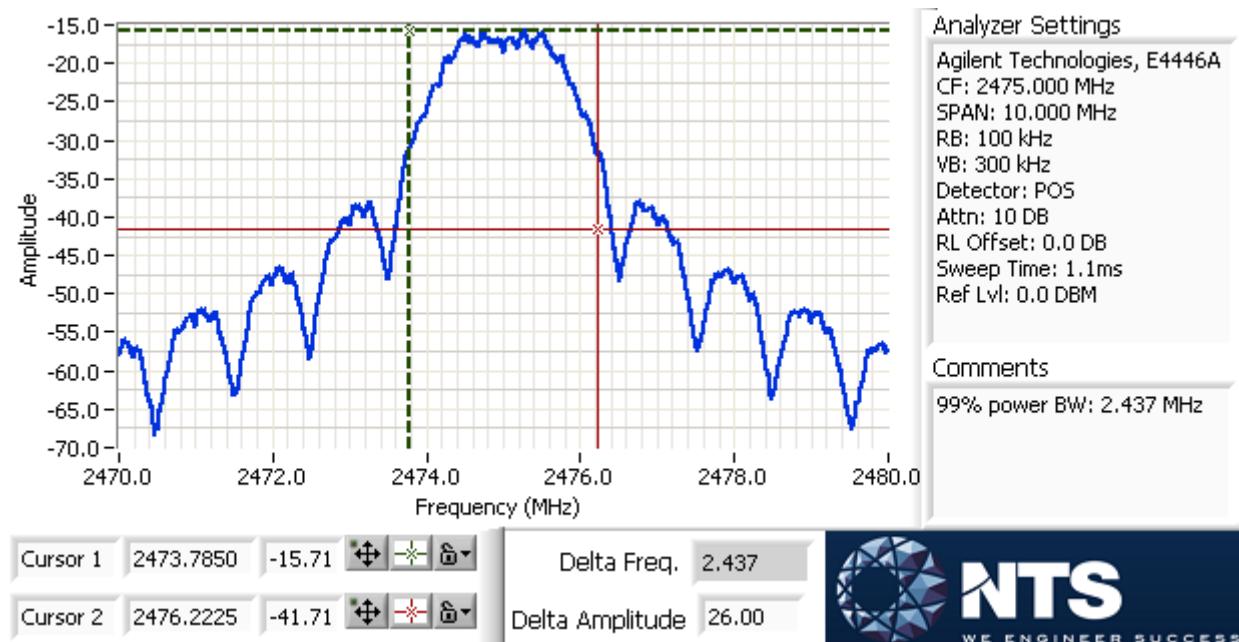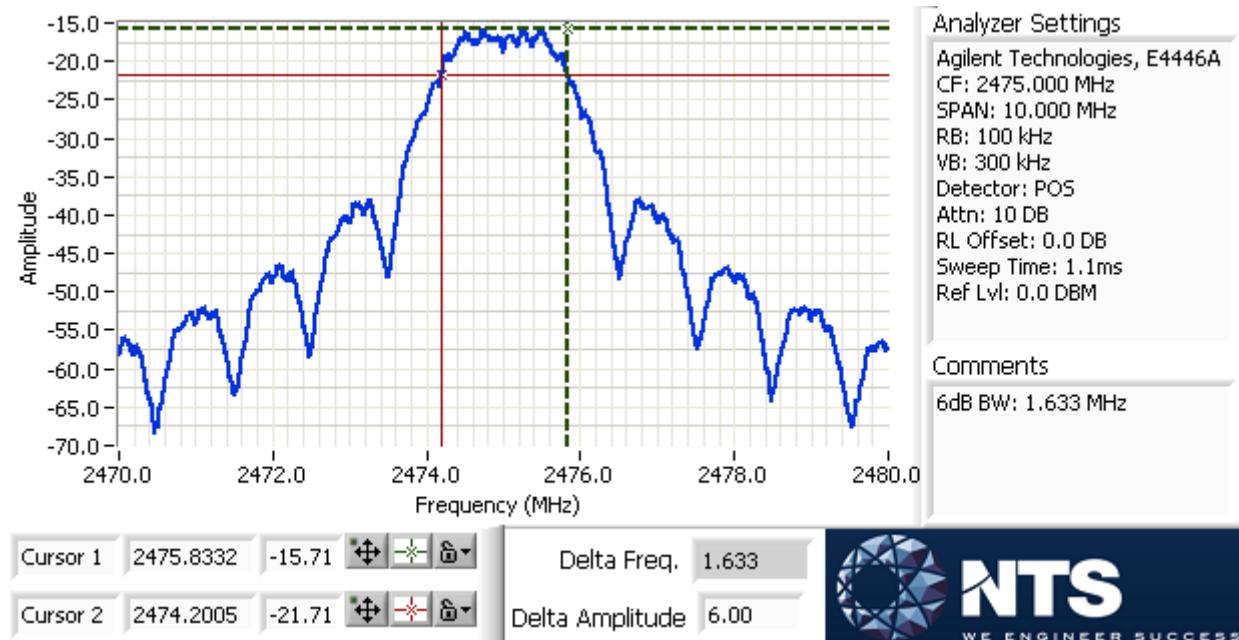

Peak Output Power

Tested in accordance with,

FCC KDB 558074 D01 DTS Meas Guidance v03r01 Section 9.1.1


Industry Canada RSS-Gen Issue 3 Section 4.8

Frequency (MHz)	Raw (dBm)	Attenuator + Cable Loss (dB)	Adjusted (dBm)	Adjusted (mW)
2405	-3.40	20.8	17.40	55.0
2440	-3.87	20.8	16.93	49.3
2470	-5.86	20.8	14.94	31.2
2475	-12.26	20.8	8.54	7.1


Date: Mar 10, 2014

Tested by: Yunus Faziloglu


Ch 11 (2405MHz)

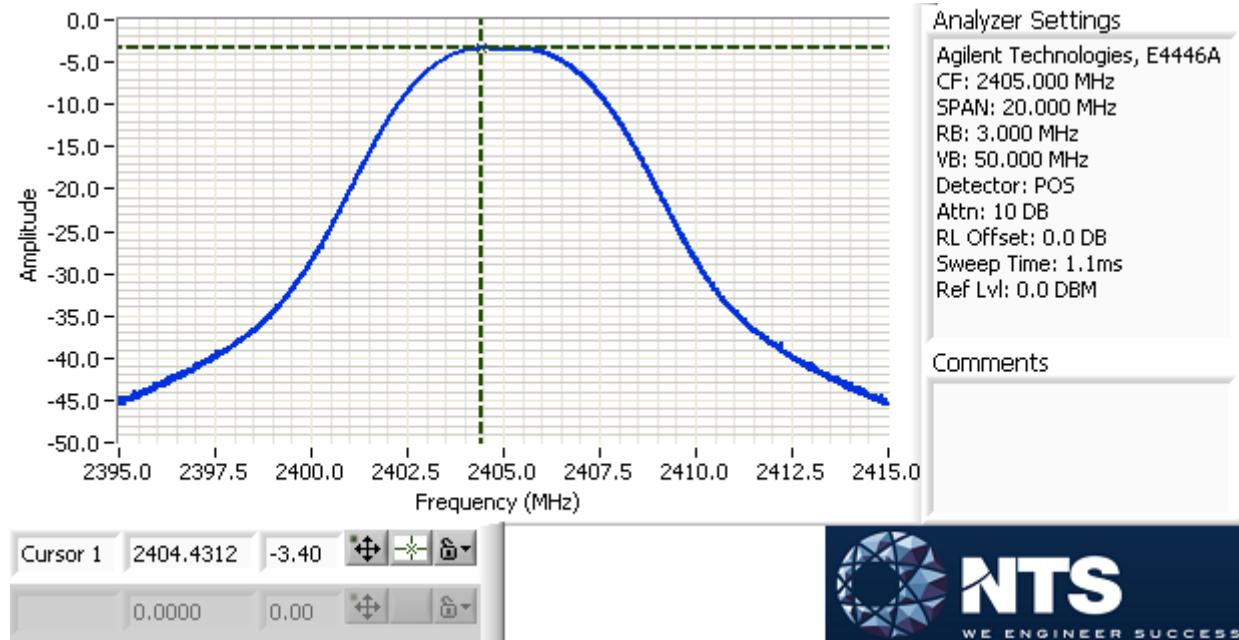


Ch 18 (2440MHz)

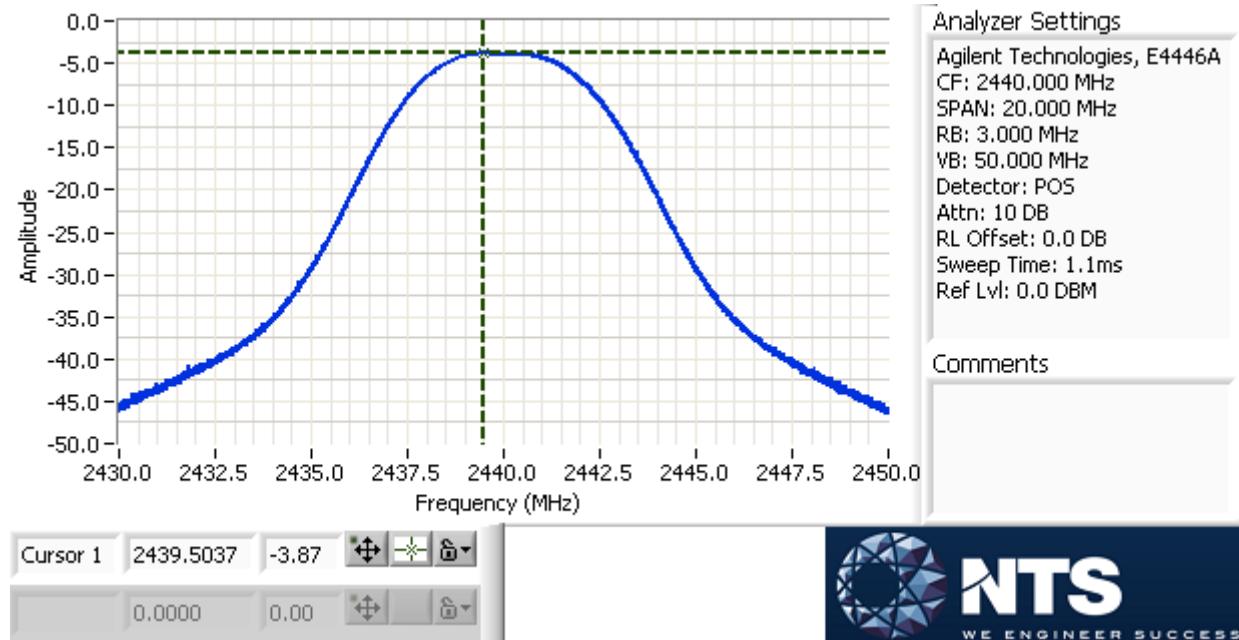

Ch 24 (2470MHz)

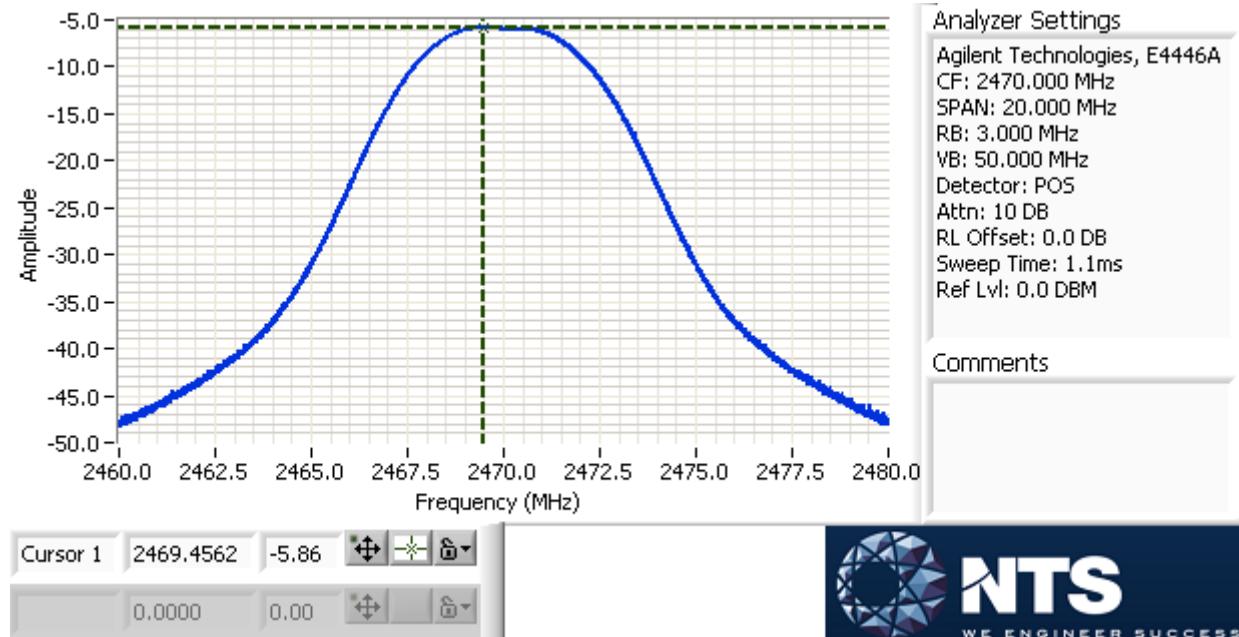

Ch 25 (2475MHz)

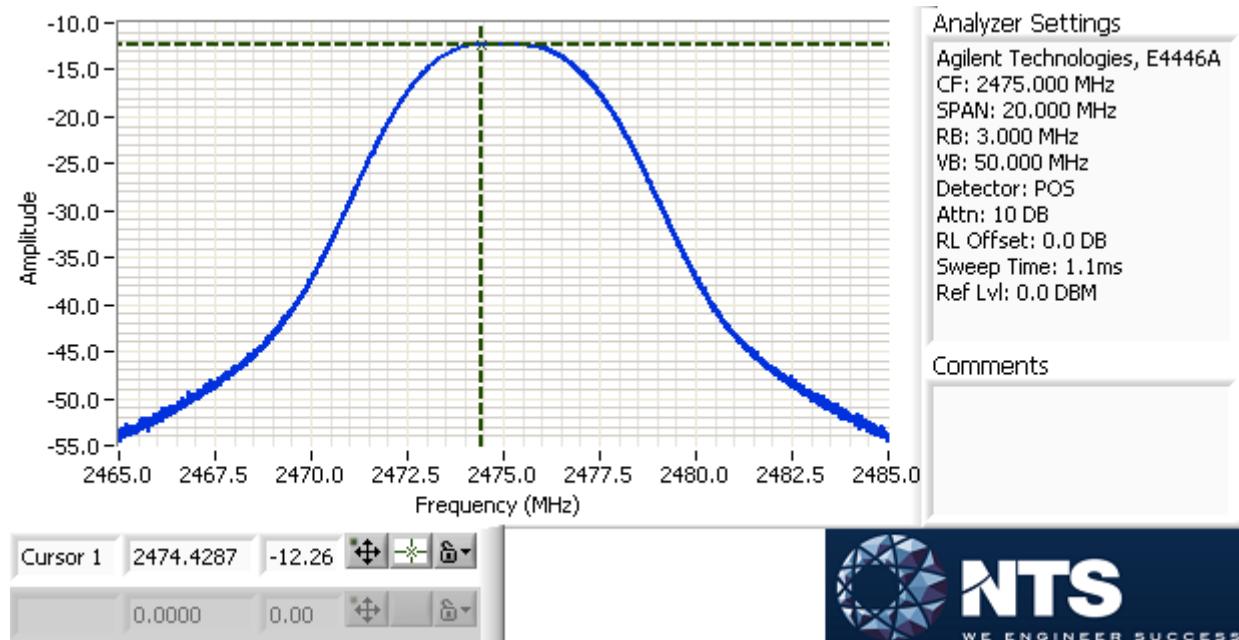

Power Spectral Density


Tested in accordance with,
FCC KDB 558074 D01 DTS Meas Guidance v03r01 Section 10.2

Frequency (MHz)	Raw (dBm)	Attenuator + Cable Loss (dB)	Adjusted (dBm)	Limit (dBm)	Margin (dB)
2405	-13.55	20.8	7.25	8.0	0.75
2440	-13.55	20.8	7.25	8.0	0.75
2470	-15.34	20.8	5.46	8.0	2.54
2475	-22.82	20.8	-2.02	8.0	10.02


Date: Mar 10, 2014

Tested by: Yunus Faziloglu


Ch 11 (2405MHz)

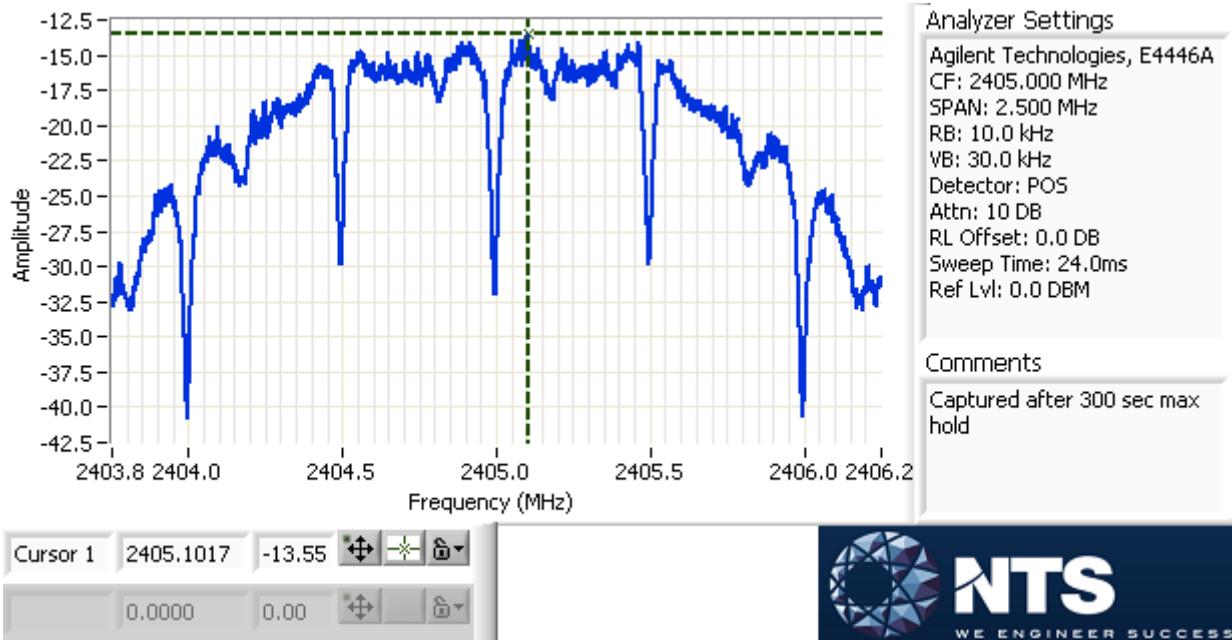


Ch 18 (2440MHz)

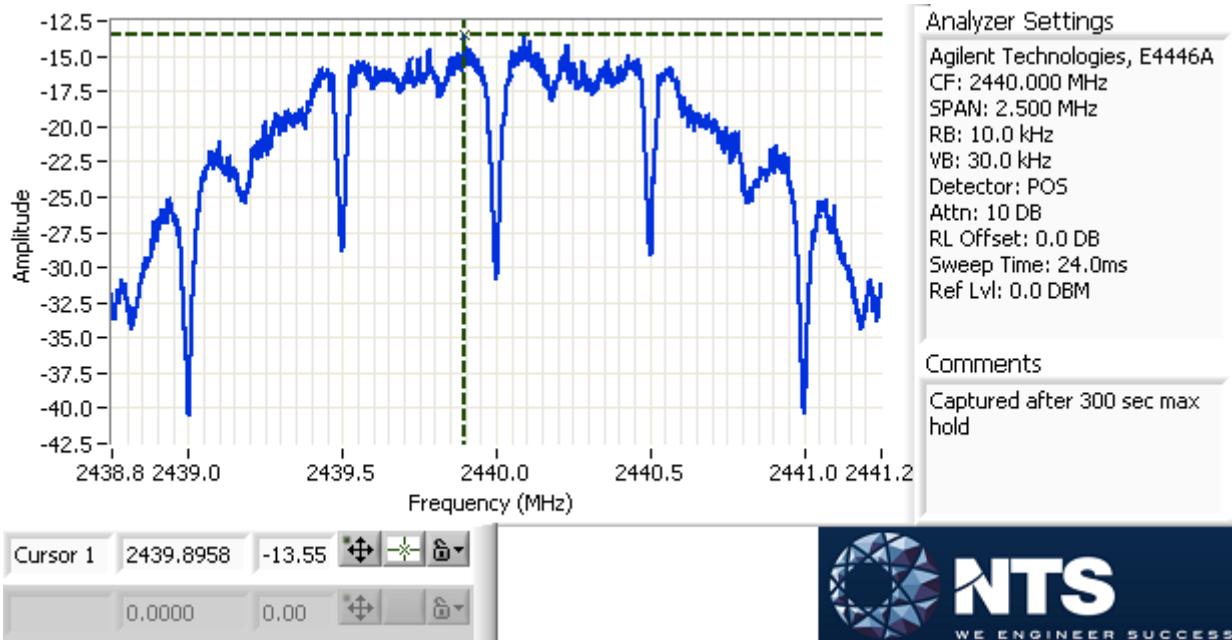

Ch 24 (2470MHz)

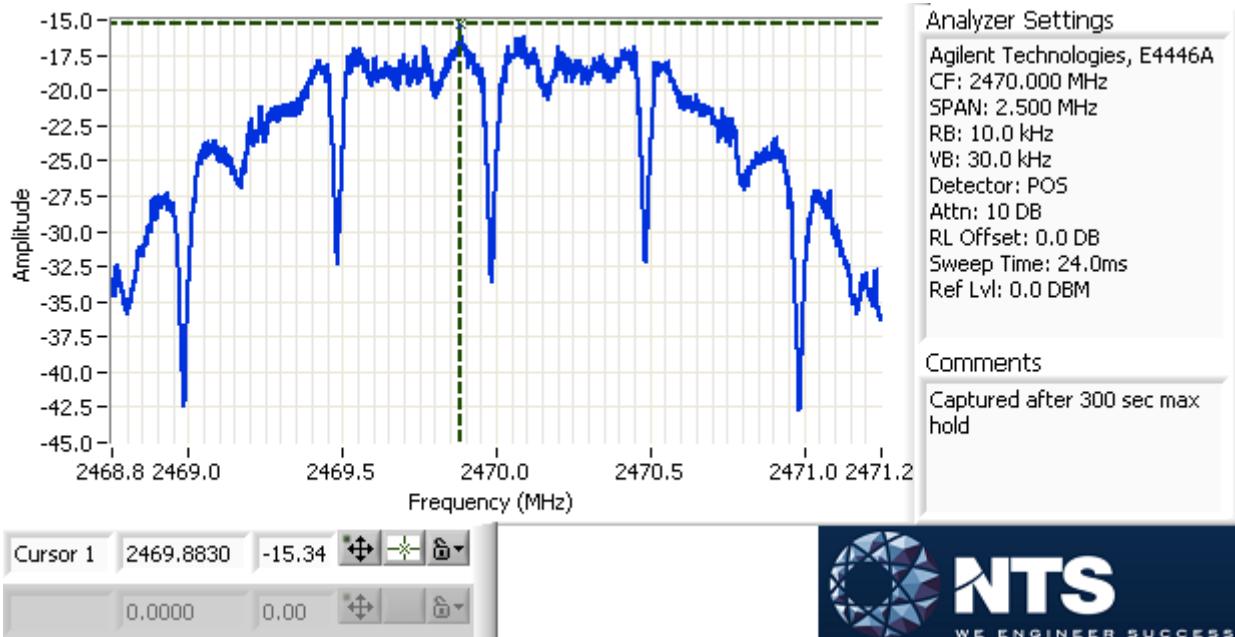

Ch 25 (2475MHz)

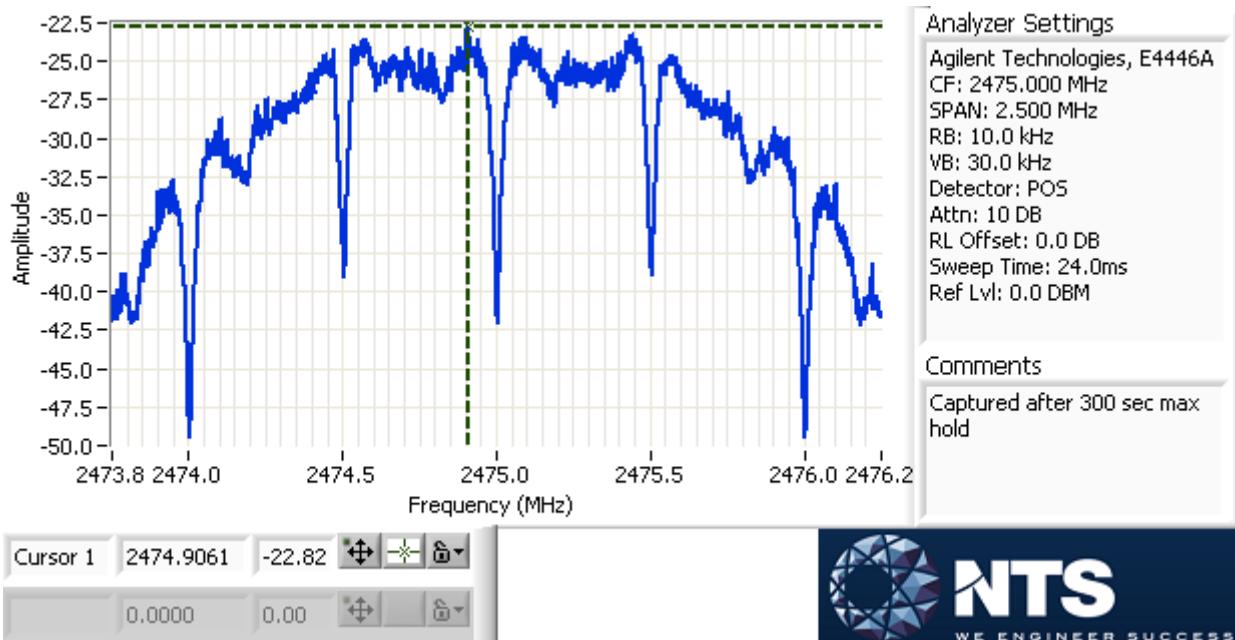

Conducted Spurious Emissions

Note: 3 channels tested at power setting -4. This is higher than final settings required for bandedge compliance. Since device complied with the requirement with power setting -4, additional testing was not performed with lower power settings.

Tested in accordance with,

FCC KDB 558074 D01 DTS Meas Guidance v03r01 Section 11.0

Plots taken with 8001 data points and frequency range (30MHz – 25GHz) divided in 32 segments, which gives approximately 780MHz span for each segment.

Settings were as follows:

RBW=100kHz, VBW=300kHz, Peak detector, auto coupled sweep, max hold for 10 sweeps in each segment to allow stabilization of the trace. New data tables and plots attached.

Date: Mar 5, 2014

Tested by: Yunus Faziloglu


Antenna Port Conducted Spurious Emissions - Ch11 (2405MHz)

March 05

2014

Frequency MHz	Limit dBm	Peaks dBm	Margin dB
30.0 MHz	-8.31	-67.01	-58.7
2.4055 GHz	Ref	11.69	N/A
3.1347 GHz	-8.31	-59.03	-50.72
3.8761 GHz	-8.31	-58.67	-50.36
4.811 GHz	-8.31	-47.8	-39.49
7.2161 GHz	-8.31	-54.75	-46.44
8.4431 GHz	-8.31	-56.91	-48.6
9.622 GHz	-8.31	-55.15	-46.84
10.417 GHz	-8.31	-56.68	-48.37
11.498 GHz	-8.31	-56.61	-48.3
13.629 GHz	-8.31	-51.63	-43.32
15.619 GHz	-8.31	-53.99	-45.68
17.1 GHz	-8.31	-53.76	-45.45
18.041 GHz	-8.31	-54.17	-45.86
19.96 GHz	-8.31	-52.76	-44.45
21.814 GHz	-8.31	-52.73	-44.42
23.325 GHz	-8.31	-48.68	-40.37
24.859 GHz	-8.31	-47.26	-38.95
25.0 GHz	-8.31	-51.55	-43.24

Peak readings corrected for external attenuator and cable loss

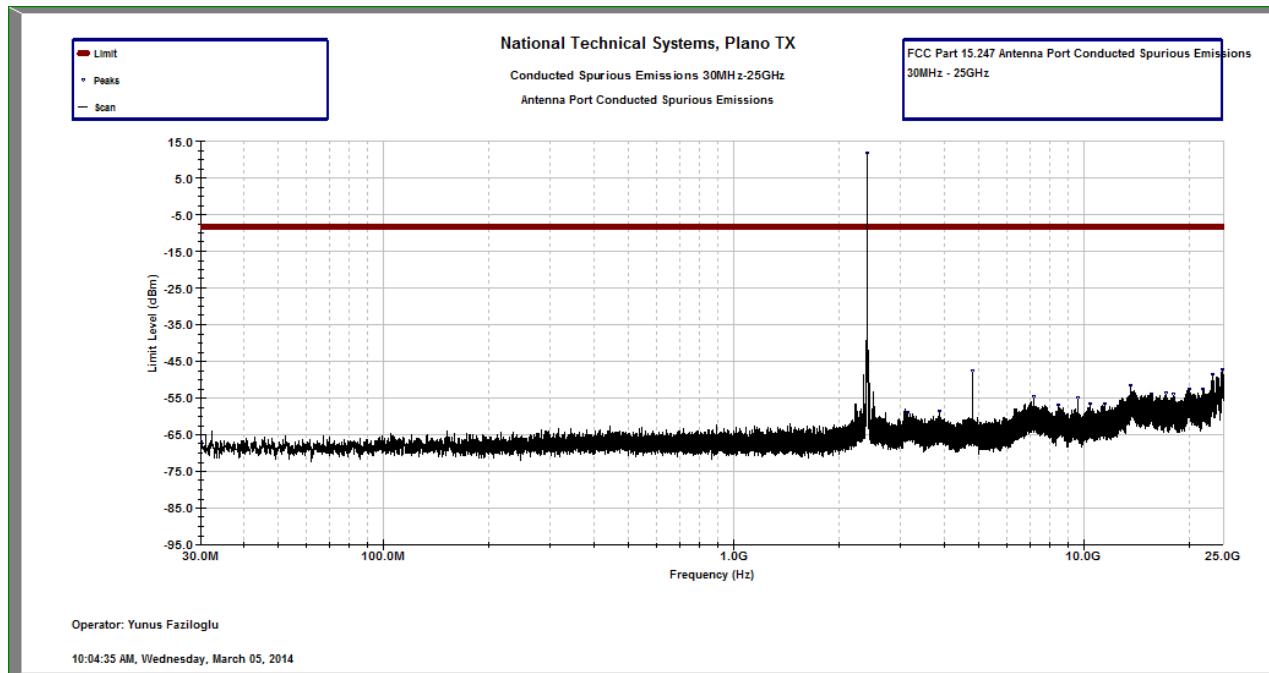


Antenna Port Conducted Spurious Emissions - Ch18 (2440MHz)

March 05 2014

Frequency	Limit	Peaks	Margin
MHz	dBm	dBm	dB
918.09 MHz	-8.29	-62.26	-53.97
2.4398 GHz	Ref	11.71	N/A
3.1504 GHz	-8.29	-58.67	-50.38
3.9396 GHz	-8.29	-58.79	-50.5
4.881 GHz	-8.29	-52.48	-44.19
7.3217 GHz	-8.29	-54.11	-45.82
8.6076 GHz	-8.29	-57.34	-49.05
10.489 GHz	-8.29	-57.45	-49.16
11.191 GHz	-8.29	-56.83	-48.54
13.837 GHz	-8.29	-52.64	-44.35
14.846 GHz	-8.29	-52.97	-44.68
15.633 GHz	-8.29	-54.11	-45.82
17.084 GHz	-8.29	-53.63	-45.34
18.13 GHz	-8.29	-54.57	-46.28
19.999 GHz	-8.29	-52.22	-43.93
21.106 GHz	-8.29	-53.31	-45.02
22.11 GHz	-8.29	-52.59	-44.3
24.869 GHz	-8.29	-46.3	-38.01
25.0 GHz	-8.29	-51.64	-43.35

Peak readings corrected for external attenuator and cable loss

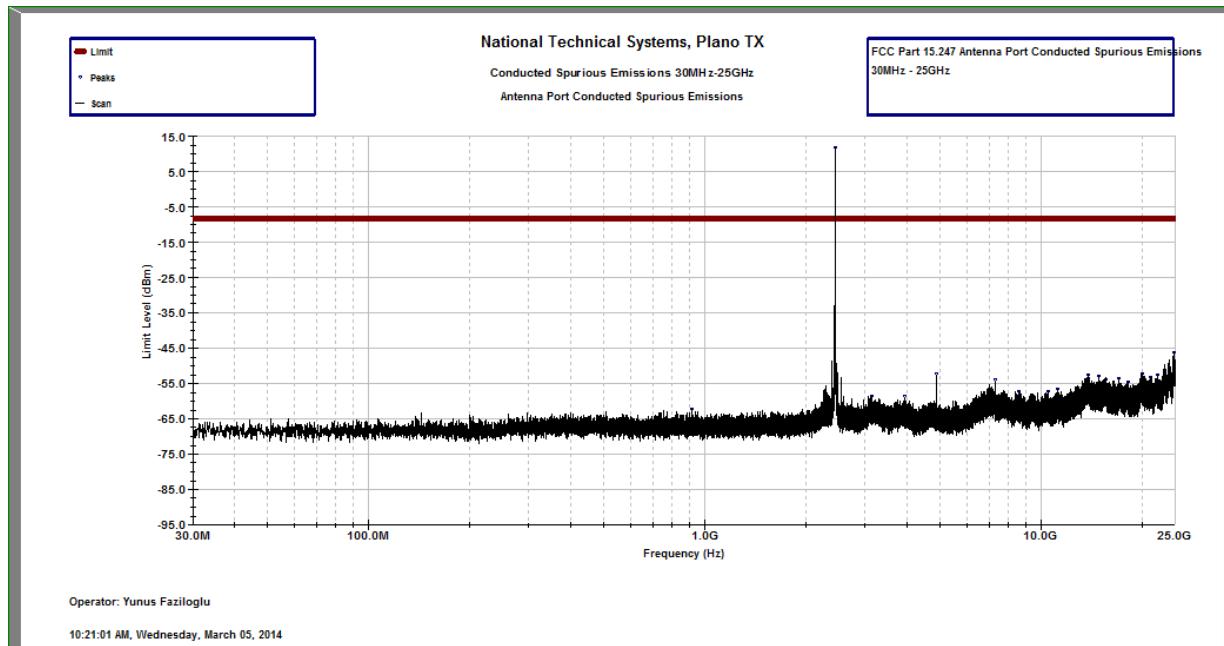


Antenna Port Conducted Spurious Emissions - Ch25 (2475MHz)

March 05 2014

Frequency MHz	Limit dBm	Peaks dBm	Margin dB
2.475 GHz	Ref	10.64	N/A
3.2529 GHz	-9.36	-58.67	-49.31
4.1205 GHz	-9.36	-59.84	-50.48
4.949 GHz	-9.36	-55.41	-46.05
7.4233 GHz	-9.36	-54.24	-44.88
8.4006 GHz	-9.36	-57.62	-48.26
9.902 GHz	-9.36	-56.02	-46.66
11.251 GHz	-9.36	-56.41	-47.05
13.749 GHz	-9.36	-52.53	-43.17
15.266 GHz	-9.36	-53.74	-44.38
17.14 GHz	-9.36	-52.96	-43.6
17.997 GHz	-9.36	-54.12	-44.76
19.912 GHz	-9.36	-52.16	-42.8
20.803 GHz	-9.36	-53.22	-43.86
21.969 GHz	-9.36	-51.95	-42.59
23.297 GHz	-9.36	-48.68	-39.32
24.002 GHz	-9.36	-47.87	-38.51
24.998 GHz	-9.36	-46.46	-37.1
25.0 GHz	-9.36	-54.2	-44.84

Peak readings corrected for external attenuator and cable loss

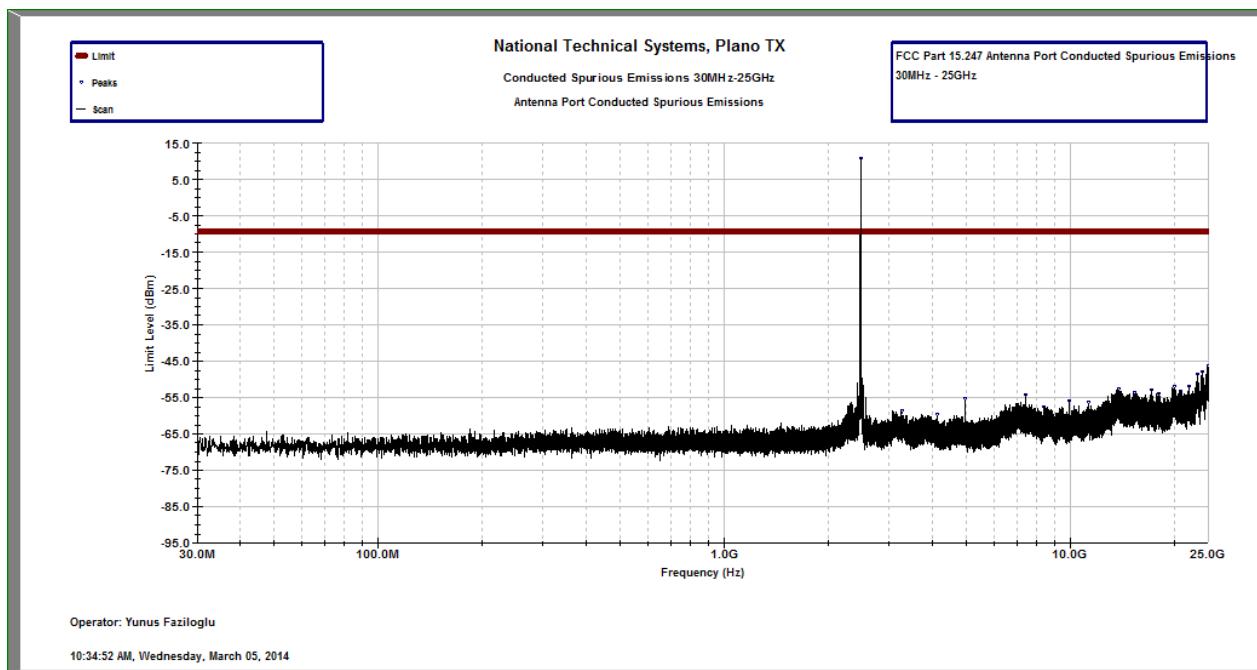

Conducted Bandedge



Tested in accordance with,


FCC KDB 558074 D01 DTS Meas Guidance v03r01 Section 11.0

Date: Mar 10, 2014


Tested by: Yunus Faziloglu


Transmitting on Ch 11 (2405MHz)

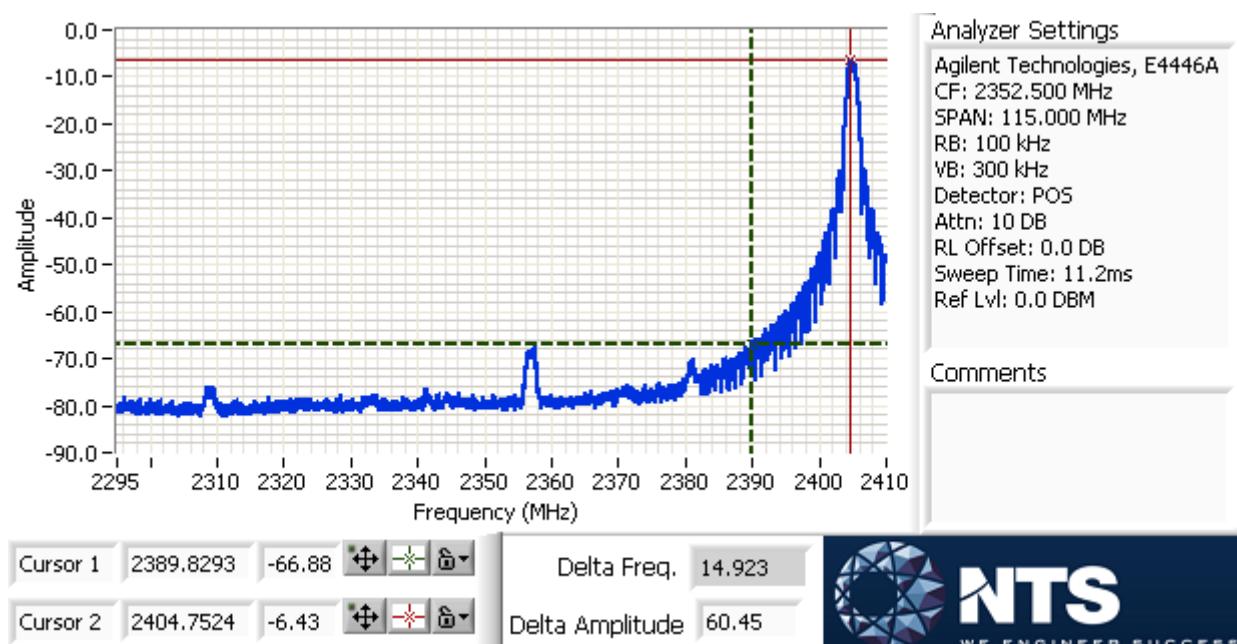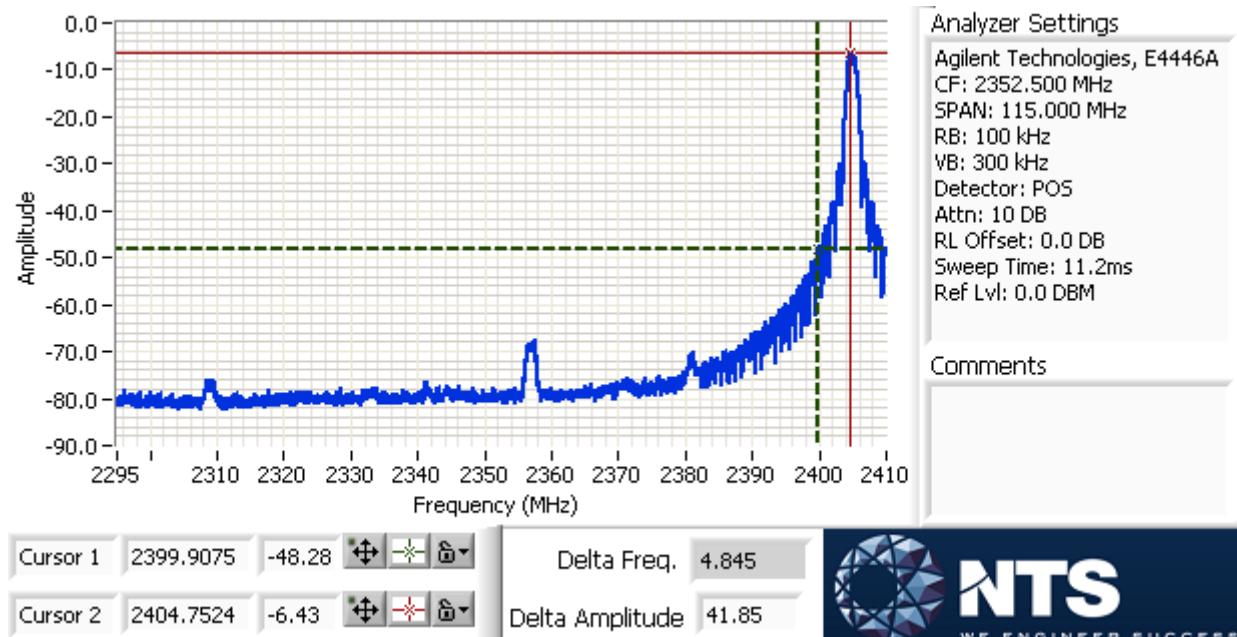

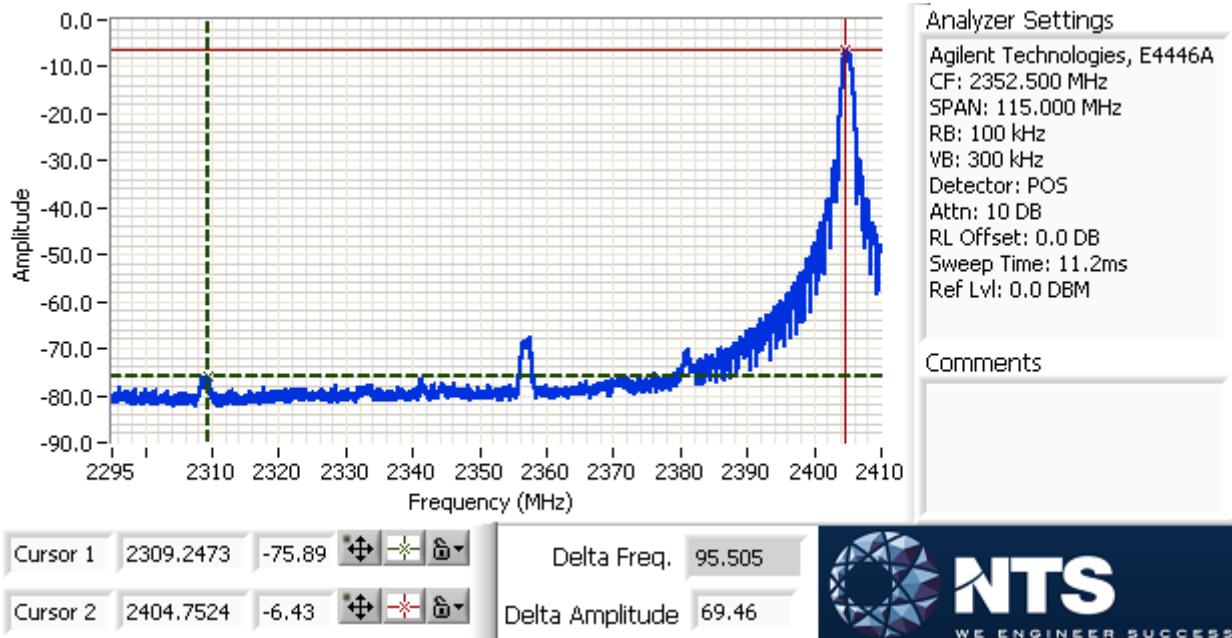


Transmitting on Ch 24 (2470MHz)

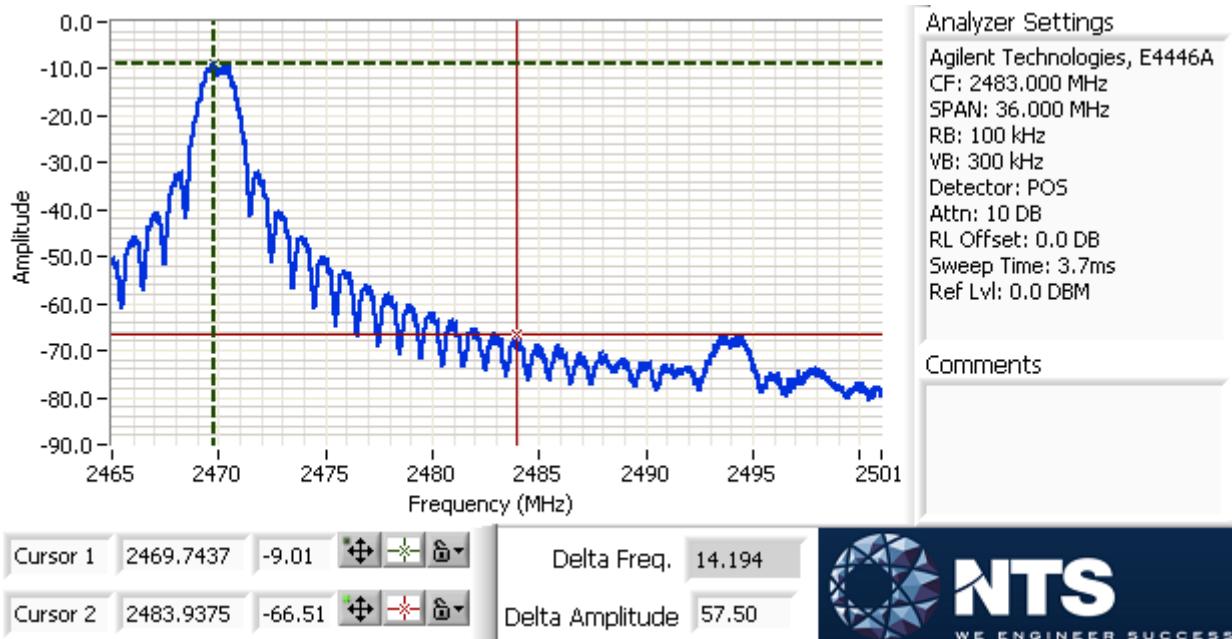

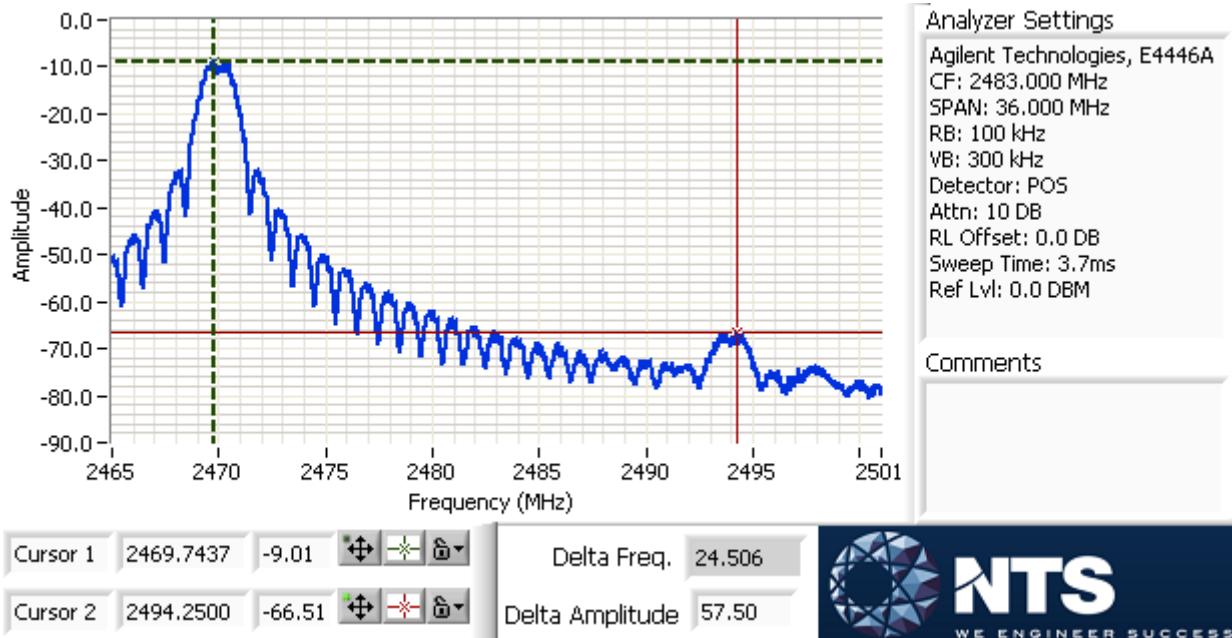

Transmitting on Ch 25 (2475MHz)

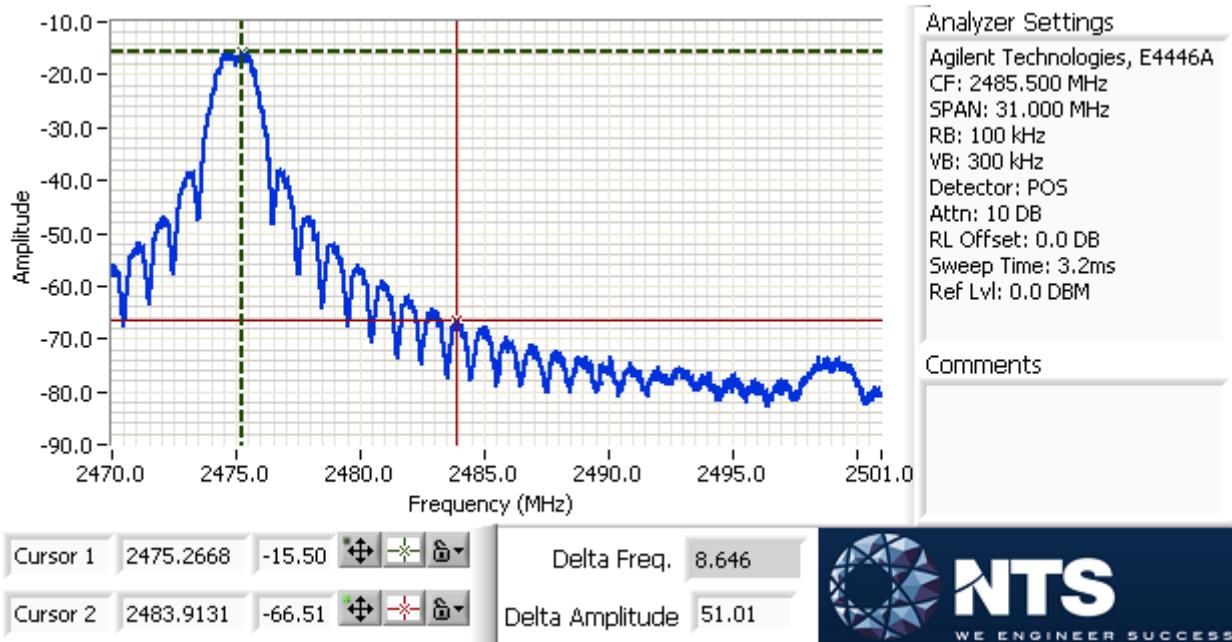

Radiated Bandedge

Tested in accordance with ANSI C63.10-2009

Peak measurements taken with RBW=1MHz, VBW=3MHz, max-hold

For average measurements Section 4.2.3.2.3 of ANSI C63.10-2009 was followed.

Date: Mar 10, 2014, Tested by: Yunus Faziloglu

Transmitting on Ch 25 (2475MHz)			Power Setting			-14				
Detector	Antenna Polarity	Freq (MHz)	Raw at 3m (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected at 3m (dBuV/m)	Limit at 3m (dBuV/m)	Margin (dB)	Verdict	
Peak	V	2483.5	33.9	28.5	1.9	64.3	74	9.7	Pass	
Average	V	2483.5	22.5	28.5	1.9	52.9	54	1.1	Pass	
Transmitting on Ch 24 (2470MHz)			Power Setting			-8				
Detector	Antenna Polarity	Freq (MHz)	Raw at 3m (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected at 3m (dBuV/m)	Limit at 3m (dBuV/m)	Margin (dB)	Verdict	
Peak	V	2483.5	32.8	28.5	1.9	63.2	74	10.8	Pass	
Average	V	2483.5	21	28.5	1.9	51.4	54	2.6	Pass	
Peak	V	2493.95	32.6	28.5	1.9	63	74	11	Pass	
Average	V	2493.95	23.5	28.5	1.9	53.9	54	0.1	Pass	
Transmitting on Ch 22 (2460MHz)			Power Setting			-8				
Detector	Antenna Polarity	Freq (MHz)	Raw at 3m (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected at 3m (dBuV/m)	Limit at 3m (dBuV/m)	Margin (dB)	Verdict	
Peak	V	2483.5	32	28.5	1.9	62.4	74	11.6	Pass	
Average	V	2483.5	20.2	28.5	1.9	50.6	54	3.4	Pass	
Peak	V	2484	31.1	28.5	1.9	61.5	74	12.5	Pass	
Average	V	2484	21.1	28.5	1.9	51.5	54	2.5	Pass	
Transmitting on Ch 21 (2455MHz)			Power Setting			-6				
Detector	Antenna Polarity	Freq (MHz)	Raw at 3m (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected at 3m (dBuV/m)	Limit at 3m (dBuV/m)	Margin (dB)	Verdict	
Peak	V	2483.5	28.4	28.5	1.9	58.8	74	15.2	Pass	
Average	V	2483.5	15.7	28.5	1.9	46.1	54	7.9	Pass	
Peak	V	2503	31.1	28.5	1.9	61.5	74	12.5	Pass	
Average	V	2503	22.3	28.5	1.9	52.7	54	1.3	Pass	
Transmitting on Ch 11 (2405MHz)			Power Setting			-6				
Detector	Antenna Polarity	Freq (MHz)	Raw at 3m (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected at 3m (dBuV/m)	Limit at 3m (dBuV/m)	Margin (dB)	Verdict	
Peak	V	2390	34.3	28.2	1.9	64.4	74	9.6	Pass	
Average	V	2390	22.7	28.2	1.9	52.8	54	1.2	Pass	
Peak	V	2357	32.1	28	1.9	62	74	12	Pass	
Average	V	2357	22.8	28	1.9	52.7	54	1.3	Pass	

Radiated Spurious Emissions

Tested in accordance with ANSI C63.10-2009

Peak measurements taken with RBW=1MHz, VBW=3MHz, max-hold

For average measurements Section 4.2.3.2.3 of ANSI C63.10-2009 was followed.

Tabular data presented represents only the frequencies observed in 30MHz – 25GHz range.

Date: Mar 10, 2014, Tested by: Yunus Faziloglu

1GHz - 25GHz (Spurious and Harmonics)

Transmitting on Ch 11 (2405MHz)

Power Setting

-6

Detector	Antenna	Freq (MHz)	Raw at 3m (dBuV)	PreAmp (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Filter Insertion Loss (dB)	Corrected at 3m (dBuV/m)	Limit at 3m (dBuV/m)	Margin (dB)	Verdict
Peak	V	2212	58.5	-38.7	27.6	2.5	2	51.9	74	22.1	Pass
Peak	V	4810	63.5	-42	32.9	3.8	2	60.2	74	13.8	Pass
Average	V	4810	55.6	-42	32.9	3.8	2	52.3	54	1.7	Pass
Peak	V	7215	50.6	-43.2	35.9	4.9	2	50.2	74	23.8	Pass
Peak	V	9620	48	-43.8	37.6	5.5	2	49.3	74	24.7	Pass
Average	V	9620	35	-43.8	37.6	5.5	2	36.3	54	17.7	Pass

Transmitting on Ch 18 (2440MHz)

Power Setting

-6

Detector	Antenna	Freq (MHz)	Raw at 3m (dBuV)	PreAmp (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Filter Insertion Loss (dB)	Corrected at 3m (dBuV/m)	Limit at 3m (dBuV/m)	Margin (dB)	Verdict
Peak	V	4880	62	-42.1	33	3.8	2	58.7	74	15.3	Pass
Average	V	4880	55.8	-42.1	33	3.8	2	52.5	54	1.5	Pass
Peak	V	7320	52.4	-43.3	36.4	4.9	2	52.4	74	21.6	Pass
Average	V	7320	40.4	-43.3	36.4	4.9	2	40.4	54	13.6	Pass
Peak	V	9760	47.8	-43.9	37.6	5.5	2	49	74	25	Pass
Average	V	9760	34.9	-43.9	37.6	5.5	2	36.1	54	17.9	Pass

Transmitting on Ch 25 (2475MHz)

Power Setting

-14

Detector	Antenna	Freq (MHz)	Raw at 3m (dBuV)	PreAmp (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Filter Insertion Loss (dB)	Corrected at 3m (dBuV/m)	Limit at 3m (dBuV/m)	Margin (dB)	Verdict
Peak	V	2250	56.4	-38.9	27.6	2.5	2	49.6	74	24.4	Pass
Peak	V	4950	59.3	-42.1	33.1	3.8	2	56.1	74	17.9	Pass
Average	V	4950	51.5	-42.1	33.1	3.8	2	48.3	54	5.7	Pass
Peak	V	7425	50.9	-43.4	36.5	4.9	2	50.9	74	23.1	Pass
Average	V	7425	38.3	-43.4	36.5	4.9	2	38.3	54	15.7	Pass
Peak	V	9900	48.3	-43.9	37.9	5.5	2	49.8	74	24.2	Pass
Average	V	9900	35.7	-43.9	37.9	5.5	2	37.2	54	16.8	Pass

Note: No significant emissions observed above 10GHz on any channel.

30MHz - 1GHz (Spurious)

Transmitting on Ch 18 (2440MHz)			Power Setting			-4		Cable Loss at 3m			Limit at 3m	
Detector	Antenna	Freq (MHz)	Raw at 3m (dBuV)	PreAmp (dB)	Antenn a Factor (dB/m)	Loss (dB)	Corrected at 3m (dBuV/m)	Loss (dB)	Corrected at 3m (dBuV/m)	Margi n (dB)	Verdic t	
Peak	V	46.6	51.3	-37	10.4	0.5	25.2	40	14.8	Pass		
Peak	V	76.5	48.7	-37	6.5	0.7	18.9	40	21.1	Pass		
Peak	H	76.5	45.6	-37	6.5	0.7	15.8	40	24.2	Pass		
Peak	V	132	48.1	-37	7.2	1	19.3	43.5	24.2	Pass		
Peak	V	749.8	48.6	-37.2	21.6	3.3	36.3	46	9.7	Pass		
Peak	V	845.9	51.6	-37.2	22.9	3.5	40.8	46	5.2	Pass		

Note: Below 1GHz emissions are from digital circuitry.

Channel selection and turning transmission on and off did not impact emissions.

Date: Feb 28, 2014

Tested by: Yunus

Faziloglu

End of Report

This page is intentionally blank and
marks the last page of this test report.