

FCC PART 15.247 TEST REPORT

For

Hena Digital Technology (Shenzhen) Co., Ltd.

3F, South Tower, Jiuzhou Electric Building, Southern No. 12Rd High-tech Industrial Park,
Nanshan District, Shenzhen, China

FCC ID: M7C-PAD11641IWL

Report Type: Original Report	Product Type: Netbook
Test Engineer:	Rocky Xiao <i>Rocky Xiao</i>
Report Number:	RDG160308003-00C
Report Date:	2016-03-25
Reviewed By:	Dean Liu <i>Dean Liu</i> RF Engineer
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	18
APPLICABLE STANDARD	18
MEASUREMENT UNCERTAINTY	18
EUT SETUP	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST RESULTS SUMMARY	20
TEST DATA	20
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	43

APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST EQUIPMENT LIST AND DETAILS.....	43
TEST DATA	43
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST EQUIPMENT LIST AND DETAILS.....	45
TEST DATA	45
FCC §15.247(e) - POWER SPECTRAL DENSITY	51
APPLICABLE STANDARD	51
TEST PROCEDURE	51
TEST EQUIPMENT LIST AND DETAILS.....	51
TEST DATA	51
DECLARATION LETTER	60

FINAL

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Hena Digital Technology (Shenzhen) Co., Ltd.'s product, model number: PAD11641iWL (FCC ID: M7C-PAD11641IWL) (the "EUT") in this report was a Netbook, which was measured approximately: 24 cm (L) x 20cm (W) x 1.9 cm (H), rated input voltage: DC3.7V rechargeable Li-ion battery or DC5.0V charging from adapter.

Adapter information:

Model: TEKA018-0502500UK

Input: AC100-240V, 50/60 Hz, 0.5A

Output: DC5.0V, 2.5A

Note: The series product, models PAD11641iWL, CB116, VB116, GB116, DB116, QB116, SB116, KB116, EB116 are electrically identical, the differences between them is model name, we selected PAD11641iWL for fully testing, the details was explained in the attached declaration letter.

All measurement and test data in this report was gathered from production sample serial number: 1600308003 (Assigned by BACL, Dongguan). The EUT was received on 2016-03-08.

Objective

This report is prepared on behalf of Hena Digital Technology (Shenzhen) Co., Ltd. in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JBC submissions with FCC ID: M7C-PAD11641IWL.

FCC Part 15.247 DSS submissions with FCC ID: M7C-PAD11641IWL.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in testing mode, which was provided by manufacturer.
For 2.4GHz band, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were tested with channel 1, 6 and 11.
For 802.11n ht40 mode were tested with Channel 3, 6 and 9.

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
..	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

Software: MPTool was used in test, for Bluetooth LE mode, the software was used for switching test channels, the output power was configured as default value.

For Wlan, the worst condition (maximum power with 100% duty cycle) was setting by the software as following table:

Test Mode	Test Software Version	MPTool		
802.11b	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	CCK1M	CCK1M	CCK1M
	Power Level Setting	57	57	56
802.11g	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	OFDM6M	OFDM6M	OFDM6M
	Power Level Setting	60	60	60
802.11n ht20	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting	61	61	61
802.11n ht40	Test Frequency	2422MHz	2437MHz	2452MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting	60	60	60


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	Earphone	/	/

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
DC Power Cable	yes	no	0.85	Adater	EUT

Block Diagram of Test Setup

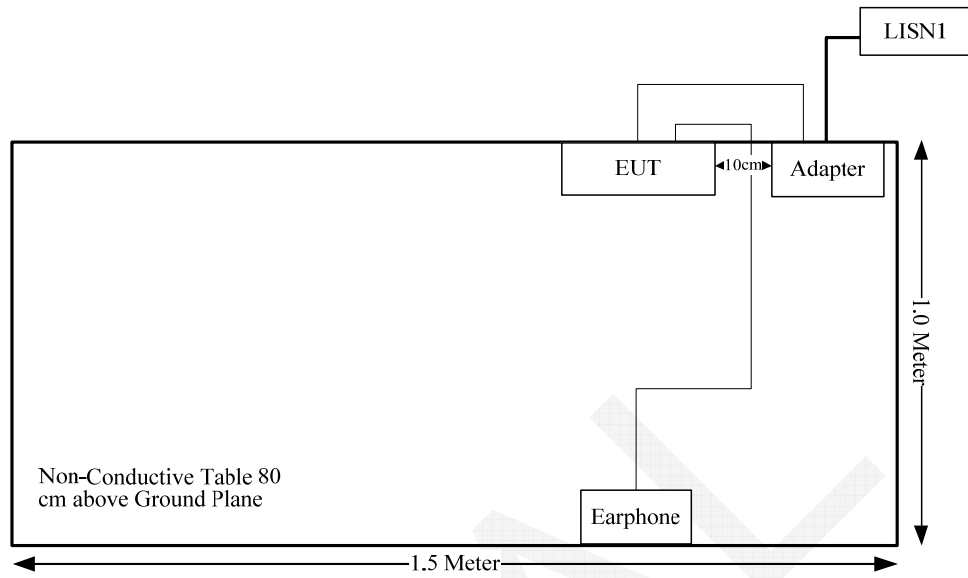

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum conducted output power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result**Test result: Compliant**

The conducted power including tune-up tolerance for BLE is 8.9 dBm (7.76 mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 7.76/5 \cdot (\sqrt{2.480}) = 2.4 < 3.0$

So the stand-alone SAR evaluation for BLE is not necessary.

For Wi-Fi, please refer to the SAR report: RDG160308003-20.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has one Internal antenna arrangement for WiFi/BT, and the antenna gain is 3.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.12 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

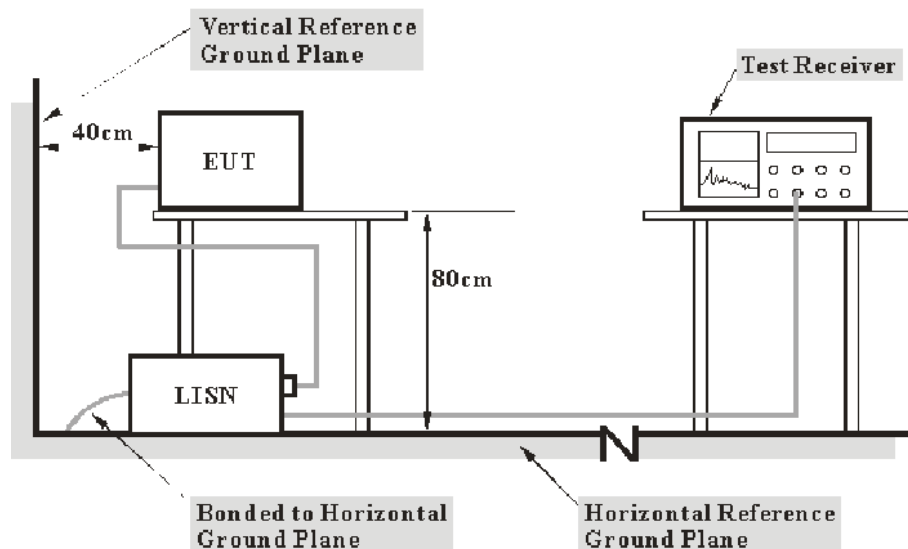

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2015-12-10	2016-12-09
R&S	L.I.S.N	ESH2-Z5	892107/021	2015-07-16	2016-07-15
R&S	Two-line V-network	ENV 216	3560.6550.12	2015-11-26	2016-11-25
N/A	Coaxial Cable	1.8m	N/A	2015-05-06	2016-05-06
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

13.4 dB at 0.495646 MHz in the **Line** conducted mode for wifi


Test Data**Environmental Conditions**

Temperature:	21.2°C
Relative Humidity:	50 %
ATM Pressure:	100.6 kPa

The testing was performed by Rocky Xiao on 2016-03-09.


Test Mode: Transmitting (Wi-Fi)

AC120 V, 60 Hz, Line:

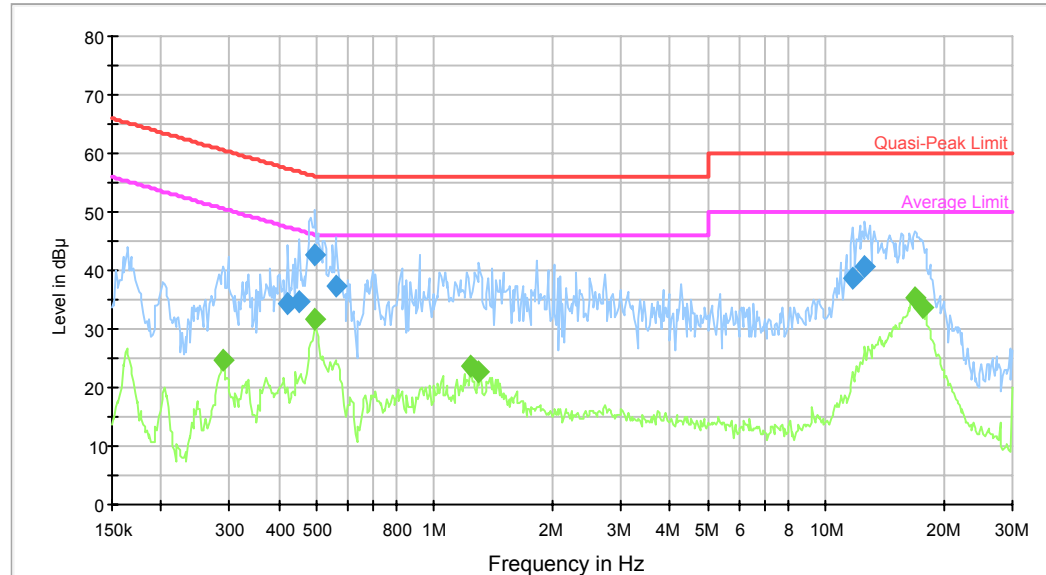

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.422630	34.2	9.000	L1	9.8	23.2	57.4	Compliance
0.450448	34.7	9.000	L1	9.8	22.2	56.9	Compliance
0.495646	42.7	9.000	L1	9.8	13.4	56.1	Compliance
0.558572	37.2	9.000	L1	9.8	18.8	56.0	Compliance
11.722024	38.6	9.000	L1	10.0	21.4	60.0	Compliance
12.593528	40.7	9.000	L1	10.1	19.3	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.288307	24.6	9.000	L1	9.7	26.0	50.6	Compliance
0.495646	31.8	9.000	L1	9.8	14.3	46.1	Compliance
1.239175	23.7	9.000	L1	9.8	22.3	46.0	Compliance
1.289541	22.7	9.000	L1	9.8	23.3	46.0	Compliance
16.911693	35.5	9.000	L1	10.1	14.5	50.0	Compliance
17.739864	33.8	9.000	L1	10.1	16.2	50.0	Compliance

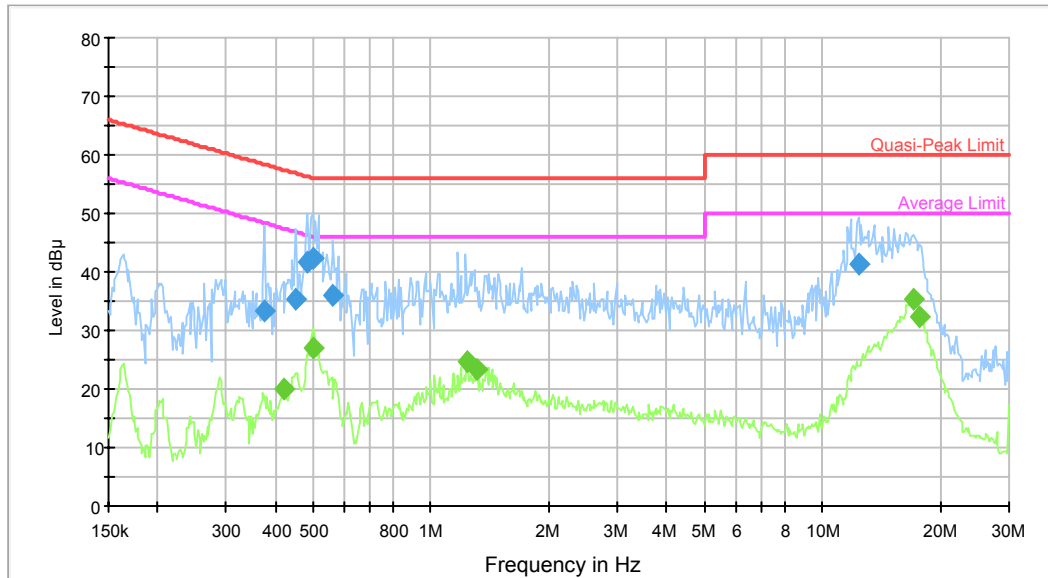
AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.375019	33.5	9.000	N	9.7	24.9	58.4	Compliance
0.450448	35.4	9.000	N	9.7	21.5	56.9	Compliance
0.483938	41.8	9.000	N	9.7	14.5	56.3	Compliance
0.499611	42.4	9.000	N	9.7	13.6	56.0	Compliance
0.563041	36.0	9.000	N	9.7	20.0	56.0	Compliance
12.394424	41.5	9.000	N	10.1	18.5	60.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.419276	19.9	9.000	N	9.7	27.6	47.5	Compliance
0.499611	27.1	9.000	N	9.7	18.9	46.0	Compliance
1.239175	24.5	9.000	N	9.8	21.5	46.0	Compliance
1.310256	23.2	9.000	N	9.8	22.8	46.0	Compliance
17.046987	35.2	9.000	N	10.1	14.8	50.0	Compliance
17.739864	32.3	9.000	N	10.1	17.7	50.0	Compliance


Test Mode: Transmitting (BLE)

AC120 V, 60 Hz, Line:

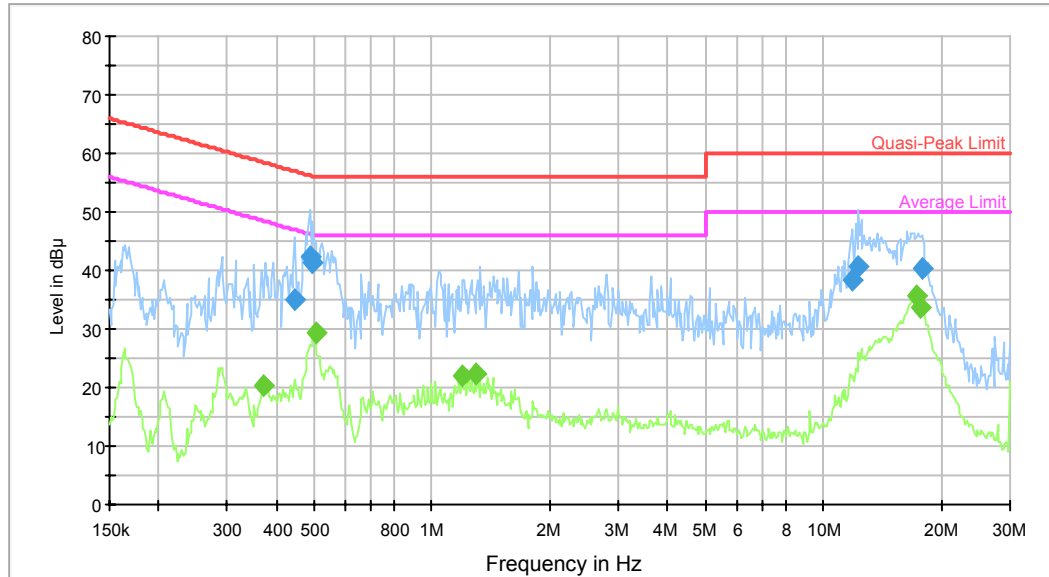

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.446873	35.1	9.000	L1	9.8	21.8	56.9	Compliance
0.487810	42.5	9.000	L1	9.8	13.7	56.2	Compliance
0.495646	41.4	9.000	L1	9.8	14.7	56.1	Compliance
11.910327	38.2	9.000	L1	10.1	21.8	60.0	Compliance
12.296055	40.7	9.000	L1	10.1	19.3	60.0	Compliance
17.881783	40.2	9.000	L1	10.1	19.8	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.372042	20.2	9.000	L1	9.7	28.3	48.5	Compliance
0.503608	29.2	9.000	L1	9.8	16.8	46.0	Compliance
1.190776	22.2	9.000	L1	9.8	23.8	46.0	Compliance
1.289541	22.3	9.000	L1	9.8	23.7	46.0	Compliance
17.320829	35.5	9.000	L1	10.1	14.5	50.0	Compliance
17.739864	33.8	9.000	L1	10.1	16.2	50.0	Compliance

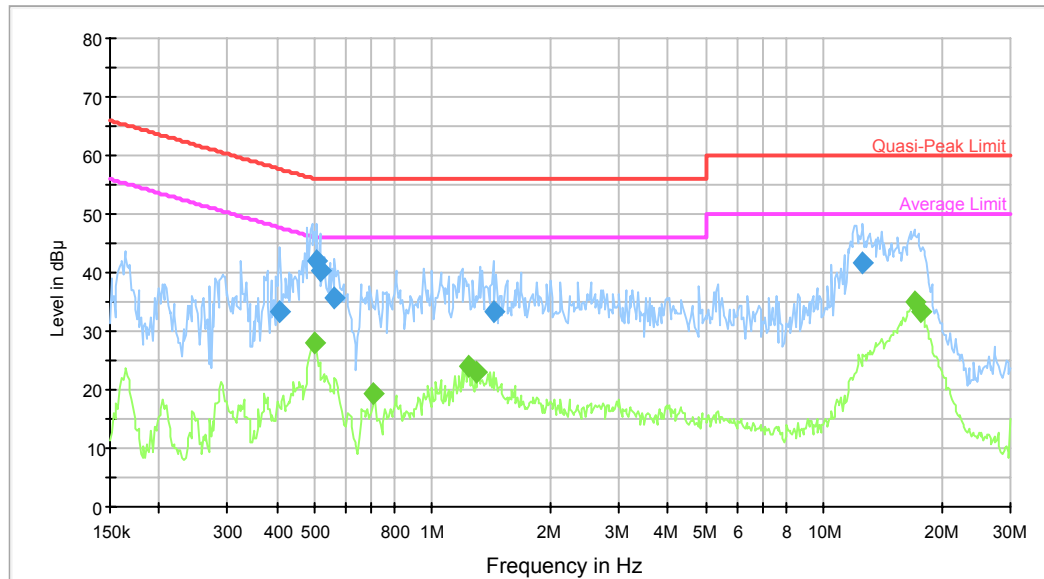AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.406123	33.2	9.000	N	9.7	24.5	57.7	Compliance
0.507637	41.8	9.000	N	9.7	14.2	56.0	Compliance
0.515791	40.4	9.000	N	9.7	15.6	56.0	Compliance
0.563041	35.8	9.000	N	9.7	20.2	56.0	Compliance
1.430284	33.2	9.000	N	9.8	22.8	56.0	Compliance
12.593528	41.7	9.000	N	10.1	18.3	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.499611	28.0	9.000	N	9.7	18.0	46.0	Compliance
0.709407	19.3	9.000	N	9.7	26.7	46.0	Compliance
1.239175	23.9	9.000	N	9.8	22.1	46.0	Compliance
1.289541	23.1	9.000	N	9.8	22.9	46.0	Compliance
17.183363	35.1	9.000	N	10.1	14.9	50.0	Compliance
17.739864	33.5	9.000	N	10.1	16.5	50.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.


Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 10m at Bay Area Compliance Laboratories Corp. (Dongguan) is: 30M~200MHz: 4.55 dB for Horizontal, 4.57 dB for Vertical; 200M~1GHz: 4.66 dB for Horizontal, 4.56 dB for Vertical; measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is: 30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical; 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB


Table 2 – Values of U_{cispr}

Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

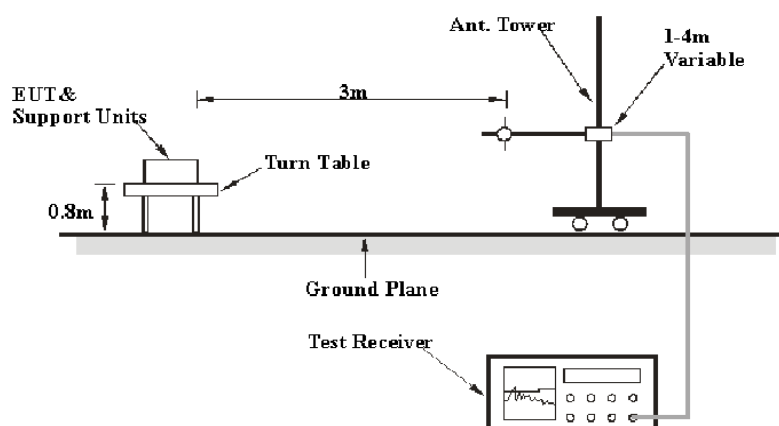

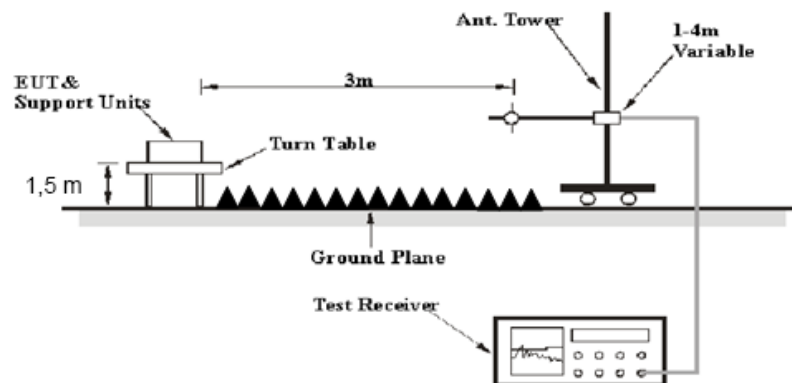Above 1GHz:

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits. The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Av

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2016-02-19	2017-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2015-09-06	2016-09-06
N/A	Coaxial Cable	14m	N/A	2015-05-06	2016-05-06
N/A	Coaxial Cable	8m	N/A	2015-05-06	2016-05-06
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

1.11 dB at 2390MHz in the Horizontal polarization

Test Data

Environmental Conditions

Temperature:	24.4°C
Relative Humidity:	64 %
ATM Pressure:	100.7 kPa

* The testing was performed by Rocky Xiao on 2016-03-22.

Test Mode: Transmitting

802.11b Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	71.74	PK	H	28.49	3.68	0.00	103.91	N/A	N/A
2412	68.31	AV	H	28.49	3.68	0.00	100.48	N/A	N/A
2412	70.29	PK	V	28.49	3.68	0.00	102.46	N/A	N/A
2412	67.09	AV	V	28.49	3.68	0.00	99.26	N/A	N/A
2400	25.51	PK	H	28.46	3.65	0.00	57.62	74.00	16.38
2400	14.89	AV	H	28.46	3.65	0.00	47.00	54.00	7.00
4824	39.66	PK	H	33.20	5.03	27.41	50.48	74.00	23.52
4824	35.52	AV	H	33.20	5.03	27.41	46.34	54.00	7.66
7236	33.55	PK	H	36.42	6.65	25.90	50.72	74.00	23.28
7236	21.03	AV	H	36.42	6.65	25.90	38.20	54.00	15.80
9648	29.79	PK	H	38.37	8.55	27.46	49.25	74.00	24.75
9648	18.04	AV	H	38.37	8.55	27.46	37.50	54.00	16.50
4000	38.2	PK	H	32.10	4.84	27.20	47.94	74.00	26.06
4000	25.55	AV	H	32.10	4.84	27.20	35.29	54.00	18.71
233.7	31.1	QP	V	12.07	1.85	21.48	23.54	46.00	22.46
Middle Channel: 2437 MHz									
2437	71.82	PK	H	28.55	3.75	0.00	104.12	N/A	N/A
2437	68.07	AV	H	28.55	3.75	0.00	100.37	N/A	N/A
2437	70.3	PK	V	28.55	3.75	0.00	102.60	N/A	N/A
2437	66.53	AV	V	28.55	3.75	0.00	98.83	N/A	N/A
4874	39.61	PK	H	33.37	5.14	27.42	50.70	74.00	23.30
4874	35.5	AV	H	33.37	5.14	27.42	46.59	54.00	7.41
7311	33.58	PK	H	36.56	6.74	25.88	51.00	74.00	23.00
7311	20.85	AV	H	36.56	6.74	25.88	38.27	54.00	15.73
9748	29.68	PK	H	38.35	8.61	27.24	49.40	74.00	24.60
9748	18.02	AV	H	38.35	8.61	27.24	37.74	54.00	16.26
4000	38.11	PK	H	32.10	4.84	27.20	47.85	74.00	26.15
4000	25.54	AV	H	32.10	4.84	27.20	35.28	54.00	18.72
3070	33.73	PK	H	31.07	6.72	27.47	44.05	74.00	29.95
3070	21.29	AV	H	31.07	6.72	27.47	31.61	54.00	22.39
233.7	30.9	QP	V	12.07	1.85	21.48	23.34	46.00	22.66
High Channel: 2462 MHz									
2462	71.51	PK	H	28.61	3.75	0.00	103.87	N/A	N/A
2462	67.78	AV	H	28.61	3.75	0.00	100.14	N/A	N/A
2462	70.03	PK	V	28.61	3.75	0.00	102.39	N/A	N/A
2462	66.29	AV	V	28.61	3.75	0.00	98.65	N/A	N/A
2483.5	26.23	PK	H	28.66	3.67	0.00	58.56	74.00	15.44
2483.5	13.91	AV	H	28.66	3.67	0.00	46.24	54.00	7.76
4924	39.21	PK	H	33.54	5.34	27.43	50.66	74.00	23.34
4924	35.39	AV	H	33.54	5.34	27.43	46.84	54.00	7.16
7386	33.29	PK	H	36.69	6.83	25.86	50.95	74.00	23.05
7386	20.74	AV	H	36.69	6.83	25.86	38.40	54.00	15.60
9848	29.5	PK	H	38.33	8.66	26.94	49.55	74.00	24.45
9848	17.81	AV	H	38.33	8.66	26.94	37.86	54.00	16.14
4000	37.94	PK	H	32.10	4.84	27.20	47.68	74.00	26.32
4000	25.33	AV	H	32.10	4.84	27.20	35.07	54.00	18.93
233.7	31.1	QP	V	12.07	1.85	21.48	23.54	46.00	22.46

802.11g Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	71.06	PK	H	28.49	3.68	0.00	103.23	N/A	N/A
2412	62.32	AV	H	28.49	3.68	0.00	94.49	N/A	N/A
2412	69.17	PK	V	28.49	3.68	0.00	101.34	N/A	N/A
2412	60.52	AV	V	28.49	3.68	0.00	92.69	N/A	N/A
2390	34.11	PK	H	28.44	3.63	0.00	66.18	74.00	7.82
2390	18.36	AV	H	28.44	3.63	0.00	50.43	54.00	3.57
4824	35.06	PK	H	33.20	5.03	27.41	45.88	74.00	28.12
4824	22.63	AV	H	33.20	5.03	27.41	33.45	54.00	20.55
7236	32.66	PK	H	36.42	6.65	25.90	49.83	74.00	24.17
7236	19.3	AV	H	36.42	6.65	25.90	36.47	54.00	17.53
9648	29.67	PK	H	38.37	8.55	27.46	49.13	74.00	24.87
9648	18.25	AV	H	38.37	8.55	27.46	37.71	54.00	16.29
4000	37.86	PK	H	32.10	4.84	27.20	47.60	74.00	26.40
4000	25.2	AV	H	32.10	4.84	27.20	34.94	54.00	19.06
233.7	30.7	QP	V	12.07	1.85	21.48	23.14	46.00	22.86
Middle Channel: 2437 MHz									
2437	70.81	PK	H	28.55	3.75	0.00	103.11	N/A	N/A
2437	61.67	AV	H	28.55	3.75	0.00	93.97	N/A	N/A
2437	68.75	PK	V	28.55	3.75	0.00	101.05	N/A	N/A
2437	59.99	AV	V	28.55	3.75	0.00	92.29	N/A	N/A
4874	34.9	PK	H	33.37	5.14	27.42	45.99	74.00	28.01
4874	22.5	AV	H	33.37	5.14	27.42	33.59	54.00	20.41
7311	32.71	PK	H	36.56	6.74	25.88	50.13	74.00	23.87
7311	19.31	AV	H	36.56	6.74	25.88	36.73	54.00	17.27
9748	29.81	PK	H	38.35	8.61	27.24	49.53	74.00	24.47
9748	18.34	AV	H	38.35	8.61	27.24	38.06	54.00	15.94
4000	37.78	PK	H	32.10	4.84	27.20	47.52	74.00	26.48
4000	25.17	AV	H	32.10	4.84	27.20	34.91	54.00	19.09
3070	33.81	PK	H	31.07	6.72	27.47	44.13	74.00	29.87
3070	21.28	AV	H	31.07	6.72	27.47	31.60	54.00	22.40
233.7	30.6	QP	V	12.07	1.85	21.48	23.04	46.00	22.96
High Channel: 2462 MHz									
2462	70.4	PK	H	28.61	3.75	0.00	102.76	N/A	N/A
2462	61.46	AV	H	28.61	3.75	0.00	93.82	N/A	N/A
2462	68.52	PK	V	28.61	3.75	0.00	100.88	N/A	N/A
2462	59.76	AV	V	28.61	3.75	0.00	92.12	N/A	N/A
2483.5	31.8	PK	H	28.66	3.67	0.00	64.13	74.00	9.87
2483.5	16.21	AV	H	28.66	3.67	0.00	48.54	54.00	5.46
4924	34.57	PK	H	33.54	5.34	27.43	46.02	74.00	27.98
4924	22.34	AV	H	33.54	5.34	27.43	33.79	54.00	20.21
7386	32.44	PK	H	36.69	6.83	25.86	50.10	74.00	23.90
7386	19.02	AV	H	36.69	6.83	25.86	36.68	54.00	17.32
9848	29.54	PK	H	38.33	8.66	26.94	49.59	74.00	24.41
9848	18.11	AV	H	38.33	8.66	26.94	38.16	54.00	15.84
4000	37.62	PK	H	32.10	4.84	27.20	47.36	74.00	26.64
4000	25.03	AV	H	32.10	4.84	27.20	34.77	54.00	19.23
233.7	30.5	QP	V	12.07	1.85	21.48	22.94	46.00	23.06

802.11 n ht20 Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	70.7	PK	H	28.49	3.68	0.00	102.87	N/A	N/A
2412	62.26	AV	H	28.49	3.68	0.00	94.43	N/A	N/A
2412	68.86	PK	V	28.49	3.68	0.00	101.03	N/A	N/A
2412	60.5	AV	V	28.49	3.68	0.00	92.67	N/A	N/A
2390	40.82	PK	H	28.44	3.63	0.00	72.89	74.00	1.11
2390	20.54	AV	H	28.44	3.63	0.00	52.61	54.00	1.39
4824	35.67	PK	H	33.20	5.03	27.41	46.49	74.00	27.51
4824	22.46	AV	H	33.20	5.03	27.41	33.28	54.00	20.72
7236	32.58	PK	H	36.42	6.65	25.90	49.75	74.00	24.25
7236	19.26	AV	H	36.42	6.65	25.90	36.43	54.00	17.57
9648	29.9	PK	H	38.37	8.55	27.46	49.36	74.00	24.64
9648	18.31	AV	H	38.37	8.55	27.46	37.77	54.00	16.23
4000	37.81	PK	H	32.10	4.84	27.20	47.55	74.00	26.45
4000	25.2	AV	H	32.10	4.84	27.20	34.94	54.00	19.06
233.7	30.8	QP	V	12.07	1.85	21.48	23.24	46.00	22.76
Middle Channel: 2437 MHz									
2437	70.74	PK	H	28.55	3.75	0.00	103.04	N/A	N/A
2437	61.72	AV	H	28.55	3.75	0.00	94.02	N/A	N/A
2437	68.55	PK	V	28.55	3.75	0.00	100.85	N/A	N/A
2437	60.29	AV	V	28.55	3.75	0.00	92.59	N/A	N/A
4874	35.6	PK	H	33.37	5.14	27.42	46.69	74.00	27.31
4874	22.37	AV	H	33.37	5.14	27.42	33.46	54.00	20.54
7311	32.51	PK	H	36.56	6.74	25.88	49.93	74.00	24.07
7311	19.21	AV	H	36.56	6.74	25.88	36.63	54.00	17.37
9748	29.93	PK	H	38.35	8.61	27.24	49.65	74.00	24.35
9748	18.18	AV	H	38.35	8.61	27.24	37.90	54.00	16.10
4000	37.77	PK	H	32.10	4.84	27.20	47.51	74.00	26.49
4000	25.23	AV	H	32.10	4.84	27.20	34.97	54.00	19.03
3070	33.84	PK	H	31.07	6.72	27.47	44.16	74.00	29.84
3070	21.39	AV	H	31.07	6.72	27.47	31.71	54.00	22.29
233.7	30.8	QP	V	12.07	1.85	21.48	23.24	46.00	22.76
High Channel: 2462 MHz									
2462	70.32	PK	H	28.61	3.75	0.00	102.68	N/A	N/A
2462	61.52	AV	H	28.61	3.75	0.00	93.88	N/A	N/A
2462	68.41	PK	V	28.61	3.75	0.00	100.77	N/A	N/A
2462	60.06	AV	V	28.61	3.75	0.00	92.42	N/A	N/A
2483.5	35.47	PK	H	28.66	3.67	0.00	67.80	74.00	6.20
2483.5	18.21	AV	H	28.66	3.67	0.00	50.54	54.00	3.46
4924	35.26	PK	H	33.54	5.34	27.43	46.71	74.00	27.29
4924	22.24	AV	H	33.54	5.34	27.43	33.69	54.00	20.31
7386	32.36	PK	H	36.69	6.83	25.86	50.02	74.00	23.98
7386	19.04	AV	H	36.69	6.83	25.86	36.70	54.00	17.30
9848	29.73	PK	H	38.33	8.66	26.94	49.78	74.00	24.22
9848	18.07	AV	H	38.33	8.66	26.94	38.12	54.00	15.88
4000	37.58	PK	H	32.10	4.84	27.20	47.32	74.00	26.68
4000	24.96	AV	H	32.10	4.84	27.20	34.70	54.00	19.30
233.7	30.7	QP	V	12.07	1.85	21.48	23.14	46.00	22.86

802.11 n ht40 Mode


Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2422 MHz									
2422	67.54	PK	H	28.51	3.71	0.00	99.76	N/A	N/A
2422	59.04	AV	H	28.51	3.71	0.00	91.26	N/A	N/A
2422	65.9	PK	V	28.51	3.71	0.00	98.12	N/A	N/A
2422	57.28	AV	V	28.51	3.71	0.00	89.50	N/A	N/A
2390	34.1	PK	H	28.44	3.63	0.00	66.17	74.00	7.83
2390	18.43	AV	H	28.44	3.63	0.00	50.50	54.00	3.50
4844	33.74	PK	H	33.27	4.99	27.42	44.58	74.00	29.42
4844	21.73	AV	H	33.27	4.99	27.42	32.57	54.00	21.43
7266	32.53	PK	H	36.48	6.68	25.89	49.80	74.00	24.20
7266	19.21	AV	H	36.48	6.68	25.89	36.48	54.00	17.52
9688	29.59	PK	H	38.36	8.58	27.37	49.16	74.00	24.84
9688	17.74	AV	H	38.36	8.58	27.37	37.31	54.00	16.69
4000	37.29	PK	H	32.10	4.84	27.20	47.03	74.00	26.97
4000	24.68	AV	H	32.10	4.84	27.20	34.42	54.00	19.58
233.7	30.5	QP	V	12.07	1.85	21.48	22.94	46.00	23.06
Middle Channel: 2437 MHz									
2437	68.12	PK	H	28.55	3.75	0.00	100.42	N/A	N/A
2437	59.3	AV	H	28.55	3.75	0.00	91.60	N/A	N/A
2437	66.25	PK	V	28.55	3.75	0.00	98.55	N/A	N/A
2437	57.7	AV	V	28.55	3.75	0.00	90.00	N/A	N/A
4874	33.58	PK	H	33.37	5.14	27.42	44.67	74.00	29.33
4874	21.77	AV	H	33.37	5.14	27.42	32.86	54.00	21.14
7311	32.54	PK	H	36.56	6.74	25.88	49.96	74.00	24.04
7311	19.2	AV	H	36.56	6.74	25.88	36.62	54.00	17.38
9748	29.71	PK	H	38.35	8.61	27.24	49.43	74.00	24.57
9748	17.9	AV	H	38.35	8.61	27.24	37.62	54.00	16.38
4000	37.26	PK	H	32.10	4.84	27.20	47.00	74.00	27.00
4000	24.68	AV	H	32.10	4.84	27.20	34.42	54.00	19.58
3070	33.61	PK	H	31.07	6.72	27.47	43.93	74.00	30.07
3070	21.08	AV	H	31.07	6.72	27.47	31.40	54.00	22.60
233.7	30.5	QP	V	12.07	1.85	21.48	22.94	46.00	23.06
High Channel: 2452 MHz									
2452	67.65	PK	H	28.58	3.78	0.00	100.01	N/A	N/A
2452	59.08	AV	H	28.58	3.78	0.00	91.44	N/A	N/A
2452	66.02	PK	V	28.58	3.78	0.00	98.38	N/A	N/A
2452	57.46	AV	V	28.58	3.78	0.00	89.82	N/A	N/A
2483.5	33.13	PK	H	28.66	3.67	0.00	65.46	74.00	8.54
2483.5	19.23	AV	H	28.66	3.67	0.00	51.56	54.00	2.44
4904	33.26	PK	H	33.47	5.31	27.43	44.61	74.00	29.39
4904	21.62	AV	H	33.47	5.31	27.43	32.97	54.00	21.03
7356	32.31	PK	H	36.64	6.79	25.87	49.87	74.00	24.13
7356	19.02	AV	H	36.64	6.79	25.87	36.58	54.00	17.42
9808	29.44	PK	H	38.34	8.64	27.09	49.33	74.00	24.67
9808	17.63	AV	H	38.34	8.64	27.09	37.52	54.00	16.48
4000	37.13	PK	H	32.10	4.84	27.20	46.87	74.00	27.13
4000	24.55	AV	H	32.10	4.84	27.20	34.29	54.00	19.71
233.7	30.5	QP	V	12.07	1.85	21.48	22.94	46.00	23.06

BLE Mode


Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2402 MHz									
2402	67.28	PK	H	28.46	3.66	0.00	99.40	N/A	N/A
2402	51.26	AV	H	28.46	3.66	0.00	83.38	N/A	N/A
2402	66.41	PK	V	28.46	3.66	0.00	98.53	N/A	N/A
2402	50.07	AV	V	28.46	3.66	0.00	82.19	N/A	N/A
2400	39.6	PK	H	28.46	3.65	0.00	71.71	74.00	2.29
2400	16.37	AV	H	28.46	3.65	0.00	48.48	54.00	5.52
4804	32.46	PK	H	33.13	5.06	27.41	43.24	74.00	30.76
4804	18.88	AV	H	33.13	5.06	27.41	29.66	54.00	24.34
7206	31.8	PK	H	36.37	6.61	25.91	48.87	74.00	25.13
7206	18.66	AV	H	36.37	6.61	25.91	35.73	54.00	18.27
9608	29.11	PK	H	38.38	8.53	27.55	48.47	74.00	25.53
9608	16.43	AV	H	38.38	8.53	27.55	35.79	54.00	18.21
4000	36.51	PK	H	32.10	4.84	27.20	46.25	74.00	27.75
4000	23.78	AV	H	32.10	4.84	27.20	33.52	54.00	20.48
233.7	30.5	QP	V	12.07	1.85	21.48	22.94	46.00	23.06
Middle Channel: 2440 MHz									
2440	67.94	PK	H	28.56	3.76	0.00	100.26	N/A	N/A
2440	51.68	AV	H	28.56	3.76	0.00	84.00	N/A	N/A
2440	66.77	PK	V	28.56	3.76	0.00	99.09	N/A	N/A
2440	60.74	AV	V	28.56	3.76	0.00	93.06	N/A	N/A
4880	32.49	PK	H	33.39	5.18	27.42	43.64	74.00	30.36
4880	18.84	AV	H	33.39	5.18	27.42	29.99	54.00	24.01
7320	31.85	PK	H	36.58	6.75	25.88	49.30	74.00	24.70
7320	18.74	AV	H	36.58	6.75	25.88	36.19	54.00	17.81
9760	29.2	PK	H	38.35	8.62	27.21	48.96	74.00	25.04
9760	16.45	AV	H	38.35	8.62	27.21	36.21	54.00	17.79
4000	36.38	PK	H	32.10	4.84	27.20	46.12	74.00	27.88
4000	23.8	AV	H	32.10	4.84	27.20	33.54	54.00	20.46
3340	34.16	PK	H	32.09	4.86	27.25	43.86	74.00	30.14
3340	21.59	AV	H	32.09	4.86	27.25	31.29	54.00	22.71
233.7	30.4	QP	V	12.07	1.85	21.48	22.84	46.00	23.16
High Channel: 2480 MHz									
2480	68.05	PK	H	28.65	3.68	0.00	100.38	N/A	N/A
2480	52.1	AV	H	28.65	3.68	0.00	84.43	N/A	N/A
2480	67.21	PK	V	28.65	3.68	0.00	99.54	N/A	N/A
2480	61.09	AV	V	28.65	3.68	0.00	93.42	N/A	N/A
2483.5	29.45	PK	H	28.66	3.67	0.00	61.78	74.00	12.22
2483.5	13.95	AV	H	28.66	3.67	0.00	46.28	54.00	7.72
4960	32.59	PK	H	33.66	5.34	27.43	44.16	74.00	29.84
4960	18.74	AV	H	33.66	5.34	27.43	30.31	54.00	23.69
7440	31.83	PK	H	36.79	6.89	25.97	49.54	74.00	24.46
7440	18.63	AV	H	36.79	6.89	25.97	36.34	54.00	17.66
9920	29.2	PK	H	38.32	8.71	26.66	49.57	74.00	24.43
9920	16.46	AV	H	38.32	8.71	26.66	36.83	54.00	17.17
4000	36.41	PK	H	32.10	4.84	27.20	46.15	74.00	27.85
4000	23.75	AV	H	32.10	4.84	27.20	33.49	54.00	20.51
233.7	30.4	QP	V	12.07	1.85	21.48	22.84	46.00	23.16

Conducted Spurious Emissions at Antenna Port


802.11b Low Channel

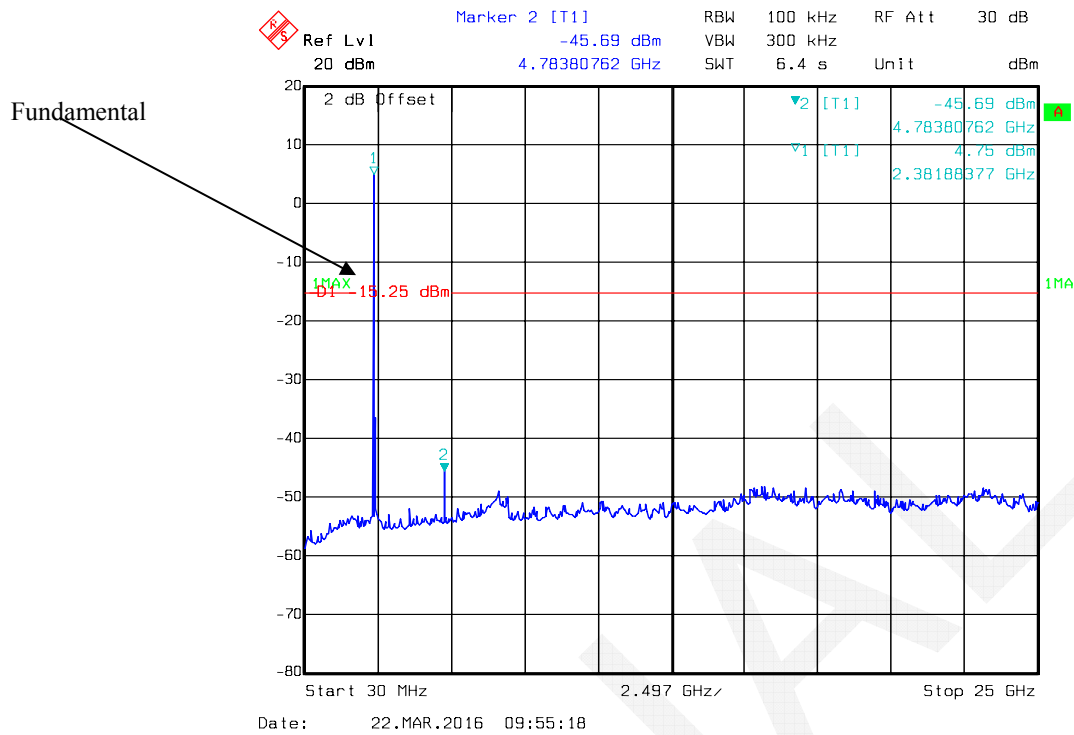


802.11b Middle Channel

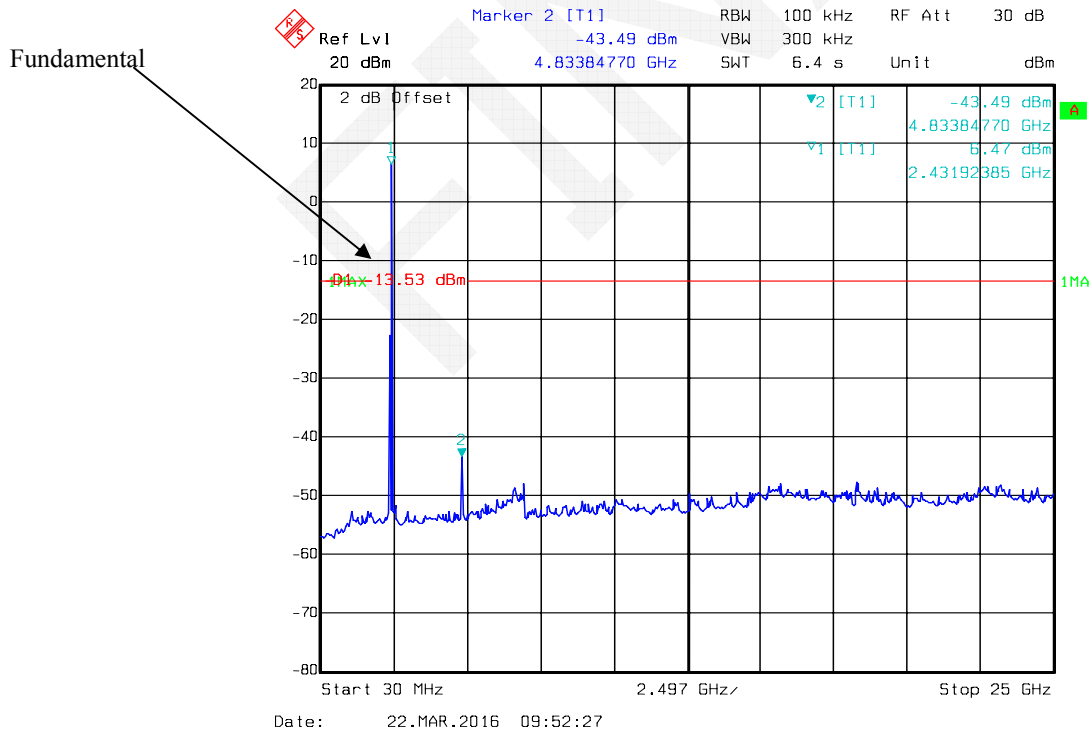


802.11b High Channel

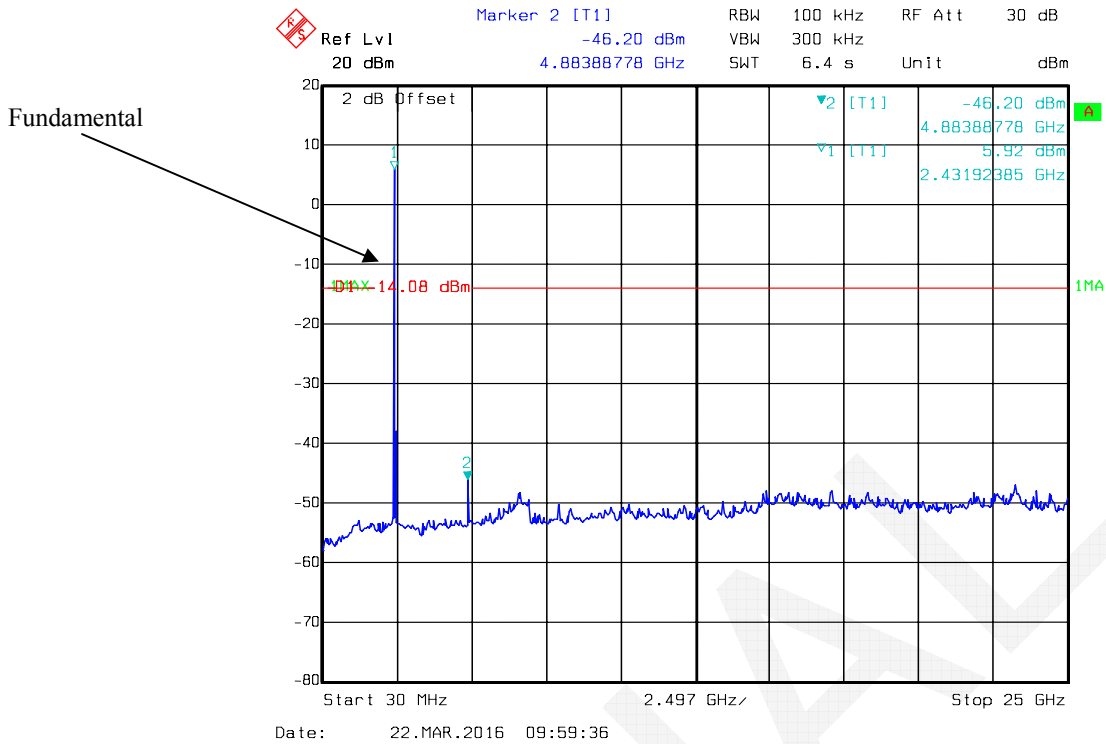


802.11g Low Channel

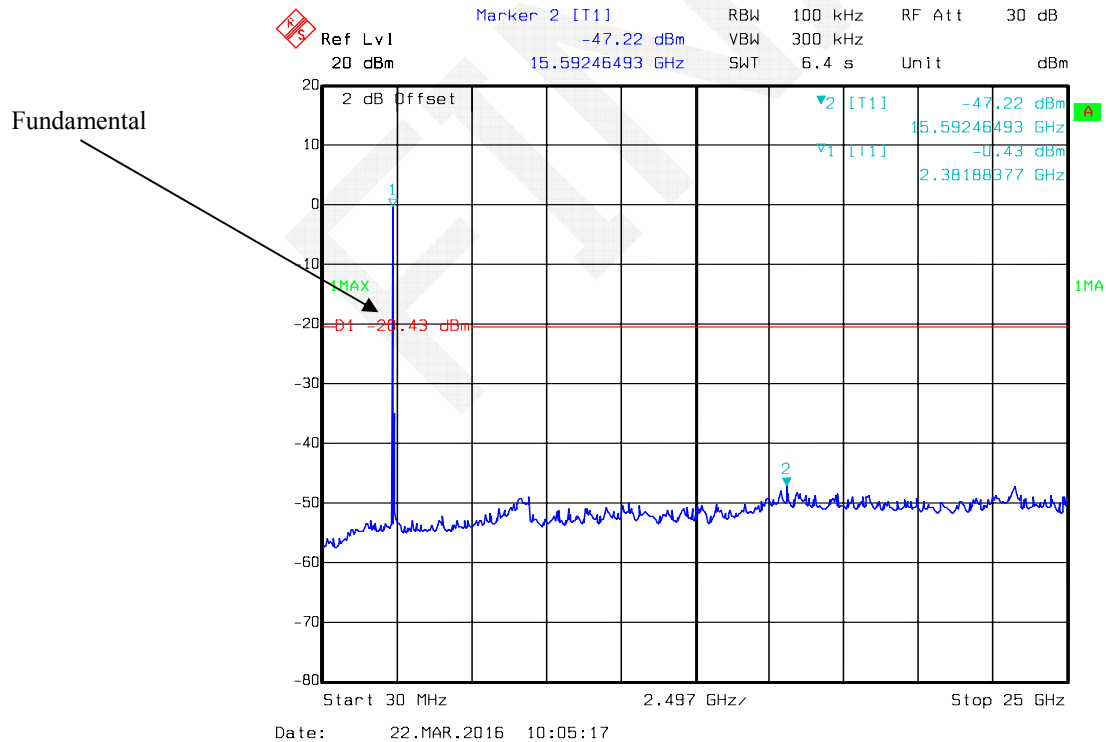


802.11g Middle Channel

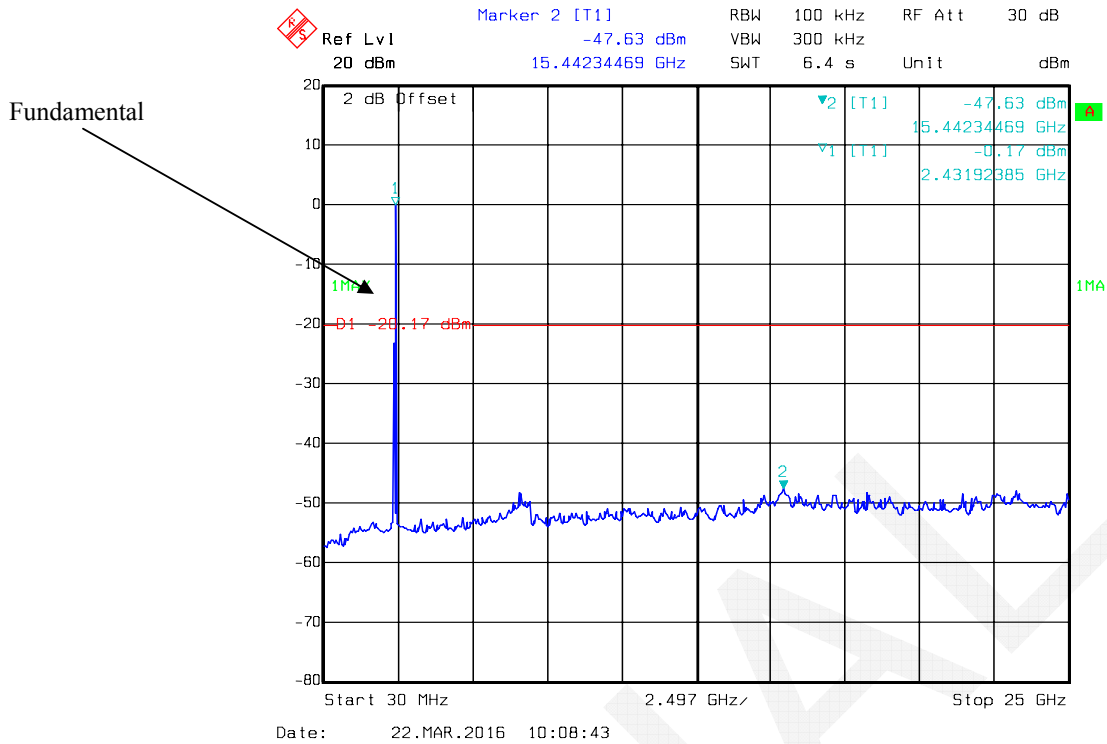


802.11g High Channel

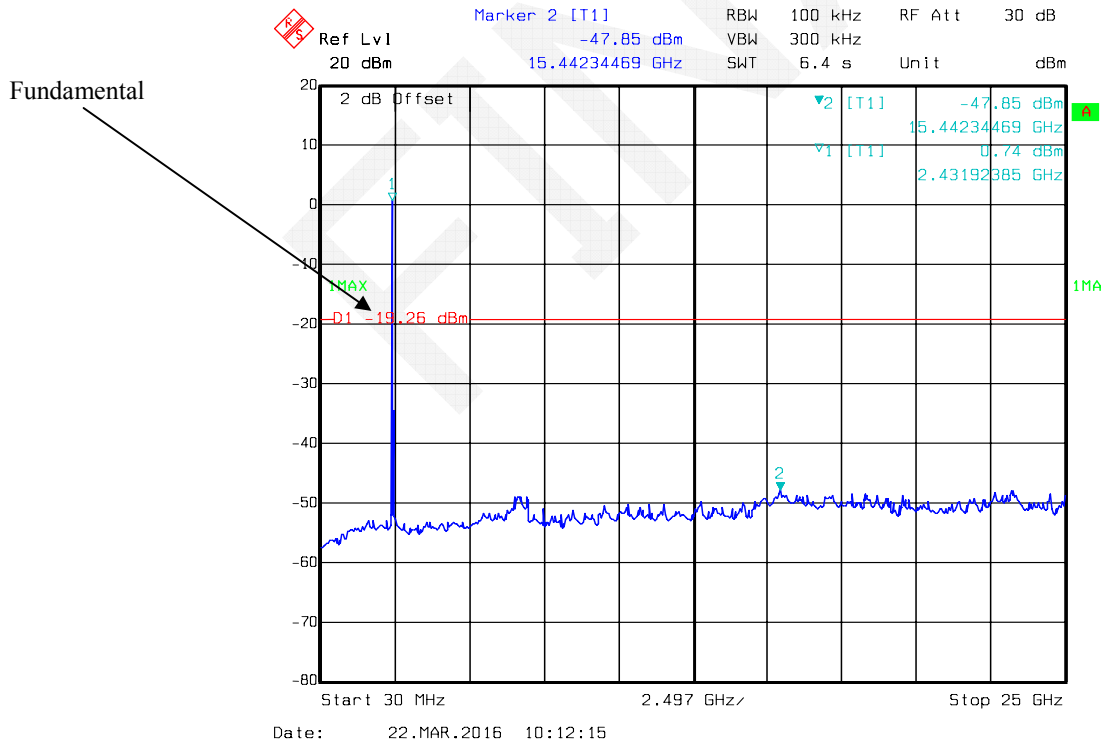


802.11n ht20 Low Channel

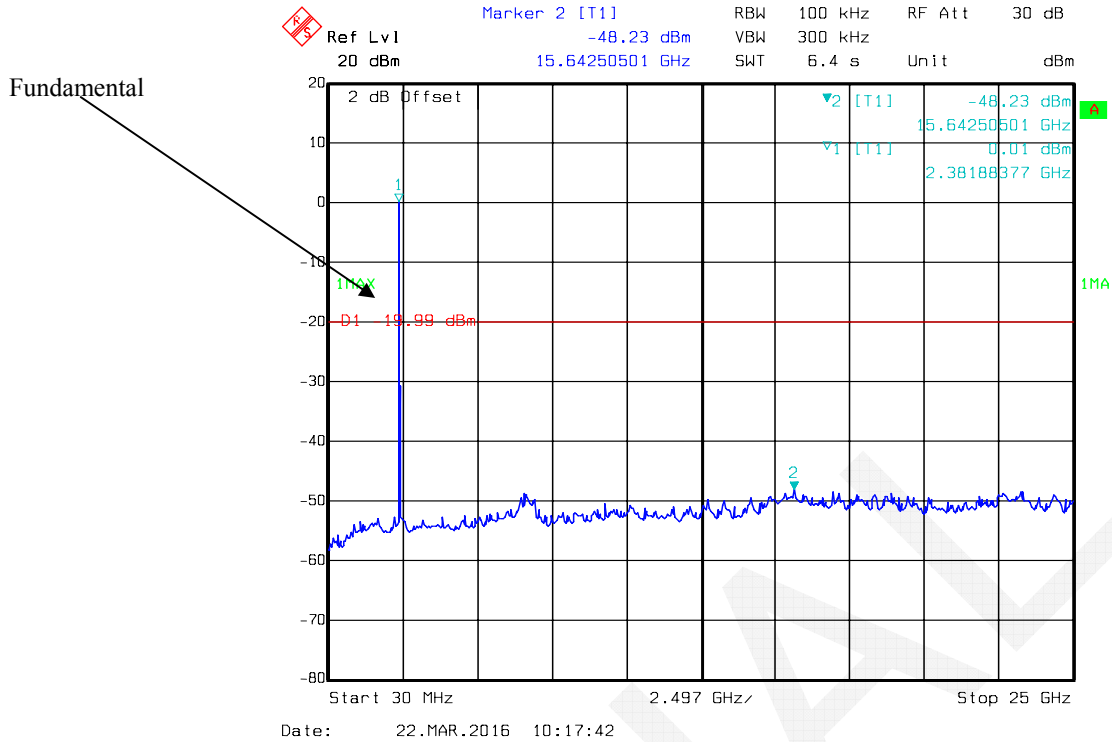


802.11n ht20 Middle Channel

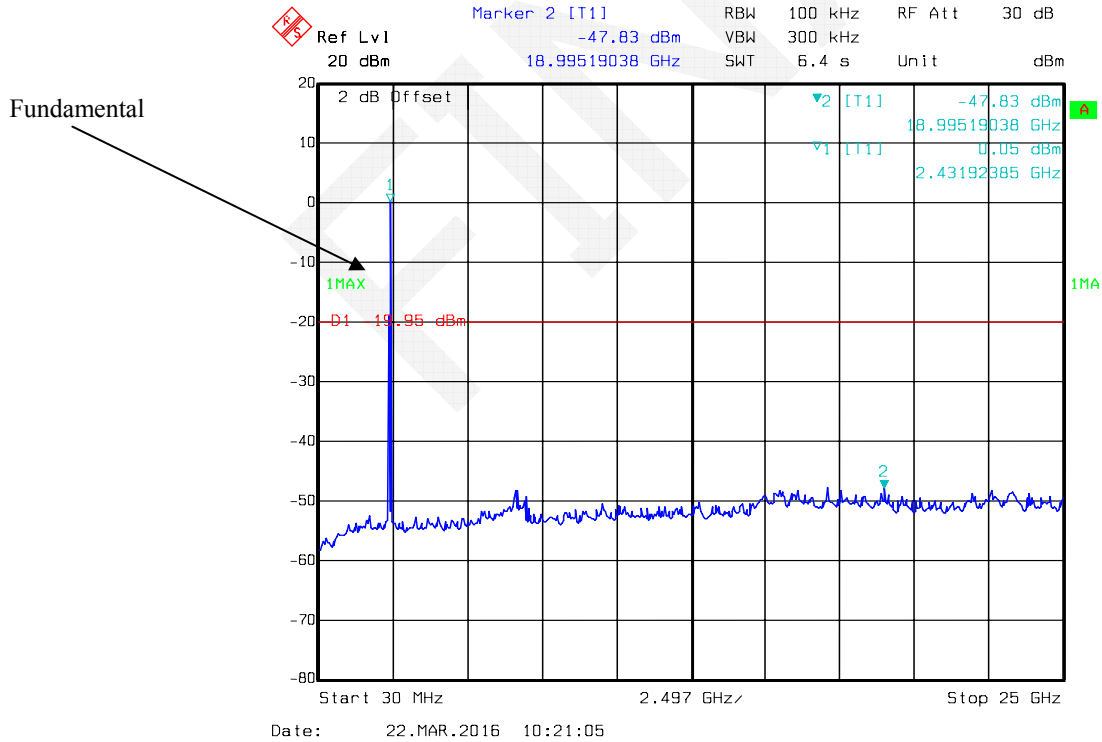


802.11n ht20 High Channel

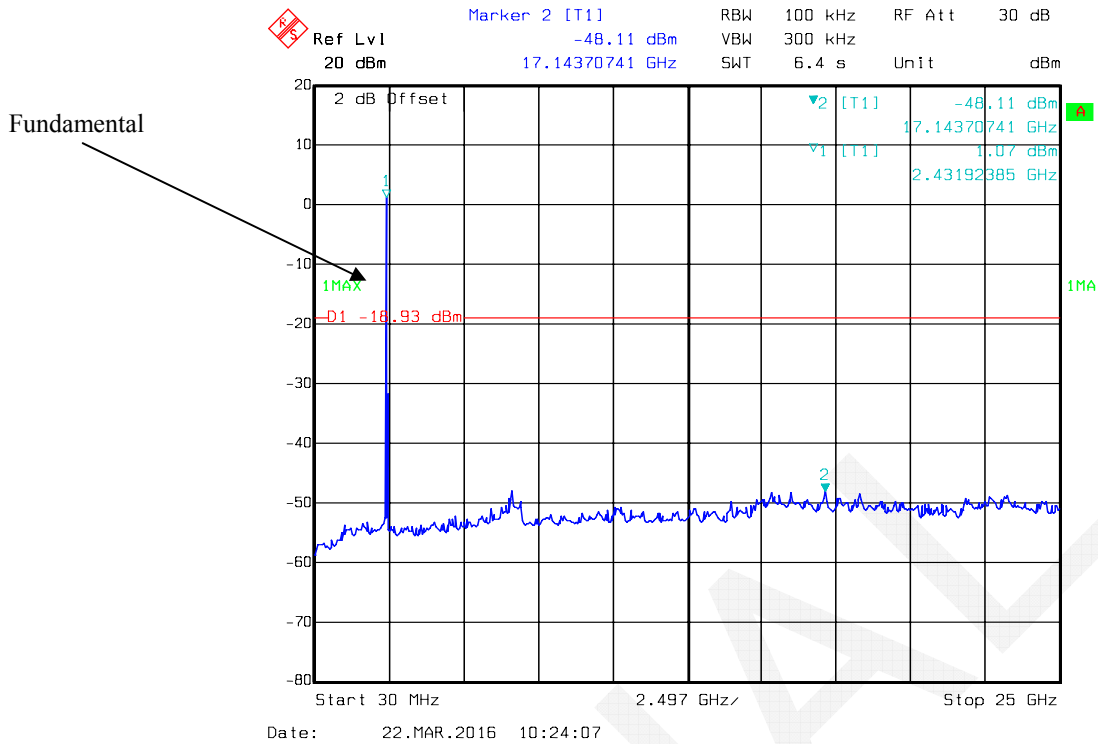


802.11n ht40 Low Channel

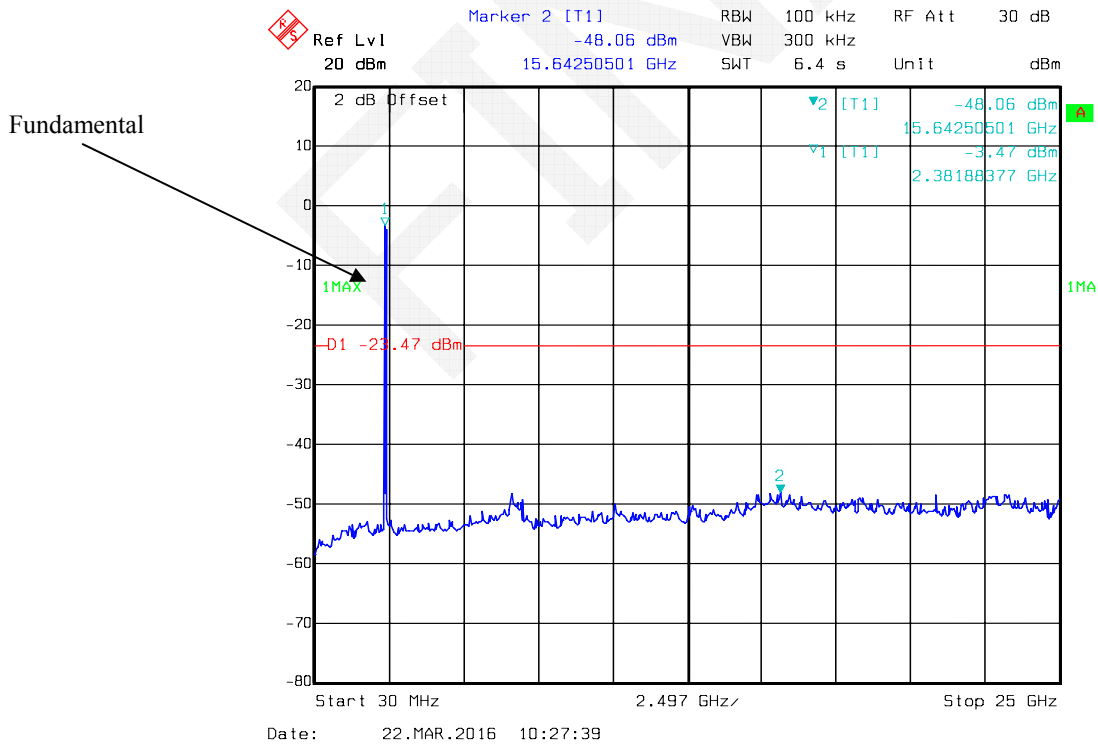


802.11n ht40 Middle Channel

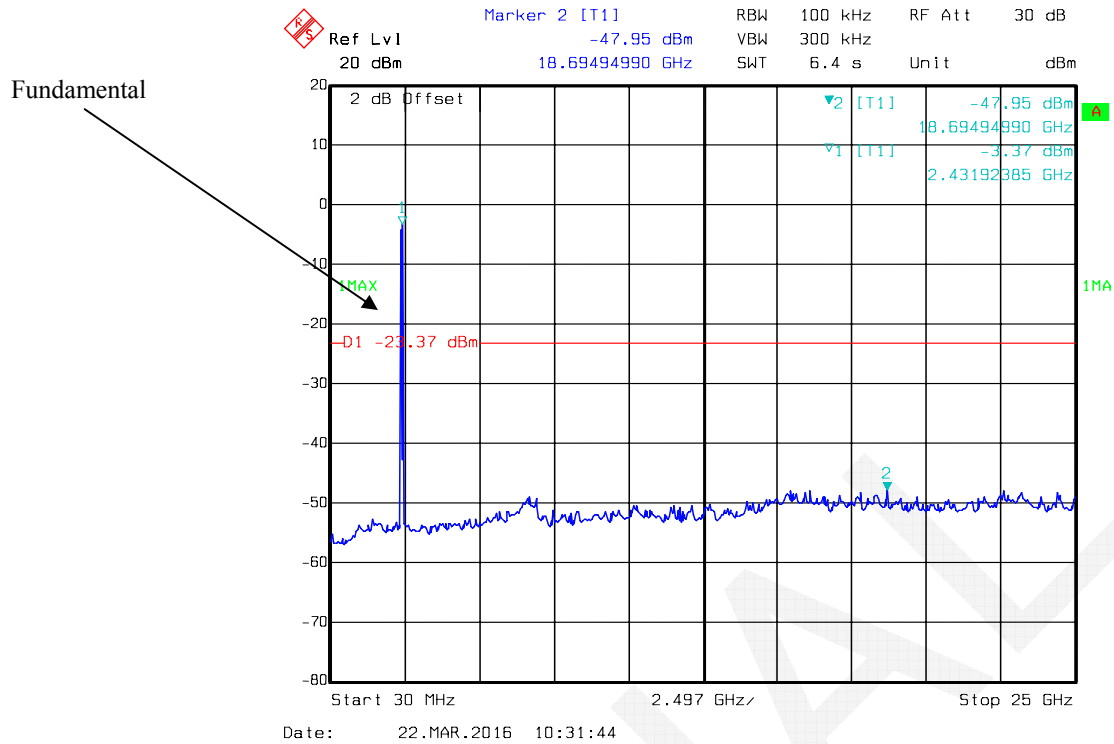


802.11n ht40 High Channel

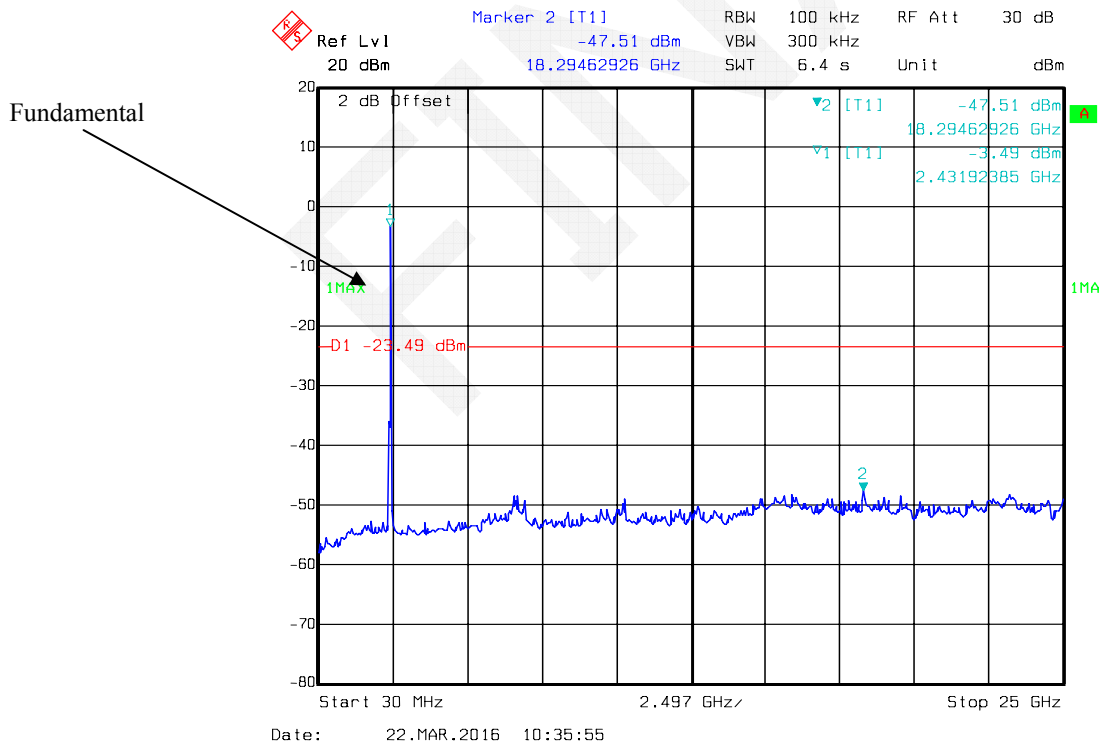


BLE Low Channel

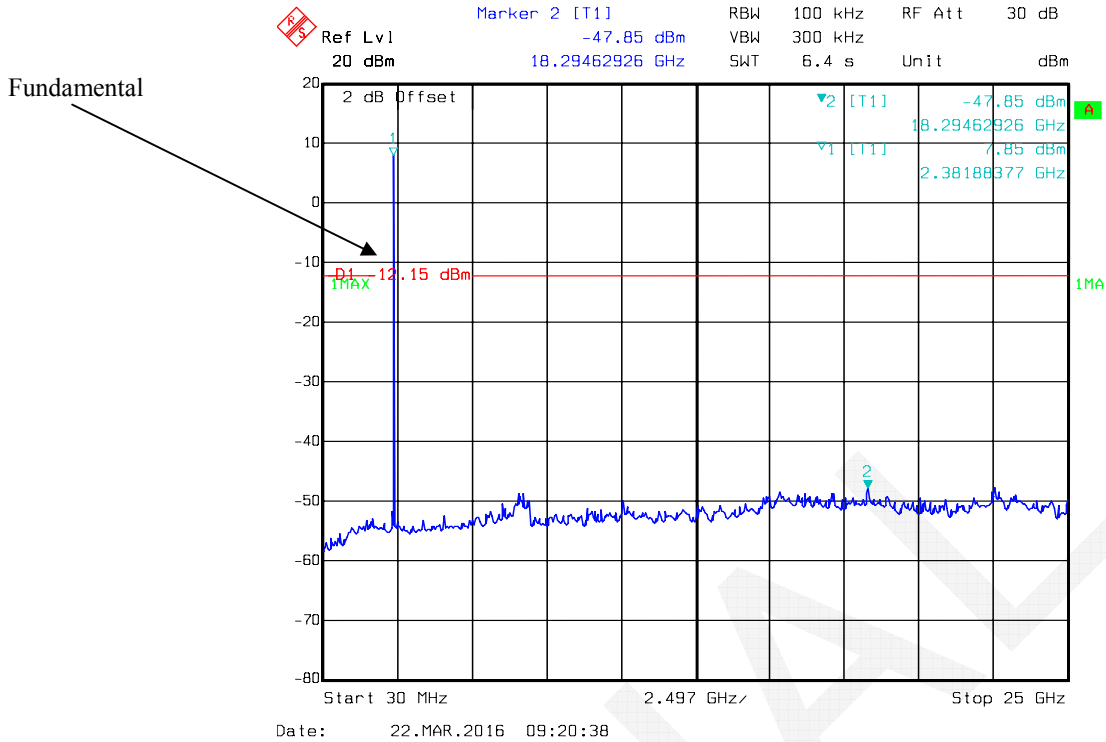

BLE Middle Channel

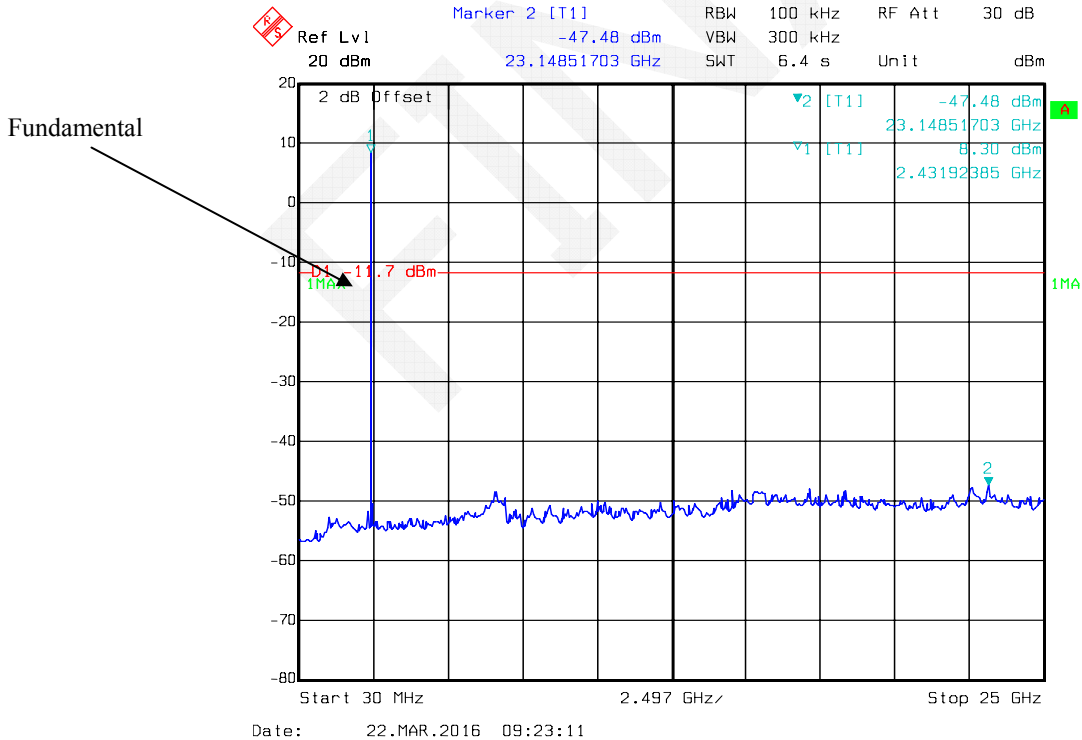

BLE High Channel

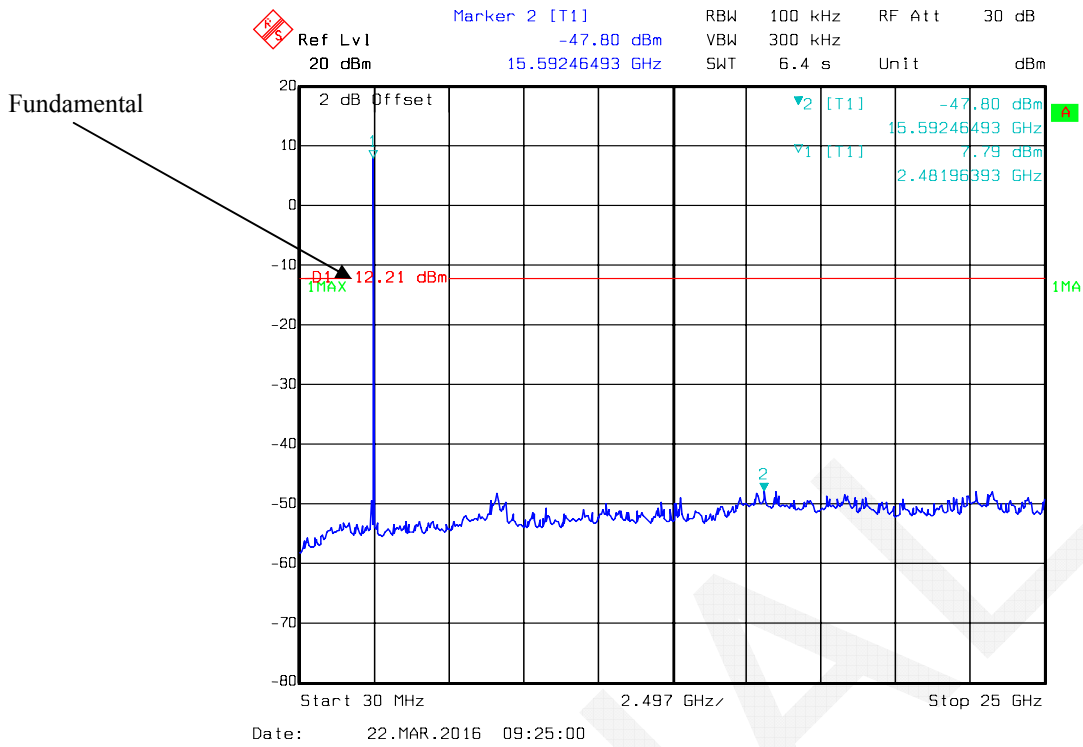

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r04

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.4°C
Relative Humidity:	64 %
ATM Pressure:	100.7 kPa


** The testing was performed by Rocky Xiao on 2016-03-22.*

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	10.10	≥ 0.5
	Middle	2437	10.18	≥ 0.5
	High	2462	10.02	≥ 0.5
802.11g	Low	2412	16.59	≥ 0.5
	Middle	2437	16.59	≥ 0.5
	High	2462	16.59	≥ 0.5
802.11n20	Low	2412	17.88	≥ 0.5
	Middle	2437	17.88	≥ 0.5
	High	2462	17.88	≥ 0.5
802.11n40	Low	2422	36.55	≥ 0.5
	Middle	2437	36.71	≥ 0.5
	High	2452	36.39	≥ 0.5
BLE	Low	2402	0.553	≥ 0.5
	Middle	2440	0.549	≥ 0.5
	High	2480	0.553	≥ 0.5

802.11b Low Channel

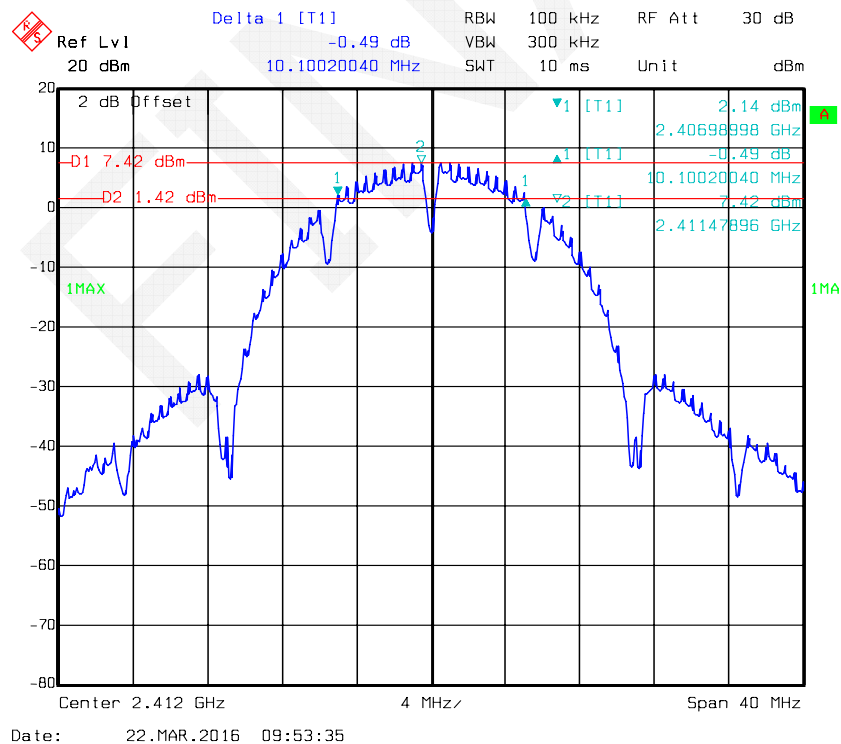

Delta 1 [T1] 0.81 dB RBW 100 kHz RF Att 30 dB
 Ref Lvl 20 dBm VBW 300 kHz
 10.18036072 MHz SWT 10 ms Unit dBm

2 dB Offset
 -D1 7.75 dBm
 -D2 1.75 dBm

1MAX 1MA

Center 2.437 GHz 4 MHz/ Span 40 MHz

0.81 dBm
 2.43190882 GHz
 0.81 dB
 10.18036072 MHz
 2.43647896 GHz

Delta 1 [T1]
-0.72 dB

Ref Lvl
20 dBm

RBW 100 kHz RF Att 30 dB
VBW 300 kHz
SWT 10 ms Unit dBm

2 dB Offset

D1 7.65 dBm
D2 1.65 dBm


1MAX

1 [T1] 2.72 dBm
2.45698998 GHz
-0.72 dB
10.02004008 MHz
2.65 dBm
2.46147896 GHz


Center 2.462 GHz 4 MHz/ Span 40 MHz

Date: 22.MAR.2016 09:57:16


802.11g Low Channel

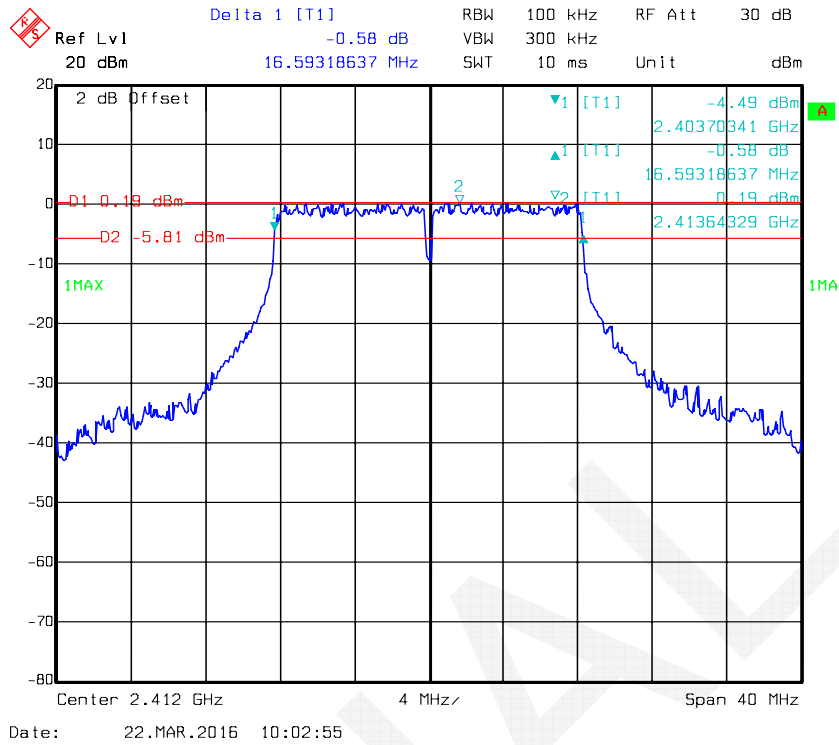


802.11g Middle Channel

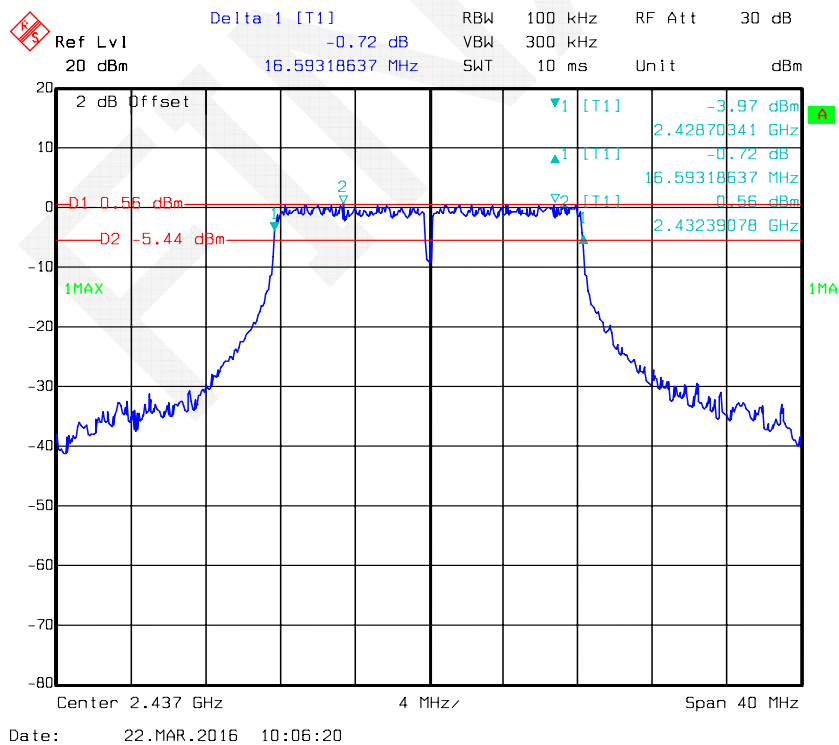

802.11g High Channel

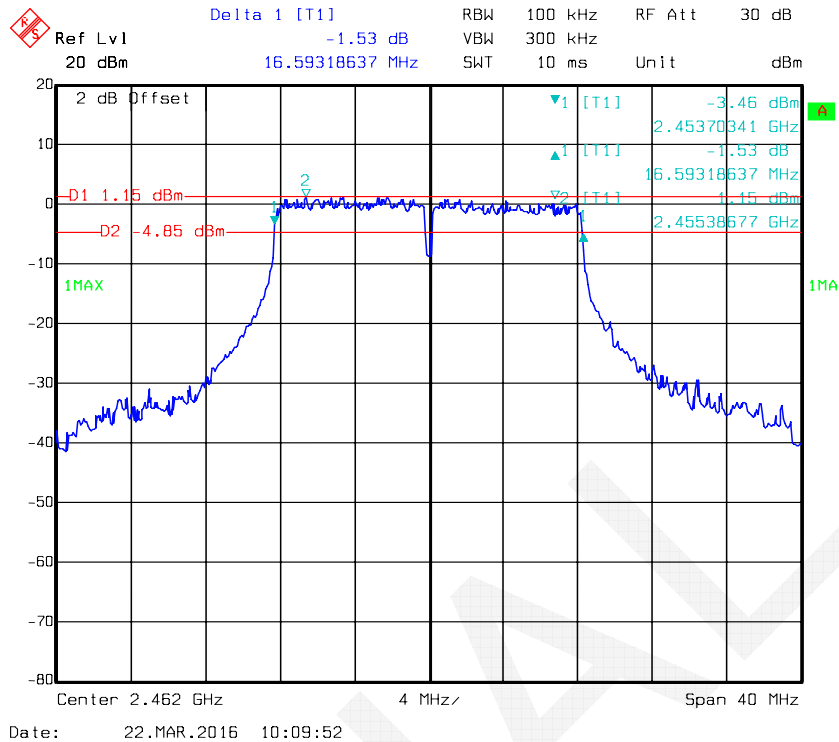

802.11n ht20 Low Channel

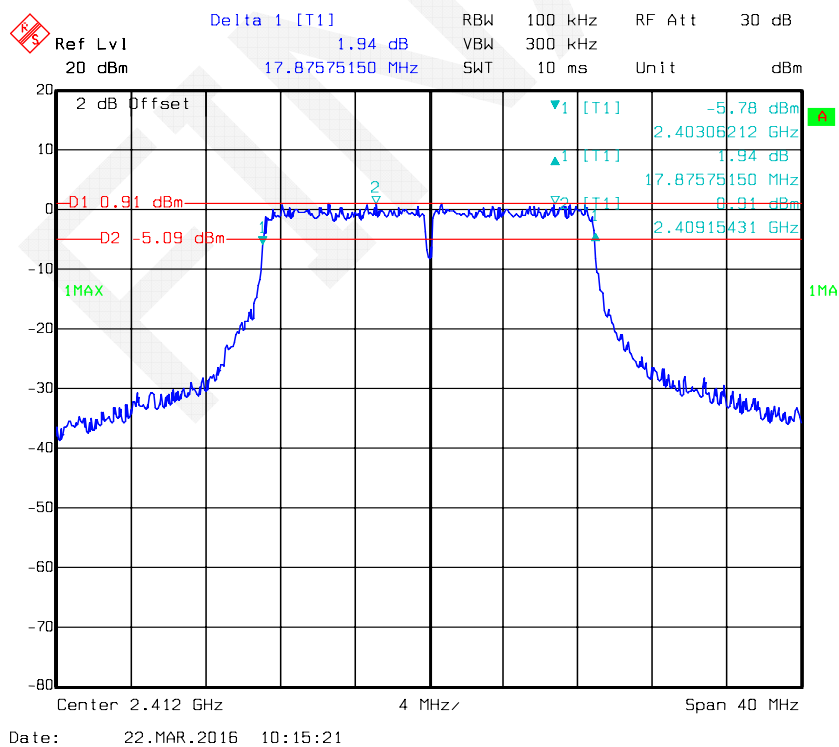

[illegible]

Ref Lvl 20 dBm Delta 1 [T1] -0.02 dB RBW 100 kHz RF Att 30 dB
 2 dB Offset 17.87575150 MHz VBW 300 kHz SWT 10 ms Unit dBm

2 dB Offset

D1 1.54 dBm D2 -4.46 dBm


1MAX 1MA

Center 2.452 GHz 4 MHz/ Span 40 MHz


1 [T1] -4.08 dBm 2.45306212 GHz
 1 [T1] -0.02 dB 17.87575150 MHz
 1 [T1] 1.54 dBm 2.45915431 GHz

Date: 22.MAR.2016 10:22:00

802.11n ht40 Low Channel

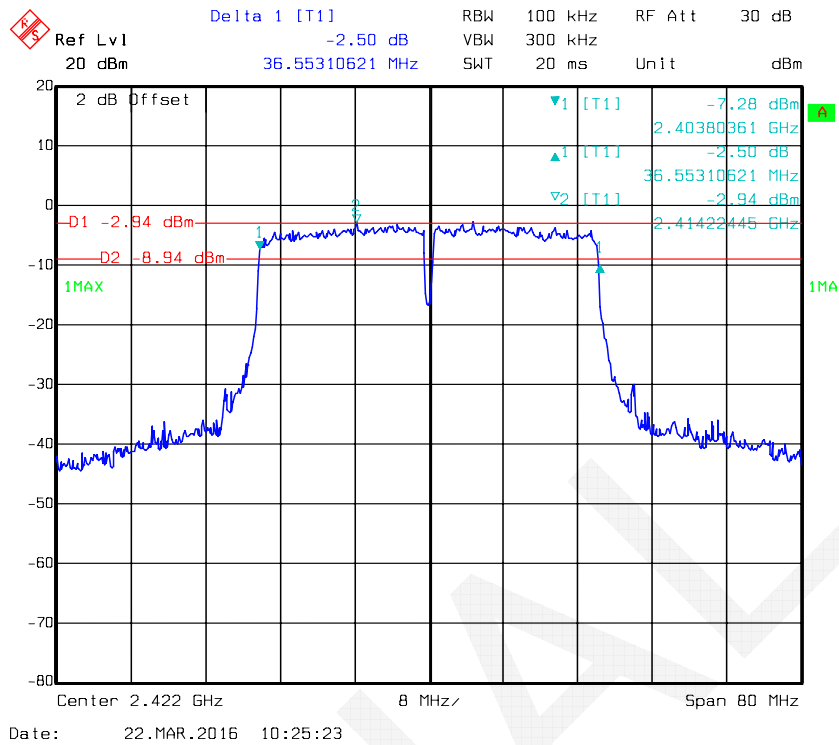

802.11n ht40 Middle Channel

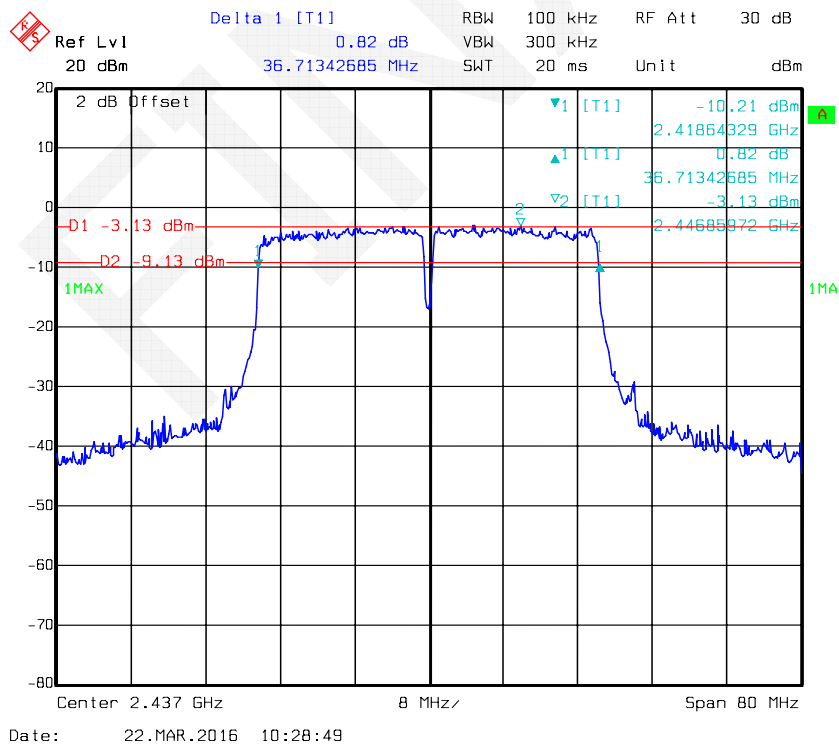

Delta 1 [T1] RBW 100 kHz RF Att 30 dB
 Ref Lvl -0.05 dB VBW 300 kHz
 20 dBm 36.39278557 MHz SWT 20 ms Unit dBm

2 dB Offset
 -D1 -2.35 dBm
 -D2 -8.35 dBm
 1MAX
 1 [T1] -7.17 dBm
 2.43380361 GHz
 1 [T1] -0.05 dB
 36.39278557 MHz
 2 [T1] -2.35 dBm
 2.45672846 GHz
 1MA

Center 2.452 GHz 8 MHz/ Span 80 MHz

Date: 22.MAR.2016 10:32:36

Ref Lvl 20 dBm Delta 1 [T1] -0.06 dB RBW 100 kHz RF Att 30 dB
 553.10621242 kHz SWT 5 ms Unit dBm

2 dB Offset

D1 8.17 dBm D2 2.17 dBm


1MAX

1 [T1] 2.31 dBm 2.40162525 GHz
 1 [T1] -0.06 dB 553.10621242 kHz
 1 [T1] 8.17 dBm 2.40171743 GHz


Center 2.402 GHz 200 kHz/ Span 2 MHz

Date: 22.MAR.2016 09:19:39

BLE Middle Channel

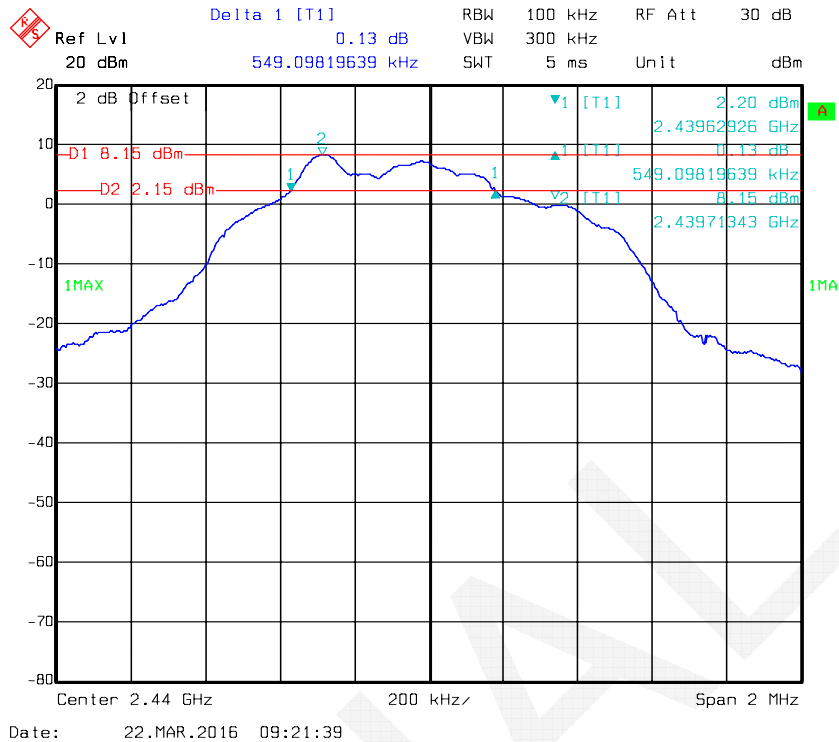

BLE High Channel

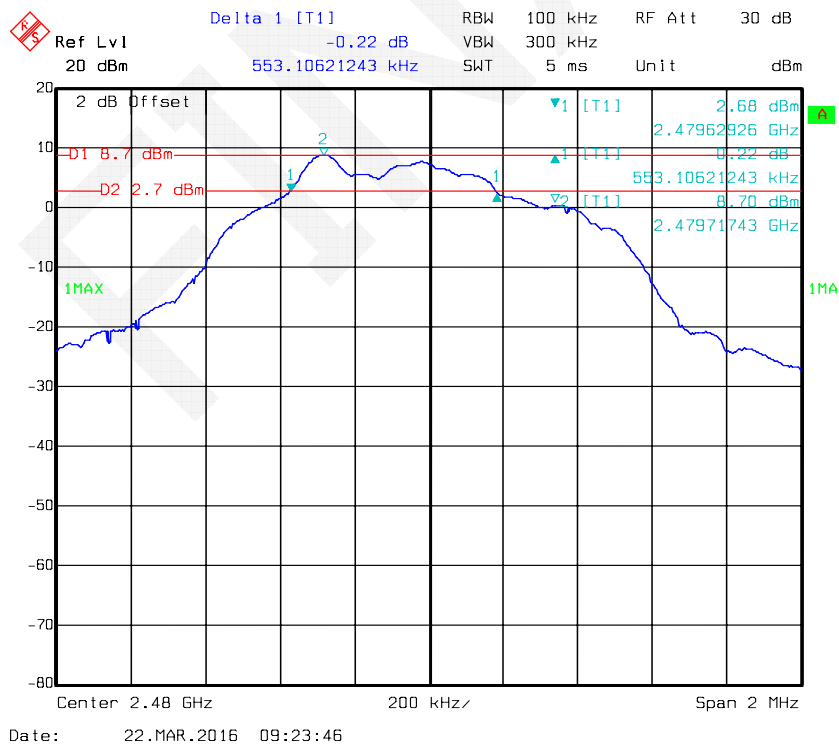

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r04

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210016	2015-11-03	2016-11-03
Agilent	Wideband Power Sensor	N1921A	MY54170013	2015-11-03	2016-11-03
Agilent	P-Series Power Meter	N1912A	MY5000448	2015-11-03	2016-11-03
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.4°C
Relative Humidity:	64 %
ATM Pressure:	100.7 kPa

* The testing was performed by Rocky Xiao on 2016-03-22.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

WIFI:

Test mode	Channel	Frequency	Max Peak Conducted Output Power	Max Conducted Average Output Power	Limit	Result
		(MHz)	(dBm)	(dBm)	(dBm)	
802.11b	Low	2412	20.94	19.28	30	Compliance
	Middle	2437	21.3	19.69	30	Compliance
	High	2462	20.85	19.18	30	Compliance
802.11g	Low	2412	20.77	15.96	30	Compliance
	Middle	2437	20.9	16.1	30	Compliance
	High	2462	21.16	16.42	30	Compliance
802.11n20	Low	2412	21.31	16.7	30	Compliance
	Middle	2437	21.12	16.45	30	Compliance
	High	2462	21.48	16.81	30	Compliance
802.11n40	Low	2422	21.13	14.17	30	Compliance
	Middle	2437	21.29	14.35	30	Compliance
	High	2452	21.35	14.44	30	Compliance

BLE:

Test mode	Channel	Frequency	Max Peak Conducted Output Power	Limit	Result
		(MHz)	(dBm)	(dBm)	
BLE	Low	2402	8.1	30	Compliance
	Middle	2440	8.1	30	Compliance
	High	2480	8.8	30	Compliance

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	24.4°C
Relative Humidity:	64 %
ATM Pressure:	100.7 kPa

* The testing was performed by Rocky Xiao on 2016-03-22.


Test mode: Transmitting

Test Result: Compliant. Please refer to following plots.


802.11b: Band Edge, Left Side

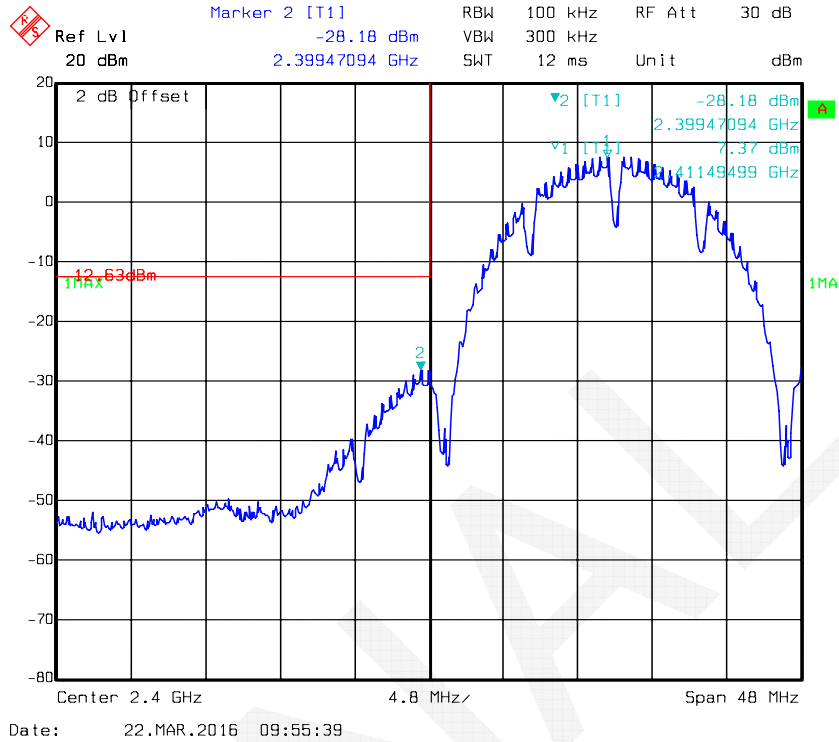


802.11b: Band Edge, Right Side

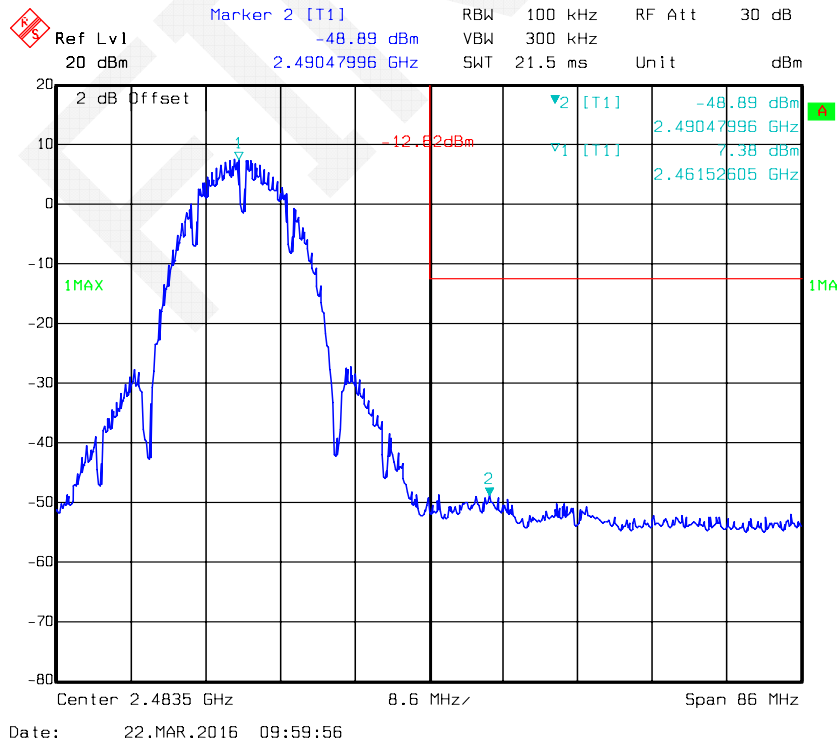


802.11g: Band Edge, Left Side

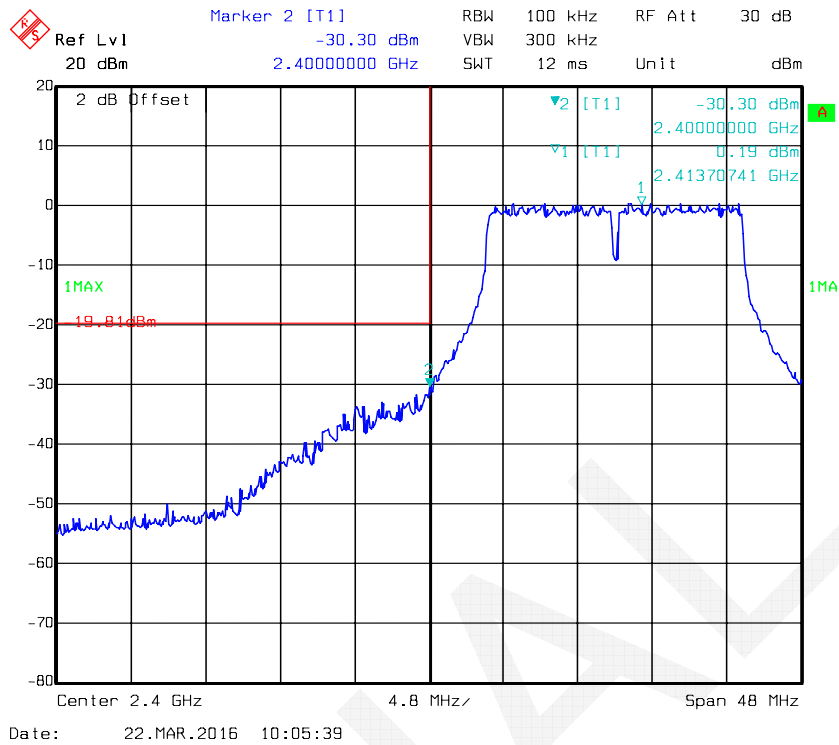


802.11g: Band Edge, Right Side

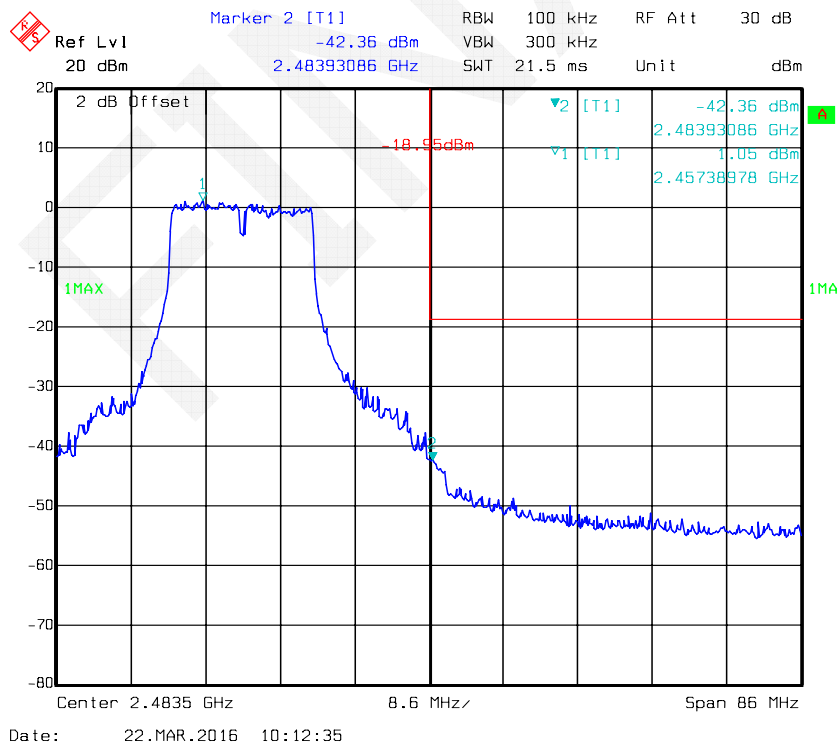


802.11n ht20 Band Edge, Left Side

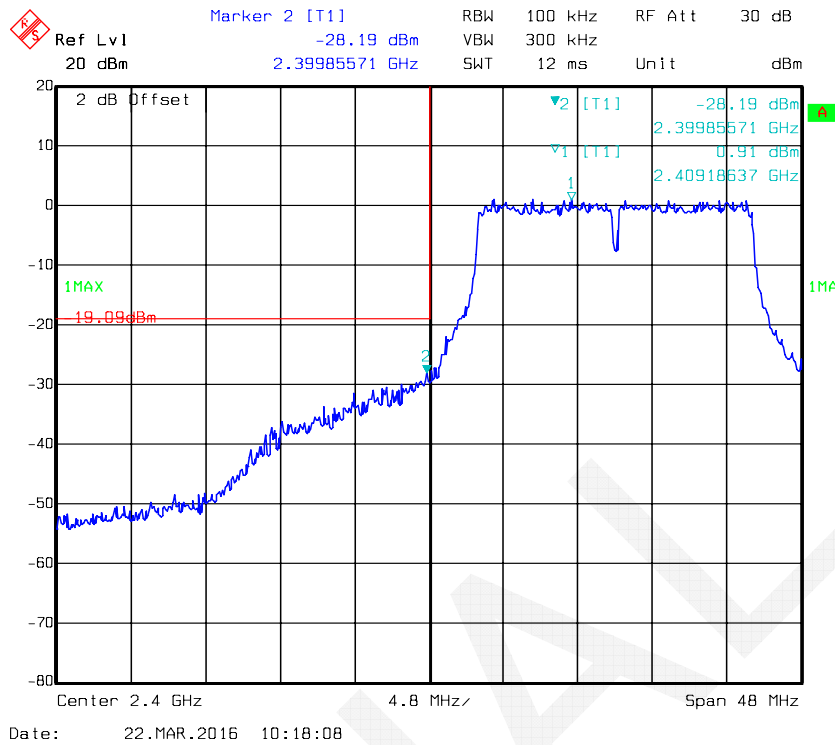


802.11n ht20 Band Edge, Right Side

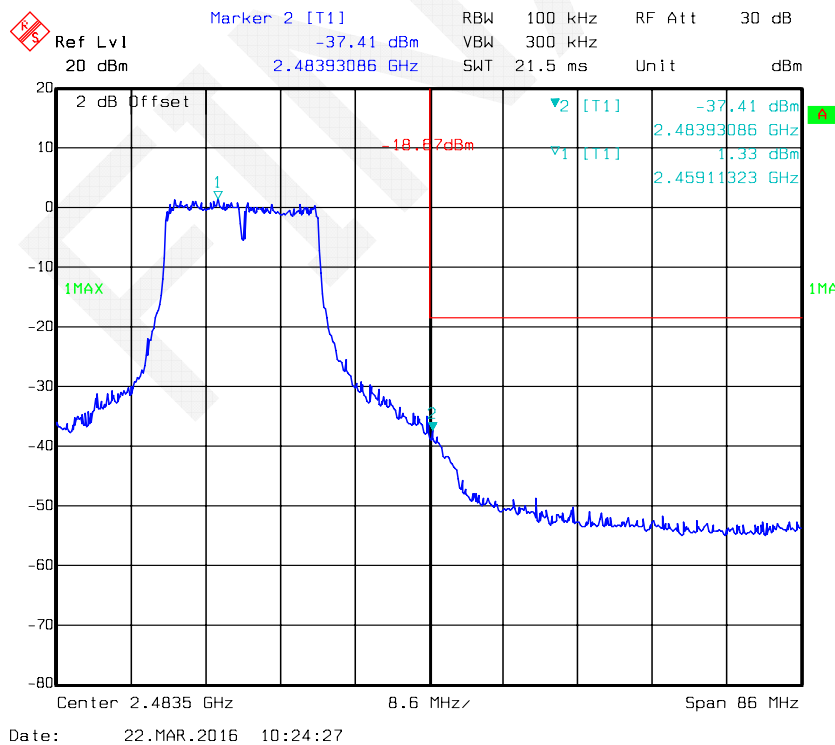


802.11n ht40 Band Edge, Left Side

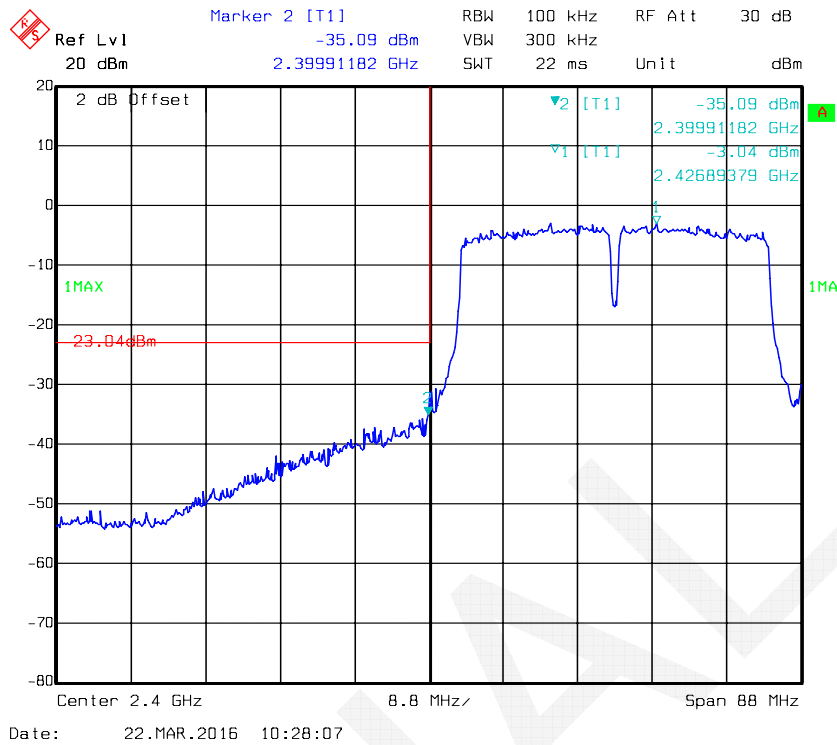


802.11n ht40 Band Edge, Right Side

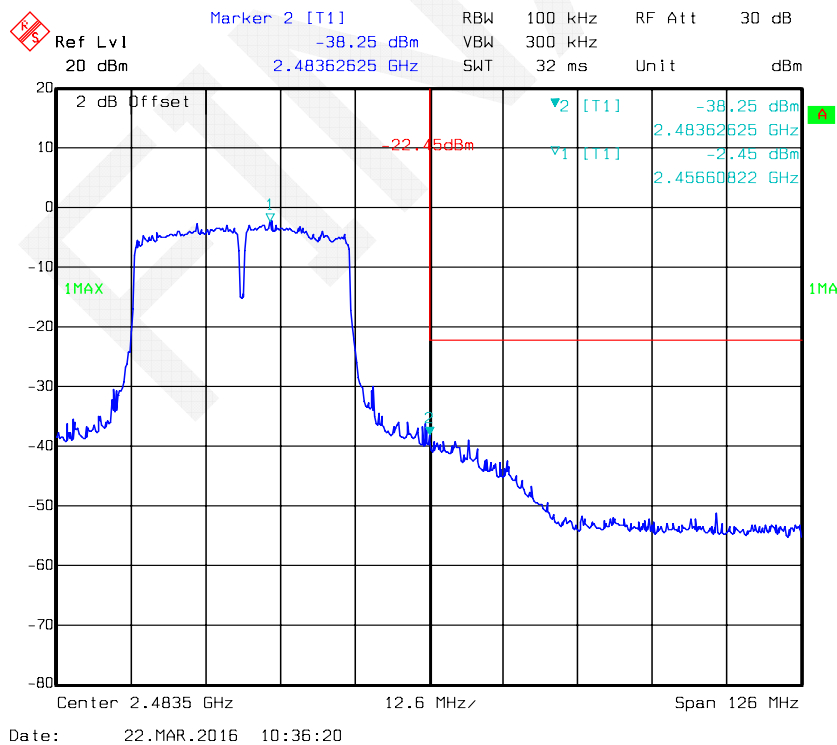

BLE Band Edge , Left Side

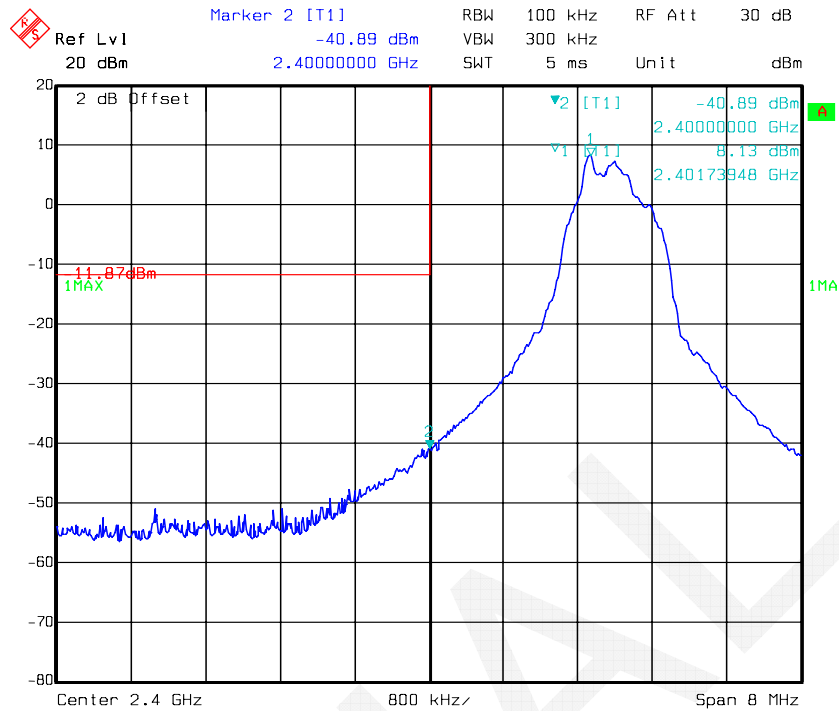

BLE Band Edge, Right Side

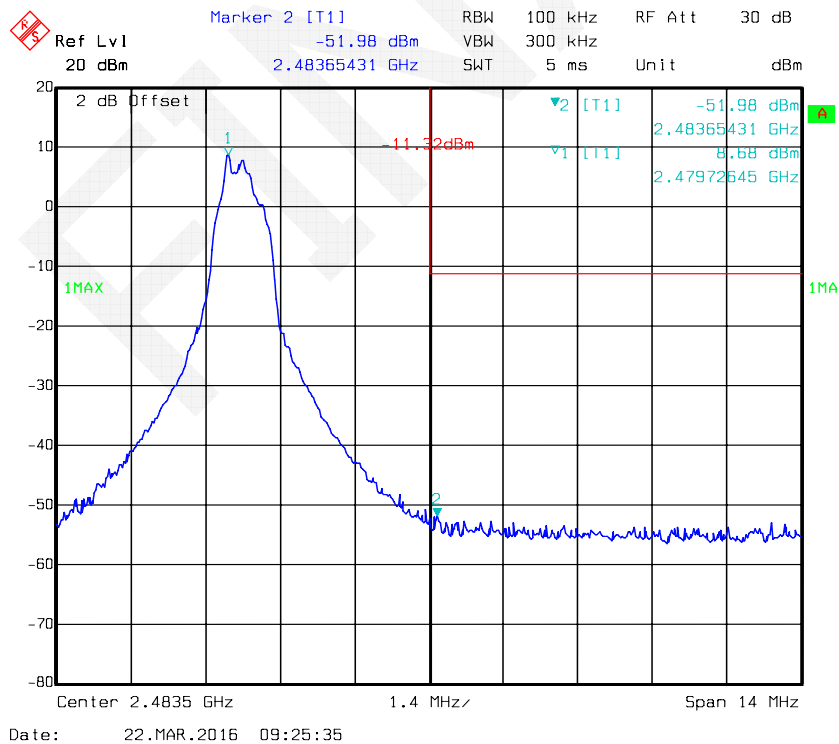

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r04

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.4°C
Relative Humidity:	64 %
ATM Pressure:	100.7 kPa


* The testing was performed by Rocky Xiao on 2016-03-22.

Test Mode: Transmitting


Test Result: Compliant. Please refer to the following table and plots

Test mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	Low	2412	-12.22	≤ 8
	Middle	2437	-11.94	≤ 8
	High	2462	-12.12	≤ 8
802.11g	Low	2412	-14.42	≤ 8
	Middle	2437	-14.21	≤ 8
	High	2462	-13.71	≤ 8
802.11n20	Low	2412	-13.04	≤ 8
	Middle	2437	-13.00	≤ 8
	High	2462	-12.49	≤ 8
802.11n40	Low	2422	-14.74	≤ 8
	Middle	2437	-14.68	≤ 8
	High	2452	-14.4	≤ 8
BLE	Low	2402	-9.16	≤ 8
	Middle	2440	-9.16	≤ 8
	High	2480	-8.62	≤ 8


Power Spectral Density, 802.11b Low Channel

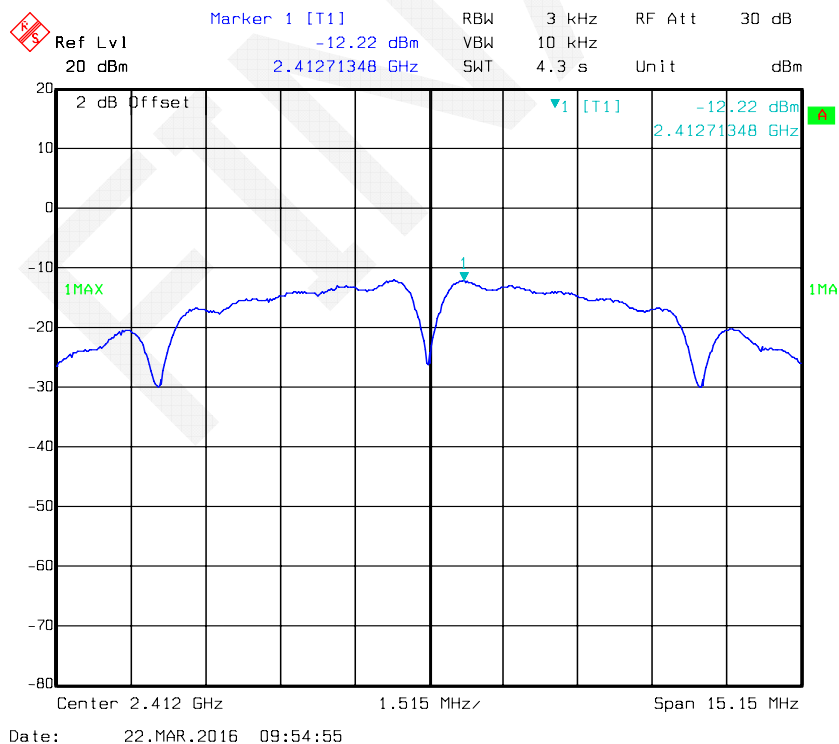


Power Spectral Density, 802.11b Middle Channel

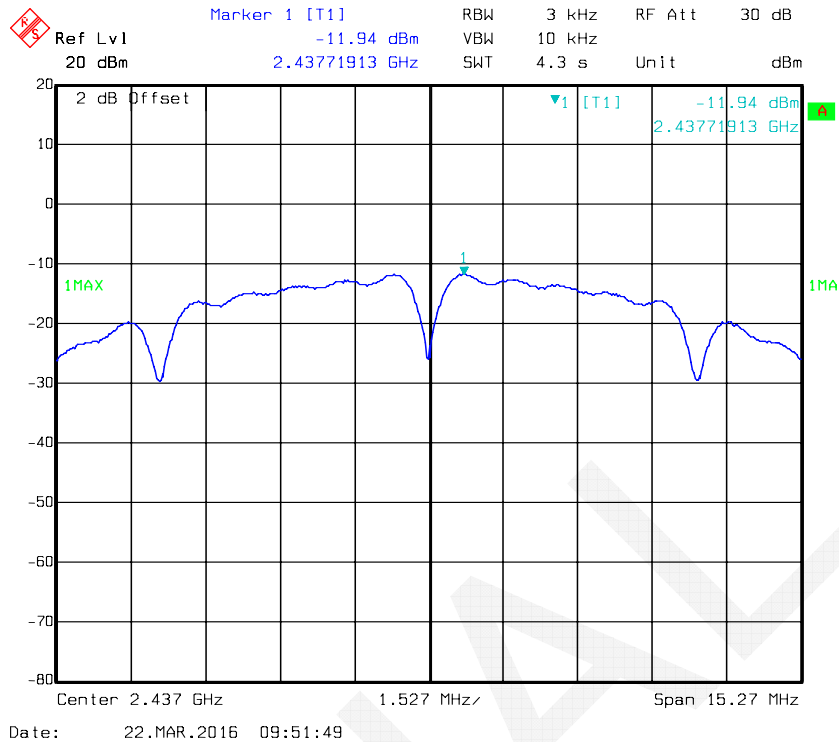


Power Spectral Density, 802.11b High Channel

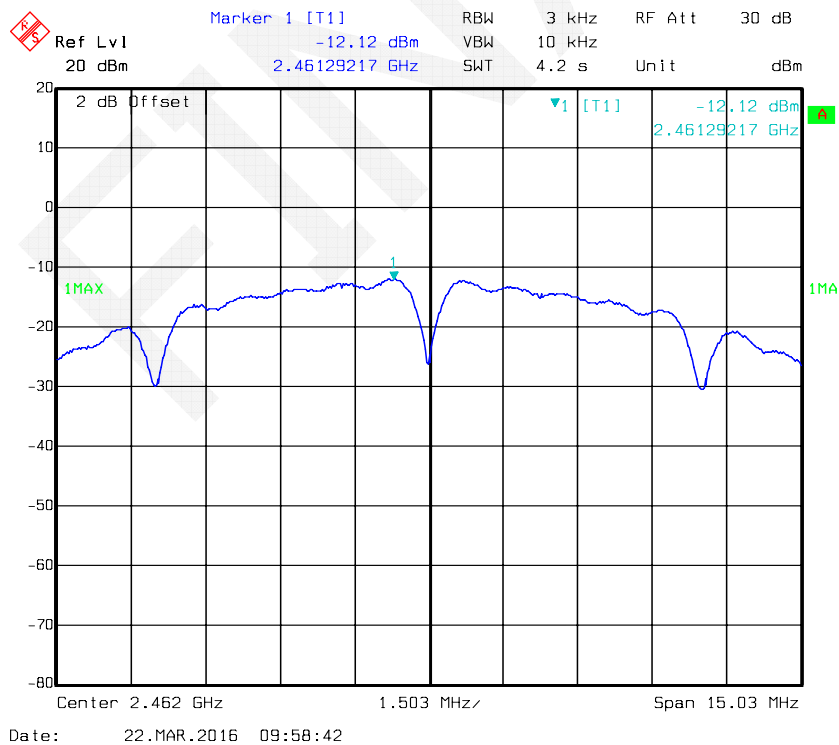


Power Spectral Density, 802.11g Low Channel

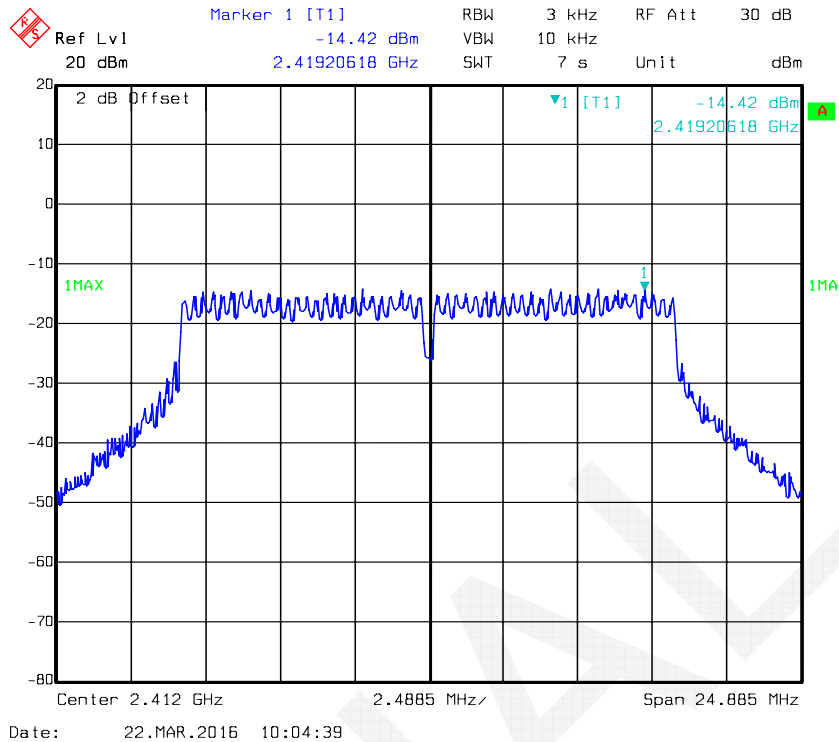


Power Spectral Density, 802.11g Middle Channel

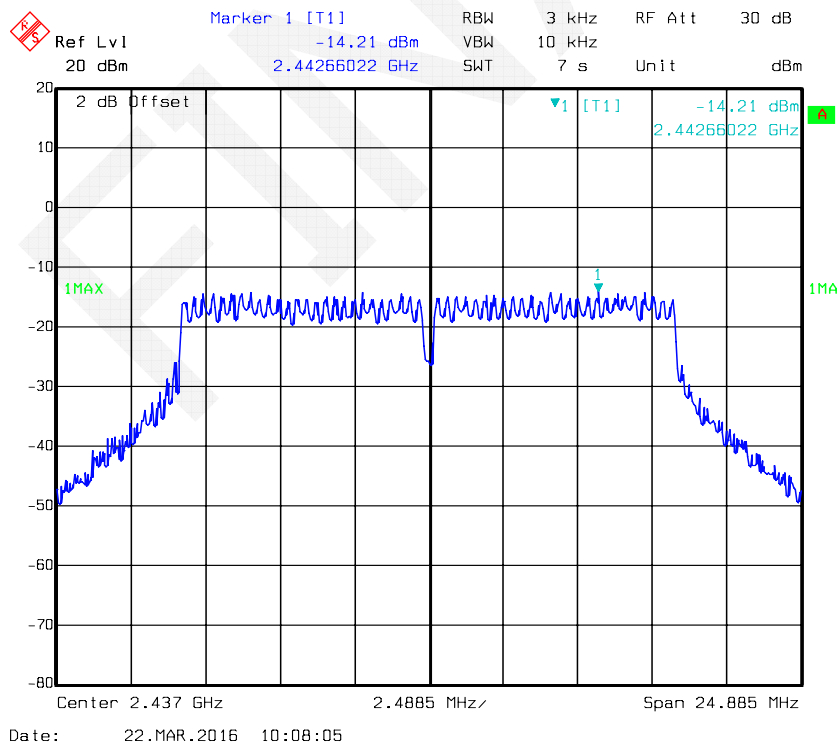


Power Spectral Density, 802.11g High Channel

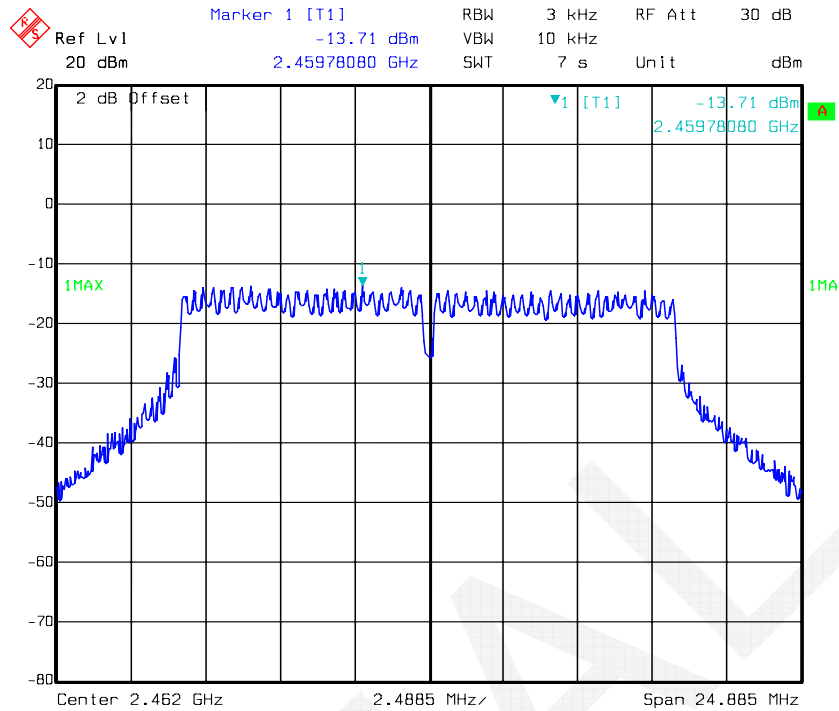


Power Spectral Density, 802.11n ht20 Low Channel

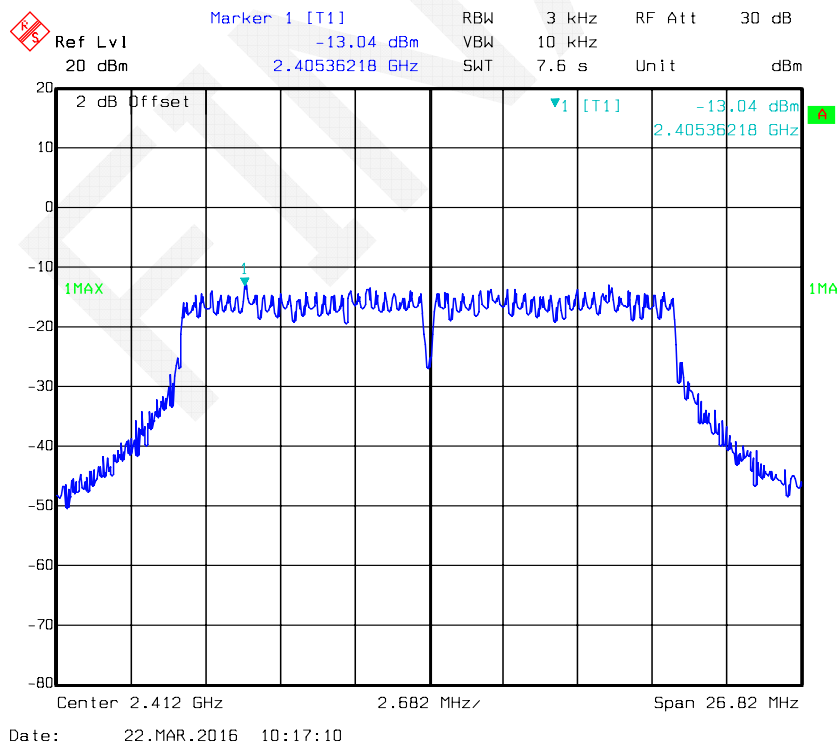


Power Spectral Density, 802.11n ht20 Middle Channel

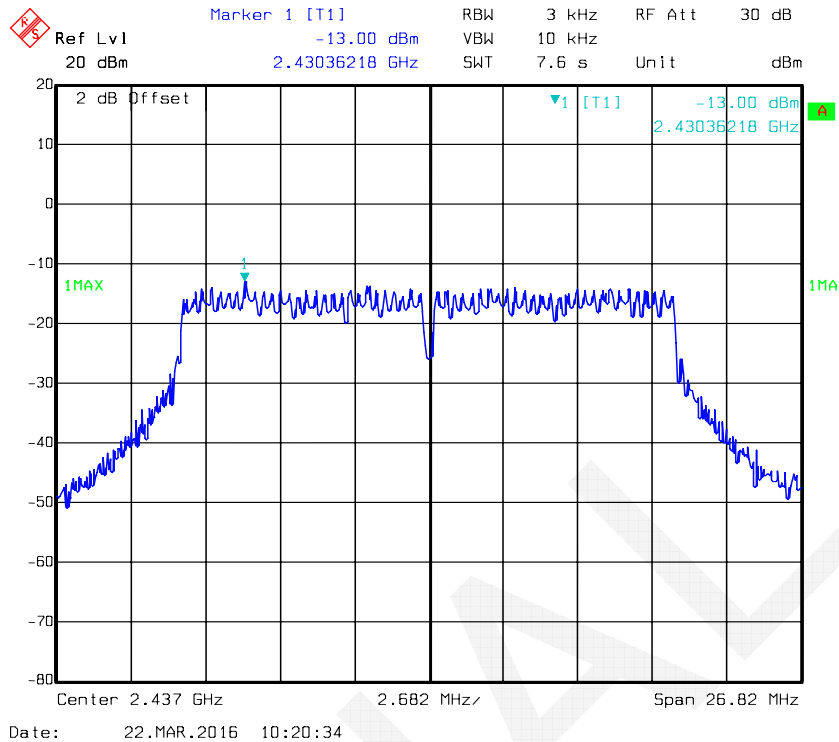


Power Spectral Density, 802.11n ht20 High Channel

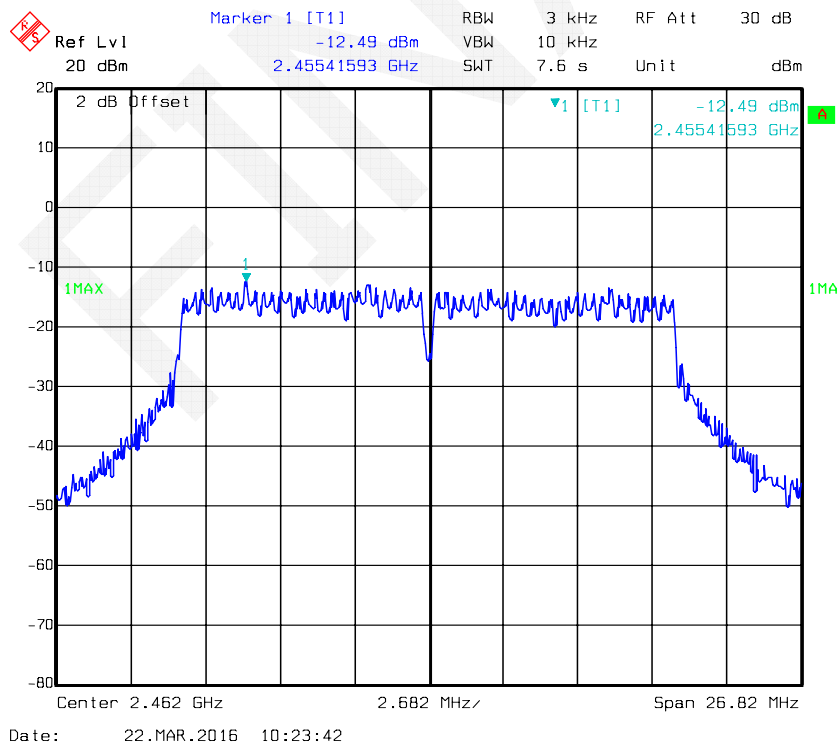


Power Spectral Density, 802.11n ht40 Low Channel

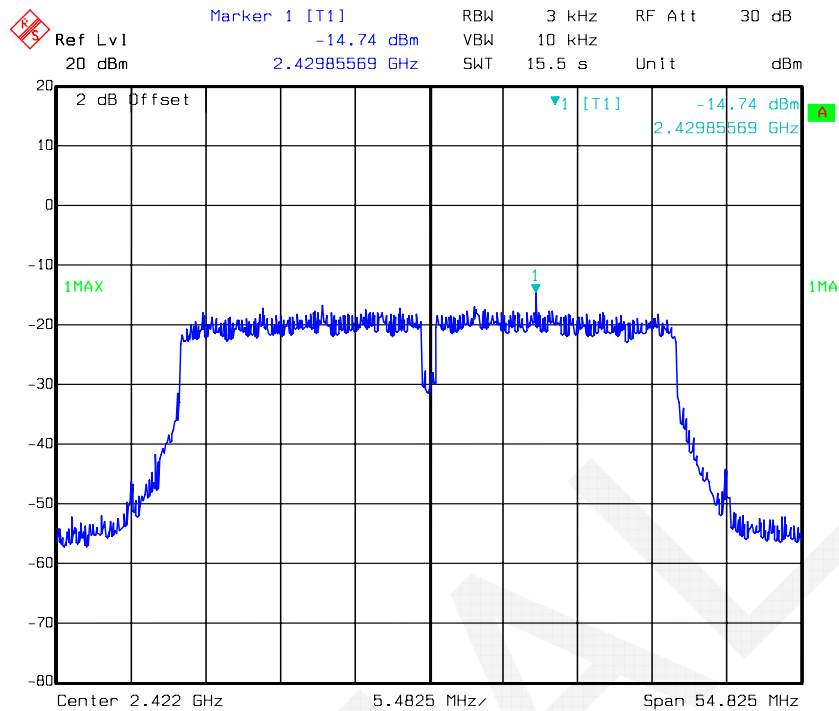


Power Spectral Density, 802.11n ht40 Middle Channel

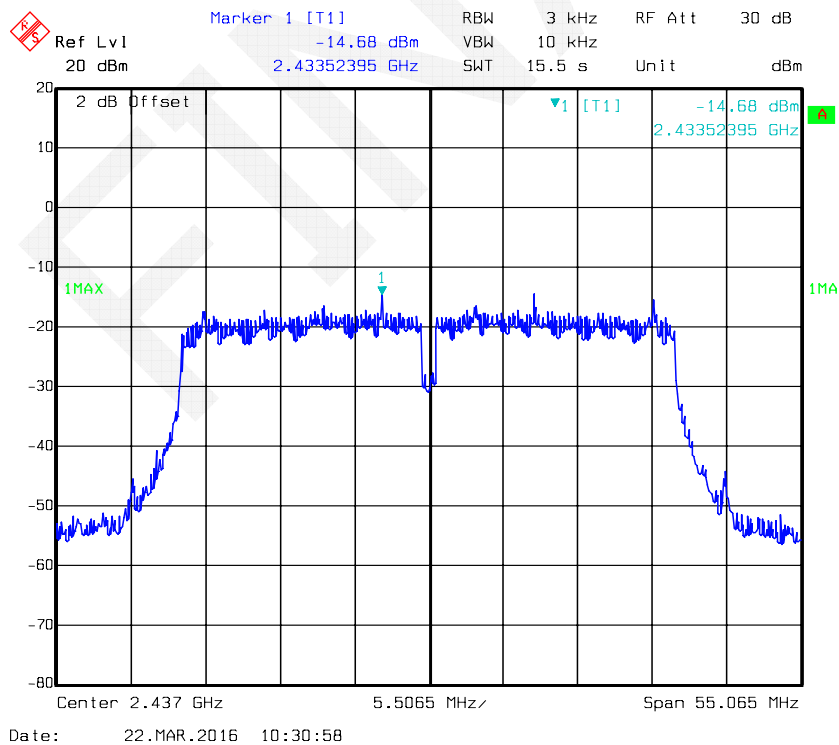


Power Spectral Density, 802.11n ht40 High Channel

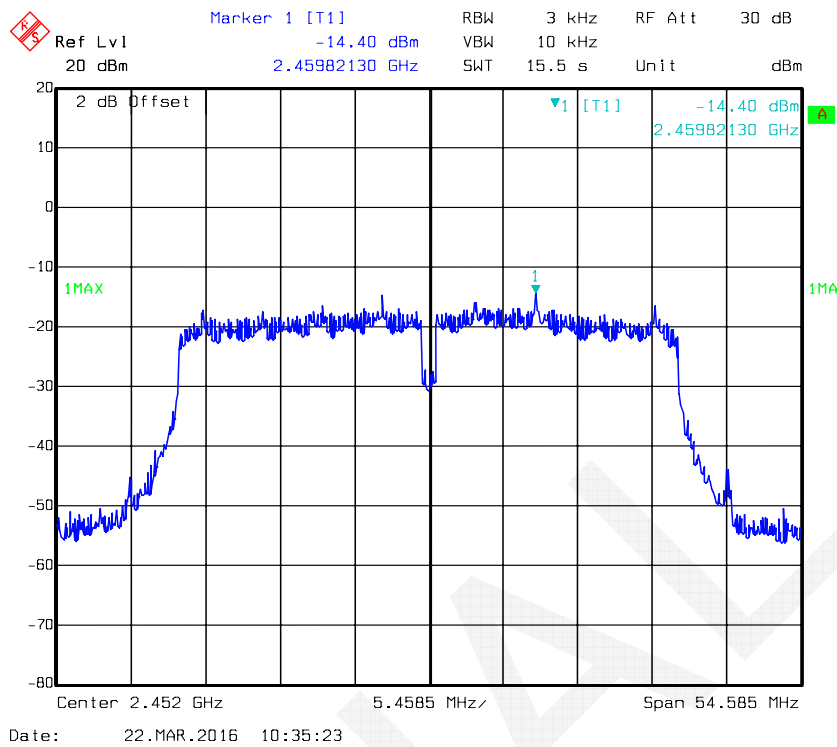


Power Spectral Density, BLE Low Channel

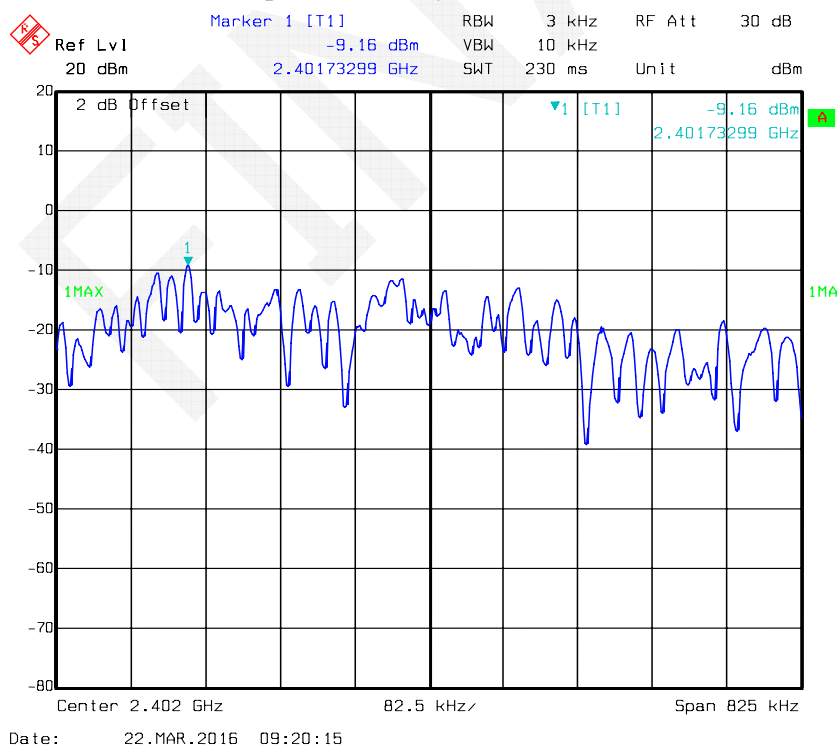

Power Spectral Density, BLE Middle Channel

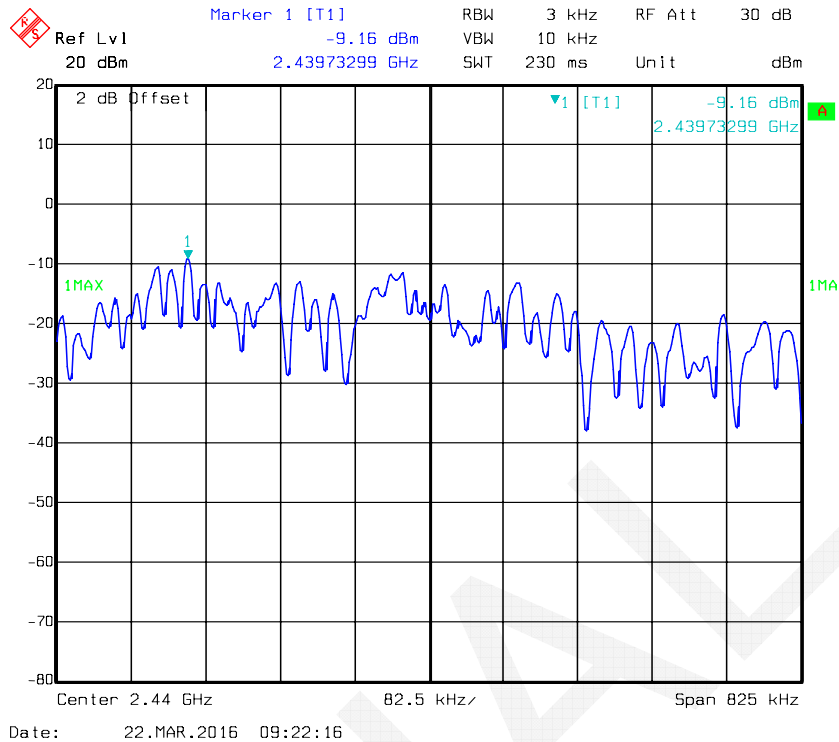

Power Spectral Density, BLE High Channel

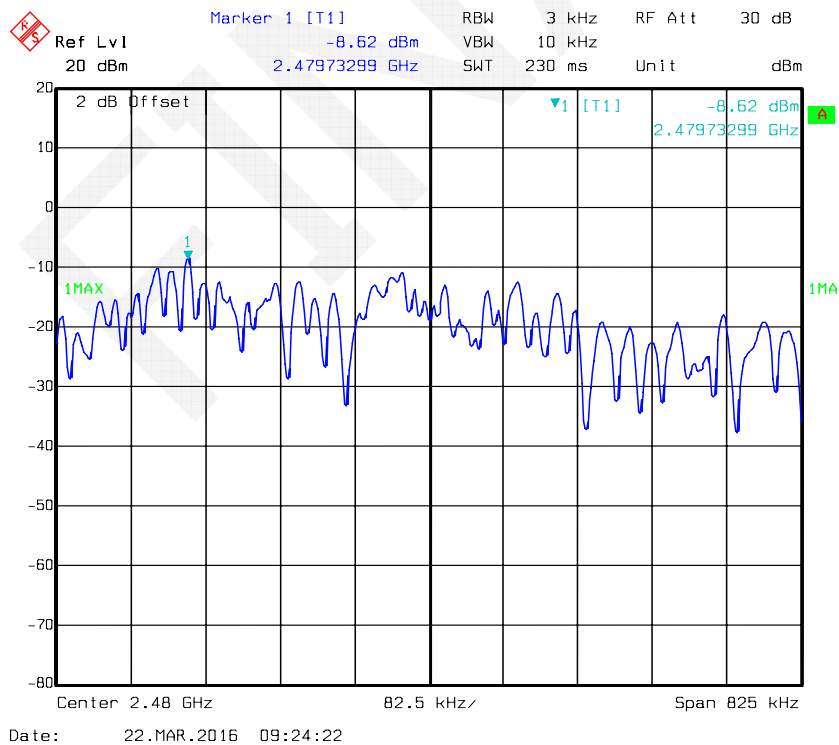

DECLARATION LETTER

Hena Digital Technology (Shenzhen) Co., Ltd.
ADD: 3F, South Tower, Jiuzhou Electric Building, Southern No, 12Rd High-tech Industrial Park,
Nanshan District, Shenzhen, China
Tel: (86)0755-8287 7246 Fax: (86)0755-8287 9070
E-mail: zijian8548@yahoo.com.cn

DECLARATION OF SIMILARITY

FEDERAL COMMUNICATIONS COMMISSION
Authorization and Evaluation Division
7435 Oakland Mills Road
Columbia, MD 21046
Date: 2016-3-8

Dear Sir or Madam:


We, Hena Digital Technology (Shenzhen) Co., Ltd., hereby declare that product: Netbook, model number: CB116, VB116, GB116, DB116, QB116, SB116, KB116 and EB116 are electrically identical with the model number PAD11641iWL which was tested by BACL. They have the same electromagnetic emissions and electromagnetic compatibility characteristics. The results of which are featured in BACL project: RDG160308003, RDG160308003-20. the FCC ID: M7C-PAD11641iWL

A description of the difference among nine models and those that are declared similar are as follows:

They are the same product, and just have the different model name, the rest are the same.

Please contact me should there be need for any additional clarification or information.

Best Regards,



Chen Yong
Manager

***** END OF REPORT *****