




TO: I.T.S (Lowrance Chow)

Date: Jan 17, 02

From: Remotec (Tim SZE)

Remotec	
MODEL: BW6091	
Released for	
☐ PRELIMINARY INFORMATION	
☐ QUOTATION ONLY	
☐ MOCK UP ONLY	
☐ HARD/SOFT TOOLING	
☐ TOOL MODIFICATION	
☐ TECHNICAL MANUAL	
☐ MANUFACTORY	
☐ PRINTING	
☒ MARKETING	
Prepared by: I.T.S	
Date: Jan 17, 02	
Approved by:	
Date: 1/17/02	

1. DIMENSION (UNIT: mm):

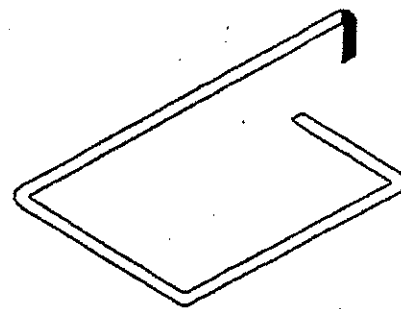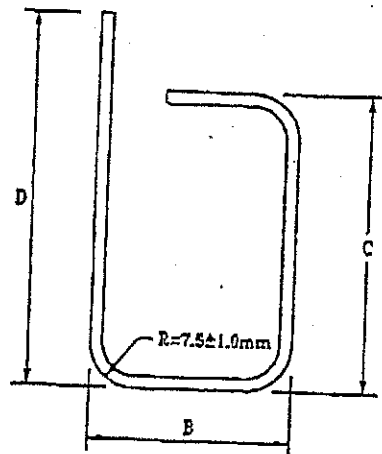

3D-SHAPE

A: 4 ± 1.0 (浸錫位)	B: 34 ± 1.0	C: 49 ± 1.0	D: 65 ± 1.0
F:	F:	G:	H:

2. ELECTRIC CHARACTERISTICS:

INDUCTANCE: --- uH ± %	TEST FREQ: @ ---	DCR: --- Ω Ref.
TURNS: --- TS	IDC: --- mA	RDC: --- mA
Q: --- MIN @ --- kHz	SRF: --- MHz Min	TEMP: -20 ~ +80 °C

3 TEST EQUIPMENT:

- | | | |
|---|--|--|
| ☐ MQ-1601 (Q-METER) | ☐ CH-1062 (LCZ-METER) | ☐ CH-301A (CURRENT METER) |
| ☐ HL-2801 (ANALIZER) | ☐ SK-3005 (INSULATION TESTER) | ☐ OTHERS: |
| ☐ CH-100 (LCR-METER) | ☐ CH-852A (HIGH POT TEST METER) | |

4. MATERIALS: [4]

CORE: ---		PIN: ---
WIRE: φ 0.9 mm 2UEW 120°C		1.0 kg/kpcs
SLEEVE: --- mm X --- mm ---		(MARK'G: --- COLOR: ---) --- m/kpcs
VARNISH: ---		BOBBIN & BASE: ---
COATING: ---		N.W: --- kg/kpcs
5.NOTE: 1.Total copper wire length		PACKING: PAPER BOX

ECC ID: M/N-BW6091TX-00