

Produkte
Products

Prüfbericht - Nr.: 14048270 001

Test Report No.:

Seite 1 von 14
Page 1 of 14

Auftraggeber: Client:	Remotec Technology Limited Workshop No. B2, Block B, Tonic Industrial Centre, 19 Lam Hing Street, Kowloon Bay, HK				
Gegenstand der Prüfung: Test Item:	AC Master (Z-Wave to IR Extender)				
Bezeichnung: Identification:	BW8490US	Serien-Nr.: Serial No.:	Engineering sample		
Wareneingangs-Nr.: Receipt No.:	A000532794 (001-002)	Eingangsdatum: Date of Receipt:	19.04.2017		
Zustand des Prüfgegenstandes bei Anlieferung: Condition of test item at delivery:	Test sample is not damaged and suitable for testing.				
Prüfort: Testing Location:	TÜV Rheinland Hong Kong Ltd. 3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong Global United Technology Services Co., Ltd. 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, China				
Prüfgrundlage: Test Specification:	FCC Part 15 Subpart B FCC Part 15 Subpart C ANSI C63.10-2013 ANSI C63.4-2014				
Prüfergebnis: Test Results:	Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage. The above mentioned product was tested and passed .				
Prüflaboratorium: Testing Laboratory:	TÜV Rheinland Hong Kong Ltd. 3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong				
geprüft/ tested by:	kontrolliert/ reviewed by:				
24.05.2017	Joey Leung Project Manager		24.05.2017	Benny Lau Senior Project Manager	
Datum Date	Name/Stellung Name/Position	Unterschrift Signature	Datum Date	Name/Stellung Name/Position	Unterschrift Signature
Sonstiges: Other Aspects	FCC ID: M7N-BW8490				
Abkürzungen:	P(pass) = entspricht Prüfgrundlage F(fail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet		Abbreviations:	P(pass) = passed F(fail) = failed N/A = not applicable N/T = not tested	
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.					

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information.....	4
Manufacturers declarations	4
Product function and intended use.....	4
Submitted documents.....	4
Independent Operation Modes	4
Related Submittal(s) Grants	4
Remark	4
Test Set-up and Operation Mode.....	5
Principle of Configuration Selection	5
Test Operation and Test Software.....	5
Special Accessories and Auxiliary Equipment.....	5
Countermeasures to achieve EMC Compliance.....	5
Test Methodology	6
Radiated Emission	6
Field Strength Calculation.....	6
Test Setup Diagram	7
List of Test and Measurement Instruments.....	8
Measurement Uncertainty	9
Results FCC Part 15 – Subpart C	10
FCC 15.203 – Antenna Requirement 1.....	Pass 10
FCC 15.204 – Antenna Requirement 2.....	Pass 10
FCC 15.207 – Conducted Emission on AC Mains	Pass 10
Subclause 15.215 (c) – 20 dB Bandwidth.....	Pass 11
Subclause 15.249 (a) – Field Strength of Fundamental and Harmonics.....	Pass 11
Subclause 15.249 (d), 15.205 – Out Of Band Radiated Emission	Pass 12
Results FCC Part 15 – Subpart B	13
Subclause 15.107 – Conducted Emission on AC Mains.....	Pass 13
Subclause 15.109 – Spurious Radiated Emissions	Pass 14

Appendix 1 – Test protocols	4 pages
Appendix 2 – Test setup	3 pages
Appendix 3 – EUT External Photos	4 pages
Appendix 4 – EUT Internal Photos	3 pages
Appendix 5 – RF exposure information.....	2 pages

Product information

Manufacturers declarations

	Transceiver
Operating frequency range	908.42MHz
Type of modulation	GFSK
Number of channels	1
Type of antenna	Integral
Power level	fix
Connection to public utility power line	No
Nominal voltage	V _{nor} : 5.0 VDC (USB) and/ or 3.0VDC (2 x 1.5V AA)

Product function and intended use

The equipment under test (EUT) is a Z-wave transceiver operating at 908.42MHz. It is powered by 5.0 Vdc (USB) and/ or 4.5Vdc (3 x 1.5V AAA batteries). The Micro USB port is used for power supply only. The phone jack is designed for dedicated external temperature sensor which sells in separate.

FCC ID: M7N-BW8490

Models	Product description
BW8490US	AC Master

Submitted documents

Circuit Diagram
 Block Diagram
 Technical Description
 User manual
 Label

Independent Operation Modes

The basic operation mode is:

- Z-wave communication link maintained with data transfer.

For further information refer to User Manual

Related Submittal(s) Grants

This is a single application for certification of the transmitter.
 The receiving portion is authorized under the verification procedure.

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

- There was no special software to exercise the device.

Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

- External temperature sensor (Provided by applicant)
- AC-DC adaptor Model: A1399 Input: 100-240 VAC 50/60 Hz Output: 5.0VDC 1A) (Provided by test house and accepted by applicant)
- Micro USB power cable with length 152cm (Provided by test house and accepted by applicant)

Countermeasures to achieve EMC Compliance

- None

Test Methodology

Radiated Emission

The radiated emission measurements of the transmitter part were performed according to the procedures in ANSI C63.10-2013. The radiated emission measurements of the receiver part were performed according to the procedures in ANSI C63.4-2014.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360 °, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:


$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.
R = Reading of Spectrum Analyzer in dBuV.
AF = Antenna Factor in dB.
CF = Cable Attenuation Factor in dB.
FA = Filter Attenuation Factor in dB.
PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.


Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

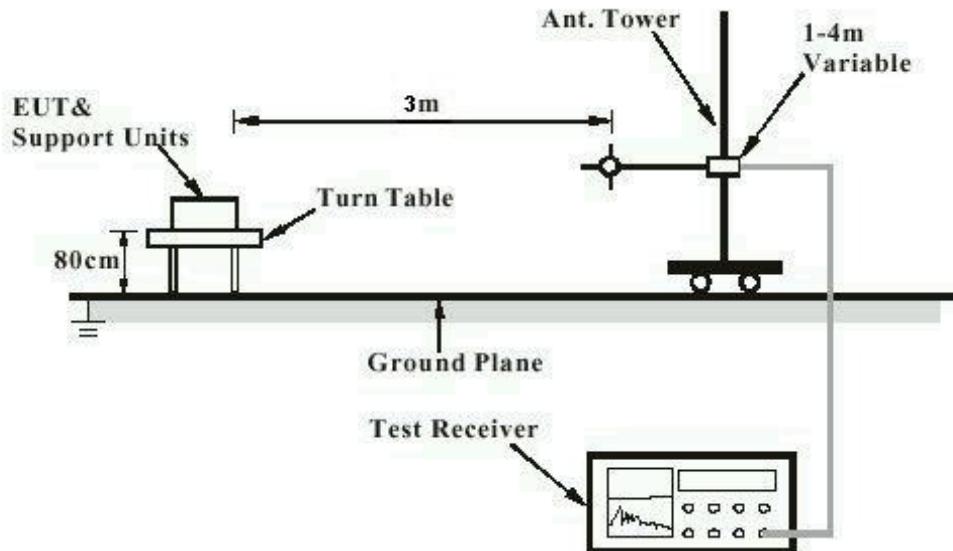

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

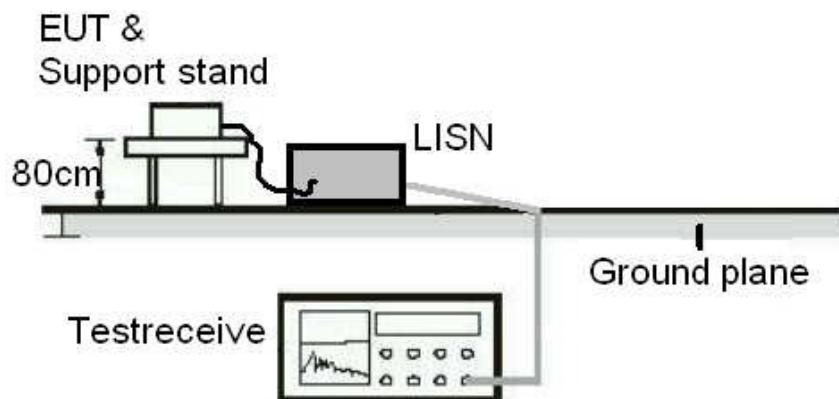

List of Test and Measurement Instruments

Global United Technology Services Co., Ltd. (FCC Registration number: 600491)

Radiated Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	03 Jul 2016	02 Jul 2020
Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	N/A	N/A
ESU EMI Test Receiver	R&S	ESU26	29 Jun 2016	28 Jun 2017
Loop Antenna	Zhinan	ZN30900A	29 Jun 2016	28 Jun 2017
BiConiLog Antenna	SCHWARZBECK	VULB9163	29 Jun 2016	28 Jun 2017
Double-ridged horn antenna	SCHWARZBECK	9120D	29 Jun 2016	28 Jun 2017
Horn Antenna	ETS-LINDGREN	3160-09	29 Jun 2016	28 Jun 2017
RF Amplifier	HP	8347A	29 Jun 2016	28 Jun 2017
RF Amplifier	HP	8349B	29 Jun 2016	28 Jun 2017
Broadband Preamplifier	SCHWARZBECK	BBV9718	29 Jun 2016	28 Jun 2017
EMI Test Software	AUDIX	E3	N/A	N/A
Coaxial cable	GTS	N/A	N/A	N/A
Coaxial Cable	GTS	N/A	29 Jun 2016	28 Jun 2017
Thermo meter	N/A	N/A	29 Jun 2016	28 Jun 2017

AC Mains Conducted Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	16 May 2016	15 May 2019
EMI Test Receiver	R&S	ESCI 7	29 Jun 2016	28 Jun 2017
Pulse Limiter	R&S	ESH3-Z2	29 Jun 2016	28 Jun 2017
Coaxial Switch	ANRITSU CORP	MP59B	29 Jun 2016	28 Jun 2017
Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	29 Jun 2016	28 Jun 2017
Coaxial Cable	GTS	N/A	N/A	N/A
EMI Test Software	AUDIX	E3	N/A	N/A
Thermo meter	KTJ	TA328	29 Jun 2016	28 Jun 2017

TÜV Rheinland Hong Kong Ltd

Radio Test

Equipment	Manufacturer	Type	Cal. Date	Due Date
Spectrum Analyzer	R & S	FSP30	16 Oct 2016	15 Oct 2017

Measurement Uncertainty

The estimated combined standard uncertainty for power-line conducted emissions measurements is $\pm 2.96\text{dB}$.

The estimated combined standard uncertainty for radiated emissions measurements is $\pm 3.70\text{dB}$ (9kHz to 30MHz) and $\pm 4.64\text{dB}$ (30MHz to 1000MHz) and $\pm 4.83\text{dB}$ (1GHz to 18GHz) and $\pm 5.20\text{dB}$ (18GHz to 25GHz).

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for the level of confidence is approximately 95%.

Results FCC Part 15 – Subpart C

FCC 15.203 – Antenna Requirement 1		Pass
FCC Requirement: No antenna other than that furnished by the responsible party shall be used with the device		
Results:	a) Antenna type: b) Manufacturer and model no: c) Peak Gain:	Fixed Integral antenna N/A N/A
Verdict:	Pass	

FCC 15.204 – Antenna Requirement 2		Pass
FCC Requirement: An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.		
Results:	Only one integral antenna can be used.	
Verdict:	N/A	

FCC 15.207 – Conducted Emission on AC Mains		Pass				
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : AC Mains input port of power supply Detector : Quasi-peak and Average Supply voltage : 120Vac 60Hz Temperature : 23°C Humidity : 50%						
Requirement: 15.207(a)						
Results: Pass						
Live measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak (dB μ V)	Average (dB μ V)	Limit QP (dB μ V)	Limit AV (dB μ V)	Verdict
0.15 – 0.5	0.320	33.49	25.74	59.71	49.71	Pass
> 0.5 – 5	0.686	39.85	32.57	56.00	46.00	Pass
	1.503	28.18	20.18	56.00	46.00	Pass
> 5 – 30	No peak found	---	---	60.00	50.00	Pass
Neutral measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak (dB μ V)	Average (dB μ V)	Limit QP (dB μ V)	Limit AV (dB μ V)	Verdict
0.15 – 0.5	0.320	33.60	27.97	59.71	49.71	Pass
> 0.5 – 5	0.683	39.45	36.44	56.00	46.00	Pass
	1.734	29.50	24.32	56.00	46.00	Pass

Results: The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz does not exceed the limits. For test Results plots refer to Appendix 1.

Subclause 15.215 (c) – 20 dB Bandwidth		Pass
Test Specification	: ANSI C63.10 – 2013	
Mode of operation	: Tx mode	
Port of testing	: Enclosure	
RBW/VBW	: 10 kHz/ 30 kHz	
Supply voltage	: 5.0 VDC (USB) and 3.0VDC (2 x 1.5V AA)	
Temperature	: 23°C	
Humidity	: 50%	
Requirement:	The intentional radiators must be designed to ensure that the 20dB bandwidth of the emission, is contained within the frequency band designated in the rule section under which the equipment is operated.	
Results:	Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. For test protocols refer to Appendix 1.	
Frequency (MHz)	20 dB left (MHz)	Limit (MHz)
908.420	907.501	> 902.000
	20 dB right (MHz)	Limit (MHz)
	908.468	< 928.000

Subclause 15.249 (a) – Field Strength of Fundamental and Harmonics		Pass
Test Specification	: ANSI C63.10 – 2013	
Mode of operation	: Tx mode	
Port of testing	: Enclosure	
Frequency range	: 9kHz – 25GHz	
RBW/VBW	: 120 kHz for f < 1 GHz 1 MHz / 3 MHz for f > 1 GHz	
Supply voltage	: 5.0 VDC (USB) and 3.0VDC (2 x 1.5V AA)	
Temperature	: 23°C	
Humidity	: 50%	
Requirement:	The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following limit.	
Results:	PASS.	
Fundamental Frequency		Vertical Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
908.400	86.23	94.0 / QP
Fundamental Frequency		Horizontal Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
908.400	92.30	94.0 / QP

Harmonics		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
1816.800	31.45	74.0 / PK
Harmonics		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
1816.800	36.23	74.0 / PK
2725.200	35.26	74.0 / PK

Subclause 15.249 (d), 15.205 – Out Of Band Radiated Emission		Pass
Test Specification	:	ANSI C63.10 – 2013
Mode of operation	:	Tx mode
Port of testing	:	Enclosure
Frequency range	:	9kHz – 25GHz
RBW/VBW	:	120 kHz for f < 1 GHz 1 MHz / 3 MHz for f > 1 GHz
Supply voltage	:	5.0 VDC (USB) and 3.0VDC (2 x 1.5V AA)
Temperature	:	23°C
Humidity	:	50%
Requirement:	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.	
Results:	Transmitting mode comply with the field strength limit of section 15.209. There is no spurious found below 30MHz.	
Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
50.764	20.24	40.0 / QP
102.011	17.66	43.5 / QP
155.910	19.80	43.5 / QP
243.377	21.62	46.0 / QP
902.000	36.06	46.0 / QP
928.000	32.07	46.0 / QP
Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
145.861	15.93	43.5 / QP
195.137	20.32	43.5 / QP
243.377	22.81	46.0 / QP
267.546	22.34	46.0 / QP
902.000	42.13	46.0 / QP
928.000	38.14	46.0 / QP

Results FCC Part 15 – Subpart B

Subclause 15.107 – Conducted Emission on AC Mains						Pass
Test Specification : ANSI C63.4 – 2003						
Mode of operation : RX mode						
Port of testing : AC Mains input port						
Detector : Quasi-peak and Average						
Supply voltage : 120Vac 60Hz						
Temperature : 23°C						
Humidity : 50%						
Requirement: 15.107(a)						
Results: Pass						
Live measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB μ V	Average dB μ V	Limit QP (dB μ V)	Limit AV (dB μ V)	Verdict
0.15 – 0.5	0.320	33.53	25.71	59.71	49.71	Pass
> 0.5 – 5	0.686	39.76	32.48	56.00	46.00	Pass
	1.503	28.23	20.14	56.00	46.00	Pass
> 5 – 30	No peak found	---	---	60.00	50.00	Pass
Neutral measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB μ V	Average dB μ V	Limit QP (dB μ V)	Limit AV (dB μ V)	Verdict
0.15 – 0.5	0.320	33.68	27.91	59.71	49.71	Pass
> 0.5 – 5	0.683	39.38	36.50	56.00	46.00	Pass
	1.734	29.52	24.42	56.00	46.00	Pass
> 5 – 30	No peak found	---	---	60.00	50.00	Pass
Results: The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz does not exceed the limits. For test Results plots refer to Appendix 1.						

Subclause 15.109 – Spurious Radiated Emissions		Pass
Test Specification	: ANSI C63.4 - 2003	
Mode of operation	: RX mode	
Port of testing	: Enclosure	
Detector	: Peak	
RBW/VBW	: 120 kHz for f < 1 GHz 1 MHz / 3 MHz for f > 1 GHz	
Supply voltage	: 5.0 VDC (USB) and 3.0VDC (2 x 1.5V AA)	
Temperature	: 23°C	
Humidity	: 50%	
Requirement:	15.109(a)	
Results:	Pass	
Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
36.637	18.88	40.0 / QP
50.942	17.40	40.0 / QP
95.762	16.25	43.5 / QP
155.910	16.94	43.5 / QP
167.824	17.72	43.5 / QP
216.024	16.25	46.0 / QP
Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
55.609	11.37	40.0 / QP
96.099	11.24	43.5 / QP
256.521	13.21	46.0 / QP