

GPRS 850

Frequency: 824.2 MHz; Duty Cycle: 1:2.79898; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C
Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.97$ S/m; $\epsilon_r = 54.67$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2017/3/20
- Probe: EX3DV4 - SN3665; ConvF(9.44, 9.44, 9.44); Calibrated: 2016/5/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Main Ant/GPRS 850/Ch128/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.393 W/kg

Rear/Main Ant/GPRS 850/Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 0.981 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.807 W/kg

SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.170 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.417 W/kg

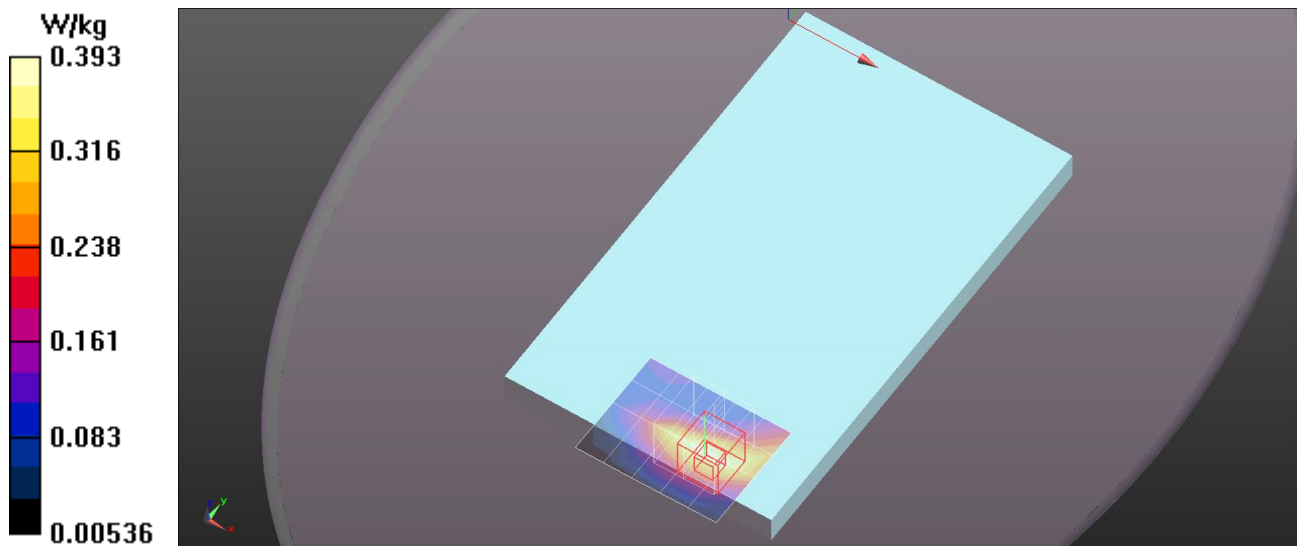


GPRS 850

Frequency: 824.2 MHz; Duty Cycle: 1:2.79898

Rear/Main Ant/GPRS 850/Ch128/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.99 W/kg

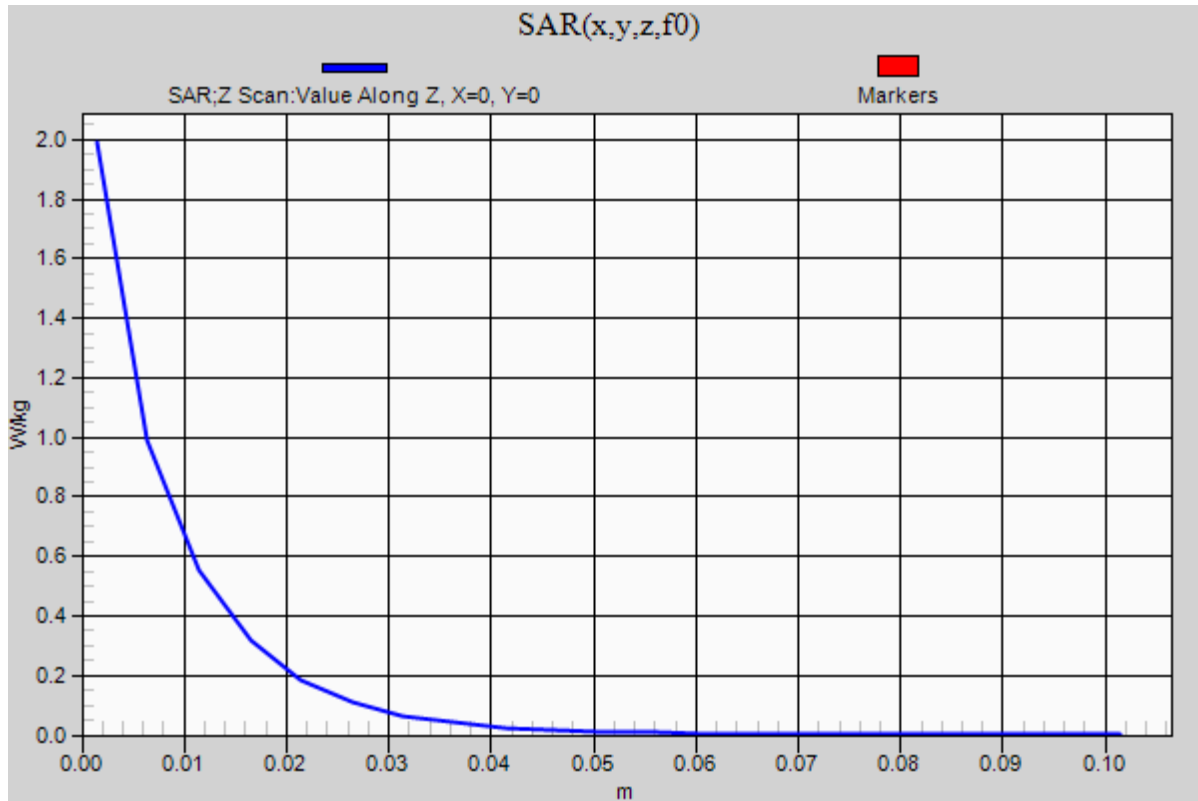

GPRS 1900

Frequency: 1880 MHz; Duty Cycle: 1:2.79898; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.462$ S/m; $\epsilon_r = 51.02$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn917; Calibrated: 2017/1/6
- Probe: EX3DV4 - SN3665; ConvF(7.66, 7.66, 7.66); Calibrated: 2016/5/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Main Ant/GPRS 1900/Ch661/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.840 W/kg

Rear/Main Ant/GPRS 1900/Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 1.609 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.580 W/kg; SAR(10 g) = 0.312 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.865 W/kg

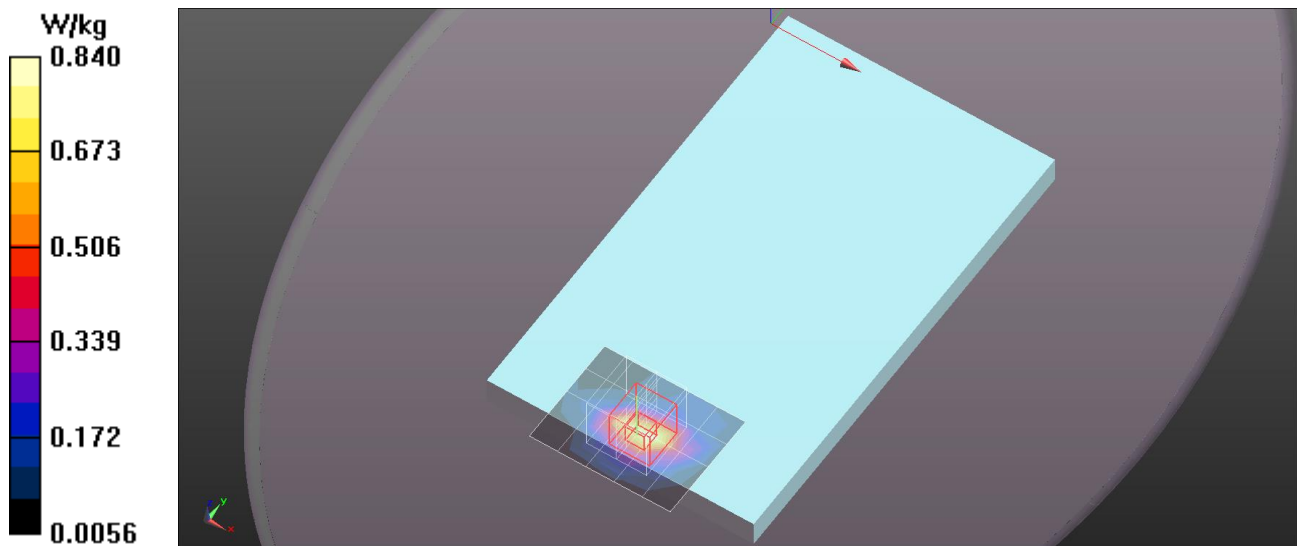


GPRS 1900

Frequency: 1880 MHz; Duty Cycle: 1:2.79898

Rear/Main Ant/GPRS 1900/Ch661/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) =1.87 W/kg

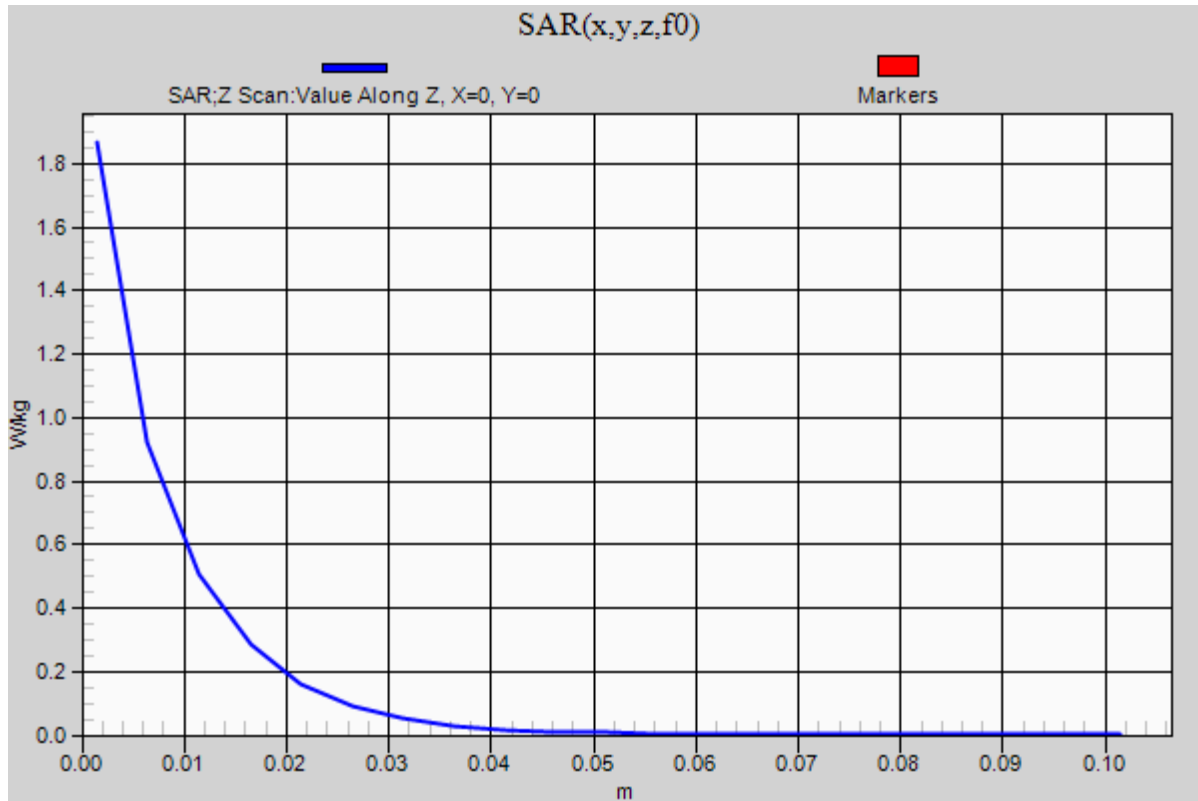

WCDMA Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used: $f = 1907.8$ MHz; $\sigma = 1.50$ S/m; $\epsilon_r = 50.87$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn917; Calibrated: 2017/1/6
- Probe: EX3DV4 - SN3665; ConvF(7.66, 7.66, 7.66); Calibrated: 2016/5/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Main Ant/WCDMA Band II/Ch9538/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.40 W/kg


Rear/Main Ant/WCDMA Band II/Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.382 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.44 W/kg

SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.562 W/kg

Maximum value of SAR (measured) = 1.89 W/kg

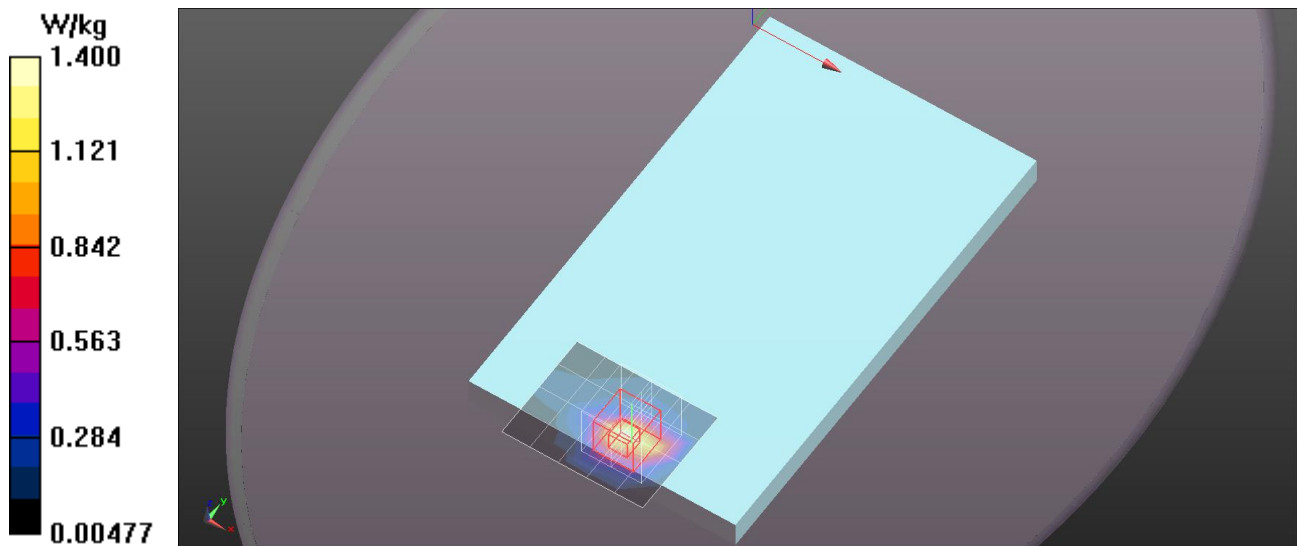


WCDMA Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1

Rear/Main Ant/WCDMA Band II/Ch9538/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 1.86 W/kg

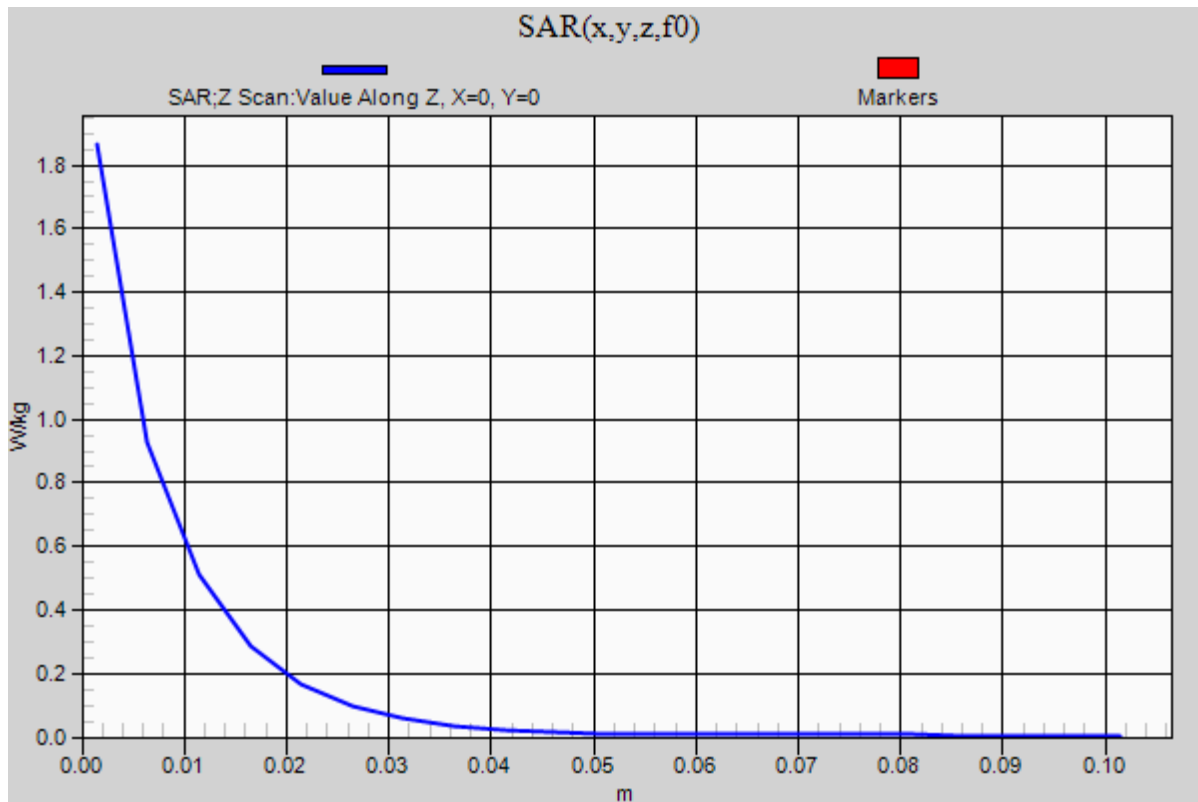

WCDMA Band IV

Frequency: 1732.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used: $f = 1732.9$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 52.73$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2017/3/20
- Probe: EX3DV4 - SN3665; ConvF(8, 8, 8); Calibrated: 2016/5/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Main Ant/WCDMA Band IV/Ch1413/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.17 W/kg


Rear/Main Ant/WCDMA Band IV/Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.931 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.549 W/kg

Maximum value of SAR (measured) = 1.92 W/kg

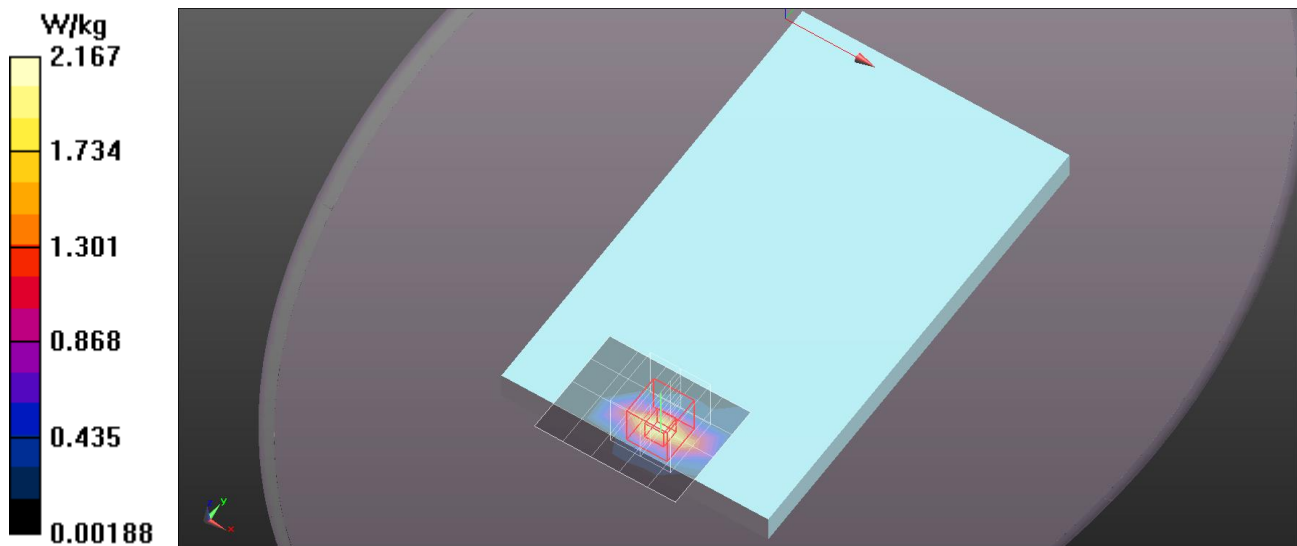


WCDMA Band IV

Frequency: 1732.6 MHz; Duty Cycle: 1:1

Rear/Main Ant/WCDMA Band IV/Ch1413/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 1.92 W/kg

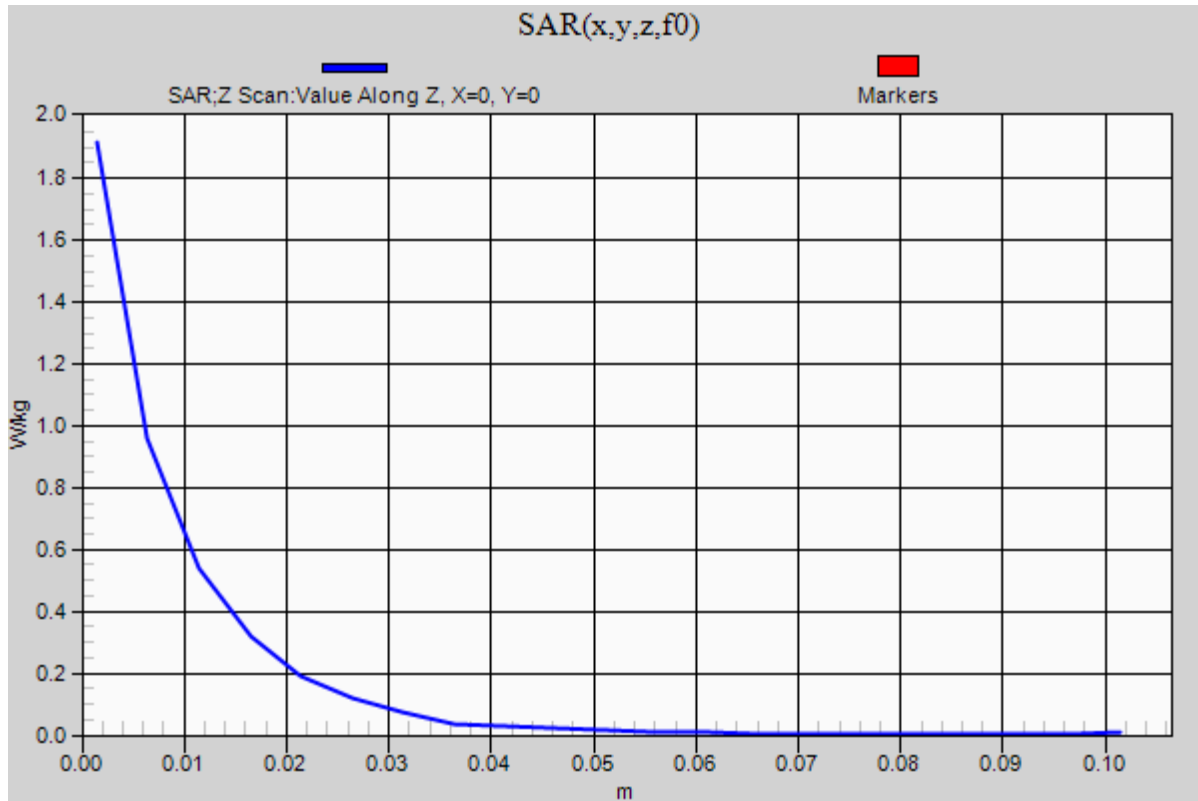

WCDMA Band V

Frequency: 846.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2017/3/20
- Probe: EX3DV4 - SN3665; ConvF(9.44, 9.44, 9.44); Calibrated: 2016/5/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Main Ant/WCDMA Band V/Ch4233/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.15 W/kg

Rear/Main Ant/WCDMA Band V/Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 14.62 V/m; Power Drift = 0.059 dB

Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 0.953 W/kg; SAR(10 g) = 0.525 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.54 W/kg

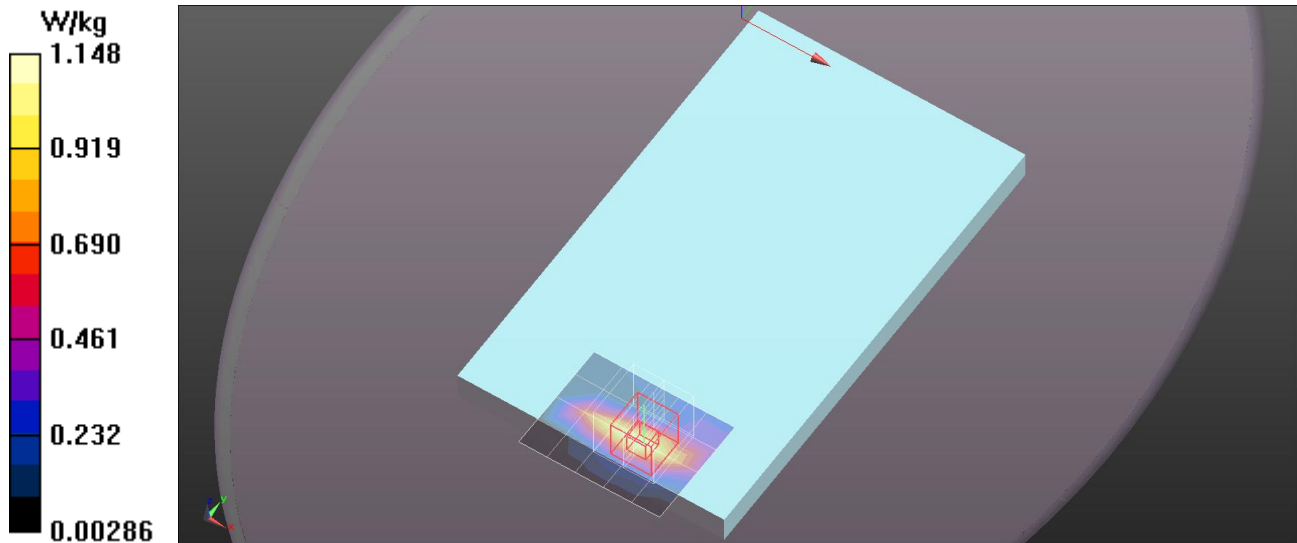


WCDMA Band V

Frequency: 829 MHz; Duty Cycle: 1:1

Rear/Main Ant/WCDMA Band V/Ch4233/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) =1.80 W/kg

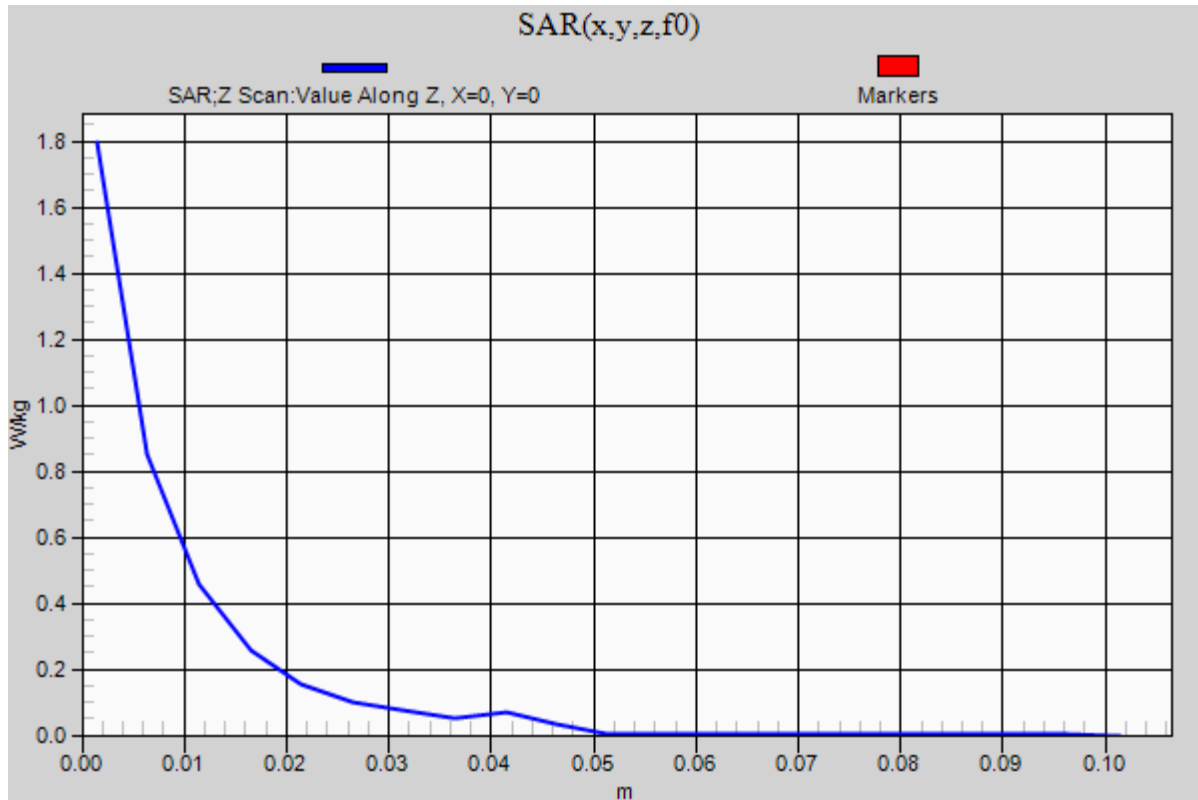

LTE Band 2

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 52.11$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn917; Calibrated: 2017/1/6
- Probe: EX3DV4 - SN3665; ConvF(7.66, 7.66, 7.66); Calibrated: 2016/5/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Main Ant/LTE Band 2 RB 1,0/Ch18900/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.68 W/kg

Rear/Main Ant/LTE Band 2 RB 1,0/Ch18900 /Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 3.489 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.53 W/kg

SAR(1 g) = 1.24 W/kg; SAR(10 g) = 0.571 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.08 W/kg

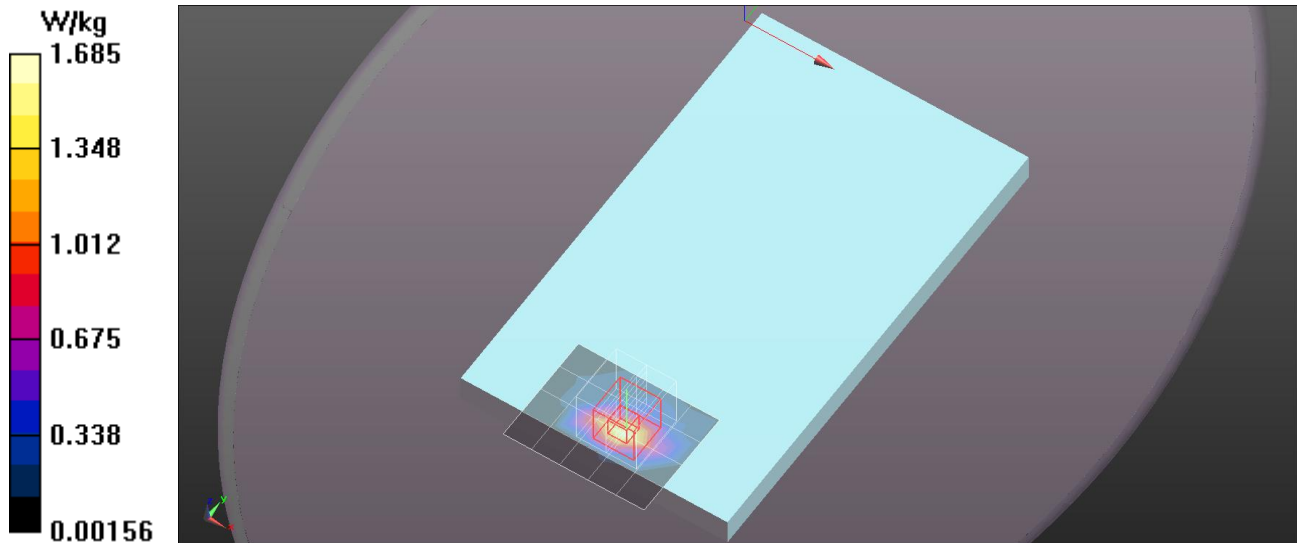


LTE Band 2

Frequency: 1880 MHz; Duty Cycle: 1:1

Rear/Main Ant/LTE Band 2 RB 1,0/Ch18900/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.64 W/kg

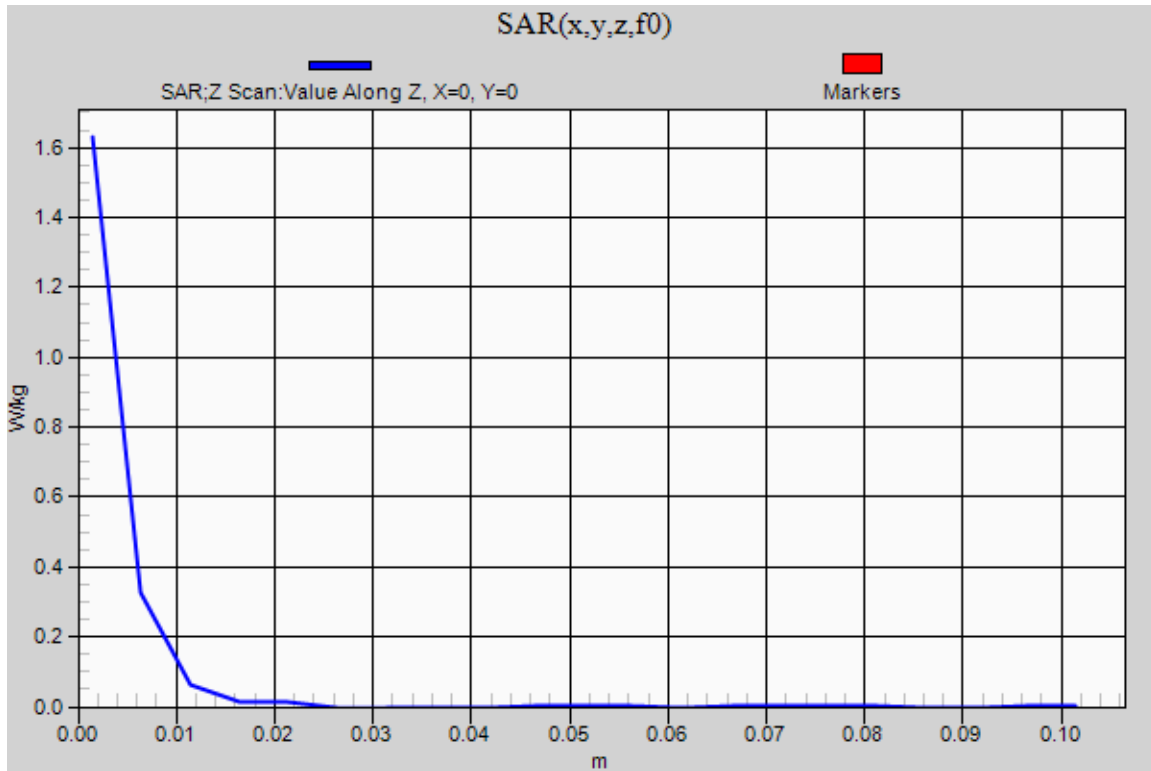

LTE Band 4

Frequency: 1732.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used: $f = 1732.9$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 51.25$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2017/3/20
- Probe: EX3DV4 - SN3665; ConvF(8, 8, 8); Calibrated: 2016/5/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Main Ant/LTE Band 4 RB 1,0/Ch20175/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.38 W/kg


Rear/Main Ant/LTE Band 4 RB 1,0/Ch20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.053 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 2.76 W/kg

SAR(1 g) = 1.26 W/kg; SAR(10 g) = 0.568 W/kg

Maximum value of SAR (measured) = 2.12 W/kg

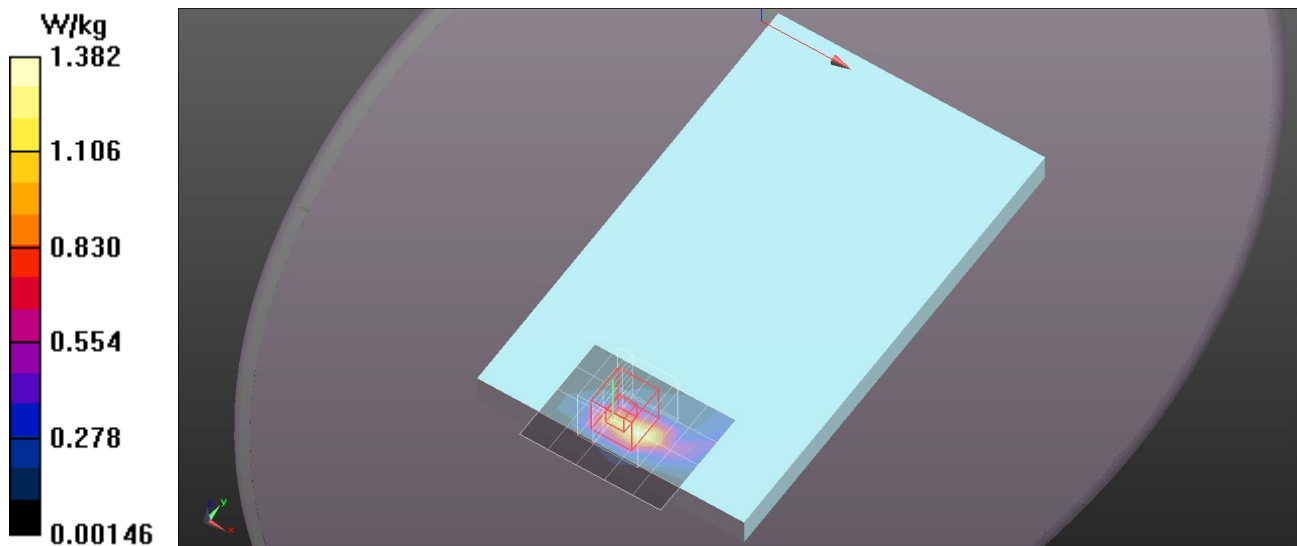


LTE Band 4

Frequency: 1732.5 MHz; Duty Cycle: 1:1

Rear/Main Ant/LTE Band 4 RB 1,0/Ch20175/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 2.03 W/kg

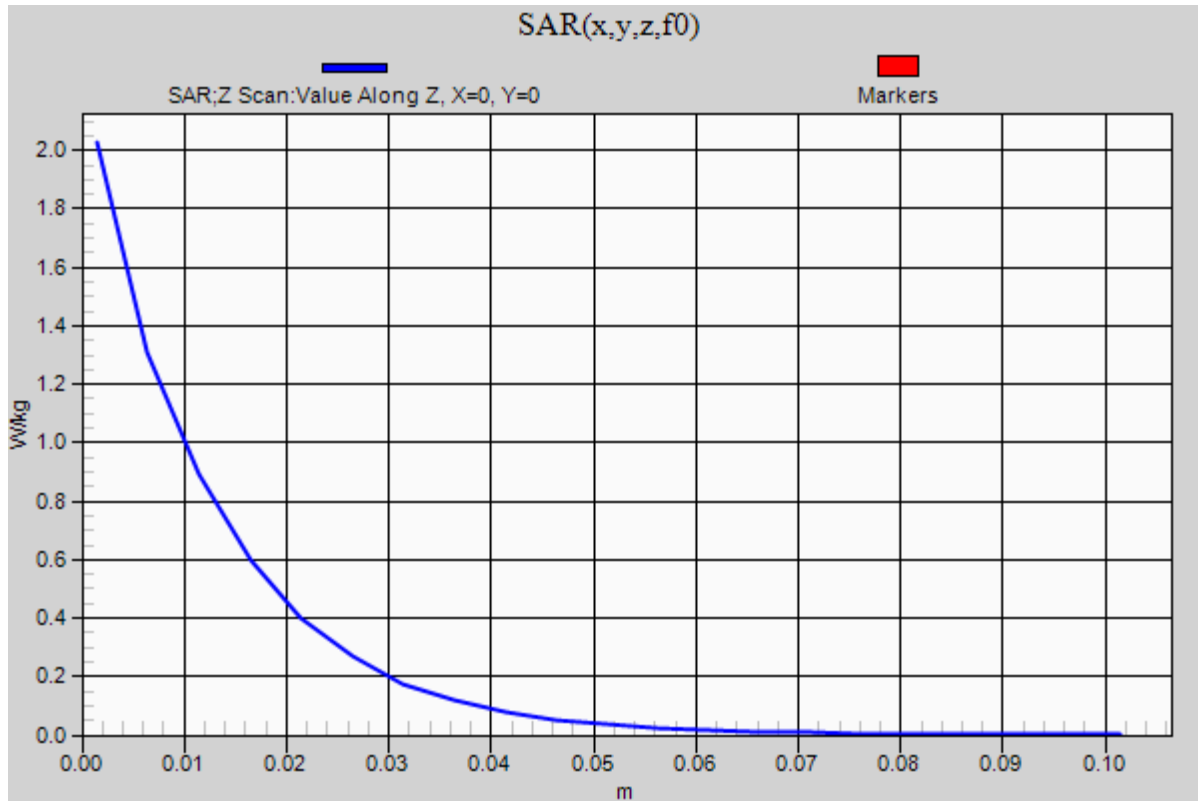

LTE Band 5

Frequency: 829 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.97$ S/m; $\epsilon_r = 54.64$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2017/3/20
- Probe: EX3DV4 - SN3665; ConvF(9.44, 9.44, 9.44); Calibrated: 2016/5/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Main Ant/LTE Band 5 RB 1,49/Ch20450/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.44 W/kg


Rear/Main Ant/LTE Band 5 RB 1,49/Ch20450/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.35 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.905 W/kg; SAR(10 g) = 0.510 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

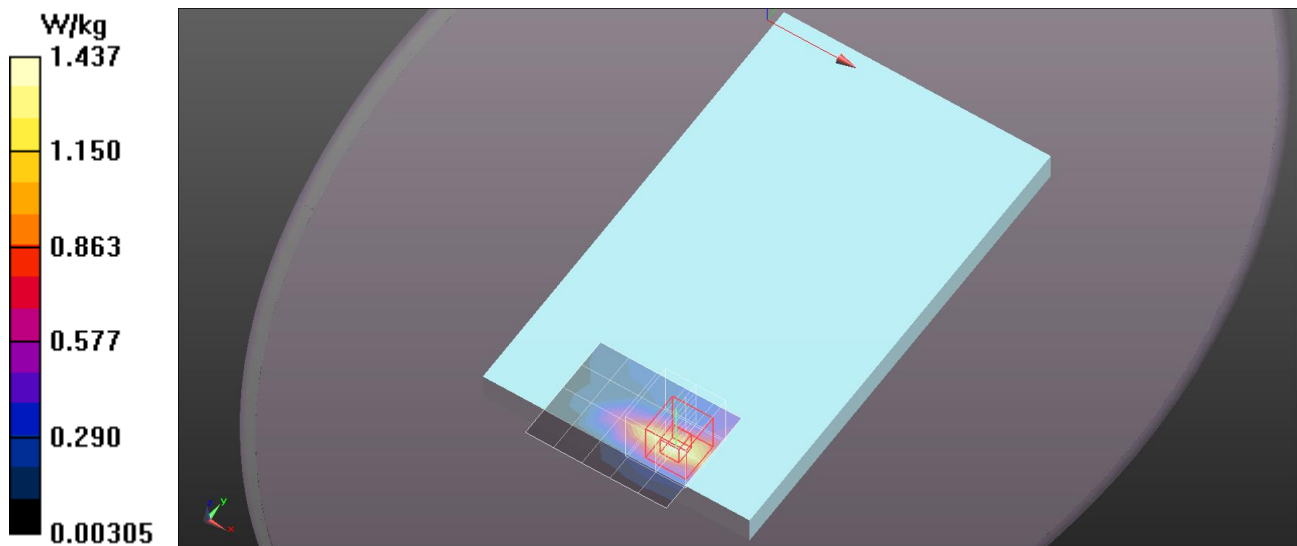


LTE Band 5

Frequency: 829 MHz; Duty Cycle: 1:1

Rear/Main Ant/LTE Band 5 RB 1,49/Ch20450/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.27 W/kg

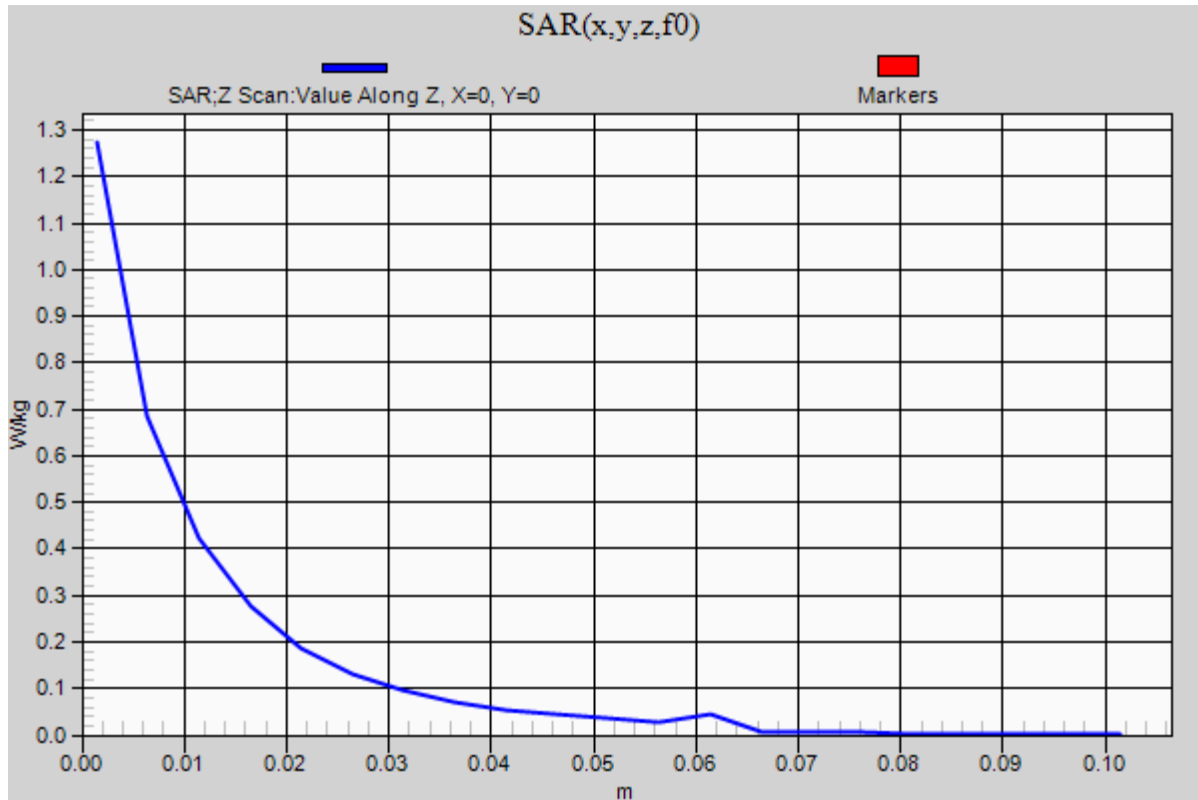

LTE Band 7

Frequency: 2560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used (interpolated): $f = 2560$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 52.31$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2017/3/20
- Probe: EX3DV4 - SN3665; ConvF(7, 7, 7); Calibrated: 2016/5/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge 4/Main Ant/LTE Band 7 RB 1,0/Ch21350/Area Scan (6x7x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.34 W/kg

Edge 4/Main Ant/LTE Band 7 RB 1,0/Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 31.34 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.63 W/kg

SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.480 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.09 W/kg

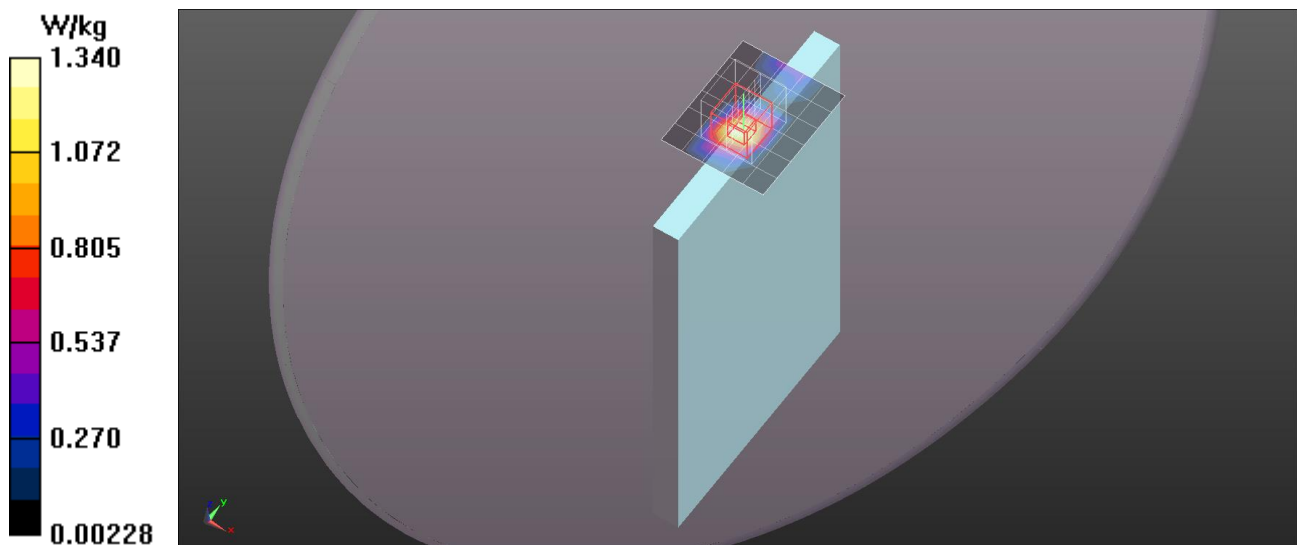


LTE Band 7

Frequency: 2560 MHz; Duty Cycle: 1:1

Edge 4/Main Ant/LTE Band 7 RB 1,0/Ch21350/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.354 W/kg

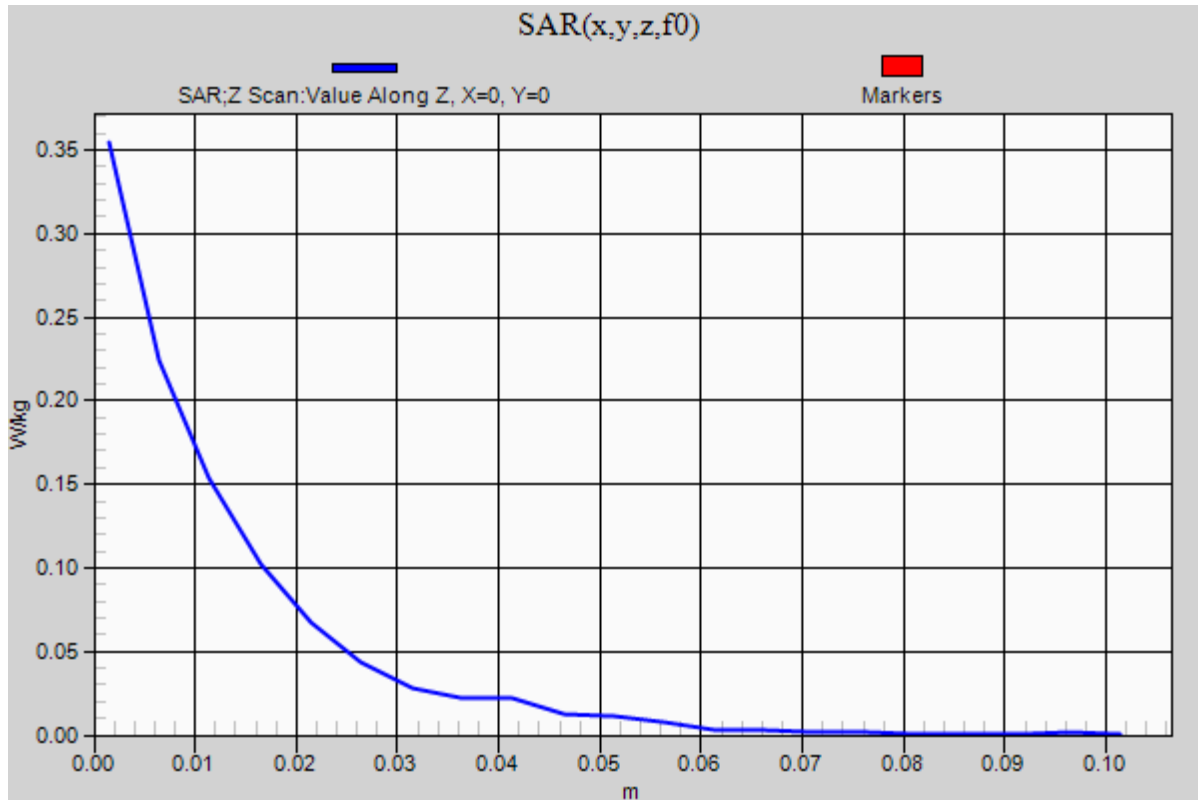

LTE Band 13

Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used: $f = 782.5$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 56.52$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2017/3/20
- Probe: EX3DV4 - SN3665; ConvF(9.49, 9.49, 9.49); Calibrated: 2016/5/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Main Ant/LTE Band 13 RB 1,0/Ch23230/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.58 W/kg


Rear/Main Ant/LTE Band 13 RB 1,0/Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.16 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.590 W/kg


Maximum value of SAR (measured) = 1.60 W/kg

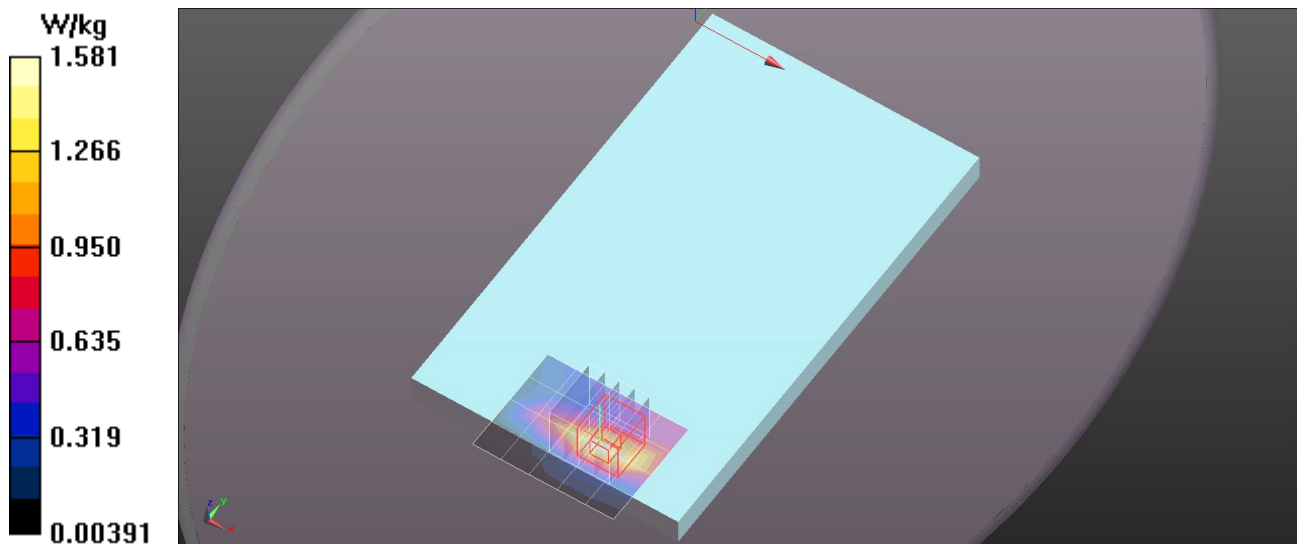

LTE Band 13

Frequency: 782 MHz; Duty Cycle: 1:1

Rear/Main Ant/LTE Band 13 RB 1,0/Ch23230/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.177 W/kg

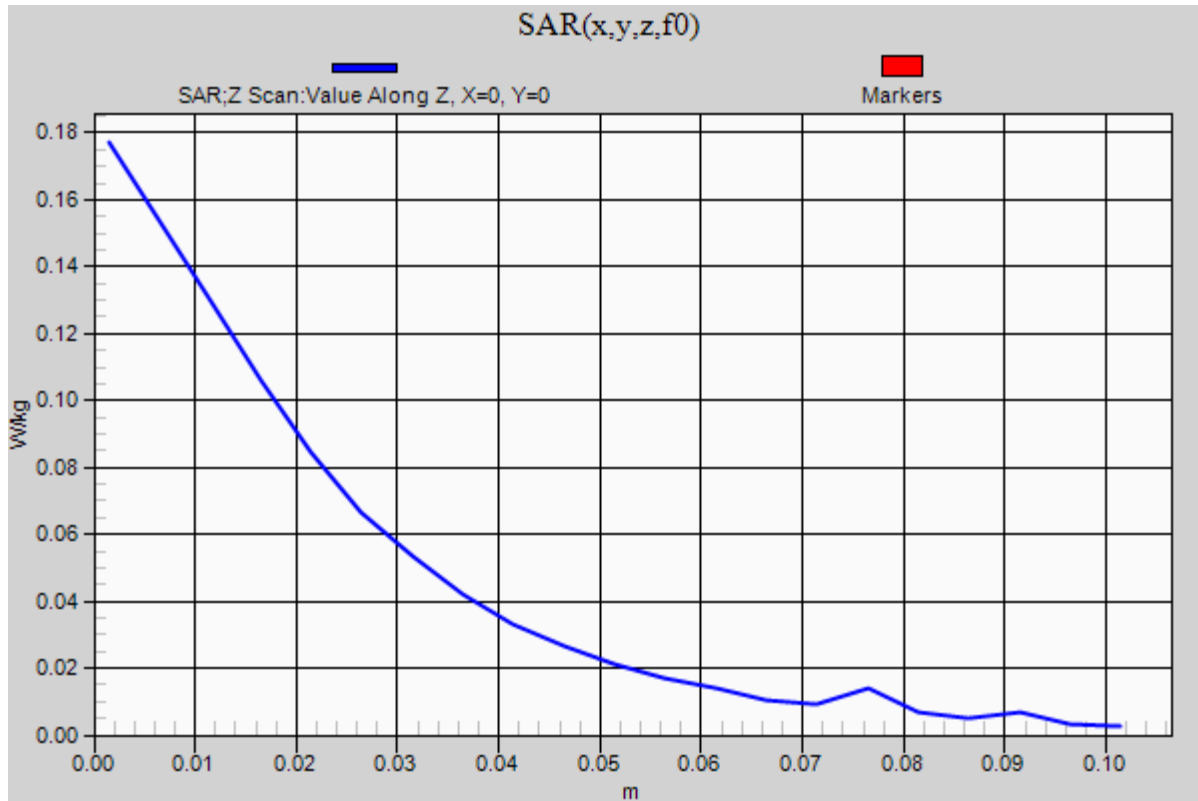

LTE Band 17

Frequency: 711 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 57.12$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2017/3/20
- Probe: EX3DV4 - SN3665; ConvF(9.49, 9.49, 9.49); Calibrated: 2016/5/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Main Ant/LTE Band 17 RB 1,0/Ch23800/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.561 W/kg

Rear/Main Ant/LTE Band 17 RB 1,0/Ch23800/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 9.381 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.738 W/kg

SAR(1 g) = 0.369 W/kg; SAR(10 g) = 0.233 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.596 W/kg

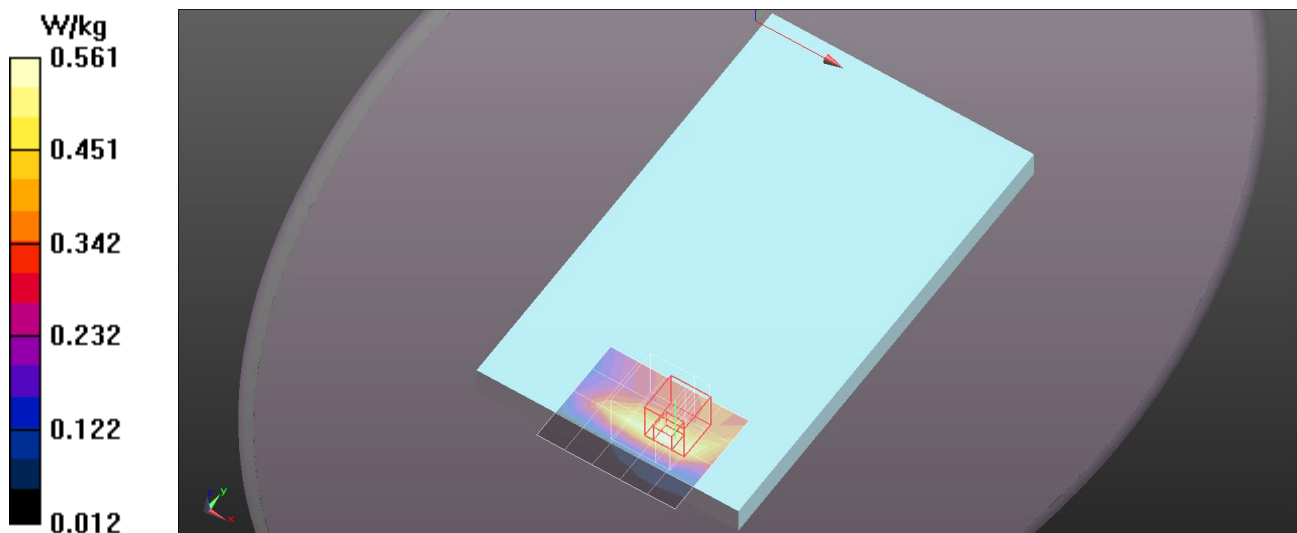


LTE Band 17

Frequency: 711 MHz; Duty Cycle: 1:1

Rear/Main Ant/LTE Band 17 RB 1,0/Ch23800/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.361 W/kg

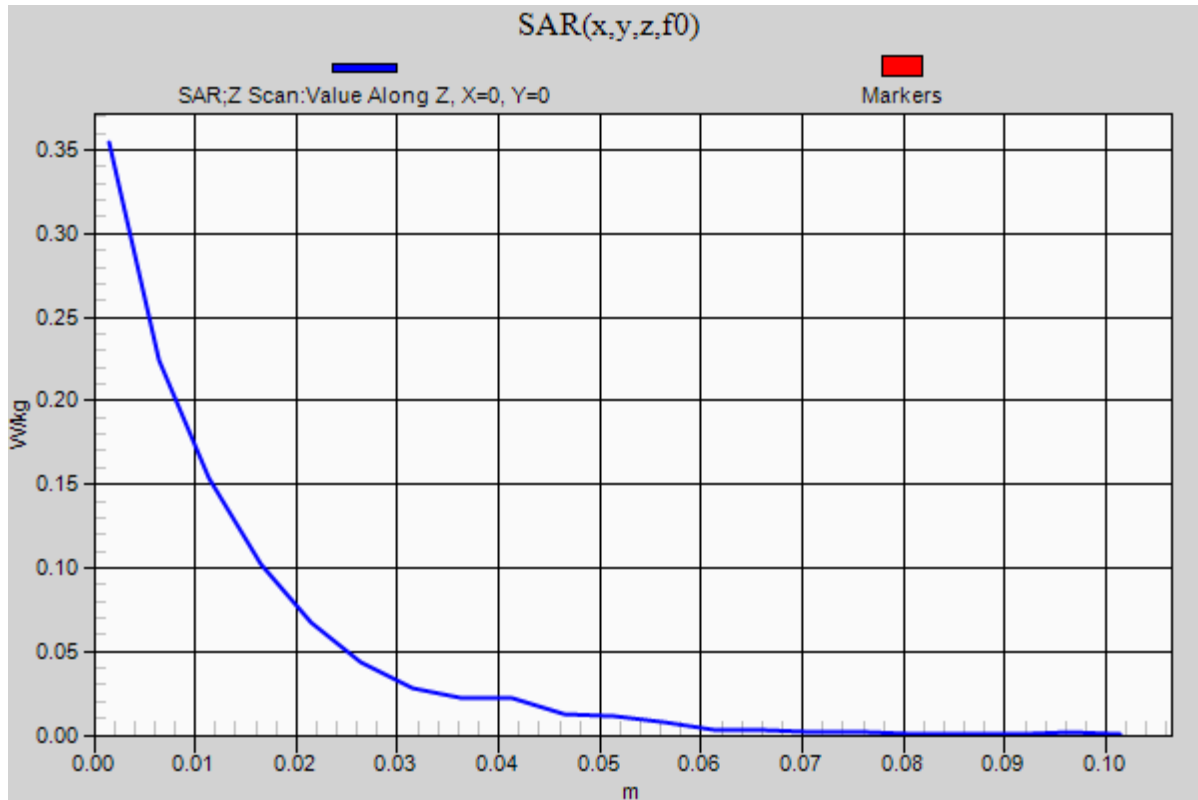

Wi-Fi 2.4GHz Band

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used: $f = 2462.2$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 52.31$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2017/3/20
- Probe: EX3DV4 - SN3665; ConvF(7.32, 7.32, 7.32); Calibrated: 2016/5/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Main Ant/802.11b/Ch11/Area Scan (6x7x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.819 W/kg

Rear/Main Ant/802.11b/Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=5mm

Reference Value = 10.03 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.588 W/kg; SAR(10 g) = 0.265 W/kg


Maximum value of SAR (measured) = 0.974 W/kg

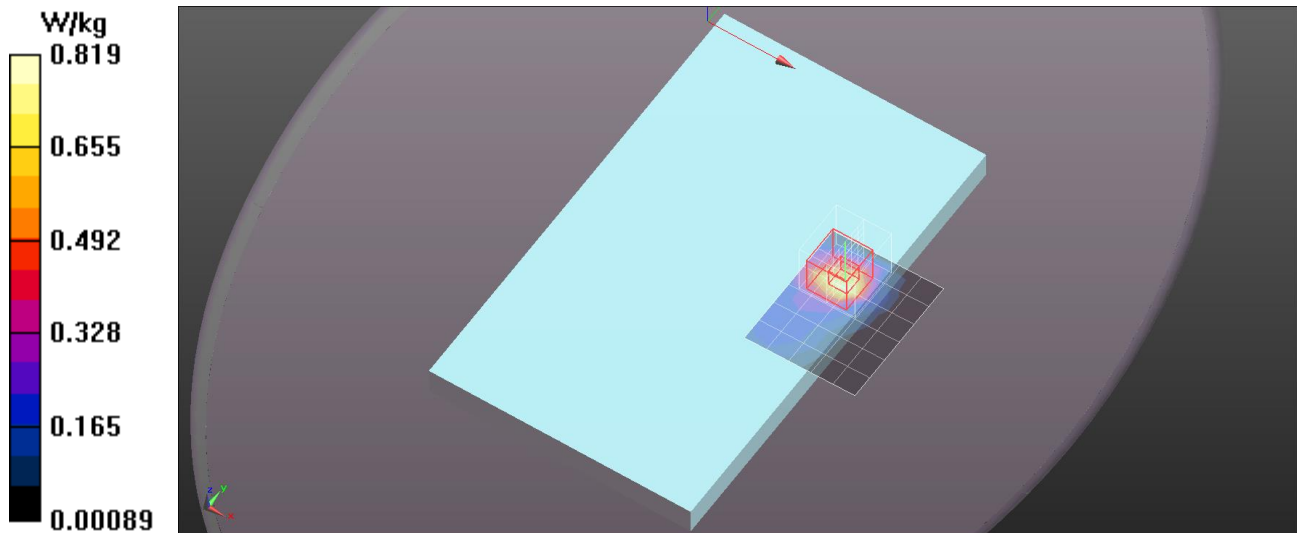

Wi-Fi 2.4GHz Band

Frequency: 2462 MHz; Duty Cycle: 1:1

Rear/Main Ant/802.11b/Ch11/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 2.03 W/kg

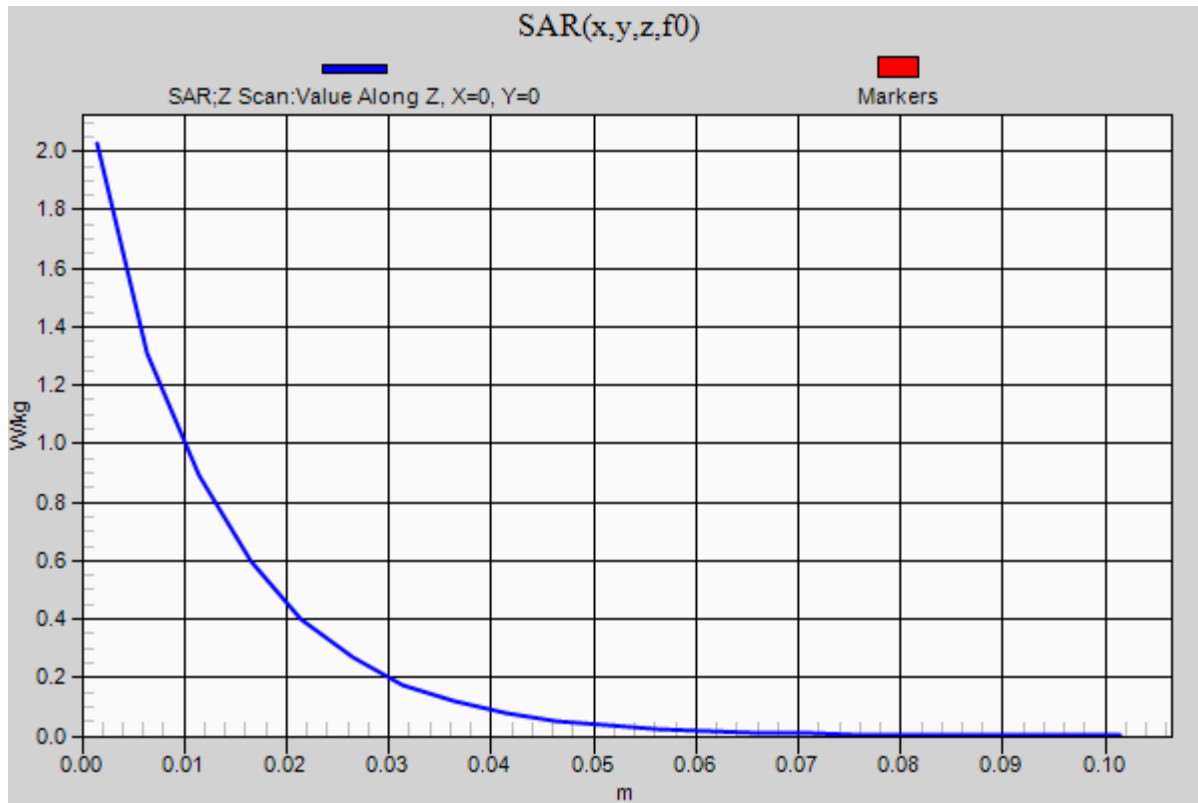

Bluetooth

Frequency: 2480 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 52.17$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2017/3/20
- Probe: EX3DV4 - SN3665; ConvF(7.32, 7.32, 7.32); Calibrated: 2016/5/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Main Ant/BLE/Ch39/Area Scan (6x7x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.269 W/kg

Rear/Main Ant/BLE/Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 3.082 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.411 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.060 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.181 W/kg

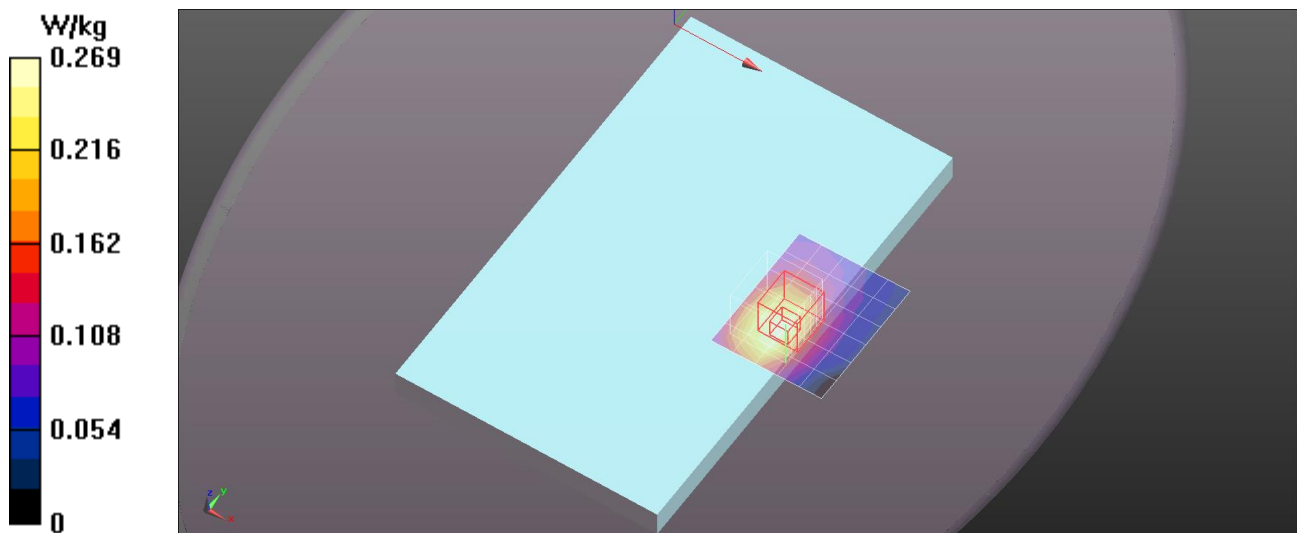

Bluetooth

Frequency: 2480 MHz; Duty Cycle: 1:1

Rear/Main Ant/BLE/Ch39/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.164 W/kg

