

FCC 47 CFR §2.1093 and IEEE Std 1528-2013

in accordance with the requirements of
FCC Report and Order: ET Docket 93-62**FCC TEST REPORT****For****Computer****Trade Name: ADVANTECH****Model:****AIM8I, AIM8Ixxxxxxxxxxxxxxxxxx, AIM-x5ATxxxxxxxxxxxxxxxx****(where "x" may be any alphanumeric character, "-" or blank for marketing purpose and no impact safety related critical components and constructions)**

Issued to

Advantech Co.Ltd.**No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 114, Taiwan, R.O.C.**

Issued by

Compliance Certification Services Inc.**No.11, Wugong 6th Rd., Wugu Dist.,****New Taipei City 24891,****Taiwan. (R.O.C.)****<http://www.ccsrf.com>****service@ccsrf.com****Issued Date: 2017/07/27**

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	2017/06/15	Initial Issue	ALL	Jerry Chuang
01	2017/07/27	Add 2600 dipole, Revise BT power table and tune-up power, Add Liquid 2600MHz, Revise test result	13, 20, 100, 103, 105, 110, 112-119, 121, 125-128	Jerry Chuang

Table of Contents

1	CERTIFICATE OF COMPLIANCE (SAR EVALUATION).....	5
2	DESCRIPTION OF EQUIPMENT UNDER TEST.....	6
2.1	SUMMARY OF HIGHEST SAR VALUES.....	7
3	REQUIREMENTS FOR COMPLIANCE TESTING DEFINED	8
3.1	REQUIREMENTS FOR COMPLIANCE TESTING DEFINED BY THE FCC	8
4	DOSIMETRIC ASSESSMENT SYSTEM	9
4.1	MEASUREMENT SYSTEM DIAGRAM.....	10
4.2	SYSTEM COMPONENTS	11
5	EVALUATION PROCEDURES.....	14
6	SAR MEASUREMENT PROCEDURES.....	16
6.1	NORMAL SAR TEST PROCEDURE.....	16
7	DEVICE UNDER TEST	18
7.1	WIRELESS TECHNOLOGIES	18
7.2	MAXIMUM TUNE-UP POWER.....	19
7.3	SIMULTANEOUS TRANSMISSION	22
8	GENERAL LTE SAR TEST AND REPORTING CONSIDERATIONS.....	23
9	POWER REDUCTION BY PROXIMITY SENSING.....	25
9.1	PROCEDURES FOR DETERMINING PROXIMITY SENSOR TRIGGERING DISTANCES.....	25
9.2	PROCEDURES FOR DETERMINING ANTENNA AND PROXIMITY SENSOR COVERAGE	26
9.3	PROXIMITY SENSOR STATUS TABLE OF TRIGGER DISTANCE	27
9.4	TILT ANGLE INFLUENCES TO PROXIMITY SENSOR TRIGGERING	29
9.5	POWER REDUCTION PER AIR-INTERFACE.....	30
9.6	PROXIMITY SENSOR COVERAGE AREA.....	43
10	RF OUTPUT POWER MEASUREMENT	44
10.1	GPRS 850	44
10.2	EDGE 850	44
10.3	GPRS 1900	45
10.4	EDGE 1900.....	45
10.5	WCDMA	46
10.6	LTE	51
10.6.1	LTE BAND 2.....	52
10.6.2	LTE BAND 4.....	62
10.6.3	LTE BAND 5.....	72
10.6.4	LTE BAND 7.....	80
10.6.5	LTE BAND 13	88
10.6.6	LTE BAND 17	94

10.7	WI-FI (2.4GHZ BAND).....	100
10.8	BLUETOOTH	101
11	SUMMARY OF SAR TEST EXCLUSION CONFIGURATIONS.....	102
11.1	STANDALONE SAR TEST EXCLUSION CALCULATIONS	102
11.1.1	SAR EXCLUSION CALCULATIONS FOR WI-FI ANTENNA < 50MM FROM THE USER.....	103
11.1.2	SAR EXCLUSION CALCULATIONS FOR WI-FI ANTENNA > 50MM FROM THE USER.....	105
11.1.3	SAR REQUIRED TEST CONFIGURATION.....	107
12	EXPOSURE LIMIT	108
13	TISSUE DIELECTRIC PROPERTIES	109
13.1	TEST LIQUID CONFIRMATION.....	109
13.2	TYPICAL COMPOSITION OF INGREDIENTS FOR LIQUID TISSUE PHANTOMS.....	110
13.3	SIMULATING LIQUIDS PARAMETER CHECK RESULTS.....	111
14	MEASUREMENT UNCERTAINTY	112
15	SYSTEM PERFORMANCE CHECK.....	113
15.1	SYSTEM PERFORMANCE CHECK RESULTS	114
16	SAR MEASUREMENTS RESULTS	115
17	SIMULTANEOUS TRANSMISSION SAR ANALYSIS	127
17.1	SUM OF THE SAR FOR SIMULTANEOUS TRANSMISSION ANALYSIS	127
17.1.1	SUM OF THE SAR FOR WLAN & WWAN	127
17.1.2	SUM OF THE 1G SAR FOR BODY EXPOSURE CONDITION	130
18	EQUIPMENT LIST & CALIBRATION STATUS	132
19	FACILITIES.....	133
20	REFERENCE	133
21	ATTACHMENTS	134

1 Certificate of Compliance (SAR Evaluation)

Applicant Advantech Co.Ltd.
No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 114,
Taiwan, R.O.C.

Equipment Under Test: Computer

Trade Name: ADVANTECH

Model Number: AIM8I, AIM8Ixxxxxxxxxxxxxxxx, AIM-x5ATxxxxxxxxxxxx
(where "x" may be any alphanumeric character, "-" or blank for
marketing purpose and no impact safety related critical
components and constructions)

Date of Test: April 10 ~ 19, 2017

Device Category: Portable Devices

Exposure Category: General Population/Uncontrolled Exposure

Applicable Standards	
FCC	● IEEE 1528 2013 ● KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 ● KDB 865664 D02 RF Exposure Reporting v01r02 ● KDB 447498 D01 General RF Exposure Guidance v06 ● KDB 616217 D04 SAR for laptop and tablets v01r02 ● KDB 248227 D01 SAR Measurement Guidance for 802.11 Transmitters v02r02 ● KDB 941225 D05 SAR for LTE Device v02r05 ● KDB 941225 D01 3G SAR procedure v03r01
Limit	
1.6 W/kg	
Test Result	
Pass	

The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:



Scott Hsu
Section Manager
Compliance Certification Services Inc.

Tested by:



Jerry Chuang
SAR Engineer
Compliance Certification Services Inc.

2 Description of Equipment Under Test

Product	Computer		
Trade Name	ADVANTECH		
Model Number	AIM8I, AIM8Ixxxxxxxxxxxxxxxxxx, AIM-x5ATxxxxxxxxxxxx (where "x" may be any alphanumeric character, "-" or blank for marketing purpose and no impact safety related critical components and constructions)		
Test Model	AIM8I		
WWAN Module	Huawei	Model:	ME936
Transmitter	GMSK, UMTS & LTE		
Modulation Technique	Operating Mode	TX Freq Range (MHz)	
	GPRS 850	824 ~ 849	
	GPRS 1900	1850 ~ 1910	
	WCDMA Band II	1850 ~ 1910	
	WCDMA Band IV	1710 ~ 1755	
	WCDMA Band V	824 ~ 849	
	LTE Band 2	1850 ~ 1910	
	LTE Band 4	1710 ~ 1755	
	LTE Band 5	824 ~ 849	
	LTE Band 7	2500 ~ 2570	
	LTE Band 13	777 ~ 787	
	LTE Band 17	705~714	
WWAN Antenna Specification	Brand name	Yageo	
	Parts Number	Main:ANTA0ZV11661LTEA2	
		Aux:ANTA0ZV11661LTEA3	
Type	PIFA		
Collocated Transmitter	Azurewave	Model:	AW-NB177NF
	Wi-Fi & Bluetooth		
Collocated Transmitter Modulation Technique	Bluetooth:GFSK for 1Mbps;π/4-DQPSK for 2Mbps;8DPSK for 3Mbps		
	802.11b: Direct Sequence Spread Spectrum(DSSS)		
	802.11g: Orthogonal Frequency Division Multiplexing (OFDM)		
	802.11n: Orthogonal Frequency Division Multiplexing (OFDM)		
WLAN Antenna Specification	Brand name	Yageo	
	Parts Number	Main:ANTA0ZV11661WLAN1	
	Type	PIFA	
Rechargeable Li-polymer Battery–alternate	Band:ADVANTECH Model:AIM-BAT-8 Rating:3.8V/4900mAh		

Note:

1. The sample selected for test was prototype that representative to production product and was provided by manufacturer.

2.1 Summary of Highest SAR Values

Results for highest reported SAR values for each frequency band and mode

Technology/Band	Test configuration	Mode	Highest Reported 1g-SAR (W/kg)
GPRS 850	Rear	GMSK	0.422
GPRS 1900	Rear	GMSK	0.636
WCDMA Band II	Rear	RMC 12.2Kbps	1.228
WCDMA band IV	Rear	RMC 12.2Kbps	1.150
WCDMA band V	Rear	RMC 12.2Kbps	1.021
LTE band 2	Rear	QPSK	1.240
LTE band 4	Rear	QPSK	1.260
LTE band 5	Rear	QPSK	1.063
LTE band 7	Edge 4	QPSK	1.200
LTE band 13	Rear	QPSK	1.171
LTE band 17	Rear	QPSK	0.405
WiFi 2.4 GHz	Rear	802.11b	0.602
Bluetooth	Rear	BLE	0.166

Result for highest Simultaneous Transmission SAR values

Technology/Band	Test configuration	Mode	Sum of Highest Reported 1g-SAR (W/kg)
LTE band 4+Bluetooth	Rear	QPSK	1.470

3 Requirements for Compliance Testing Defined


3.1 Requirements for Compliance Testing Defined by the FCC

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996 [1]. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 W/kg for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the FCC 47 CFR §2.1093 and IEEE Std 1528-2013.

4 Dosimetric Assessment System

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m) which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetric probe EX3DV4-SN: 3665 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure and found to be better than ± 0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEE 1528 2013.

4.1 Measurement System Diagram

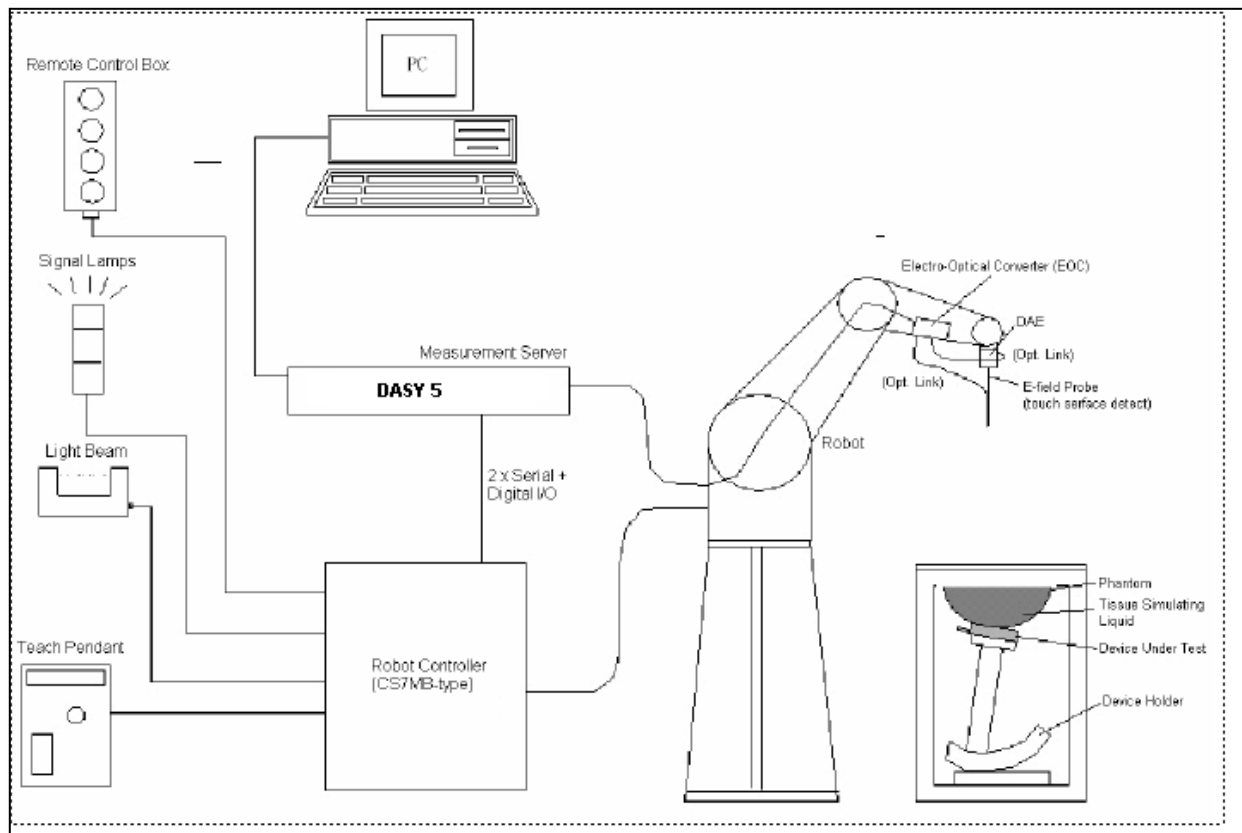

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7 or Windows XP.
- DASY5 software version: 52.8.8.1222.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing validating the proper functioning of the system.

4.2 System Components

DASY4/DASY5 Measurement Server



The DASY4/DASY5 measurement server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chip disk and 64MB RAM. The necessary circuits for communication with either the DAE3 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4/DASY5 I/O-board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.



The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server. Calibration: No calibration required.

Data Acquisition Electronics (DAE)



The data acquisition electronics (DAE4) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE4 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

EX3DV4 Isotropic E-Field Probe for Dosimetric Measurements

	Construction: Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE) Calibration: Basic Broad Band Calibration in air: 10-3000 MHz. Conversion Factors (CF) for HSL 900 and HSL 1800 CF-Calibration for other liquids and frequencies upon request. Frequency: 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz) Directivity: ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in HSL (rotation normal to probe axis) Dynamic Range: 10 μW/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μW/g)
	Dimensions: Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1 mm Application: High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.


SAM Phantom (V4.0)

	Construction: The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 2013, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot. Shell Thickness: 2 ± 0.2 mm Filling Volume: Approx. 25 liters Dimensions: Height: 810mm; Length: 1000mm; Width: 500mm
---	---


SAM Phantom (ELI4)

	Construction: Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is supported by software version DASY4/DASY5 and higher and is compatible with all SPEAG dosimetric probes and dipoles Shell Thickness: 2.0 ± 0.2 mm (sagging: <1%) Filling Volume: Approx. 25 liters Dimensions: Major ellipse axis: 600 mm Minor axis: 400 mm 500mm
---	---


Device Holder for SAM Twin Phantom

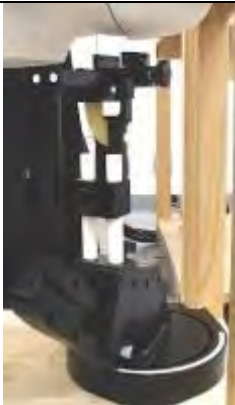	Construction: In combination with the Twin SAM Phantom V4.0 or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).
---	---

System Validation Kits for SAM Phantom (V4.0)

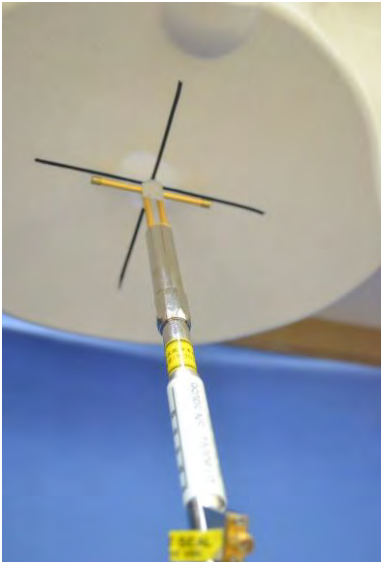	Construction: Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor. Frequency: 750, 835, 1750, 1900, 2450 MHz Return loss: > 20 dB at specified validation position Power capability: > 100 W (f < 1GHz); > 40 W (f > 1GHz) Dimensions: D750V3: dipole length: 178 mm; overall height: 330 mm D835V2: dipole length: 161 mm; overall height: 340 mm D1750V2: dipole length: 75.2 mm; overall height: 301.5 mm D1900V2: dipole length: 67.7 mm; overall height: 300 mm D2450V2: dipole length: 51.5 mm; overall height: 290 mm D2600V2: dipole length: 49.2 mm; overall height: 290 mm
--	---

System Validation Kits for ELI4 phantom

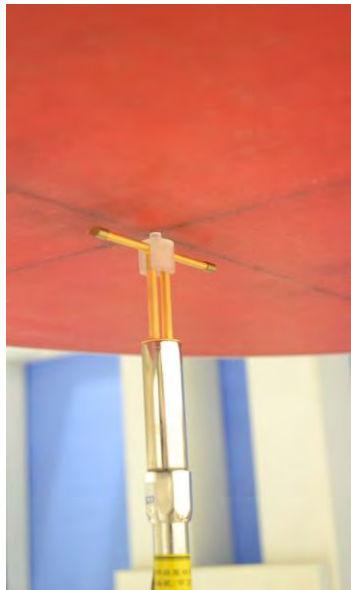	Construction: Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor. Frequency: 750, 835, 1750, 1900, 2450 MHz Return loss: > 20 dB at specified validation position Power capability: > 100 W (f < 1GHz); > 40 W (f > 1GHz) Dimensions: D750V3: dipole length: 178 mm; overall height: 330 mm D835V2: dipole length: 161 mm; overall height: 340 mm D1750V2: dipole length: 75.2 mm; overall height: 301.5 mm D1900V2: dipole length: 67.7 mm; overall height: 300 mm D2450V2: dipole length: 51.5 mm; overall height: 290 mm D2600V2: dipole length: 49.2 mm; overall height: 290 mm
---	---

5 Evaluation Procedures

Data Evaluation

The DASY4/DASY5 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	$ConvF_i$
	- Diode compression point	dcp_i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with	V_i	= Compensated signal of channel i	(i = x, y, z)
	U_i	= Input signal of channel i	(i = x, y, z)
	cf	= Crest factor of exciting field	(DASY parameter)
	dcp_i	= Diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:
$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

H-field probes:
$$H_i = \sqrt{V_i} \cdot \frac{a_{i10} + a_{i11}f + a_{i12}f^2}{f}$$

with	V_i	= Compensated signal of channel i	(i = x, y, z)
	$Norm_i$	= Sensor sensitivity of channel i	(i = x, y, z)

$\mu V/(V/m)^2$ for E0field Probes

$ConvF$	= Sensitivity enhancement in solution
a_{ij}	= Sensor sensitivity factors for H-field probes
f	= Carrier frequency (GHz)
E_i	= Electric field strength of channel i in V/m
H_i	= Magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with

- SAR = local specific absorption rate in W/kg
- E_{tot} = total field strength in V/m
- σ = conductivity in [mho/m] or [Siemens/m]
- ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{377} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with

- P_{pwe} = Equivalent power density of a plane wave in mW/cm²
- E_{tot} = total electric field strength in V/m
- H_{tot} = total magnetic field strength in A/m

6 SAR Measurement Procedures

6.1 Normal SAR Test Procedure

- **Power Reference Measurement**

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

- **Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4/DASY5 software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, the grid resolution has to less than 15 mm by 15 mm at frequency ≤ 2 GHz; the grid resolution has to less than 12mm by 12 mm at frequency between 2GHz to 4GHz; grid resolution has to less than 10 mm by 10 mm at frequency between 4GHz to 6GHz.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

- Zoom Scan**

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures points in accordance with the frequency can be divided into three parts. (1)The zoom scan volume was set to 5x5x7 points at frequency ≤ 2 GHz. (2) The zoom scan volume was set to 7x7x7 points at frequency between 2GHz to 4GHz (3) The zoom scan volume was set to 7x7x12 points at frequency between 4GHz to 6GHz. The measures points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm	3 – 4 GHz: ≤ 5 mm 4 – 6 GHz: ≤ 4 mm
Maximum zoom scan spatial resolution, normal to phantom surface	Uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$:between 1 st two points losest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Maximum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	

- Power Drift Measurement**

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have DASY4/DASY5 software stop the measurements if this limit is exceeded.

- Z-Scan**

The Z Scan job measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. A user can anchor the grid to the current probe location. As with any other grids, the local Z-axis of the anchor location establishes the Z-axis of the grid.

7 Device Under Test

7.1 Wireless Technologies

Wireless technologies	Tx Frequency Bands	Operating mode	Duty Cycle used for testing
GPRS(GMSK)	850 1900	GPRS(GMSK) EGPRS(8PSK)	GPRS/EGPRS: 1 Slot 12.5% 2 Slot 25% 3 Slot 37.5% 4 Slot 50%
WCDMA (UMTS)	Band II Band IV Band V	UMTS Rel. 99 HSDPA HSUPA	100%
LTE	Band 2 Band 4 Band 5 Band 7 Band 13 Band 17	QPSK 16QAM	100%
Wi-Fi	2.4GHz Band	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)	100%
Bluetooth	2.4GHz	2.1 4.0	NA

7.2 Maximum Tune-up Power

P-sensor off

Tolerance (dB): ± 2		RF Output Power (dBm)		
Band	Mode	Target	Max. tune-up power	Max. Fram Avg. power
GPRS 850	1 Slot	31.0	33.0	24.0
	2 Slot	29.0	31.0	25.0
	3 Slot	28.0	30.0	25.7
	4 Slot	26.0	28.0	25.0
EDGE 850	1 Slot	25.0	27.0	18.0
	2 Slot	23.0	25.0	19.0
	3 Slot	23.0	25.0	20.7
	4 Slot	21.0	23.0	20.0
GPRS 1900	1 Slot	28.5	30.5	21.5
	2 Slot	26.0	28.0	22.0
	3 Slot	25.0	27.0	22.7
	4 Slot	23.0	25.0	22.0
EDGE 1900	1 Slot	24.0	26.0	17.0
	2 Slot	22.0	24.0	18.0
	3 Slot	22.0	24.0	19.7
	4 Slot	21.0	23.0	20.0

Tolerance (dB): ± 2		RF Output Power (dBm)	
Band	Mode	Target	Max. tune-up power
WCDMA Band II	R99	22.0	24.0
	HSDPA	22.0	24.0
	HSUPA	22.0	24.0
WCDMA Band IV	R99	22.0	24.0
	HSDPA	22.0	24.0
	HSUPA	22.0	24.0
WCDMA Band V	R99	22.0	24.0
	HSDPA	22.0	24.0
	HSUPA	22.0	24.0
Tolerance (dB): ± 2		RF Output Power (dBm)	
Band	Mode	Target	Max. tune-up power
LTE Band 2	QPSK	22.0	24.0
LTE Band 4	QPSK	22.0	24.0
LTE Band 5	QPSK	22.0	24.0
LTE Band 7	QPSK	22.0	24.0
LTE Band 13	QPSK	22.0	24.0
LTE Band 17	QPSK	22.0	24.0

P-sensor on

Tolerance (dB): ± 2		RF Output Power (dBm)		
Band	Mode	Target	Max. tune-up power	Max. Fram Avg. power
GPRS 850	1 Slot	28.0	30.0	21.0
	2 Slot	25.0	27.0	21.0
	3 Slot	24.0	26.0	21.7
	4 Slot	22.0	24.0	21.0
EDGE 850	1 Slot	25.0	27.0	18.0
	2 Slot	23.0	25.0	19.0
	3 Slot	23.0	25.0	20.7
	4 Slot	21.0	23.0	20.0
GPRS 1900	1 Slot	27.0	29.0	20.0
	2 Slot	24.0	26.0	20.0
	3 Slot	23.0	25.0	20.7
	4 Slot	21.0	23.0	20.0
EDGE 1900	1 Slot	24.0	26.0	17.0
	2 Slot	22.0	24.0	18.0
	3 Slot	22.0	24.0	19.7
	4 Slot	21.0	23.0	20.0

Tolerance (dB): ± 2		RF Output Power (dBm)	
Band	Mode	Target	Max. tune-up power
WCDMA Band II	R99	18.0	20.0
	HSDPA	18.0	20.0
	HSUPA	18.0	20.0
WCDMA Band IV	R99	18.0	20.0
	HSDPA	18.0	20.0
	HSUPA	18.0	20.0
WCDMA Band V	R99	19.0	21.0
	HSDPA	19.0	21.0
	HSUPA	19.0	21.0

Tolerance (dB): ± 2		RF Output Power (dBm)	
Band	Mode	Target	Max. tune-up power
LTE Band 2	QPSK	17.0	19.0
LTE Band 4	QPSK	18.0	20.0
LTE Band 5	QPSK	22.0	24.0
LTE Band 7	QPSK	18.0	20.0
LTE Band 13	QPSK	22.0	24.0
LTE Band 17	QPSK	22.0	24.0

Tolerance (dB): ± 1		RF Output Power (dBm)	
Band	Mode	Target	Max. tune-up power
2.4GHz	802.11b	15.5	16.5
	802.11g	13.5	14.5
	802.11n HT20	12.5	13.5
	802.11n HT20	12.5	13.5
Mode		Max. tune-up power	
Bluetooth		6.0	
BLE		9.0	

7.3 Simultaneous Transmission

RF Exposure Condition	Transmit Configurations
WWAN + Wi-Fi	GPRS + Wi-Fi/ BT GPRS 850/1900 + BT(Chain 0) GPRS 850/1900 + 2.4GHz(Chain0) WCDMA + Wi-Fi / BT WCDMA Band II/IV/V + BT (Chain 0) WCDMA Band II/IV/V + 2.4GHz (Chain 0) LTE + Wi-Fi / BT LTE Band 2/4/5/7/13/17 + BT (Chain 0) LTE Band 2/4/5/7/13/17+ 2.4GHz (Chain 0) Wi-Fi 2.4GHz(Chain 0) BT BT (Chain 0)

Note(s):

1. For WWAN mode only Chain 0 can be used as transmitting and Chain 1 only be used as receiving.

8 General LTE SAR Test and Reporting Considerations

KDB 941225 D05 SAR for LTE Devices V02

Item	Description	Information					
1	Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Channel Bandwidth				
			1.4MHz	3MHz	5MHz	10MHz	15MHz
		Low	18607/ 1850.7	18615/ 1851.5	18625/ 1852.5	18650/ 1855	18675/ 1857.5
		Mid	18900/ 11880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
		High	19192/ 1909.2	19184/ 1908.4	19175/ 1907.5	19150/ 1905	19125/ 1902.5
		Band 4	Channel Bandwidth				
			1.4MHz	3MHz	5MHz	10MHz	15MHz
		Low	19957/ 1710.7	19965/ 1711.5	19975/ 1712.5	20000/ 1715	20025/ 1717.5
		Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
		High	20392/ 1754.2	20384/ 1753.4	20375/ 1752.5	20350/ 1750	20325/ 1747.5
		Band 5	Channel Bandwidth				
			1.4MHz	3MHz	5MHz	10MHz	15MHz
		Low	20407/ 824.7	20415/ 825.5	20425/ 826.5	20450/ 829	
		Mid	20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5	
		High	20642/ 848.2	20643/ 847.4	20625/ 846.5	20600/ 844	
		Band 7	Channel Bandwidth				
			1.4MHz	3MHz	5MHz	10MHz	15MHz
		Low			20775/ 2502.5	20800/ 2505.5	20825/ 2507.5
		Mid			21100/ 2535.0	21100/ 2535.0	21100/ 2535.0
		High			21425/ 2567.5	21400/ 2565.0	21375/ 2562.5
		Band 13	Channel Bandwidth				
			1.4MHz	3MHz	5MHz	10MHz	15MHz
		Low			23205/ 779.5		
		Mid			23230/ 782	23230/ 782	
		High			23255/ 784.5		
		Band 17	Channel Bandwidth				
			1.4MHz	3MHz	5MHz	10MHz	15MHz
		Low			23755/ 706.5	23780/ 709	
		Mid			23790/ 710	23790/ 710	
		High			23825/ 713.5	23800/ 711	

KDB 941225 D05 SAR for LTE Devices V02 (Continued)

Item	Description	Information																																						
2	Descriptions of the LTE transmitter and antenna implementation;	A single antenna is used for LTE and other wireless modes (GPRS/EGPRS/UMTS) for both Transmit and Receive. A Secondary antenna is used for LTE and other wireless modes (GPRS/EGPRS/UMTS) for Receive Only.																																						
3	Maximum power reduction (MPR)	As per 3GPP 36.101 v9.11.0 (2012-03), Release 9 Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3 <table><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr></table> MPR is permanently built-in by design A-MPR was disabled	Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)																																	
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																		
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																	
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																	
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																	
4	Power Reduction	Yes																																						
5	Spectrum plots for RB configurations	Refer to Section 10.6																																						

9 Power Reduction by Proximity Sensing

A proximity sensor for power reduction is implemented in this device to address RF exposure compliance when the cellular antenna is positioned close to the user's body. The sensor's mechanical structure is designed to fit within the enclosure design used in this device and also extended around the edge and top of the antenna element in order to optimize sensitivity in these orientations. This design combines the antenna printed directly on a plastic part and proximity sensor FPC (Flexible Printed Circuit) bonded together into one piece. According to KDB 616217 D04 SAR for laptop and tablets v01r02)

9.1 Procedures for determining proximity sensor triggering distances

The following procedures should be applied to determine proximity sensor triggering distances for the back surface and individual edges of a tablet. Conducted power is monitored qualitatively to identify the general triggering characteristics and recorded quantitatively, versus spacing, as required by the procedures. Unless there is built-in test software that reports the triggering conditions and enables the power levels to be confirmed separately, monitoring of conducted power during the triggering tests typically requires internal access to the antenna ports inside the tablet, which may interfere with the triggering tests.

- (1) The relevant transmitter should be set to operate at its normal maximum output power.
- (2) The entire back surface or edge of the tablet is positioned below a flat phantom filled with the required tissue-equivalent medium, and positioned at least 20 mm further than the distance that triggers power reduction.
- (3) It should be ensured that the cables required for power measurements are not interfering with the proximity sensor. Cable losses should be properly compensated to report the measured power results.
- (4) The back surface or edge is moved toward the phantom in 3 mm steps until the sensor triggers.
- (5) The back surface or edge is then moved back (further away) from the phantom by at least 5 mm or until maximum output power is returned to the normal maximum level.
- (6) The back surface or edge is again moved toward the phantom, but in 1 mm steps, until it is at least 5 mm past the triggering point or touching the phantom. If 1 mm resolution is not suitable for the sensor triggering sensitivity, a KDB inquiry should be submitted to determine alternative test configurations.
- (7) If the tablet is not touching the phantom, it is moved in 3 mm steps until it touches the phantom to confirm that the sensor remains triggered and the maximum power stays reduced.
- (8) The process is then reversed by moving the tablet away from the phantom according to steps 4) to 7), to determine triggering release, until it is at least 10 mm beyond the point that triggers the return of normal maximum power.
- (9) The measured output power within ± 5 mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom should be tabulated in the SAR report.
- (10) If the sensor design and implementation allow additional variations for triggering distance tolerances, multiple samples should be tested to determine the most conservative distance required for SAR evaluation.
- (11) To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.

9.2 Procedures for determining antenna and proximity sensor coverage

The sensing regions are usually limited to areas near the sensor element. If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. The following are used to determine if additional SAR measurements may be necessary due to sensor and antenna offset. 25 These procedures do not apply and are not required for configurations where the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

- (1) The back surface or edge of the tablet is positioned at a test separation distance less than or equal to the distance required for back surface or edge triggering, with both the antenna and sensor pad located at least 20 mm laterally outside the edge (boundary) of the phantom, along the direction of maximum antenna and sensor offset. For the back surface, if the direction of maximum offset is not aligned with the tablet coordinates (physical edges) the tablet test position would not be aligned with the phantom coordinates (orientations). Each applicable tablet edge should be positioned perpendicularly to the phantom to determine sensor coverage. For antennas and/or sensors located near the corner of a tablet, both adjacent edges must be considered.
- (2) The similar sequence of steps applied to determine sensor triggering distance in section 6.2 are used to verify back surface and edge sensor coverage by moving the tablet (sensor and antenna) horizontally toward the phantom while maintaining the same vertical separation between the back surface or edge and the phantom.
- (3) After the exact location where triggering of power reduction is determined, with respect to the sensor and antenna, the tablet movement should be continued, in 3 mm increments, until both the sensor and antenna(s) are fully under the phantom and at least 20 mm inside the phantom edge.
- (4) The process is then repeated from the opposite direction, starting at the other end of the maximum antenna and sensor offset, by rotating the tablet 180° along the vertical axis.
- (5) The triggering points should be documented graphically, with the antenna and sensor clearly identified, along with all relevant dimensions.
- (6) If the subsequently measured peak SAR location for the antenna is not between the triggering points, established by the sensor coverage tests from opposite ends of the antenna and sensor, additional SAR tests may be required for conditions where only part of the back surface or edge of a tablet corresponding to the antenna is in proximity to the user and the sensor may not be triggering as desired. A KDB inquiry must be submitted by the test lab to determine if additional tests are required and the proper test configurations to use for testing. This may include situations where the sensor coverage region is too small for the antenna, the sensor is located too far away from the antenna, the sensor location is insufficient to cover multiple antennas or the antenna is at the corner of a tablet etc.

9.3 Proximity Sensor Status Table of trigger distance

As per the KDB 616217 D04 SAR for laptop and tablets v01r02, section 6.2, the following procedure is used to determine the triggering distances.

Proximity Sensor Status Table when DUT is moving towards the phantom

Distance to the DUT (mm)	Proximity Sensor Status – Rear Surface	Proximity Sensor Status – Top-Edge
30	OFF	OFF
27	OFF	OFF
25	OFF	OFF
24	OFF	OFF
23	OFF	OFF
22	OFF	OFF
21	OFF	OFF
20	OFF	OFF
19	OFF	OFF
18	OFF	OFF
17	OFF	OFF
16	OFF	OFF
15	OFF	OFF
14	OFF	OFF
13	OFF	OFF
12	OFF	OFF
11	OFF	OFF
10	ON	ON
9	ON	ON
8	ON	ON
7	ON	ON
6	ON	ON
5	ON	ON
4	ON	ON
3	ON	ON
2	ON	ON
1	ON	ON
0	ON	ON


Rear Power Back-off

Edge Power Back-off

Body Phantom


Proximity Sensor Status Table when DUT is moving away from the phantom

Distance to the DUT (mm)	Proximity Sensor Status – Rear Surface	Proximity Sensor Status – Top-Edge
0	ON	ON
1	ON	ON
2	ON	ON
3	ON	ON
4	ON	ON
5	ON	ON
6	ON	ON
7	ON	ON
8	ON	ON
9	ON	ON
10	ON	ON
11	OFF	OFF
12	OFF	OFF
13	OFF	OFF
14	OFF	OFF
15	OFF	OFF
16	OFF	OFF
17	OFF	OFF
18	OFF	OFF
19	OFF	OFF
20	OFF	OFF
21	OFF	OFF
22	OFF	OFF
23	OFF	OFF
24	OFF	OFF
25	OFF	OFF
27	OFF	OFF
30	OFF	OFF

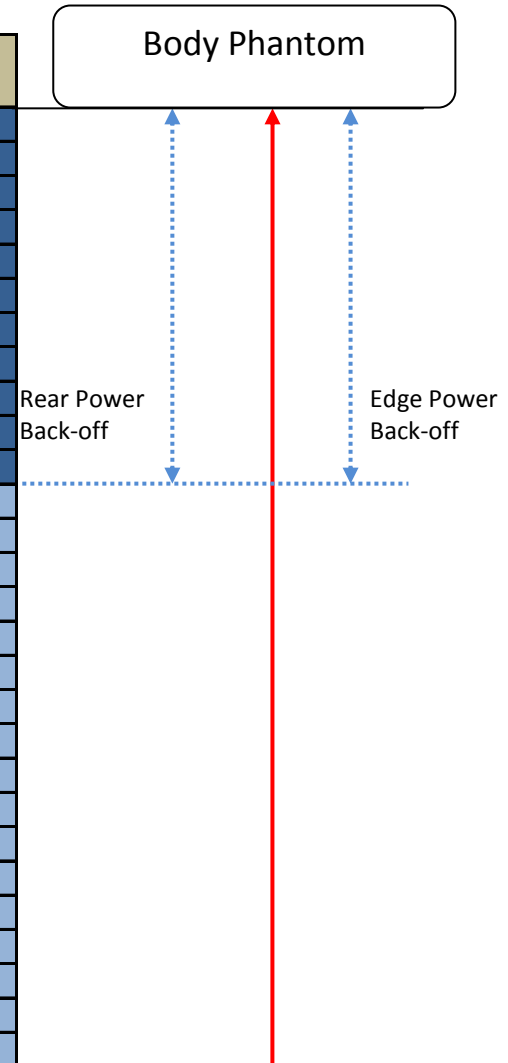

9.4 Tilt angle influences to proximity sensor triggering

As per the KDB 616217 D04 SAR for laptop and tablets v01r02, section 6.4, the following procedure is used to determine the tilt angle influences to proximity sensor triggering.

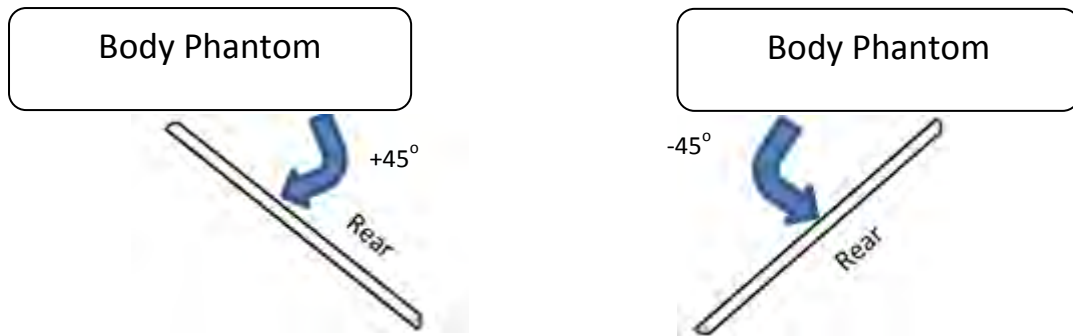


Distance to the DUT (mm)	Proximity Sensor Status 0° to +45°	Proximity Sensor Status 0° to -45°
10	ON	ON
9	ON	ON
8	ON	ON
7	ON	ON
6	ON	ON
5	ON	ON
4	ON	ON
3	ON	ON
2	ON	ON
1	ON	ON
0	ON	ON


9.5 Power Reduction per Air-interface

The following graphs show the power level and the distance from the DUT to the flat phantom for the Top-Edge and Rear Surface.


GPRS 850

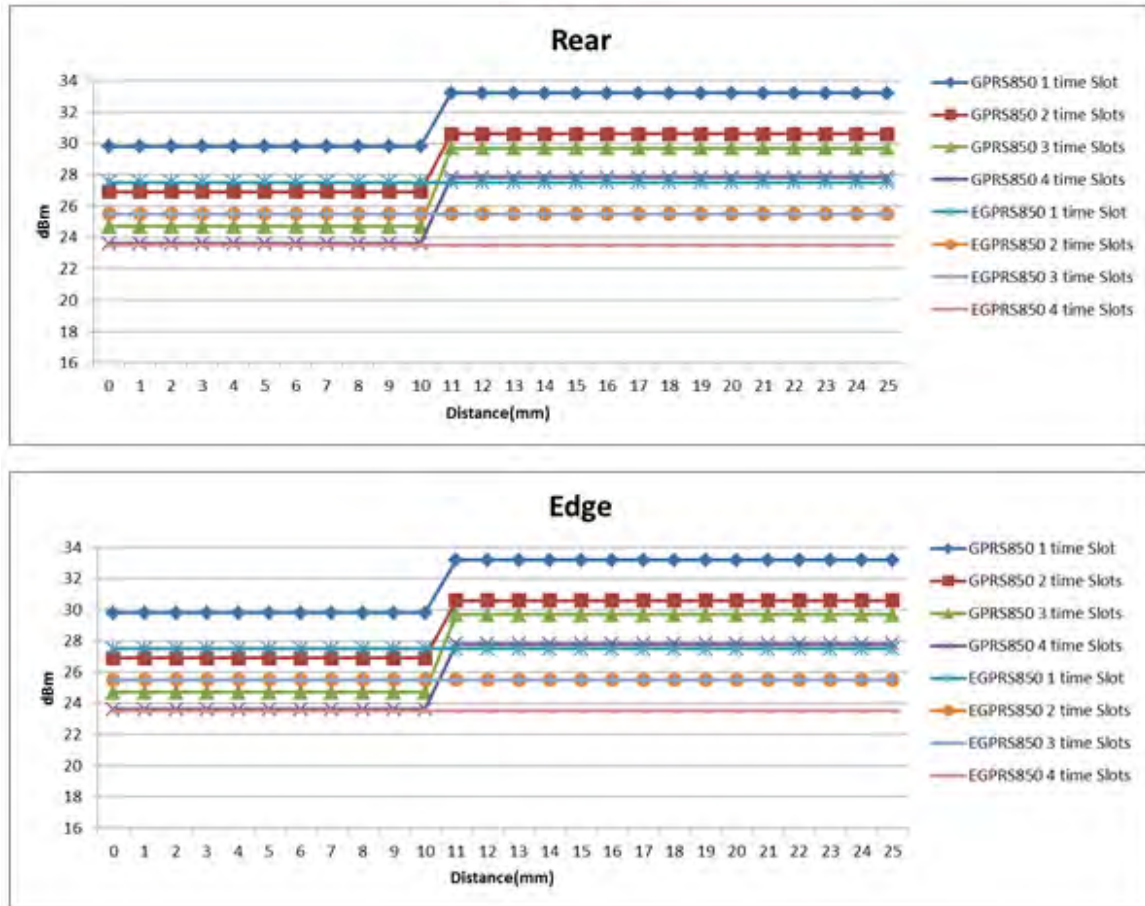


GPRS 1900

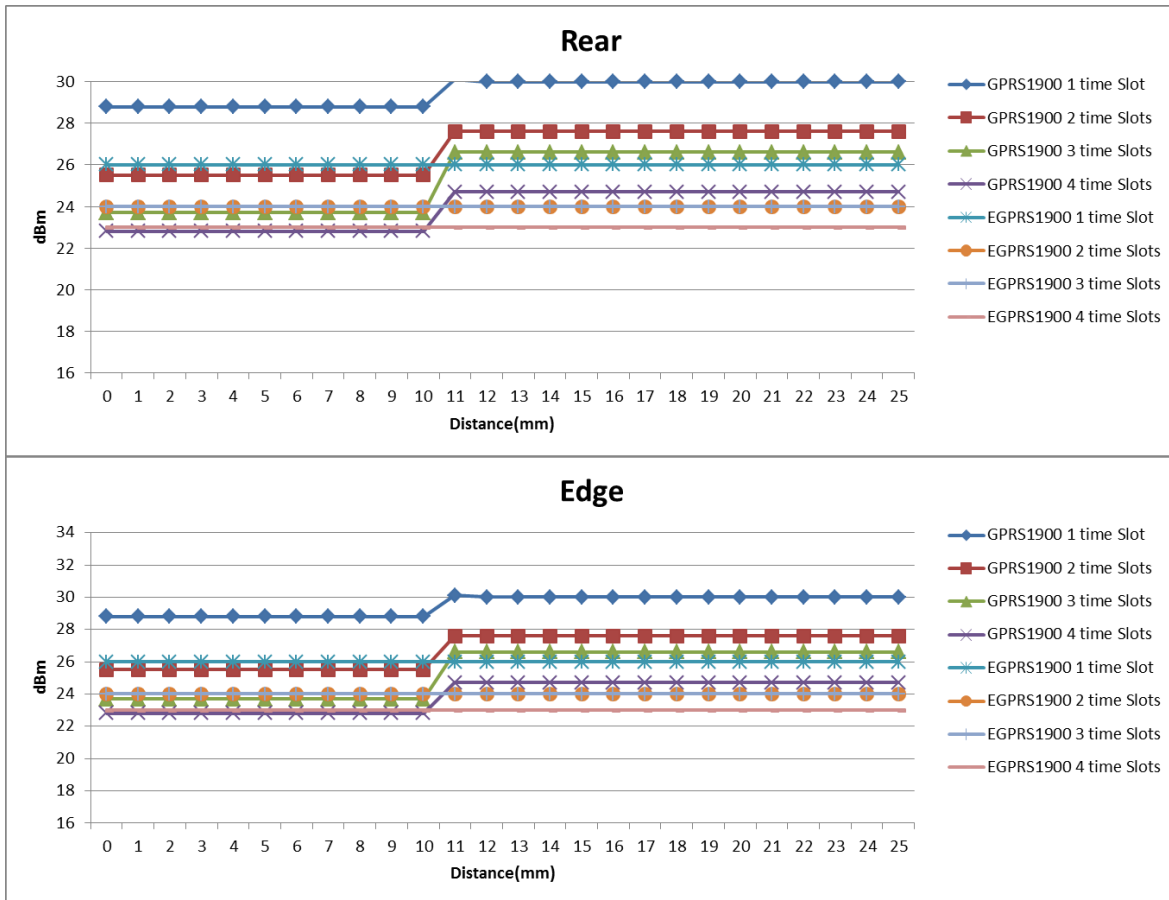


WCDMA Band II

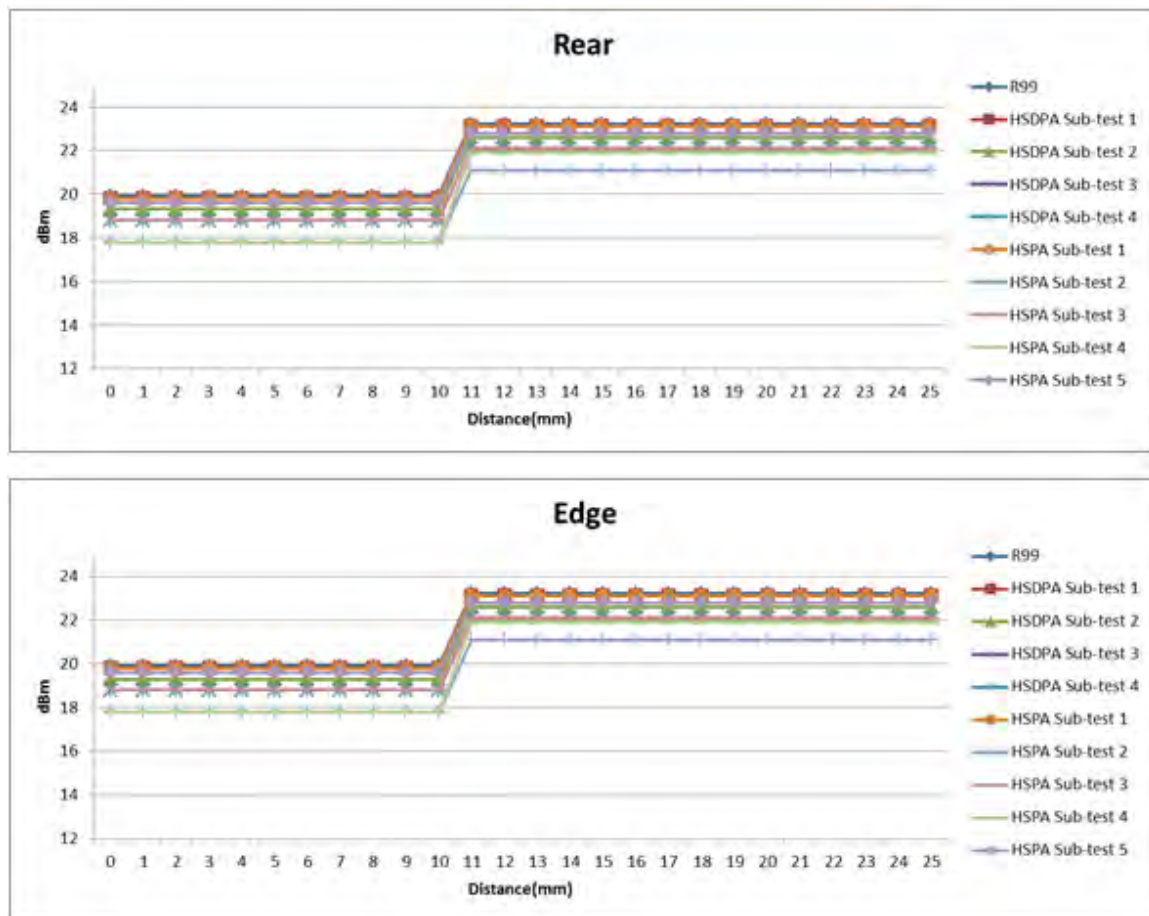


WCDMA Band IV




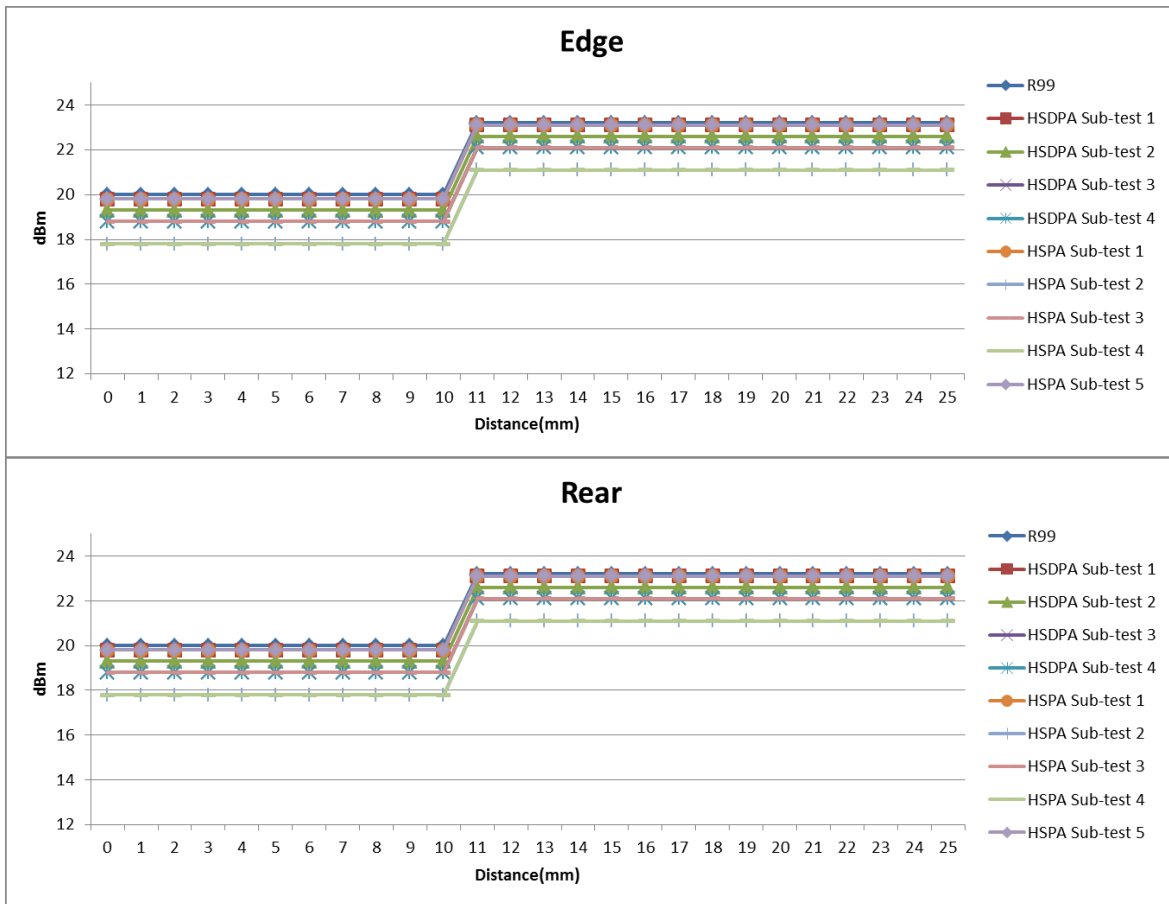



WCDMA Band V

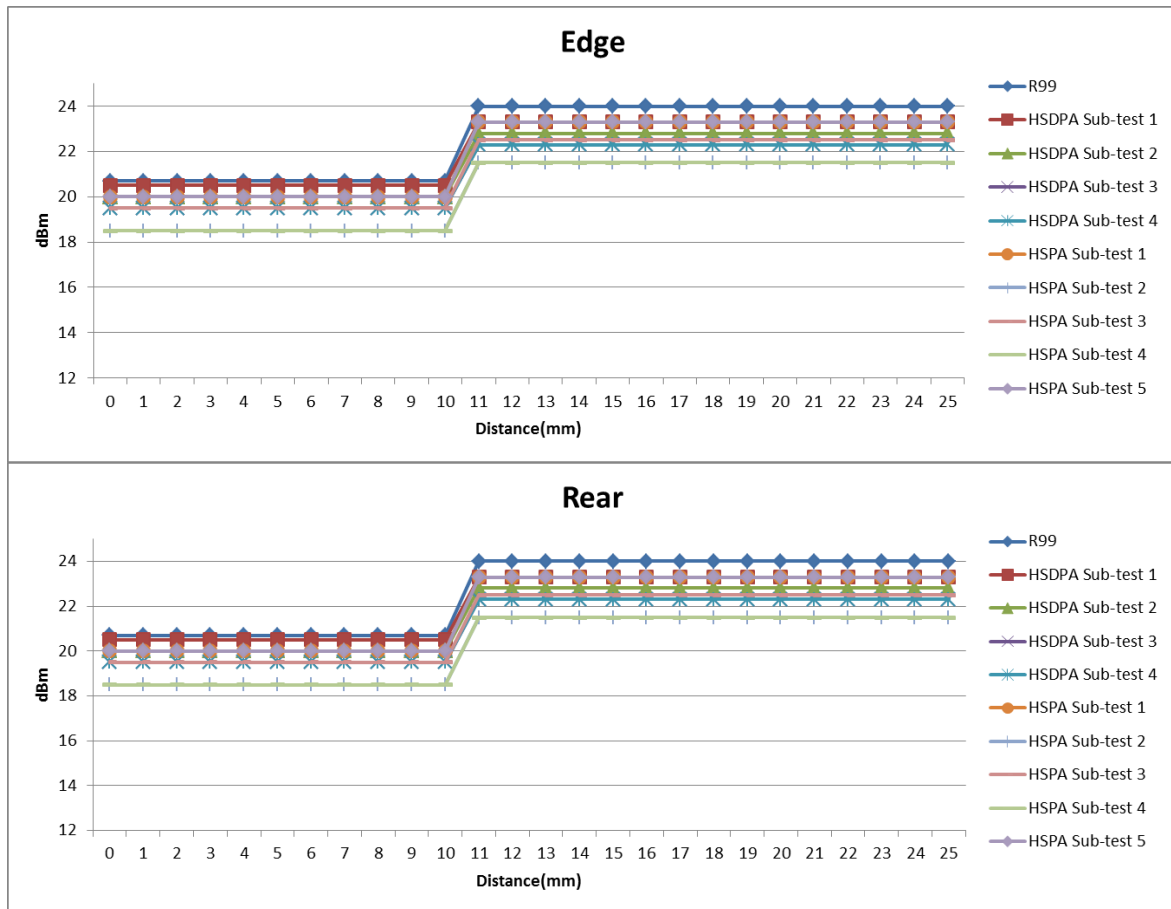


LTE Band 2

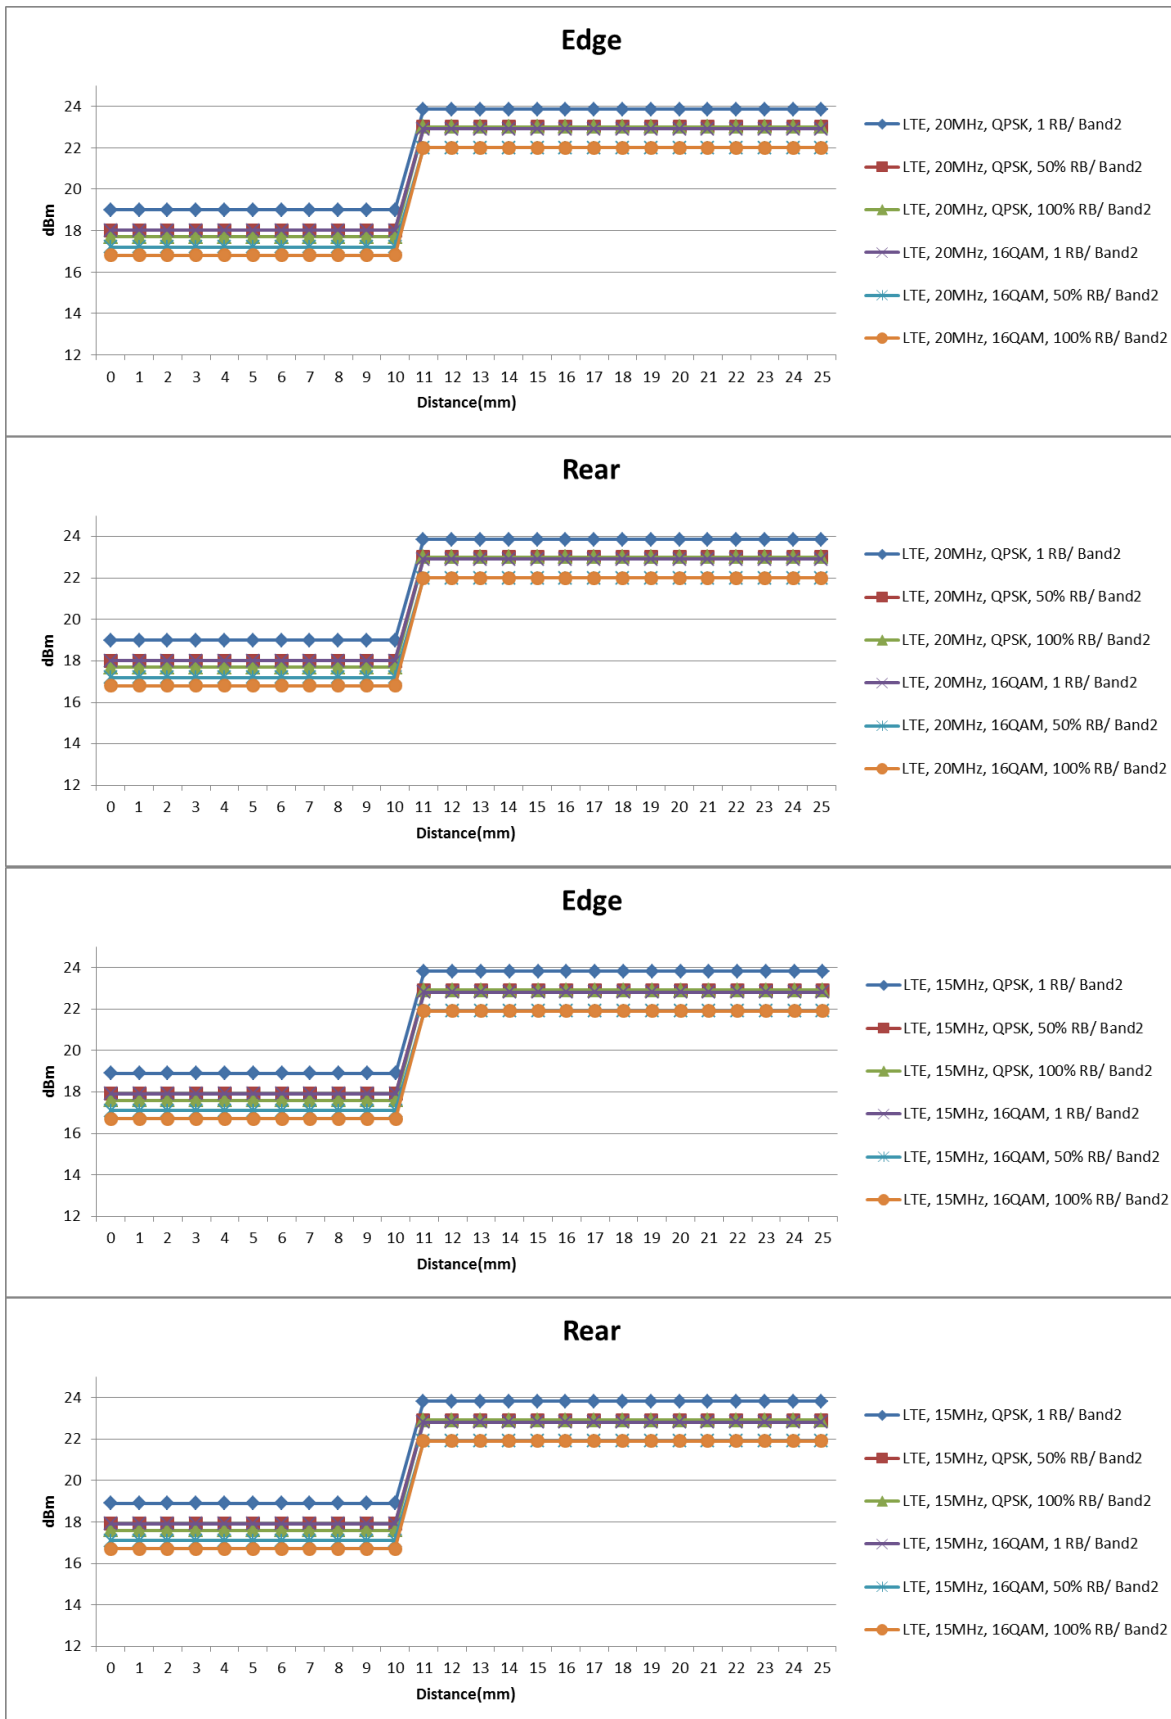


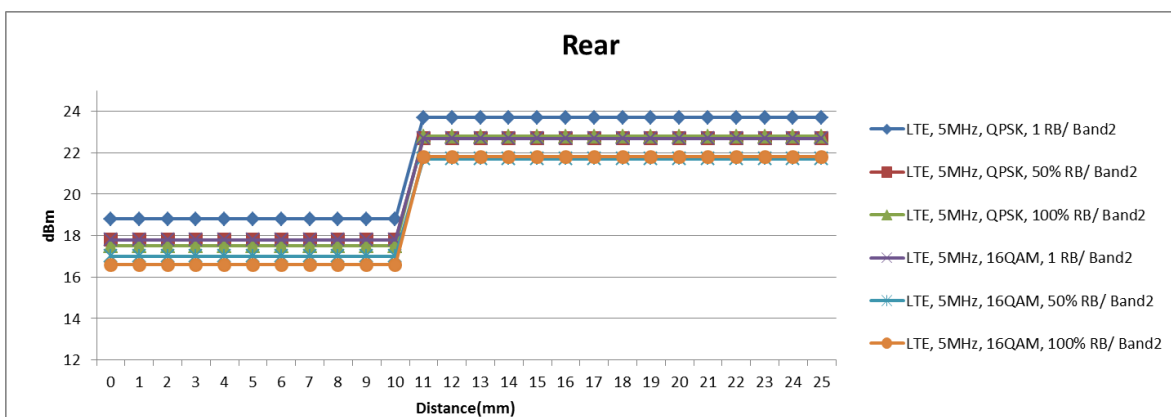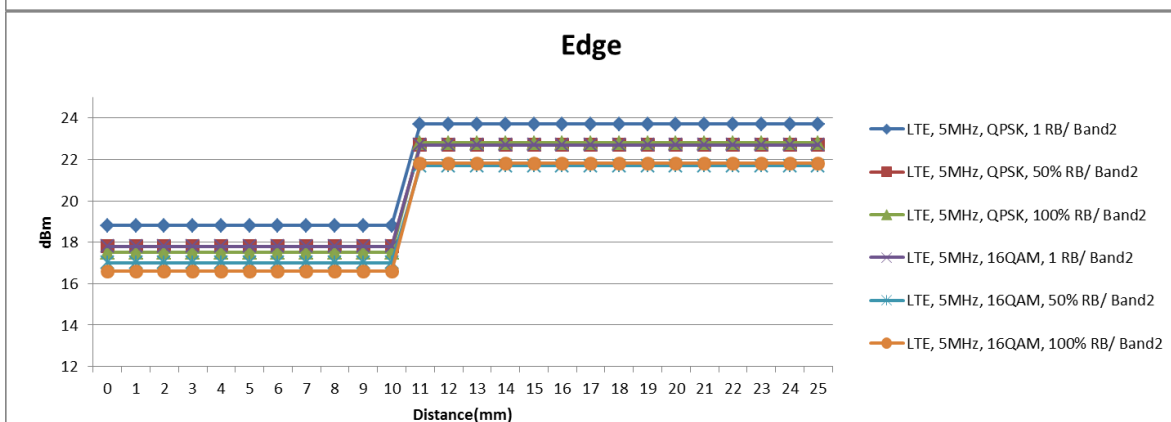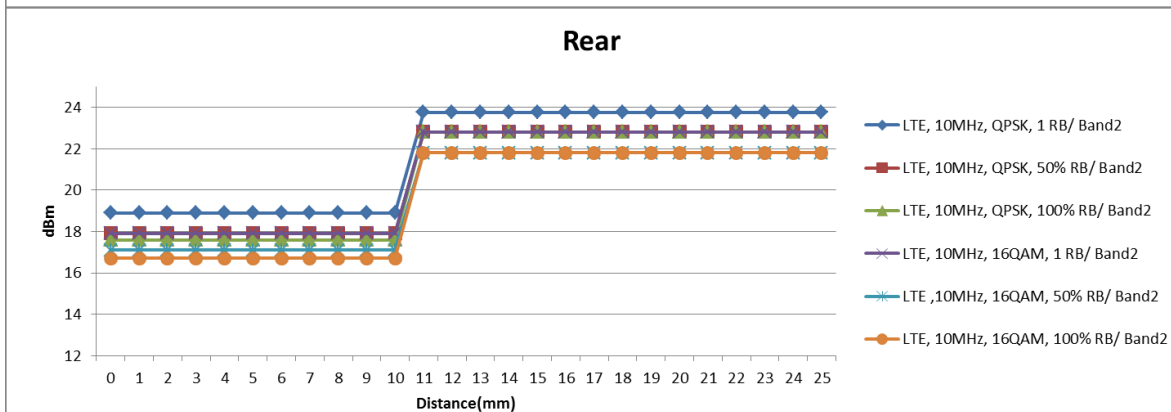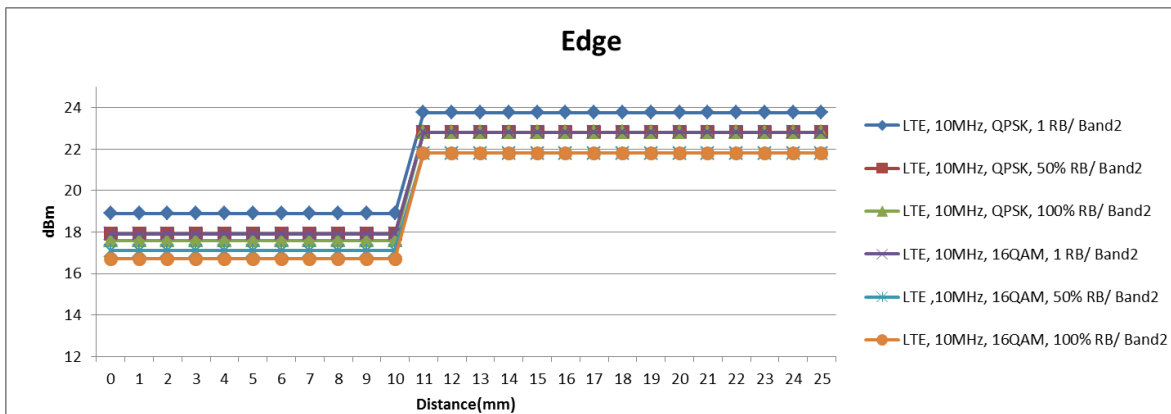


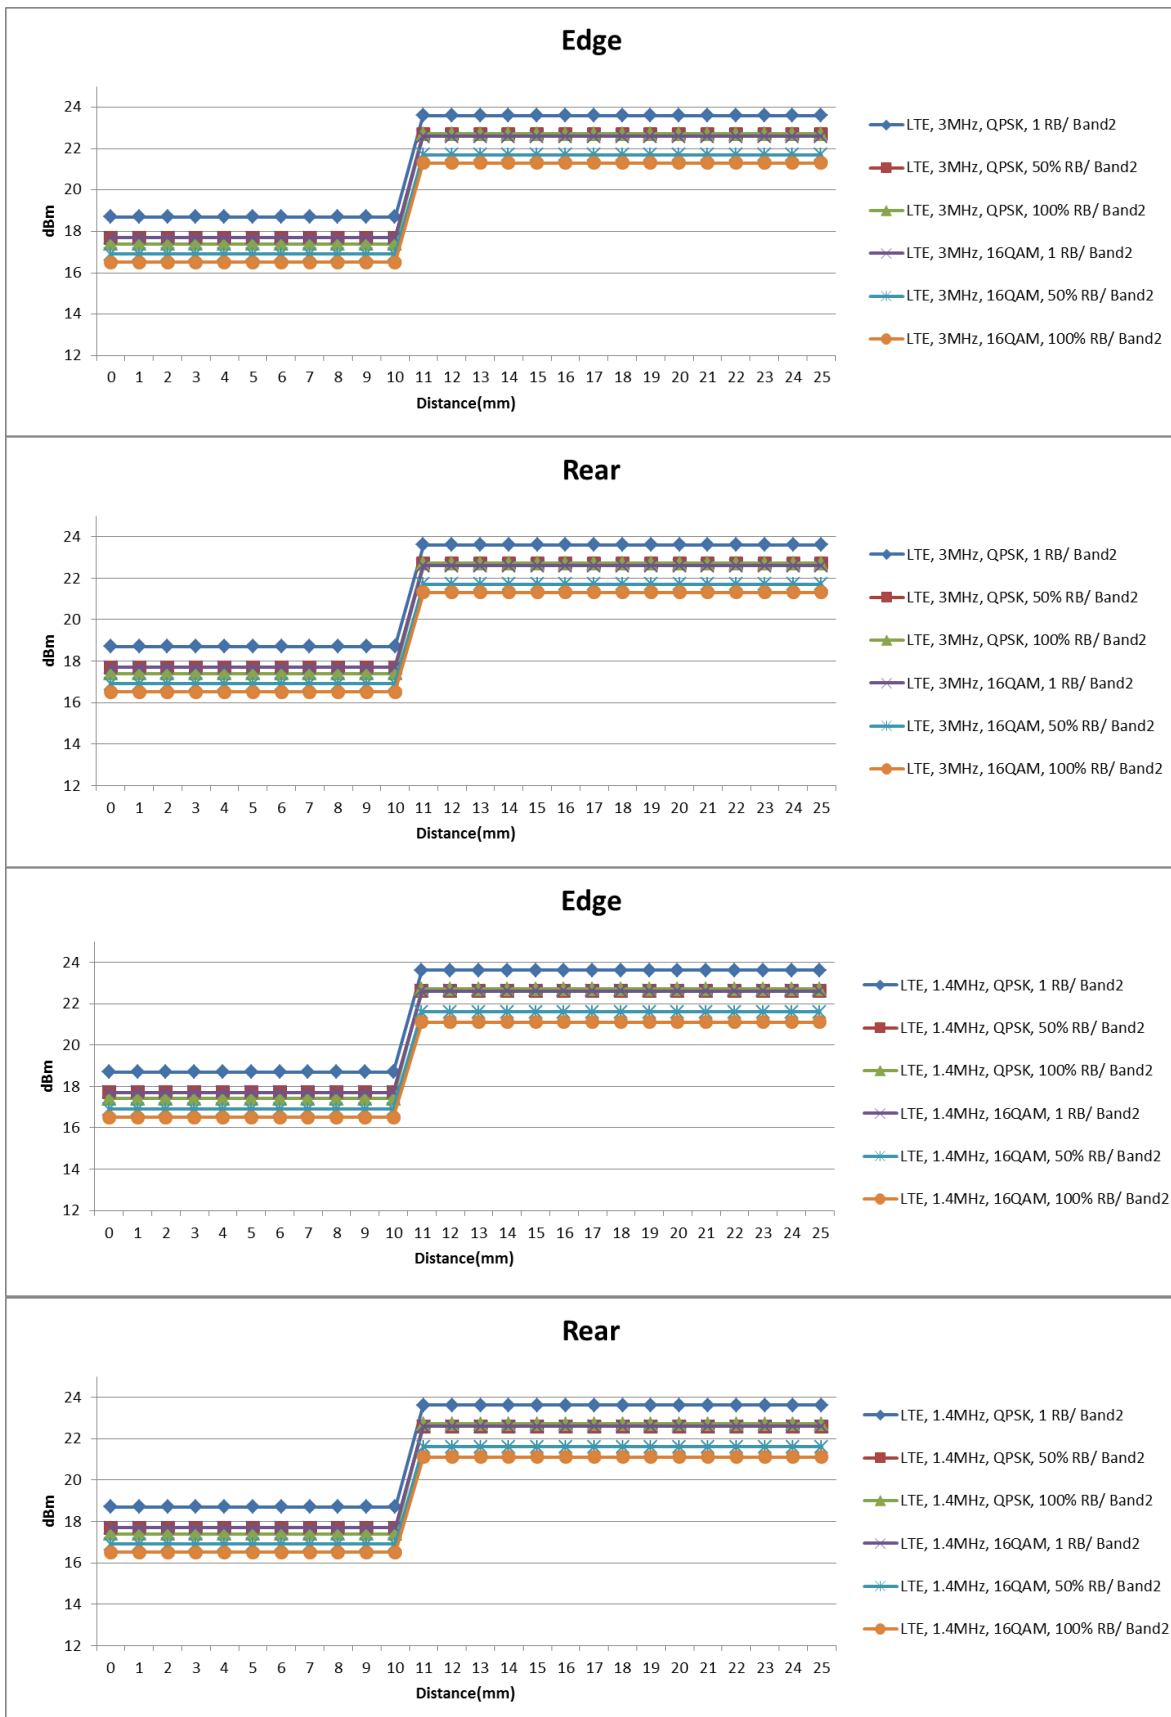


LTE Band 4

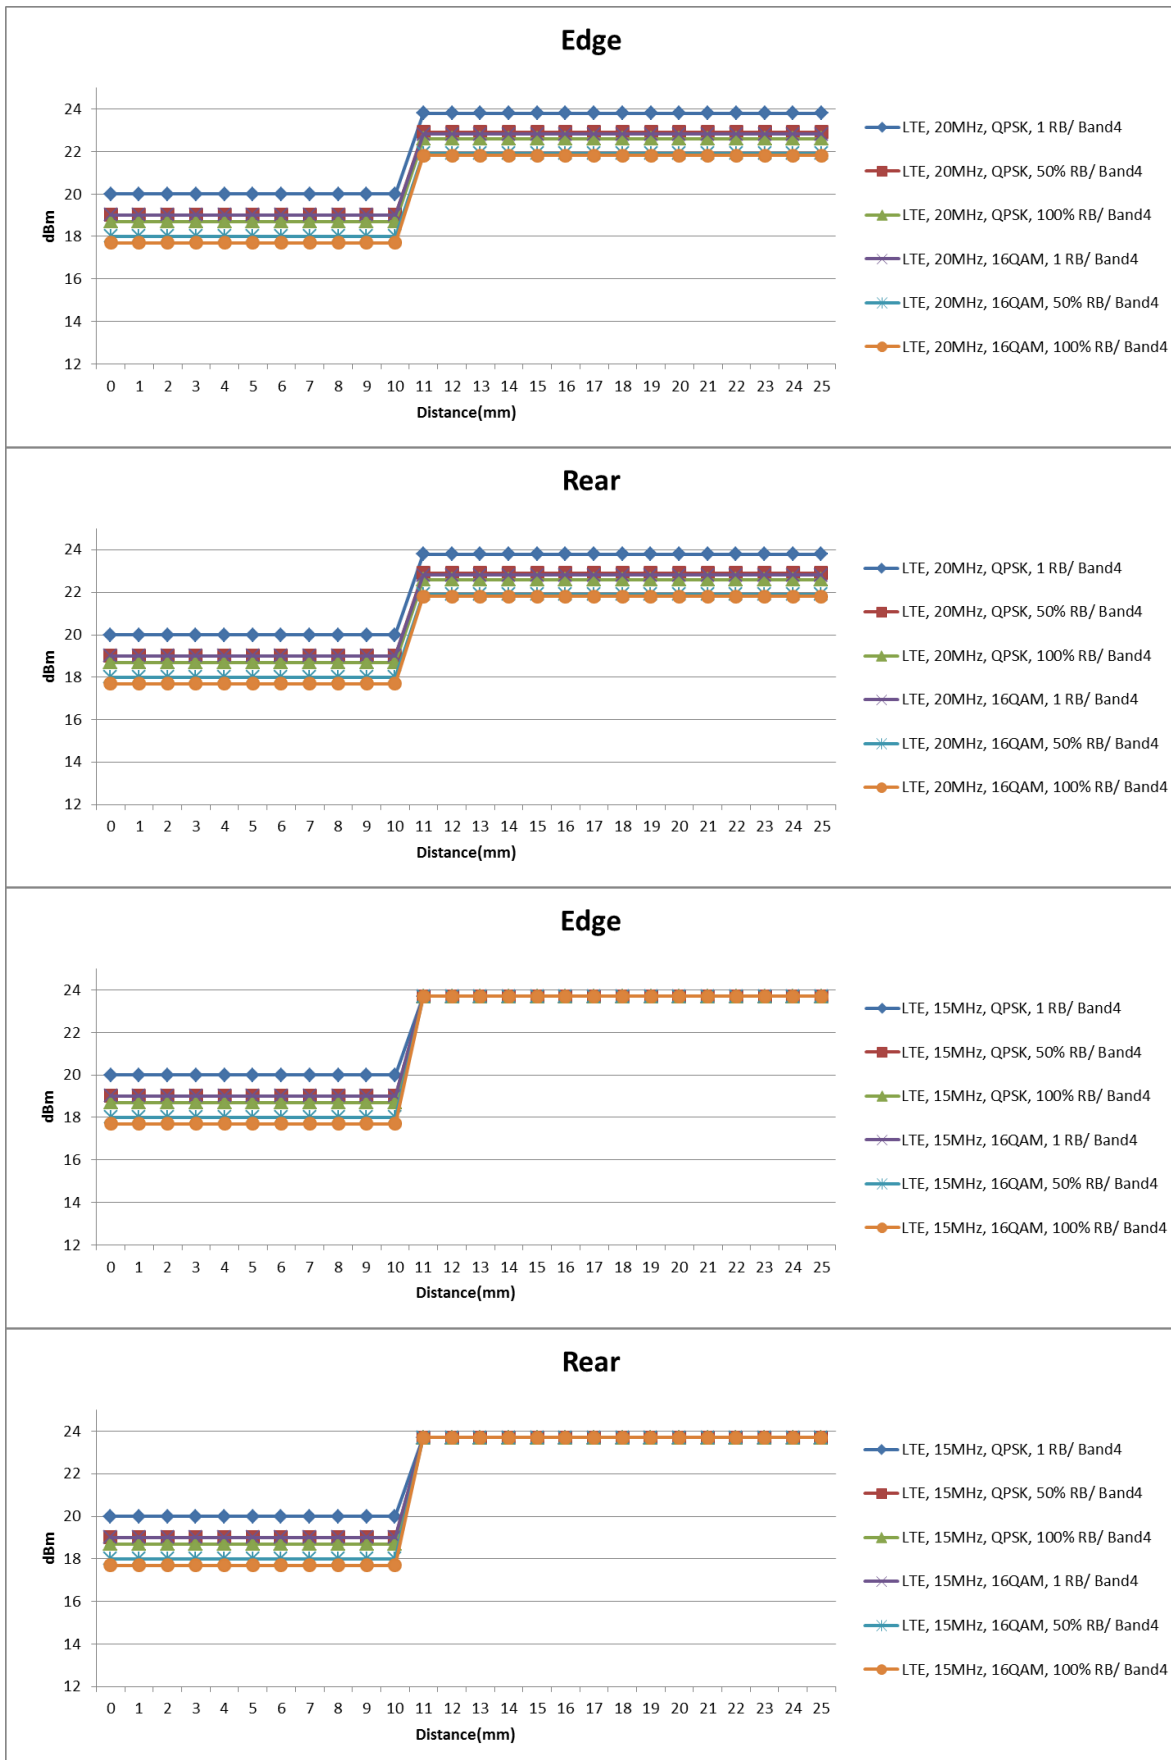


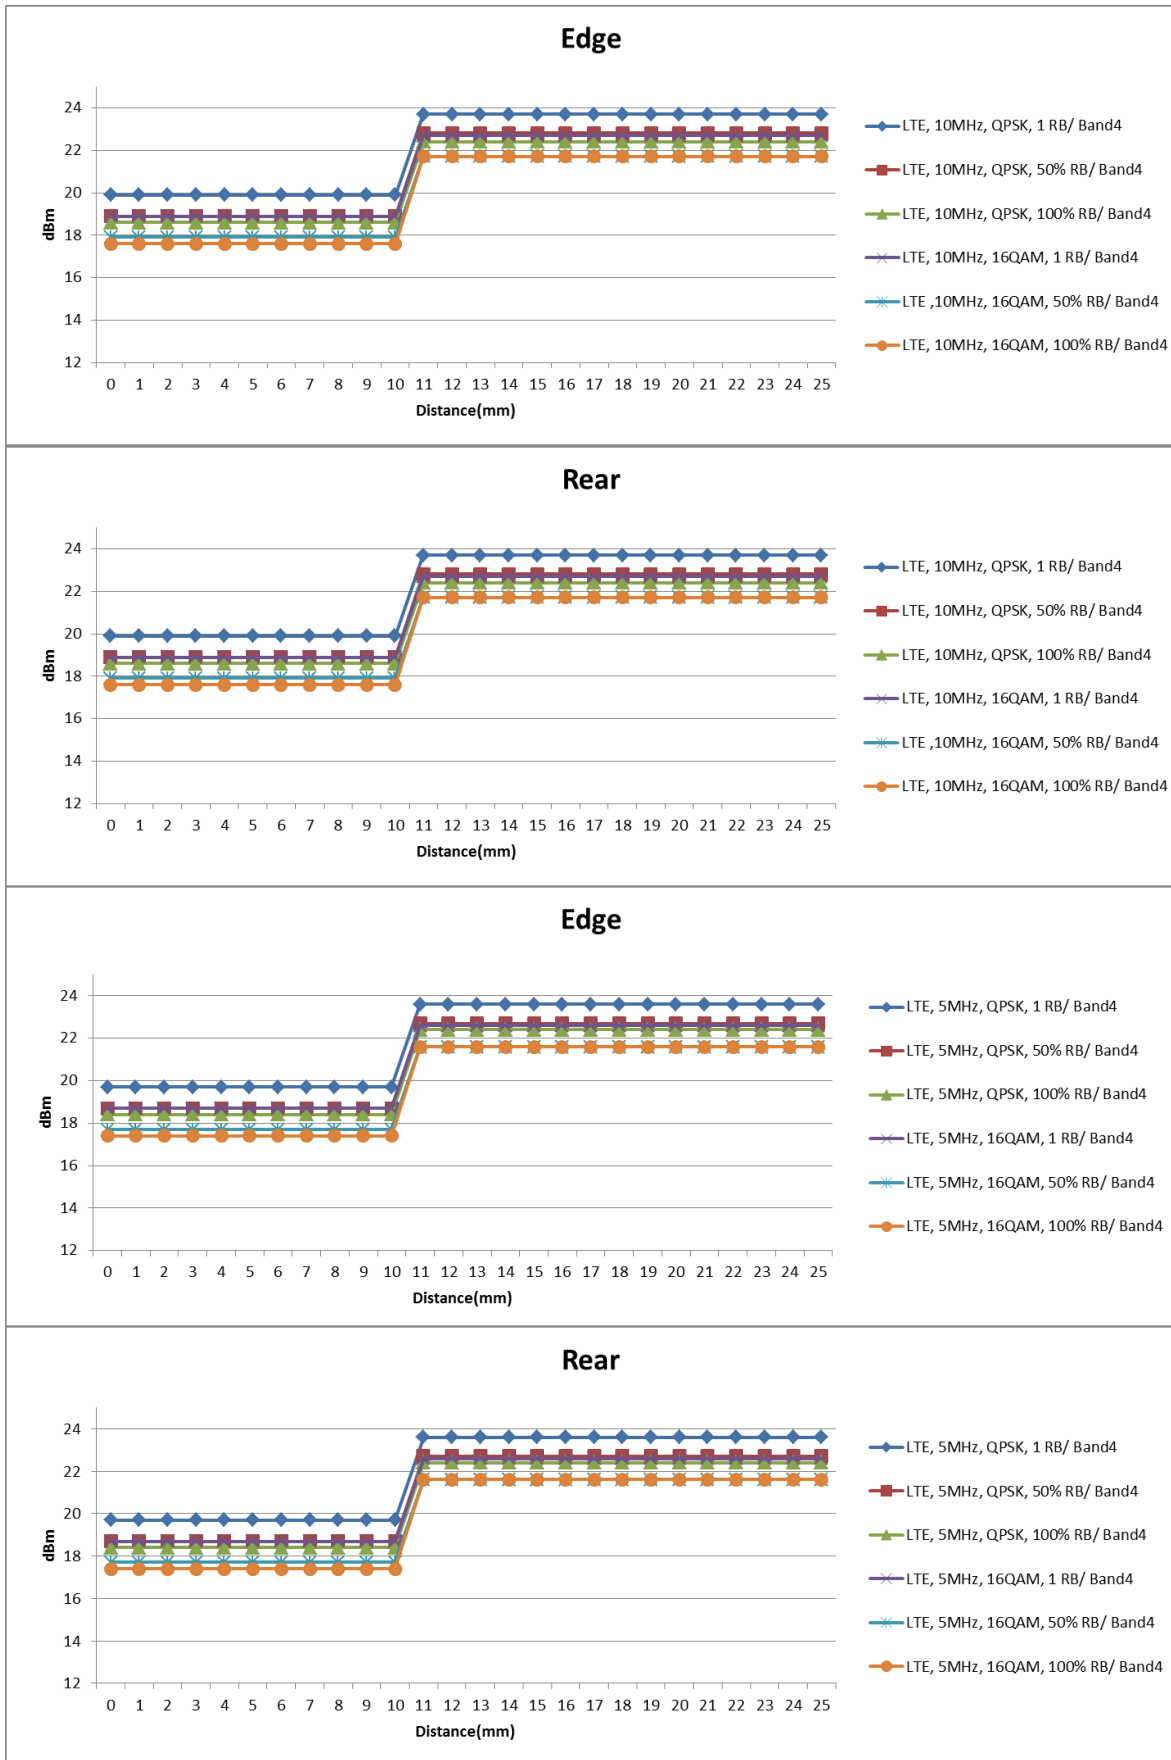

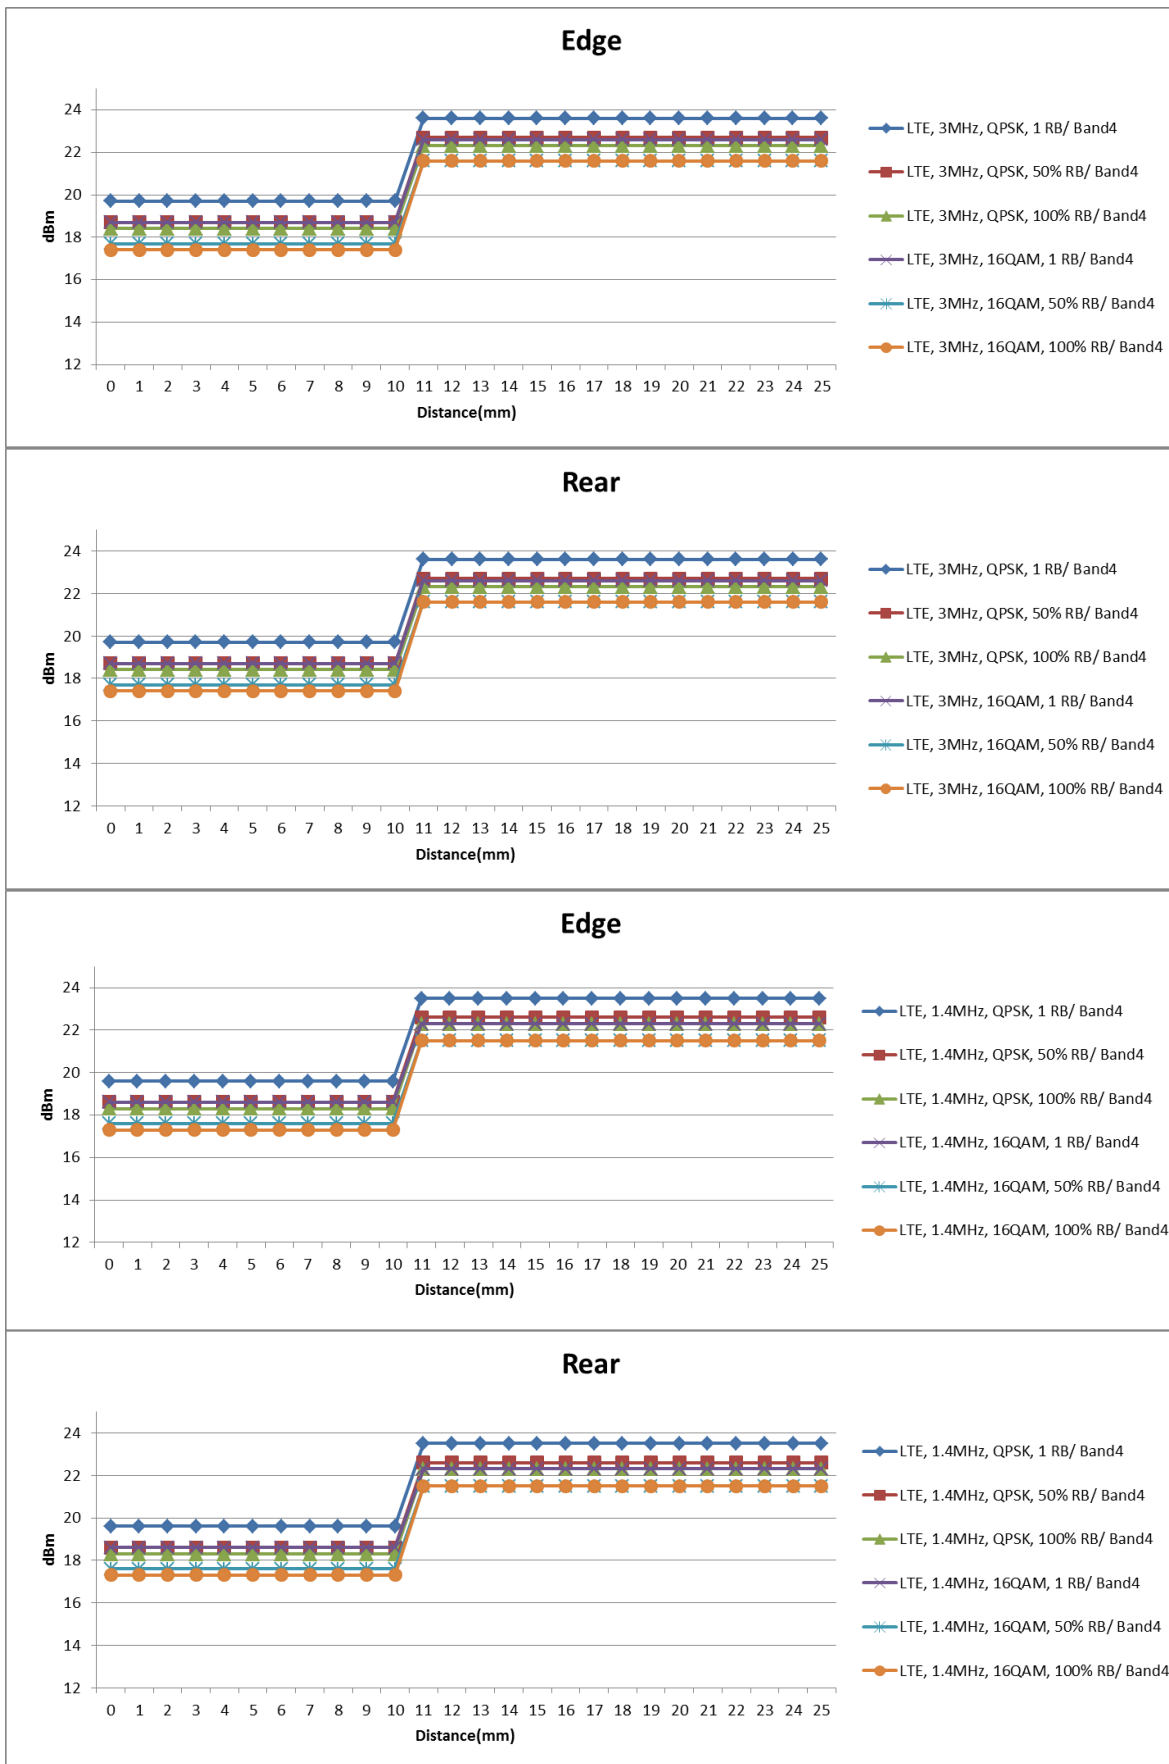

LTE Band 7

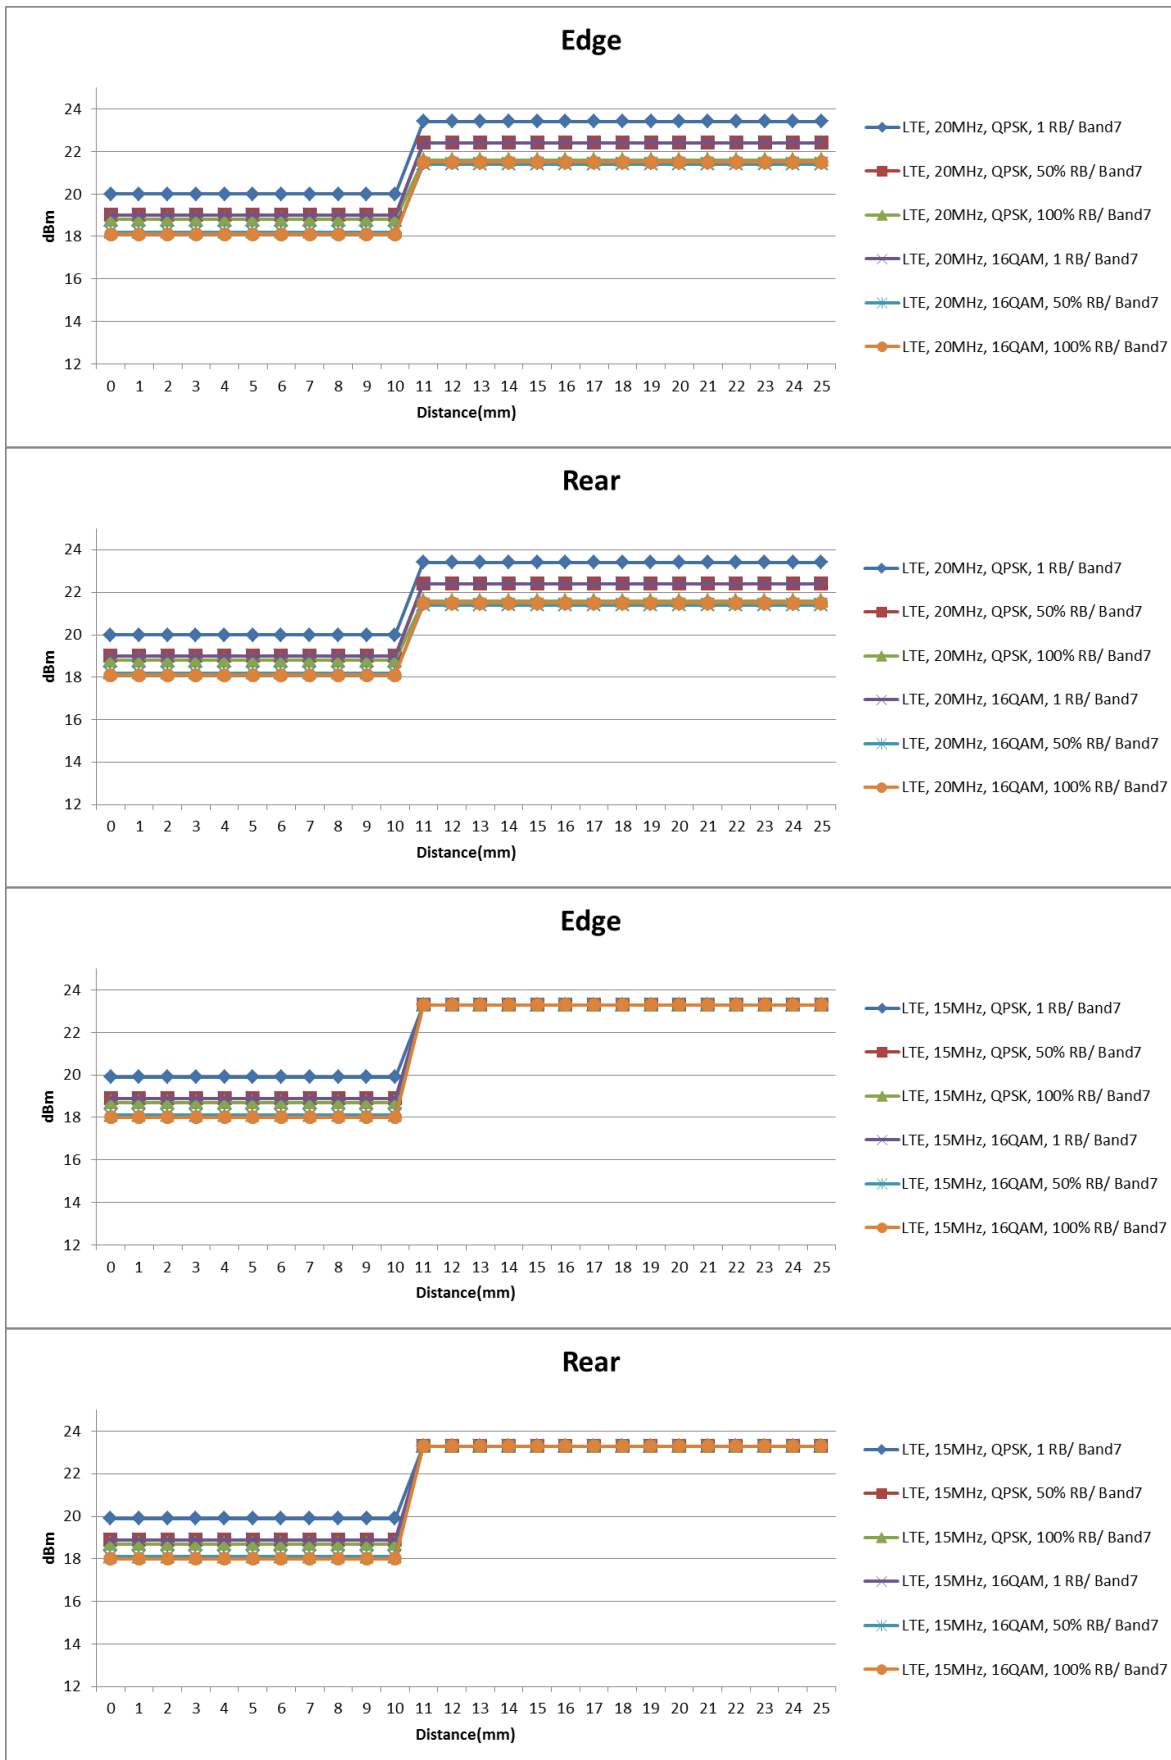

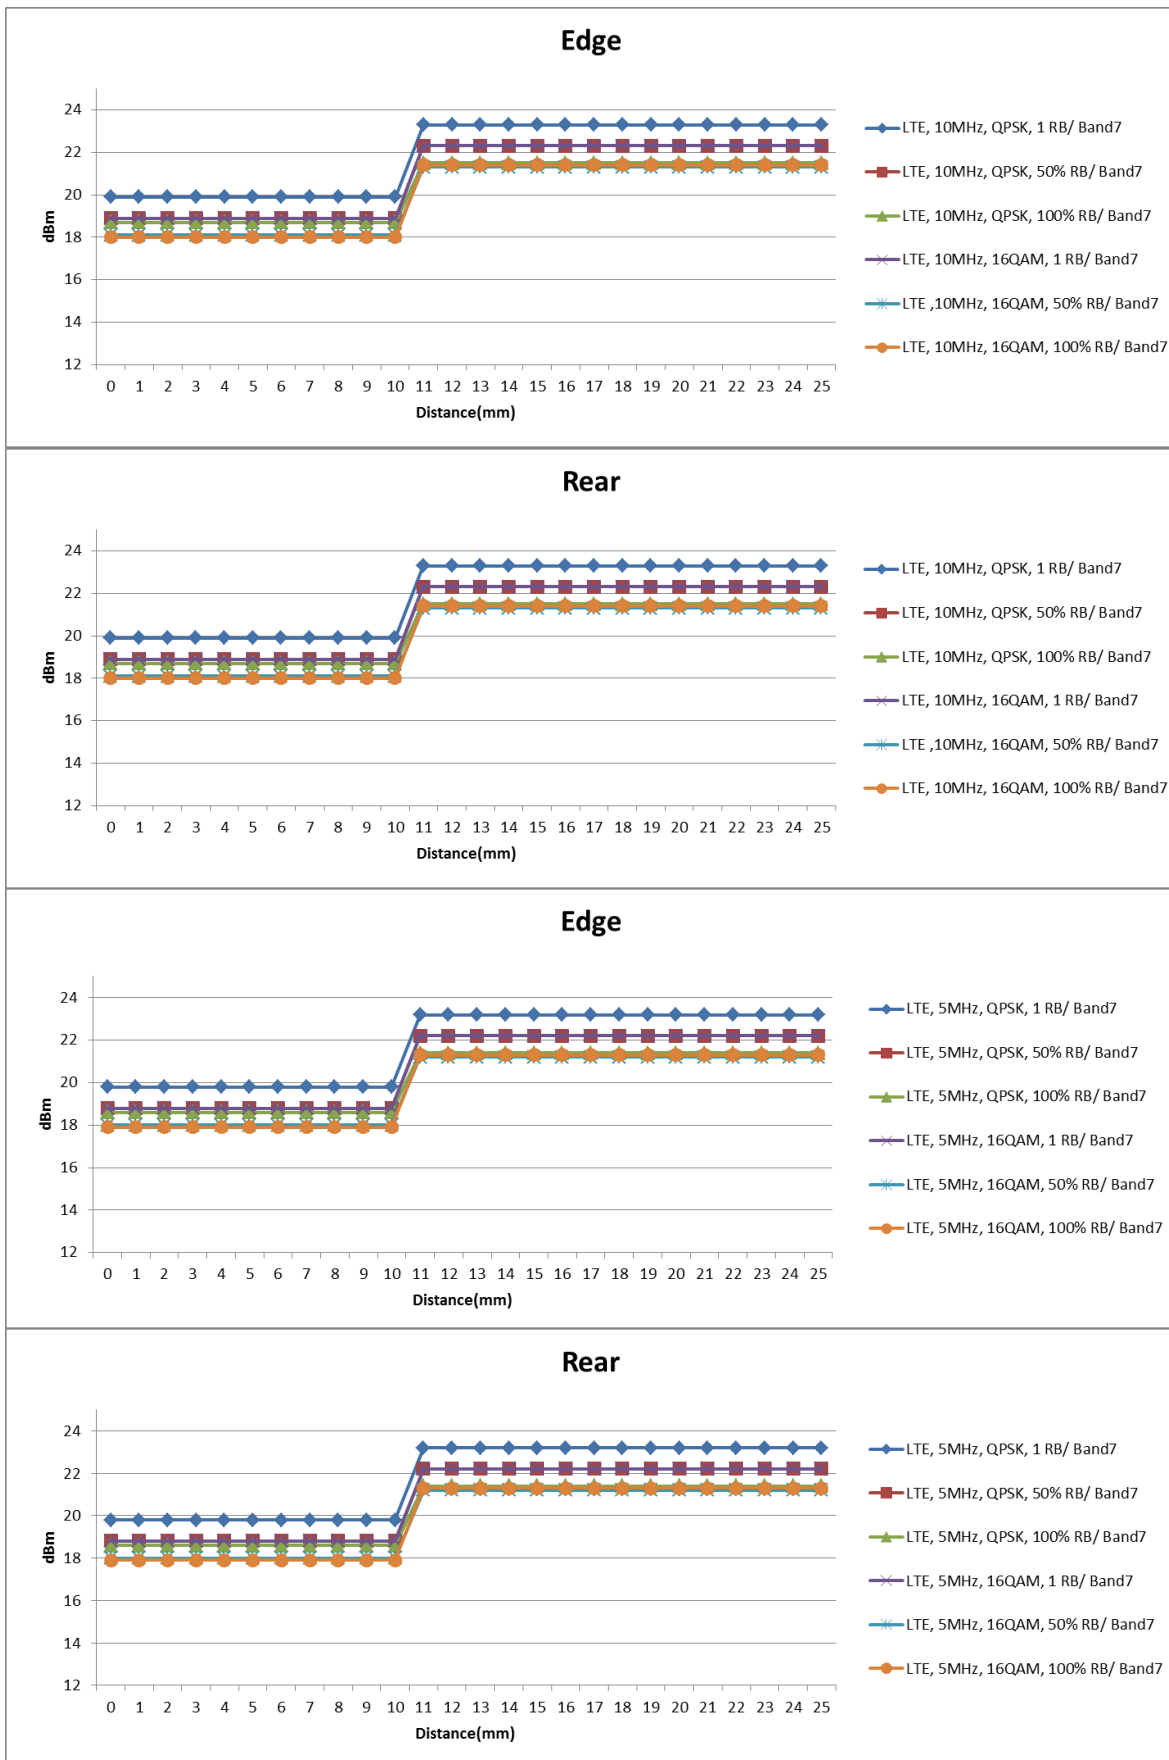

9.6 Proximity Sensor Coverage Area

According to KDB 616217 D04, Proximity Sensor Coverage Area of not request when the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

10 RF Output Power Measurement

10.1 GPRS 850

GMSK (GPRS) Mode Coding scheme : CS-1

Band	Slot	Channel No.	Frequency (MHz)	Average power(dBm)		Frame Avg Pwr	
				W/o Power back-off	W/ Power back-off	W/o Power back-off	W/ Power back-off
GPRS 850	1	128	824.2	33.2	29.8	24.2	20.8
		190	836.6	32.7	29.5	23.7	20.5
		251	848.8	32.8	29.6	23.8	20.6
GPRS 850	2	128	824.2	30.6	26.9	24.6	20.9
		190	836.6	30.1	26.6	24.1	20.6
		251	848.8	30.3	26.6	24.3	20.6
GPRS 850	3	128	824.2	29.7	24.7	25.4	21.0
		190	836.6	29.3	24.3	25.0	20.3
		251	848.8	29.4	24.4	25.1	20.7
GPRS 850	4	128	824.2	27.8	23.6	24.8	20.6
		190	836.6	27.5	23.6	24.5	20.6
		251	848.8	27.6	23.2	24.6	20.2

10.2 EDGE 850

8PSK (EDGE) Mode Coding scheme : MCS-5

Band	Slot	Channel No.	Frequency (MHz)	Average power(dBm)		Frame Avg Pwr	
				W/o Power back-off	W/ Power back-off	W/o Power back-off	W/ Power back-off
EDGE 850	1	128	824.2	27.5	27.5	18.5	18.5
		190	836.6	27.5	27.5	18.5	18.5
		251	848.8	27.5	27.5	18.5	18.5
EDGE 850	2	128	824.2	25.5	25.5	19.5	19.5
		190	836.6	25.5	25.5	19.5	19.5
		251	848.8	25.5	25.5	19.5	19.5
EDGE 850	3	128	824.2	25.5	24.5	21.2	20.8
		190	836.6	25.5	24.5	21.2	20.5
		251	848.8	25.5	24.5	21.2	20.8
EDGE 850	4	128	824.2	23.5	23.5	20.5	20.5
		190	836.6	23.5	23.5	20.5	20.5
		251	848.8	23.5	23.5	20.5	20.5

10.3 GPRS 1900

GMSK (GPRS) Mode Coding scheme : CS-1

Band	Slot	Channel No.	Frequency (MHz)	Average power(dBm)		Frame Avg Pwr	
				W/o Power back-off	W/ Power back-off	W/o Power back-off	W/ Power back-off
GPRS 1900	1	512	1850.2	30.1	28.5	21.1	19.5
		661	1880.0	30.1	28.8	21.1	19.8
		810	1909.8	30.0	28.7	21.0	19.7
GPRS 1900	2	512	1850.2	27.5	25.4	21.5	19.4
		661	1880.0	27.6	25.5	21.6	19.5
		810	1909.8	27.4	25.4	21.4	19.4
GPRS 1900	3	512	1850.2	26.6	23.3	22.3	19.6
		661	1880.0	26.6	23.7	22.3	20.0
		810	1909.8	26.4	23.6	22.1	19.9
GPRS 1900	4	512	1850.2	24.7	22.6	21.7	19.6
		661	1880.0	24.7	22.8	21.7	19.8
		810	1909.8	24.5	22.5	21.5	19.5

10.4 EDGE 1900

8PSK (EDGE) Mode Coding scheme : MCS-5

Band	Slot	Channel No.	Frequency (MHz)	Average power(dBm)		Frame Avg Pwr	
				W/o Power back-off	W/ Power back-off	W/o Power back-off	W/ Power back-off
EDGE 1900	1	512	1850.2	26.0	26.0	17.0	17.0
		661	1880.0	26.0	26.0	17.0	17.0
		810	1909.8	26.0	26.0	17.0	17.0
EDGE 1900	2	512	1850.2	25.0	24.5	19.0	18.5
		661	1880.0	25.0	24.5	19.0	18.5
		810	1909.8	25.0	24.5	19.0	18.5
EDGE 1900	3	512	1850.2	25.0	23.5	20.7	19.8
		661	1880.0	25.0	23.5	20.7	19.8
		810	1909.8	25.0	23.5	20.7	19.8
EDGE 1900	4	512	1850.2	23.0	22.5	20.0	19.5
		661	1880.0	23.0	22.5	20.0	19.5
		810	1909.8	23.0	22.5	20.0	19.5

10.5 WCDMA

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 V8.5.0 specification. The EUT supports power Class 3, which has a nominal maximum output power of 23 dBm (+1.0/-1.0) 12.2kps RMC is used for this testing. Power control set to All bits up. A summary of these settings are illustrated below:

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Output power table

Band	Mode	UL/DL Channel No.	Frequency(MHz)	Average power(dBm)	
				W/o Power back-off	W/ Power back-off
WCDMA Band II	Rel 99	9262/9662	1852.4	23.0	19.8
		9400/9800	1880.0	23.2	19.9
		9538/9983	1907.6	23.1	19.9
WCDMA Band IV	Rel 99	1312/1537	1712.4	23.0	19.9
		1413/1638	1732.6	23.2	20.0
		1513/1738	1752.6	23.0	19.7
WCDMA Band V	Rel 99	4132/4157	826.4	23.6	20.5
		4182/4407	836.4	23.7	20.3
		4233/4458	846.6	24.0	20.7

HSDPA

The following 4 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	8/15	4/15
	β_{hs}	4/15	24/15	30/15	30/15
	CM (dB)	0	1	1.5	1.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

Output power table

Band	Mode	UL/DL Channel No.	Frequency(MHz)	Average power(dBm)	
				W/o Power back-off	W/ Power back-off
HSDPA II	1	9262/9662	1852.4	22.9	19.6
		9400/9800	1880.0	23.1	19.8
		9538/9983	1907.6	23.0	19.7
	2	9262/9662	1852.4	22.4	19.1
		9400/9800	1880.0	22.6	19.3
		9538/9983	1907.6	22.5	19.2
	3	9262/9662	1852.4	21.9	18.6
		9400/9800	1880.0	22.1	18.8
		9538/9983	1907.6	22.1	18.7
	4	9262/9662	1852.4	21.9	18.6
		9400/9800	1880.0	22.1	18.8
		9538/9983	1907.6	22.0	18.7
HSDPA IV	1	1312/1537	1712.4	22.9	19.8
		1413/1638	1732.6	23.2	19.8
		1513/1738	1752.6	23.0	19.5
	2	1312/1537	1712.4	22.5	19.3
		1413/1638	1732.6	22.7	19.3
		1513/1738	1752.6	22.5	19.0
	3	1312/1537	1712.4	21.9	18.8
		1413/1638	1732.6	22.2	18.8
		1513/1738	1752.6	22.0	18.5
	4	1312/1537	1712.4	22.0	18.8
		1413/1638	1732.6	22.2	18.8
		1513/1738	1752.6	22.0	18.5
HSDPA V	1	4132/4157	826.4	23.6	20.3
		4182/4407	836.4	23.7	20.0
		4233/4458	846.6	23.9	20.5
	2	4132/4157	826.4	23.1	19.8
		4182/4407	836.4	23.2	19.5
		4233/4458	846.6	23.4	20.0
	3	4132/4157	826.4	22.6	19.3
		4182/4407	836.4	22.7	19.0
		4233/4458	846.6	22.9	19.5
	4	4132/4157	826.4	22.6	19.3
		4182/4407	836.4	22.7	19.0
		4233/4458	846.6	22.9	19.5

Note(s):

1. The HSDPA output power less than WCDMA, so we performed the SAR test in WCDMA.

HSPA (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA	HSPA	HSPA	HSPA	HSPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	15/15
	β_{ec}	209/225	12/15	30/15	2/15	24/15
	β_c/β_d	11/15	6/15	9/15	2/15	15/15
	β_{hs}	22/15	12/15	30/15	4/15	30/15
	β_{ed}	1309/225	94/75	47/15	56/75	134/15
	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = β_{hs}/β_c	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11		E-TFCI 11	E-TFCI 11	
		E-TFCI PO 4		E-TFCI PO 4	E-TFCI PO 4	
		E-TFCI 67		E-TFCI 92	E-TFCI 67	
		E-TFCI PO 18		E-TFCI PO 18	E-TFCI PO 18	
		E-TFCI 71		E-TFCI 71	E-TFCI 71	
		E-TFCI PO 23		E-TFCI PO 23	E-TFCI PO 23	
		E-TFCI 75		E-TFCI 75	E-TFCI 75	
		E-TFCI PO 26		E-TFCI PO 26	E-TFCI PO 26	
		E-TFCI 81		E-TFCI 81	E-TFCI 81	
		E-TFCI PO 27		E-TFCI PO 27	E-TFCI PO 27	

Output power table

Band	Mode	UL/DL Channel No.	Frequency(MHz)	Average power(dBm)	
				W/o Power back-off	W/ Power back-off
HSUPA II	1	9262/9662	1852.4	22.9	19.6
		9400/9800	1880.0	23.1	19.8
		9538/9983	1907.6	23.0	19.7
	2	9262/9662	1852.4	21.0	17.6
		9400/9800	1880.0	21.1	17.8
		9538/9983	1907.6	21.1	17.7
	3	9262/9662	1852.4	21.9	18.6
		9400/9800	1880.0	22.1	18.8
		9538/9983	1907.6	22.2	18.7
	4	9262/9662	1852.4	20.9	17.6
		9400/9800	1880.0	21.1	17.8
		9538/9983	1907.6	21.0	17.7
HSUPA IV	1	9262/9662	1852.4	22.9	19.6
		9400/9800	1880.0	23.1	19.8
		9538/9983	1907.6	23.0	19.7
	2	9262/9662	1852.4	21.0	17.6
		9400/9800	1880.0	21.1	17.8
		9538/9983	1907.6	21.1	17.7
	3	9262/9662	1852.4	21.9	18.6
		9400/9800	1880.0	22.1	18.8
		9538/9983	1907.6	22.2	18.7
	4	9262/9662	1852.4	20.9	17.6
		9400/9800	1880.0	21.1	17.8
		9538/9983	1907.6	21.0	17.7
HSUPA V	1	9262/9662	1852.4	22.9	19.6
		9400/9800	1880.0	23.1	19.8
		9538/9983	1907.6	23.0	19.7
	2	9262/9662	1852.4	21.0	17.6
		9400/9800	1880.0	21.1	17.8
		9538/9983	1907.6	21.1	17.7
	3	9262/9662	1852.4	21.9	18.6
		9400/9800	1880.0	22.1	18.8
		9538/9983	1907.6	22.2	18.7
	4	9262/9662	1852.4	20.9	17.6
		9400/9800	1880.0	21.1	17.8
		9538/9983	1907.6	21.0	17.7

Note(s):

- The HSUPA output power less than WCDMA, so we performed the SAR test in WCDMA.

10.6 LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 1dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

10.6.1 LTE Band 2

Output power table

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
2	20	18700	1860.0	QPSK	1	0	0	23.6	18.9
					1	49	0	23.5	18.7
					1	99	0	23.5	18.5
					50	0	1	22.6	18.0
					50	24	1	22.6	17.7
					50	49	1	22.6	17.6
					100	0	1	22.6	17.9
				16QAM	1	0	1	22.7	17.9
					1	49	1	22.6	17.8
					1	99	1	22.6	17.5
					50	0	2	21.6	16.9
					50	24	2	21.5	16.7
					50	49	2	21.6	16.6
					100	0	2	21.6	16.6
		18900	1880.0	QPSK	1	0	0	23.9	19.0
					1	49	0	23.8	18.8
					1	99	0	23.4	18.7
					50	0	1	23.0	18.0
					50	24	1	22.8	17.8
					50	49	1	22.4	17.8
					100	0	1	23.0	18.0
				16QAM	1	0	1	22.9	18.0
					1	49	1	22.8	17.9
					1	99	1	22.4	17.8
					50	0	2	22.0	17.0
					50	24	2	21.9	16.8
					50	49	2	21.4	16.7
					100	0	2	21.4	16.8
		19100	1900.0	QPSK	1	0	0	23.6	18.9
					1	49	0	23.5	18.7
					1	99	0	23.5	18.6
					50	0	1	22.8	18.0
					50	24	1	22.5	17.8
					50	49	1	22.5	17.7
					100	0	1	22.6	18.0
				16QAM	1	0	1	22.7	18.0
					1	49	1	22.5	17.7
					1	99	1	22.5	17.7
					50	0	2	21.7	17.0
					50	24	2	21.6	16.8
					50	49	2	21.6	16.7
					100	0	2	21.5	16.6

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
2	15	18675	1857.5	QPSK	1	0	0	23.6	18.9
					1	37	0	23.5	18.7
					1	74	0	23.5	18.5
					36	0	1	22.6	18.0
					36	18	1	22.6	17.7
					36	35	1	22.5	17.6
					75	0	1	22.6	17.9
				16QAM	1	0	1	22.7	17.9
					1	37	1	22.6	17.8
					1	74	1	22.6	17.5
					36	0	2	21.6	16.9
					36	18	2	21.5	16.7
					36	35	2	21.6	16.6
					75	0	2	21.6	16.5
		18900	1880.0	QPSK	1	0	0	23.9	18.9
					1	37	0	23.8	18.7
					1	74	0	23.3	18.6
					36	0	1	22.9	17.9
					36	18	1	22.8	17.7
					36	35	1	22.4	17.7
					75	0	1	23.0	17.9
				16QAM	1	0	1	22.9	17.9
					1	37	1	22.8	17.8
					1	74	1	22.4	17.7
					36	0	2	21.9	17.0
					36	18	2	21.8	16.7
					36	35	2	21.4	16.6
					75	0	2	21.3	16.7
		19125	1902.5	QPSK	1	0	0	23.6	18.8
					1	37	0	23.4	18.6
					1	74	0	23.4	18.5
					36	0	1	22.7	17.9
					36	18	1	22.5	17.7
					36	35	1	22.4	17.6
					75	0	1	22.6	17.9
				16QAM	1	0	1	22.7	17.9
					1	37	1	22.5	17.6
					1	74	1	22.4	17.6
					36	0	2	21.6	16.9
					36	18	2	21.5	16.7
					36	35	2	21.5	16.6
					75	0	2	21.4	16.5


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
2	10	18650	1855.0	QPSK	1	0	0	23.6	18.9
					1	24	0	23.5	18.7
					1	49	0	23.5	18.5
					25	0	1	22.6	18.0
					25	12	1	22.5	17.7
					25	24	1	22.5	17.6
					50	0	1	22.6	17.9
				16QAM	1	0	1	22.6	17.9
					1	24	1	22.6	17.8
					1	49	1	22.6	17.5
					25	0	2	21.6	16.9
					25	12	2	21.5	16.7
					25	24	2	21.6	16.6
					50	0	2	21.6	16.5
		18900	1880.0	QPSK	1	0	0	23.9	18.9
					1	24	0	23.8	18.7
					1	49	0	23.3	18.6
					25	0	1	22.9	17.9
					25	12	1	22.8	17.7
					25	24	1	22.3	17.7
					50	0	1	23.0	17.9
				16QAM	1	0	1	22.9	17.9
					1	24	1	22.8	17.8
					1	49	1	22.4	17.7
					25	0	2	21.9	17.0
					25	12	2	21.8	16.7
					25	24	2	21.3	16.6
					50	0	2	21.3	16.7
		19150	1905.0	QPSK	1	0	0	23.5	18.8
					1	24	0	23.4	18.6
					1	49	0	23.4	18.5
					25	0	1	22.7	17.9
					25	12	1	22.4	17.7
					25	24	1	22.4	17.6
					50	0	1	22.6	17.9
				16QAM	1	0	1	22.7	17.9
					1	24	1	22.5	17.6
					1	49	1	22.4	17.6
					25	0	2	21.6	16.9
					25	12	2	21.5	16.7
					25	24	2	21.5	16.6
					50	0	2	21.4	16.5

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
2	5	18625	1852.5	QPSK	1	0	0	23.6	18.8
					1	12	0	23.4	18.6
					1	24	0	23.5	18.4
					12	0	1	22.6	17.9
					12	6	1	22.5	17.6
					12	11	1	22.5	17.5
					25	0	1	22.6	17.8
				16QAM	1	0	1	22.6	17.8
					1	12	1	22.6	17.7
					1	24	1	22.6	17.4
					12	0	2	21.6	16.9
					12	6	2	21.5	16.7
					12	11	2	21.5	16.5
					25	0	2	21.6	16.5
		18900	1880.0	QPSK	1	0	0	23.8	18.9
					1	12	0	23.7	18.7
					1	24	0	23.3	18.6
					12	0	1	22.9	17.9
					12	6	1	22.7	17.7
					12	11	1	22.3	17.7
					25	0	1	22.9	17.9
				16QAM	1	0	1	22.8	17.9
					1	12	1	22.7	17.8
					1	24	1	22.3	17.7
					12	0	2	21.9	16.9
					12	6	2	21.8	16.7
					12	11	2	21.3	16.6
					25	0	2	21.3	16.7
		19175	1907.5	QPSK	1	0	0	23.5	18.8
					1	12	0	23.4	18.6
					1	24	0	23.4	18.5
					12	0	1	22.7	17.9
					12	6	1	22.4	17.7
					12	11	1	22.4	17.6
					25	0	1	22.5	17.9
				16QAM	1	0	1	22.6	17.9
					1	12	1	22.4	17.6
					1	24	1	22.4	17.6
					12	0	2	21.6	16.9
					12	6	2	21.5	16.7
					12	11	2	21.5	16.6
					25	0	2	21.4	16.5


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
2	3	18615	1851.5	QPSK	1	0	0	23.5	18.8
					1	7	0	23.4	18.6
					1	14	0	23.4	18.4
					8	0	1	22.5	17.9
					8	4	1	22.5	17.6
					8	7	1	22.5	17.5
					15	0	1	22.5	17.8
				16QAM	1	0	1	22.6	17.8
					1	7	1	22.5	17.7
					1	14	1	22.5	17.4
					8	0	2	21.5	16.8
					8	4	2	21.4	16.6
					8	7	2	21.5	16.5
					15	0	2	21.5	16.5
		18900	1880.0	QPSK	1	0	0	23.8	18.9
					1	7	0	23.7	18.7
					1	14	0	23.3	18.6
					8	0	1	22.8	17.9
					8	4	1	22.7	17.7
					8	7	1	22.3	17.7
					15	0	1	22.9	17.9
				16QAM	1	0	1	22.8	17.9
					1	7	1	22.7	17.8
					1	14	1	22.3	17.7
					8	0	2	21.8	16.9
					8	4	2	21.7	16.7
					8	7	2	21.3	16.6
					15	0	2	21.3	16.7
		19184	1908.4	QPSK	1	0	0	23.5	18.7
					1	7	0	23.4	18.5
					1	14	0	23.3	18.4
					8	0	1	22.6	17.8
					8	4	1	22.4	17.6
					8	7	1	22.4	17.5
					15	0	1	22.5	17.8
				16QAM	1	0	1	22.6	17.8
					1	7	1	22.4	17.5
					1	14	1	22.4	17.5
					8	0	2	21.6	16.8
					8	4	2	21.4	16.6
					8	7	2	21.4	16.5
					15	0	2	21.3	16.4

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
2	1.4	18607	1850.7	QPSK	1	0	0	23.5	18.8
					1	2	0	23.4	18.6
					1	5	0	23.4	18.4
					3	0	1	22.5	17.9
					3	1	1	22.5	17.6
					3	2	1	22.5	17.5
					6	0	1	22.5	17.8
				16QAM	1	0	1	22.6	17.8
					1	2	1	22.5	17.7
					1	5	1	22.5	17.4
					3	0	2	21.5	16.8
					3	1	2	21.4	16.6
					3	2	2	21.5	16.5
					6	0	2	21.5	16.4
		18900	1880.0	QPSK	1	0	0	23.8	18.9
					1	2	0	23.7	18.7
					1	5	0	23.3	18.6
					3	0	1	22.8	17.9
					3	1	1	22.7	17.7
					3	2	1	22.3	17.7
					6	0	1	22.9	17.9
				16QAM	1	0	1	22.8	17.9
					1	2	1	22.7	17.8
					1	5	1	22.3	17.7
					3	0	2	21.8	16.9
					3	1	2	21.7	16.7
					3	2	2	21.3	16.6
					6	0	2	21.3	16.7
		19192	1909.2	QPSK	1	0	0	23.4	18.7
					1	2	0	23.3	18.5
					1	5	0	23.3	18.4
					3	0	1	22.6	17.8
					3	1	1	22.3	17.6
					3	2	1	22.3	17.5
					6	0	1	22.5	17.8
				16QAM	1	0	1	22.6	17.8
					1	2	1	22.4	17.5
					1	5	1	22.3	17.5
					3	0	2	21.5	16.8
					3	1	2	21.4	16.6
					3	2	2	21.4	16.5
					6	0	2	21.3	16.4


Spectrum Plots for the Test RB allocations

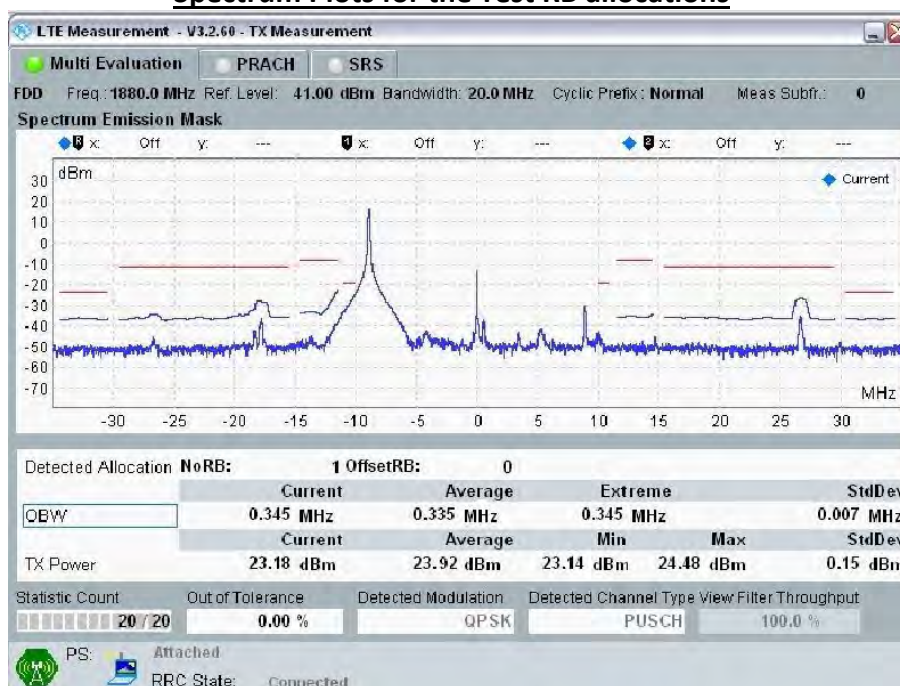


20MHz Band Width: Ch 18900, RB Size=1; RB Offset = 0

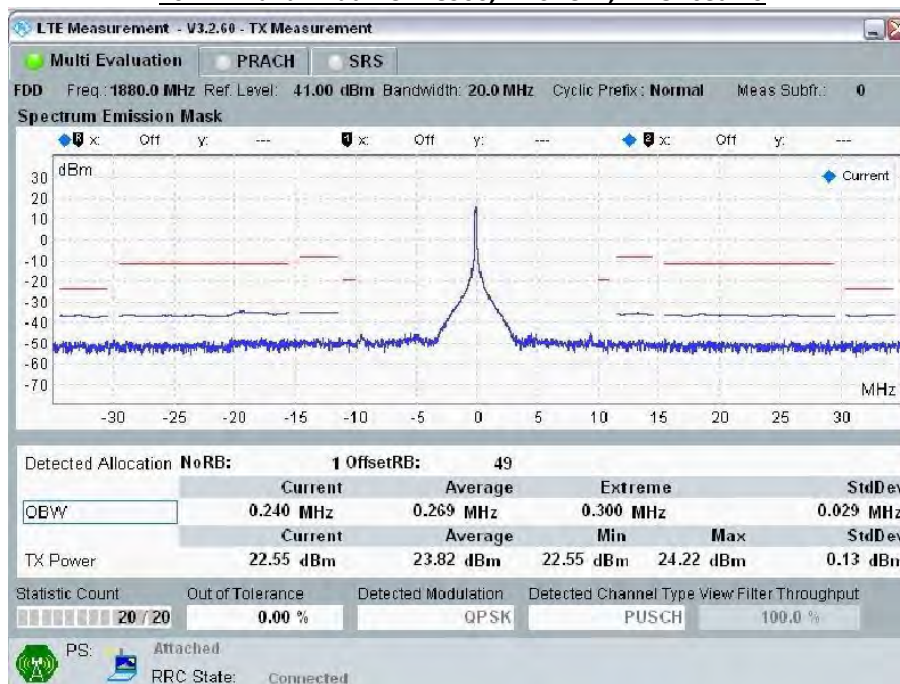


20MHz Band Width: Ch 18900, RB Size=1; RB Offset = 49

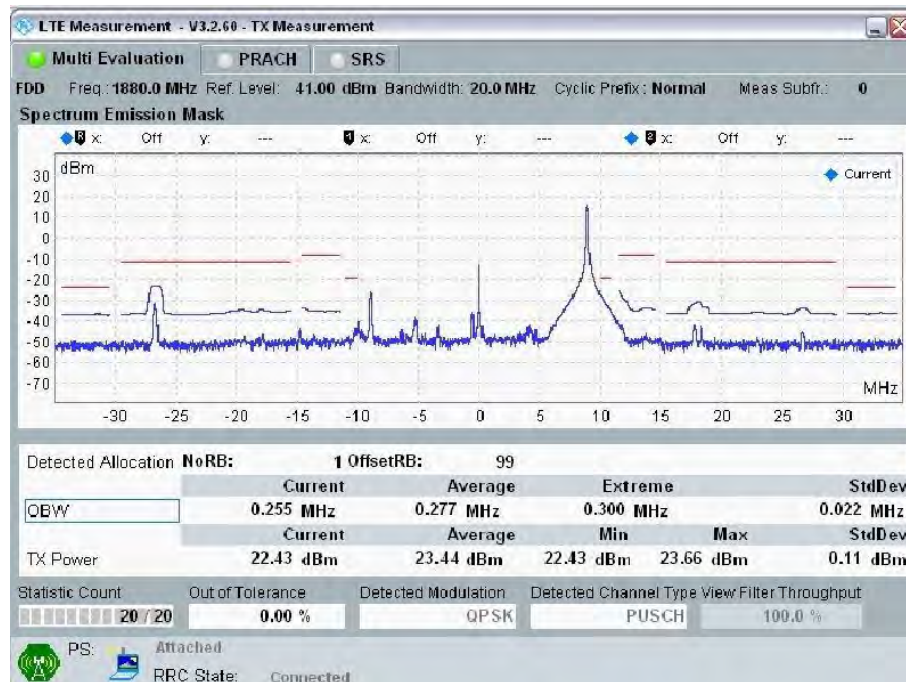


20MHz Band Width: Ch 18900, RB Size=1; RB Offset = 99

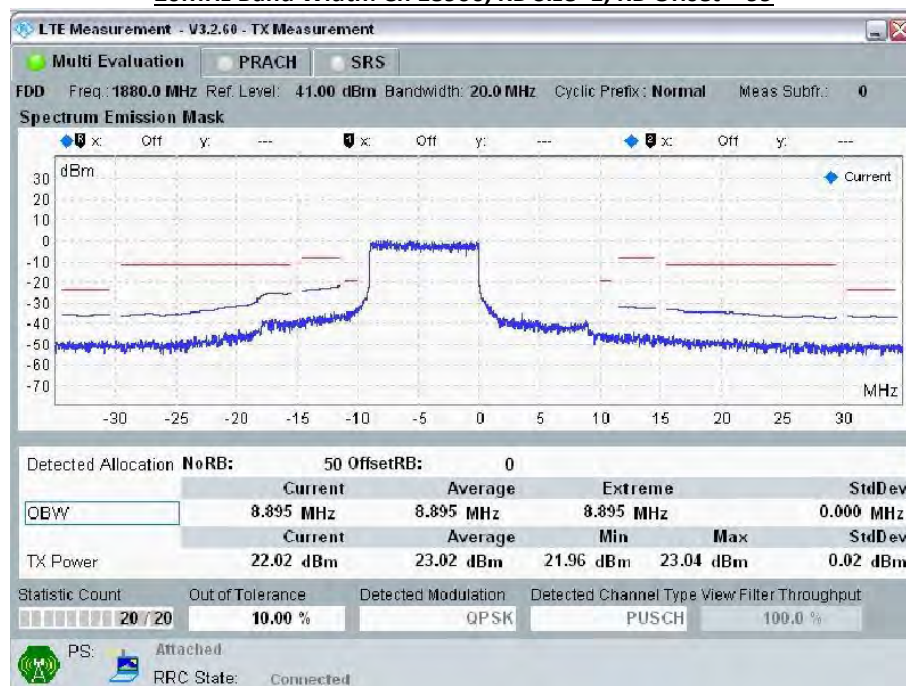


20MHz Band Width: Ch 18900, RB Size=50; RB Offset = 0

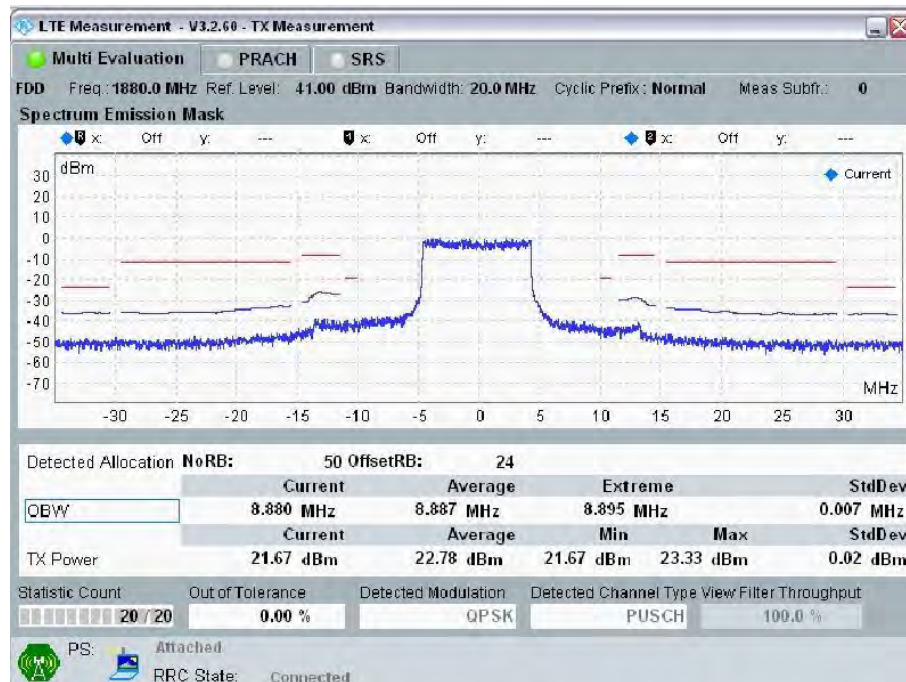

20MHz Band Width: Ch 18900, RB Size=50; RB Offset = 24

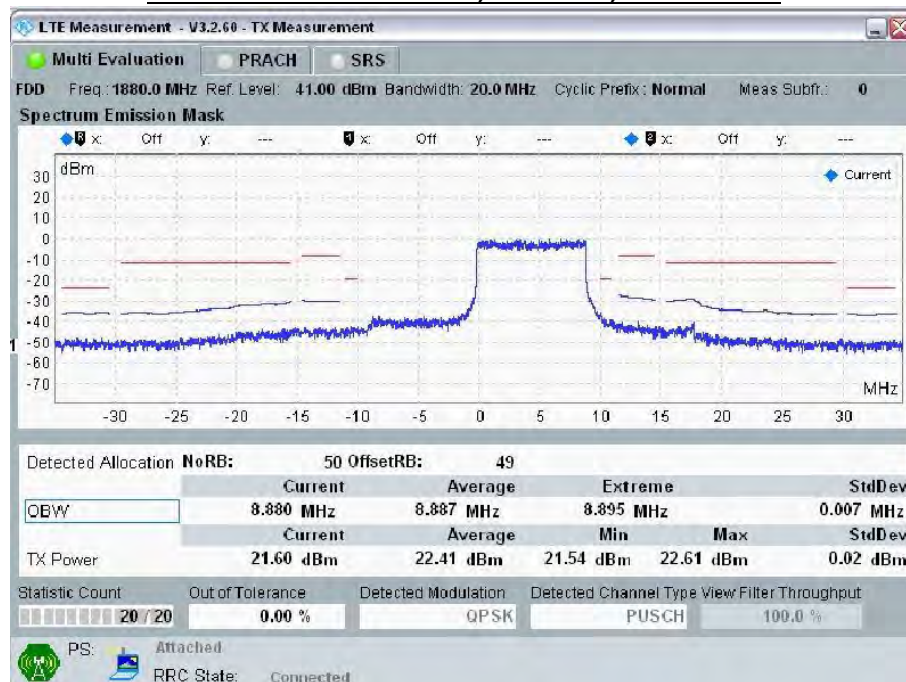

20MHz Band Width: Ch 18900, RB Size=50; RB Offset = 49

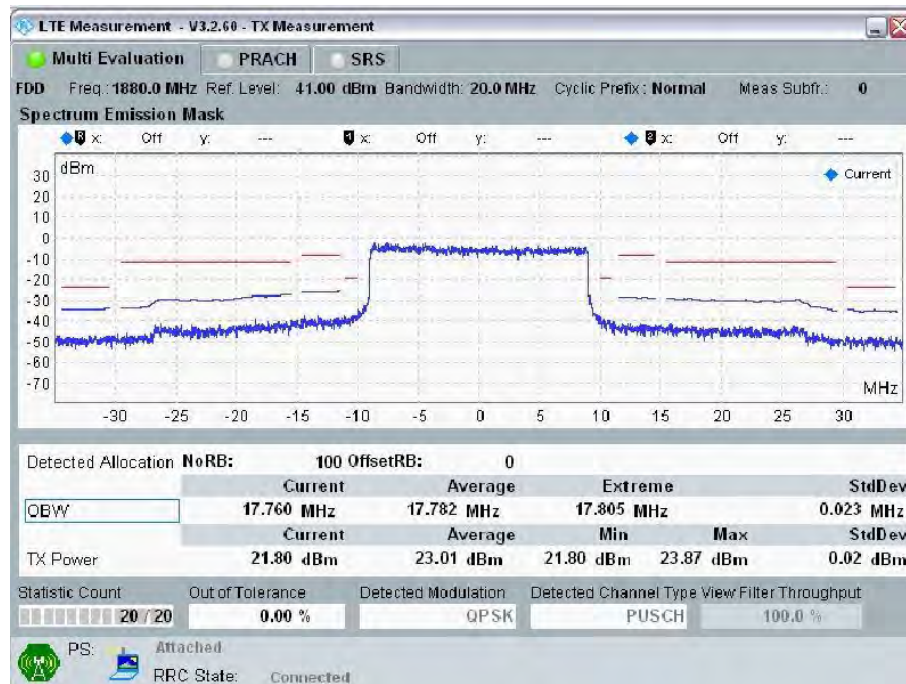

20MHz Band Width: Ch 18900, RB Size=100; RB Offset = 0

10.6.2 LTE Band 4

Output power table

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
4	20	20050	1720.0	QPSK	1	0	0	23.5	19.9
					1	49	0	23.2	19.6
					1	99	0	23.1	19.5
					50	0	1	22.5	19.0
					50	24	1	22.3	18.7
					50	49	1	22.1	18.5
					100	0	1	22.5	18.9
				16QAM	1	0	1	22.5	19.0
					1	49	1	22.3	18.6
					1	99	1	22.2	18.6
					50	0	2	21.6	18.0
					50	24	2	21.3	17.7
					50	49	2	21.2	17.5
					100	0	2	21.1	17.5
		20175	1732.5	QPSK	1	0	0	23.8	20.0
					1	49	0	23.3	19.7
					1	99	0	23.1	19.7
					50	0	1	22.9	19.0
					50	24	1	22.4	18.7
					50	49	1	22.2	18.7
					100	0	1	22.9	19.0
				16QAM	1	0	1	22.8	19.0
					1	49	1	22.4	18.8
					1	99	1	22.2	18.7
					50	0	2	21.9	18.0
					50	24	2	21.3	17.8
					50	49	2	21.2	17.7
					100	0	2	21.1	17.7
		20300	1745.0	QPSK	1	0	0	23.1	19.5
					1	49	0	23.0	19.4
					1	99	0	22.9	19.4
					50	0	1	22.3	18.6
					50	24	1	22.1	18.5
					50	49	1	22.0	18.4
					100	0	1	22.2	18.5
				16QAM	1	0	1	22.2	18.5
					1	49	1	22.1	18.5
					1	99	1	22.0	18.4
					50	0	2	21.2	17.6
					50	24	2	21.1	17.5
					50	49	2	21.0	17.4
					100	0	2	21.0	17.5

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
4	15	20025	1717.5	QPSK	1	0	0	23.4	19.9
					1	37	0	23.2	19.6
					1	74	0	23.0	19.5
					36	0	1	22.4	19.0
					36	18	1	22.2	18.7
					36	35	1	22.0	18.5
					75	0	1	22.4	18.9
				16QAM	1	0	1	22.5	19.0
					1	37	1	22.3	18.6
					1	74	1	22.1	18.6
					36	0	2	21.5	18.0
					36	18	2	21.3	17.7
					36	35	2	21.1	17.5
					75	0	2	21.0	17.5
		20175	1732.5	QPSK	1	0	0	23.7	19.9
					1	37	0	23.3	19.6
					1	74	0	23.1	19.6
					36	0	1	22.8	18.9
					36	18	1	22.3	18.6
					36	35	1	22.1	18.6
					75	0	1	22.8	18.9
				16QAM	1	0	1	22.7	18.9
					1	37	1	22.3	18.7
					1	74	1	22.1	18.6
					36	0	2	21.8	17.9
					36	18	2	21.3	17.7
					36	35	2	21.1	17.6
					75	0	2	21.1	17.6
		20325	1747.5	QPSK	1	0	0	23.1	19.4
					1	37	0	23.0	19.3
					1	74	0	22.9	19.3
					36	0	1	22.2	18.5
					36	18	1	22.1	18.4
					36	35	1	22.0	18.3
					75	0	1	22.2	18.4
				16QAM	1	0	1	22.2	18.4
					1	37	1	22.1	18.4
					1	74	1	22.0	18.3
					36	0	2	21.2	17.5
					36	18	2	21.1	17.4
					36	35	2	21.0	17.3
					75	0	2	20.9	17.4


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
4	10	20000	1715.0	QPSK	1	0	0	23.4	19.9
					1	24	0	23.1	19.6
					1	49	0	23.0	19.5
					25	0	1	22.4	19.0
					25	12	1	22.2	18.7
					25	24	1	22.0	18.5
					50	0	1	22.4	18.9
				16QAM	1	0	1	22.4	19.0
					1	24	1	22.2	18.6
					1	49	1	22.0	18.6
					25	0	2	21.5	18.0
					25	12	2	21.2	17.7
					25	24	2	21.0	17.5
					50	0	2	21.0	17.5
		20175	1732.5	QPSK	1	0	0	23.7	19.9
					1	24	0	23.2	19.6
					1	49	0	23.0	19.6
					25	0	1	22.8	18.9
					25	12	1	22.3	18.6
					25	24	1	22.1	18.6
					50	0	1	22.8	18.9
				16QAM	1	0	1	22.7	18.9
					1	24	1	22.3	18.7
					1	49	1	22.1	18.6
					25	0	2	21.8	17.9
					25	12	2	21.3	17.7
					25	24	2	21.1	17.6
					50	0	2	21.0	17.6
		20350	1750.0	QPSK	1	0	0	23.1	19.4
					1	24	0	22.9	19.3
					1	49	0	22.8	19.3
					25	0	1	22.2	18.5
					25	12	1	22.0	18.4
					25	24	1	21.9	18.3
					50	0	1	22.1	18.4
				16QAM	1	0	1	22.2	18.4
					1	24	1	22.0	18.4
					1	49	1	21.9	18.3
					25	0	2	21.1	17.5
					25	12	2	21.0	17.4
					25	24	2	20.9	17.3
					50	0	2	20.9	17.4

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
4	5	19975	1712.5	QPSK	1	0	0	23.4	19.8
					1	12	0	23.1	19.5
					1	24	0	23.0	19.4
					12	0	1	22.4	18.9
					12	6	1	22.2	18.6
					12	11	1	22.0	18.4
					25	0	1	22.4	18.8
				16QAM	1	0	1	22.4	18.9
					1	12	1	22.2	18.5
					1	24	1	22.0	18.5
					12	0	2	21.5	17.9
					12	6	2	21.2	17.6
					12	11	2	21.0	17.4
					25	0	2	21.0	17.4
		20175	1732.5	QPSK	1	0	0	23.7	19.9
					1	12	0	23.2	19.6
					1	24	0	23.0	19.6
					12	0	1	22.8	18.9
					12	6	1	22.3	18.6
					12	11	1	22.1	18.6
					25	0	1	22.8	18.9
				16QAM	1	0	1	22.7	18.9
					1	12	1	22.3	18.7
					1	24	1	22.1	18.6
					12	0	2	21.8	17.9
					12	6	2	21.2	17.7
					12	11	2	21.1	17.6
					25	0	2	21.0	17.6
		20375	1752.5	QPSK	1	0	0	23.0	19.4
					1	12	0	22.9	19.3
					1	24	0	22.8	19.3
					12	0	1	22.2	18.5
					12	6	1	22.0	18.4
					12	11	1	21.9	18.3
					25	0	1	22.1	18.4
				16QAM	1	0	1	22.1	18.4
					1	12	1	22.0	18.4
					1	24	1	21.9	18.3
					12	0	2	21.1	17.5
					12	6	2	21.0	17.4
					12	11	2	20.9	17.3
					25	0	2	20.9	17.4


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
4	3	19965	1711.5	QPSK	1	0	0	23.4	19.8
					1	7	0	23.1	19.5
					1	14	0	22.9	19.4
					8	0	1	22.4	18.9
					8	4	1	22.2	18.6
					8	7	1	21.9	18.4
					15	0	1	22.4	18.8
				16QAM	1	0	1	22.4	18.9
					1	7	1	22.2	18.5
					1	14	1	22.0	18.5
					8	0	2	21.4	17.9
					8	4	2	21.2	17.6
					8	7	2	21.0	17.4
					15	0	2	21.0	17.4
		20175	1732.5	QPSK	1	0	0	23.7	19.9
					1	7	0	23.2	19.6
					1	14	0	23.0	19.6
					8	0	1	22.8	18.9
					8	4	1	22.3	18.6
					8	7	1	22.1	18.6
					15	0	1	22.8	18.9
				16QAM	1	0	1	22.7	18.9
					1	7	1	22.3	18.7
					1	14	1	22.1	18.6
					8	0	2	21.8	17.9
					8	4	2	21.2	17.7
					8	7	2	21.1	17.6
					15	0	2	21.0	17.6
		20384	1753.4	QPSK	1	0	0	23.0	19.3
					1	7	0	22.9	19.2
					1	14	0	22.8	19.2
					8	0	1	22.1	18.4
					8	4	1	22.0	18.3
					8	7	1	21.9	18.2
					15	0	1	22.1	18.3
				16QAM	1	0	1	22.1	18.3
					1	7	1	22.0	18.3
					1	14	1	21.9	18.2
					8	0	2	21.1	17.4
					8	4	2	21.0	17.3
					8	7	2	20.9	17.2
					15	0	2	20.9	17.3

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
4	1.4	19957	1710.7	QPSK	1	0	0	23.4	19.8
					1	2	0	23.1	19.5
					1	5	0	22.9	19.4
					3	0	1	22.4	18.9
					3	1	1	22.1	18.6
					3	2	1	21.9	18.4
					6	0	1	22.4	18.8
				16QAM	1	0	1	22.4	18.9
					1	2	1	22.2	18.5
					1	5	1	22.0	18.5
					3	0	2	21.4	17.9
					3	1	2	21.2	17.6
					3	2	2	21.0	17.4
					6	0	2	21.0	17.4
		20175	1732.5	QPSK	1	0	0	23.7	19.9
					1	2	0	23.2	19.6
					1	5	0	23.0	19.6
					3	0	1	22.8	18.9
					3	1	1	22.2	18.6
					3	2	1	22.1	18.6
					6	0	1	22.8	18.9
				16QAM	1	0	1	22.7	18.9
					1	2	1	22.2	18.7
					1	5	1	22.0	18.6
					3	0	2	21.8	17.9
					3	1	2	21.2	17.6
					3	2	2	21.1	17.6
					6	0	2	21.0	17.6
		20392	1754.2	QPSK	1	0	0	23.0	19.3
					1	2	0	22.9	19.2
					1	5	0	22.8	19.2
					3	0	1	22.1	18.4
					3	1	1	22.0	18.3
					3	2	1	21.9	18.2
					6	0	1	22.1	18.3
				16QAM	1	0	1	22.1	18.3
					1	2	1	22.0	18.3
					1	5	1	21.9	18.2
					3	0	2	21.1	17.4
					3	1	2	21.0	17.3
					3	2	2	20.9	17.2
					6	0	2	20.9	17.3


Spectrum Plots for the Test RB allocations

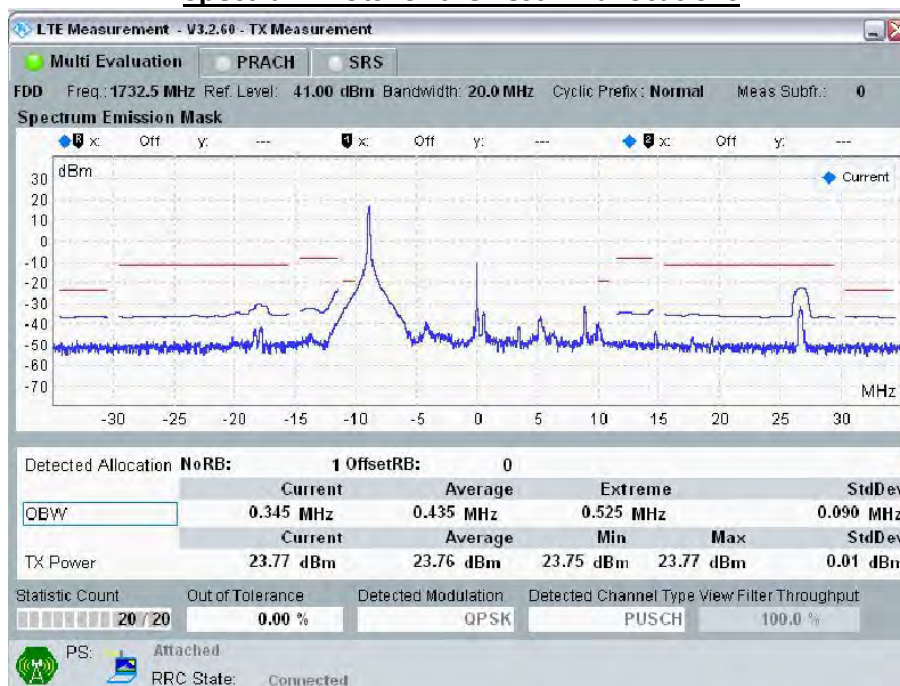


20MHz Band Width: Ch 20175, RB Size=1; RB Offset = 0

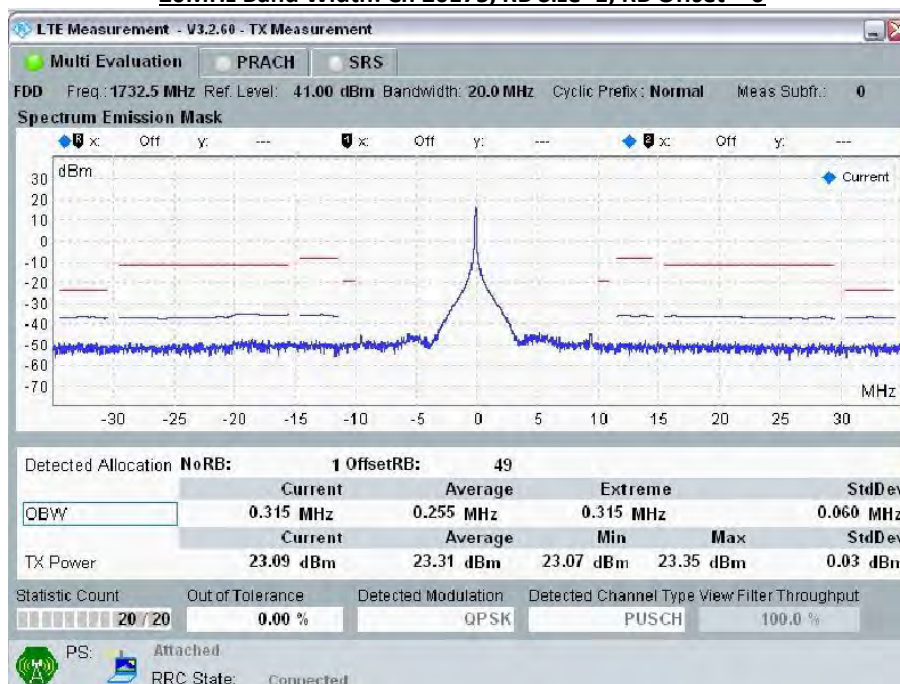



20MHz Band Width: Ch 20175, RB Size=1; RB Offset = 49

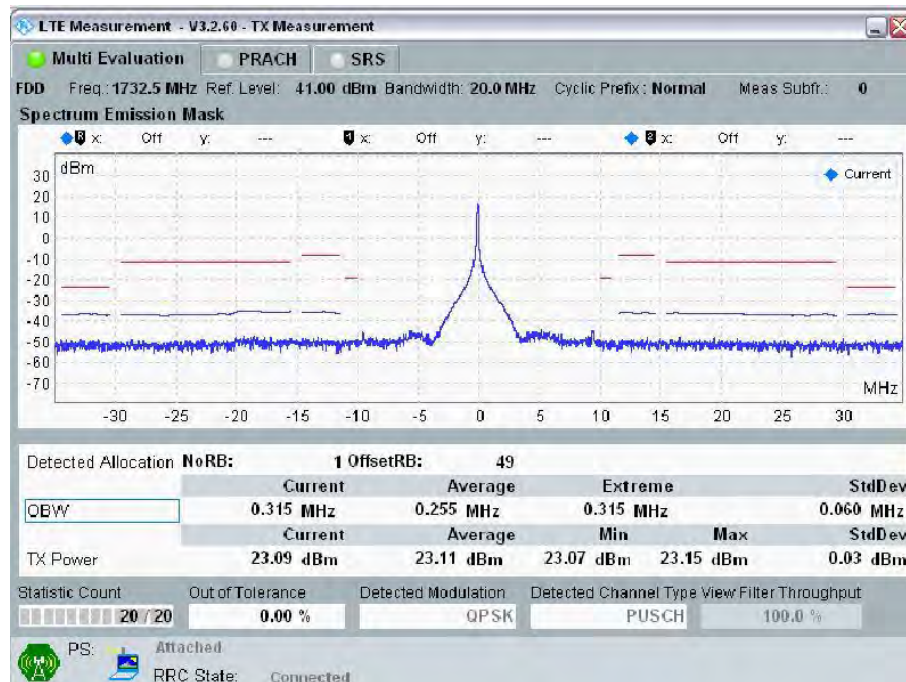


20MHz Band Width: Ch 20175, RB Size=1; RB Offset = 99

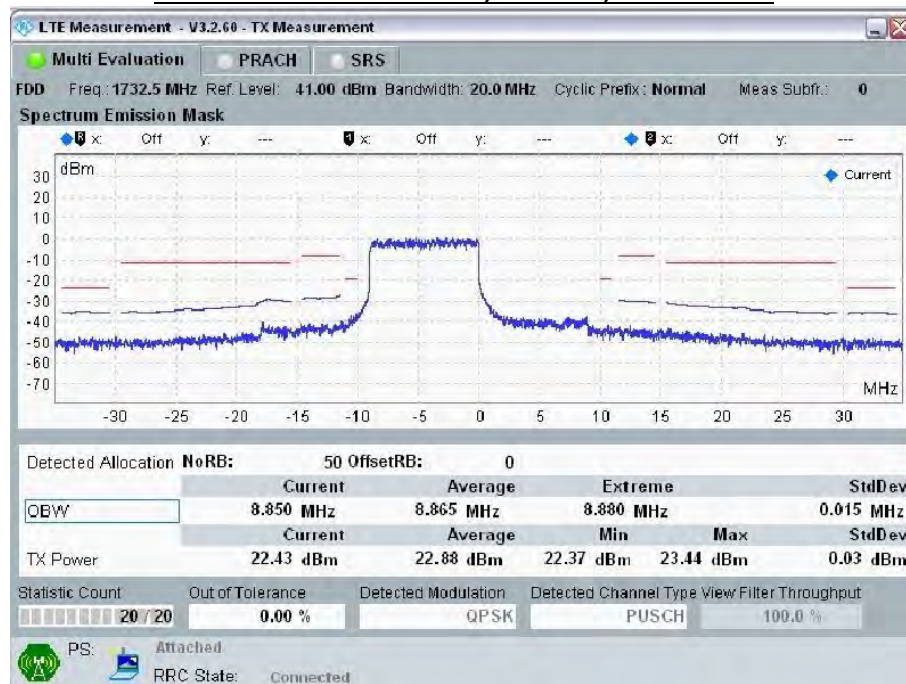

20MHz Band Width: Ch 20175, RB Size=50; RB Offset = 0

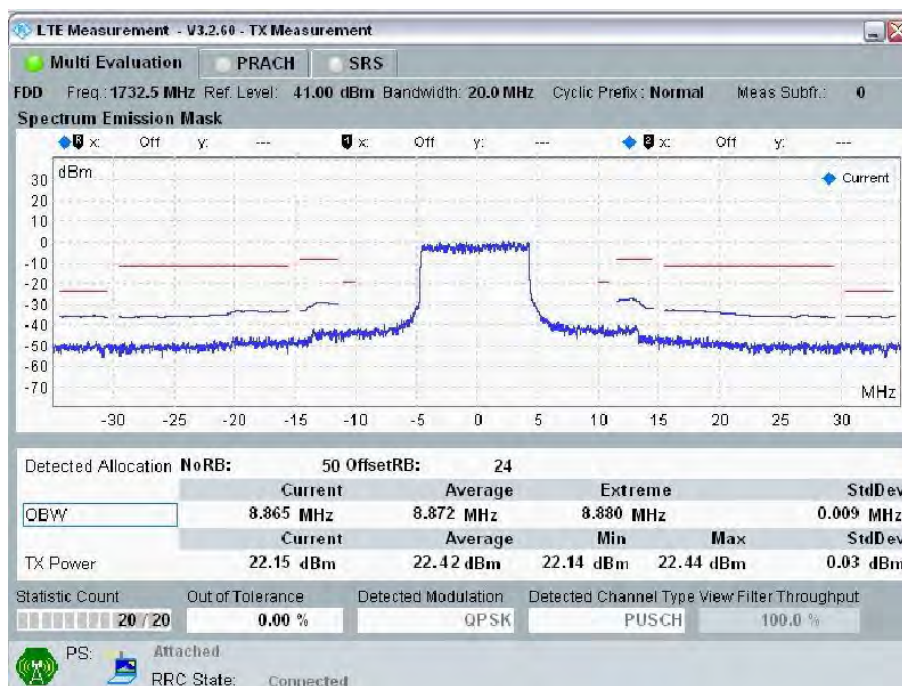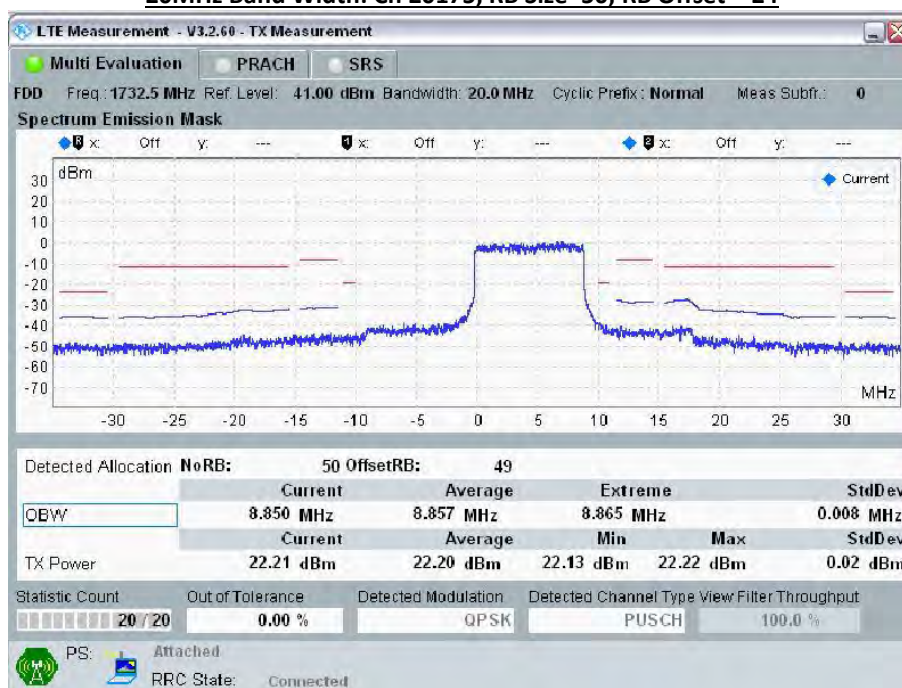**20MHz Band Width: Ch 20175, RB Size=50; RB Offset = 24****20MHz Band Width: Ch 20175, RB Size=50; RB Offset = 49**

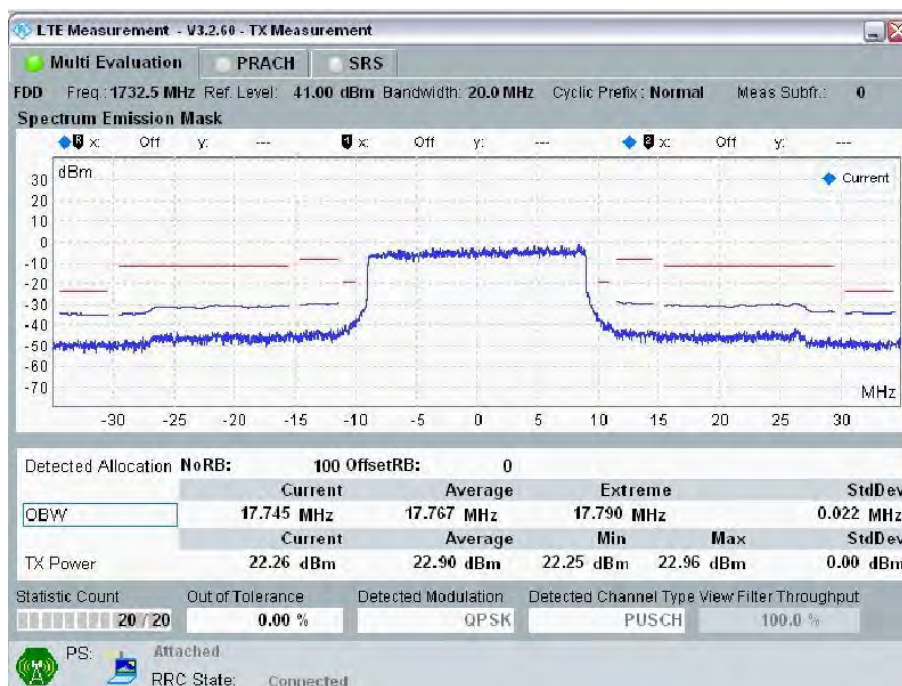

20MHz Band Width: Ch 20175, RB Size=100; RB Offset = 0

10.6.3 LTE Band 5

Output power table


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)
5	10	20450	829.0	QPSK	1	0	0	23.5
					1	24	0	23.4
					1	49	0	23.3
					25	0	1	22.5
					25	12	1	22.5
					25	24	1	22.4
					50	0	1	22.6
				16QAM	1	0	1	22.5
					1	24	1	22.5
					1	49	1	22.4
					25	0	2	21.6
					25	12	2	21.6
					25	24	2	21.3
					50	0	2	21.5
		20525	836.5	QPSK	1	0	0	23.4
					1	24	0	23.3
					1	49	0	23.1
					25	0	1	22.5
					25	12	1	22.4
					25	24	1	22.2
					50	0	1	22.5
				16QAM	1	0	1	22.4
					1	24	1	22.3
					1	49	1	22.2
					25	0	2	21.5
					25	12	2	21.3
					25	24	2	21.2
					50	0	2	21.1
		20600	844.0	QPSK	1	0	0	23.3
					1	24	0	23.2
					1	49	0	23.0
					25	0	1	22.4
					25	12	1	22.3
					25	24	1	22.1
					50	0	1	22.4
				16QAM	1	0	1	22.3
					1	24	1	22.3
					1	49	1	22.1
					25	0	2	21.3
					25	12	2	21.3
					25	24	2	21.1
					50	0	2	21.1

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)
5	5	20425	826.5	QPSK	1	0	0	23.5
					1	12	0	23.4
					1	24	0	23.3
					12	0	1	22.5
					12	6	1	22.4
					12	11	1	22.3
					25	0	1	22.5
				16QAM	1	0	1	22.5
					1	12	1	22.4
					1	24	1	22.3
					12	0	2	21.6
					12	6	2	21.5
					12	11	2	21.3
					25	0	2	21.5
		20525	836.5	QPSK	1	0	0	23.4
					1	12	0	23.3
					1	24	0	23.1
					12	0	1	22.5
					12	6	1	22.3
					12	11	1	22.2
					25	0	1	22.4
				16QAM	1	0	1	22.4
					1	12	1	22.3
					1	24	1	22.2
					12	0	2	21.5
					12	6	2	21.3
					12	11	2	21.1
					25	0	2	21.1
		20625	846.5	QPSK	1	0	0	23.2
					1	12	0	23.2
					1	24	0	23.0
					12	0	1	22.3
					12	6	1	22.2
					12	11	1	22.0
					25	0	1	22.3
				16QAM	1	0	1	22.3
					1	12	1	22.2
					1	24	1	22.0
					12	0	2	21.3
					12	6	2	21.2
					12	11	2	21.0
					25	0	2	21.0


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)
5	3	20415	825.5	QPSK	1	0	0	23.4
					1	7	0	23.3
					1	14	0	23.3
					8	0	1	22.4
					8	4	1	22.4
					8	7	1	22.3
					15	0	1	22.5
				16QAM	1	0	1	22.4
					1	7	1	22.4
					1	14	1	22.3
					8	0	2	21.5
					8	4	2	21.5
					8	7	2	21.3
					15	0	2	21.4
		20525	836.5	QPSK	1	0	0	23.4
					1	7	0	23.2
					1	14	0	23.1
					8	0	1	22.5
					8	4	1	22.3
					8	7	1	22.2
					15	0	1	22.4
				16QAM	1	0	1	22.4
					1	7	1	22.3
					1	14	1	22.1
					8	0	2	21.4
					8	4	2	21.3
					8	7	2	21.1
					15	0	2	21.1
		20634	847.4	QPSK	1	0	0	23.2
					1	7	0	23.2
					1	14	0	23.0
					8	0	1	22.3
					8	4	1	22.2
					8	7	1	22.0
					15	0	1	22.3
				16QAM	1	0	1	22.3
					1	7	1	22.2
					1	14	1	22.0
					8	0	2	21.3
					8	4	2	21.2
					8	7	2	21.0
					15	0	2	21.0

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)
5	1.4	20407	824.7	QPSK	1	0	0	23.4
					1	2	0	23.3
					1	5	0	23.2
					3	0	1	22.4
					3	1	1	22.4
					3	2	1	22.3
					6	0	1	22.5
				16QAM	1	0	1	22.4
					1	2	1	22.4
					1	5	1	22.3
					3	0	2	21.5
					3	1	2	21.5
					3	2	2	21.2
					6	0	2	21.4
		20525	836.5	QPSK	1	0	0	23.3
					1	2	0	23.2
					1	5	0	23.0
					3	0	1	22.4
					3	1	1	22.3
					3	2	1	22.1
					6	0	1	22.4
				16QAM	1	0	1	22.4
					1	2	1	22.3
					1	5	1	22.1
					3	0	2	21.4
					3	1	2	21.2
					3	2	2	21.1
					6	0	2	21.0
		20642	848.2	QPSK	1	0	0	23.2
					1	2	0	23.1
					1	5	0	22.9
					3	0	1	22.3
					3	1	1	22.1
					3	2	1	22.0
					6	0	1	22.2
				16QAM	1	0	1	22.2
					1	2	1	22.2
					1	5	1	22.0
					3	0	2	21.2
					3	1	2	21.1
					3	2	2	21.0
					6	0	2	21.0


Spectrum Plots for the Test RB allocations

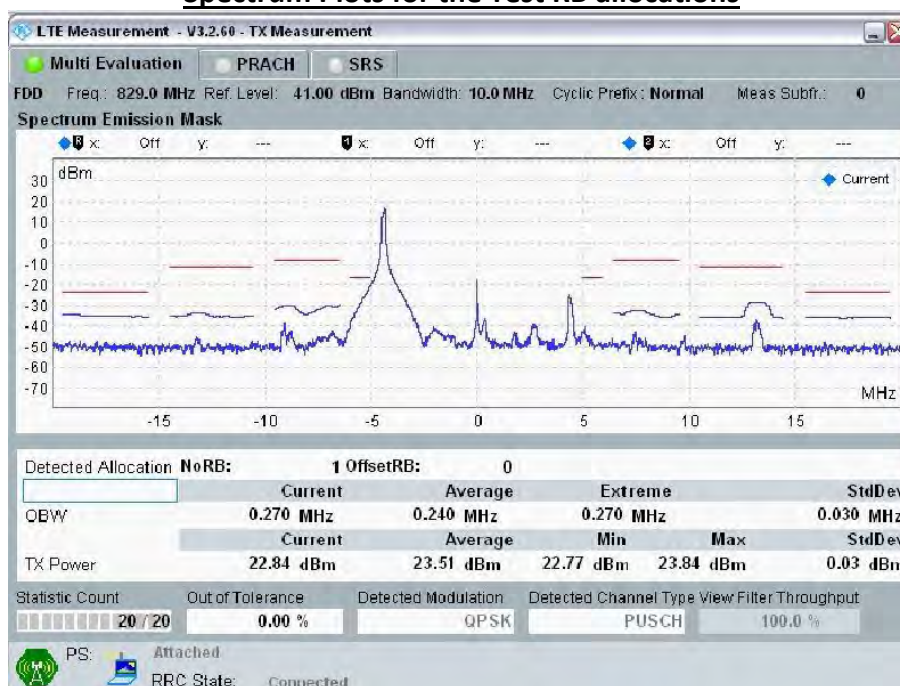


10MHz Band Width: Ch 20450, RB Size=1; RB Offset = 0

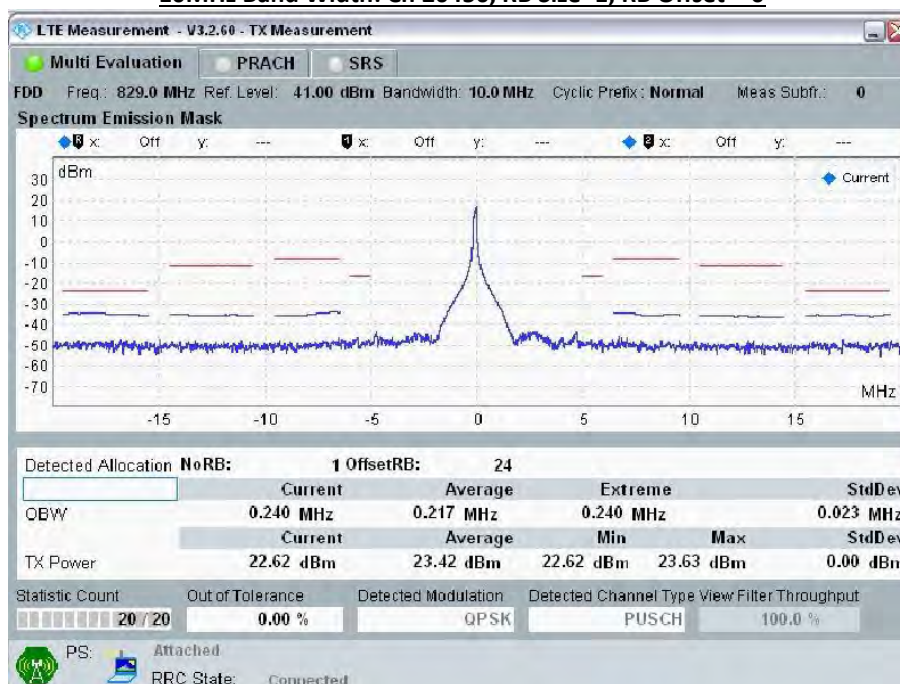


10MHz Band Width: Ch 20450, RB Size=1; RB Offset = 24

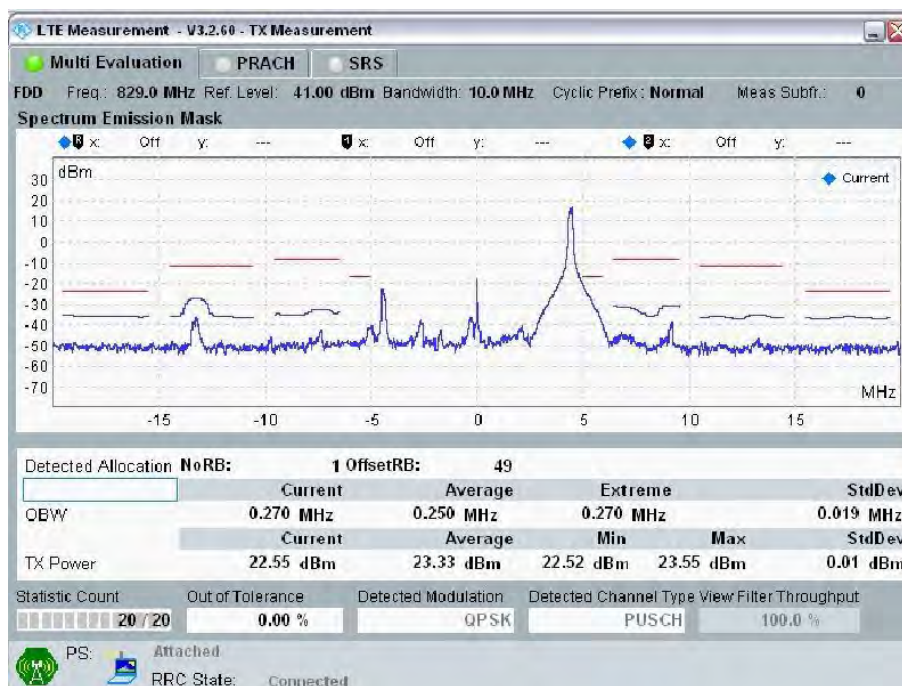


10MHz Band Width: Ch 20450, RB Size=1; RB Offset = 49

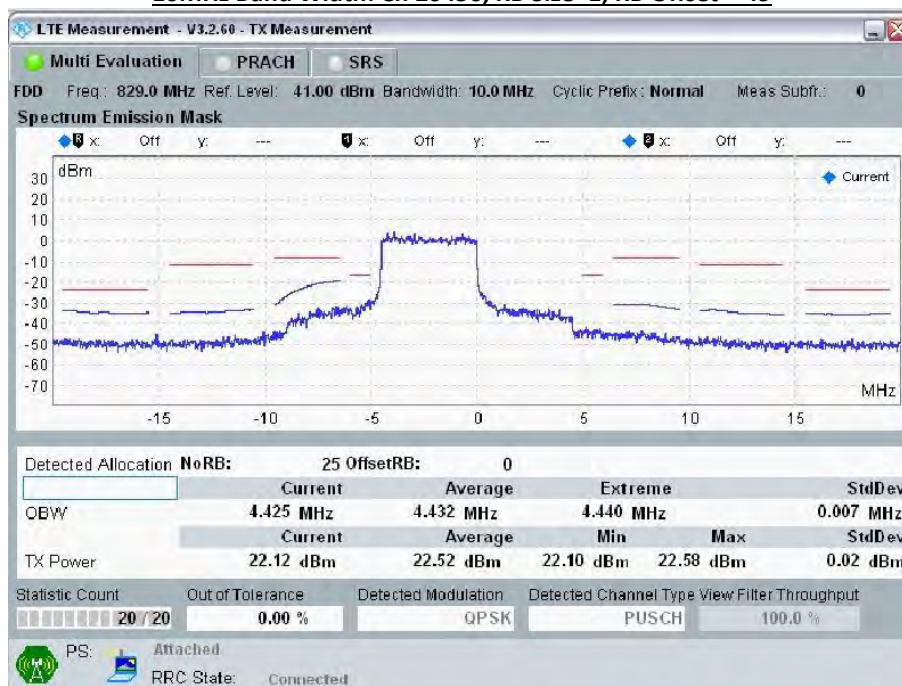


10MHz Band Width: Ch 20450, RB Size=25; RB Offset = 0

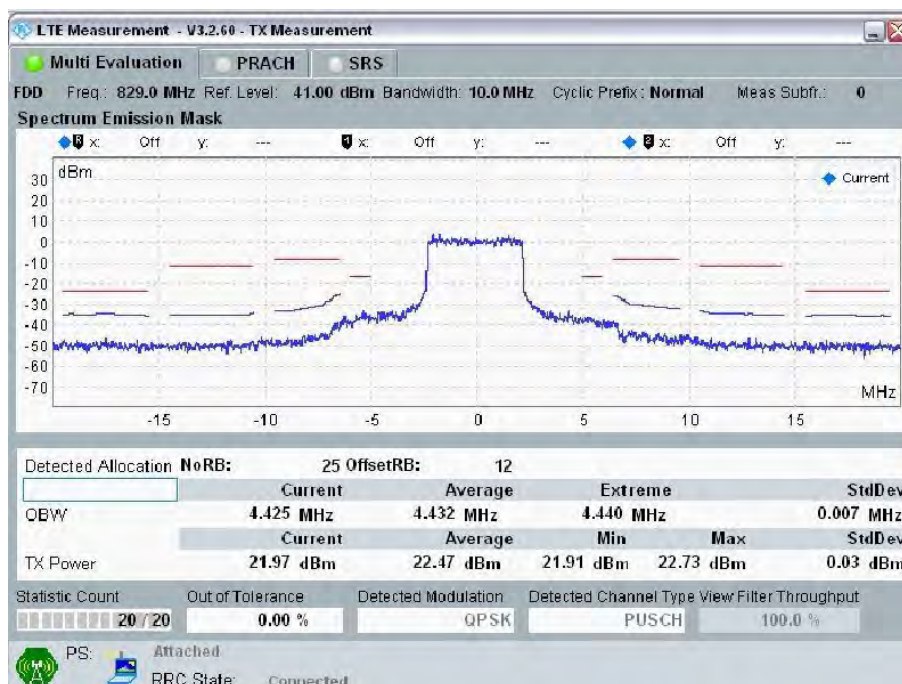

10MHz Band Width: Ch 20450, RB Size=25; RB Offset = 12

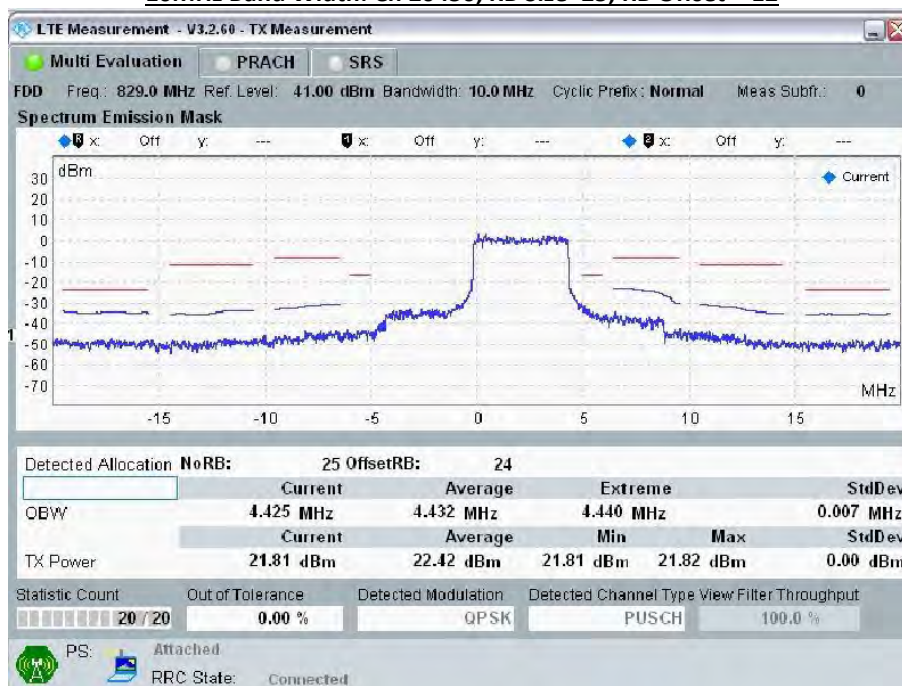

10MHz Band Width: Ch 20450, RB Size=25; RB Offset = 24

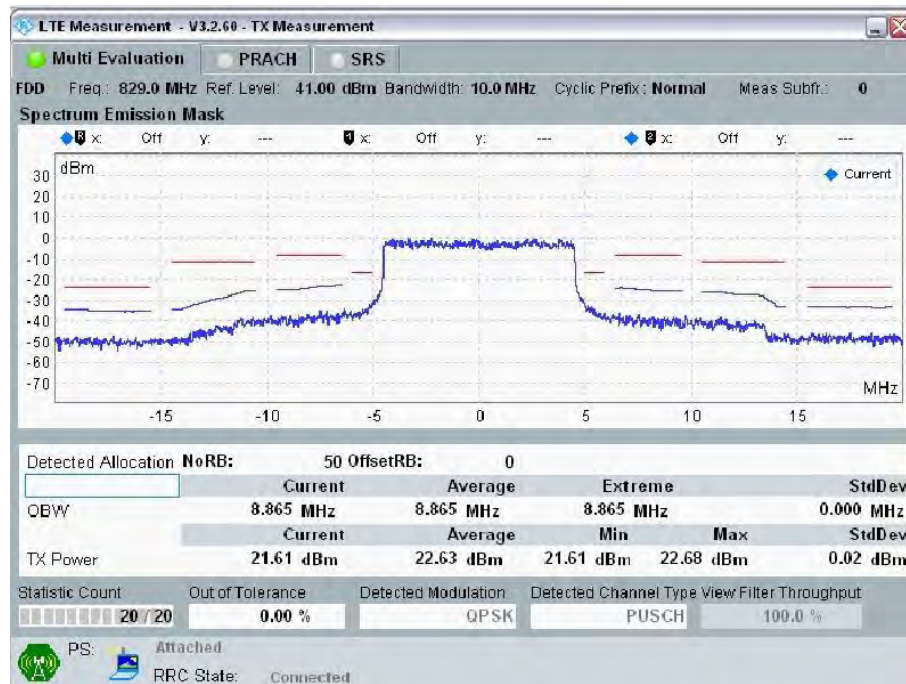

10MHz Band Width: Ch 20450, RB Size=50; RB Offset = 0

10.6.4 LTE Band 7

Output power table


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
7	20	20850	2510.0	QPSK	1	0	0	23.1	19.9
					1	49	0	22.5	19.7
					1	99	0	22.3	19.6
					50	0	1	22.1	19.0
					50	24	1	21.6	18.7
					50	49	1	21.4	18.8
					100	0	1	22.1	19.0
				16QAM	1	0	1	22.1	18.9
					1	49	1	21.5	18.8
					1	99	1	21.4	18.6
					50	0	2	21.2	18.0
					50	24	2	20.5	17.9
					50	49	2	20.4	17.7
					100	0	2	20.3	17.7
		21100	2535.0	QPSK	1	0	0	23.1	19.7
					1	49	0	22.4	19.5
					1	99	0	22.4	19.5
					50	0	1	22.1	18.8
					50	24	1	21.5	18.5
					50	49	1	21.5	18.6
					100	0	1	22.1	18.7
				16QAM	1	0	1	22.1	18.8
					1	49	1	21.5	18.6
					1	99	1	21.5	18.5
					50	0	2	21.1	17.9
					50	24	2	20.5	17.7
					50	49	2	20.4	17.5
					100	0	2	20.4	17.6
		21350	2560.0	QPSK	1	0	0	23.4	20.0
					1	49	0	22.6	19.8
					1	99	0	22.5	19.8
					50	0	1	22.4	19.0
					50	24	1	21.7	18.9
					50	49	1	21.7	18.8
					100	0	1	22.5	19.0
				16QAM	1	0	1	22.4	19.0
					1	49	1	21.7	18.8
					1	99	1	21.5	18.9
					50	0	2	21.4	18.2
					50	24	2	20.7	18.0
					50	49	2	20.6	18.0
					100	0	2	20.5	17.9

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
7	15	20825	2507.5	QPSK	1	0	0	23.1	19.9
					1	37	0	22.5	19.7
					1	74	0	22.3	19.6
					36	0	1	22.1	19.0
					36	18	1	21.6	18.7
					36	35	1	21.4	18.8
					75	0	1	22.1	19.0
				16QAM	1	0	1	22.1	18.9
					1	37	1	21.5	18.8
					1	74	1	21.4	18.6
					36	0	2	21.2	18.0
					36	18	2	20.5	17.9
					36	35	2	20.4	17.7
					75	0	2	20.3	17.7
		21100	2535.0	QPSK	1	0	0	23.0	19.6
					1	37	0	22.3	19.4
					1	74	0	22.3	19.4
					36	0	1	22.0	18.7
					36	18	1	21.4	18.4
					36	35	1	21.4	18.5
					75	0	1	22.0	18.6
				16QAM	1	0	1	22.0	18.7
					1	37	1	21.4	18.5
					1	74	1	21.4	18.4
					36	0	2	21.0	17.8
					36	18	2	20.4	17.6
					36	35	2	20.4	17.4
					75	0	2	20.3	17.5
		21375	2562.5	QPSK	1	0	0	23.3	19.9
					1	37	0	22.5	19.7
					1	74	0	22.4	19.7
					36	0	1	22.3	18.9
					36	18	1	21.6	18.8
					36	35	1	21.6	18.7
					75	0	1	22.4	18.9
				16QAM	1	0	1	22.3	18.9
					1	37	1	21.6	18.7
					1	74	1	21.4	18.8
					36	0	2	21.3	18.1
					36	18	2	20.6	17.9
					36	35	2	20.5	17.9
					75	0	2	20.4	17.8


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
7	10	20800	2505.0	QPSK	1	0	0	23.1	19.9
					1	24	0	22.5	19.7
					1	49	0	22.3	19.6
					25	0	1	22.1	19.0
					25	12	1	21.6	18.7
					25	24	1	21.4	18.8
					50	0	1	22.1	19.0
				16QAM	1	0	1	22.1	18.9
					1	24	1	21.5	18.8
					1	49	1	21.4	18.6
					25	0	2	21.2	18.0
					25	12	2	20.5	17.9
					25	24	2	20.4	17.7
					50	0	2	20.3	17.7
		21100	2535.0	QPSK	1	0	0	23.0	19.6
					1	24	0	22.3	19.4
					1	49	0	22.3	19.4
					25	0	1	22.0	18.7
					25	12	1	21.4	18.4
					25	24	1	21.4	18.5
					50	0	1	22.0	18.6
				16QAM	1	0	1	22.0	18.7
					1	24	1	21.4	18.5
					1	49	1	21.4	18.4
					25	0	2	21.0	17.8
					25	12	2	20.4	17.6
					25	24	2	20.4	17.4
					50	0	2	20.3	17.5
		21400	2565.0	QPSK	1	0	0	23.3	19.9
					1	24	0	22.5	19.7
					1	49	0	22.4	19.7
					25	0	1	22.3	18.9
					25	12	1	21.6	18.8
					25	24	1	21.6	18.7
					50	0	1	22.4	18.9
				16QAM	1	0	1	22.3	18.9
					1	24	1	21.6	18.7
					1	49	1	21.4	18.8
					25	0	2	21.3	18.1
					25	12	2	20.6	17.9
					25	24	2	20.5	17.9
					50	0	2	20.4	17.8

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
7	5	20775	2502.5	QPSK	1	0	0	23.0	19.8
					1	12	0	22.4	19.6
					1	24	0	22.2	19.5
					12	0	1	22.0	18.9
					12	6	1	21.5	18.6
					12	11	1	21.3	18.7
					25	0	1	22.0	18.9
				16QAM	1	0	1	22.0	18.8
					1	12	1	21.4	18.7
					1	24	1	21.3	18.5
					12	0	2	21.1	17.9
					12	6	2	20.4	17.8
					12	11	2	20.3	17.6
					25	0	2	20.2	17.6
		21100	2535.0	QPSK	1	0	0	23.0	19.6
					1	12	0	22.3	19.4
					1	24	0	22.3	19.4
					12	0	1	22.0	18.7
					12	6	1	21.4	18.4
					12	11	1	21.4	18.5
					25	0	1	22.0	18.6
				16QAM	1	0	1	22.0	18.7
					1	12	1	21.4	18.5
					1	24	1	21.4	18.4
					12	0	2	21.0	17.8
					12	6	2	20.4	17.6
					12	11	2	20.3	17.4
					25	0	2	20.3	17.5
		21425	2567.5	QPSK	1	0	0	23.3	19.9
					1	12	0	22.5	19.7
					1	24	0	22.4	19.7
					12	0	1	22.3	18.9
					12	6	1	21.6	18.8
					12	11	1	21.6	18.7
					25	0	1	22.4	18.9
				16QAM	1	0	1	22.3	18.9
					1	12	1	21.6	18.7
					1	24	1	21.4	18.8
					12	0	2	21.3	18.1
					12	6	2	20.6	17.9
					12	11	2	20.5	17.9
					25	0	2	20.4	17.8


Spectrum Plots for the Test RB allocations

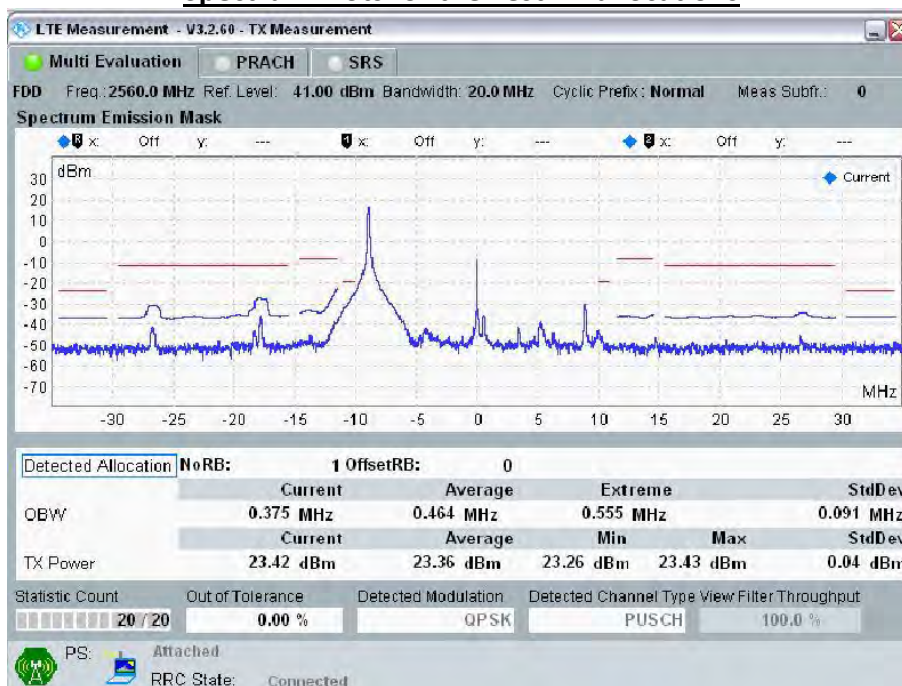


20MHz Band Width: Ch 21350, RB Size=1; RB Offset = 0

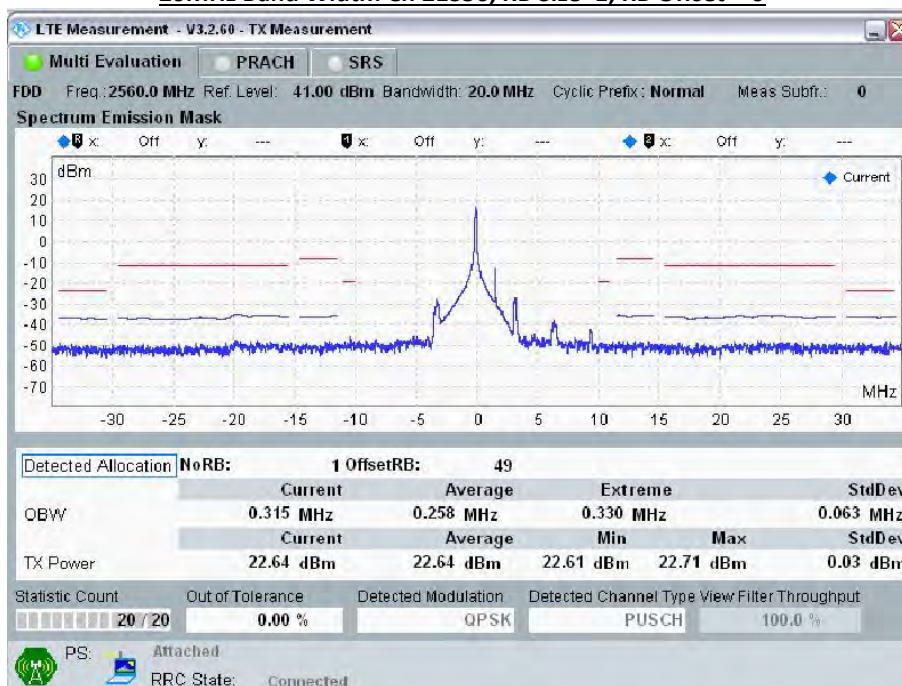


20MHz Band Width: Ch 21350, RB Size=1; RB Offset = 49

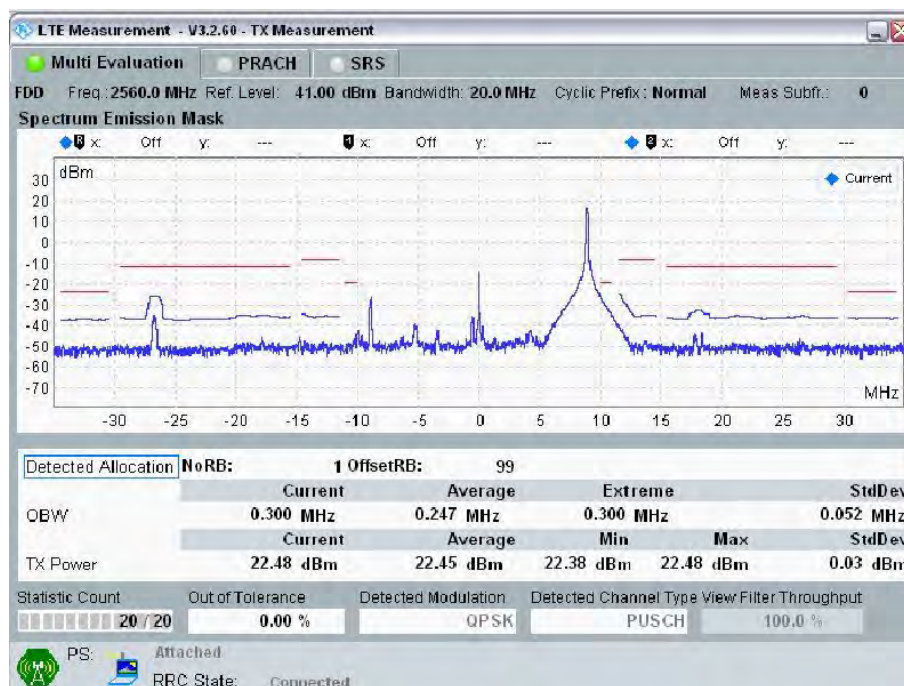


20MHz Band Width: Ch 21350, RB Size=1; RB Offset = 99

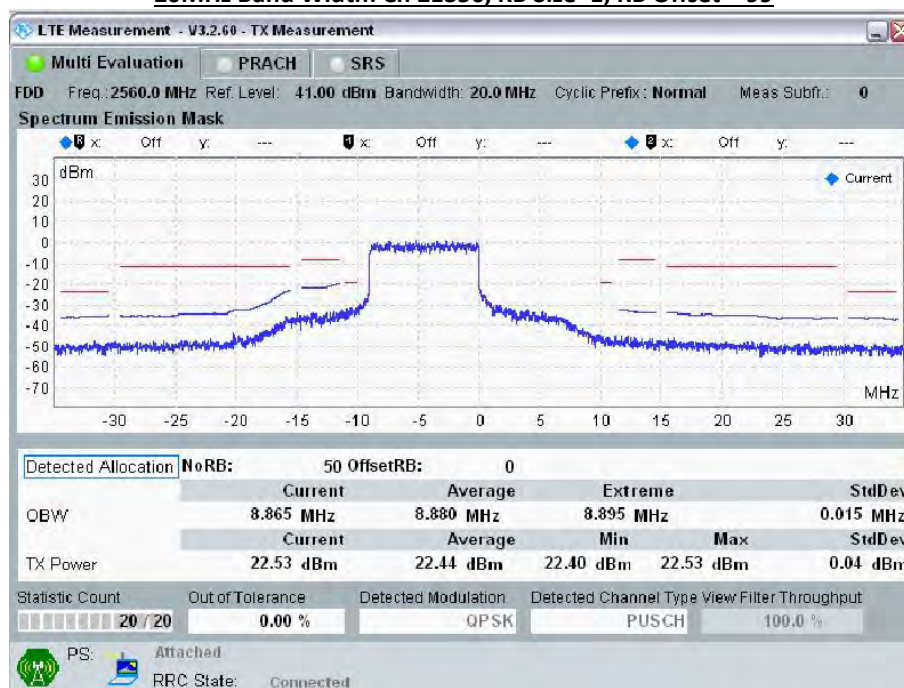


20MHz Band Width: Ch 21350, RB Size=50; RB Offset = 0

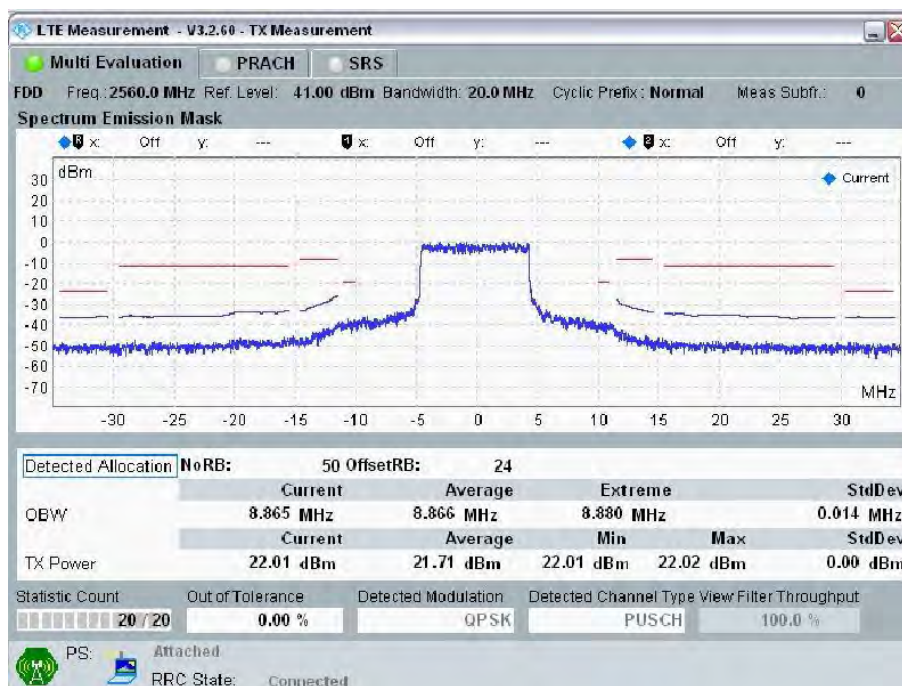

20MHz Band Width: Ch 21350, RB Size=50; RB Offset = 24

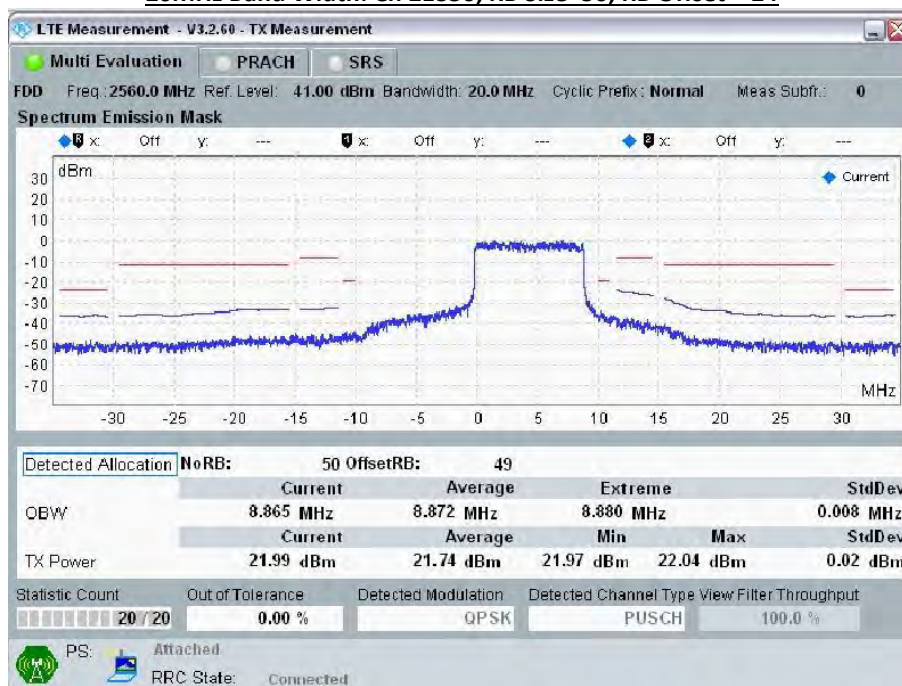

20MHz Band Width: Ch 21350, RB Size=50; RB Offset = 49


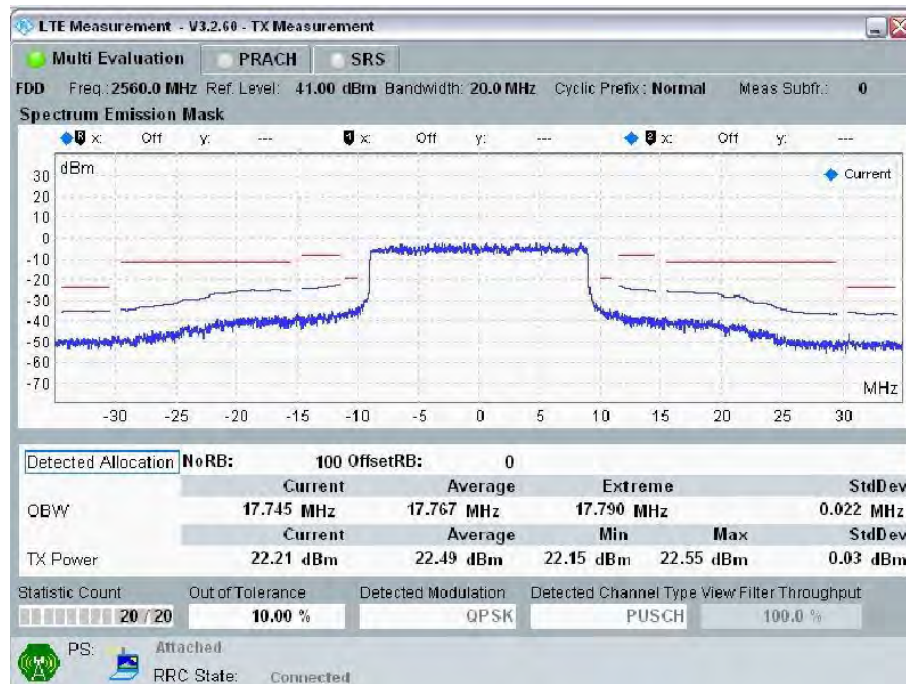



20MHz Band Width: Ch 21350, RB Size=100; RB Offset = 0

10.6.5 LTE Band 13**Output power table**


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)
13	10	23230	782.0	QPSK	1	0	0	23.4
					1	24	0	23.2
					1	49	0	23.1
					25	0	1	22.5
					25	12	1	22.2
					25	24	1	22.1
					50	0	1	22.4
				16QAM	1	0	1	22.5
					1	24	1	22.3
					1	49	1	22.1
					25	0	2	21.5
					25	12	2	21.3
					25	24	2	21.1
					50	0	2	21.2

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)
13	5	23205	779.5	QPSK	1	0	0	23.4
					1	12	0	23.1
					1	24	0	23.0
					12	0	1	22.4
					12	6	1	22.1
					12	11	1	22.0
					25	0	1	22.4
				16QAM	1	0	1	22.5
					1	12	1	22.2
					1	24	1	22.0
					12	0	2	21.4
					12	6	2	21.2
					12	11	2	21.0
					25	0	2	21.1
		23230	782.0	QPSK	1	0	0	23.1
					1	12	0	23.3
					1	24	0	23.0
					12	0	1	22.4
					12	6	1	22.1
					12	11	1	22.0
					25	0	1	22.4
				16QAM	1	0	1	22.5
					1	12	1	22.2
					1	24	1	22.0
					12	0	2	21.4
					12	6	2	21.2
					12	11	2	21.0
					25	0	2	21.1
		23255	784.5	QPSK	1	0	0	23.4
					1	12	0	23.2
					1	24	0	23.1
					12	0	1	22.4
					12	6	1	22.2
					12	11	1	22.1
					25	0	1	22.4
				16QAM	1	0	1	22.5
					1	12	1	22.3
					1	24	1	22.1
					12	0	2	21.5
					12	6	2	21.3
					12	11	2	21.1
					25	0	2	21.2

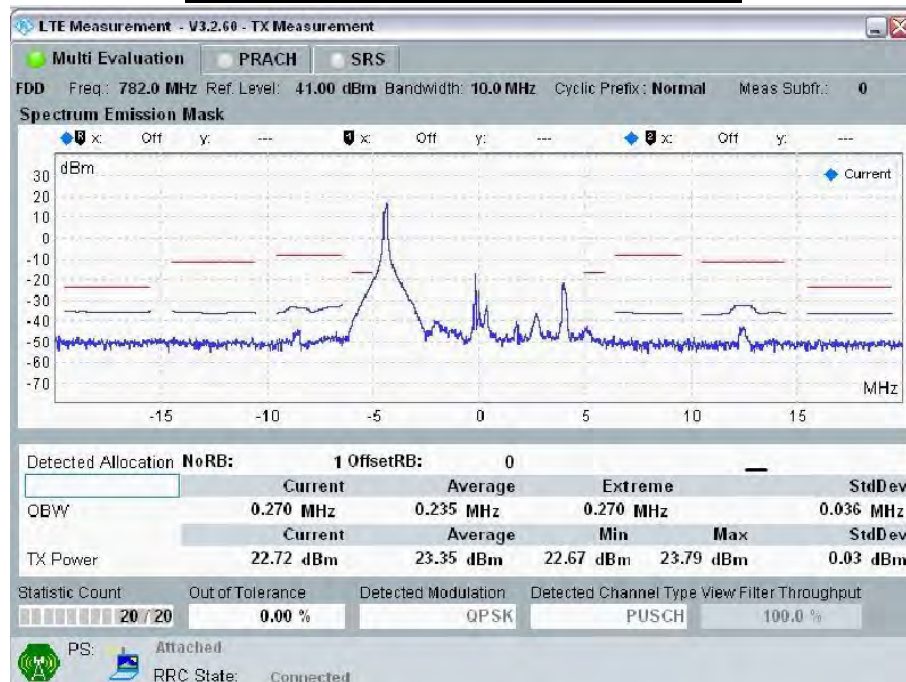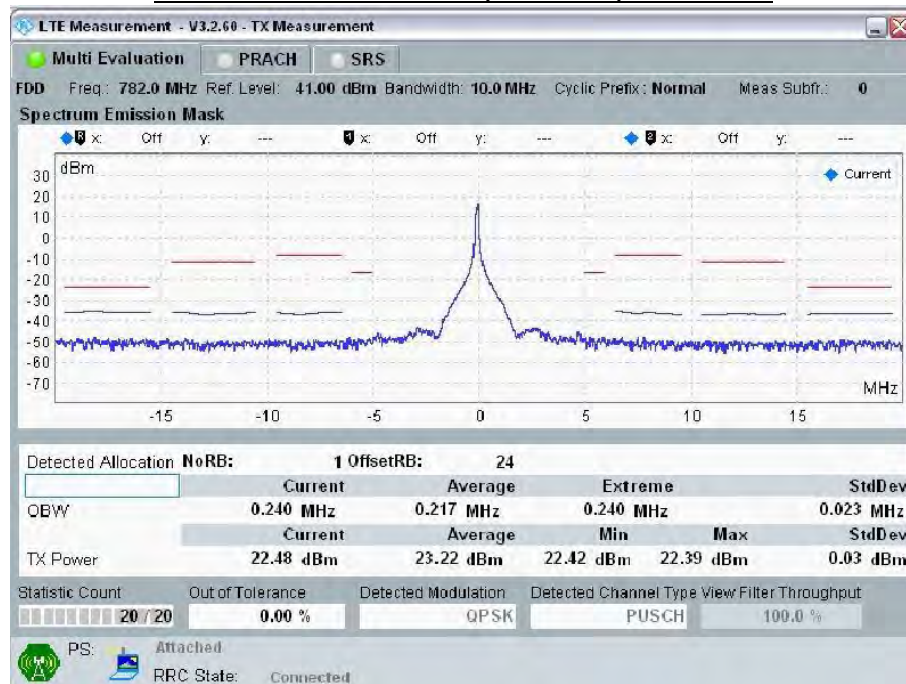
Spectrum Plots for the Test RB allocations**10MHz Band Width: Ch 23230, RB Size = 1; RB Offset = 0****10MHz Band Width: Ch 23230, RB Size = 1; RB Offset = 24**

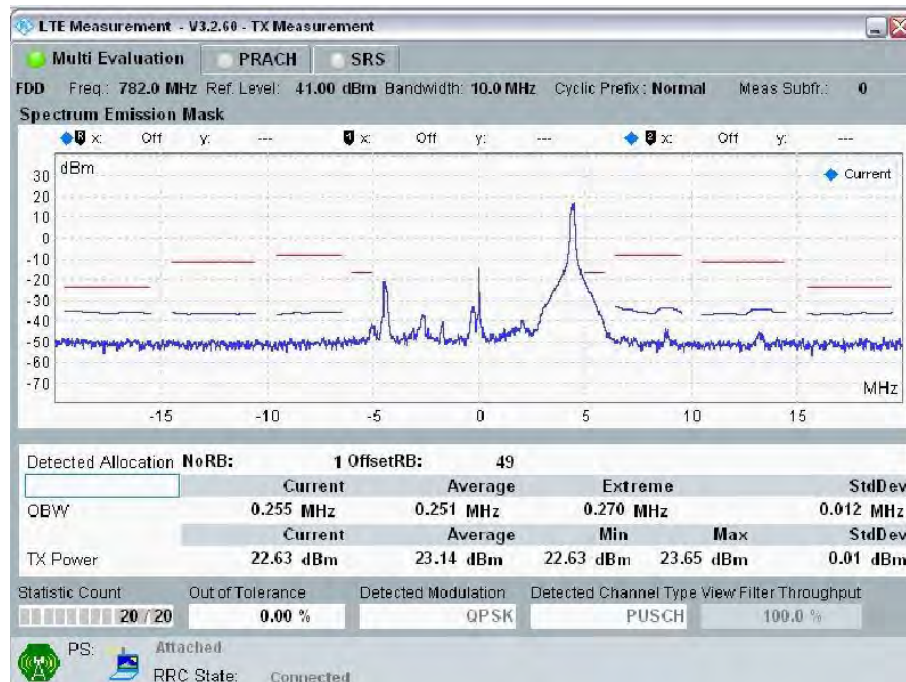


10MHz Band Width: Ch 23230, RB Size = 1; RB Offset = 49

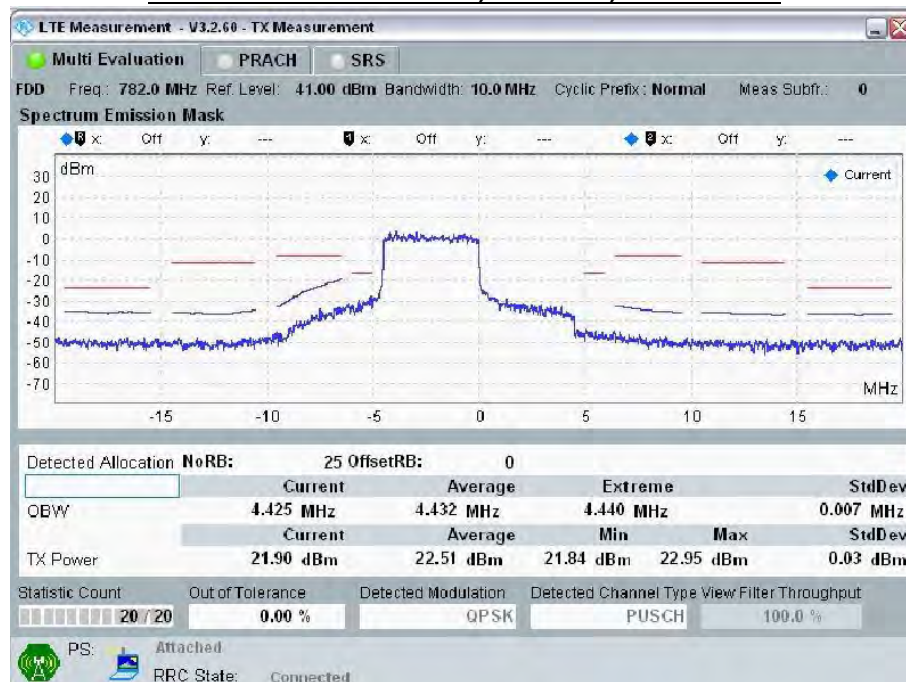


10MHz Band Width: Ch 23230, RB Size = 25; RB Offset = 0

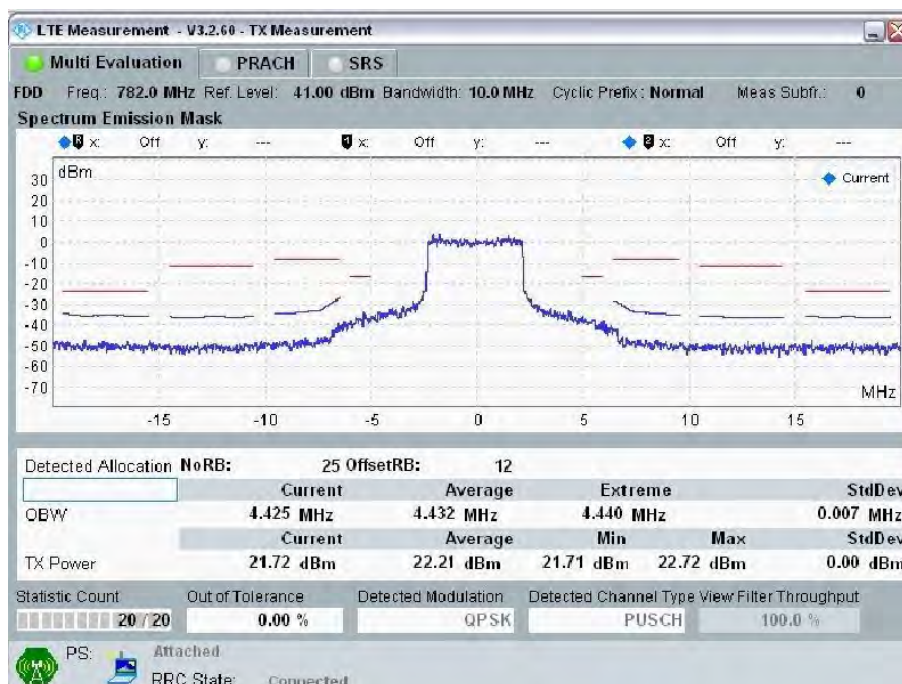

10MHz Band Width: Ch 23230, RB Size = 25; RB Offset = 12

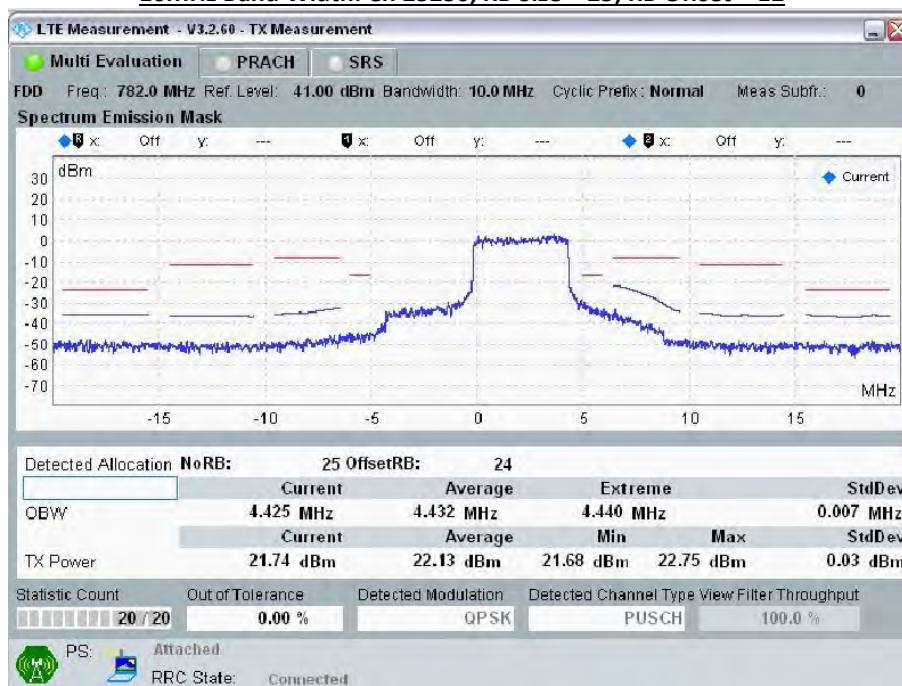

10MHz Band Width: Ch 23230, RB Size = 25; RB Offset = 24

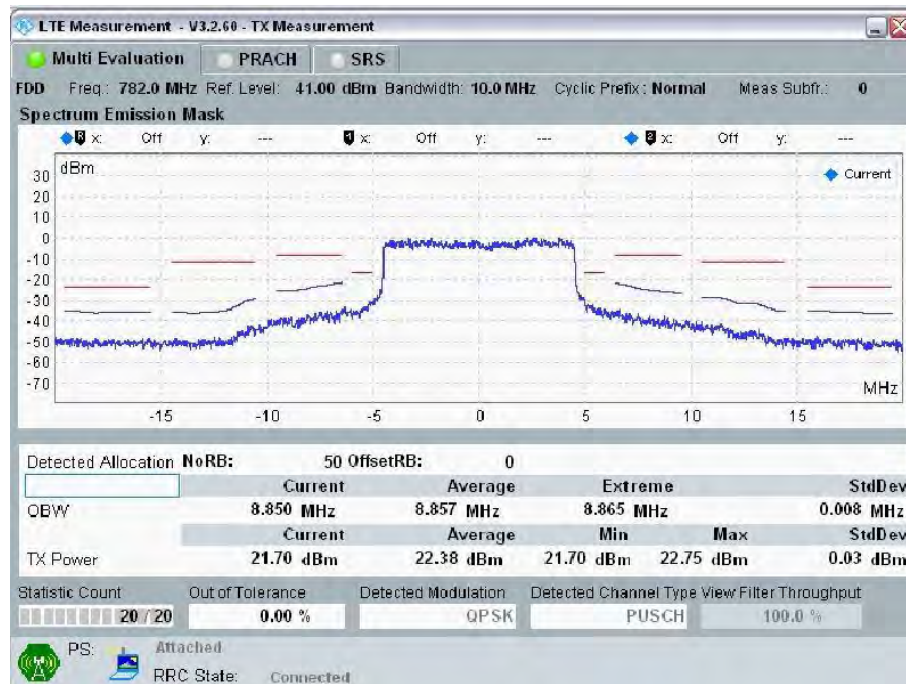

10MHz Band Width: Ch 23230, RB Size = 50; RB Offset = 0


10.6.6 LTE Band 17

Output power table


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)
17	10	23780	709.0	QPSK	1	0	0	23.8
					1	24	0	23.3
					1	49	0	23.0
					25	0	1	22.8
					25	12	1	22.4
					25	24	1	22.1
					50	0	1	22.8
				16QAM	1	0	1	22.9
					1	24	1	22.4
					1	49	1	22.1
					25	0	2	21.8
					25	12	2	21.3
					25	24	2	21.1
					50	0	2	21.0
		23790	710.0	QPSK	1	0	0	23.5
					1	24	0	23.3
					1	49	0	23.2
					25	0	1	22.6
					25	12	1	22.4
					25	24	1	22.3
					50	0	1	22.6
				16QAM	1	0	1	22.6
					1	24	1	22.4
					1	49	1	22.3
					25	0	2	21.6
					25	12	2	21.4
					25	24	2	21.3
					50	0	2	21.2
		23800	711.0	QPSK	1	0	0	23.6
					1	24	0	23.5
					1	49	0	23.2
					25	0	1	22.7
					25	12	1	22.5
					25	24	1	22.2
					50	0	1	22.6
				16QAM	1	0	1	22.7
					1	24	1	22.5
					1	49	1	22.3
					25	0	2	21.6
					25	12	2	21.5
					25	24	2	21.3
					50	0	2	21.3

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)
17	5	23755	706.5	QPSK	1	0	0	23.7
					1	12	0	22.8
					1	24	0	22.9
					12	0	1	21.5
					12	6	1	21.7
					12	11	1	21.8
					25	0	1	21.5
				16QAM	1	0	1	21.6
					1	12	1	21.8
					1	24	1	21.9
					12	0	2	20.6
					12	6	2	20.8
					12	11	2	20.9
					25	0	2	20.5
		23790	710.0	QPSK	1	0	0	23.4
					1	12	0	23.3
					1	24	0	23.1
					12	0	1	22.5
					12	6	1	22.3
					12	11	1	22.2
					25	0	1	22.5
				16QAM	1	0	1	22.5
					1	12	1	22.3
					1	24	1	22.2
					12	0	2	21.5
					12	6	2	21.3
					12	11	2	21.2
					25	0	2	21.1
		23825	713.5	QPSK	1	0	0	23.5
					1	12	0	23.4
					1	24	0	23.1
					12	0	1	22.6
					12	6	1	22.4
					12	11	1	22.1
					25	0	1	22.5
				16QAM	1	0	1	22.6
					1	12	1	22.5
					1	24	1	22.2
					12	0	2	21.5
					12	6	2	21.4
					12	11	2	21.2
					25	0	2	21.2


Spectrum Plots for the Test RB allocations

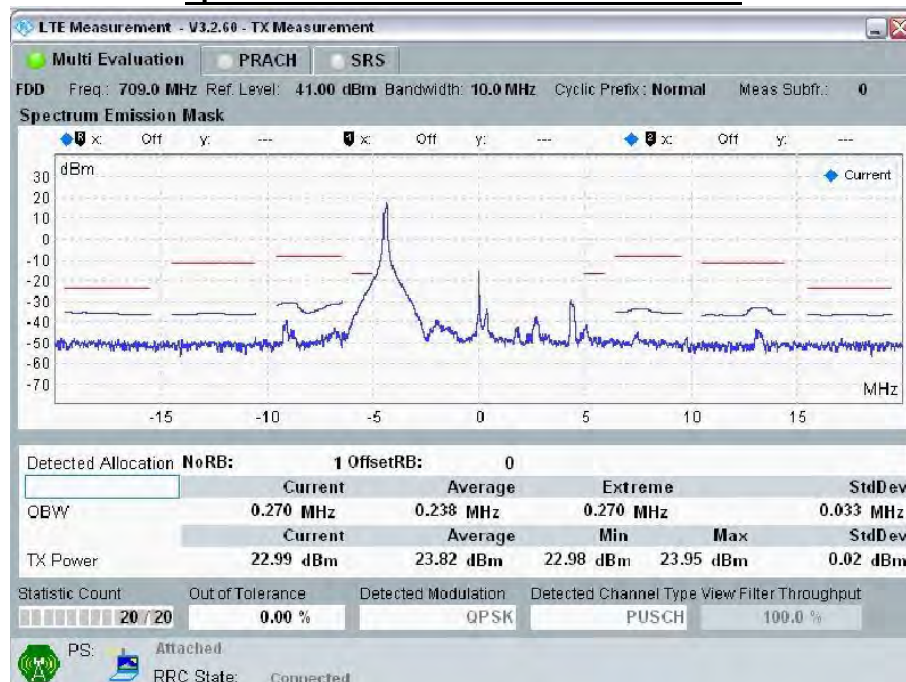


10MHz Band Width: Ch 23780, RB Size = 1; RB Offset = 0

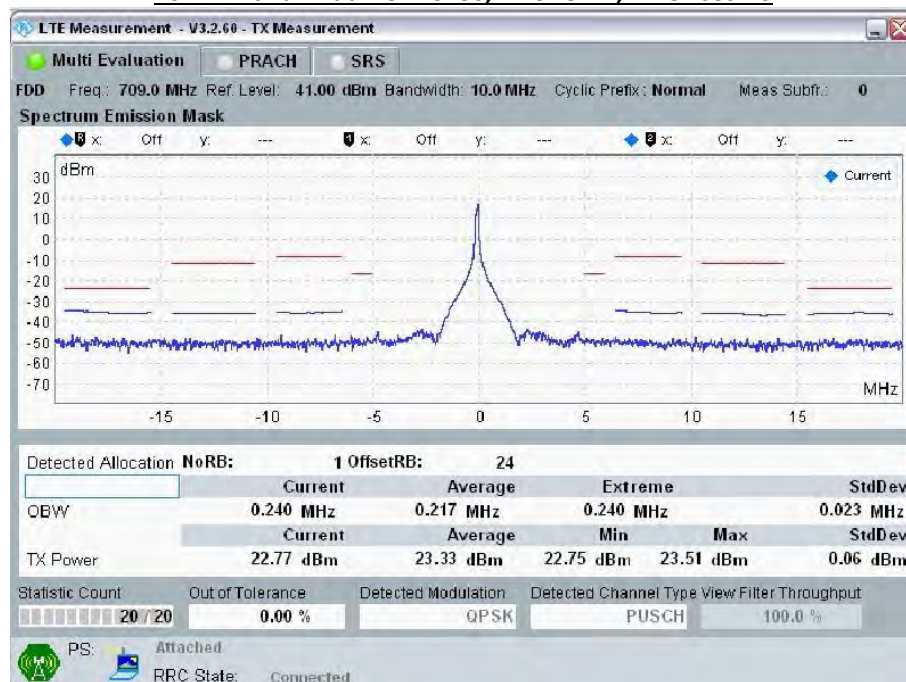


10MHz Band Width: Ch 23780, RB Size = 1; RB Offset = 24

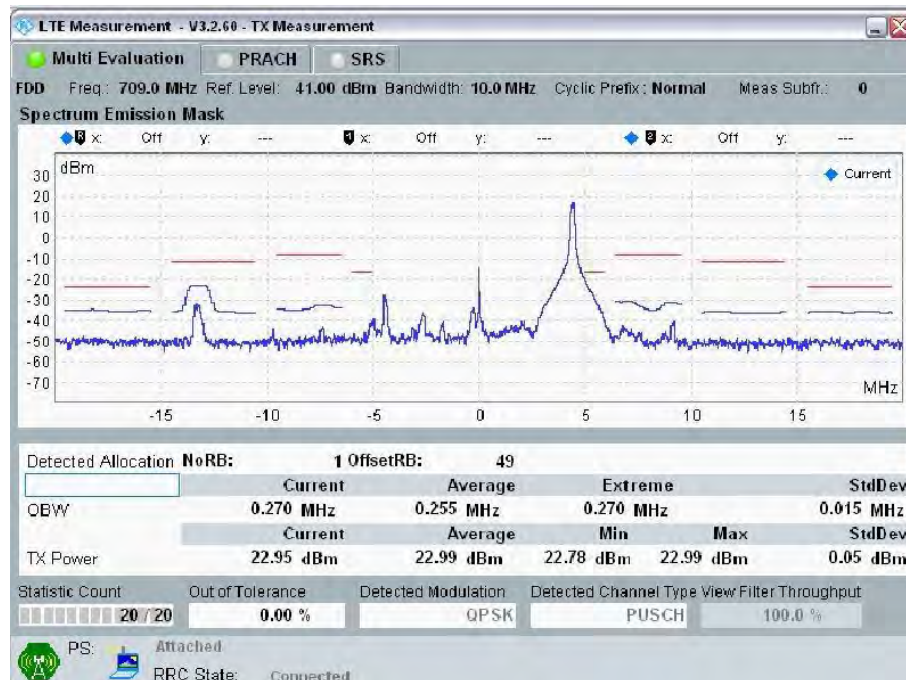


10MHz Band Width: Ch 23780, RB Size = 1; RB Offset = 49

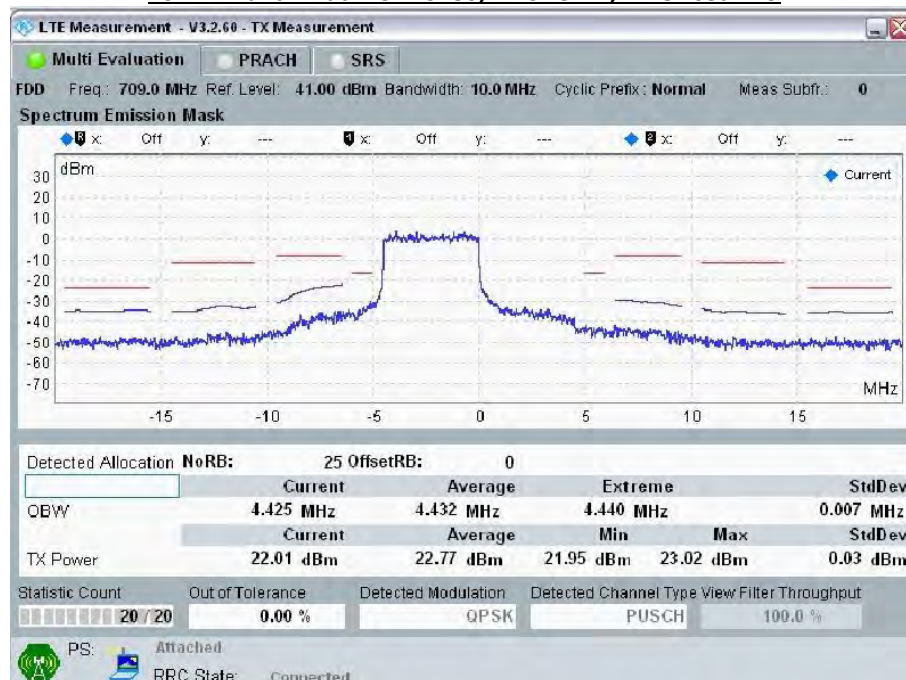


10MHz Band Width: Ch 23780, RB Size = 25; RB Offset = 0

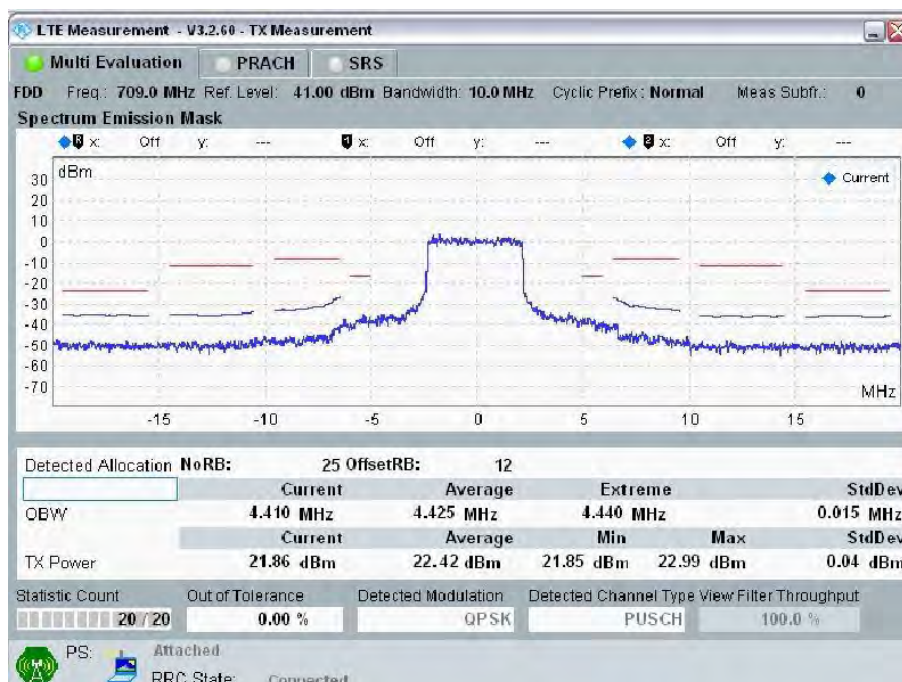

10MHz Band Width: Ch 23780, RB Size = 25; RB Offset = 12

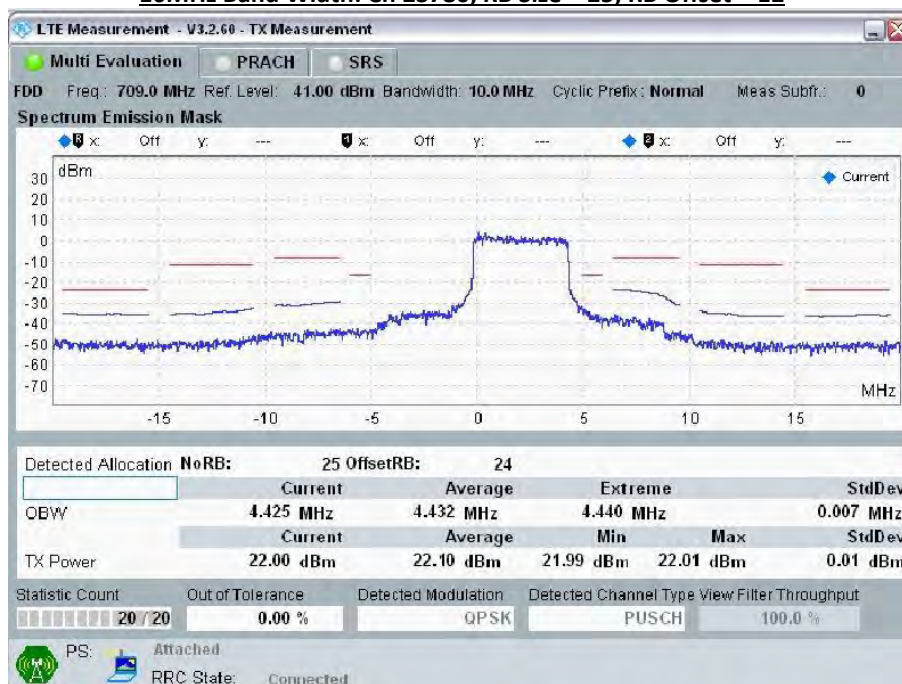

10MHz Band Width: Ch 23780, RB Size = 25; RB Offset = 24

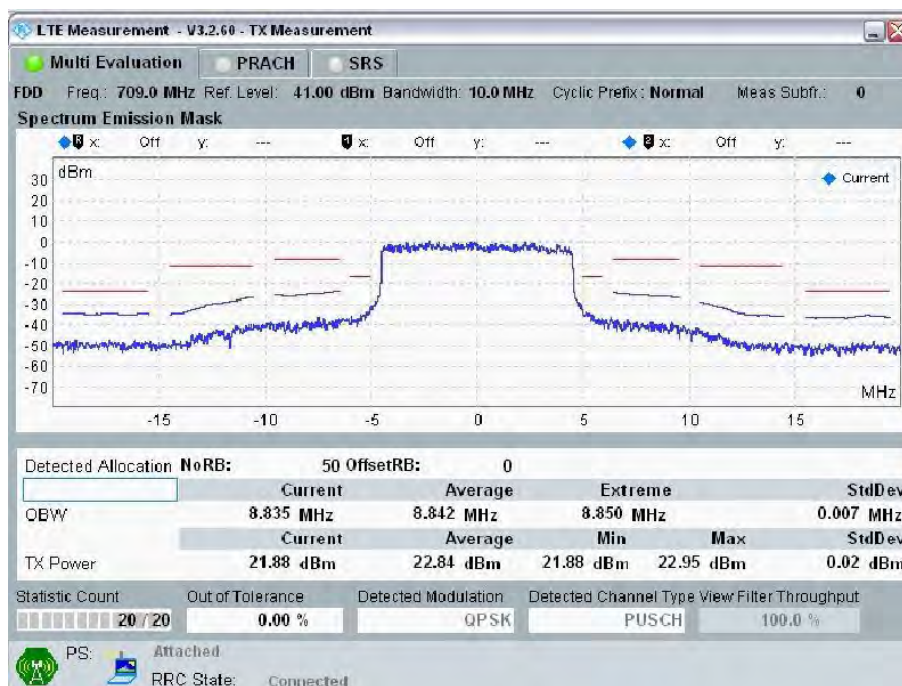

10MHz Band Width: Ch 23780, RB Size = 50; RB Offset = 0

10.7 Wi-Fi (2.4GHz Band)

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Avg. Pwr (dBm)	Maximum Tune-up Pwr (dBm)	SAR Test (Yes/No)	Note
2.4	802.11b	1	1	2412	15.7	16.5	Yes	
			6	2437	15.7	16.5		
			11	2462	15.9	16.5		
	802.11g	6	1	2412	Not Required	14.5	No	
			6	2437		14.5		
			11	2462		14.5		
	802.11n HT20	MCS0	1	2412	Not Required	13.5	No	
			6	2437		13.5		
			11	2462		13.5		
	802.11n HT40	MCS0	3	2422	Not Required	13.5	No	
			6	2437		13.5		
			9	2452		0.5		

10.8 Bluetooth

Modulation	Channel No.	Frequency(MHz)	Avg. power(dBm)
DH5	Low	2402	3.8
	Middle	2441	4.0
	High	2480	4.1
3DH5	Low	2402	3.1
	Middle	2441	3.3
	High	2480	3.3
BLE	Low	2402	7.2
	Middle	2440	7.3
	High	2480	7.4

11 Summary of SAR Test Exclusion Configurations

11.1 Standalone SAR Test Exclusion Calculations

Since the Dedicated Host Approach is applied, the standalone SAR test exclusion procedure in KDB 447498 section 4.3.1 is applied in conjunction with KDB 616217 section 4.3 to determine the minimum test separation distance:

1. According to KDB 447498 Section 4.1 5) if the antenna is at close proximity to user then the outer surface of the DUT should be treated as the radiating surface. The test separation distance is then determined by the smallest distance between the outer surface of the device and the user. For the purposes of this report close proximity has been defined as closer than 50 mm. For antennas <50 mm from the rear or edge the separation distance used for the estimated SAR calculations is 0 mm.
2. When the minimum test separation distance is < 5mm, a distance of 5mm is applied to determine SAR test exclusion.
3. When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.
4. If the antenna to DUT adjacent edge or bottom separation distance >50mm the actual antenna to user separation distance is used to determine SAR exclusion and estimated SAR value.

Refer to Appendix for the specific details on the antenna-to-antenna and antenna-to-edge distances used for test exclusion calculations.

11.1.1 SAR Exclusion Calculations for Wi-Fi Antenna < 50mm from the User

According to KDB 447498 v06 r02 in section 4.3.1, if the calculated threshold value is > 3 then SAR testing is required.

For WWAN

Full Power, Proximity Sensor Off.

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
			dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
WWAN	GPRS 850	836.0	25.7	372	4.40	19.00	224.10	42.00	7.90	77.30	17.90	>200mm	8.10	43.05
	GPRS 1900	1910.0	22.7	186	4.40	19.00	224.10	42.00	7.90	58.42	13.53	>200mm	6.12	32.54
	WCDMA Band II	1852.4	24.0	251	4.40	19.00	224.10	42.00	7.90	77.64	17.98	>200mm	8.13	43.24
	WCDMA Band IV	1712.4	24.0	251	4.40	19.00	224.10	42.00	7.90	74.65	17.29	>200mm	7.82	41.58
	WCDMA Band V	826.4	24.0	251	4.40	19.00	224.10	42.00	7.90	51.86	12.01	>200mm	5.43	28.88
	LTE Band 2	1860.0	24.0	251	4.40	19.00	224.10	42.00	7.90	77.80	18.02	>200mm	8.15	43.33
	LTE Band 4	1720.0	24.0	251	4.40	19.00	224.10	42.00	7.90	74.81	17.33	>200mm	7.84	41.67
	LTE Band 5	829.0	24.0	251	4.40	19.00	224.10	42.00	7.90	51.94	12.03	>200mm	5.44	28.93
	LTE Band 7	2510.0	24.0	251	4.40	19.00	224.10	42.00	7.90	90.38	20.93	>200mm	9.47	50.34
	LTE Band 13	782.0	24.0	251	4.40	19.00	224.10	42.00	7.90	50.45	11.68	>200mm	5.28	28.10
	LTE Band 17	710.0	24.0	251	4.40	19.00	224.10	42.00	7.90	48.07	11.13	>200mm	5.04	26.77

Power back off, Proximity Sensor On.

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
			dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
WWAN	GPRS 850	836.0	21.3	135	4.40	19.00	224.10	42.00	7.90	28.05	6.50	>200mm	2.94	15.62
	GPRS 1900	1910.0	20.3	107	4.40	19.00	224.10	42.00	7.90	33.61	7.78	>200mm	3.52	18.72
	WCDMA Band II	1852.4	20.0	100	4.40	19.00	224.10	42.00	7.90	30.93	7.16	>200mm	3.24	17.23
	WCDMA Band IV	1712.4	20.0	100	4.40	19.00	224.10	42.00	7.90	29.74	6.89	>200mm	3.12	16.56
	WCDMA Band V	826.4	21.0	126	4.40	19.00	224.10	42.00	7.90	26.03	6.03	>200mm	2.73	14.50
	LTE Band 2	1860.0	19.0	79	4.40	19.00	224.10	42.00	7.90	24.49	5.67	>200mm	2.57	13.64
	LTE Band 4	1720.0	20.0	100	4.40	19.00	224.10	42.00	7.90	29.81	6.90	>200mm	3.12	16.60
	LTE Band 7	2510.0	20.0	100	4.40	19.00	224.10	42.00	7.90	36.01	8.34	>200mm	3.77	20.05

For WLAN

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
			dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main	2.4GHz	2437	16.0	40	4.40	8.00	93.50	129.00	121.50	14.19	7.81	>50mm	>50mm	>50mm
Wi-Fi Main	BLE	2440	9.0	8	4.40	8.00	93.50	129.00	121.50	2.84	1.56	>50mm	>50mm	>50mm

11.1.2 SAR Exclusion Calculations for Wi-Fi Antenna > 50mm from the User

According to KDB 447498 v06 r02, if the calculated Power threshold is less than the output power then SAR testing is required.

For WWAN

Full Power, Proximity Sensor Off.

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
			dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
WWAN	GPRS 850	836.0	25.7	372	4.4	19	224.1	42	7.9	<50mm	<50mm	1905.05	<50mm	<50mm
	GPRS 1900	1910.0	22.7	186	4.4	19	224.1	42	7.9	<50mm	<50mm	1849.54	<50mm	<50mm
	WCDMA Band II	1852.4	24.0	251	4.4	19	224.1	42	7.9	<50mm	<50mm	1851.21	<50mm	<50mm
	WCDMA Band IV	1712.4	24.0	251	4.4	19	224.1	42	7.9	<50mm	<50mm	1855.63	<50mm	<50mm
	WCDMA Band V	826.4	24.0	251	4.4	19	224.1	42	7.9	<50mm	<50mm	1906.00	<50mm	<50mm
	LTE Band 2	1860.0	24.0	251	4.4	19	224.1	42	7.9	<50mm	<50mm	1850.99	<50mm	<50mm
	LTE Band 4	1720.0	24.0	251	4.4	19	224.1	42	7.9	<50mm	<50mm	1855.37	<50mm	<50mm
	LTE Band 5	829.0	24.0	251	4.4	19	224.1	42	7.9	<50mm	<50mm	1905.75	<50mm	<50mm
	LTE Band 7	2510.0	24.0	251	4.4	19	224.1	42	7.9	<50mm	<50mm	1835.68	<50mm	<50mm
	LTE Band 13	782.0	24.0	251	4.4	19	224.1	42	7.9	<50mm	<50mm	1910.62	<50mm	<50mm
	LTE Band 17	710.0	24.0	251	4.4	19	224.1	42	7.9	<50mm	<50mm	1919.02	<50mm	<50mm

Power back off, Proximity Sensor On.

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
			dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
WWAN	GPRS 850	836.0	21.3	135	4.4	19	224.1	42	7.9	<50mm	<50mm	1905.05	<50mm	<50mm
	GPRS 1900	1910.0	20.3	107	4.4	19	224.1	42	7.9	<50mm	<50mm	1849.54	<50mm	<50mm
	WCDMA Band II	1852.4	20.0	100	4.4	19	224.1	42	7.9	<50mm	<50mm	1851.21	<50mm	<50mm
	WCDMA Band IV	1712.4	20.0	100	4.4	19	224.1	42	7.9	<50mm	<50mm	1855.63	<50mm	<50mm
	WCDMA Band V	826.4	21.0	126	4.4	19	224.1	42	7.9	<50mm	<50mm	1906.00	<50mm	<50mm
	LTE Band 2	1860.0	19.0	79	4.4	19	224.1	42	7.9	<50mm	<50mm	1850.99	<50mm	<50mm
	LTE Band 4	1720.0	20.0	100	4.4	19	224.1	42	7.9	<50mm	<50mm	1855.37	<50mm	<50mm
	LTE Band 7	2510.0	20.0	100	4.4	19	224.1	42	7.9	<50mm	<50mm	1835.68	<50mm	<50mm

For WLAN

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
			dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main	2.4GHz	2437	16.0	40	4.4	8	93.50	129.00	121.50	<50mm	<50mm	531.09	886.09	811.09
Wi-Fi Main	BLE	2440	9.0	8	4.4	8	93.50	129.00	121.50	<50mm	<50mm	531.03	886.03	811.03

11.1.3 SAR Required Test Configuration**For WWAN**

Full Power, Proximity Sensor Off

Test Configurations	Rear	Edge1	Edge2	Edge3	Edge4
GPRS 850	Yes	Yes	No	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	Yes
WCDMA Band II	Yes	Yes	No	Yes	Yes
WCDMA Band IV	Yes	Yes	No	Yes	Yes
WCDMA Band V	Yes	Yes	No	Yes	Yes
LTE Band 2	Yes	Yes	No	Yes	Yes
LTE Band 4	Yes	Yes	No	Yes	Yes
LTE Band 5	Yes	Yes	No	Yes	Yes
LTE Band 7	Yes	Yes	No	Yes	Yes
LTE Band 13	Yes	Yes	No	Yes	Yes
LTE Band 17	Yes	Yes	No	Yes	Yes
Wi-Fi 2.4GHz	Yes	Yes	No	No	No
Bluetooth	No	No	No	No	No

Note(s):

1. Yes = SAR is required.
2. No = SAR is not required.

Power back off, Proximity Sensor On

Test Configurations	Rear	Edge1	Edge2	Edge3	Edge4
GPRS 850	Yes	Yes	No	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	Yes
WCDMA Band II	Yes	Yes	No	Yes	Yes
WCDMA Band IV	Yes	Yes	No	Yes	Yes
WCDMA Band V	Yes	Yes	No	No	Yes
LTE Band 2	Yes	Yes	No	No	Yes
LTE Band 4	Yes	Yes	No	Yes	Yes
LTE Band 7	Yes	Yes	No	Yes	Yes

Note(s):

1. Yes = SAR is required.
2. No = SAR is not required.

12 Exposure Limit

(A). Limits for Occupational/Controlled Exposure (W/kg)

<u>Whole-Body</u>	<u>Partial-Body</u>	<u>Hands, Wrists, Feet and Ankles</u>
0.4	8.0	2.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

<u>Whole-Body</u>	<u>Partial-Body</u>	<u>Hands, Wrists, Feet and Ankles</u>
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE
GENERAL POPULATION/UNCONTROLLED EXPOSURE
PARTIAL BODY LIMIT
1.6 W/kg

13 Tissue Dielectric Properties

13.1 Test Liquid Confirmation

Simulating Liquids Parameter Check

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values

The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below. 5% may not be easily achieved at certain frequencies.

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in IEEE 1528 2013 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in IEEE 1528 2013 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE 1528 2013

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

13.2 Typical Composition of Ingredients for Liquid Tissue Phantoms

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

alt: 99⁺% Pure Sodium Chloride

Sugar: 98⁺% Pure Sucrose

Water: De-ionized, 16 MΩ⁺ resistivity

HEC: Hydroxy thyl Cellulose

DGBE: 99⁺% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra-pure): Polyethylene glycol mono [4-(1, 1, 3, 3-tetramethylbutyl)phenyl]ether

Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2

13.3 Simulating Liquids Parameter Check Results

Date	Band	Freq(MHz)	Measured			Standard		Δ		Limit (%)
			e' (ϵ_r)	e''	σ	e' (ϵ_r)	σ	e' (ϵ_r)	σ	
2017/4/10	Body 1900	1855	52.17	14.27	1.47	53.30	1.52	-2.13%	-3.25%	± 5
		1880	52.11	14.31	1.49	53.30	1.52	-2.24%	-1.68%	± 5
		1905	52.02	14.35	1.52	53.30	1.52	-2.40%	-0.09%	± 5
2017/4/11	Body 1900	1850.2	51.12	14.06	1.44	53.30	1.52	-4.10%	-4.95%	± 5
		1880	51.02	13.98	1.46	53.30	1.52	-4.27%	-3.91%	± 5
		1909.8	50.86	14.18	1.50	53.30	1.52	-4.58%	-1.01%	± 5
2017/4/11	Body 1900	1852.4	51.12	14.04	1.45	53.30	1.52	-4.10%	-4.93%	± 5
		1880	51.02	13.98	1.46	53.30	1.52	-4.27%	-3.91%	± 5
		1907.6	50.87	14.16	1.50	53.30	1.52	-4.55%	-1.30%	± 5
2017/4/13	Body 1800	1715	51.31	15.46	1.47	53.52	1.47	-4.14%	0.47%	± 5
		1732.5	51.25	15.49	1.49	53.48	1.48	-4.17%	0.97%	± 5
		1750	51.20	15.52	1.51	53.43	1.49	-4.17%	1.39%	± 5
		1800	51.04	15.60	1.56	53.30	1.52	-4.24%	2.65%	± 5
2017/4/14	Body 1800	1712.4	52.74	14.98	1.43	53.53	1.46	-1.47%	-2.69%	± 5
		1732.4	52.73	14.86	1.43	53.48	1.48	-1.39%	-3.16%	± 5
		1752.6	52.53	14.86	1.45	53.43	1.49	-1.68%	-2.89%	± 5
2017/4/17	Body 750	782	56.52	22.68	0.99	55.41	0.97	2.00%	2.02%	± 5
2017/4/17	Body 750	709	57.12	23.25	0.92	55.69	0.96	2.57%	-4.63%	± 5
		710	57.12	23.25	0.92	55.69	0.96	2.57%	-4.51%	± 5
		711	57.12	23.25	0.92	55.68	0.96	2.58%	-4.38%	± 5
2017/4/18	Body 900	824.2	54.67	21.10	0.97	55.24	0.97	-1.04%	-0.32%	± 5
		836.6	54.58	21.03	0.98	55.20	0.97	-1.12%	0.64%	± 5
		848.8	54.47	20.92	0.99	55.16	0.99	-1.26%	0.06%	± 5
2017/4/18	Body 900	826.4	54.67	21.10	0.97	55.24	0.97	-1.03%	-0.07%	± 5
		836.6	54.58	21.03	0.98	55.20	0.97	-1.12%	0.64%	± 5
		846.6	54.50	20.94	0.99	55.17	0.98	-1.21%	0.16%	± 5
2017/4/18	Body 900	829	54.64	21.08	0.97	55.22	0.97	-1.06%	0.14%	± 5
		836.5	54.58	21.03	0.98	55.20	0.97	-1.12%	0.63%	± 5
		844	54.50	20.94	0.98	55.17	0.98	-1.22%	0.10%	± 5
2017/4/19	Body 2450	2412	52.46	14.49	1.94	52.75	1.91	-0.56%	1.44%	± 5
		2437	52.47	14.54	1.97	52.72	1.94	-0.47%	1.63%	± 5
		2442	52.45	14.54	1.97	52.71	1.94	-0.49%	1.56%	± 5
		2450	52.41	14.54	1.98	52.70	1.95	-0.55%	1.51%	± 5
		2462	52.31	14.55	1.99	52.68	1.97	-0.71%	1.16%	± 5
		2472	52.22	14.56	2.00	52.67	1.98	-0.86%	0.92%	± 5
		2480	52.17	14.58	2.01	52.66	1.99	-0.94%	0.84%	± 5
2017/4/19	Body 2600	2510	51.95	14.98	2.09	52.62	2.04	-1.27%	2.64%	± 5
		2535	51.84	15.01	2.11	52.59	2.07	-1.43%	2.07%	± 5
		2560	51.79	15.04	2.14	52.56	2.11	-1.46%	1.56%	± 5
		2600	51.75	15.10	2.18	52.51	2.16	-1.45%	0.83%	± 5

14 Measurement Uncertainty

According to KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz section 2.8.2, SAR measurement uncertainty analysis is required in SAR reports only when the highest measured SAR in a frequency band is ≥ 1.5 W/kg for 1-g SAR, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

15 System Performance Check

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications. The system performance check results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the SAM twin phantom filled with Body simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm
- The DASY5 system with E-field probe EX3DV4 SN:3665 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15 mm (below 1 GHz) and 10 mm (above 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 10mm was aligned with the dipole.
- Special 7x7x7 fine cube was chosen for cube integration ($dx=dy=5$ mm, $dz=5$ mm).
- Distance between probe sensors and phantom surface was set to 3.0 mm.
- The dipole input power (forward power) was 100 mW $\pm$ 3%.
- The results are normalized to 1 W input power.

Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D750V3	1020	2017/01/18	750	1g	8.43	8.67
				10g	5.47	5.66
D835V2	4d015	2017/03/21	835	1g	9.45	9.75
				10g	6.18	6.39
D1750V2	1158	2016/12/07	1800	1g	36.3	36.4
				10g	19.2	19.5
D1900V2	5d056	2017/02/17	1900	1g	39.9	40.2
				10g	20.7	21.1
D2450V2	728	2016/05/24	2450	1g	50.5	50.3
				10g	23.7	23.7
D2600V2	1058	2017/06/27	2600	1g	57.0	54.3
				10g	25.5	24.3

15.1 System Performance Check Results

Date	System Dipole			Parameters	Target	Measured	Deviation[%]	Limited[%]
	Type	Serial No.	Liquid					
2017/4/10	D1900V2	5d056	Body	1g SAR:	40.20	40.20	0.00	± 5
				10g SAR:	21.10	21.00	-0.47	± 5
2017/4/11	D1900V2	5d056	Body	1g SAR:	40.20	39.50	-1.74	± 5
				10g SAR:	21.10	20.60	-2.37	± 5
2017/4/13	D1750V2	1158	Body	1g SAR:	36.40	36.70	0.82	± 5
				10g SAR:	19.50	19.30	-1.03	± 5
2017/4/14	D1750V2	1158	Body	1g SAR:	36.40	35.30	-3.02	± 5
				10g SAR:	19.50	18.60	-4.62	± 5
2017/4/17	D750V3	1020	Body	1g SAR:	8.67	8.74	0.81	± 5
				10g SAR:	5.66	5.78	2.12	± 5
2017/4/18	D835V2	4d015	Body	1g SAR:	9.75	9.98	2.36	± 5
				10g SAR:	6.39	6.61	3.44	± 5
2017/4/19	D2450V2	728	Body	1g SAR:	50.30	51.00	1.39	± 5
				10g SAR:	23.70	24.00	1.27	± 5
2017/4/19	D2600V2	1058	Body	1g SAR:	54.30	55.50	2.21	± 5
				10g SAR:	24.30	23.40	-3.70	± 5

16 SAR Measurements Results

GPRS 850

Power back off (On/Off)	Mode	Slot	Test Position	Channel	Freq. (MHz)	Dist. (mm)	Frame Power (dBm)		Meas 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot.
							Tune up limit	Measured				
On	GPRS 850	3	Edge1	128	824.2	0	21.7	21.0	0.312	0.367		
		3	Edge3	128	824.2	0	21.7	21.0	0.047	0.055		
		3	Edge4	128	824.2	0	21.7	21.0	0.359	0.422		
		3	Rear	128	824.2	0	21.7	21.0	0.084	0.099		
Off		3	Edge1	128	824.2	9	25.7	25.4	0.127	0.136		
		3	Edge3	128	824.2	9	25.7	25.4	0.091	0.098		
		3	Edge4	128	824.2	9	25.7	25.4	0.266	0.285		
		3	Rear	128	824.2	9	25.7	25.4	0.387	0.415		1

GPRS 1900

Power back off (On/Off)	Mode	Slot	Test Position	Channel	Freq. (MHz)	Dist. (mm)	Frame Power (dBm)		Meas 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot.
							Tune up limit	Measured				
On	GPRS 1900	3	Edge1	661	1880.0	0	20.7	20.0	0.219	0.257		
		3	Edge3	661	1880.0	0	20.7	20.0	0.048	0.056		
		3	Edge4	661	1880.0	0	20.7	20.0	0.179	0.210		
		3	Rear	661	1880.0	0	20.7	20.0	0.359	0.422		
Off		3	Edge1	661	1880.0	9	22.7	22.3	0.103	0.113		
		3	Edge3	661	1880.0	9	22.7	22.3	0.092	0.101		
		3	Edge4	661	1880.0	9	22.7	22.3	0.108	0.118		
		3	Rear	661	1880.0	9	22.7	22.3	0.580	0.636		2

WCDMA Band II:

Power back off (On/Off)	Mode	Test Position	Channel	Freq. (MHz)	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot.
						Tune up limit	Measured				
On	Rel 99 RMC 12.2Kbps	Edge 1	9400	1880.0	0	20.0	19.9	0.323	0.331		
		Edge 3	9400	1880.0	0	20.0	19.9	0.168	0.172		
		Edge 4	9400	1880.0	0	20.0	19.9	0.559	0.572		
		Rear	9400	1880.0	0	20.0	19.9	1.170	1.197		
		Rear	9262	1852.4	0	20.0	19.8	1.140	1.194	1	
		Rear	9538	1907.6	0	20.0	19.9	1.190	1.218	1	
Off	Rel 99 RMC 12.2Kbps	Rear	9538	1907.6	0	20.0	19.9	1.200	1.228	2	3
		Edge 1	9400	1880.0	9	24.0	23.2	0.165	0.198		
		Edge 3	9400	1880.0	9	24.0	23.2	0.161	0.194		
		Edge 4	9400	1880.0	9	24.0	23.2	0.235	0.283		
		Rear	9400	1880.0	9	24.0	23.2	0.500	0.601		

Note(s):

- Testing of other required channels within the operating mode of a frequency band is required when the reported 1-g SAR for the mid-band or highest output power channel. ≥ 0.8 W/kg and transmission band ≤ 100 MHz (Per KDB 447498 D01 v06)
- Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR values are < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04)
 - Original SAR = 1.19 W/kg, therefore two times repeat SAR is required.
 - Repeat SAR = 1.2 W/kg < 1.45 W/kg
 - SAR variation= -0.84%

WCDMA Band IV:

Power back off (On/Off)	Mode	Test Position	Channel	Freq. (MHz)	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot
						Tune up limit	Measured				
On	Rel 99 RMC 12.2Kbps	Edge 1	1413	1732.6	0	20.0	20.0	0.340	0.340		
		Edge 3	1413	1732.6	0	20.0	20.0	0.198	0.198		
		Edge 4	1413	1732.6	0	20.0	20.0	0.606	0.606		
		Rear	1413	1732.6	0	20.0	20.0	1.150	1.150		4
		Rear	1312	1712.4	0	20.0	19.9	1.120	1.146	1	
		Rear	1513	1752.6	0	20.0	19.7	1.020	1.093	1	
Off	Rel 99 RMC 12.2Kbps	Rear	1413	1732.6	0	20.0	20.0	1.110	1.110	2	
		Edge 1	1413	1732.6	9	24.0	23.2	0.206	0.248		
		Edge 3	1413	1732.6	9	24.0	23.2	0.037	0.044		
		Edge 4	1413	1732.6	9	24.0	23.2	0.535	0.643		
		Rear	1413	1732.6	9	24.0	23.2	0.637	0.766		

Note(s):

- Testing of other required channels within the operating mode of a frequency band is required when the reported 1-g SAR for the mid-band or highest output power channel. ≥ 0.8 W/kg and transmission band ≤ 100 MHz (Per KDB 447498 D01 v06)
- Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR values are < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04)
 - Original SAR = 1.15 W/kg, therefore two times repeat SAR is required.
 - Repeat SAR = 1.11/kg < 1.45 W/kg
 - SAR variation= 3.48% $< 20\%$

WCDMA Band V:

Power back off (On/Off)	Mode	Test Position	Channel	Freq. (MHz)	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot
						Tune up limit	Measured				
On	Rel 99 RMC 12.2Kbps	Edge 1	4233	846.6	0	21.0	20.7	0.574	0.615		
		Edge 4	4233	846.6	0	21.0	20.7	0.751	0.805		
		Edge 4	4132	826.4	0	21.0	20.5	0.537	0.603	1	
		Rear	4233	846.6	0	21.0	20.7	0.953	1.021		5
		Rear	4132	826.4	0	21.0	20.5	0.590	0.662	1	
		Rear	4183	836.6	0	21.0	20.3	0.495	0.582	1	
		Rear	4233	846.6	0	21.0	20.7	0.952	1.020	2	
Off	Rel 99 RMC 12.2Kbps	Edge 1	4233	846.6	9	24.0	23.6	0.145	0.159		
		Edge 3	4233	846.6	9	24.0	23.6	0.018	0.020		
		Edge 4	4233	846.6	9	24.0	23.6	0.113	0.124		
		Rear	4233	846.6	9	24.0	23.6	0.266	0.292		

Note(s):

- Testing of other required channels within the operating mode of a frequency band is required when the reported 1-g SAR for the mid-band or highest output power channel. ≥ 0.8 W/kg and transmission band ≤ 100 MHz (Per KDB 447498 D01 v06)
- Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR values are < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04)
 - Original SAR = 0.953 W/kg, therefore two times repeat SAR is required.
 - Repeat SAR = 0.952 W/kg < 1.45 W/kg
 - SAR variation= 0.1 % $< 20\%$

LTE Band 2 (20MHz Bandwidth):

Power back off (On/Off)	Mode	Test Position	Channel	Freq. (MHz)	Dist. (mm)	UL RB Allocation	UL RB Start	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot
								Tune up limit	Measured				
On	QPSK	Edge1	18900	1880.0	0	1	0	19.0	19.0	0.353	0.353	1	
			18900	1880.0	0	50	0	18.0	18.0	0.289	0.289	1	
		Edge 4	18900	1880.0	0	1	0	19.0	19.0	0.559	0.559	1	
			18900	1880.0	0	50	0	18.0	18.0	0.479	0.479	1	
		Rear	18900	1880.0	0	1	0	19.0	19.0	1.190	1.190		
			18900	1880.0	0	1	49	19.0	18.8	1.120	1.173	2	
			18900	1880.0	0	1	99	19.0	18.7	1.110	1.189	2	
			18900	1880.0	0	50	0	18.0	18.0	0.972	0.972		
			18900	1880.0	0	50	24	18.0	17.8	0.930	0.974	2	
			18900	1880.0	0	50	49	18.0	17.8	0.929	0.973	2	
			18900	1880.0	0	100	0	18.0	18.0	0.956	0.956	2	
			18700	1860.0	0	1	0	19.0	18.9	1.060	1.085	2	
			18700	1860.0	0	50	0	18.0	18.0	0.790	0.790	2	
			19100	1900.0	0	1	0	19.0	18.9	1.050	1.074	2	
			19100	1900.0	0	50	0	18.0	18.0	0.961	0.961	2	
			18900	1880.0	0	1	0	19.0	19.0	1.240	1.240	3	6
Off	QPSK	Edge1	18900	1880.0	9	1	0	24.0	23.9	0.297	0.304	1	
			18900	1880.0	9	50	0	23.0	23.0	0.262	0.262	1	
		Edge3	18900	1880.0	9	1	0	24.0	23.9	0.253	0.259	1	
			18900	1880.0	9	50	0	23.0	23.0	0.240	0.240	1	
		Edge4	18900	1880.0	9	1	0	24.0	23.9	0.430	0.440	1	
			18900	1880.0	9	50	0	23.0	23.0	0.370	0.370	1	
		Rear	18900	1880.0	9	1	0	24.0	23.9	1.010	1.034		
			18900	1880.0	9	1	49	24.0	23.8	0.927	0.971	2	
			18900	1880.0	9	1	99	24.0	23.4	0.975	1.119	2	
			18900	1880.0	9	50	0	23.0	23.0	0.786	0.786	1	
			18900	1880.0	9	100	0	23.0	23.0	0.742	0.742	2	
			18700	1860.0	9	1	0	24.0	23.6	0.843	0.924	2	
			19100	1900.0	9	1	0	24.0	23.6	1.040	1.140	2	

Note(s):

- When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. (Per KDB 941225 D05 v02r05)
- The highest reported SAR for 1 RB and 50% RB allocation are ≥ 0.8 W/kg, SAR is required of 100% RB. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg. (Per KDB 941225 D05 v02r05)
- Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR values are < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04)
 - Original SAR = 1.190 W/kg, therefore two times repeat SAR is required.
 - Repeat SAR = 1.240 W/kg < 1.45 W/kg
 - SAR variation= -4.2 % $< 20\%$

LTE Band 4 (20MHz Bandwidth):

Power back off (On/Off)	Mode	Test Position	Channel	Freq. (MHz)	Dist. (mm)	UL RB Allocation	UL RB Start	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plots
								Tune up limit	Measured				
On	QPSK	Edge1	20175	1732.5	0	1	0	20.0	20.0	0.477	0.477	1	
			20175	1732.5	0	50	0	19.0	19.0	0.364	0.364	1	
		Edge3	20175	1732.5	0	1	0	20.0	20.0	0.005	0.005	1	
			20175	1732.5	0	50	0	19.0	19.0	0.005	0.005	1	
		Edge4	20175	1732.5	0	1	0	20.0	20.0	0.919	0.919		
			20175	1732.5	0	1	49	20.0	20.0	0.882	0.882		
			20175	1732.5	0	1	99	20.0	20.0	0.702	0.702		
			20175	1732.5	0	50	0	19.0	19.0	0.663	0.663	1	
		Rear	20175	1732.5	0	1	0	20.0	20.0	1.260	1.260		7
			20175	1732.5	0	1	49	20.0	19.7	0.805	0.863	2	
			20175	1732.5	0	1	99	20.0	19.7	0.830	0.889	2	
			20175	1732.5	0	50	0	19.0	19.0	0.763	0.763		
			20175	1732.5	0	100	0	19.0	19.0	0.738	0.738		
			20050	1720.0	0	1	0	20.0	19.9	1.180	1.207	2	
			20300	1745.0	0	1	0	20.0	19.5	1.020	1.144	2	
			20175	1732.5	0	1	0	20.0	20.0	1.210	1.210	3	
Off	QPSK	Edge1	20175	1732.5	9	1	0	24.0	23.8	0.335	0.351	1	
			20175	1732.5	9	50	0	23.0	22.9	0.279	0.285	1	
		Edge3	20175	1732.5	9	1	0	24.0	23.8	0.155	0.162	1	
			20175	1732.5	9	50	0	23.0	22.9	0.134	0.137	1	
		Edge4	20175	1732.5	9	1	0	24.0	23.8	0.549	0.575	1	
			20175	1732.5	9	50	0	23.0	22.9	0.439	0.449	1	
		Rear	20175	1732.5	9	1	0	24.0	23.8	0.763	0.799	1	
			20175	1732.5	9	50	0	23.0	22.9	0.583	0.597	1	

Note(s):

- When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. (Per KDB 941225 D05 v02r05)
- The highest reported SAR for 1 RB and 50% RB allocation are ≥ 0.8 W/kg, SAR is required of 100% RB. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg. (Per KDB 941225 D05 v02r05)
- Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR values are < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04)
 - Original SAR = 1.260 W/kg, therefore two times repeat SAR is required.
 - Repeat SAR = 1.210 W/kg < 1.45 W/kg
 - SAR variation= 3.97 % $< 20\%$

LTE Band 5 (10MHz Bandwidth):

Mode	Test Position	Channel	Freq. (MHz)	Dist. (mm)	UL RB Allocation	UL RB Start	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot.
							Tune up limit	Measured				
QPSK	Edge1	20450	829.0	0	1	0	24.0	23.5	0.550	0.617	1	
		20450	829.0	0	25	0	23.0	22.5	0.415	0.466	1	
	Edge3	20450	829.0	0	1	0	24.0	23.5	0.058	0.065	1	
		20450	829.0	0	25	0	23.0	22.5	0.049	0.055	1	
	Edge4	20450	829.0	0	1	0	24.0	23.5	0.616	0.691	1	
		20450	829.0	0	25	0	23.0	22.5	0.473	0.531	1	
	Rear	20450	829.0	0	1	0	24.0	23.5	0.924	1.037		
		20450	829.0	0	1	24	24.0	23.4	0.858	0.985	2	
		20450	829.0	0	1	49	24.0	23.3	0.905	1.063	2	8
		20450	829.0	0	25	0	23.0	22.5	0.726	0.815		
		20450	829.0	0	25	12	23.0	22.5	0.715	0.802	2	
		20450	829.0	0	25	24	23.0	22.4	0.709	0.814	2	
		20450	829.0	0	50	0	23.0	22.6	0.719	0.788		
		20525	836.5	0	1	0	24.0	23.4	0.833	0.956	2	
		20525	836.5	0	25	0	23.0	22.5	0.748	0.839	2	
		20600	844.0	0	1	0	24.0	23.3	0.837	0.983	2	
		20600	844.0	0	25	0	23.0	22.4	0.745	0.855	2	
		20450	829.0	0	1	0	24.0	23.5	0.939	1.054	3	

Note(s):

- When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. (Per KDB 941225 D05 v02r05)
- The highest reported SAR for 1 RB and 50% RB allocation are ≥ 0.8 W/kg, SAR is required of 100% RB. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg. (Per KDB 941225 D05 v02r05)
- Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR values are < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04)
 - Original SAR = 0.924 W/kg, therefore two times repeat SAR is required.
 - Repeat SAR = 0.939 W/kg < 1.45 W/kg
 - SAR variation= -1.62 % $< 20\%$

LTE Band 7 (20MHz Bandwidth):

Power back off (On/Off)	Mode	Test Position	Channel	Freq. (MHz)	Dist. (mm)	UL RB Allocation	UL RB Start	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot.
								Tune up limit	Measured				
On	QPSK	Edge1	21350	2560.0	0	1	0	20.0	20.0	0.559	0.559		
			21350	2560.0	0	50	0	19.0	19.0	0.521	0.521		
		Edge 3	21350	2560.0	0	1	0	20.0	20.0	0.215	0.215		
			21350	2560.0	0	50	0	19.0	19.0	0.187	0.187		
		Edge4	21350	2560.0	0	1	0	20.0	20.0	1.180	1.180		
			21350	2560.0	0	1	49	20.0	19.8	1.100	1.152	2	
			21350	2560.0	0	1	99	20.0	19.8	1.010	1.058	2	
			21350	2560.0	0	50	0	19.0	19.0	0.962	0.962		
			21350	2560.0	0	50	24	19.0	18.9	0.892	0.913	2	
			21350	2560.0	0	50	49	19.0	18.8	0.908	0.951	2	
			21350	2560.0	0	100	0	19.0	19.0	0.991	0.991	2	
			20850	2535.0	0	1	0	20.0	19.9	1.130	1.156	2	
			20850	2535.0	0	50	0	19.0	19.0	0.886	0.886	2	
			21100	2535.0	0	1	0	20.0	19.7	0.955	1.023	2	
			21100	2535.0	0	50	0	19.0	18.8	0.927	0.971	2	
			21350	2560.0	0	1	0	20.0	20.0	1.200	1.200	3	9
		Rear	21350	2560.0	0	1	0	20.0	20.0	1.010	1.010		
			21350	2560.0	0	1	49	20.0	19.8	1.000	1.047	2	
			21350	2560.0	0	1	99	20.0	19.8	0.923	0.966	2	
			21350	2560.0	0	50	0	19.0	19.0	0.803	0.803		
			21350	2560.0	0	50	24	19.0	18.9	0.767	0.785	2	
			21350	2560.0	0	50	49	19.0	18.8	0.800	0.838	2	
			21350	2560.0	0	100	0	19.0	19.0	0.810	0.810	2	
			20850	2510.0	0	1	0	20.0	19.9	0.897	0.918	2	
			20850	2510.0	0	50	0	19.0	19.0	0.675	0.675	2	
			21100	2535.0	0	1	0	20.0	19.7	0.960	1.029	2	
			21100	2535.0	0	50	0	19.0	18.8	0.812	0.850		
Off	QPSK	Edge1	21350	2560.0	9	1	0	24.0	23.4	0.170	0.195	1	
			21350	2560.0	9	50	0	23.0	22.4	0.149	0.171	1	
		Edge 3	21350	2560.0	9	1	0	24.0	23.4	0.090	0.103	1	
			21350	2560.0	9	50	0	23.0	22.4	0.048	0.055	1	
		Edge4	21350	2560.0	9	1	0	24.0	23.4	0.515	0.591	1	
			21350	2560.0	9	50	0	23.0	22.4	0.339	0.389	1	
		Rear	21350	2560.0	9	1	0	24.0	23.4	0.434	0.498	1	
			21350	2560.0	9	50	0	23.0	22.4	0.359	0.412	1	

Note(s):

- When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. (Per KDB 941225 D05 v02r05)
- The highest reported SAR for 1 RB and 50% RB allocation are ≥ 0.8 W/kg, SAR is required of 100% RB. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg. (Per KDB 941225 D05 v02r05)
- Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR values are < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04)
 - Original SAR = 1.180 W/kg, therefore two times repeat SAR is required.
 - Repeat SAR = 1.200 W/kg < 1.45 W/kg
 - SAR variation= -1.69 % $< 20\%$

LTE Band 13 (10MHz Bandwidth):

Power back off (On/Off)	Mode	Test Position	Channel	Freq. (MHz)	Dist. (mm)	UL RB Allocation	UL RB Start	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot.
								Tune up limit	Measured				
On	QPSK	Edge1	23230	782.0	0	1	0	24.0	23.4	0.205	0.235	1	
			23230	782.0	0	25	0	23.0	22.5	0.182	0.204	1	
		Edge3	23230	782.0	0	1	0	24.0	23.4	0.046	0.053	1	
			23230	782.0	0	25	0	23.0	22.5	0.034	0.038	1	
		Edge4	23230	782.0	0	1	0	24.0	23.4	0.378	0.434	1	
			23230	782.0	0	25	0	23.0	22.5	0.352	0.395	1	
		Rear	23230	782.0	0	1	0	24.0	23.4	1.020	1.171		10
			23230	782.0	0	1	24	24.0	23.2	0.917	1.102	2	
			23230	782.0	0	1	49	24.0	23.1	0.877	1.079	2	
			23230	782.0	0	25	0	23.0	22.5	0.851	0.955		
			23230	782.0	0	25	12	23.0	22.2	0.843	1.014	2	
			23230	782.0	0	25	24	23.0	22.1	0.842	1.036	2	
			23230	782.0	0	50	0	23.0	22.4	0.856	0.983	2	
			23230	782.0	0	1	0	24.0	23.4	1.010	1.160	3	

Note(s):

- When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. (Per KDB 941225 D05 v02r05)
- The highest reported SAR for 1 RB and 50% RB allocation are ≥ 0.8 W/kg, SAR is required of 100% RB. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg. (Per KDB 941225 D05 v02r05)
- Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR values are < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04)
 - Original SAR = 1.02 W/kg, therefore two times repeat SAR is required.
 - Repeat SAR = 1.01 W/kg < 1.45 W/kg
 - SAR variation= 0.98 % $< 20\%$

LTE Band 17 (10MHz Bandwidth):

Power back off (On/Off)	Mode	Test Position	Channel	Freq. (MHz)	Dist. (mm)	UL RB Allocation	UL RB Start	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot.
								Tune up limit	Measured				
On	QPSK	Edge1	23780	709.0	0	1	0	24.0	23.8	0.048	0.050	1	
			23780	709.0	0	25	0	23.0	22.8	0.040	0.042	1	
		Edge3	23780	709.0	0	1	0	24.0	23.8	0.040	0.042	1	
			23780	709.0	0	25	0	23.0	22.8	0.023	0.024	1	
		Edge4	23780	709.0	0	1	0	24.0	23.8	0.177	0.185	1	
			23780	709.0	0	25	0	23.0	22.8	0.146	0.153	1	
		Rear	23780	709.0	0	1	0	24.0	23.8	0.326	0.341	1	
			23780	709.0	0	25	0	23.0	22.8	0.364	0.381	1	
			23790	708.0	0	1	0	24.0	23.5	0.326	0.366		
			23800	710.0	0	1	0	24.0	23.6	0.369	0.405		11

Note(s):

- When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. (Per KDB 941225 D05 v02r05)
- The highest reported SAR for 1 RB and 50% RB allocation are ≥ 0.8 W/kg, SAR is required of 100% RB. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg. (Per KDB 941225 D05 v02r05)

Wi-Fi (2.4GHz Band):

Test Mode	Band (GHz)	Mode	Dist. (mm)	Test Position	Ch#	Freq. (MHz)	Chain	Power (dBm)		Area Scan 1g SAR (W/Kg)	Zoom Scan 1g SAR (W/kg)	Reported SAR (W/kg)	Note	Plot No.
								Tune up limit	Meas.					
Tablet	2.4GHz	802.11b	0	Edge 1	11	2462	Main	16.5	15.9	0.366	0.354	0.406		
			0	Rear	11	2462	Main	16.5	15.9	0.575	0.588	0.675		12

Bluetooth:

Band (GHz)	Mode	Dist. (mm)	Test Position	Ch#	Freq. (MHz)	Chain	Power (dBm)		Area Scan 1g SAR (W/Kg)	Zoom Scan 1g SAR (W/kg)	Reported SAR (W/kg)	Note	Plot No.
							Tune up limit	Meas.					
Bluetooth	BLE	0	Edge 1	39	2480	1	9.0	7.4	0.075	0.080	0.116		
			Rear	39	2480	1	9.0	7.4	0.185	0.145	0.210		13

17 Simultaneous Transmission SAR Analysis

17.1 Sum of the SAR for Simultaneous Transmission Analysis

17.1.1 Sum of the SAR for WLAN & WWAN

GPRS 850+2.4G Band

Test Position	Simultaneous Transmission Scenario			1+2 Summed 1g SAR(W/kg)	1+3 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2	3			
	GPRS 850	Wi-Fi Main 2.4 GHz Band	Bluetooth			
Rear	0.422	0.675	0.210	1.097	0.632	No
Edge 1	0.367	0.406	0.116	0.773	0.522	No

Note(s):

As the Sum of the SAR is less than 1.6W/Kg, so SPLSR is not required.

GPRS 1900+2.4G Band

Test Position	Simultaneous Transmission Scenario			1+2 Summed 1g SAR(W/kg)	1+3 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2	3			
	GPRS 1900	Wi-Fi Main 2.4 GHz Band	Bluetooth			
Rear	0.636	0.675	0.210	1.311	0.846	No
Edge 1	0.257	0.406	0.116	0.663	0.522	No

Note(s):

As the Sum of the SAR is less than 1.6W/Kg, so SPLSR is not required.

WCDMA Band II+2.4G Band

Test Position	Simultaneous Transmission Scenario			1+2 Summed 1g SAR(W/kg)	1+3 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2	3			
	WCDMA Band II	Wi-Fi Main 2.4 GHz Band	Bluetooth			
Rear	1.228	0.675	0.210	1.903	1.438	Yes
Edge 1	0.331	0.406	0.116	0.737	0.522	No

Note(s):

As the Sum of the SAR is greater than 1.6W/Kg, so SPLSR is required.

WCDMA Band IV+2.4G Band

Test Position	Simultaneous Transmission Scenario			1+2 Summed 1g SAR(W/kg)	1+3 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2	3			
	WCDMA Band IV	Wi-Fi Main 2.4 GHz Band	Bluetooth			
Rear	1.150	0.675	0.210	1.825	1.360	Yes
Edge 1	0.340	0.406	0.116	0.746	0.522	No

Note(s):

As the Sum of the SAR is greater than 1.6W/Kg, so SPLSR is required.

WCDMA Band V +2.4G Band

Test Position	Simultaneous Transmission Scenario			1+2 Summed 1g SAR(W/kg)	1+3 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2	3			
	WCDMA Band V	Wi-Fi Main 2.4 GHz Band	Bluetooth			
Rear	1.021	0.675	0.210	1.696	1.231	Yes
Edge 1	0.615	0.406	0.116	1.021	0.522	No

Note(s):

As the Sum of the SAR is greater than 1.6W/Kg, so SPLSR is required.

LTE Band 2 +2.4G Band

Test Position	Simultaneous Transmission Scenario			1+2 Summed 1g SAR(W/kg)	1+3 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2	3			
	LTE Band 2	Wi-Fi Main 2.4 GHz Band	Bluetooth			
Rear	1.240	0.675	0.210	1.915	1.450	Yes
Edge 1	0.353	0.406	0.116	0.759	0.522	No

Note(s):

As the Sum of the SAR is greater than 1.6W/Kg, so SPLSR is required.

LTE Band 4 +2.4G Band

Test Position	Simultaneous Transmission Scenario			1+2 Summed 1g SAR(W/kg)	1+3 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2	3			
	LTE Band 4	Wi-Fi Main 2.4 GHz Band	Bluetooth			
Rear	1.260	0.675	0.210	1.935	1.470	Yes
Edge 1	0.477	0.406	0.116	0.883	0.522	No

Note(s):

As the Sum of the SAR is greater than 1.6W/Kg, so SPLSR is required.

LTE Band 5 +2.4G Band

Test Position	Simultaneous Transmission Scenario			1+2 Summed 1g SAR(W/kg)	1+3 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2	3			
	LTE Band 5	Wi-Fi Main 2.4 GHz Band	Bluetooth			
Rear	1.063	0.675	0.210	1.738	1.273	Yes
Edge 1	0.617	0.406	0.116	1.023	0.522	No

Note(s):

As the Sum of the SAR is greater than 1.6W/Kg, so SPLSR is required.

LTE Band 7 +2.4G Band

Test Position	Simultaneous Transmission Scenario			1+2 Summed 1g SAR(W/kg)	1+3 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2	3			
	LTE Band 7	Wi-Fi Main 2.4 GHz Band	Bluetooth			
Rear	1.200	0.675	0.210	1.875	1.410	Yes
Edge 1	0.559	0.406	0.116	0.965	0.522	No

Note(s):

As the Sum of the SAR is greater than 1.6W/Kg, so SPLSR is required.

LTE Band 13 +2.4G Band

Test Position	Simultaneous Transmission Scenario			1+2 Summed 1g SAR(W/kg)	1+3 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2	3			
	LTE Band 13	Wi-Fi Main 2.4 GHz Band	Bluetooth			
Rear	1.171	0.675	0.210	1.846	1.381	Yes
Edge 1	0.235	0.406	0.116	0.641	0.522	No

Note(s):

As the Sum of the SAR is greater than 1.6W/Kg, so SPLSR is required.

LTE Band 17 +2.4G Band

Test Position	Simultaneous Transmission Scenario			1+2 Summed 1g SAR(W/kg)	1+3 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2	3			
	LTE Band 17	Wi-Fi Main 2.4 GHz Band	Bluetooth			
Rear	0.405	0.675	0.210	1.080	0.615	No
Edge 1	0.050	0.406	0.116	0.456	0.522	No

Note(s):

As the Sum of the SAR is less than 1.6W/Kg, so SPLSR is not required.

17.1.2 Sum of the 1g SAR for Body Exposure Condition**WCDMA Band II + 2.4GHz Band**

Test Position	Simultaneous Transmission Scenario		Σ 1-g SAR (W/kg)	Calculated distance (cm)	SPLSR	Figure
	WCDMA Band II	Wi-Fi Main 2.4 GHz Band				
Rear	1.228	0.675	1.903	14.34	0.02	1

Note(s):

The SPLSR is rounded to two decimal digits and ≤ 0.04 **WCDMA Band IV + 2.4GHz Band**

Test Position	Simultaneous Transmission Scenario		Σ 1-g SAR (W/kg)	Calculated distance (cm)	SPLSR	Figure
	WCDMA Band IV	Wi-Fi Main 2.4 GHz Band				
Rear	1.150	0.675	1.825	14.35	0.02	2

Note(s):

The SPLSR is rounded to two decimal digits and ≤ 0.04 **WCDMA Band V + 2.4GHz Band**

Test Position	Simultaneous Transmission Scenario		Σ 1-g SAR (W/kg)	Calculated distance (cm)	SPLSR	Figure
	WCDMA Band V	Wi-Fi Main 2.4 GHz Band				
Rear	1.021	0.675	1.696	13.72	0.02	3

Note(s):

The SPLSR is rounded to two decimal digits and ≤ 0.04 **LTE Band 2 + 2.4GHz Band**

Test Position	Simultaneous Transmission Scenario		Σ 1-g SAR (W/kg)	Calculated distance (cm)	SPLSR	Figure
	LTE Band 2	Wi-Fi Main 2.4 GHz Band				
Rear	1.240	0.675	1.915	13.87	0.02	4

Note(s):

The SPLSR is rounded to two decimal digits and ≤ 0.04 **LTE Band 4 + 2.4GHz Band**

Test Position	Simultaneous Transmission Scenario		Σ 1-g SAR (W/kg)	Calculated distance (cm)	SPLSR	Figure
	LTE Band 4	Wi-Fi Main 2.4 GHz Band				
Rear	1.260	0.675	1.935	14.72	0.02	5

Note(s):

The SPLSR is rounded to two decimal digits and ≤ 0.04 **LTE Band 5 + 2.4GHz Band**

Test Position	Simultaneous Transmission Scenario		Σ 1-g SAR (W/kg)	Calculated distance (cm)	SPLSR	Figure
	LTE Band 5	Wi-Fi Main 2.4 GHz Band				
Rear	1.063	0.675	1.738	13.63	0.02	6

Note(s):

The SPLSR is rounded to two decimal digits and ≤ 0.04

LTE Band 7 + 2.4GHz Band

Test Position	Simultaneous Transmission Scenario		Σ 1-g SAR (W/kg)	Calculated distance (cm)	SPLSR	Figure
	LTE Band 7	Wi-Fi Main 2.4 GHz Band				
Rear	1.200	0.675	1.875	15.22	0.02	7

Note(s):

The SPLSR is rounded to two decimal digits and ≤ 0.04

LTE Band 13 + 2.4GHz Band

Test Position	Simultaneous Transmission Scenario		Σ 1-g SAR (W/kg)	Calculated distance (cm)	SPLSR	Figure
	LTE Band 13	Wi-Fi Main 2.4 GHz Band				
Rear	1.171	0.675	1.846	13.63	0.02	8

Note(s):

The SPLSR is rounded to two decimal digits and ≤ 0.04

18 Equipment List & Calibration Status

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Cycle(year)	Calibration Due
Wireless Communication Test Set	Agilent	E5515C 8960	MY48361017	1	2017/08/31
Radio Communication Analyzer	Anritsu	MT8820C	620093800	1	2017/07/25
Wideband Radio communication Tester	R&S	CMW 500	116875	1	2018/04/24
S-Parameter Network Analyzer	Agilent	E5071C	MY46107234	1	2017/10/18
Electronic Probe kit	Hewlett Packard	85070D	N/A	N/A	N/A
Power Meter	Agilent	4416	GB41291611	1	2017/08/30
Power Sensor	Agilent	8481H	MY41091956	1	2017/08/30
Data Acquisition Electronics (DAE)	SPEAG	DAE4	877	1	2018/03/19
Data Acquisition Electronics (DAE)	SPEAG	DAE4	917	1	2018/01/05
Dosimetric E-Field Probe	SPEAG	EX3DV4	3665	1	2017/05/25
750 MHz System Validation Dipole	SPEAG	D750V3	1020	1	2018/01/17
835 MHz System Validation Dipole	SPEAG	D835V2	4d015	1	2018/03/20
1750 MHz System Validation Dipole	SPEAG	D1750V2	1158	1	2017/10/06
1900 MHz System Validation Dipole	SPEAG	D1900V2	5d056	1	2018/02/16
2450 MHz System Validation Dipole	SPEAG	D2450V2	728	1	2017/05/23
Robot	Staubli	RX90L	F02/5T69A1/A/01	N/A	N/A
Amplifier	Mini-Circuit	ZVE-8G	665500309	N/A	N/A
Amplifier	Mini-Circuit	ZHL-1724HLN	D072602#2	N/A	N/A
Thermometer	Comet	53120	12932714	1	2018/2/23

19 Facilities

All measurement facilities used to collect the measurement data are located at

- ☐ No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang, Taoyuan Hsien, Taiwan, R.O.C.
- ☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)
- ☐ No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

20 Reference

- [1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environ-mental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commision, O_ce of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-_eld scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions on Communications, vol. E80-B, no. 5, pp. 645{652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz - 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-2005: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 2005.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-_eld probes in tissue simulating liquids at mobile communications frequencies", in ICECOM _ 97, Dubrovnik, October 15{17, 1997, pp. 120{124.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-_eld probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23{25 June, 1996, pp. 172{175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard K. uhn, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865{1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992..Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10

21 Attachments

Exhibit	Content
1	System Performance Check Plots
2	SAR Test Data Plots
3	SPLSR Plots
4	Calibration Data Report
5	T170328D17-SF PHOTOS

END OF REPORT