

FCC Test Report

Report No.: RF180522C01 R1

FCC ID: M82-ARK1124

Model: ARK-1124

Series Model: ARK-1124YXXXXXXXXXXXXXXXXXX, ARK1124YXXXXXXXXXXXXXXXXXX,
EIS-D210WXXXXXXXXXXXXXXXXXX, EISD210WXXXXXXXXXXXXXXXXXX
(X=0-9, A-Z, hyphen, or blank, Y= 0-9, A-Z, hyphen, or blank, except "Y" not be
"D" and "F")

Received Date: May 22, 2018

Test Date: Jun. 06 ~ Jun. 27, 2018

Issued Date: Aug. 13, 2018

Applicant: ADVANTECH CO., LTD

Address: No. 1, Alley 20, Lane 26, Rueiguang Rd, Neihs District, Taipei, Taiwan 114

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan,
R.O.C.

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN (R.O.C.)

**FCC Registration/
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail	9
3.3 Duty Cycle of Test Signal	11
3.4 Description of Support Units	12
3.4.1 Configuration of System under Test	12
3.5 General Description of Applied Standards	12
4 Test Types and Results	13
4.1 Radiated Emission and Bandedge Measurement	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement	13
4.1.2 Test Instruments	14
4.1.3 Test Procedures	15
4.1.4 Deviation from Test Standard	15
4.1.5 Test Set Up	16
4.1.6 EUT Operating Conditions	17
4.1.7 Test Results	18
4.2 Conducted Emission Measurement	39
4.2.1 Limits of Conducted Emission Measurement	39
4.2.2 Test Instruments	39
4.2.3 Test Procedures	40
4.2.4 Deviation from Test Standard	40
4.2.5 Test Setup	40
4.2.6 EUT Operating Conditions	40
4.2.7 Test Results	41
4.3 6dB Bandwidth Measurement	43
4.3.1 Limits of 6dB Bandwidth Measurement	43
4.3.2 Test Setup	43
4.3.3 Test Instruments	43
4.3.4 Test Procedure	43
4.3.5 Deviation from Test Standard	43
4.3.6 EUT Operating Conditions	43
4.3.7 Test Result	44
4.4 Conducted Output Power Measurement	46
4.4.1 Limits of Conducted Output Power Measurement	46
4.4.2 Test Setup	46
4.4.3 Test Instruments	46
4.4.4 Test Procedures	46
4.4.5 Deviation from Test Standard	46
4.4.6 EUT Operating Conditions	46
4.4.7 Test Results	47
4.5 Power Spectral Density Measurement	48
4.5.1 Limits of Power Spectral Density Measurement	48
4.5.2 Test Setup	48
4.5.3 Test Instruments	48
4.5.4 Test Procedure	48
4.5.5 Deviation from Test Standard	48
4.5.6 EUT Operating Condition	48

4.5.7 Test Results	49
4.6 Conducted Out of Band Emission Measurement.....	52
4.6.1 Limits of Conducted Out of Band Emission Measurement	52
4.6.2 Test Setup.....	52
4.6.3 Test Instruments	52
4.6.4 Test Procedure	52
4.6.5 Deviation from Test Standard	52
4.6.6 EUT Operating Condition	53
4.6.7 Test Results	53
5 Pictures of Test Arrangements.....	70
Appendix – Information on the Testing Laboratories	71

Release Control Record

Issue No.	Description	Date Issued
RF180522C01	Original release	Jul. 16, 2018
RF180522C01 R1	Added WiFi module information	Aug. 13, 2018

1 Certificate of Conformity

Product: Computer

Brand: Advantech

Model: ARK-1124

Series Model: ARK-1124YXXXXXXXXXXXXXXXXXX, ARK1124YXXXXXXXXXXXXXXXXXX,
EIS-D210WXXXXXXXXXXXXXXXXXX, EISD210WXXXXXXXXXXXXXXXXXX
(X=0-9, A-Z, hyphen, or blank, Y= 0-9, A-Z, hyphen, or blank, except "Y" not be "D" and
"F")

Sample Status: Engineering sample

Applicant: ADVANTECH CO., LTD

Test Date: Jun. 06 ~ Jun. 27, 2018

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Pettie Chen, **Date:** Aug. 13, 2018
Pettie Chen / Senior Specialist

Approved by : Bruce Chen, **Date:** Aug. 13, 2018
Bruce Chen / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -12.08dB at 0.44325MHz
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.5dB at 2483.50MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is SMA Male Reverse not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Computer
Brand	Advantech
Model	ARK-1124
Series Model	ARK-1124YXXXXXXXXXXXXXXXXX, ARK1124YXXXXXXXXXXXXXXXXX, EIS-D210WXXXXXXXXXXXXXXXXX, EISD210WXXXXXXXXXXXXXXXXX (X=0-9, A-Z, hyphen, or blank, Y= 0-9, A-Z, hyphen, or blank, except "Y" not be "D" and "F")
Model Difference	Refer to Note
Sample Status	Engineering sample
Power Supply Rating	12Vdc (Adapter)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b:11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300Mbps
Operating Frequency	2412 ~ 2472MHz
Number of Channel	13 for 802.11b, 802.11g, 802.11n (HT20) 9 for 802.11n (HT40)
Output Power	458.498mW
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	Adapter
Data Cable Supplied	NA

Note:

1. All models are listed as below. Model ARK-1124 is the representative for final test.

Brand	Model	Description
Advantech	ARK-1124YXXXXXXXXXXXXXXXXX	Marketing purpose
	ARK1124YXXXXXXXXXXXXXXXXX	
	EIS-D210WXXXXXXXXXXXXXXXXX	
	EISD210WXXXXXXXXXXXXXXXXX	

X= 0-9, A-Z, hyphen, or blank

Y= 0-9, A-Z, hyphen, or blank, except "Y" not be "D" and "F"

2. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	TX Function
802.11b	2TX
802.11g	2TX
802.11n (HT20)	2TX
802.11n (HT40)	2TX

3. The EUT with follow antennas gain is listed as table below.

Brand	Model	Antenna Type	Connector Type	Frequency Range	Antenna Gain(dBi)
Cortec Technology Inc.	AN2450-5511BRS	Dipole	SMA Male Reverse	2.4~2.5GHz	2.89
				5.15~5.85GHz	3.58

4. The following configurations are set for EUT.

Item	Specification
CPU	Intel E3940 Quad Core SoC
	Intel N3350 Dual Core SoC

* Intel N3350 Dual Core SoC is the worst case for the final tests.

5. The EUT consumes power from the following adapter.

Adapter	
Brand	FSP GROUP INC.
Model	FSP060-DIBAN2
Input Power	100-240V~, 1.5A, 50-60Hz
Output Power	12.0V/ 5.0A MAX
Power cable	1.4m non-shielded cable with one core

6. The following WiFi module was provided to the EUT.

Model	Chipset	Type
QCNFA364A	QCA6174A	IEEE 802.11ac/a/b/g/n 2X2 MIMO WLAN & Bluetooth M.2 module

7. Both of the Bluetooth and WLAN (5GHz) can transmit simultaneously.

3.2 Description of Test Modes

13 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	8	2447MHz
2	2417MHz	9	2452MHz
3	2422MHz	10	2457MHz
4	2427MHz	11	2462MHz
5	2432MHz	12	2467MHz
6	2437MHz	13	2472MHz
7	2442MHz		

9 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	8	2447MHz
4	2427MHz	9	2452MHz
5	2432MHz	10	2457MHz
6	2437MHz	11	2462MHz
7	2442MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 13	1, 6, 11, 12, 13	DSSS	DBPSK	1.0
-	802.11g	1 to 13	1, 6, 11, 12, 13	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 13	1, 6, 11, 12, 13	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 11	3, 6, 9, 10, 11	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (HT20)	1 to 13	6	OFDM	BPSK	6.5

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (HT20)	1 to 13	6	OFDM	BPSK	6.5

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 13	1, 6, 11, 12, 13	DSSS	DBPSK	1.0
-	802.11g	1 to 13	1, 6, 11, 12, 13	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 13	1, 6, 11, 12, 13	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 11	3, 6, 9, 10, 11	OFDM	BPSK	13.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	25deg. C, 70%RH	120Vac, 60Hz	Luis Lee
RE<1G	23deg. C, 69%RH	120Vac, 60Hz	Willy Cheng
PLC	23deg. C, 69%RH	120Vac, 60Hz	Willy Cheng
APCM	25deg. C, 60%RH	120Vac, 60Hz	Frank Liu

3.3 Duty Cycle of Test Signal


Duty cycle of test signal is > 98 %, duty factor is not required.
Duty cycle of test signal is < 98%, duty factor shall be considered.

802.11b: Duty cycle = $12.309/12.49 = 0.986$

802.11g: Duty cycle = $2.047/2.149 = 0.953$, Duty factor = $10 * \log(1/0.953) = 0.21$

802.11n (HT20): Duty cycle = $1.91/2.015 = 0.948$, Duty factor = $10 * \log(1/0.948) = 0.23$

802.11n (HT40): Duty cycle = $0.935/1.045 = 0.895$, Duty factor = $10 * \log(1/0.895) = 0.48$

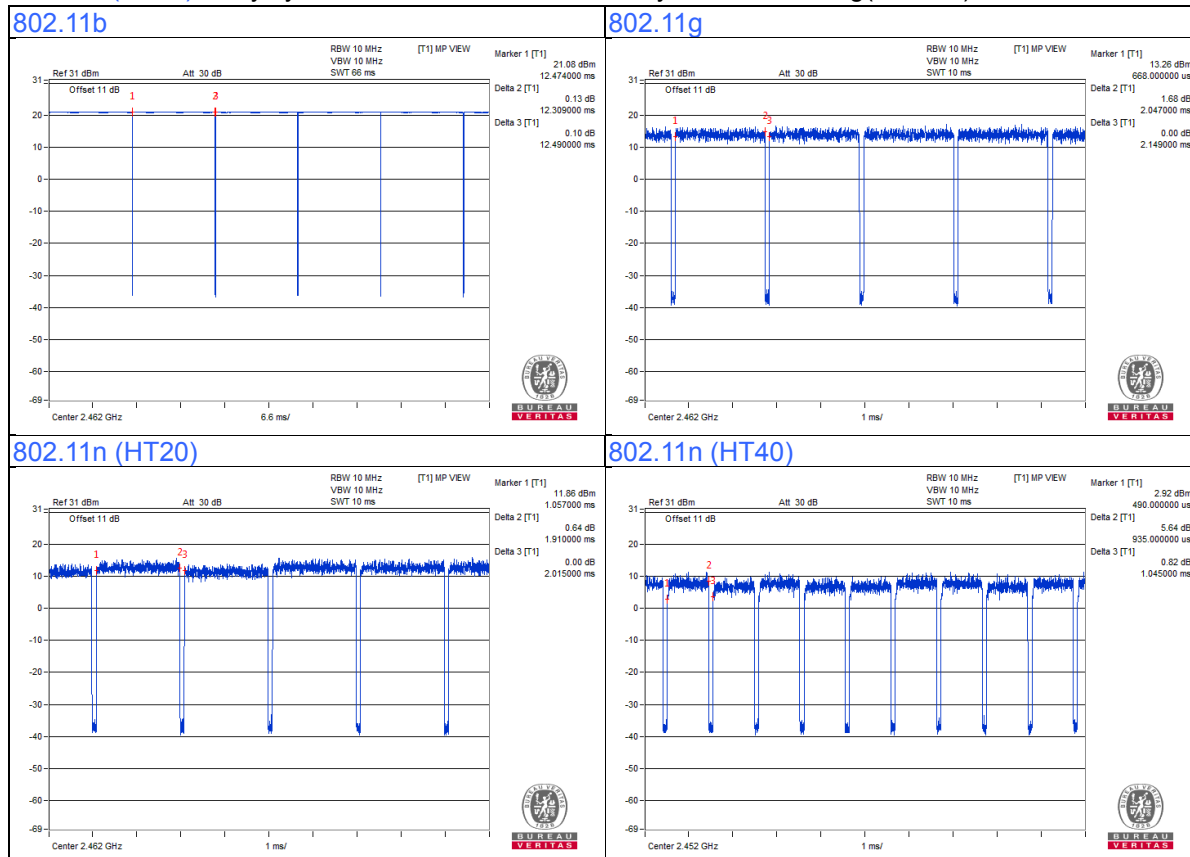

3.4 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Monitor	DELL	2001FP	CN-0C0647-466 33-544-06AL	FCC DoC Approved	-
B.	Keyboard	DELL	RT7D50	CN-0J4624-3717 2-44T-000M	FCC DoC Approved	-
C.	Mouse	DELL	MO56U0	516056250	FCC DoC Approved	-
D.	Load	NA	NA	NA	NA	-

Note: All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB cable	1	1	Y	0	-
2.	USB cable	1	1	Y	0	-
3.	USB cable	1	1	Y	0	-
4.	RJ45 cable	2	1.5	N	0	-

3.4.1 Configuration of System under Test

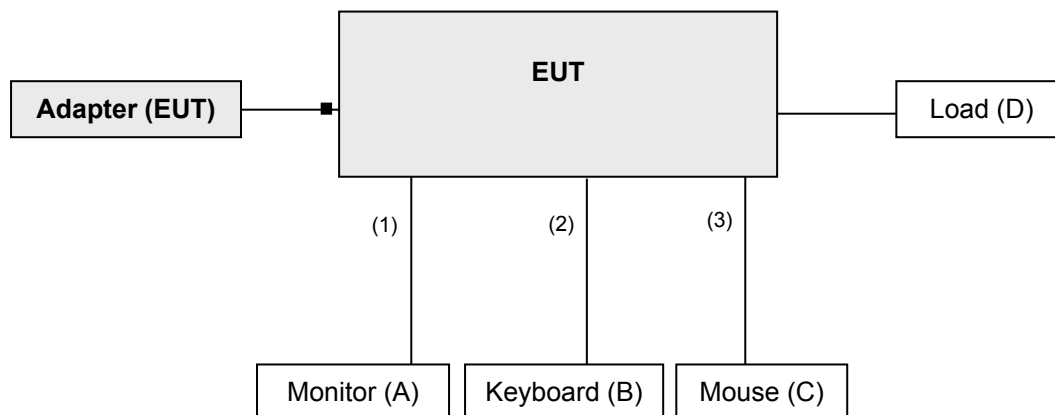

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 DTS Meas Guidance v04

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	May 29, 2018	May 28, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Dec. 12, 2017	Dec. 11, 2018
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Dec. 11, 2017	Dec. 10, 2018
HORN Antenna SCHWARZBECK	9120D	209	Dec. 13, 2017	Dec. 12, 2018
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Dec. 01, 2017	Nov. 30, 2018
Loop Antenna EMCI	EM-6879	269	Aug. 11, 2017	Aug. 10, 2018
Preamplifier Agilent (Below 1GHz)	8447D	2944A10738	Aug. 21, 2017	Aug. 20, 2018
Preamplifier Agilent (Above 1GHz)	8449B	3008A02465	Apr. 03, 2018	Apr. 02, 2019
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Aug. 21, 2017	Aug. 20, 2018
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 104&EMC104-SM-SM-8 000	Cable-CH3-03 (309224+170907)	Sep.11, 2017	Sep. 10, 2018
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
High Speed Peak Power Meter	ML2495A	0824012	Aug. 18, 2017	Aug. 17, 2018
Power Sensor	MA2411B	0738171	Aug. 18, 2017	Aug. 17, 2018

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 3.
3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Designation Number is TW0003. The number will be varied with the Lab location and scope as attached.
5. The IC Site Registration No. is IC 7450F-3.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up


For Radiated emission below 30MHz

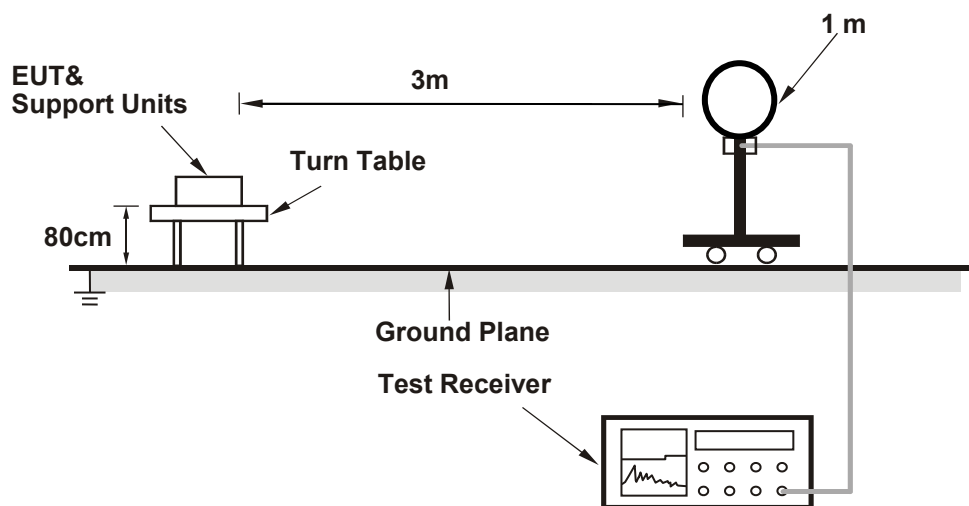

For Radiated emission 30MHz to 1GHz

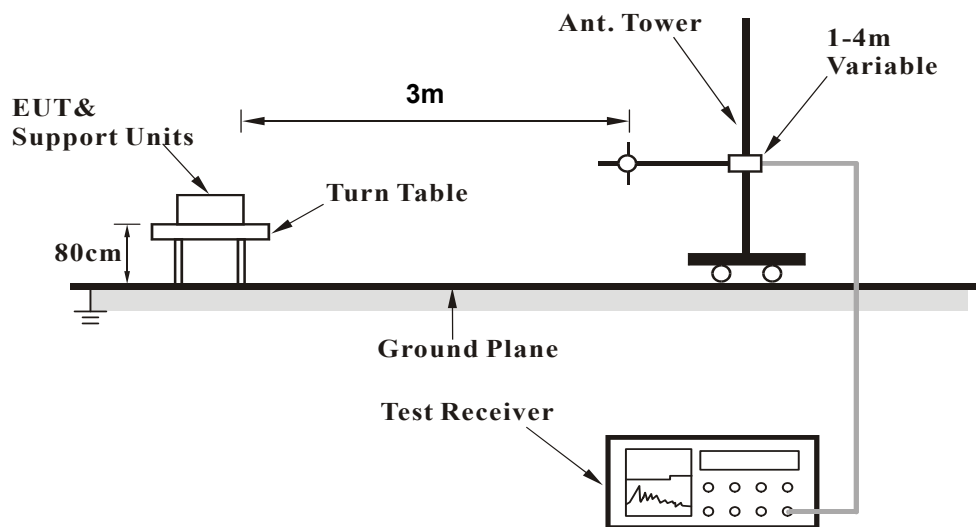

For Radiated emission above 1GHz

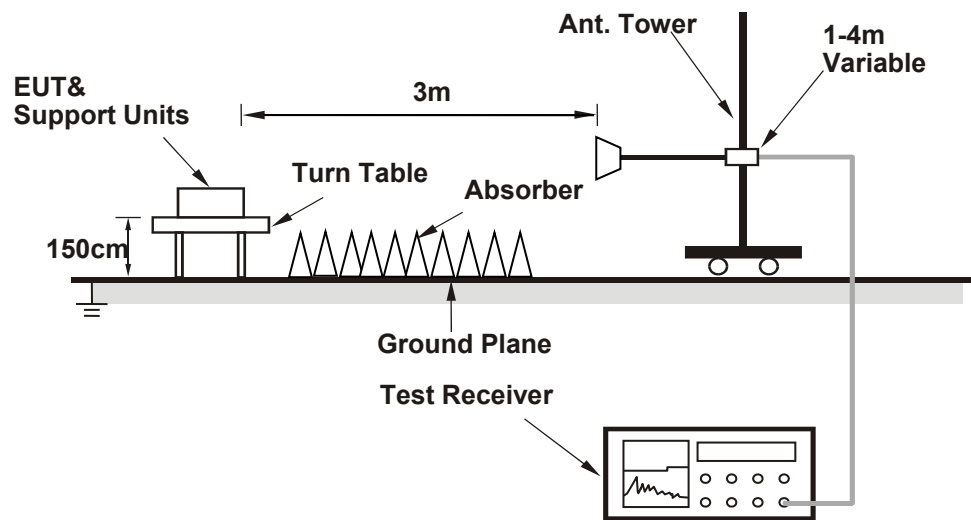

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- The EUT ran test program "QCAQMSL-QLIB" to enable all functions.
- Set the EUT under transmission condition continuously at specific channel frequency.
- The EUT sent "H" patterns to the monitor and the monitor displayed "H" patterns.

4.1.7 Test Results

Above 1GHz worst-Case data:

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.0 PK	74.0	-16.0	2.18 H	239	24.5	33.5
2	2390.00	46.0 AV	54.0	-8.0	2.18 H	239	12.5	33.5
3	*2412.00	106.3 PK			2.06 H	222	72.9	33.4
4	*2412.00	103.3 AV			2.06 H	222	69.9	33.4
5	4824.00	52.6 PK	74.0	-21.4	2.08 H	319	48.6	4.0
6	4824.00	47.1 AV	54.0	-6.9	2.08 H	319	43.1	4.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.6 PK	74.0	-15.4	1.16 V	200	25.1	33.5
2	2390.00	47.5 AV	54.0	-6.5	1.16 V	200	14.0	33.5
3	*2412.00	112.3 PK			1.05 V	216	78.9	33.4
4	*2412.00	108.6 AV			1.05 V	216	75.2	33.4
5	4824.00	53.2 PK	74.0	-20.8	1.00 V	64	49.2	4.0
6	4824.00	47.6 AV	54.0	-6.4	1.00 V	64	43.6	4.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.0 PK			2.27 H	221	74.6	33.4
2	*2437.00	105.9 AV			2.27 H	221	72.5	33.4
3	4874.00	51.1 PK	74.0	-22.9	2.39 H	287	47.4	3.7
4	4874.00	46.9 AV	54.0	-7.1	2.39 H	287	43.2	3.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.0 PK			1.17 V	214	79.6	33.4
2	*2437.00	109.1 AV			1.17 V	214	75.7	33.4
3	4874.00	52.2 PK	74.0	-21.8	1.26 V	79	48.5	3.7
4	4874.00	47.4 AV	54.0	-6.6	1.26 V	79	43.7	3.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.8 PK			2.19 H	221	73.5	33.3
2	*2462.00	104.5 AV			2.19 H	221	71.2	33.3
3	2483.50	58.1 PK	74.0	-15.9	1.98 H	233	24.9	33.2
4	2483.50	47.3 AV	54.0	-6.7	1.98 H	233	14.1	33.2
5	4924.00	50.5 PK	74.0	-23.5	2.11 H	305	47.0	3.5
6	4924.00	47.1 AV	54.0	-6.9	2.11 H	305	43.6	3.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.7 PK			1.00 V	217	79.4	33.3
2	*2462.00	108.8 AV			1.00 V	217	75.5	33.3
3	2483.50	59.9 PK	74.0	-14.1	1.13 V	227	26.7	33.2
4	2483.50	49.9 AV	54.0	-4.1	1.13 V	227	16.7	33.2
5	4924.00	52.1 PK	74.0	-21.9	1.31 V	90	48.6	3.5
6	4924.00	47.6 AV	54.0	-6.4	1.31 V	90	44.1	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 12	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2467.00	105.7 PK			2.29 H	217	72.4	33.3
2	*2467.00	101.7 AV			2.29 H	217	68.4	33.3
3	2483.50	60.4 PK	74.0	-13.6	2.04 H	213	27.2	33.2
4	2483.50	50.4 AV	54.0	-3.6	2.04 H	213	17.2	33.2
5	4934.00	50.5 PK	74.0	-23.5	2.02 H	330	46.9	3.6
6	4934.00	46.4 AV	54.0	-7.6	2.02 H	330	42.8	3.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2467.00	110.8 PK			1.00 V	214	77.5	33.3
2	*2467.00	107.0 AV			1.00 V	214	73.7	33.3
3	2483.50	62.9 PK	74.0	-11.1	1.03 V	204	29.7	33.2
4	2483.50	53.0 AV	54.0	-1.0	1.03 V	204	19.8	33.2
5	4934.00	51.6 PK	74.0	-22.4	1.06 V	86	48.0	3.6
6	4934.00	46.8 AV	54.0	-7.2	1.06 V	86	43.2	3.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 13	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2472.00	99.3 PK			2.26 H	222	66.1	33.2
2	*2472.00	96.1 AV			2.26 H	222	62.9	33.2
3	2483.50	59.2 PK	74.0	-14.8	2.49 H	235	26.0	33.2
4	2483.50	47.3 AV	54.0	-6.7	2.49 H	235	14.1	33.2
5	4944.00	48.2 PK	74.0	-25.8	1.92 H	299	44.6	3.6
6	4944.00	35.1 AV	54.0	-18.9	1.92 H	299	31.5	3.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2472.00	104.7 PK			1.00 V	216	71.5	33.2
2	*2472.00	100.8 AV			1.00 V	216	67.6	33.2
3	2483.50	60.6 PK	74.0	-13.4	1.25 V	239	27.4	33.2
4	2483.50	50.5 AV	54.0	-3.5	1.25 V	239	17.3	33.2
5	4944.00	48.5 PK	74.0	-25.5	1.16 V	66	44.9	3.6
6	4944.00	35.2 AV	54.0	-18.8	1.16 V	66	31.6	3.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.5 PK	74.0	-13.5	3.34 H	209	27.0	33.5
2	2390.00	48.9 AV	54.0	-5.1	3.34 H	209	15.4	33.5
3	*2412.00	106.7 PK			3.25 H	219	73.3	33.4
4	*2412.00	96.6 AV			3.25 H	219	63.2	33.4
5	4824.00	48.7 PK	74.0	-25.3	3.69 H	229	44.7	4.0
6	4824.00	36.9 AV	54.0	-17.1	3.69 H	229	32.9	4.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.8 PK	74.0	-9.2	1.09 V	127	31.3	33.5
2	2390.00	52.9 AV	54.0	-1.1	1.09 V	127	19.4	33.5
3	*2412.00	112.4 PK			1.22 V	147	79.0	33.4
4	*2412.00	102.6 AV			1.22 V	147	69.2	33.4
5	4824.00	50.5 PK	74.0	-23.5	2.25 V	123	46.5	4.0
6	4824.00	36.3 AV	54.0	-17.7	2.25 V	123	32.3	4.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.9 PK			3.21 H	207	77.5	33.4
2	*2437.00	100.6 AV			3.21 H	207	67.2	33.4
3	4874.00	50.0 PK	74.0	-24.0	3.99 H	272	46.3	3.7
4	4874.00	36.7 AV	54.0	-17.3	3.99 H	272	33.0	3.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	116.7 PK			2.20 V	342	83.3	33.4
2	*2437.00	106.7 AV			2.20 V	342	73.3	33.4
3	4874.00	50.0 PK	74.0	-24.0	2.57 V	256	46.3	3.7
4	4874.00	37.0 AV	54.0	-17.0	2.57 V	256	33.3	3.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.4 PK			3.63 H	136	71.1	33.3
2	*2462.00	94.6 AV			3.63 H	136	61.3	33.3
3	2483.50	58.3 PK	74.0	-15.7	3.93 H	148	25.1	33.2
4	2483.50	46.8 AV	54.0	-7.2	3.93 H	148	13.6	33.2
5	4924.00	46.7 PK	74.0	-27.3	3.63 H	249	43.2	3.5
6	4924.00	33.7 AV	54.0	-20.3	3.63 H	249	30.2	3.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.4 PK			1.77 V	6	78.1	33.3
2	*2462.00	101.3 AV			1.77 V	6	68.0	33.3
3	2483.50	68.1 PK	74.0	-5.9	1.75 V	13	34.9	33.2
4	2483.50	52.9 AV	54.0	-1.1	1.75 V	13	19.7	33.2
5	4924.00	46.7 PK	74.0	-27.3	2.13 V	200	43.2	3.5
6	4924.00	33.0 AV	54.0	-21.0	2.13 V	200	29.5	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 12	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2467.00	102.2 PK			3.92 H	142	68.9	33.3
2	*2467.00	92.3 AV			3.92 H	142	59.0	33.3
3	2483.50	58.5 PK	74.0	-15.5	3.77 H	155	25.3	33.2
4	2483.50	46.9 AV	54.0	-7.1	3.77 H	155	13.7	33.2
5	4934.00	46.7 PK	74.0	-27.3	3.81 H	270	43.1	3.6
6	4934.00	33.2 AV	54.0	-20.8	3.81 H	270	29.6	3.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2467.00	108.9 PK			2.24 V	11	75.6	33.3
2	*2467.00	98.6 AV			2.24 V	11	65.3	33.3
3	2483.50	67.4 PK	74.0	-6.6	1.83 V	14	34.2	33.2
4	2483.50	53.1 AV	54.0	-0.9	1.83 V	14	19.9	33.2
5	4934.00	46.6 PK	74.0	-27.4	2.11 V	220	43.0	3.6
6	4934.00	33.2 AV	54.0	-20.8	2.11 V	220	29.6	3.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 13	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2472.00	93.3 PK			4.00 H	142	60.1	33.2
2	*2472.00	83.7 AV			4.00 H	142	50.5	33.2
3	2483.50	59.7 PK	74.0	-14.3	3.87 H	151	26.5	33.2
4	2483.50	47.2 AV	54.0	-6.8	3.87 H	151	14.0	33.2
5	4944.00	46.4 PK	74.0	-27.6	3.41 H	273	42.8	3.6
6	4944.00	33.2 AV	54.0	-20.8	3.41 H	273	29.6	3.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2472.00	100.4 PK			2.30 V	19	67.2	33.2
2	*2472.00	90.4 AV			2.30 V	19	57.2	33.2
3	2483.50	68.4 PK	74.0	-5.6	1.79 V	19	35.2	33.2
4	2483.50	53.2 AV	54.0	-0.8	1.79 V	19	20.0	33.2
5	4944.00	46.6 PK	74.0	-27.4	2.20 V	235	43.0	3.6
6	4944.00	33.3 AV	54.0	-20.7	2.20 V	235	29.7	3.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.5 PK	74.0	-10.5	3.74 H	219	30.0	33.5
2	2390.00	50.4 AV	54.0	-3.6	3.74 H	219	16.9	33.5
3	*2412.00	107.6 PK			3.75 H	216	74.2	33.4
4	*2412.00	97.3 AV			3.75 H	216	63.9	33.4
5	4824.00	50.0 PK	74.0	-24.0	2.02 H	189	46.0	4.0
6	4824.00	36.0 AV	54.0	-18.0	2.02 H	189	32.0	4.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.5 PK	74.0	-10.5	2.10 V	353	30.0	33.5
2	2390.00	51.9 AV	54.0	-2.1	2.10 V	353	18.4	33.5
3	*2412.00	112.9 PK			2.11 V	359	79.5	33.4
4	*2412.00	103.1 AV			2.11 V	359	69.7	33.4
5	4824.00	50.0 PK	74.0	-24.0	2.02 V	189	46.0	4.0
6	4824.00	36.0 AV	54.0	-18.0	2.02 V	189	32.0	4.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.4 PK			3.61 H	214	78.0	33.4
2	*2437.00	101.8 AV			3.61 H	214	68.4	33.4
3	4874.00	50.5 PK	74.0	-23.5	1.53 H	160	46.8	3.7
4	4874.00	37.4 AV	54.0	-16.6	1.53 H	160	33.7	3.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	117.6 PK			2.01 V	13	84.2	33.4
2	*2437.00	107.5 AV			2.01 V	13	74.1	33.4
3	4874.00	50.8 PK	74.0	-23.2	1.99 V	188	47.1	3.7
4	4874.00	37.7 AV	54.0	-16.3	1.99 V	188	34.0	3.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.7 PK			4.00 H	197	70.4	33.3
2	*2462.00	93.5 AV			4.00 H	197	60.2	33.3
3	2483.50	60.4 PK	74.0	-13.6	3.98 H	209	27.2	33.2
4	2483.50	48.3 AV	54.0	-5.7	3.98 H	209	15.1	33.2
5	4924.00	45.7 PK	74.0	-28.3	2.12 H	191	42.2	3.5
6	4924.00	32.8 AV	54.0	-21.2	2.12 H	191	29.3	3.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.7 PK			2.25 V	5	77.4	33.3
2	*2462.00	100.7 AV			2.25 V	5	67.4	33.3
3	2483.50	66.7 PK	74.0	-7.3	1.92 V	359	33.5	33.2
4	2483.50	53.2 AV	54.0	-0.8	1.92 V	359	20.0	33.2
5	4924.00	46.9 PK	74.0	-27.1	2.04 V	199	43.4	3.5
6	4924.00	33.5 AV	54.0	-20.5	2.04 V	199	30.0	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 12	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2467.00	102.4 PK			3.54 H	215	69.1	33.3
2	*2467.00	91.9 AV			3.54 H	215	58.6	33.3
3	2483.50	60.4 PK	74.0	-13.6	3.57 H	209	27.2	33.2
4	2483.50	48.3 AV	54.0	-5.7	3.57 H	209	15.1	33.2
5	4934.00	45.8 PK	74.0	-28.2	1.95 H	188	42.2	3.6
6	4934.00	32.7 AV	54.0	-21.3	1.95 H	188	29.1	3.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2467.00	107.9 PK			2.21 V	7	74.6	33.3
2	*2467.00	98.0 AV			2.21 V	7	64.7	33.3
3	2483.50	66.2 PK	74.0	-7.8	1.75 V	12	33.0	33.2
4	2483.50	53.1 AV	54.0	-0.9	1.75 V	12	19.9	33.2
5	4934.00	46.9 PK	74.0	-27.1	2.03 V	202	43.3	3.6
6	4934.00	33.6 AV	54.0	-20.4	2.03 V	202	30.0	3.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 13	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2472.00	92.5 PK			3.59 H	211	59.3	33.2
2	*2472.00	82.6 AV			3.59 H	211	49.4	33.2
3	2483.50	60.2 PK	74.0	-13.8	3.65 H	203	27.0	33.2
4	2483.50	47.5 AV	54.0	-6.5	3.65 H	203	14.3	33.2
5	4944.00	45.6 PK	74.0	-28.4	1.87 H	195	42.0	3.6
6	4944.00	32.6 AV	54.0	-21.4	1.87 H	195	29.0	3.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2472.00	99.6 PK			1.94 V	345	66.4	33.2
2	*2472.00	89.5 AV			1.94 V	345	56.3	33.2
3	2483.50	66.1 PK	74.0	-7.9	1.95 V	1	32.9	33.2
4	2483.50	52.5 AV	54.0	-1.5	1.95 V	1	19.3	33.2
5	4944.00	46.7 PK	74.0	-27.3	2.11 V	197	43.1	3.6
6	4944.00	33.4 AV	54.0	-20.6	2.11 V	197	29.8	3.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.7 PK	74.0	-12.3	3.76 H	214	28.2	33.5
2	2390.00	47.7 AV	54.0	-6.3	3.76 H	214	14.2	33.5
3	*2422.00	99.7 PK			3.59 H	213	66.3	33.4
4	*2422.00	89.8 AV			3.59 H	213	56.4	33.4
5	4844.00	45.8 PK	74.0	-28.2	2.13 H	191	42.0	3.8
6	4844.00	32.7 AV	54.0	-21.3	2.13 H	191	28.9	3.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.2 PK	74.0	-7.8	1.06 V	211	32.7	33.5
2	2390.00	50.2 AV	54.0	-3.8	1.06 V	211	16.7	33.5
3	*2422.00	103.9 PK			1.10 V	207	70.5	33.4
4	*2422.00	94.6 AV			1.10 V	207	61.2	33.4
5	4844.00	45.9 PK	74.0	-28.1	1.88 V	193	42.1	3.8
6	4844.00	32.8 AV	54.0	-21.2	1.88 V	193	29.0	3.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.0 PK			3.64 H	211	69.6	33.4
2	*2437.00	93.3 AV			3.64 H	211	59.9	33.4
3	4874.00	46.2 PK	74.0	-27.8	2.21 H	205	42.5	3.7
4	4874.00	32.8 AV	54.0	-21.2	2.21 H	205	29.1	3.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.9 PK			1.96 V	19	73.5	33.4
2	*2437.00	97.5 AV			1.96 V	19	64.1	33.4
3	2483.50	67.7 PK	74.0	-6.3	2.01 V	17	34.5	33.2
4	2483.50	53.4 AV	54.0	-0.6	2.01 V	17	20.2	33.2
5	4874.00	47.5 PK	74.0	-26.5	3.03 V	153	43.8	3.7
6	4874.00	34.6 AV	54.0	-19.4	3.03 V	153	30.9	3.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	98.6 PK			3.64 H	207	65.2	33.4
2	*2452.00	89.0 AV			3.64 H	207	55.6	33.4
3	2483.50	61.3 PK	74.0	-12.7	3.48 H	206	28.1	33.2
4	2483.50	48.0 AV	54.0	-6.0	3.48 H	206	14.8	33.2
5	4904.00	45.6 PK	74.0	-28.4	1.89 H	188	42.1	3.5
6	4904.00	32.7 AV	54.0	-21.3	1.89 H	188	29.2	3.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	103.0 PK			1.97 V	19	69.6	33.4
2	*2452.00	93.3 AV			1.97 V	19	59.9	33.4
3	2483.50	69.3 PK	74.0	-4.7	1.95 V	7	36.1	33.2
4	2483.50	52.8 AV	54.0	-1.2	1.95 V	7	19.6	33.2
5	4904.00	46.3 PK	74.0	-27.7	2.18 V	181	42.8	3.5
6	4904.00	33.0 AV	54.0	-21.0	2.18 V	181	29.5	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 10	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2457.00	97.0 PK			3.50 H	195	63.7	33.3
2	*2457.00	88.1 AV			3.50 H	195	54.8	33.3
3	2483.50	63.4 PK	74.0	-10.6	3.51 H	208	30.2	33.2
4	2483.50	48.9 AV	54.0	-5.1	3.51 H	208	15.7	33.2
5	4914.00	45.4 PK	74.0	-28.6	2.11 H	199	41.9	3.5
6	4914.00	32.2 AV	54.0	-21.8	2.11 H	199	28.7	3.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2457.00	103.8 PK			2.24 V	16	70.5	33.3
2	*2457.00	94.2 AV			2.24 V	16	60.9	33.3
3	2483.50	70.0 PK	74.0	-4.0	1.89 V	0	36.8	33.2
4	2483.50	53.5 AV	54.0	-0.5	1.89 V	0	20.3	33.2
5	4914.00	45.6 PK	74.0	-28.4	1.95 V	193	42.1	3.5
6	4914.00	32.7 AV	54.0	-21.3	1.95 V	193	29.2	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	90.4 PK			3.16 H	206	57.1	33.3
2	*2462.00	81.0 AV			3.16 H	206	47.7	33.3
3	2483.50	62.2 PK	74.0	-11.8	3.06 H	207	29.0	33.2
4	2483.50	47.5 AV	54.0	-6.5	3.06 H	207	14.3	33.2
5	4924.00	46.1 PK	74.0	-27.9	1.98 H	189	42.6	3.5
6	4924.00	32.6 AV	54.0	-21.4	1.98 H	189	29.1	3.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	95.6 PK			1.52 V	351	62.3	33.3
2	*2462.00	86.2 AV			1.52 V	351	52.9	33.3
3	2483.50	66.9 PK	74.0	-7.1	1.93 V	2	33.7	33.2
4	2483.50	52.3 AV	54.0	-1.7	1.93 V	2	19.1	33.2
5	4924.00	46.4 PK	74.0	-27.6	2.00 V	189	42.9	3.5
6	4924.00	32.8 AV	54.0	-21.2	2.00 V	189	29.3	3.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz worst-case data:

802.11n (HT20)

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	76.56	30.8 QP	40.0	-9.2	2.00 H	61	43.3	-12.5
2	88.23	32.9 QP	43.5	-10.6	2.00 H	90	47.5	-14.6
3	208.77	32.5 QP	43.5	-11.0	1.50 H	103	43.9	-11.4
4	325.43	38.3 QP	46.0	-7.7	1.00 H	95	44.8	-6.5
5	418.76	37.9 QP	46.0	-8.1	1.00 H	143	42.6	-4.7
6	729.84	39.4 QP	46.0	-6.6	1.50 H	322	37.4	2.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	41.57	32.1 QP	40.0	-7.9	1.00 V	149	41.8	-9.7
2	113.50	34.4 QP	43.5	-9.1	1.00 V	153	46.3	-11.9
3	166.00	36.1 QP	43.5	-7.4	1.00 V	160	45.0	-8.9
4	325.43	33.5 QP	46.0	-12.5	1.49 V	149	40.0	-6.5
5	477.09	36.2 QP	46.0	-9.8	1.00 V	197	39.5	-3.3
6	718.18	39.5 QP	46.0	-6.5	1.99 V	158	38.0	1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 23, 2017	Nov. 22, 2018
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Sep. 05, 2017	Sep. 04, 2018
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 26, 2018	Feb. 25, 2019
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 15, 2017	Aug. 14, 2018
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

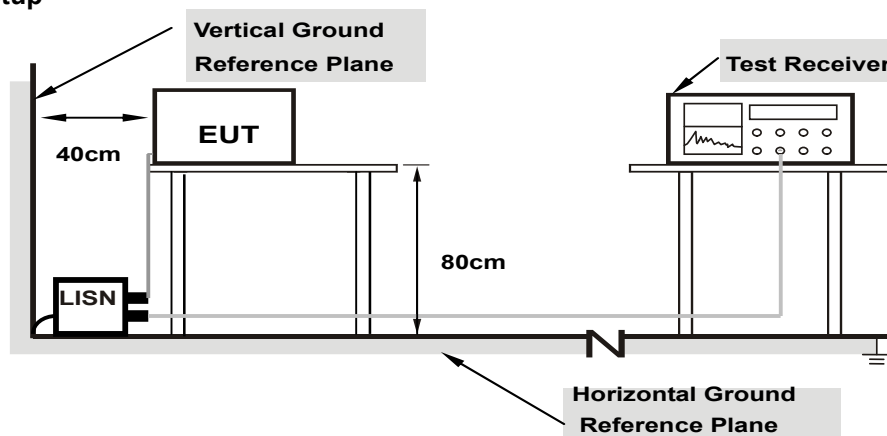

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.10	36.13	16.28	46.23	26.38	65.79	55.79	-19.56	-29.41
2	0.17744	10.10	40.28	26.72	50.38	36.82	64.60	54.60	-14.22	-17.78
3	0.22038	10.11	33.85	20.72	43.96	30.83	62.80	52.80	-18.84	-21.97
4	0.44325	10.12	29.68	24.80	39.80	34.92	57.00	47.00	-17.20	-12.08
5	13.43227	10.82	19.93	14.56	30.75	25.38	60.00	50.00	-29.25	-24.62
6	29.78780	11.39	22.40	21.87	33.79	33.26	60.00	50.00	-26.21	-16.74

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

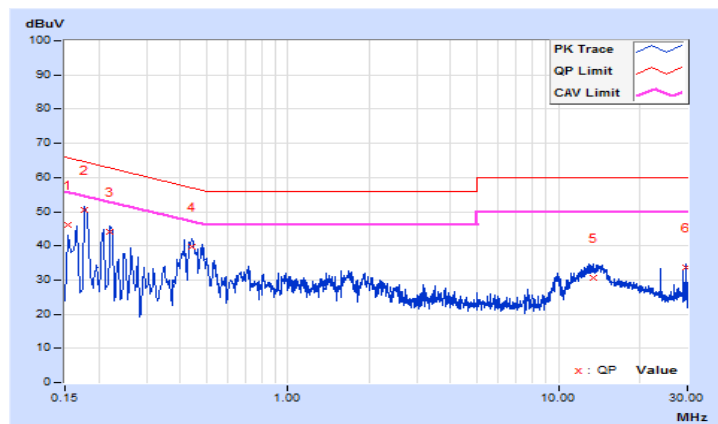


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	-----------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16967	10.10	35.11	19.78	45.21	29.88	64.98	54.98	-19.77	-25.10
2	0.18519	10.10	35.29	16.71	45.39	26.81	64.25	54.25	-18.86	-27.44
3	0.43579	10.12	29.50	23.30	39.62	33.42	57.14	47.14	-17.52	-13.72
4	0.70131	10.12	23.37	16.24	33.49	26.36	56.00	46.00	-22.51	-19.64
5	12.63854	10.63	18.16	12.72	28.79	23.35	60.00	50.00	-31.21	-26.65
6	29.78780	11.07	22.28	22.12	33.35	33.19	60.00	50.00	-26.65	-16.81

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

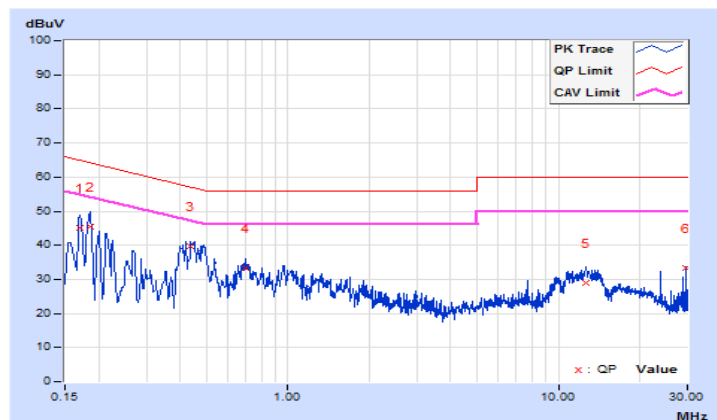


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	8.08	8.09	0.5	Pass
6	2437	8.07	8.08	0.5	Pass
11	2462	7.62	8.07	0.5	Pass
12	2467	7.58	8.08	0.5	Pass
13	2472	8.07	8.11	0.5	Pass

802.11g


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.36	15.36	0.5	Pass
6	2437	15.36	15.33	0.5	Pass
11	2462	15.36	15.20	0.5	Pass
12	2467	15.61	15.17	0.5	Pass
13	2472	15.35	15.36	0.5	Pass

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.37	15.17	0.5	Pass
6	2437	15.11	15.18	0.5	Pass
11	2462	15.18	15.19	0.5	Pass
12	2467	15.19	15.34	0.5	Pass
13	2472	15.21	15.49	0.5	Pass

802.11n (HT40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	35.18	35.18	0.5	Pass
6	2437	35.18	35.20	0.5	Pass
9	2452	35.18	35.22	0.5	Pass
10	2457	35.27	35.19	0.5	Pass
11	2462	35.24	35.25	0.5	Pass

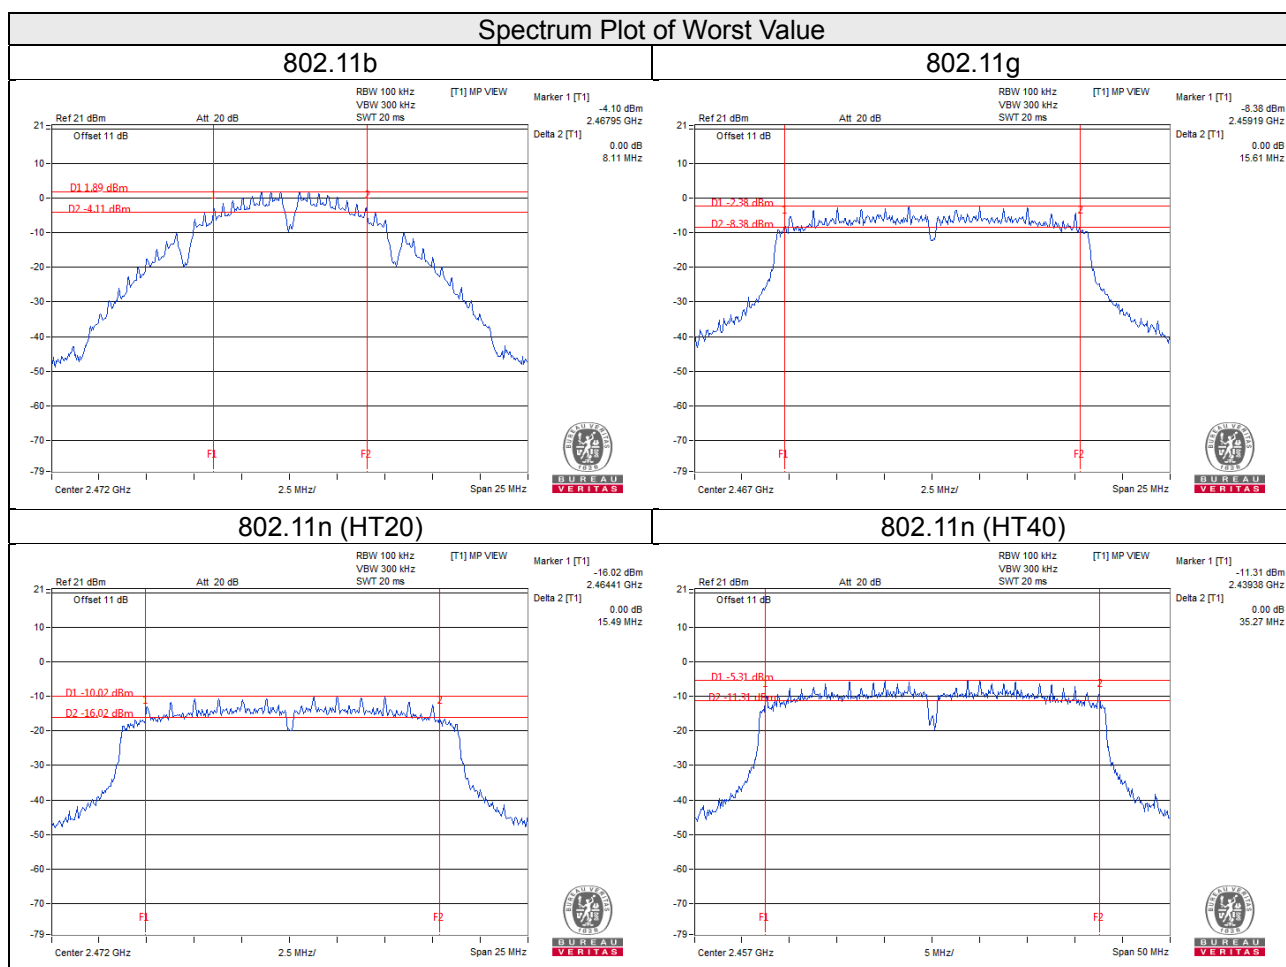

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = $5 \log(NANT/NSS)$ dB or 3 dB, whichever is less for 20-MHz channel widths with $NANT \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(NANT/NSS)$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

802.11b

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.95	20.42	209.009	23.20	30.00	Pass
6	2437	21.34	21.22	268.578	24.29	30.00	Pass
11	2462	20.97	20.11	227.591	23.57	30.00	Pass
12	2467	18.77	19.12	156.994	21.96	30.00	Pass
13	2472	12.21	13.23	37.672	15.76	30.00	Pass

802.11g

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.99	21.43	264.598	24.23	30.00	Pass
6	2437	23.71	23.20	443.893	26.47	30.00	Pass
11	2462	18.64	19.34	159.015	22.01	30.00	Pass
12	2467	16.11	17.61	98.509	19.93	30.00	Pass
13	2472	7.61	8.71	13.198	11.21	30.00	Pass

802.11n (HT20)

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	21.73	21.56	292.155	24.66	30.00	Pass
6	2437	23.86	23.33	458.498	26.61	30.00	Pass
11	2462	17.29	18.12	118.443	20.74	30.00	Pass
12	2467	16.21	17.33	95.858	19.82	30.00	Pass
13	2472	7.00	7.11	10.152	10.07	30.00	Pass

802.11n (HT40)


Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	17.24	18.21	119.188	20.76	30.00	Pass
6	2437	20.12	20.74	221.379	23.45	30.00	Pass
9	2452	16.38	17.21	96.053	19.83	30.00	Pass
10	2457	16.33	17.09	94.122	19.74	30.00	Pass
11	2462	7.86	8.93	13.925	11.44	30.00	Pass

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

TX chain	Channel	Frequency (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-6.59	3.01	-3.58	8.00	Pass
	6	2437	-3.74	3.01	-0.73	8.00	Pass
	11	2462	-4.17	3.01	-1.16	8.00	Pass
	12	2467	-7.14	3.01	-4.13	8.00	Pass
	13	2472	-13.09	3.01	-10.08	8.00	Pass
1	1	2412	-5.97	3.01	-2.96	8.00	Pass
	6	2437	-3.15	3.01	-0.14	8.00	Pass
	11	2462	-3.89	3.01	-0.88	8.00	Pass
	12	2467	-6.09	3.01	-3.08	8.00	Pass
	13	2472	-11.34	3.01	-8.33	8.00	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = 2.89dBi + 10log(2) = 5.9dBi < 6dBi, so the power density limit no need to reduce.

802.11g

TX chain	Channel	Frequency (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-12.39	3.01	-9.38	8.00	Pass
	6	2437	-7.86	3.01	-4.85	8.00	Pass
	11	2462	-14.42	3.01	-11.41	8.00	Pass
	12	2467	-18.28	3.01	-15.27	8.00	Pass
	13	2472	-25.18	3.01	-22.17	8.00	Pass
1	1	2412	-11.66	3.01	-8.65	8.00	Pass
	6	2437	-6.89	3.01	-3.88	8.00	Pass
	11	2462	-12.33	3.01	-9.32	8.00	Pass
	12	2467	-15.93	3.01	-12.92	8.00	Pass
	13	2472	-24.55	3.01	-21.54	8.00	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = 2.89dBi + 10log(2) = 5.9dBi < 6dBi, so the power density limit no need to reduce.

802.11n (HT20)

TX chain	Channel	Frequency (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-11.48	3.01	-8.47	8.00	Pass
	6	2437	-7.81	3.01	-4.80	8.00	Pass
	11	2462	-15.15	3.01	-12.14	8.00	Pass
	12	2467	-16.66	3.01	-13.65	8.00	Pass
	13	2472	-26.67	3.01	-23.66	8.00	Pass
1	1	2412	-10.87	3.01	-7.86	8.00	Pass
	6	2437	-5.61	3.01	-2.60	8.00	Pass
	11	2462	-14.61	3.01	-11.60	8.00	Pass
	12	2467	-15.27	3.01	-12.26	8.00	Pass
	13	2472	-24.50	3.01	-21.49	8.00	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = 2.89dBi + 10log(2) = 5.9dBi < 6dBi, so the power density limit no need to reduce.

802.11n (HT40)

TX chain	Channel	Frequency (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	3	2422	-20.64	3.01	-17.63	8.00	Pass
	6	2437	-17.83	3.01	-14.82	8.00	Pass
	9	2452	-20.25	3.01	-17.24	8.00	Pass
	10	2457	-22.11	3.01	-19.10	8.00	Pass
	11	2462	-27.79	3.01	-24.78	8.00	Pass
1	3	2422	-18.40	3.01	-15.39	8.00	Pass
	6	2437	-15.95	3.01	-12.94	8.00	Pass
	9	2452	-20.35	3.01	-17.34	8.00	Pass
	10	2457	-21.15	3.01	-18.14	8.00	Pass
	11	2462	-29.74	3.01	-26.73	8.00	Pass



Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = 2.89dBi + 10log(2) = 5.9dBi < 6dBi, so the power density limit no need to reduce.

Spectrum Plot of Worst Value



802.11b

802.11g

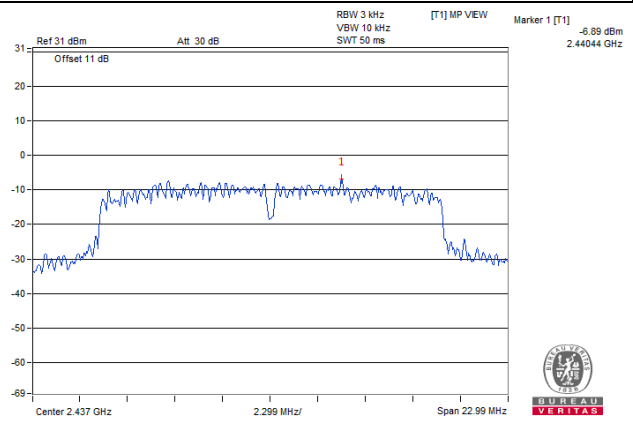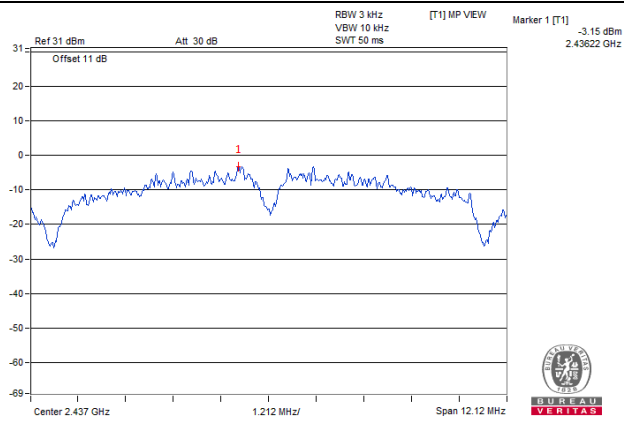

802.11n (HT20)

802.11n (HT40)

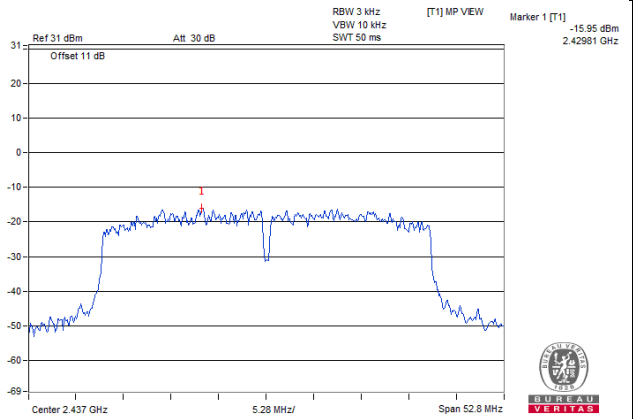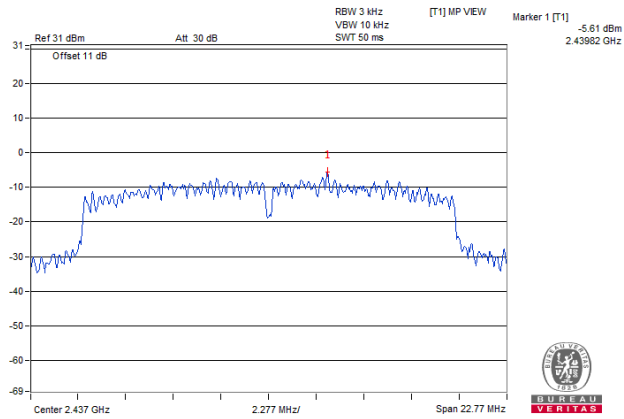


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set the RBW = 100 kHz.
- Set the VBW $\geq$ 300 kHz.
- Detector = average.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW $\geq$ 300 kHz.
- Ensure that the number of measurement points $\geq$ span/RBW
- According to measurement points to set differ measurement span.
- Detector = Peak.
- Trace Mode = max hold.
- Sweep = auto couple.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition



Same as Item 4.3.6

4.6.7 Test Results



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b_Chain 0



CH 1

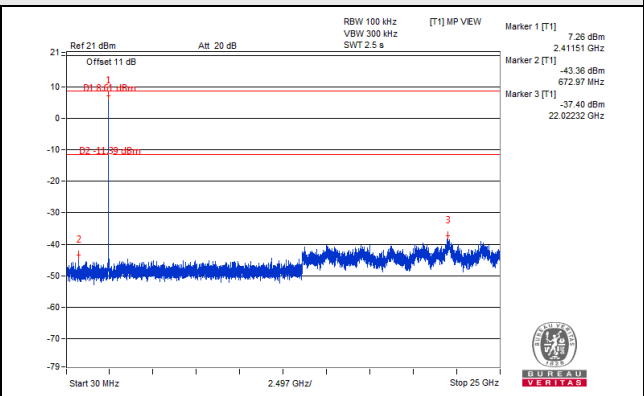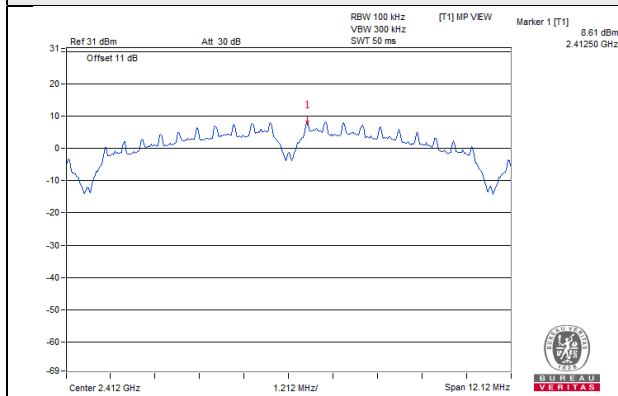


CH 6

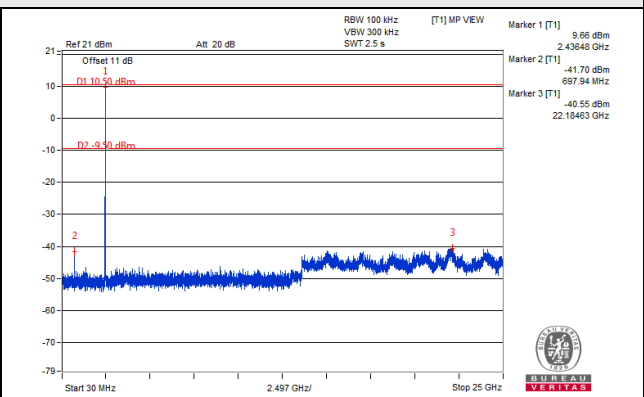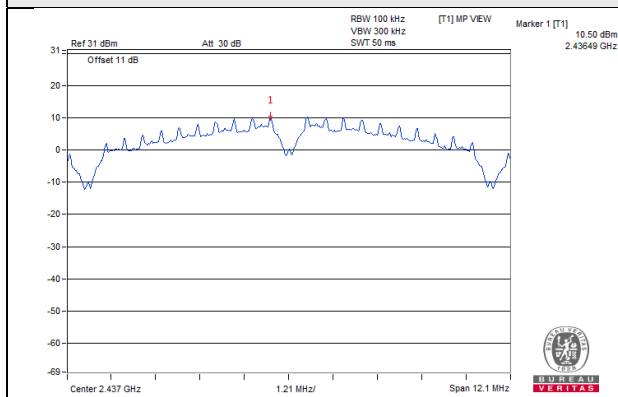


CH 11

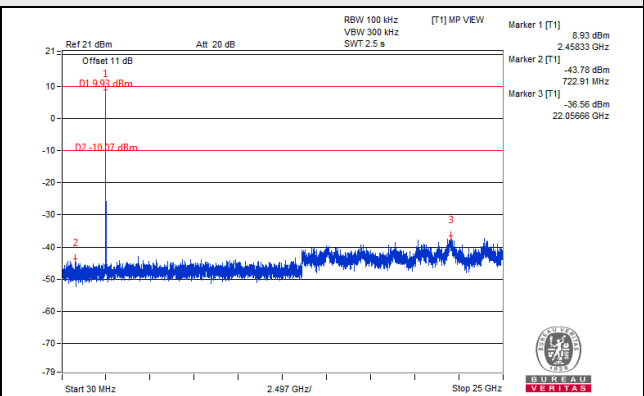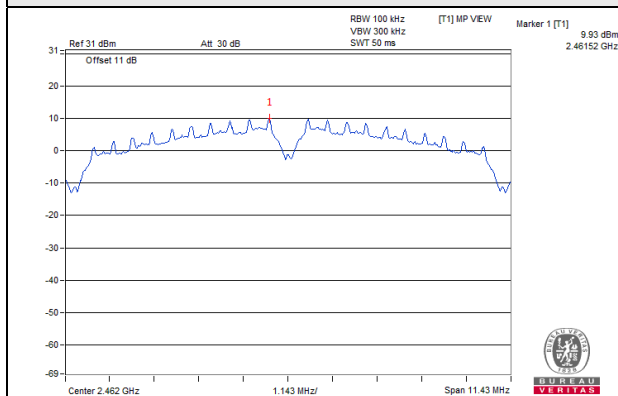



CH 1 Band edge

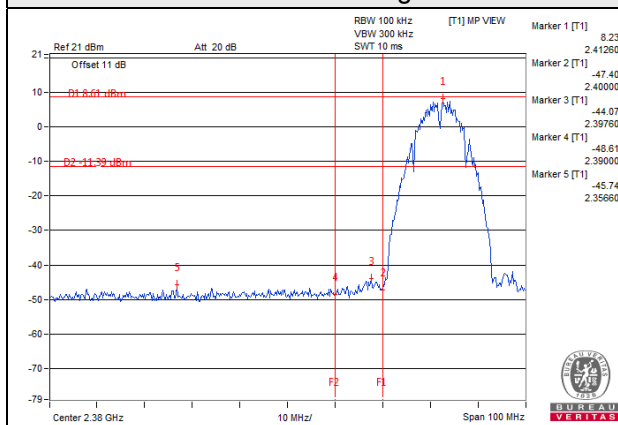



CH 11 Band edge

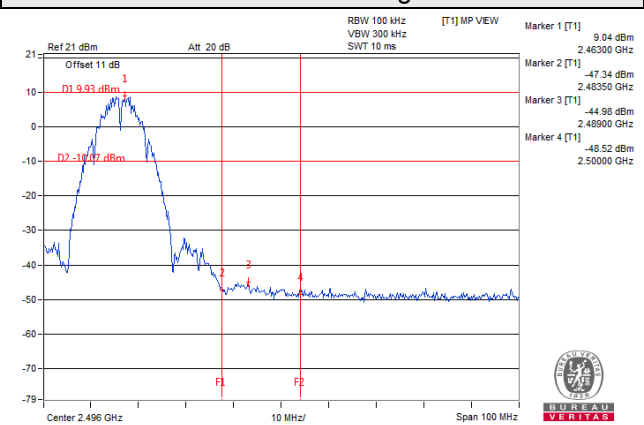


CH 12

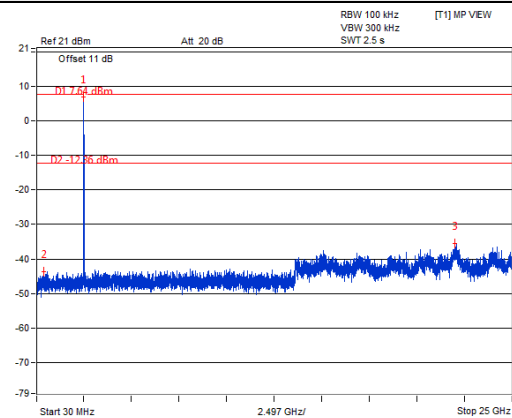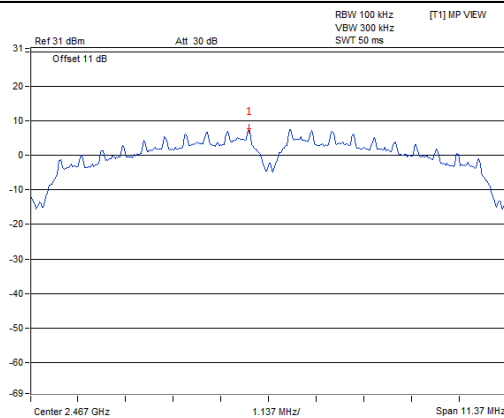


CH 13

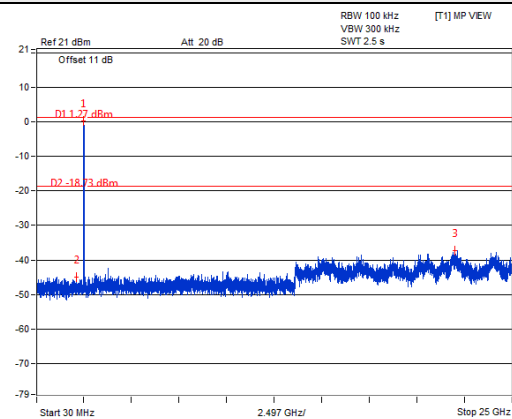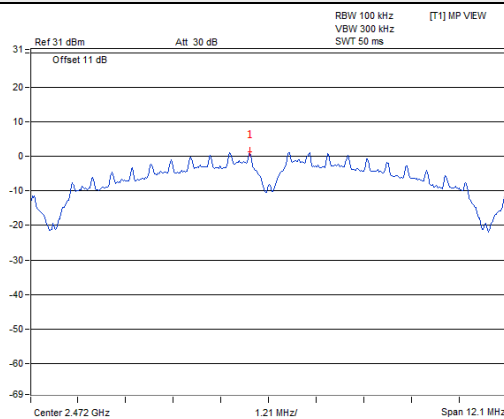

CH 12 Band edge


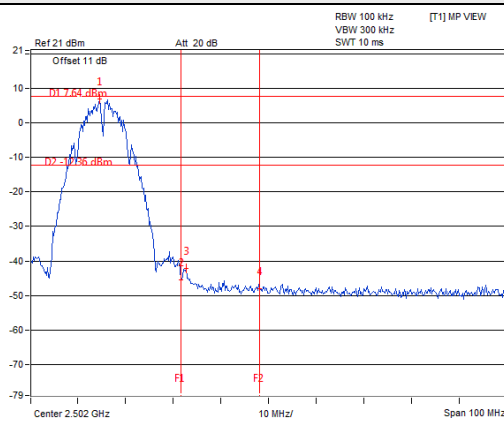


CH 13 Band edge


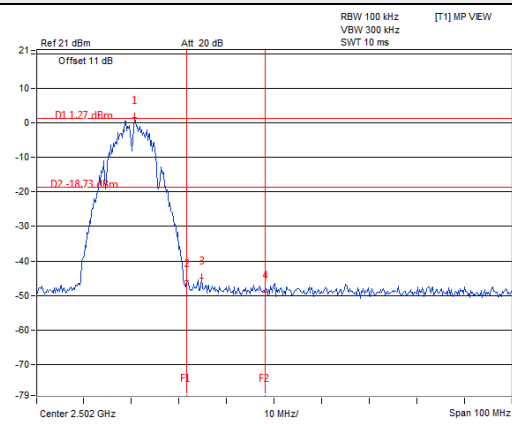


802.11b_Chain 1



CH 1

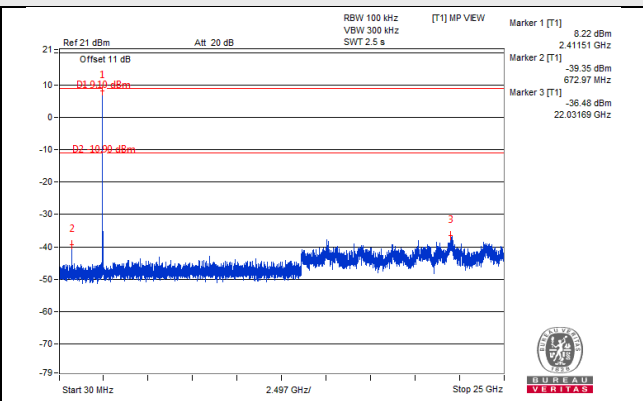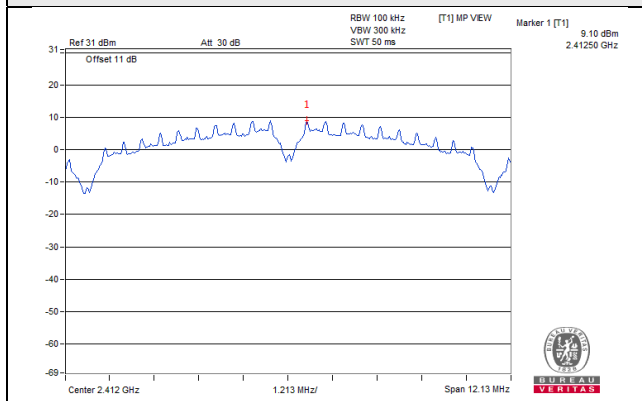


CH 6

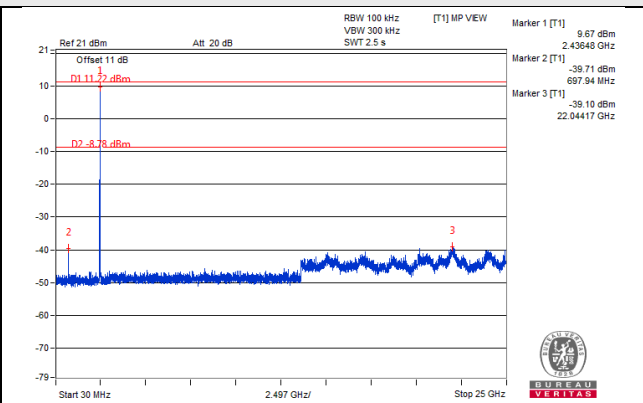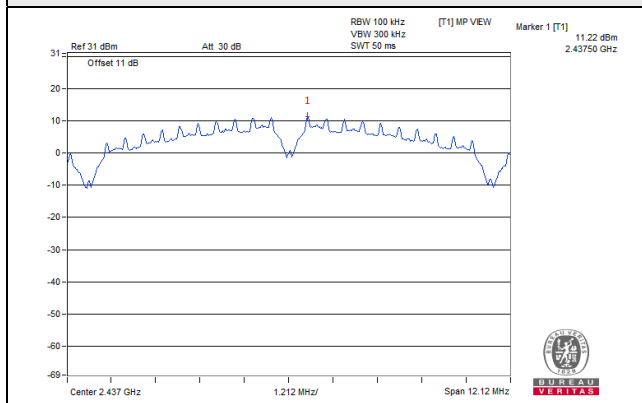


CH 11

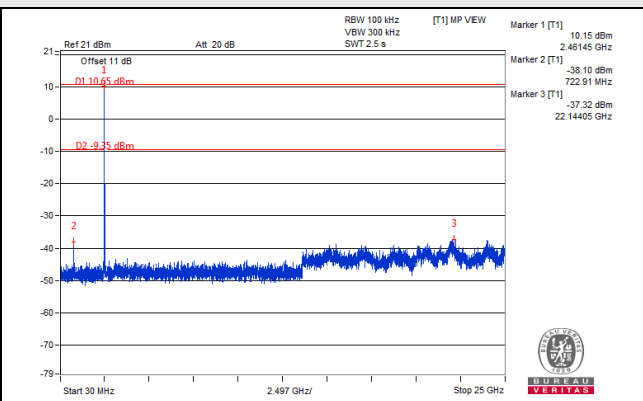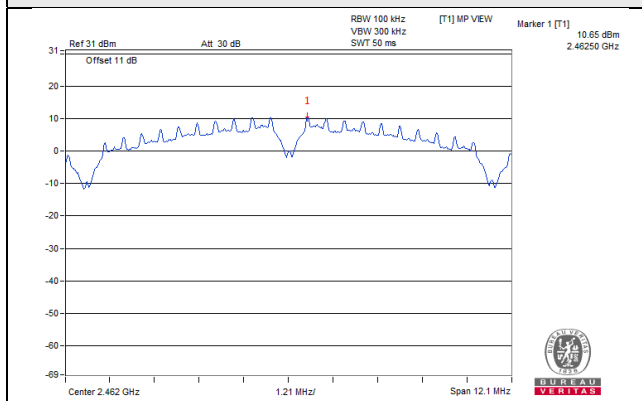



CH 1 Band edge

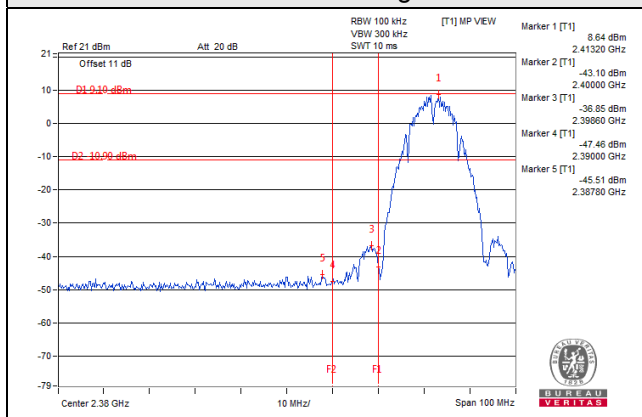



CH 11 Band edge

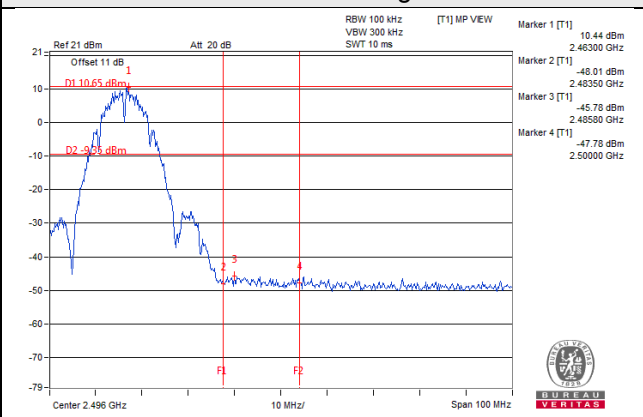


CH 12

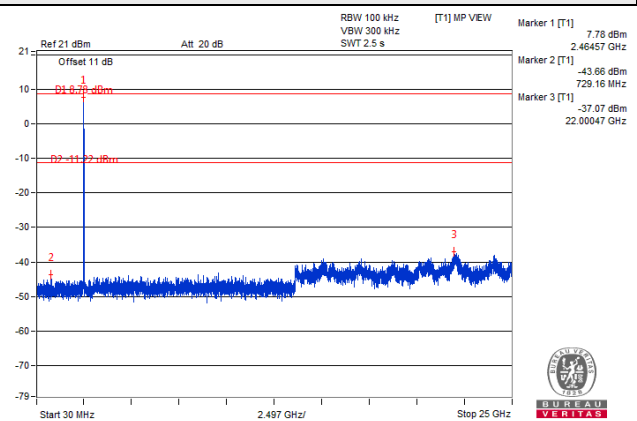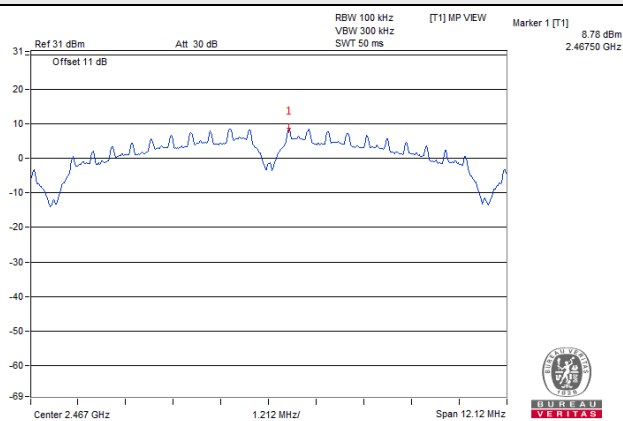


CH 13

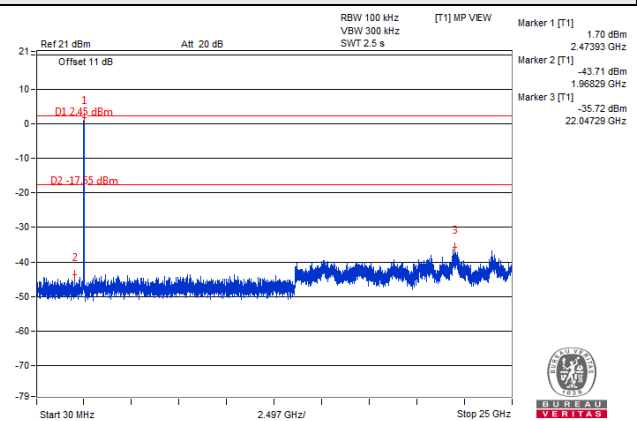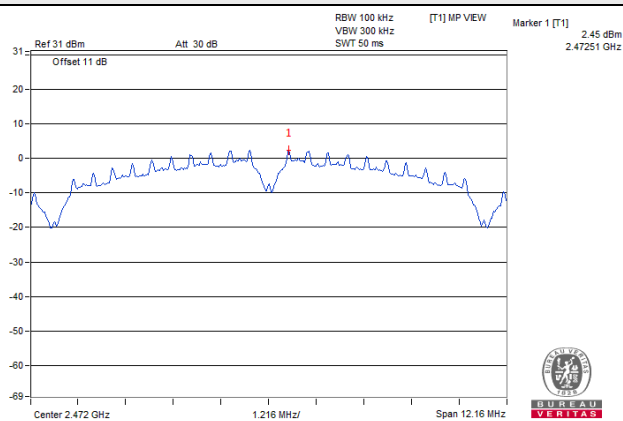

CH 12 Band edge


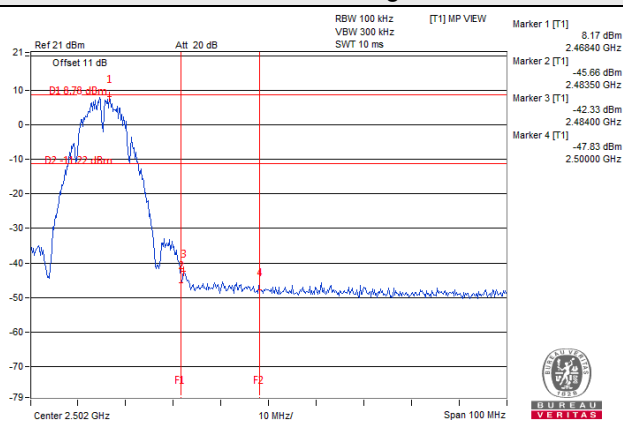


CH 13 Band edge


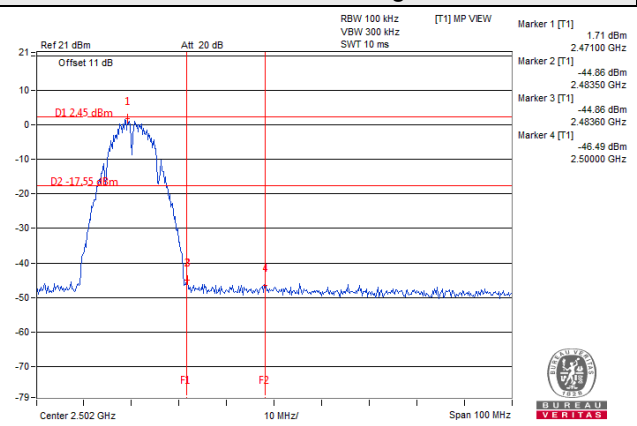


802.11g_Chain 0



CH 1

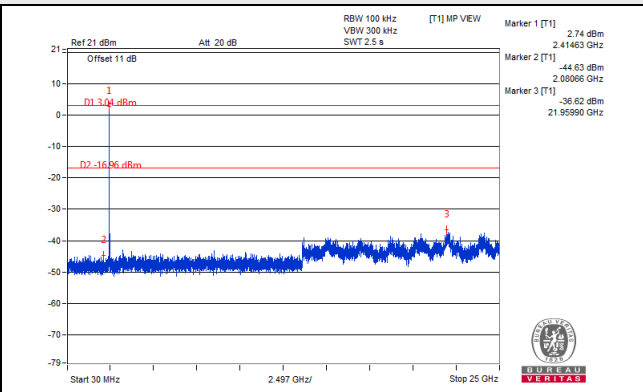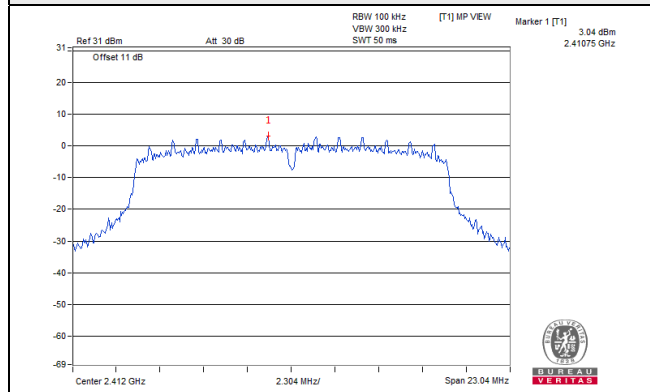


CH 6

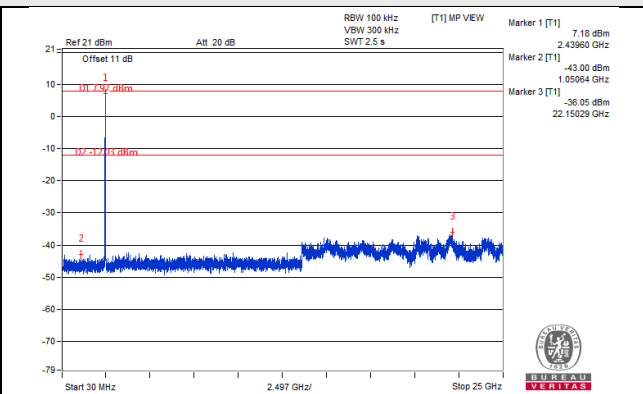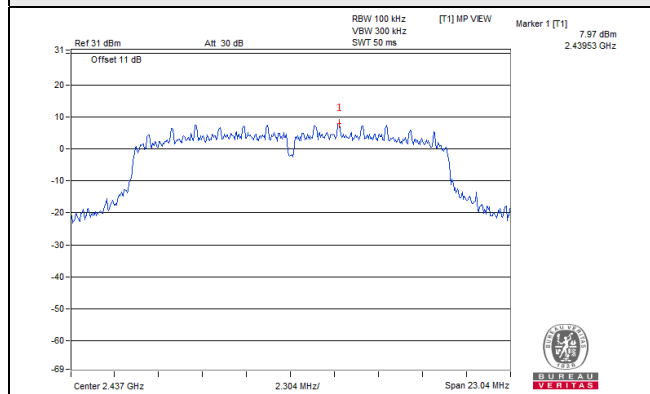


CH 11

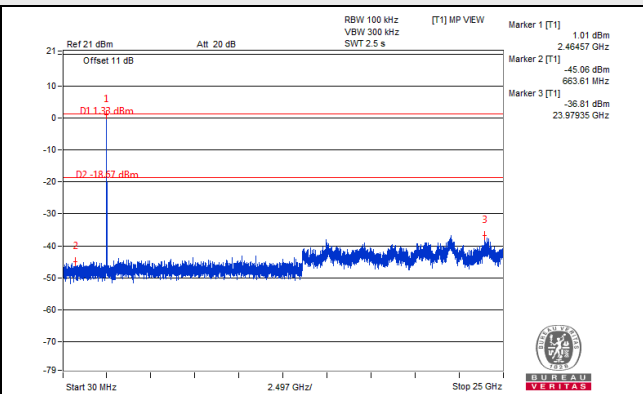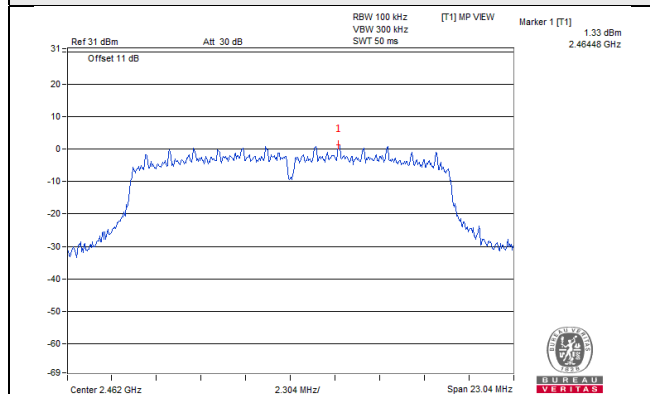



CH 1 Band edge

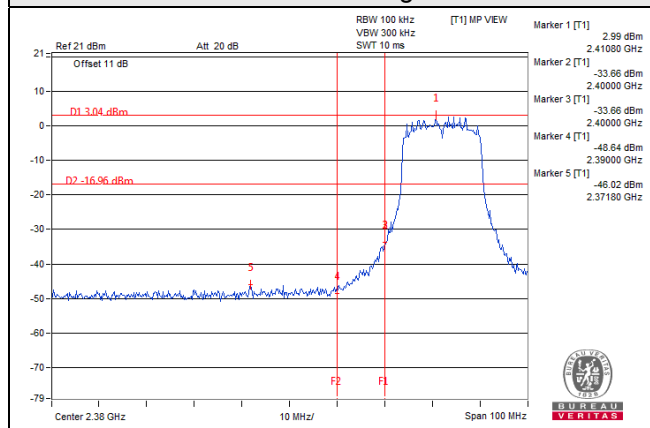



CH 11 Band edge

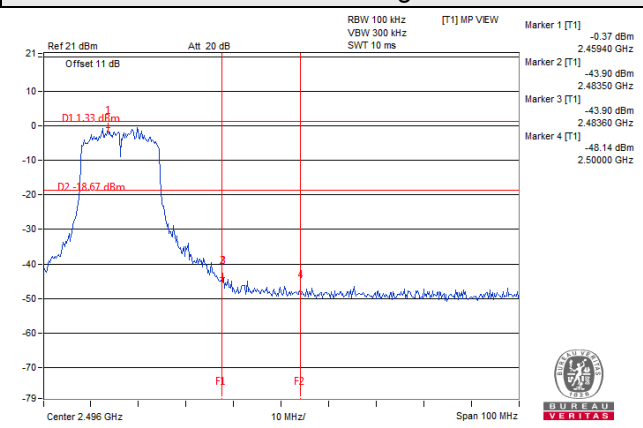


CH 12

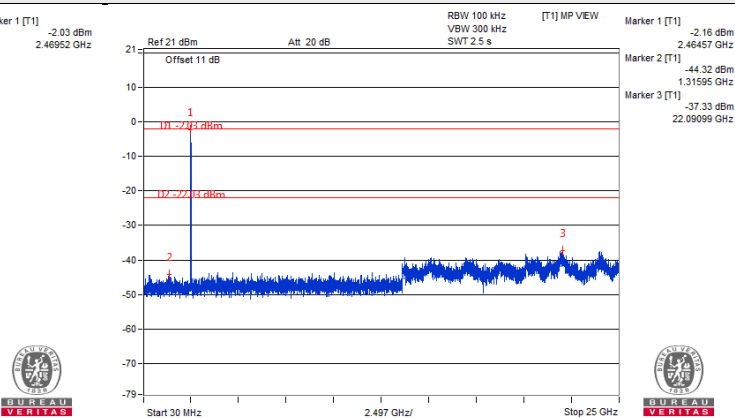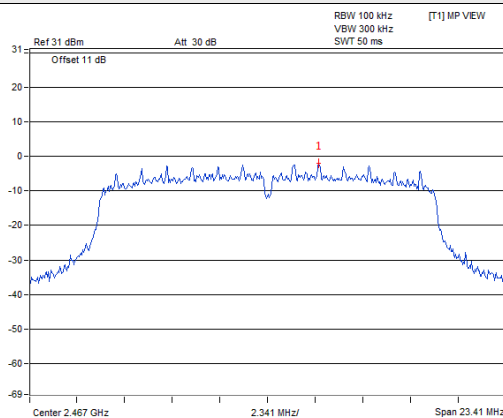


CH 13

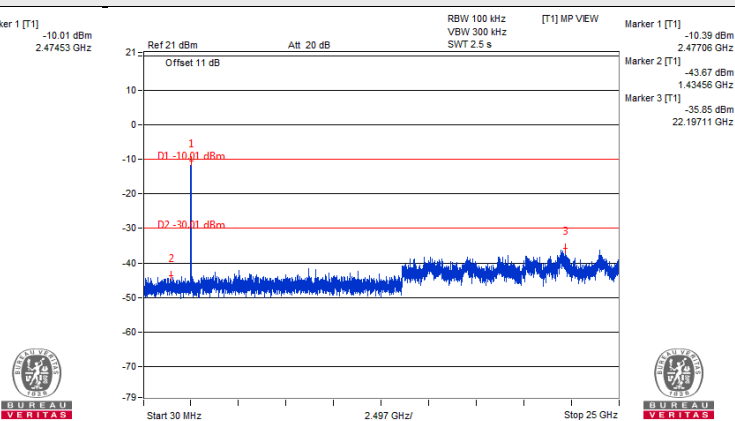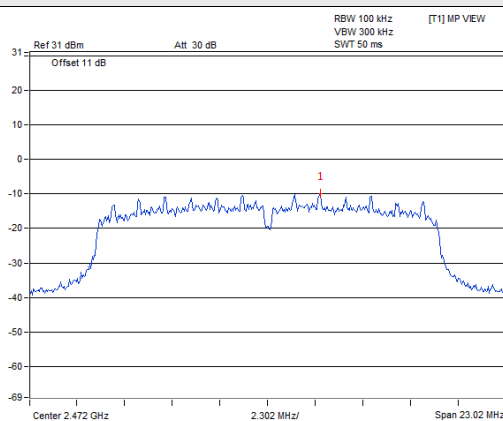

CH 12 Band edge


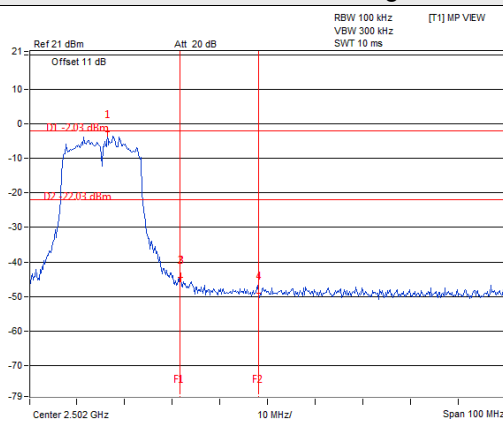


CH 13 Band edge


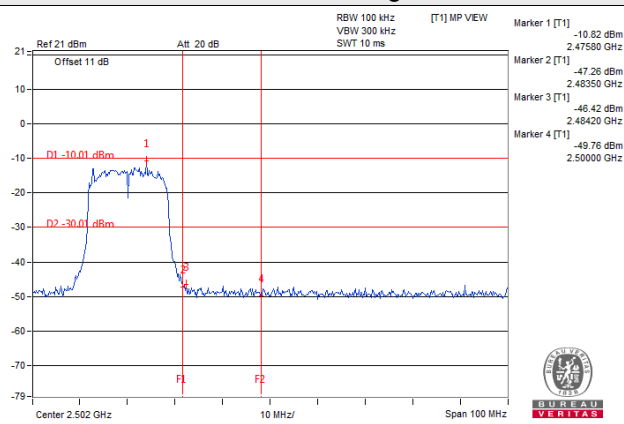


802.11g_Chain 1



CH 1

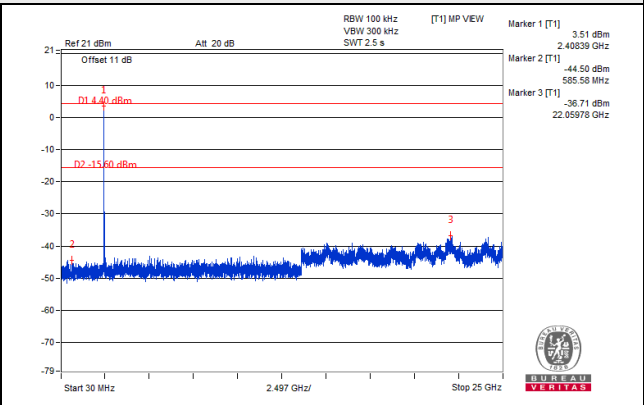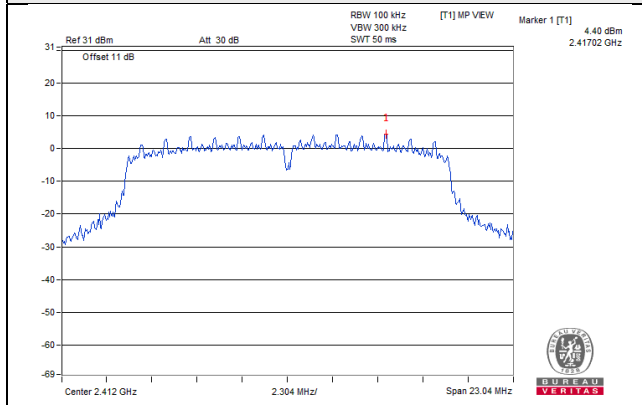


CH 6

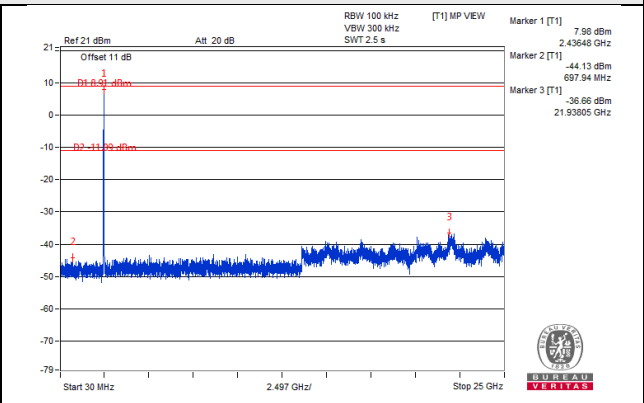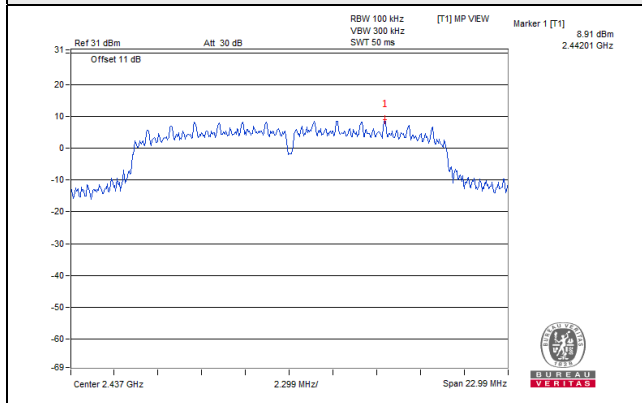


CH 11

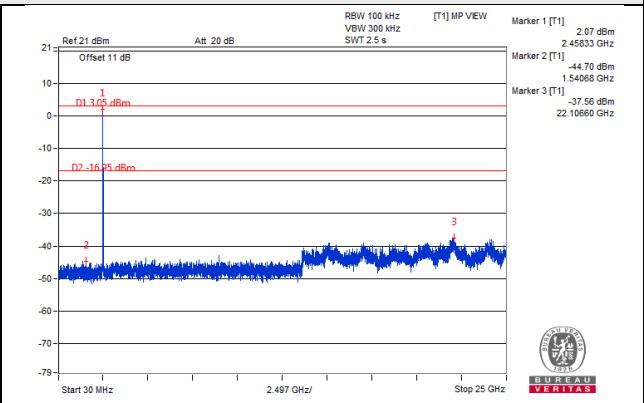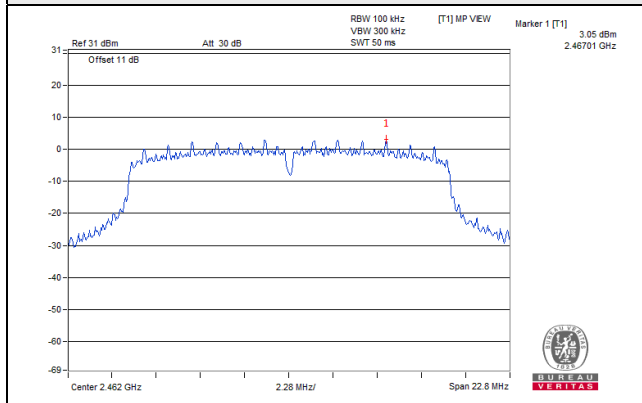



CH 1 Band edge

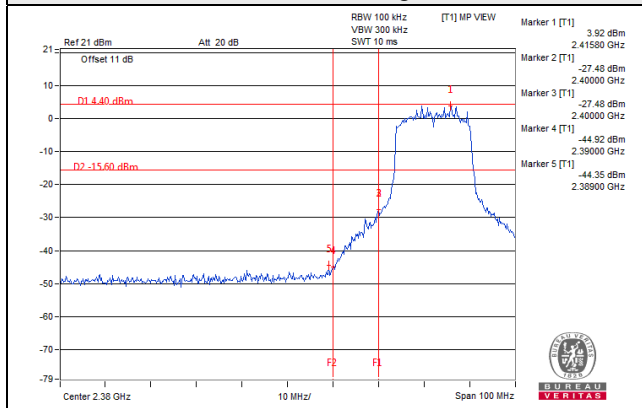



CH 11 Band edge

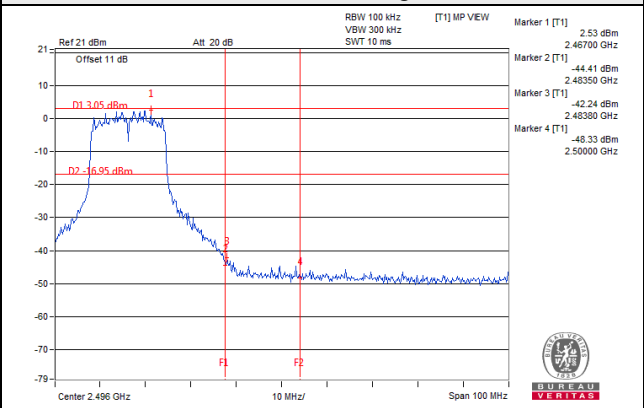


CH 12

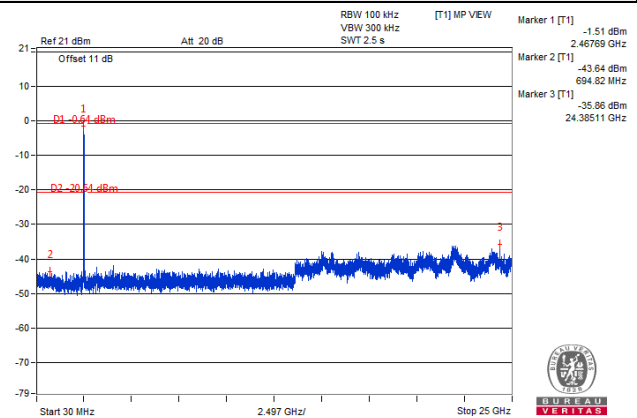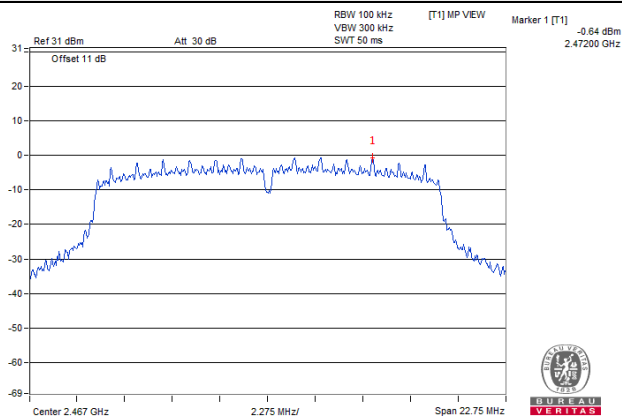


CH 13

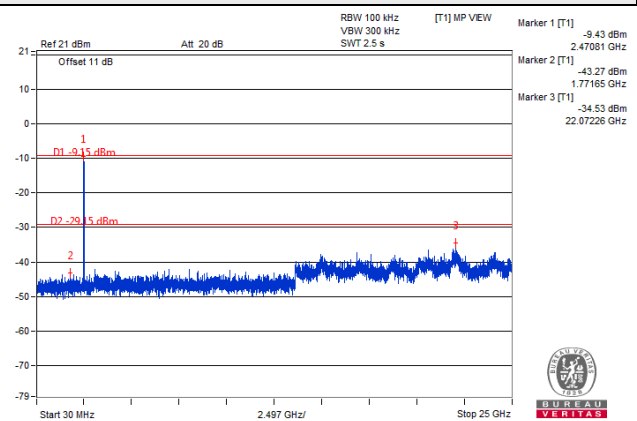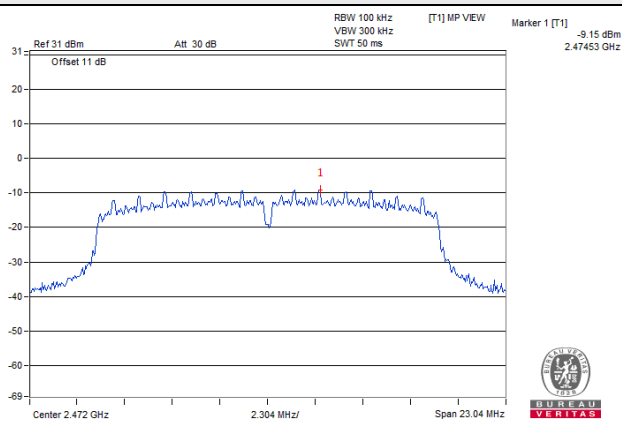

CH 12 Band edge


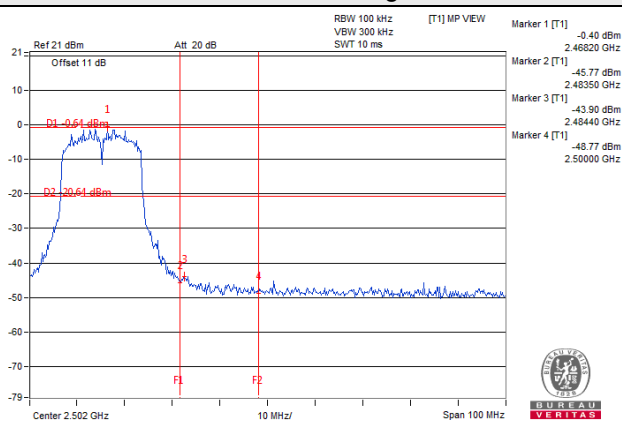


CH 13 Band edge


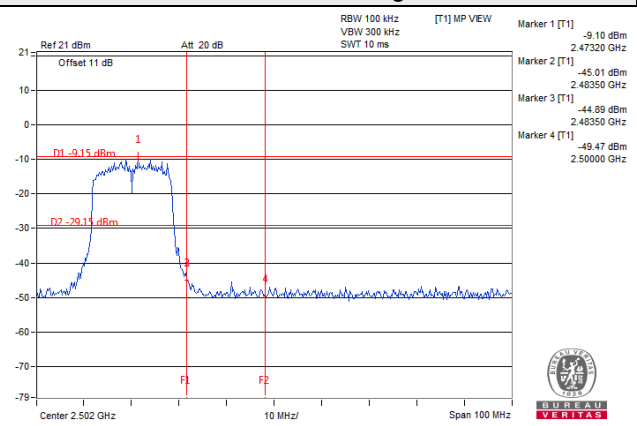


802.11n (HT20)_Chain 0



CH 1

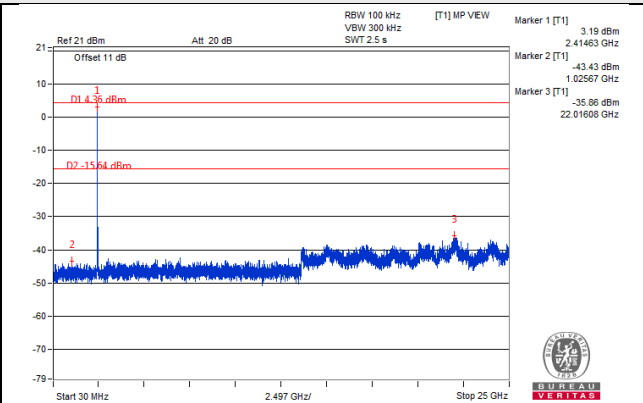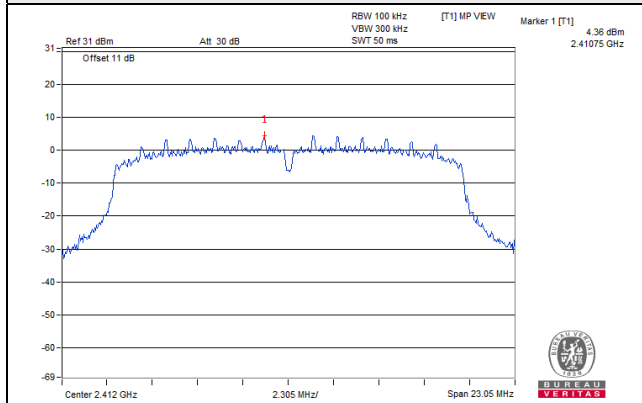


CH 6

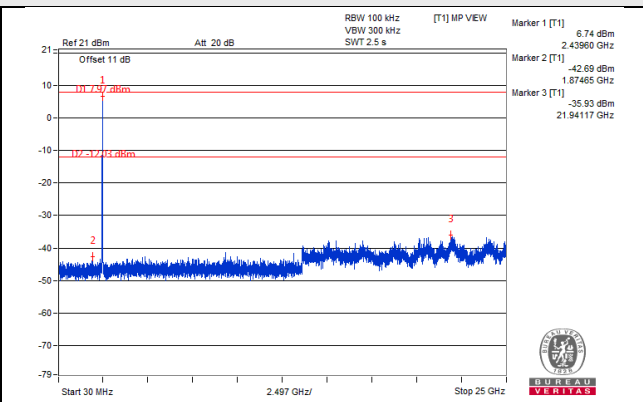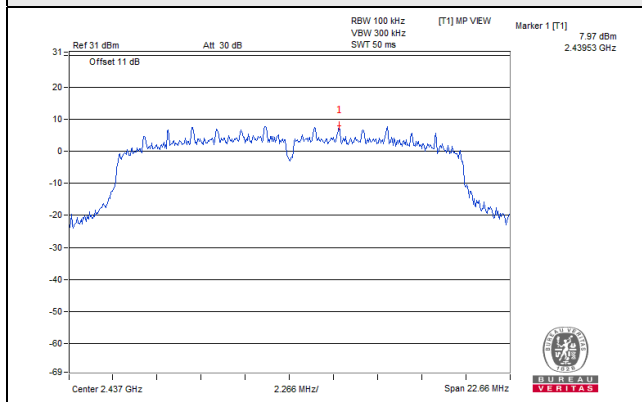


CH 11

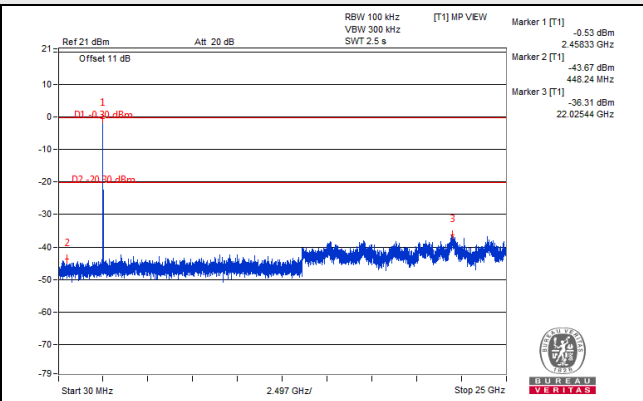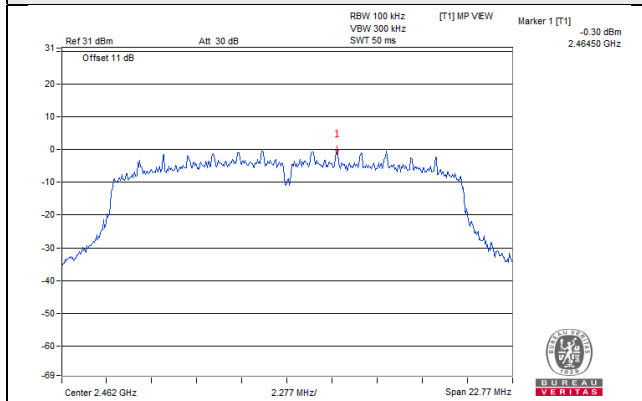



CH 1 Band edge

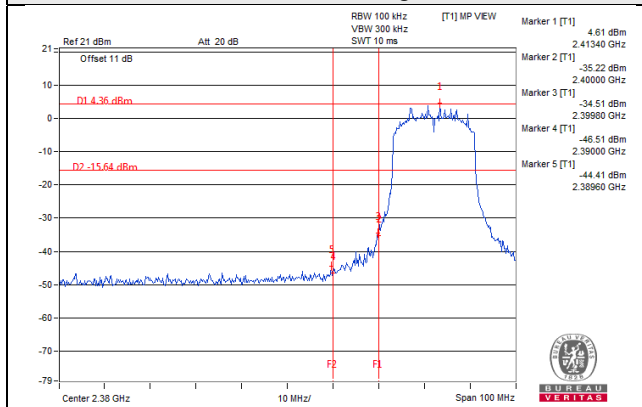



CH 11 Band edge

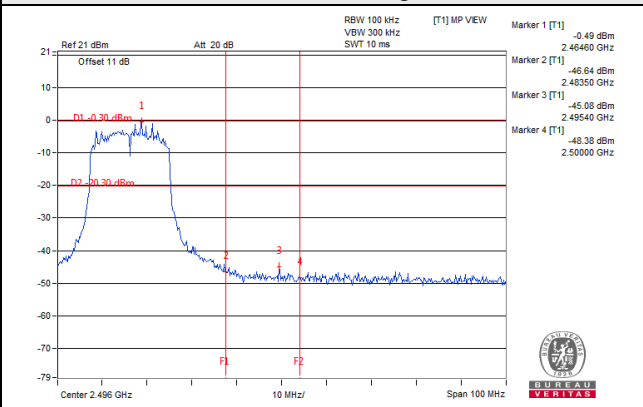


CH 12

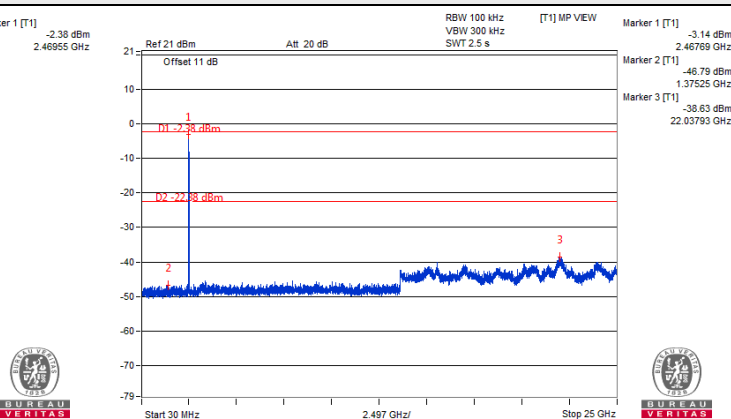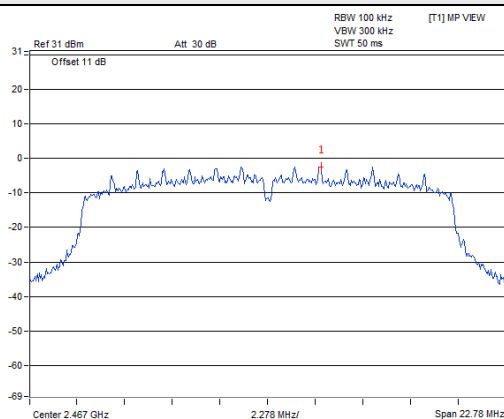


CH 13

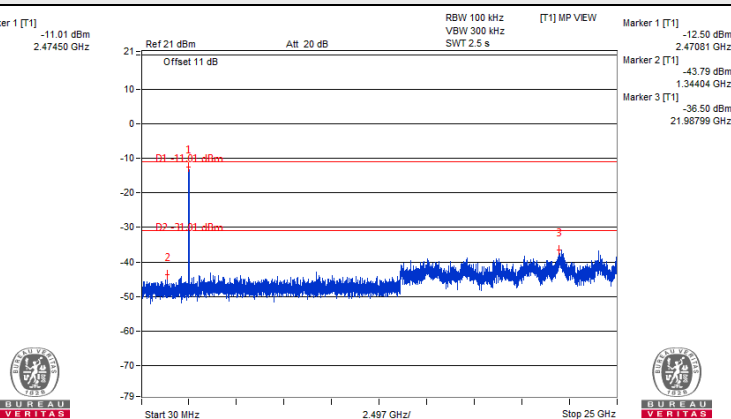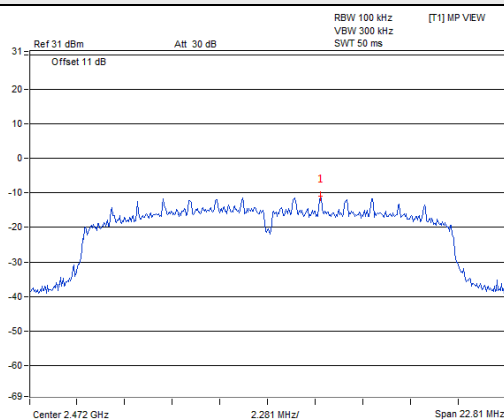

CH 12 Band edge


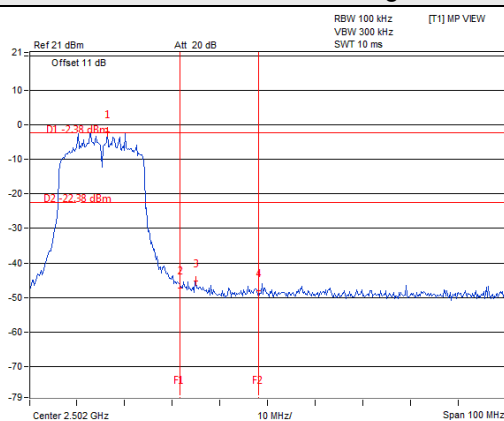


CH 13 Band edge


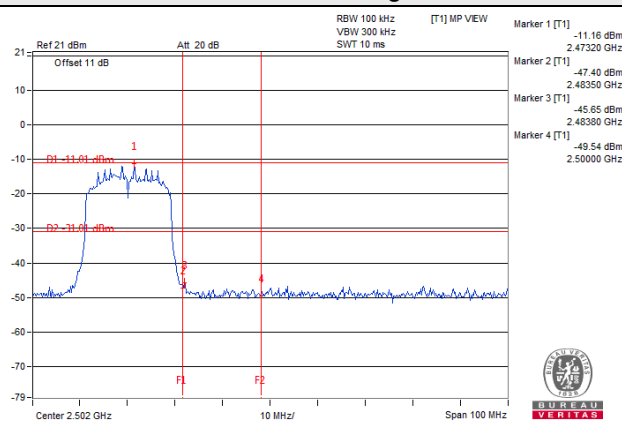


802.11n (HT20)_Chain 1



CH 1

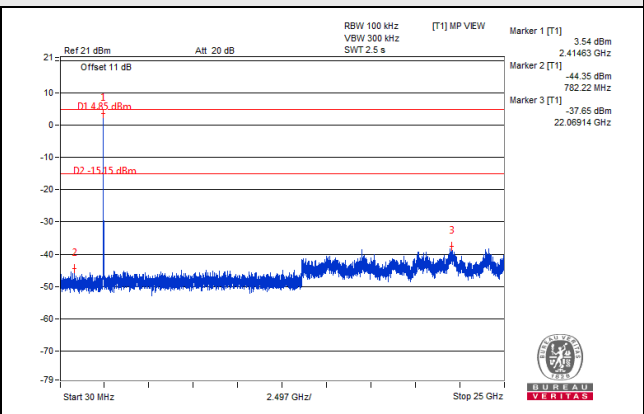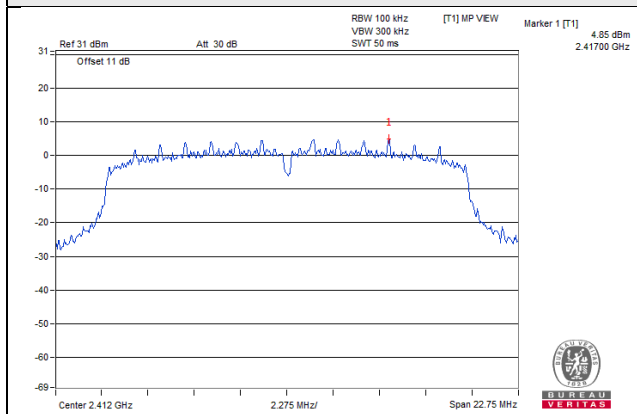


CH 6

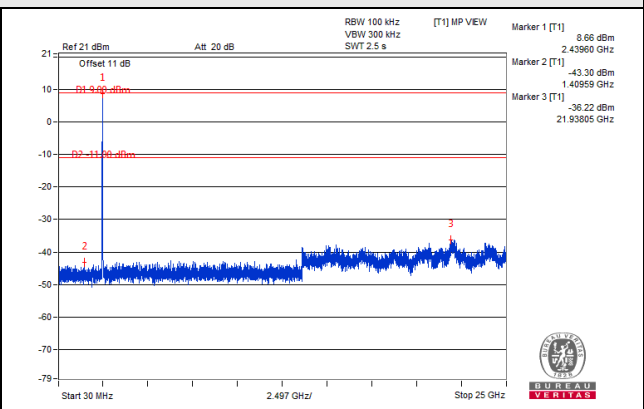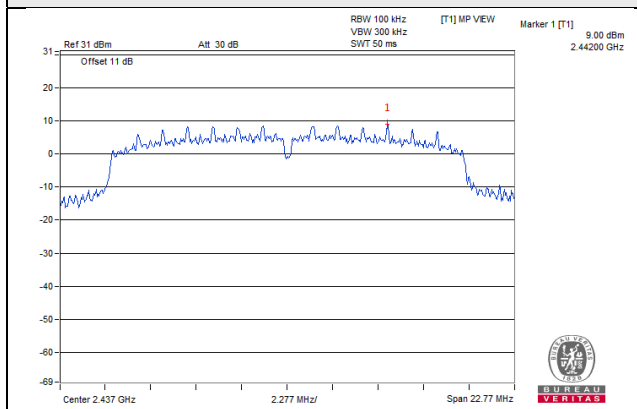


CH 11

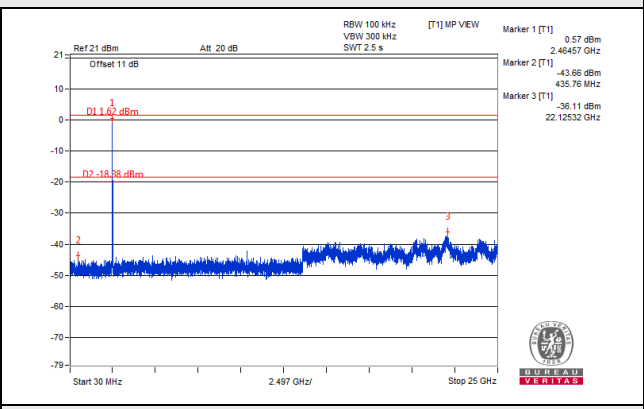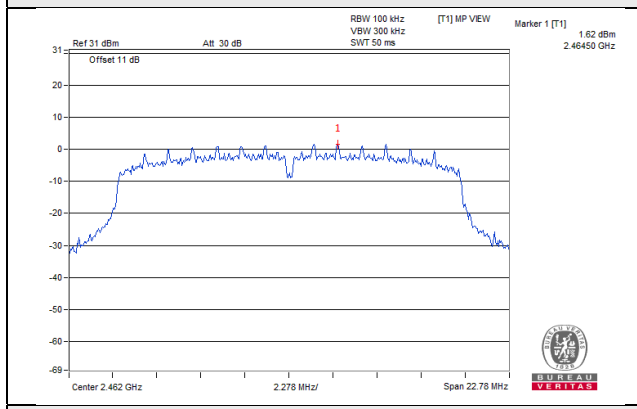



CH 1 Band edge

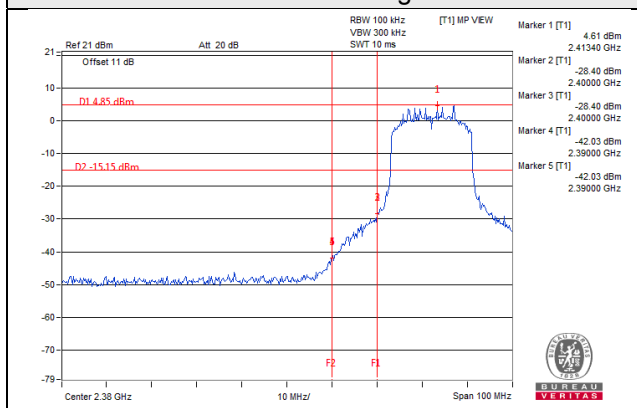



CH 11 Band edge

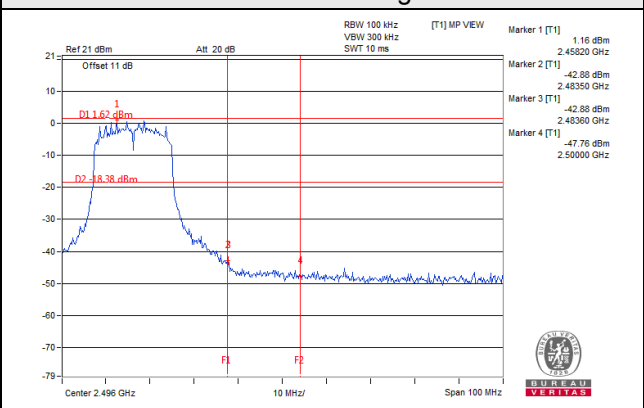


CH 12

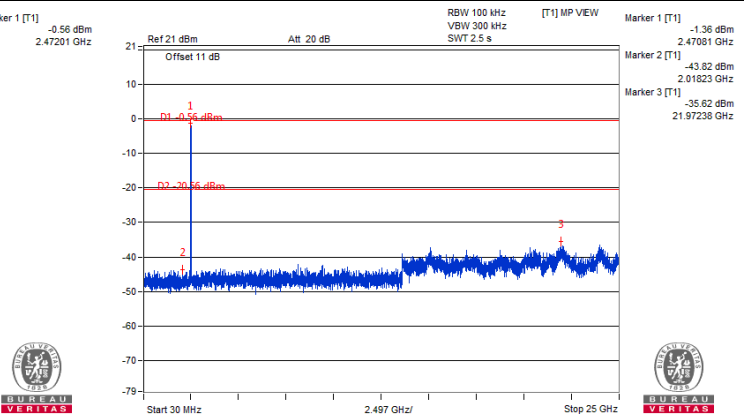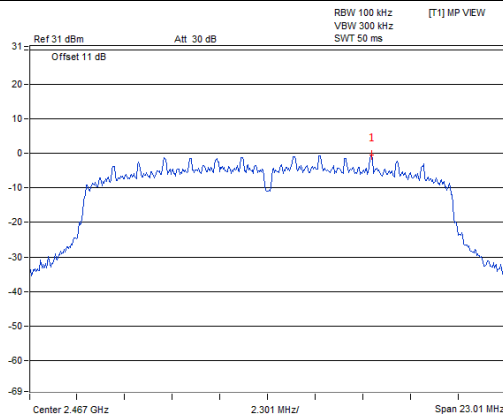


CH 13

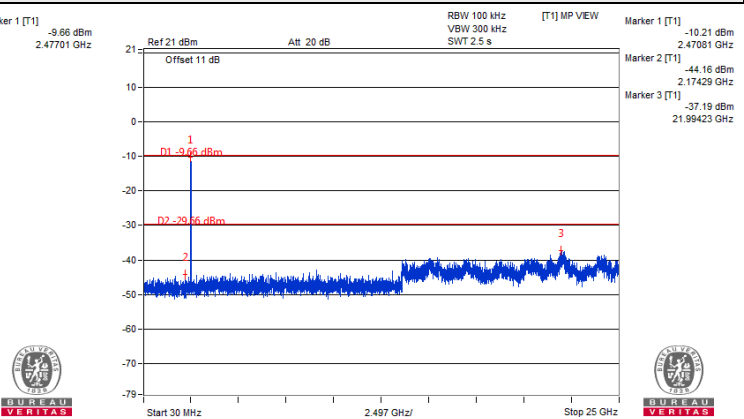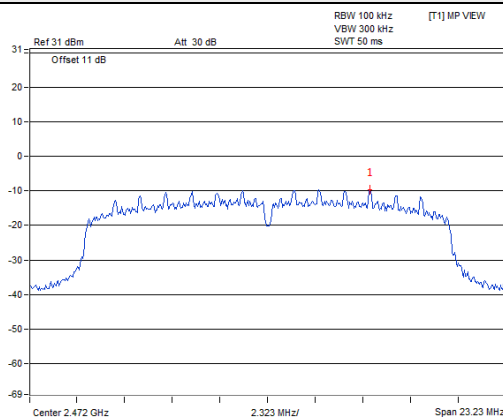

CH 12 Band edge


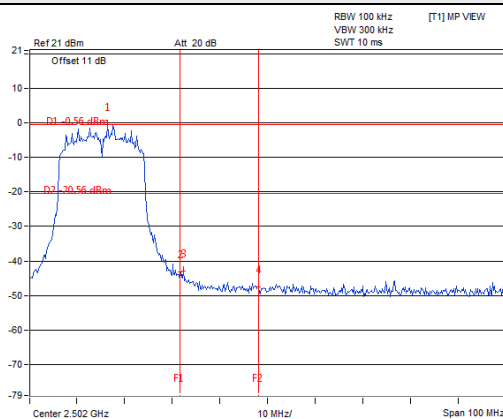


CH 13 Band edge


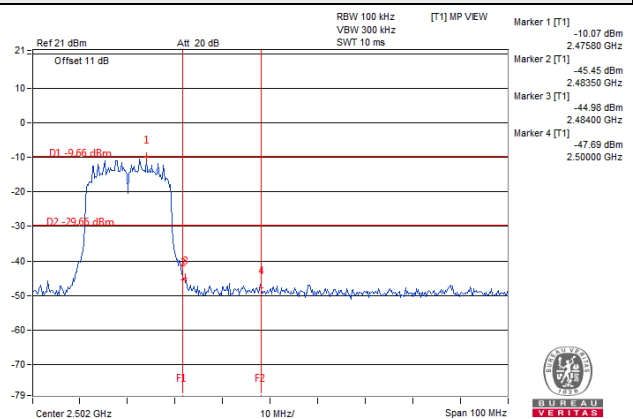


802.11n (HT40) Chain 0



CH 3

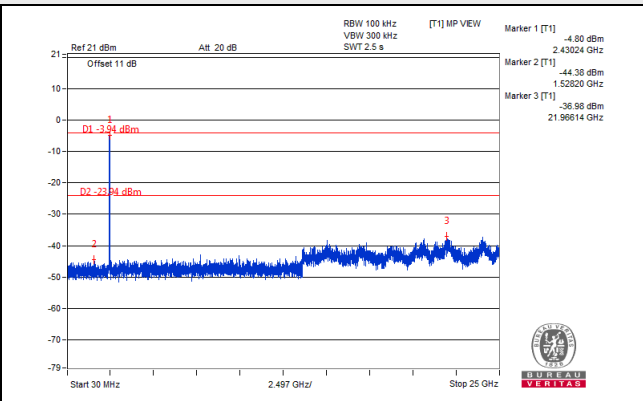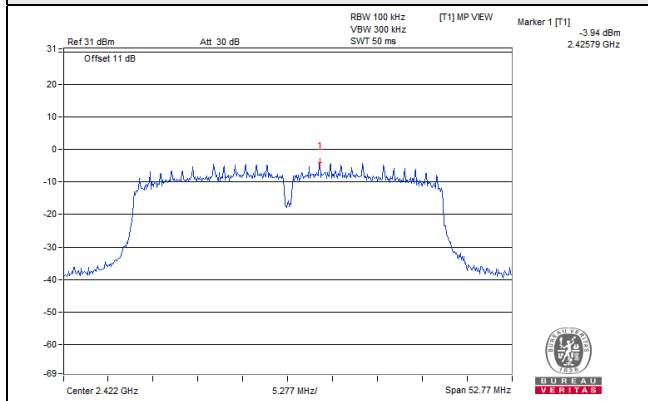


CH 6

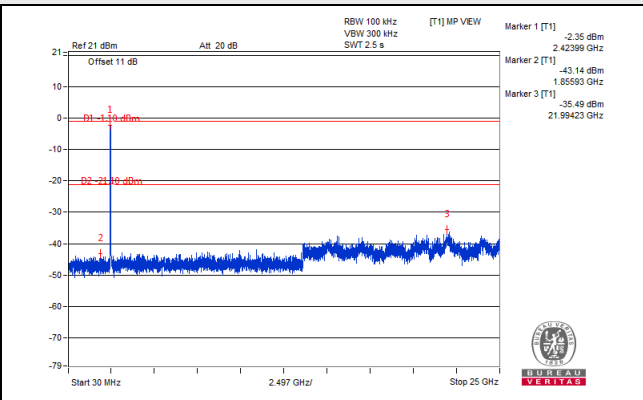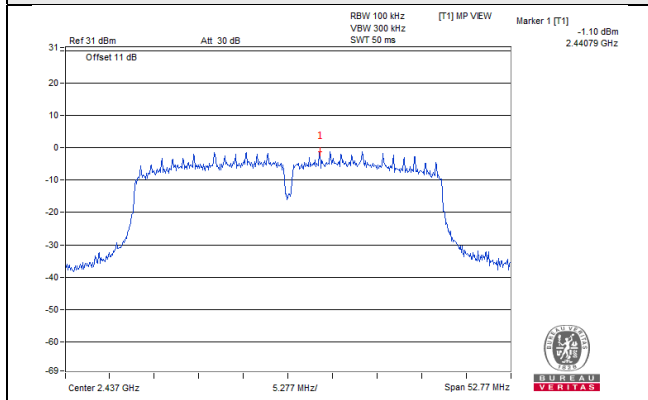


CH 9

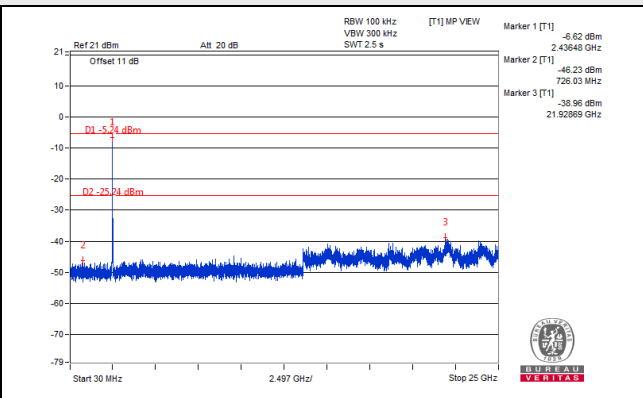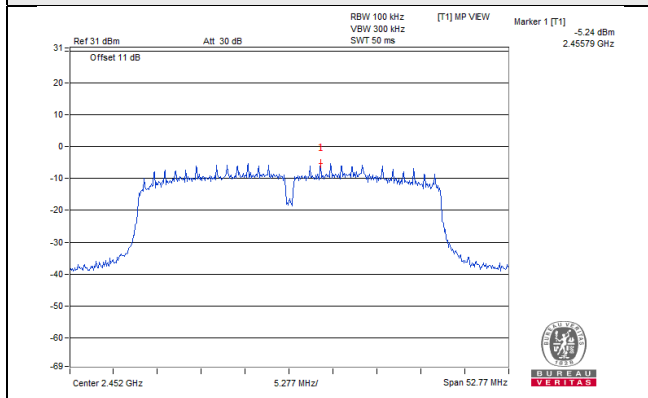



CH 3 Band edge

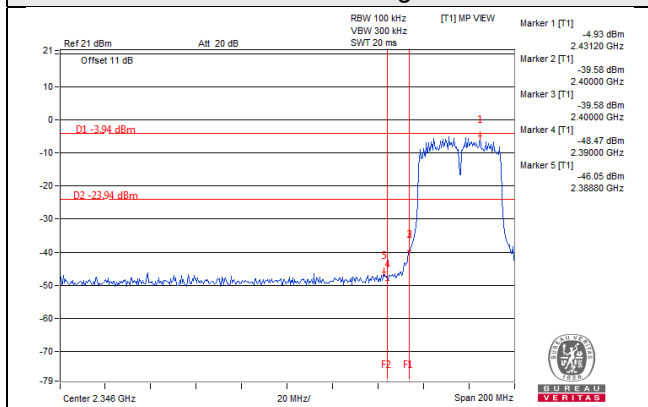



CH 9 Band edge

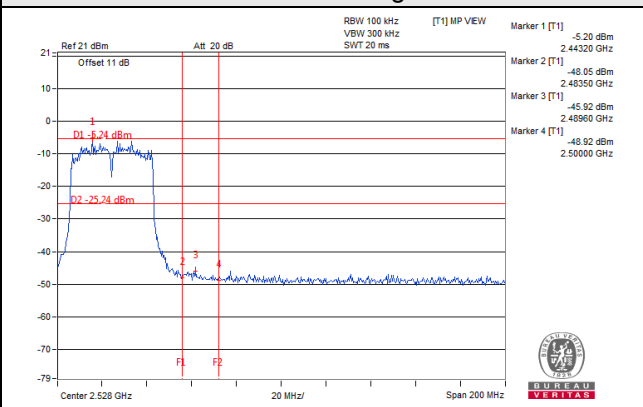


CH 10

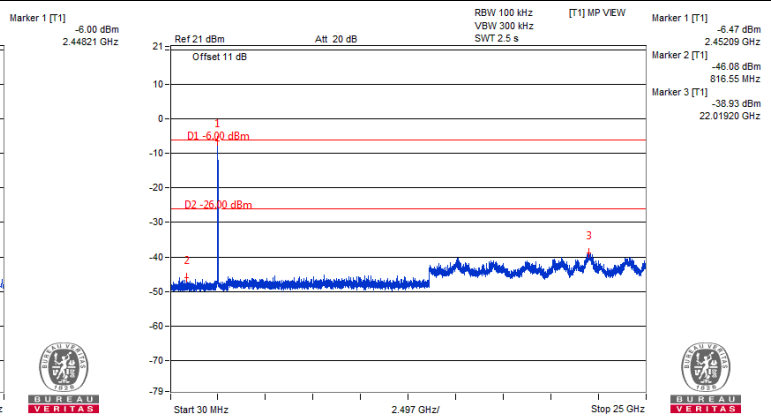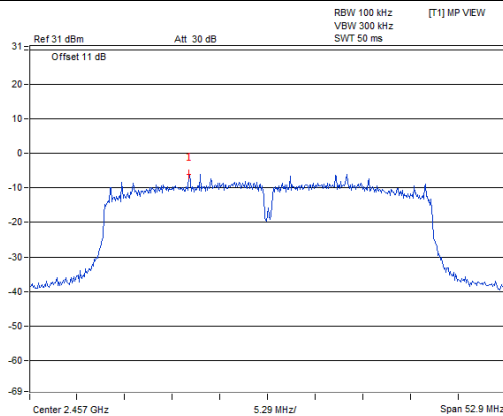


CH 11

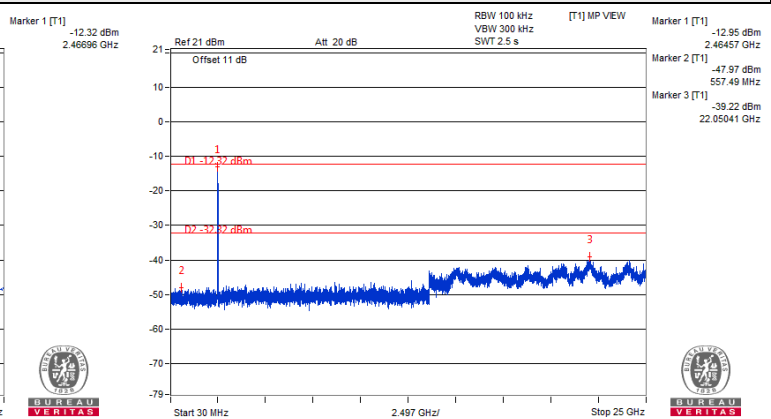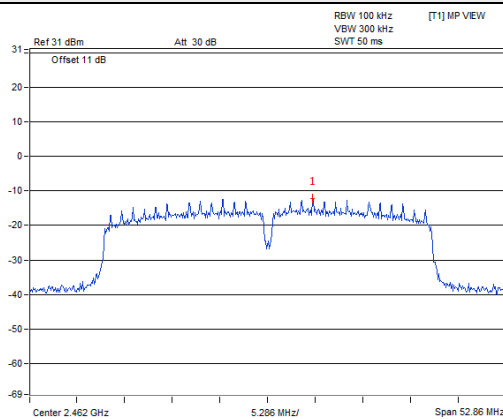

CH 10 Band edge


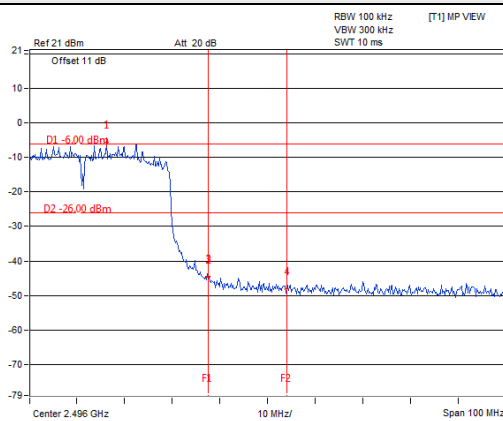


CH 11 Band edge


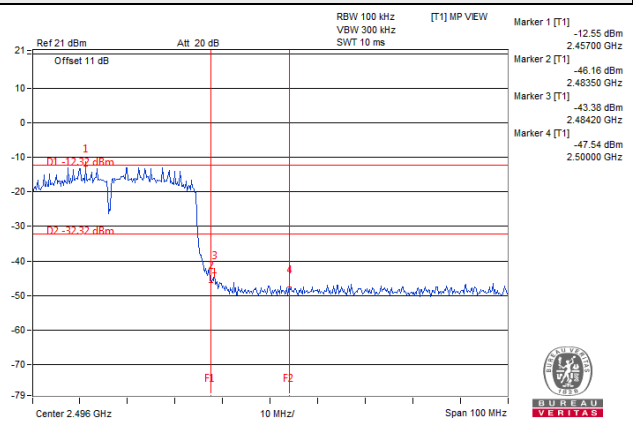


802.11n (HT40) Chain 1



CH 3

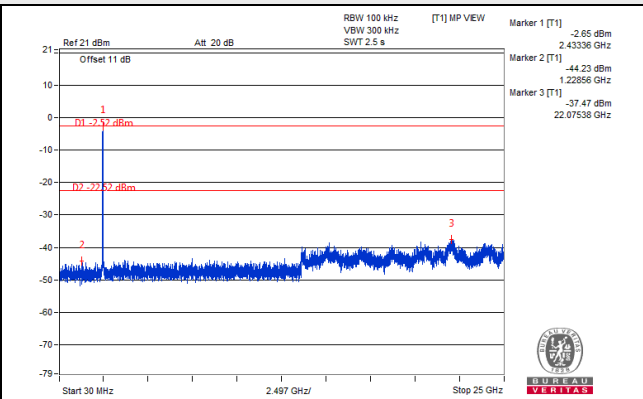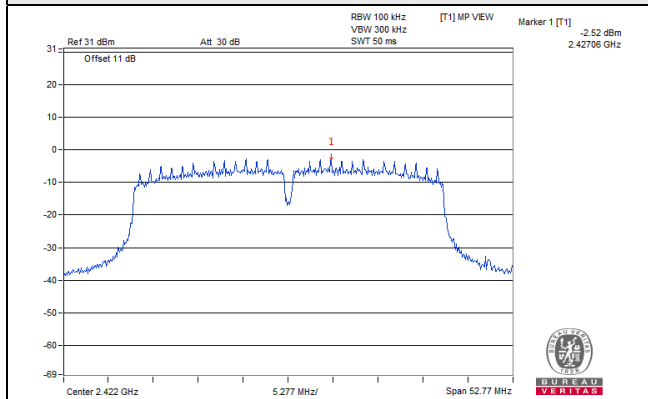


CH 6

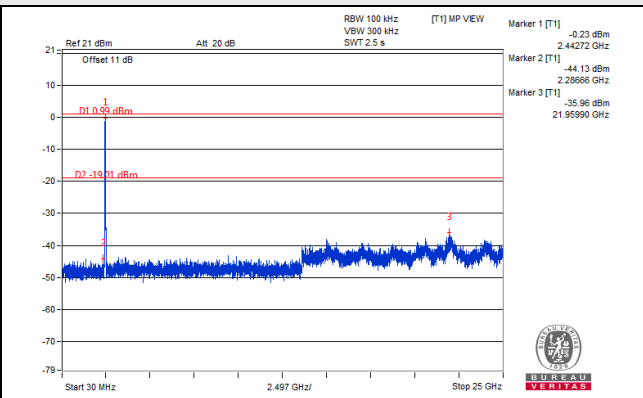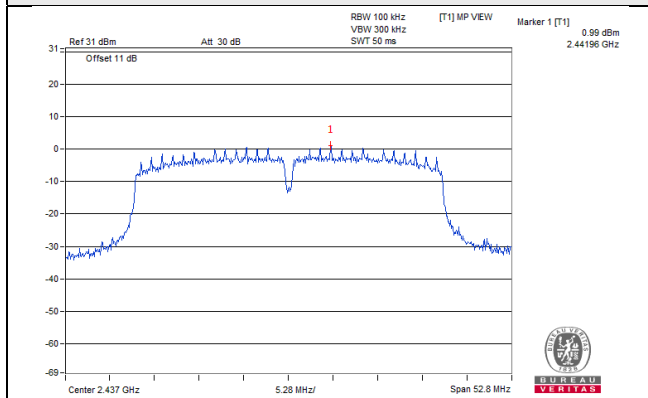


CH 9

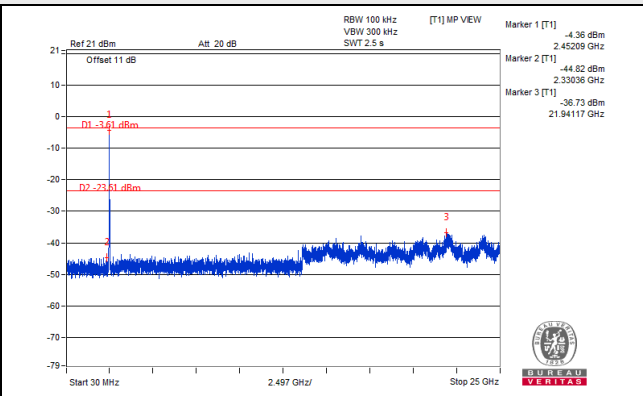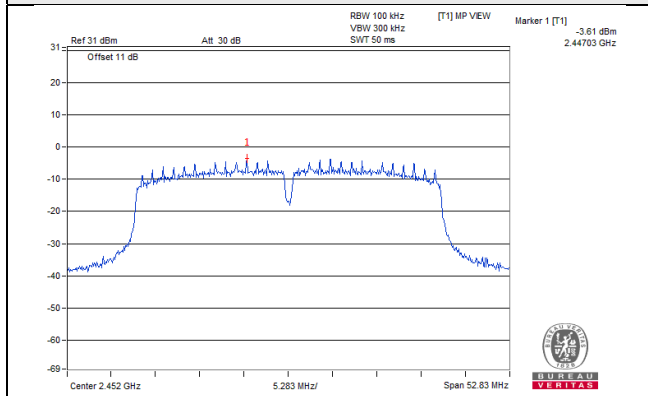



CH 3 Band edge

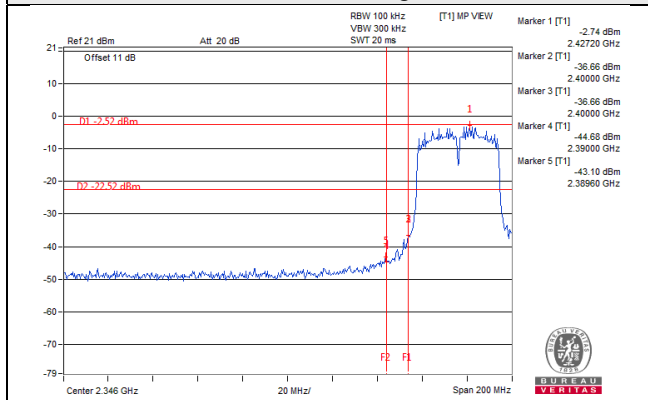



CH 9 Band edge

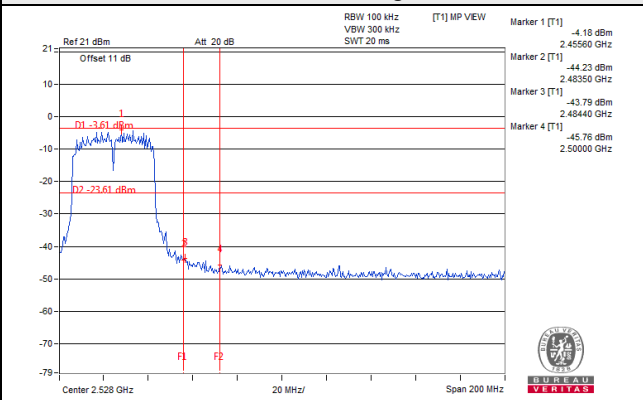


CH 10

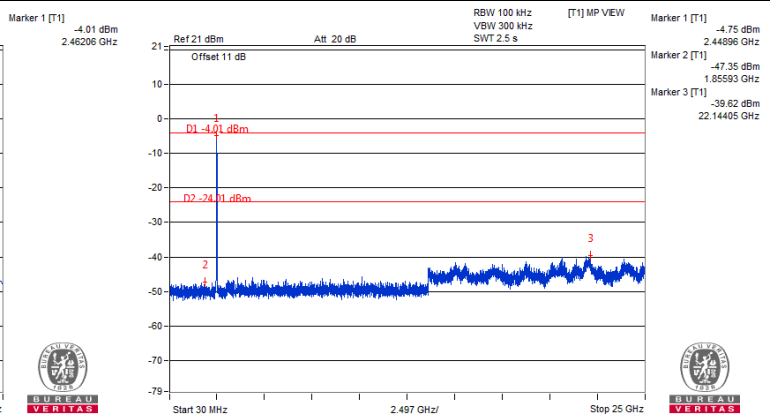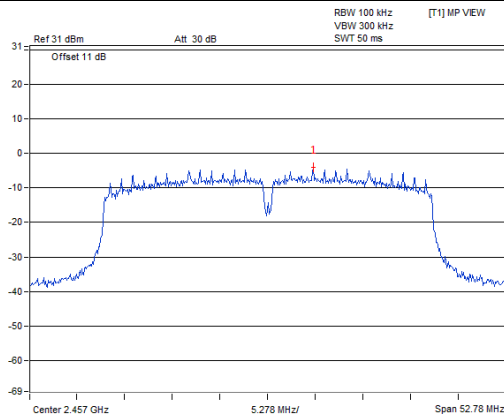


CH 11

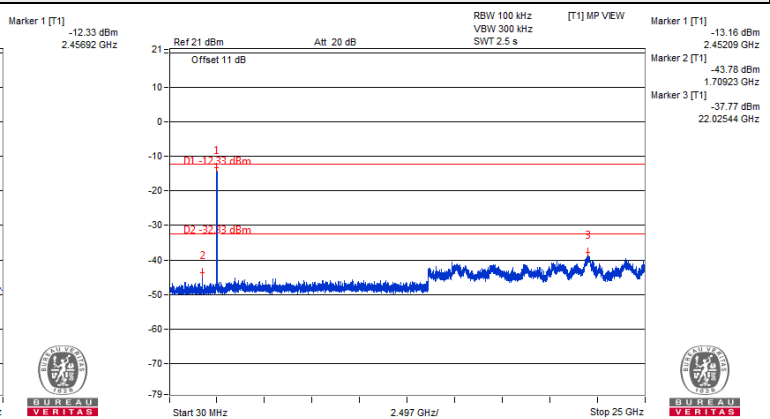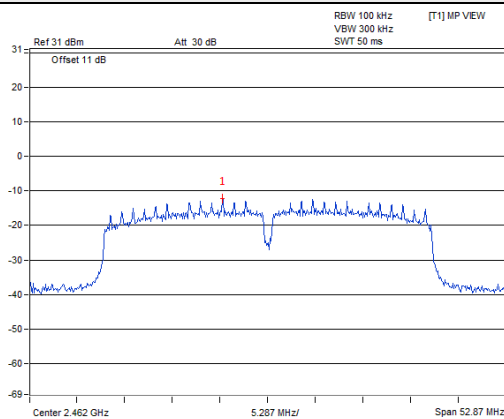

CH 10 Band edge

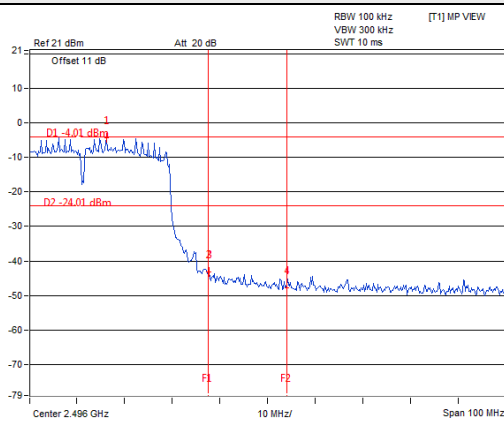

CH 11 Band edge

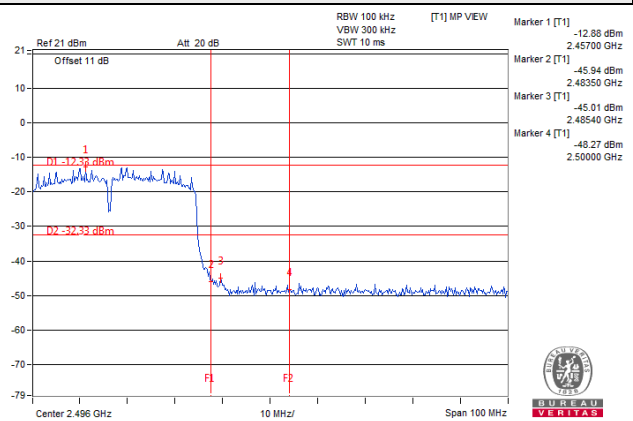

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---