



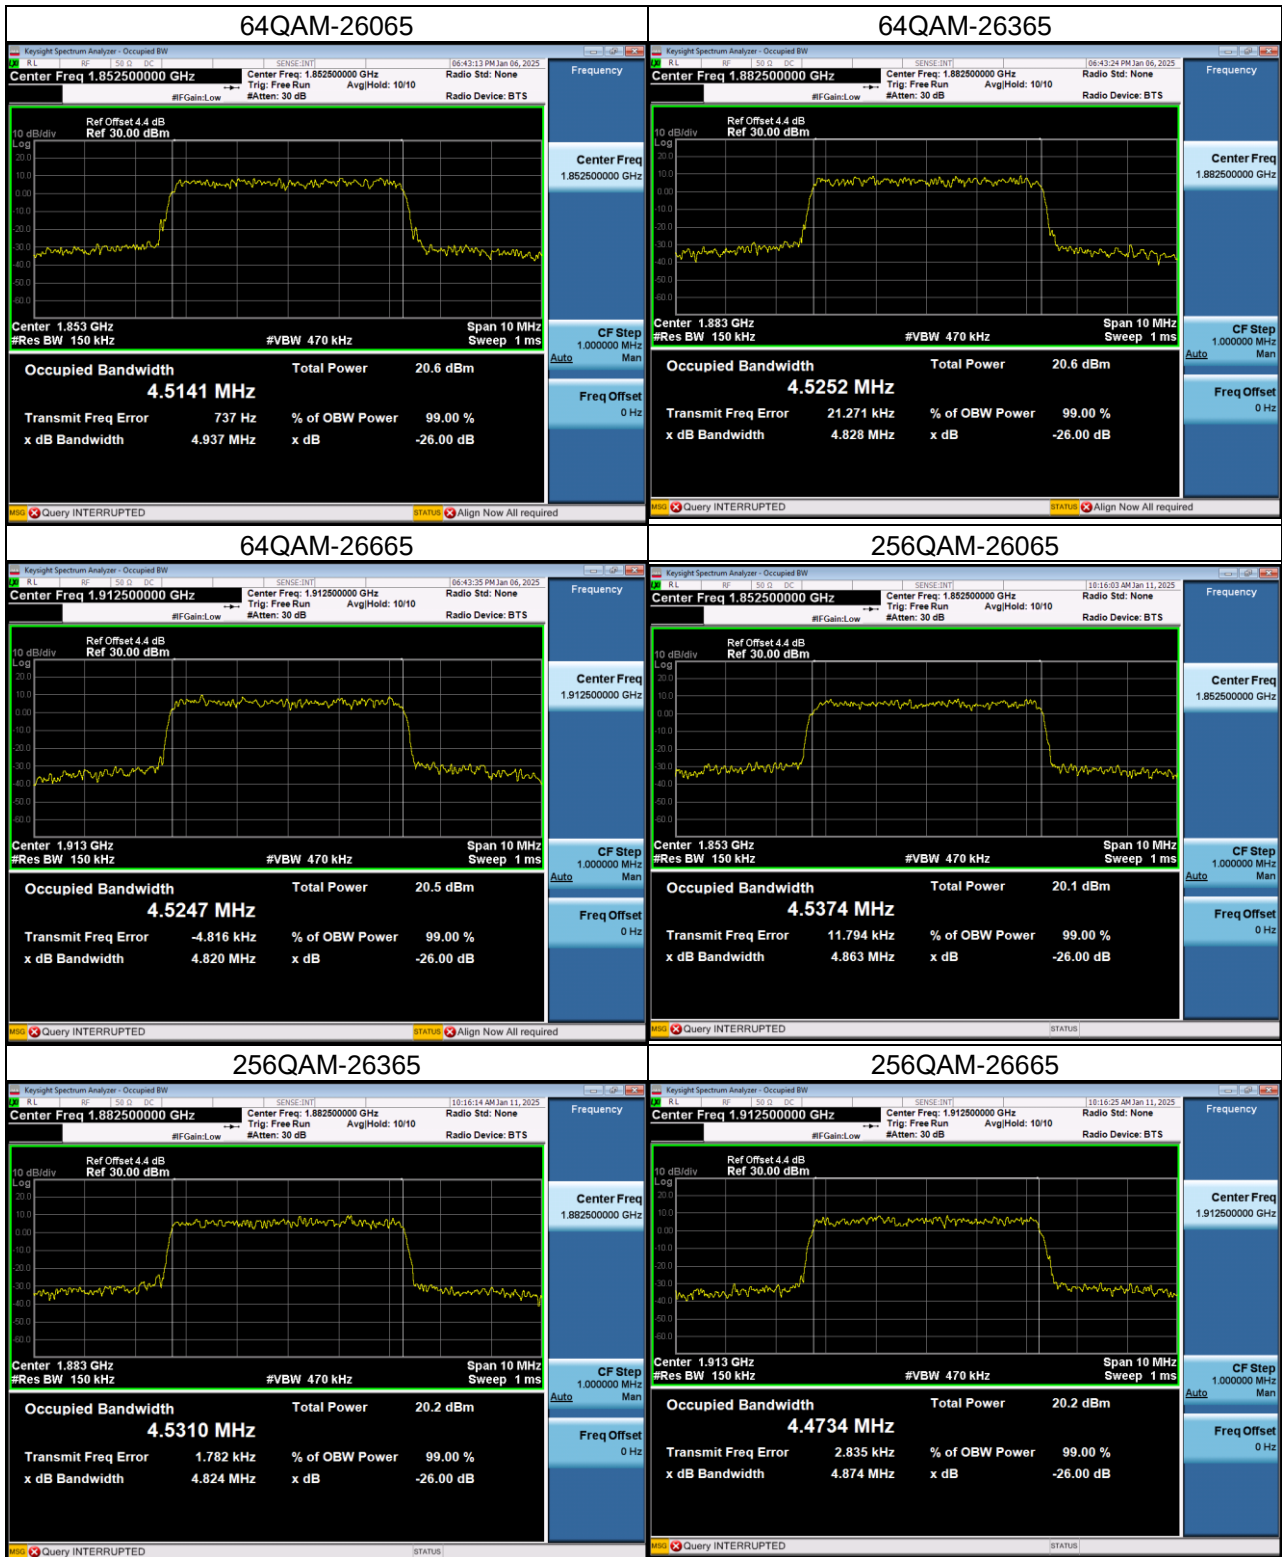


LTE Band 25_10M					
QPSK					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
26090	1855	8.9492	26090	1855	9.464
26365	1882.5	9.0051	26365	1882.5	9.524
26640	1910	8.9494	26640	1910	9.510
16QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
26090	1855	8.9286	26090	1855	9.426
26365	1882.5	8.9445	26365	1882.5	9.575
26640	1910	9.0056	26640	1910	9.452
64QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
26090	1855	8.9892	26090	1855	9.448
26365	1882.5	8.9925	26365	1882.5	9.462
26640	1910	9.0062	26640	1910	9.483
256QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
26090	1855	8.9750	26090	1855	9.486
26365	1882.5	8.9678	26365	1882.5	9.500
26640	1910	9.0197	26640	1910	9.533

Spectrum Plot


QPSK-26090

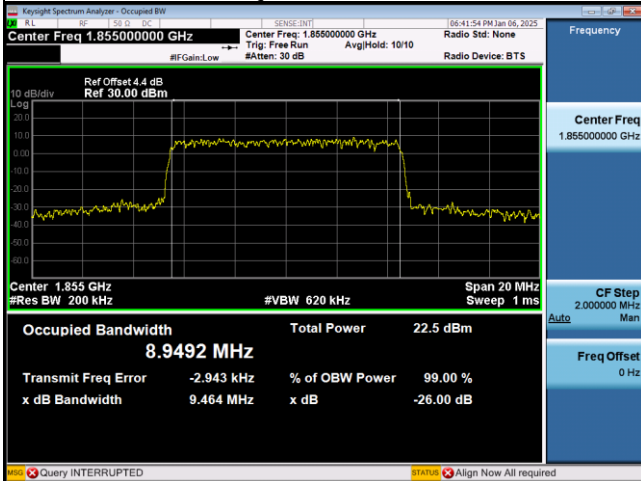


QPSK-26365

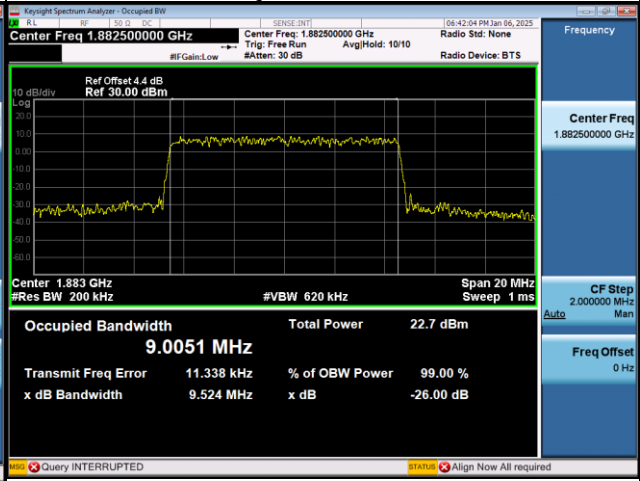


QPSK-26640

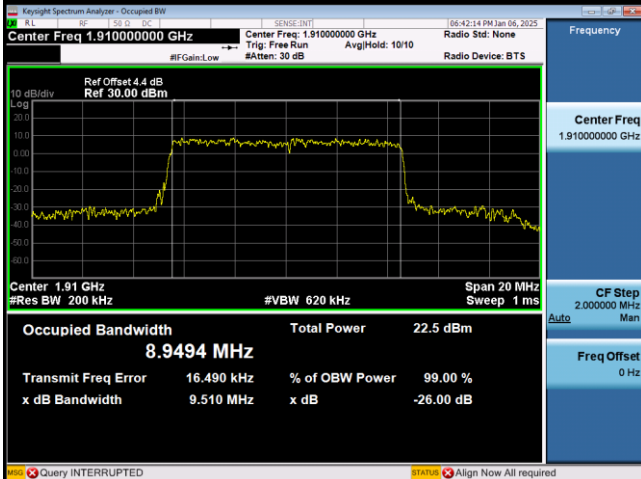


16QAM-26090

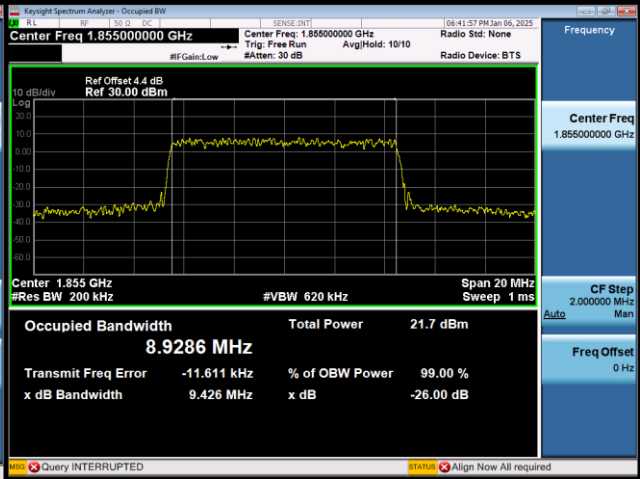


16QAM-26365

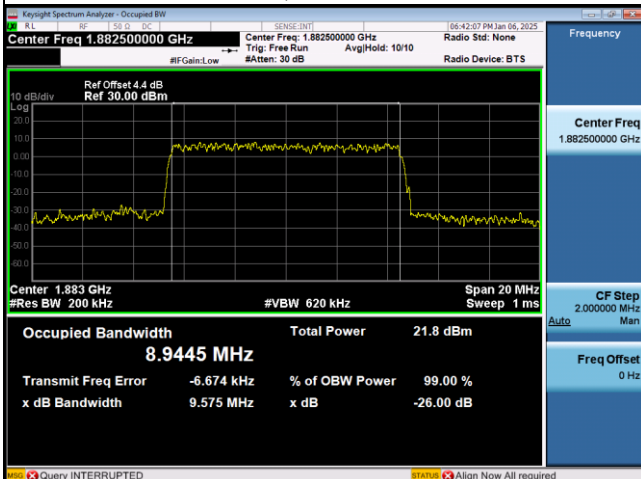

16QAM-26640

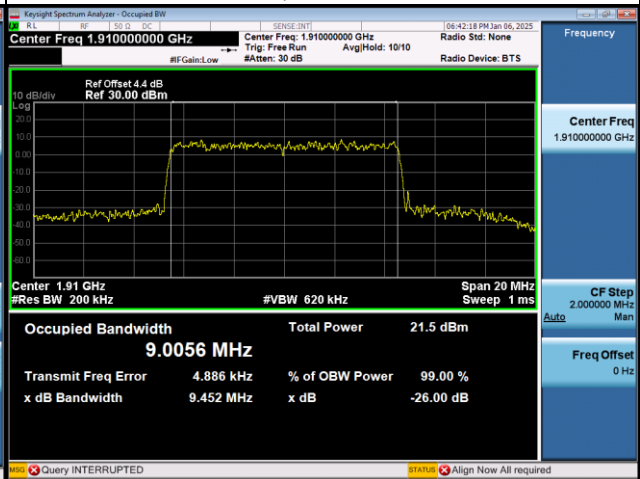


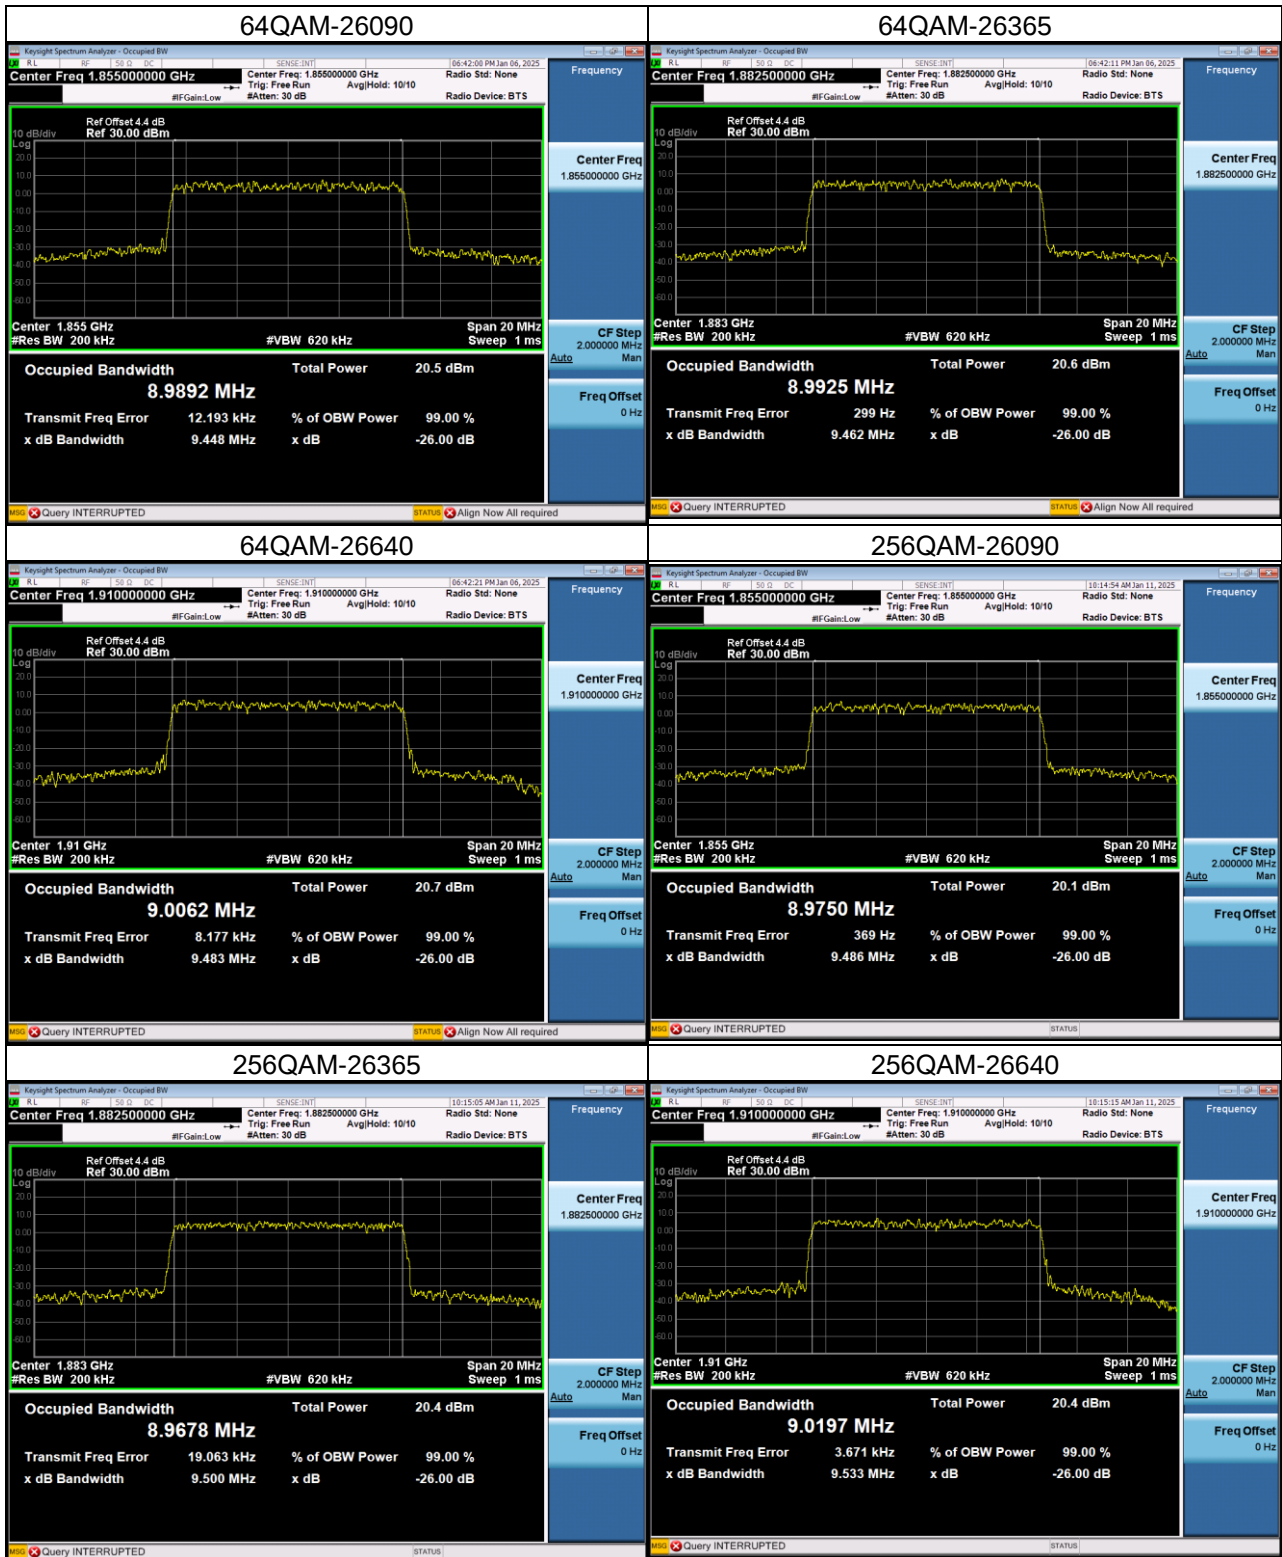


LTE Band 25_15M					
QPSK					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
26115	1857.5	13.474	26115	1857.5	14.13
26365	1882.5	13.442	26365	1882.5	14.12
26615	1907.5	13.464	26615	1907.5	14.22
16QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
26115	1857.5	13.465	26115	1857.5	14.19
26365	1882.5	13.420	26365	1882.5	14.24
26615	1907.5	13.483	26615	1907.5	14.15
64QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
26115	1857.5	13.449	26115	1857.5	14.18
26365	1882.5	13.414	26365	1882.5	14.20
26615	1907.5	13.434	26615	1907.5	14.20
256QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
26115	1857.5	13.406	26115	1857.5	14.16
26365	1882.5	13.480	26365	1882.5	14.31
26615	1907.5	13.343	26615	1907.5	14.14

Spectrum Plot


QPSK-26115

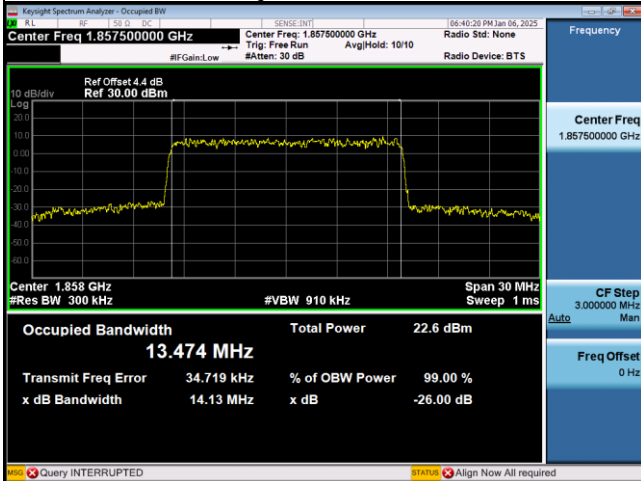


QPSK-26365

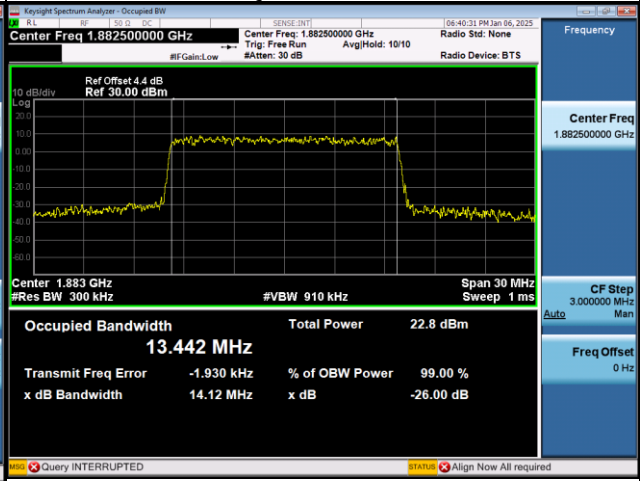


QPSK-26615

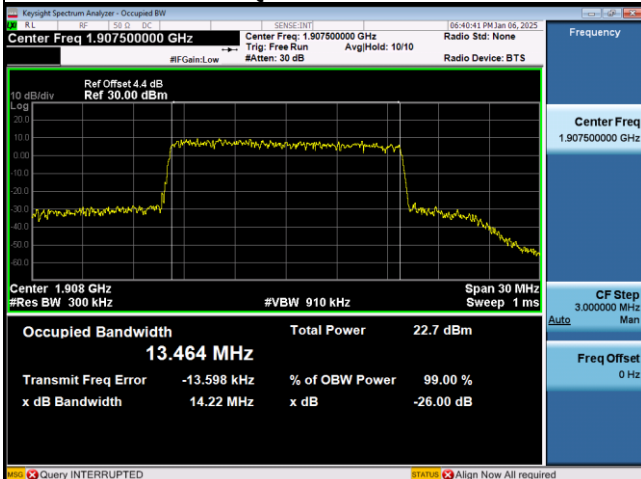

16QAM-26115

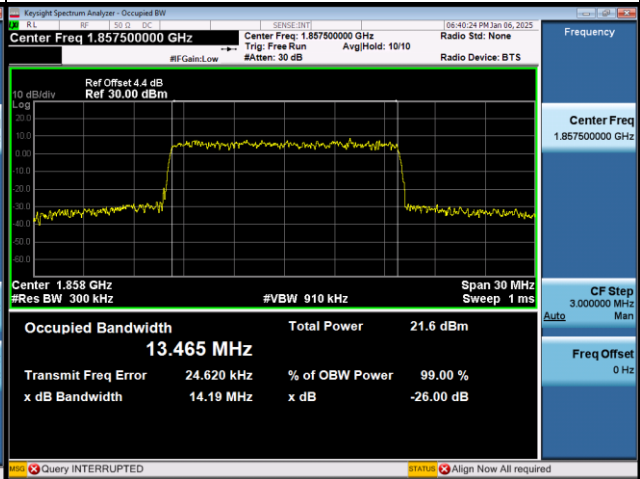


16QAM-26365

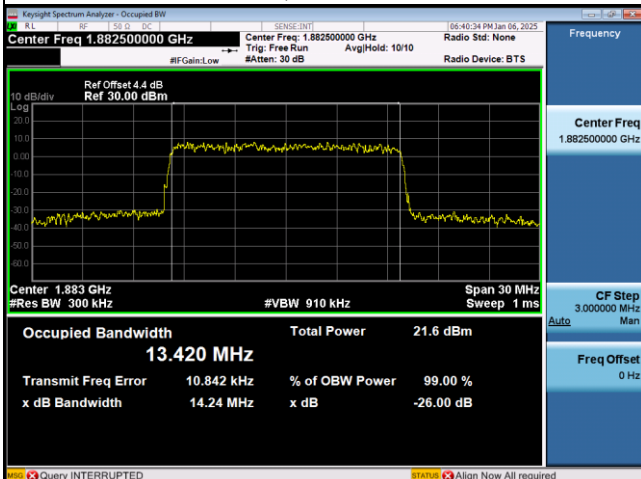


16QAM-26615




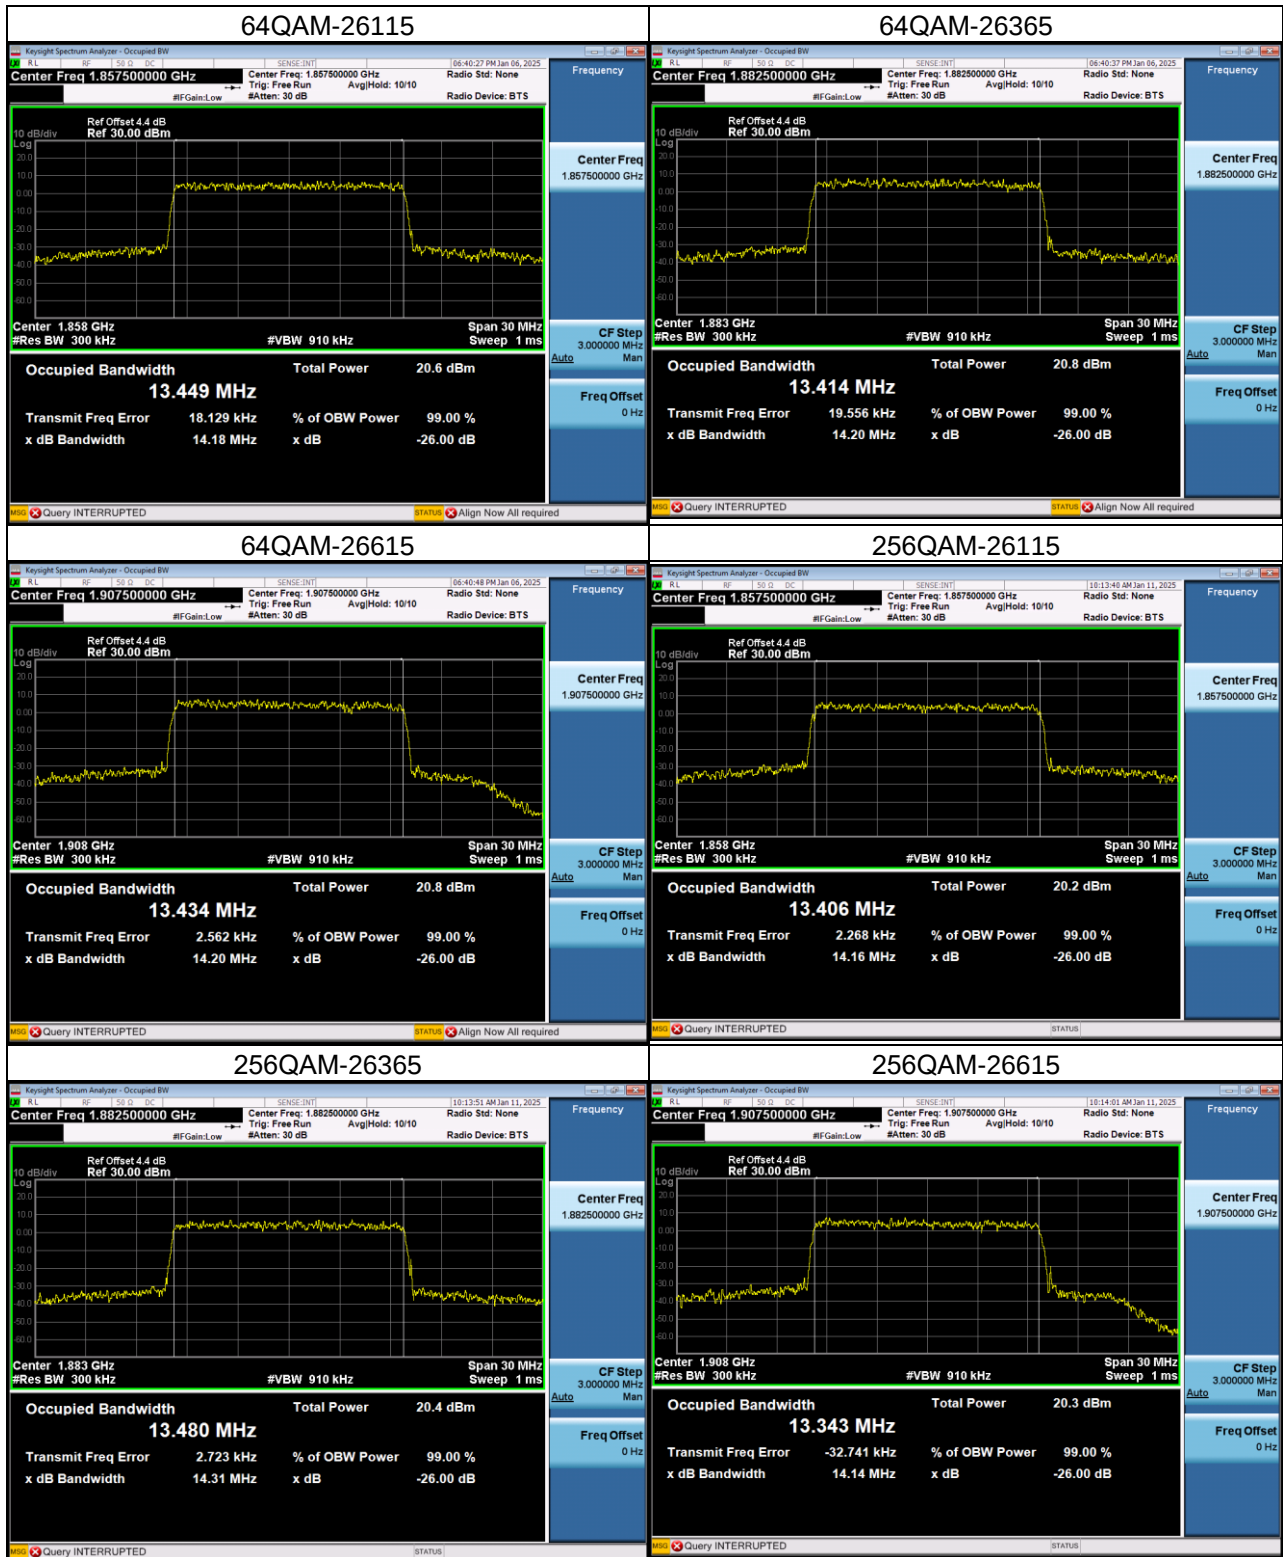


LTE Band 25_20M					
QPSK					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
26140	1860	17.945	26140	1860	18.89
26365	1882.5	17.858	26365	1882.5	18.86
26590	1905	17.869	26590	1905	18.83
16QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
26140	1860	17.943	26140	1860	18.83
26365	1882.5	17.847	26365	1882.5	18.83
26590	1905	17.906	26590	1905	18.87
64QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
26140	1860	17.871	26140	1860	18.83
26365	1882.5	17.869	26365	1882.5	18.89
26590	1905	17.891	26590	1905	18.89
256QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
26140	1860	17.874	26140	1860	18.90
26365	1882.5	17.934	26365	1882.5	18.85
26590	1905	17.858	26590	1905	18.83


Spectrum Plot

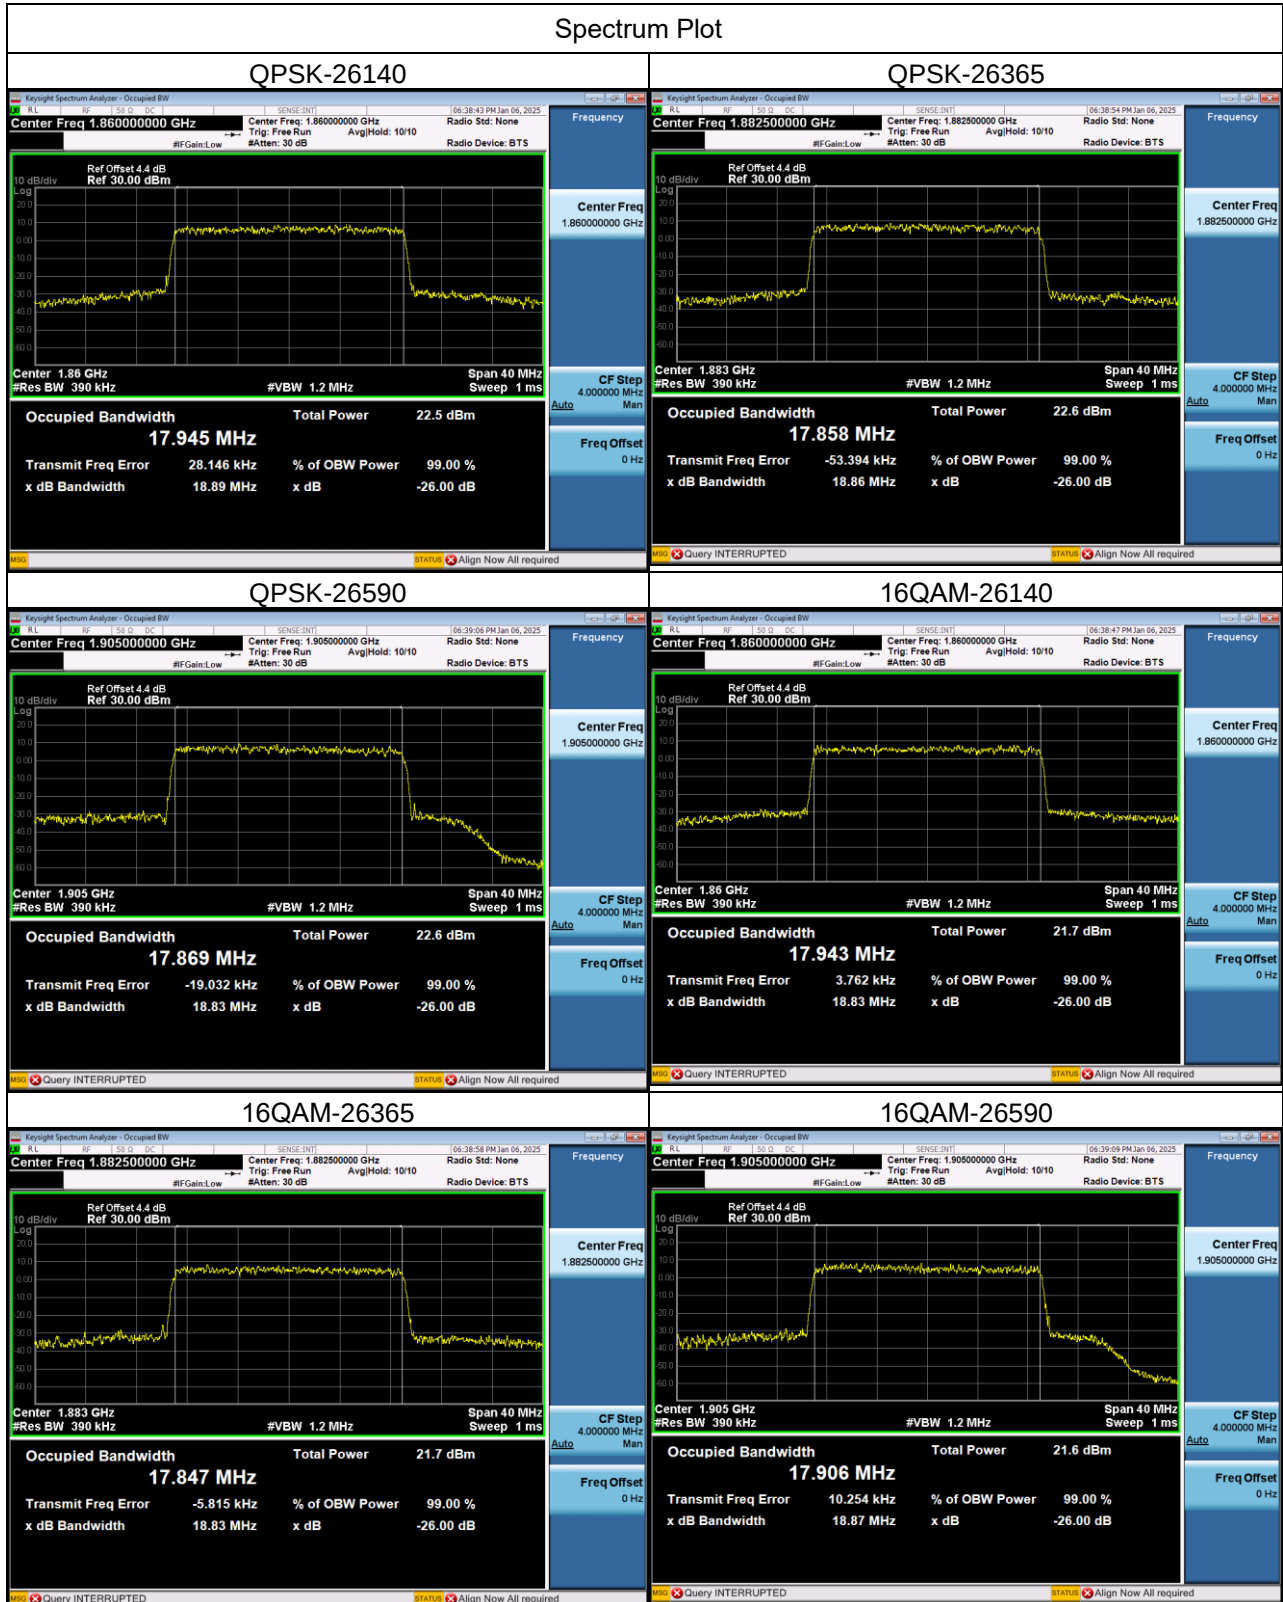


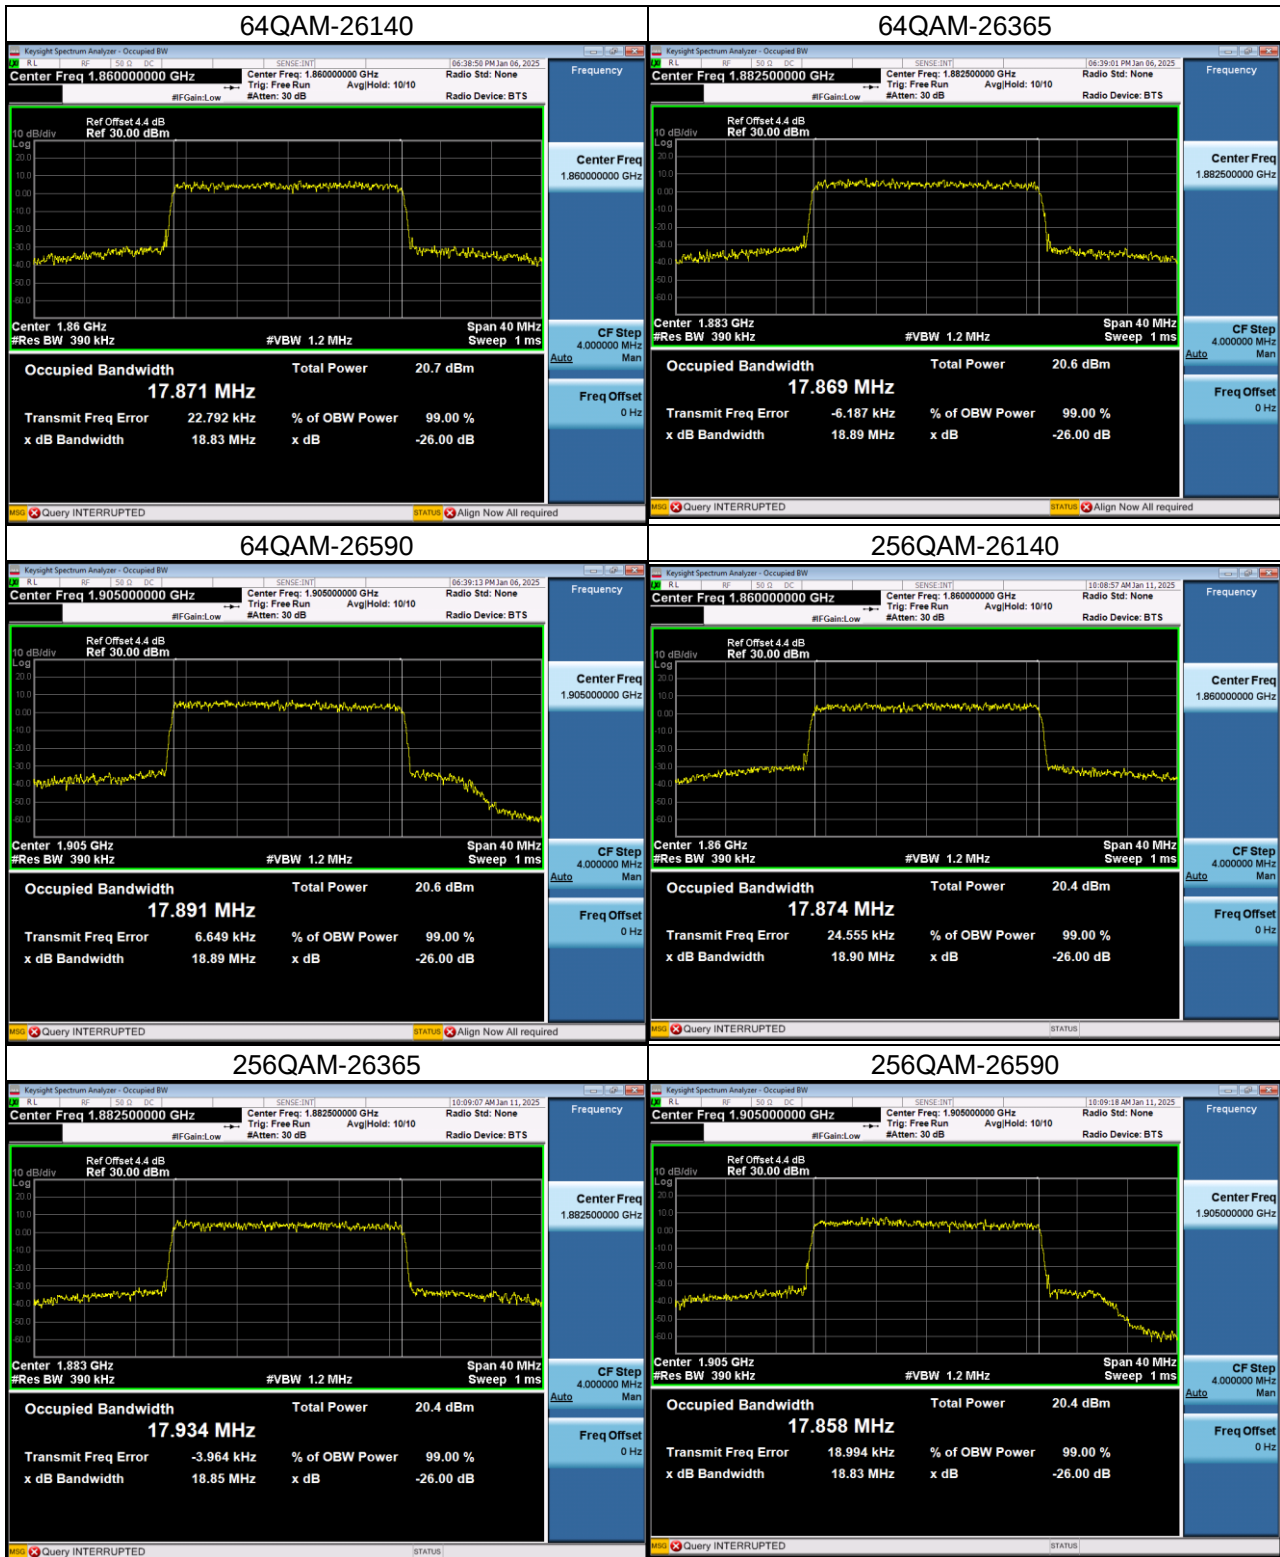



APPENDIX C CONDUCTED SPURIOUS EMISSION

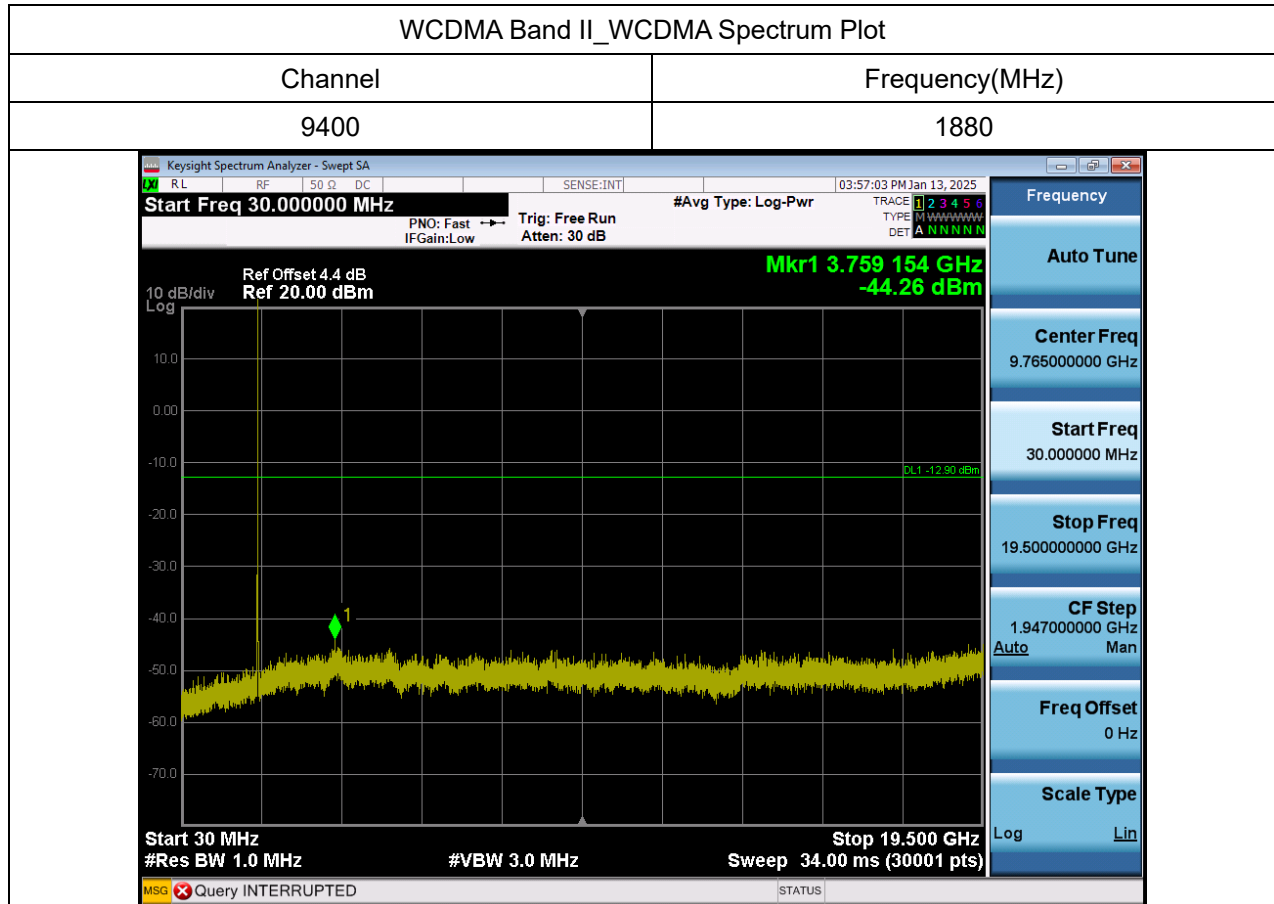


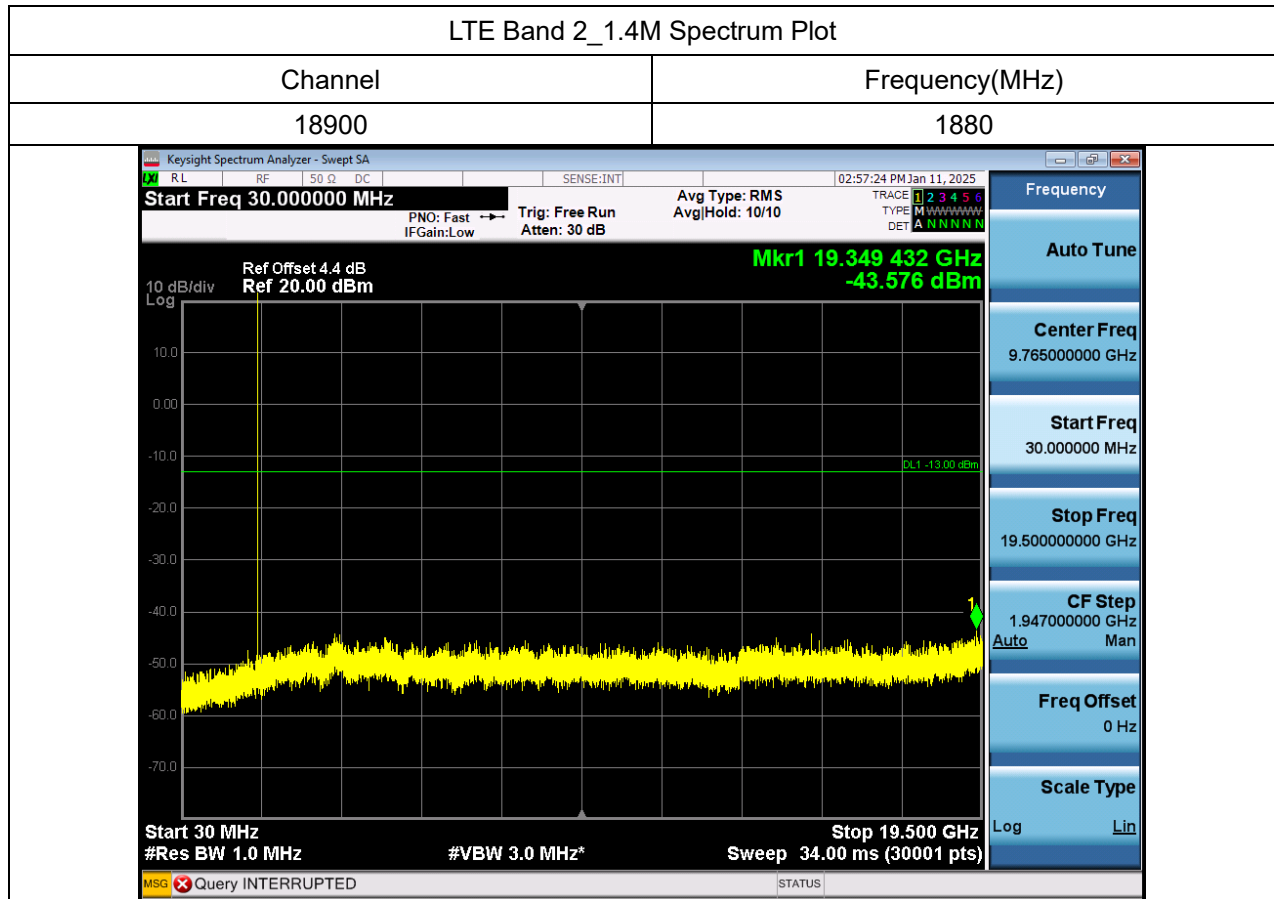


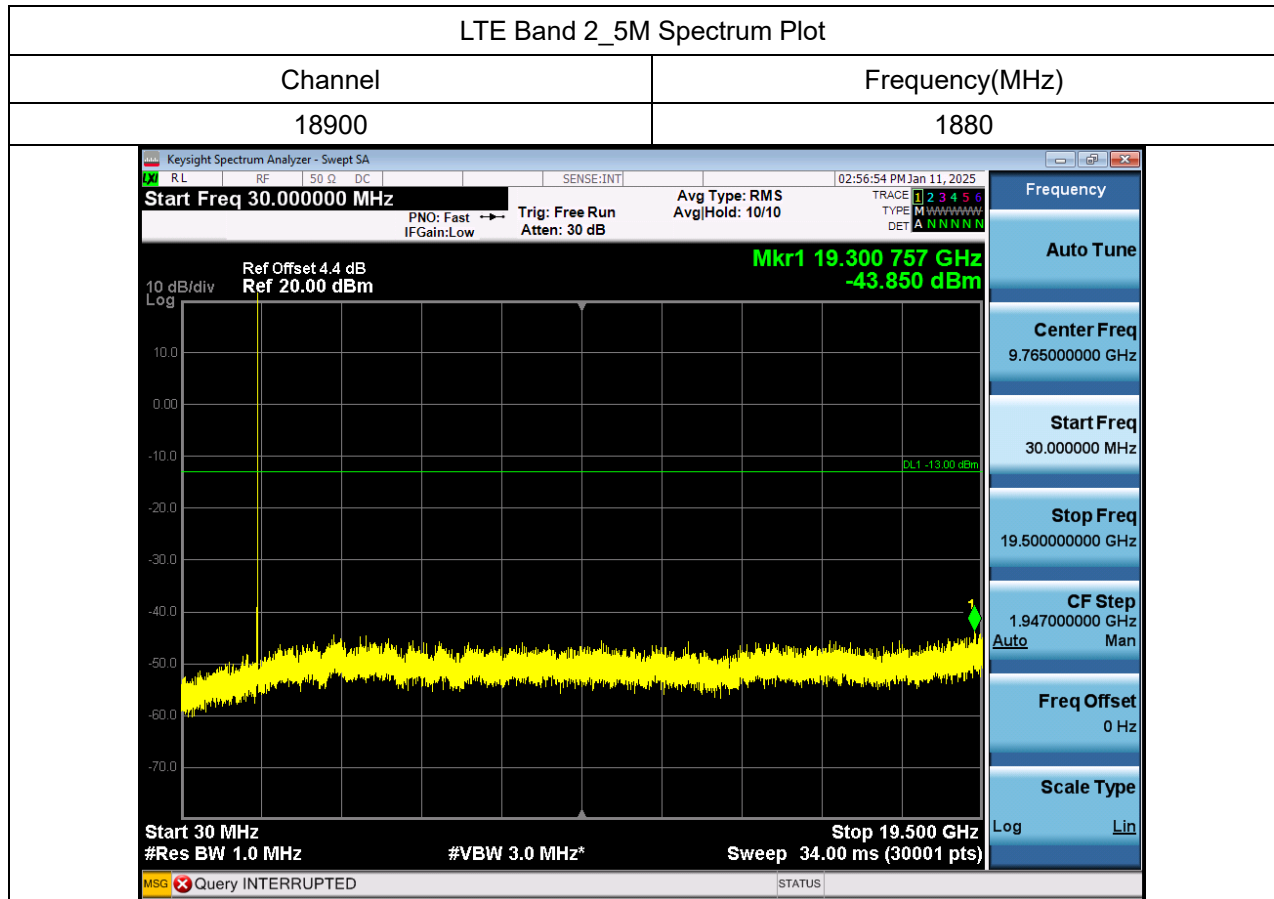

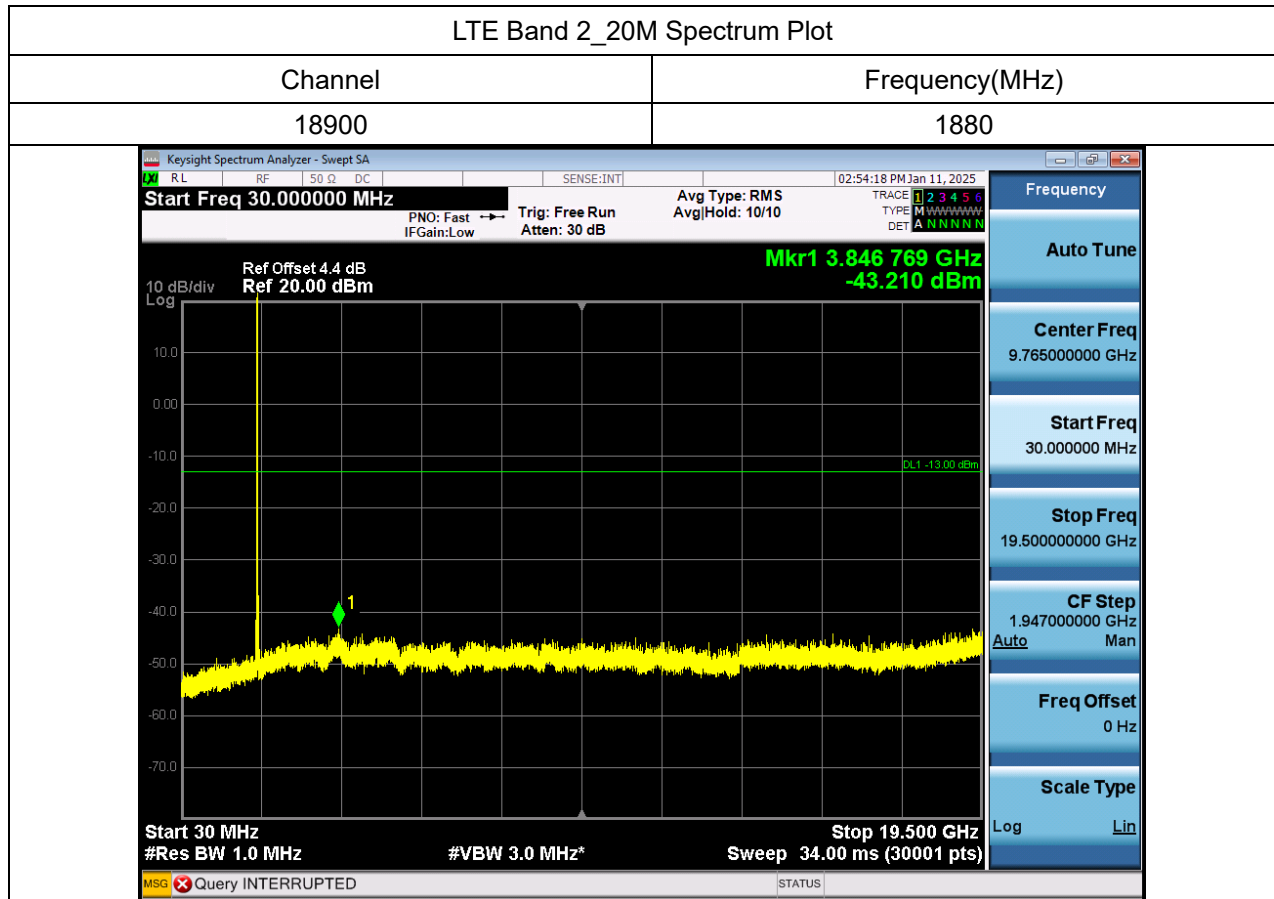

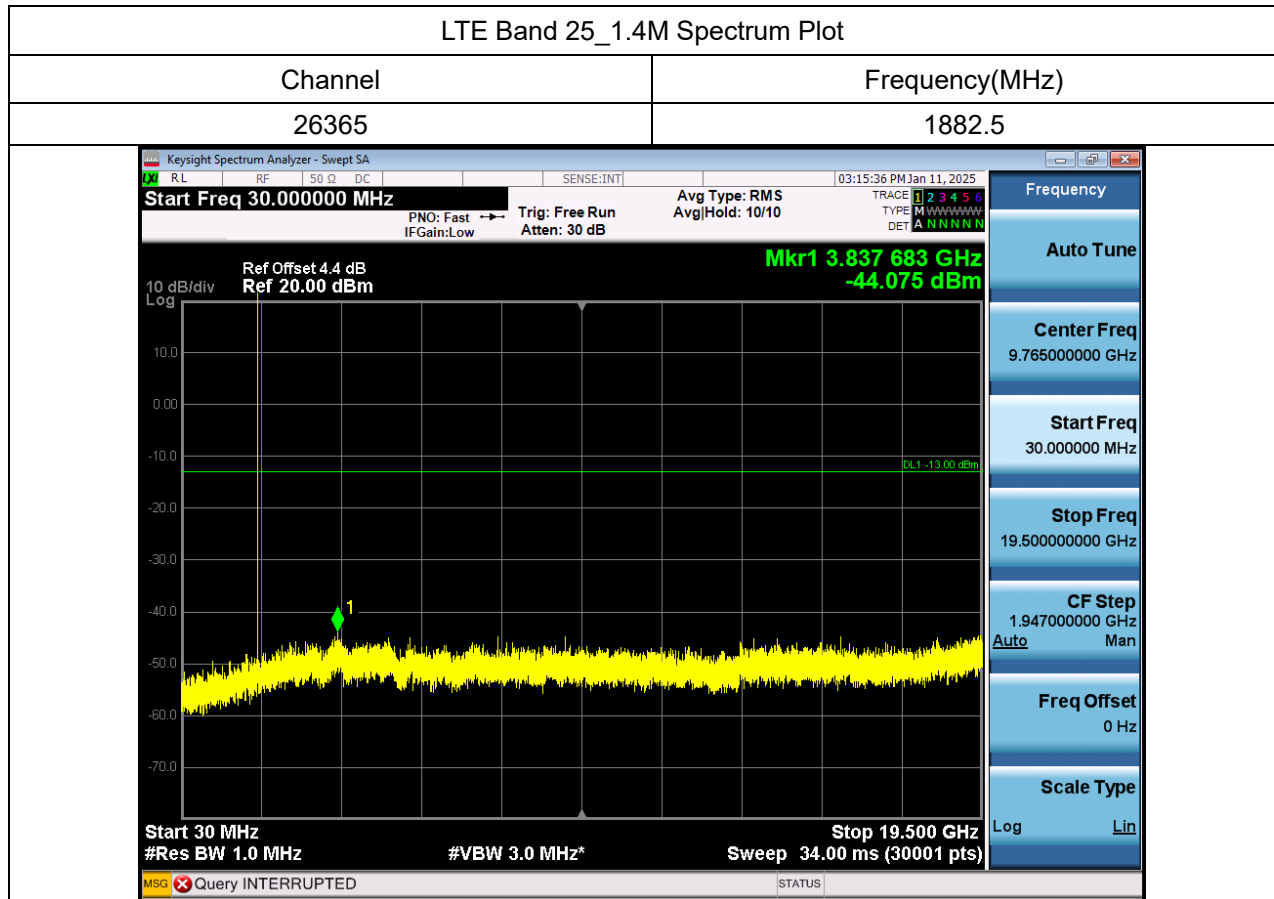

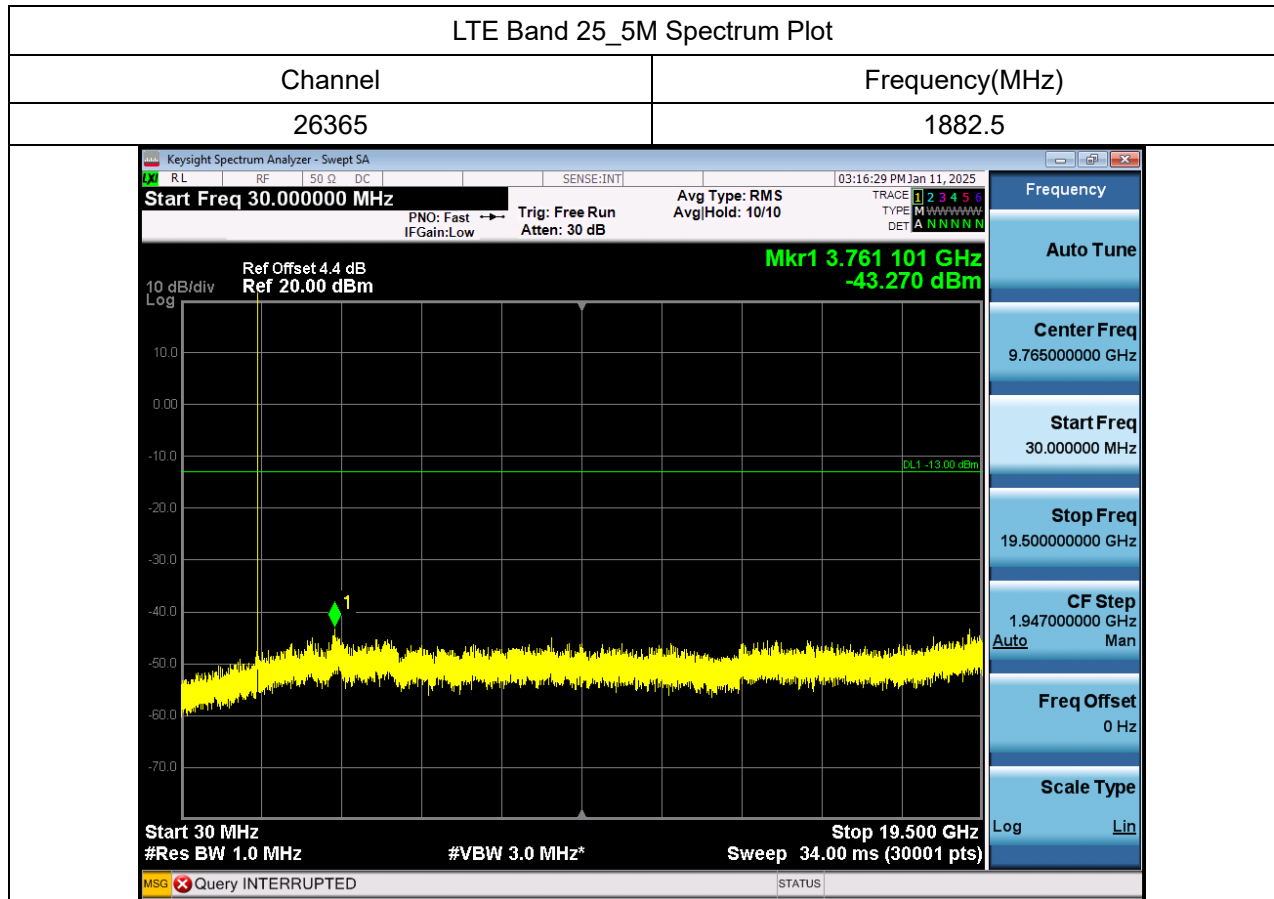


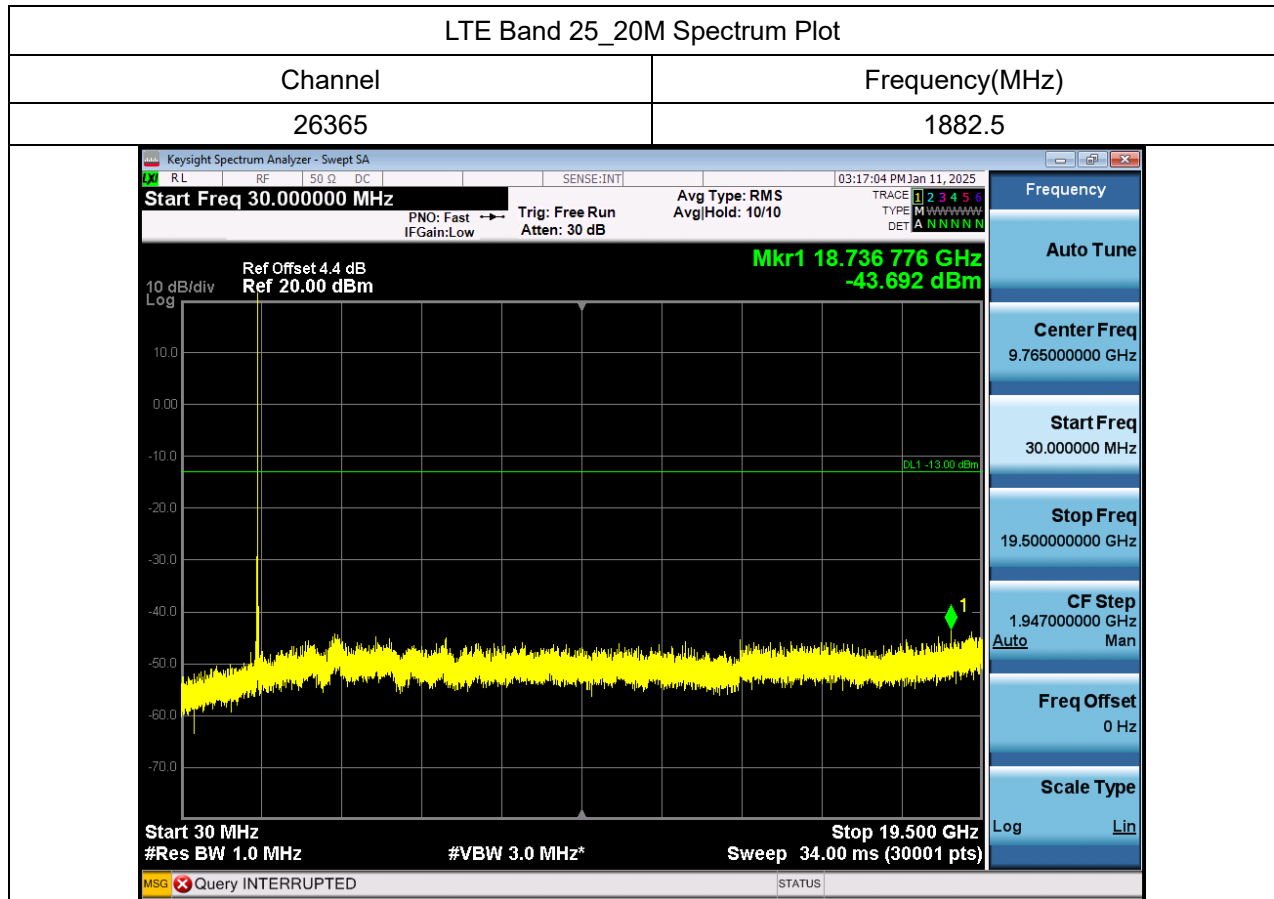

APPENDIX D RADIATED SPURIOUS EMISSIONS

Dipole Antenna:

Test Mode	WCDMA Band II	Test Date	2025/1/21
Test Channel	CH9400	Polarization	Vertical
Temp	25°C	Hum.	61%

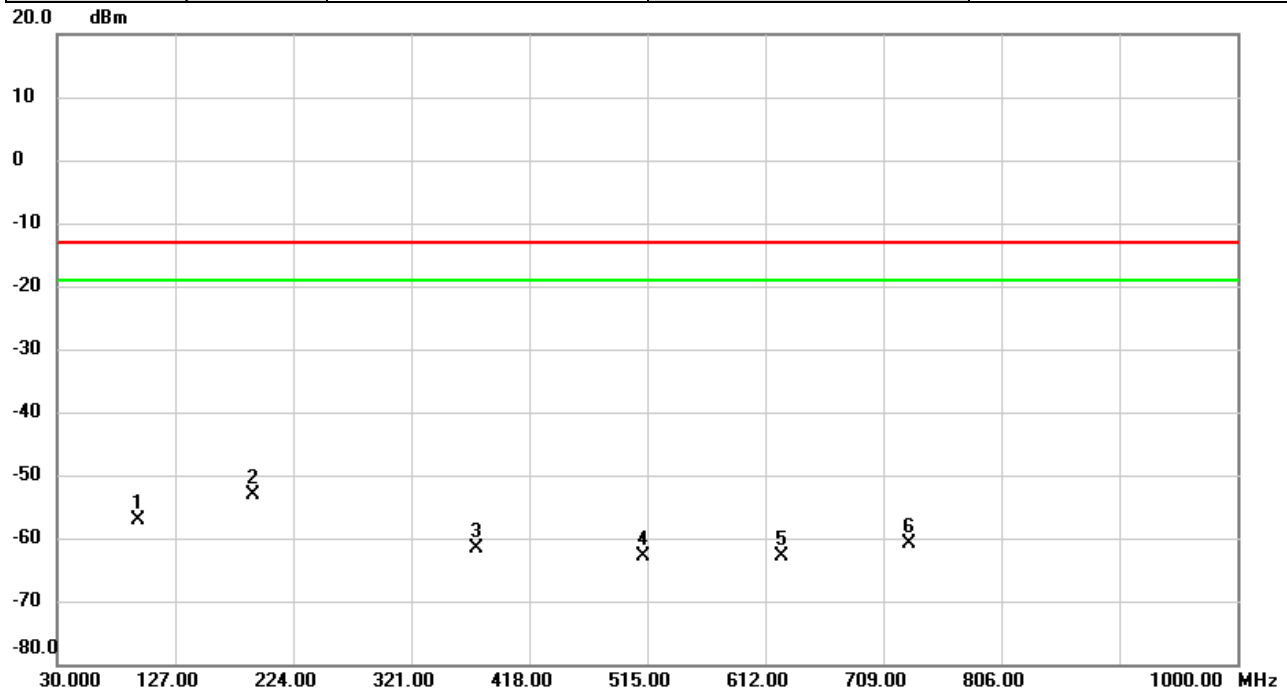


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		96.6713	-50.89	-6.11	-57.00	-13.00	-44.00	peak	
2	*	190.4057	-50.23	-2.79	-53.02	-13.00	-40.02	peak	
3		374.9967	-59.00	-2.60	-61.60	-13.00	-48.60	peak	
4		511.9283	-63.72	0.73	-62.99	-13.00	-49.99	peak	
5		625.0950	-66.09	3.28	-62.81	-13.00	-49.81	peak	
6		730.3076	-64.71	3.81	-60.90	-13.00	-47.90	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band II	Test Date	2025/1/21
Test Channel	CH9400	Polarization	Horizontal
Temp	25°C	Hum.	61%

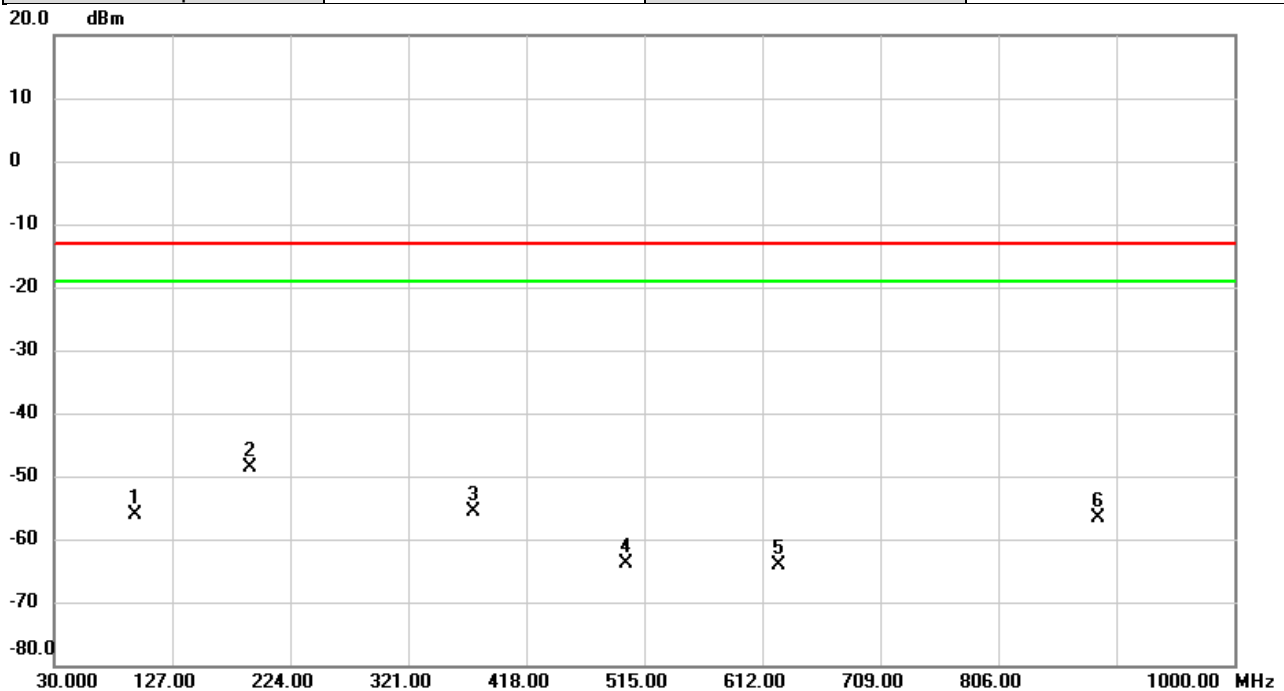


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		96.8977	-48.01	-8.07	-56.08	-13.00	-43.08	peak	
2	*	190.4703	-40.14	-8.36	-48.50	-13.00	-35.50	peak	
3		374.9967	-53.14	-2.52	-55.66	-13.00	-42.66	peak	
4		499.9973	-62.28	-1.48	-63.76	-13.00	-50.76	peak	
5		624.9980	-64.67	0.46	-64.21	-13.00	-51.21	peak	
6		888.5793	-61.31	4.70	-56.61	-13.00	-43.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band II	Test Date	2025/1/20
Test Channel	CH9400	Polarization	Vertical
Temp	23°C	Hum.	56%

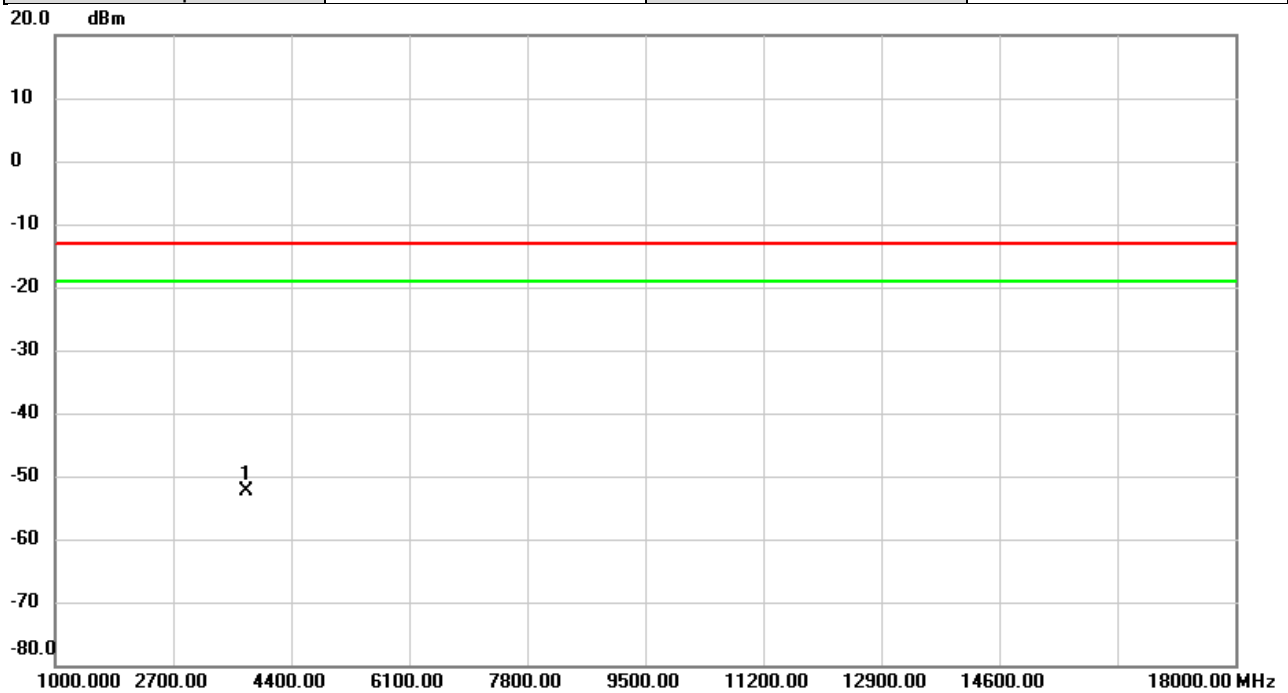


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3760.000	-63.82	11.56	-52.26	-13.00	-39.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band II	Test Date	2025/1/20
Test Channel	CH9400	Polarization	Horizontal
Temp	23°C	Hum.	56%

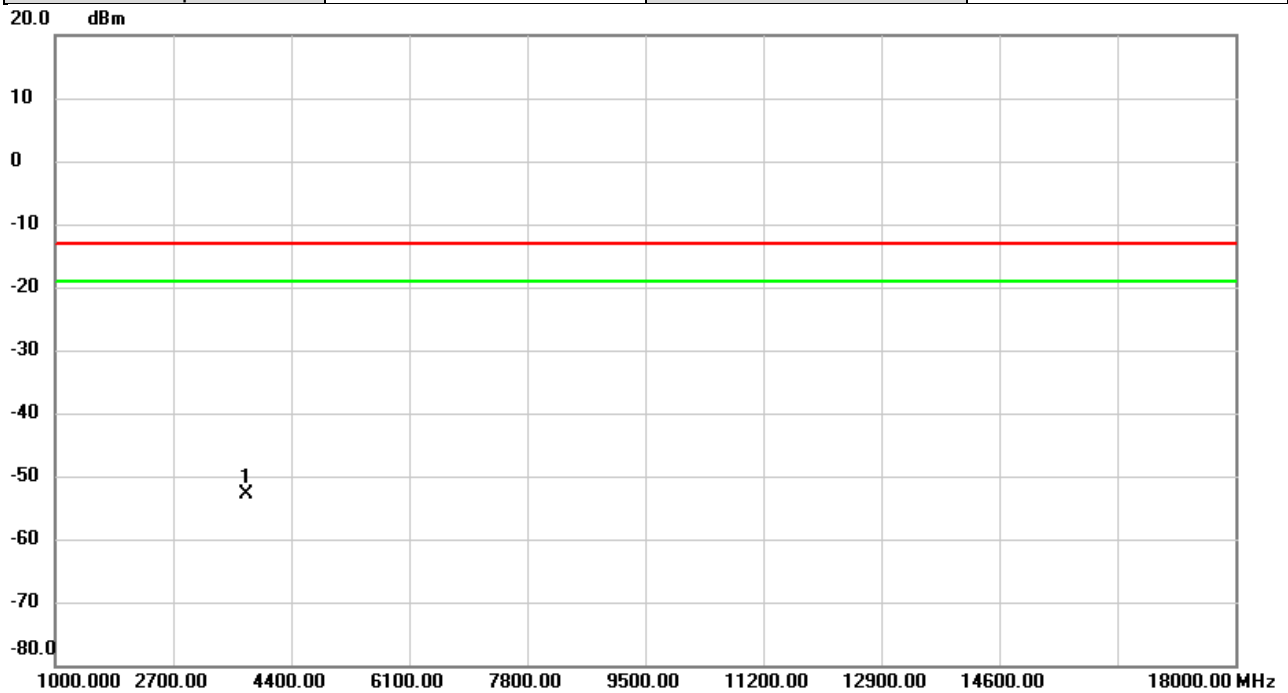

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3760.000	-64.14	11.22	-52.92	-13.00	-39.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band II	Test Date	2025/1/22
Test Channel	CH9400	Polarization	Vertical
Temp	26°C	Hum.	54%



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18800.00	-53.26	2.50	-50.76	-13.00	-37.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band II	Test Date	2025/1/22
Test Channel	CH9400	Polarization	Horizontal
Temp	26°C	Hum.	54%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18800.00	-53.78	1.50	-52.28	-13.00	-39.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/1/22
Test Channel	CH18900	Polarization	Vertical
Temp	26°C	Hum.	54%

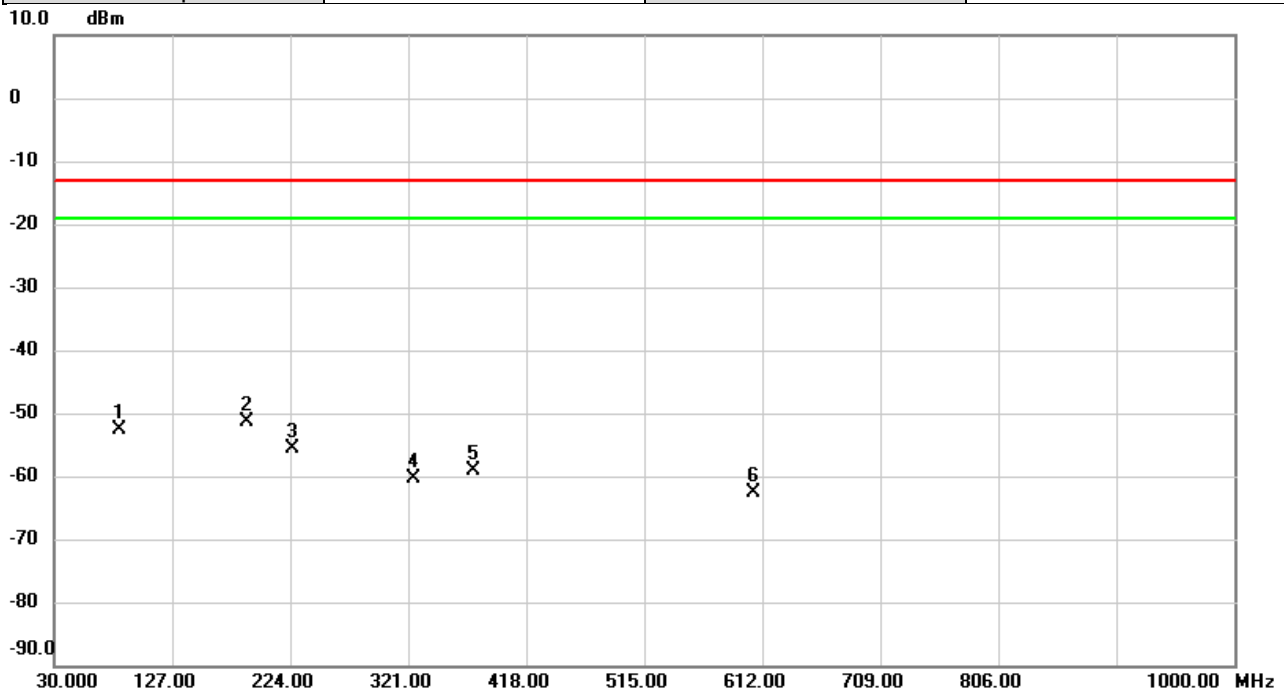


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		83.1237	-46.59	-5.94	-52.53	-13.00	-39.53	peak	
2	*	188.2717	-48.50	-2.78	-51.28	-13.00	-38.28	peak	
3		226.3927	-52.46	-3.19	-55.65	-13.00	-42.65	peak	
4		325.7853	-57.35	-3.13	-60.48	-13.00	-47.48	peak	
5		374.9967	-56.43	-2.60	-59.03	-13.00	-46.03	peak	
6		605.0160	-65.83	3.27	-62.56	-13.00	-49.56	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/1/22
Test Channel	CH18900	Polarization	Horizontal
Temp	26°C	Hum.	54%

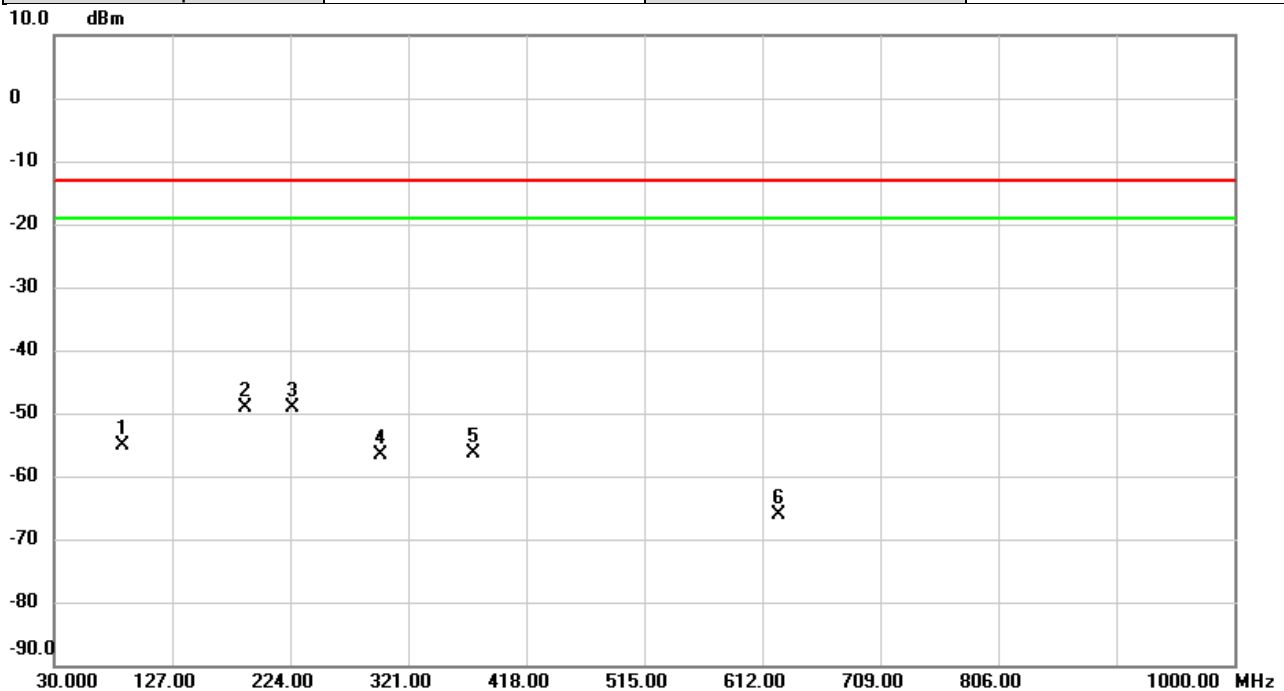

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		85.9043	-46.85	-8.23	-55.08	-13.00	-42.08	peak	
2		187.7220	-41.21	-7.94	-49.15	-13.00	-36.15	peak	
3	*	225.6813	-40.59	-8.47	-49.06	-13.00	-36.06	peak	
4		298.3020	-50.37	-6.26	-56.63	-13.00	-43.63	peak	
5		375.0290	-53.88	-2.52	-56.40	-13.00	-43.40	peak	
6		624.9980	-66.61	0.46	-66.15	-13.00	-53.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/1/22
Test Channel	CH18900	Polarization	Vertical
Temp	26°C	Hum.	54%



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3760.000	-63.26	11.56	-51.70	-13.00	-38.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/1/22
Test Channel	CH18900	Polarization	Horizontal
Temp	26°C	Hum.	54%



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3760.000	-63.90	11.22	-52.68	-13.00	-39.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/1/22
Test Channel	CH18900	Polarization	Vertical
Temp	26°C	Hum.	54%



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18800.00	-53.45	2.50	-50.95	-13.00	-37.95	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/1/22
Test Channel	CH18900	Polarization	Horizontal
Temp	26°C	Hum.	54%



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18800.00	-54.25	1.50	-52.75	-13.00	-39.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 25	Test Date	2025/1/22
Test Channel	CH26365	Polarization	Vertical
Temp	26°C	Hum.	54%



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3765.000	-63.58	11.57	-52.01	-13.00	-39.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 25	Test Date	2025/1/22
Test Channel	CH26365	Polarization	Horizontal
Temp	26°C	Hum.	54%



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3765.000	-63.29	11.27	-52.02	-13.00	-39.02	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 25	Test Date	2025/1/22
Test Channel	CH26365	Polarization	Vertical
Temp	26°C	Hum.	54%



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18825.00	-55.16	2.49	-52.67	-13.00	-39.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 25	Test Date	2025/1/22
Test Channel	CH26365	Polarization	Horizontal
Temp	26°C	Hum.	54%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18825.00	-54.30	1.49	-52.81	-13.00	-39.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Patch Type Antenna:

Test Mode	WCDMA Band II	Test Date	2025/1/21
Test Channel	CH9400	Polarization	Vertical
Temp	25°C	Hum.	61%

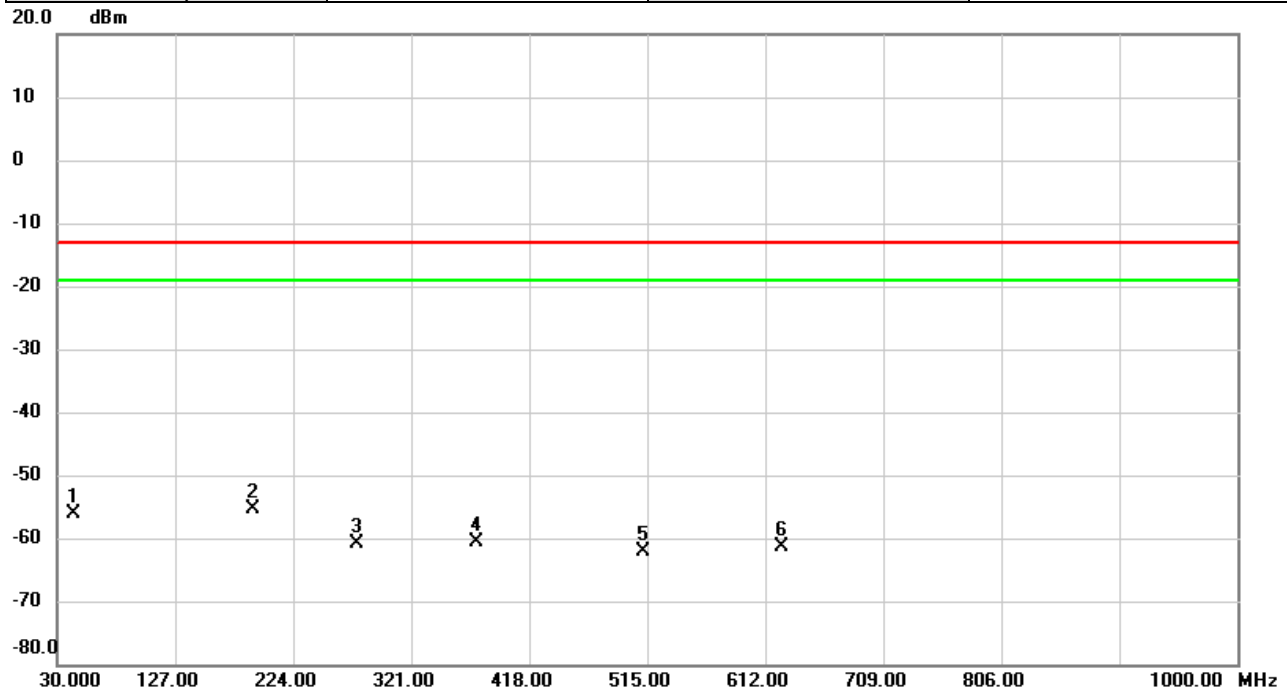

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		43.7740	-49.78	-6.31	-56.09	-13.00	-43.09	peak	
2	*	190.4057	-52.50	-2.79	-55.29	-13.00	-42.29	peak	
3		276.5093	-57.63	-3.16	-60.79	-13.00	-47.79	peak	
4		374.9967	-57.92	-2.60	-60.52	-13.00	-47.52	peak	
5		511.9283	-62.95	0.73	-62.22	-13.00	-49.22	peak	
6		625.0303	-64.69	3.28	-61.41	-13.00	-48.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band II	Test Date	2025/1/21
Test Channel	CH9400	Polarization	Horizontal
Temp	25°C	Hum.	61%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		118.5933	-49.93	-7.55	-57.48	-13.00	-44.48	peak	
2		190.4057	-47.68	-8.35	-56.03	-13.00	-43.03	peak	
3	*	374.9967	-53.21	-2.52	-55.73	-13.00	-42.73	peak	
4		499.9973	-62.46	-1.48	-63.94	-13.00	-50.94	peak	
5		624.9980	-66.86	0.46	-66.40	-13.00	-53.40	peak	
6		741.3657	-64.25	3.36	-60.89	-13.00	-47.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band II	Test Date	2025/1/21
Test Channel	CH9400	Polarization	Vertical
Temp	25°C	Hum.	61%

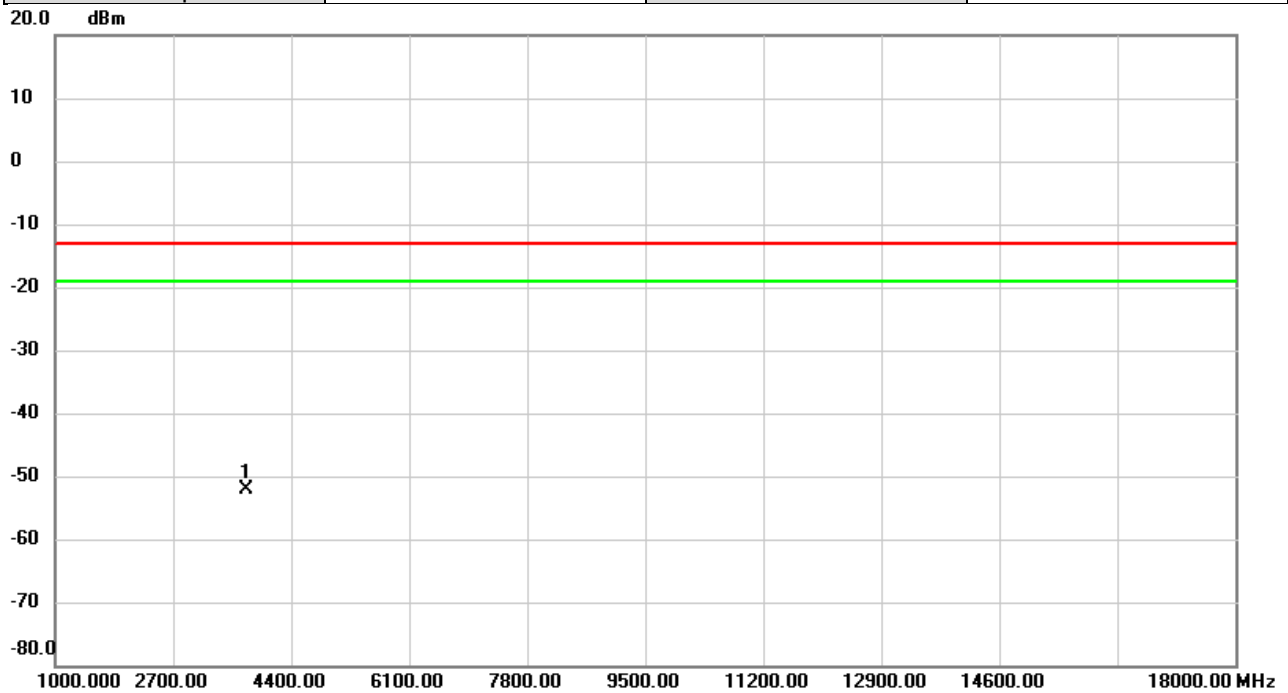


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3760.000	-63.75	11.56	-52.19	-13.00	-39.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band II	Test Date	2025/1/21
Test Channel	CH9400	Polarization	Horizontal
Temp	25°C	Hum.	61%

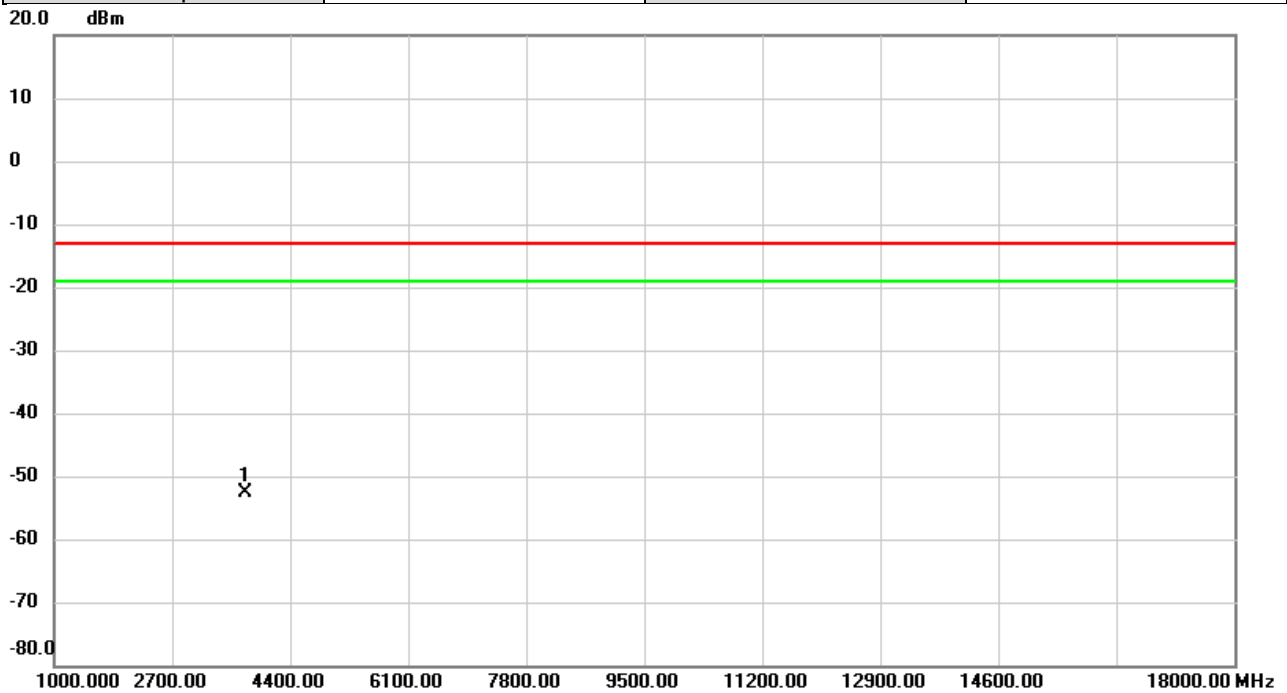

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3760.000	-63.84	11.22	-52.62	-13.00	-39.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/1/22
Test Channel	CH18900	Polarization	Vertical
Temp	26°C	Hum.	54%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		81.8627	-43.14	-6.02	-49.16	-13.00	-36.16	peak	
2	*	189.0477	-46.05	-2.77	-48.82	-13.00	-35.82	peak	
3		226.1987	-51.71	-3.21	-54.92	-13.00	-41.92	peak	
4		374.9967	-52.78	-2.60	-55.38	-13.00	-42.38	peak	
5		499.9973	-65.20	0.07	-65.13	-13.00	-52.13	peak	
6		624.9980	-65.17	3.28	-61.89	-13.00	-48.89	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/1/22
Test Channel	CH18900	Polarization	Horizontal
Temp	26°C	Hum.	54%

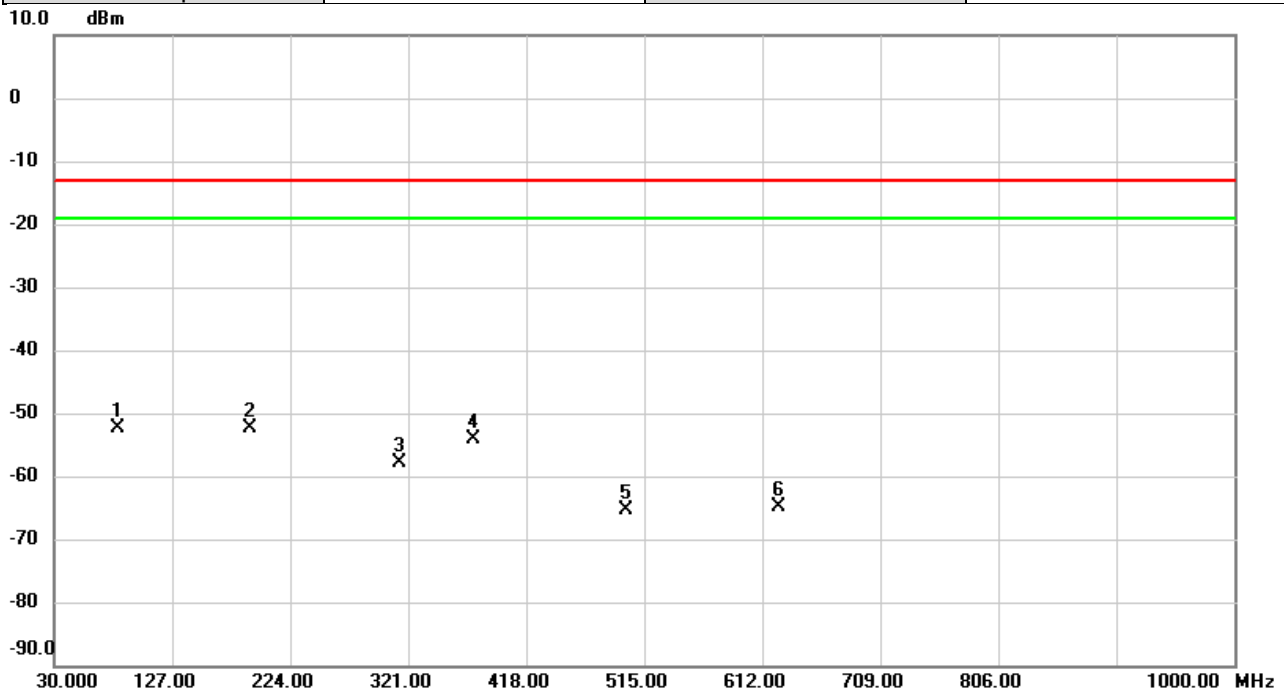

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	82.5093	-44.20	-8.10	-52.30	-13.00	-39.30	peak	
2		190.5997	-43.99	-8.38	-52.37	-13.00	-39.37	peak	
3		313.3047	-52.55	-5.23	-57.78	-13.00	-44.78	peak	
4		374.9967	-51.61	-2.52	-54.13	-13.00	-41.13	peak	
5		499.9973	-63.98	-1.48	-65.46	-13.00	-52.46	peak	
6		624.9980	-65.45	0.46	-64.99	-13.00	-51.99	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/1/22
Test Channel	CH18900	Polarization	Vertical
Temp	26°C	Hum.	54%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3760.000	-64.00	11.56	-52.44	-13.00	-39.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/1/22
Test Channel	CH18900	Polarization	Horizontal
Temp	26°C	Hum.	54%

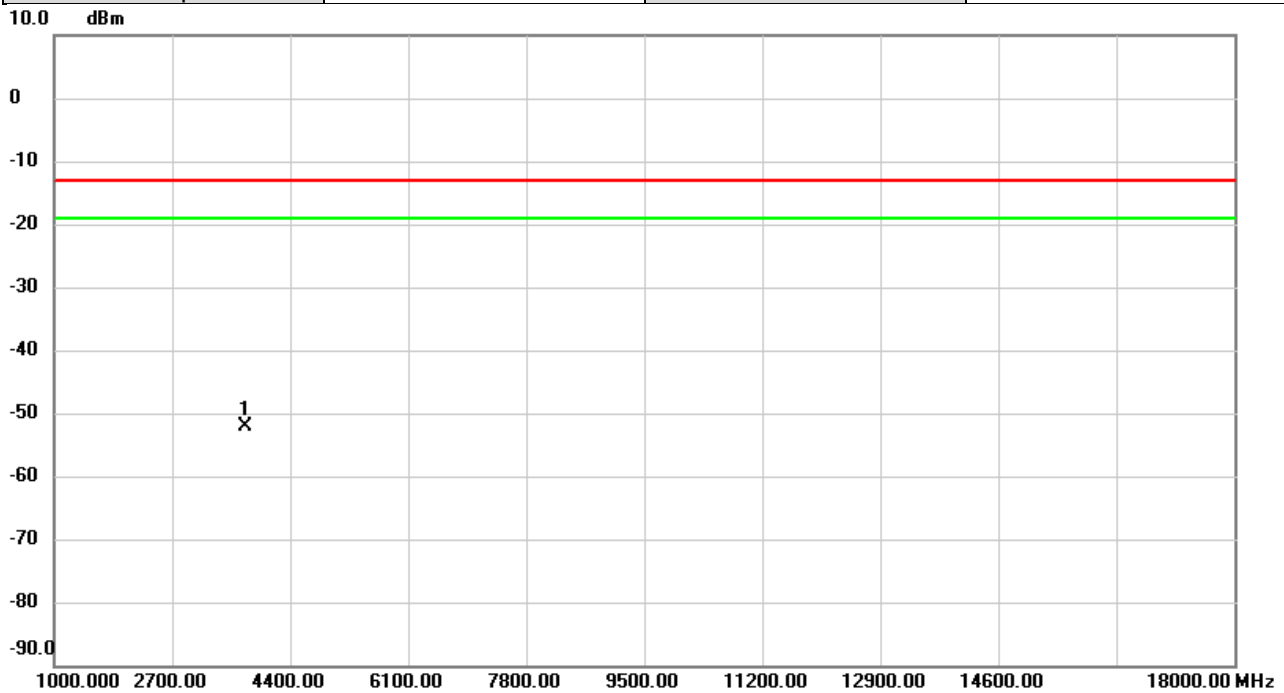

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3760.000	-63.43	11.22	-52.21	-13.00	-39.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/1/22
Test Channel	CH18900	Polarization	Vertical
Temp	26°C	Hum.	54%



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18800.00	-53.01	2.50	-50.51	-13.00	-37.51	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 2	Test Date	2025/1/22
Test Channel	CH18900	Polarization	Horizontal
Temp	26°C	Hum.	54%



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18800.00	-54.03	1.50	-52.53	-13.00	-39.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 25	Test Date	2025/1/22
Test Channel	CH26365	Polarization	Vertical
Temp	26°C	Hum.	54%



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18825.00	-53.34	2.49	-50.85	-13.00	-37.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 25	Test Date	2025/1/22
Test Channel	CH26365	Polarization	Horizontal
Temp	26°C	Hum.	54%



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18825.00	-53.10	1.49	-51.61	-13.00	-38.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 25	Test Date	2025/1/22
Test Channel	CH26365	Polarization	Vertical
Temp	26°C	Hum.	54%



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3765.000	-63.31	11.57	-51.74	-13.00	-38.74	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 25	Test Date	2025/1/22
Test Channel	CH26365	Polarization	Horizontal
Temp	26°C	Hum.	54%



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3765.000	-63.93	11.27	-52.66	-13.00	-39.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E BAND EDGE



WCDMA Band II_WCDMA Spectrum Plot

Channel

9262

Channel

9538

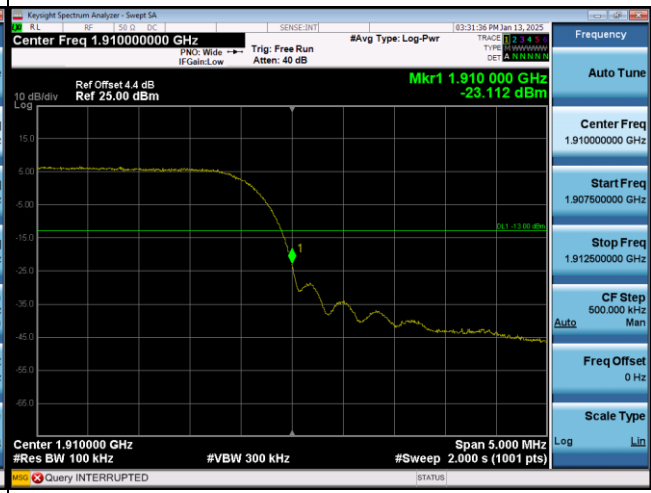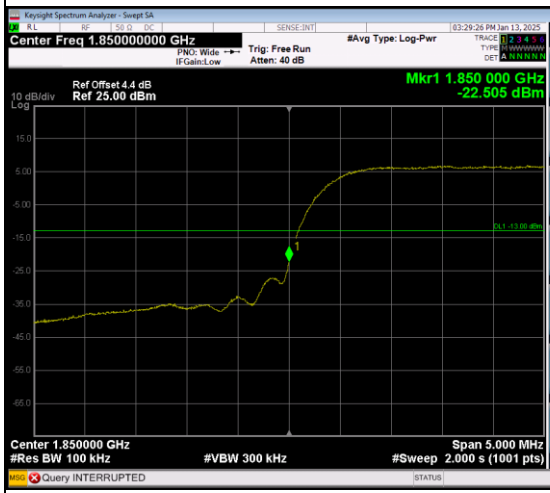

LTE Band 2_1.4M Spectrum Plot

1RB#0



1RB#5

Channel

18607

Channel

19193

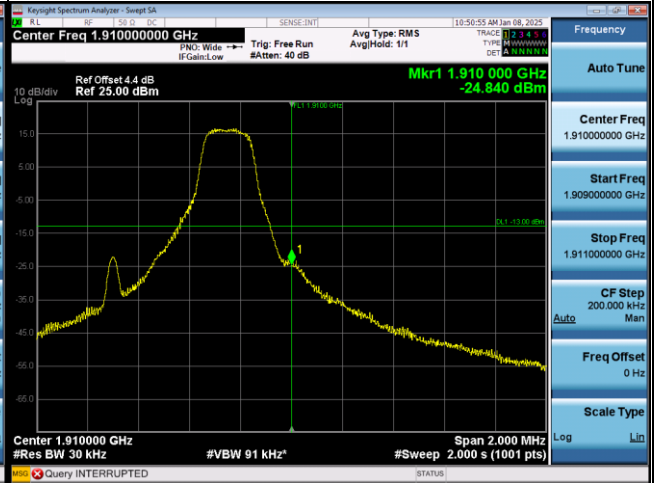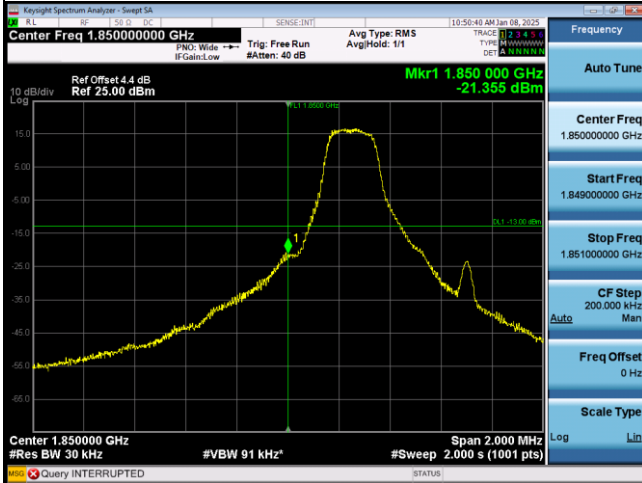

6RB#0

Channel

18607

Channel

19193

