



## FCC 47 CFR PART 15 SUBPART C

### TEST REPORT

For

**Patient Infotainment Terminal/Computer**

**Model: PIT-1501W; PIT-15XXXXXXXXXXXX (X = 0 ~ 9 or A ~ Z or blank)**

**Trade Name: ADVANTECH**

*Issued to*

**Advantech Co. Ltd.**

**No. 1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 114, Taiwan, R.O.C.**

*Issued by*

**Compliance Certification Services Inc.**

**No. 81-1, Lane 210, Pa-De 2nd Rd., Luchu Hsiang,  
Taoyuan Shien, (338) Taiwan, R.O.C.**

**TEL: 886-3-324-0332**

**FAX: 886-3-324-5235**

**<http://www.ccsrf.com>**

**service@ccsrf.com**



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies. The test results in the report only apply to the tested sample.

---



## Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	January 29, 2010	Initial Issue	All	Sabrina Wang



## TABLE OF CONTENTS

<b>1 TEST RESULT CERTIFICATION .....</b>	<b>4</b>
<b>2 EUT DESCRIPTION .....</b>	<b>5</b>
<b>3 TEST METHODOLOGY .....</b>	<b>6</b>
3.1. EUT CONFIGURATION .....	6
3.2. EUT EXERCISE .....	6
3.3. GENERAL TEST PROCEDURES .....	6
3.4. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS .....	7
3.5. DESCRIPTION OF TEST MODES .....	8
<b>4 INSTRUMENT CALIBRATION.....</b>	<b>9</b>
4.1. MEASURING INSTRUMENT CALIBRATION .....	9
4.2. MEASUREMENT EQUIPMENT USED .....	9
4.3. MEASUREMENT UNCERTAINTY .....	10
<b>5 FACILITIES AND ACCREDITATIONS.....</b>	<b>11</b>
5.1 FACILTIES.....	11
5.2 EQUIPMENT .....	11
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	12
<b>6 SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>13</b>
6.1. SETUP CONFIGURATION OF EUT .....	13
6.2. SUPPORT EQUIPMENT .....	13
<b>7 FCC PART 15.247 REQUIREMENTS .....</b>	<b>14</b>
7.1. 6dB BANDWIDTH .....	14
7.2. PEAK POWER.....	24
7.3. AVERAGE POWER.....	34
7.4. BAND EDGES MEASUREMENT .....	44
7.5. PEAK POWER SPECTRAL DENSITY .....	61
7.6. SPURIOUS EMISSIONS .....	71
7.7. RADIATED EMISSIONS.....	80
7.8. POWERLINE CONDUCTED EMISSIONS .....	96
<b>APPENDIX II PHOTOGRAPHS OF TEST SETUP .....</b>	<b>99</b>



## 1 TEST RESULT CERTIFICATION

**Advantech Co. Ltd.**

**Applicant:** No. 1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 114, Taiwan, R.O.C.

**Advantech Co. Ltd.**

**Manufacturer:** No. 1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 114, Taiwan, R.O.C.

**Equipment Under Test:** Patient Infotainment Terminal/Computer

**Trade Name:** ADVANTECH

**Model:** PIT-1501W; PIT-15XXXXXXXXXXXX (X = 0 ~ 9 or A ~ Z or blank)

**Date of Test:** December 31, 2009 ~ January 26, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

**Approved by:**

Ethan Huang  
Section Manager

**Reviewed by:**

Stan Lin  
Supervisor



## 2 EUT DESCRIPTION

<b>Product</b>	Patient Infotainment Terminal/Computer		
<b>Trade Name</b>	ADVANTECH		
<b>Model Number</b>	PIT-1501W; PIT-15XXXXXXXXXXXX (X = 0 ~ 9 or A ~ Z or blank)		
<b>Model Discrepancy</b>	1. For marketing purpose only, all the model numbers are identical. 2. The means of "X" (X = 0 ~ 9 or A ~ Z or blank) on model number is just for marketing purpose only. 3. Client consigns only one sample to test (model number: PIT-1501W). Therefore, the testing Lab. just guarantees the unit, which has been tested.		
<b>EUT Power Rating</b>	19VDC, 2.63A		
<b>Power Adapter Manufacturer</b>	FSP	<b>Model</b>	FSP075-DMBB1
	SINPRO	<b>Model</b>	MPU50-107
<b>Power Adapter Power Rating</b>	<b>For FSP075-DMBB1</b> I/P: 100-240V, 50-60Hz, 1.20A O/P: 19VDC, 3.95A		
	<b>For MPU50-107</b> I/P: 100-240V, 47-63Hz, 1.35A O/P: 19VDC, 2.63A		
<b>WLAN Module Manufacturer</b>	Gemtek	<b>Model</b>	WPEA-110N
<b>Operating Frequency Range</b>	2412 ~ 2462 MHz		
<b>Transmit Power</b>	IEEE 802.11b mode: 20.69 dBm IEEE 802.11g mode: 24.30 dBm draft 802.11n 20 MHz Channel mode: 27.27 dBm draft 802.11n 40 MHz Channel mode: 26.13 dBm		
<b>Modulation Technique</b>	IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) draft 802.11n 20 MHz Channel mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) draft 802.11n 40 MHz Channel mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps)		
<b>Number of Channels</b>	IEEE 802.11b/g mode: 11 Channels draft 802.11n 20 MHz Channel mode: 11 Channels draft 802.11n 40 MHz Channel mode: 7 Channels		
<b>Antenna Specification</b>	PIFA Antenna / 2.11 dBi (Antenna Gain: b/g/n: 2.11 dBi MIMO: 2.11 dBi + 10 log (2) = 5.12 dBi) (Numeric gain: 3.25)		

**Remark:**

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: M82-PIT-1501W filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



## 3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 (2003) and FCC CFR 47 Part 2, 15.207, 15.209 and 15.247.

### 3.1. EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 3.2. EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

### 3.3. GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 (2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4 (2003).

**3.4. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS**

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-Peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



## 3.5. DESCRIPTION OF TEST MODES

The EUT is a 2x2 configuration spatial MIMO (2Tx & 2Rx) without beam forming function that operate in double TX chains and double RX chains. The 2x2 configuration is implemented with two outside TX & RX chains (Chain 0 and 1).

The two Power Adapters (FSP / FSP075-DMBB1, SINPRO / MPU50-107) have been pre-scanned during the test. The Adapter (FSP / FSP075-DMBB1) was selected as the worst case for final test.

The EUT (model: PIT-1501W) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

The worst case data rate is determined as the data rate with highest output power.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

### **IEEE 802.11b mode:**

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

### **IEEE 802.11g mode:**

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

### **draft 802.11n 20 MHz Channel mode:**

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 13.5Mbps data rate were chosen for full testing.

### **draft 802.11n 40 MHz Channel mode:**

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



## 4 INSTRUMENT CALIBRATION

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 4.2. MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

*Remark: Each piece of equipment is scheduled for calibration once a year.*

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY48250064	10/28/2010
Spectrum Analyzer	R&S	FSEB	825829/011	10/29/2010

3M Chamber Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY48250064	10/28/2010
Spectrum Analyzer	R&S	FSEB	825829/011	10/29/2010
Pre-Amplifier	HP	8447D	2944A06530	12/31/2010
Pre-Amplifier	HP	8449B	3008A01738	04/17/2010
EMI Test Receiver	SCHAFFNER	SCR 3501	436	01/21/2010
Loop Antenna	EMCO	6502	2356	05/28/2010
Bilog Antenna	SCHWAZBECK	VULB9160	3084	09/08/2010
Horn Antenna	EMCO	3115	00022250	05/08/2010
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Test S/W	LabVIEW 6.1 (Wugu Chamber EMI Test V1_4.5.3)			

*Remark: The measurement uncertainty is less than +/- 4.0235dB (30MHz ~ 1GHz), +/- 3.0958dB (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.*

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	845552/030	05/18/2010
LISN	R&S	ENV216	100074	12/09/2010
LISN	FCC	FCC-LISN-50/250-16-2-07	06013	10/12/2010
Test S/W	CCS-3A1-CE-Luchu			

*Remark: The measurement uncertainty is less than +/- 1.7806dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.*



## 4.3. MEASUREMENT UNCERTAINTY

Parameter	Uncertainty
Powerline Conducted Emission	±1.7983
3M Semi Anechoic Chamber / 30MHz ~ 1GHz	±3.8856
3M Semi Anechoic Chamber / Above 1GHz	±3.8721

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## 5 FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.  
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
- No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan  
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
- No. 81-1, Lane 210, Pa-De 2nd Rd., Luchu Hsiang, Taoyuan Shien, (338) Taiwan, R.O.C.  
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-Peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



### 5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	CFR 47, FCC Part15/18, CISPR 22, EN 55022, ICES-003, AS/NZS CISPR 22, VCCI V-3, EN 55011, CISPR 11, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 61000-6-1/2/3/4, EN 55024, CISPR 24, AS/NZS CISPR 24, AS/NZS 61000.6.2, EN 55014-1/-2, ETSI EN 300 386 v1.3.2/v1.3.3, IEC/EN 61000-3-2, AS/NZS 61000.3.2, IEC/EN 61000-3-3, AS/NZS 61000.3.3	 ACCREDITED No. 0824-01
USA	FCC MRA	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 TW1026
Japan	VCCI	3/10 meter Open Area Test Sites and conducted test sites to perform radiated/conducted measurements	<b>VCCI</b> R-2882/2541/2798/725/1868 C-402/747/912 T-321/325
Taiwan	TAF	EN 55014-1, CISPR 14, CNS 13781-1, EN 55013, CISPR 13, CNS 13439, EN 55011, CISPR 11, CNS 13803, PLMN09, IS2045-0, LP0002 FCC Part 27/90, Part 15B/C/D/E, RSS-192/193/210/310 ETSI EN 300 328/ 300 220-1/ 300 220-2/ 301 893/ 301 489-01/ 301 489-03/ 301 489-07 / 301 489-17/ 300 440-1/ 300 440-2 AS/NZS 4268, AS/NZS 4771 CISPR 22, EN 55022, CNS 13438, AS/NZS CISPR 22, VCCI, IEC/EN 61000-4-2/3/4/5/6/8/11, CNS 14676-2/3/4/5/6/8, CNS 14934-2/3, CNS 13783-1, CNS 13439, CNS 13803	  Testing Laboratory 0363
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	SL2-IS-E-0014 / IN-E-0014 /A1-E-0014 /R1-E-0014 /R2-E-0014 /L1-E-0014
Canada	Industry Canada	RSS212, Issue 1	 IC 2324C-3 IC 2324C-5

**Note:** No part of this report may be used to claim or imply product endorsement by A2LA, TAF or other government agency.



## 6 SETUP OF EQUIPMENT UNDER TEST

### 6.1. SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 6.2. SUPPORT EQUIPMENT

#### For Radiated Emission Above 1GHz & Conductected Measurement

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
	N/A**						

\*\*No any support equipment during the test.

#### For Radiated Emission Below 1GHz & Powerline Measurement

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1	Traveling Disk	U172	N/A	FCC DoC	PQI	Unshielded, 1.2m	N/A
2	USB Keyboard	6512-UV	21200201-12939 41245	FCC DoC	ACER	Unshielded, 1.8m	N/A
3	USB Mouse	MO19UCA	020440953	FCC DoC	HP	Unshielded, 1.8m	N/A
4	Multimedia Headset	ClearChat	N/A	FCC DoC	Logitech	Unshielded, 1.8m x 2	N/A
5	Notebook PC (Remote)	S7110	DU4A00EG0944 P010	FCC DOC	Fujitsu	LAN Cable: Unshielded, 10m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

**Remark:** Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




## 7 FCC PART 15.247 REQUIREMENTS

### 7.1. 6dB BANDWIDTH

#### LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST CONFIGURATION



#### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Span = 30MHz, Sweep = auto.
4. Mark the Peak frequency and –6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

#### TEST RESULTS

*No non-compliance noted*



## TEST DATA

### Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	12.986	>500	PASS
Mid	2437	13.106		PASS
High	2462	13.106		PASS

### Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.533	>500	PASS
Mid	2437	16.533		PASS
High	2462	16.533		PASS

### Test mode: draft 802.11n 20 MHz Channel mode

Channel	Frequency (MHz)	Bandwidth (MHz)			Limit (kHz)	Result
		Combiner	Chain 0	Chain 1		
Low	2412	17.194	17.856	17.856	>500	PASS
Mid	2437	17.194	17.796	17.856		PASS
High	2462	17.134	17.796	17.856		PASS

### Test mode: draft 802.11n 40 MHz Channel mode

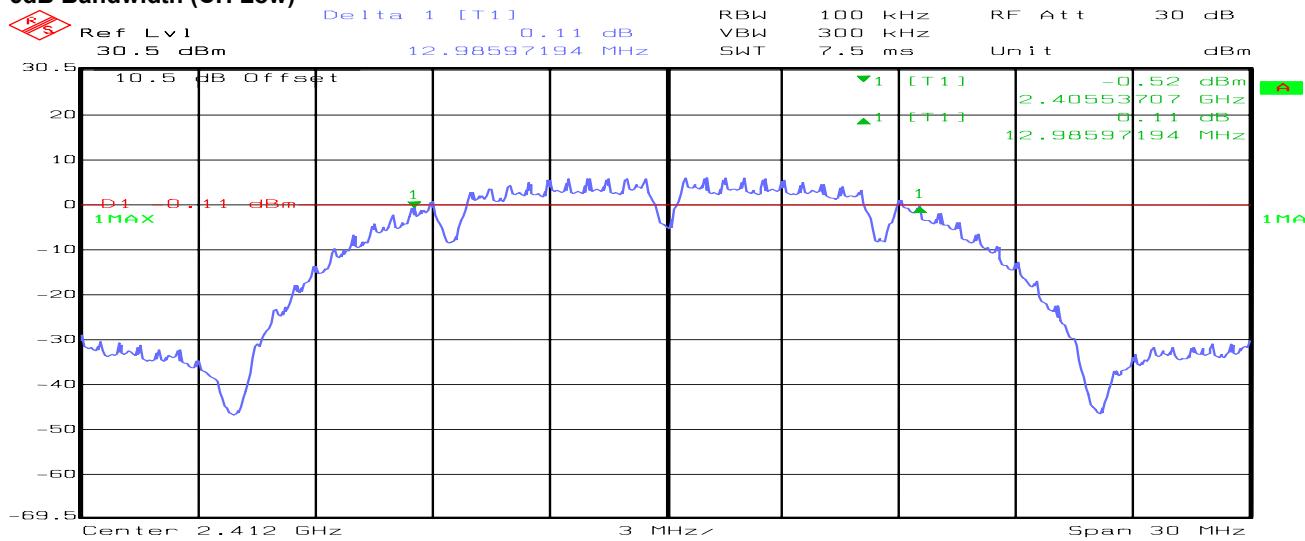
Channel	Frequency (MHz)	Bandwidth (MHz)			Limit (kHz)	Result
		Combiner	Chain 0	Chain 1		
Low	2412	36.373	36.072	36.373	>500	PASS
Mid	2437	36.273	36.072	36.373		PASS
High	2462	35.872	36.172	36.273		PASS



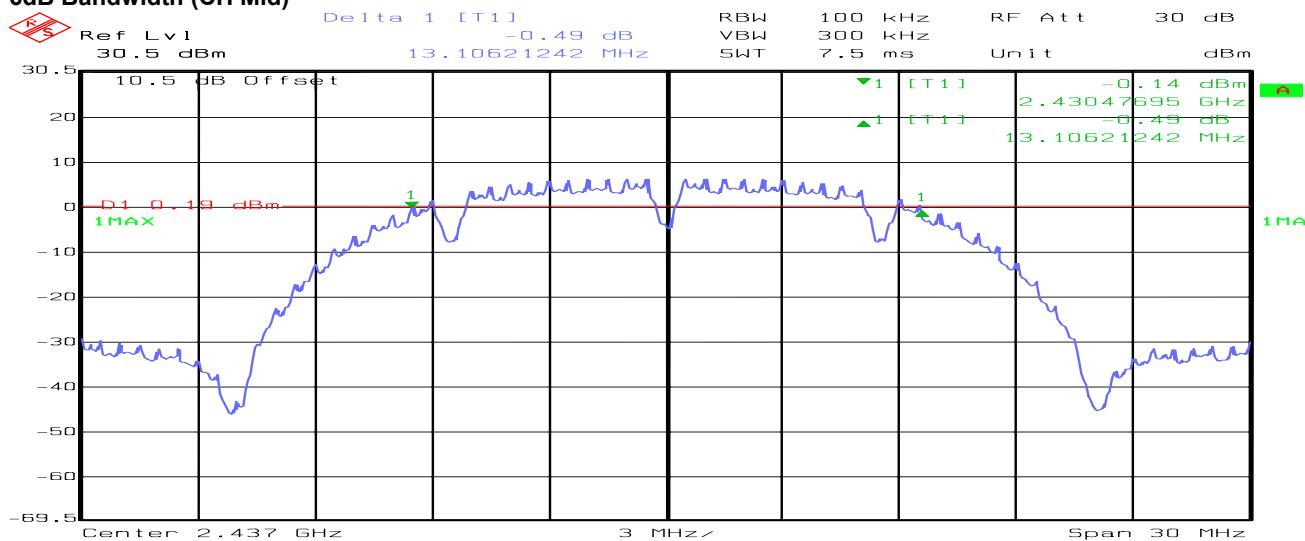
## Test Plot

### IEEE 802.11b mode

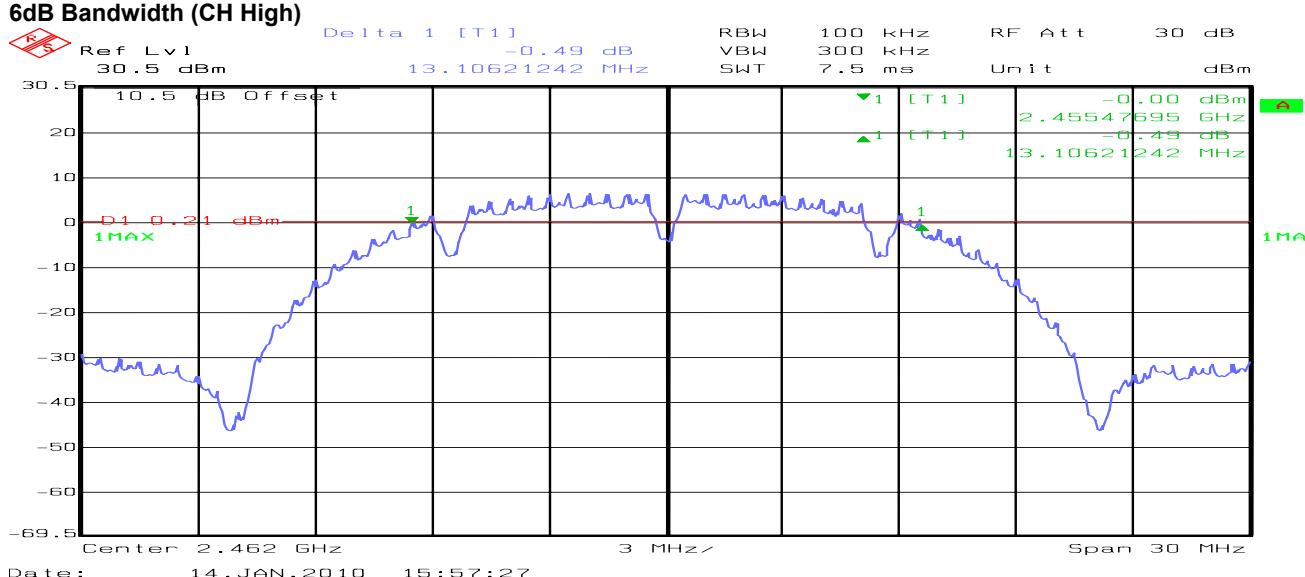
#### 6dB Bandwidth (CH Low)

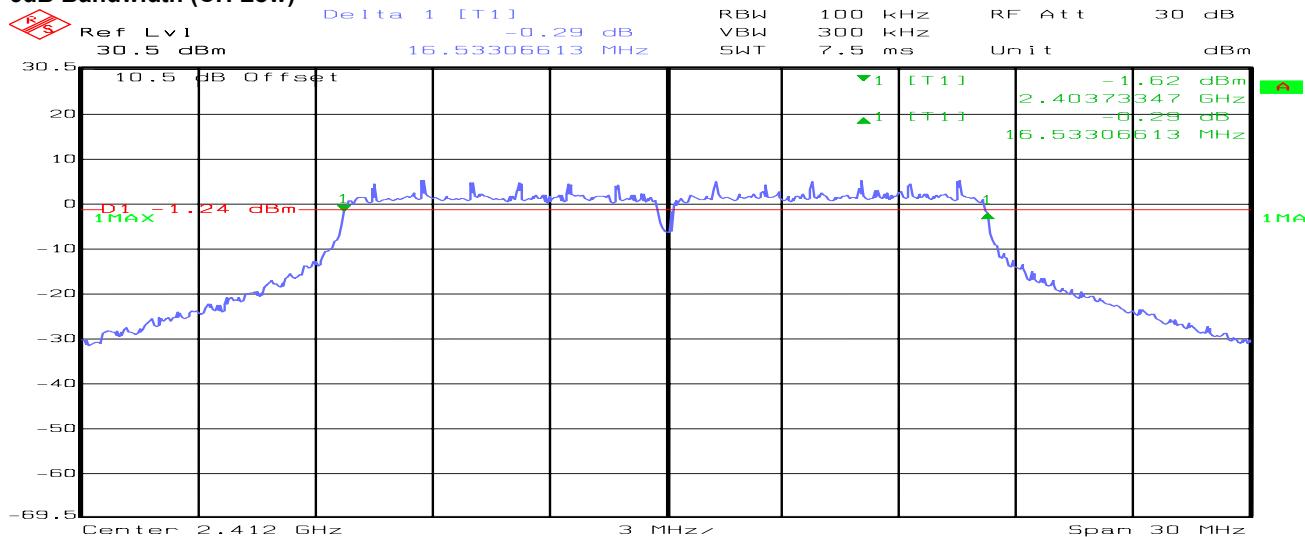


#### 6dB Bandwidth (CH Mid)

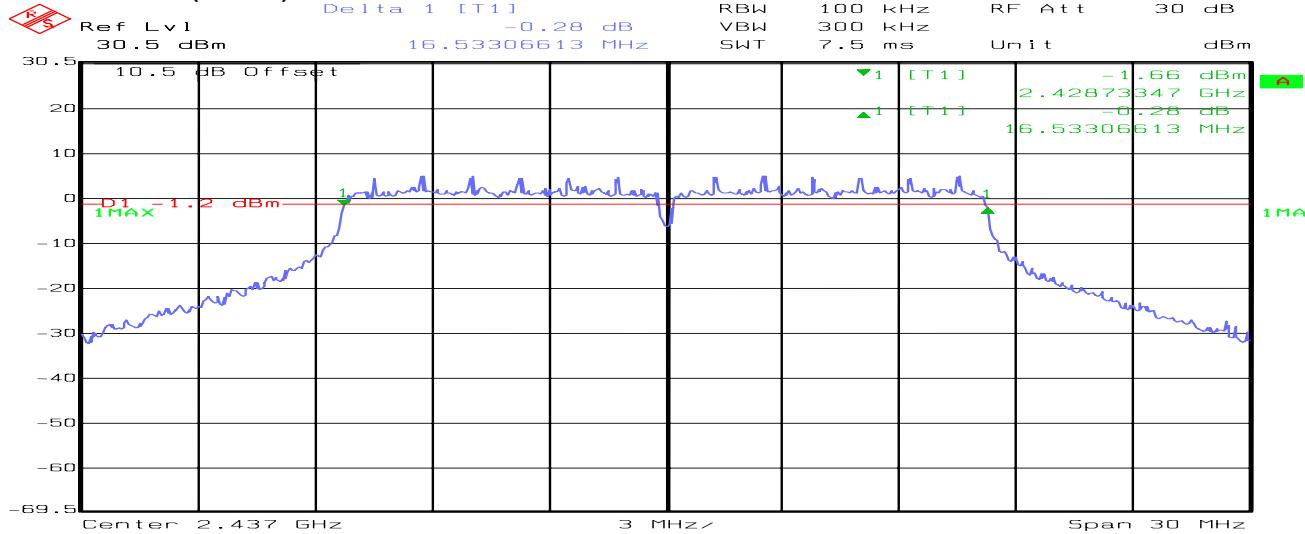


#### 6dB Bandwidth (CH High)

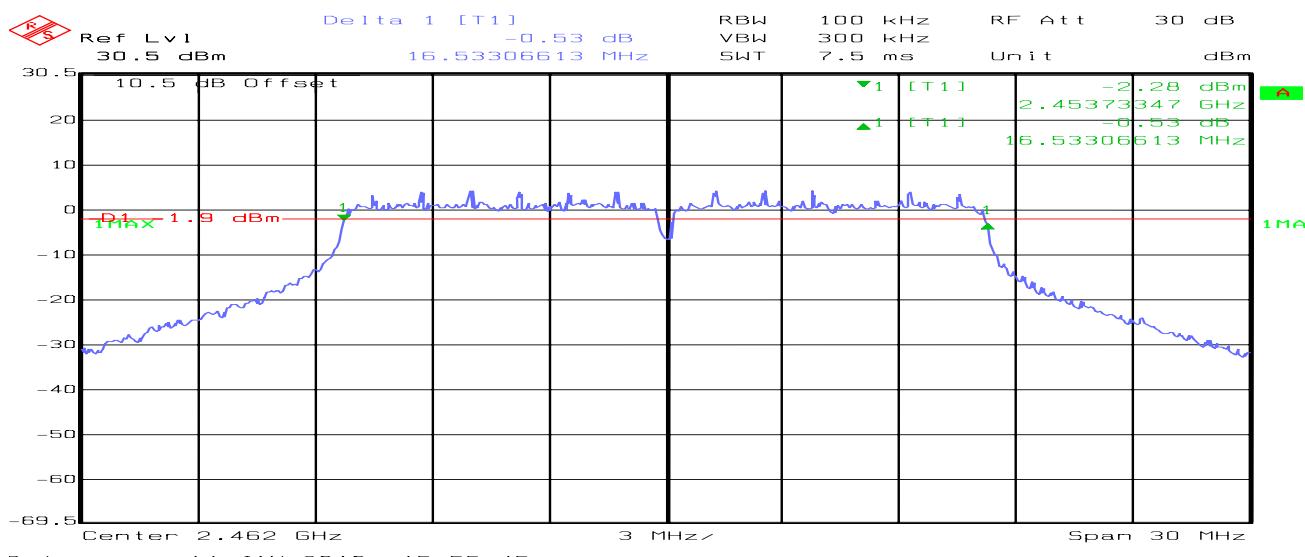


**IEEE 802.11g mode****6dB Bandwidth (CH Low)**

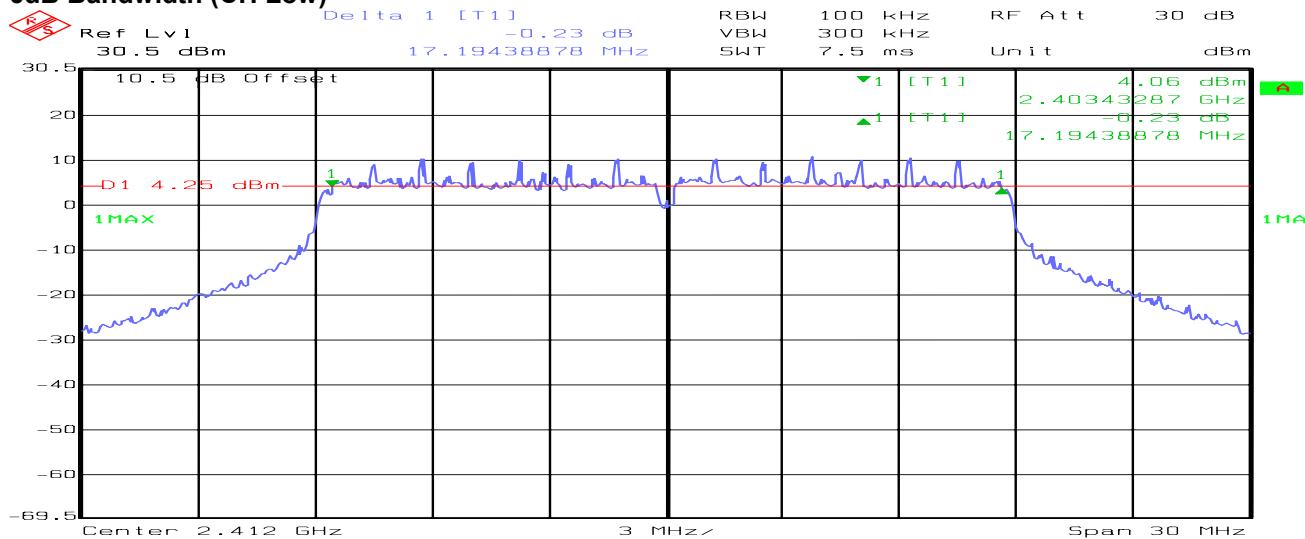
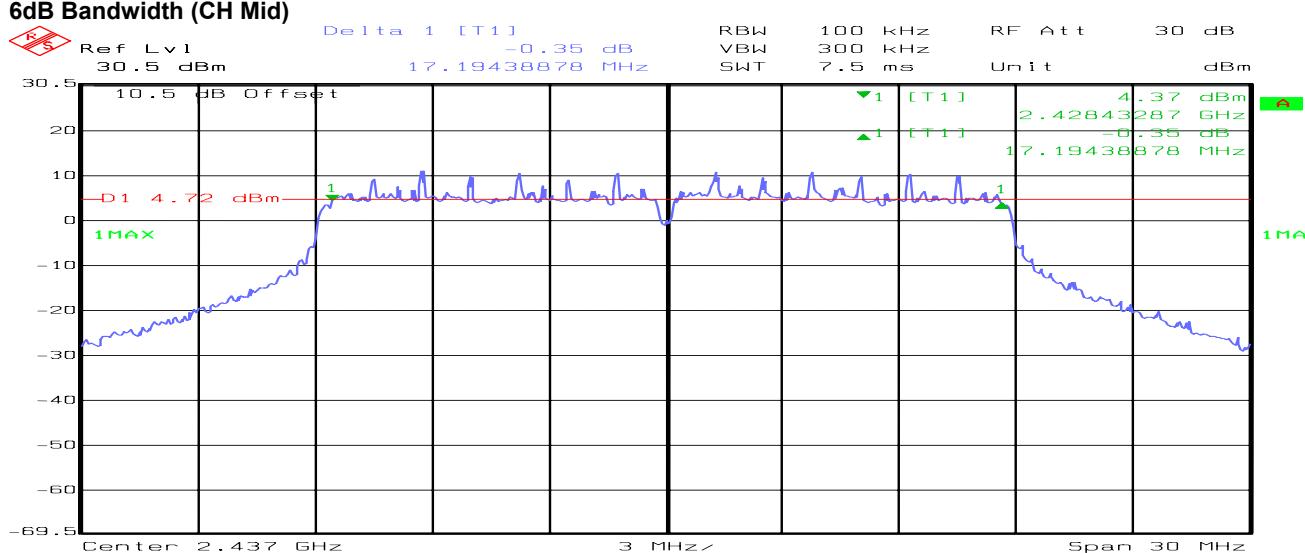
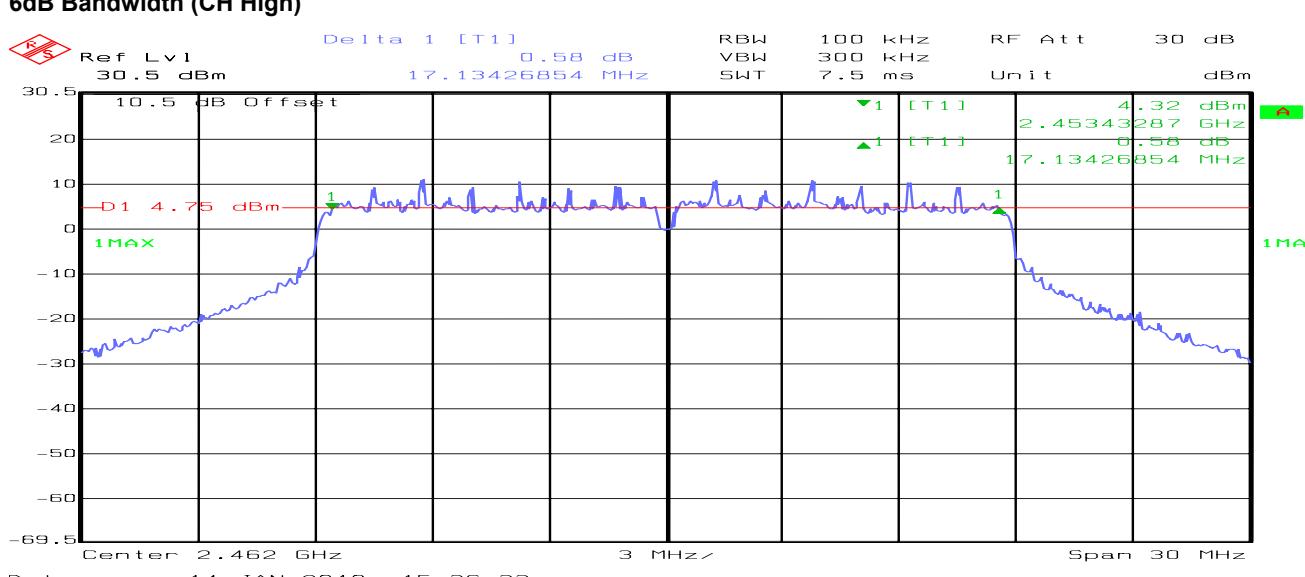
Date: 14.JAN.2010 15:52:47

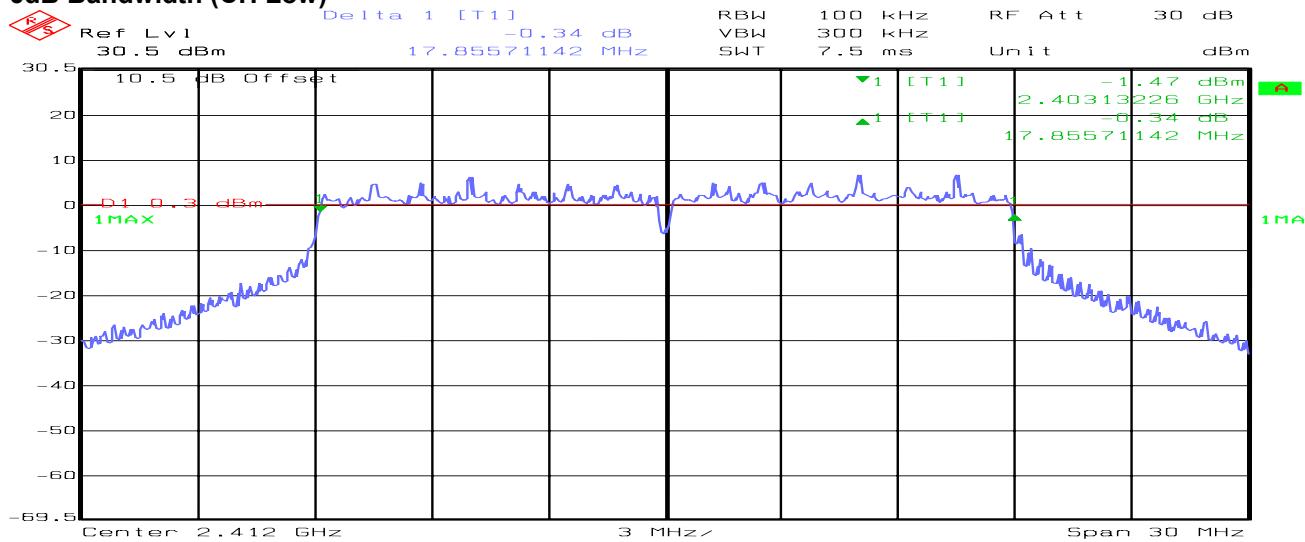
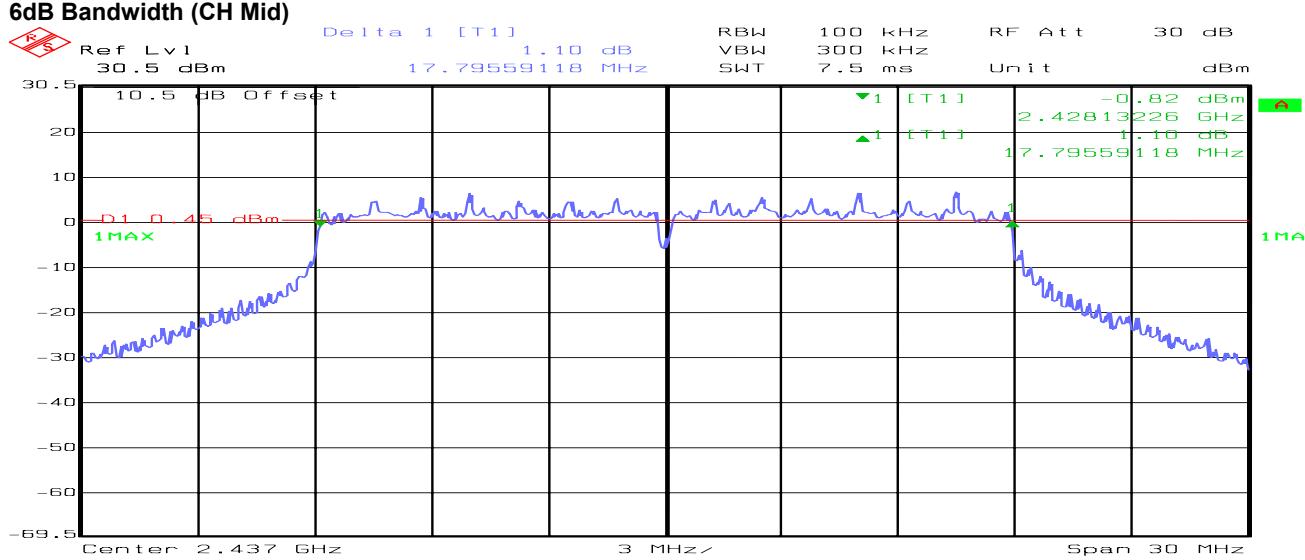
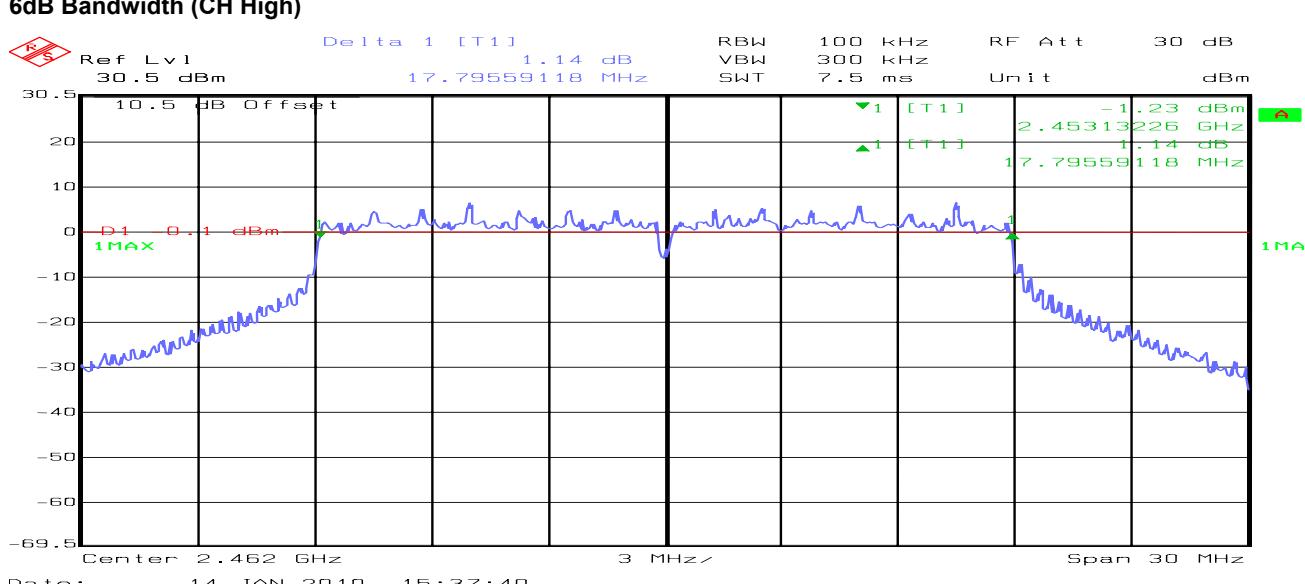
**6dB Bandwidth (CH Mid)**

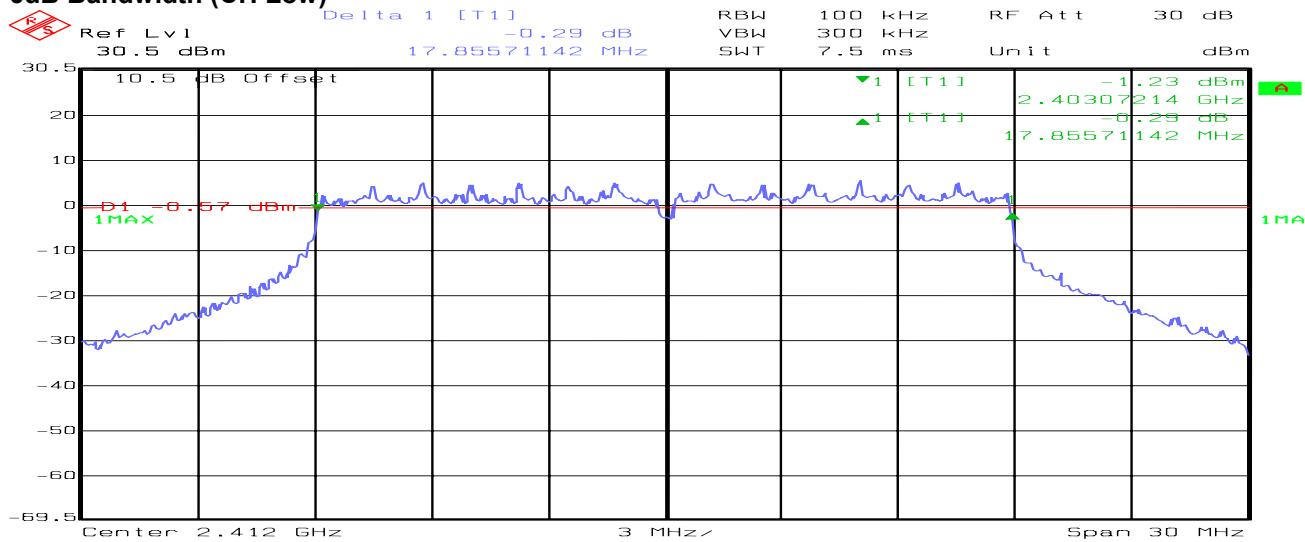
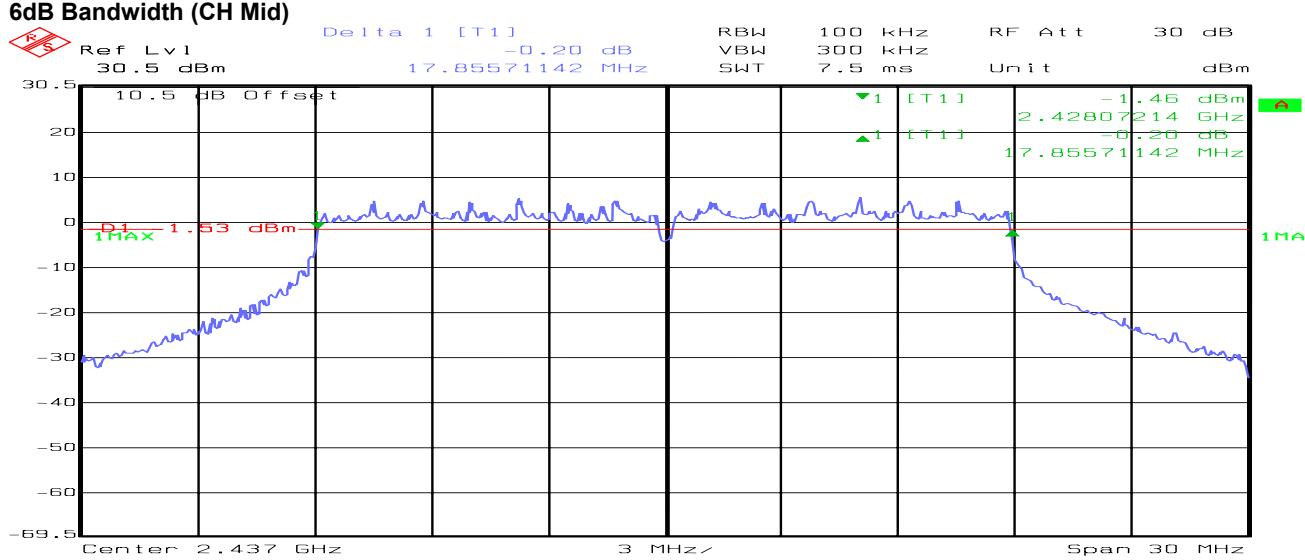
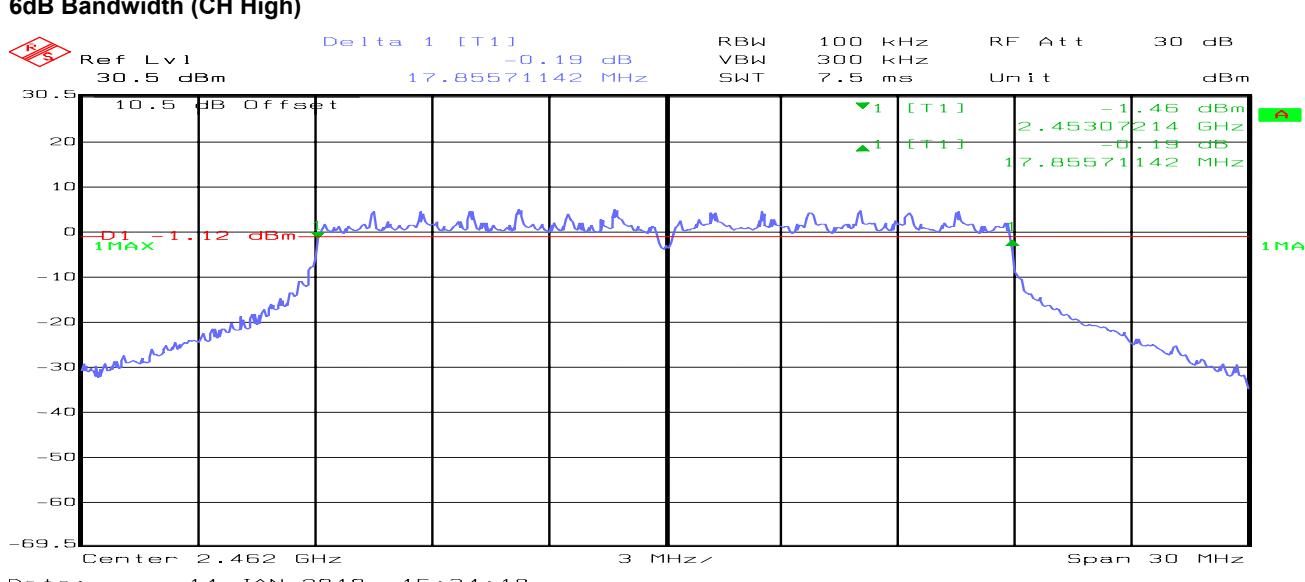
Date: 14.JAN.2010 15:54:36

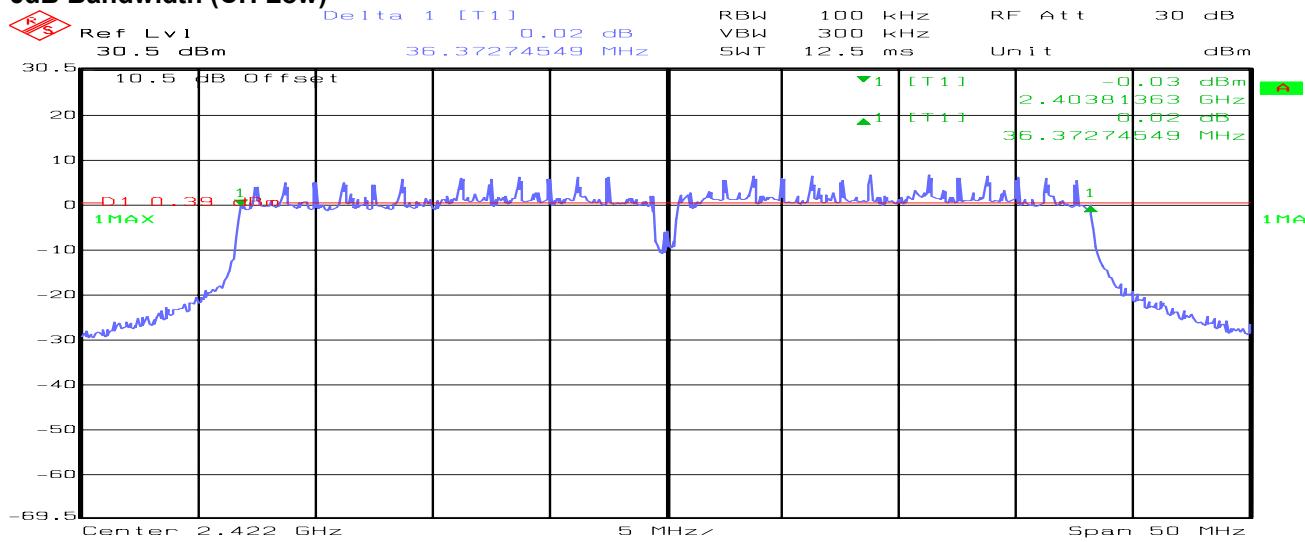
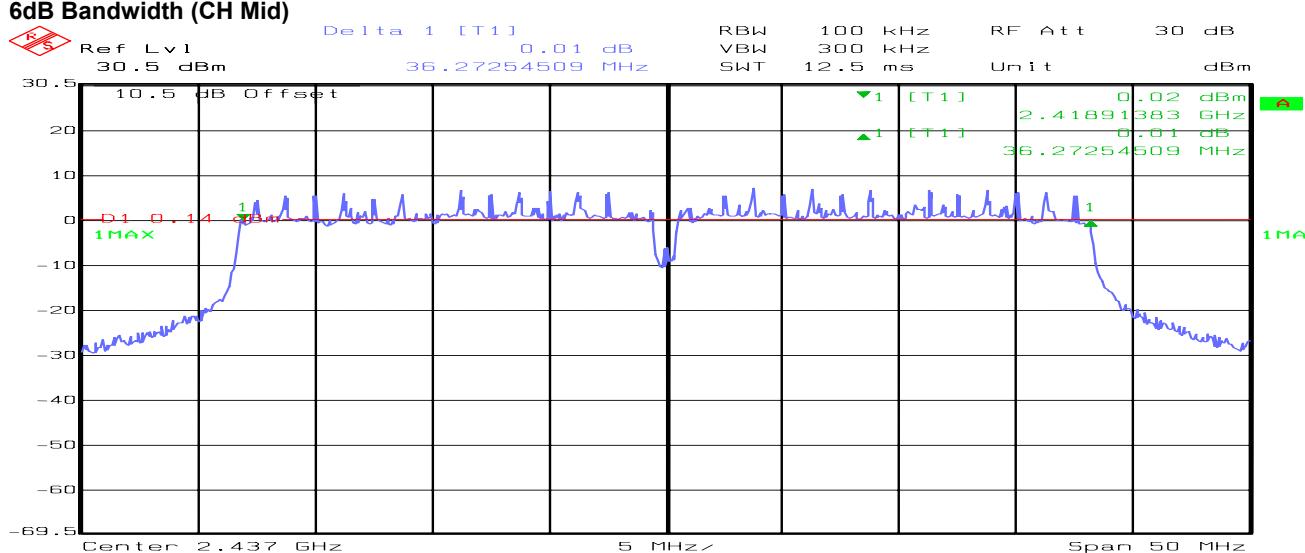
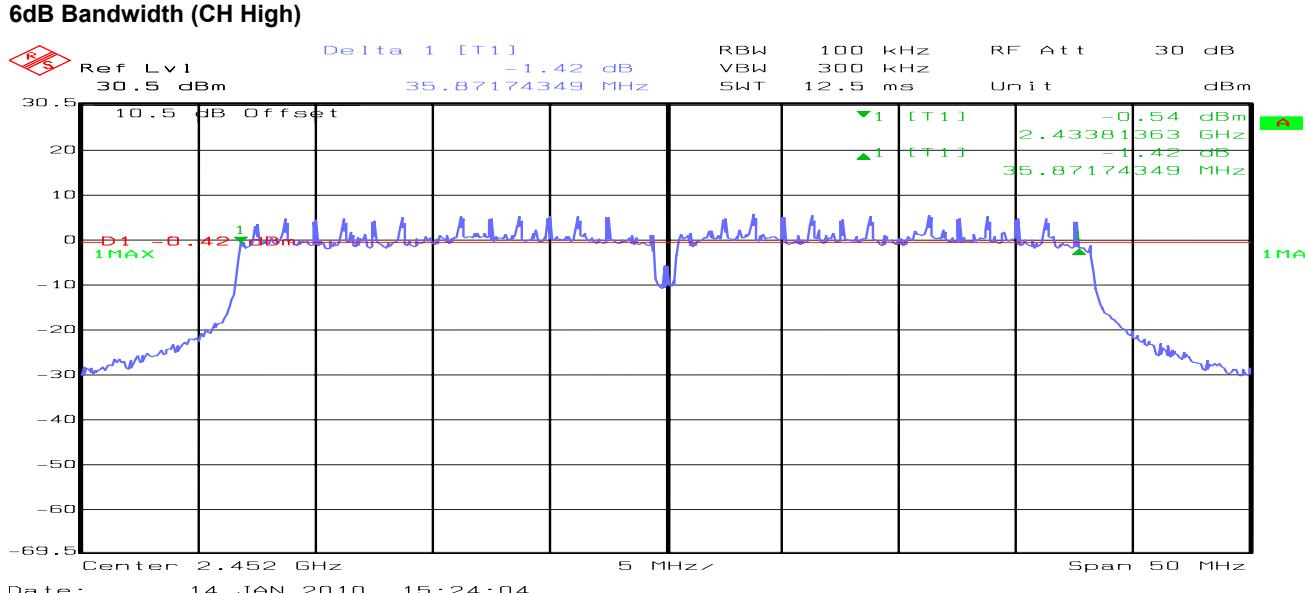
**6dB Bandwidth (CH High)**

Date: 14.JAN.2010 15:55:45

**draft 802.11n 20 MHz Channel mode / Combiner****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)****6dB Bandwidth (CH High)**

**draft 802.11n 20 MHz Channel mode / Chain 0****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)****6dB Bandwidth (CH High)**

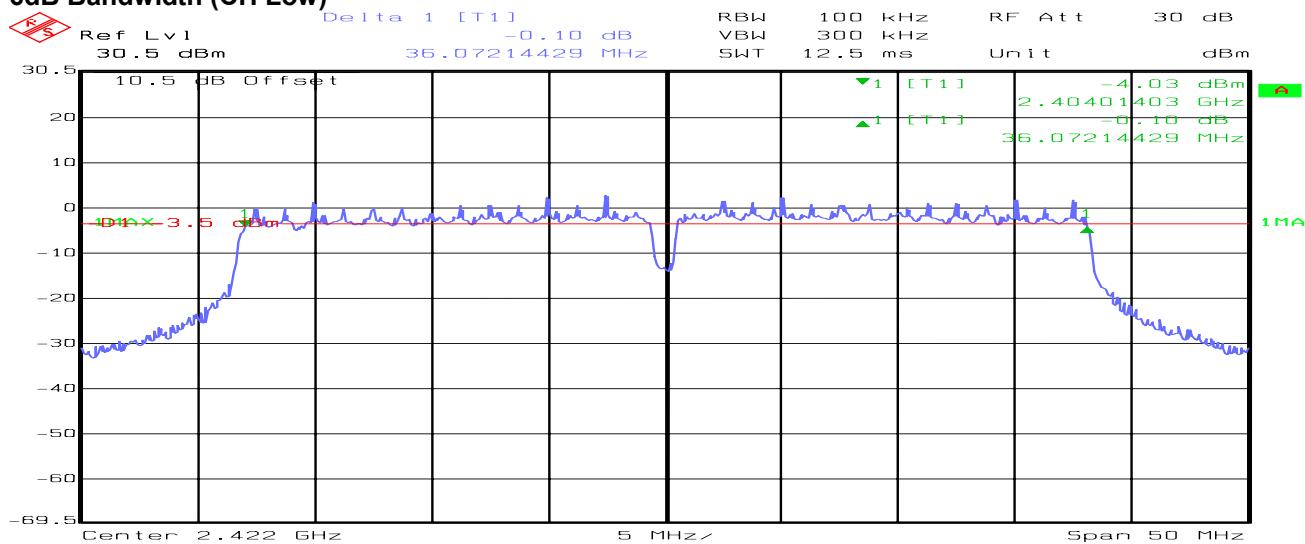
**draft 802.11n 20 MHz Channel mode / Chain 1****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)****6dB Bandwidth (CH High)**

**draft 802.11n 40 MHz Channel mode Combiner****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)****6dB Bandwidth (CH High)**



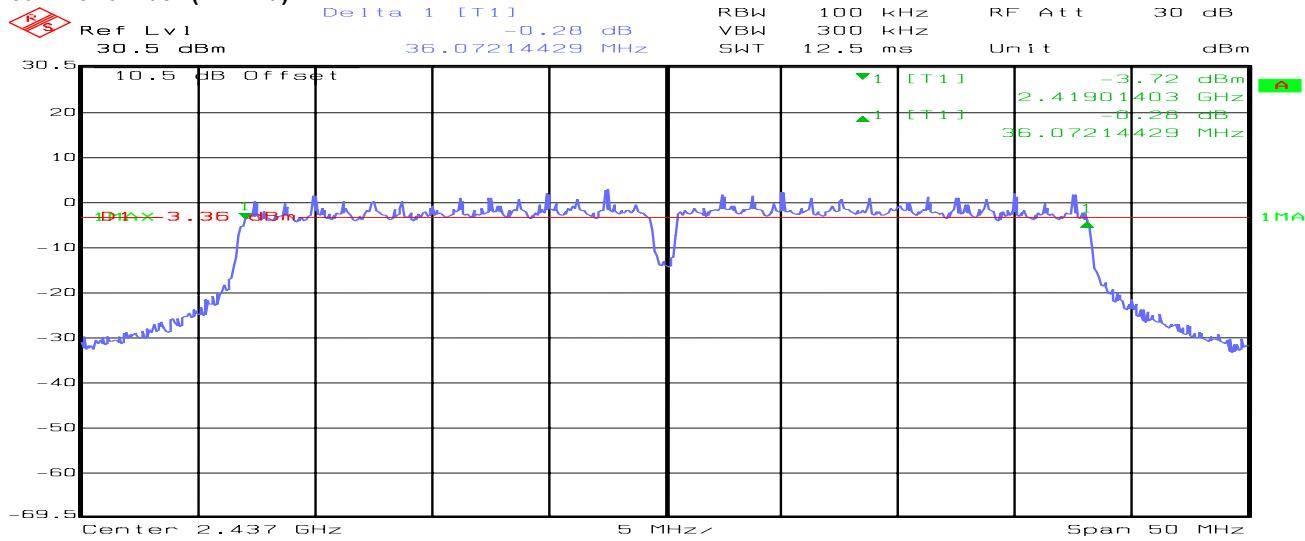
**draft 802.11n 40 MHz Channel mode / Chain 0**

## 6dB Bandwidth (CH Low)



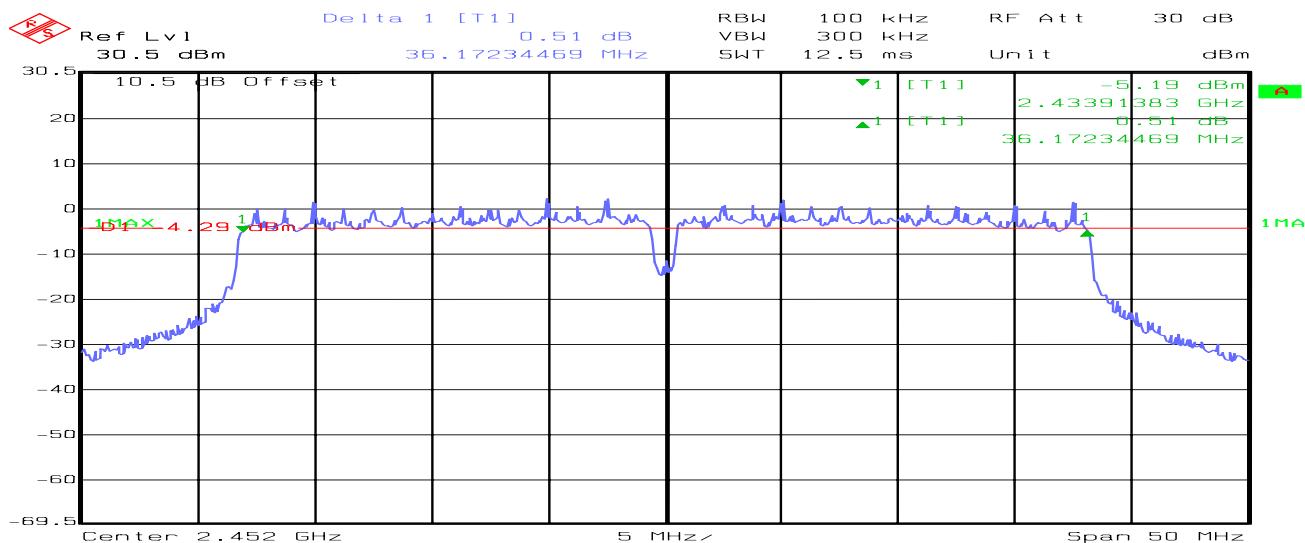
Date: 14.JAN.2010 15:05:15

## 6dB Bandwidth (CH Mid)

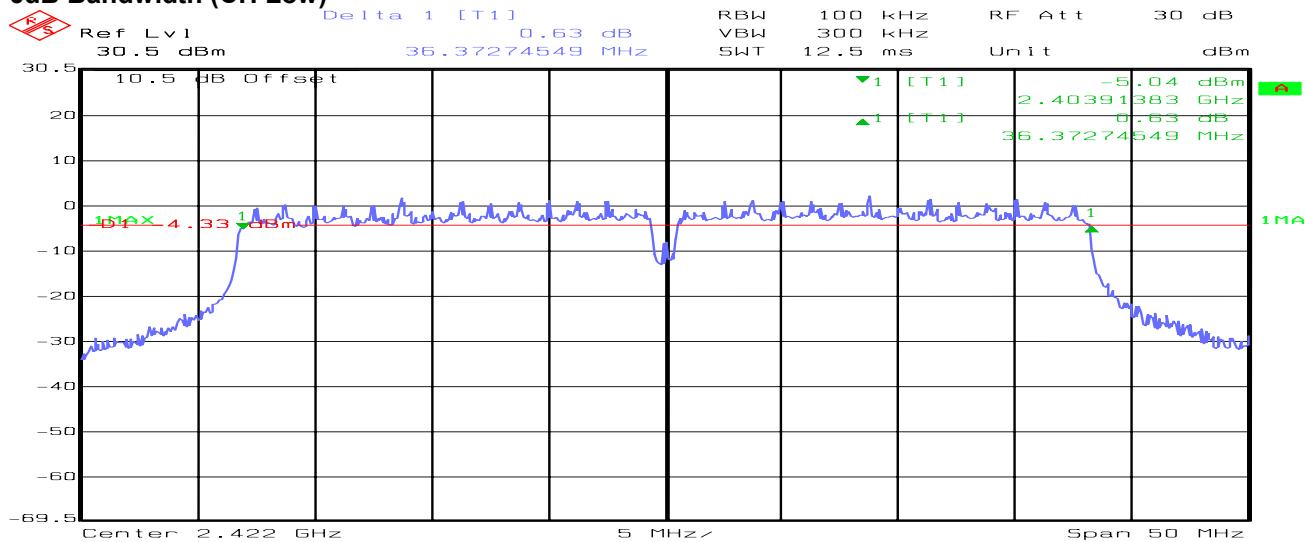


Date: 14.JAN.2010 15:15:39

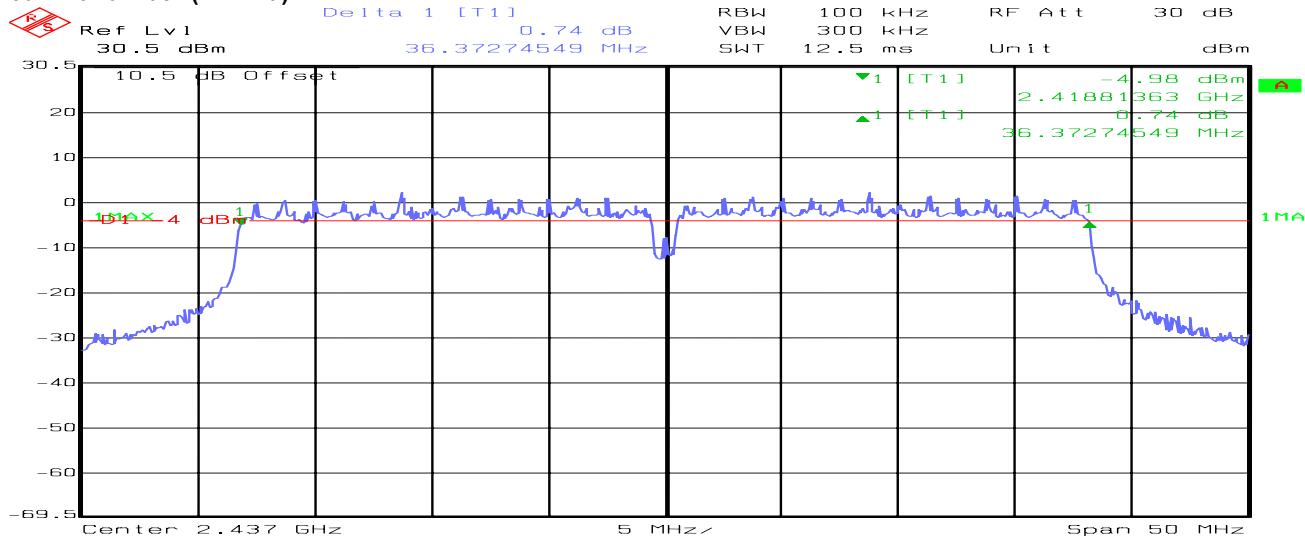
### 6dB Bandwidth (CH High)



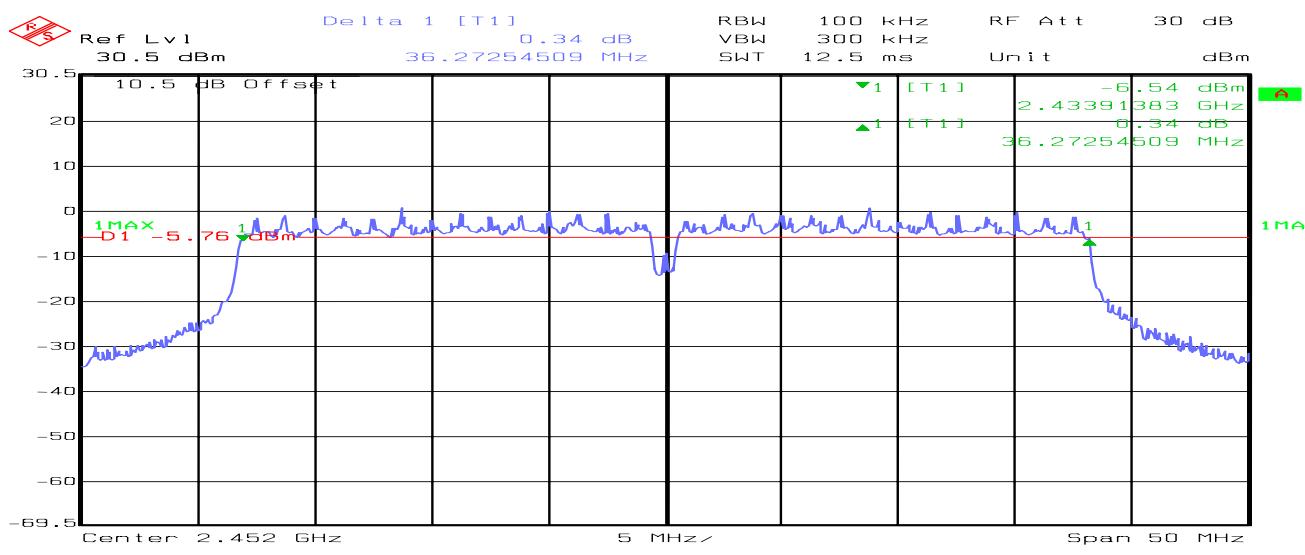
Date: 14.JAN.2010 15:20:31

**draft 802.11n 40 MHz Channel mode / Chain 1****6dB Bandwidth (CH Low)**

Date: 14.JAN.2010 15:08:22

**6dB Bandwidth (CH Mid)**

Date: 14.JAN.2010 15:12:35

**6dB Bandwidth (CH High)**

Date: 14.JAN.2010 15:25:42




## 7.2. PEAK POWER

### LIMIT

The maximum Peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### TEST CONFIGURATION



### TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the Peak power detection.

### TEST RESULTS

*No non-compliance noted*



## TEST DATA

### Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	19.61	0.09141	1.00	PASS
Mid	2437	20.21	0.10495		PASS
High	2462	20.69	0.11722		PASS

### Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	24.24	0.26546	1.00	PASS
Mid	2437	24.30	0.26915		PASS
High	2462	23.66	0.23227		PASS

### Test mode: draft 802.11n 20 MHz Channel mode

Channel	Frequency (MHz)	Output Power (dBm)				Output Power (W)				Limit (W)	Result
		Chain 0	Chain 1	Combiner	Total	Chain 0	Chain 1	Combiner	Total		
Low	2412	24.49	23.95	27.21	27.24	0.28119	0.248.31	0.52601	0.52950	1.00	PASS
Mid	2437	24.58	23.92	27.50	27.27	0.28708	0.24660	0.56234	0.53368		PASS
High	2462	24.38	23.70	27.40	27.06	0.27416	0.23442	0.54954	0.50858		PASS

### Test mode: draft 802.11n 40 MHz Channel mode

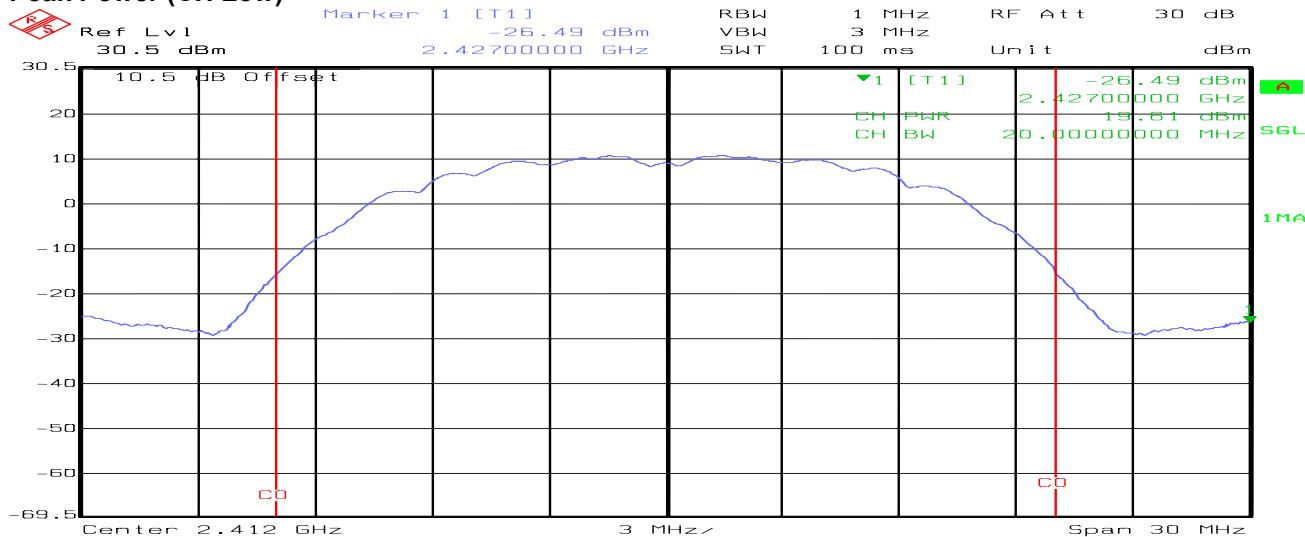
Channel	Frequency (MHz)	Output Power (dBm)				Output Power (W)				Limit (W)	Result
		Chain 0	Chain 1	Combiner	Total	Chain 0	Chain 1	Combiner	Total		
Low	2422	23.33	22.90	26.17	26.13	0.21528	0.19498	0.41400	0.41026	1.00	PASS
Mid	2437	23.24	22.88	26.20	26.07	0.21086	0.19409	0.41687	0.40495		PASS
High	2452	22.57	21.50	25.22	25.08	0.18072	0.14125	0.33266	0.32197		PASS



## Test Plot

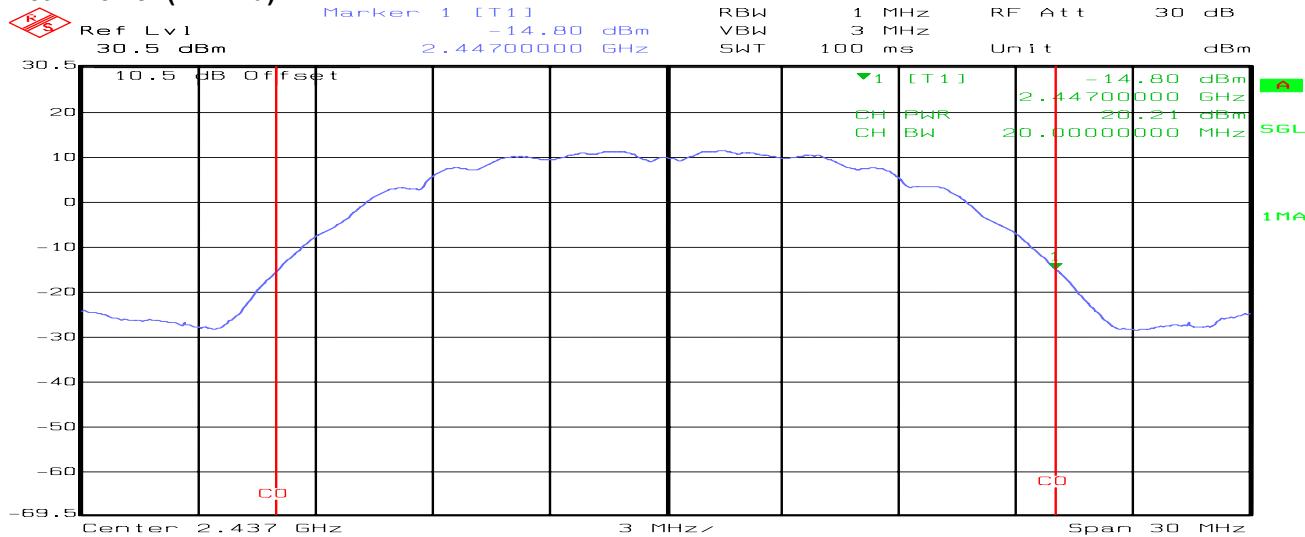
### IEEE 802.11b mode

#### Peak Power (CH Low)



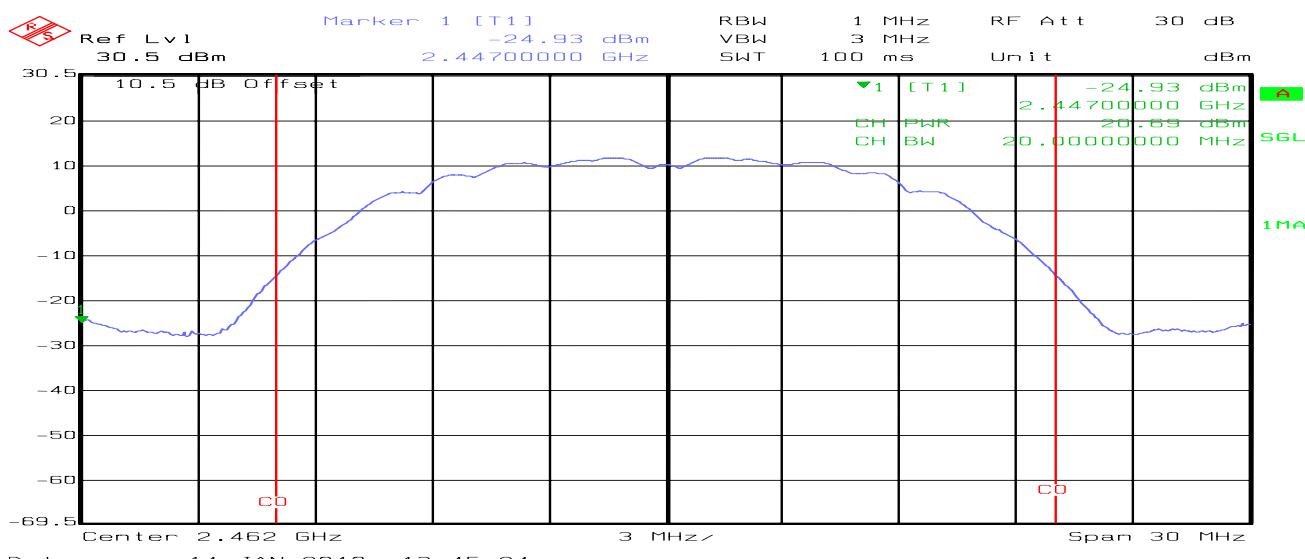
Date: 14.JAN.2010 13:48:20

#### Peak Power (CH Mid)

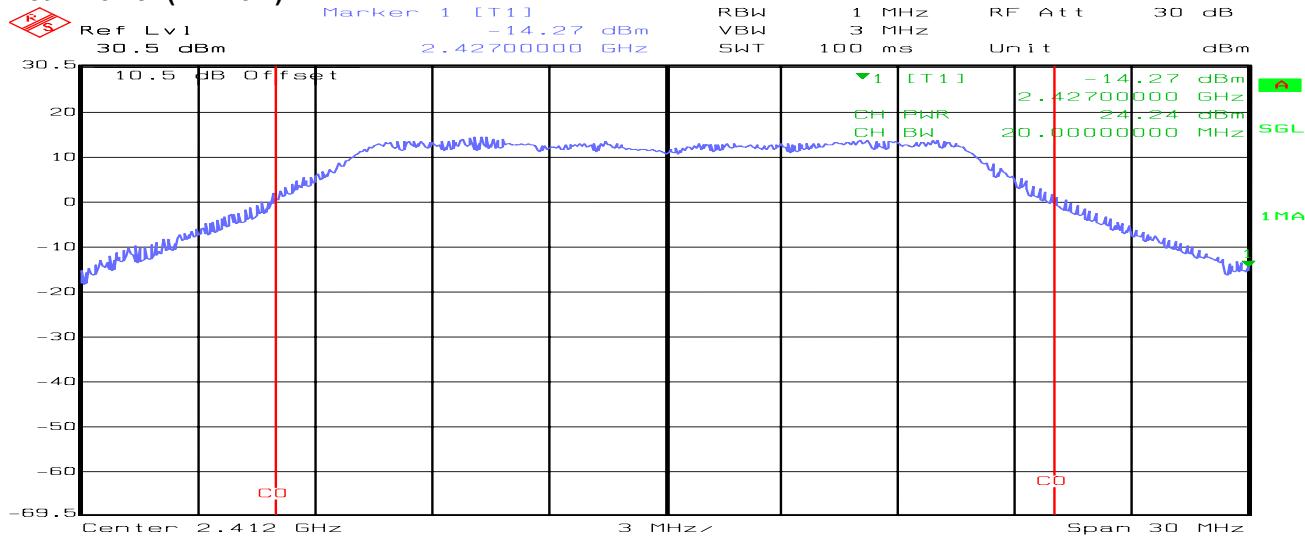
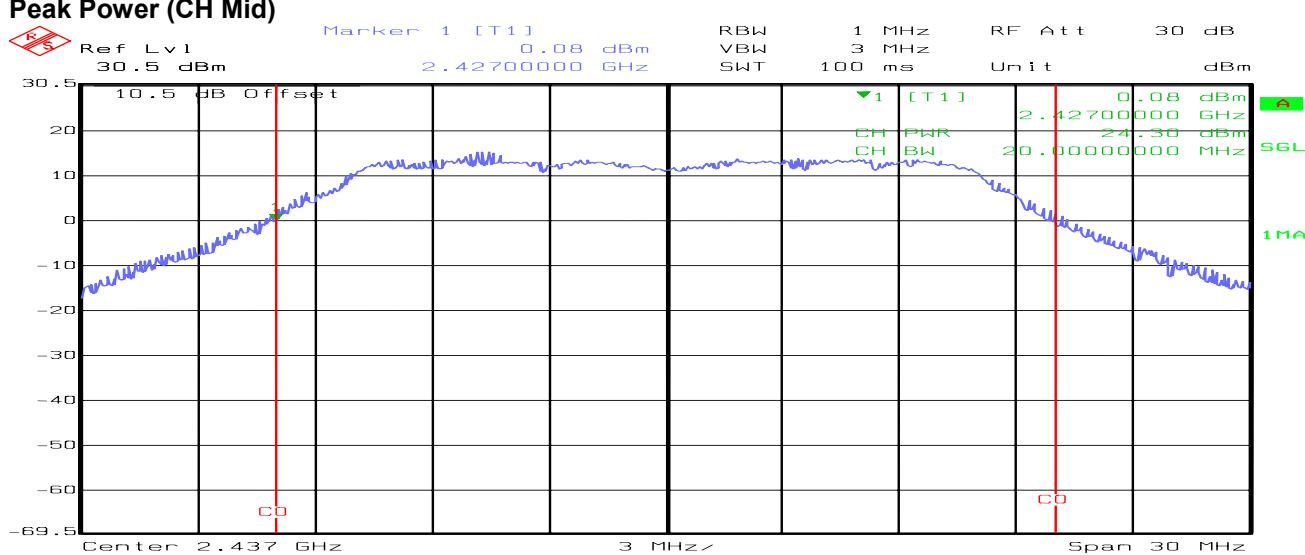
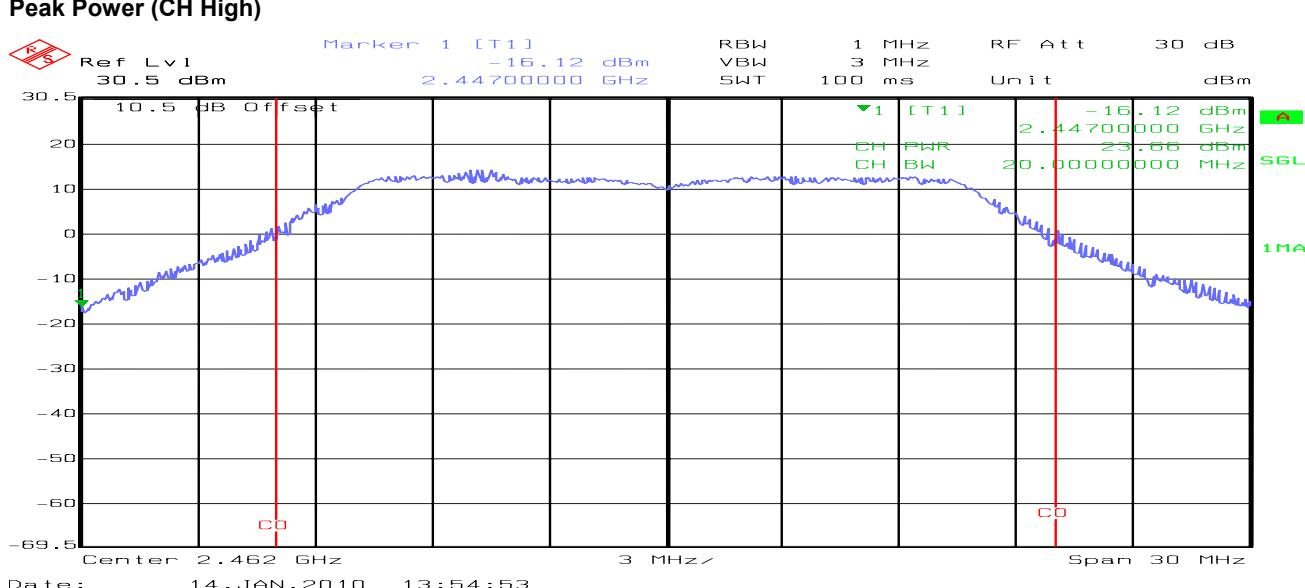


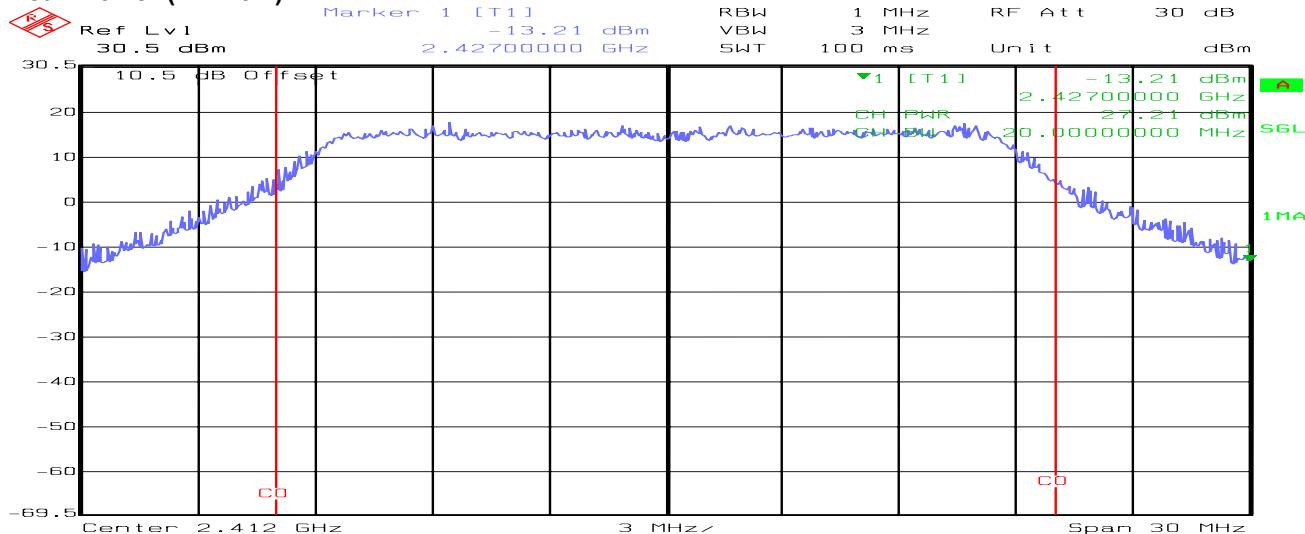
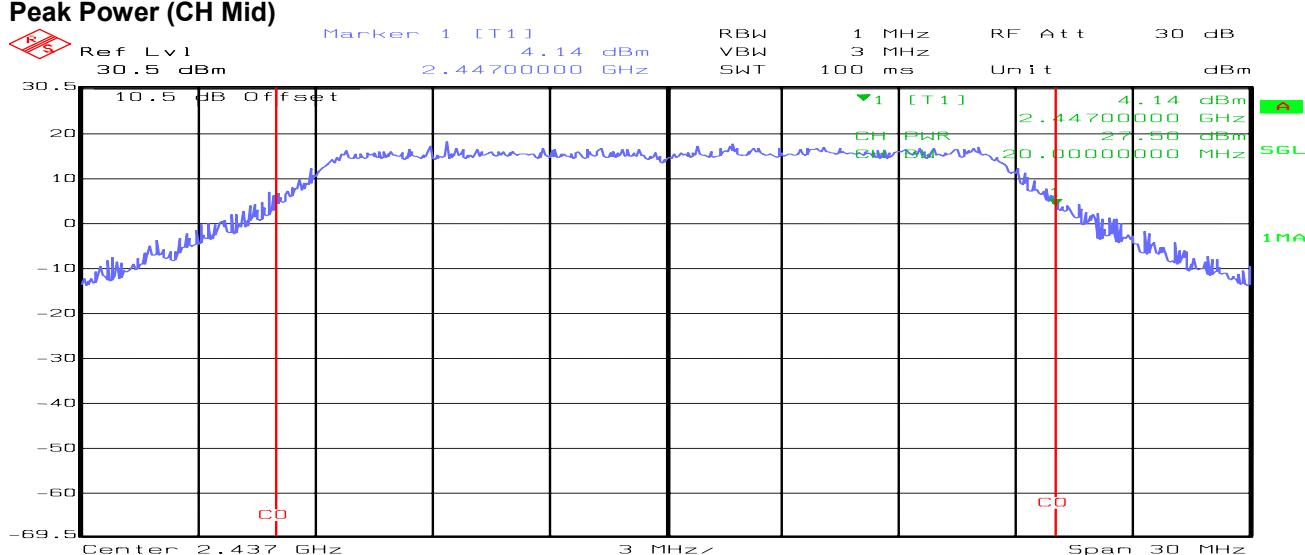
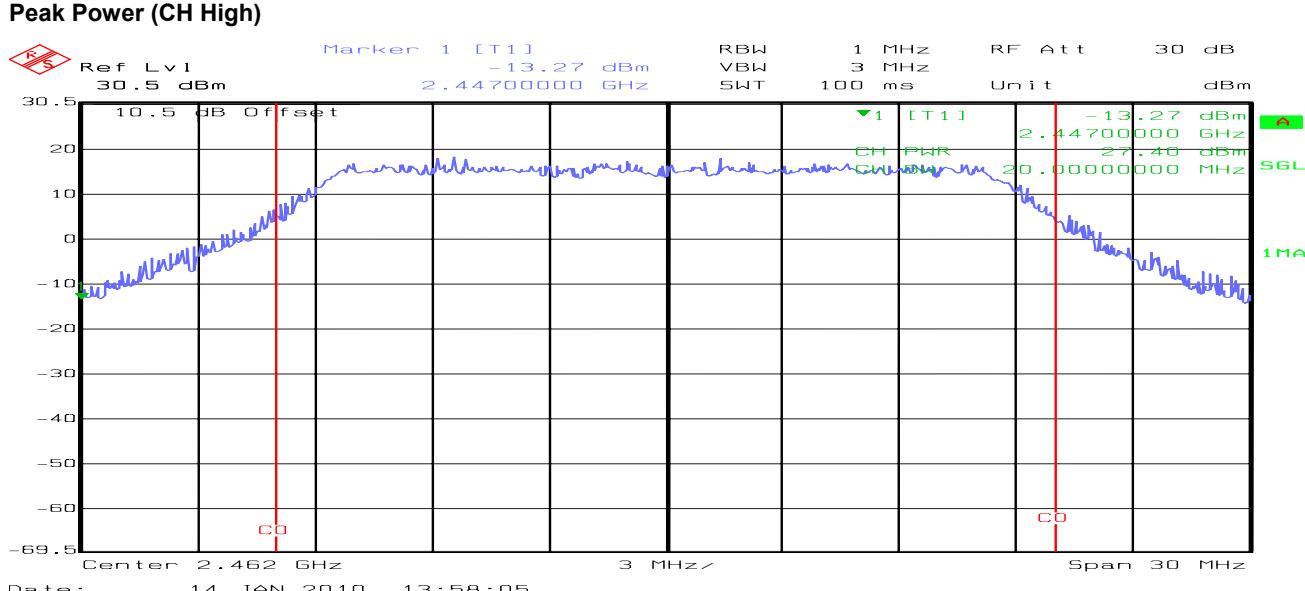
Date: 14.JAN.2010 13:47:14

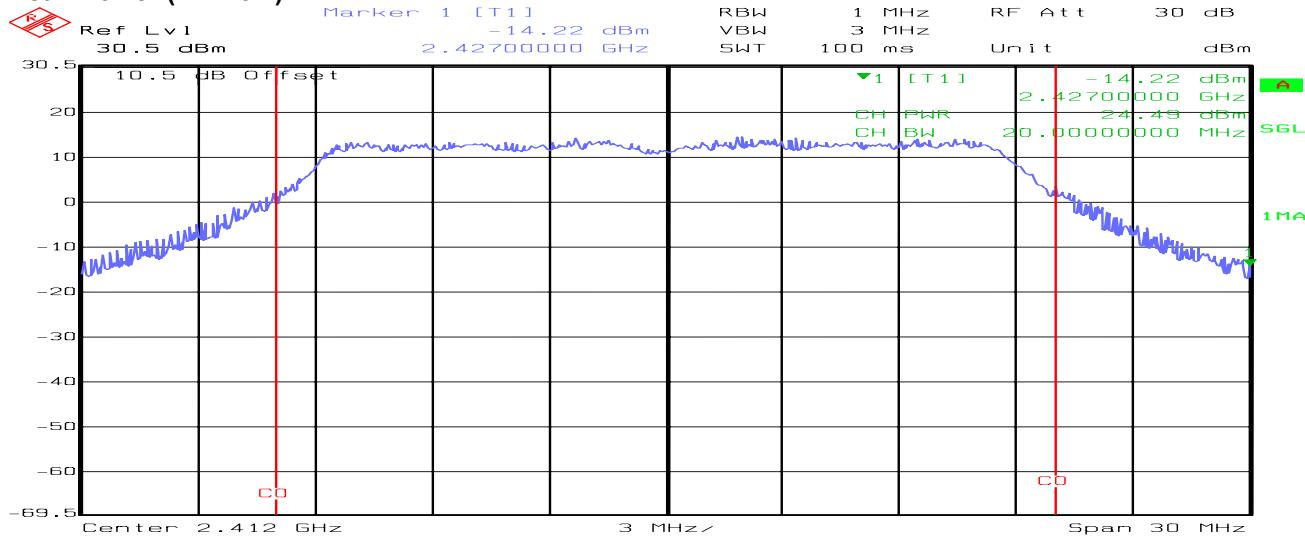
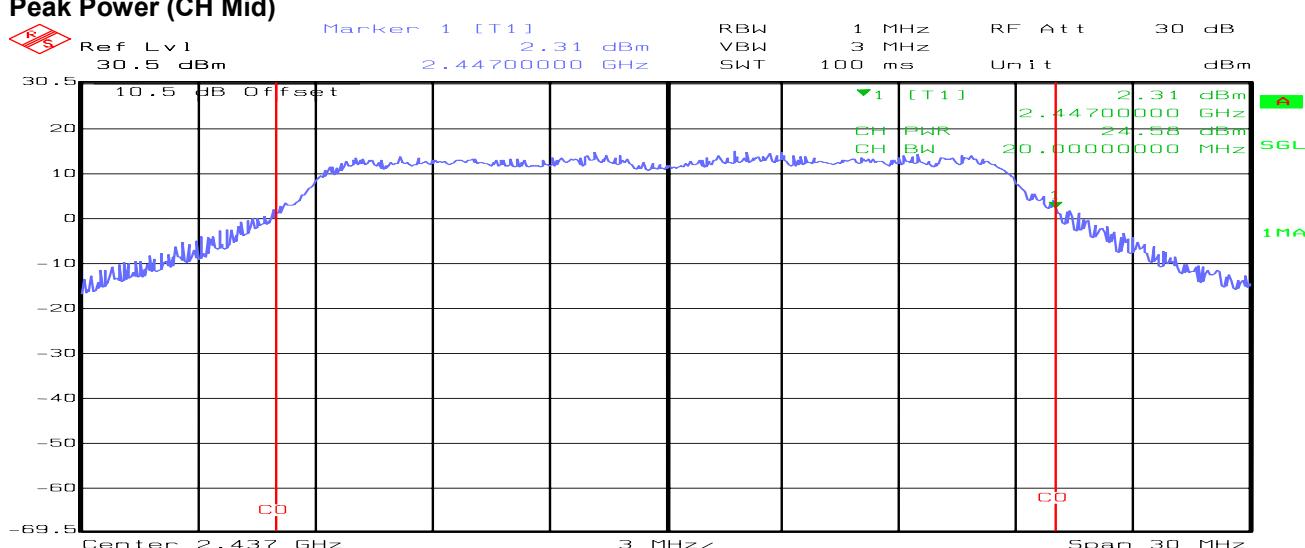
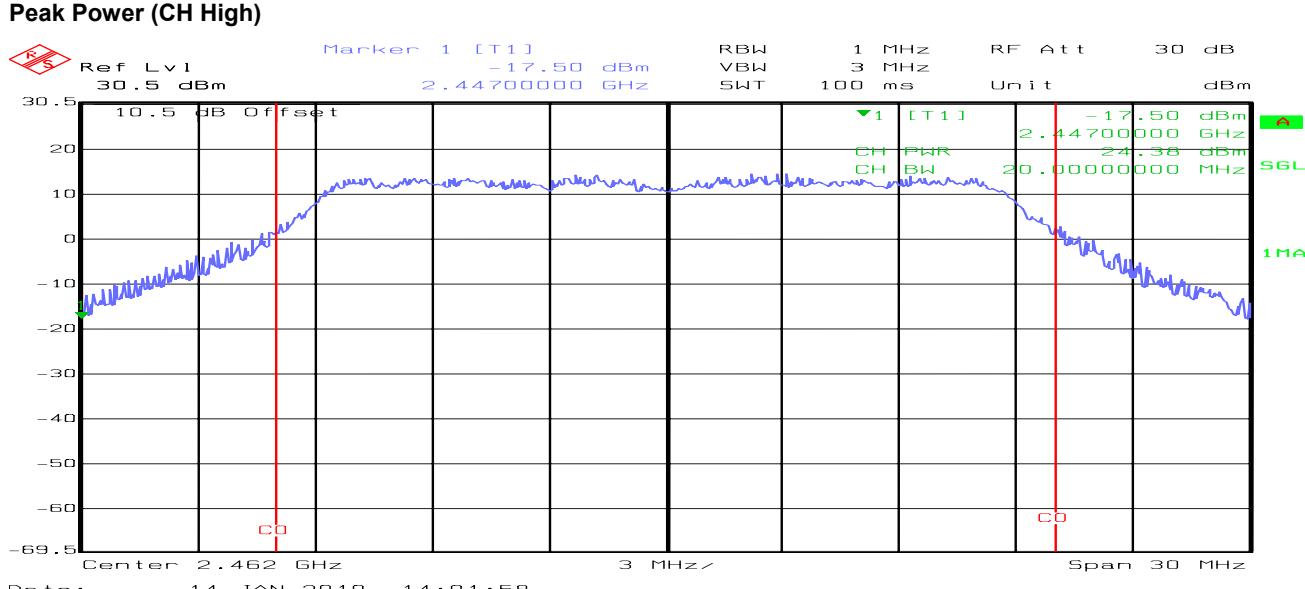
#### Peak Power (CH High)

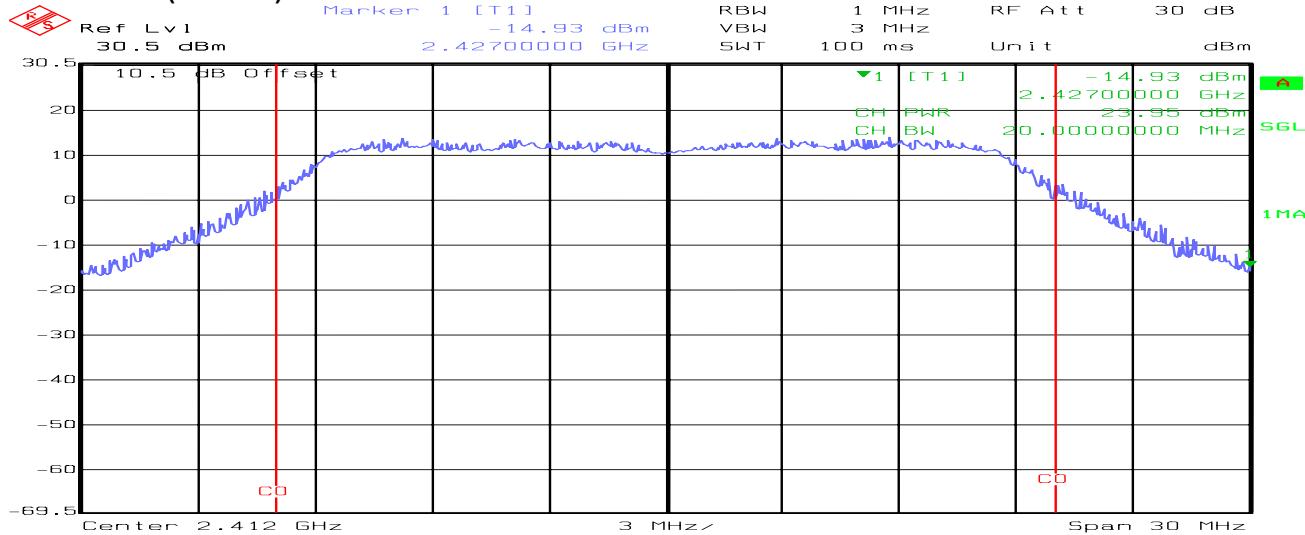


Date: 14.JAN.2010 13:45:24

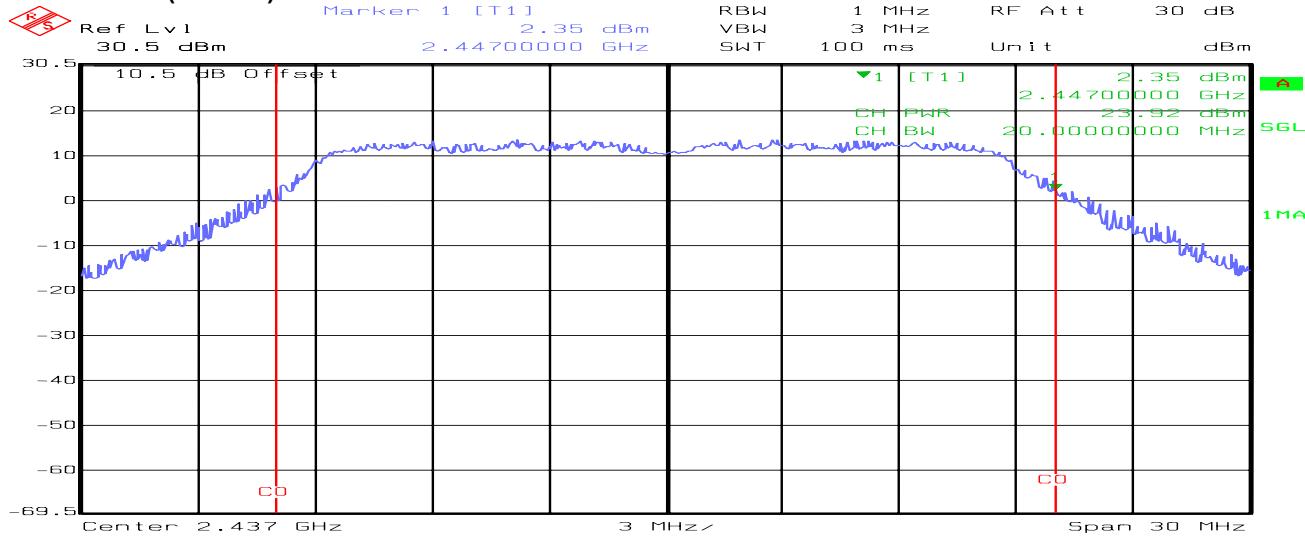
**IEEE 802.11g mode****Peak Power (CH Low)****Peak Power (CH Mid)****Peak Power (CH High)**

**draft 802.11n 20 MHz Channel mode Combiner****Peak Power (CH Low)****Peak Power (CH Mid)****Peak Power (CH High)**

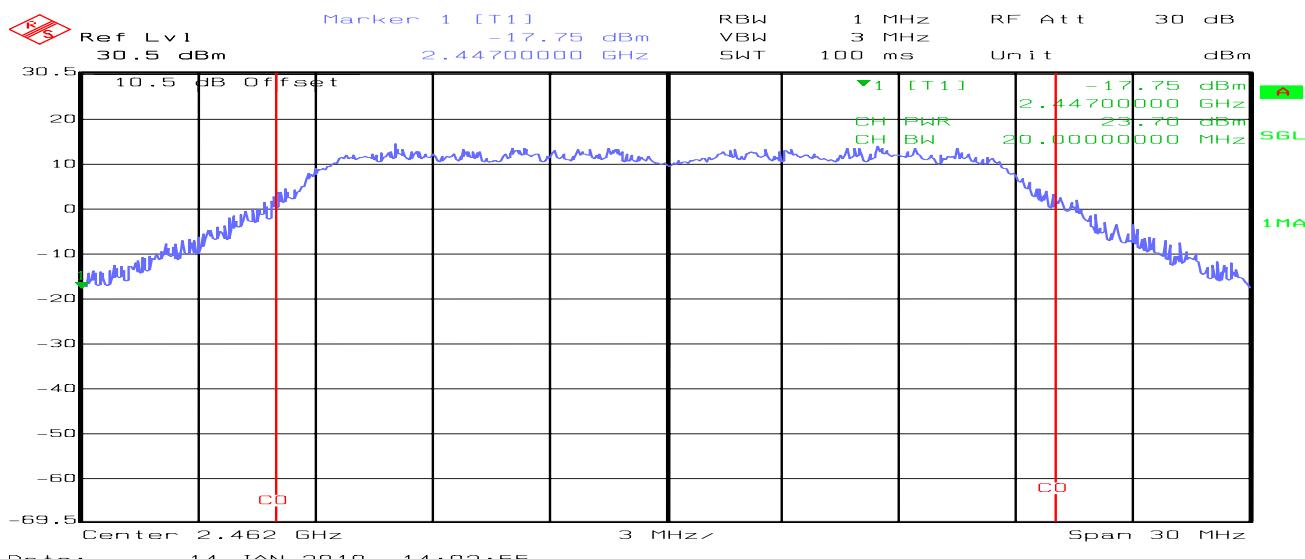
**draft 802.11n 20 MHz Channel mode / Chain 0****Peak Power (CH Low)****Peak Power (CH Mid)****Peak Power (CH High)**

**draft 802.11n 20 MHz Channel mode / Chain 1****Peak Power (CH Low)**

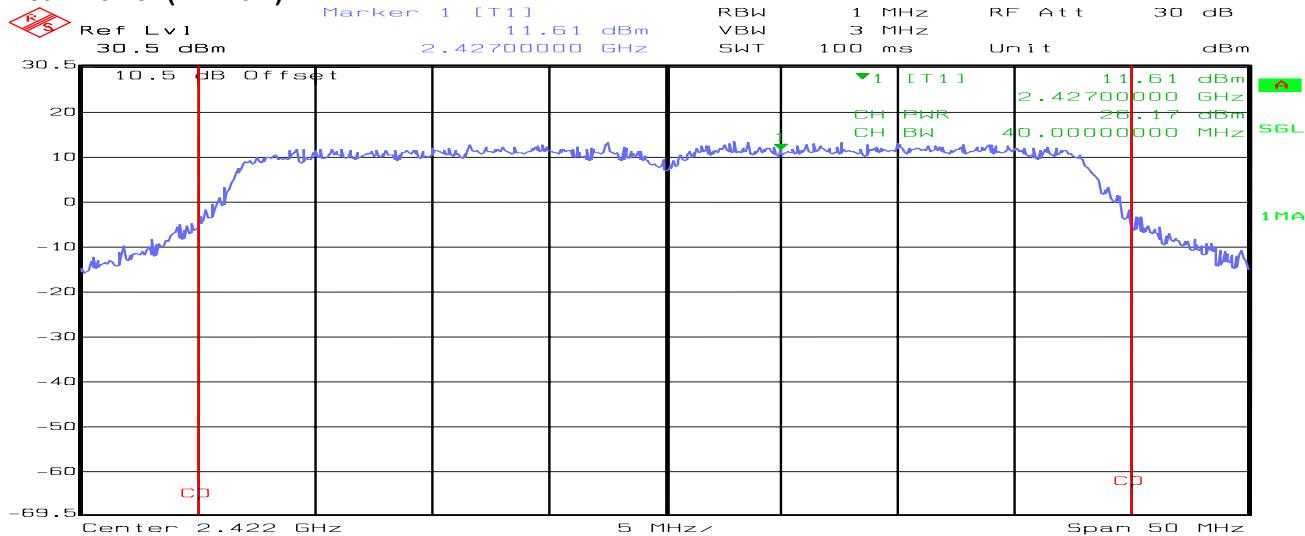
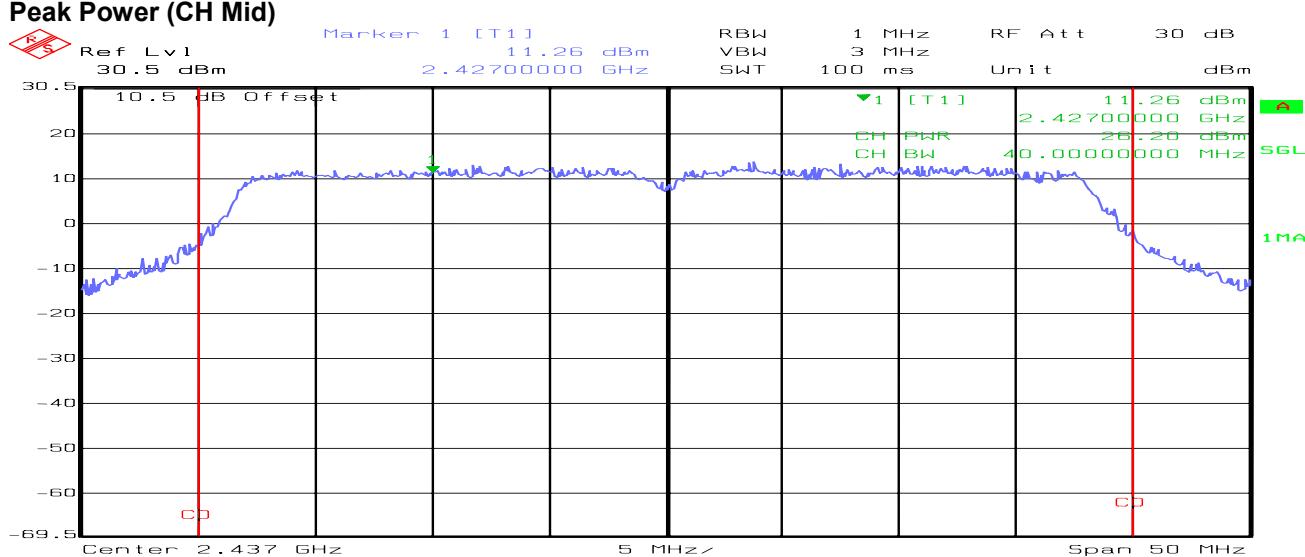
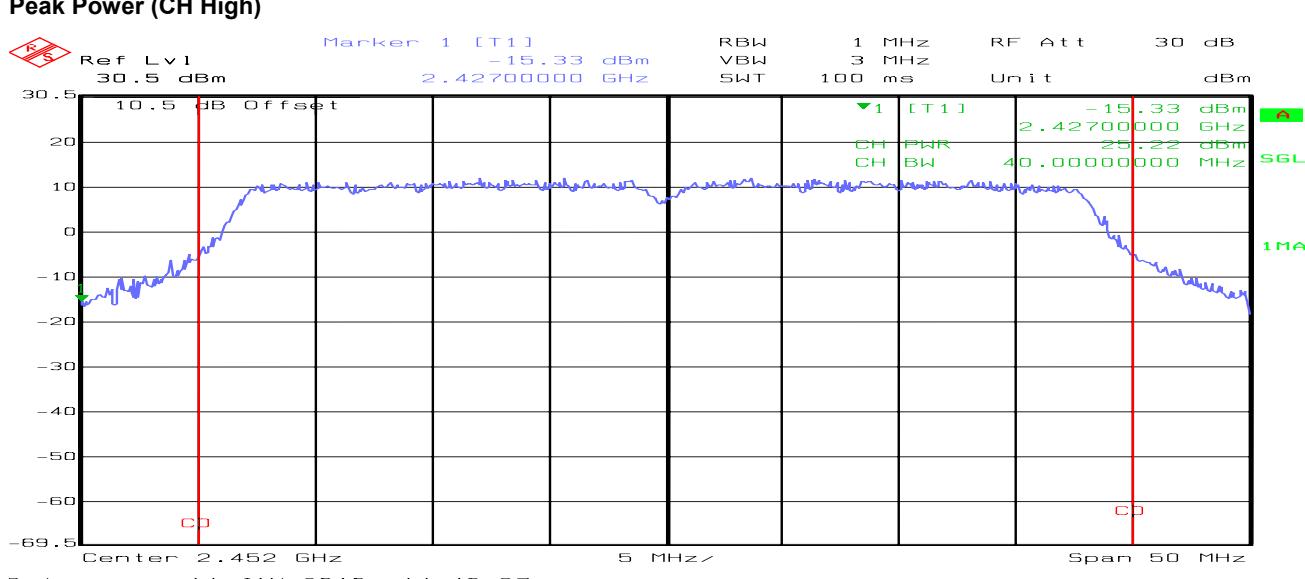
Date: 14.JAN.2010 14:14:48

**Peak Power (CH Mid)**

Date: 14.JAN.2010 14:06:21

**Peak Power (CH High)**

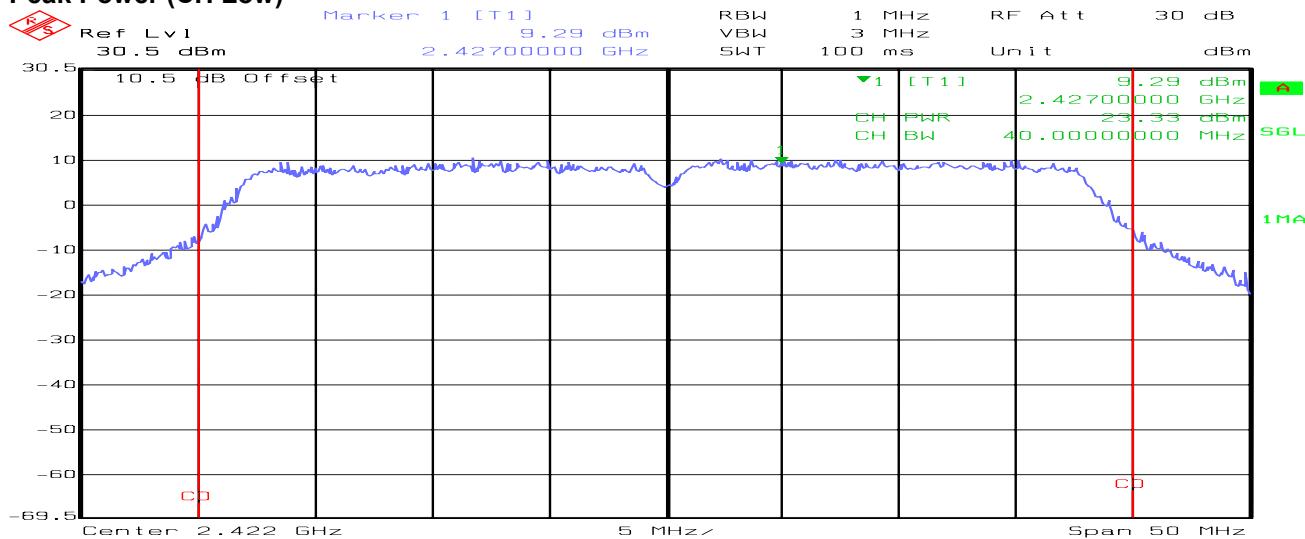
Date: 14.JAN.2010 14:02:55

**draft 802.11n 40 MHz Channel mode / Combiner****Peak Power (CH Low)****Peak Power (CH Mid)****Peak Power (CH High)**



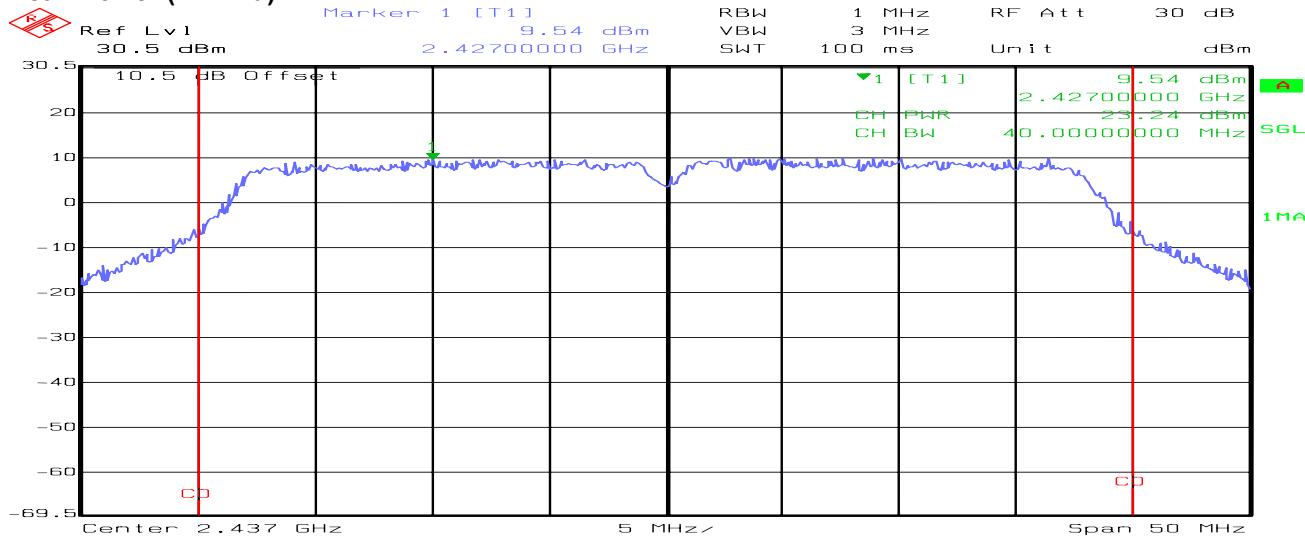
## **draft 802.11n 40 MHz Channel mode / Chain 0**

## Peak Power (CH Low)



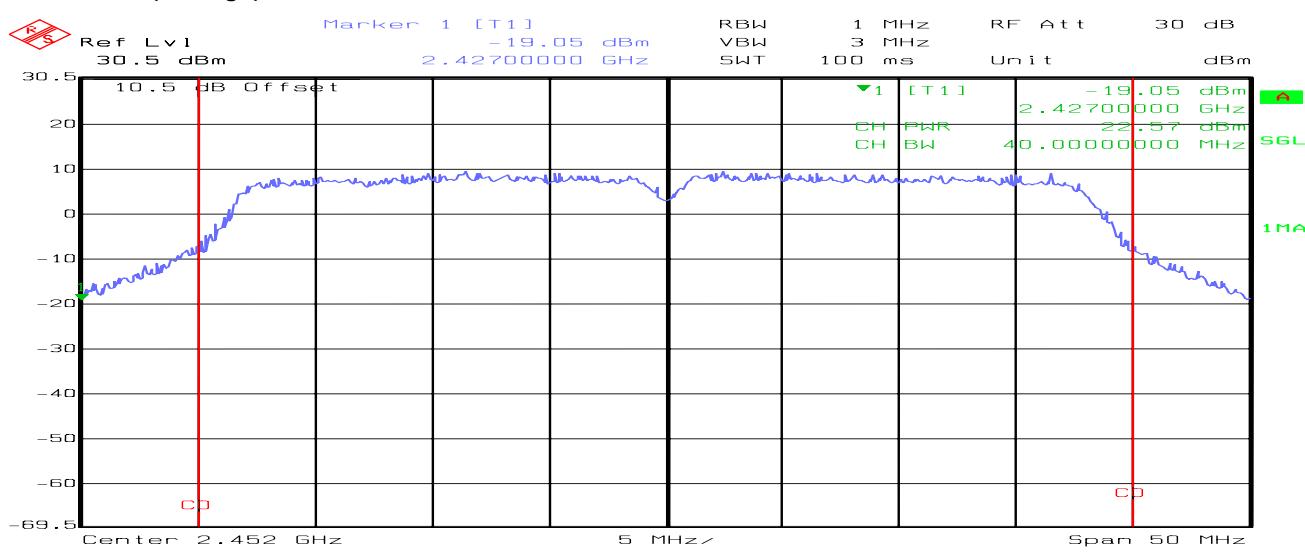
Date: 14.JAN.2010 14:24:09

## Peak Power (CH Mid)

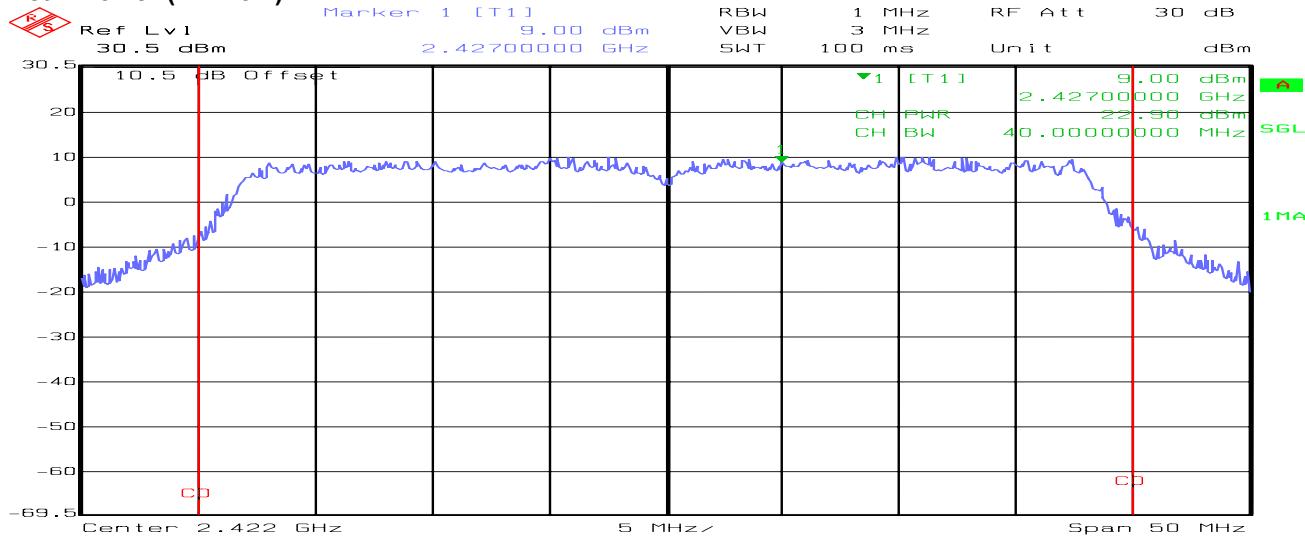


Date: 14.JAN.2010 14:27:19

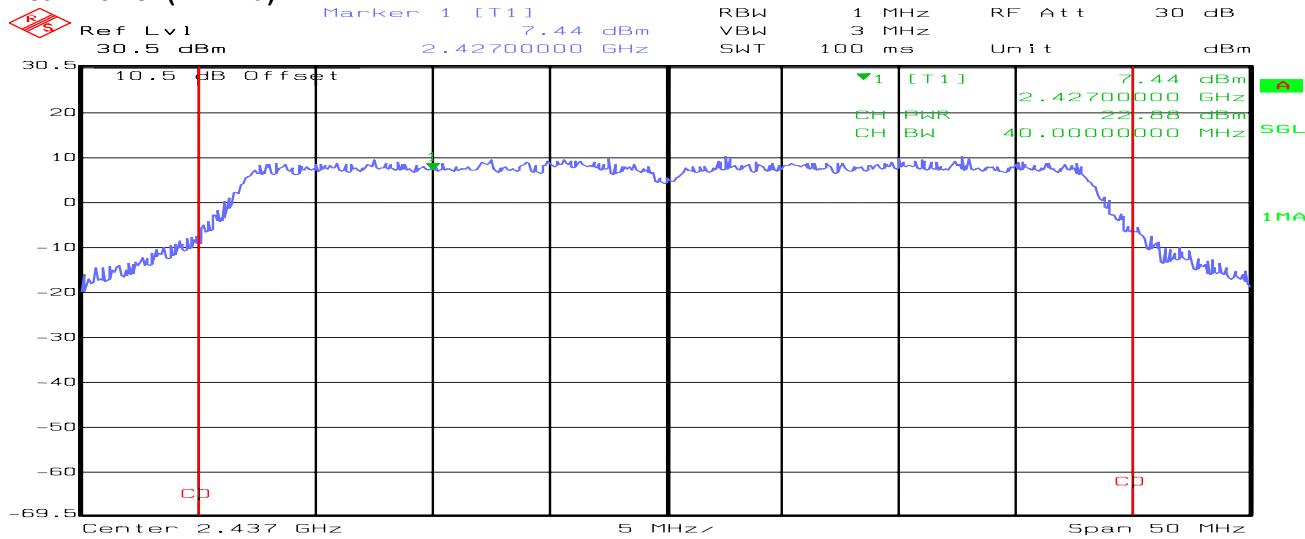
## Peak Power (CH High)



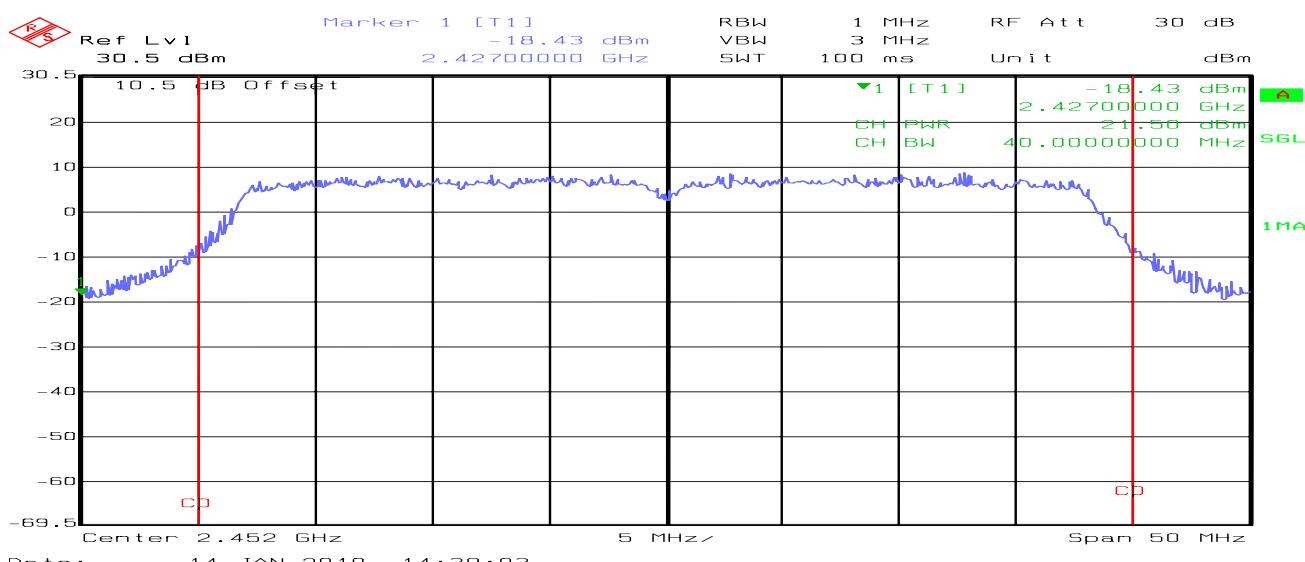
Date: 14.JAN.2010 14:43:11

**draft 802.11n 40 MHz Channel mode / Chain 1****Peak Power (CH Low)**

Date: 14.JAN.2010 14:20:24

**Peak Power (CH Mid)**

Date: 14.JAN.2010 14:34:14

**Peak Power (CH High)**

Date: 14.JAN.2010 14:39:03




## 7.3. AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### TEST CONFIGURATION



### TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the average power detection.

### TEST RESULTS

*No non-compliance noted*



## TEST DATA

### IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	16.77	0.04753
Mid	2437	17.32	0.05395
High	2462	17.62	0.05781

### IEEE 802.11g

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	16.67	0.04645
Mid	2437	16.59	0.04560
High	2462	23.66	0.23227

### draft 802.11n 20 MHz

Channel	Frequency (MHz)	Output Power (dBm)				Output Power (W)				Limit (W)	Result
		Chain 0	Chain 1	Combiner	Total	Chain 0	Chain 1	Combiner	Total		
Low	2412	16.59	16.63	19.32	19.62	0.04560	0.04603	0.08551	0.09163	1.00	PASS
Mid	2437	16.50	16.33	19.83	19.43	0.04467	0.04295	0.09616	0.08762		PASS
High	2462	16.39	15.98	19.66	19.20	0.04355	0.03963	0.09247	0.08318		PASS

### draft 802.11n 40 MHz

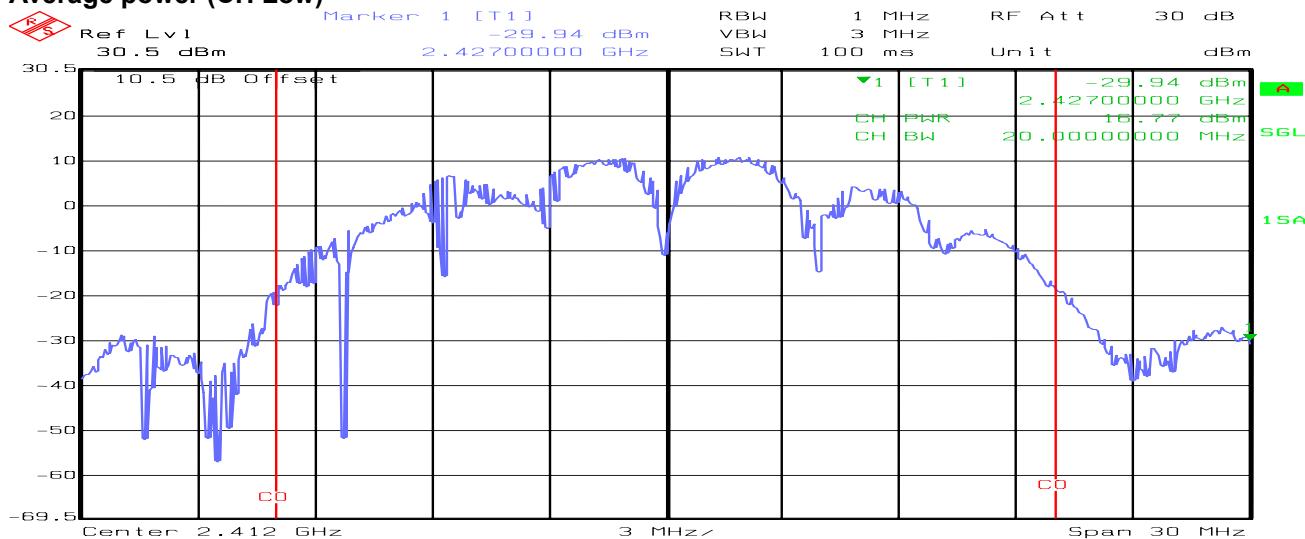
Channel	Frequency (MHz)	Output Power (dBm)				Output Power (W)				Limit (W)	Result
		Chain 0	Chain 1	Combiner	Total	Chain 0	Chain 1	Combiner	Total		
Low	2422	15.28	15.01	18.25	18.16	0.03373	0.03170	0.06683	0.06542	1.00	PASS
Mid	2437	15.16	15.14	18.65	18.16	0.03281	0.03266	0.07328	0.06547		PASS
High	2452	14.40	13.53	17.37	17.00	0.02754	0.02254	0.05458	0.05008		PASS



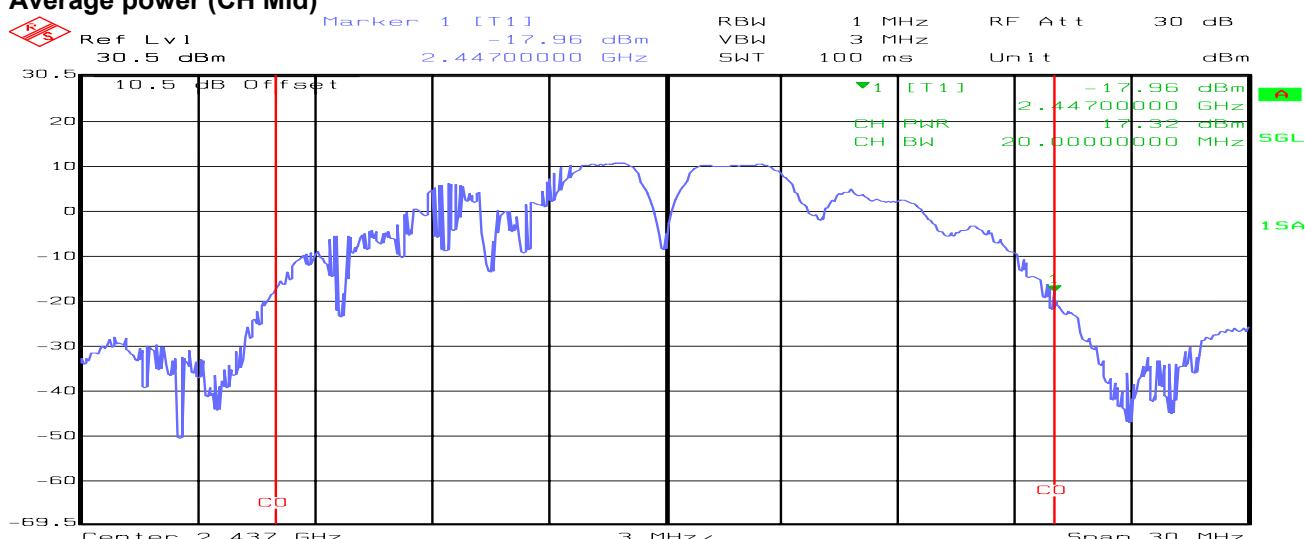
## Test Plot

### IEEE 802.11b mode

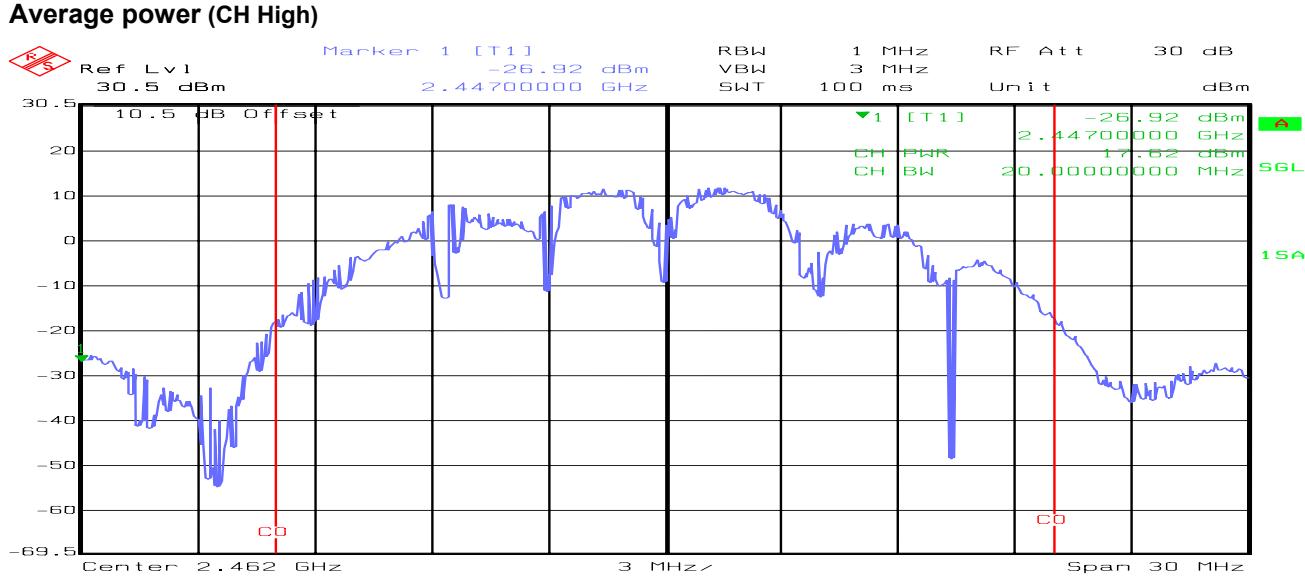
#### Average power (CH Low)

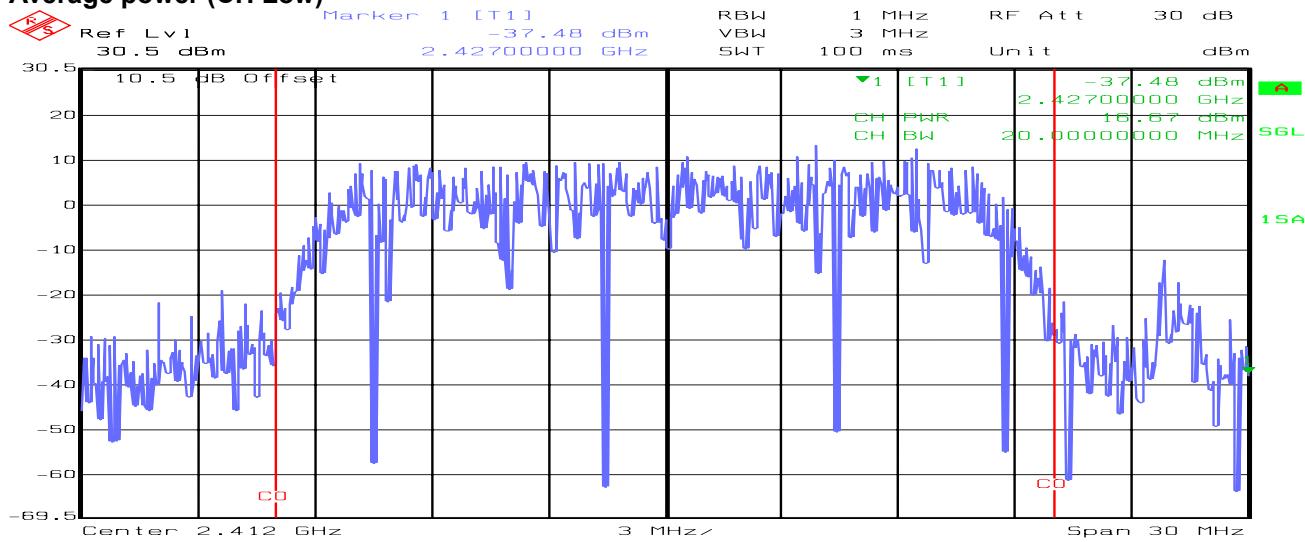
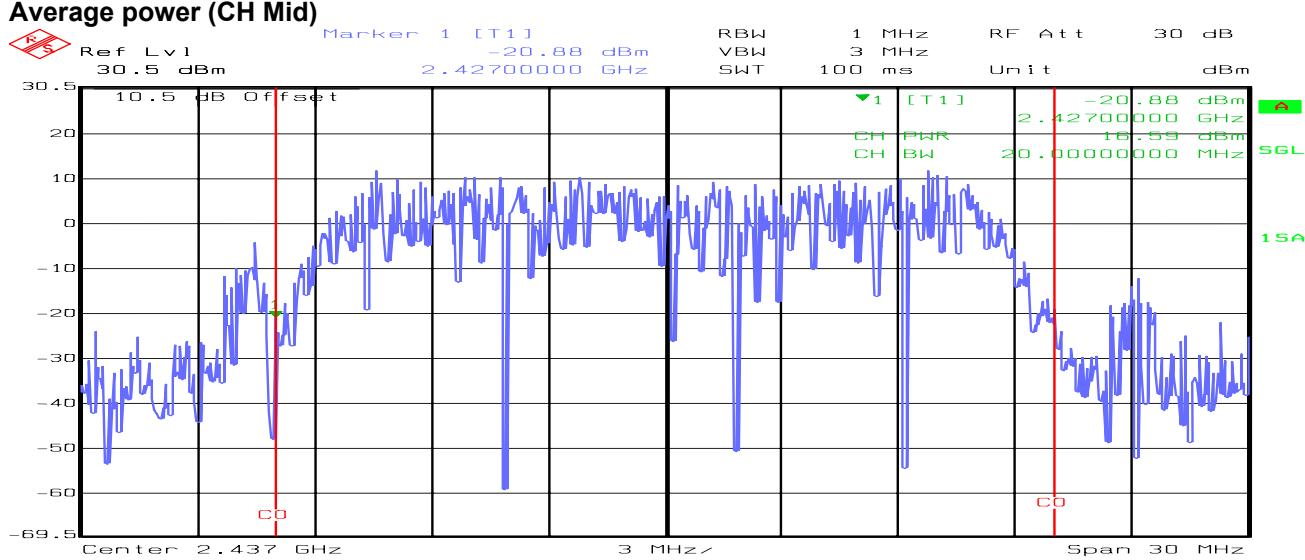
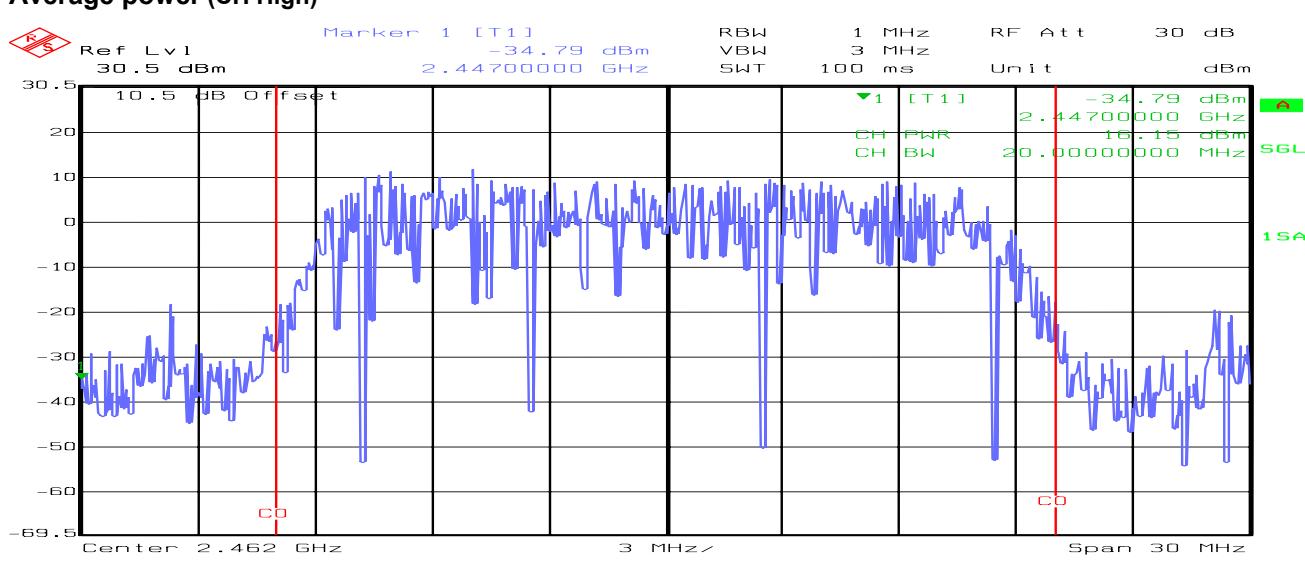


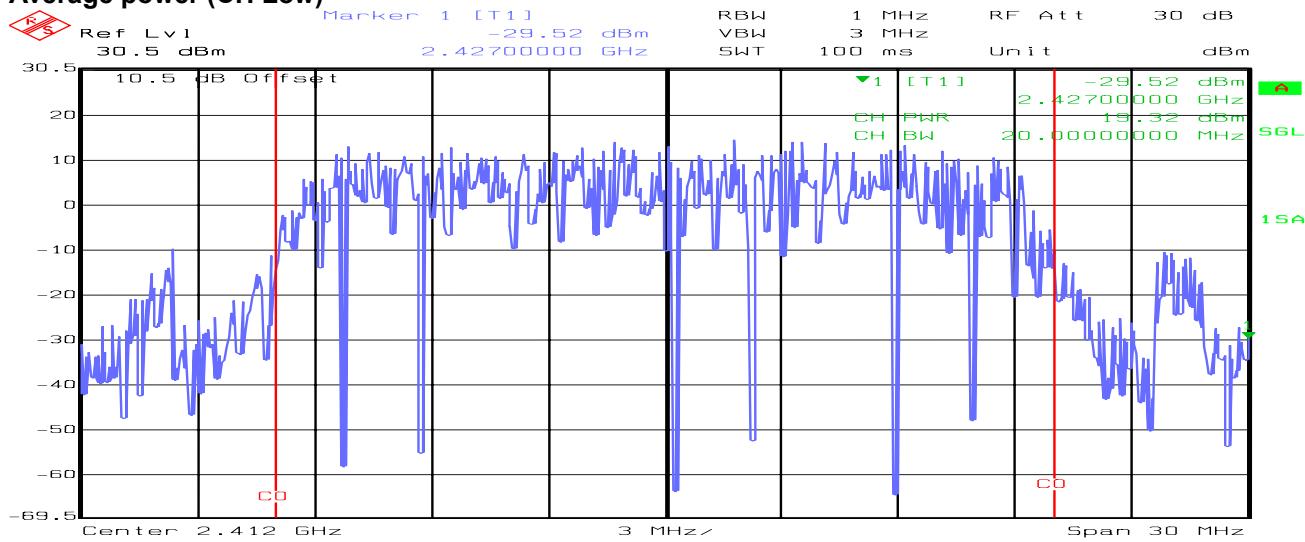
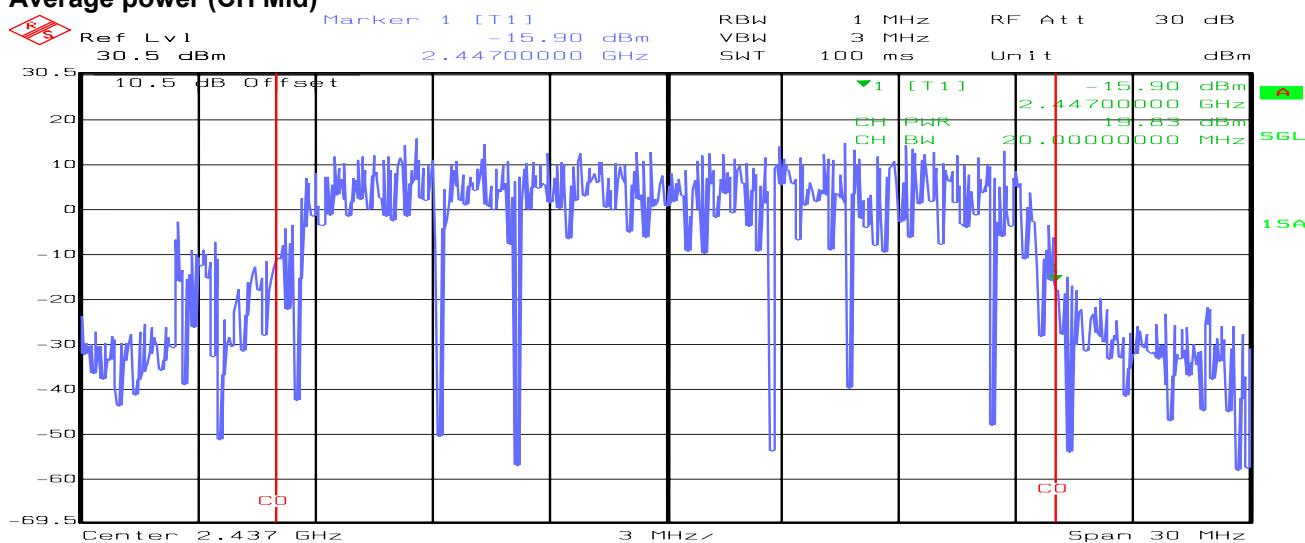
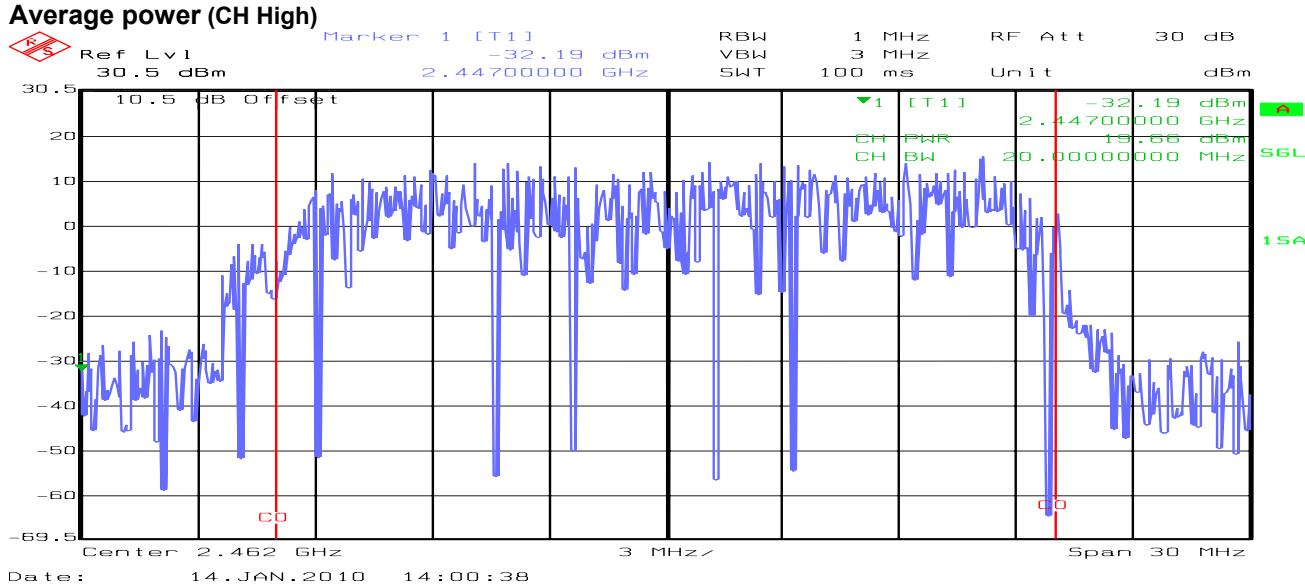
#### Average power (CH Mid)

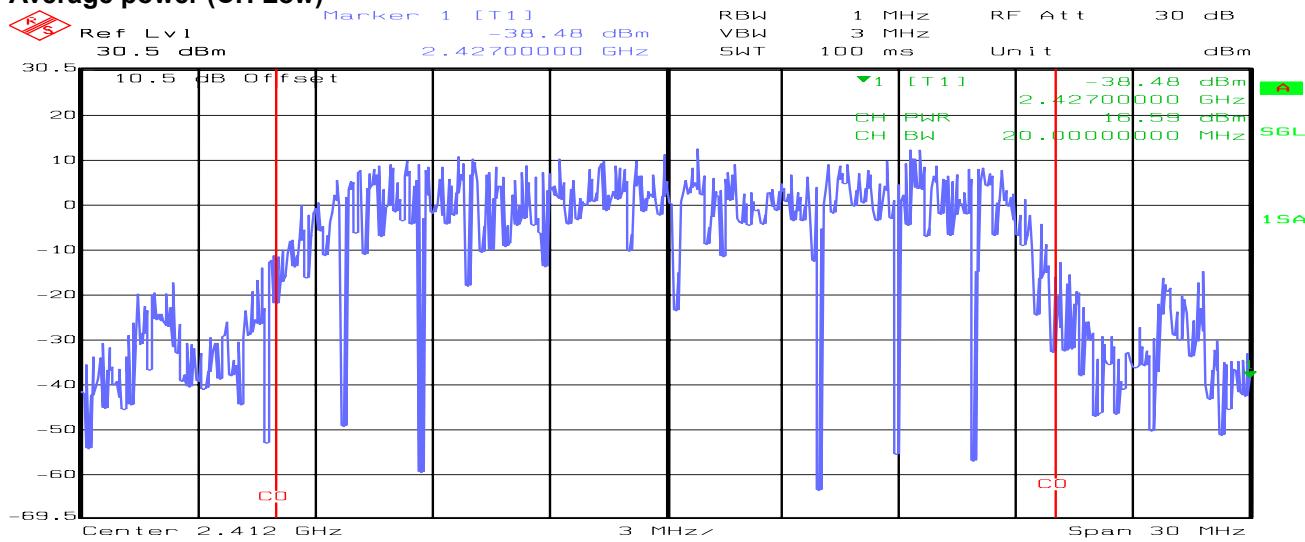


#### Average power (CH High)

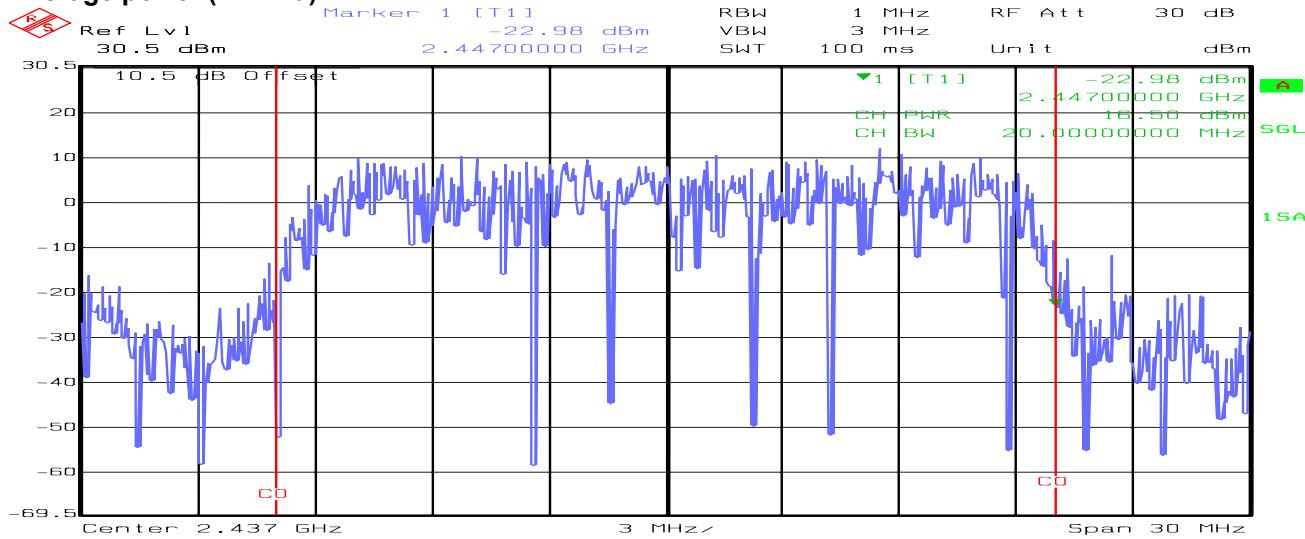


**IEEE 802.11g mode****Average power (CH Low)****Average power (CH Mid)****Average power (CH High)**

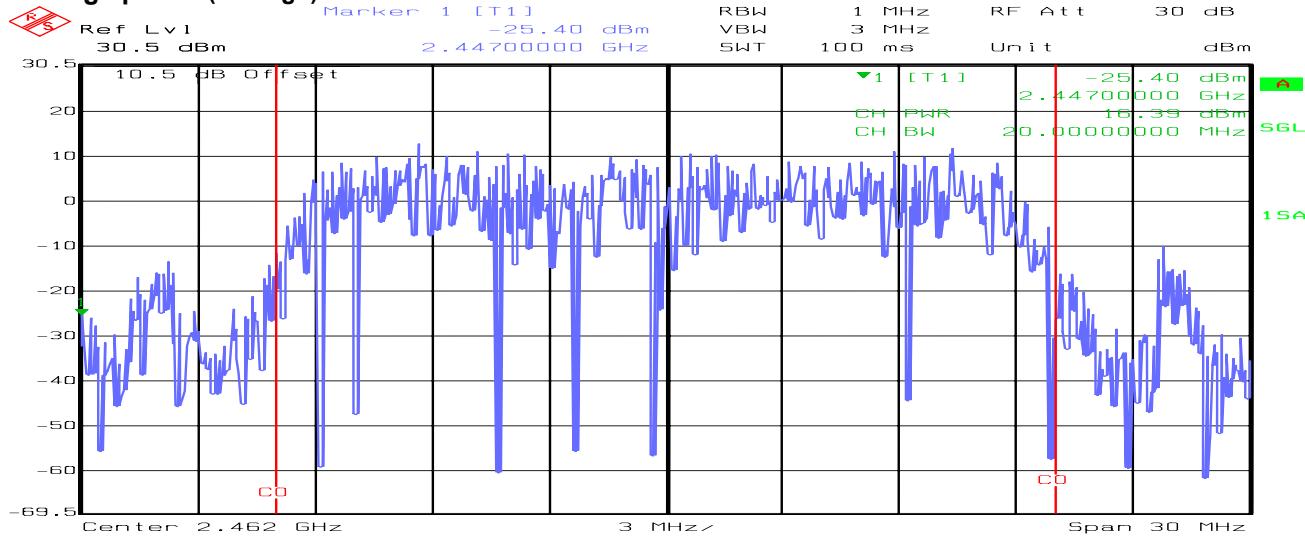
**draft 802.11n 20 MHz Channel mode****Average power (CH Low)****Average power (CH Mid)****Average power (CH High)**

**draft 802.11n 20 MHz Channel mode / Chain 0****Average power (CH Low)**

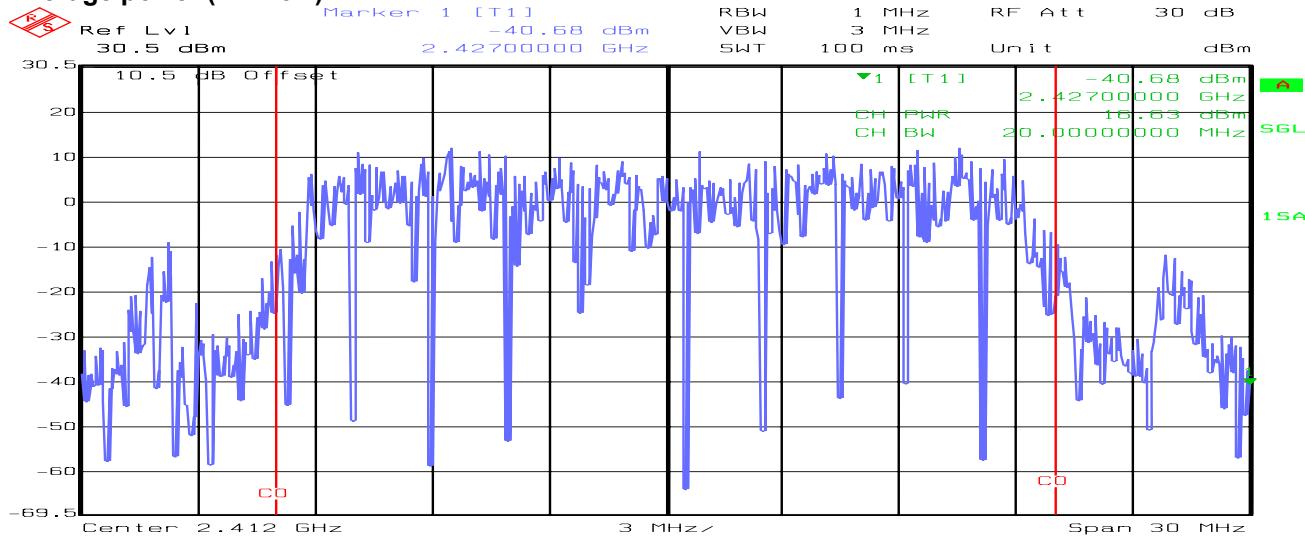
Date: 14.JAN.2010 14:12:05

**Average power (CH Mid)**

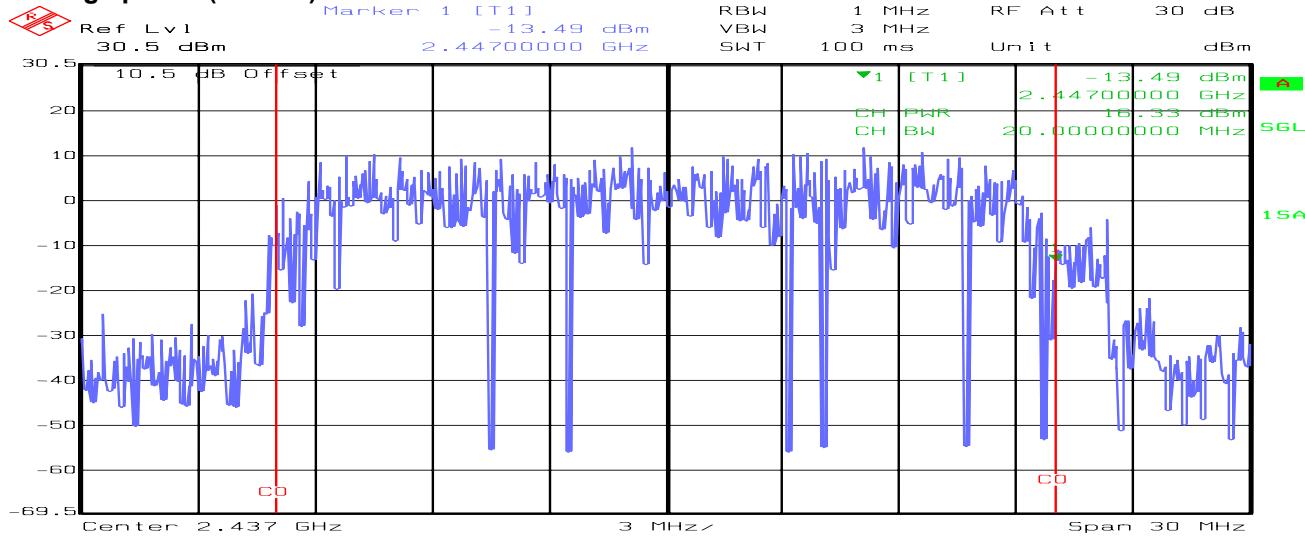
Date: 14.JAN.2010 14:09:04

**Average power (CH High)**

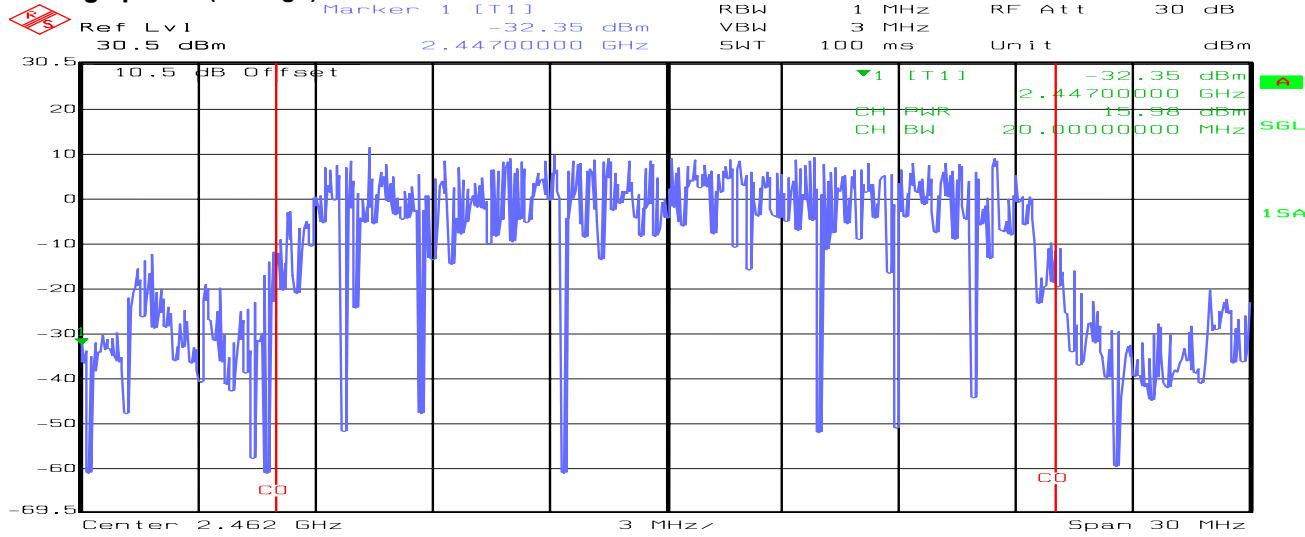
Date: 14.JAN.2010 14:01:24

**draft 802.11n 20 MHz Channel mode / Chain 1****Average power (CH Low)**

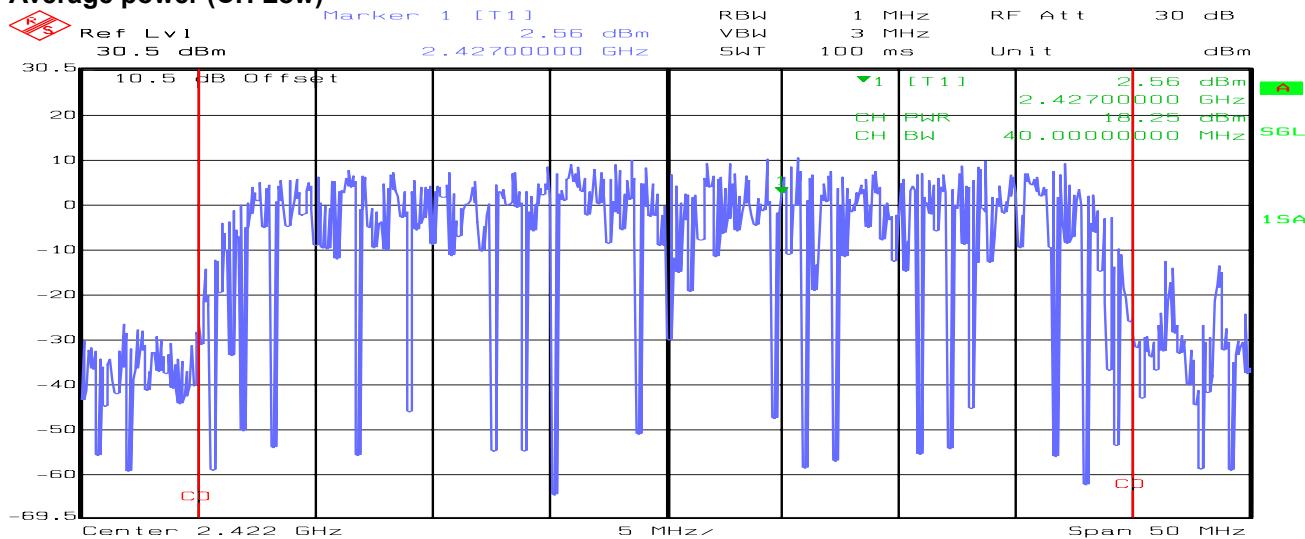
Date: 14.JAN.2010 14:15:38

**Average power (CH Mid)**

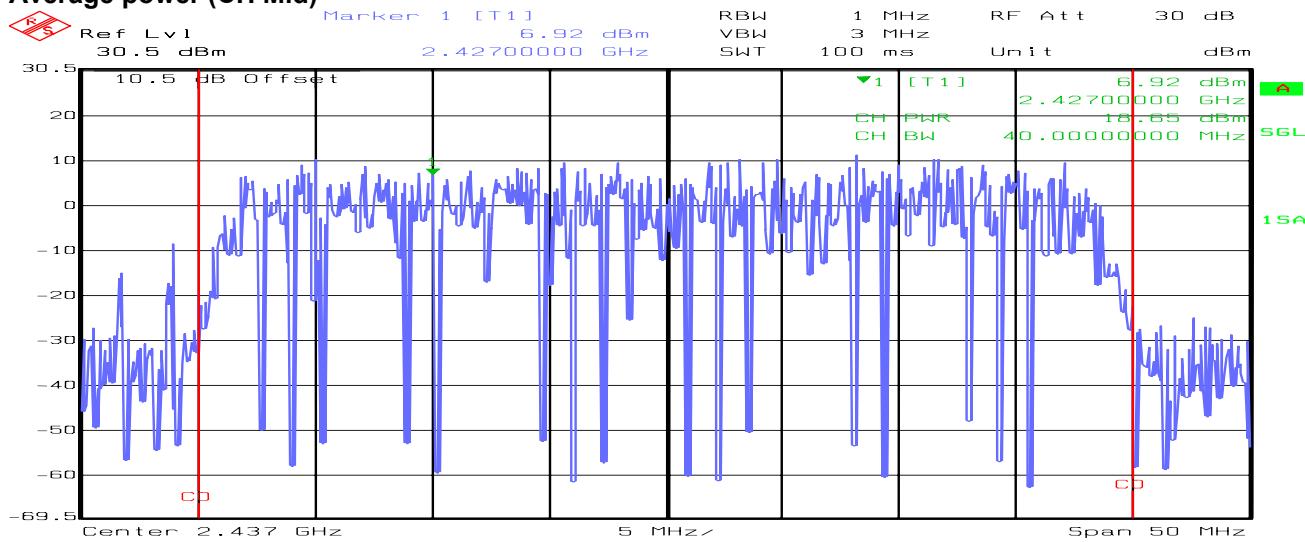
Date: 14.JAN.2010 14:05:45

**Average power (CH High)**

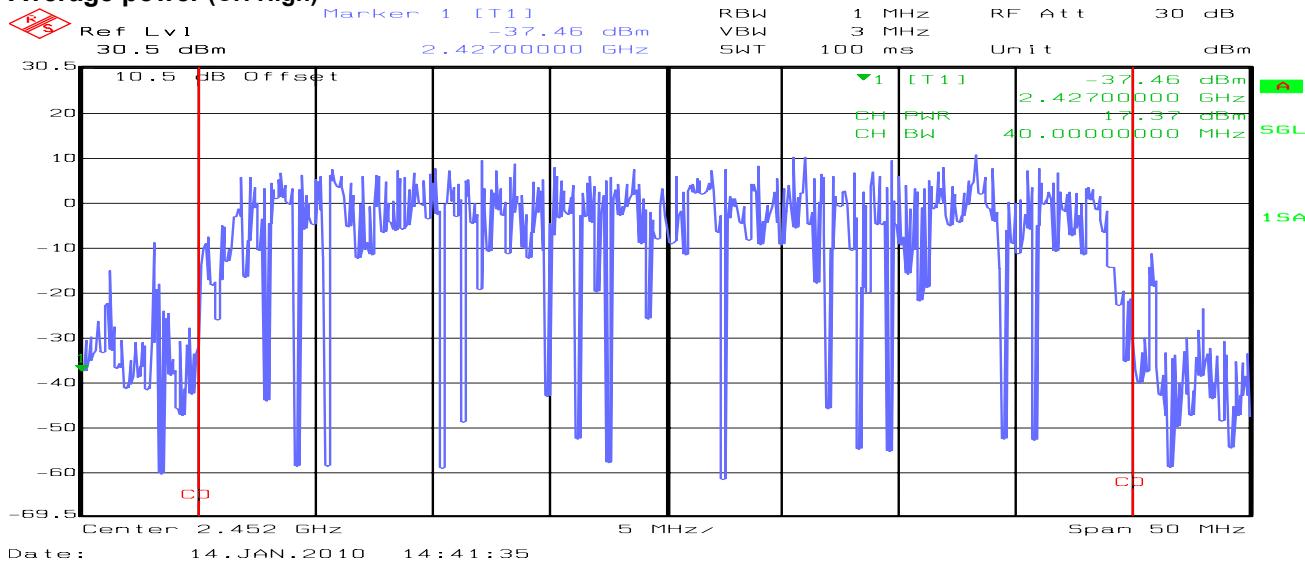
Date: 14.JAN.2010 14:03:53

**draft 802.11n 40 MHz Channel mode****Average power (CH Low)**

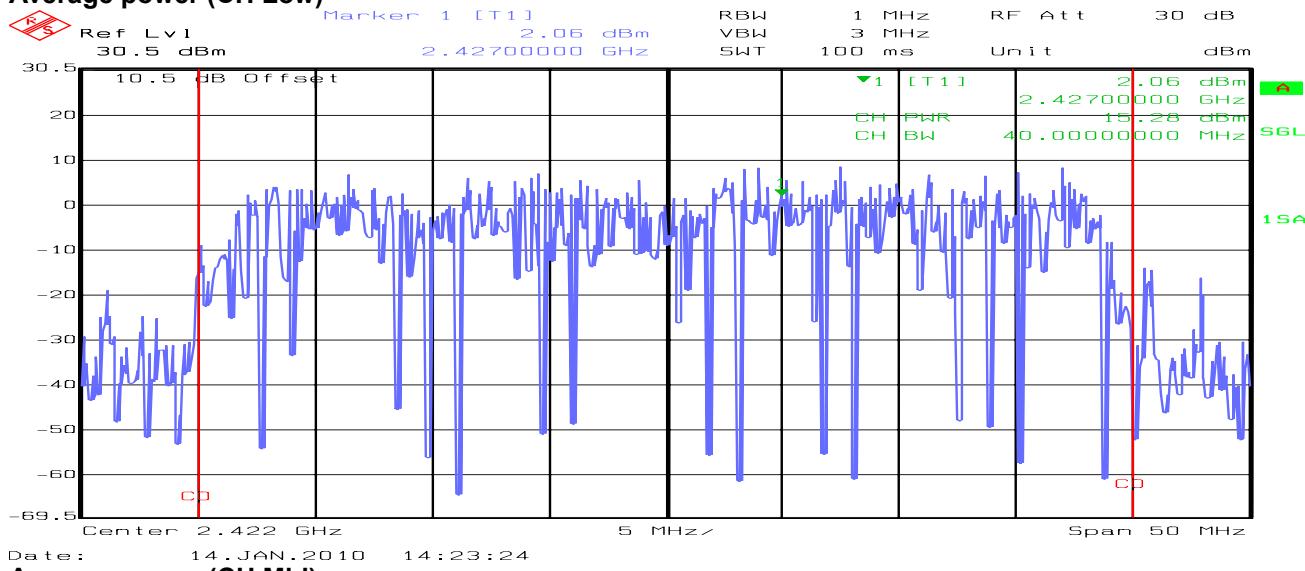
Date: 14.JAN.2010 14:22:28

**Average power (CH Mid)**

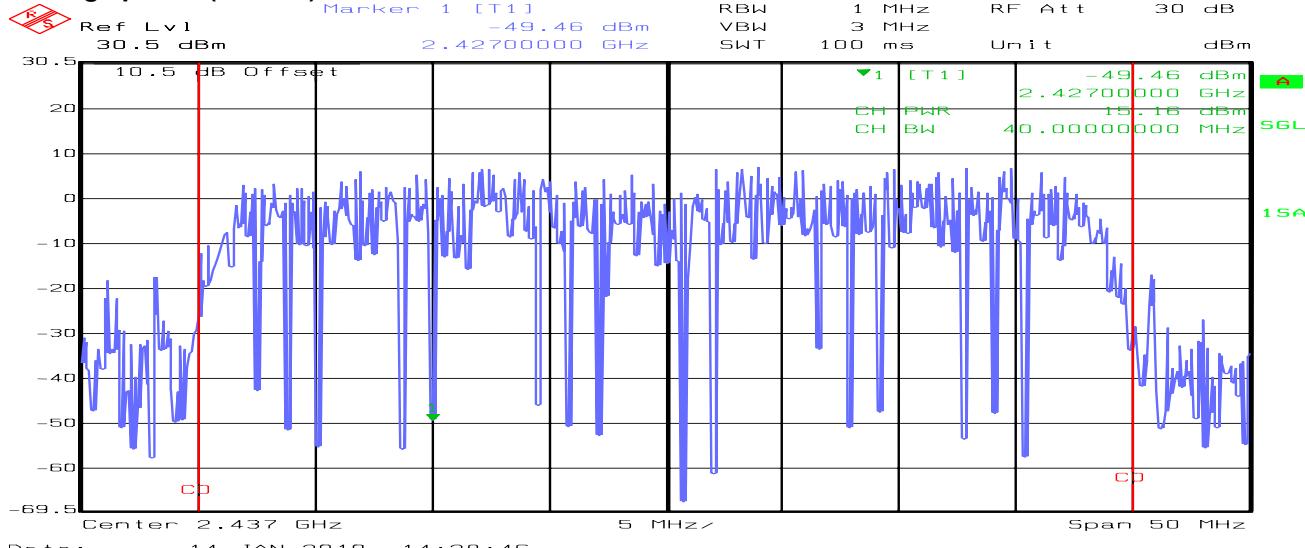
Date: 14.JAN.2010 14:30:09

**Average power (CH High)**

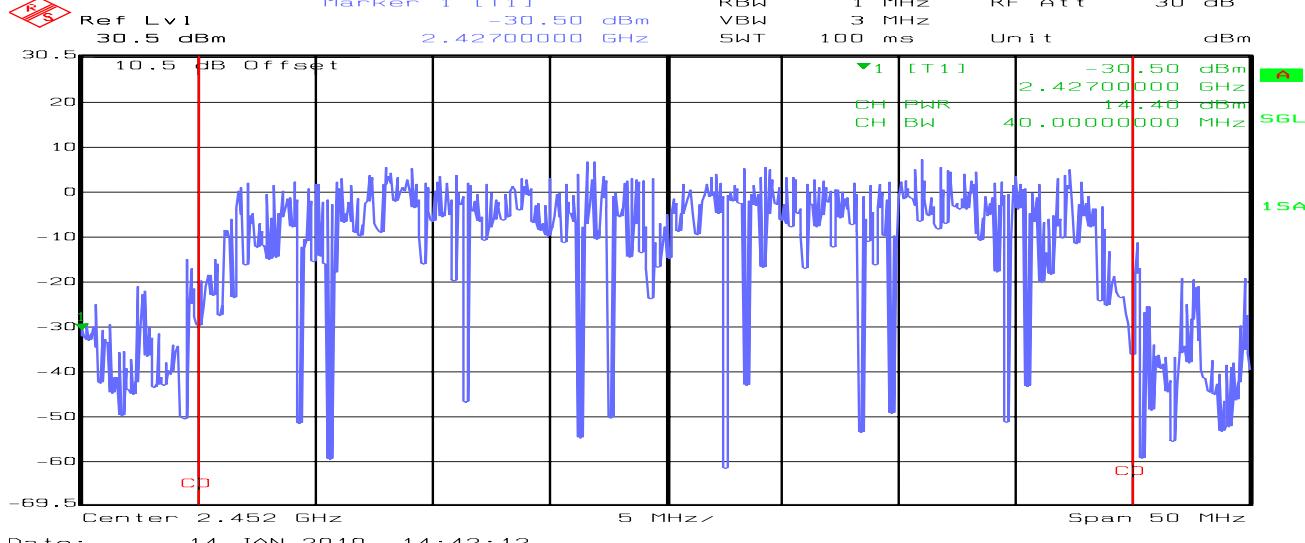
Date: 14.JAN.2010 14:41:35

**draft 802.11n 40 MHz Channel mode / Chain 0****Average power (CH Low)**

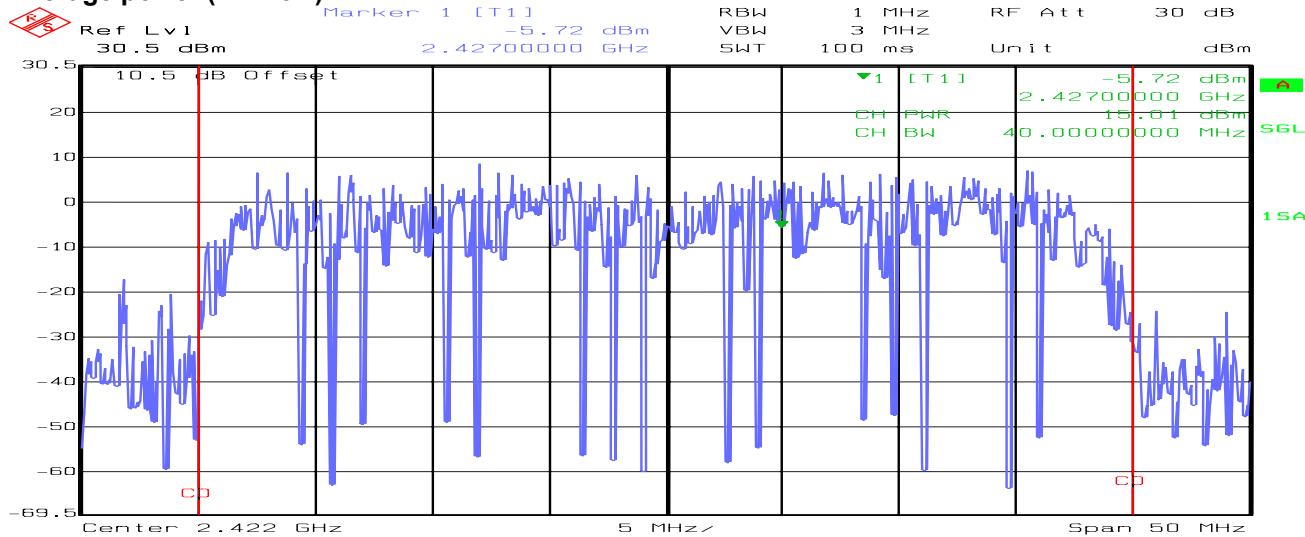
Date: 14.JAN.2010 14:23:24

**Average power (CH Mid)**

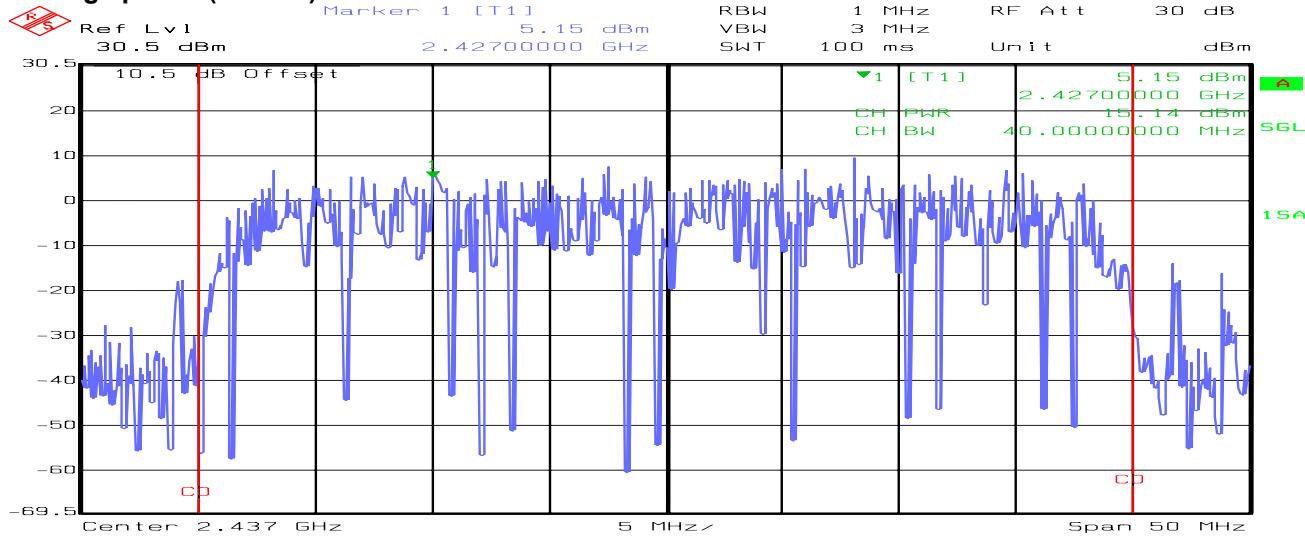
Date: 14.JAN.2010 14:28:46

**Average power (CH High)**

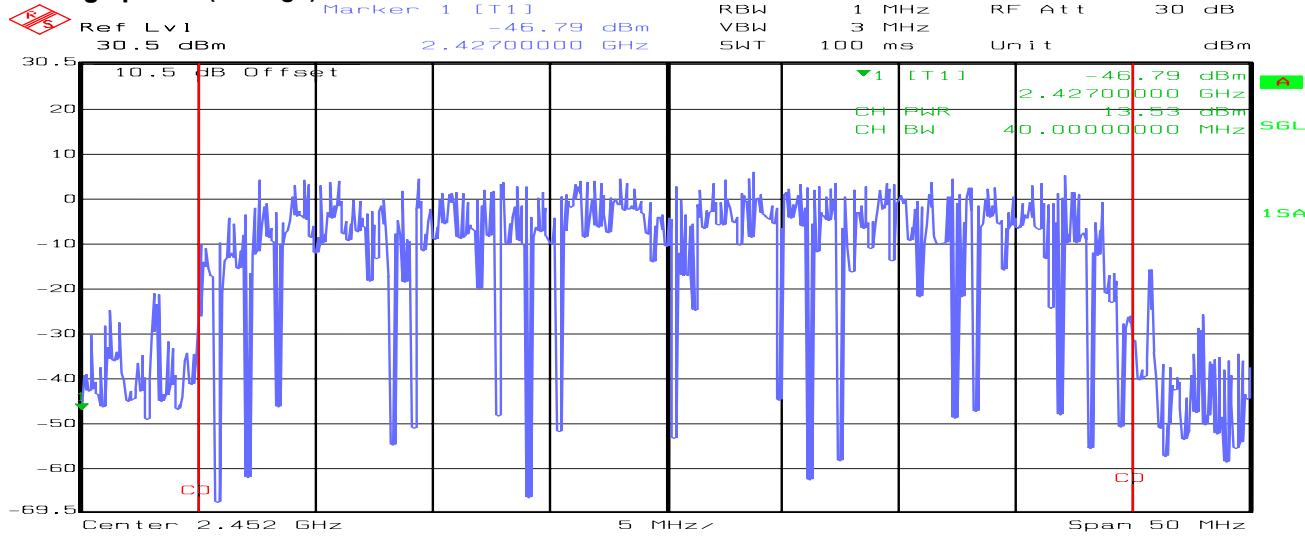
Date: 14.JAN.2010 14:42:12

**draft 802.11n 40 MHz Channel mode / Chain 1****Average power (CH Low)**

Date: 14.JAN.2010 14:19:36

**Average power (CH Mid)**

Date: 14.JAN.2010 14:35:02

**Average power (CH High)**

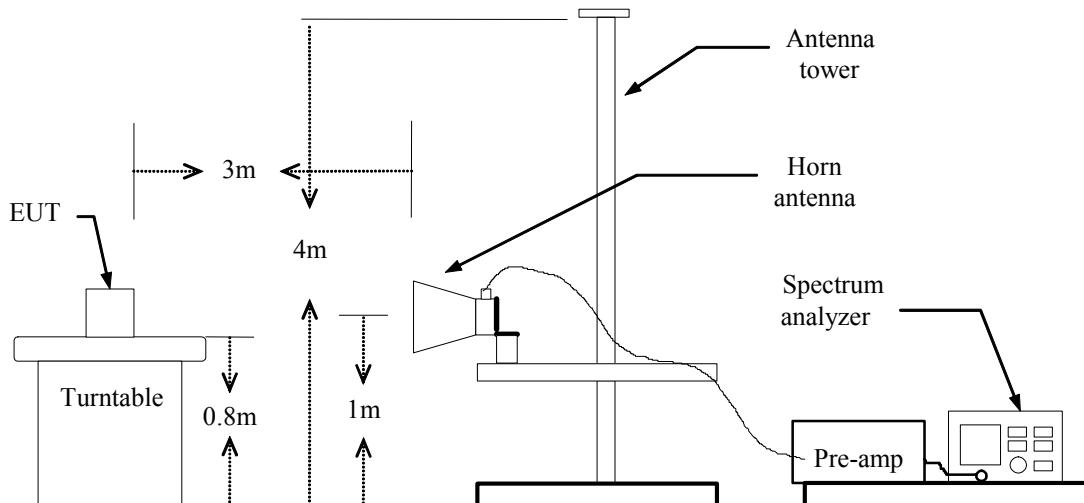
Date: 14.JAN.2010 14:38:10

## 7.4. BAND EDGES MEASUREMENT

### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the Peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### TEST CONFIGURATION



### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=100MHz
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### TEST RESULTS

Refer to attach spectrum analyzer data chart.

## Test Plot

### Band Edges (IEEE 802.11b mode / CH Low)

Detector mode: Peak

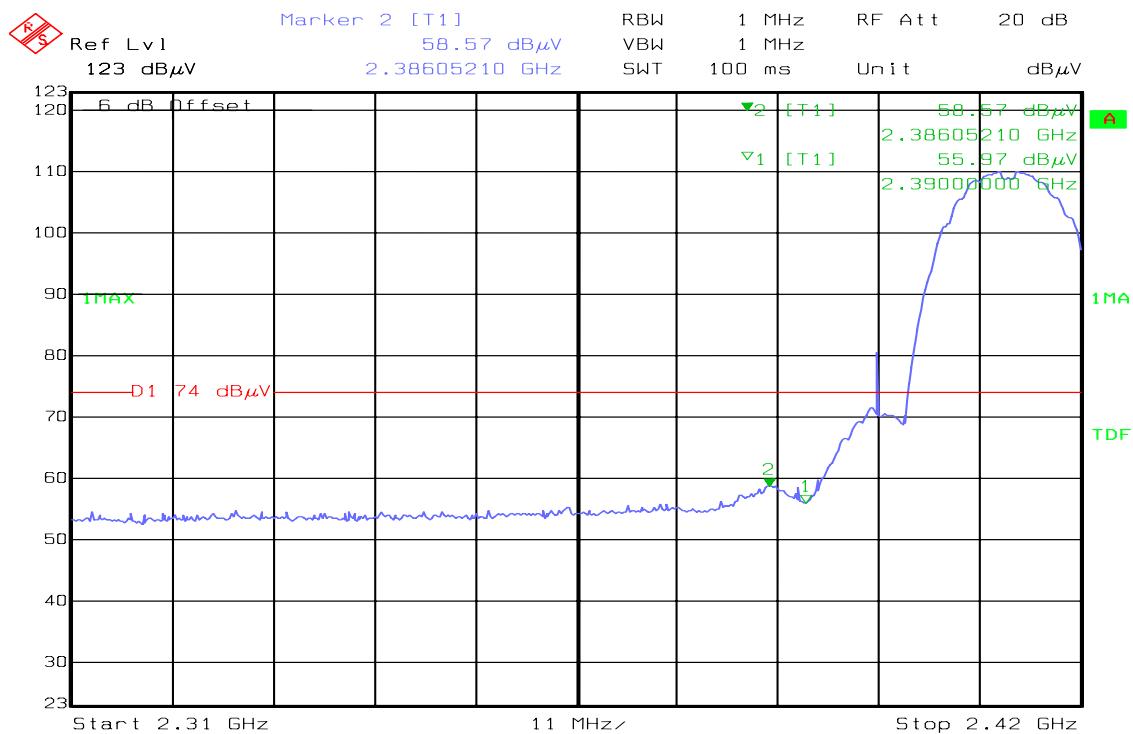
Polarity: Vertical



Detector mode: Average

Polarity: Vertical



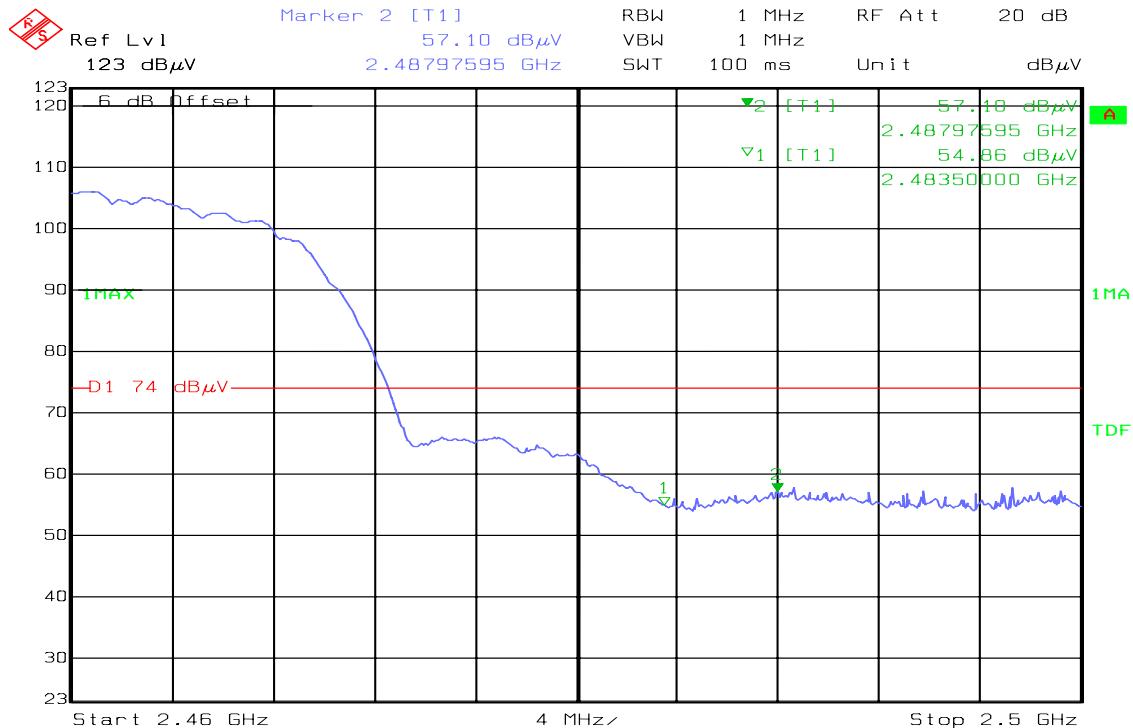
**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**



## Band Edges (IEEE 802.11b mode / CH High)

Detector mode: Peak

Polarity: Vertical



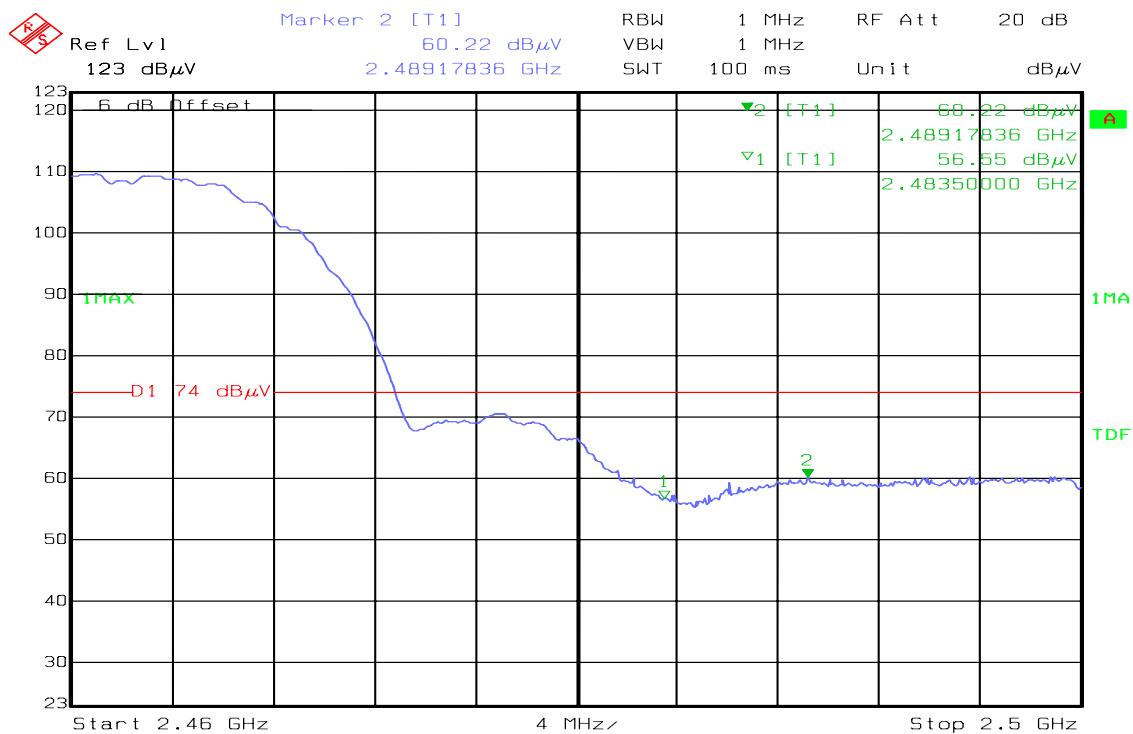
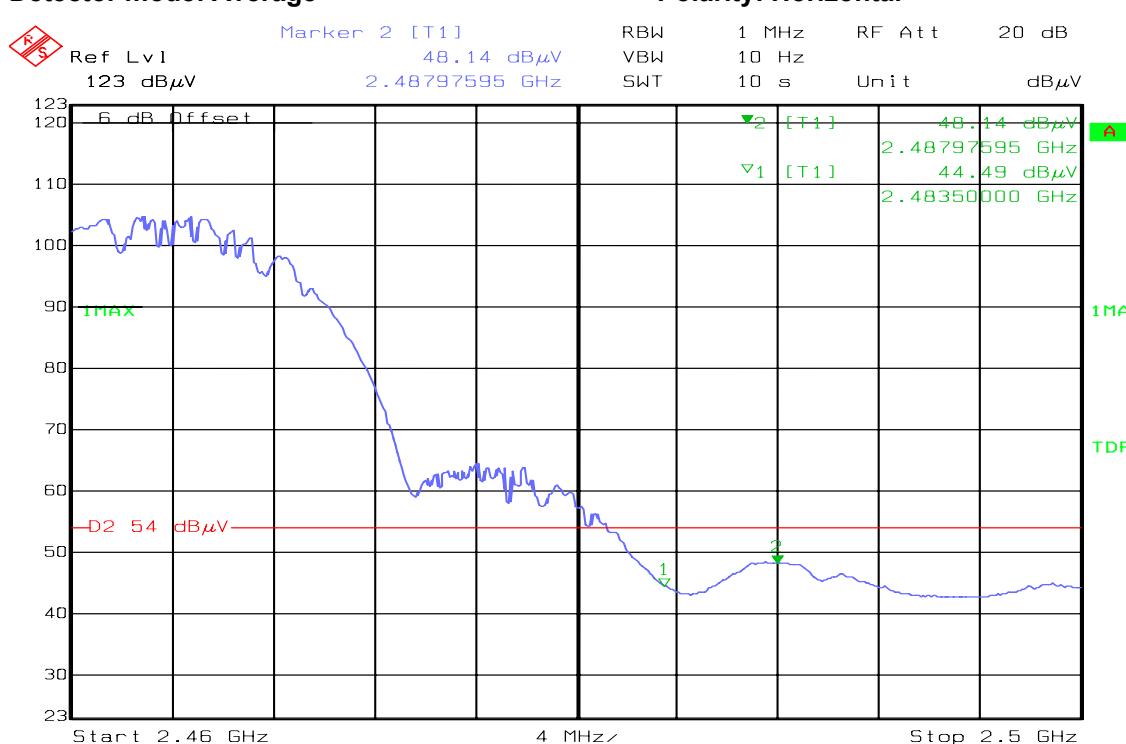
Date: 14.JAN.2010 11:34:39

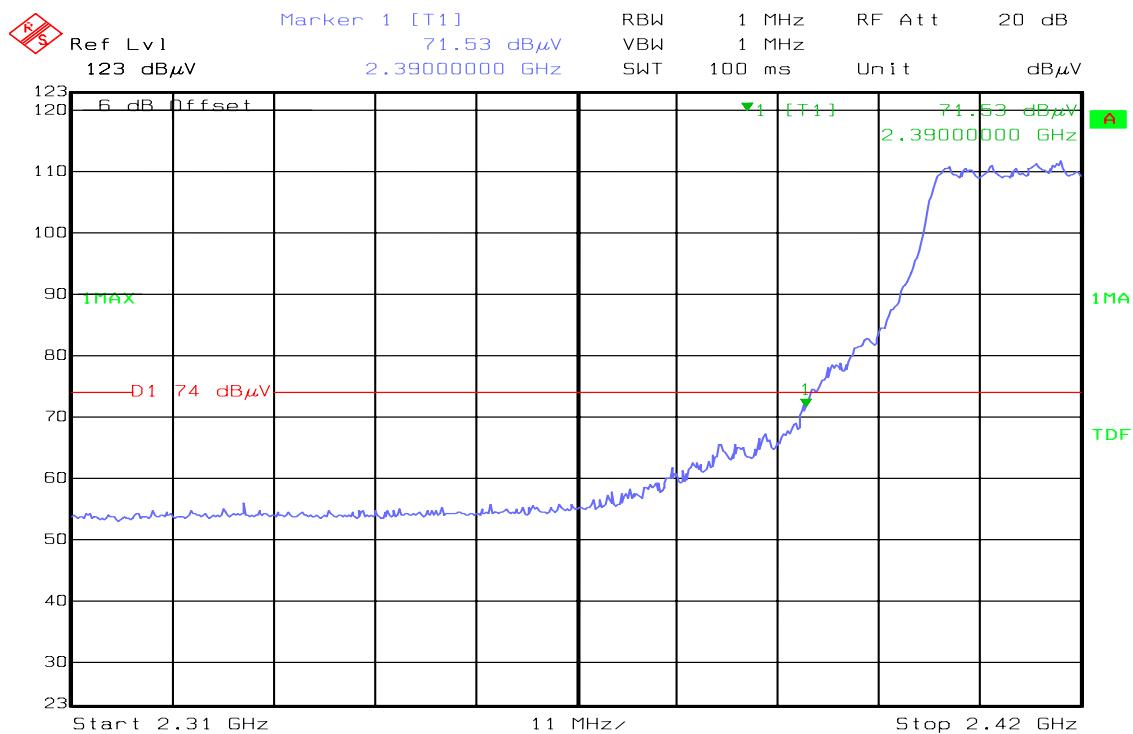
Detector mode: Average

Polarity: Vertical

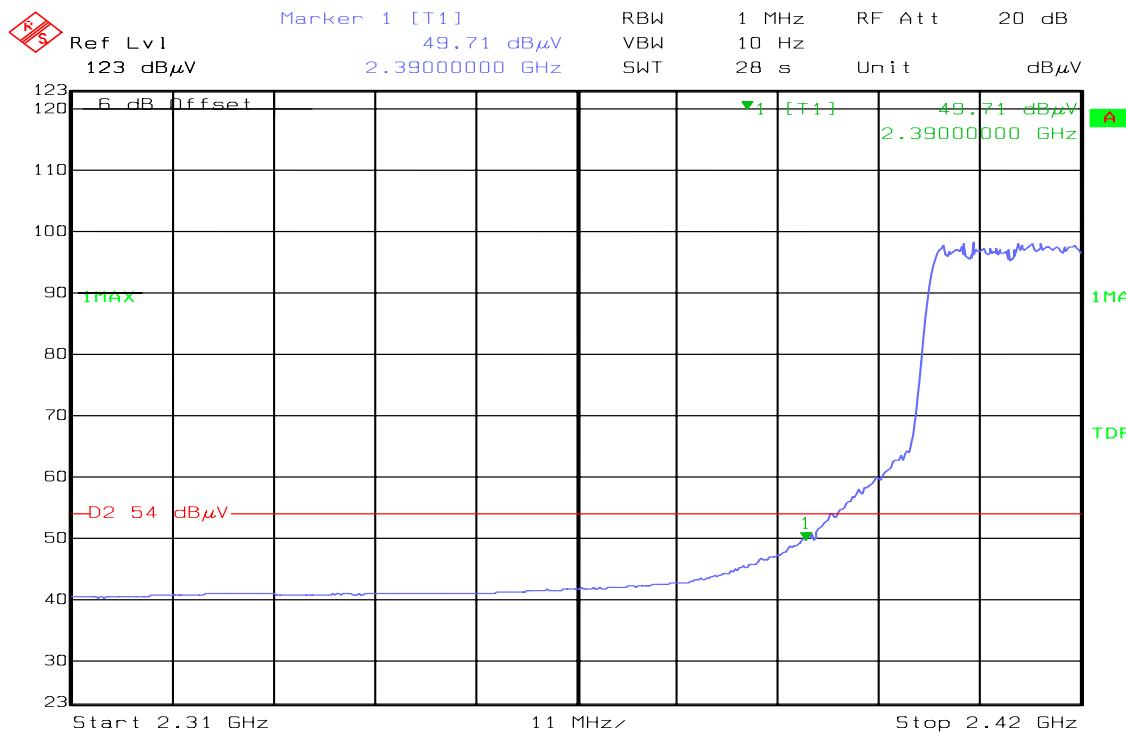


Date: 14.JAN.2010 11:35:55

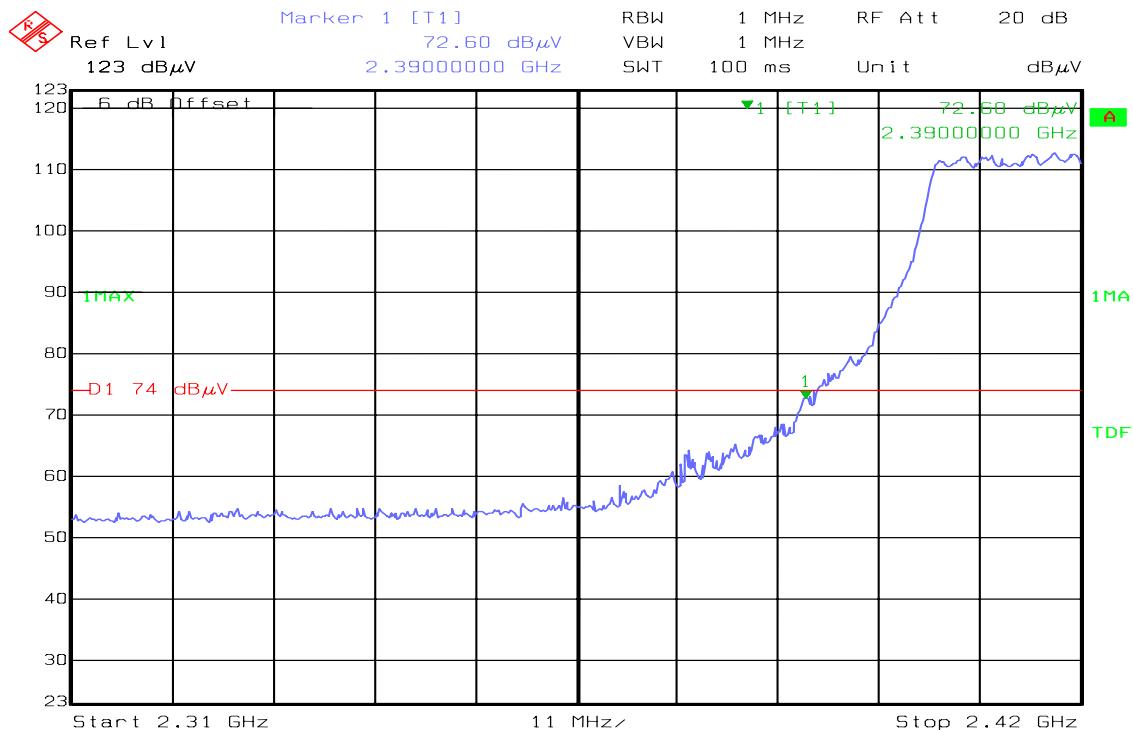
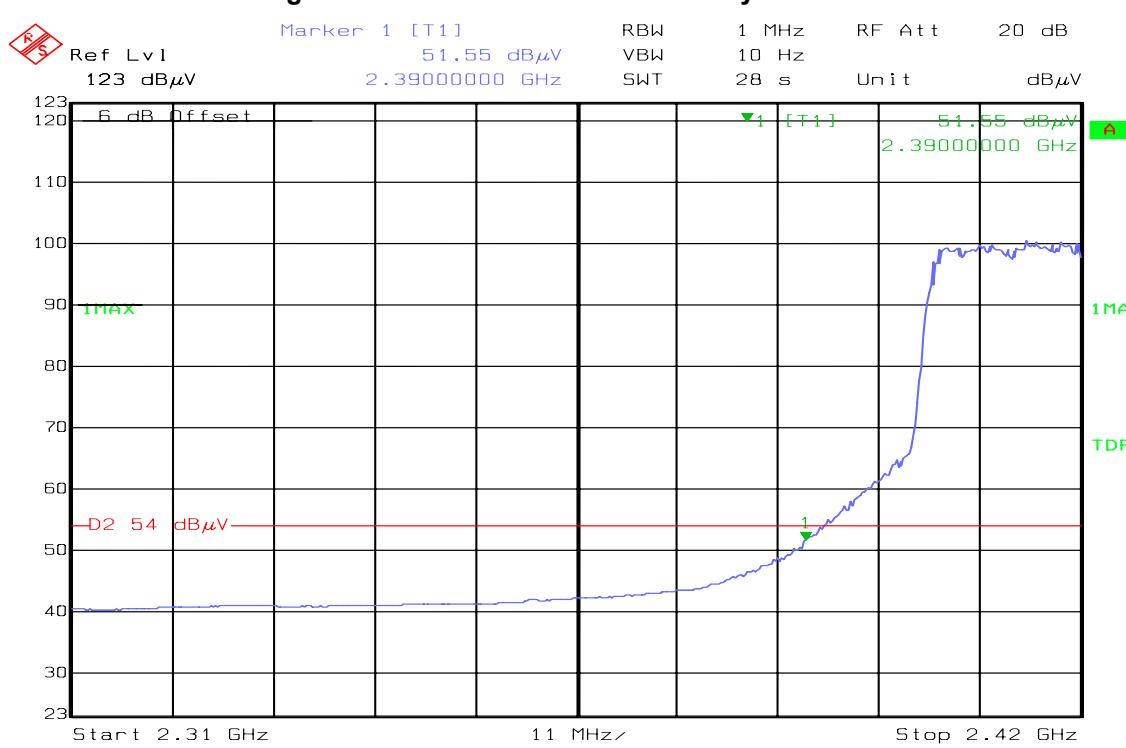
**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**

**Band Edges (IEEE 802.11g mode / CH Low)****Detector mode: Peak****Polarity: Vertical**

Date: 14.JAN.2010 10:12:47

**Detector mode: Average****Polarity: Vertical**

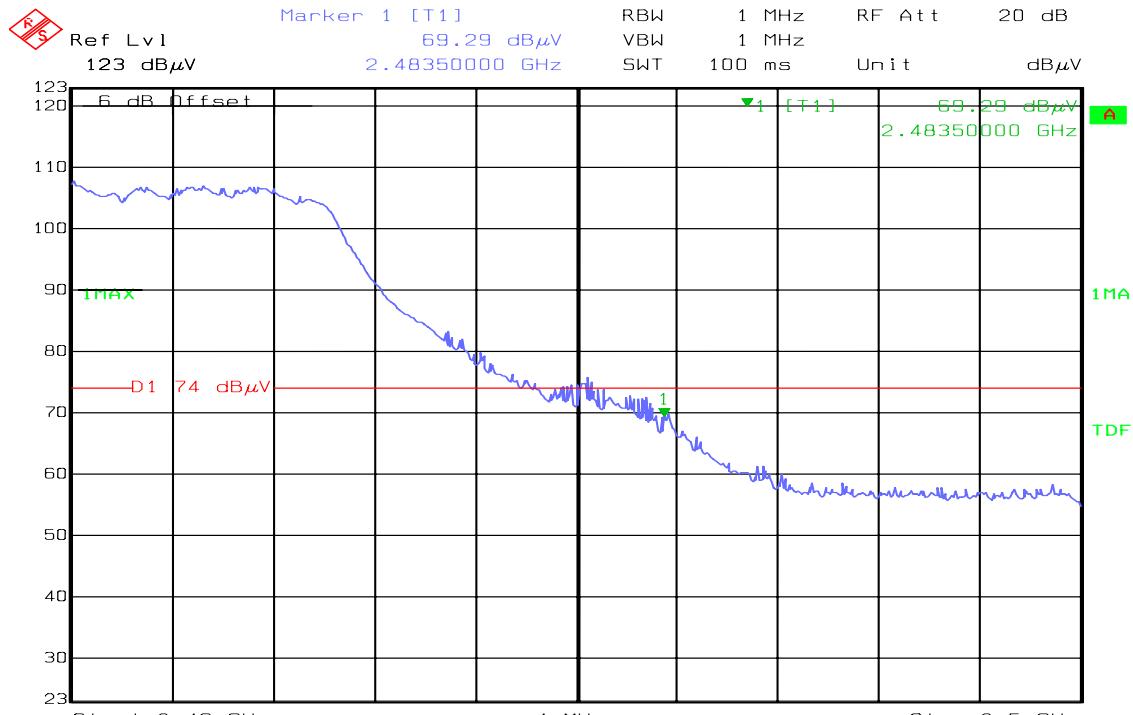
Date: 14.JAN.2010 10:13:52

**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**

## Band Edges (IEEE 802.11g mode / CH High)

## Detector mode: Peak

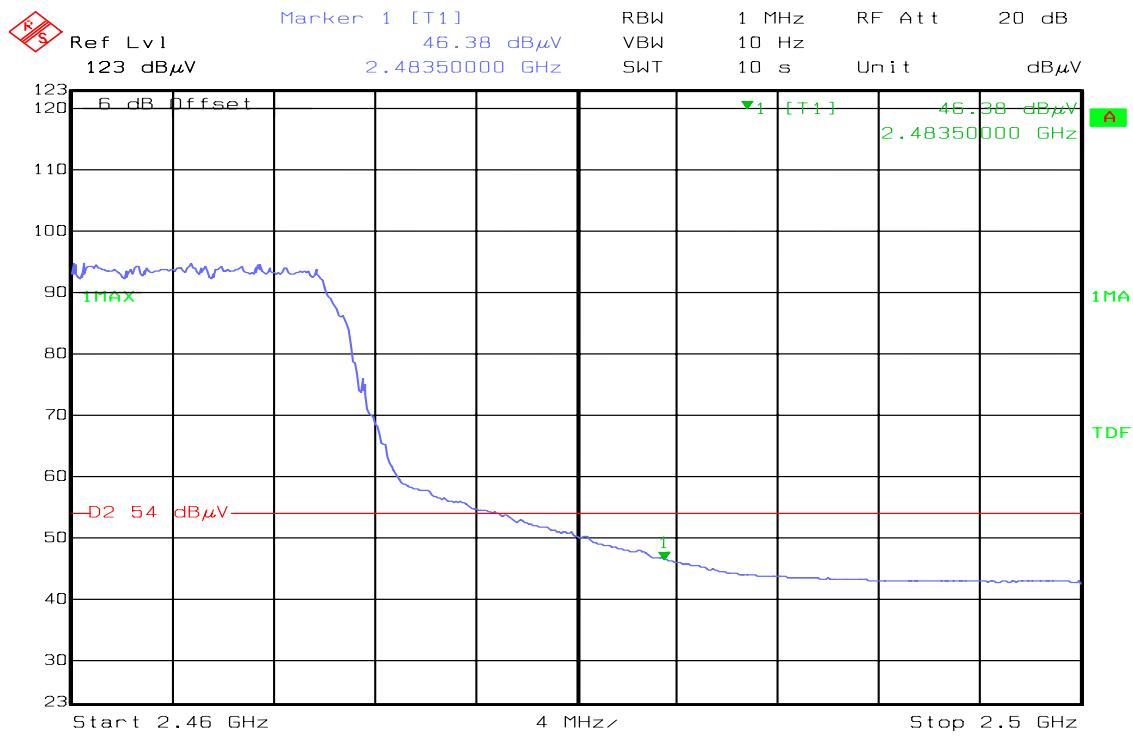
## Polarity: Vertical



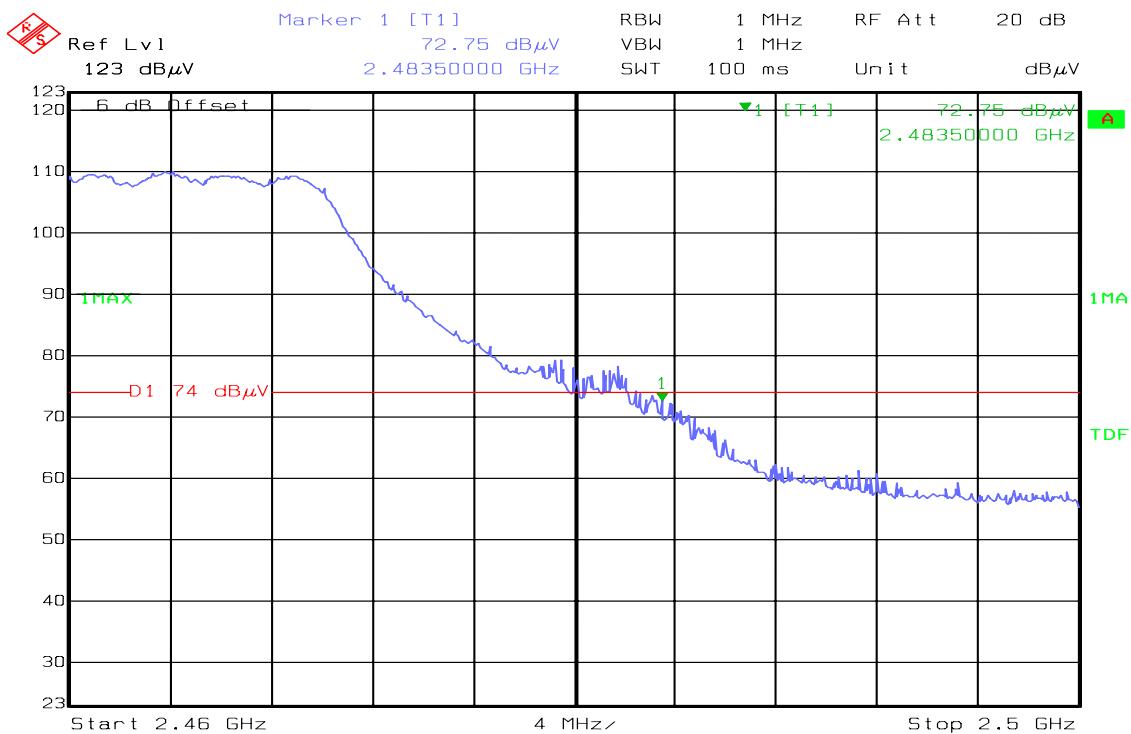
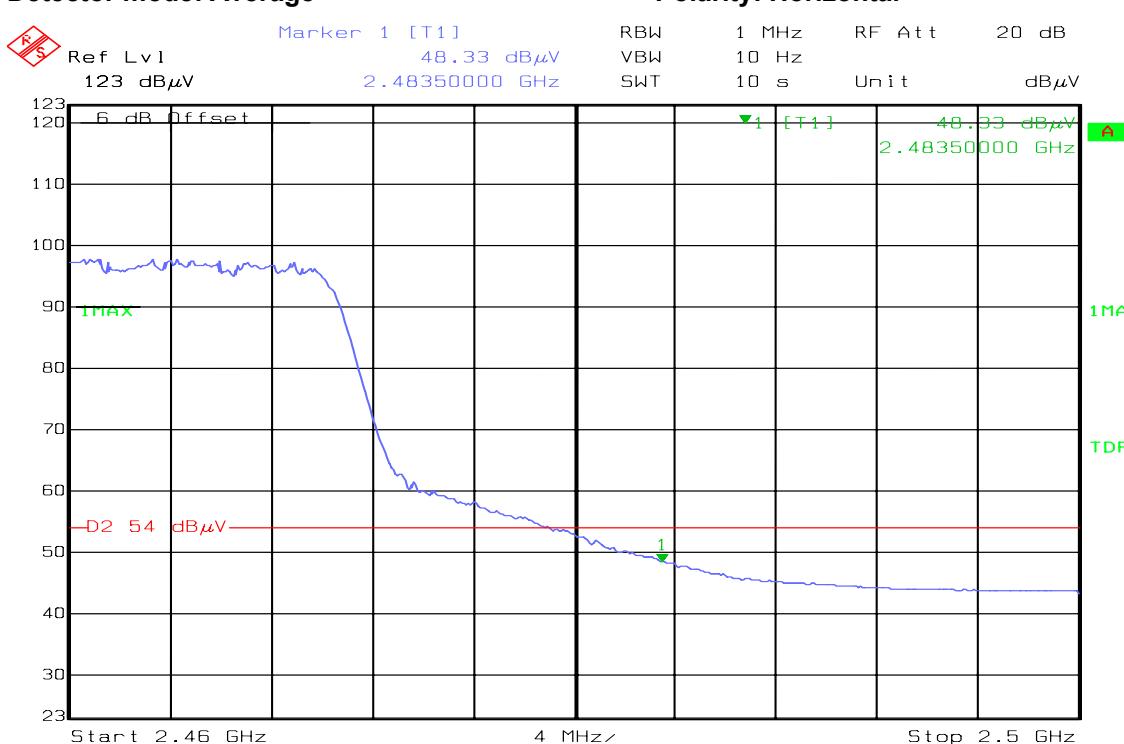
Date: 14.JAN.2010 11:24:55

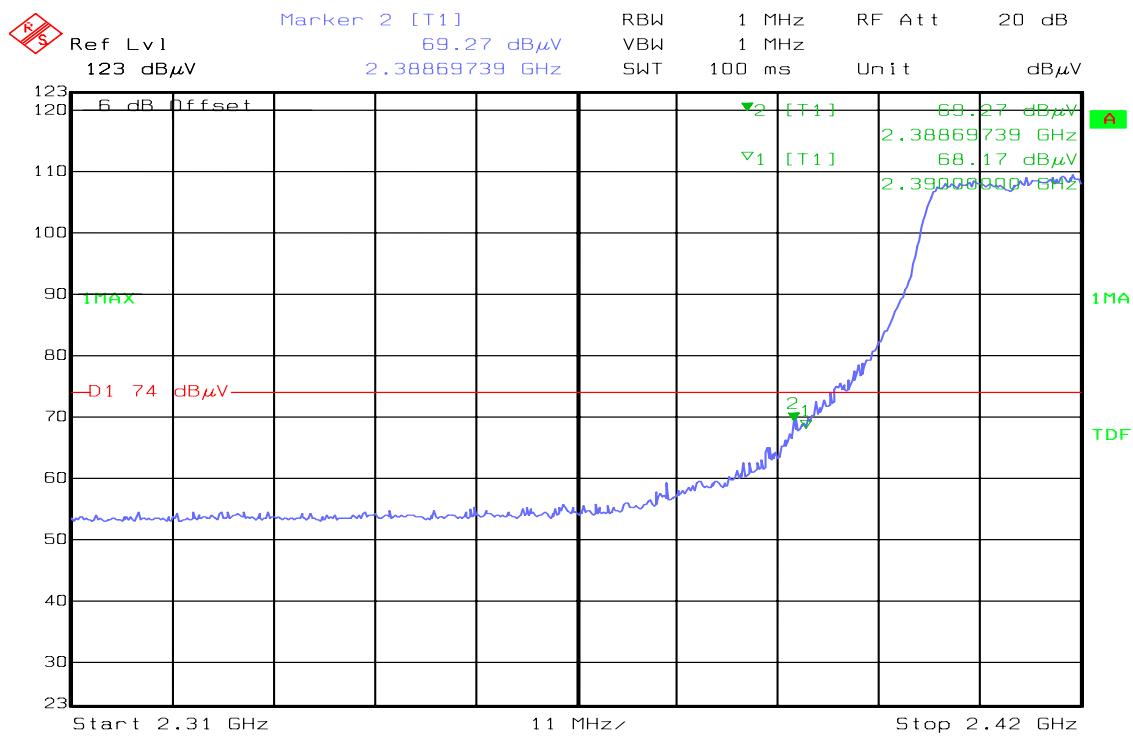
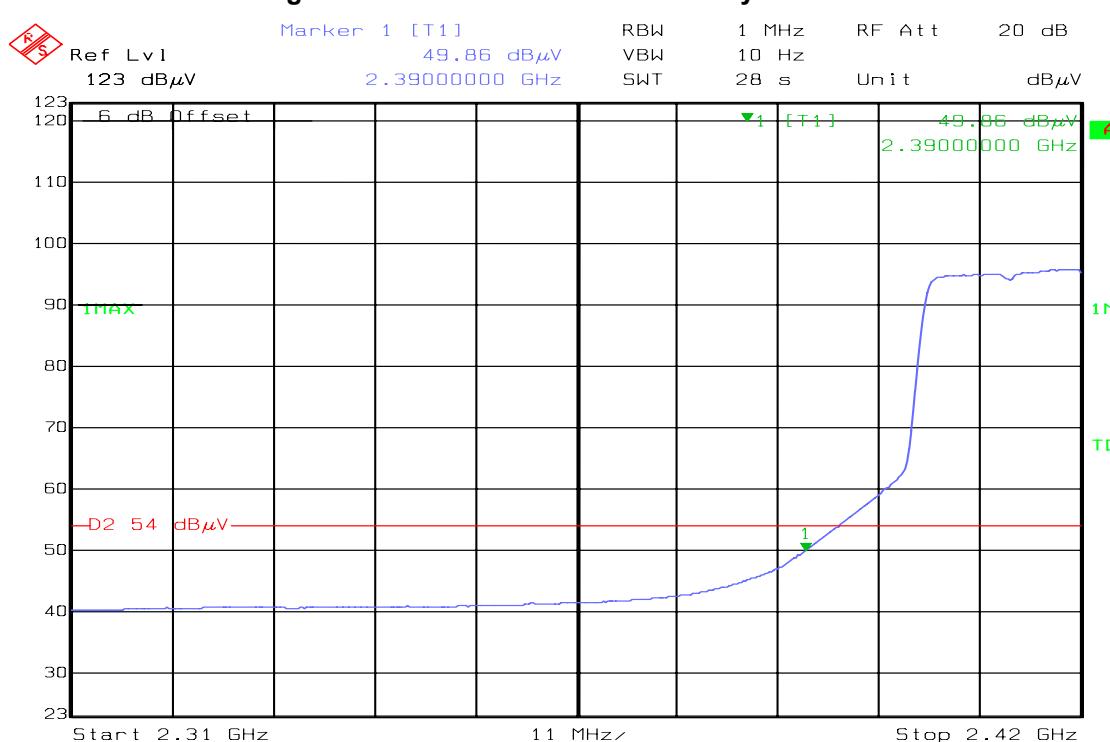
## Detector mode: Average

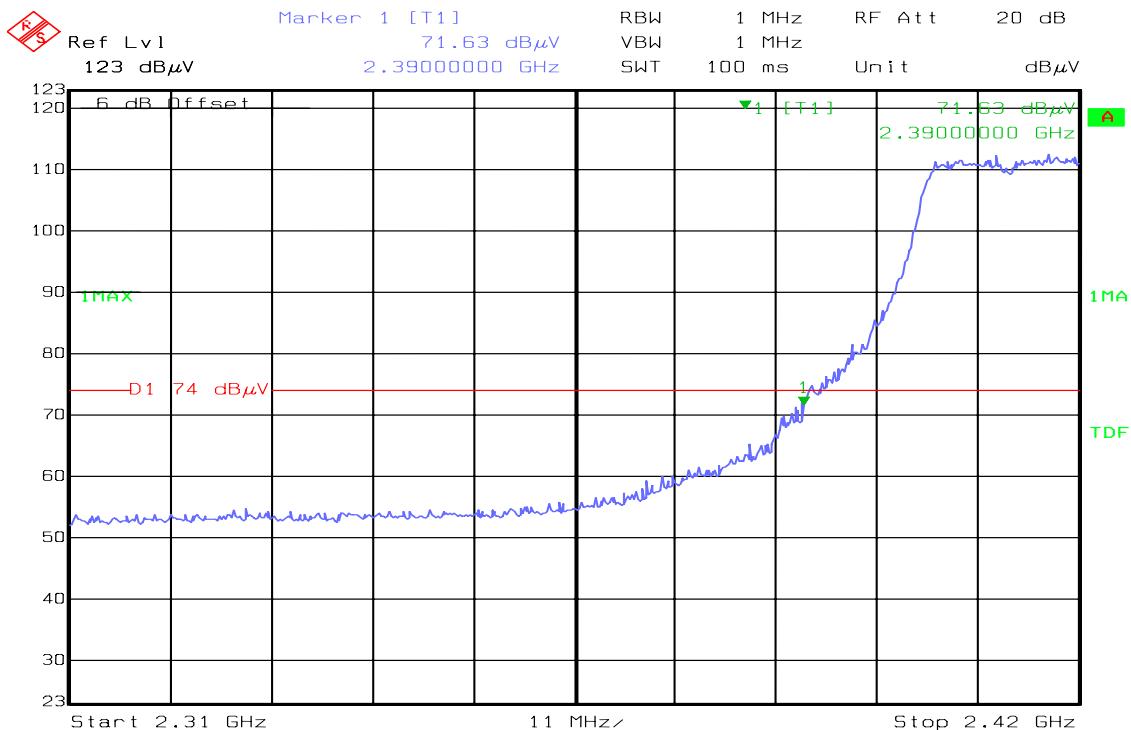
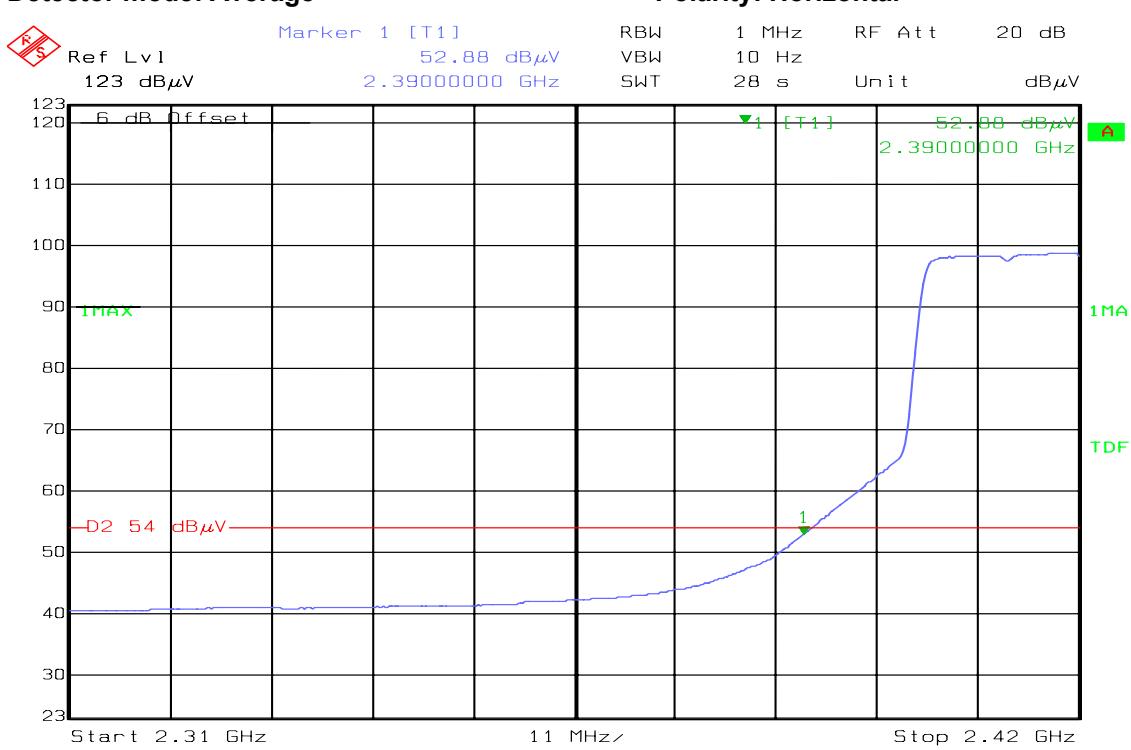
## Polarity: Vertical

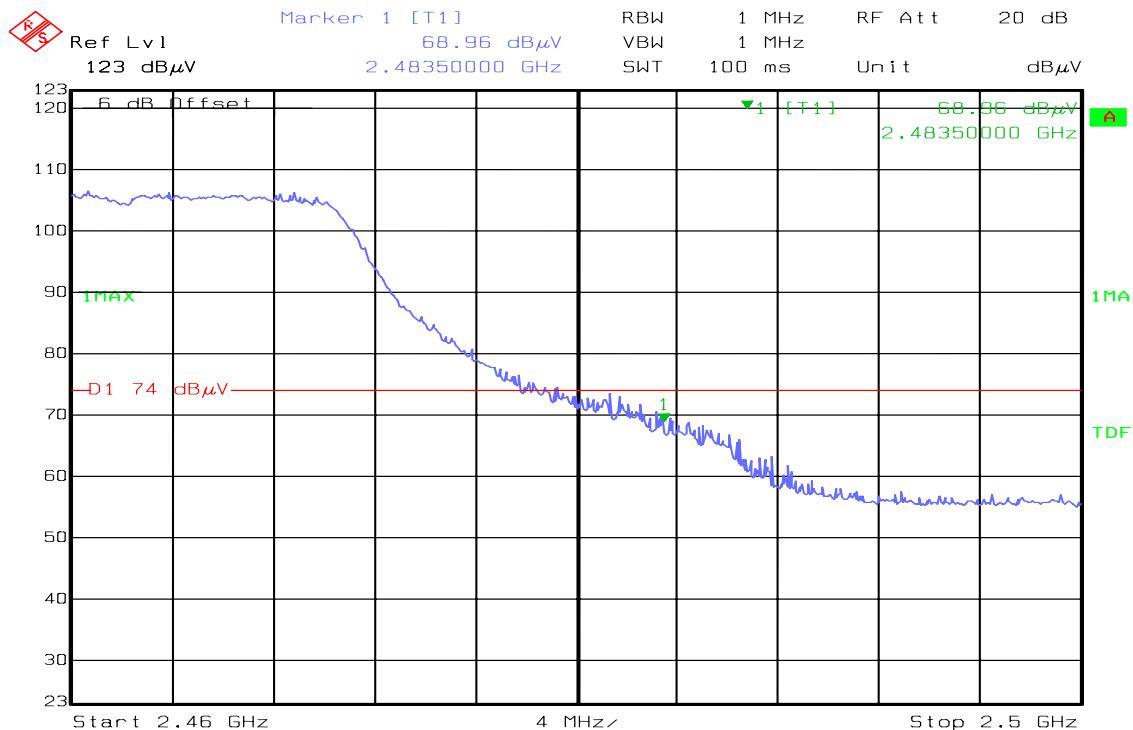


Date: 14.JAN.2010 11:26:23

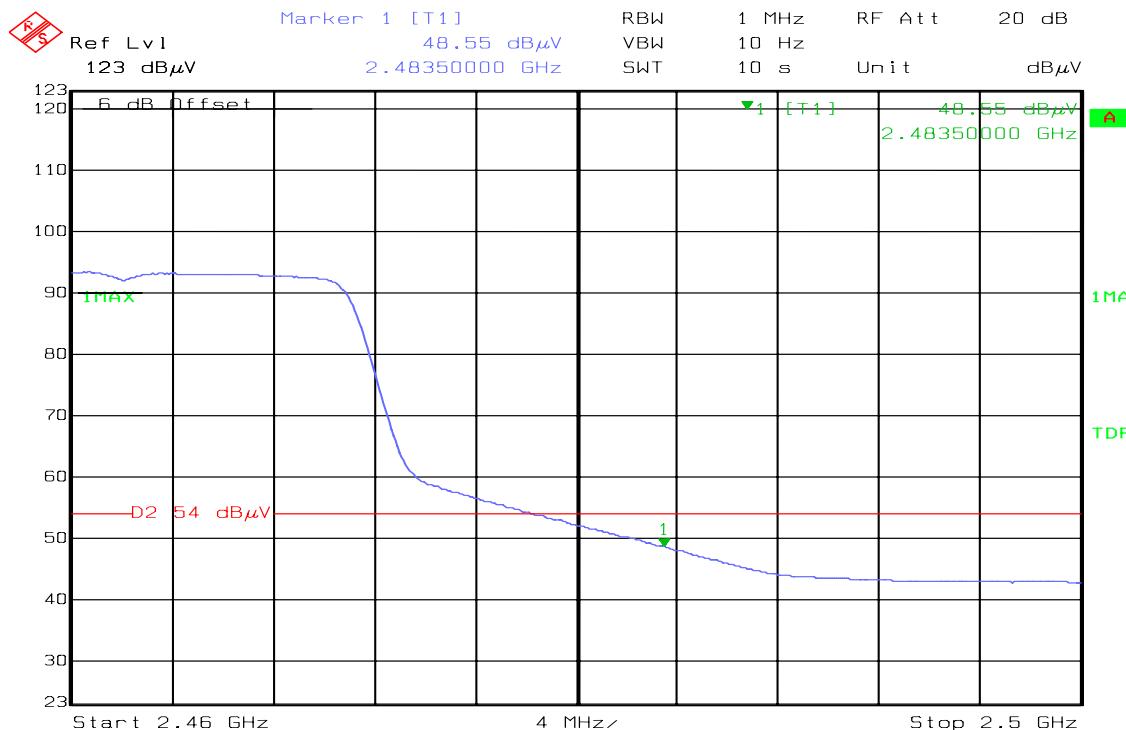
**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**

**Band Edges (draft 802.11n 20 MHz Channel mode / CH Low)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

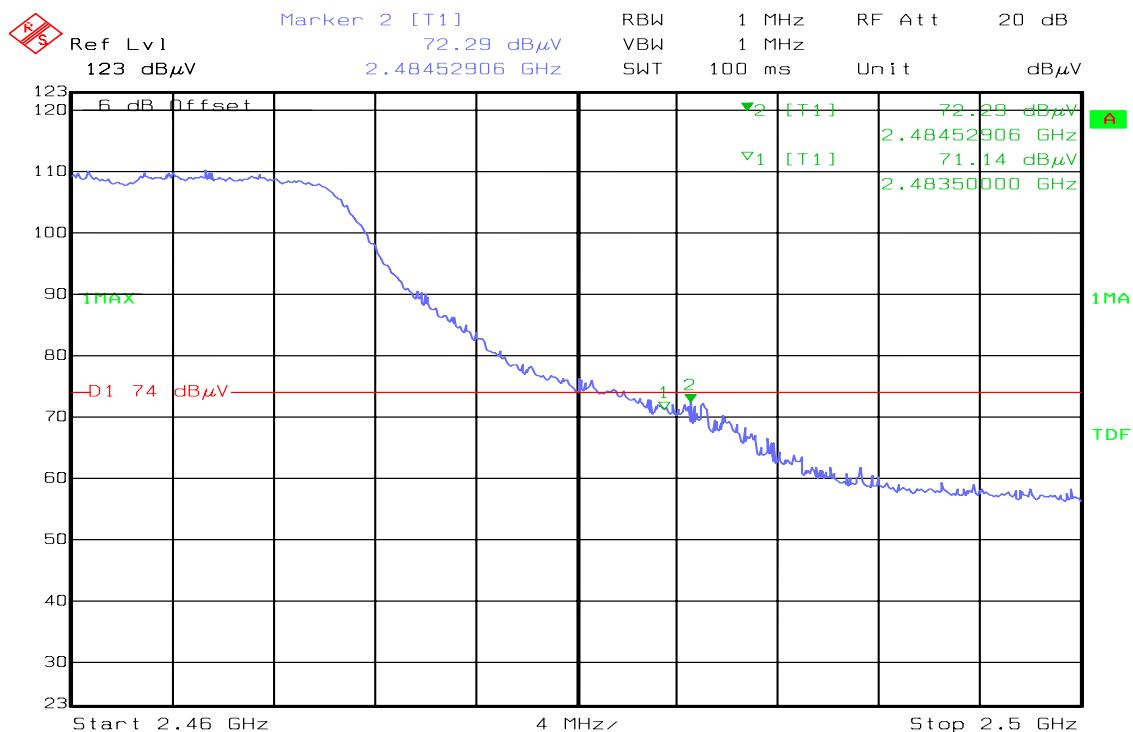
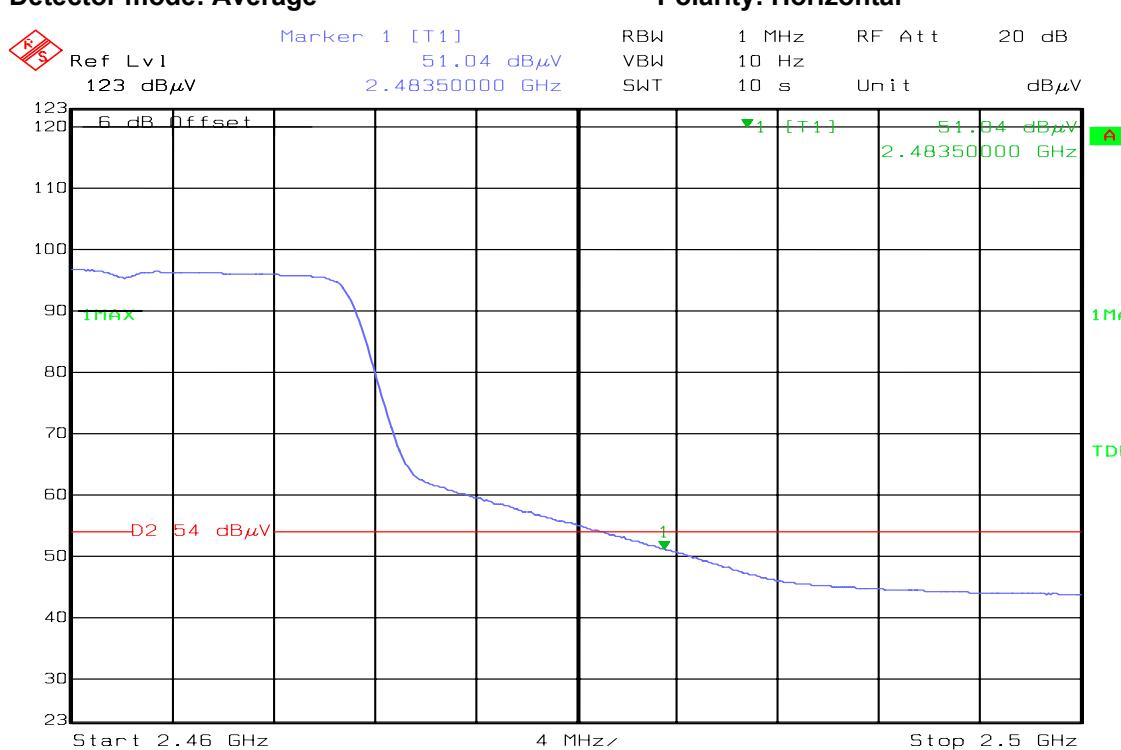
**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**

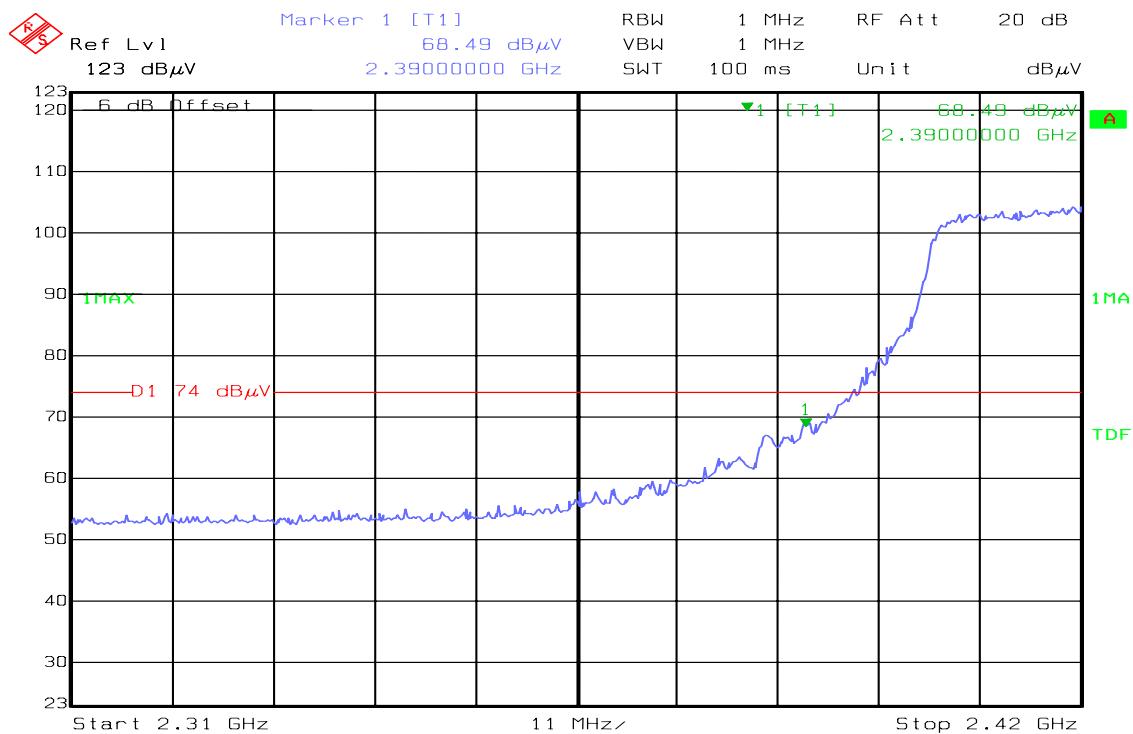
**Band Edges (draft 802.11n 20 MHz Channel mode / CH High)****Detector mode: Peak****Polarity: Vertical**

Date: 14.JAN.2010 11:47:00

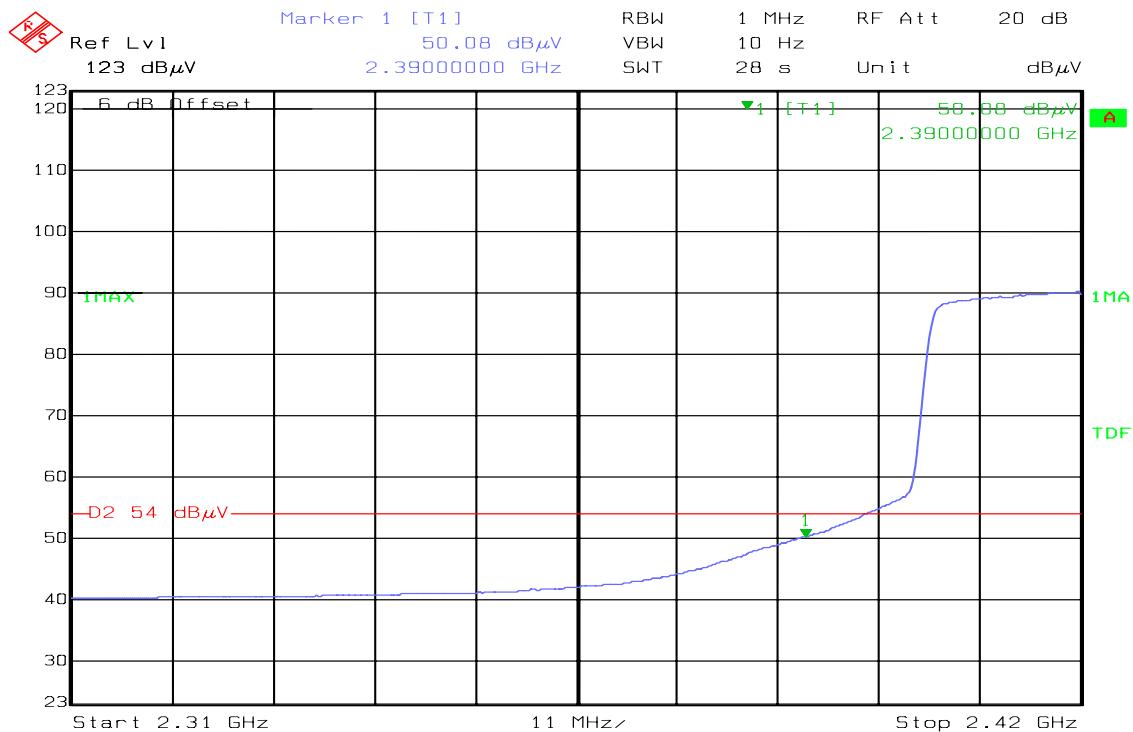
**Detector mode: Average****Polarity: Vertical**

Date: 14.JAN.2010 11:49:02

**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**

**Band Edges (draft 802.11n 40 MHz Channel mode / CH Low)****Detector mode: Peak****Polarity: Vertical**

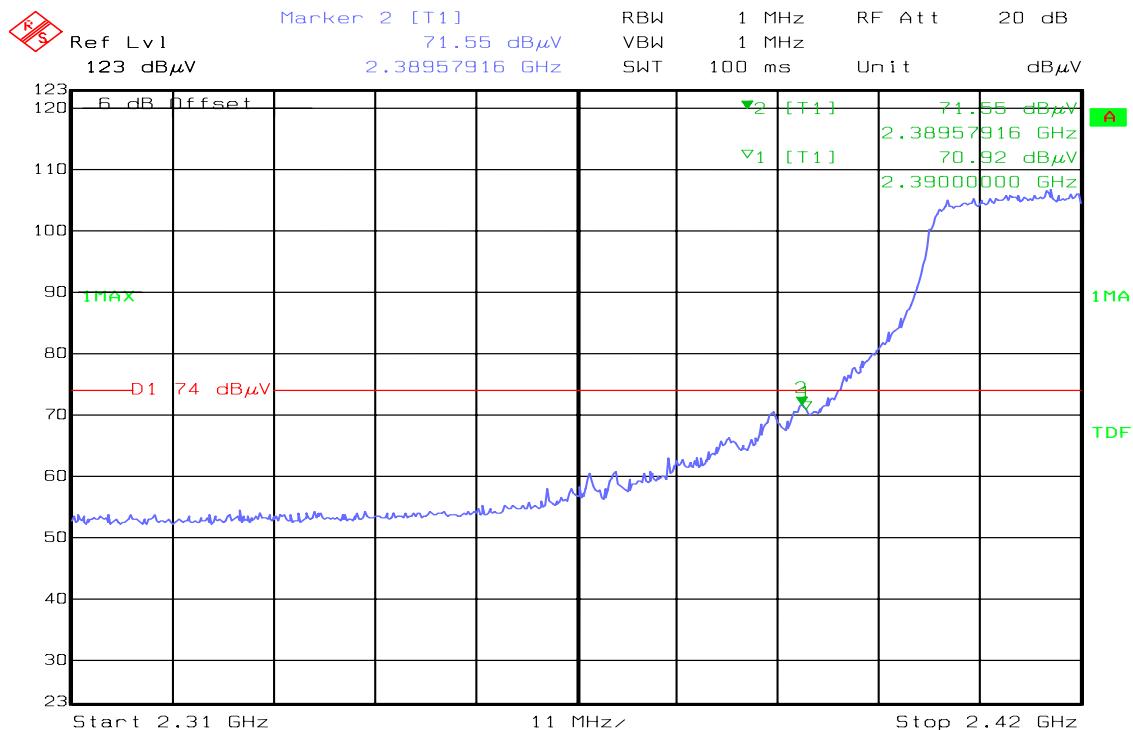
Date: 14.JAN.2010 10:57:51

**Detector mode: Average****Polarity: Vertical**

Date: 14.JAN.2010 10:59:03

## Detector mode: Peak

## Polarity: Horizontal



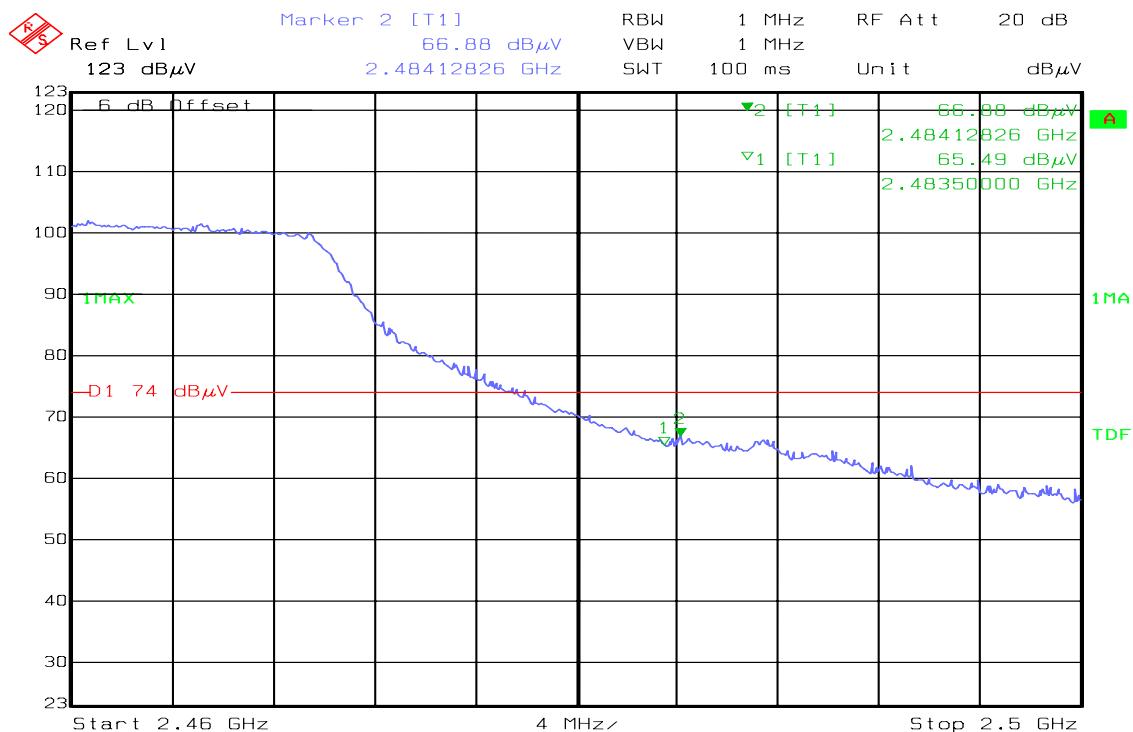
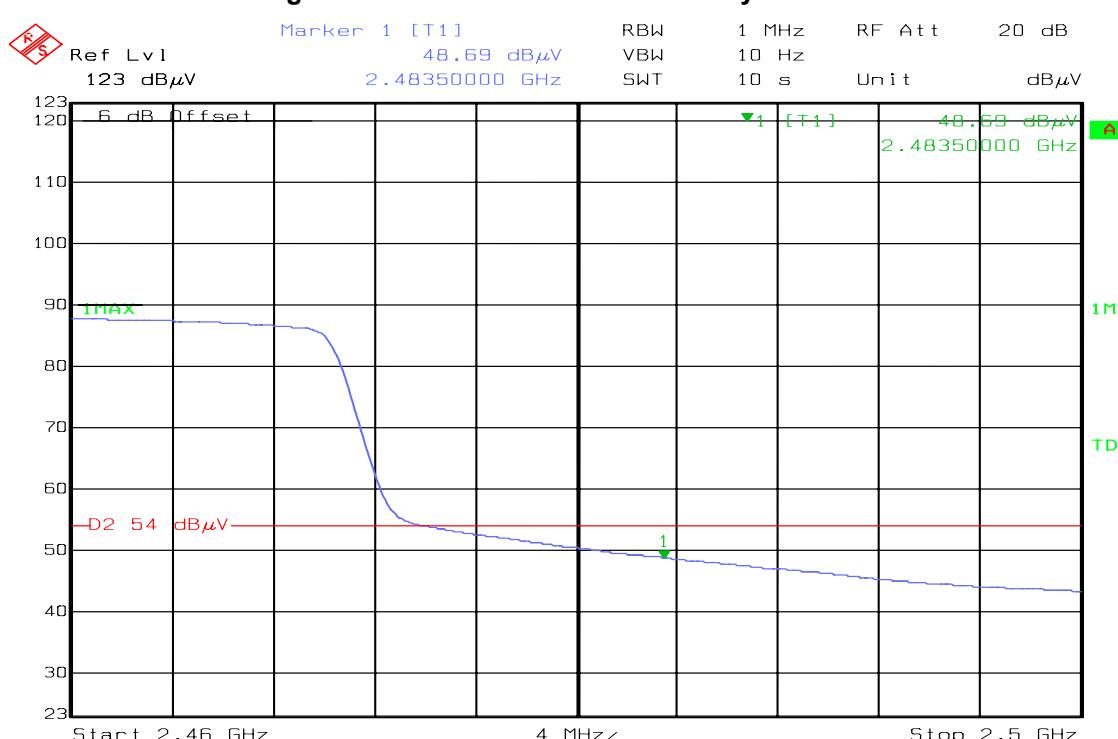
Date: 14.JAN.2010 10:54:19

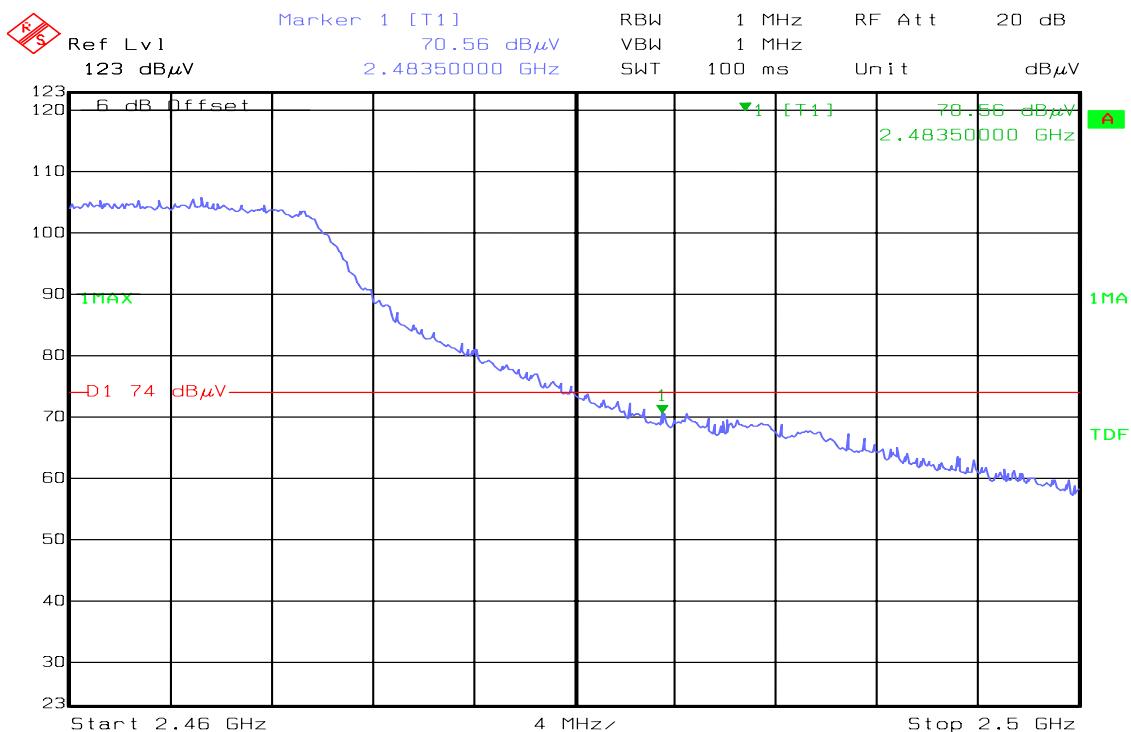
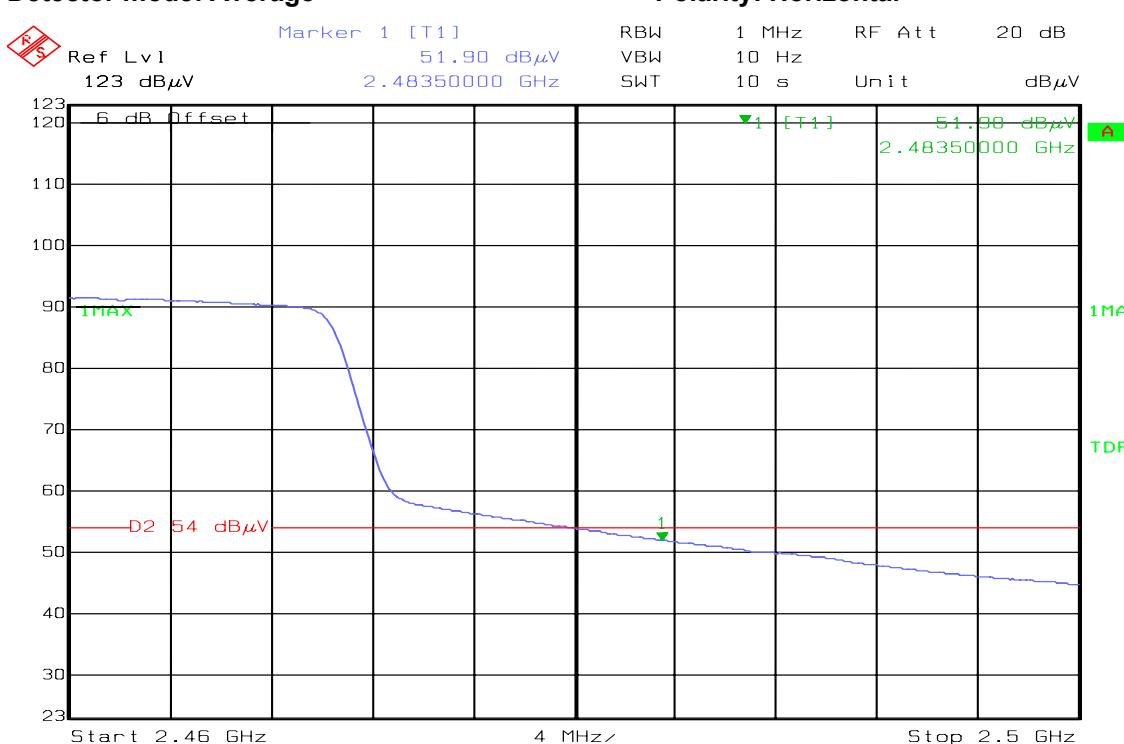
## Detector mode: Average

## Polarity: Horizontal



Date: 14.JAN.2010 10:52:31

**Band Edges (draft 802.11n 40 MHz Channel mode / CH High)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**




## 7.5. PEAK POWER SPECTRAL DENSITY

### LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

### TEST CONFIGURATION



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

### TEST RESULTS

*No non-compliance noted*



## TEST DATA

### Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-7.79	8.00	PASS
Mid	2437	-5.81		PASS
High	2462	-5.67		PASS

### Test mode: IEEE 802.11g mode

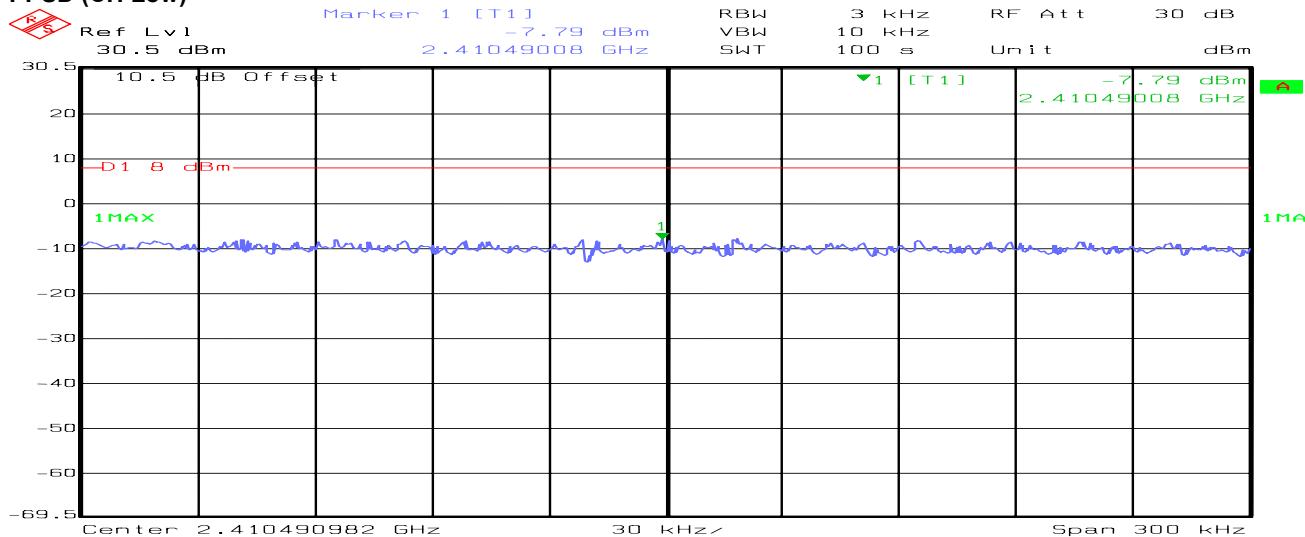
Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-8.13	8.00	PASS
Mid	2437	-7.68		PASS
High	2462	-6.90		PASS

### Test mode: draft 802.11n 20 MHz Channel mode

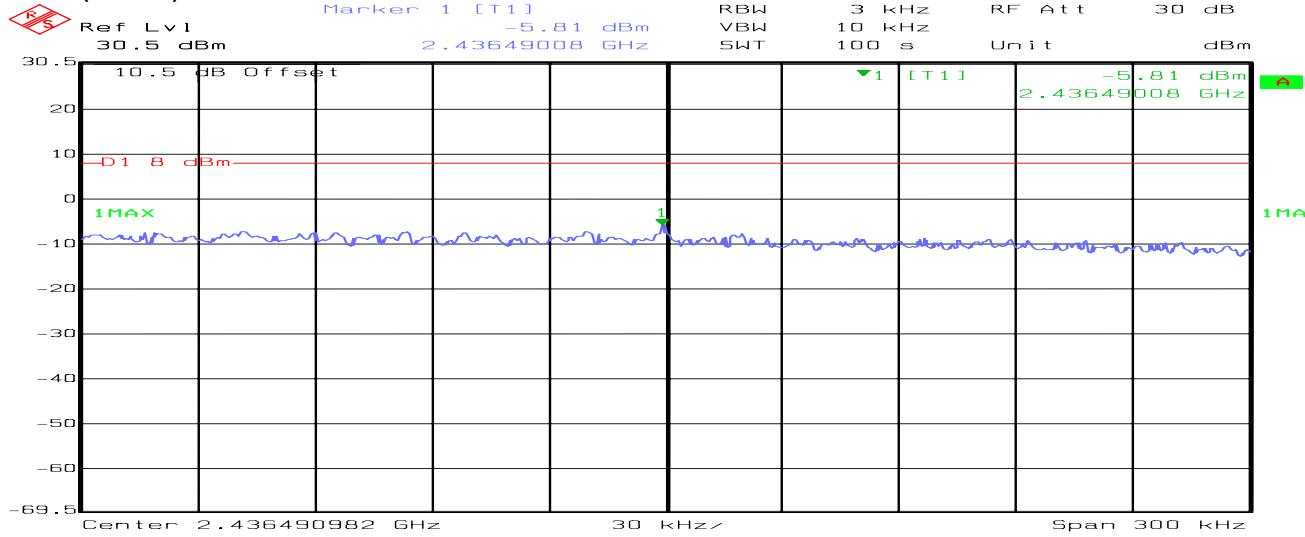
Channel	Frequency (MHz)	PPSD (dBm)				Limit (dBm)	Result
		Chain 0	Chain 1	Combiner	Total		
Low	2412	-6.76	-6.89	-6.61	-3.81	8.00	PASS
Mid	2437	-6.79	-6.77	-7.21	-3.77		PASS
High	2462	-6.97	-8.50	-5.83	-4.66		PASS

### Test mode: draft 802.11n 40 MHz Channel mode

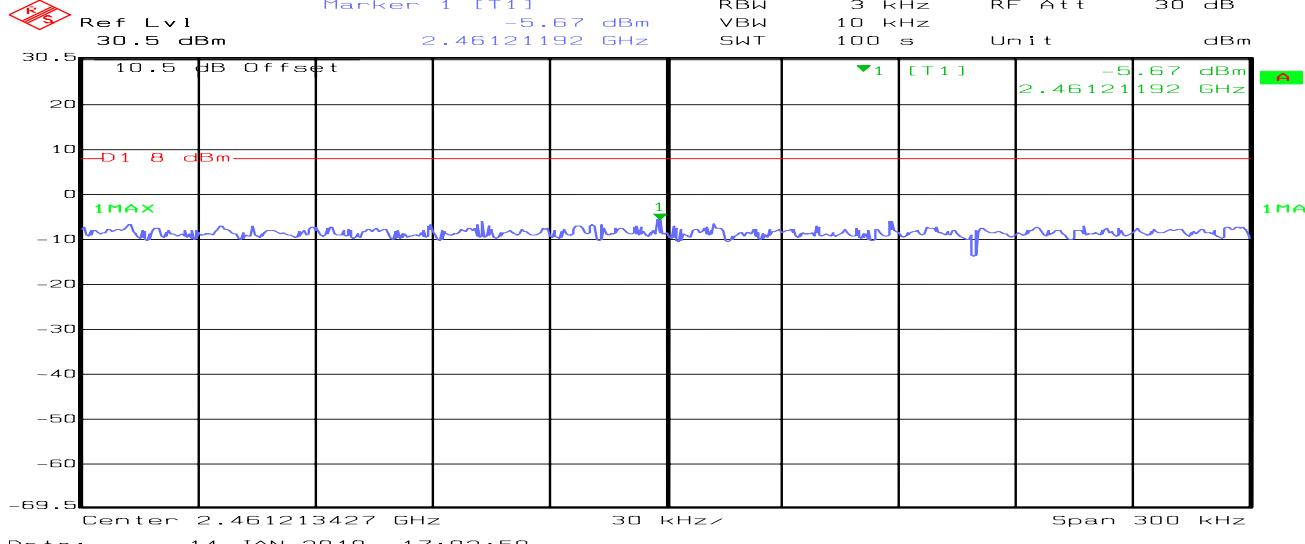
Channel	Frequency (MHz)	PPSD (dBm)				Limit (dBm)	Result
		Chain 0	Chain 1	Combiner	Total		
Low	2422	-10.31	-2.93	-3.01	-2.20	8.00	PASS
Mid	2437	-11.77	-2.63	-2.64	-2.13		PASS
High	2452	-10.49	-2.65	-2.71	-1.99		PASS

**Test Plot****IEEE 802.11b mode****PPSD (CH Low)**

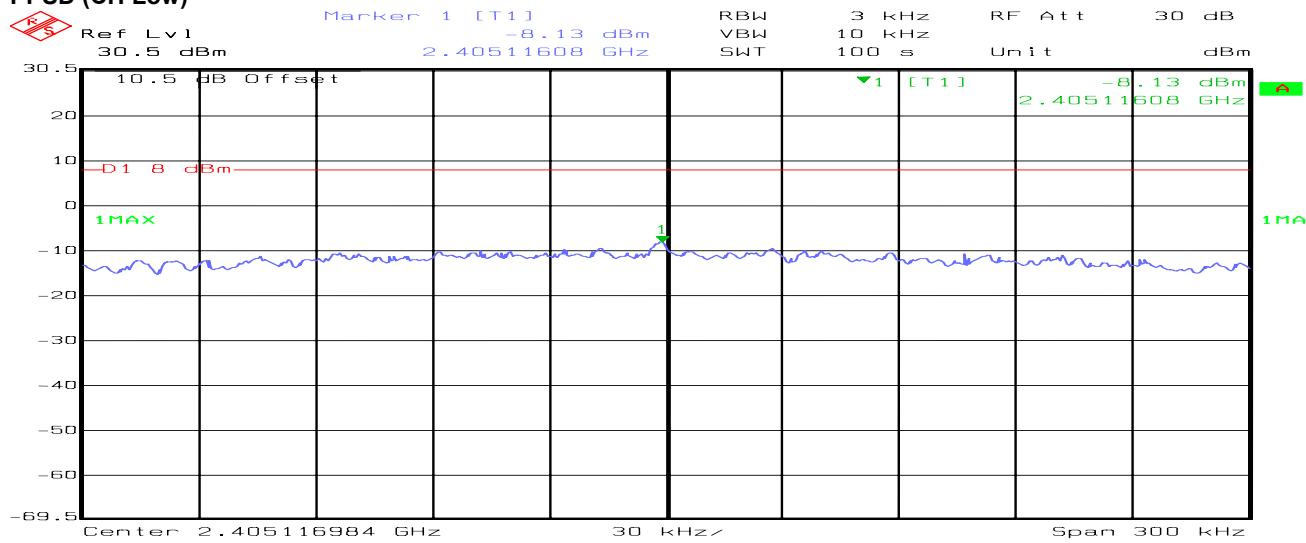
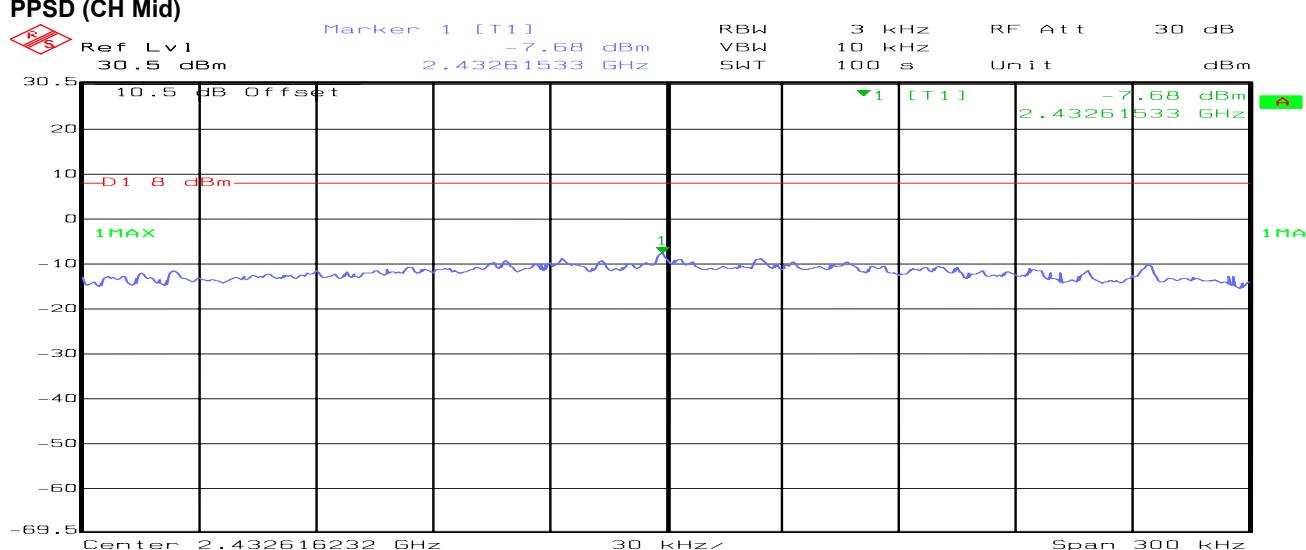
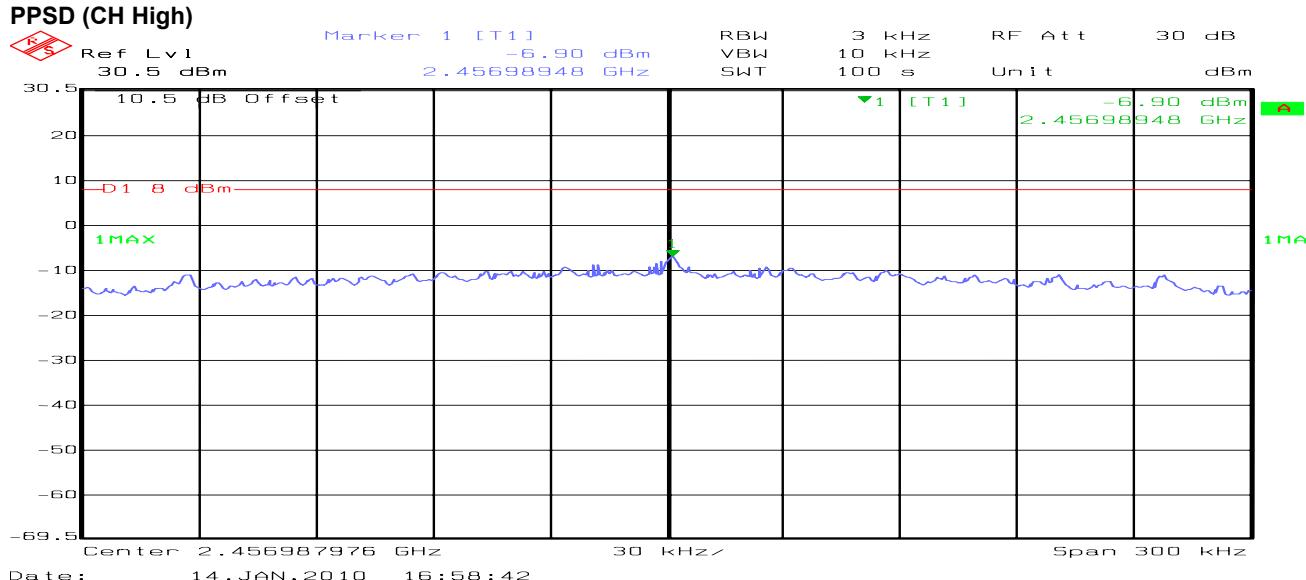
Date: 14.JAN.2010 17:11:22

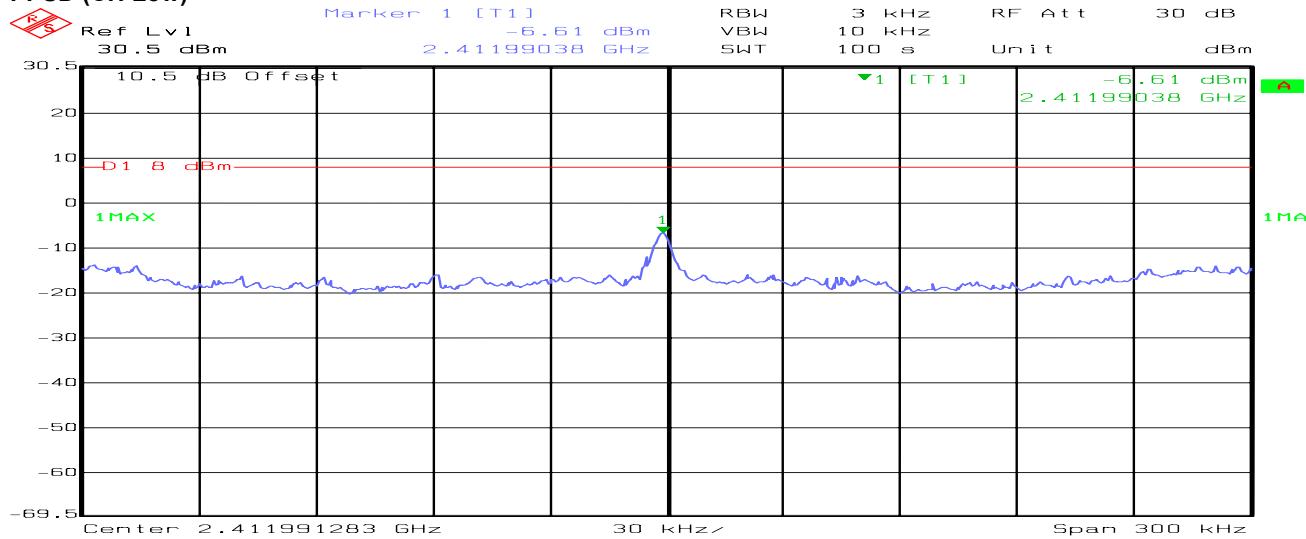
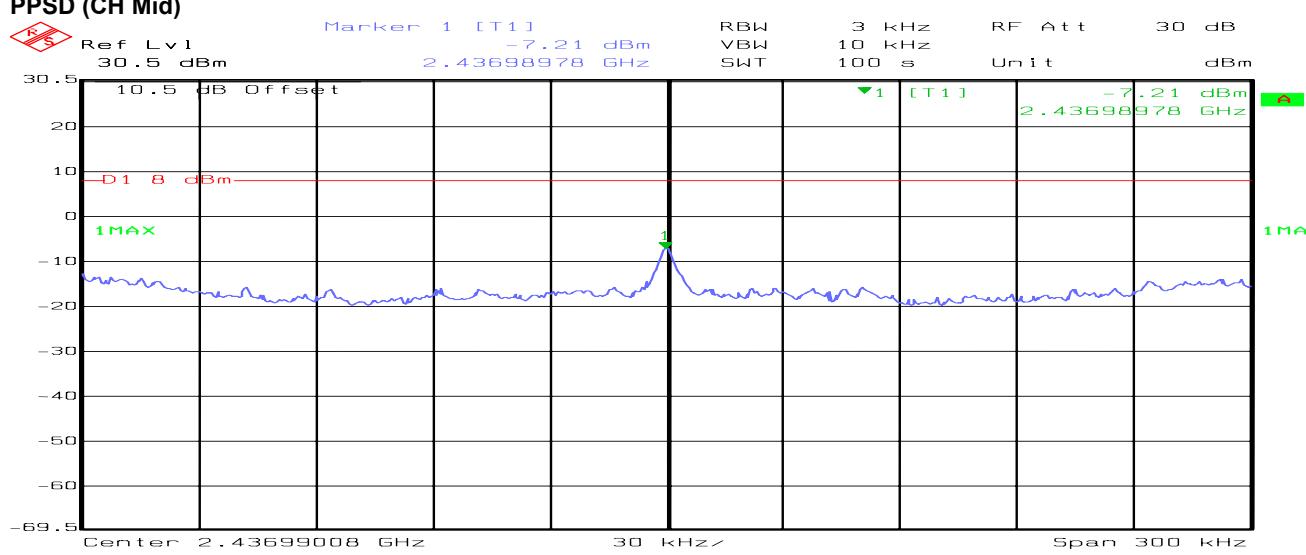
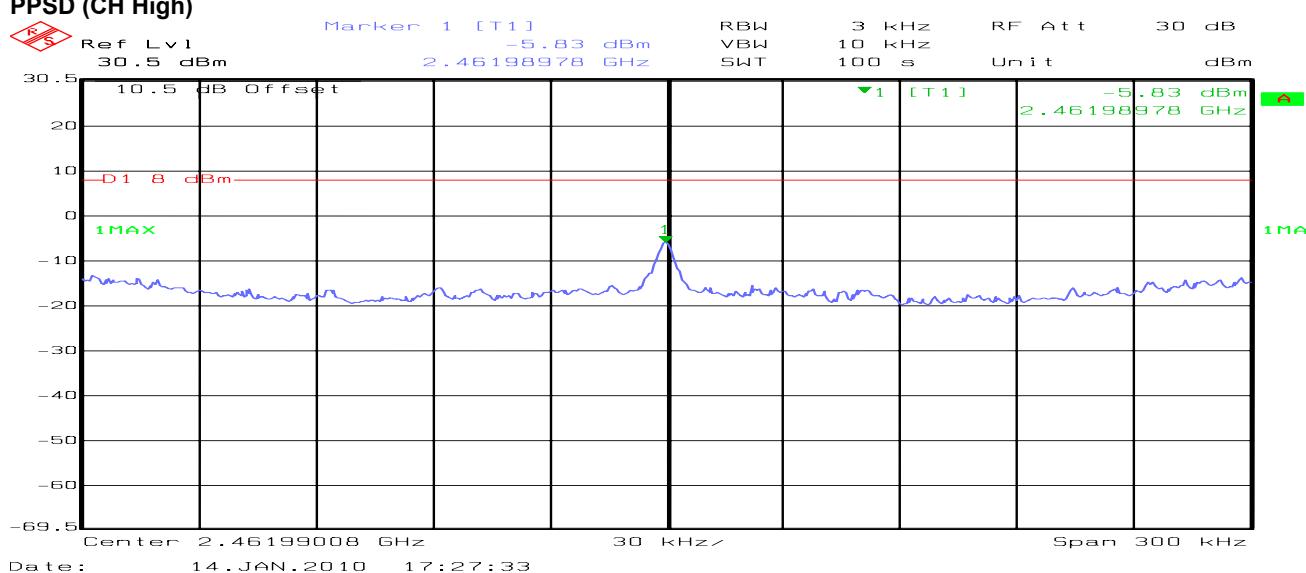
**PPSD (CH Mid)**

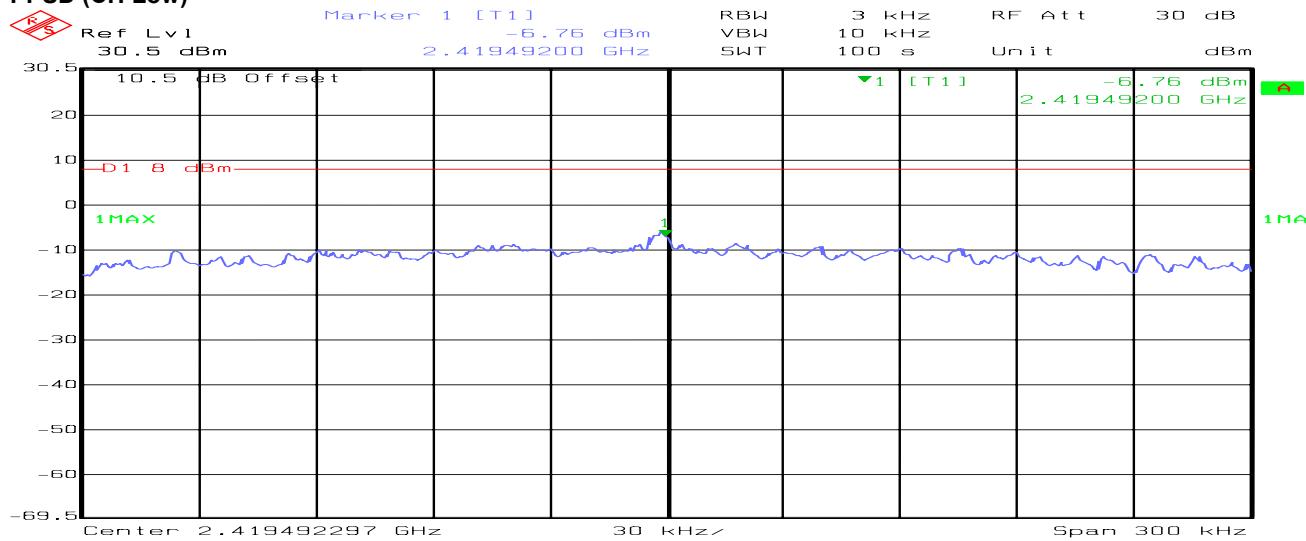
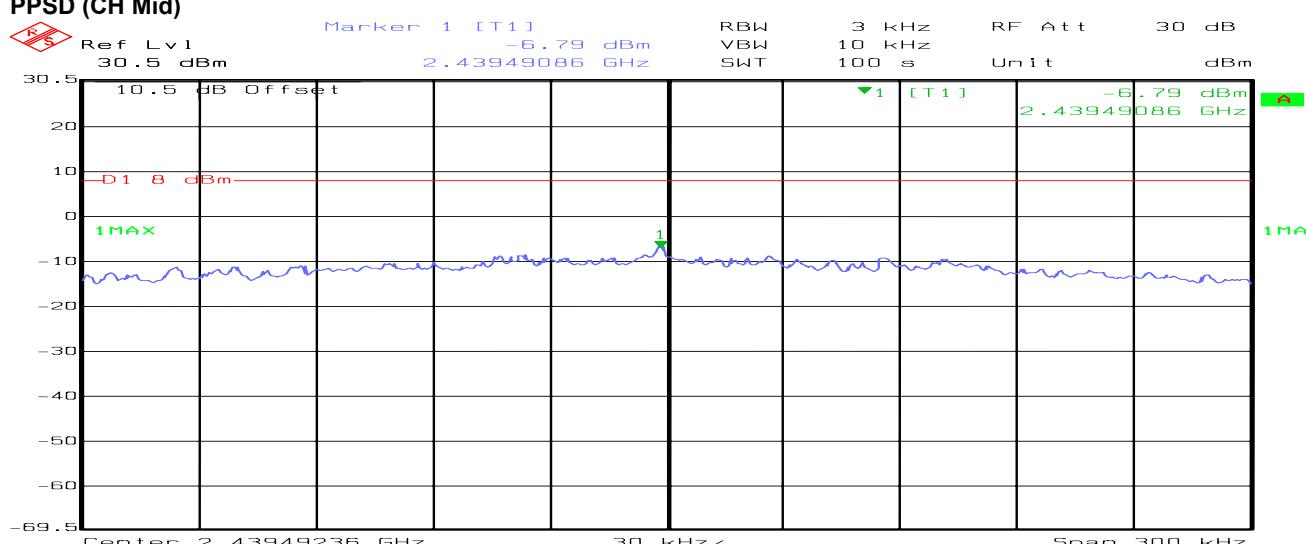
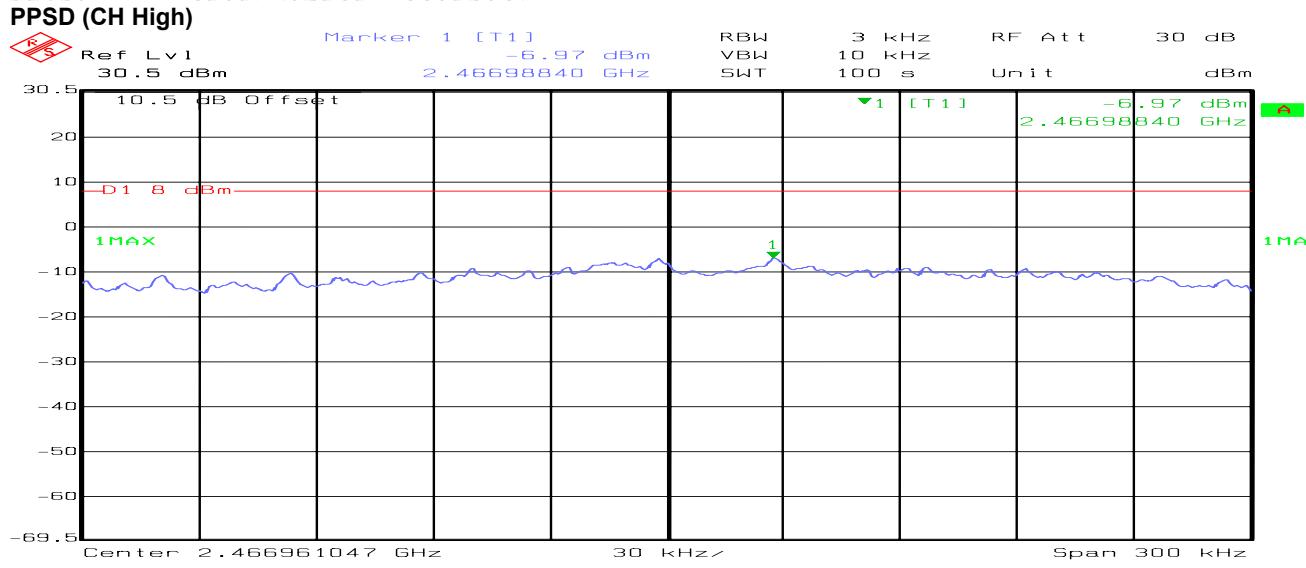
Date: 14.JAN.2010 17:07:18

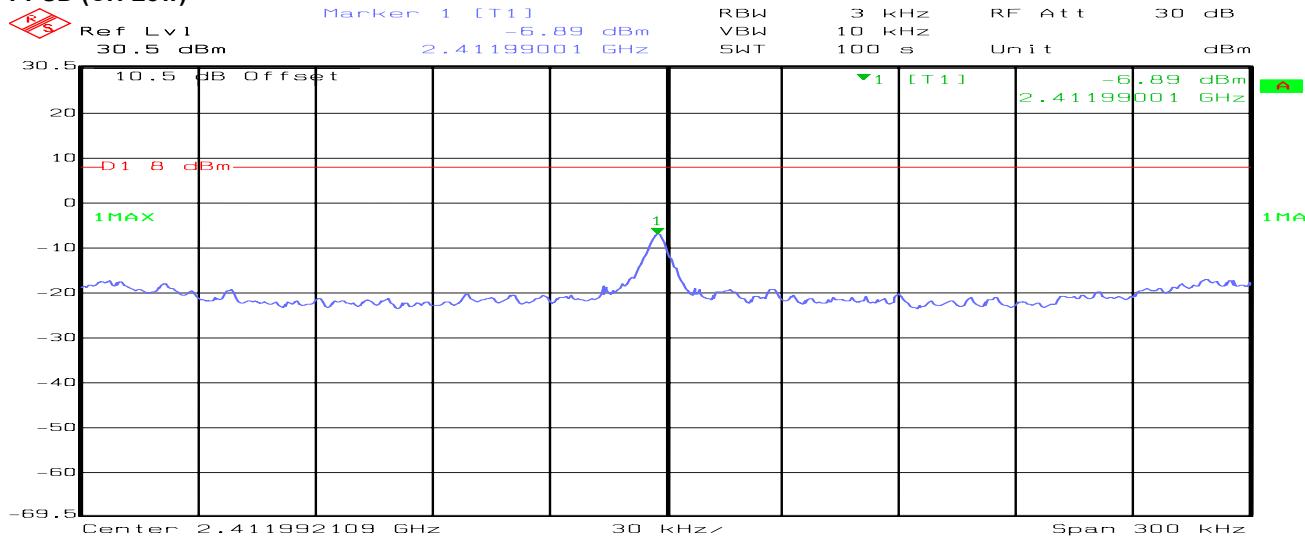
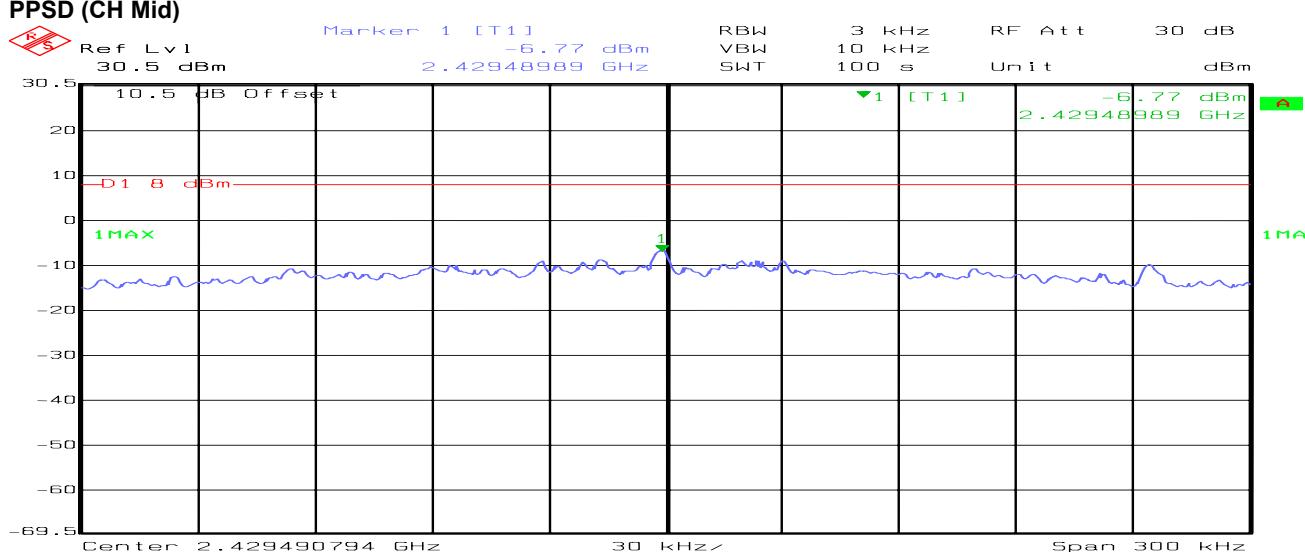
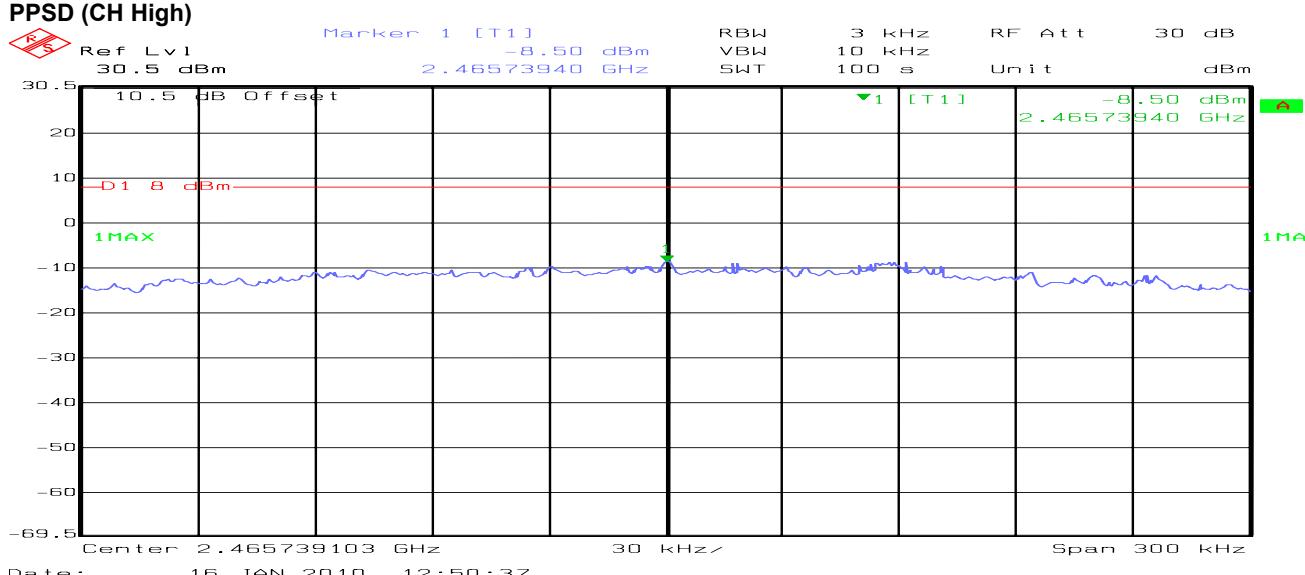
**PPSD (CH High)**

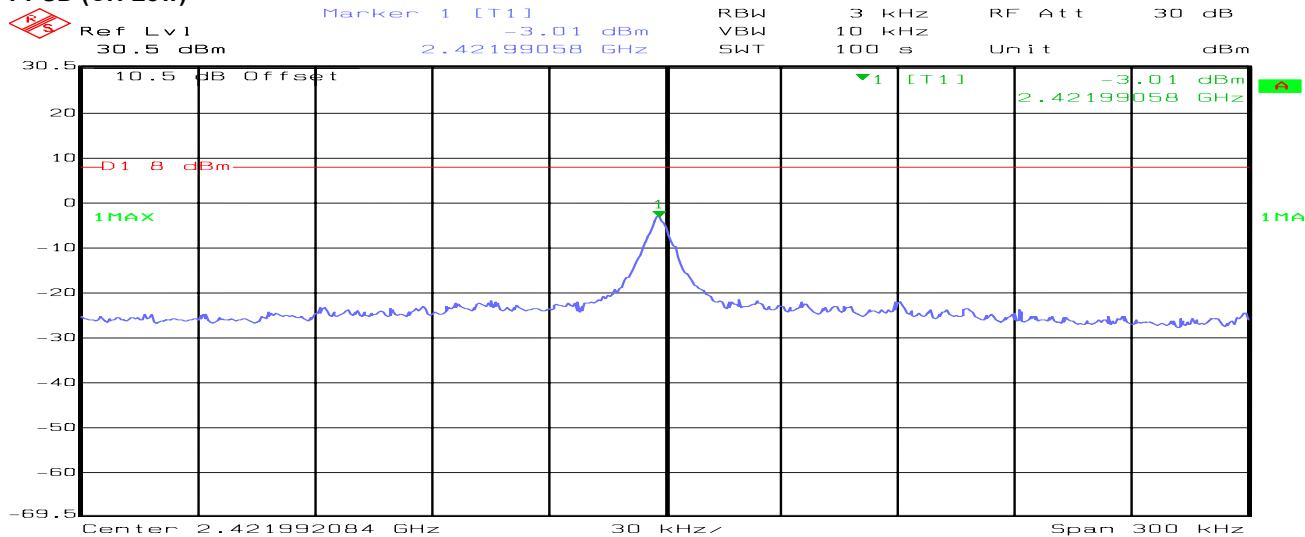
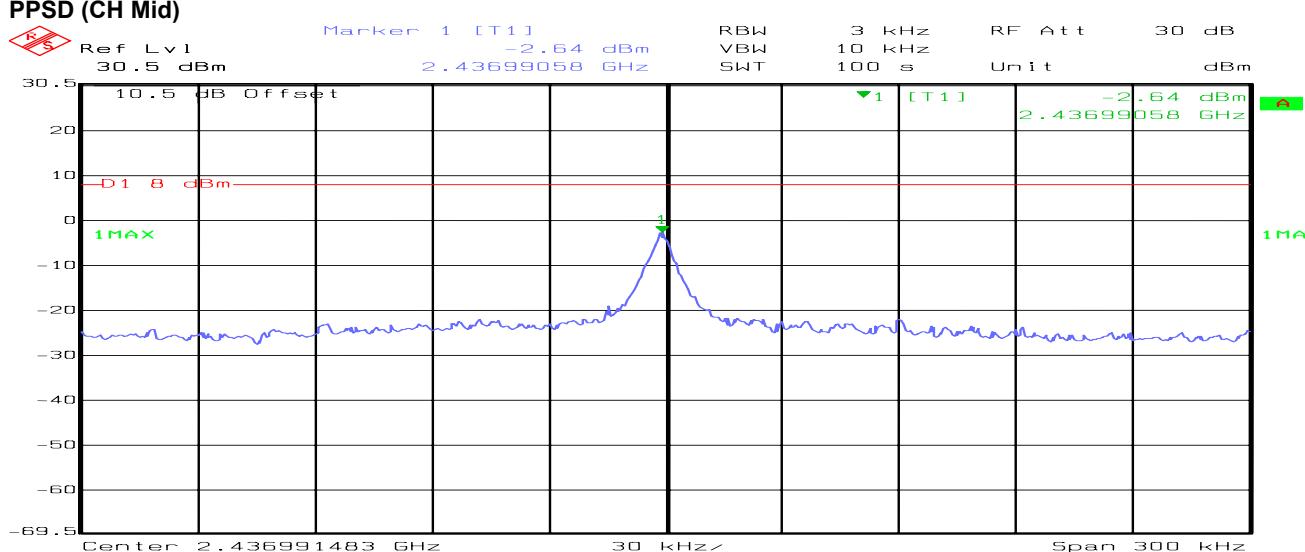
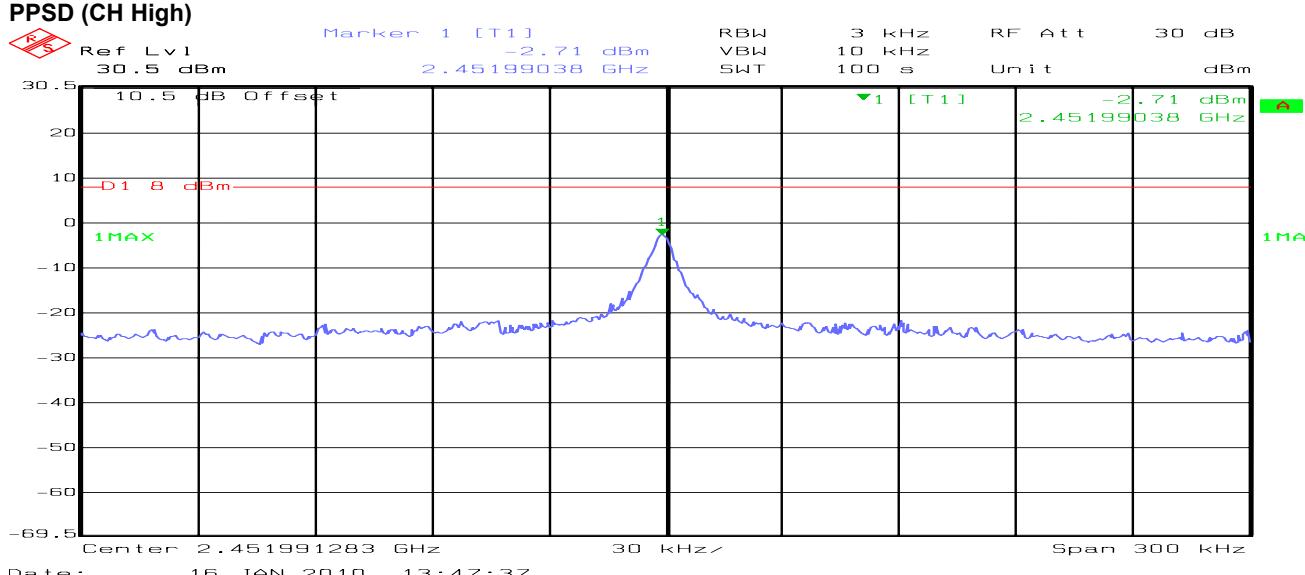
Date: 14.JAN.2010 17:02:50

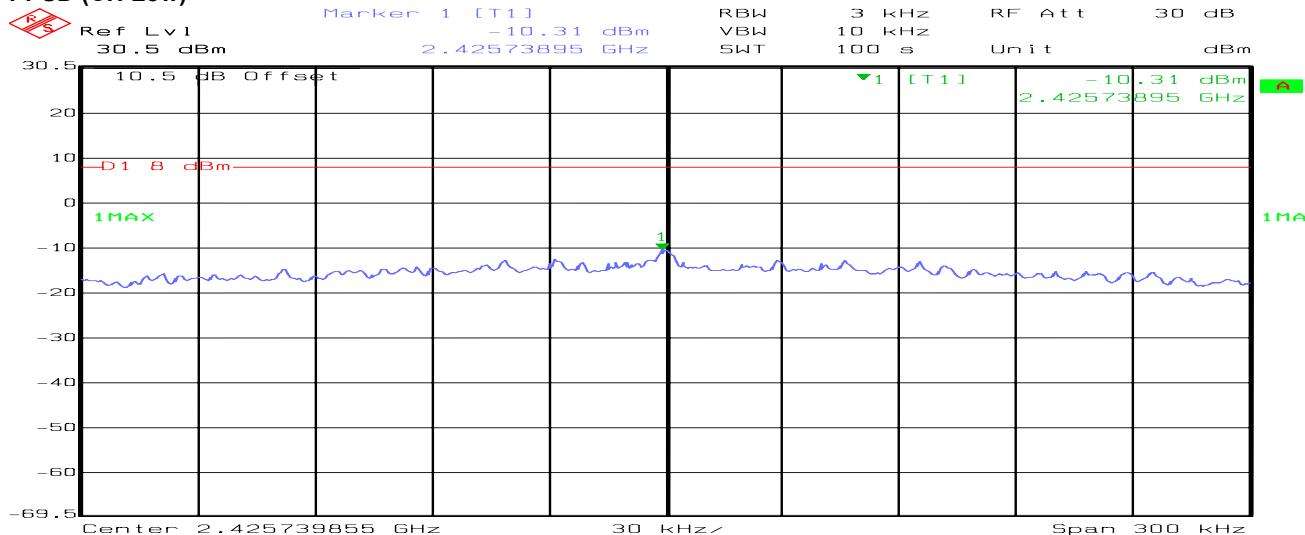
**IEEE 802.11q mode****PPSD (CH Low)****PPSD (CH Mid)****PPSD (CH High)**

**draft 802.11n 20 MHz Channel mode / Combiner****PPSD (CH Low)****PPSD (CH Mid)****PPSD (CH High)**

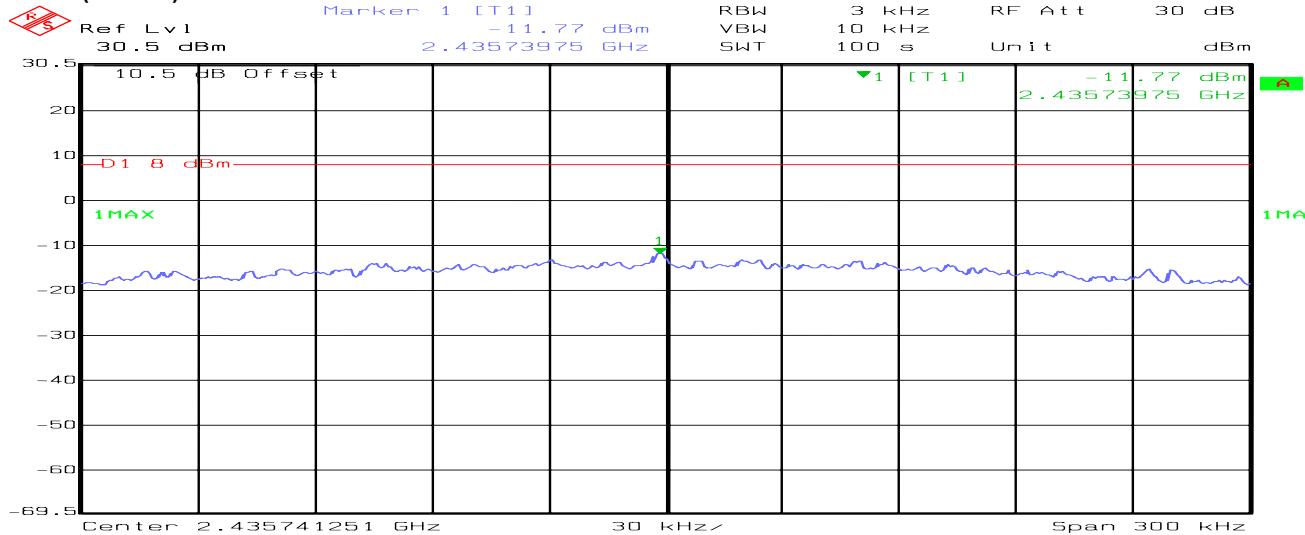
**draft 802.11n 20 MHz Channel mode / Chain 0****PPSD (CH Low)****PPSD (CH Mid)****PPSD (CH High)**

**draft 802.11n 20 MHz Channel mode / Chain 1****PPSD (CH Low)****PPSD (CH Mid)****PPSD (CH High)**

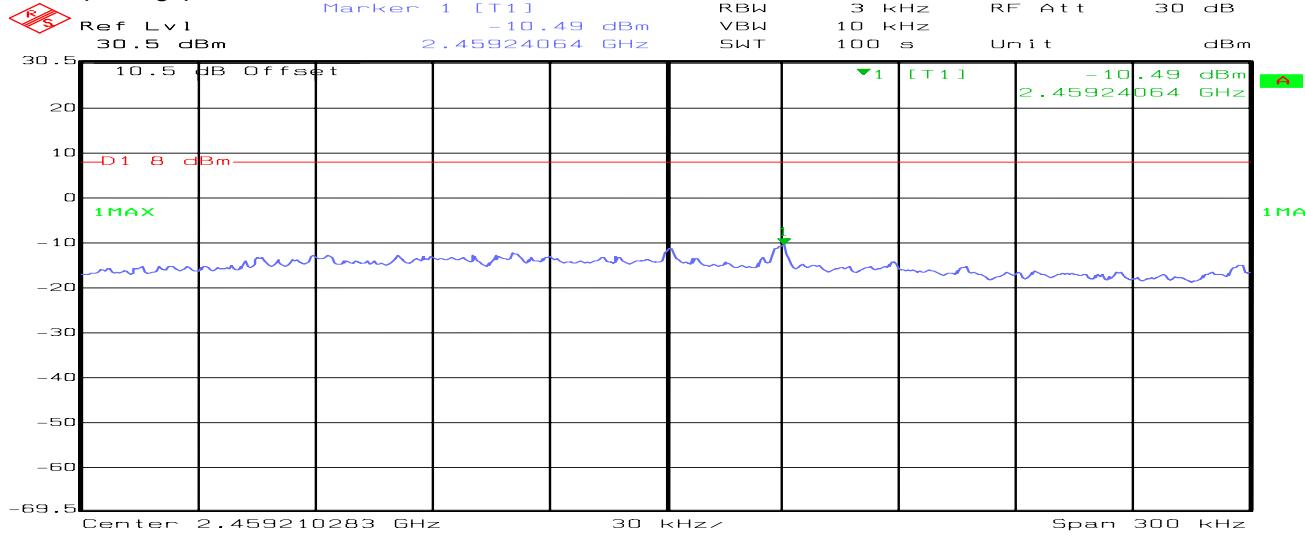
**draft 802.11n 40 MHz Channel mode / Combiner****PPSD (CH Low)****PPSD (CH Mid)****PPSD (CH High)**

**draft 802.11n 40 MHz Channel mode / Chain 0****PPSD (CH Low)**

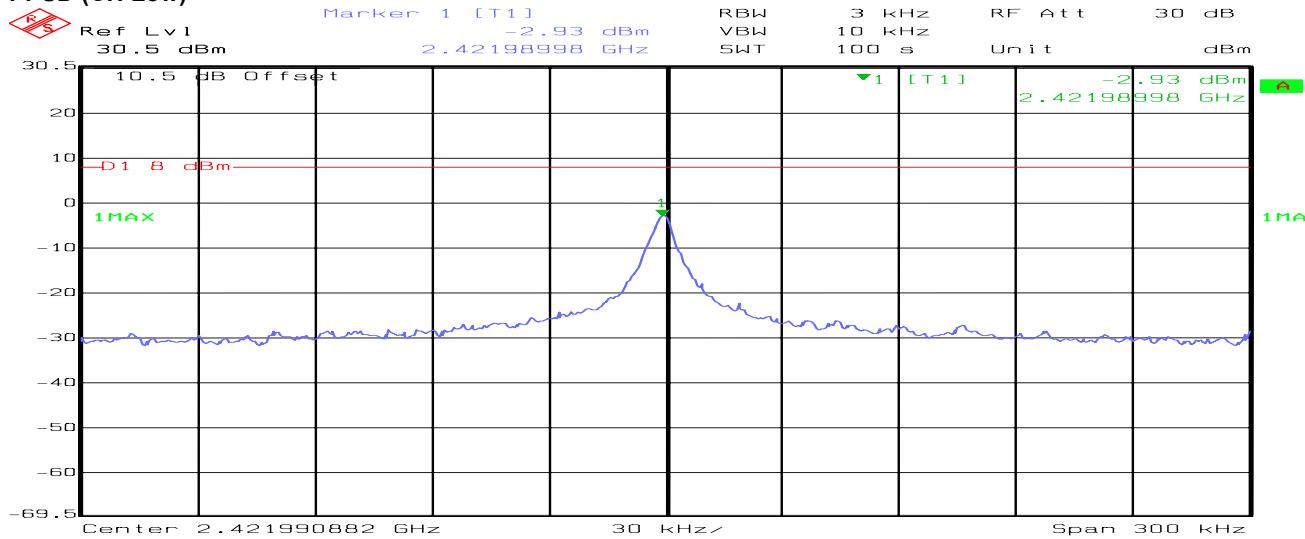
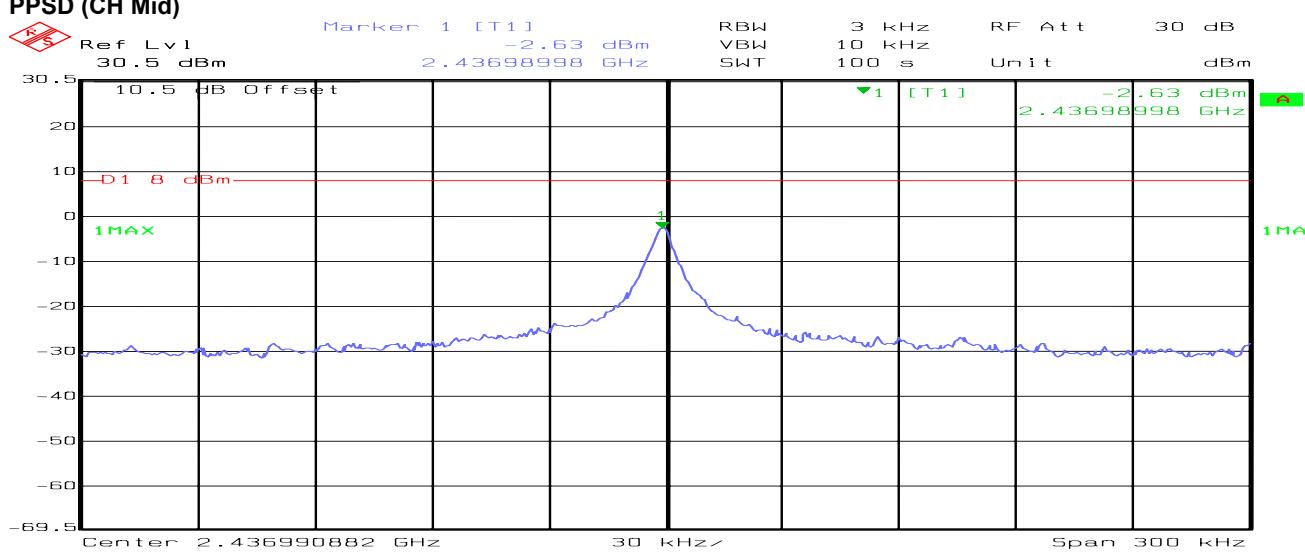
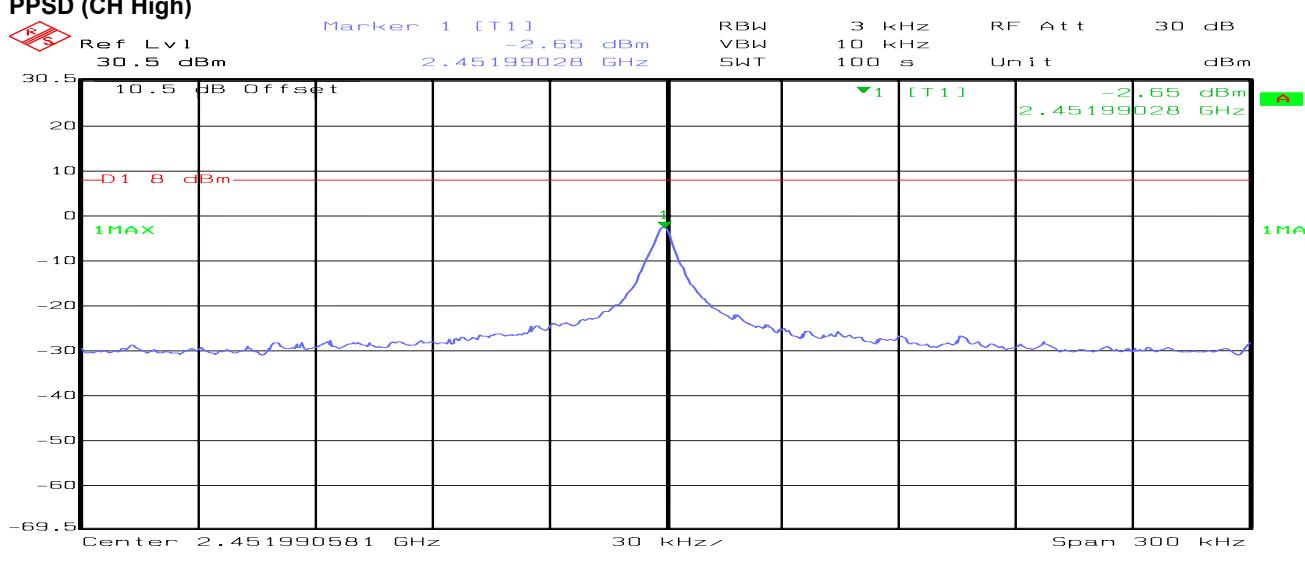
Date: 16.JAN.2010 14:48:02

**PPSD (CH Mid)**

Date: 16.JAN.2010 14:39:43

**PPSD (CH High)**

Date: 16.JAN.2010 14:05:31

**draft 802.11n 40 MHz Channel mode / Chain 1****PPSD (CH Low)****PPSD (CH Mid)****PPSD (CH High)**




## 7.6. SPURIOUS EMISSIONS

### CONDUCTED MEASUREMENT

#### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the Peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### TEST CONFIGURATION



#### TEST PROCEDURE

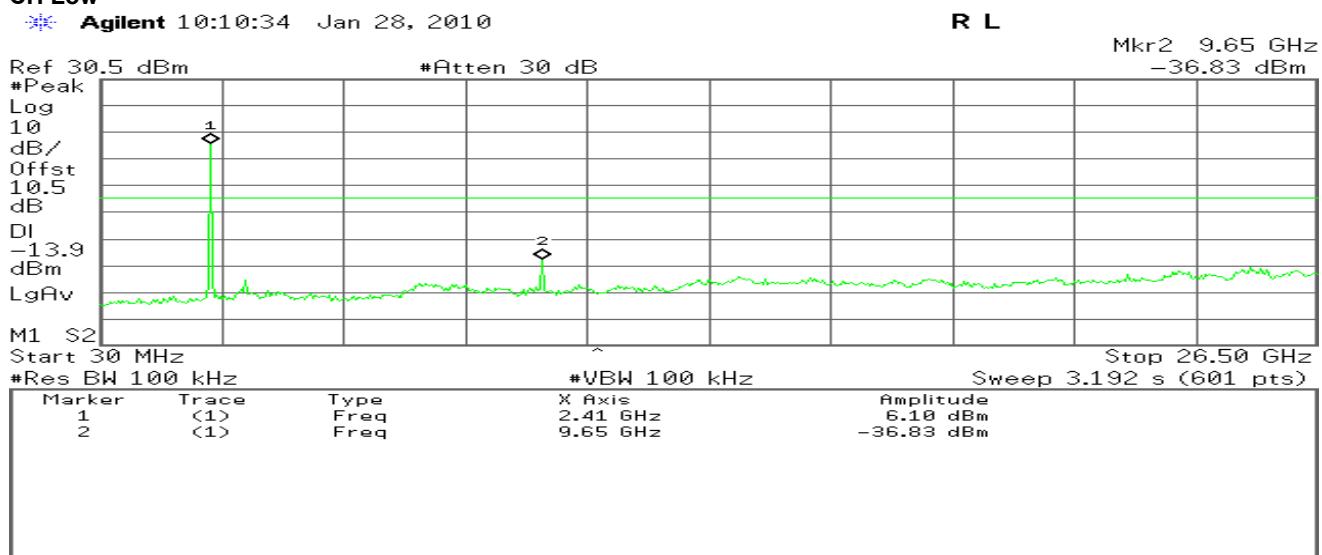
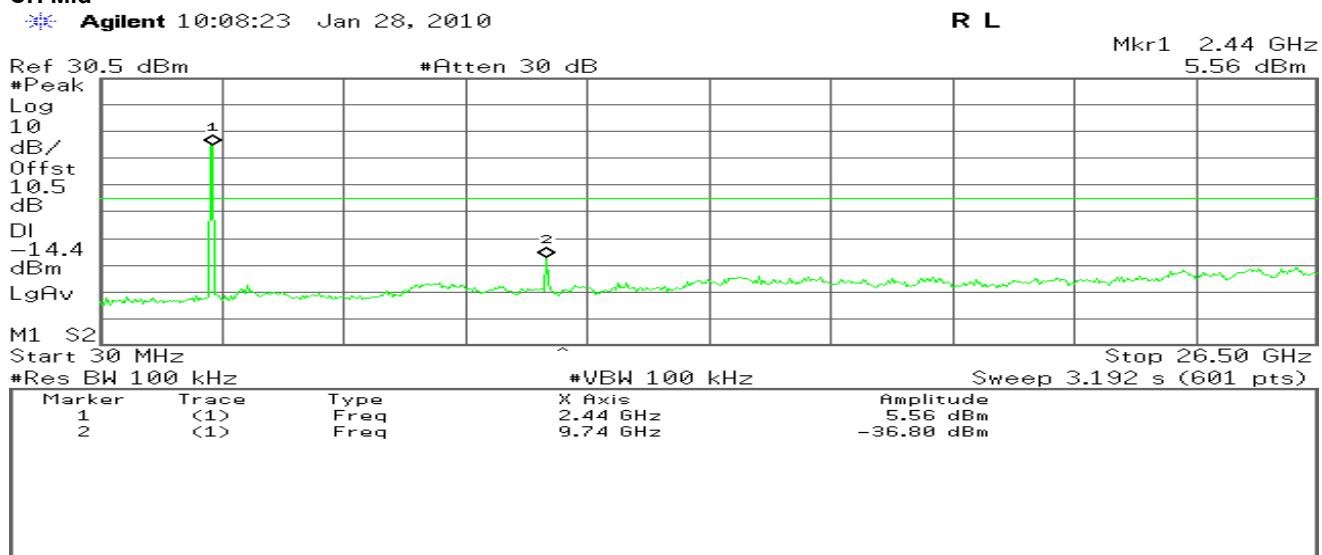
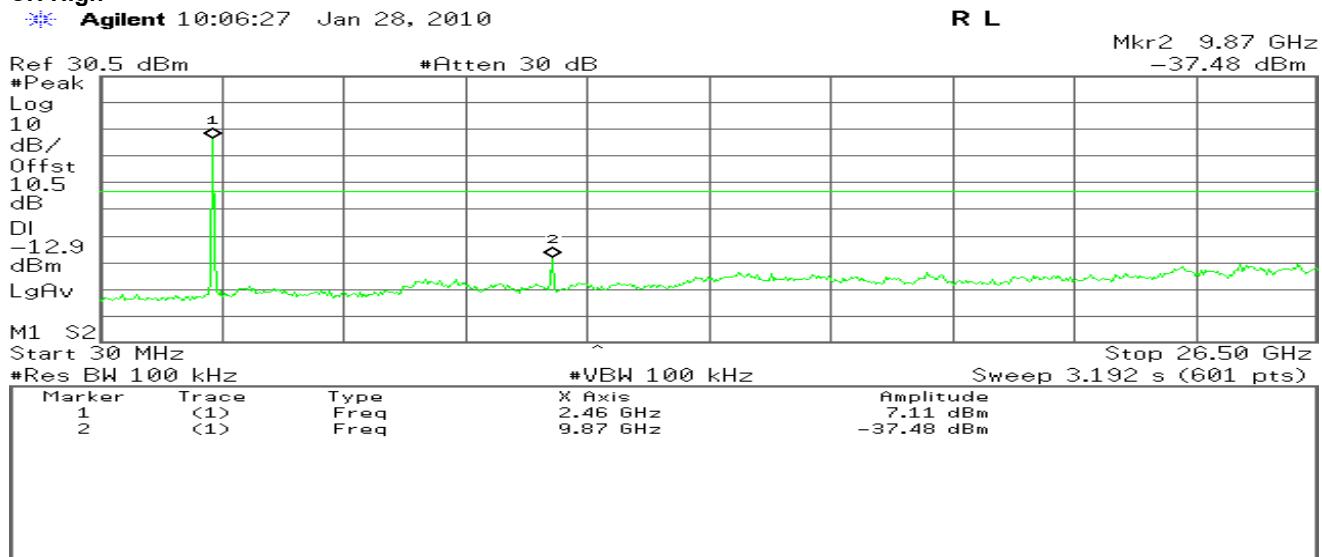
Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

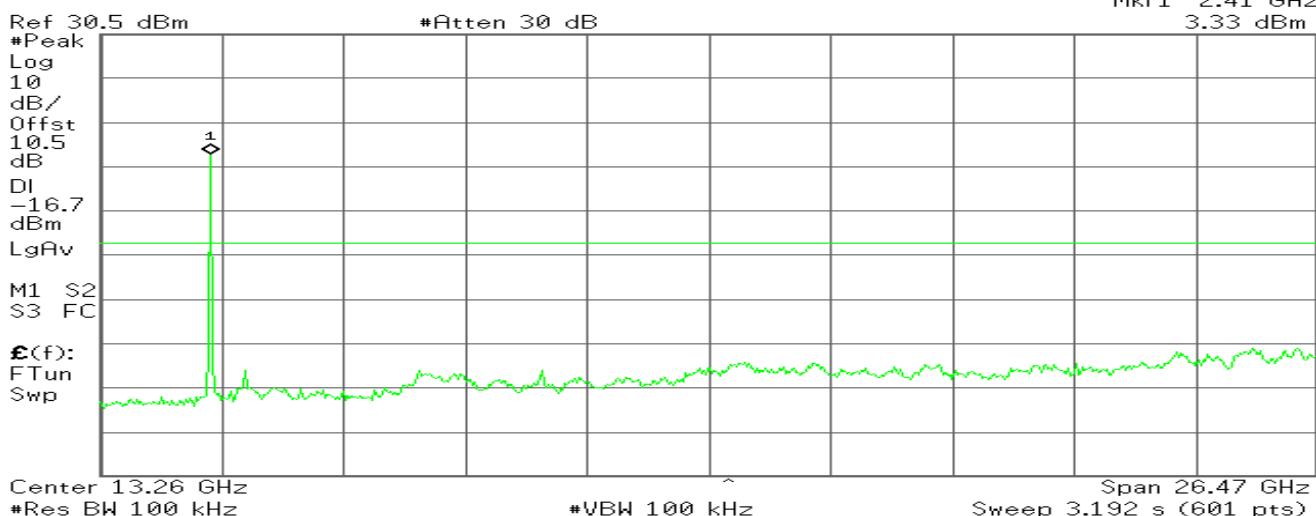
#### TEST RESULTS

*No non-compliance noted.*

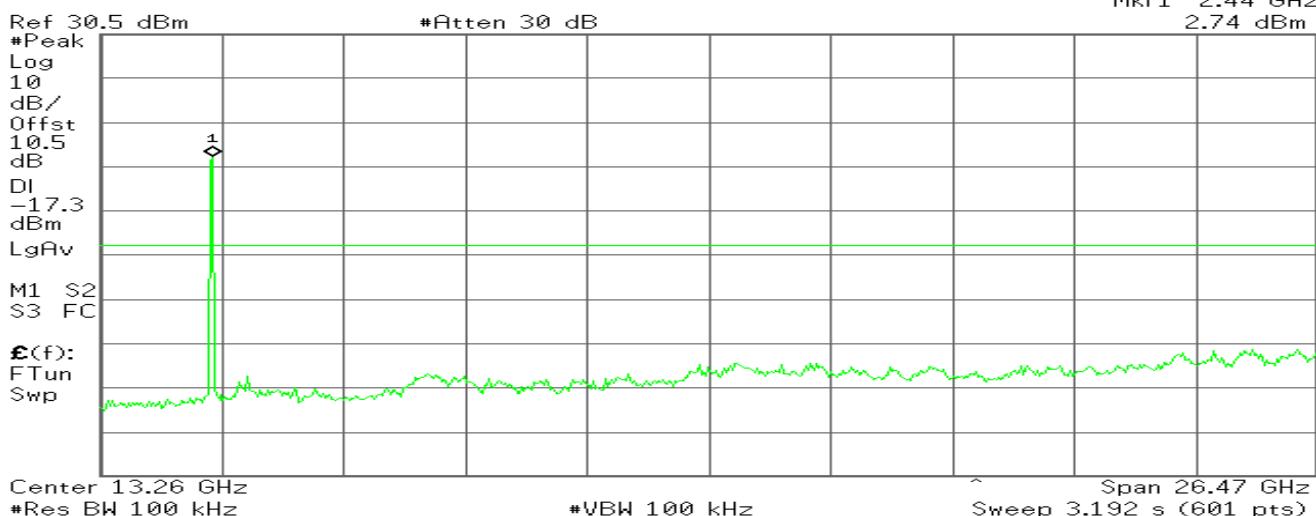
**Test Plot****IEEE 802.11b mode****CH Low****CH Mid****CH High**

**IEEE 802.11g mode****CH Low**

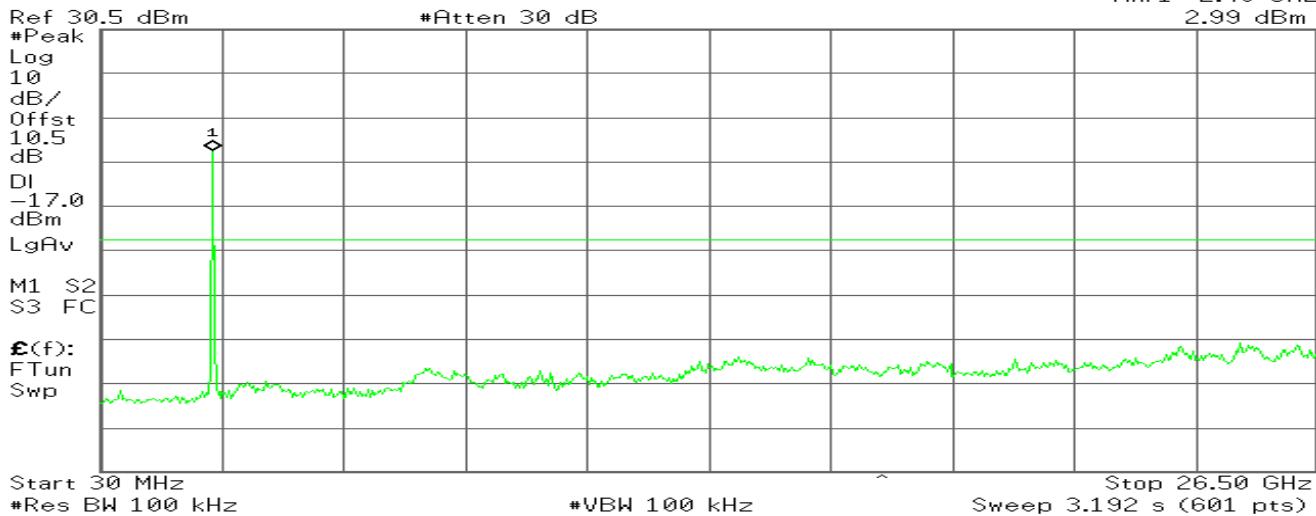
\* Agilent 10:00:21 Jan 28, 2010

**R L**Mkr1 2.41 GHz  
3.33 dBm**CH Mid**

\* Agilent 10:01:50 Jan 28, 2010

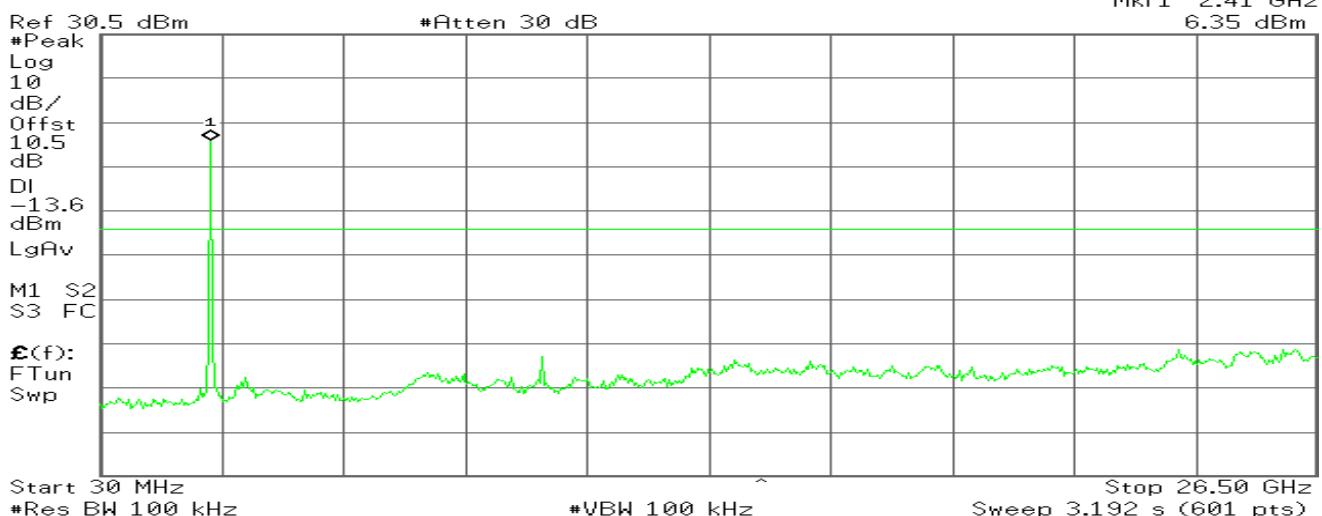
**R L**Mkr1 2.44 GHz  
2.74 dBm**CH High**

\* Agilent 10:04:16 Jan 28, 2010

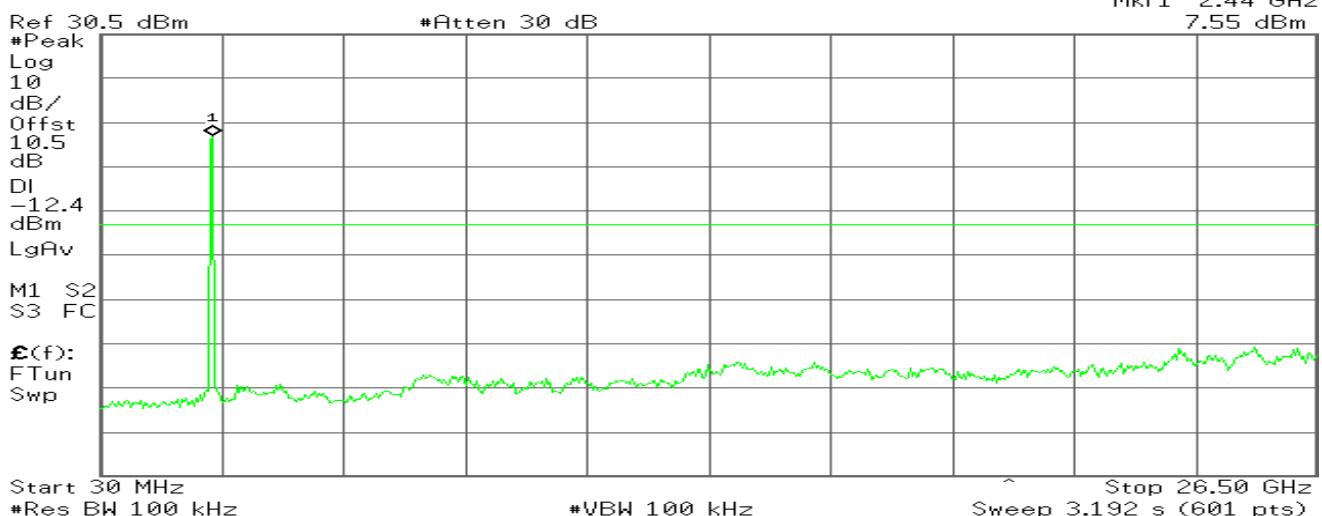
**R L**Mkr1 2.46 GHz  
2.99 dBm

**draft 802.11n 20 MHz Channel mode / Combiner****CH Low**

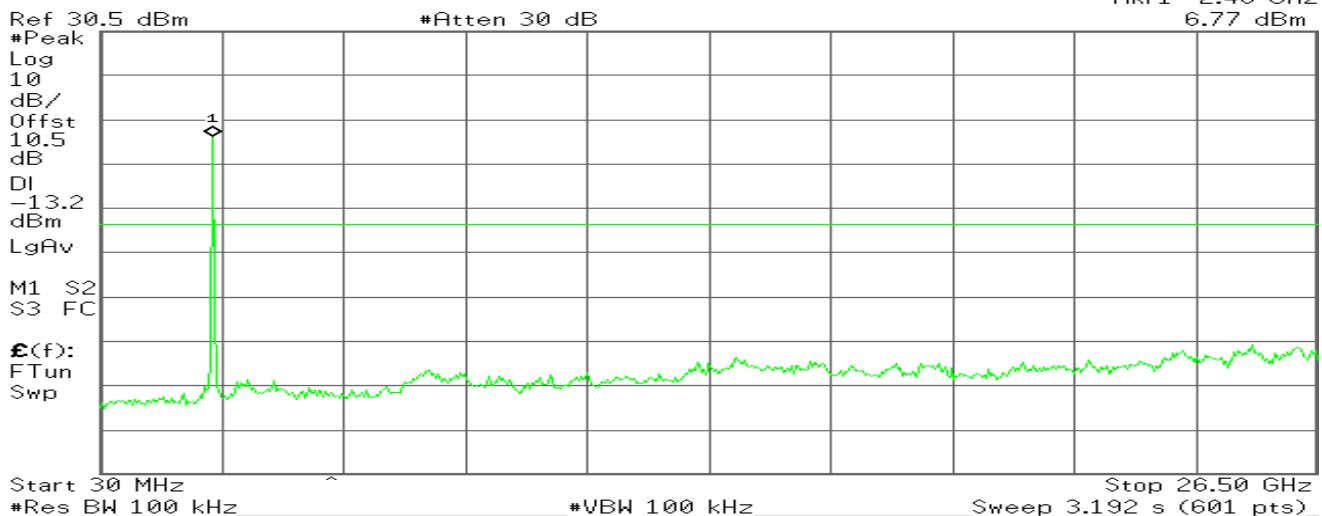
Agilent 10:27:48 Jan 28, 2010

**R L**Mkr1 2.41 GHz  
6.35 dBm**CH Mid**

Agilent 10:29:26 Jan 28, 2010

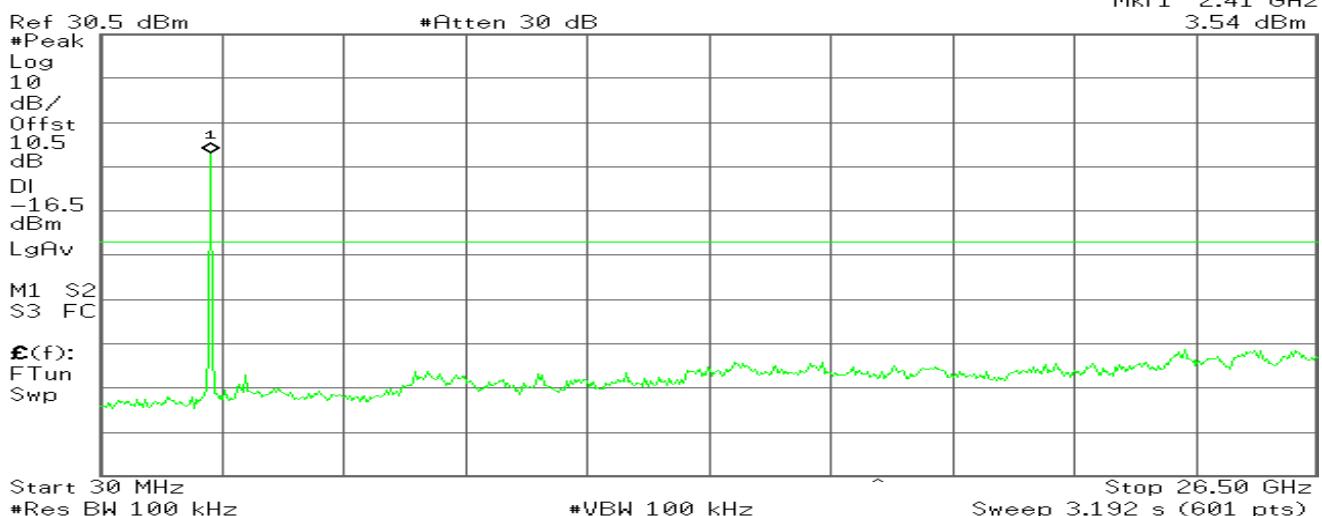
**R L**Mkr1 2.44 GHz  
7.55 dBm**CH High**

Agilent 10:30:45 Jan 28, 2010

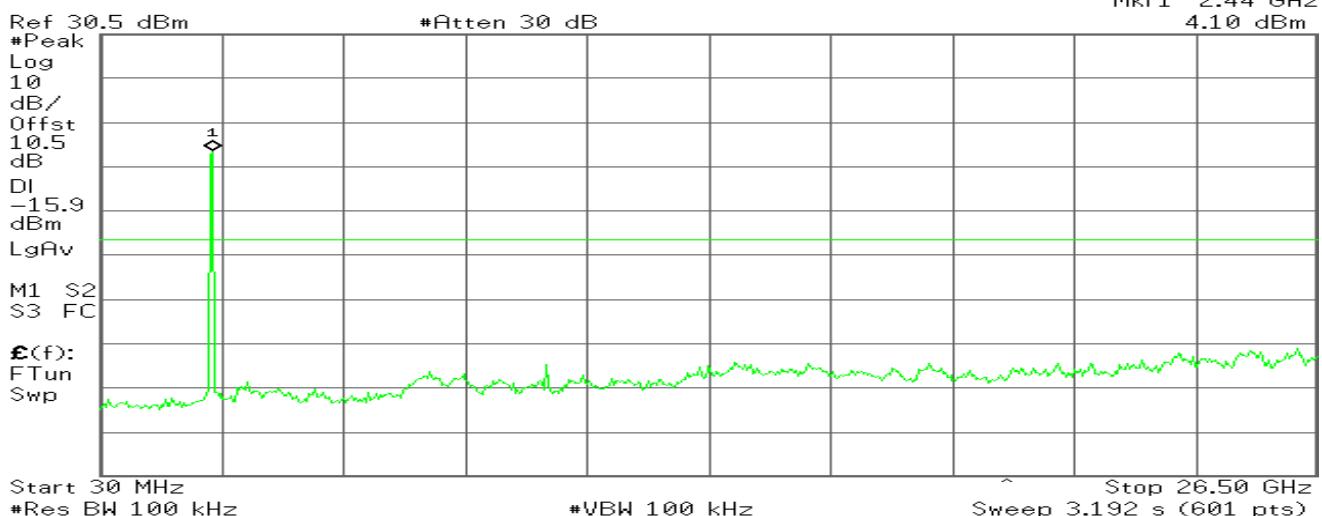
**R L**Mkr1 2.46 GHz  
6.77 dBm

**draft 802.11n 20 MHz Channel mode / Chain 0****CH Low**

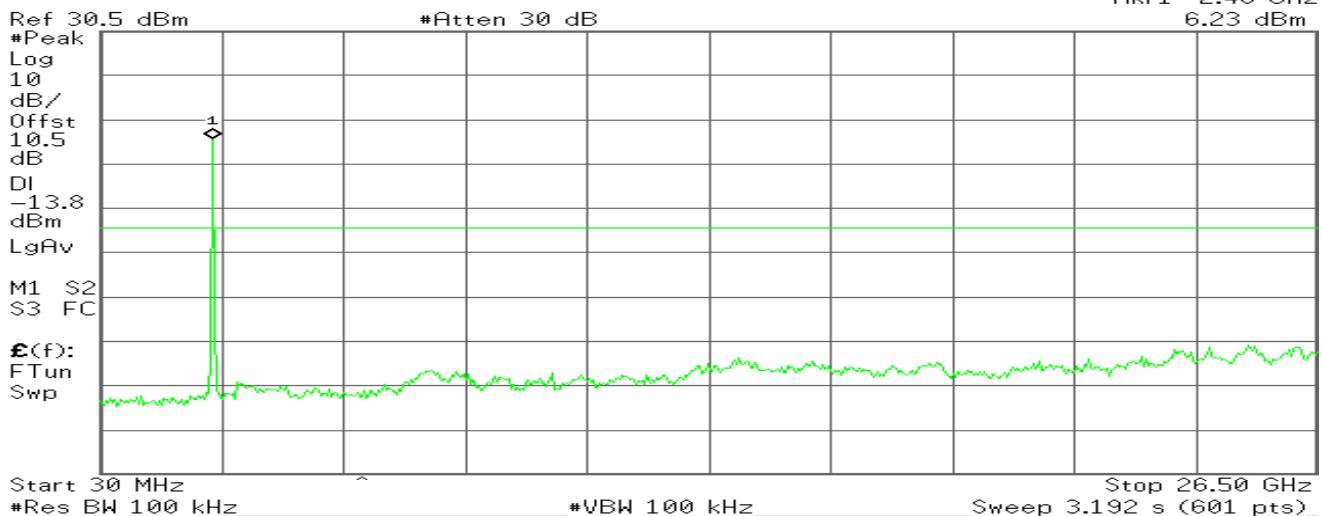
\* Agilent 10:15:16 Jan 28, 2010

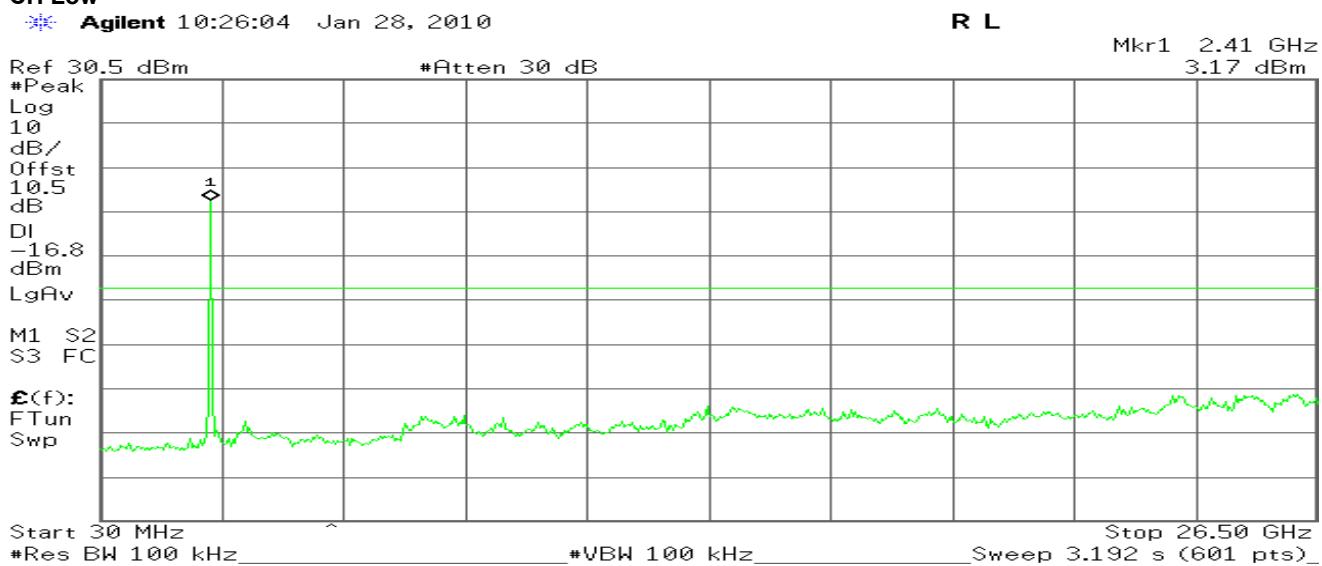
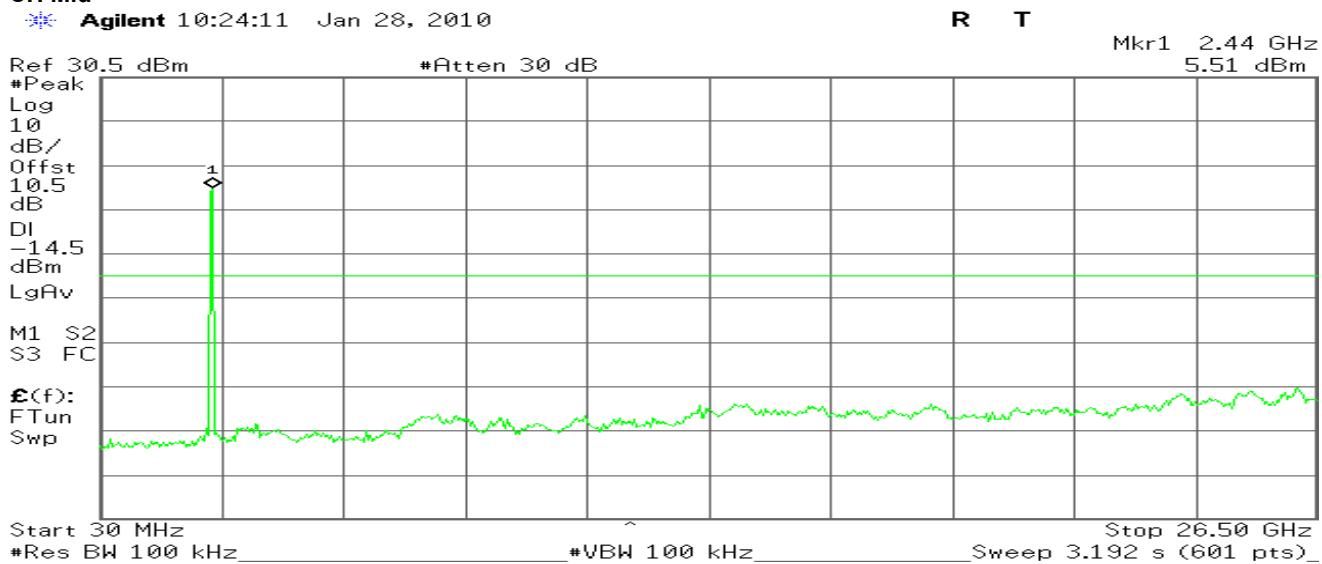
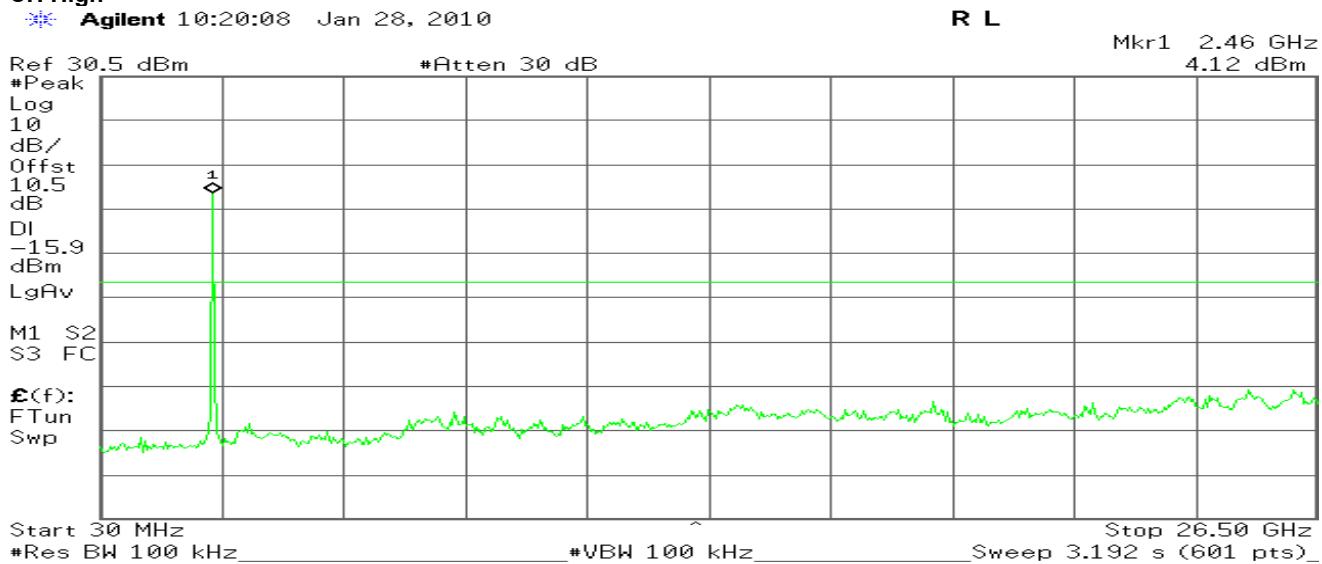
**R T**Mkr1 2.41 GHz  
3.54 dBm**CH Mid**

\* Agilent 10:16:24 Jan 28, 2010

**R L**Mkr1 2.44 GHz  
4.10 dBm**CH High**

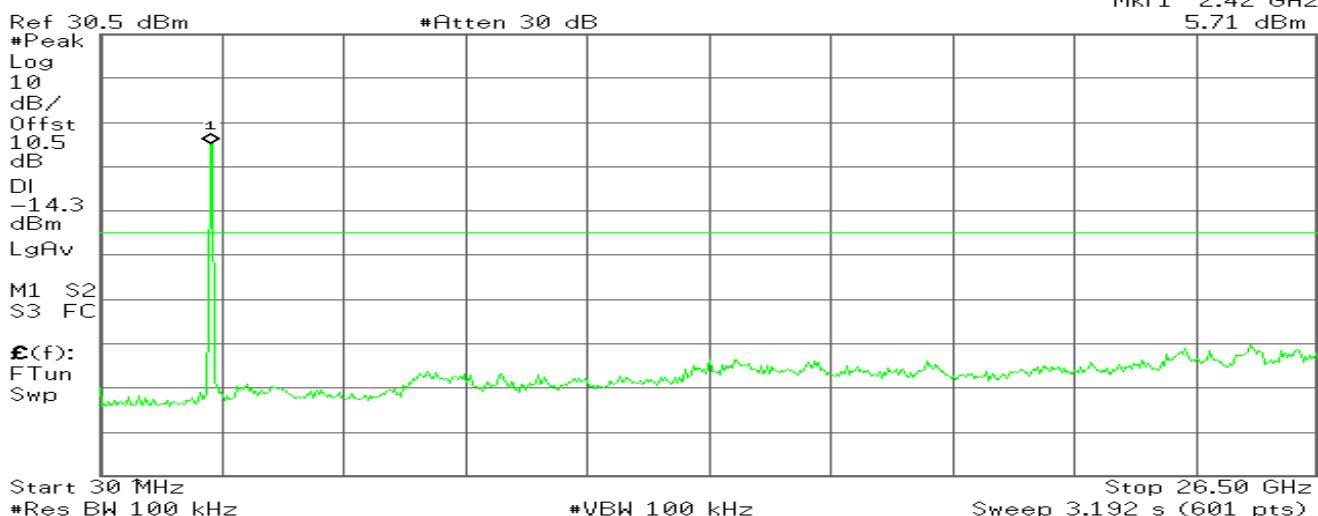
\* Agilent 10:18:33 Jan 28, 2010

**R L**Mkr1 2.46 GHz  
6.23 dBm

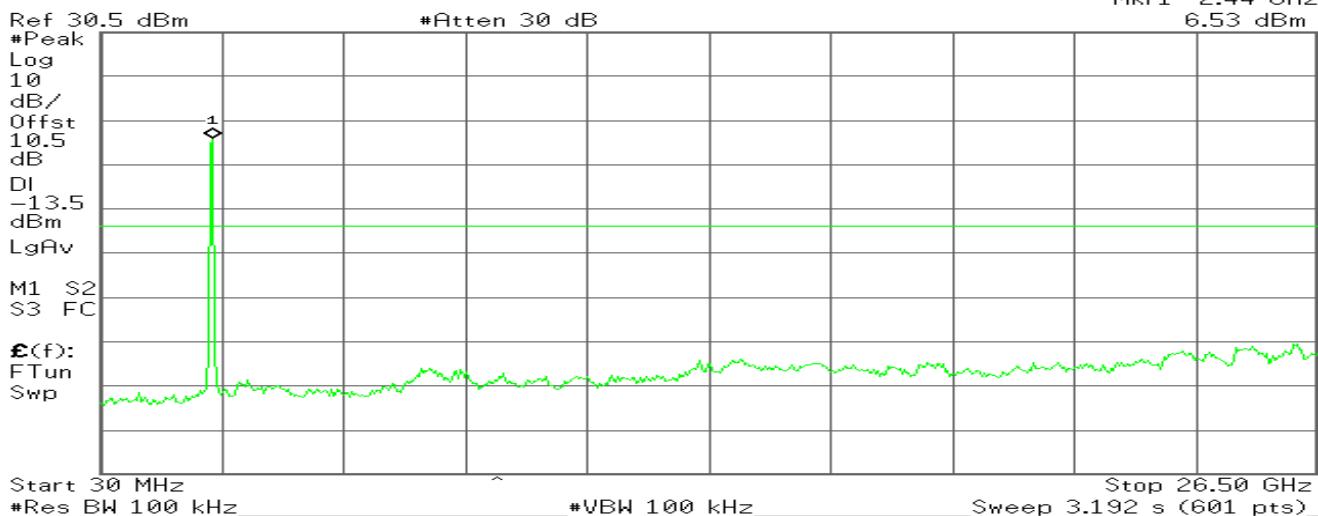
**draft 802.11n 20 MHz Channel mode / Chain 1****CH Low****CH Mid****CH High**

**draft 802.11n 40 MHz Channel mode / Combiner****CH Low**

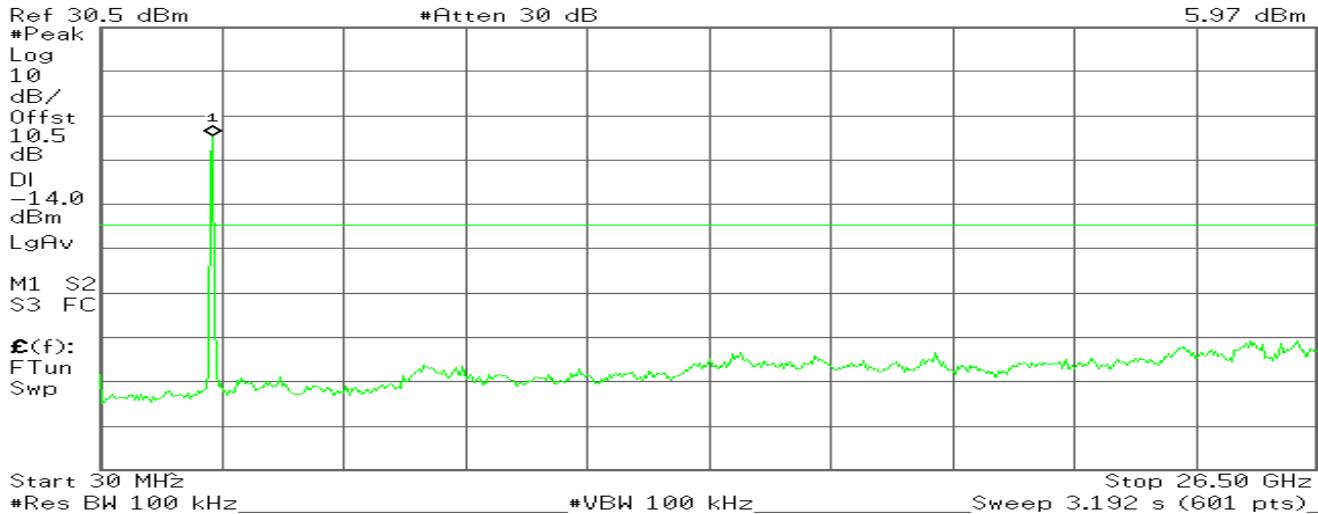
Agilent 10:39:44 Jan 28, 2010

**R L**Mkr1 2.42 GHz  
5.71 dBm**CH Mid**

Agilent 10:36:23 Jan 28, 2010

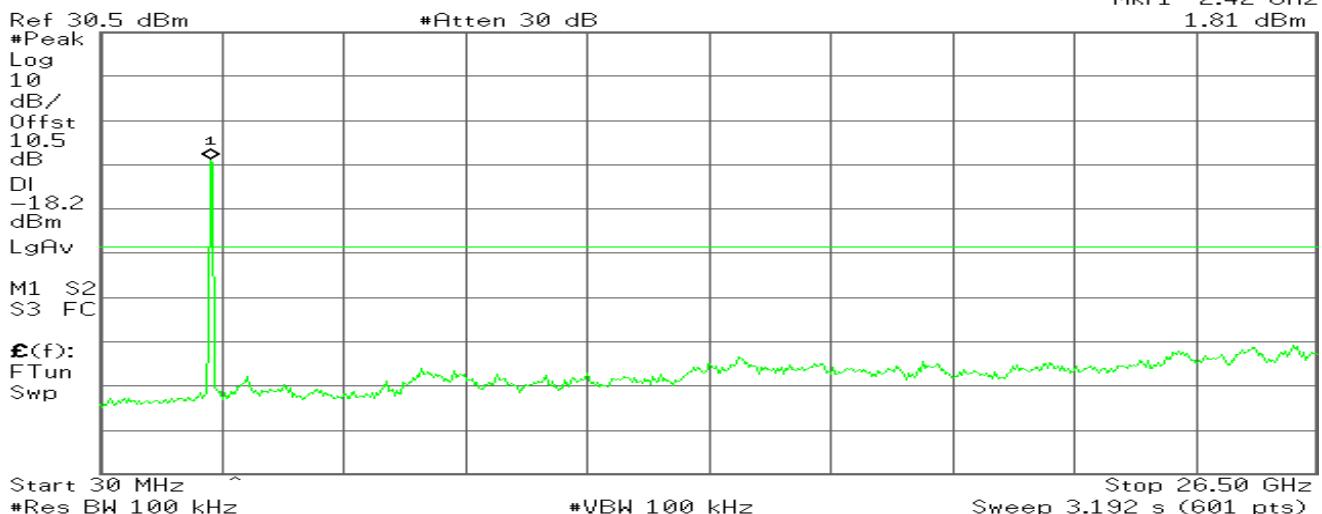
**R L**Mkr1 2.44 GHz  
6.53 dBm**CH High**

Agilent 10:33:11 Jan 28, 2010

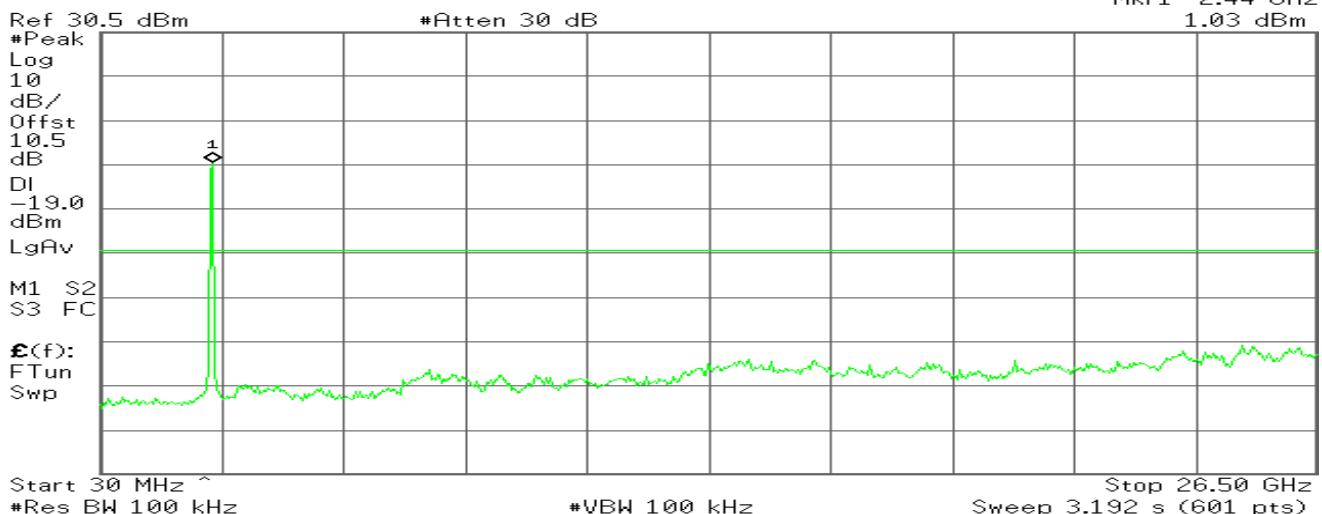
**R L**Mkr1 2.45 GHz  
5.97 dBm

**draft 802.11n 40 MHz Channel mode / Chain 0****CH Low**

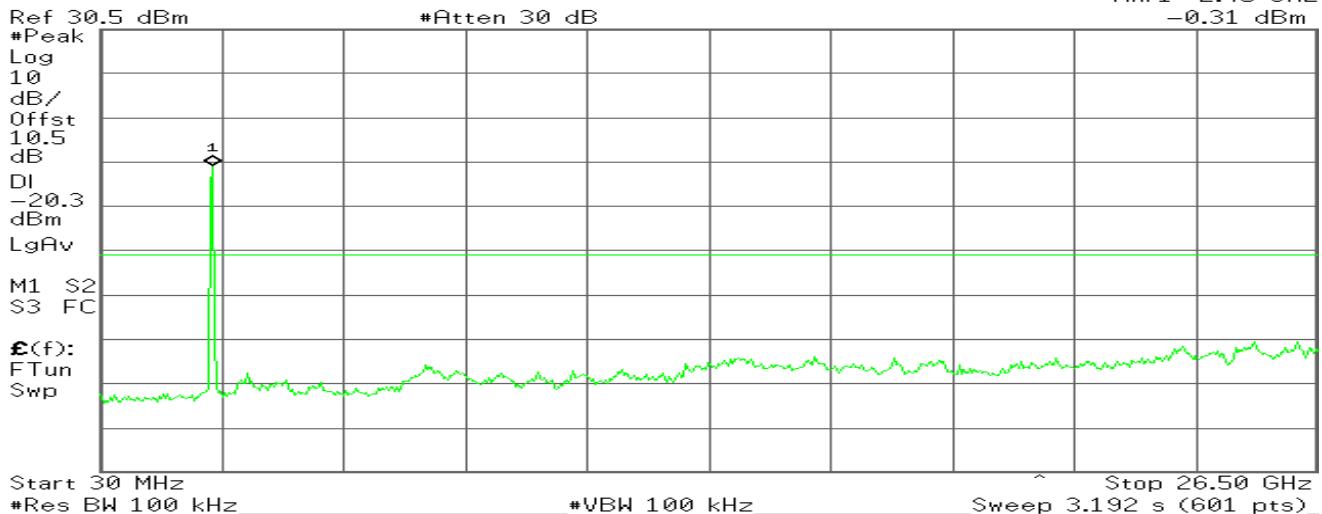
Agilent 10:45:58 Jan 28, 2010

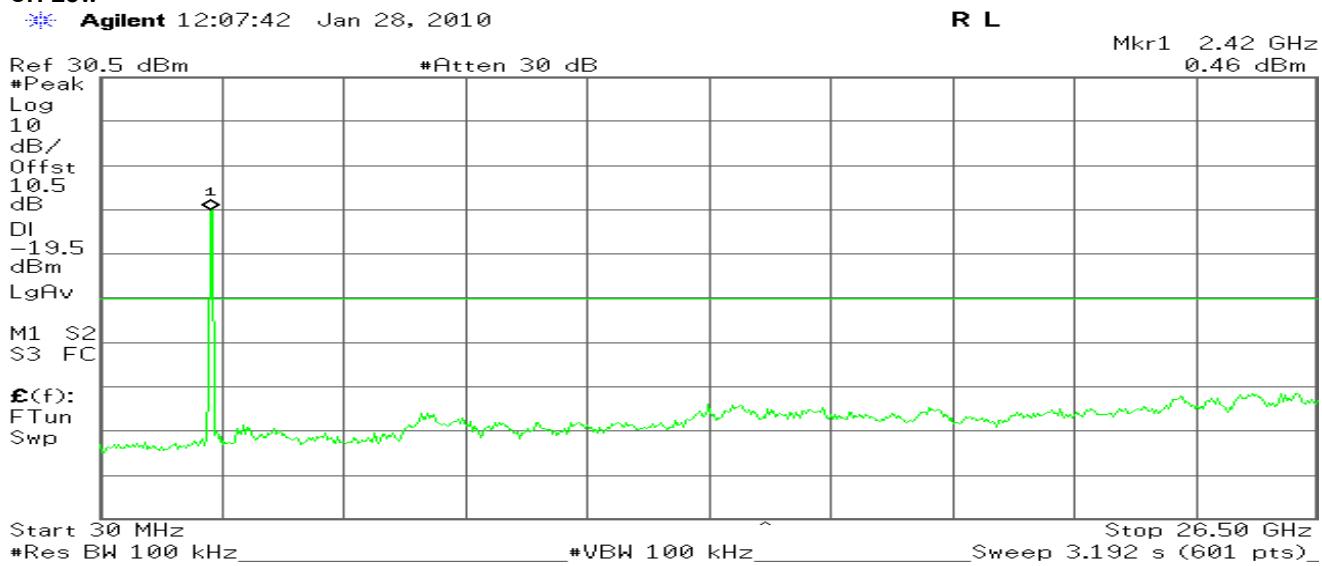
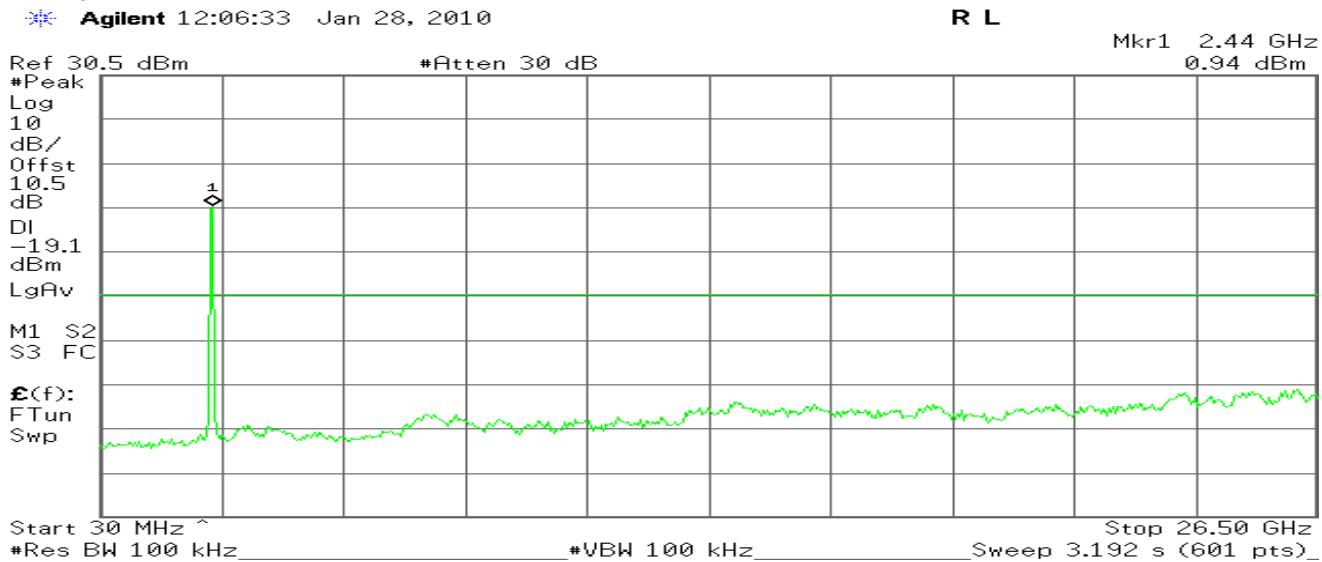
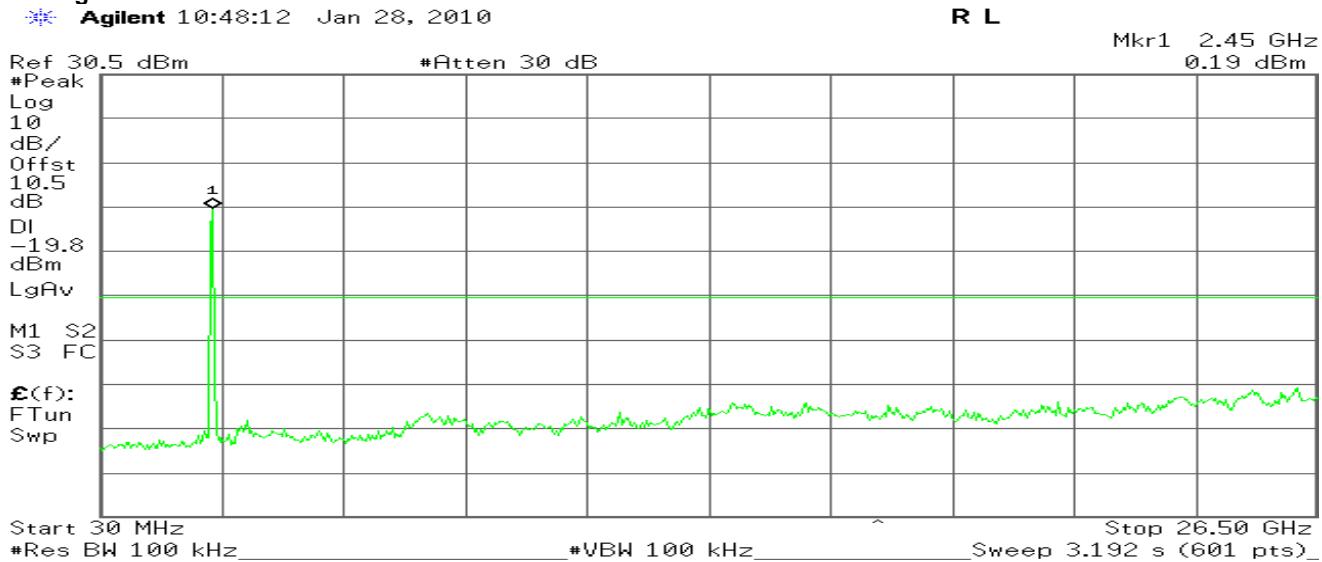
**R L**Mkr1 2.42 GHz  
1.81 dBm**CH Mid**

Agilent 10:47:01 Jan 28, 2010

**R L**Mkr1 2.44 GHz  
1.03 dBm**CH High**

Agilent 12:04:23 Jan 28, 2010

**R L**Mkr1 2.45 GHz  
-0.31 dBm

**draft 802.11n 40 MHz Channel mode / Chain 1****CH Low****CH Mid****CH High**



## 7.7. RADIATED EMISSIONS

### LIMIT

- According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

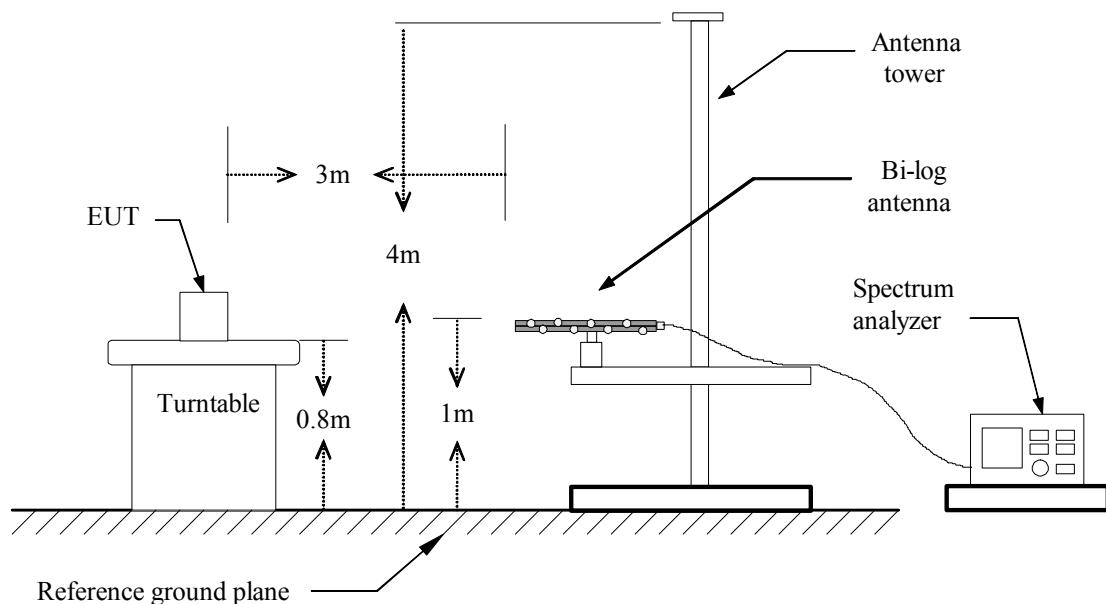
**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

- In the emission table above, the tighter limit applies at the band edges.

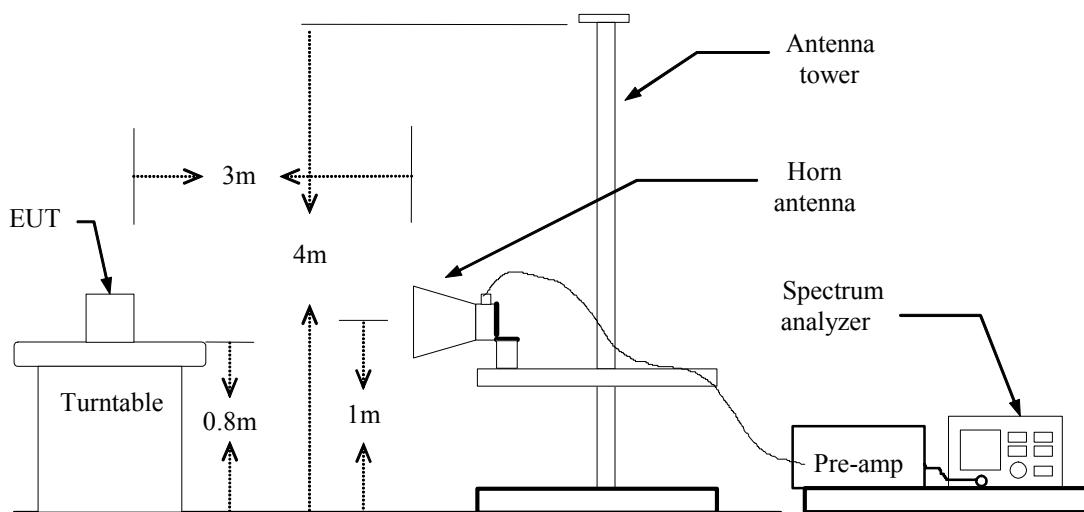
Frequency (MHz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

## TEST CONFIGURATION

### **Below 1 GHz**



### **Above 1 GHz**





## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=100kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

## **TEST RESULTS**

*No non-compliance noted.*



## TEST DATA

### Below 1GHz

**Operation Mode:** Normal Link

**Test Date:** 2010/1/27

**Temperature:** 18°C

**Tested by:** Alonso Lu

**Humidity:** 60% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
41.4942	V	49.28	-13.57	35.71	40.00	-4.29	QP
56.6750	V	48.92	-15.03	33.89	40.00	-6.11	QP
61.5250	V	50.59	-16.03	34.56	40.00	-5.44	QP
97.9000	V	51.58	-17.69	33.89	43.50	-9.61	QP
129.4250	V	47.33	-14.47	32.86	43.50	-10.64	QP
190.0500	V	52.80	-14.97	37.83	43.50	-5.67	QP
228.8500	V	50.43	-14.44	35.99	46.00	-10.01	QP
250.6750	V	49.04	-12.48	36.56	46.00	-9.44	QP
500.4500	V	49.06	-7.06	42.00	46.00	-4.00	QP
750.2250	V	43.83	-2.15	41.68	46.00	-4.32	QP
71.2250	H	49.22	-18.41	30.81	40.00	-9.19	QP
97.9000	H	56.28	-17.69	38.59	43.50	-4.91	QP
173.0750	H	51.69	-13.99	37.70	43.50	-5.80	QP
190.0500	H	55.58	-14.97	40.61	43.50	-2.89	QP
228.8500	H	52.97	-14.44	38.53	46.00	-7.47	QP
333.1250	H	48.28	-10.16	38.12	46.00	-7.88	QP
500.4500	H	49.65	-7.06	42.59	46.00	-3.41	QP
750.2250	H	44.84	-2.15	42.69	46.00	-3.31	QP

**Remark:**

1. No emission found between lowest internal used / generated frequency to 30 MHz. (9kHz ~ 30MHz)
2. Measuring frequencies from 30 MHz to the 1GHz.
3. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/quasi-Peak detector mode.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).



## Above 1 GHz

**Operation Mode:** TX / IEEE 802.11b / CH Low

**Test Date:** 2010/1/26

**Temperature:** 18°C

**Tested by:** Alonso Lu

**Humidity:** 50 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.67	V	56.99	---	-6.82	50.17	---	74.00	54.00	-3.83	Peak
1333.33	V	54.02	---	-5.11	48.91	---	74.00	54.00	-5.09	Peak
1500.00	V	57.43	52.39	-4.97	52.46	47.42	74.00	54.00	-6.58	AVG
1600.00	V	62.80	41.17	-3.33	59.47	37.84	74.00	54.00	-16.16	AVG
2496.67	V	51.09	28.73	2.39	53.48	31.12	74.00	54.00	-22.88	AVG
3000.00	V	46.15	---	2.07	48.22	---	74.00	54.00	-5.78	Peak
5000.00	V	43.88	---	6.43	50.31	---	74.00	54.00	-3.69	Peak
7475.00	V	42.00	27.47	12.66	54.67	40.13	74.00	54.00	-13.87	AVG
1063.33	H	55.96	---	-7.53	48.43	---	74.00	54.00	-5.57	Peak
1500.00	H	57.24	---	-6.13	51.11	---	74.00	54.00	-2.89	Peak
1596.67	H	58.77	40.08	-6.10	52.67	33.98	74.00	54.00	-20.02	AVG
2496.67	H	53.54	38.27	-1.51	52.03	36.76	74.00	54.00	-17.24	AVG
3741.67	H	43.85	---	7.00	50.85	---	74.00	54.00	-3.15	Peak
5000.00	H	46.29	27.49	9.47	55.76	36.96	74.00	54.00	-17.04	AVG
7491.67	H	41.96	27.38	11.92	53.88	39.30	74.00	54.00	-14.70	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** 2010/1/26**Temperature:** 18°C**Tested by:** Alonso Lu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1063.33	V	55.58	---	-6.80	48.77	---	74.00	54.00	-5.23	Peak
1500.00	V	57.28	52.42	-4.97	52.31	47.45	74.00	54.00	-6.55	AVG
1593.33	V	63.19	41.13	-3.44	59.75	37.69	74.00	54.00	-16.31	AVG
2496.67	V	50.33	28.34	2.39	52.72	30.73	74.00	54.00	-23.27	AVG
3000.00	V	45.27	---	2.07	47.34	---	74.00	54.00	-6.66	Peak
5000.00	V	43.76	---	6.43	50.19	---	74.00	54.00	-3.81	Peak
7466.67	V	42.75	27.58	12.67	55.41	40.25	74.00	54.00	-13.75	AVG
1063.33	H	54.88	---	-7.53	47.35	---	74.00	54.00	-6.65	Peak
1500.00	H	57.21	---	-6.13	51.08	---	74.00	54.00	-2.92	Peak
1600.00	H	58.70	40.17	-6.10	52.60	34.07	74.00	54.00	-19.93	AVG
1860.00	H	54.80	---	-4.75	50.05	---	74.00	54.00	-3.95	Peak
2490.00	H	54.52	28.67	-1.51	53.01	27.16	74.00	54.00	-26.84	AVG
3000.00	H	44.44	---	2.48	46.92	---	74.00	54.00	-7.08	Peak
3758.33	H	43.82	---	7.15	50.97	---	74.00	54.00	-3.03	Peak
4991.67	H	46.55	27.56	9.33	55.87	36.89	74.00	54.00	-17.11	AVG
7475.00	H	41.53	27.30	11.81	53.34	39.11	74.00	54.00	-14.89	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** 2010/1/26**Temperature:** 18°C**Tested by:** Alonso Lu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1063.33	V	55.63	---	-6.80	48.82	---	74.00	54.00	-5.18	Peak
1500.00	V	57.26	52.37	-4.97	52.29	47.40	74.00	54.00	-1.71	Peak
1600.00	V	62.88	41.23	-3.33	59.55	37.90	74.00	54.00	-16.10	AVG
1860.00	V	52.90	---	-0.94	51.96	---	74.00	54.00	-2.04	Peak
2393.33	V	53.62	39.68	1.22	54.84	40.90	74.00	54.00	-13.10	AVG
3716.67	V	43.65	---	4.79	48.44	---	74.00	54.00	-5.56	Peak
4925.00	V	42.30	---	7.38	49.68	---	74.00	54.00	-4.32	Peak
4991.67	V	43.18	---	6.54	49.72	---	74.00	54.00	-4.28	Peak
7466.67	V	42.76	27.33	12.67	55.43	40.00	74.00	54.00	-14.00	AVG
1063.33	H	55.33	---	-7.53	47.81	---	74.00	54.00	-6.19	Peak
1330.00	H	55.40	---	-7.47	47.93	---	74.00	54.00	-6.07	Peak
1500.00	H	57.76	---	-6.13	51.63	---	74.00	54.00	-2.37	Peak
1593.33	H	59.17	40.13	-6.10	53.07	34.03	74.00	54.00	-19.97	AVG
1853.33	H	53.76	---	-4.71	49.05	---	74.00	54.00	-4.95	Peak
2390.00	H	55.02	38.36	-1.52	53.50	36.84	74.00	54.00	-17.16	AVG
3791.67	H	43.21	---	7.45	50.66	---	74.00	54.00	-3.34	Peak
4925.00	H	43.46	---	8.18	51.64	---	74.00	54.00	-2.36	Peak
5000.00	H	44.30	27.44	9.47	53.77	36.91	74.00	54.00	-17.09	AVG
7475.00	H	42.77	27.37	11.81	54.59	39.18	74.00	54.00	-14.82	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** 2010/1/26**Temperature:** 18°C**Tested by:** Alonso Lu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1063.33	V	56.32	---	-6.80	49.51	---	74.00	54.00	-4.49	Peak
1333.33	V	54.42	---	-5.11	49.31	---	74.00	54.00	-4.69	Peak
1410.00	V	53.54	---	-4.52	49.02	---	74.00	54.00	-4.98	Peak
1500.00	V	58.02	52.33	-4.97	53.05	47.36	74.00	54.00	-6.64	AVG
1593.33	V	62.67	52.33	-3.44	59.23	48.89	74.00	54.00	-5.11	AVG
4991.67	V	42.27	---	6.54	48.81	---	74.00	54.00	-5.19	Peak
5075.00	V	41.36	---	6.19	47.55	---	74.00	54.00	-6.45	Peak
7491.67	V	41.91	27.51	12.65	54.56	40.16	74.00	54.00	-13.84	AVG
1410.00	H	55.29	---	-6.33	48.96	---	74.00	54.00	-5.04	Peak
1500.00	H	57.30	---	-6.13	51.17	---	74.00	54.00	-2.83	Peak
1600.00	H	58.83	40.04	-6.10	52.73	33.94	74.00	54.00	-20.06	AVG
2493.33	H	54.00	28.57	-1.51	52.49	27.06	74.00	54.00	-26.94	AVG
3758.33	H	44.70	---	7.15	51.85	---	74.00	54.00	-2.15	Peak
5000.00	H	45.73	27.54	9.47	55.20	37.01	74.00	54.00	-16.99	AVG
7491.67	H	41.07	27.08	11.92	52.99	39.00	74.00	54.00	-15.00	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** 2010/1/26**Temperature:** 18°C**Tested by:** Alonso Lu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1060.00	V	56.26	---	-6.79	49.47	---	74.00	54.00	-4.53	Peak
1333.33	V	54.72	---	-5.11	49.61	---	74.00	54.00	-4.39	Peak
1413.33	V	53.80	---	-4.54	49.26	---	74.00	54.00	-4.74	Peak
1500.00	V	57.54	52.37	-4.97	52.57	47.40	74.00	54.00	-6.60	AVG
1600.00	V	62.60	41.24	-3.33	59.27	37.91	74.00	54.00	-16.09	AVG
1760.00	V	53.25	---	-1.64	51.62	---	74.00	54.00	-2.38	Peak
2496.67	V	51.06	28.52	2.39	53.45	30.91	74.00	54.00	-23.09	AVG
4500.00	V	42.13	---	5.96	48.09	---	74.00	54.00	-5.91	Peak
5366.67	V	40.06	---	9.29	49.34	---	74.00	54.00	-4.66	Peak
7475.00	V	40.18	27.11	12.66	52.84	39.77	74.00	54.00	-14.23	AVG
1060.00	H	54.90	---	-7.55	47.35	---	74.00	54.00	-6.65	Peak
1326.67	H	54.92	---	-7.52	47.40	---	74.00	54.00	-6.60	Peak
1500.00	H	57.98	---	-6.13	51.85	---	74.00	54.00	-2.15	Peak
1600.00	H	59.03	40.13	-6.10	52.93	34.03	74.00	54.00	-19.97	AVG
2496.67	H	53.44	---	-1.51	51.93	---	74.00	54.00	-2.07	Peak
3783.33	H	43.65	---	7.37	51.02	---	74.00	54.00	-2.98	Peak
5000.00	H	45.49	27.53	9.47	54.96	37.00	74.00	54.00	-17.00	AVG
7466.67	H	40.82	27.14	11.76	52.58	38.90	74.00	54.00	-15.10	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** 2010/1/26**Temperature:** 18°C**Tested by:** Alonso Lu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1060.00	V	55.78	---	-6.79	48.99	---	74.00	54.00	-5.01	Peak
1333.33	V	54.41	---	-5.11	49.30	---	74.00	54.00	-4.70	Peak
1500.00	V	58.66	52.35	-4.97	53.69	47.38	74.00	54.00	-6.621	AVG
1593.33	V	63.00	41.32	-3.44	59.56	37.88	74.00	54.00	-16.12	AVG
2280.00	V	50.70	---	0.50	51.21	---	74.00	54.00	-2.79	Peak
4500.00	V	41.65	---	5.96	47.61	---	74.00	54.00	-6.39	Peak
5000.00	V	43.00	---	6.43	49.43	---	74.00	54.00	-4.57	Peak
7483.33	V	42.15	27.38	12.66	54.81	40.04	74.00	54.00	-13.96	AVG
1500.00	H	57.45	---	-6.13	51.32	---	74.00	54.00	-2.68	Peak
1530.00	H	54.55	---	-6.12	48.43	---	74.00	54.00	-5.57	Peak
1600.00	H	58.35	39.98	-6.10	52.25	33.88	74.00	54.00	-20.12	AVG
1783.33	H	53.31	---	-4.25	49.06	---	74.00	54.00	-4.94	Peak
1863.33	H	53.05	---	-4.77	48.28	---	74.00	54.00	-5.72	Peak
2076.67	H	50.22	---	-2.12	48.10	---	74.00	54.00	-5.90	Peak
3700.00	H	43.63	---	6.63	50.26	---	74.00	54.00	-3.74	Peak
5000.00	H	45.55	27.40	9.47	55.02	36.87	74.00	54.00	-17.13	AVG
7491.67	H	41.69	27.23	11.92	53.62	39.15	74.00	54.00	-14.85	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / draft 802.11n 20 MHz Channel mode /  
CH Low

**Test Date:** 2010/1/26

**Temperature:** 18°C

**Tested by:** Alonso Lu

**Humidity:** 50 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.67	V	55.85	---	-6.82	49.03	---	74.00	54.00	-4.97	Peak
1200.00	V	55.78	---	-5.70	50.08	---	74.00	54.00	-3.92	Peak
1333.33	V	54.67	---	-5.11	49.56	---	74.00	54.00	-4.44	Peak
1500.00	V	57.55	52.41	-4.97	52.58	47.44	74.00	54.00	-6.56	AVG
1596.67	V	63.47	41.23	-3.38	60.09	37.85	74.00	54.00	-16.15	AVG
2500.00	V	50.60	28.32	2.43	53.03	30.75	74.00	54.00	-23.25	AVG
3675.00	V	44.11	---	4.50	48.61	---	74.00	54.00	-5.39	Peak
5000.00	V	44.36	---	6.43	50.79	---	74.00	54.00	-3.21	Peak
7500.00	V	42.08	27.32	12.65	54.73	39.97	74.00	54.00	-14.03	AVG
1063.33	H	54.60	---	-7.53	47.07	---	74.00	54.00	-6.93	Peak
1500.00	H	56.88	---	-6.13	50.75	---	74.00	54.00	-3.25	Peak
1596.67	H	58.99	40.07	-6.10	52.89	33.97	74.00	54.00	-20.03	AVG
2493.33	H	54.35	38.30	-1.51	52.84	36.79	74.00	54.00	-17.21	AVG
3741.67	H	44.59	---	7.00	51.60	---	74.00	54.00	-2.40	Peak
4991.67	H	45.79	27.49	9.33	55.11	36.82	74.00	54.00	-17.18	AVG
7491.67	H	41.48	27.33	11.92	53.41	39.25	74.00	54.00	-14.75	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / draft 802.11n 20 MHz Channel mode / CH Mid      **Test Date:** 2010/1/26

**Temperature:** 18°C

**Tested by:** Alonso Lu

**Humidity:** 50 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1063.33	V	55.19	---	-6.80	48.38	---	74.00	54.00	-5.62	Peak
1500.00	V	57.67	52.43	-4.97	52.70	47.46	74.00	54.00	-6.54	AVG
1596.67	V	62.97	41.22	-3.38	59.59	37.84	74.00	54.00	-16.16	AVG
1766.67	V	51.78	---	-1.53	50.26	---	74.00	54.00	-3.74	Peak
4975.00	V	42.87	---	6.75	49.61	---	74.00	54.00	-4.39	Peak
5525.00	V	40.09	---	8.77	48.87	---	74.00	54.00	-5.13	Peak
1063.33	H	54.46	---	-7.53	46.94	---	74.00	54.00	-7.06	Peak
1330.00	H	54.53	---	-7.47	47.06	---	74.00	54.00	-6.94	Peak
1500.00	H	57.36	---	-6.13	51.23	---	74.00	54.00	-2.77	Peak
1596.67	H	58.97	40.15	-6.10	52.87	34.05	74.00	54.00	-19.95	AVG
2493.33	H	53.99	38.44	-1.51	52.48	36.93	74.00	54.00	-17.07	AVG
3700.00	H	44.02	---	6.63	50.65	---	74.00	54.00	-3.35	Peak
4975.00	H	45.27	27.57	9.04	54.31	36.61	74.00	54.00	-17.39	AVG
7491.67	H	40.46	27.30	11.92	52.38	39.22	74.00	54.00	-14.78	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



# Compliance Certification Services Inc.

Report No: 9122106-RP1

FCC ID: M82-PIT-1501

Date of Issue: January 29, 2010

**Operation Mode:** TX / draft 802.11n 20 MHz Channel mode / CH High      **Test Date:** 2010/1/26

**Temperature:** 18°C

**Tested by:** Alonso Lu

**Humidity:** 50 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1063.33	V	55.61	---	-6.80	48.81	---	74.00	54.00	-5.19	Peak
1333.33	V	54.01	---	-5.11	48.90	---	74.00	54.00	-5.10	Peak
1466.67	V	54.28	---	-4.80	49.48	---	74.00	54.00	-4.52	Peak
1500.00	V	57.60	52.30	-4.97	52.63	47.33	74.00	54.00	-6.67	AVG
1593.33	V	63.02	41.14	-3.44	59.58	37.70	74.00	54.00	-16.30	AVG
2666.67	V	49.91	---	1.40	51.31	---	74.00	54.00	-2.69	Peak
3000.00	V	45.99	---	2.07	48.06	---	74.00	54.00	-5.94	Peak
3441.67	V	43.88	---	3.42	47.30	---	74.00	54.00	-6.70	Peak
5000.00	V	43.28	---	6.43	49.71	---	74.00	54.00	-4.29	Peak
7483.33	V	41.52	27.46	12.66	54.18	40.12	74.00	54.00	-13.88	AVG
1066.67	H	54.80	---	-7.50	47.29	---	74.00	54.00	-6.71	Peak
1333.33	H	53.32	---	-7.42	45.90	---	74.00	54.00	-8.10	Peak
1500.00	H	57.19	---	-6.13	51.06	---	74.00	54.00	-2.94	Peak
1600.00	H	59.05	40.08	-6.10	52.95	33.98	74.00	54.00	-20.02	AVG
1780.00	H	53.64	---	-4.23	49.41	---	74.00	54.00	-4.59	Peak
3750.00	H	44.08	---	7.08	51.16	---	74.00	54.00	-2.84	Peak
5000.00	H	46.08	27.52	9.47	55.55	36.99	74.00	54.00	-17.01	AVG
7491.67	H	41.25	27.36	11.92	53.18	39.28	74.00	54.00	-14.72	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



# Compliance Certification Services Inc.

Report No: 9122106-RP1

FCC ID: M82-PIT-1501

Date of Issue: January 29, 2010

**Operation Mode:** TX / draft 802.11n 40 MHz Channel mode / CH Low      **Test Date:** 2010/1/26

**Temperature:** 18°C

**Tested by:** Alonso Lu

**Humidity:** 50 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1063.33	V	58.31	---	-6.80	51.50	---	74.00	54.00	-2.50	Peak
1333.33	V	53.97	---	-5.11	48.86	---	74.00	54.00	-5.14	Peak
1500.00	V	58.07	52.33	-4.97	53.10	47.36	74.00	54.00	-6.64	AVG
1596.67	V	62.94	41.14	-3.38	59.56	37.76	74.00	54.00	-16.24	AVG
4975.00	V	42.75	---	6.75	49.50	---	74.00	54.00	-4.50	Peak
6741.67	V	40.18	---	10.03	50.21	---	74.00	54.00	-3.79	Peak
1500.00	H	57.74	---	-6.13	51.61	---	74.00	54.00	-2.39	Peak
1600.00	H	58.70	40.08	-6.10	52.60	33.98	74.00	54.00	-20.02	AVG
1866.67	H	53.74	---	-4.79	48.94	---	74.00	54.00	-5.06	Peak
2496.67	H	53.91	28.72	-1.51	52.40	27.21	74.00	54.00	-26.79	AVG
2820.00	H	51.43	---	-0.38	51.05	---	74.00	54.00	-2.95	Peak
3758.33	H	44.08	---	7.15	51.23	---	74.00	54.00	-2.77	Peak
5000.00	H	44.72	27.41	9.47	54.19	36.88	74.00	54.00	-17.12	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / draft 802.11n 40 MHz Channel mode / CH Mid      **Test Date:** 2010/1/26

**Temperature:** 18°C

**Tested by:** Alonso Lu

**Humidity:** 50 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1063.33	V	55.49	---	-6.80	48.69	---	74.00	54.00	-5.31	Peak
1200.00	V	54.89	---	-5.70	49.19	---	74.00	54.00	-4.81	Peak
1333.33	V	54.47	---	-5.11	49.36	---	74.00	54.00	-4.64	Peak
1500.00	V	58.11	52.39	-4.97	53.14	47.42	74.00	54.00	-6.58	AVG
1593.33	V	63.26	41.20	-3.44	59.82	37.76	74.00	54.00	-16.24	AVG
4500.00	V	41.24	---	5.96	47.20	---	74.00	54.00	-6.80	Peak
5000.00	V	43.67	---	6.43	50.10	---	74.00	54.00	-3.90	Peak
1063.33	H	54.88	---	-7.53	47.35	---	74.00	54.00	-6.65	Peak
1320.00	H	53.33	---	-7.63	45.70	---	74.00	54.00	-8.30	Peak
1500.00	H	57.37	---	-6.13	51.24	---	74.00	54.00	-2.76	Peak
1593.33	H	59.27	40.01	-6.10	53.17	33.91	74.00	54.00	-20.09	AVG
1730.00	H	52.33	---	-3.89	48.44	---	74.00	54.00	-5.56	Peak
1770.00	H	53.09	---	-4.16	48.93	---	74.00	54.00	-5.07	Peak
3741.67	H	44.16	---	7.00	51.16	---	74.00	54.00	-2.84	Peak
4500.00	H	42.62	---	9.00	51.62	---	74.00	54.00	-2.38	Peak
4975.00	H	44.85	27.45	9.04	53.89	36.49	74.00	54.00	-17.51	AVG
7483.33	H	41.87	27.37	11.87	53.74	39.24	74.00	54.00	-14.76	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / draft 802.11n 40 MHz Channel mode /  
CH High

**Test Date:** 2010/1/26

**Temperature:** 18°C

**Tested by:** Alonso Lu

**Humidity:** 50 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.67	V	55.25	---	-6.82	48.43	---	74.00	54.00	-5.57	Peak
1333.33	V	53.74	---	-5.11	48.63	---	74.00	54.00	-5.37	Peak
1413.33	V	54.63	---	-4.54	50.10	---	74.00	54.00	-3.90	Peak
1500.00	V	57.03	52.30	-4.97	52.06	47.33	74.00	54.00	-6.67	AVG
1600.00	V	63.37	41.17	-3.33	60.04	37.84	74.00	54.00	-16.16	AVG
1766.67	V	52.54	---	-1.53	51.01	---	74.00	54.00	-2.99	Peak
4500.00	V	42.29	---	5.96	48.25	---	74.00	54.00	-5.75	Peak
5000.00	V	42.96	---	6.43	49.39	---	74.00	54.00	-4.61	Peak
7475.00	V	41.51	27.33	12.66	54.18	39.99	74.00	54.00	-14.01	AVG
1066.67	H	56.15	---	-7.50	48.65	---	74.00	54.00	-5.35	Peak
1326.67	H	57.04	---	-7.52	49.51	---	74.00	54.00	-4.49	Peak
1500.00	H	57.42	---	-6.13	51.29	---	74.00	54.00	-2.71	Peak
1596.67	H	58.52	40.12	-6.10	52.42	34.02	74.00	54.00	-19.98	AVG
5000.00	H	45.88	27.43	9.47	55.35	36.90	74.00	54.00	-17.10	AVG
7491.67	H	42.45	27.36	11.92	54.38	39.28	74.00	54.00	-14.72	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



## 7.8. POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-Peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### TEST CONFIGURATION

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

### TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer Peak scan of the measurement range. Significant Peaks are then marked as shown on the following data page, and these signals are then quasi-Peaked.



## TEST DATA

**Operation Mode:** Normal Link

**Test Date:** 2009/12/31

**Temperature:** 25°C

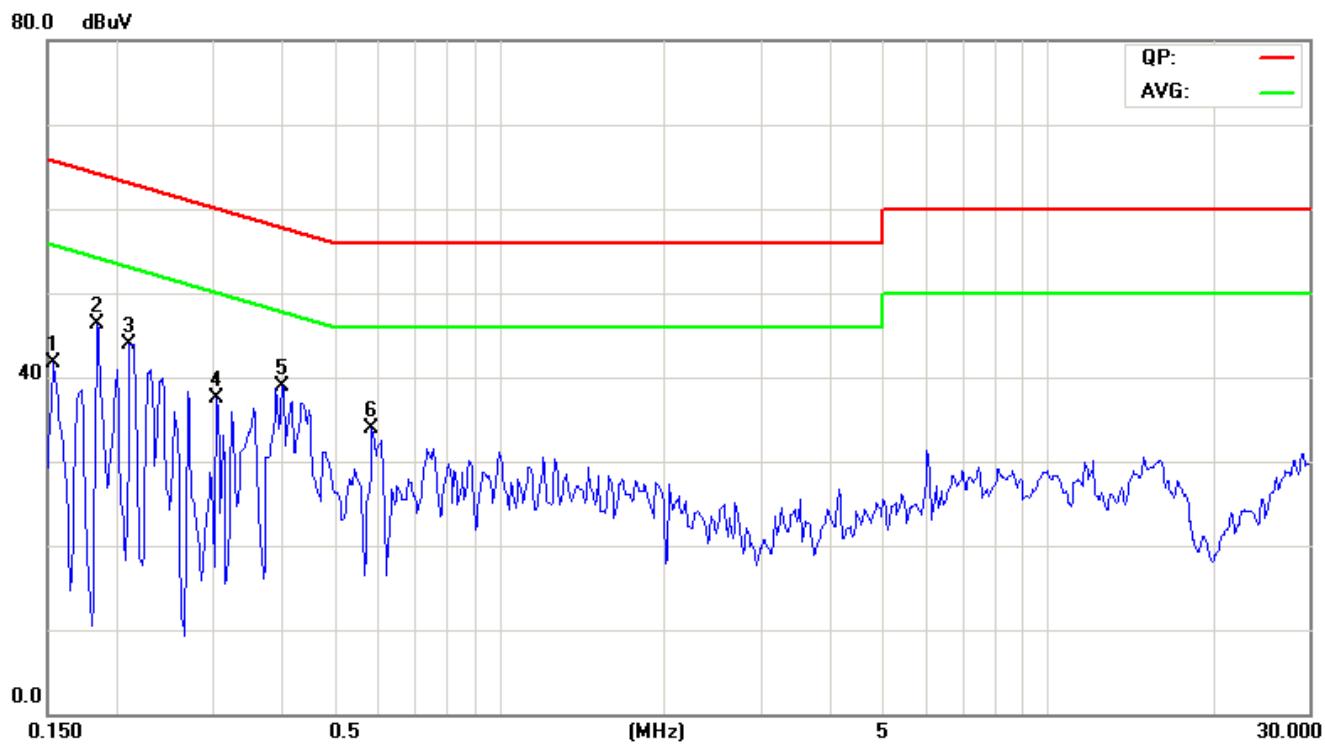
**Tested by:** Bill Cheng

**Humidity:** 57% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1539	42.43	27.53	0.17	42.60	27.70	65.79	55.79	-23.19	-28.09	L1
0.1852	40.45	17.15	0.15	40.60	17.30	64.25	54.25	-23.65	-36.95	L1
0.2125	41.16	14.86	0.14	41.30	15.00	63.11	53.11	-21.81	-38.11	L1
0.3063	32.88	11.48	0.12	33.00	11.60	60.07	50.07	-27.07	-38.47	L1
0.4039	33.30	24.30	0.10	33.40	24.40	57.77	47.77	-24.37	-23.37	L1
0.5875	28.90	20.10	0.00	28.90	20.10	56.00	46.00	-27.10	-25.90	L1
0.1500	39.53	30.63	0.17	39.70	30.80	66.00	56.00	-26.30	-25.20	L2
0.2945	23.48	16.38	0.12	23.60	16.50	60.40	50.40	-36.80	-33.90	L2
0.3883	34.40	27.70	0.10	34.50	27.80	58.10	48.10	-23.60	-20.30	L2
0.4430	36.94	29.44	0.06	37.00	29.50	57.01	47.01	-20.01	-17.51	L2
0.6070	29.60	18.40	0.00	29.60	18.40	56.00	46.00	-26.40	-27.60	L2
1.0133	29.00	17.30	0.00	29.00	17.30	56.00	46.00	-27.00	-28.70	L2

**Remark:**

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-Peak detector and Average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

**Test Plot*****Conducted emissions (Line 1)******Conducted emissions (Line 2)***