



A D T

FCC TEST REPORT

(RFID)

REPORT NO.: RF130521C18-4

MODEL NO.: PWS-770xxxxxxxxxxxxxx ("x" can be 0-9 or A-Z or blank or any alphanumeric character for marketing purpose)

FCC ID: M82-PWS-770PH

RECEIVED: Mar. 25, 2013

TESTED: Jun. 03 ~ Aug. 13, 2013

ISSUED: Aug. 19, 2013

APPLICANT: ADVANTECH CO., LTD

ADDRESS: No. 1, Alley 20, Lane 26, Rueiguang Rd, Neihu District, Taipei, Taiwan 114

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



Table of Contents

RELEASE CONTROL RECORD	3
1. CERTIFICATION	4
2. SUMMARY OF TEST RESULTS	5
2.1 MEASUREMENT UNCERTAINTY	5
3. GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	7
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	7
3.3 DESCRIPTION OF SUPPORT UNITS	9
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST	10
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	11
4. TEST TYPES AND RESULTS	12
4.1 RADIATED EMISSION MEASUREMENT	12
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	12
4.1.2 TEST INSTRUMENTS	13
4.1.3 TEST PROCEDURES	14
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP	15
4.1.6 EUT OPERATING CONDITIONS	15
4.1.7 TEST RESULTS	16
4.2 CONDUCTED EMISSION MEASUREMENT	22
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	22
4.2.2 TEST INSTRUMENTS	22
4.2.3 TEST PROCEDURES	23
4.2.4 DEVIATION FROM TEST STANDARD	23
4.2.5 TEST SETUP	23
4.2.6 EUT OPERATING CONDITIONS	23
4.2.7 TEST RESULTS	24
4.3 FREQUENCY STABILITY	30
4.3.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	30
4.3.2 TEST INSTRUMENTS	30
4.3.3 TEST PROCEDURE	30
4.3.4 DEVIATION FROM TEST STANDARD	31
4.3.5 TEST SETUP	31
4.3.6 EUT OPERATING CONDITION	31
4.3.7 TEST RESULTS	32
4.4 20dB BANDWIDTH	33
4.4.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT	33
4.4.2 TEST INSTRUMENTS	33
4.4.3 TEST PROCEDURE	33
4.4.4 DEVIATION FROM TEST STANDARD	33
4.4.5 TEST SETUP	33
4.4.6 EUT OPERATING CONDITION	33
4.4.7 TEST RESULTS	34
5. PHOTOGRAPHS OF THE TEST CONFIGURATION	35
6. INFORMATION ON THE TESTING LABORATORIES	36
7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	37



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130521C18-4	Original release	Aug. 19, 2013



A D T

1. CERTIFICATION

PRODUCT: Computer

MODEL: PWS-770xxxxxxxxxxxxxx ("x" can be 0-9 or A-Z or blank or any alphanumeric character for marketing purpose)

BRAND: **ADVANTECH**

APPLICANT: ADVANTECH CO., LTD

TESTED: Jun. 03 ~ Aug. 13, 2013

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.225)

FCC Part 15, Subpart C (Section 15.215)

ANSI C63.10-2009

The above equipment (model: PWS-770) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Celine Chou , **DATE :** Aug. 19, 2013
Celine Chou / Specialist

APPROVED BY : Ken Liu , **DATE :** Aug. 19, 2013
Ken Liu / Senior Manager



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.225, 15.215)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	Conducted emission test	PASS	Meet the requirement of limit. Minimum passing margin is -1.35dB at 13.55859MHz.
15.225 (a)	The field strength of any emissions within the band 13.553-13.567 MHz	PASS	Meet the requirement of limit. Minimum passing margin is -65.94dB at 13.56MHz.
15.225 (d)	The field strength of any emissions appearing outside of the 13.110-14.010 MHz band	PASS	Meet the requirement of limit. Minimum passing margin is -1.4dB at 199.05MHz.
15.225 (e)	The frequency tolerance	PASS	Meet the requirement of limit.
15.215 (c)	20dB Bandwidth	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted Emission	150kHz ~ 30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Computer
MODEL NO.	PWS-770xxxxxxxxxxxxxx ("x" can be 0-9 or A-Z or blank or any alphanumeric character for marketing purpose)
POWER SUPPLY	19Vdc (Adapter) 11.1Vdc (Battery)
MODULATION TYPE	ASK
OPERATING FREQUENCY	13.56MHz
ANTENNA TYPE	Loop antenna with 0dBi gain
ANTENNA CONNECTOR	Pin header
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Adapter, Cradle, Stylus, Battery

NOTE:

1. All models are electrically identical, different model names are for marketing purpose. Model PWS-770 is the representative for final test.

Brand	Model
Advantech	PWS-770xxxxxxxxxxxxxx ("x" can be 0-9 or A-Z or blank or any alphanumeric character for marketing purpose)

2. The EUT contains the following accessories.

No.	Product	Brand	Model	Description
1	Adapter	FSP GROUP INC.	FSP065-RAB	Input: 100-240Vac, 1.5A, 50-60Hz Output: 19Vdc, 3.42A Power Line: 1.5m cable with 1 core attached on adapter
2	Battery Pack	Joules	1760001576	Rating: 11.1Vdc, 1880mA, 20.87Wh Type: Li-ion
3	Cradle 1	ADVANTECH	pws-770 cradle	Rating: 19Vdc, 3.42A
4	Cradle 2	ADVANTECH	pws-770 vehicle cradle	Rating: 18.5Vdc, 4.9A

3. The above EUT information is declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

3.2 DESCRIPTION OF TEST MODES

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE	PLC	FS	BW	
A	√	√	-	-	EUT with Cradle 1
B	√	√	-	-	EUT with Cradle 2
C	√	√	√	√	EUT without Cradle

Where RE: Radiated Emission

PLC: Power Line Conducted Emission

FS: Frequency Stability

BW: 20dB Bandwidth

NOTE:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.
2. “-”means no effect.

RADIATED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
A, B, C	1	1	ASK

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
A, B, C	1	1	ASK

FREQUENCY STABILITY:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
C	1	1	ASK



A D T

20dB BANDWIDTH:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
C	1	1	ASK

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE	22deg. C, 72%RH 25deg. C, 65%RH	120Vac, 60Hz	Martin Lee Ted Chang
FS	25deg. C, 60%RH	120Vac, 60Hz	Martin Lee
PLC	25deg. C, 65%RH 25deg. C, 64%RH	120Vac, 60Hz	Alan Wu Leo Tsai Ted Chang
BW	25deg. C, 60%RH	120Vac, 60Hz	Martin Lee



3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	KEYBOARD	DELL	KB4021	CN-05V23T-71581-1A K-01Q2-A01	FCC DoC Approved
2	MOUSE	DELL	MS111-P	CN-011D3V-71581-1C J-019E	FCC DoC Approved
3	USB FLASH DRIVE	Transcend	V85	538455 4490	NA
4	USB FLASH DRIVE	Transcend	V85	538455 4489	NA
5	NOTEBOOK	DELL	E5410	6RP2YM1	FCC DoC Approved


NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.8m foil shielded wire, USB connector, w/o core
2	1.8m foil shielded wire, USB connector, w/o core
3	NA
4	NA
5	10m RJ45cable, w/o core

NOTE:


1. All power cords of the above support units are non shielded (1.8m).
2. Item 5 acted as communication partners to transfer data.

3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

TEST MODE A, B

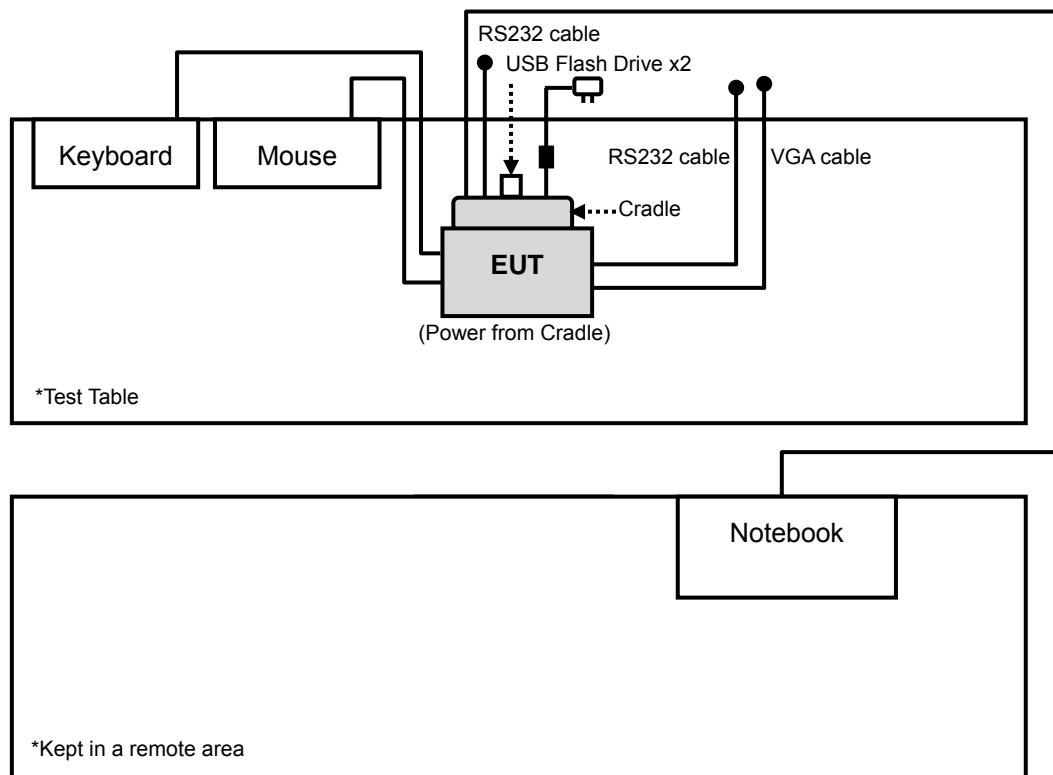

TEST MODE C

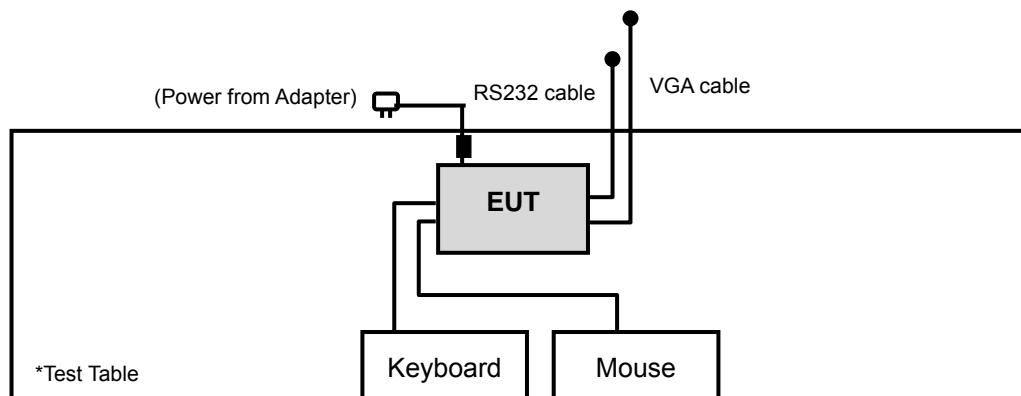



A D T

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RFID Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.225)

FCC Part 15, Subpart C (15.215)

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B. The test report has been issued separately.



4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_BV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Dec. 25, 2012	Dec. 24, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jan. 31, 2013	Jan. 30, 2014
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Mar. 20, 2013	Mar. 19, 2014
HORN Antenna SCHWARZBECK	9120D	209	Sep. 03, 2012	Sep. 02, 2013
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 15, 2013	Jul. 14, 2014
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier Agilent	8447D	2944A10633	Oct. 25, 2012	Oct. 24, 2013
Preamplifier Agilent	8449B	3008A01964	Oct. 25, 2012	Oct. 24, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250723/4	Aug. 28, 2012	Aug. 27, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 106	12738/6+309224/4	Aug. 28, 2012	Aug. 27, 2013
Software BV ADT	ADT_Radiated_V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in HwaYa Chamber 3.
4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
5. The FCC Site Registration No. is 988962.
6. The IC Site Registration No. is IC 7450F-3.



A D T

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

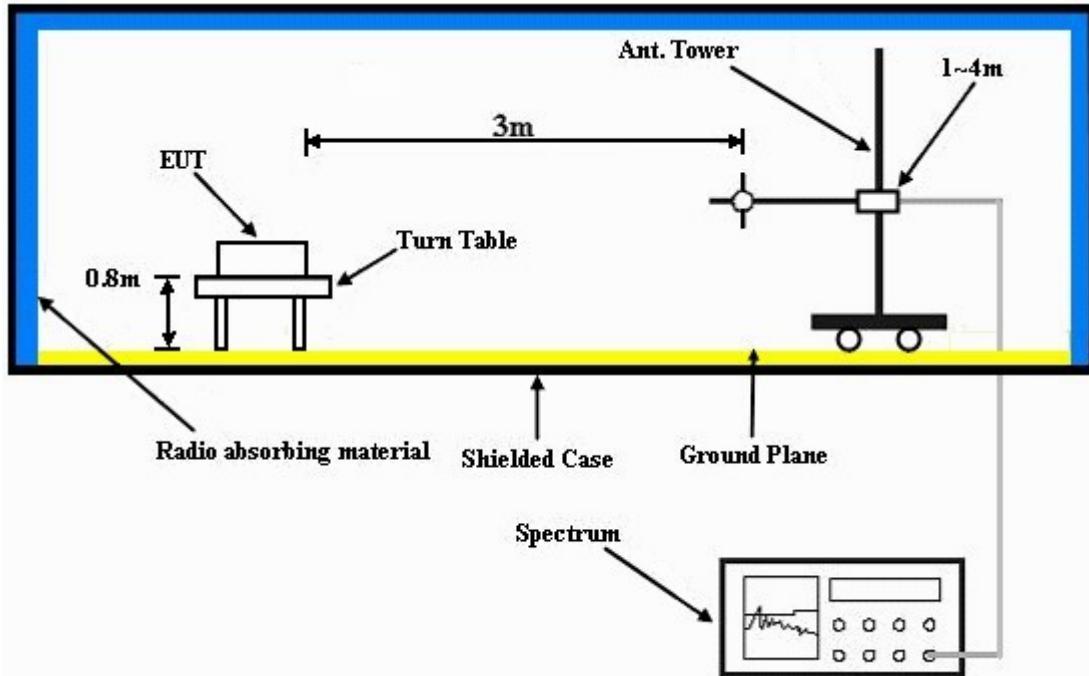

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

TEST MODE A, B

- Placed the EUT on the testing table.
- The notebook connected with EUT via a RJ45 cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.

TEST MODE C

- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 TEST RESULTS

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	13.553 ~ 13.567MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	22deg. C, 72%RH	TESTED BY	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA OPEN AT 3m								
No.	Freq. (MHz)	Emission Level (dB _u V/m)	Limit (dB _u V/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dB _u V)	Correction Factor (dB/m)
1	13.56	58.06	124.00	-65.94	0.1	68	38.13	19.93


REMARKS:

1. Emission level(dB_uV/m)=Raw Value(dB_uV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} & 30\text{m} \\
 &= 84\text{dB}_u\text{V/m} & 30\text{m} \\
 &= 84+20\log(30/3)^2 & 3\text{m} \\
 &= 124\text{dB}_u\text{V/m}
 \end{aligned}$$

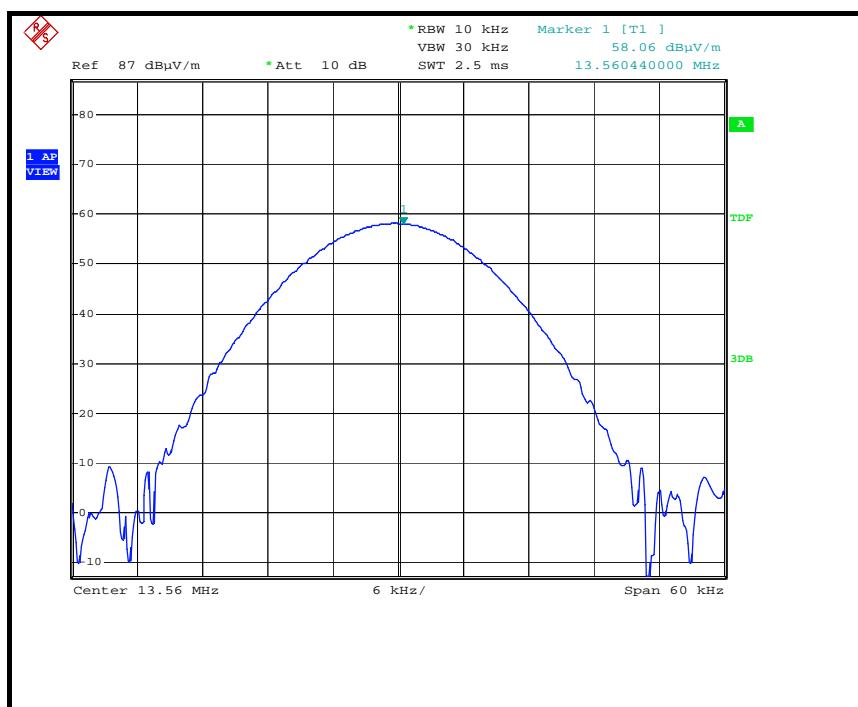

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	13.553 ~ 13.567MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	22deg. C, 72%RH	TESTED BY	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA CLOSE AT 3m								
No.	Freq. (MHz)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dB μ V)	Correction Factor (dB/m)
1	13.56	54.37	124.00	-69.63	0.1	0	34.44	19.93


REMARKS:

1. Emission level(dB μ V/m)=Raw Value(dB μ V) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} & 30\text{m} \\
 &= 84\text{dB μ V/m} & 30\text{m} \\
 &= 84+20\log(30/3)^2 & 3\text{m} \\
 &= 124\text{dB μ V/m}
 \end{aligned}$$

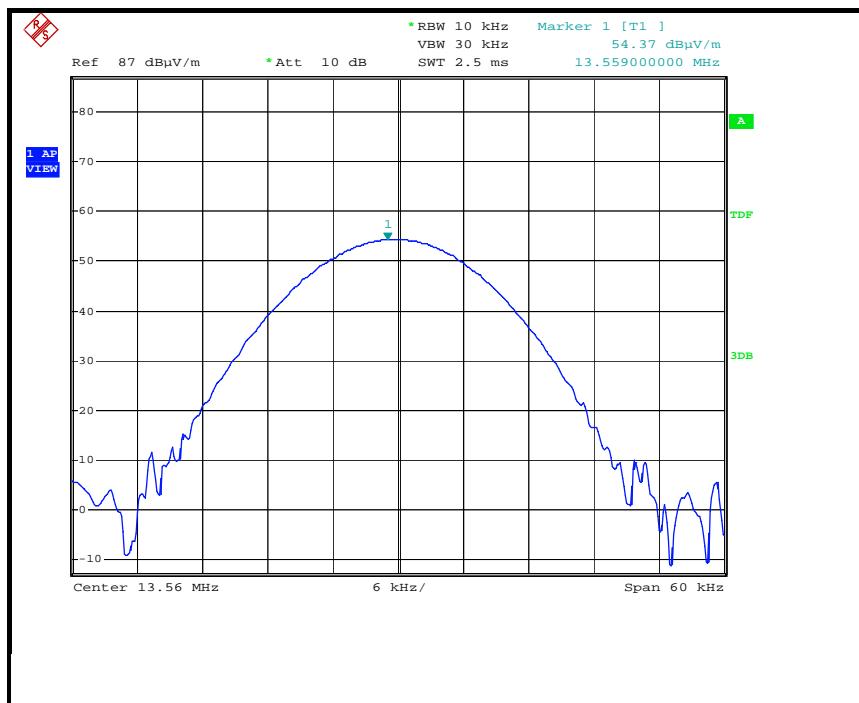



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 1		FREQUENCY RANGE
INPUT POWER		120Vac, 60Hz		DETECTOR FUNCTION
ENVIRONMENTAL CONDITIONS		22deg. C, 72%RH		TESTED BY
				Martin Lee

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA OPEN AT 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	27.12	31.75	69.54	-37.79	0.1	178	11.72	20.03
ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA CLOSE AT 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	27.12	32.98	69.54	-36.56	0.1	132	12.95	20.03

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	22deg. C, 72%RH	TESTED BY	Martin Lee
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	199.05	37.3 QP	43.5	-6.2	1.24 H	87	26.50	10.80
2	300.16	37.6 QP	46.0	-8.4	1.00 H	278	22.90	14.70
3	447.92	41.7 QP	46.0	-4.3	1.69 H	326	23.10	18.60
4	552.91	37.9 QP	46.0	-8.1	1.00 H	15	16.60	21.30
5	601.52	36.6 QP	46.0	-9.4	2.21 H	15	14.10	22.50
6	700.68	37.5 QP	46.0	-8.5	1.74 H	295	13.50	24.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.62	25.9 QP	40.0	-14.1	1.25 V	86	11.80	14.10
2	199.05	37.2 QP	43.5	-6.3	1.00 V	1	26.40	10.80
3	298.21	36.6 QP	46.0	-9.4	2.00 V	10	21.90	14.70
4	447.92	41.6 QP	46.0	-4.4	1.65 V	102	23.00	18.60
5	700.68	40.5 QP	46.0	-5.5	1.49 V	152	16.50	24.00
6	799.84	37.0 QP	46.0	-9.0	1.14 V	155	11.20	25.80
7	836.78	38.6 QP	46.0	-7.4	1.58 V	15	12.20	26.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	26.4 QP	40.0	-13.6	1.24 H	67	41.00	-14.60
2	99.89	25.9 QP	43.5	-17.6	1.00 H	202	44.30	-18.40
3	162.11	28.4 QP	43.5	-15.1	1.00 H	208	41.90	-13.50
4	199.05	41.5 QP	43.5	-2.0	1.99 H	75	58.10	-16.60
5	329.32	25.0 QP	46.0	-21.0	1.00 H	228	36.40	-11.40
6	700.68	36.2 QP	46.0	-9.8	1.00 H	110	40.70	-4.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	26.9 QP	40.0	-13.1	1.00 V	282	41.50	-14.60
2	99.89	35.9 QP	43.5	-7.6	1.50 V	223	54.30	-18.40
3	199.05	42.1 QP	43.5	-1.4	1.24 V	27	58.70	-16.60
4	399.31	25.8 QP	46.0	-20.2	1.00 V	194	36.30	-10.50
5	498.47	29.0 QP	46.0	-17.0	1.24 V	252	37.30	-8.30
6	700.68	29.0 QP	46.0	-17.0	1.00 V	173	33.50	-4.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 1		FREQUENCY RANGE	
INPUT POWER		120Vac, 60Hz		DETECTOR FUNCTION	
ENVIRONMENTAL CONDITIONS		22deg. C, 72%RH		TESTED BY	
TEST MODE		C			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	119.34	31.1 QP	43.5	-12.4	1.50 H	248	19.10	12.00
2	179.61	33.0 QP	43.5	-10.5	2.00 H	4	20.90	12.10
3	407.09	33.2 QP	46.0	-12.8	1.00 H	110	15.50	17.70
4	504.31	36.1 QP	46.0	-9.9	2.00 H	346	16.10	20.00
5	601.52	37.7 QP	46.0	-8.3	1.25 H	23	15.20	22.50
6	650.13	37.1 QP	46.0	-8.9	1.25 H	324	13.90	23.20
7	696.79	35.7 QP	46.0	-10.3	1.00 H	3	11.70	24.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	121.28	26.2 QP	43.5	-17.3	1.50 V	244	14.00	12.20
2	239.88	27.4 QP	46.0	-18.6	2.00 V	209	14.80	12.60
3	290.43	27.5 QP	46.0	-18.5	1.50 V	199	13.10	14.40
4	407.09	31.6 QP	46.0	-14.4	2.00 V	181	13.90	17.70
5	455.70	31.4 QP	46.0	-14.6	2.00 V	187	12.60	18.80
6	550.97	27.8 QP	46.0	-18.2	1.00 V	4	6.60	21.20
7	650.13	28.4 QP	46.0	-17.6	1.00 V	281	5.20	23.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 09, 2012	Nov. 08, 2013
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 28, 2012	Dec. 27, 2013
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Dec. 21, 2012	Dec. 20, 2013
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jun. 26, 2012	Jul. 02, 2013
Software ADT	BV ADT_Cond_V7.3.7.3		Jul. 02, 2013	Jul. 01, 2014
		NA	NA	NA

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 2.
3. The VCCI Site Registration No. is C-2047.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

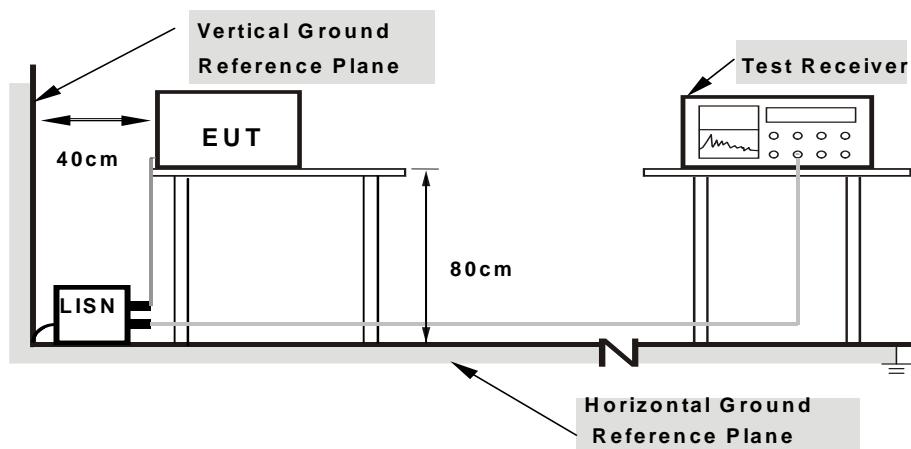

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.


4.2.7 TEST RESULTS

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18516	0.17	39.75	22.95	39.92	23.12	64.25	54.25	-24.33	-31.13
2	0.29063	0.19	28.20	13.89	28.39	14.08	60.51	50.51	-32.12	-36.43
3	0.66953	0.24	25.51	16.56	25.75	16.80	56.00	46.00	-30.25	-29.20
4	5.69141	0.39	20.40	11.85	20.79	12.24	60.00	50.00	-39.21	-37.76
5	13.55859	0.50	49.79	48.15	50.29	48.65	60.00	50.00	-9.71	-1.35
6	27.11719	0.56	38.65	38.43	39.21	38.99	60.00	50.00	-20.79	-11.01

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

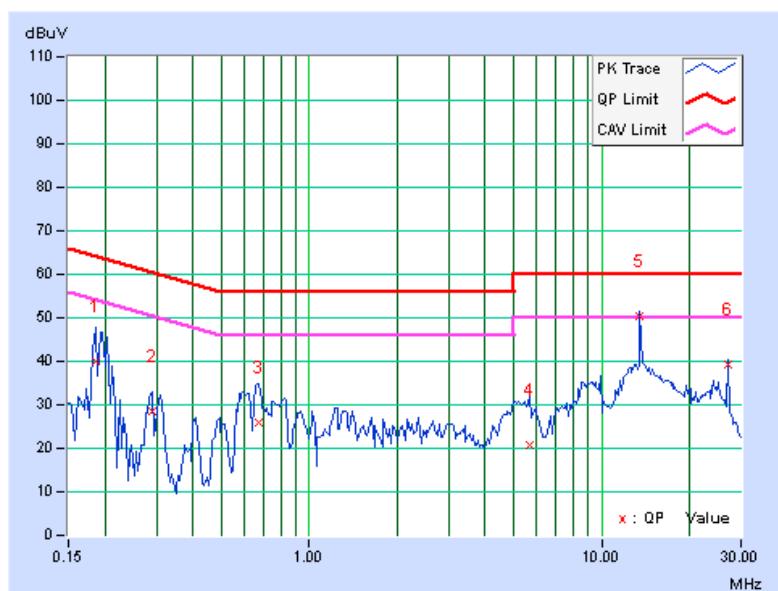


PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18516	0.18	40.13	22.63	40.31	22.81	64.25	54.25	-23.94	-31.44
2	0.29453	0.21	27.53	13.49	27.74	13.70	60.40	50.40	-32.65	-36.69
3	0.65781	0.24	27.86	15.21	28.10	15.45	56.00	46.00	-27.90	-30.55
4	13.55859	0.57	48.61	47.53	49.18	48.10	60.00	50.00	-10.82	-1.90
5	15.62500	0.62	38.44	29.41	39.06	30.03	60.00	50.00	-20.94	-19.97
6	27.12109	0.65	38.25	37.97	38.90	38.62	60.00	50.00	-21.10	-11.38

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

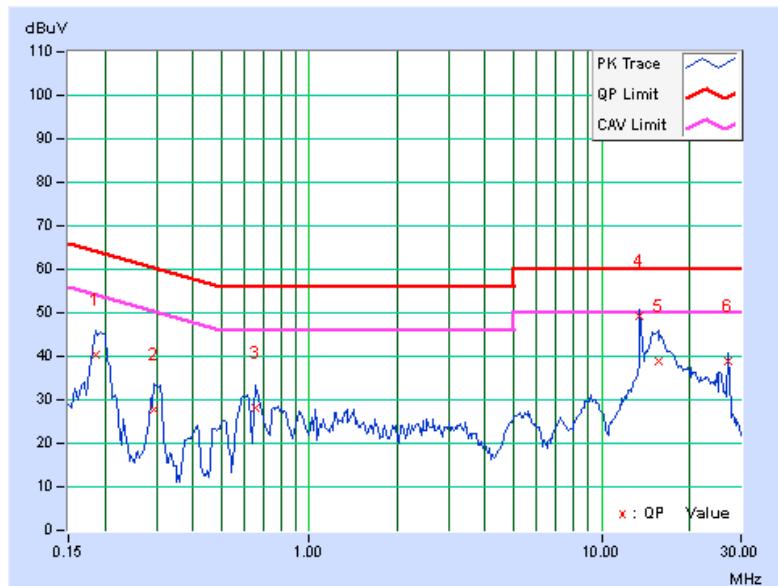


PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19297	0.16	46.72	34.94	46.88	35.10	63.91	53.91	-17.03	-18.81
2	0.67734	0.24	41.49	30.45	41.73	30.69	56.00	46.00	-14.27	-15.31
3	0.91172	0.25	37.20	21.67	37.45	21.92	56.00	46.00	-18.55	-24.08
4	1.53516	0.27	36.84	21.98	37.11	22.25	56.00	46.00	-18.89	-23.75
5	13.56000	0.90	46.77	46.61	47.67	47.51	60.00	50.00	-12.33	-2.49
6	27.12000	1.56	34.83	31.34	36.39	32.90	60.00	50.00	-23.61	-17.10

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

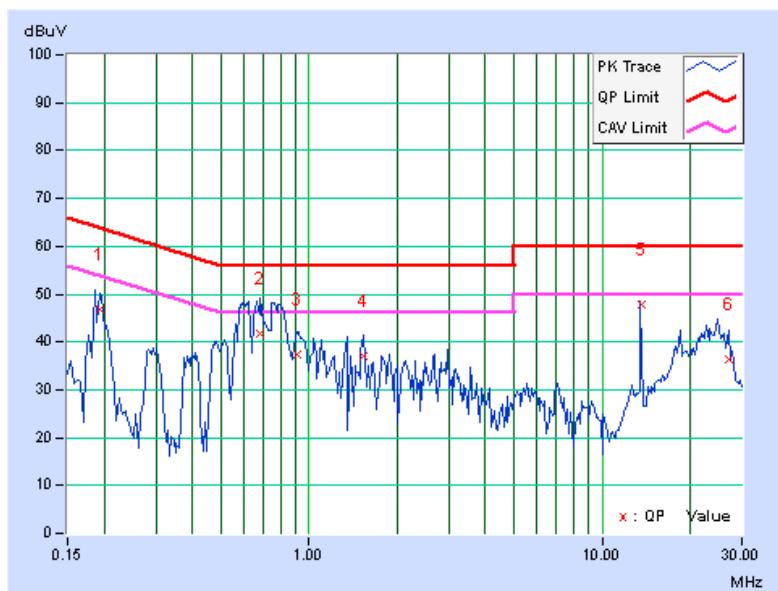


PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.17	42.93	34.96	43.10	35.13	63.74	53.74	-20.64	-18.61
2	0.61875	0.24	45.38	32.94	45.62	33.18	56.00	46.00	-10.38	-12.82
3	1.12891	0.25	37.29	23.40	37.54	23.65	56.00	46.00	-18.46	-22.35
4	2.21094	0.29	33.23	17.89	33.52	18.18	56.00	46.00	-22.48	-27.82
5	13.56000	0.71	46.65	46.51	47.36	47.22	60.00	50.00	-12.64	-2.78
6	27.12000	1.16	34.89	31.07	36.05	32.23	60.00	50.00	-23.95	-17.77

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

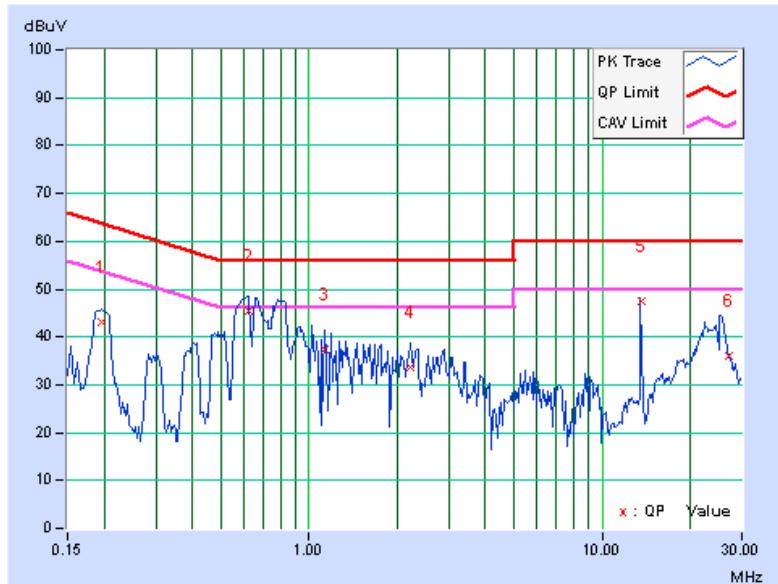


PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19297	0.20	43.95	33.81	44.15	34.01	63.91	53.91	-19.76	-19.90
2	0.65781	0.25	42.61	32.05	42.86	32.30	56.00	46.00	-13.14	-13.70
3	1.66406	0.31	30.34	17.79	30.65	18.10	56.00	46.00	-25.35	-27.90
4	13.56000	0.58	24.06	16.06	24.64	16.64	60.00	50.00	-35.36	-33.36
5	19.17969	0.71	38.56	30.87	39.27	31.58	60.00	50.00	-20.73	-18.42
6	27.12000	0.65	32.36	24.86	33.01	25.51	60.00	50.00	-26.99	-24.49

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

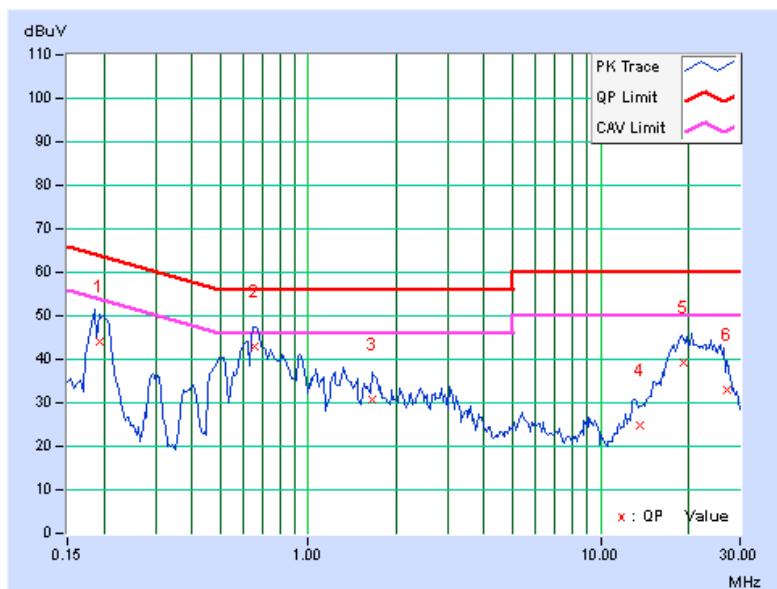


PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.19	40.61	33.26	40.80	33.45	63.74	53.74	-22.94	-20.29
2	0.66172	0.27	42.54	32.87	42.81	33.14	56.00	46.00	-13.19	-12.86
3	1.69531	0.30	31.04	18.13	31.34	18.43	56.00	46.00	-24.66	-27.57
4	2.89453	0.38	24.92	14.96	25.30	15.34	56.00	46.00	-30.70	-30.66
5	13.56000	0.66	23.34	15.38	24.00	16.04	60.00	50.00	-36.00	-33.96
6	27.12000	0.74	32.18	24.84	32.92	25.58	60.00	50.00	-27.08	-24.42

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

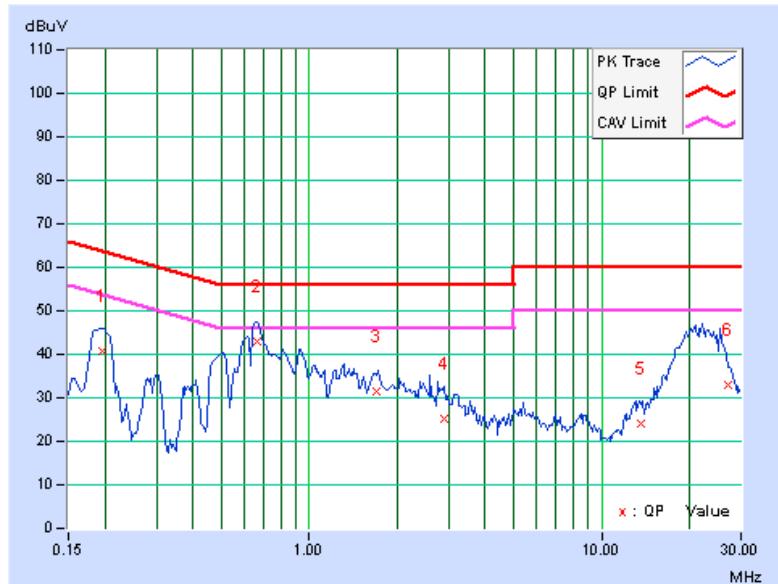



4.3 FREQUENCY STABILITY

4.3.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100039	Feb. 03, 2013	Feb. 02, 2014
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 13, 2013	Jun. 12, 2014

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

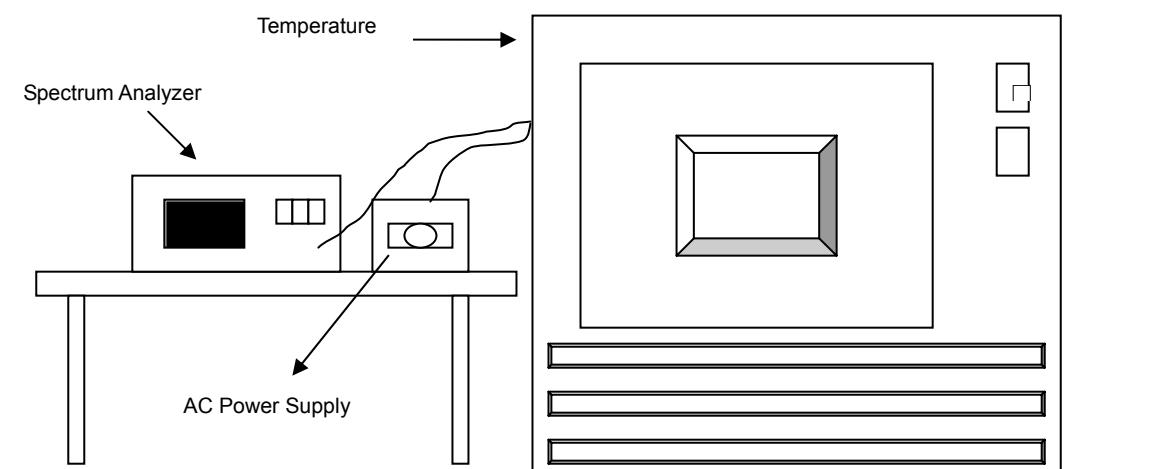

4.3.6 EUT OPERATING CONDITION

Same as Item 4.1.6.



4.3.7 TEST RESULTS

FREQUEMCY STABILITY VERSUS TEMP.									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	120	13.560048	0.00035	13.560037	0.00027	13.560056	0.00041	13.56004	0.00029
40	120	13.56005	0.00037	13.560052	0.00038	13.560057	0.00042	13.560058	0.00043
30	120	13.559958	-0.00031	13.559945	-0.00041	13.559965	-0.00026	13.559958	-0.00031
20	120	13.560028	0.00021	13.56004	0.00029	13.560036	0.00027	13.560041	0.00030
10	120	13.560003	0.00002	13.560002	0.00001	13.560016	0.00012	13.56001	0.00007
0	120	13.559984	-0.00012	13.559996	-0.00003	13.560005	0.00004	13.559987	-0.00010
-10	120	13.56004	0.00029	13.560039	0.00029	13.560034	0.00025	13.560048	0.00035
-20	120	13.56007	0.00052	13.560054	0.00040	13.560072	0.00053	13.560064	0.00047

FREQUEMCY STABILITY VERSUS VOLTAGE									
TEMP. (°C)	POWER SUPPLY (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	138	13.560028	0.00021	13.560042	0.00031	13.560037	0.00027	13.560039	0.00029
	120	13.560028	0.00021	13.56004	0.00029	13.560036	0.00027	13.560041	0.00030
	102	13.560028	0.00021	13.56004	0.00029	13.560039	0.00029	13.560039	0.00029



A D T

4.4 20dB BANDWIDTH

4.4.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT

The 20dB bandwidth shall be specified in operating frequency band.

4.4.2 TEST INSTRUMENTS

Same as Item 4.1.2.

4.4.3 TEST PROCEDURE

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1kHz RBW and 3kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP


Same as Item 4.1.5.

4.4.6 EUT OPERATING CONDITION

Same as Item 4.1.6.

4.4.7 TEST RESULTS

20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	PASS/FAIL
13.5584 MHz	13.56096 MHz	13.553~13.567	PASS

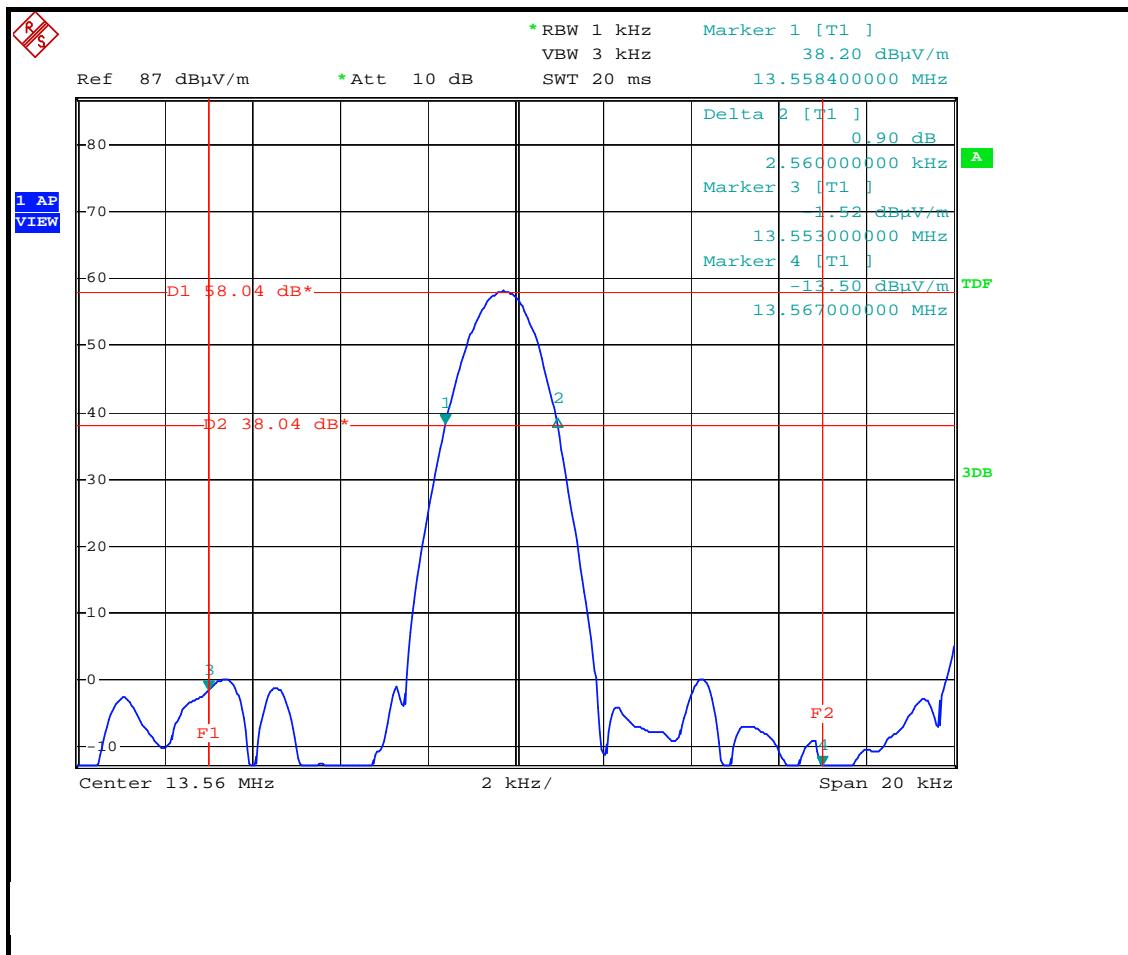



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---