



FCC 47 CFR PART 15 SUBPART C AND ANSI C63.4:2009
TEST REPORT

For

Computer

Model : PWS-440

Data Applies To : PWS-440XXXXXXXXXXXXXX
(where "X" may be any alphanumeric character, "-" or blank)

Trade Name : ADVANTECH

Issued for

Advantech Co Ltd

**No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District,
Taipei 114, Taiwan, R.O.C.**

Issued by

**Compliance Certification Services Inc.
Hsinchu Lab.**

**NO. 989-1 Wen Shan Rd., Shang Shan Village,
Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C**

**TEL: +886-3-5921698
FAX: +886-3-5921108**

**<http://www.ccsrf.com>
E-Mail : service@ccsrf.com**

Issued Date: May 15, 2013



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF or any government agencies. The test results of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	05/15/2013	Initial Issue	ALL	Victoria Liu

**TABLE OF CONTENTS**

TITLE	PAGE NO.
1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST MODES	6
4. TEST METHODOLOGY	7
5. FACILITIES AND ACCREDITATION	7
5.1 FACILITIES	7
5.2 ACCREDITATIONS.....	7
5.3 MEASUREMENT UNCERTAINTY	8
6. SETUP OF EQUIPMENT UNDER TEST.....	9-10
7. FCC PART 15.247 REQUIREMENTS	11
7.1 6dB BANDWIDTH	11-16
7.2 MAXIMUM PEAK OUTPUT POWER	17-18
7.3 POWER SPECTRAL DENSITY	19-24
7.4 CONDUCTED SPURIOUS EMISSION	25-31
7.5 RADIATED EMISSION.....	32-51
7.6 CONDUCTED EMISSION.....	52-58



1. TEST REPORT CERTIFICATION

Applicant : Advantech Co. Ltd..
Address : No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 114, Taiwan, R.O.C.
Equipment Under Test : Computer
Model : PWS-440
Data Applies To : PWS-440XXXXXXXXXXXXXX (where "X" may be any alphanumeric character, “-” or blank)
Trade Name : ADVANTECH
Tested Date : March 12 ~ May 14, 2013

APPLICABLE STANDARD	
Standard	Test Result
FCC Part 15 Subpart C AND ANSI C63.4:2009	PASS

WE HEREBY CERTIFY THAT: The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Sb. Lu
Sr. Engineer

Reviewed by:

Gundam Lin
Sr. Engineer



2. EUT DESCRIPTION

Product Name	Computer
Model Number	PWS-440
Data Applies To	PWS-440XXXXXXXXXXXXXXXXXXXX (where "X" may be any alphanumeric character, "-" or blank)
Identify Number	T130312L06
Received Date	March 12, 2013
Frequency Range	IEEE 802.11b/g : 2412MHz ~ 2462MHz
Transmit Power	IEEE 802.11b : 18.11 dBm (0.0647W) IEEE 802.11g : 21.53 dBm (0.1422W)
Channel Spacing	IEEE 802.11b/g : 5MHz
Channel Number	IEEE 802.11b/g : 11 Channels
Transmit Data Rate	IEEE 802.11b : 11, 5.5, 2, 1 Mbps IEEE 802.11g : 54, 48, 36, 24, 18, 12, 9, 6 Mbps
Type of Modulation	IEEE 802.11b : DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g : OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Type	PCB Antenna, Antenna Gain : 2.0dBi
Power Rating	12Vdc (For Power Adapter) 7.4Vdc, 1880mAh (For Battery)
Test Voltage	120Vac, 60Hz
AC Power Cord Type	Non-shielded cable 1.8m (Detachable)
DC Power Cable Type	Non-shielded cable 1.5m (Non-detachable) with a ferrite core (For Power Adapter 1) Non-shielded cable 1.3m (Non-detachable) with a ferrite core (For Power Adapter 2)
I/O Port	Mini USB Port x 1, USB 2.0 Port x 2, RJ-45 Port x 1, SD Card Port x 1, RS232 Port x 2, Audio In Port x 1, Audio Out Port x 1, Power Port x 1

Power Adapter :

No.	Manufacturer	Model No.	Power Input	Power Output
1	SOLY	AD4212B	100-240Vac, 1.5A, 50/60Hz	11.0-13.5Vdc, 3.82-3.11A Max. 42W
2	Elementech International Co., Ltd	Au-799Im	100-240Vac, 50-60Hz, 2A	12Vdc, 4A

Remark :

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. For more details, please refer to the User's manual of the EUT.
3. The model PWS-440 was considered the main model for testing.
4. This submittal(s) (test report) is intended for FCC ID: M82-PWS440 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. DESCRIPTION OF TEST MODES

The EUT is an 802.11 transceiver in Computer form factor.

IEEE 802.11b/g : 1TX / 1RX.

Conducted Emission / Radiated Emission Test (Below 1 GHz)

TX Mode

Conducted / Radiated Emission Test (Above 1 GHz)

IEEE 802.11b, 802.11g Mode

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode : 1Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11g mode : 6Mbps data rate (worst case) were chosen for full testing.

Remark: The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X, Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.



4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2009 and FCC CFR 47, 15.207, 15.209 and 15.247.

5. FACILITIES AND ACCREDITATION

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
NO. 989-1 Wen Shan Rd., Shang Shan Village,
Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C

The sites are constructed in conformance with the requirements of ANSI C63.4:2009 and CISPR 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-4, CISPR 16-1-5.

5.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

Taiwan TAF

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	INDUSTRY CANADA
Japan	VCCI
Taiwan	BSMI
USA	FCC MRA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>



5.3 MEASUREMENT UNCERTAINTY

The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2.

PARAMETER	UNCERTAINTY
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 30 to 1000 MHz	+/- 3.97
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 1 to 18GHz	+/- 3.58
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 18 to 26 GHz	+/- 3.59
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 26 to 40 GHz	+/- 3.81
Conducted Emission (Mains Terminals), 9kHz to 30MHz	+/- 2.48

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Consistent with industry standard (e.g. CISPR 22, clause 11, Measurement Uncertainty) determining compliance with the limits shall be base on the results of the compliance measurement. Consequently the measure emissions being less than the maximum allowed emission result in this be a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is base on conducted and radiated emissions being less than U_{CISPR} which is 3.6dB and 5.2dB respectively. CCS values (called U_{Lab} in CISPR 16-4-2) is less than U_{CISPR} as shown in the table above. Therefore, MU need not be considered for compliance.



6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

No.	Product	Manufacturer	Model No.	Serial No.	FCC ID
1	Keyboard	View Sonic	VS10230	P80053001326	DoC
2	Mouse	Logitech	M-BJ58	LNA14607423	DoC
3	Modem	ZyXEL	Omni 56K	S1Z4107727	1880MNI56K
4	Headphones	i-Acon	CW-010M.V	-----	-----

No.	Signal cable description
1	Non-shielded RJ-45 Cable, 10m ×1
2	Shielded RS232 Cable, 1m ×2

SETUP DIAGRAM FOR TESTS

EUT & peripherals setup diagram is shown in appendix setup photos.

EUT OPERATING CONDITION

1. run " mfgui.exe "

(1)Command: 22 x xx x

22: Initial transmit power in the antenna

x: Set the wanted channel (1~14)

xx: Set the wanted power, (0~16)

x: Set the mode, 1→G mode, 0→ B mode

(2)Command 17 1 xx

17: Set continuous mode.

1: Enable data rate

xx: Set data rate, 1→1Mbps, 3→5.5Mbps, 4→11Mbps, 6→6Mbps, 7→9Mbps,

8→12Mbps, 9→18Mbps, 10→24Mbps, 11→36Mbps, 12→48Mbps,

13→54Mbps

(3)Command 17 0: Stop transmitting continuous signal



2. TX Mode:

- ⇒ **Tx Data Rate:** 1Mbps Bandwidth 20 (IEEE 802.11b mode)
6Mbps Bandwidth 20 (IEEE 802.11g mode)

- ⇒ **Power control**

- IEEE 802.11b Channel Low (2412MHz) TX Power 16
- IEEE 802.11b Channel Mid (2437MHz) TX Power 16
- IEEE 802.11b Channel High (2462MHz) TX Power 16
- IEEE 802.11g Channel Low (2412MHz) TX Power 15
- IEEE 802.11g Channel Mid (2437MHz) TX Power 15
- IEEE 802.11g Channel High (2462MHz) TX Power 15

3. All of the functions are under run.

4. Start test.



7. FCC PART 15.247 REQUIREMENTS

7.1 6dB BANDWIDTH

LIMITS


§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/14/2013

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP

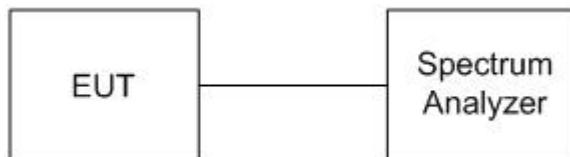

TEST PROCEDURE


1. The transmitter output was connected to a spectrum analyzer.
2. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
3. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


**TEST RESULTS****IEEE 802.11b Mode**


Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	10.10	500	PASS
Middle	2437	10.10	500	PASS
High	2462	10.10	500	PASS


IEEE 802.11g Mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	16.67	500	PASS
Middle	2437	16.60	500	PASS
High	2462	16.60	500	PASS

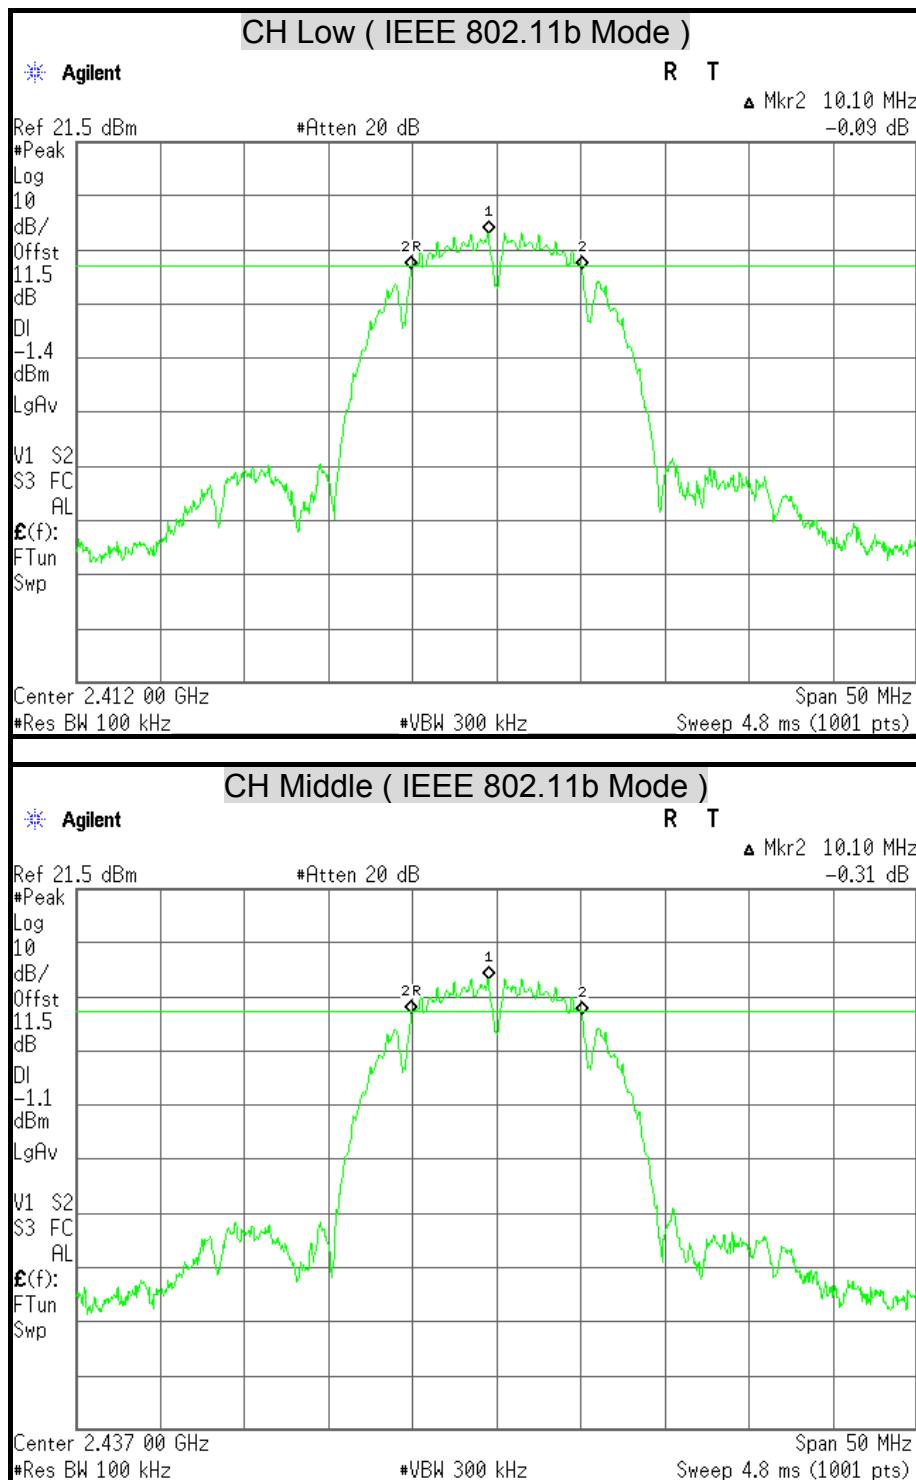6dB BANDWIDTH

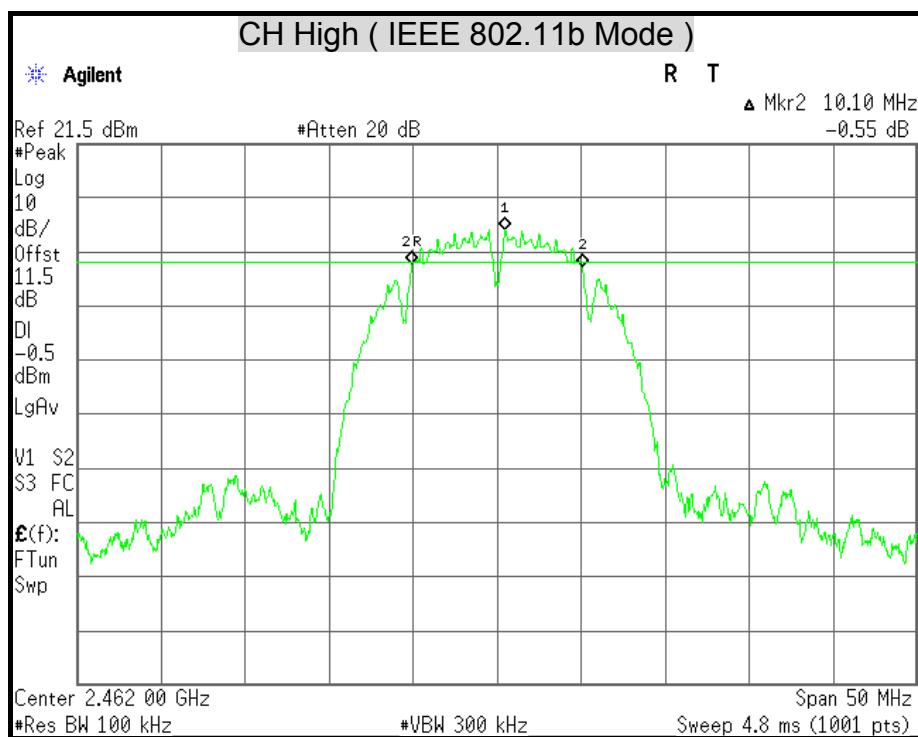

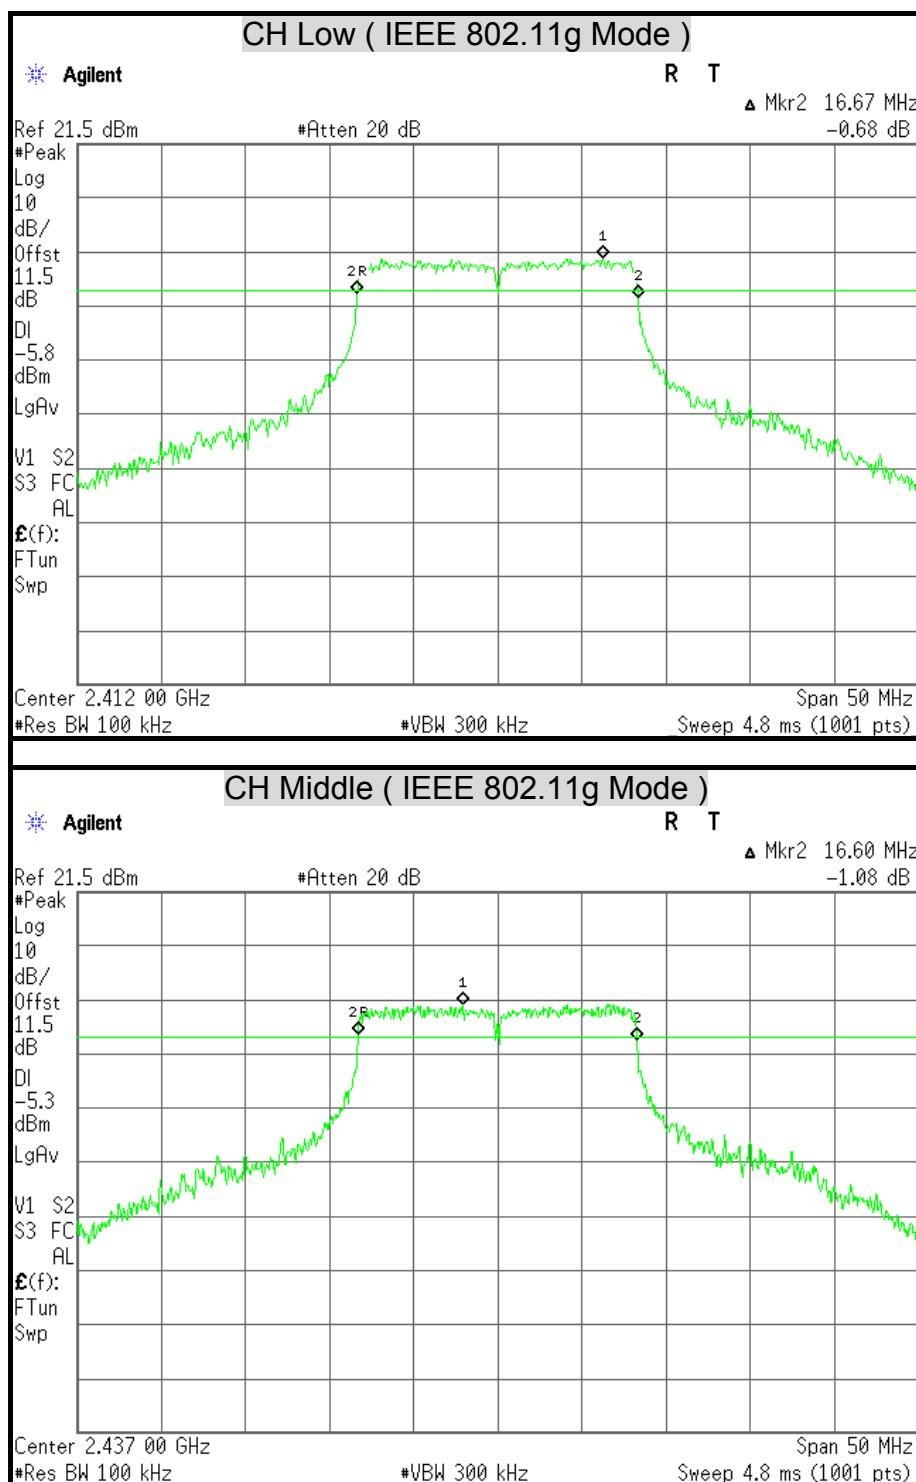

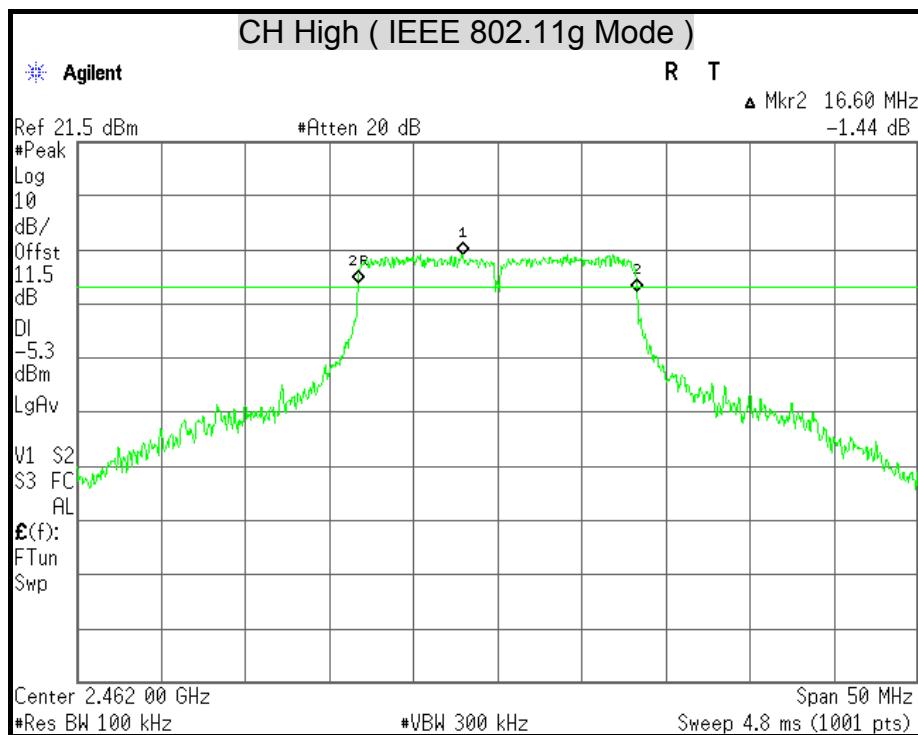



7.2 MAXIMUM PEAK OUTPUT POWER

LIMITS

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	Anritsu	ML2495A	1149001	12/06/2013
Power Sensor	Anritsu	MA2411B	1126148	12/07/2013

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.



TEST RESULTS

IEEE 802.11b Mode

Channel	Channel Frequency (MHz)	Peak Power		Peak Power Limit		Pass / Fail
		(dBm)	(W)	(dBm)	(W)	
Low	2412	17.32	0.0540	30	1	PASS
Middle	2437	17.76	0.0597	30	1	PASS
High	2462	18.11	0.0647	30	1	PASS

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 11.5dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.

IEEE 802.11g Mode

Channel	Channel Frequency (MHz)	Peak Power		Peak Power Limit		Pass / Fail
		(dBm)	(W)	(dBm)	(W)	
Low	2412	21.45	0.1396	30	1	PASS
Middle	2437	21.52	0.1419	30	1	PASS
High	2462	21.53	0.1422	30	1	PASS

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.5dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.



7.3 POWER SPECTRAL DENSITY

LIMITS

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/14/2013

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set analyzer center frequency to DTS channel center frequency.
3. Set the span to 1.5 times the DTS channel bandwidth.
4. Set the RBW \geq 3 kHz.
5. Set the VBW \geq 3 x RBW.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



TEST RESULTS

IEEE 802.11b Mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Minimum Limit (dBm)	Pass / Fail
Low	2412	-13.82	8	PASS
Middle	2437	-13.33	8	PASS
High	2462	-13.15	8	PASS

Remark:


1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 11.5dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.


IEEE 802.11g Mode


Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Minimum Limit (dBm)	Pass / Fail
Low	2412	-11.11	8	PASS
Middle	2437	-9.09	8	PASS
High	2462	-8.53	8	PASS


Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.5dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

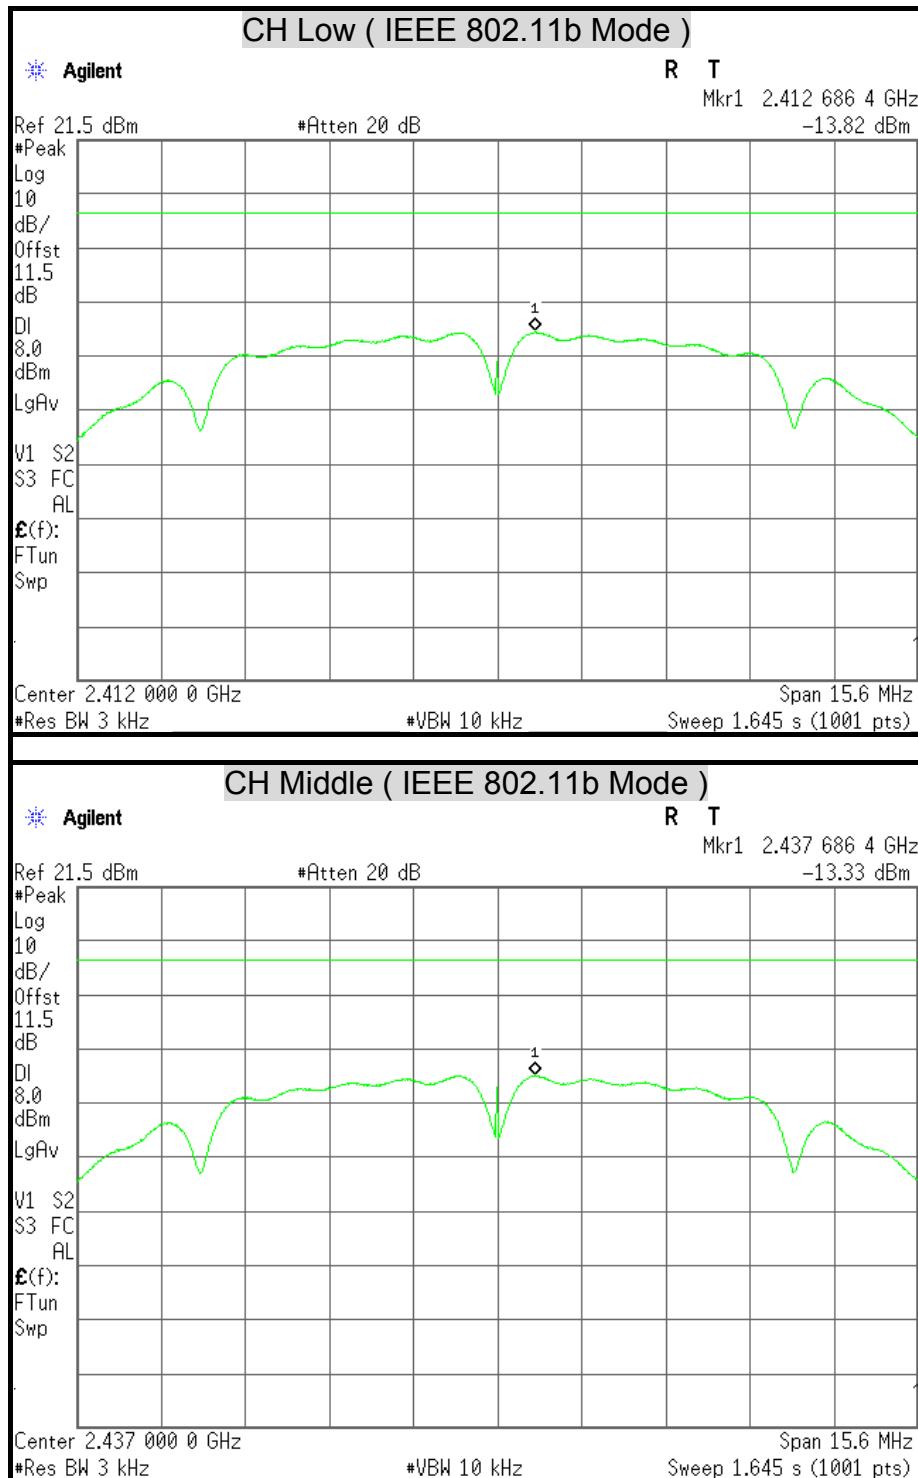POWER SPECTRAL DENSITY

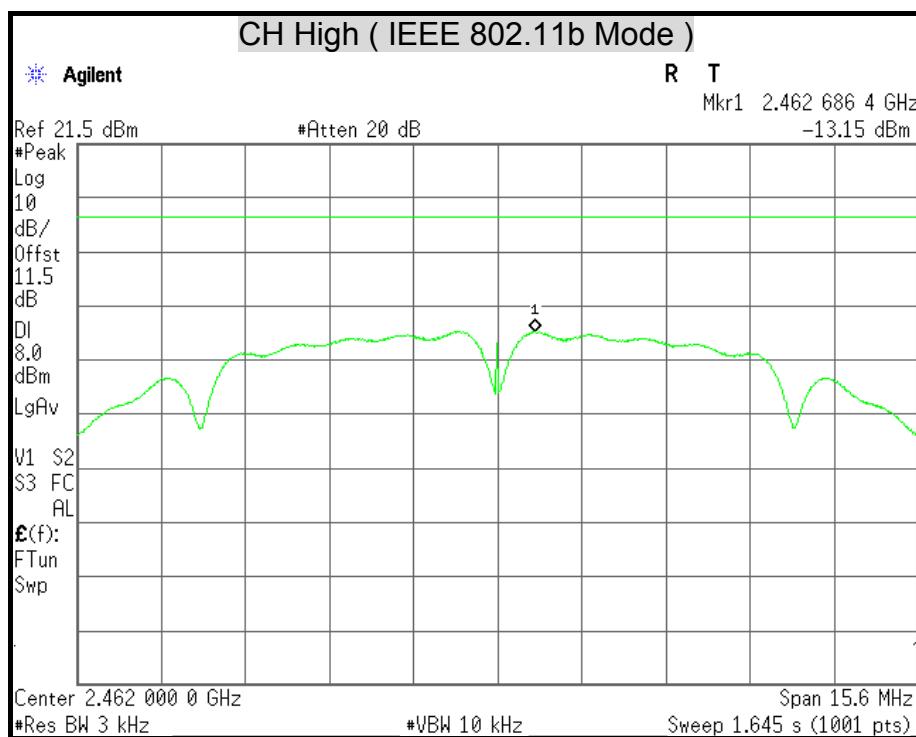

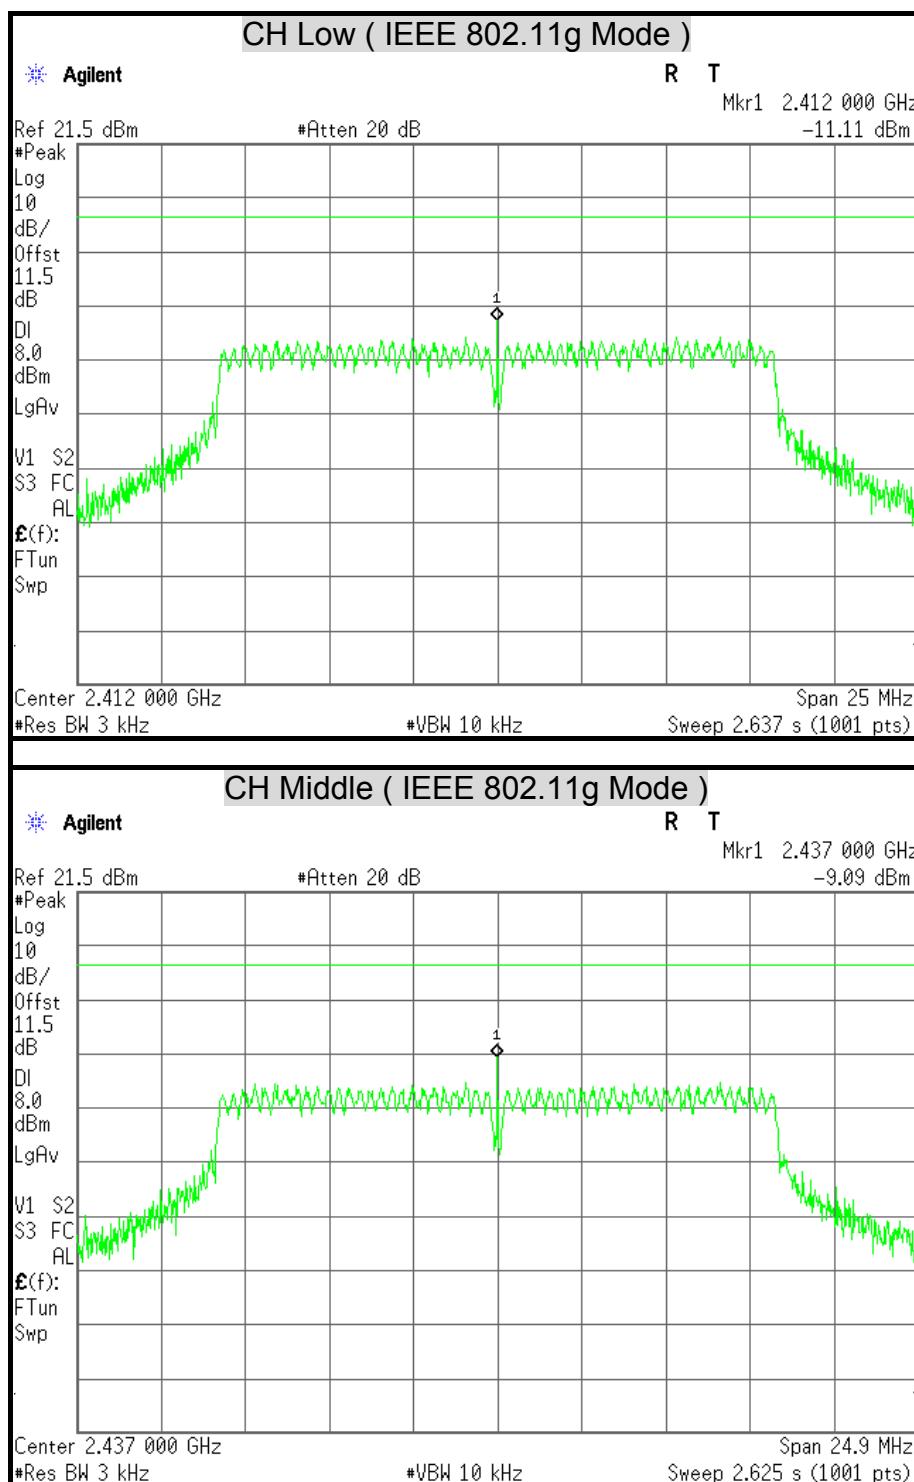

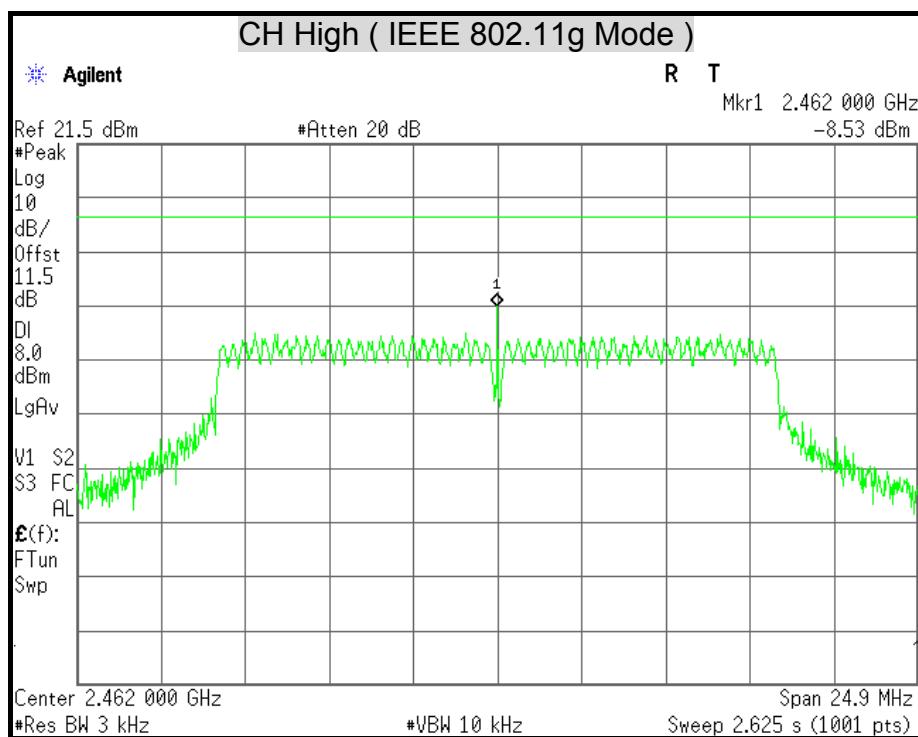



7.4 CONDUCTED SPURIOUS EMISSION

LIMITS

§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the and that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/14/2013

Remark: Each piece of equipment is scheduled for calibration once a year.


TEST SETUP





TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

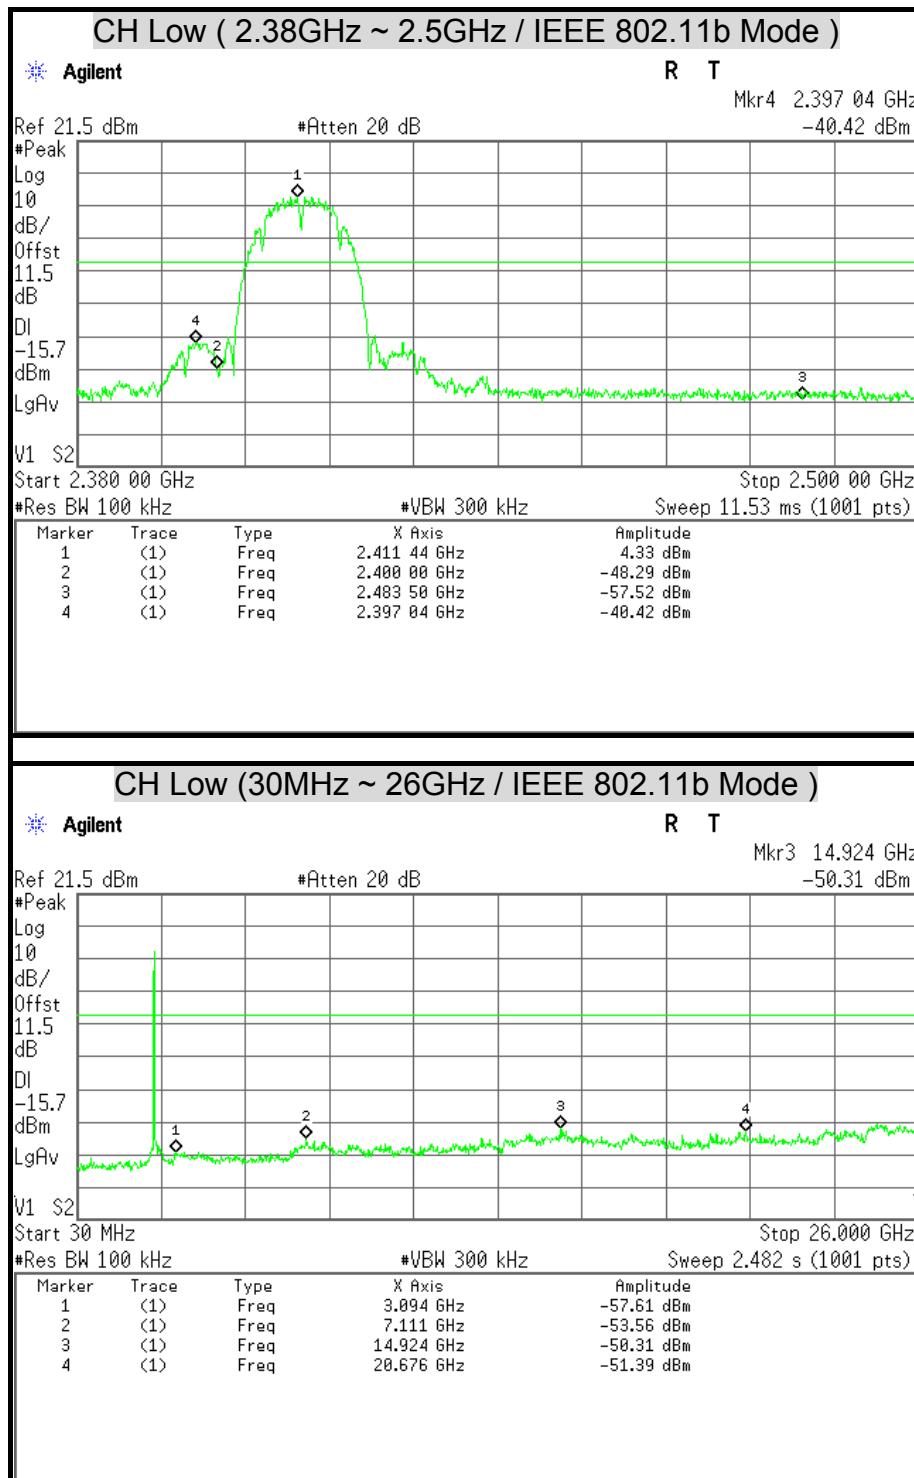**TEST RESULTS****OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT**

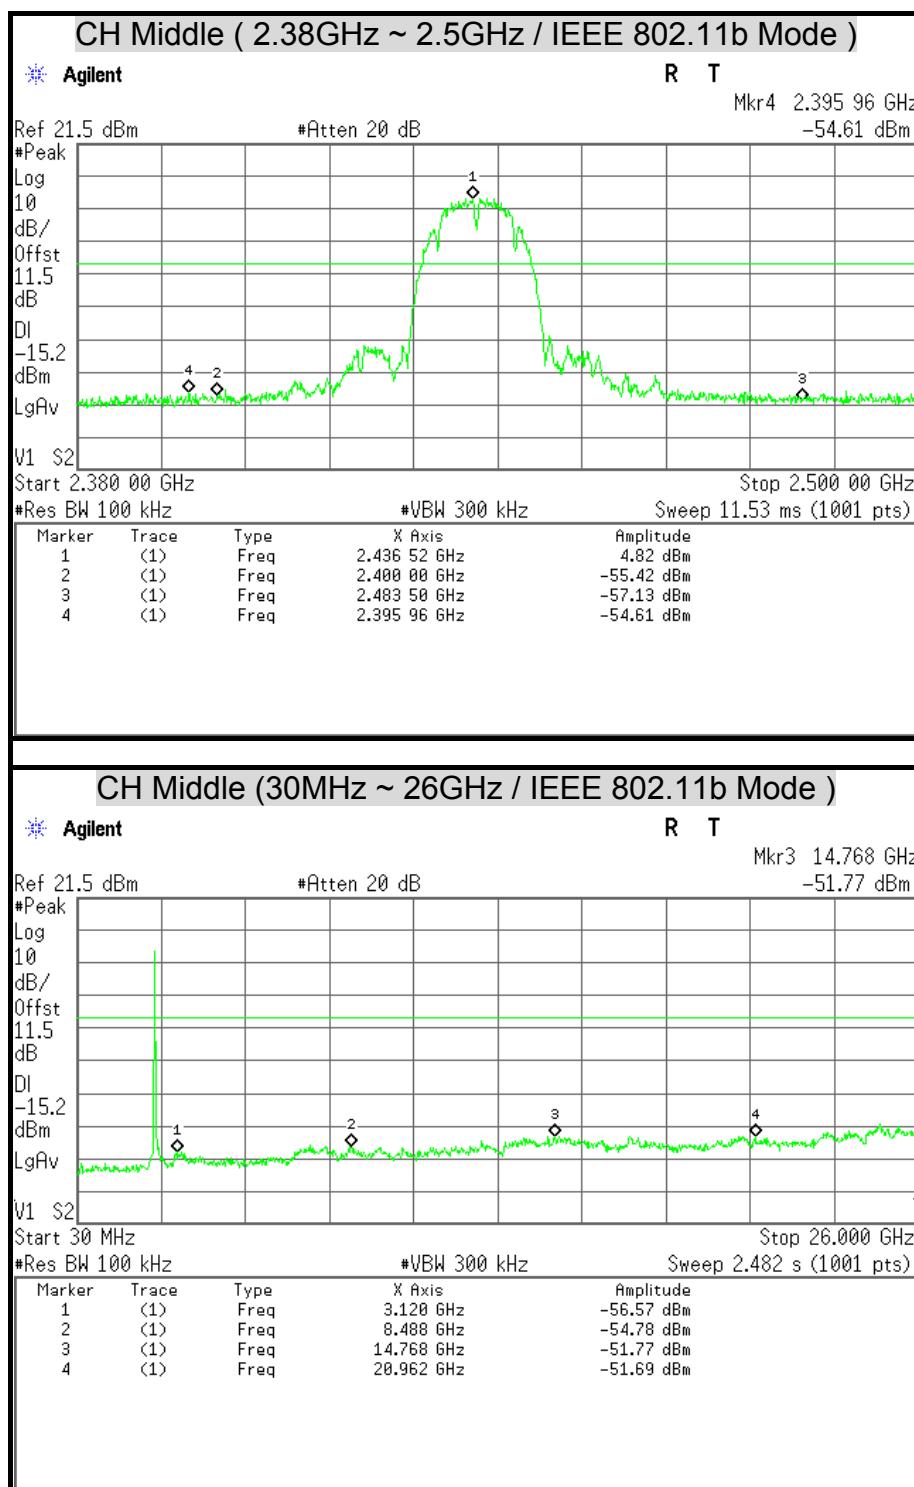

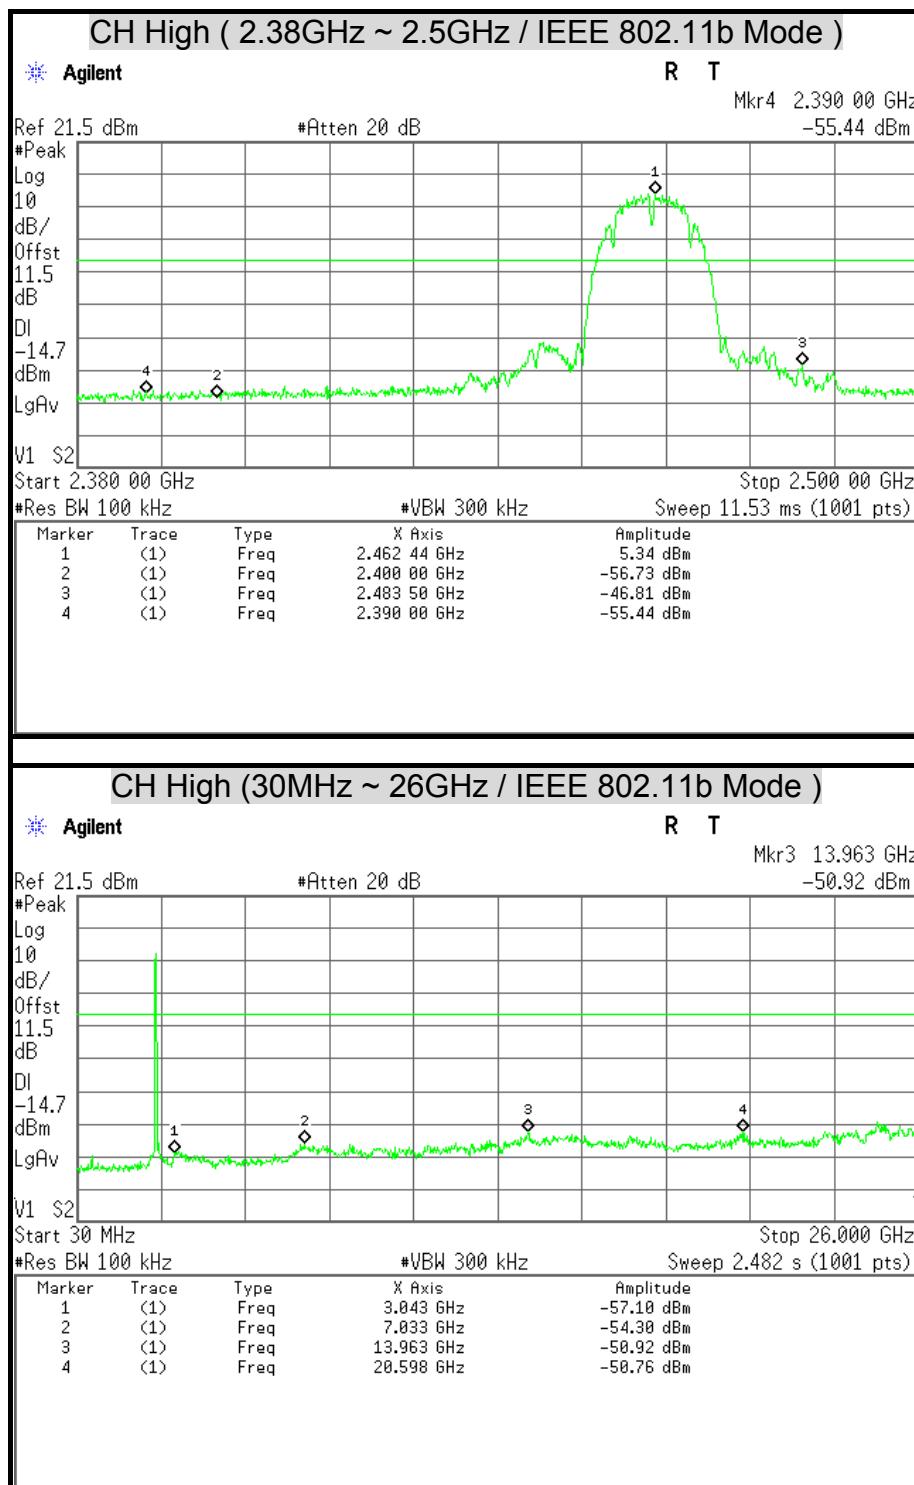

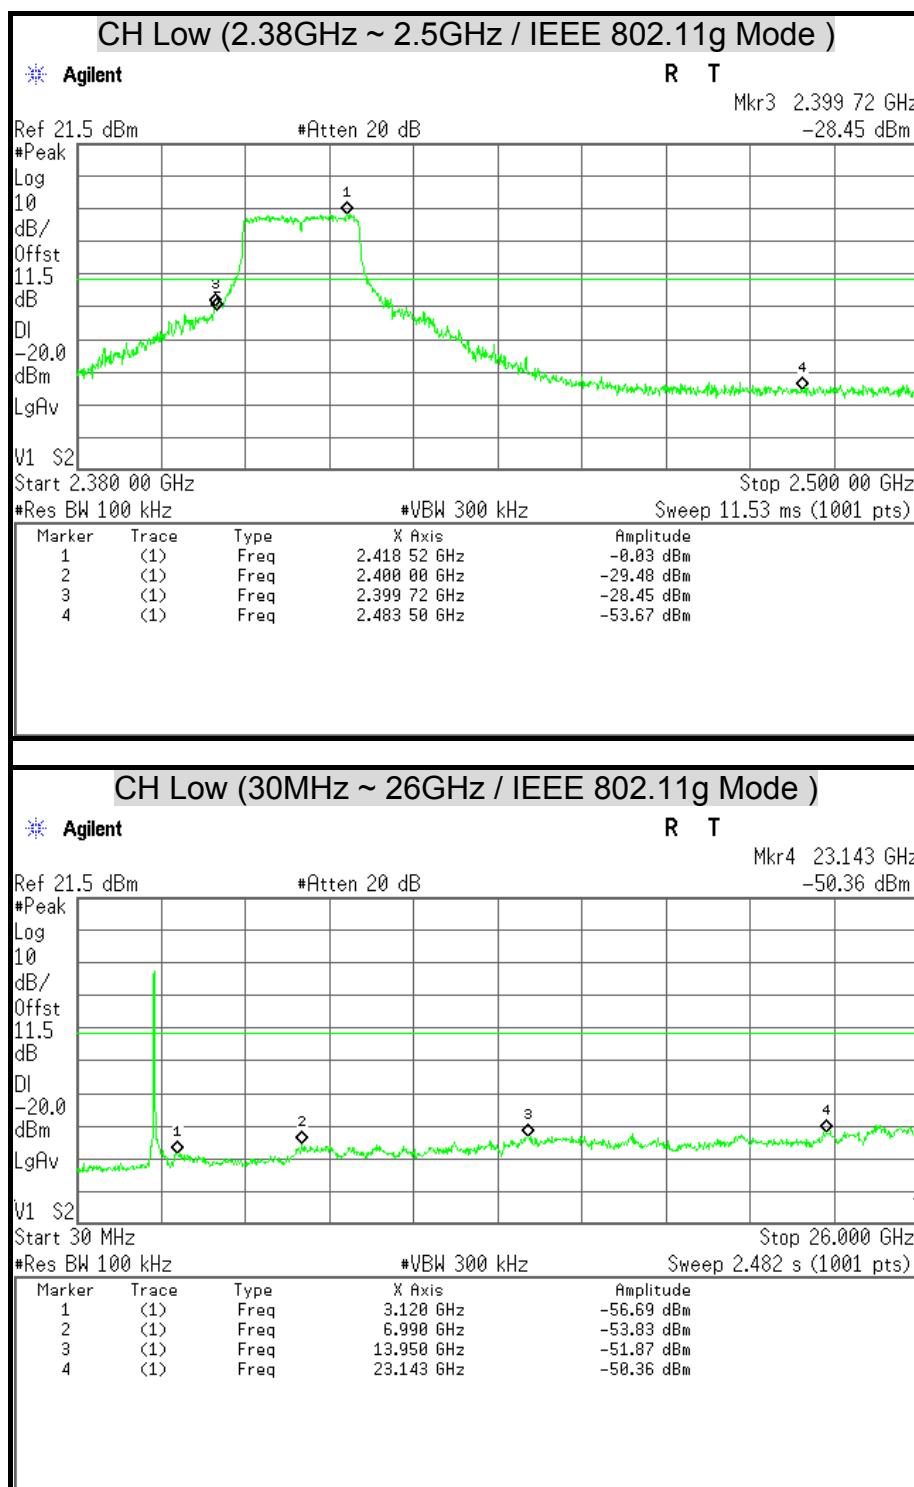

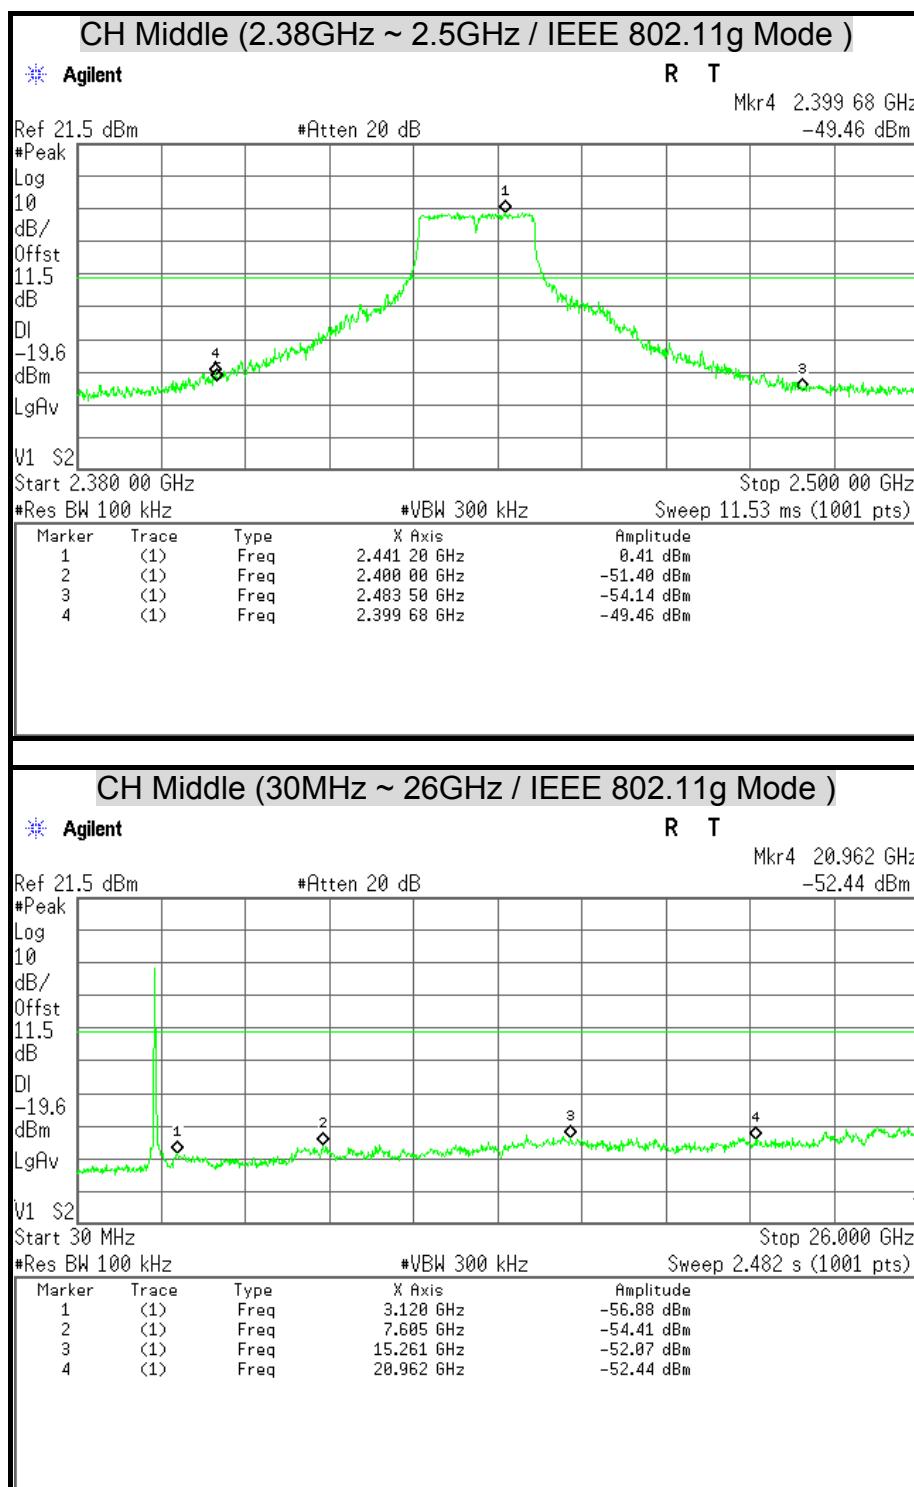




CH High (2.38GHz ~ 2.5GHz / IEEE 802.11g Mode)

Agilent

R T

Mkr4 2.396 08 GHz

-52.76 dBm

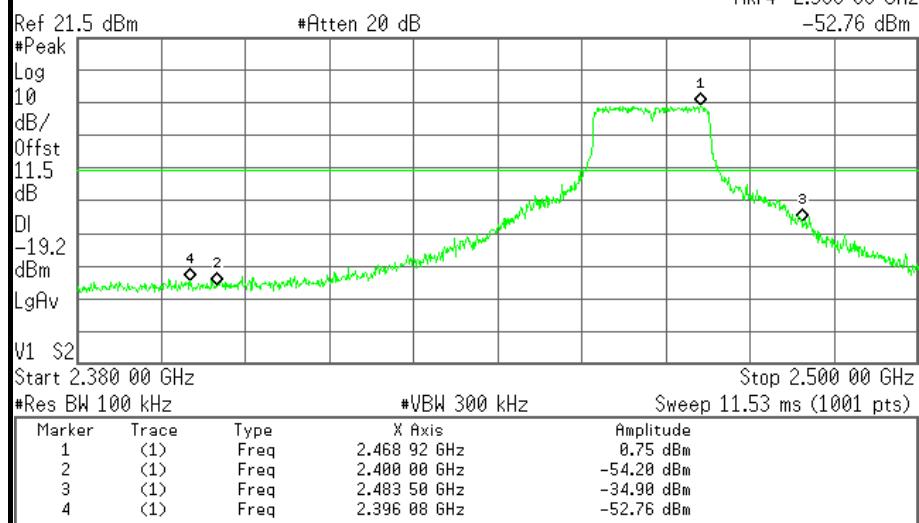


CH High (30MHz ~ 26GHz / IEEE 802.11g Mode)

Agilent

R T

Mkr4 20.520 GHz

-51.77 dBm

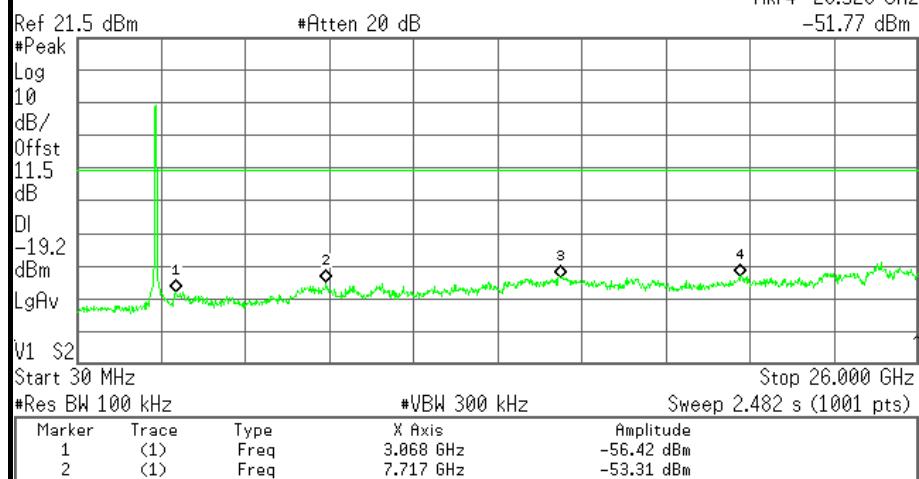



7.5 RADIATED EMISSION

LIMITS

(1) According to § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Remark:

1. ¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
2. ² Above 38.6

(2) According to § 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



(3) According to § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

Remark: **Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(4) According to § 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST EQUIPMENT

Radiated Emission / 966Chamber_B

Name of Equipment	Manufacture	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY46180323	04/15/2014
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101131	01/14/2014
Bi-log Antenna	SCHWARZBECK	VULB 9168	9168-250	09/26/2013
Double-Ridged Waveguide Horn	ETS-LINDGREN	3117	00078733	12/11/2013
Horn Antenna	COM-POWER	AH-840	03077	12/20/2013
Pre-Amplifier	Agilent	8447D	2944A10052	07/17/2013
Pre-Amplifier	Agilent	8449B	3008A01916	07/17/2013
LOOP Antenna	EMCO	6502	8905-2356	06/10/2013
Notch Filters Band Reject	Micro-Tronics	BRM05702-01	026	N.C.R


Remark: 1. Each piece of equipment is scheduled for calibration once a year.
2. N.C.R = No Calibration Request.




TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from below 1GHz.

9kHz ~ 30MHz

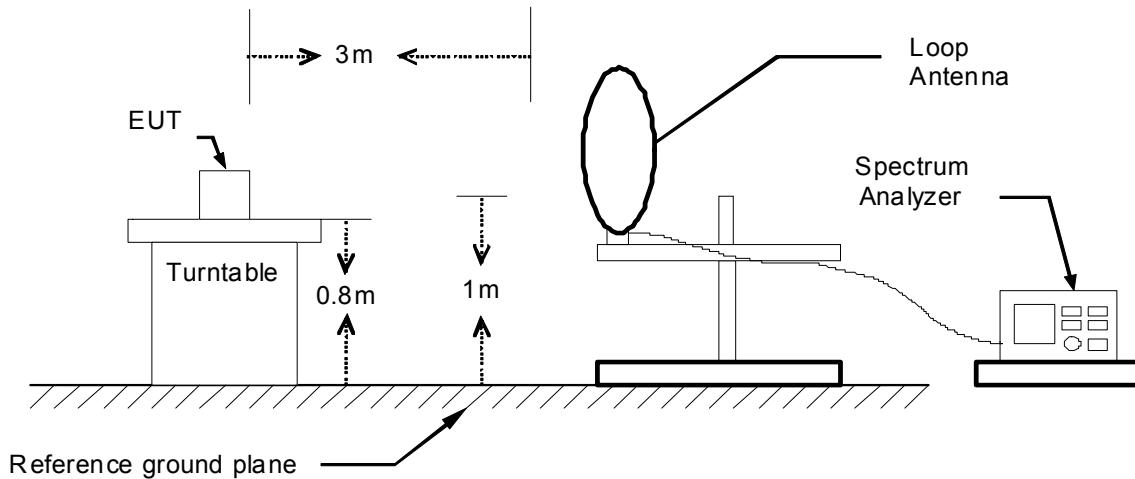


30MHz ~ 1GHz

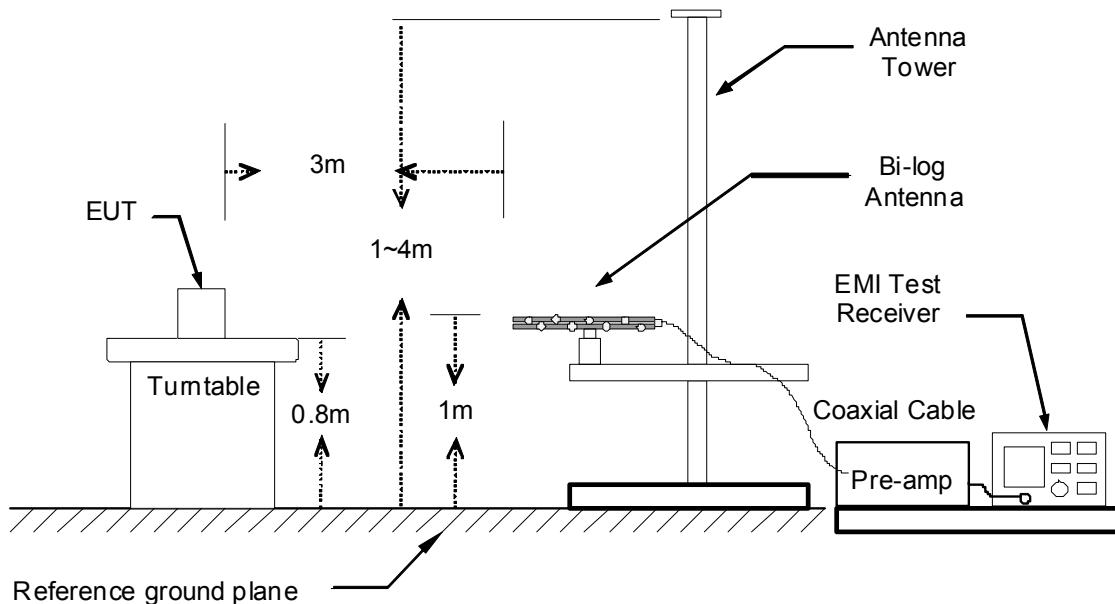



The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

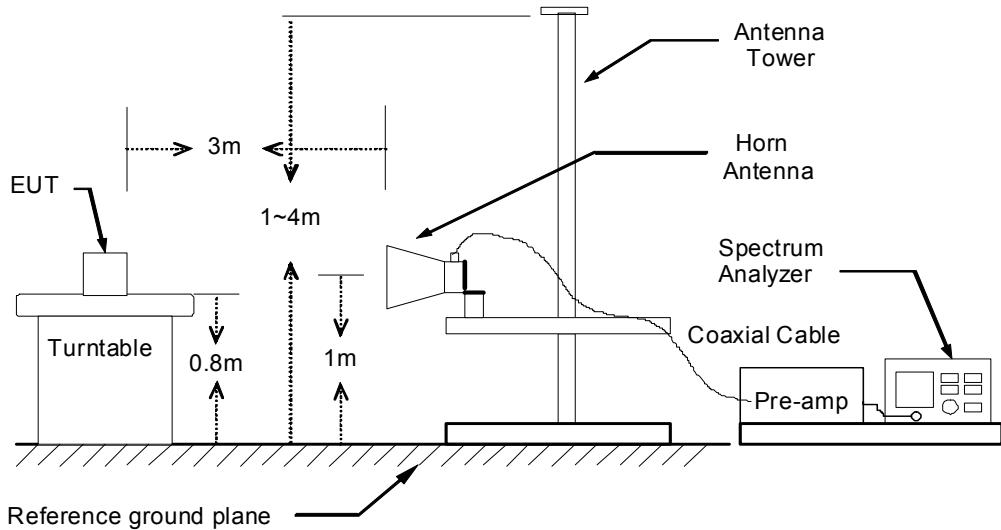

TEST PROCEDURE

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
2. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Remark :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

**TEST RESULTS****Below 1 GHz (9kHz ~ 30MHz)**

No emission found between lowest internal used/generated frequency to 30MHz.

Below 1 GHz (30MHz ~ 1GHz)

Product Name	Computer	Test By	Rueyyan Lin
Test Model	PWS-440	Test Date	2013/04/17
Test Mode	TX Mode / Power Adapter 1	Temp. & Humidity	23 °C, 46%

966 Chamber_B at 3Meter / Horizontal						
Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
87.23	56.40	-19.07	37.33	40.00	-2.67	QP
95.96	58.50	-18.60	39.90	43.50	-3.60	QP
128.94	54.20	-14.92	39.28	43.50	-4.22	QP
239.52	50.36	-13.65	36.70	46.00	-9.30	Peak
335.55	43.13	-10.69	32.44	46.00	-13.56	Peak
649.83	40.88	-5.05	35.83	46.00	-10.17	Peak
874.87	38.89	-0.97	37.92	46.00	-8.08	Peak

966 Chamber_B at 3Meter / Vertical						
Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
43.58	50.20	-13.45	36.75	40.00	-3.25	QP
127.97	54.40	-15.01	39.39	43.50	-4.11	QP
156.10	53.80	-13.51	40.29	43.50	-3.21	QP
247.28	47.14	-13.33	33.81	46.00	-12.19	Peak
507.24	39.89	-7.65	32.23	46.00	-13.77	Peak
649.83	39.61	-5.05	34.56	46.00	-11.44	Peak
874.87	39.57	-0.97	38.60	46.00	-7.40	Peak

Remark:

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – PreAmp.Gain (dB)
4. Result (dB μ V/m) = Reading (dB μ V) + Correction Factor (dB/m)
5. Margin (dB) = Remark result (dB μ V/m) - Quasi-peak limit (dB μ V/m).



Product Name	Computer	Test By	Rueyyan Lin
Test Model	PWS-440	Test Date	2013/04/17
Test Mode	TX Mode / Power Adapter 2	Temp. & Humidity	23 °C, 46%

966 Chamber_B at 3Meter / Horizontal						
Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
43.58	42.93	-13.45	29.48	40.00	-10.52	Peak
106.63	56.30	-17.26	39.04	43.50	-4.46	QP
156.10	51.03	-13.51	37.52	43.50	-5.98	Peak
240.49	49.87	-13.60	36.27	46.00	-9.73	Peak
648.86	40.76	-5.06	35.70	46.00	-10.30	Peak
719.67	42.17	-3.70	38.47	46.00	-7.53	Peak
874.87	39.97	-0.97	39.00	46.00	-7.00	Peak

966 Chamber_B at 3Meter / Vertical						
Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
43.58	49.20	-13.45	35.75	40.00	-4.25	QP
106.63	57.26	-17.26	40.00	43.50	-3.50	Peak
134.76	53.60	-14.36	39.24	43.50	-4.26	QP
156.10	51.78	-13.51	38.27	43.50	-5.23	Peak
428.67	41.48	-8.74	32.73	46.00	-13.27	Peak
648.86	40.86	-5.06	35.80	46.00	-10.20	Peak
874.87	38.63	-0.97	37.66	46.00	-8.34	Peak
943.74	41.65	-0.16	41.50	46.00	-4.50	Peak

Remark:

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - PreAmp.Gain (dB)
4. Result (dB μ V/m) = Reading (dB μ V) + Correction Factor (dB/m)
5. Margin (dB) = Remark result (dB μ V/m) - Quasi-peak limit (dB μ V/m).



Above 1 GHz

Product Name	Computer	Test By	Rueyyan Lin
Test Model	PWS-440	Test Date	2013/04/16
Test Mode	IEEE 802.11b TX / CH Low	Temp. & Humidity	25°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1160.00	45.27	---	-3.44	41.83	---	74.00	54.00	-12.17	Peak
1538.00	43.63	---	-1.91	41.72	---	74.00	54.00	-12.28	Peak
1968.00	43.56	---	1.96	45.52	---	74.00	54.00	-8.48	Peak
2320.00	43.18	---	3.34	46.51	---	74.00	54.00	-7.49	Peak
2532.00	42.42	---	4.02	46.44	---	74.00	54.00	-7.56	Peak
4815.00	38.34	---	9.20	47.54	---	74.00	54.00	-6.46	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1080.00	45.37	---	-3.72	41.65	---	74.00	54.00	-12.35	Peak
1316.00	45.80	---	-2.89	42.91	---	74.00	54.00	-11.09	Peak
1678.00	43.07	---	-0.65	42.42	---	74.00	54.00	-11.58	Peak
2226.00	42.54	---	3.02	45.55	---	74.00	54.00	-8.45	Peak
2646.00	42.55	---	4.26	46.81	---	74.00	54.00	-7.19	Peak
4830.00	38.35	---	9.24	47.59	---	74.00	54.00	-6.41	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Computer	Test By	Rueyyan Lin
Test Model	PWS-440	Test Date	2013/04/16
Test Mode	IEEE 802.11b TX / CH Middle	Temp. & Humidity	25 °C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1194.00	45.69	---	-3.32	42.37	---	74.00	54.00	-11.63	Peak
1502.00	44.13	---	-2.23	41.90	---	74.00	54.00	-12.10	Peak
1826.00	42.99	---	0.68	43.67	---	74.00	54.00	-10.33	Peak
2078.00	42.85	---	2.52	45.37	---	74.00	54.00	-8.63	Peak
2574.00	43.26	---	4.11	47.36	---	74.00	54.00	-6.64	Peak
4875.00	38.17	---	9.36	47.53	---	74.00	54.00	-6.47	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1288.00	45.41	---	-2.99	42.42	---	74.00	54.00	-11.58	Peak
1526.00	43.77	---	-2.02	41.75	---	74.00	54.00	-12.25	Peak
1732.00	43.67	---	-0.16	43.51	---	74.00	54.00	-10.49	Peak
2078.00	43.11	---	2.52	45.62	---	74.00	54.00	-8.38	Peak
2524.00	42.41	---	4.00	46.42	---	74.00	54.00	-7.58	Peak
4875.00	38.04	---	9.36	47.40	---	74.00	54.00	-6.60	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Computer	Test By	Rueyyan Lin
Test Model	PWS-440	Test Date	2013/04/16
Test Mode	IEEE 802.11b TX / CH High	Temp. & Humidity	25 °C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1162.00	44.82	---	-3.43	41.39	---	74.00	54.00	-12.61	Peak
1446.00	43.89	---	-2.44	41.45	---	74.00	54.00	-12.55	Peak
1794.00	43.26	---	0.40	43.65	---	74.00	54.00	-10.35	Peak
2158.00	42.21	---	2.79	44.99	---	74.00	54.00	-9.01	Peak
2736.00	42.18	---	4.45	46.62	---	74.00	54.00	-7.38	Peak
4920.00	38.77	---	9.48	48.25	---	74.00	54.00	-5.75	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1210.00	45.04	---	-3.27	41.78	---	74.00	54.00	-12.22	Peak
1456.00	44.78	---	-2.40	42.38	---	74.00	54.00	-11.62	Peak
1764.00	44.15	---	0.13	44.27	---	74.00	54.00	-9.73	Peak
2170.00	43.15	---	2.83	45.98	---	74.00	54.00	-8.02	Peak
2600.00	42.23	---	4.16	46.39	---	74.00	54.00	-7.61	Peak
4920.00	39.08	---	9.48	48.56	---	74.00	54.00	-5.44	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Computer	Test By	Rueyyan Lin
Test Model	PWS-440	Test Date	2013/04/16
Test Mode	IEEE 802.11g TX / CH Low	Temp. & Humidity	25 °C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1318.00	45.51	---	-2.89	42.62	---	74.00	54.00	-11.38	Peak
1748.00	44.60	---	-0.02	44.58	---	74.00	54.00	-9.42	Peak
2012.00	42.84	---	2.29	45.13	---	74.00	54.00	-8.87	Peak
2572.00	43.34	---	4.10	47.44	---	74.00	54.00	-6.56	Peak
4830.00	37.89	---	9.24	47.13	---	74.00	54.00	-6.87	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1034.00	45.33	---	-3.88	41.45	---	74.00	54.00	-12.55	Peak
1256.00	45.19	---	-3.10	42.09	---	74.00	54.00	-11.91	Peak
1890.00	43.69	---	1.26	44.95	---	74.00	54.00	-9.05	Peak
2226.00	43.29	---	3.02	46.31	---	74.00	54.00	-7.69	Peak
2616.00	42.94	---	4.19	47.14	---	74.00	54.00	-6.86	Peak
4815.00	38.00	---	9.20	47.20	---	74.00	54.00	-6.80	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Computer	Test By	Rueyyan Lin
Test Model	PWS-440	Test Date	2013/04/16
Test Mode	IEEE 802.11g TX / CH Middle	Temp. & Humidity	25 °C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1066.00	45.20	---	-3.77	41.43	---	74.00	54.00	-12.57	Peak
1288.00	44.65	---	-2.99	41.66	---	74.00	54.00	-12.34	Peak
1568.00	44.14	---	-1.64	42.51	---	74.00	54.00	-11.49	Peak
1954.00	43.80	---	1.84	45.64	---	74.00	54.00	-8.36	Peak
2626.00	42.99	---	4.21	47.21	---	74.00	54.00	-6.79	Peak
4935.00	39.28	---	9.52	48.80	---	74.00	54.00	-5.20	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1192.00	44.80	---	-3.33	41.48	---	74.00	54.00	-12.52	Peak
1520.00	45.18	---	-2.07	43.11	---	74.00	54.00	-10.89	Peak
1980.00	43.14	---	2.07	45.21	---	74.00	54.00	-8.79	Peak
2228.00	42.48	---	3.03	45.50	---	74.00	54.00	-8.50	Peak
2680.00	42.57	---	4.33	46.90	---	74.00	54.00	-7.10	Peak
4965.00	39.63	---	9.60	49.22	---	74.00	54.00	-4.78	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Computer	Test By	Rueyyan Lin
Test Model	PWS-440	Test Date	2013/04/16
Test Mode	IEEE 802.11g TX / CH High	Temp. & Humidity	25 °C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1364.00	45.14	---	-2.73	42.42	---	74.00	54.00	-11.58	Peak
1748.00	44.18	---	-0.02	44.16	---	74.00	54.00	-9.84	Peak
1966.00	43.07	---	1.94	45.02	---	74.00	54.00	-8.98	Peak
2352.00	44.01	---	3.45	47.46	---	74.00	54.00	-6.54	Peak
2592.00	43.29	---	4.14	47.44	---	74.00	54.00	-6.56	Peak
4935.00	39.92	---	9.52	49.44	---	74.00	54.00	-4.56	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1164.00	45.17	---	-3.43	41.75	---	74.00	54.00	-12.25	Peak
1694.00	43.38	---	-0.50	42.87	---	74.00	54.00	-11.13	Peak
2010.00	43.17	---	2.28	45.46	---	74.00	54.00	-8.54	Peak
2286.00	42.44	---	3.22	45.66	---	74.00	54.00	-8.34	Peak
2638.00	42.93	---	4.24	47.17	---	74.00	54.00	-6.83	Peak
4965.00	39.08	---	9.60	48.68	---	74.00	54.00	-5.32	Peak

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Restricted Band Edges


Detector Mode : Peak

Polarity : Horizontal

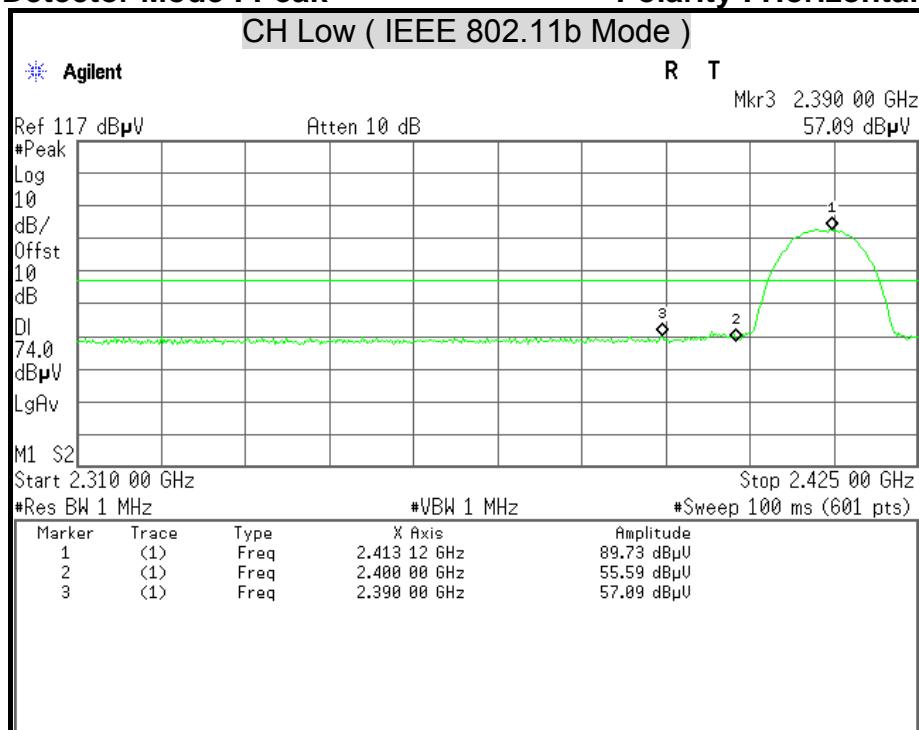

Detector Mode : Average


Polarity : Horizontal

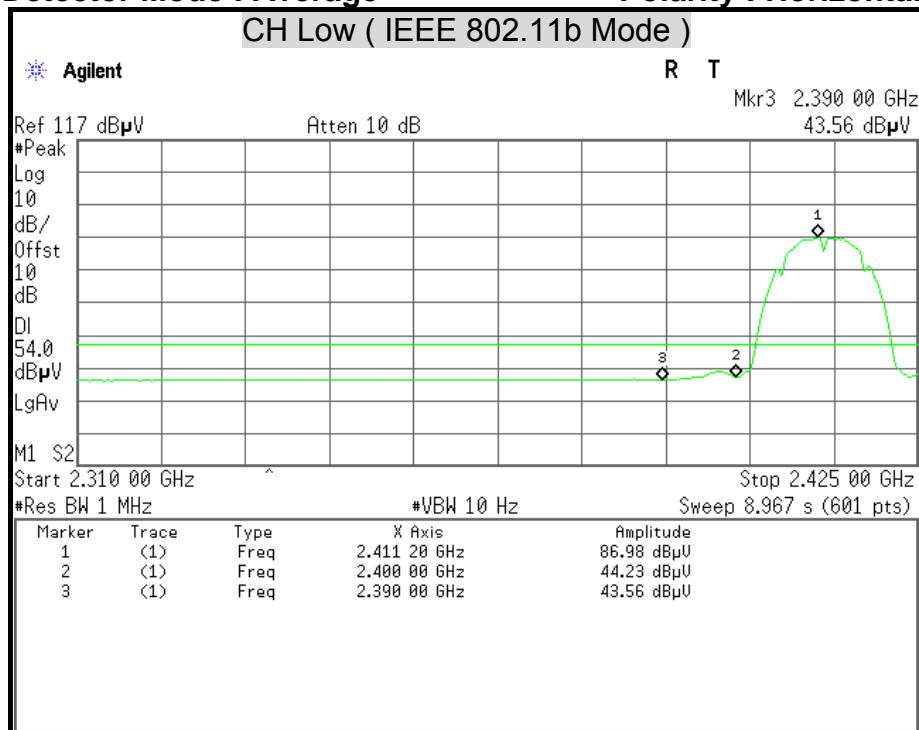




Detector Mode : Peak



Polarity : Vertical


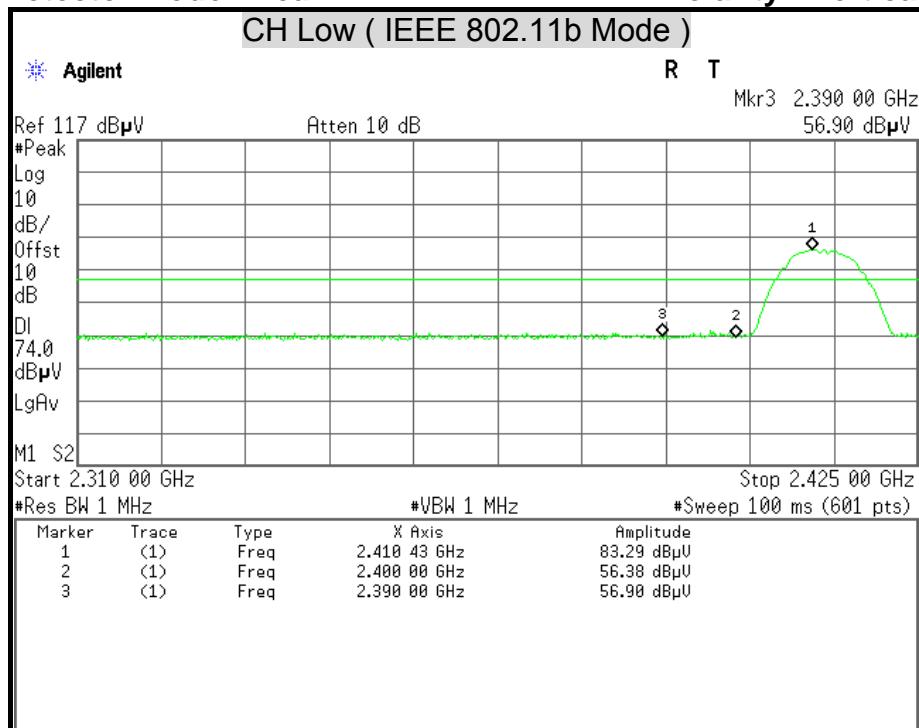




Detector Mode : Average

Polarity : Vertical

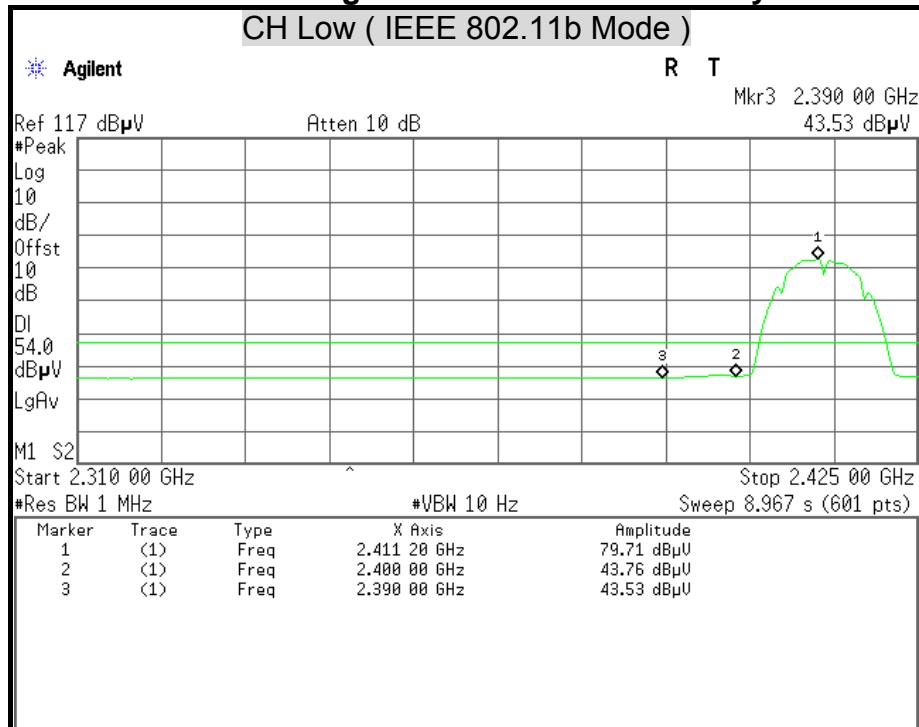

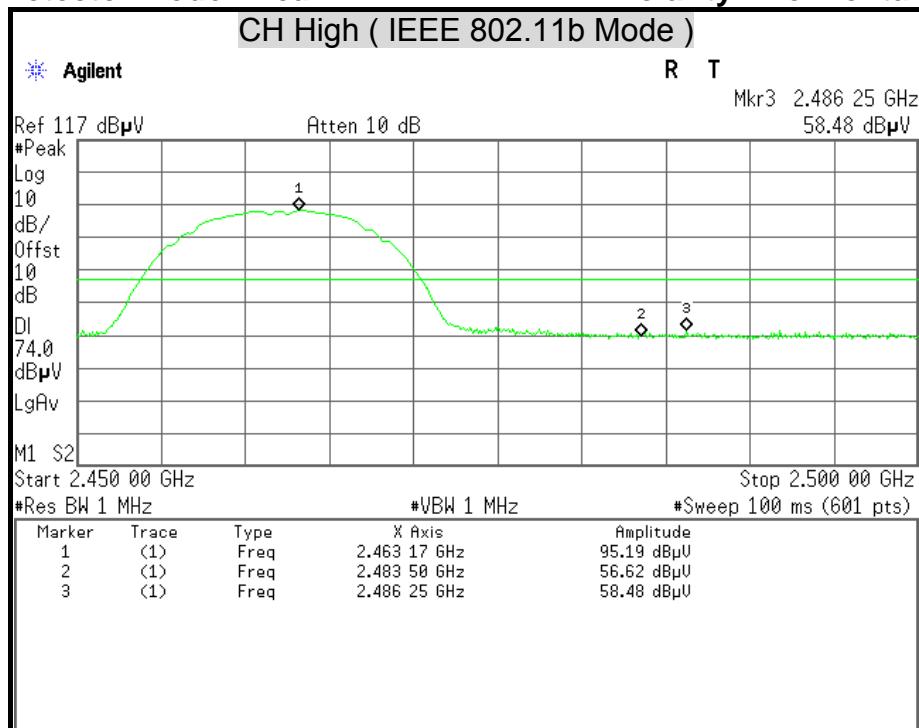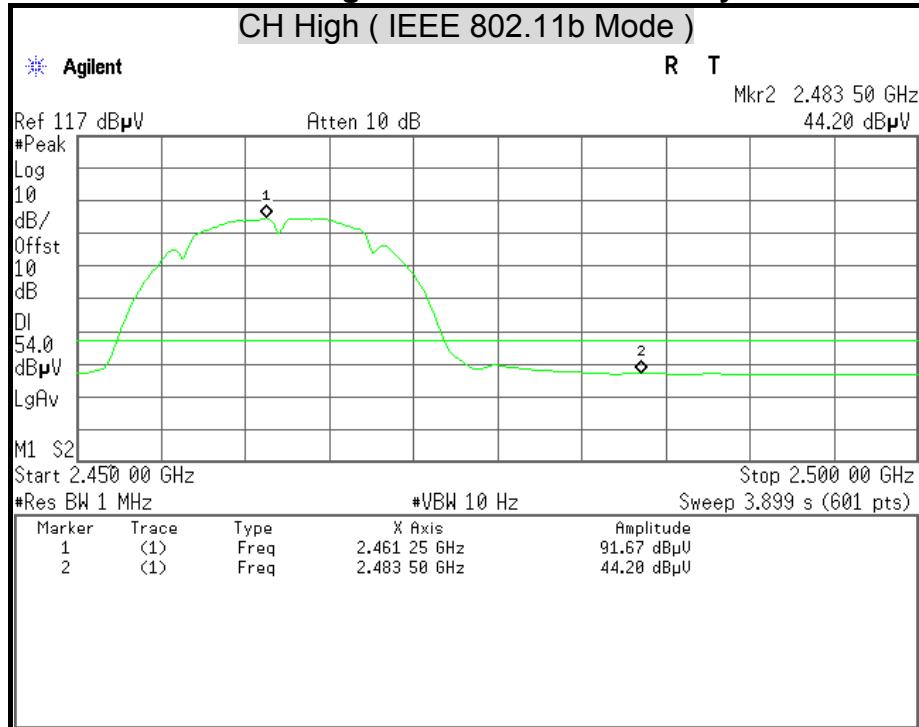**Detector Mode : Peak****Polarity : Horizontal****Detector Mode : Average****Polarity : Horizontal**

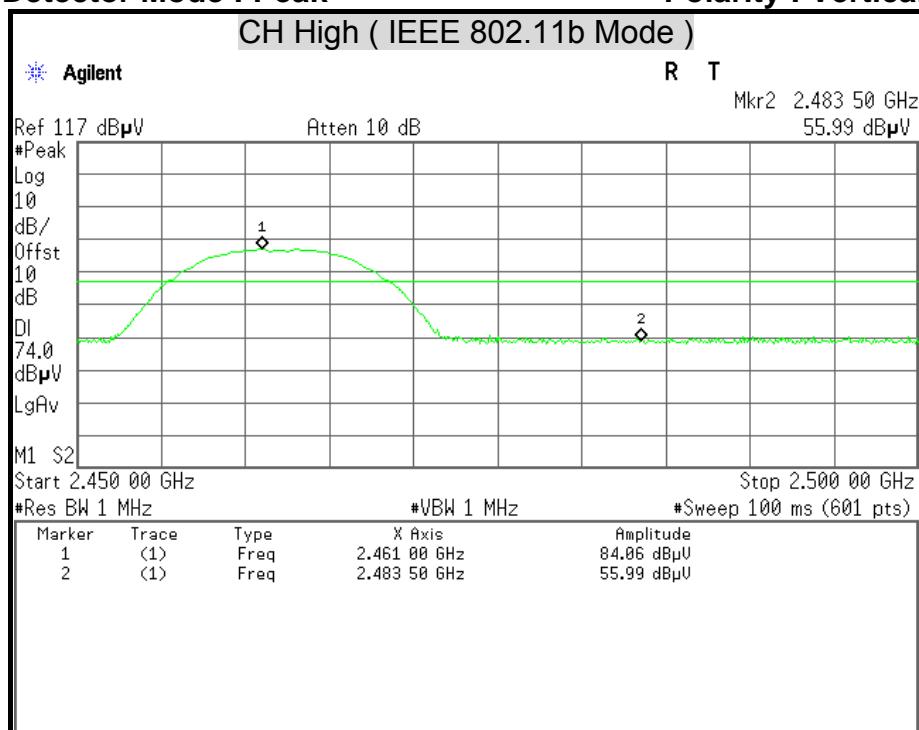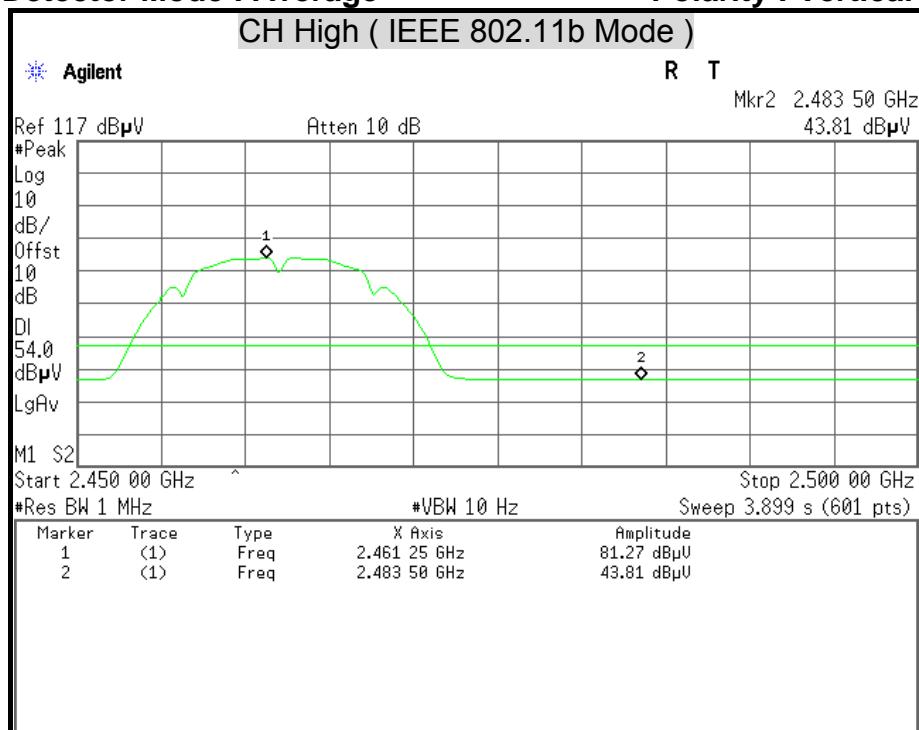
**Detector Mode : Peak****Polarity : Vertical****Detector Mode : Average****Polarity : Vertical**

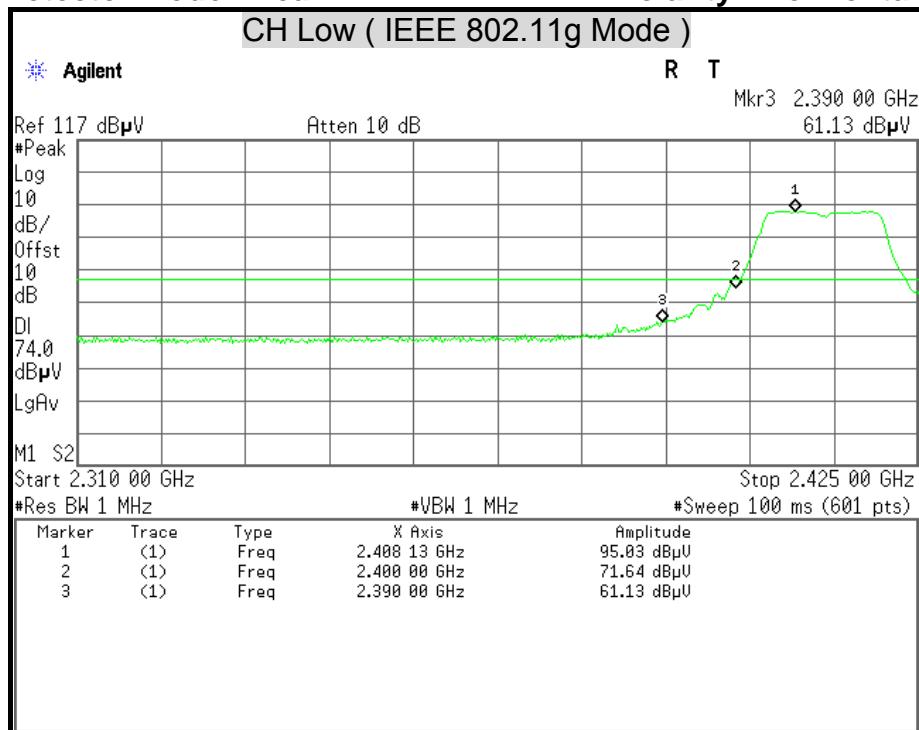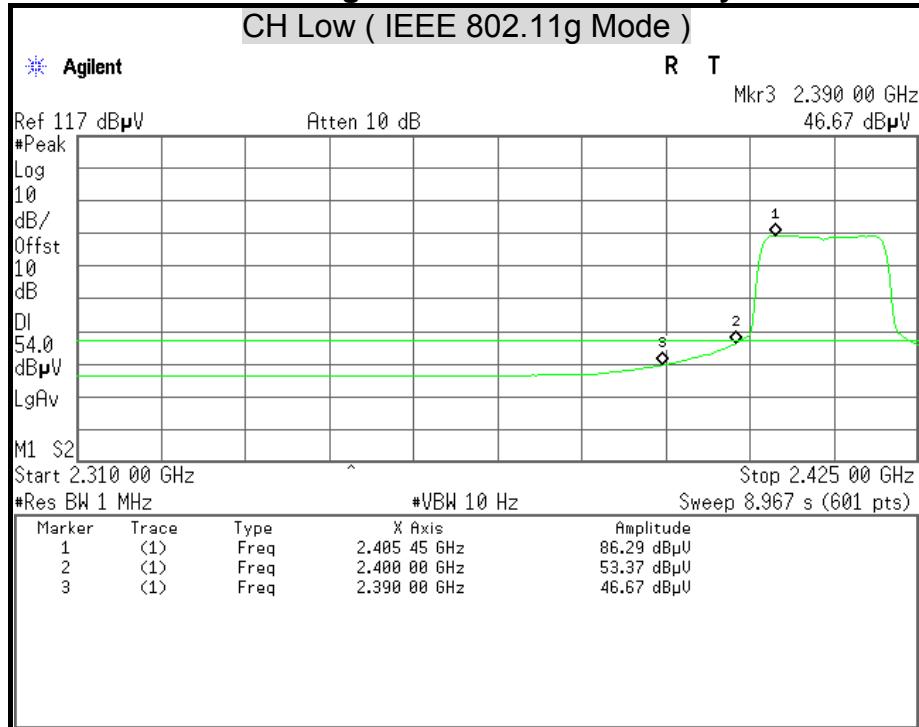**Detector Mode : Peak****Polarity : Horizontal****Detector Mode : Average****Polarity : Horizontal**




Detector Mode : Peak

Polarity : Vertical

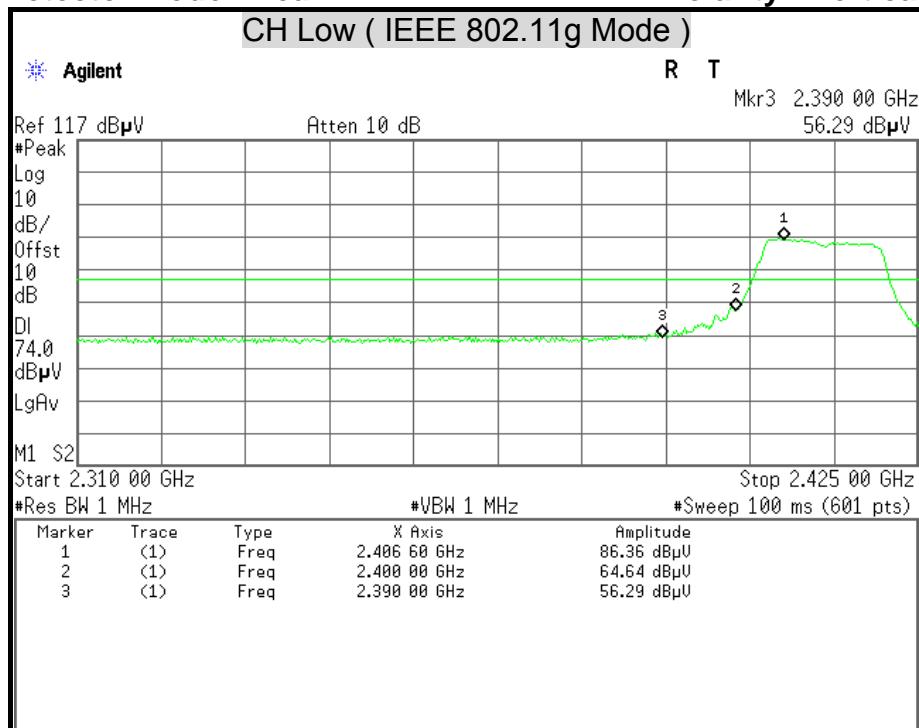

Detector Mode : Average


Polarity : Vertical

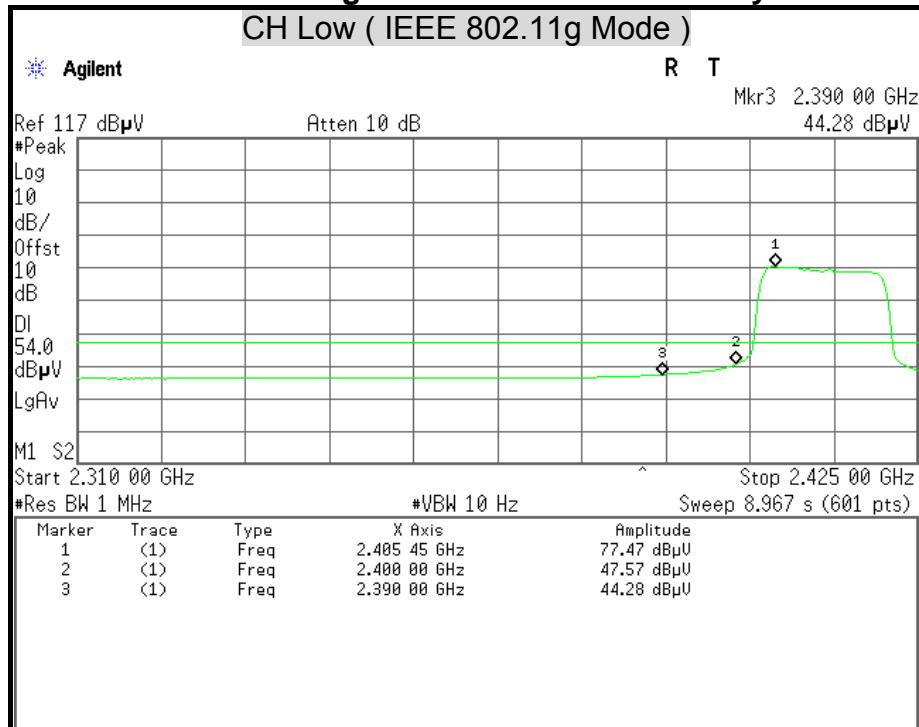




Detector Mode : Peak



Polarity : Horizontal

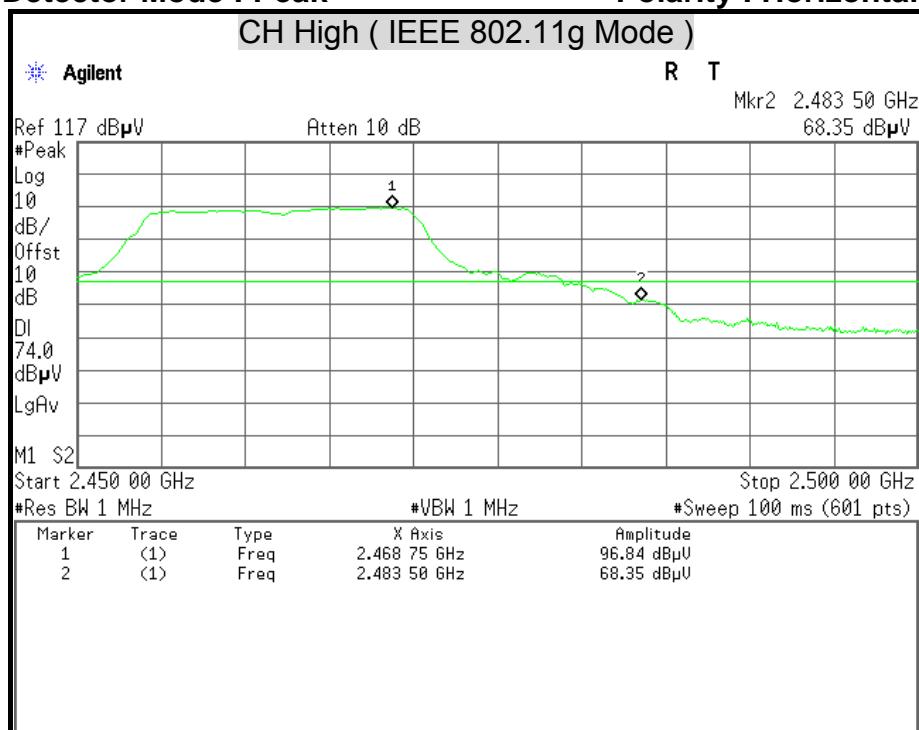

Detector Mode : Average

Polarity : Horizontal

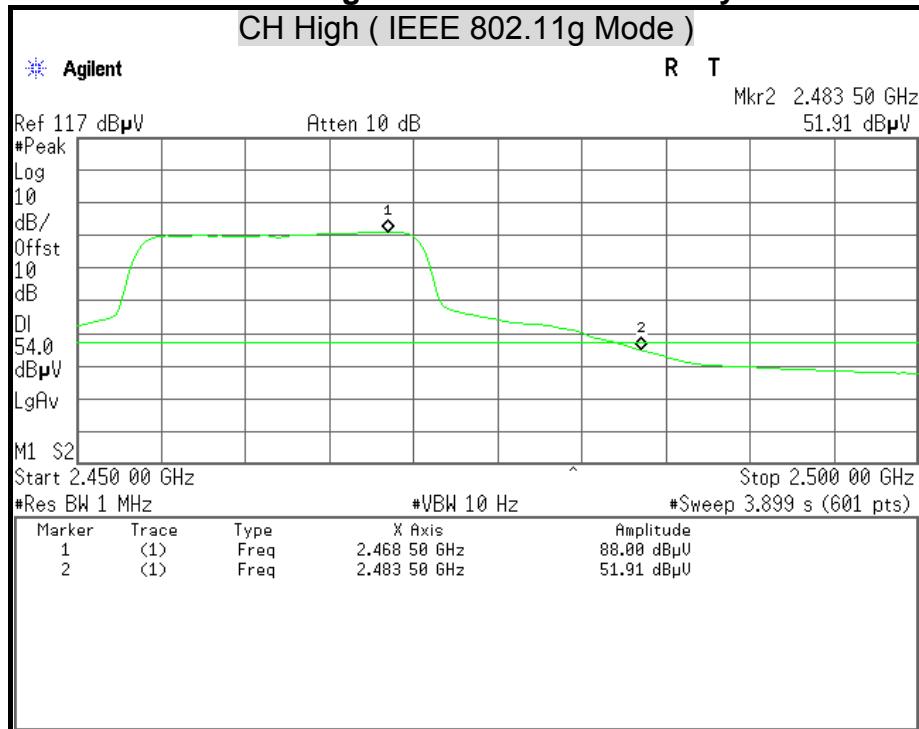

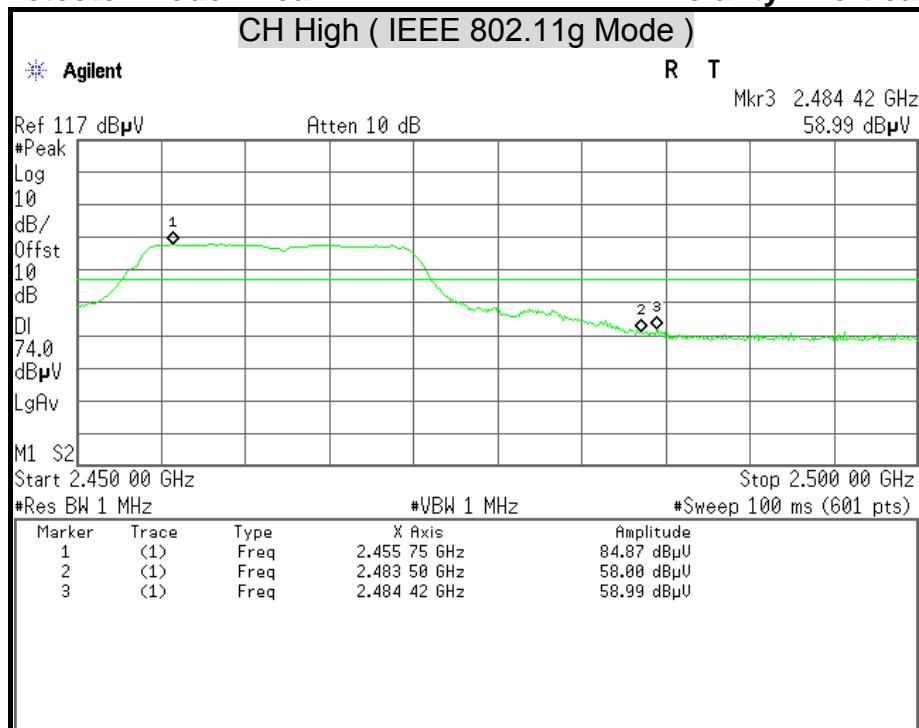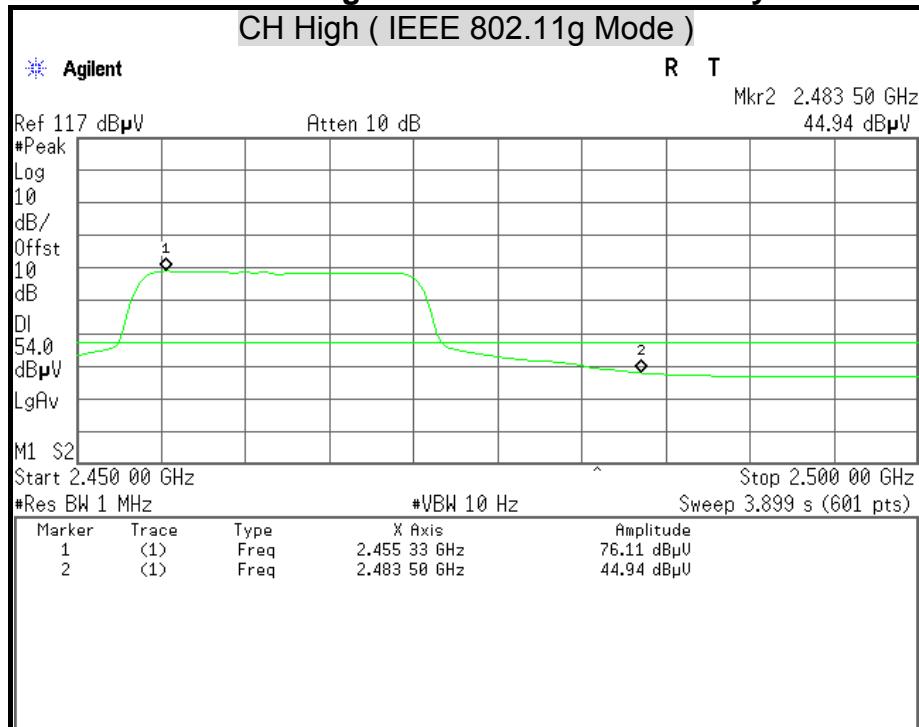**Detector Mode : Peak****Polarity : Vertical****Detector Mode : Average****Polarity : Vertical**



7.6 CONDUCTED EMISSION

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5.00	56	46
5.00 - 30.0	60	50



TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-465	08/07/2013
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-473	03/07/2014
EMI Receiver	ROHDE & SCHWARZ	ESCS 30	835418/008	10/16/2013
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	100117	07/03/2013

Remark: Each piece of equipment is scheduled for calibration once a year.



TEST SETUP

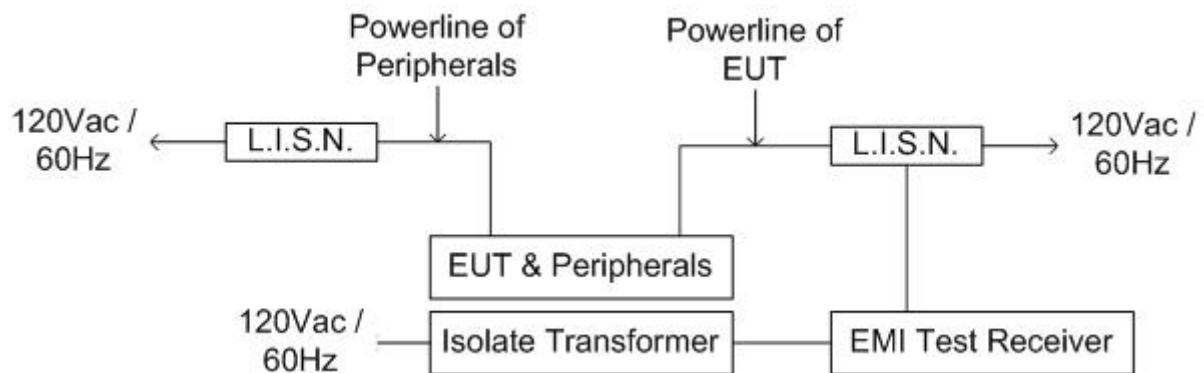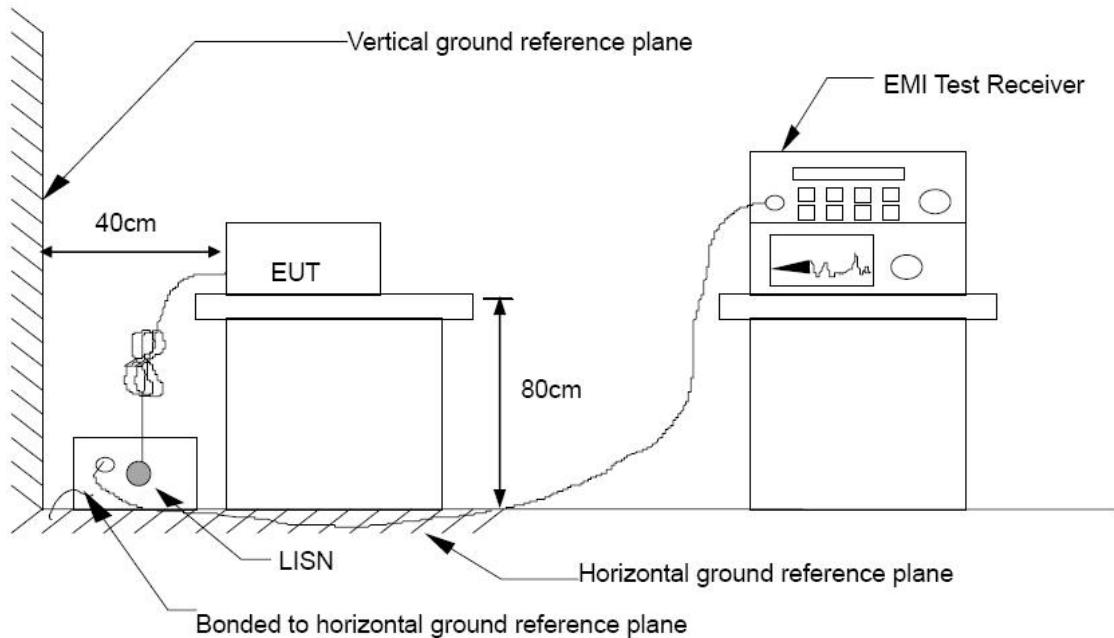



TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4:2009.

The test procedure is performed in a 4m × 3m × 2.4m (L×W×H) shielded room.

The EUT along with its peripherals were placed on a 1.0m (W) × 1.5m (L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.


The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.

The EUT was located so that the distance between the boundary of the EUT and the closest surface of the LISN is 0.8 m. Where a mains flexible cord was provided by the manufacturer shall be 1 m long, or if in excess of 1 m, the excess cable was folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

TEST RESULTS

Product Name	Computer	Test By	Rueyyan Lin
Test Model	PWS-440	Test Date	2013/04/17
Test Mode	TX Mode / Power Adapter 1	Temp. & Humidity	21°C, 60%

LINE

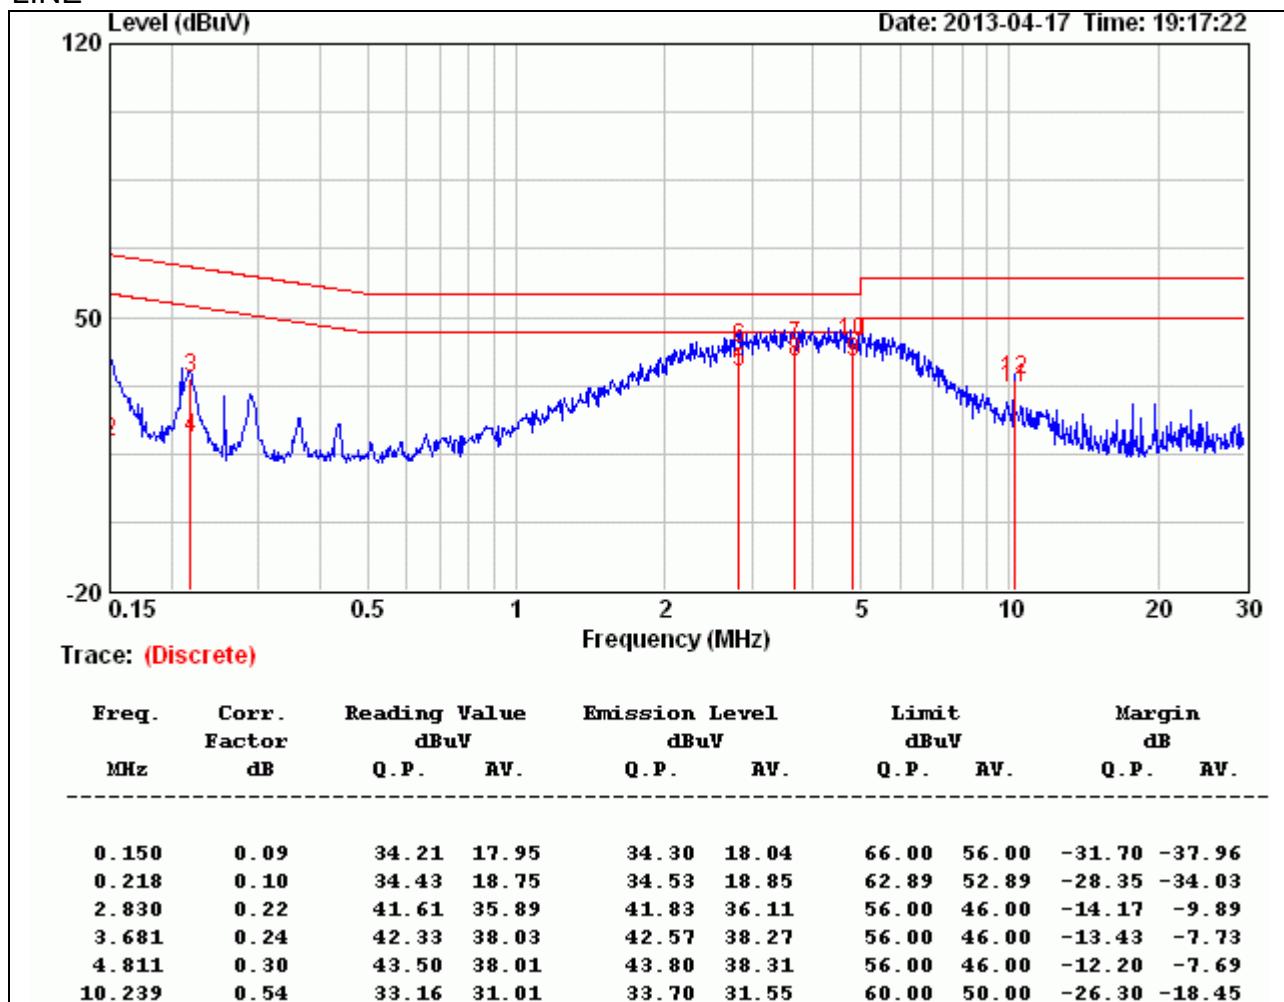
**Remark:**

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level – Limit value



Product Name	Computer	Test By	Rueyyan Lin
Test Model	PWS-440	Test Date	2013/04/17
Test Mode	TX Mode / Power Adapter 1	Temp. & Humidity	21°C, 60%

NEUTRAL

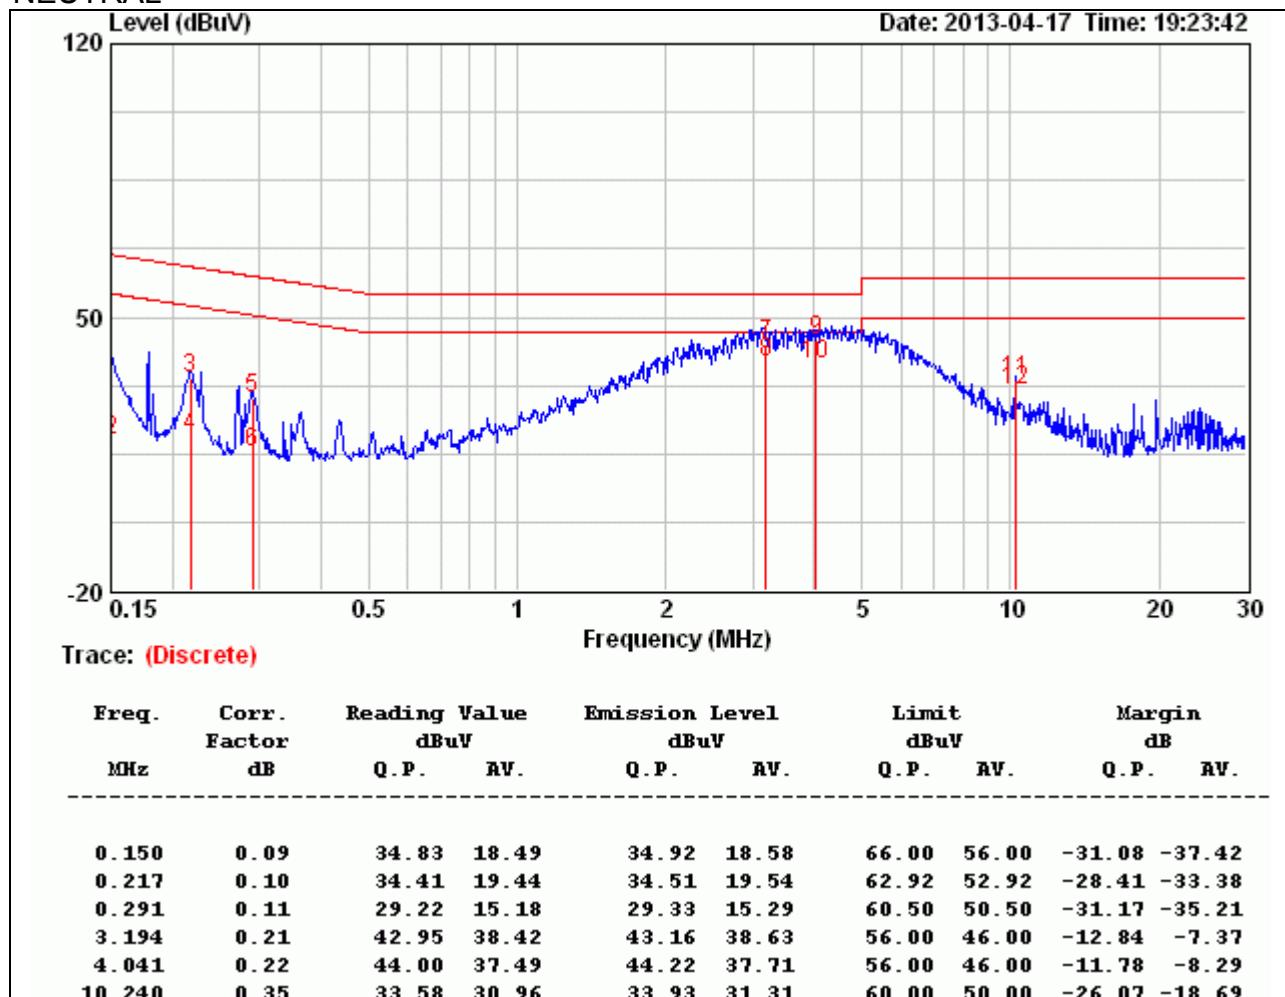


Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level – Limit value



Product Name	Computer	Test By	Rueyyan Lin
Test Model	PWS-440	Test Date	2013/04/17
Test Mode	TX Mode / Power Adapter 2	Temp. & Humidity	21°C, 60%

LINE

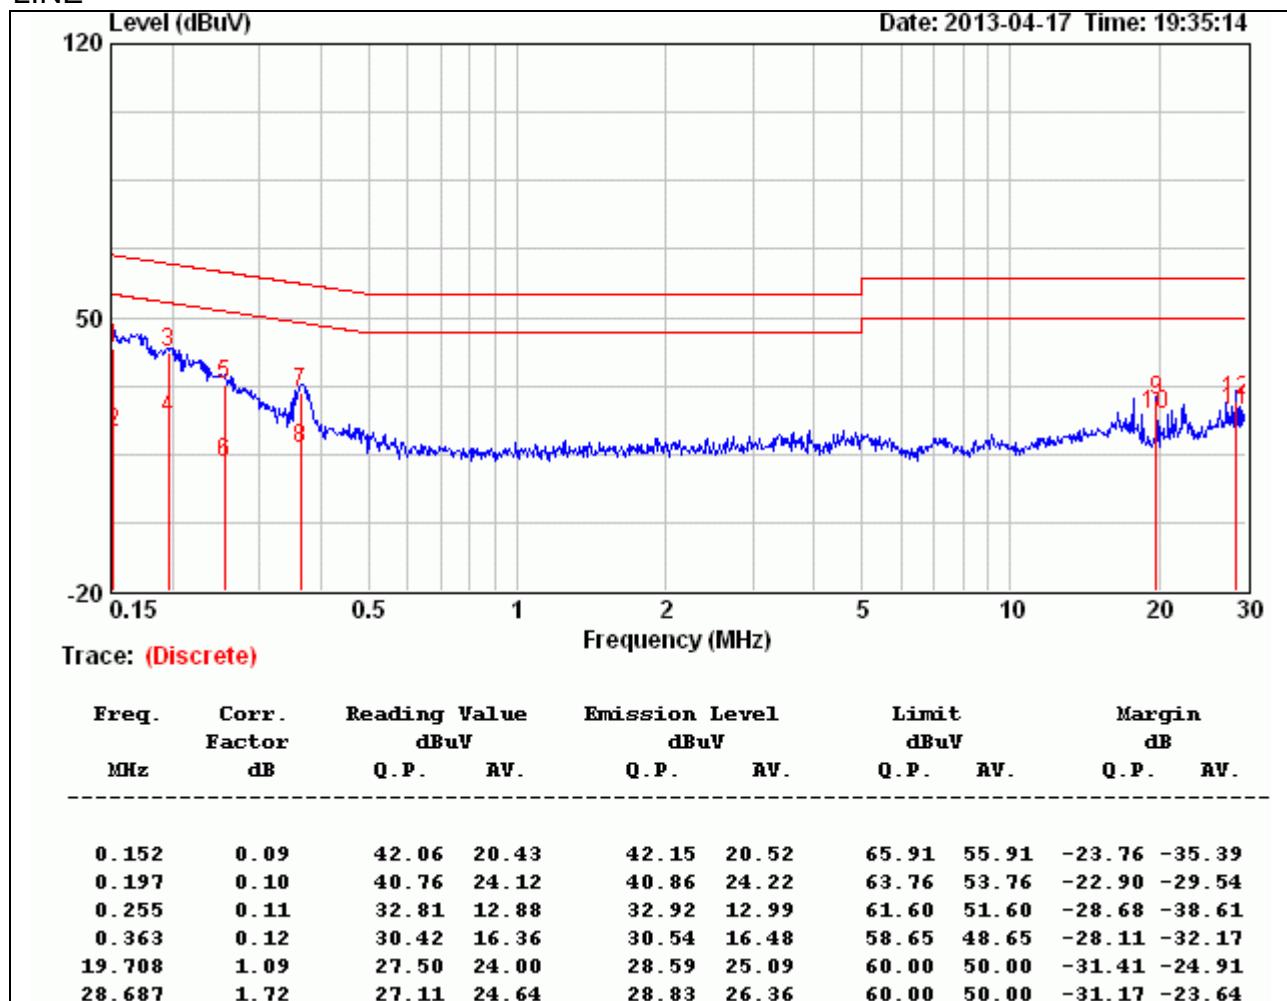


Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level – Limit value



Product Name	Computer	Test By	Rueyyan Lin
Test Model	PWS-440	Test Date	2013/04/17
Test Mode	TX Mode / Power Adapter 2	Temp. & Humidity	21°C, 60%

NEUTRAL

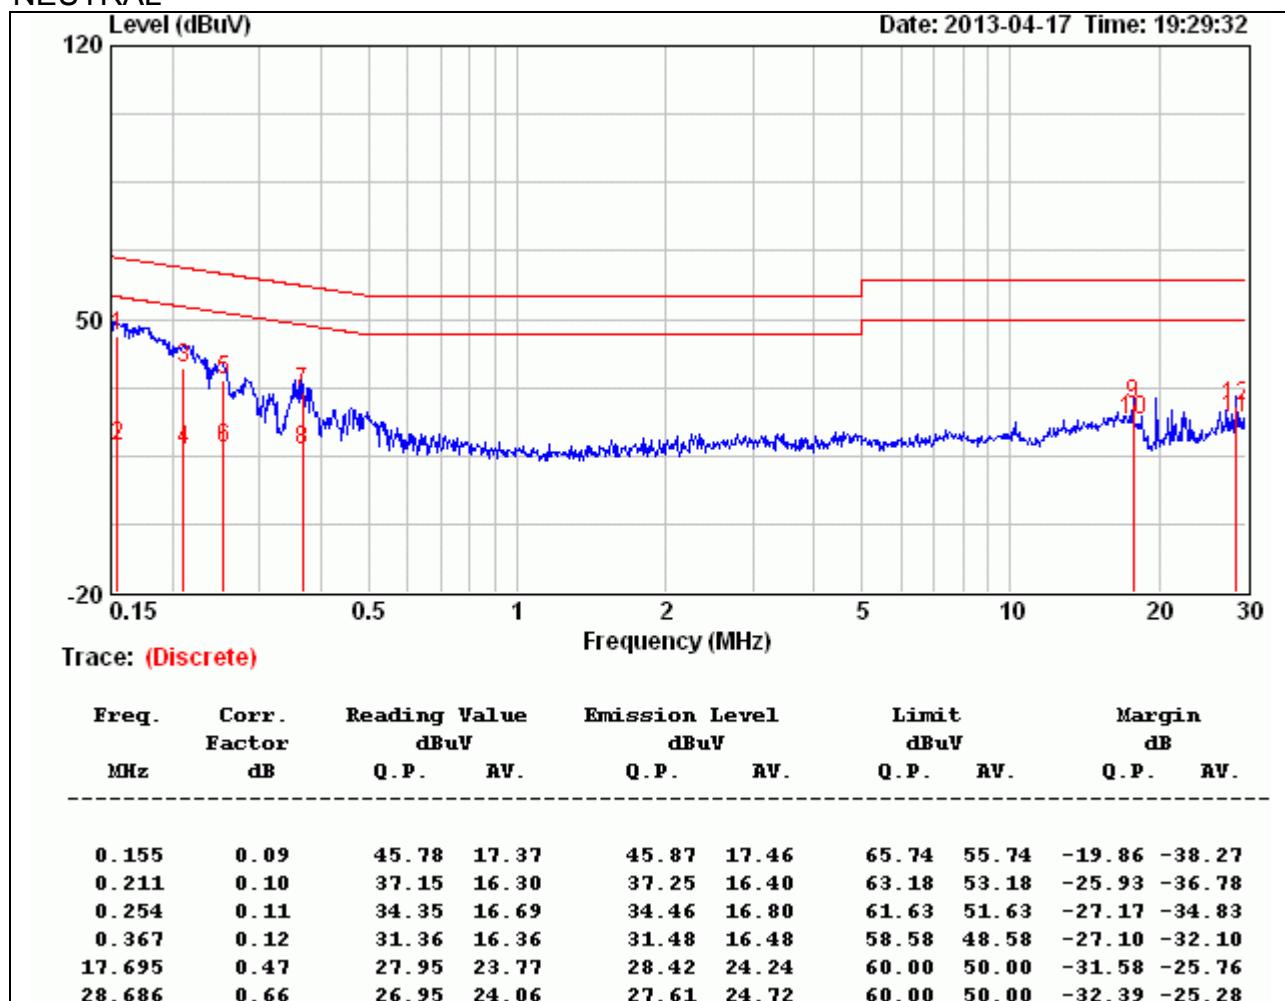

Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level – Limit value