

FCC RADIO TEST REPORT

FCC 47 CFR PART 15 SUBPART C

Test Standard	FCC Part 15.247
FCC ID	M82-TREK734LTE
Brand name	ADVANTECH
Product name	Computer
Model No.	TREK-734
Test Result	Pass

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc.(Wugu Laboratory)



Approved by:

Tested by:

A handwritten signature in black ink, appearing to read "Sam Chuang", written over a horizontal line.

Sam Chuang
Manager

A handwritten signature in black ink, appearing to read "Jerry Chuang", written over a horizontal line.

Jerry Chuang
Engineer

Revision History

Rev.	Issue Date	Revisions	Revised By
00	November 16, 2017	Initial Issue	Allison Chen
01	February 13, 2018	Modify KDB 558074 version to D01 v04 in P.8, P.14, P.19, P.21, P.26, P.37.	Allison Chen

Table of contents

1.	GENERAL INFORMATION	4
1.1	EUT INFORMATION.....	4
1.2	EUT CHANNEL INFORMATION	5
1.3	ANTENNA INFORMATION	5
1.4	MEASUREMENT UNCERTAINTY	6
1.5	FACILITIES AND TEST LOCATION	7
1.6	INSTRUMENT CALIBRATION	7
1.7	SUPPORT AND EUT ACCESSORIES EQUIPMENT.....	8
1.8	TEST METHODOLOGY AND APPLIED STANDARDS.....	8
2.	TEST SUMMERY.....	9
3.	DESCRIPTION OF TEST MODES	10
3.1	THE WORST MODE OF OPERATING CONDITION.....	10
3.2	THE WORST MODE OF MEASUREMENT	11
3.3	EUT DUTY CYCLE	12
4.	TEST RESULT.....	13
4.1	AC POWER LINE CONDUCTED EMISSION.....	13
4.2	6DB BANDWIDTH AND OCCUPIED BANDWIDTH(99%).....	14
4.3	OUTPUT POWER MEASUREMENT	19
4.4	POWER SPECTRAL DENSITY	21
4.5	CONDUCTED BANDEDGE AND SPURIOUS EMISSION	26
4.6	RADIATION BANDEDGE AND SPURIOUS EMISSION.....	36
APPENDIX I PHOTOGRAPHS OF EUT		

1. GENERAL INFORMATION

1.1 EUT INFORMATION

Applicant	Advantech Co.Ltd. No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 114, Taiwan, R.O.C.
Manufacturer	Advantech Co.Ltd. No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 114, Taiwan, R.O.C.
Equipment	Computer
Model No.	TREK-734
Model Discrepancy	N/A
Received Date	October 23, 2017
Date of Test	November 10 ~ November 13, 2017
Output Power(W)	IEEE 802.11b mode: 0.0351 IEEE 802.11g mode: 0.0315 IEEE 802.11n HT 20 MHz mode: 0.0232
Power Supply	Tested: DC 12V I/P: 9~32Vdc, 10A Max

1.2 EUT CHANNEL INFORMATION

Frequency Range	2412MHz-2462MHz
Modulation Type	1. IEEE 802.11b mode: CCK 2. IEEE 802.11g mode: OFDM 3. IEEE 802.11n HT 20 MHz mode: OFDM
Bandwidth	1. IEEE 802.11b mode: 11 Channels 2. IEEE 802.11g mode: 11 Channels 3. IEEE 802.11n HT 20 MHz mode: 11 Channels

Remark:

Refer as ANSI 63.10:2013 clause 5.6.1 Table 4 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
☐ 1 MHz or less	1	Middle
☐ 1 MHz to 10 MHz	2	1 near top and 1 near bottom
☒ More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

1.3 ANTENNA INFORMATION

Antenna Type	☐ PIFA ☐ PCB ☒ Dipole ☐ Coils
Antenna Gain	Gain: -0.61dBi

1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 1.4003
RF output power, conducted	+/- 1.1372
Power density, conducted	+/- 1.4003
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683
3M Semi Anechoic Chamber / 40G~60G	+/- 1.8509
3M Semi Anechoic Chamber / 60G~75G	+/- 1.9869
3M Semi Anechoic Chamber / 75G~110G	+/- 2.9651
3M Semi Anechoic Chamber / 110G~170G	+/- 2.7807
3M Semi Anechoic Chamber / 170G~220G	+/- 3.6437
3M Semi Anechoic Chamber / 220G~325G	+/- 4.2982

Remark:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Test site	Test Engineer	Remark
AC Conduction Room	--	Not applicable, because EUT not connect to AC Main Source direct.
Radiation	Jerry Chuang	-
RF Conducted	Eric Lee	-

Remark: The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.6 INSTRUMENT CALIBRATION

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Power Meter	Anritsu	ML2495A	1012009	07/03/2017	07/02/2018
Power Sensor	Anritsu	MA2411B	917072	07/03/2017	07/02/2018
Spectrum Analyzer	R&S	FSV 40	101073	10/02/2017	10/01/2018

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Bilog Antenna	Sunol Sciences	JB3	A030105	06/20/2017	06/19/2018
Horn Antenna	EMCO	3117	00055165	02/20/2017	02/19/2018
Pre-Amplifier	EMCI	EMC 012635	980151	08/01/2017	07/31/2018
Pre-Amplifier	EMEC	EM330	060609	06/07/2017	06/06/2018
Spectrum Analyzer	Agilent	E4446A	US42510252	12/05/2016	12/04/2017
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R

Remark: Each piece of equipment is scheduled for calibration once a year.

1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

EUT Accessories Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				

Support Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
1.	DC power supply	Motech	N/A	N/A	N/A

1.8 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247, KDB 558074 D01 v04.

2. TEST SUMMERY

FCC Standard Section	Report Section	Test Item	Result
15.203	1.2	Antenna Requirement	Pass
15.207(a)	4.1	AC Conducted Emission	-
15.247(a)(2)	4.2	6 dB Bandwidth	Pass
15.247(b)	4.3	Output Power Measurement	Pass
15.247(e)	4.4	Power Spectral Density	Pass
15.247(d)	4.5	Conducted Band Edge	Pass
15.247(d)	4.5	Conducted Emission	Pass
15.247(d)	4.6	Radiation Band Edge	Pass
15.247(d)	4.6	Radiation Spurious Emission	Pass

3. DESCRIPTION OF TEST MODES

3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	IEEE 802.11b mode :1Mbps IEEE 802.11g mode :6Mbps IEEE 802.11n HT20 mode :MCS0
Test Channel Frequencies	IEEE 802.11b mode : 1. Lowest Channel : 2412MHz 2. Middle Channel : 2437MHz 3. Highest Channel : 2462MHz IEEE 802.11g mode : 1. Lowest Channel : 2412MHz 2. Middle Channel : 2437MHz 3. Highest Channel : 2462MHz IEEE 802.11n HT20 mode : 1. Lowest Channel : 2412MHz 2. Middle Channel : 2437MHz 3. Highest Channel : 2462MHz
Operation Transmitter	IEEE 802.11b mode :1T1R IEEE 802.11g mode :1T1R IEEE 802.11n HT20 mode :1T1R

Remark:

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.

3.2 THE WORST MODE OF MEASUREMENT

Radiated Emission Measurement Above 1G	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Voltage/Hz	DC 12V
Test Mode	Mode 1: EUT power by DC Source via cable.
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4
Worst Position	☐ Placed in fixed position. ☐ Placed in fixed position at X-Plane (E2-Plane) ☒ Placed in fixed position at Y-Plane (E1-Plane) ☐ Placed in fixed position at Z-Plane (H-Plane)
Worst Polarity	☐ Horizontal ☒ Vertical


Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Voltage/Hz	DC 12V
Test Mode	Mode 1: EUT power by DC Source via cable.
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X,Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case(Y-Plane and Vertical) were recorded in this report
3. For below 1G, Radiation emission is performed the EUT transmit at the highest output power channel as worse case.

3.3 EUT DUTY CYCLE

Duty Cycle				
Configuration	TX ON (ms)	TX ALL (ms)	Duty Cycle (%)	Duty Factor(dB)
802.11b	8.4400	8.4500	99.88%	0.01
802.11g	1.4300	1.4400	99.31%	0.03
802.11n HT20	1.3400	1.3500	99.26%	0.03

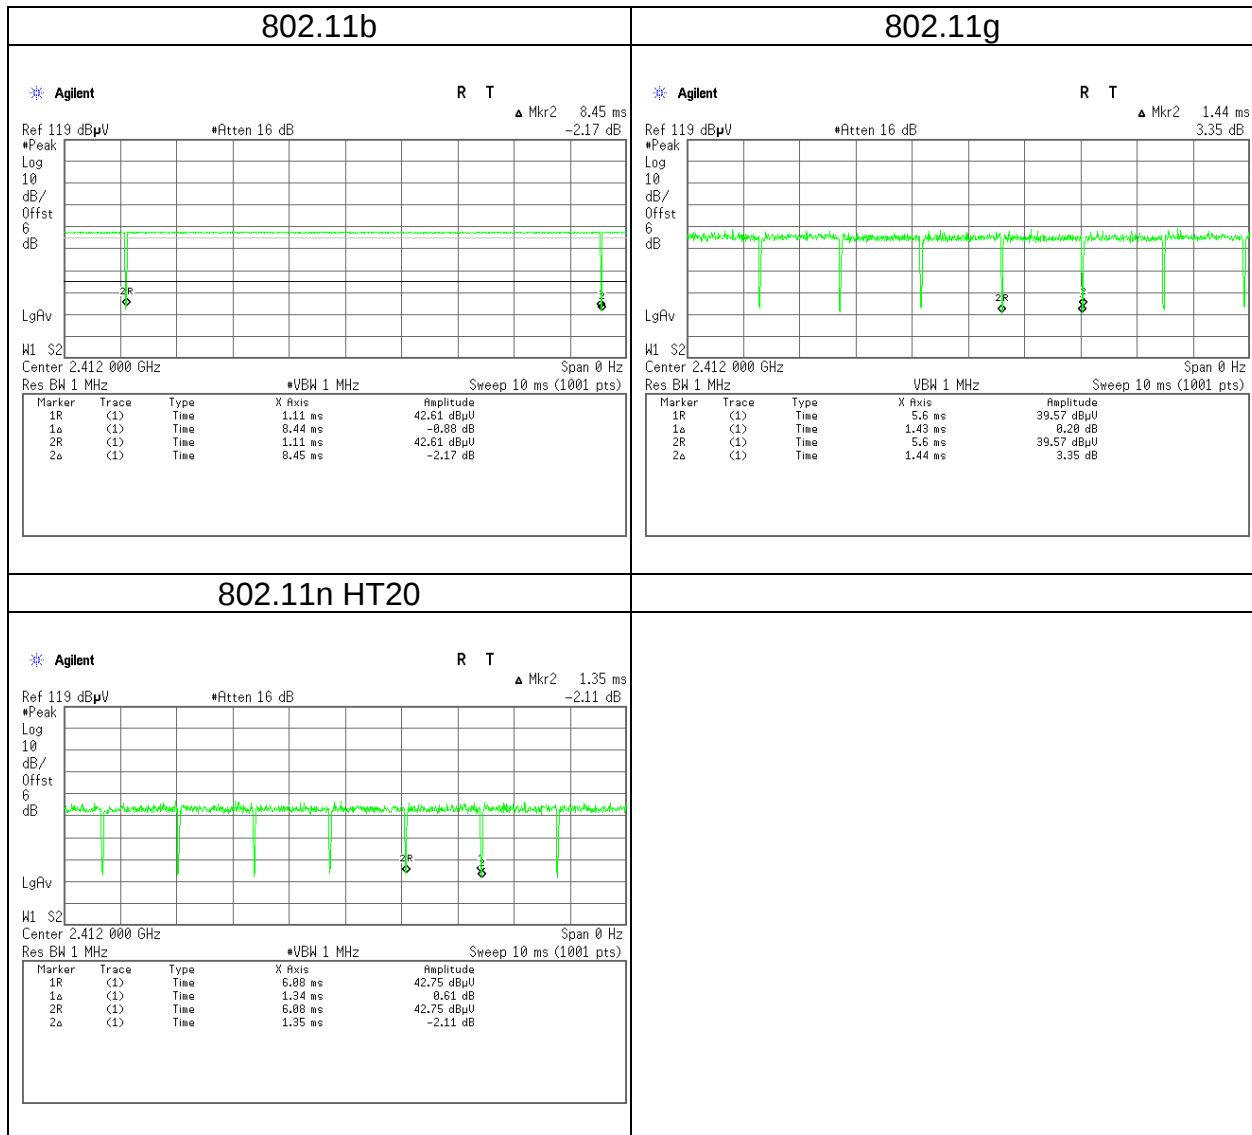

4. TEST RESULT

4.1 AC POWER LINE CONDUCTED EMISSION

4.1.1 Test Limit

According to §15.207(a)(2)

Frequency Range (MHz)	Limits(dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


* Decreases with the logarithm of the frequency.

4.1.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

4.1.3 Test Setup

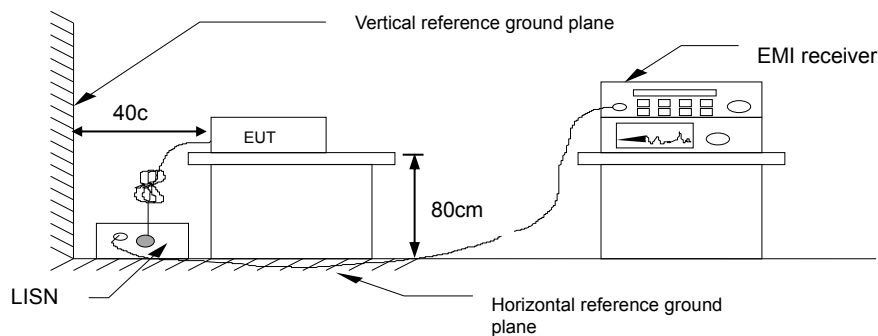

4.1.4 Test Result

Not applicable, because EUT not connect to AC Main Source direct.

4.2 6DB BANDWIDTH AND OCCUPIED BANDWIDTH(99%)

4.2.1 Test Limit

According to §15.247(a)(2)

6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------


Occupied Bandwidth(99%) : For reporting purposes only.

4.2.2 Test Procedure

Test method Refer as KDB 558074 D01 v04, Section 8.1 and ANSI 63.10:2013 clause 6.9.2,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 100kHz, VBW = 300kHz and Detector = Peak, to measurement 6 dB Bandwidth and 99% Bandwidth.
4. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

4.2.3 Test Setup

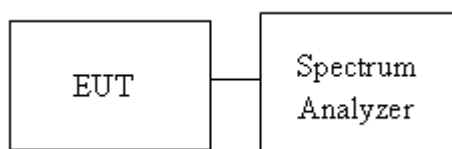


4.2.4 Test Result

Test mode: IEEE 802.11b mode / 2412-2462 MHz						
Channel	Frequency (MHz)	Chain 0 OBW(99%) (MHz)	Chain 1 OBW(99%) (MHz)	Chain 0 6dB BW (MHz)	Chain 1 6dB BW (MHz)	6dB limit (kHz)
Low	2412	14.0231	--	9.0870	--	≥500
Mid	2437	13.9797	--	8.5652	--	
High	2462	14.0231	--	9.0870	--	

Test mode: IEEE 802.11g mode / 2412-2462 MHz						
Channel	Frequency (MHz)	Chain 0 OBW(99%) (MHz)	Chain 1 OBW(99%) (MHz)	Chain 0 6dB BW (MHz)	Chain 1 6dB BW (MHz)	6dB limit (kHz)
Low	2412	16.6714	--	16.0870	--	≥500
Mid	2437	16.8017	--	15.8696	--	
High	2462	16.8017	--	15.8696	--	


Test mode: IEEE 802.11n HT 20 MHz mode / 2412-2462 MHz						
Channel	Frequency (MHz)	Chain 0 OBW(99%) (MHz)	Chain 1 OBW(99%) (MHz)	Chain 0 6dB BW (MHz)	Chain 1 6dB BW (MHz)	6dB limit (kHz)
Low	2412	17.8437	--	17.3043	--	≥500
Mid	2437	17.8871	--	16.2174	--	
High	2462	17.8437	--	17.5652	--	

Test Data

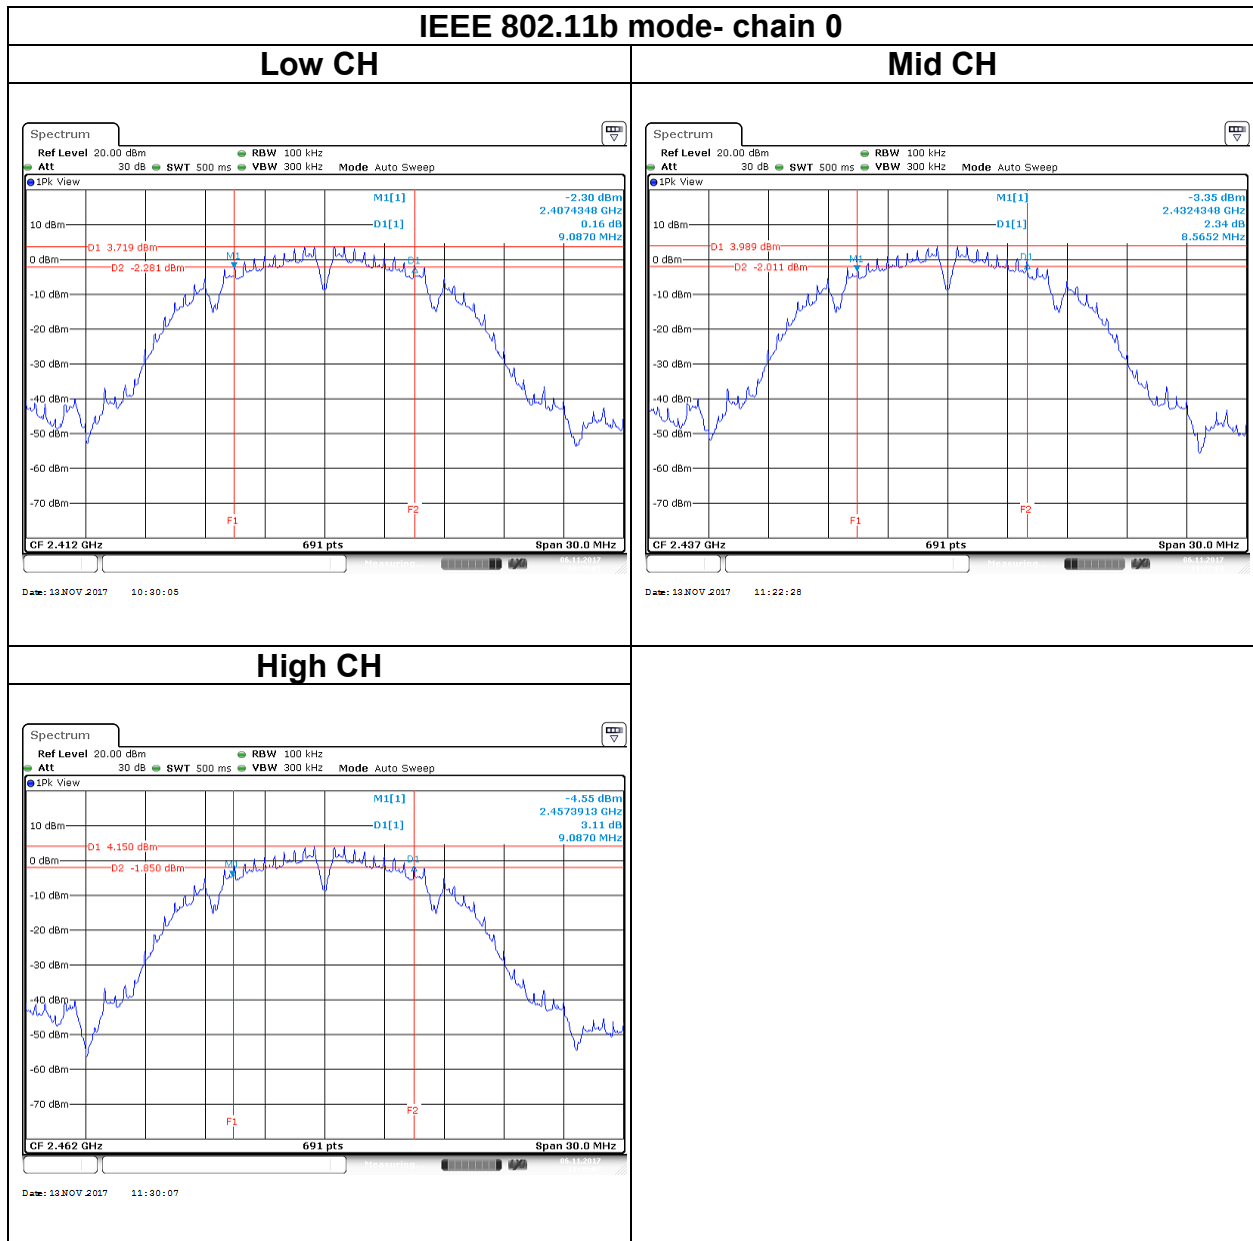


IEEE 802.11g mode- chain 0


Low CH

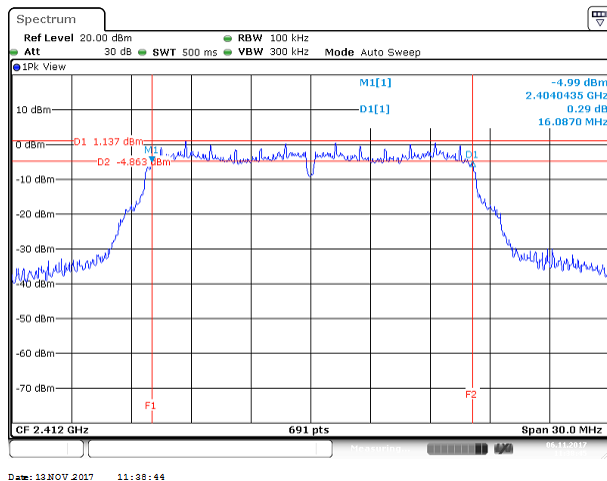

Mid CH

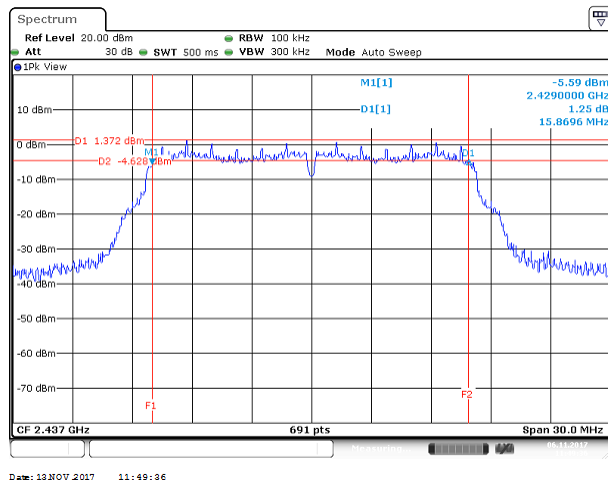


High CH

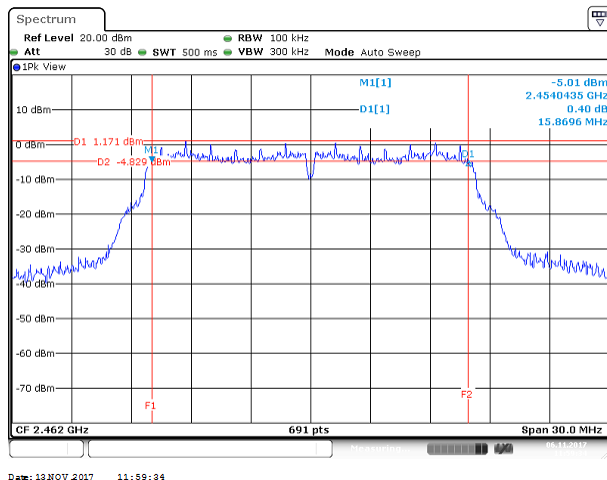


IEEE 802.11n HT20 mode- chain 0


Low CH

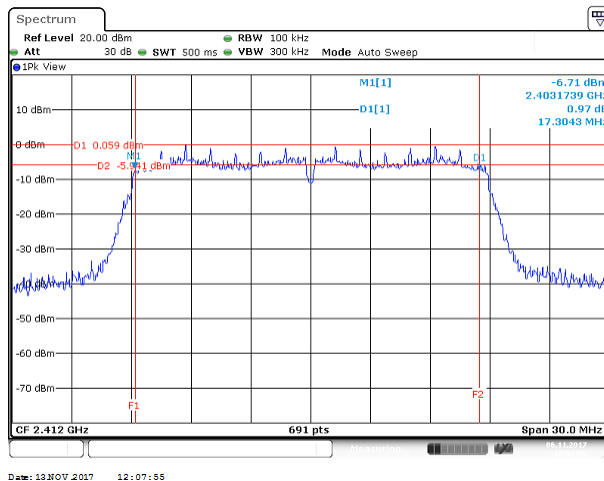

Mid CH

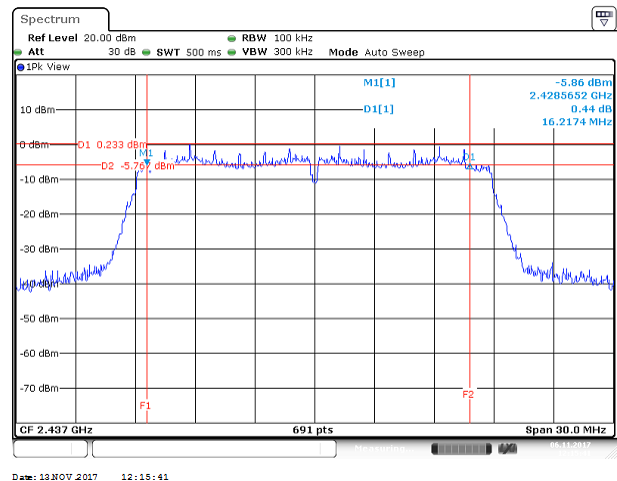

High CH

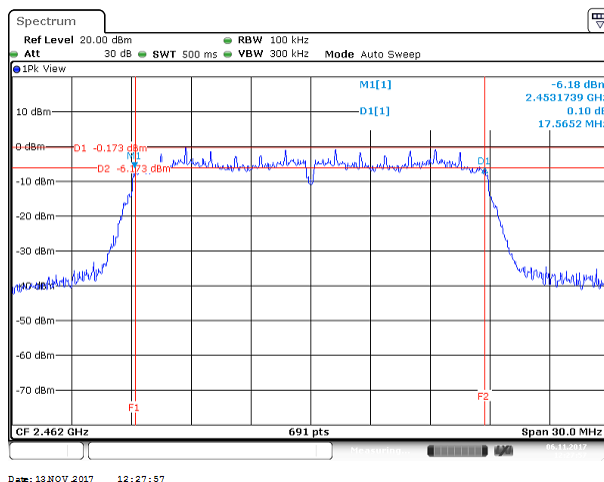

4.3 OUTPUT POWER MEASUREMENT

4.3.1 Test Limit

According to §15.247(b)

Peak output power :

For systems using digital modulation in the 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt(30 dBm) and the e.i.r.p. shall not exceed 4Watt(36 dBm), base on the use of antennas with directional gain not exceed 6 dBi If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Limit	☒ Antenna not exceed 6 dBi : 30dBm ☐ Antenna with DG greater than 6 dBi : [Limit = 30 – (DG – 6)] ☐ Point-to-point operation :
-------	---


Average output power : For reporting purposes only.

4.3.2 Test Procedure

Test method Refer as KDB 558074 D01 v04, Section 9.1.2.

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

4.3.3 Test Setup

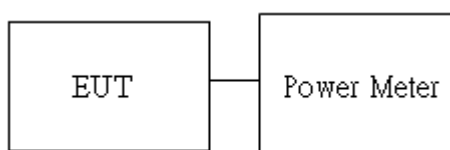

4.3.4 Test Result

Peak output power :

Wifi 2.4G									
Config	CH	Freq. (MHz)	power set		PK Power(dBm)		PK Total Power (dBm)	PK Total Power (W)	Limit (dBm)
			chain0	chain1	chain0	chain1			
IEEE 802.11b Data rate: 1Mbps	Low	2412	22	-	15.45	-	15.45	0.0351	30
	Mid	2437	17	-	15.36	-	15.36	0.0344	
	High	2462	18.5	-	15.38	-	15.38	0.0345	
IEEE 802.11g Data rate: 6Mbps	Low	2412	15	-	14.98	-	14.98	0.0315	
	Mid	2437	15	-	14.91	-	14.91	0.031	
	High	2462	13	-	14.92	-	14.92	0.031	
IEEE 802.11n HT20 Data rate: MCS 0	Low	2412	13	-	13.66	-	13.66	0.0232	
	Mid	2437	13	-	13.63	-	13.63	0.0231	
	High	2462	12	-	13.58	-	13.58	0.0228	

Average output power :

Wifi 2.4G					
Config	CH	Freq. (MHz)	AV Power(dBm)		AV Total Power (dBm)
			chain0	chain1	
IEEE 802.11b Data rate: 1Mbps	Low	2412	14.33	-	14.33
	Mid	2437	14.26	-	14.26
	High	2462	14.30	-	14.30
IEEE 802.11g Data rate: 6Mbps	Low	2412	13.88	-	13.88
	Mid	2437	13.83	-	13.83
	High	2462	13.85	-	13.85
IEEE 802.11n HT20 Data rate: MCS 0	Low	2412	12.65	-	12.65
	Mid	2437	12.55	-	12.55
	High	2462	12.58	-	12.58

4.4 POWER SPECTRAL DENSITY

4.4.1 Test Limit

According to §15.247(e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


Limit	☒ Antenna not exceed 6 dBi : 8dBm ☐ Antenna with DG greater than 6 dBi : [Limit = 8 – (DG – 6)] ☐ Point-to-point operation :
-------	---

4.4.2 Test Procedure

Test method Refer as KDB 558074 D01 v04, Section 10.2

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 30kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss and Duty Factor were compensated to the results for each measurement by SA.
5. Mark the maximum level.
6. Measure and record the result of power spectral density. in the test report.

4.4.3 Test Setup




4.4.4 Test Result

Test mode: IEEE 802.11b mode / 2412-2462 MHz					
Channel	Frequency (MHz)	Chain 0 PPSS (dBm)	Chain 1 PPSS (dBm)	Total PPSS (dBm)	Limit (dBm)
Low	2412	-9.39	-	-9.39	8
Mid	2437	-9.11	-	-9.11	
High	2462	-8.25	-	-8.25	

Test mode: IEEE 802.11g mode / 2412-2462 MHz					
Channel	Frequency (MHz)	Chain 0 PPSS (dBm)	Chain 1 PPSS (dBm)	Total PPSS (dBm)	Limit (dBm)
Low	2412	-11.10	-	-11.10	8
Mid	2437	-11.76	-	-11.76	
High	2462	-11.65	-	-11.65	


Test mode: IEEE 802.11n HT 20 MHz mode / 2412-2462 MHz					
Channel	Frequency (MHz)	Chain 0 PPSS (dBm)	Chain 1 PPSS (dBm)	Total PPSS (dBm)	Limit (dBm)
Low	2412	-11.85	-	-11.85	8
Mid	2437	-13.25	-	-13.25	
High	2462	-13.56	-	-13.56	

Test Data

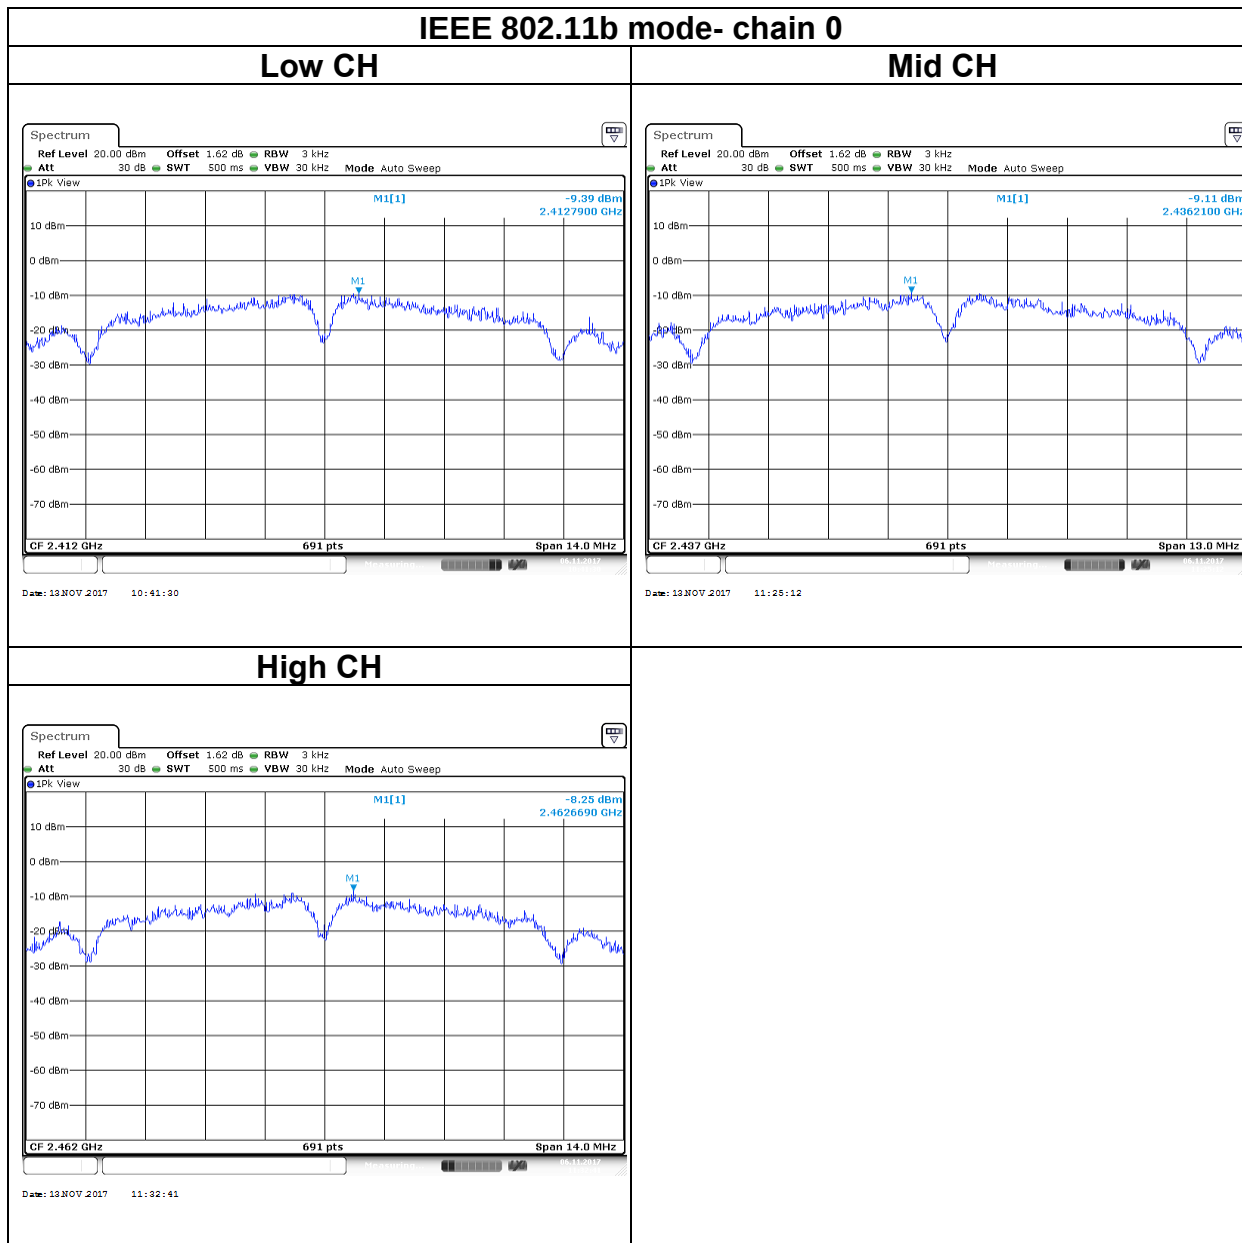


IEEE 802.11g mode- chain 0


Low CH

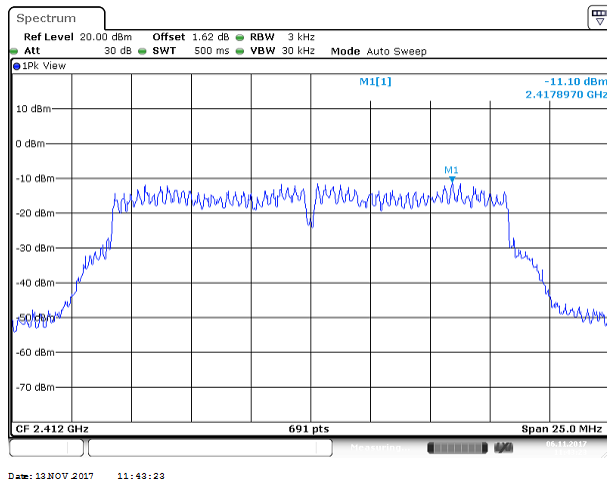

Mid CH

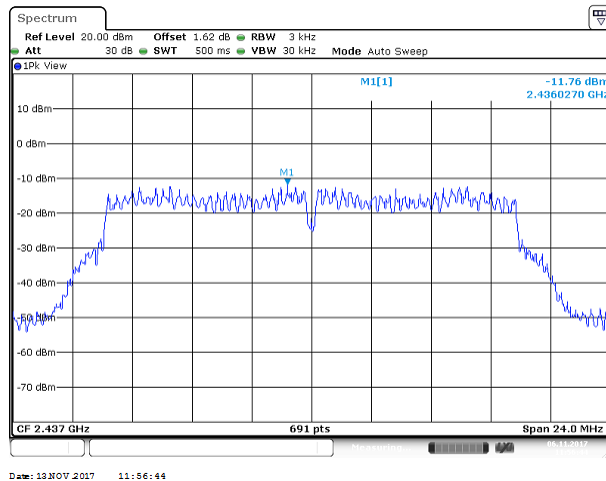


High CH

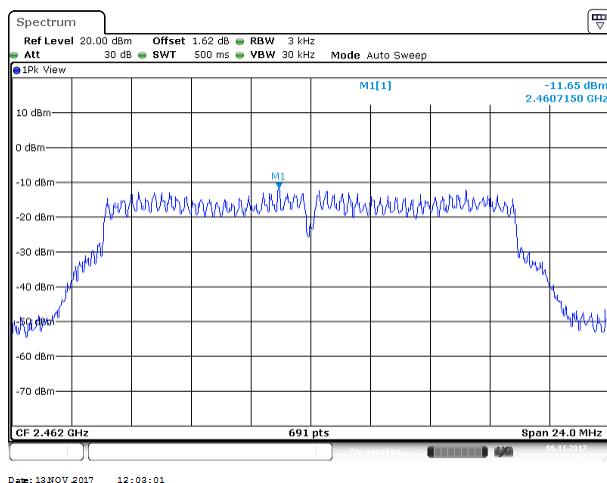


IEEE 802.11n HT20 mode- chain 0


Low CH

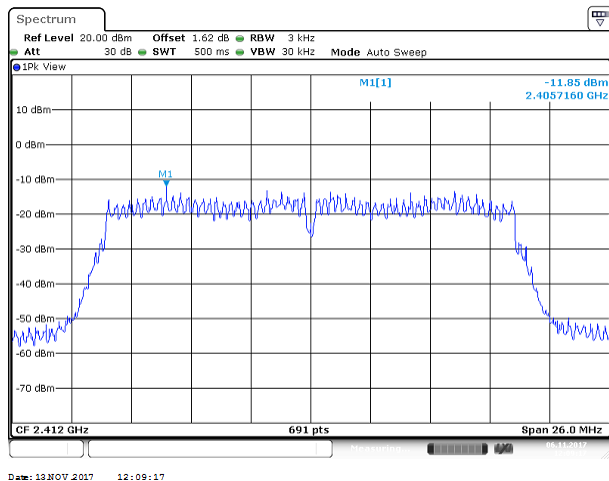

Mid CH

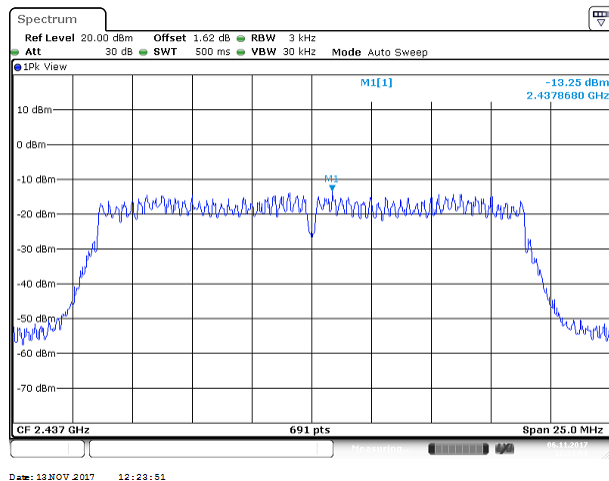

High CH

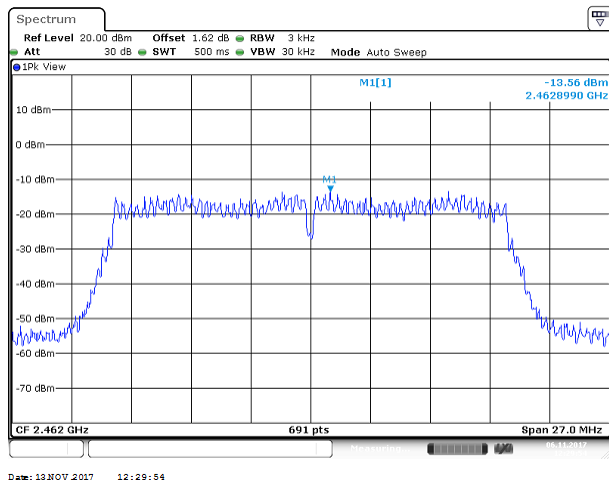

4.5 CONDUCTED BANDEDGE AND SPURIOUS EMISSION

4.5.1 Test Limit

According to §15.247(d)

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

4.5.2 Test Procedure

Test method Refer as KDB 558074 D01 v04, Section 11.


1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

4.5.3 Test Setup




4.5.4 Test Result

Test Data

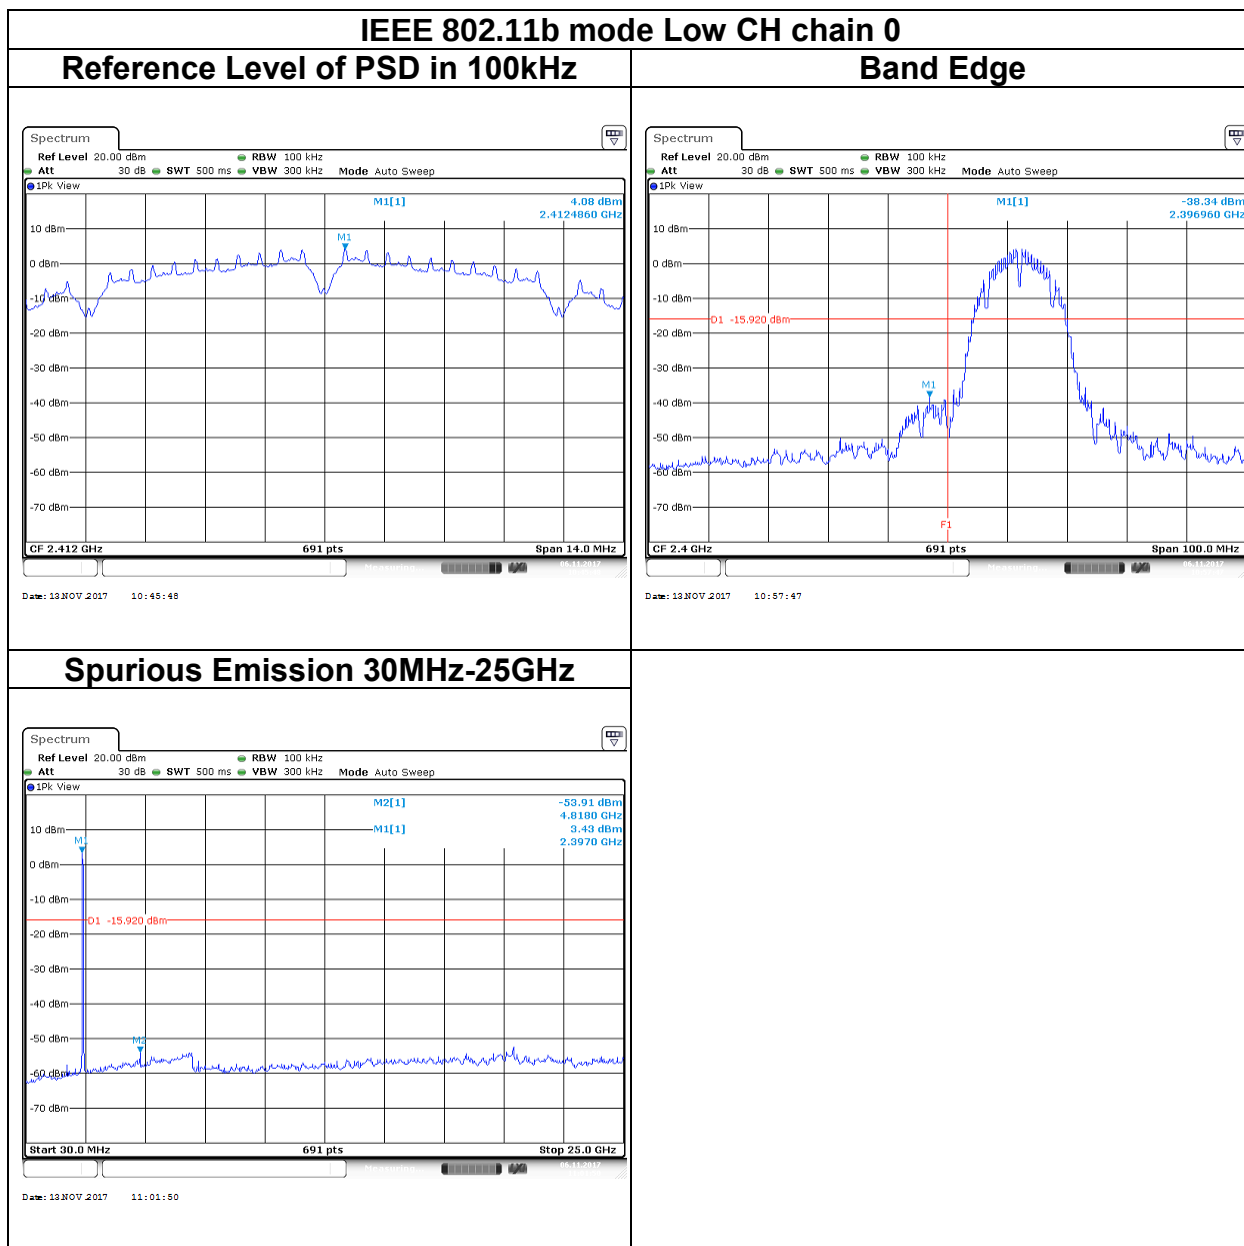


IEEE 802.11b mode Mid CH chain 0

Reference Level of PSD in 100kHz

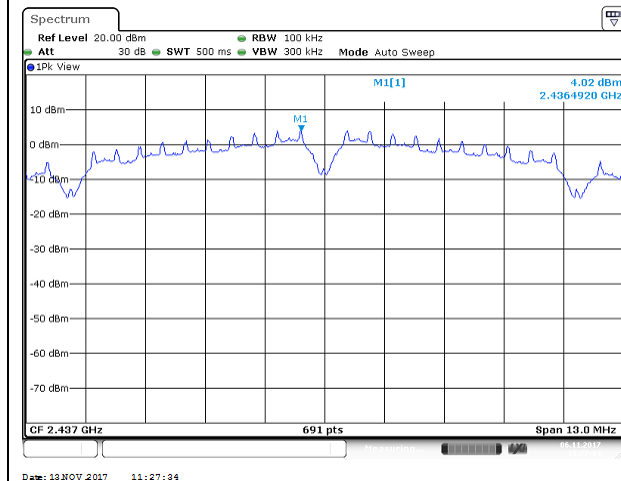


Spurious Emission 30MHz-25GHz

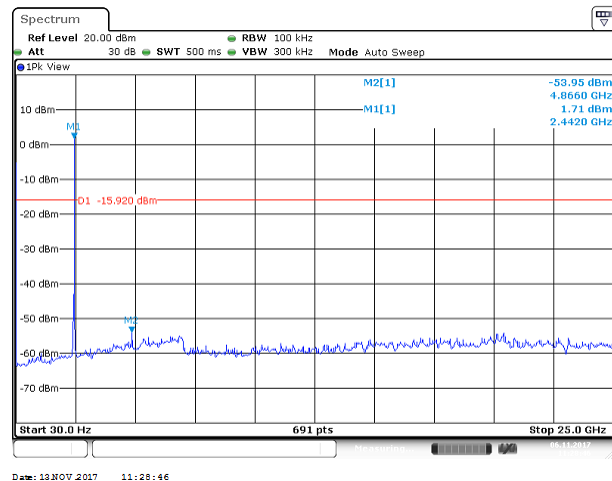


IEEE 802.11b mode High CH chain 0


Reference Level of PSD in 100kHz

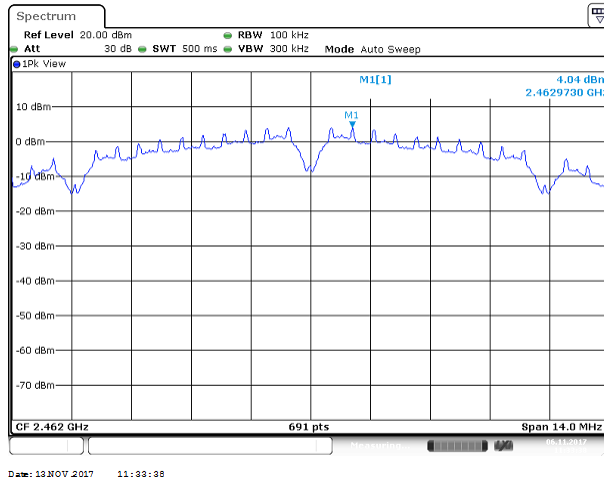

Band Edge

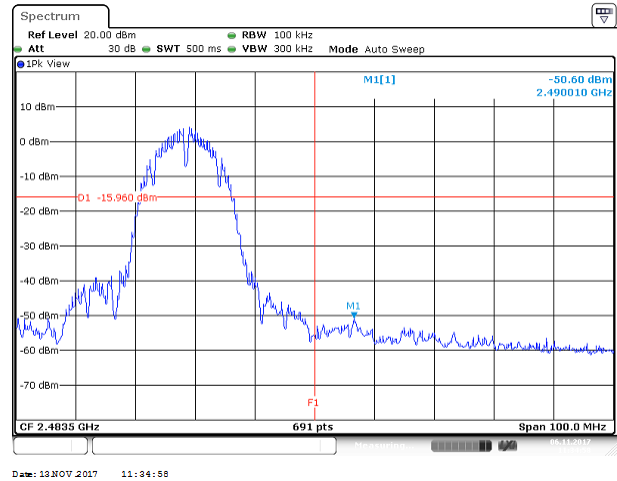


Spurious Emission 30MHz-25GHz

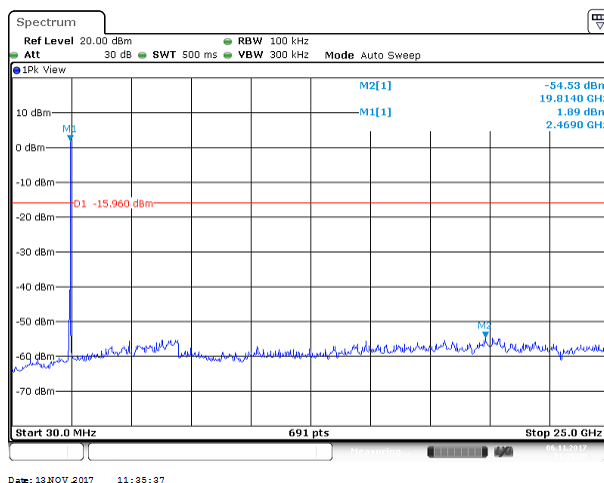


IEEE 802.11g mode Low CH chain 0


Reference Level of PSD in 100kHz

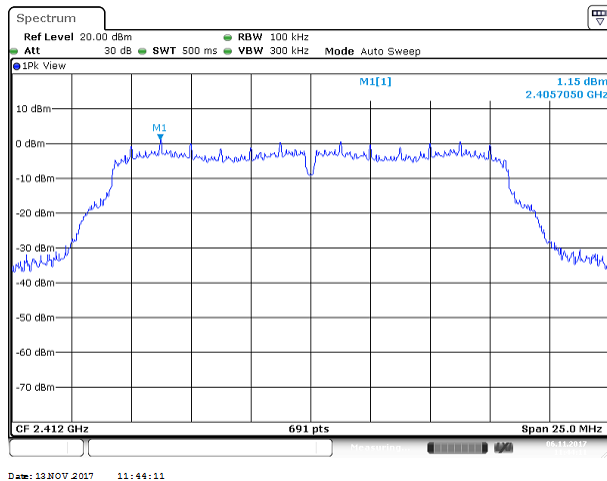


Band Edge

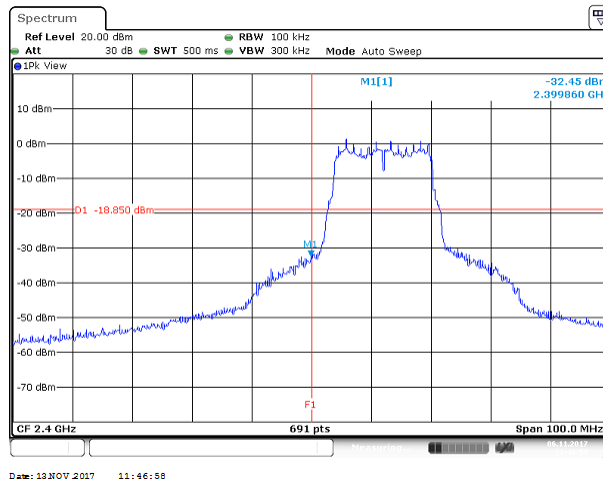


Spurious Emission 30MHz-25GHz

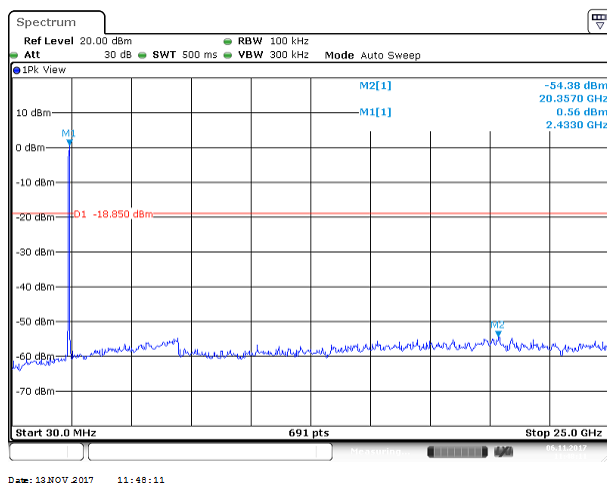

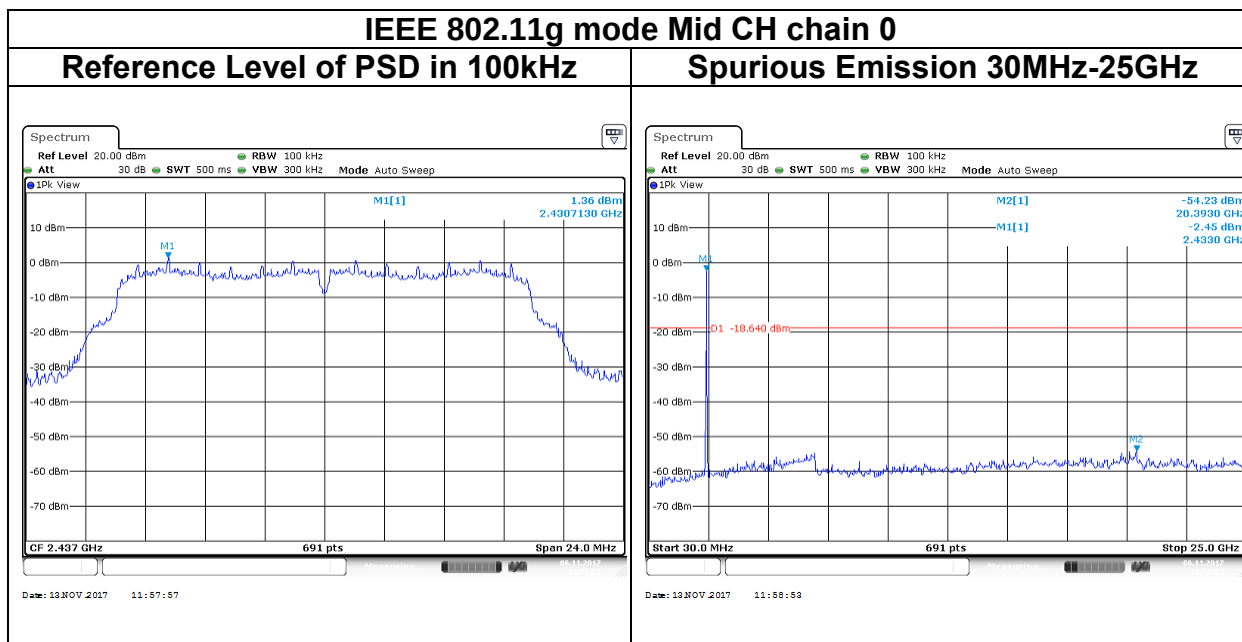


IEEE 802.11g mode High CH chain 0


Reference Level of PSD in 100kHz

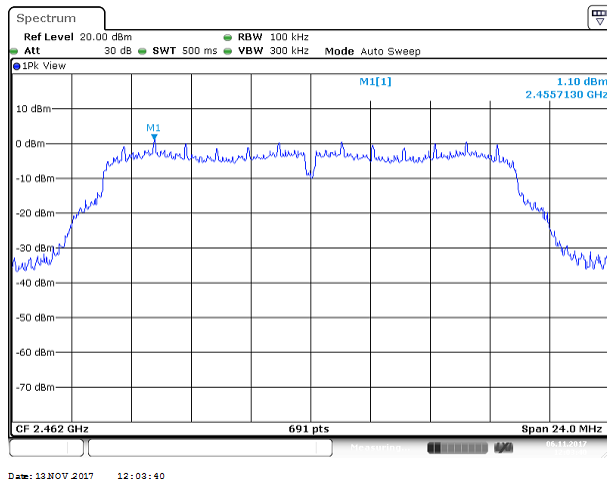


Band Edge

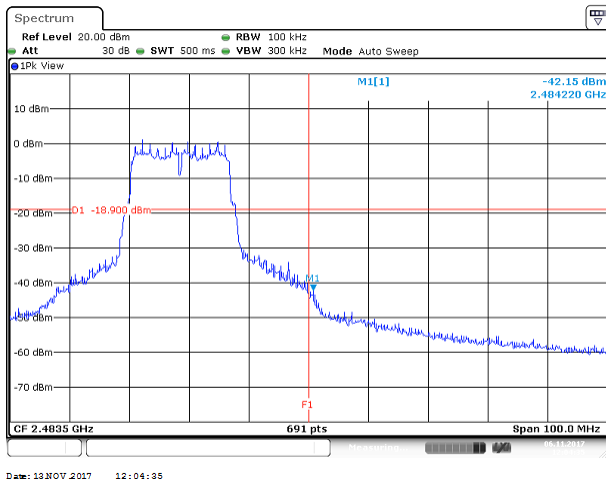


Spurious Emission 30MHz-25GHz

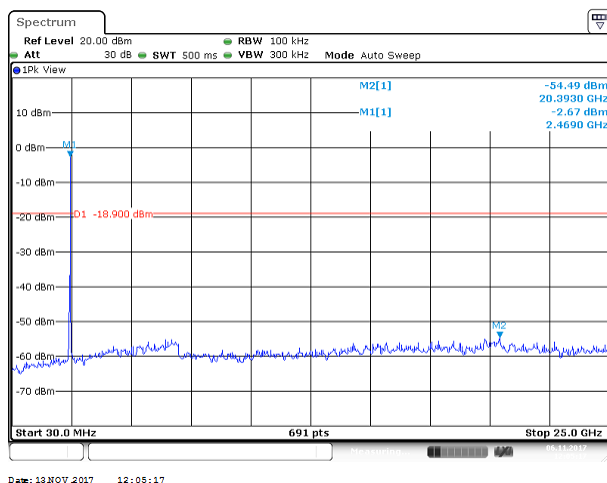

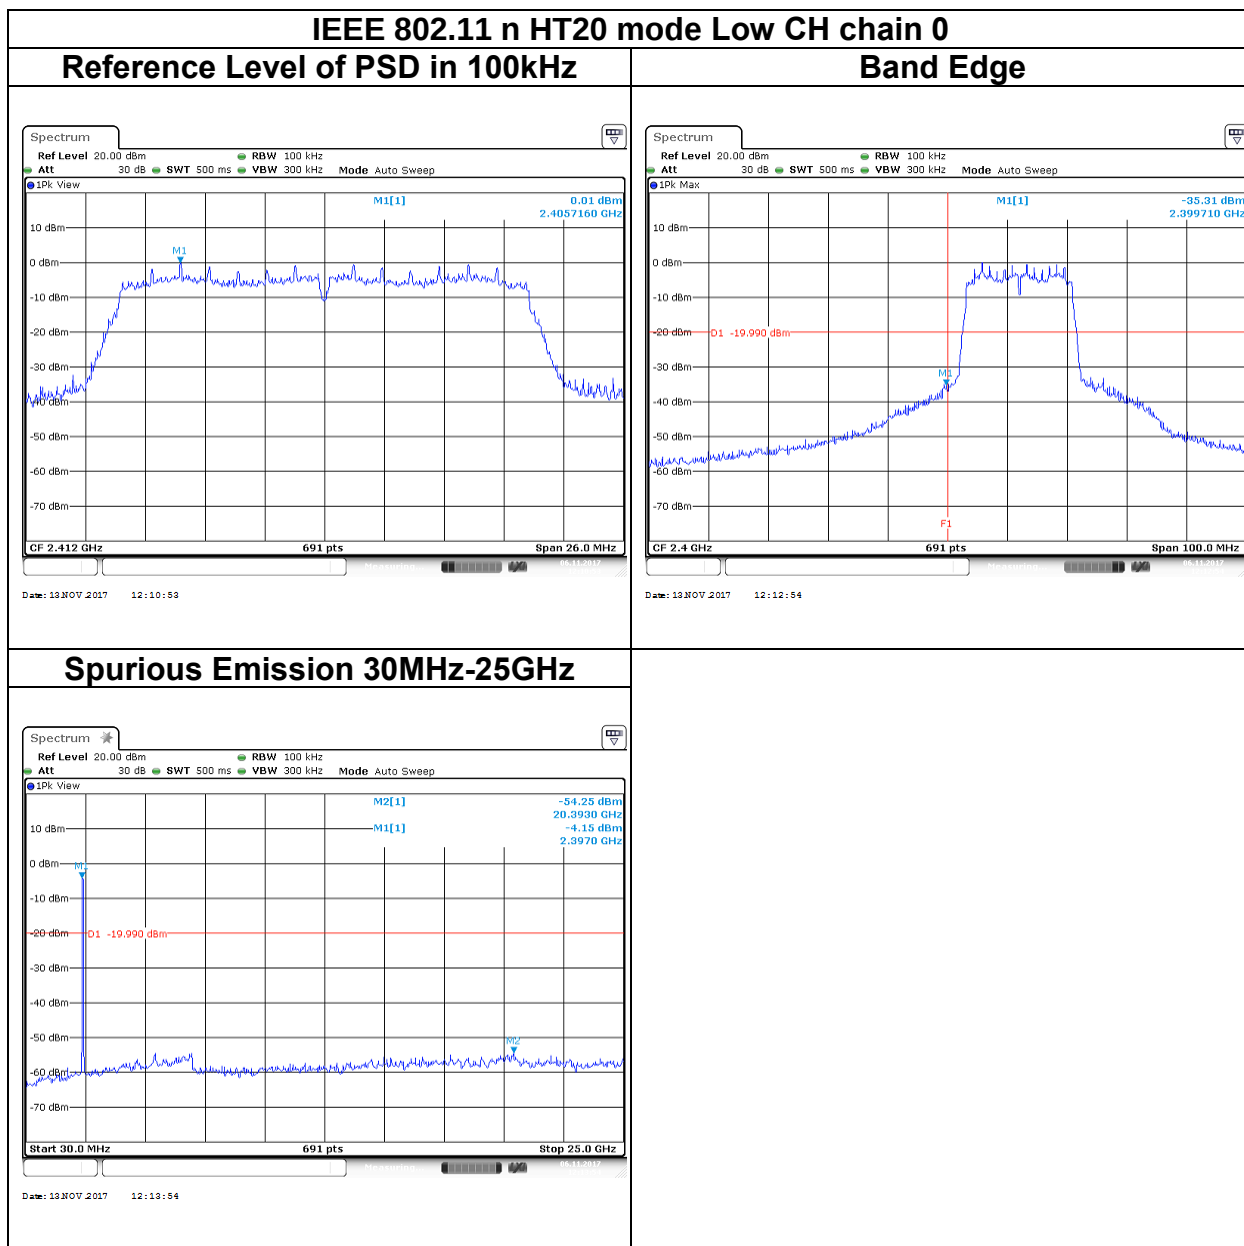


IEEE 802.11 n HT20 mode Mid CH chain 0

Reference Level of PSD in 100kHz

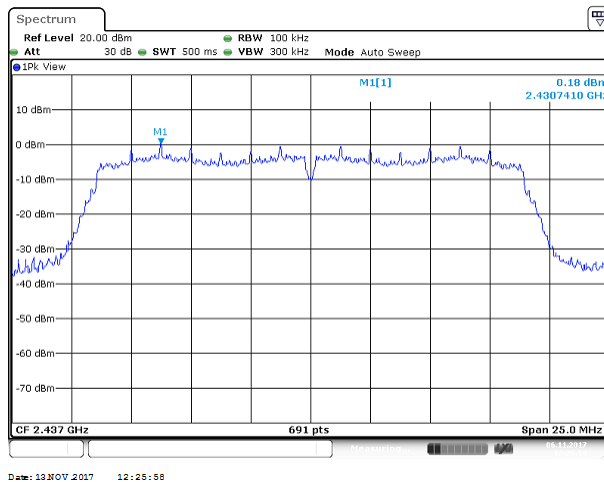


Spurious Emission 30MHz-25GHz

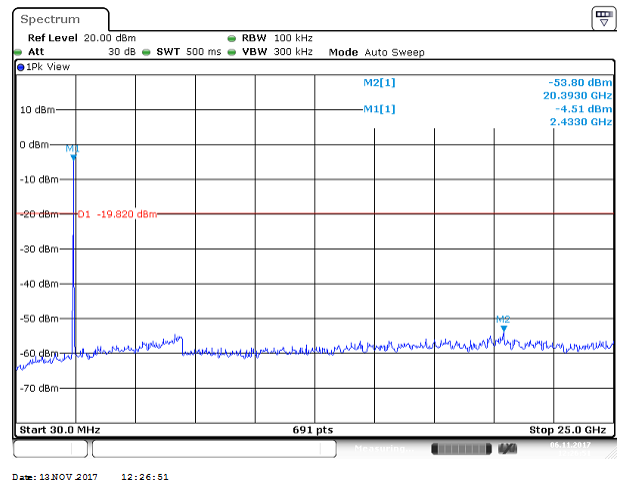


IEEE 802.11n HT20 mode High CH chain 0


Reference Level of PSD in 100kHz

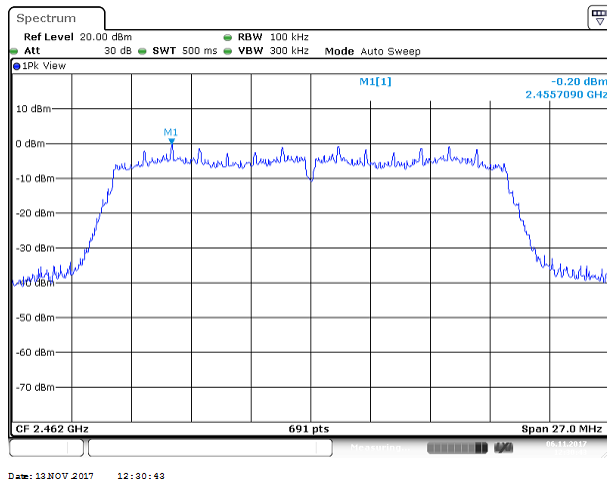

Band Edge

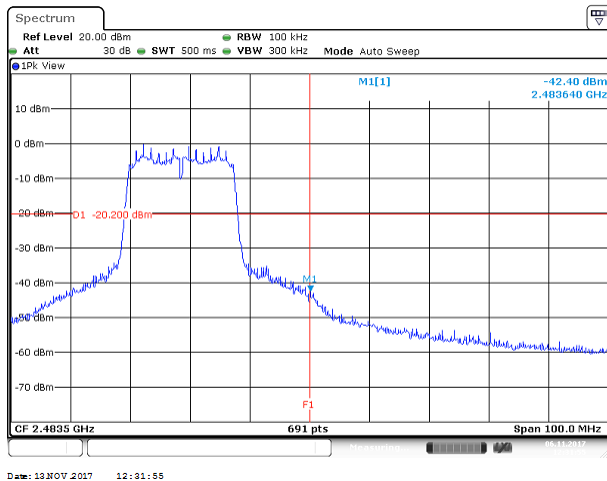

Spurious Emission 30MHz-25GHz

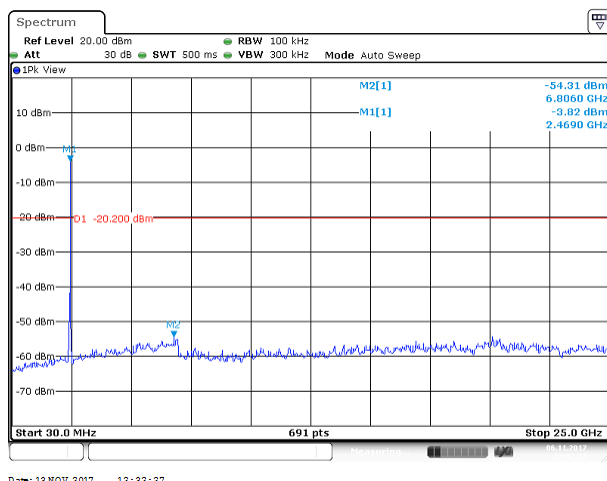

4.6 RADIATION BANDEDGE AND SPURIOUS EMISSION

4.6.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency	Field Strength (microvolts/m)	Measurement Distance (metres)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

4.6.2 Test Procedure

Test method Refer as KDB 558074 D01 v04, Section 12.1.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10, and the EUT set in a continuous mode.

2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.

3. Span shall wide enough to full capture the emission measured. The SA from 30MHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.

5. The SA setting following :

(1) Below 1G : RBW = 100kHz, VBW $\geq$ 3 RBW, Sweep = Auto, Detector = Peak,
Trace = Max hold.

(2) Above 1G :

(2.1) For Peak measurement : RBW = 1MHz, VBW $\geq$ 3 RBW, Sweep = Auto,
Detector = Peak, Trace = Max hold.

(2.2) For Average measurement : RBW = 1MHz, VBW


·If Duty Cycle $\geq$ 98%, VBW=10Hz.

·If Duty Cycle < 98%, VBW=1/T.


Configuration	Duty Cycle (%)	T(ms)	1/T (kHz)	VBW Setting
802.11b	100%	100.0000	-	10Hz
802.11g	99%	1.4300	-	10Hz
802.11n HT20	99%	1.3400	-	10Hz

4.6.3 Test Setup


9kHz ~ 30MHz

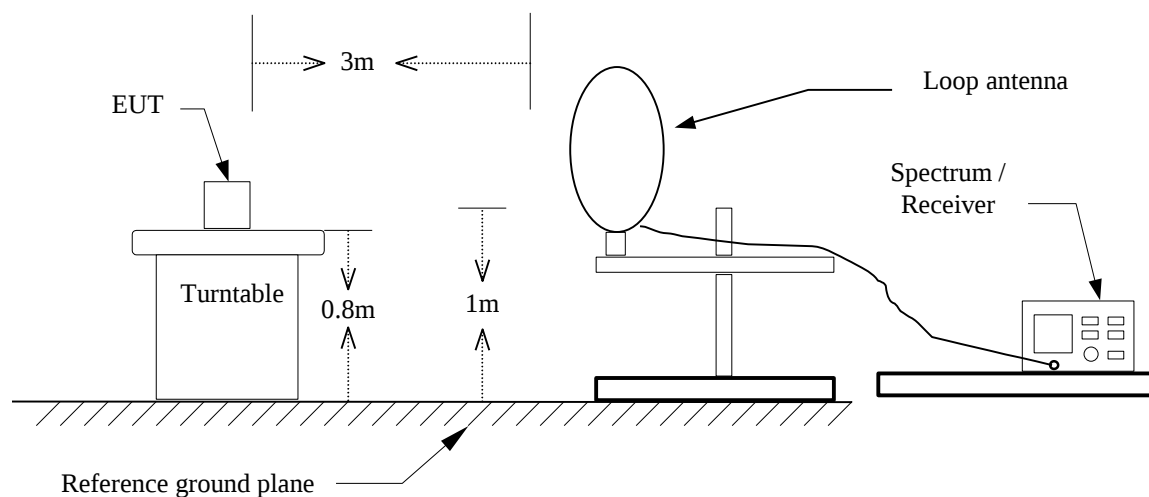

30MHz ~ 1GHz

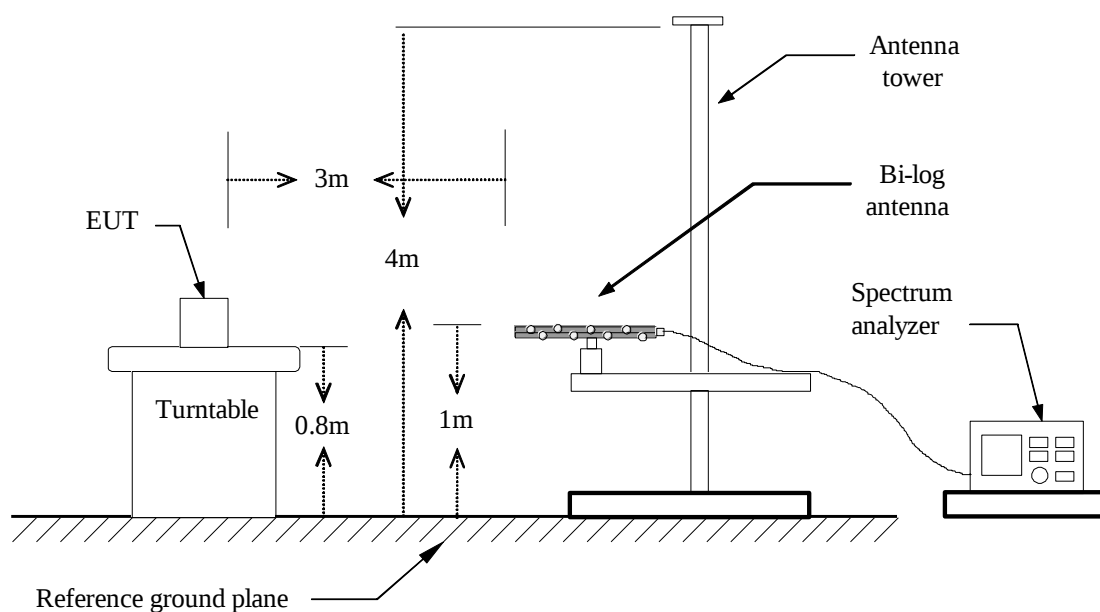


Above 1 GHz

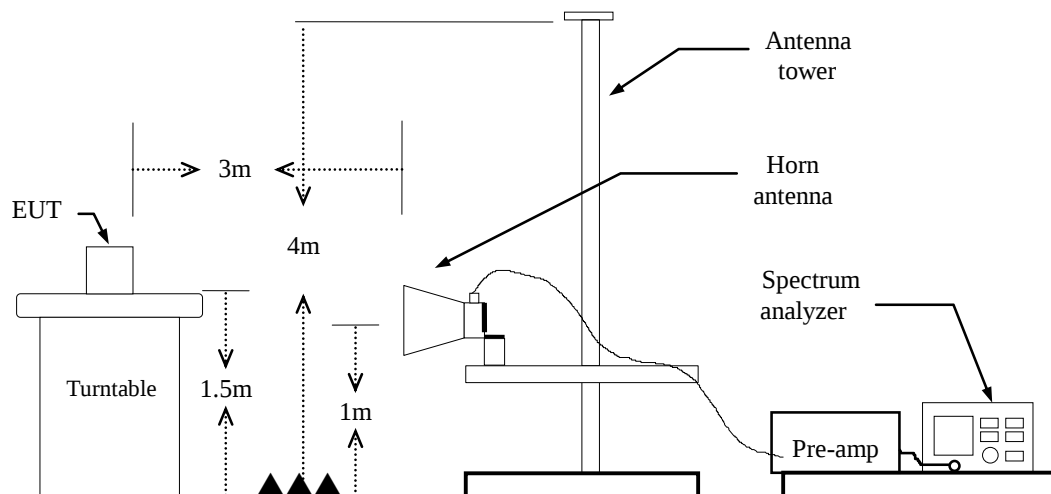

4.6.4 Test Result


Band Edge Test Data

Test Mode	IEEE 802.11b Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

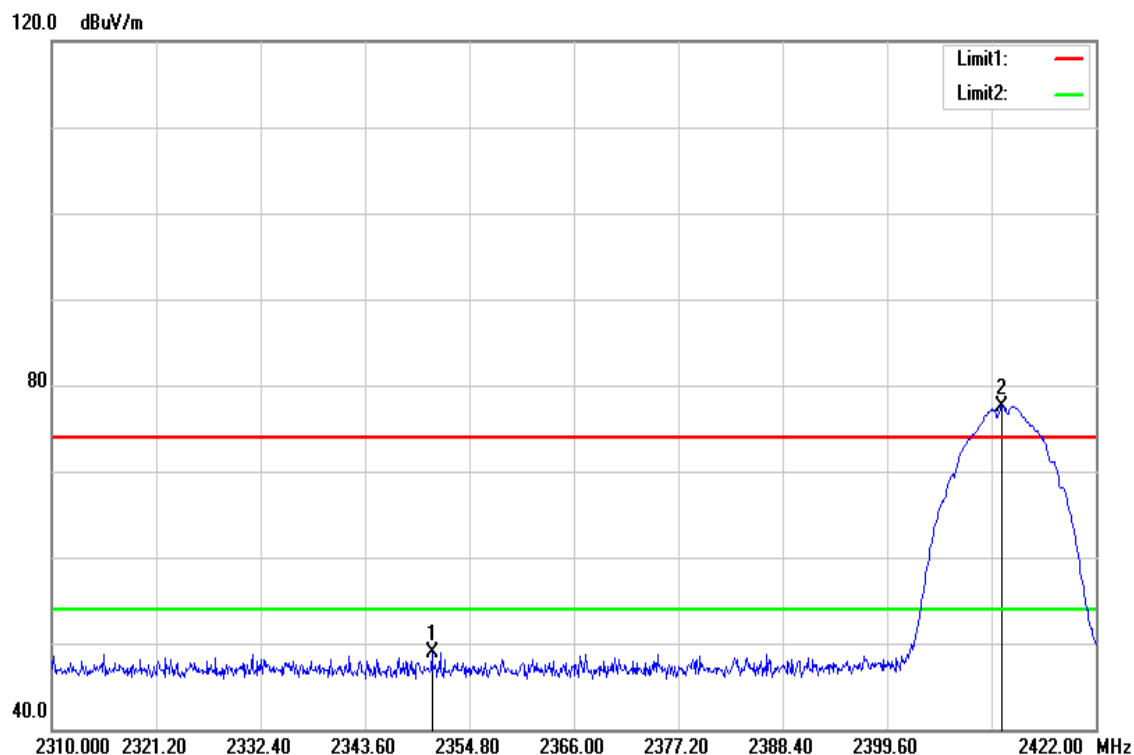


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2350.768	49.64	-0.72	48.92	74.00	-25.08	peak
2411.920	78.13	-0.54	77.59	-	-	peak

Test Mode	IEEE 802.11b Low CH	Temperature:	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

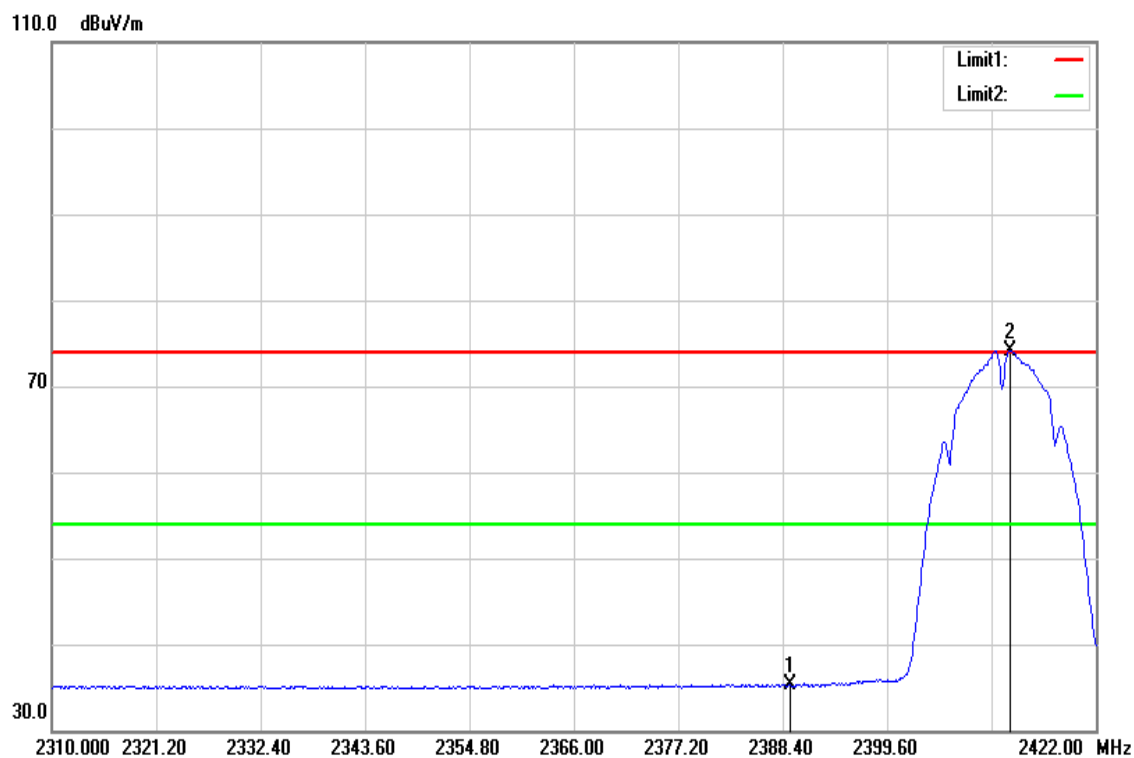


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2389.184	35.98	-0.60	35.38	54.00	-18.62	AVG
2412.816	74.70	-0.52	74.18	-	-	AVG

Test Mode	IEEE 802.11b High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

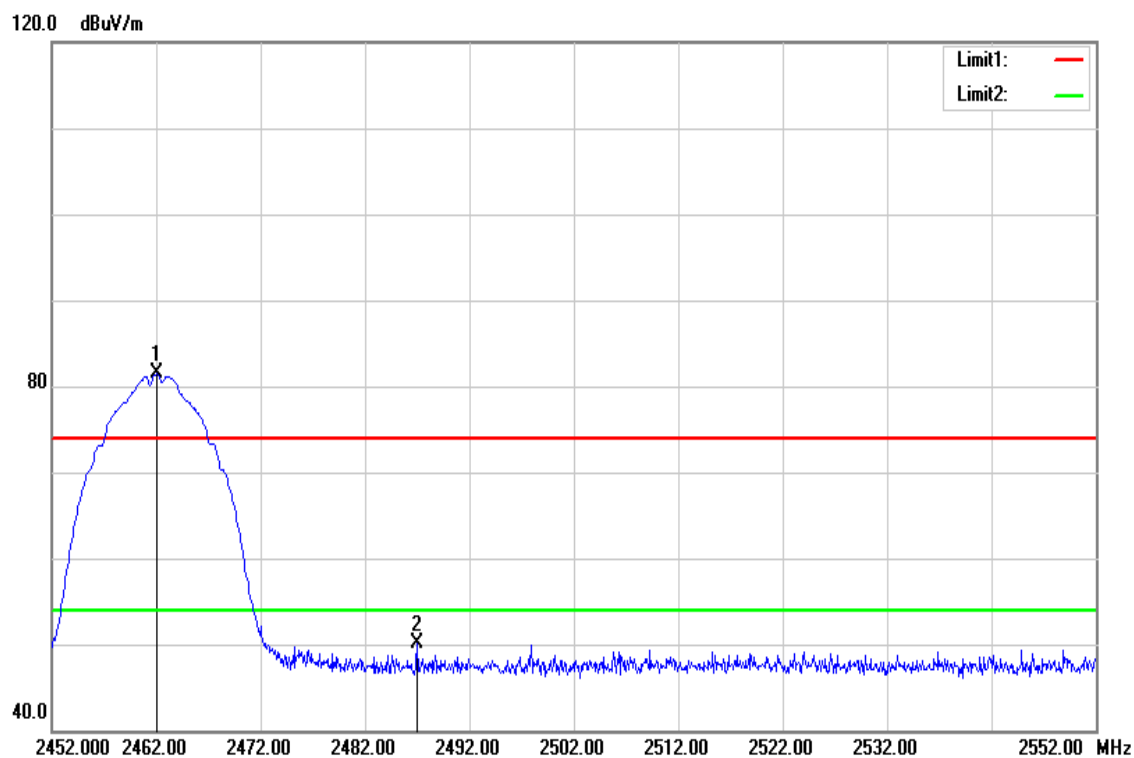


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2462.000	81.81	-0.37	81.44	-	-	peak
2487.000	50.38	-0.29	50.09	74.00	-23.91	peak

Test Mode	IEEE 802.11b High CH	Temperature:	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

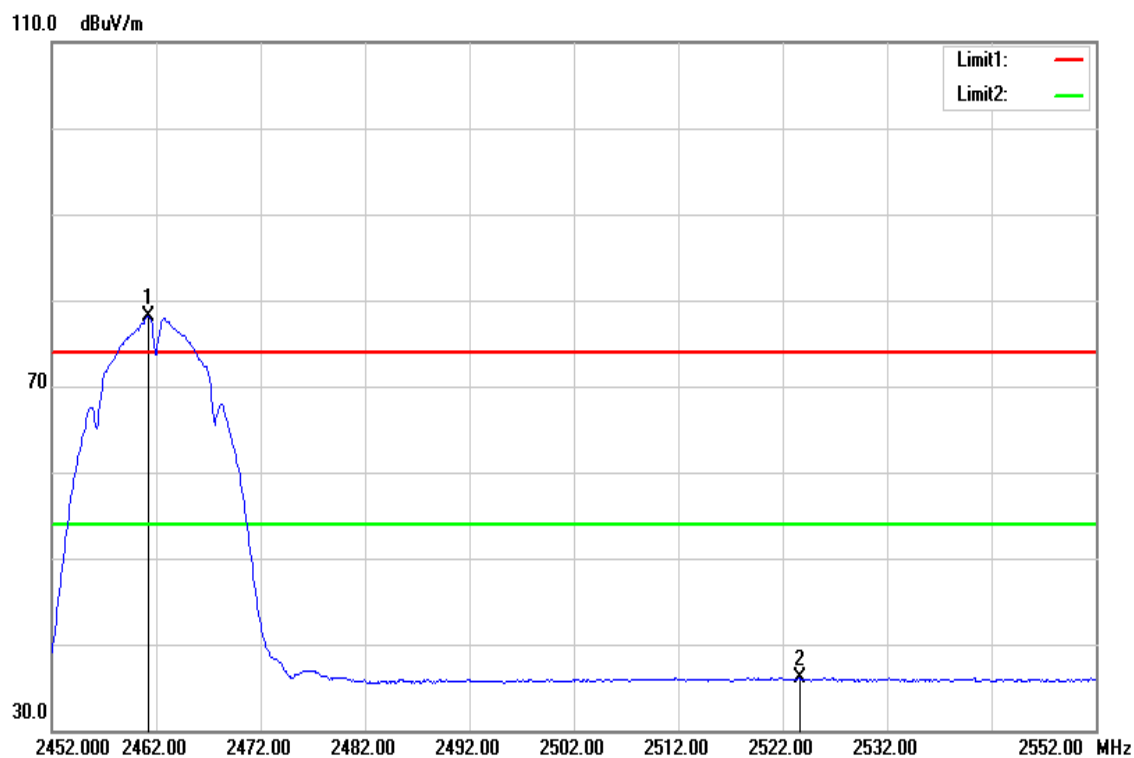


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2461.200	78.47	-0.37	78.10	-	-	AVG
2523.600	36.34	-0.20	36.14	54.00	-17.86	AVG

Test Mode	IEEE 802.11g Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

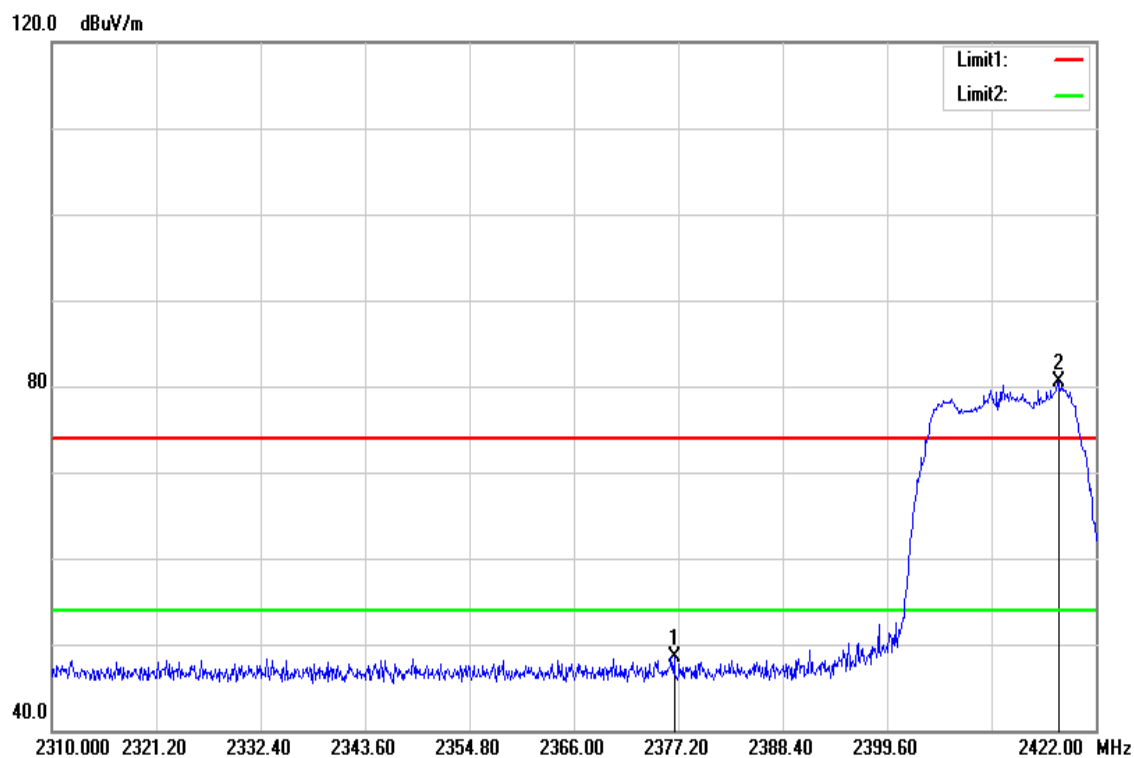


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2376.752	49.19	-0.64	48.55	74.00	-25.45	peak
2417.968	81.02	-0.51	80.51	-	-	peak

Test Mode	IEEE 802.11g Low CH	Temperature:	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

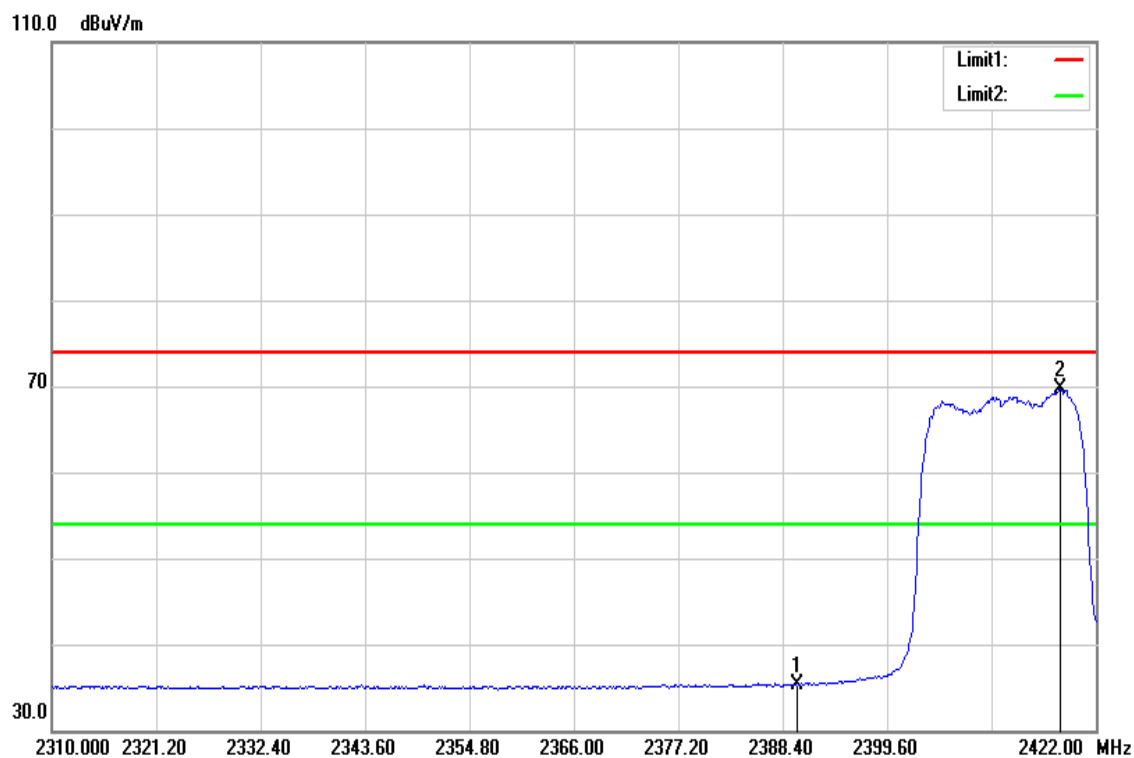


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390.000	35.98	-0.60	35.38	54.00	-18.62	AVG
2418.192	70.22	-0.51	69.71	-	-	AVG

Test Mode	IEEE 802.11g High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

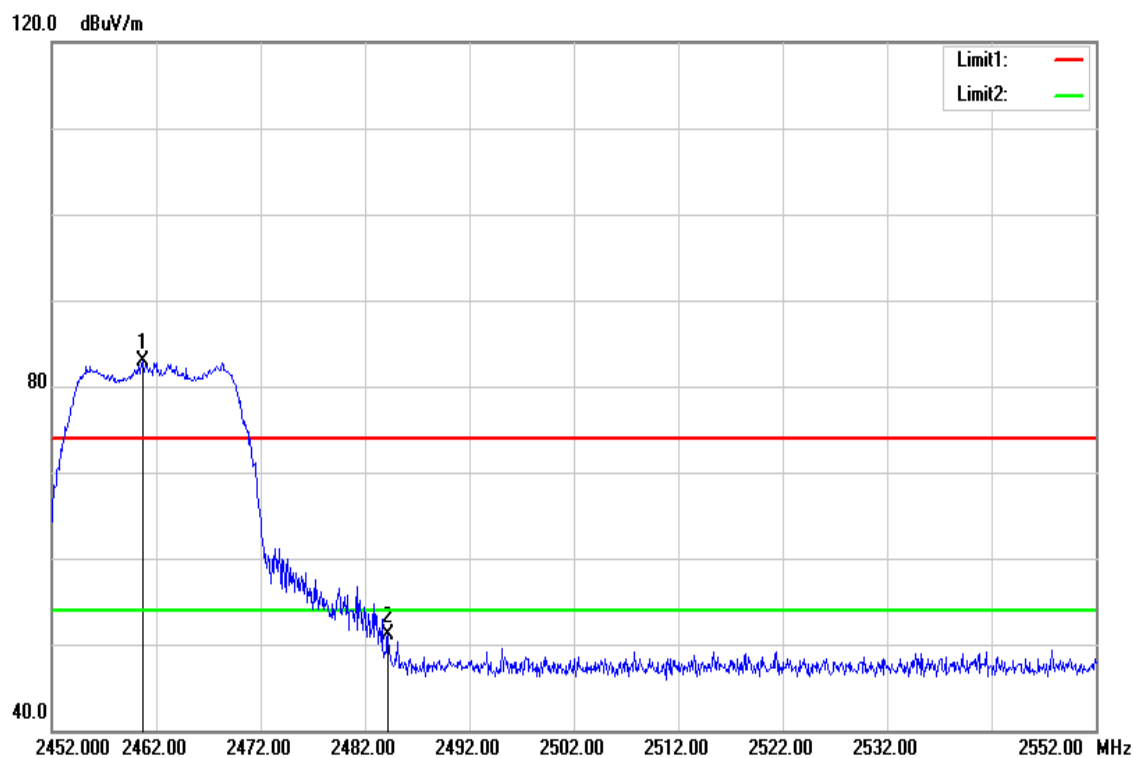


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2460.700	83.23	-0.37	82.86	-	-	peak
2484.200	51.37	-0.30	51.07	74.00	-22.93	peak

Test Mode	IEEE 802.11g High CH	Temperature:	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

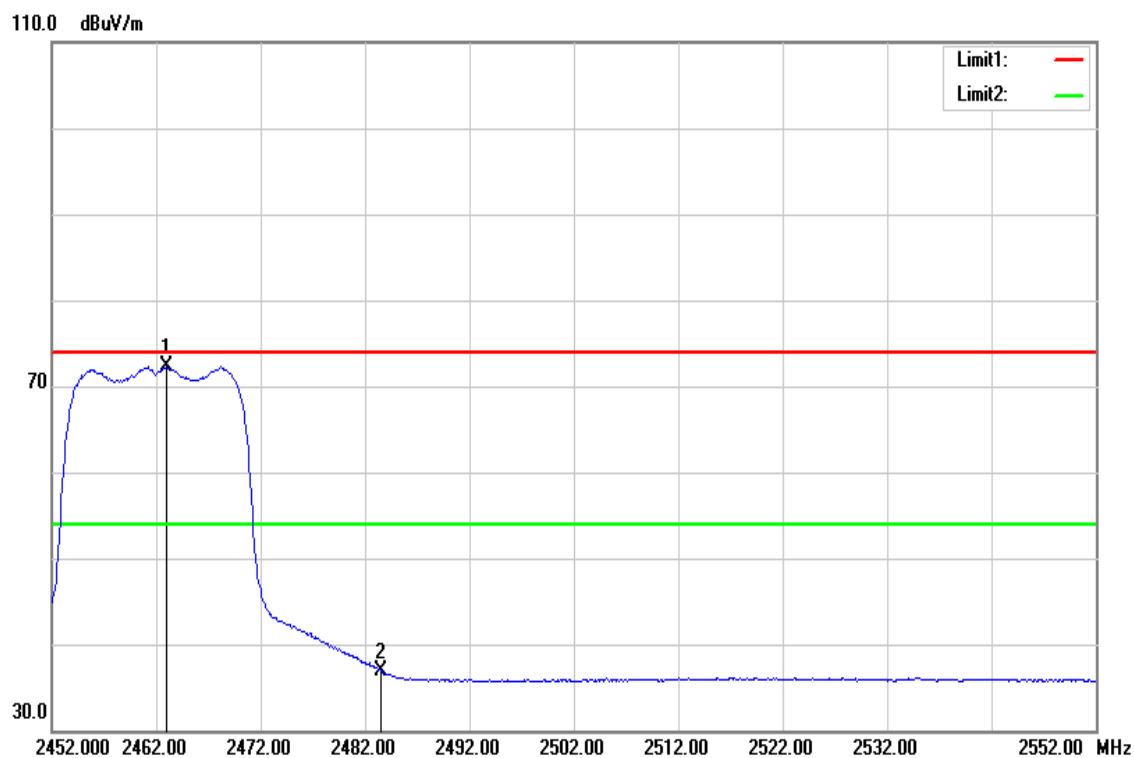


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2463.000	72.67	-0.36	72.31	-	-	AVG
2483.500	37.29	-0.30	36.99	54.00	-17.01	AVG

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

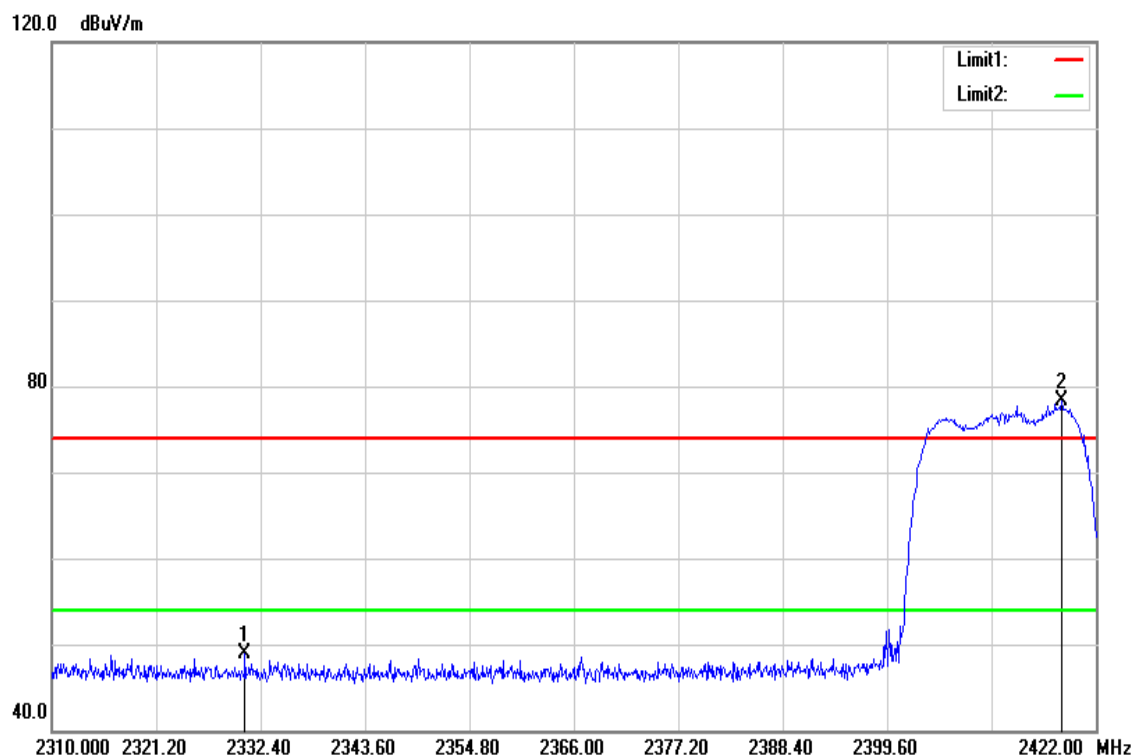


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2330.720	49.66	-0.79	48.87	74.00	-25.13	peak
2418.304	78.89	-0.51	78.38	-	-	peak

Test Mode	IEEE 802.11n HT20 Low CH	Temperature:	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

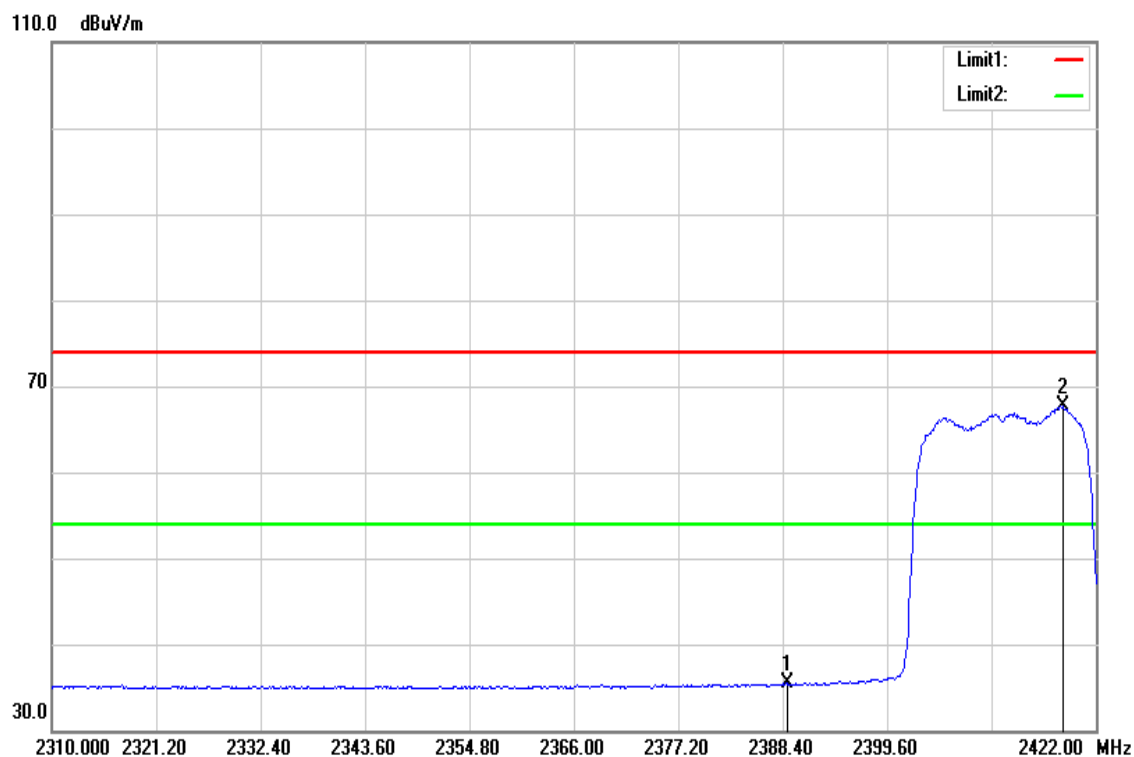


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2388.848	36.06	-0.60	35.46	54.00	-18.54	AVG
2418.528	68.24	-0.51	67.73	-	-	AVG

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

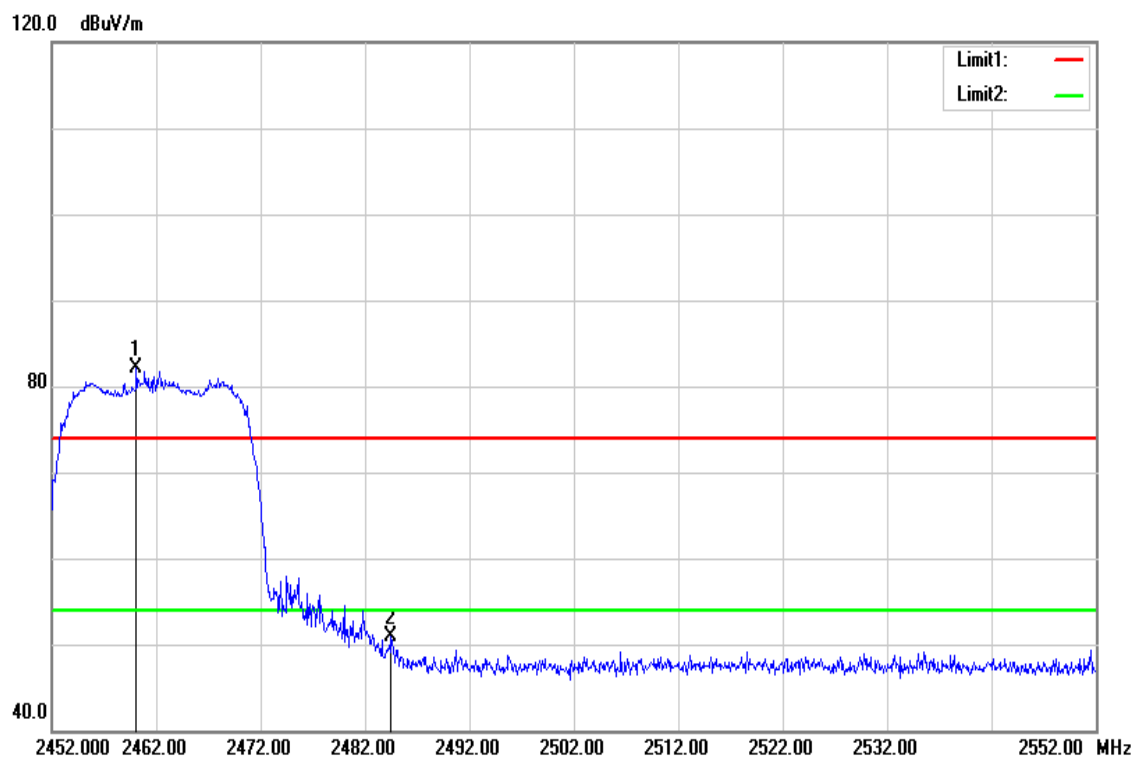

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2460.100	82.43	-0.37	82.06	-	-	peak
2484.500	51.21	-0.30	50.91	74.00	-23.09	peak


Test Mode	IEEE 802.11n HT20 High CH	Temperature:	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

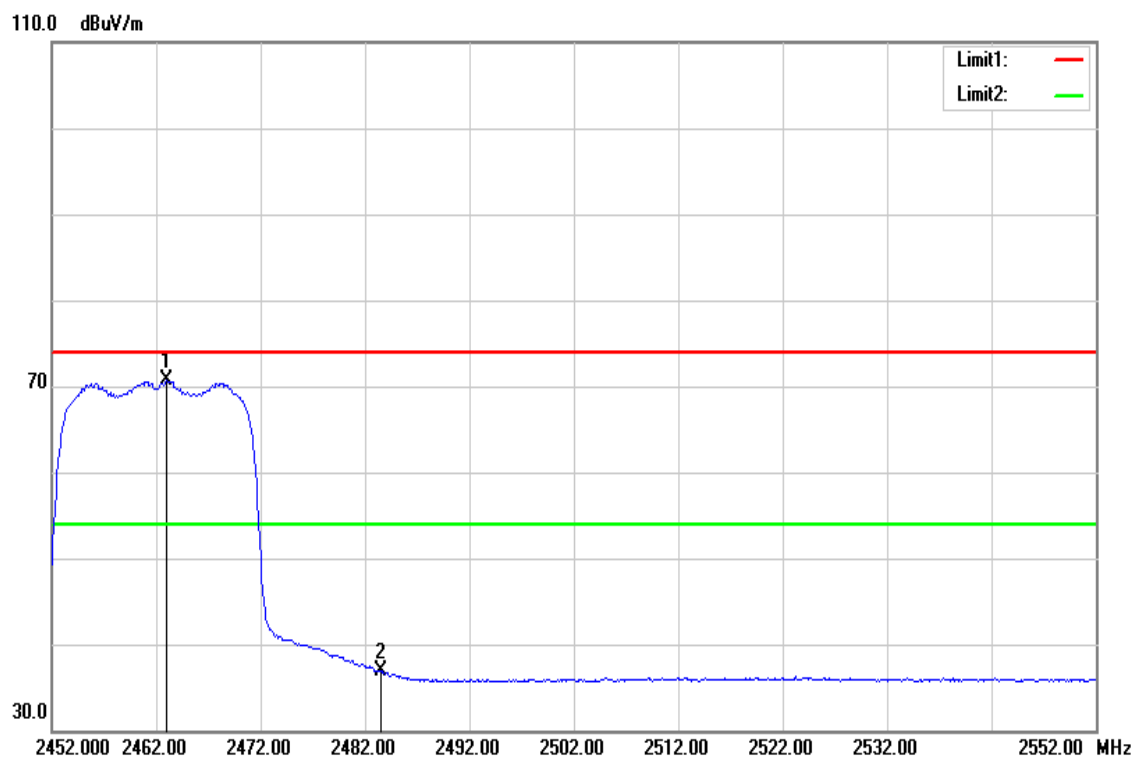

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2463.000	71.10	-0.36	70.74	-	-	AVG
2483.500	37.15	-0.30	36.85	54.00	-17.15	AVG


Below 1G Test Data

Test Mode	Mode 1	Temp/Hum	24(°C)/ 33%RH
Test Item	30MHz-1GHz	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

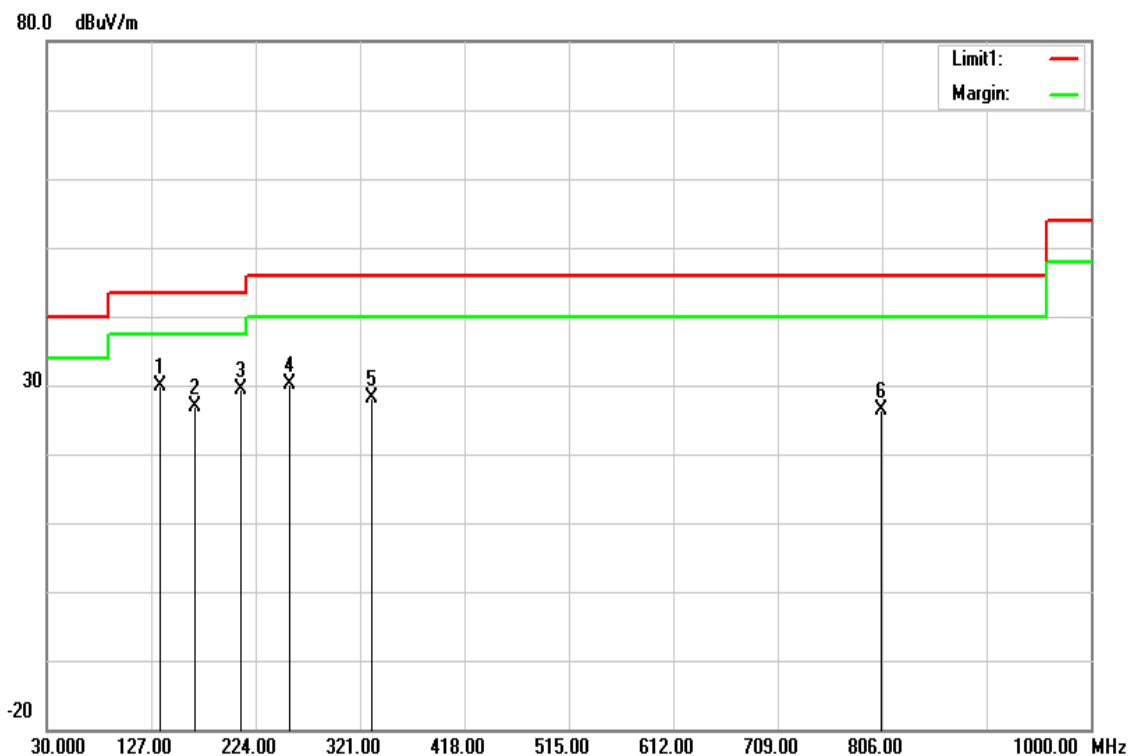

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
135.7300	45.22	-15.42	29.80	43.50	-13.70	peak
167.7400	43.20	-16.41	26.79	43.50	-16.71	peak
210.4200	45.79	-16.37	29.42	43.50	-14.08	peak
256.0100	45.71	-15.65	30.06	46.00	-15.94	peak
331.6700	41.42	-13.37	28.05	46.00	-17.95	peak
805.0300	29.78	-3.32	26.46	46.00	-19.54	peak


Test Mode	Mode 1	Temp/Hum	24(°C)/ 33%RH
Test Item	30MHz-1GHz	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

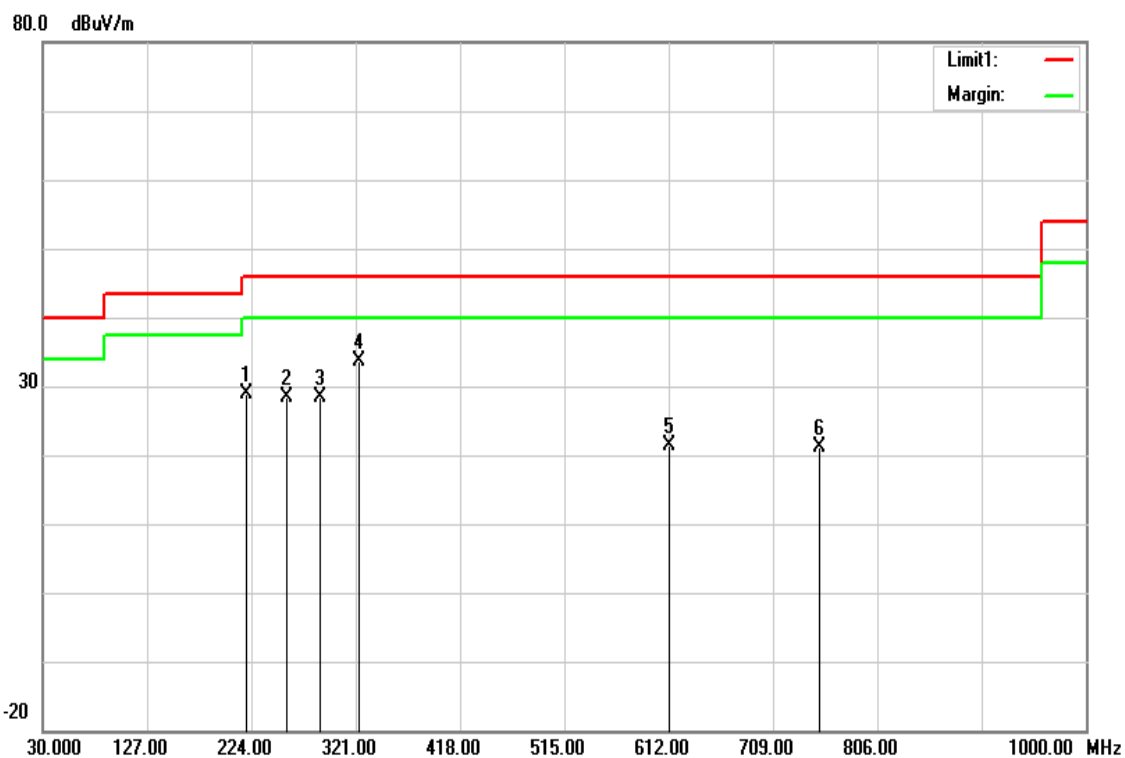

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
219.1500	46.14	-17.26	28.88	46.00	-17.12	peak
256.9800	43.94	-15.62	28.32	46.00	-17.68	peak
288.0200	42.61	-14.19	28.42	46.00	-17.58	peak
323.9100	47.10	-13.55	33.55	46.00	-12.45	peak
612.9700	27.89	-6.56	21.33	46.00	-24.67	peak
752.6500	25.44	-4.24	21.20	46.00	-24.80	peak

Above 1G Test Data

Test Mode	IEEE 802.11b Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

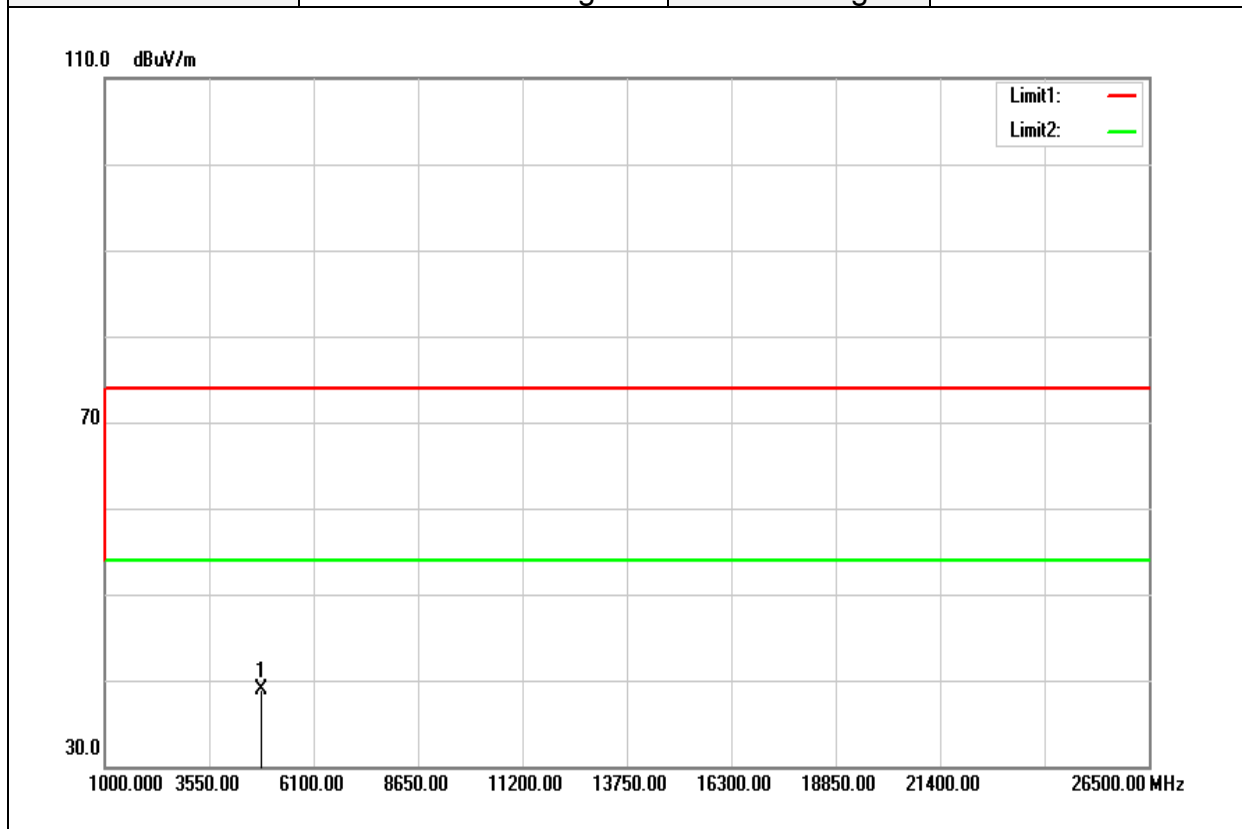


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	emark
4824.000	32.02	6.84	38.86	74.00	-35.14	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11b Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

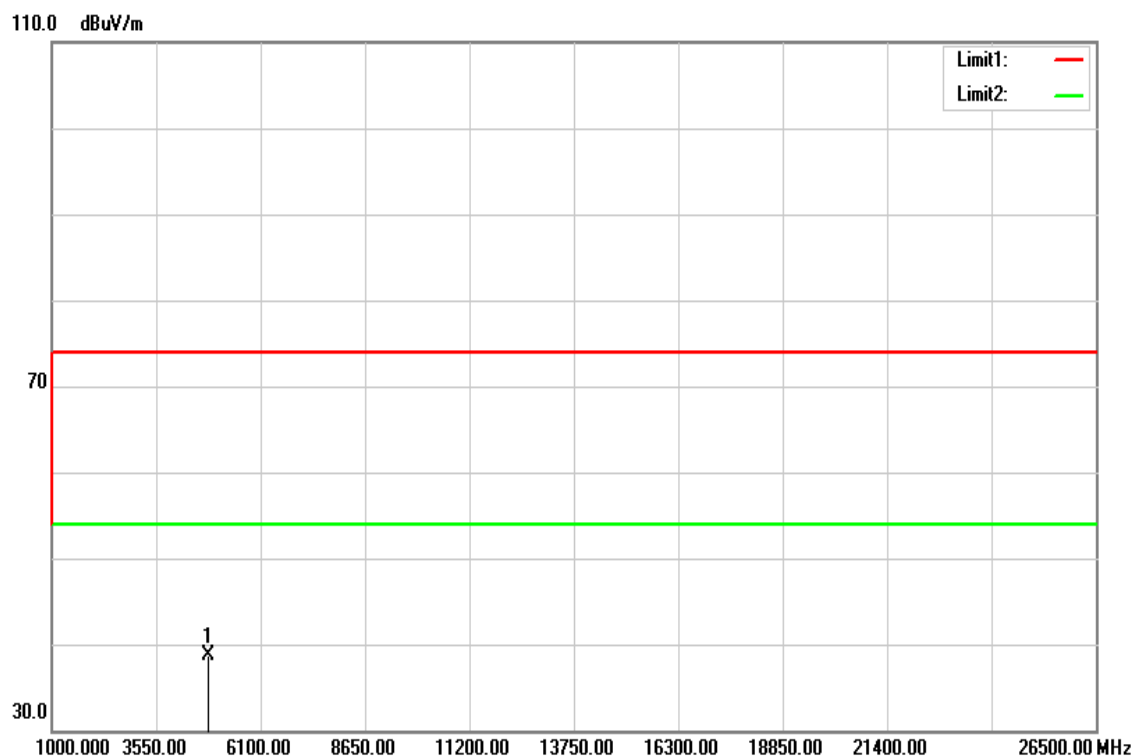


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (BuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.000	31.88	6.84	38.72	74.00	-35.28	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11b Mid CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

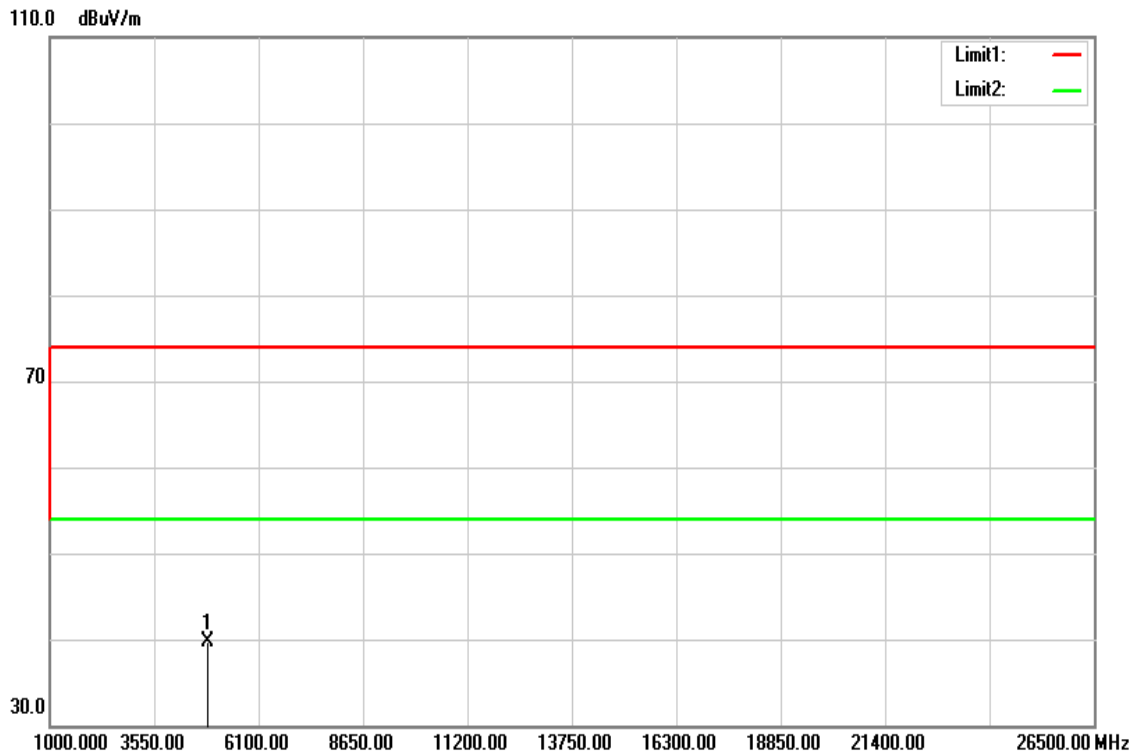


Frequency (MHz)	Reading (dBu)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.000	32.63	6.97	39.60	74.00	-34.40	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11b Mid CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

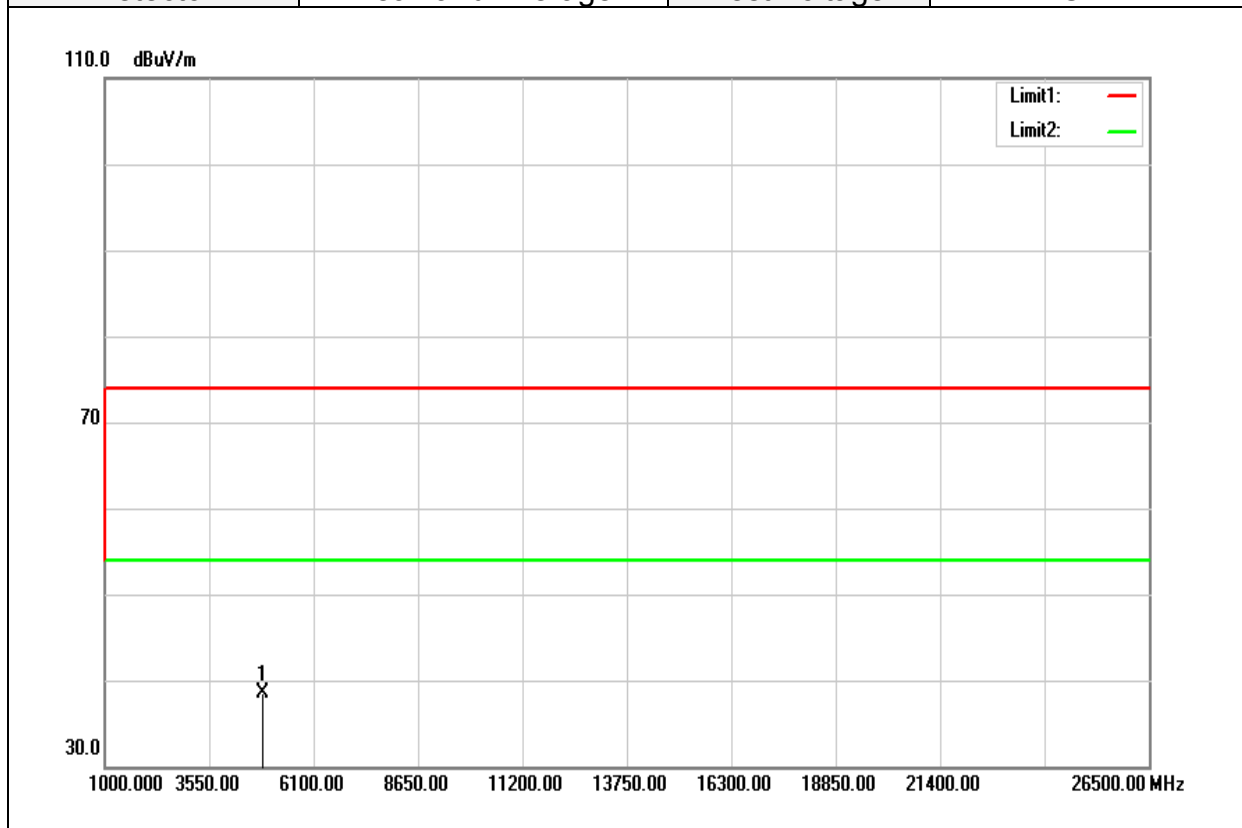


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.000	31.62	6.97	38.59	74.00	-35.41	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11b High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

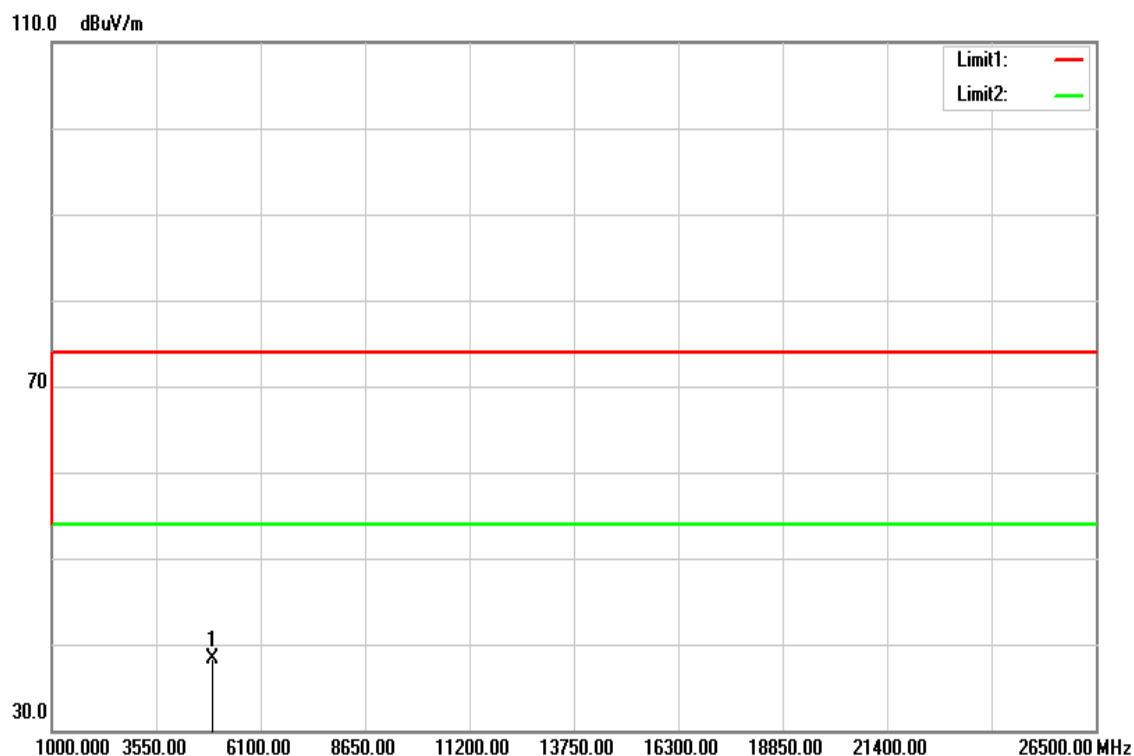


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.000	31.15	7.09	38.24	74.00	-35.76	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11b High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

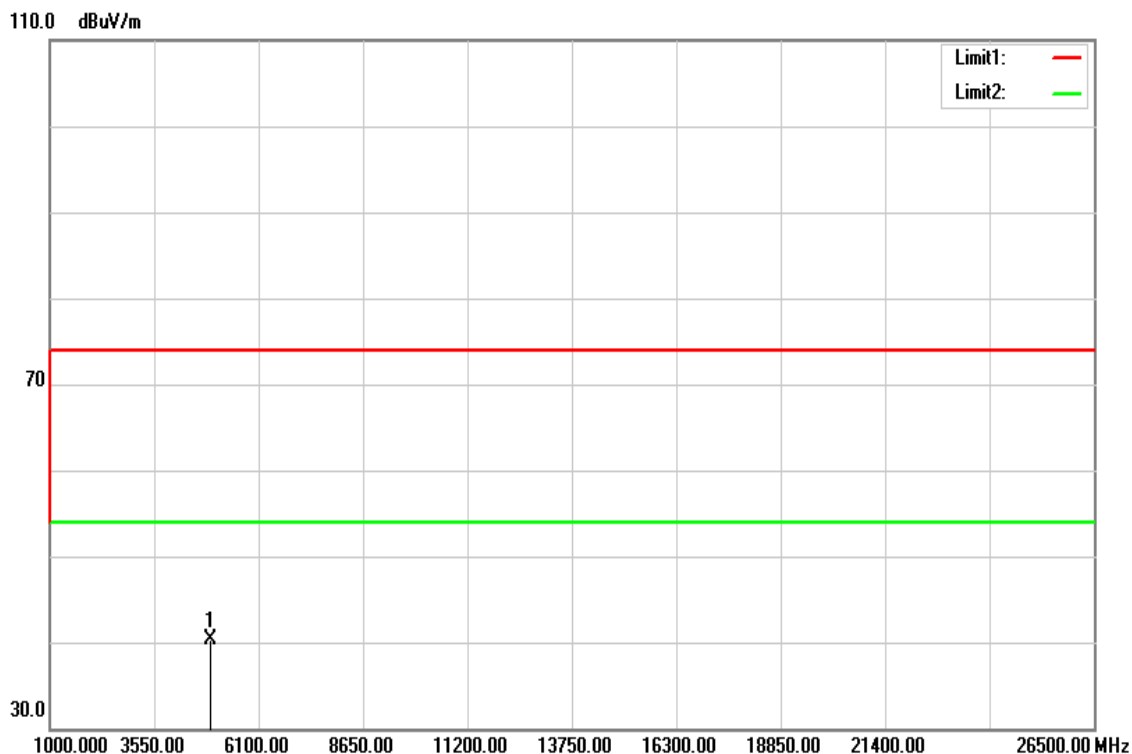


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.000	33.25	7.09	40.34	74.00	-33.66	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11g Low CH	Temp/Hum	24 (°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

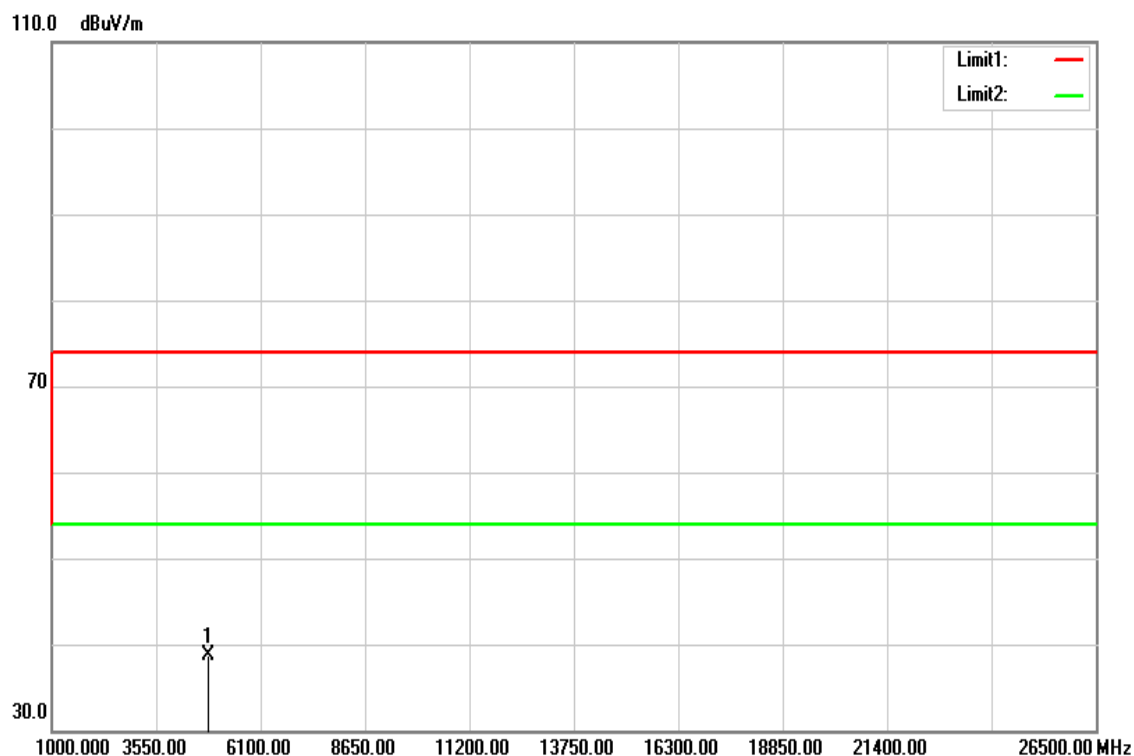


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.000	31.79	6.84	38.63	74.00	-35.37	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11g Low CH	Temp/Hum	24 (°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

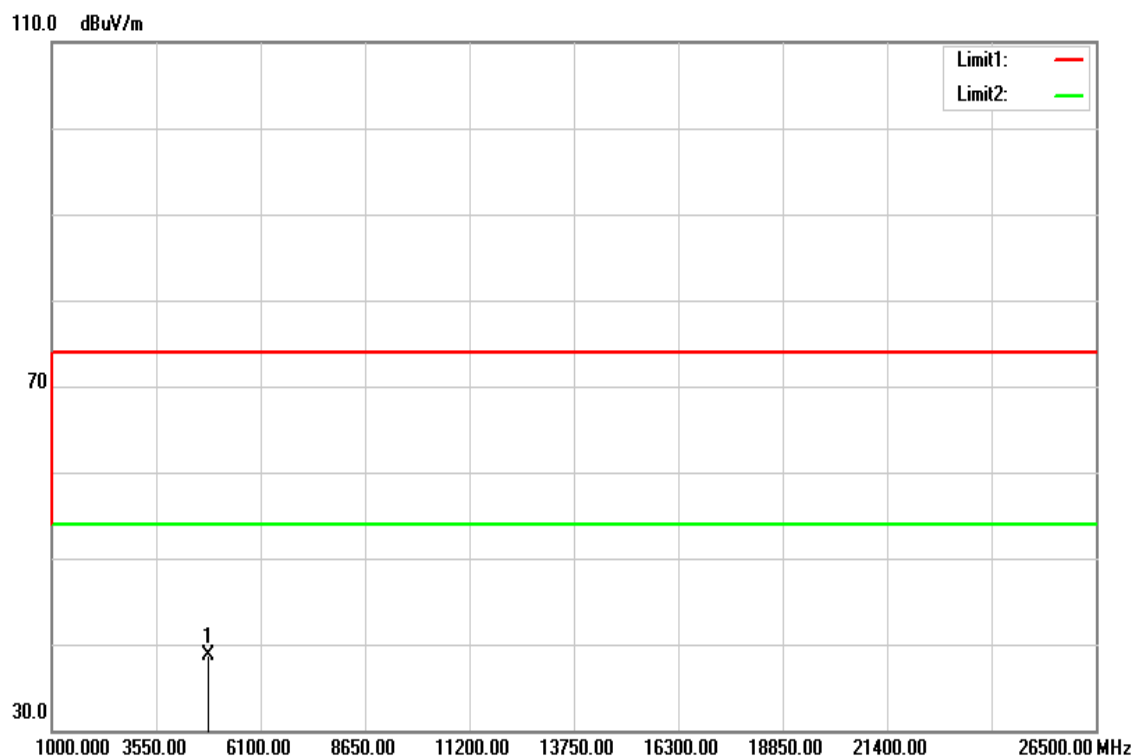


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.000	31.80	6.84	38.64	74.00	-35.36	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11g Mid CH	Temp/Hum	24 (°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

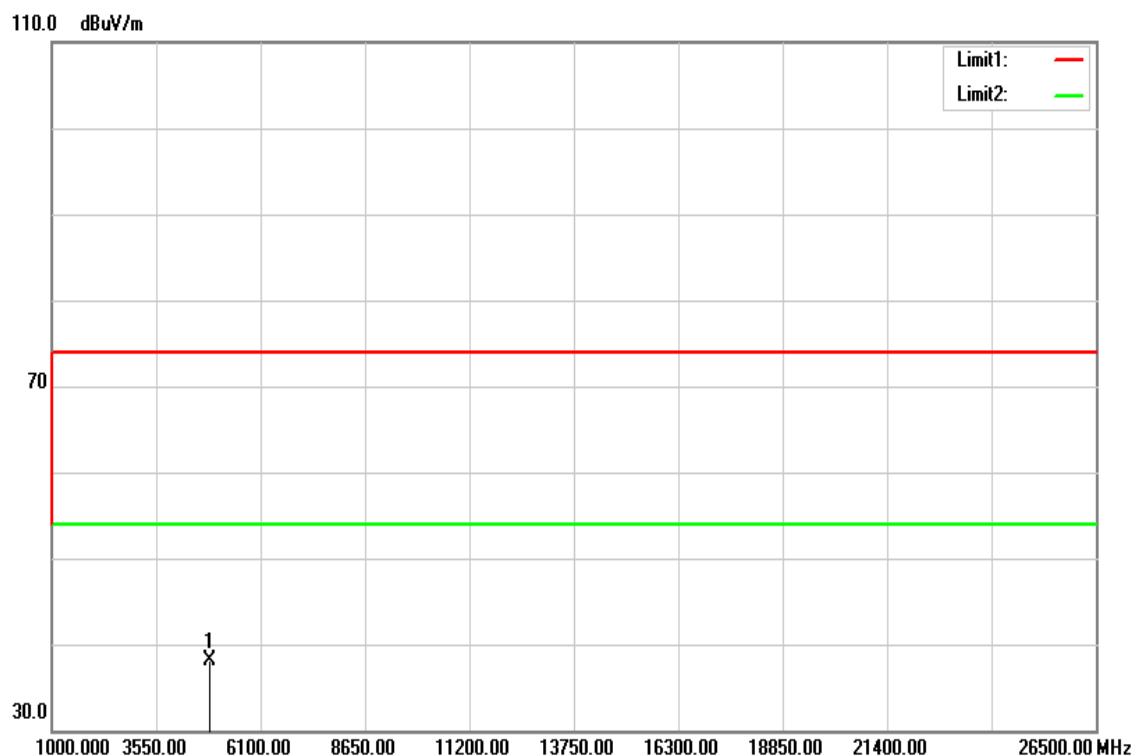


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.000	31.09	6.97	38.06	74.00	-35.94	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11g Mid CH	Temp/Hum	24 (°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

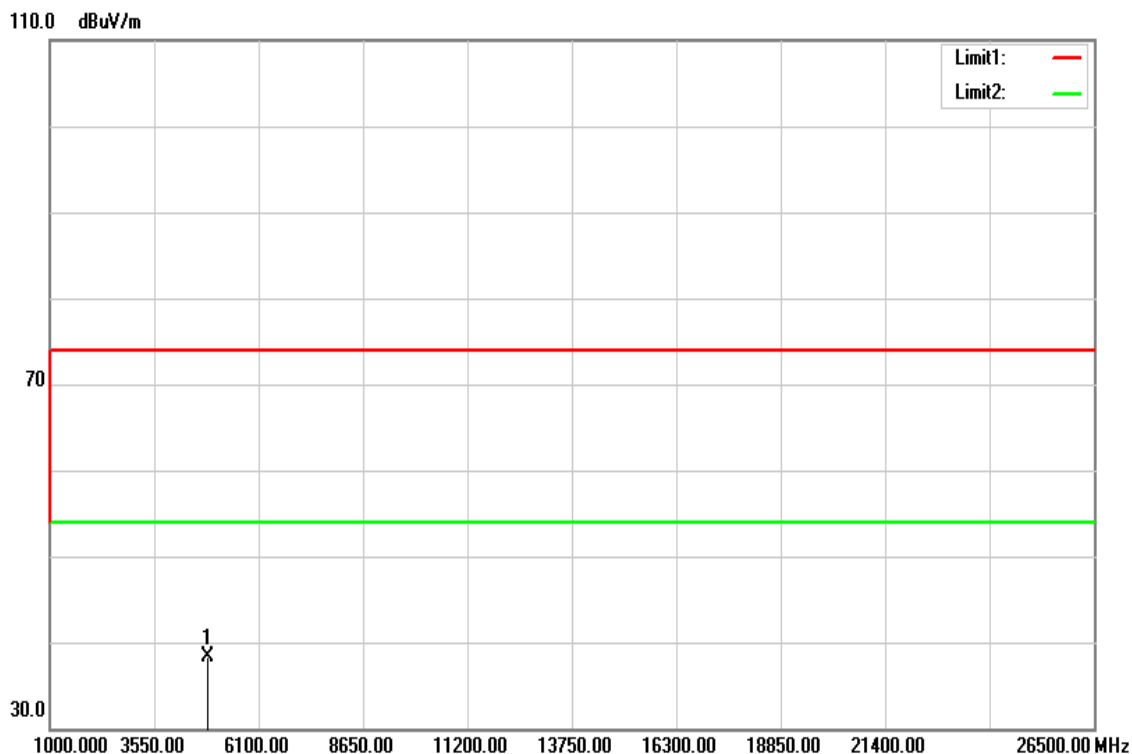


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (B)	Remark
4874.000	31.33	6.97	38.30	74.00	-35.70	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11g High CH	Temp/Hum	24 (°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

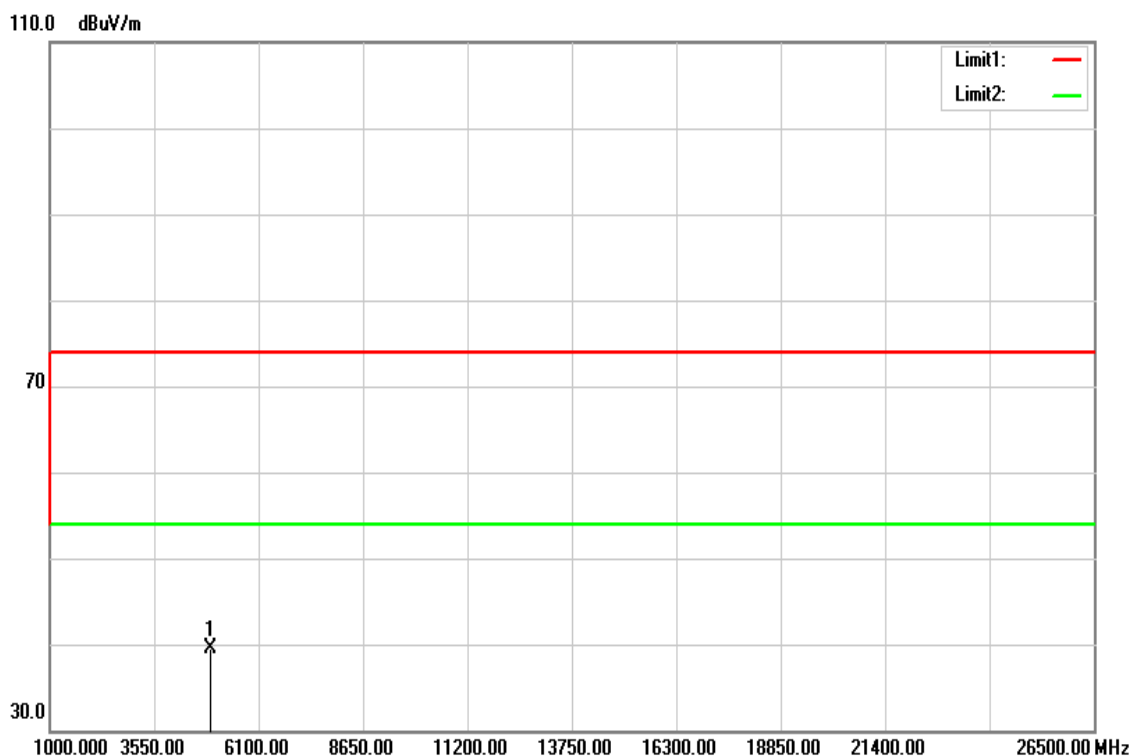


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.000	32.45	7.09	39.54	74.00	-34.46	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11g High CH	Temp/Hum	24 (°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

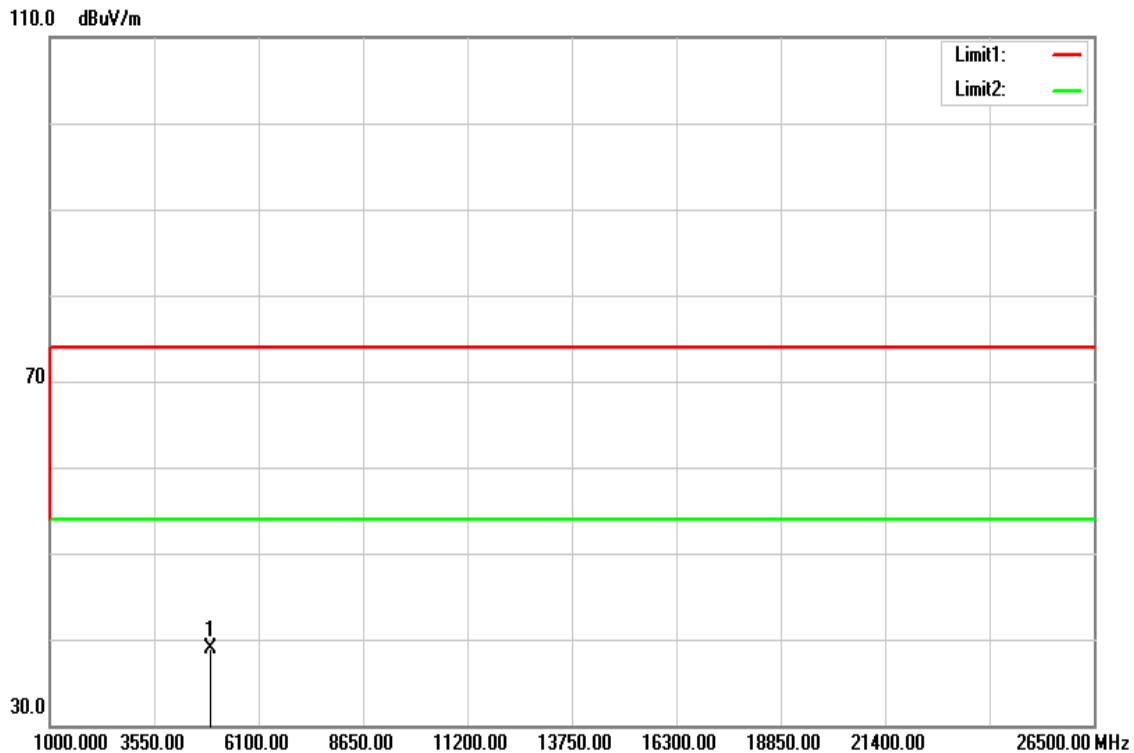


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.000	31.79	7.09	38.88	74.00	-35.12	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	24 (°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

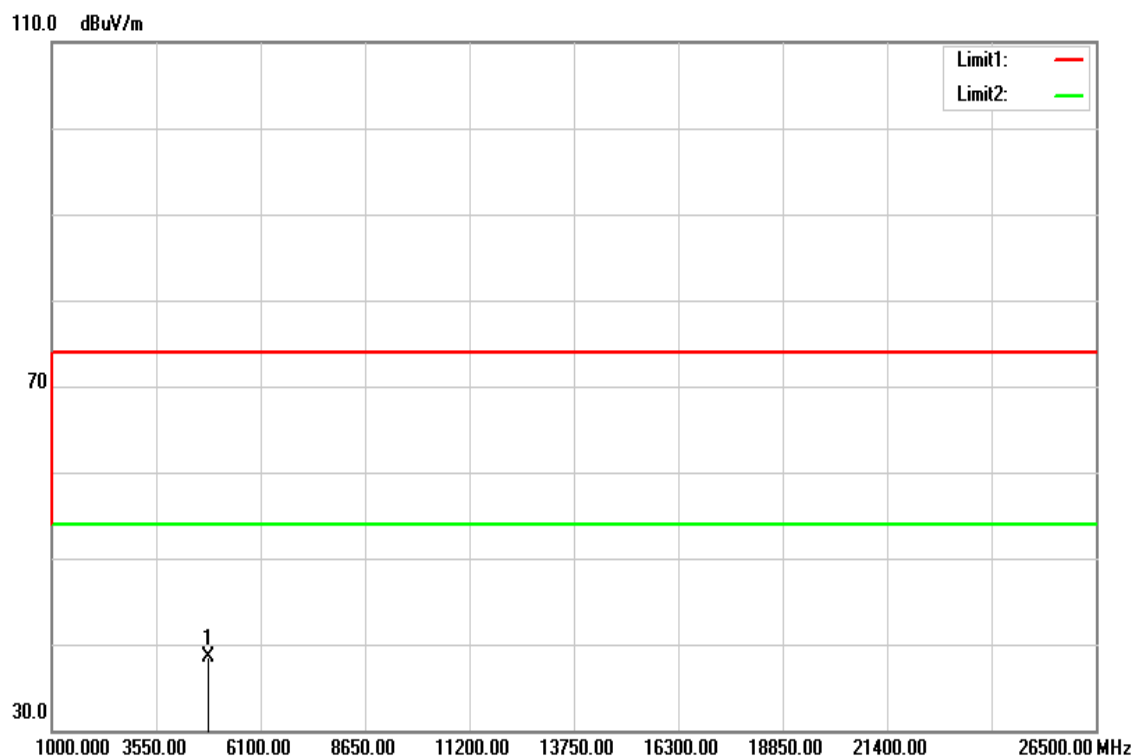


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	R mark
4824.000	31.62	6.84	38.46	74.00	-35.54	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	24 (°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

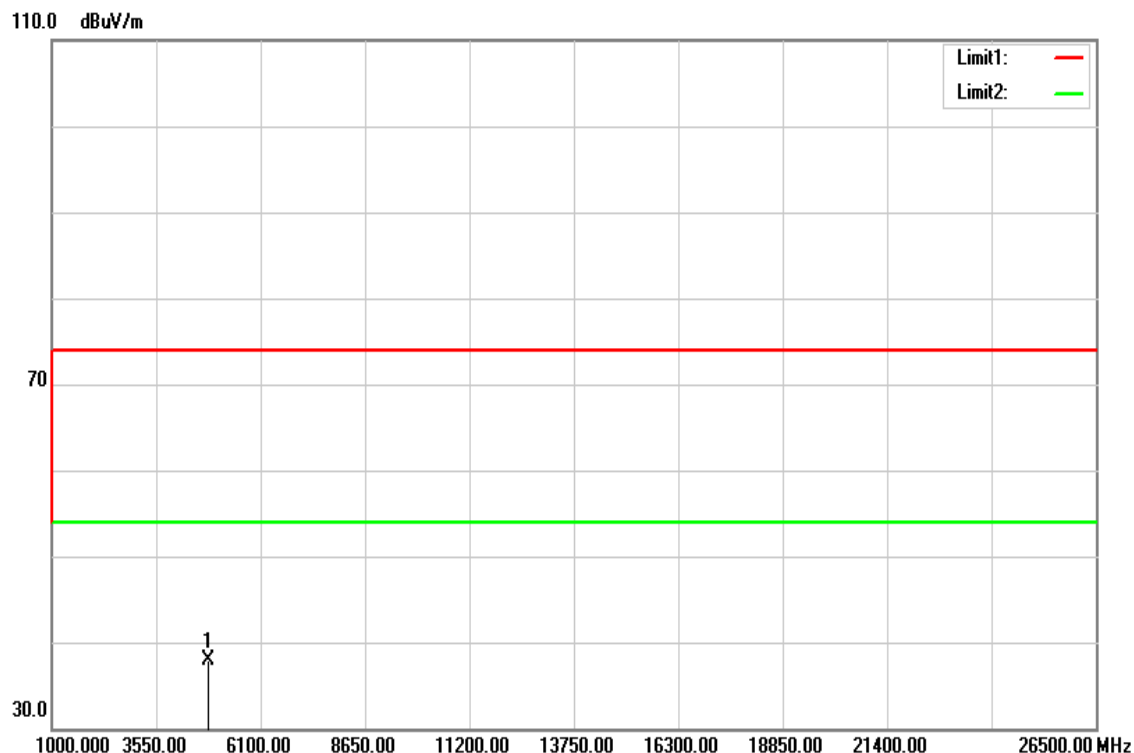


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.000	31.14	6.84	37.98	74.00	-36.02	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT20 Mid CH	Temp/Hum	24 (°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

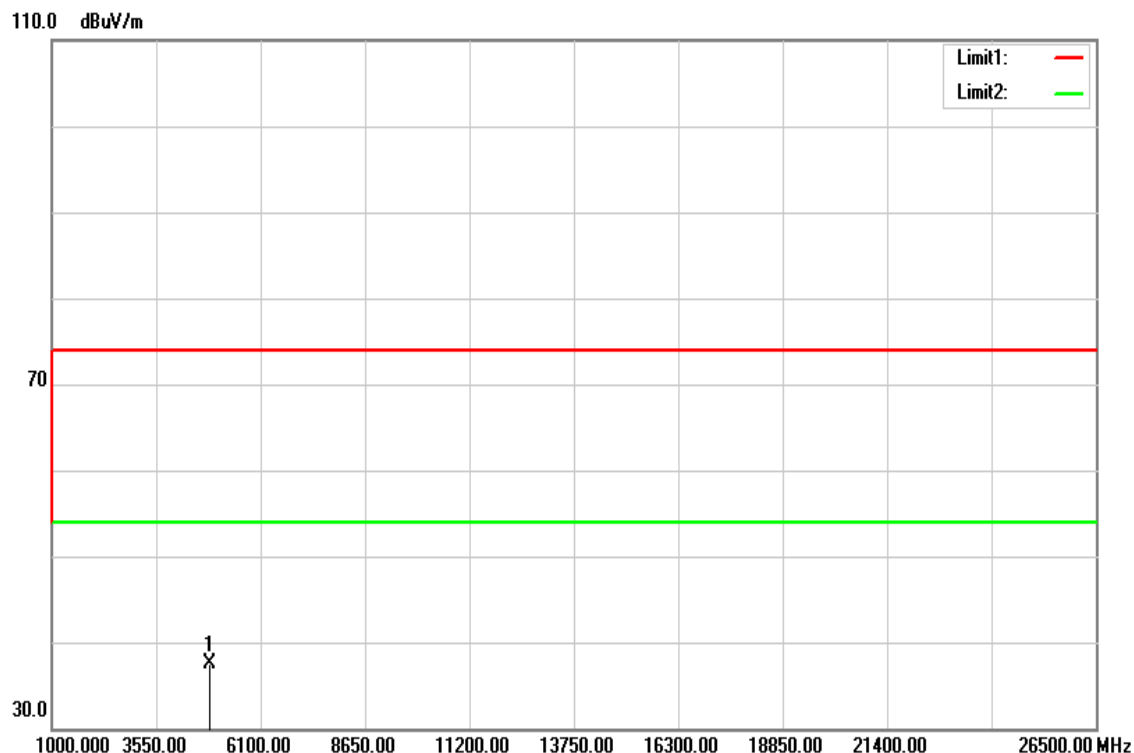


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	R mark
4874.000	30.54	6.97	37.51	74.00	-36.49	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT20 Mid CH	Temp/Hum	24 (°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

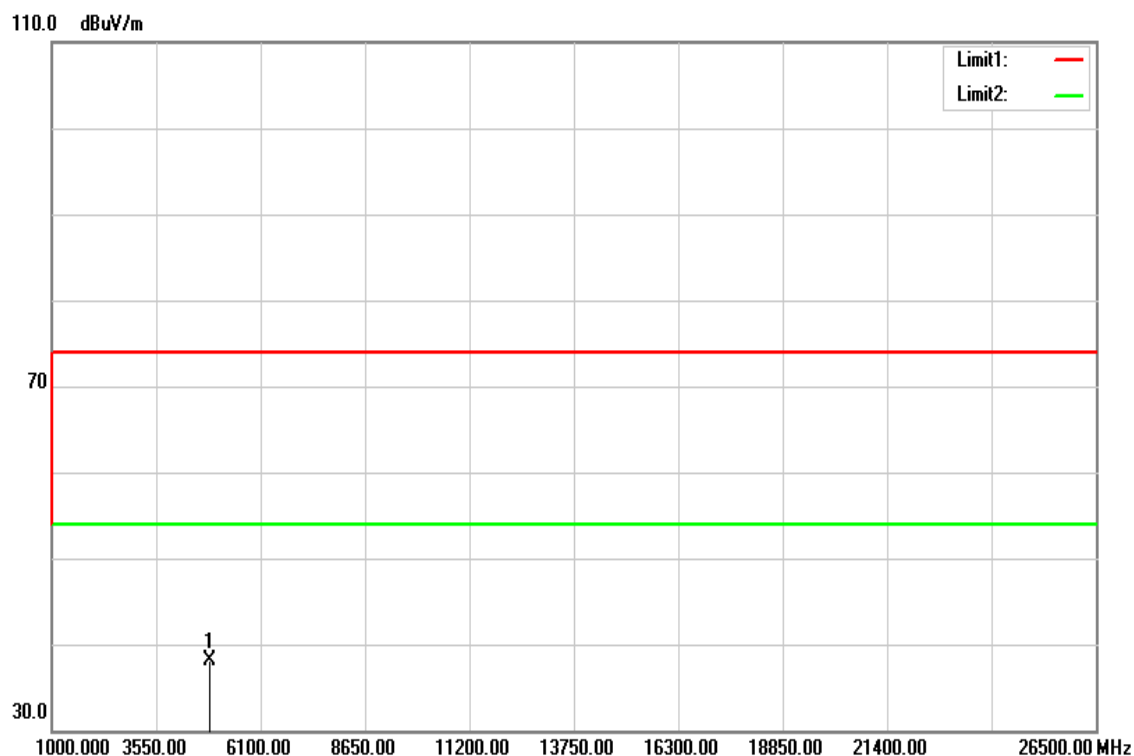


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.000	31.12	6.97	38.09	74.00	-35.91	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	24 (°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

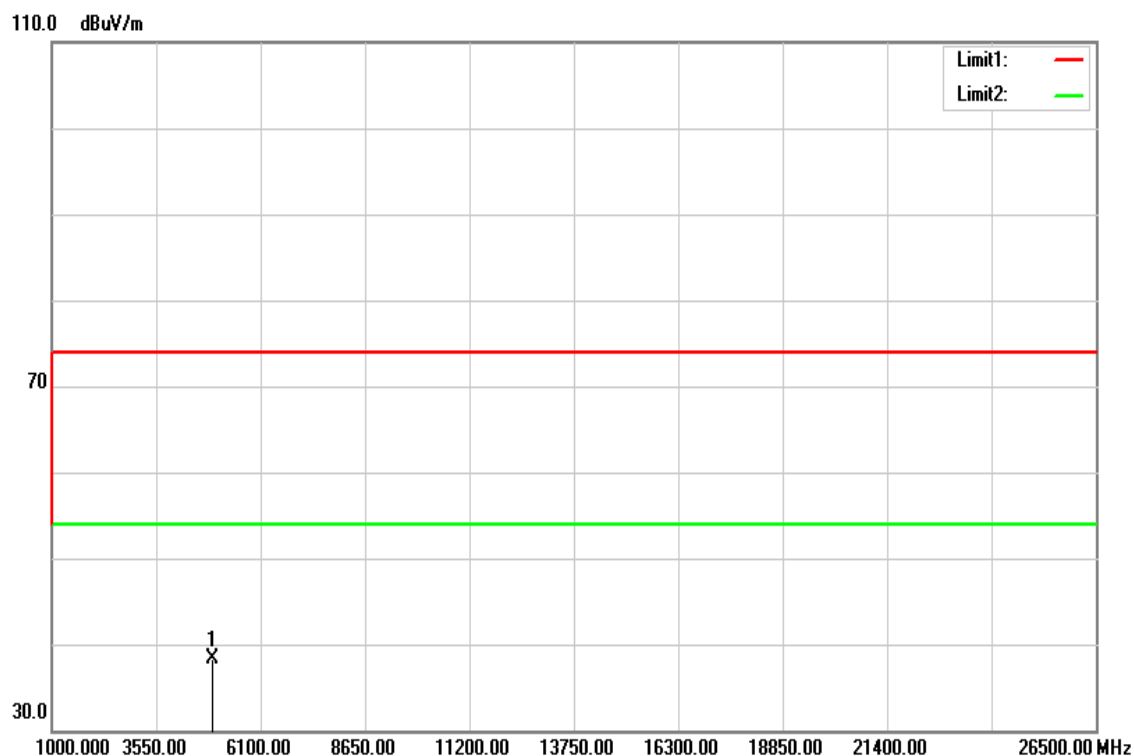


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.000	31.17	7.09	38.26	74.00	-35.74	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	24 (°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

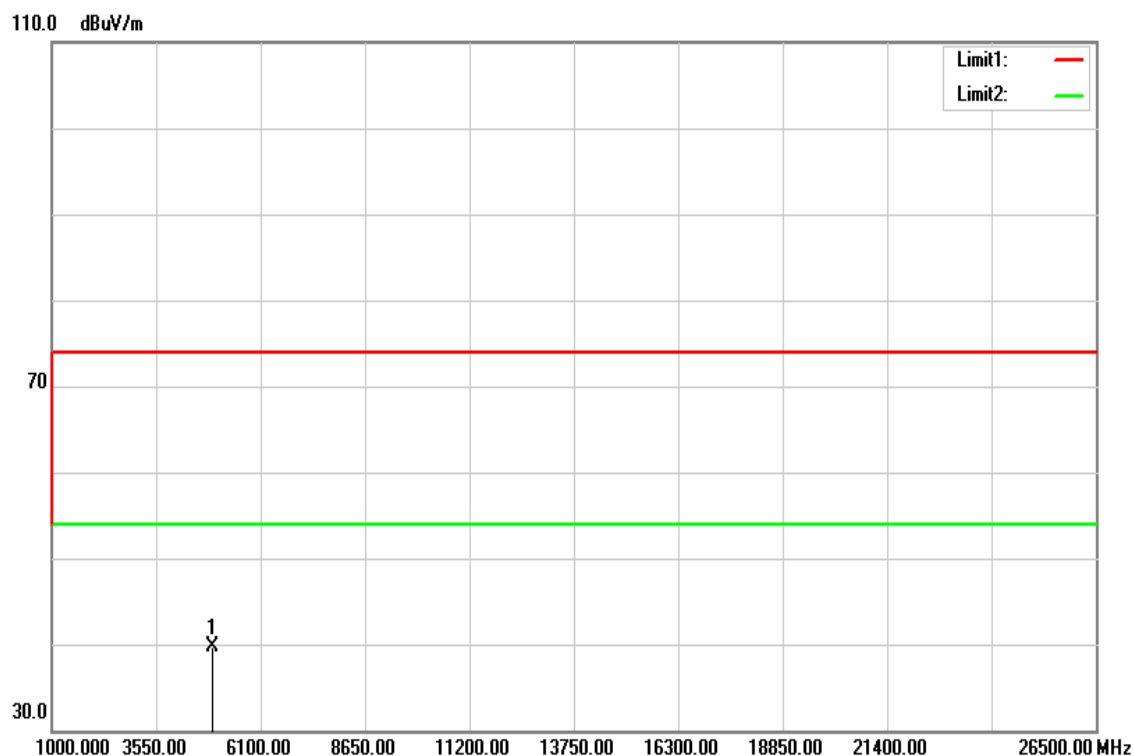

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.000	32.51	7.09	39.60	74.00	-34.40	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit