



## **Accredited testing-laboratory**

**DAR registration number: DAT-P-176/94-D1**

**Federal Motor Transport Authority (KBA)  
DAR registration number: KBA-P 00070-97**

**Recognized by the Federal Communications Commission**

**Anechoic chamber registration no.: 90462 (FCC)**

**Anechoic chamber registration no.: 3463A-1 (IC)**

**Certification ID: DE 0001**

**Accreditation ID: DE 0002**

**Accredited Bluetooth® Test Facility (BQTF)**

*The Bluetooth word mark and logos are owned by the Bluetooth SIG,  
Inc. and any use of such marks by Cetecom ICT is under license*

**Test report no. : 4-2927-15-11/08**  
**Type identification : EX2008P**  
**Applicant : Sagem Mobiles**  
**FCC ID : M9HEX2008P**  
**IC Certification No : -/-**  
**Test standards : 47 CFR Part 15**

## Table of contents

|          |                                                                                   |           |
|----------|-----------------------------------------------------------------------------------|-----------|
| <b>1</b> | <b>General information.....</b>                                                   | <b>3</b>  |
| 1.1      | Notes .....                                                                       | 3         |
| 1.2      | Testing laboratory .....                                                          | 4         |
| 1.3      | Details of applicant .....                                                        | 4         |
| 1.4      | Application details .....                                                         | 4         |
| <b>2</b> | <b>Test standard/s:.....</b>                                                      | <b>5</b>  |
| <b>3</b> | <b>Technical tests .....</b>                                                      | <b>6</b>  |
| 3.1      | Details of manufacturer.....                                                      | 6         |
| 3.1.1    | Test item.....                                                                    | 6         |
| 3.1.2    | Additional EUT information For IC Canada (appendix 2).....                        | 7         |
| 3.1.3    | EUT operating modes.....                                                          | 8         |
| 3.1.4    | Extreme conditions testing values .....                                           | 8         |
| <b>4</b> | <b>Summary of Measurement Results and list of all performed test cases .....</b>  | <b>9</b>  |
| <b>5</b> | <b>RF measurement testing .....</b>                                               | <b>10</b> |
| 5.1      | Description of test set-up.....                                                   | 10        |
| 5.1.1    | Radiated measurements.....                                                        | 10        |
| 5.1.2    | Conducted measurements.....                                                       | 10        |
| 5.2      | Referenced documents .....                                                        | 11        |
| 5.3      | Additional comments .....                                                         | 11        |
| 5.4      | Antenna gain .....                                                                | 11        |
| 5.5      | Carrier frequency separation §15.247(a)(1) .....                                  | 12        |
| 5.6      | Number of hopping channels §15.247(a) (1) .....                                   | 13        |
| 5.7      | Time of occupancy (dwell time) §15.247(a) (1) (iii).....                          | 14        |
| 5.8      | Power Spectral density (Hybrid system in Inquiry mode/Page scan) §15.247(e) ..... | 15        |
| 5.9      | Spectrum Bandwidth of a FHSS System / 20dB Bandwidth §15.247(a)(1).....           | 16        |
| 5.10     | Maximum output power (conducted) § 15.247 (b) (1).....                            | 21        |
| 5.11     | Max. peak output power (radiated) § 15.247 (b)(1) .....                           | 26        |
| 5.12     | Band-edge compliance of conducted emissions §15.247 (d) .....                     | 27        |
| 5.13     | Band-edge compliance of radiated emissions §15.205 .....                          | 34        |
| 5.14     | Spurious Emissions - conducted (Transmitter) § 15.247 (c)(1) .....                | 43        |
| 5.15     | Spurious Emissions > 30 MHz- radiated (Transmitter) § 15.247 (c)(1).....          | 49        |
| 5.16     | Spurious Emissions - radiated (Receiver) § 15.109 .....                           | 58        |
| 5.17     | Spurious Emissions < 30 MHz - Transmitter radiated § 15.209 .....                 | 62        |
| 5.18     | Conducted Emissions <30 MHz § 15.107/207.....                                     | 63        |
| <b>6</b> | <b>Test equipment and ancillaries used for tests .....</b>                        | <b>67</b> |
| <b>7</b> | <b>Photographs of the Test Set-up.....</b>                                        | <b>71</b> |
| <b>8</b> | <b>Photographs of the EUT .....</b>                                               | <b>72</b> |

## 1 General information

### 1.1 Notes

The test results of this test report relate exclusively to the test item specified in 3.1.1. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

#### Test laboratory manager:

2008-08-27      Meheza Kpelou Walla

Date

Name

Signature



2008-08-27      Daniel Muyunga

Date

Name

Signature



#### Technical responsibility for area of testing:

2008-08-27      Michael Berg

Date

Name

Signature



## 1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

e-mail: info@ICT.cetecom.de

Internet: http://www.cetecom-ict.de

State of accreditation: The test laboratory (area of testing) is accredited according to  
DIN EN ISO/IEC 17025  
DAR registration number: DAT-P-176/94-D1

Accredited by: Federal Motor Transport Authority (KBA)  
DAR registration number: KBA-P 00070-97

Testing location, if different from CETECOM ICT Services GmbH:

Name :  
Street :  
Town :  
Country :  
Phone :  
Fax :

## 1.3 Details of applicant

|                   |                                    |
|-------------------|------------------------------------|
| <b>Name:</b>      | Sagem Mobiles<br>FR 93 440 349 181 |
| <b>Street:</b>    | 2 rue du Petit Albi                |
| <b>Town:</b>      | 95801 Cergy Pontoise Cedex         |
| <b>Country:</b>   | France                             |
| <b>Telephone:</b> | +33-(0)1-58-11-91-72               |
| <b>Fax:</b>       | +33-(0)1-58-11-14-11               |
| <b>Contact:</b>   | Herrn Jean Marquet                 |
| <b>E-mail:</b>    | jean.marquet@sagem.com             |
| <b>Telephone:</b> | +33(0)1-58-11-91-72                |

## 1.4 Application details

|                                                          |            |
|----------------------------------------------------------|------------|
| <b>Date of receipt of order:</b>                         | 2008-06-16 |
| <b>Date of receipt of test item:</b>                     | 2008-08-18 |
| <b>Date of start test:</b>                               | 2008-08-18 |
| <b>Date of end test</b>                                  | 2008-08-27 |
| <b>Persons(s) who have been present during the test:</b> | -/-        |

## 2 Test standard/s:

|                |         |                                                                                                                                                         |
|----------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| 47 CFR Part 15 | 2007-09 | Title 47 of the Code of Federal Regulations; Chapter I-<br>Federal Communications Commission<br>subchapter A - general, Part 15-Radio frequency devices |
|----------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------|

### 3 Technical tests

#### 3.1 Details of manufacturer

|          |                                 |
|----------|---------------------------------|
| Name:    | Sagem Mobiles FR 93 440 349 181 |
|          |                                 |
| Street:  | 2 rue du Petit Albi             |
| Town:    | 95801 Cergy Pontoise Cedex      |
| Country: | France                          |

##### 3.1.1 Test item

|                      |   |                                                                                                                                                                    |
|----------------------|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Kind of test item    | : | GSM mobile phone                                                                                                                                                   |
| Type identification  | : | EX2008P                                                                                                                                                            |
|                      |   |                                                                                                                                                                    |
| S/N serial number    | : | 354680029500239 radiated sample 1<br>354680029500288 radiated sample 2 (EUT)<br><br>354680020001666 conducted sample 1 (EUT)<br>354800200001781 conducted sample 2 |
| HW hardware status   | : | V0X                                                                                                                                                                |
| SW software status   | : | E N,WE                                                                                                                                                             |
| Frequency Band [MHz] | : | ISM 2.400 - 2.483,5                                                                                                                                                |
| Type of Modulation   | : | GFSK, Pi/4 DQPSK, 8 DPSK                                                                                                                                           |
| Number of channels   | : | 79                                                                                                                                                                 |
| Antenna              | : | Integrated antenna                                                                                                                                                 |
| Power Supply         | : | 3.9 V DC by power supply / Li-Ion BDL4C Sanyo                                                                                                                      |
| Temperature Range    | : | -20 °C to + 55°C                                                                                                                                                   |

Max. power radiated : -0.40 dBm

Max. power conducted : 5.47 dBm

FCC ID : M9HEX2008P

IC : -/-

## 3.1.2 Additional EUT information For IC Canada (appendix 2)

|                                             |                                                                                                                                                                                                                 |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IC Registration Number:                     | -/-                                                                                                                                                                                                             |
| Model Name:                                 | EX2008P                                                                                                                                                                                                         |
| Manufacturer (complete Address):            | Sagem Mobiles<br>2 rue du Petit Albi<br>95801 Cergy Pontoise Cedex<br>France                                                                                                                                    |
| Frequency Range (or fixed frequency) [MHz]: | 2400 – 2483.5 MHz                                                                                                                                                                                               |
| RF: Power [W] (max):                        | GFSK Modulation:<br>Rad. EIRP: 0.91 mW<br>Conducted : 3.52 mW<br><br>Pi/4 DQPSK Modulation:<br>Rad. EIRP: 0.52 mW<br>Conducted : 1.94 mW<br><br>8 DPSK Modulation:<br>Rad. EIRP: 0.40 mW<br>Conducted : 1.47 mW |
| Antenna Type:                               | Integrated antenna                                                                                                                                                                                              |
| Occupied Bandwidth (99% BW) [kHz]:          | 878 GFSK<br>1317 Pi/4 DPQSK<br>1220 8 DPSK                                                                                                                                                                      |
| Type of Modulation:                         | GFSK, Pi/4 DQPSK, 8 DPSK                                                                                                                                                                                        |
| Emission Designator (TRC-43):               | 878KFXD GFSK<br>1M32FXD Pi/4 DQPSK<br>1M22FXD 8 DPSK                                                                                                                                                            |
| Transmitter Spurious (worst case) [dBμV]:   | 39.30 dBμV                                                                                                                                                                                                      |
| Receiver Spurious (worst case) [dBμV]:      | 39.31 dBμV                                                                                                                                                                                                      |

### ATTESTATION:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned departmental standard(s), and that the radio equipment identified in this application has been subject to all applicable test conditions specified in the departmental standards and all of the requirements of the standards have been met.

Signature:



Test engineer: Meheza Kpelou Walla

Date: 2008-08-27

### 3.1.3 EUT operating modes

| EUT operating mode no. *) | Description of operating modes | Additional information                         |
|---------------------------|--------------------------------|------------------------------------------------|
| Op. 0                     | Normal mode                    | Normal temperature and power source conditions |
| Op. 1                     |                                | low temperature, low power source conditions   |
| Op. 2                     |                                | low temperature, high power source conditions  |
| Op. 3                     |                                | high temperature, low power source conditions  |
| Op. 4                     |                                | high temperature, high power source conditions |

\*) EUT operating mode no. is used to simplify the test plan

### 3.1.4 Extreme conditions testing values

| Description          | Shortcut         | Unit | Value |
|----------------------|------------------|------|-------|
|                      |                  |      |       |
| Nominal Temperature  | T <sub>nom</sub> | °C   | +23   |
| Nominal Humidity     | H <sub>nom</sub> | %    | 50    |
| Nominal Power Source | V <sub>nom</sub> | V    | 3.9   |

**Type of power source: DC by power supply / Li-Ion BDL4C Sanyo**

Deviations from these values are reported in chapter 2

#### 4 Summary of Measurement Results and list of all performed test cases

☒ No deviations from the technical specifications were ascertained

☐ There were deviations from the technical specifications ascertained

| TC identifier | Description         | verdict | date       | Remark |
|---------------|---------------------|---------|------------|--------|
| RF-Testing    | FCC Part 15 §15.247 | passed  | 2008-08-27 | -/-    |

| Test Specification Clause | Test Case                                                        | Modulation                   | Pass              | Fail | N/A | Not performed |
|---------------------------|------------------------------------------------------------------|------------------------------|-------------------|------|-----|---------------|
| None                      | Antenna Gain                                                     | GFSK                         | Yes               |      |     |               |
| §15.247(a1)               | Carrier frequency separation                                     | GFSK                         | Yes               |      |     |               |
| §15.247(a1)               | Number of hopping channels                                       | GFSK                         | Yes               |      |     |               |
| §15.247(a)(1)(iii)        | Time of occupancy (dwell time)                                   | --                           | Yes               |      |     |               |
| §15.247(e)                | Power Spectral density (Hybrid system in Inquiry mode/Page scan) | --                           |                   |      | Yes |               |
| §15.247(a)(1)             | Spectrum Bandwidth of a FHSS System / 20dB Bandwith              | GFSK<br>Pi/4 DQPSK<br>8 DPSK | Yes<br>Yes<br>Yes |      |     |               |
| § 15.247 (b)(1)           | Maximum output power (conducted)                                 | GFSK<br>Pi/4 DQPSK<br>8 DPSK | Yes<br>Yes<br>Yes |      |     |               |
| § 15.247 (b)(1)           | Max. peak output power (radiated)                                | GFSK<br>Pi/4 DQPSK<br>8 DPSK | Yes<br>Yes<br>Yes |      |     |               |
| § 15.247 (d)              | Band-edge compliance of conducted emissions                      | GFSK<br>Pi/4 DQPSK<br>8 DPSK | Yes<br>Yes<br>Yes |      |     |               |
| § 15.205                  | Band-edge compliance of radiated emissions                       | GFSK<br>Pi/4 DQPSK<br>8 DPSK | Yes<br>Yes<br>Yes |      |     |               |
| § 15.247 (d)              | Spurious Emission - conducted (Transmitter)                      | GFSK<br>Pi/4 DQPSK<br>8 DPSK | Yes<br>Yes<br>Yes |      |     |               |
| § 15.247 (d)              | Spurious Emission - radiated (Transmitter) >30 MHz               | GFSK                         | Yes               |      |     |               |
| § 15.109                  | Spurious Emissions - radiated (Receiver)                         | GFSK                         | Yes               |      |     |               |
| § 15.209                  | Spurious Emissions - radiated (Transmitter) <30 MHz              | GFSK                         | Yes               |      |     |               |
| § 15.107/207              | Conducted Emissions <30 MHz                                      | GFSK                         | Yes               |      |     |               |

## 5 RF measurement testing

### 5.1 Description of test set-up

#### 5.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2003 clause 4.2. Antennas are confirmed with ANSI C63.2-1996 item 15.


9 kHz - 150 kHz: Quasi Peak measurement, 200 Hz Bandwidth, passive loop antenna.  
150 kHz - 30 MHz: Quasi Peak measurement, 9 kHz Bandwidth, passive loop antenna.  
30 MHz - 200 MHz: Quasi Peak measurement, 120 kHz Bandwidth, bi-conical antenna  
200MHz - 1GHz: Quasi Peak measurement, 120 kHz Bandwidth, log periodic antenna  
>1GHz: Average, RBW 1MHz, VBW 10 Hz, waveguide horn

All measurements are done in accordance with the Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems DA 00-705 and Appendix A "BLUETOOTH APPROVALS"

The EUT is powered by an external power supply with nominal voltage. The signalling is performed from outside the chamber with a signalling unit (CMU200 or other) by air link using signalling antenna.

#### 5.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

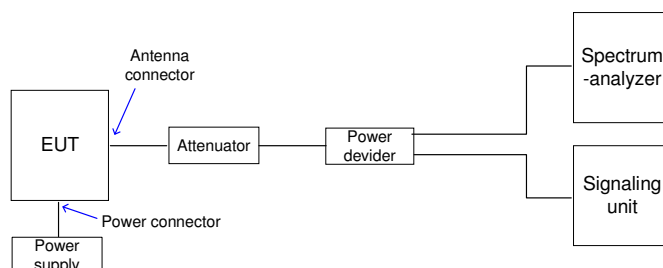

## 5.2 Referenced documents

None

## 5.3 Additional comments

None

## 5.4 Antenna gain


The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

|                                                    | low channel<br>2402 MHz | mid channel<br>2441 MHz | high channel<br>2480 MHz |
|----------------------------------------------------|-------------------------|-------------------------|--------------------------|
| Conducted power [dBm]<br>Measured, GFSK modulation | 4.87                    | <b>5.47</b>             | 5.06                     |
| Radiated power [dBm]<br>Measured, GFSK modulation  | <b>-0.40</b>            | -0.86                   | -1.52                    |
| Gain [dBi]<br>Calculated                           | <b>-5.27</b>            | -6.33                   | -6.58                    |

## 5.5 Carrier frequency separation §15.247(a)(1)

Modulation: GFSK

Plot 1 of 1:

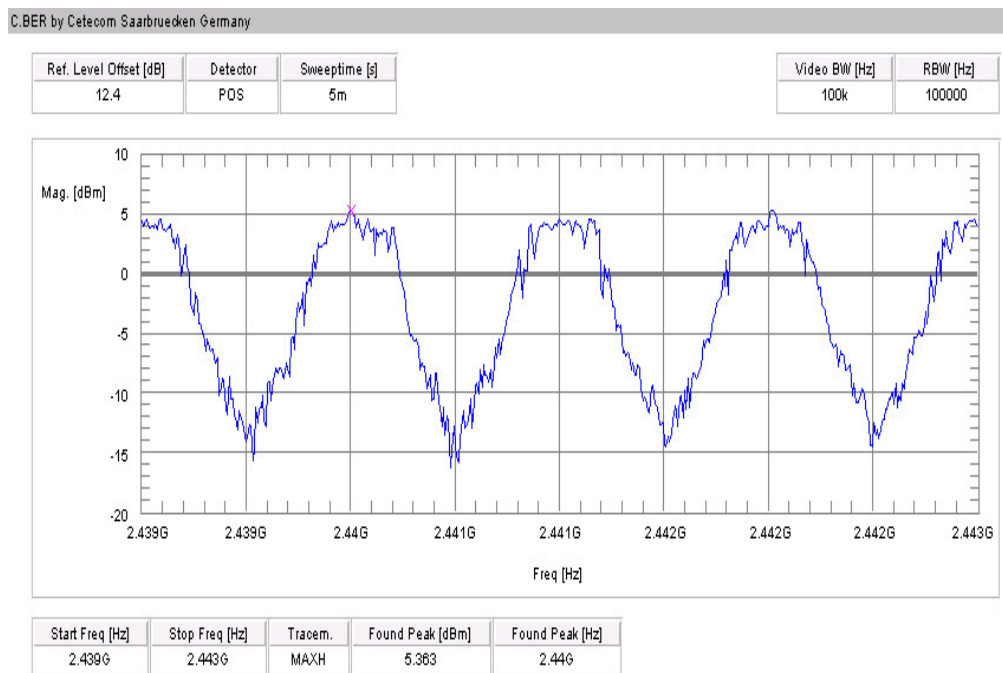

Result: Channel separation is: ~ 1 MHz


Limits:

|                                   |                                                         |
|-----------------------------------|---------------------------------------------------------|
| Under normal test conditions only | Minimum 25 kHz or 20 dB Bandwidth of the hopping system |
|-----------------------------------|---------------------------------------------------------|


## 5.6 Number of hopping channels §15.247(a) (1)

Modulation: GFSK

Plot 1 of 2:

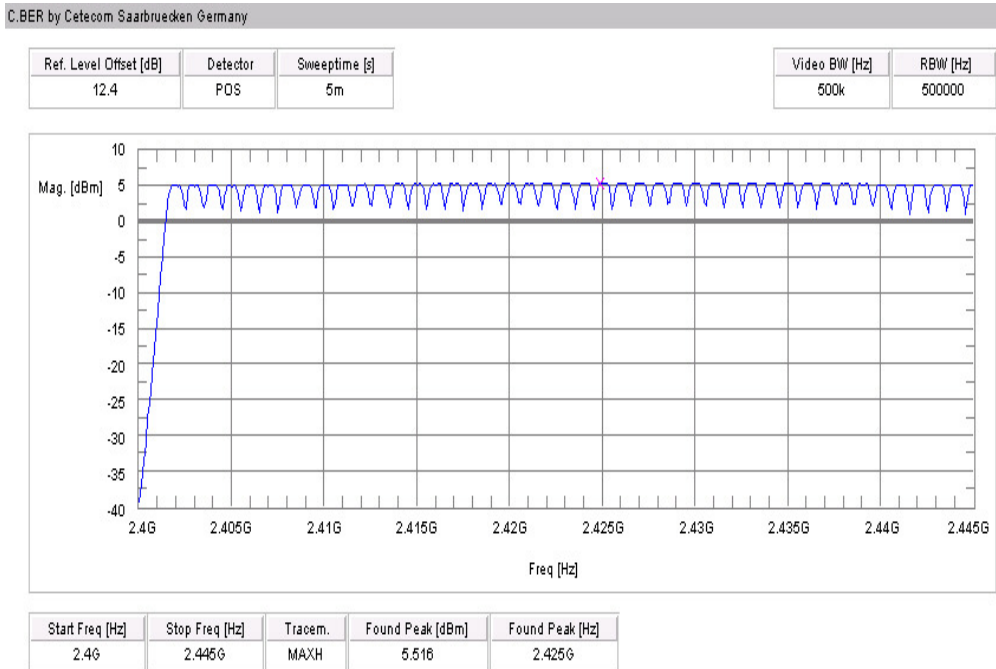

Plot 2 of 2:

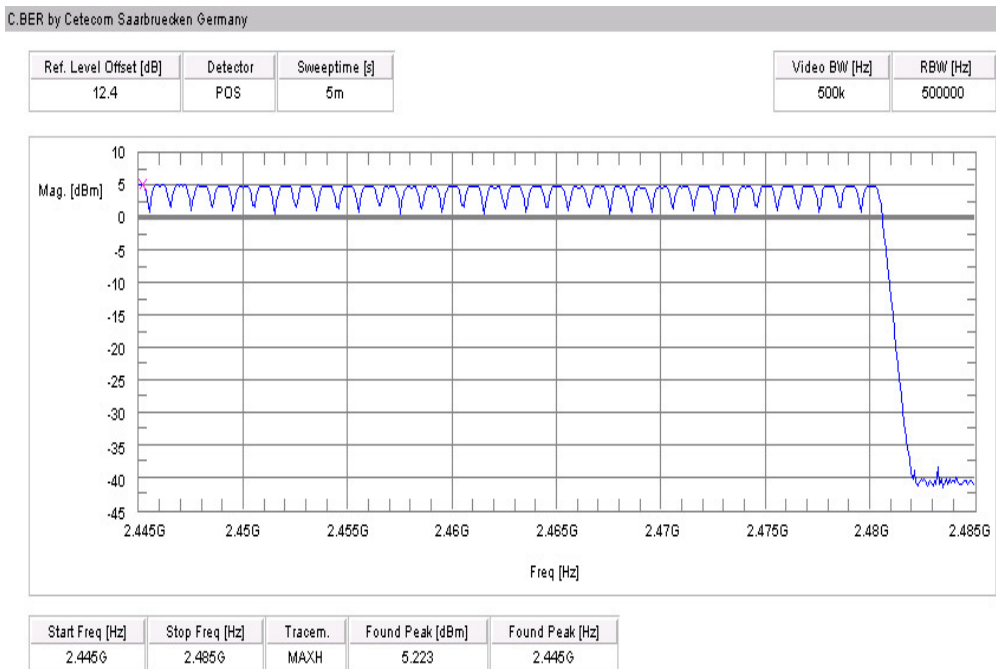

Result: The number of hopping channels is: 79

Limits:

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Under normal test conditions only | at least 15 non-overlapping channels |
|-----------------------------------|--------------------------------------|

---

## 5.7 Time of occupancy (dwell time) §15.247(a) (1) (iii)

### For Bluetooth devices:

The dwell time of 0.4 s within a 31.6 second period in data mode is independent from the packet type (packet length).  
The calculation for a 31.6 second period is as follows:

Dwell time = time slot length \* hop rate / number of hopping channels \* 31.6 s

Example for a DH1 packet (with a maximum length of one time slot)

Dwell time =  $625 \mu\text{s} * 1600 \text{ 1/s} / 79 * 31.6 \text{ s} = 0.4 \text{ s}$  (in a 31.6 s period)

For multi-slot packet the hopping is reduced according to the length of the packet.

Example for a DH5 packet (with a maximum length of five time slots)

Dwell time =  $5 * 625 \mu\text{s} * 1600 * 1/5 * 1/s / 79 * 31.6 \text{ s} = 0.4 \text{ s}$  (in a 31.6 s period)

This is according to the Bluetooth Core Specification V 1.1 & V 1.2 & V2.0 (+ critical errata) for all Bluetooth devices.

Therefore, all Bluetooth devices comply with the FCC dwell time requirement in the data mode.

This was checked during the Bluetooth Qualification tests.

The Dwell time in hybrid mode is approximately 2.6 ms (in a 12.8s period)

**5.8 Power Spectral density (Hybrid system in Inquiry mode/Page scan)  
§15.247(e)**

**Not applicable !**


Result: Power density: - dBm/Hz = - dBm / 3 kHz  
Correction factor from dBm/Hz to dBm / 3 kHz is +34,8 dB

Limits:


|                                   |                                                                                                                                                                                                                               |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Under normal test conditions only | For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

5.9 Spectrum Bandwidth of a FHSS System / 20dB Bandwidth §15.247(a)(1)


Plot 1: GFSK

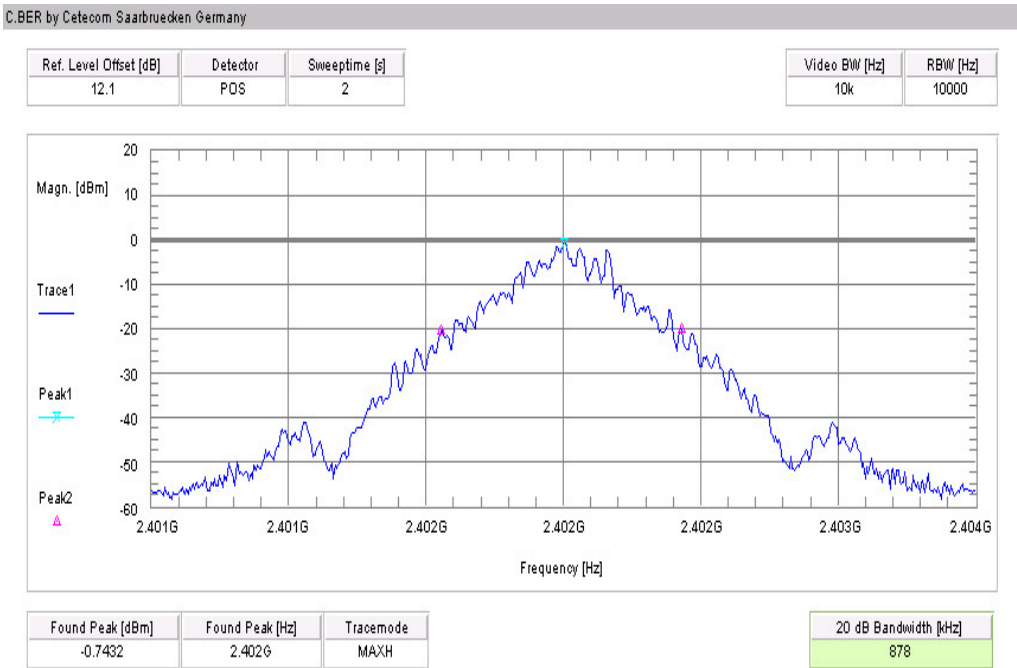


Plot 2: GFSK

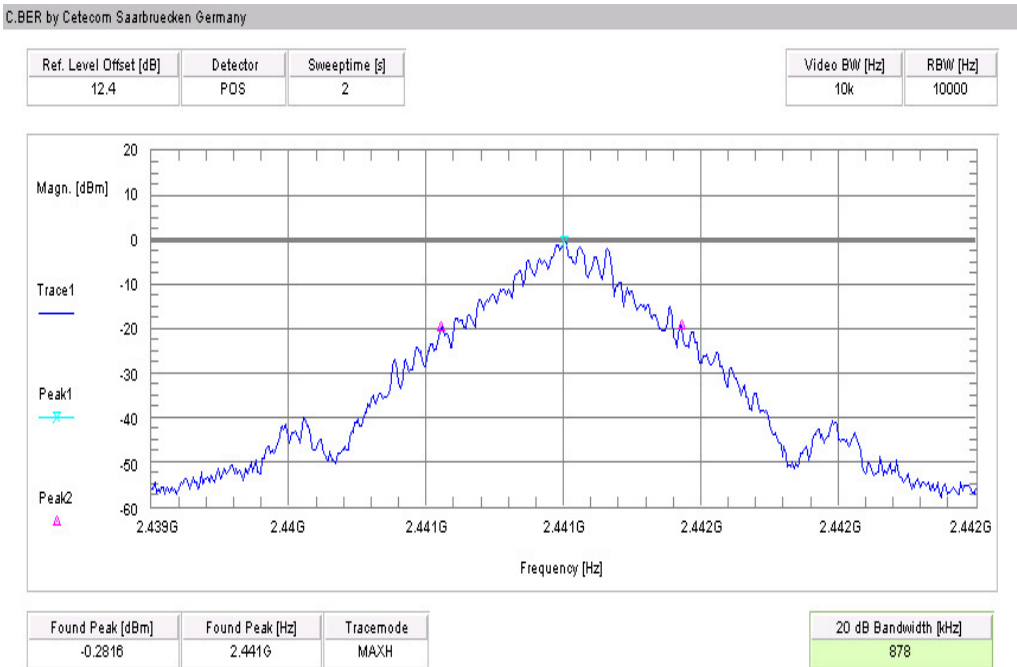


Plot 3: GFSK

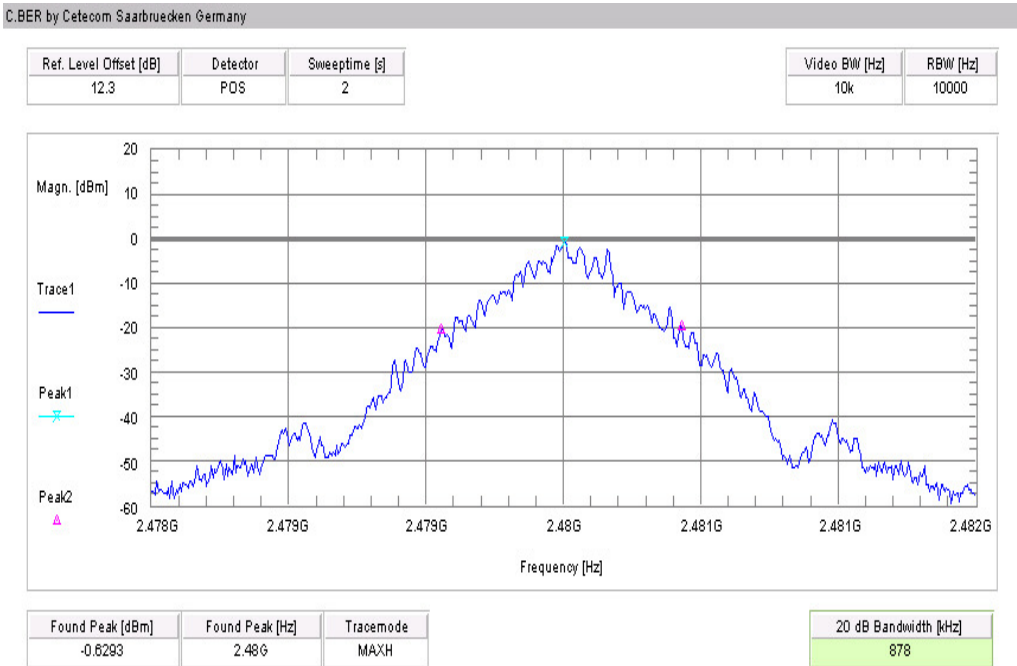


Plot 4: Pi/4 DQPSK

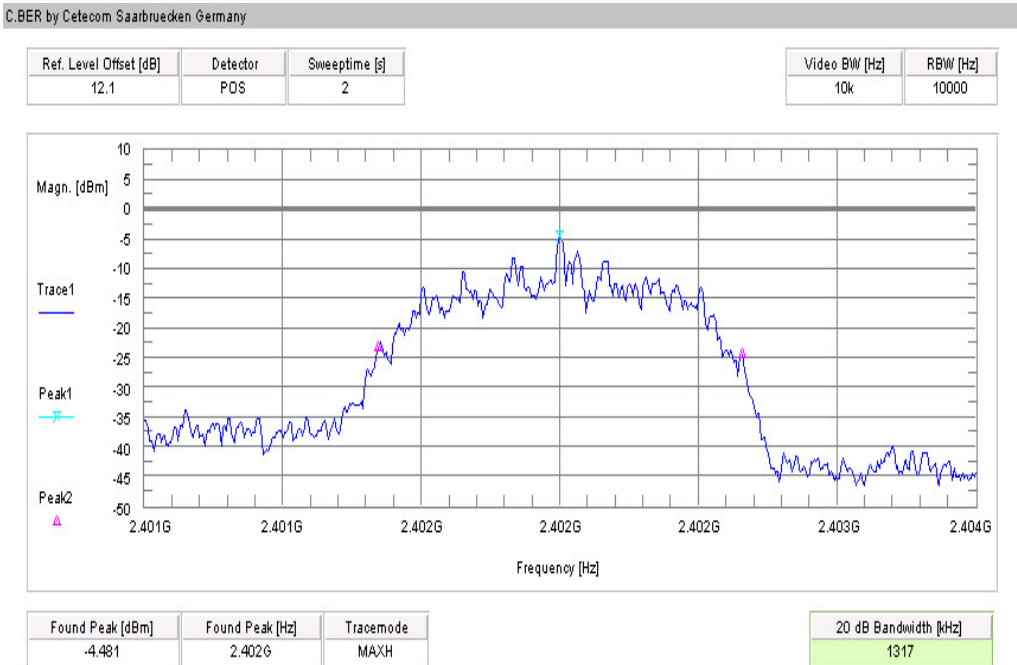


Plot 5: Pi/4 DQPSK

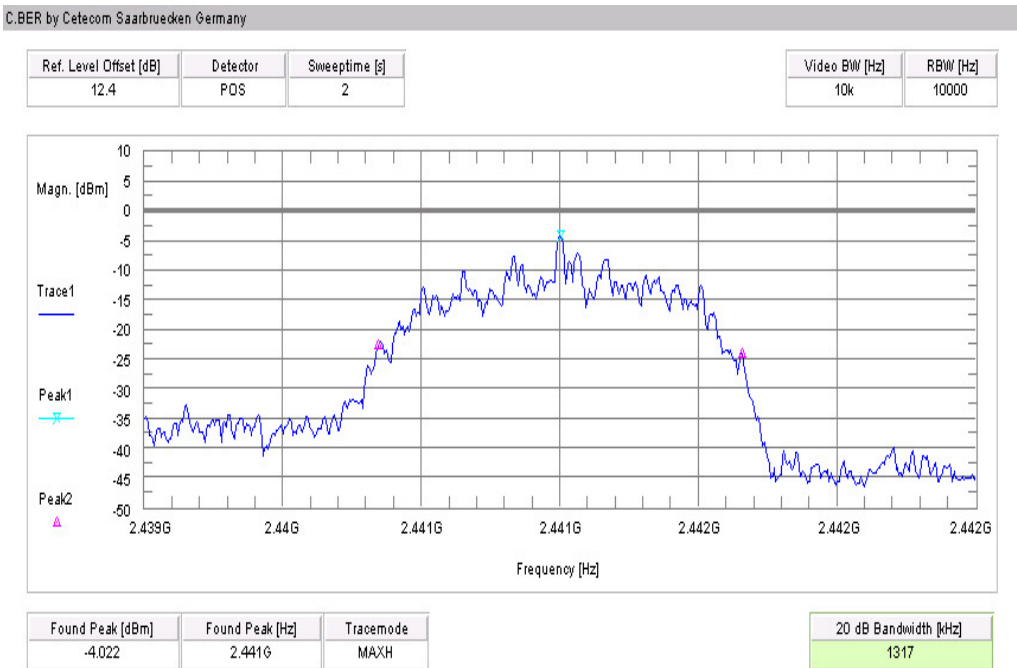


Plot 6: Pi/4 DQPSK

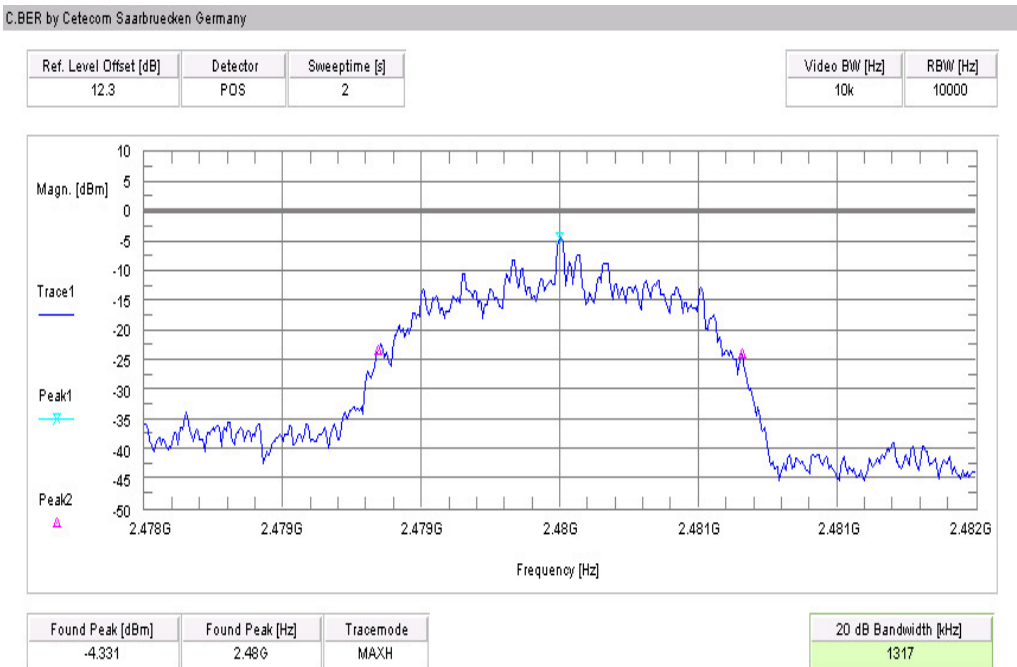


Plot 7: 8DPSK

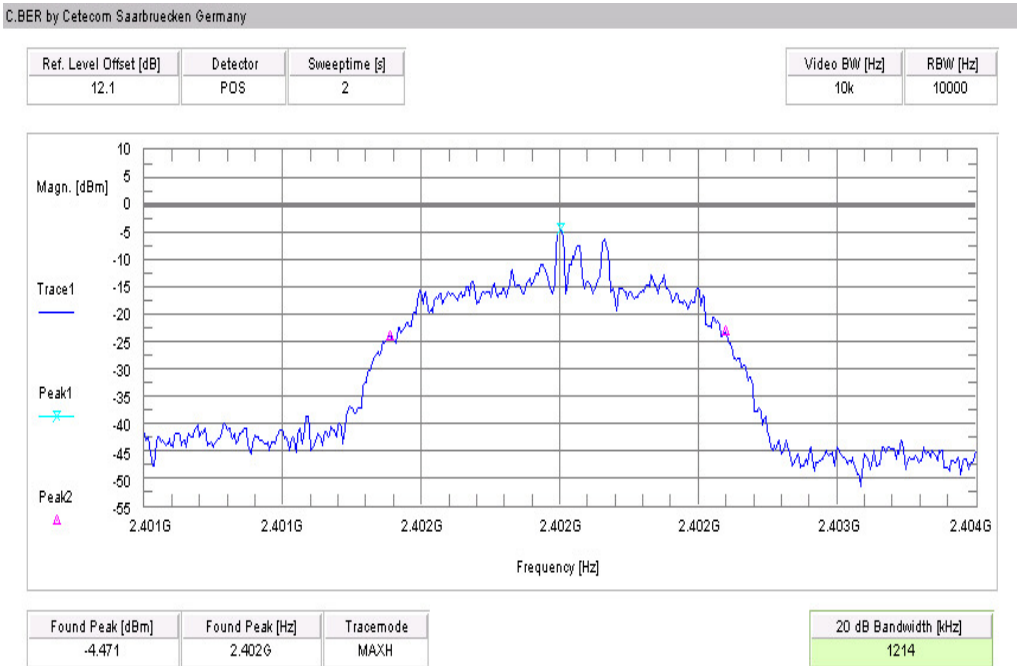

Plot 8: 8DPSK

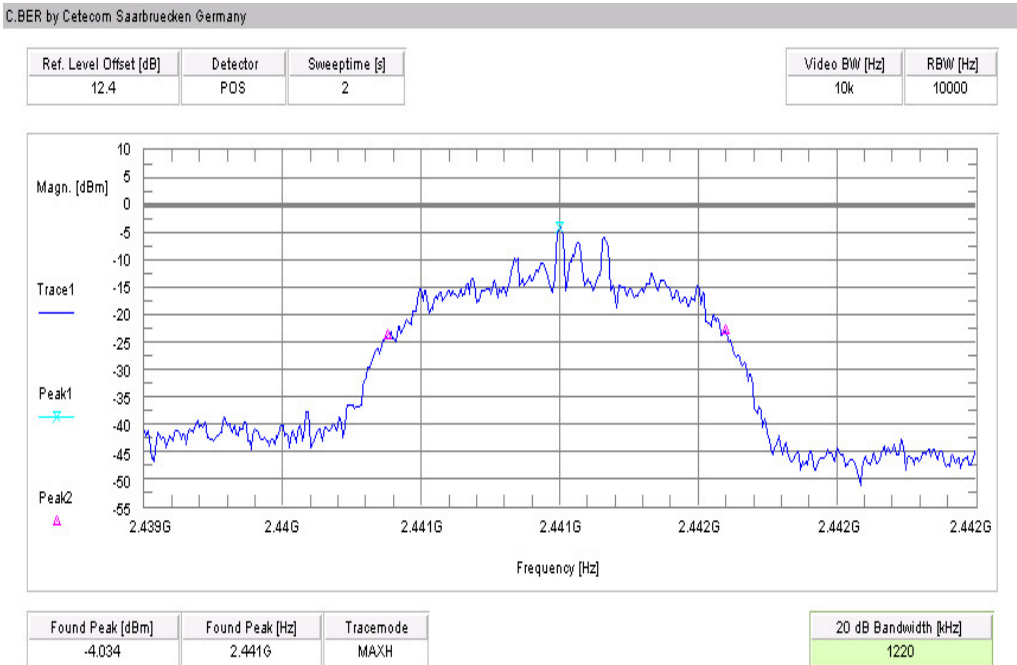

Plot 9: 8DPSK

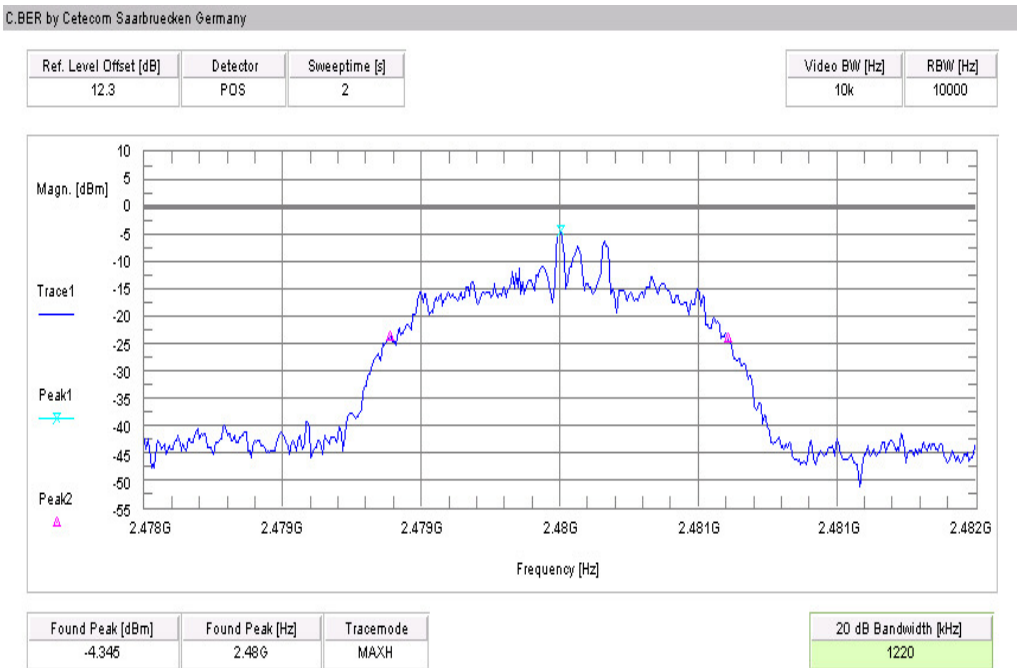

Result:

| Modulation              | 20 dB BANDWIDTH [kHz] |      |      |
|-------------------------|-----------------------|------|------|
|                         | 2402                  | 2441 | 2480 |
| Frequency [MHz]         |                       |      |      |
| GFSK                    | 878                   | 878  | 878  |
| Pi/4 DQPSK              | 1317                  | 1317 | 1317 |
| 8DPSK                   | 1214                  | 1220 | 1220 |
| Measurement uncertainty | ±1kHz                 |      |      |


RBW / VBW as provided in the „Measurement Guidelines“ (DA 00-705, March 30, 2000)  
RBW: 10 kHz / VBW 10 kHz

Limits:


|                                   |                                                      |
|-----------------------------------|------------------------------------------------------|
| Under normal test conditions only | GFSK < 1000 kHz<br>Pi/4 DQPSK < 1500<br>8DPSK < 1500 |
|-----------------------------------|------------------------------------------------------|

## 5.10 Maximum output power (conducted) § 15.247 (b) (1)

Plot 1: GFSK

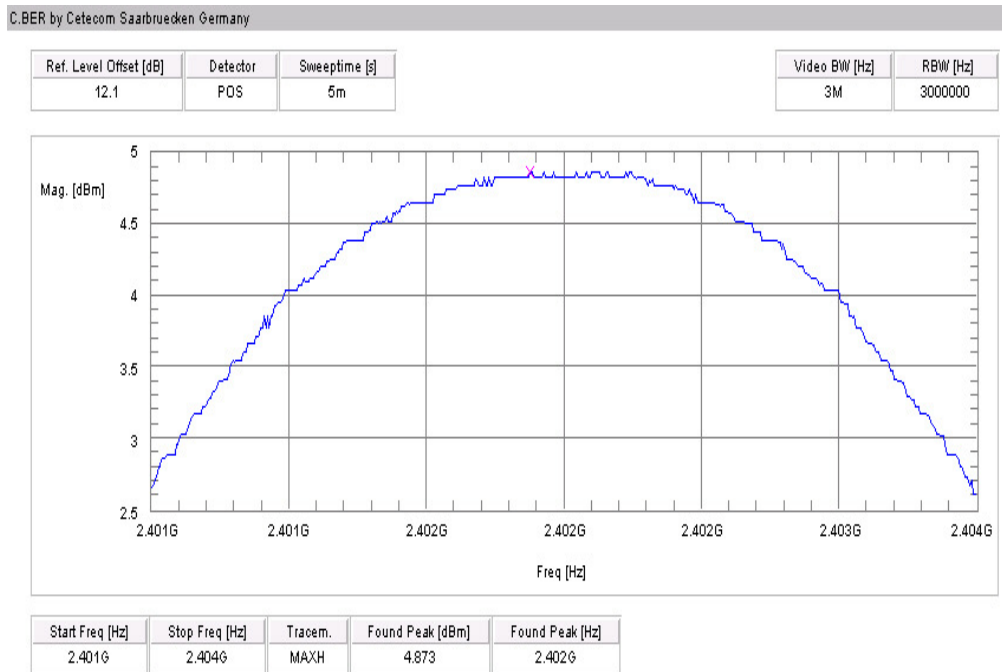


Plot 2: GFSK

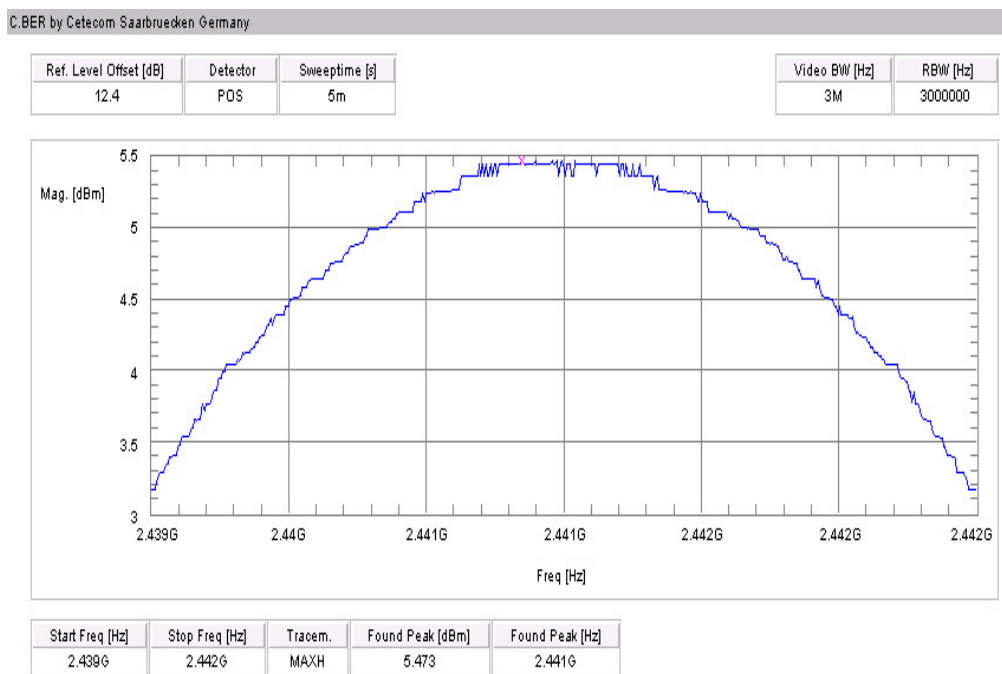


Plot 3: GFSK




Plot 4: Pi/4 DQPSK

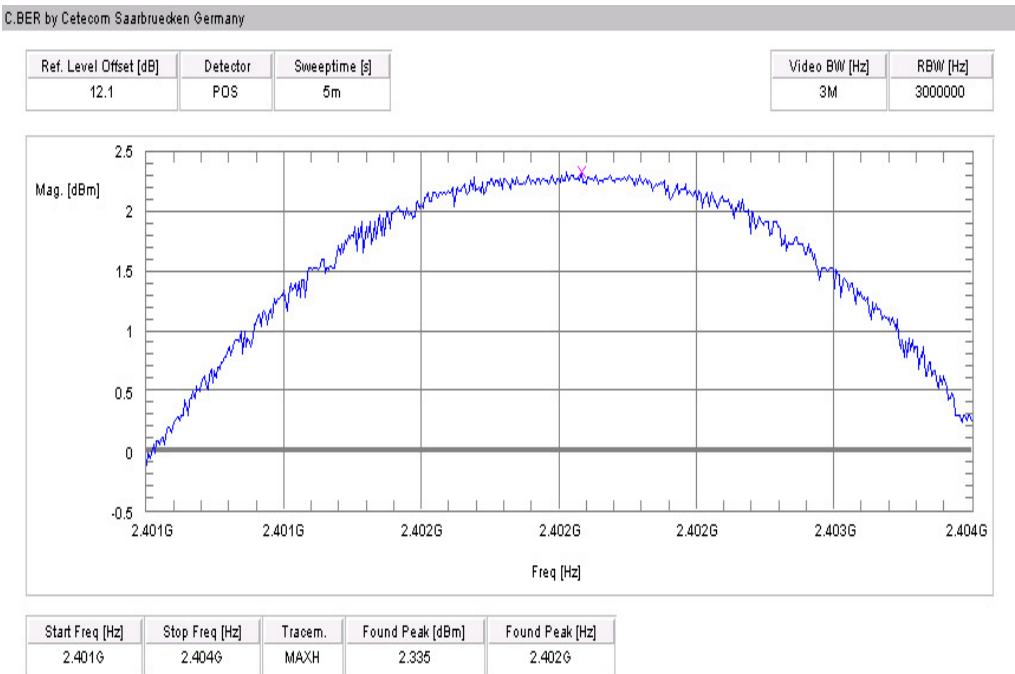


Plot 5: Pi/4 DQPSK

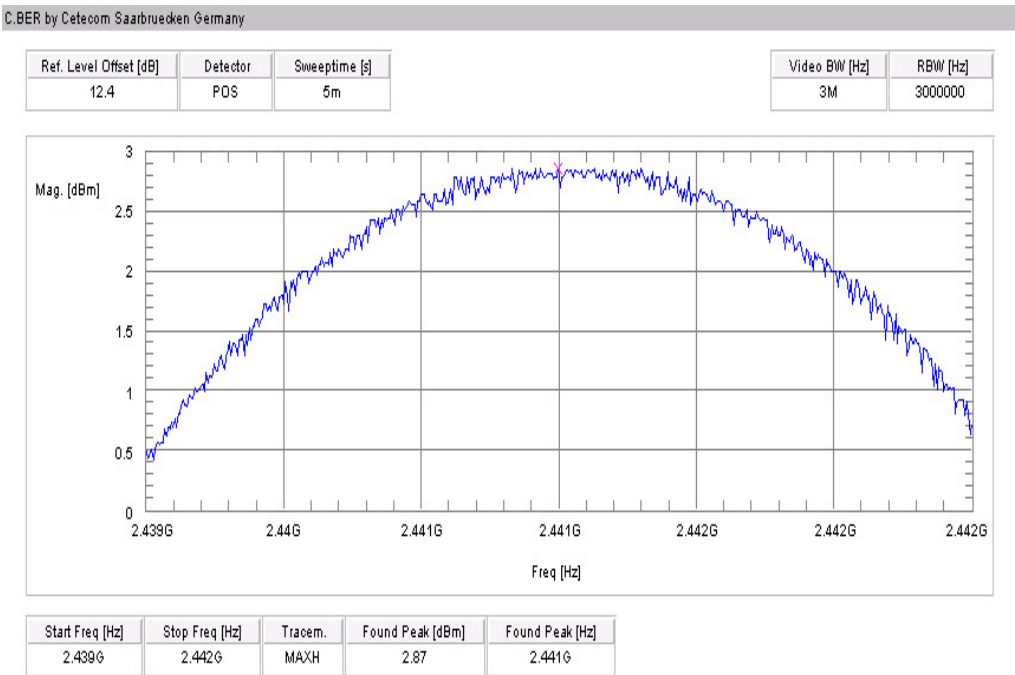


Plot 6: Pi/4 DQPSK

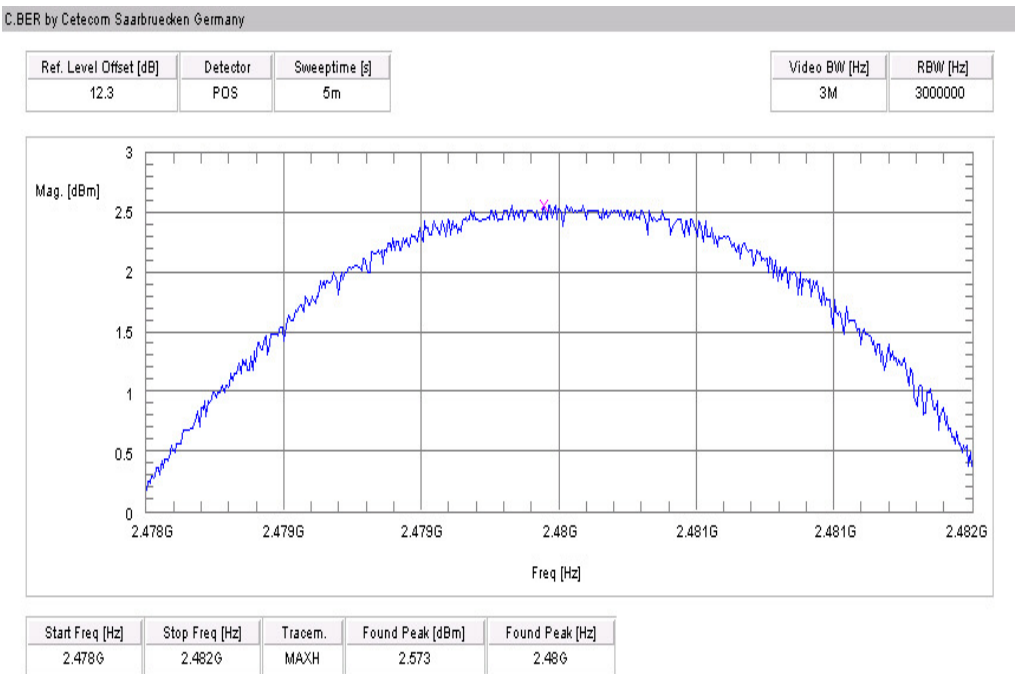


Plot 7: 8DPSK

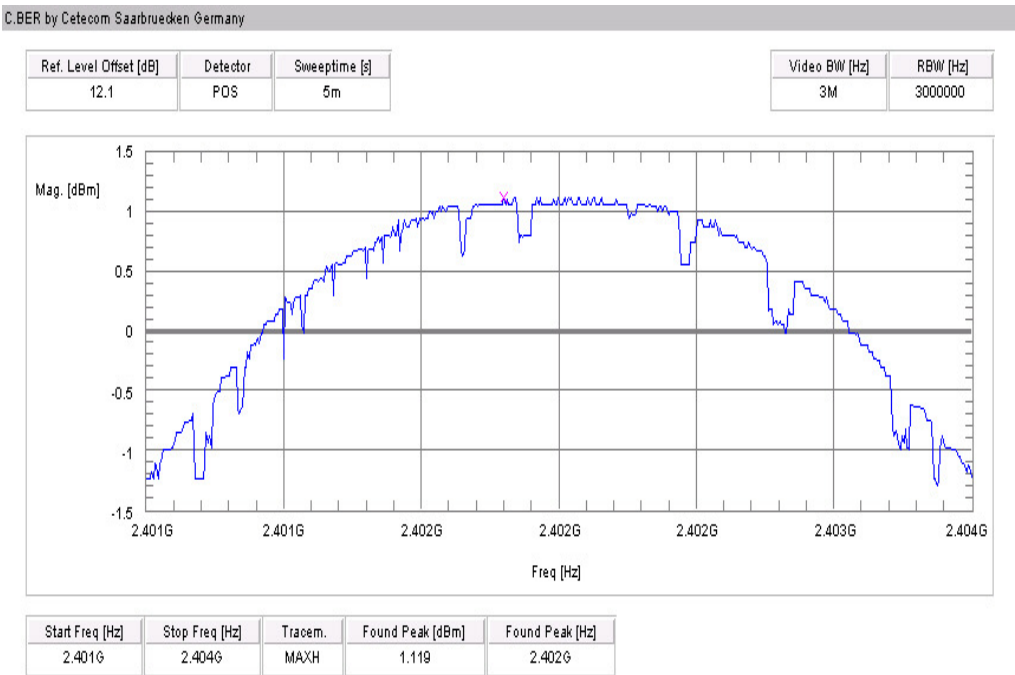

Plot 8: 8DPSK

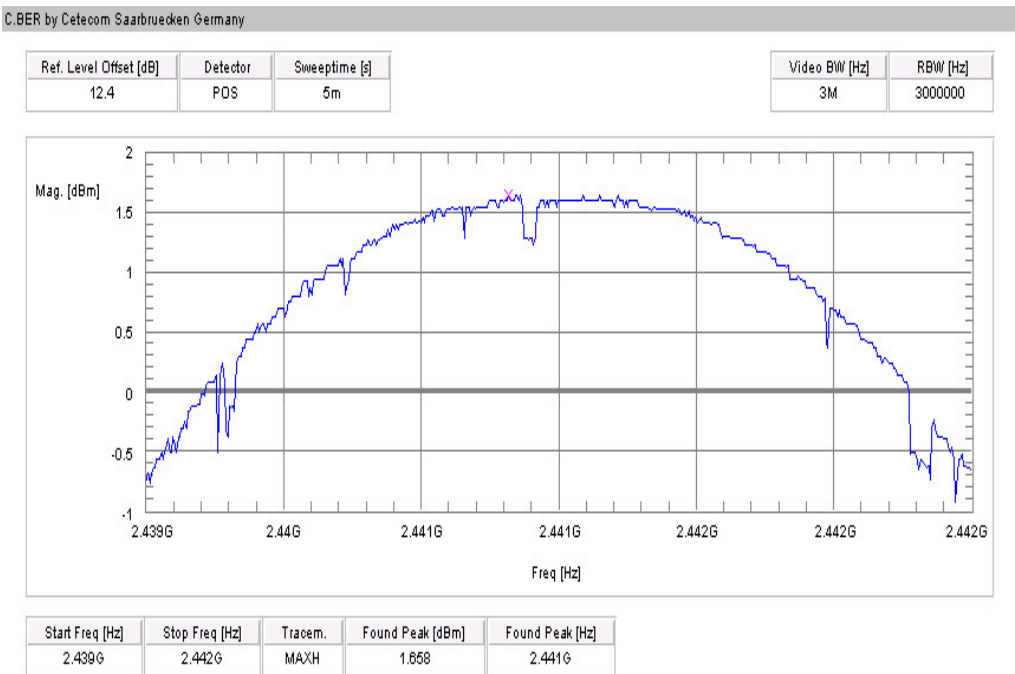

Plot 9: 8DPSK

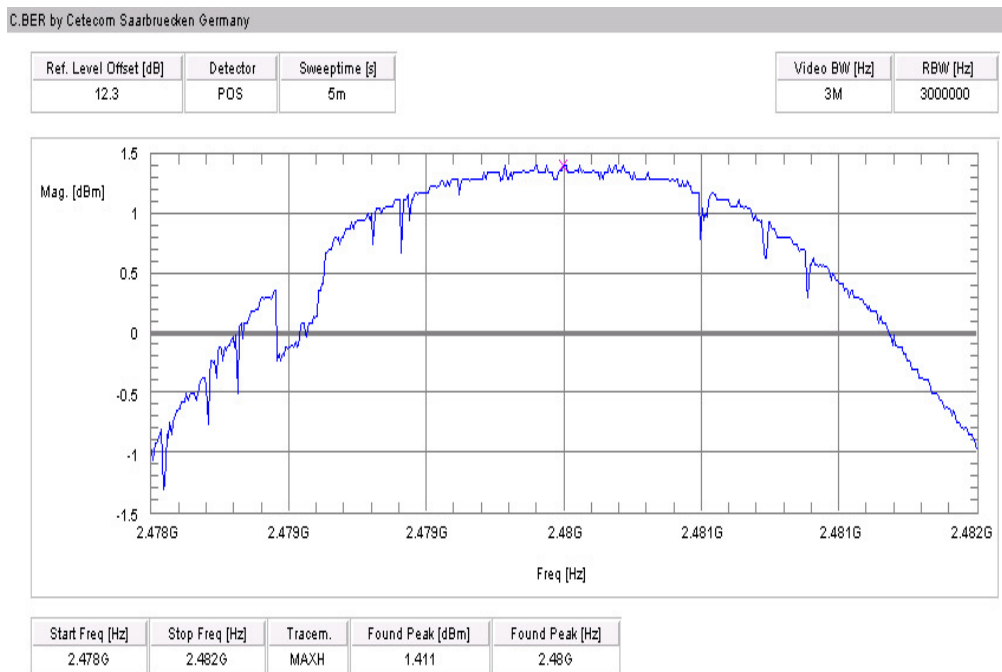

## Results:

| Modulation<br>Frequency [MHz] | Max. peak output power [dBm] |             |      |
|-------------------------------|------------------------------|-------------|------|
|                               | 2402                         | 2441        | 2480 |
| GFSK                          | 4.87                         | <b>5.47</b> | 5.06 |
| Pi/4 DQPSK                    | 2.33                         | <b>2.87</b> | 2.57 |
| 8DPSK                         | 1.12                         | <b>1.66</b> | 1.41 |
| Measurement uncertainty       | ±2dB                         |             |      |

RBW / VBW: 3 MHz

## Limits:

|                                                                        |               |
|------------------------------------------------------------------------|---------------|
| Under normal test conditions only, for frequency range 2400-2483.5 MHz | Max. 1.0 Watt |
|------------------------------------------------------------------------|---------------|

### 5.11 Max. peak output power (radiated) § 15.247 (b)(1)

Modulation: GFSK

Results:

| Test conditions         |                  | Max. peak output power EIRP [dBm] |       |       |
|-------------------------|------------------|-----------------------------------|-------|-------|
| Frequency [MHz]         |                  | 2402                              | 2442  | 2480  |
| T <sub>nom</sub>        | V <sub>nom</sub> | <b>-0.40</b>                      | -0.86 | -1.52 |
| Measurement uncertainty |                  | ±3dB                              |       |       |

RBW / VBW: 3 MHz

Measured at a distance of 3m

Modulation: Pi/4 DQPSK

Results:

| Test conditions         |                  | Max. peak output power EIRP [dBm] |       |       |
|-------------------------|------------------|-----------------------------------|-------|-------|
| Frequency [MHz]         |                  | 2402                              | 2442  | 2480  |
| T <sub>nom</sub>        | V <sub>nom</sub> | <b>-2.87</b>                      | -3.38 | -3.78 |
| Measurement uncertainty |                  | ±3dB                              |       |       |

RBW / VBW: 3 MHz

Measured at a distance of 3m

Modulation: GFSK

Results:

| Test conditions         |                  | Max. peak output power EIRP [dBm] |       |       |
|-------------------------|------------------|-----------------------------------|-------|-------|
| Frequency [MHz]         |                  | 2402                              | 2442  | 2480  |
| T <sub>nom</sub>        | V <sub>nom</sub> | <b>-3.98</b>                      | -4.23 | -4.53 |
| Measurement uncertainty |                  | ±3dB                              |       |       |

RBW / VBW: 3 MHz

Measured at a distance of 3m


Limits:

|                                                                        |               |
|------------------------------------------------------------------------|---------------|
| Under normal test conditions only, for frequency range 2400-2483.5 MHz | Max. 1.0 Watt |
|------------------------------------------------------------------------|---------------|


## 5.12 Band-edge compliance of conducted emissions §15.247 (d)

Modulation: GFSK


Plot 1 of 4 (hopping off, lowest frequency):

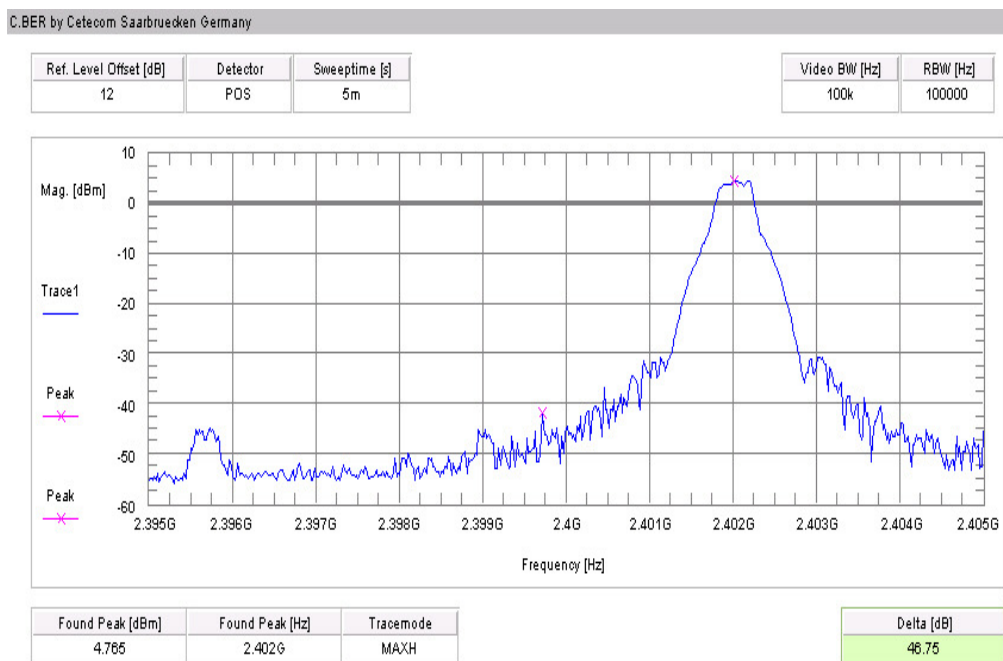


Plot 2 of 4 (hopping on, lowest frequency):

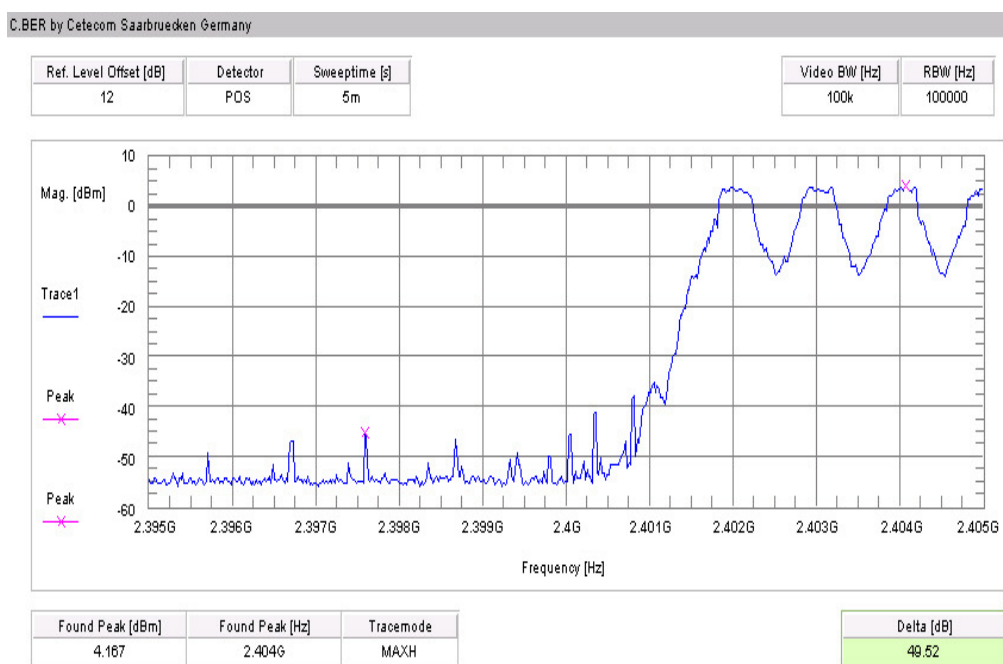

Plot 3 of 4 (hopping off, highest frequency):

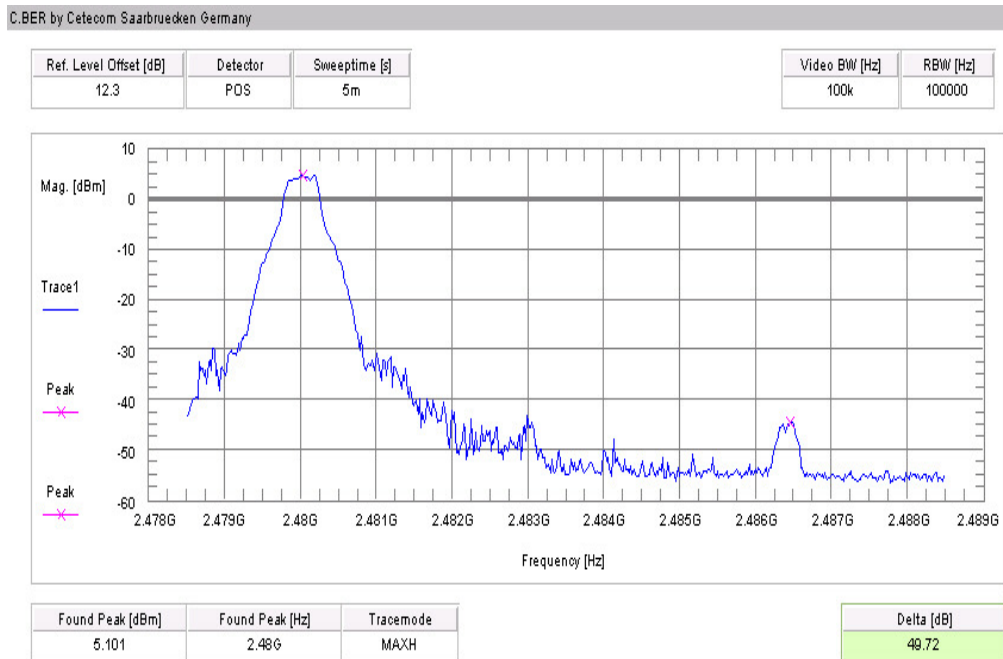

Plot 4 of 4 (hopping on, highest frequency):

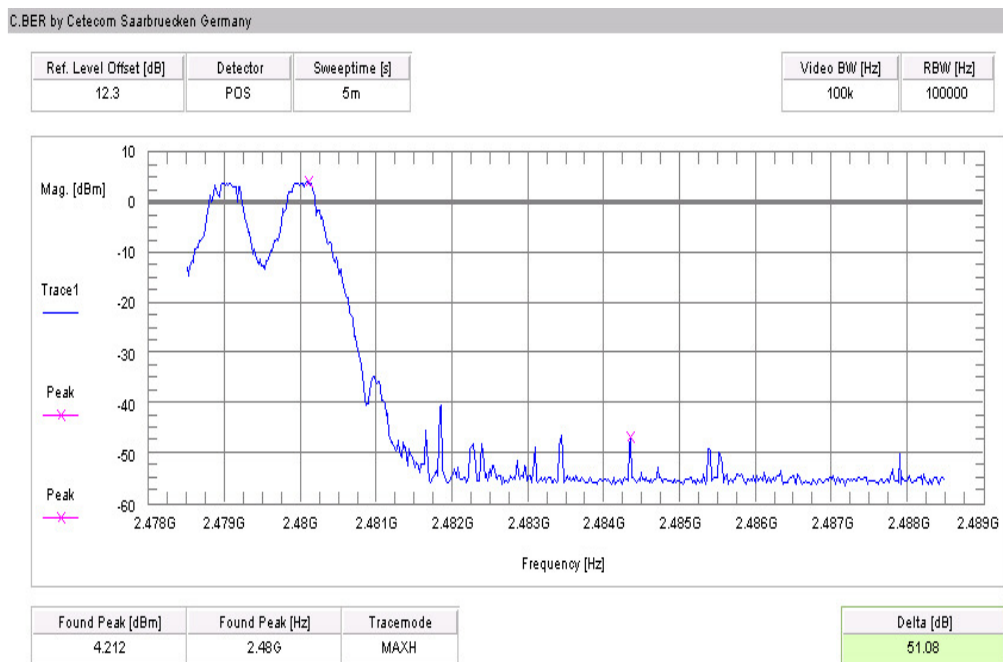


Results:


| SZENARIO                       | DELTA VALUE [DB] |
|--------------------------------|------------------|
| hopping off, lowest frequency  | > 20 dB          |
| hopping on, lowest frequency   | > 20 dB          |
| hopping off, highest frequency | > 20 dB          |
| hopping on, highest frequency  | > 20 dB          |
| Measurement uncertainty        | ±1,5dB           |

Modulation: Pi/4 DQPSK


Plot 1 of 4 (hopping off, lowest frequency):

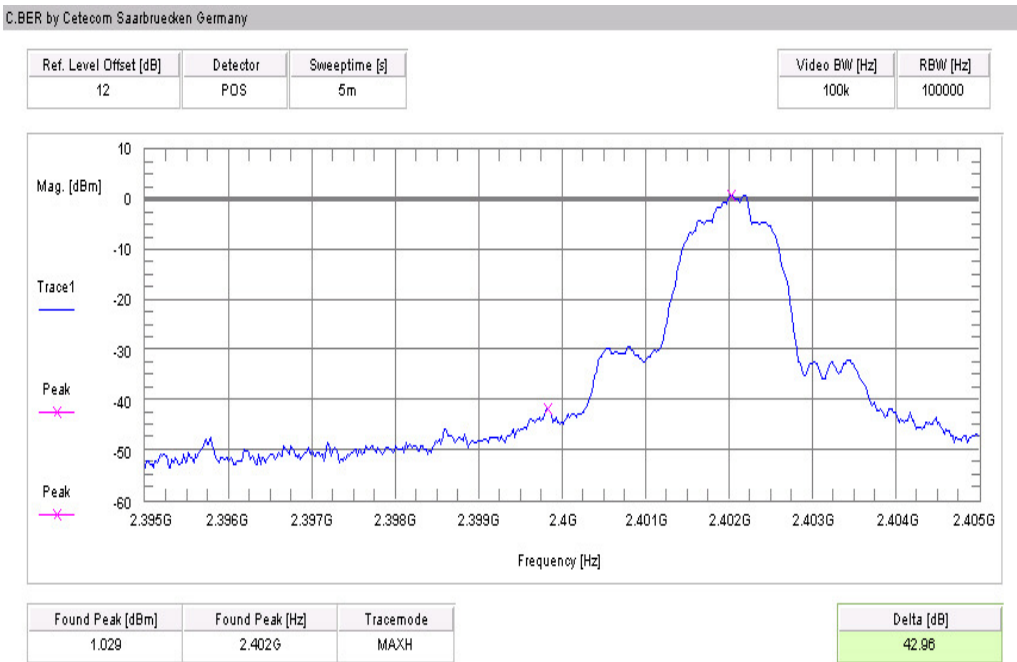


Plot 2 of 4 (hopping on, lowest frequency):

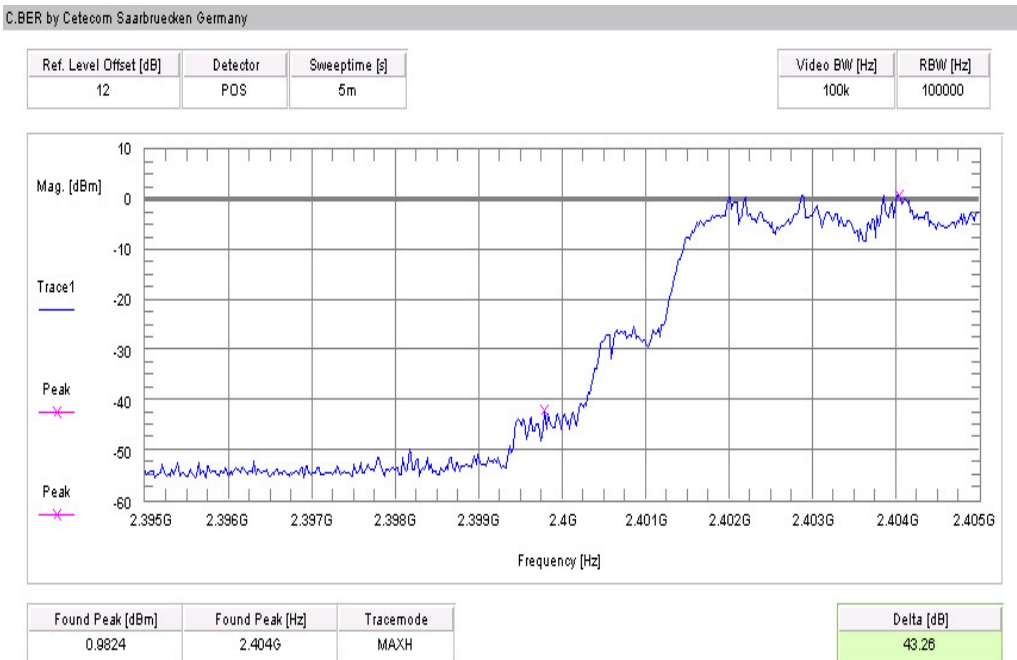

Plot 3 of 4 (hopping off, highest frequency):

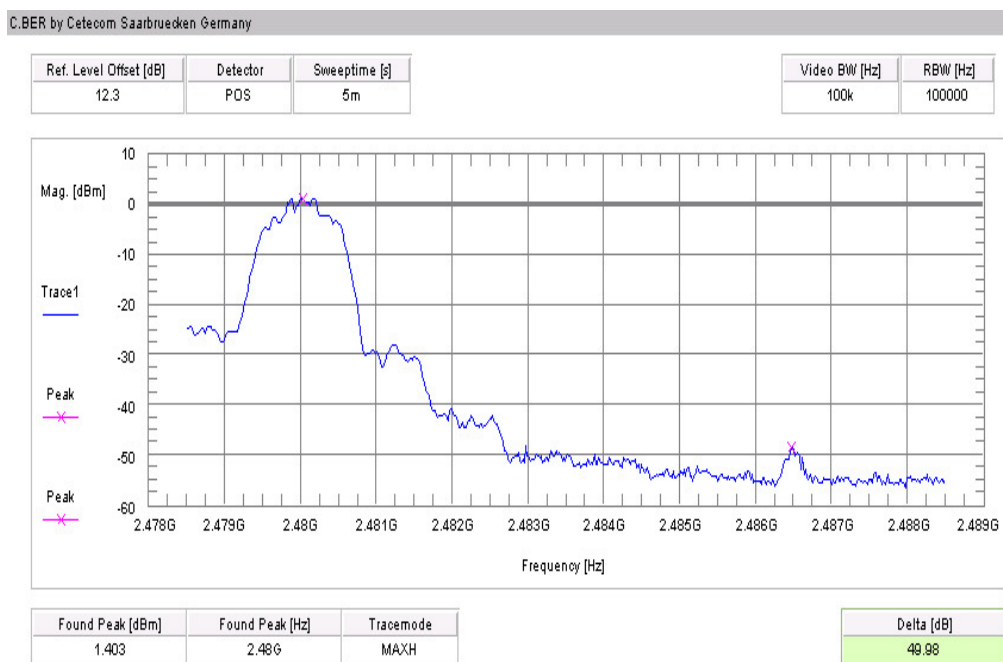

Plot 4 of 4 (hopping on, highest frequency):

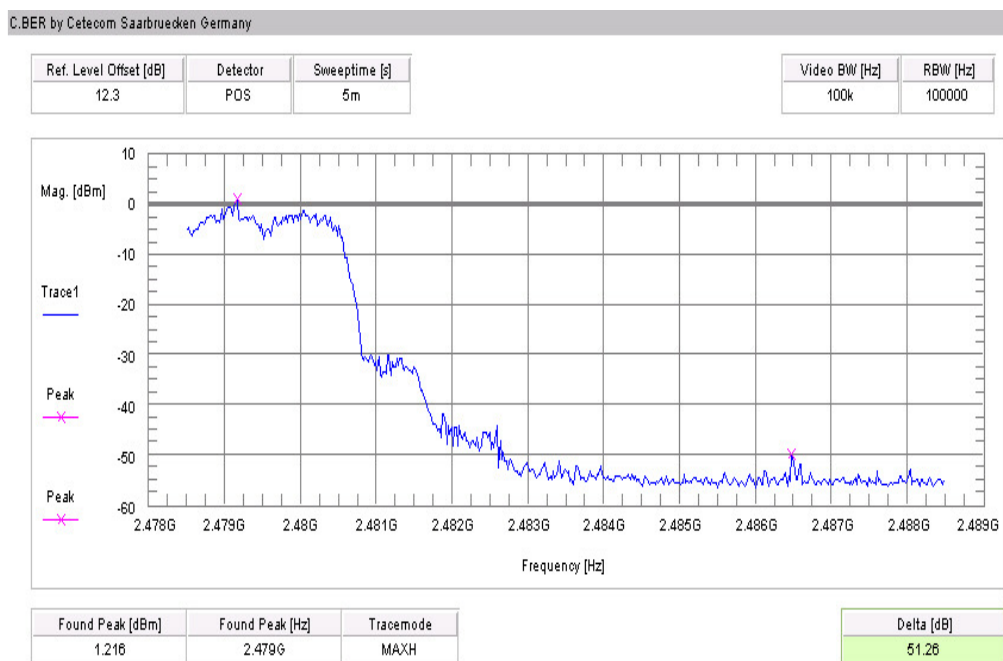


Results:


| SZENARIO                       | DELTA VALUE [DB] |
|--------------------------------|------------------|
| hopping off, lowest frequency  | > 20 dB          |
| hopping on, lowest frequency   | > 20 dB          |
| hopping off, highest frequency | > 20 dB          |
| hopping on, highest frequency  | > 20 dB          |
| Measurement uncertainty        | ±1,5dB           |

## Modulation: 8 DPSK


Plot 1 of 4 (hopping off, lowest frequency):

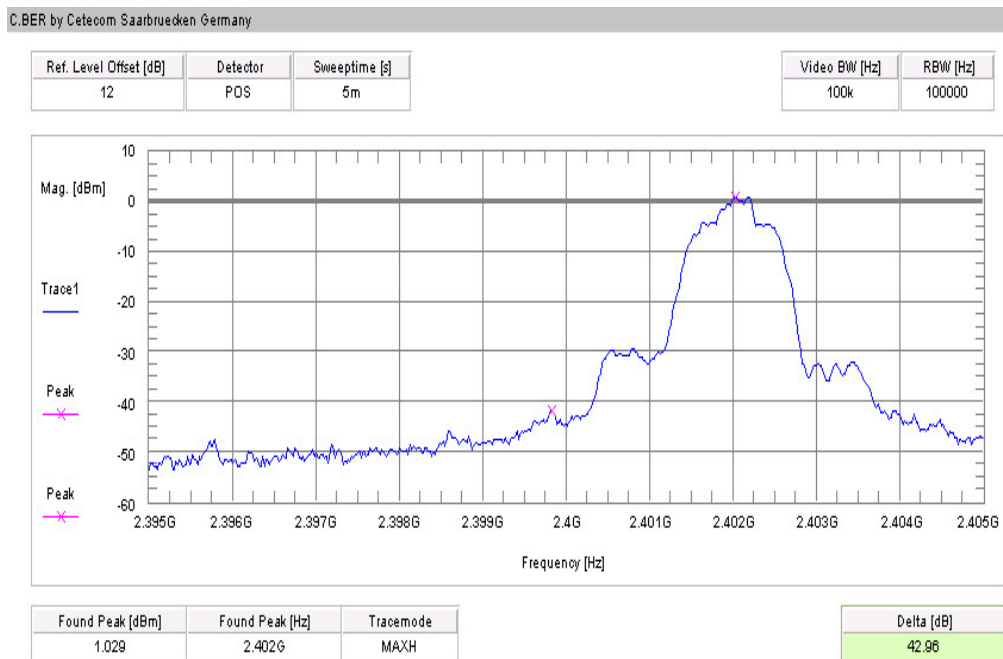


Plot 2 of 4 (hopping on, lowest frequency):

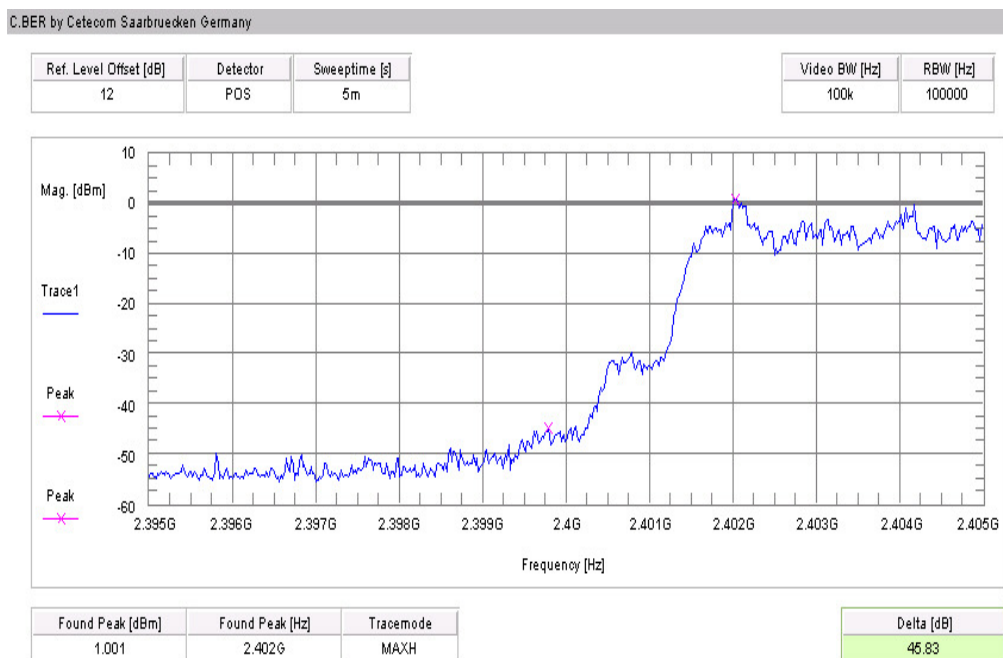

Plot 3 of 4 (hopping off, highest frequency):

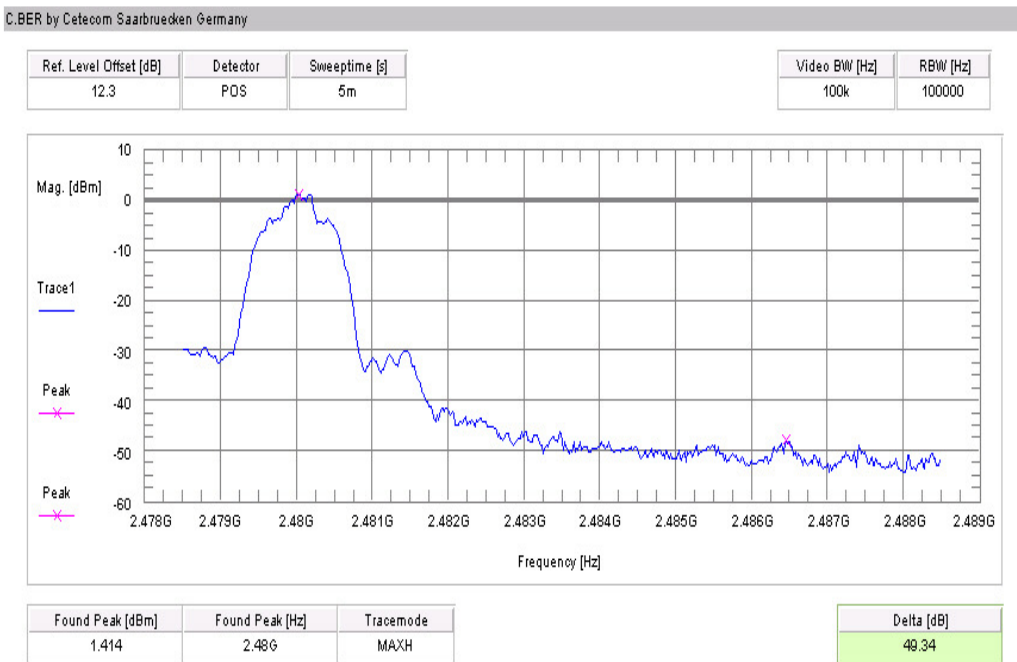

Plot 4 of 4 (hopping on, highest frequency):

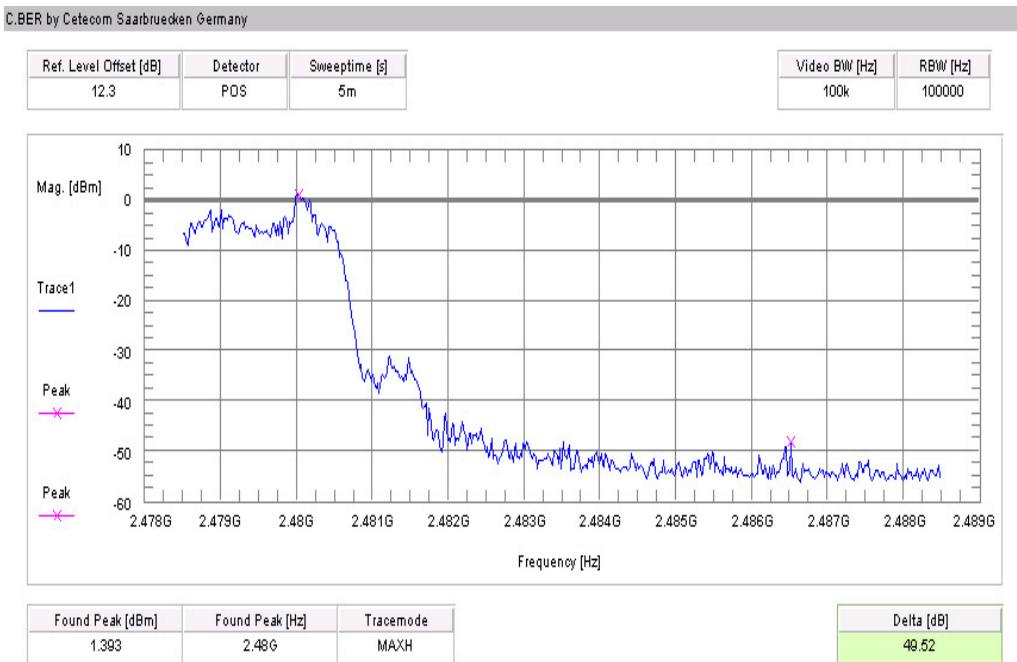

Results:

| SZENARIO                       | DELTA VALUE [DB] |
|--------------------------------|------------------|
| hopping off, lowest frequency  | > 20 dB          |
| hopping on, lowest frequency   | > 20 dB          |
| hopping off, highest frequency | > 20 dB          |
| hopping on, highest frequency  | > 20 dB          |
| Measurement uncertainty        | ±1,5dB           |


Limits:

|                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Under normal test conditions only | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)). |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## 5.13 Band-edge compliance of radiated emissions §15.205


Modulation: GFSK

Plot 1: Max field strength in 3m distance (single frequency)

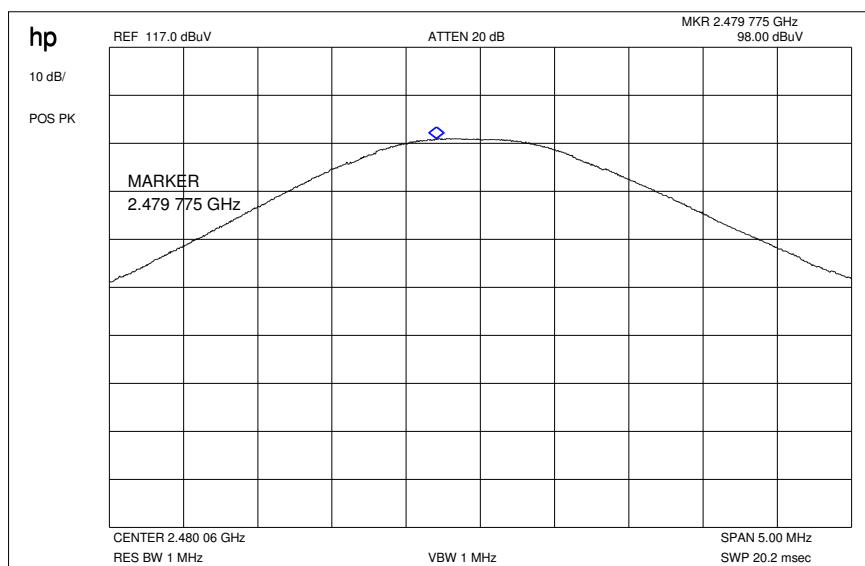

Result: 98.00 dBμV/m


Plot 2: Marker-Delta Method (single carrier)

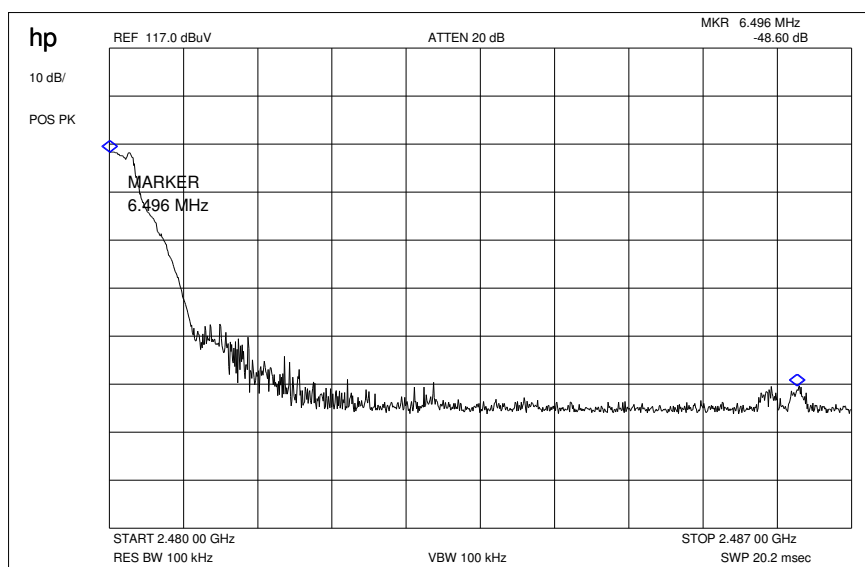

Marker-Delta-Value: 48.60 dB

This measurement was made to show that the behaviour of the system is conform to FCC 15.205 (restricted bands)


Plot 3: Marker-Delta Method (hopping)

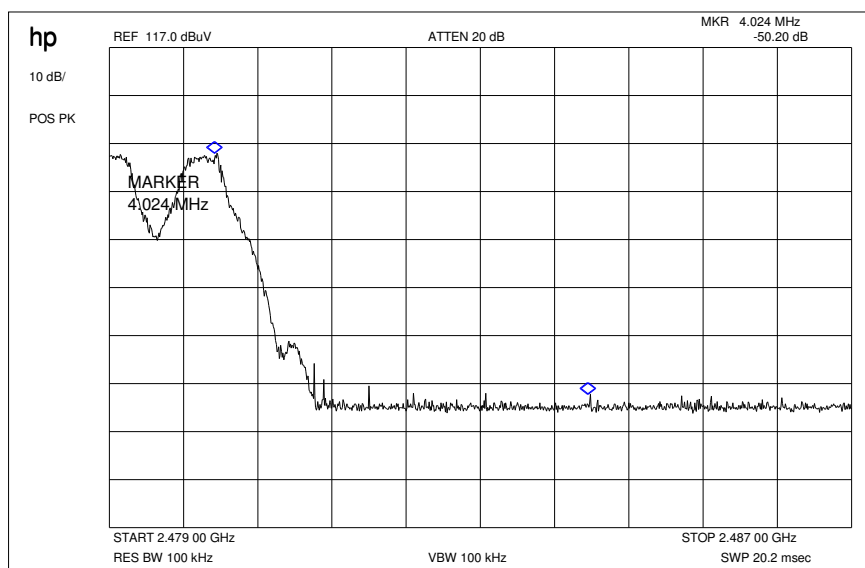


Marker-Delta-Value: 50.20 dB

This measurement was made to show that the behaviour of the system is conform to FCC 15.205 (restricted bands)

Plot 4: Restricted Bands low

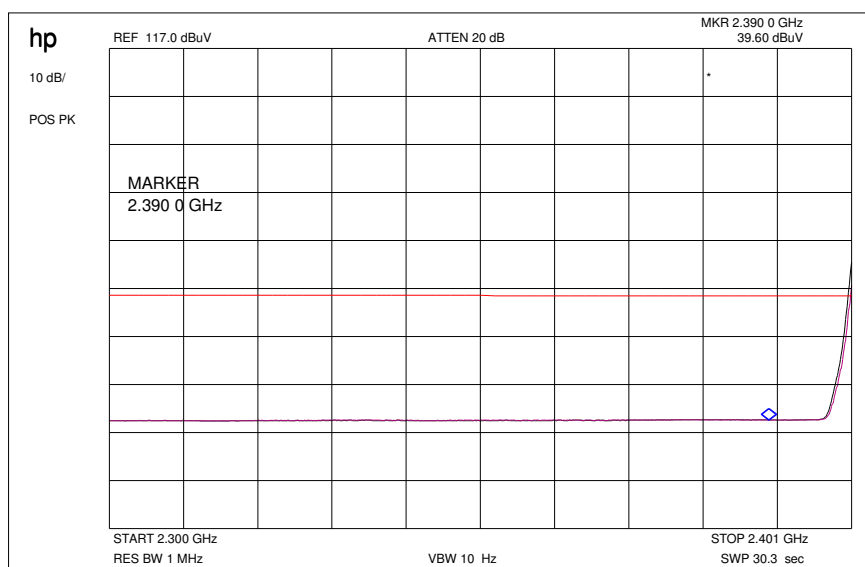

Plot 5: Restricted Bands high

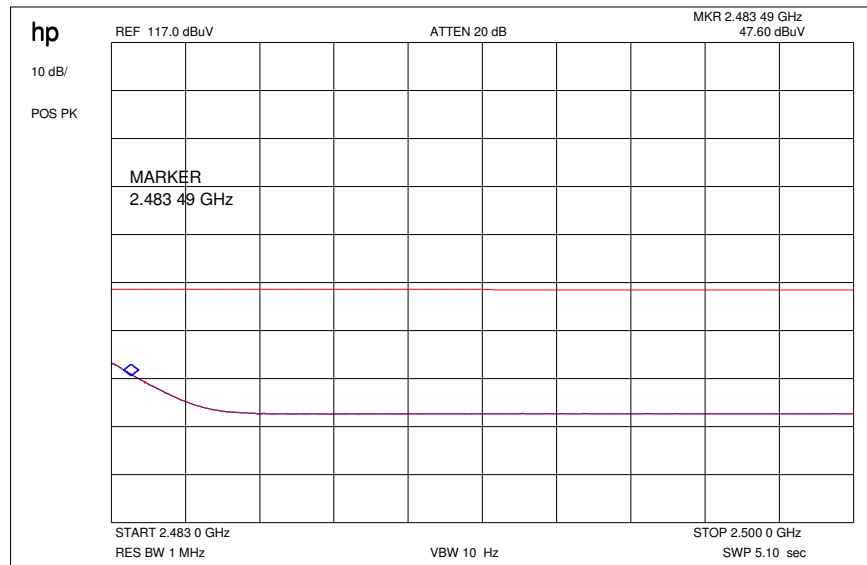Results & Limits:


## Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

| high channel       | setup                                        | measured value (3m)                                  | correction factor (3m)                                   | calculated value (3m)                                                    |
|--------------------|----------------------------------------------|------------------------------------------------------|----------------------------------------------------------|--------------------------------------------------------------------------|
| Max. peak value    | 1 MHz RBW<br>1 MHz VBW                       | 98.00 dB $\mu$ V/m                                   | -6.3                                                     | 91.7 dB $\mu$ V/m                                                        |
| Max. average value | Calculated with duty cycle correction factor | 91.7 dB $\mu$ V/m peak                               | -1.07dB<br>duty cycle correction factor (worst case DH5) | 90.63 dB $\mu$ V/m                                                       |
| Delta value        | Peak<br>100 kHz<br>RBW/VBW                   | 48.60 dB (single carrier)<br>50.20 dB (hopping mode) | -                                                        | -                                                                        |
| Value at band edge | limit 54 dB $\mu$ V/m                        |                                                      |                                                          | 42.03 dB $\mu$ V/m (single carrier)<br>40.43 dB $\mu$ V/m (hopping mode) |
| <b>Statement:</b>  |                                              |                                                      |                                                          | <b>Complies</b>                                                          |


Modulation: Pi/4 DQPSK

Plot 1: Max field strength in 3m distance (single frequency)

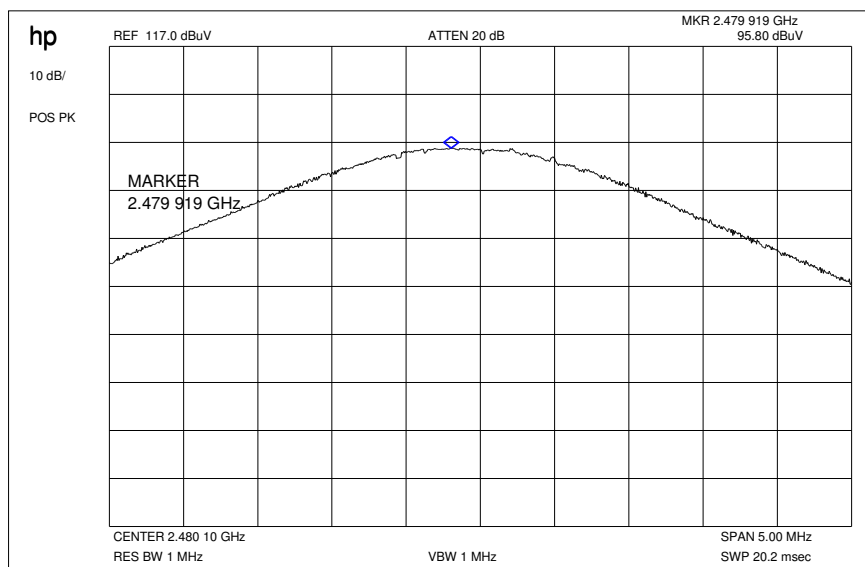

Result: 95.80 dB $\mu$ V/m


Plot 2: Marker-Delta Method (single carrier)

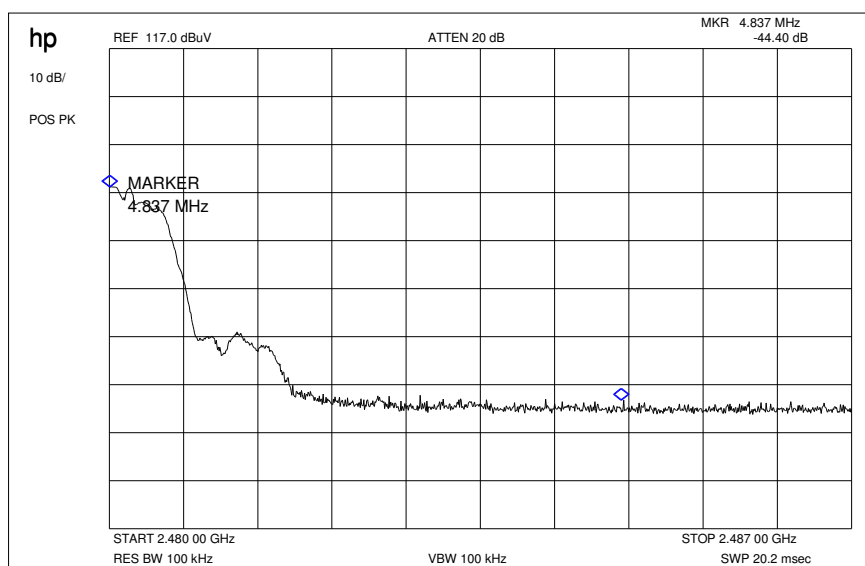

Marker-Delta-Value: 44.40 dB

This measurement was made to show that the behaviour of the system is conform to FCC 15.205 (restricted bands)


Plot 3: Marker-Delta Method (hopping)

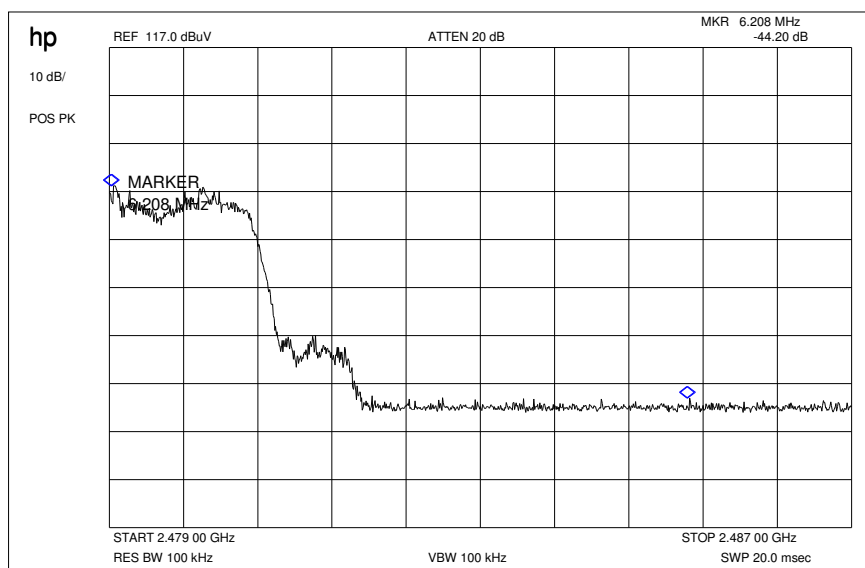


Marker-Delta-Value: 44.20 dB

This measurement was made to show that the behaviour of the system is conform to FCC 15.205 (restricted bands)

Plot 4: Restricted Bands low

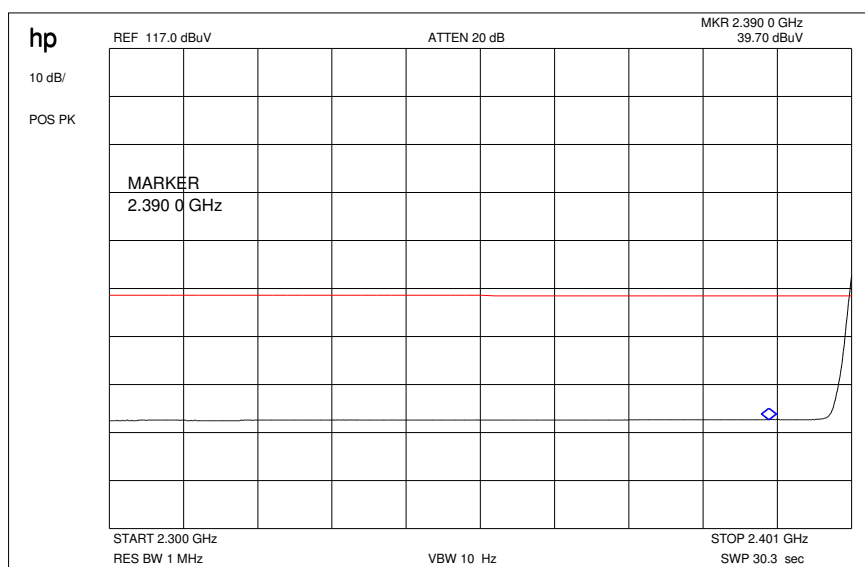

Plot 5: Restricted Bands high

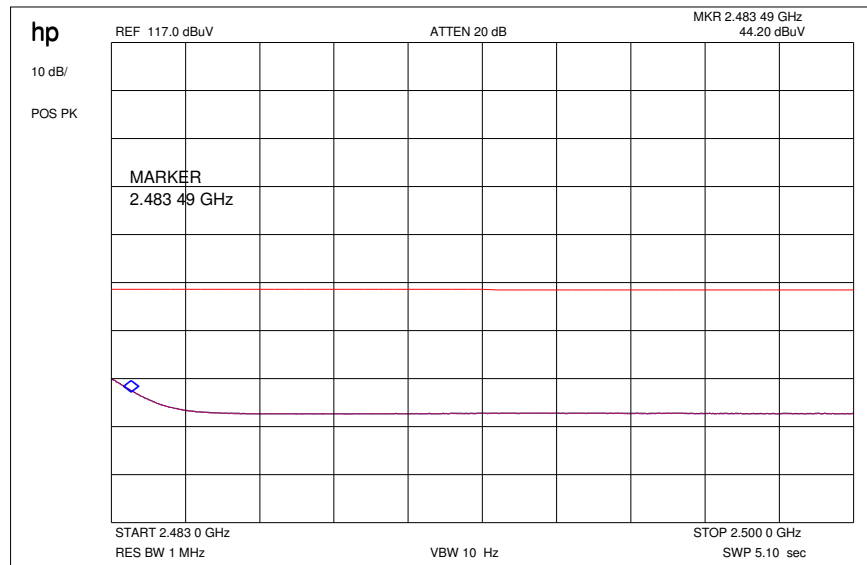Results & Limits:


## Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

| high channel       | setup                                        | measured value (3m)                                  | correction factor (3m)                                   | calculated value (3m)                                                    |
|--------------------|----------------------------------------------|------------------------------------------------------|----------------------------------------------------------|--------------------------------------------------------------------------|
| Max. peak value    | 1 MHz RBW<br>1 MHz VBW                       | 95.80 dB $\mu$ V/m                                   | -6.3                                                     | 89.5 dB $\mu$ V/m                                                        |
| Max. average value | Calculated with duty cycle correction factor | 89.5 dB $\mu$ V/m peak                               | -1,07dB<br>duty cycle correction factor (worst case DH5) | 88.43 dB $\mu$ V/m                                                       |
| Delta value        | Peak<br>100 kHz<br>RBW/VBW                   | 44.40 dB (single carrier)<br>44.20 dB (hopping mode) | -                                                        | -                                                                        |
| Value at band edge | limit 54 dB $\mu$ V/m                        |                                                      |                                                          | 44.03 dB $\mu$ V/m (single carrier)<br>44.23 dB $\mu$ V/m (hopping mode) |
| <b>Statement:</b>  |                                              |                                                      |                                                          | <b>Complies</b>                                                          |


Modulation: 8 DPSK

Plot 1: Max field strength in 3m distance (single frequency)

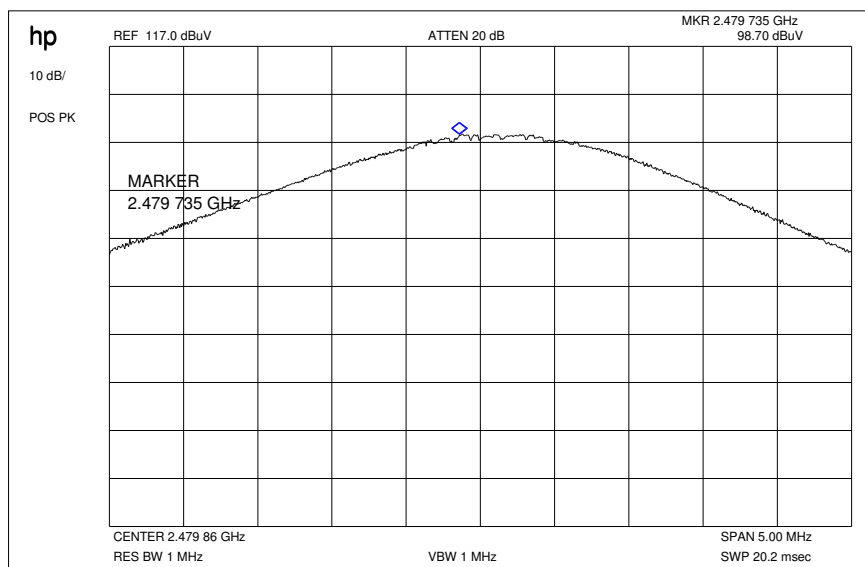

Result: 98.70 dB $\mu$ V/m


Plot 2: Marker-Delta Method (single carrier)

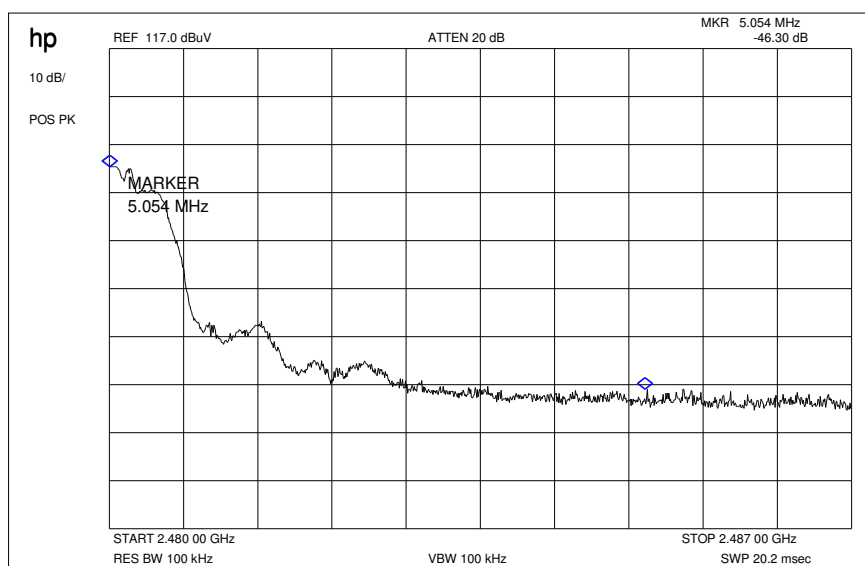

Marker-Delta-Value: 46.30 dB

This measurement was made to show that the behaviour of the system is conform to FCC 15.205 (restricted bands)


Plot 3: Marker-Delta Method (hopping)

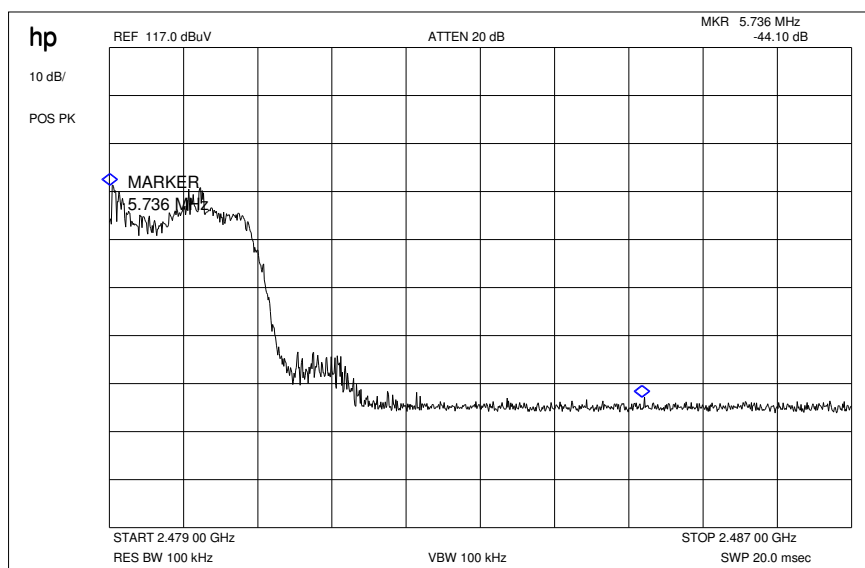


Marker-Delta-Value: 44.10 dB

This measurement was made to show that the behaviour of the system is conform to FCC 15.205 (restricted bands)

Plot 4: Restricted Bands low

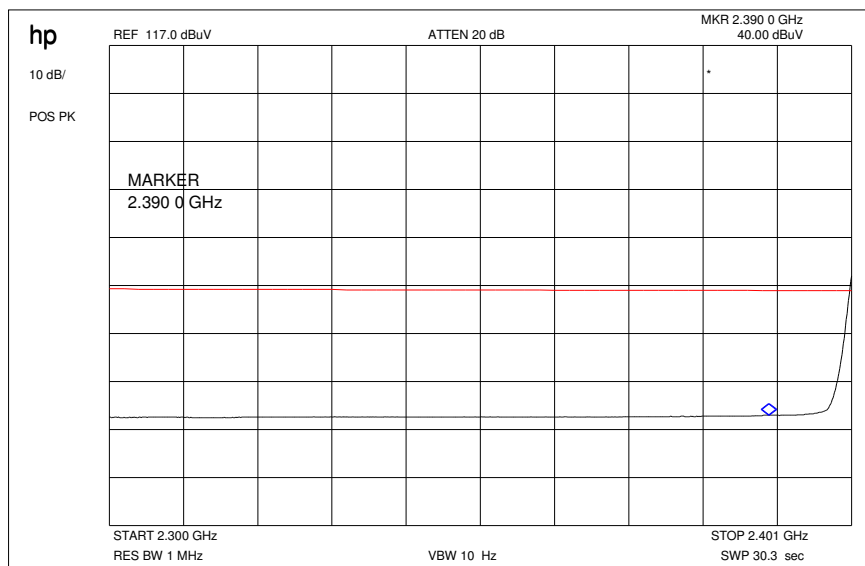

Plot 5: Restricted Bands high

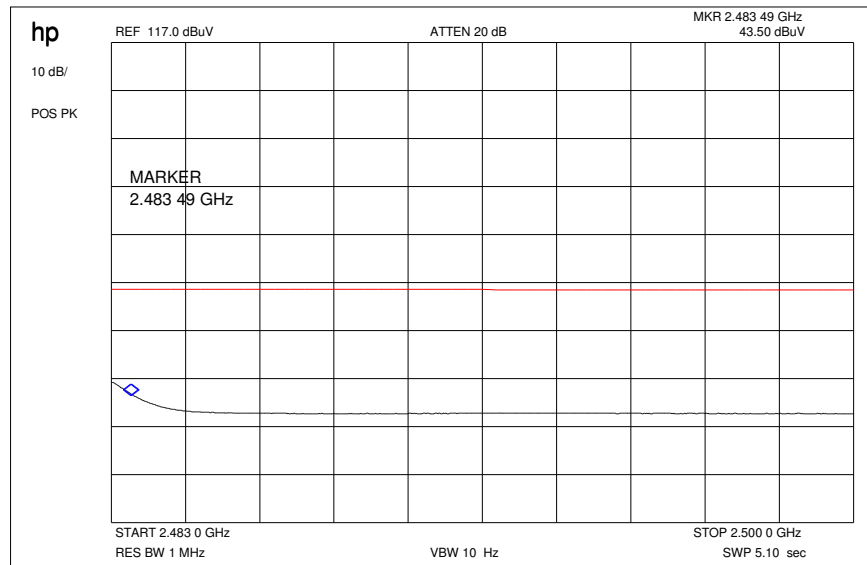Results & Limits:


## Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1 MHz RBW / 10 Hz VBW for average at a distance of 3m.


| high channel       | setup                                        | measured value (3m)                                  | correction factor (3m)                                   | calculated value (3m)                                                    |
|--------------------|----------------------------------------------|------------------------------------------------------|----------------------------------------------------------|--------------------------------------------------------------------------|
| Max. peak value    | 1 MHz RBW<br>1 MHz VBW                       | 98.70 dB $\mu$ V/m                                   | -6.3                                                     | 92.40 dB $\mu$ V/m                                                       |
| Max. average value | Calculated with duty cycle correction factor | 92.40 dB $\mu$ V/m peak                              | -1.07dB<br>duty cycle correction factor (worst case DH5) | 91.33 dB $\mu$ V/m                                                       |
| Delta value        | Peak<br>100 kHz<br>RBW/VBW                   | 46.30 dB (single carrier)<br>44.10 dB (hopping mode) | -                                                        | -                                                                        |
| Value at band edge | limit 54 dB $\mu$ V/m                        |                                                      |                                                          | 45.03 dB $\mu$ V/m (single carrier)<br>47.23 dB $\mu$ V/m (hopping mode) |
| <b>Statement:</b>  |                                              |                                                      |                                                          | <b>Complies</b>                                                          |

**5.14 Spurious Emissions - conducted (Transmitter) § 15.247 (c)(1)**Modulation: GFSK


Plot 1 of 3: lowest channel

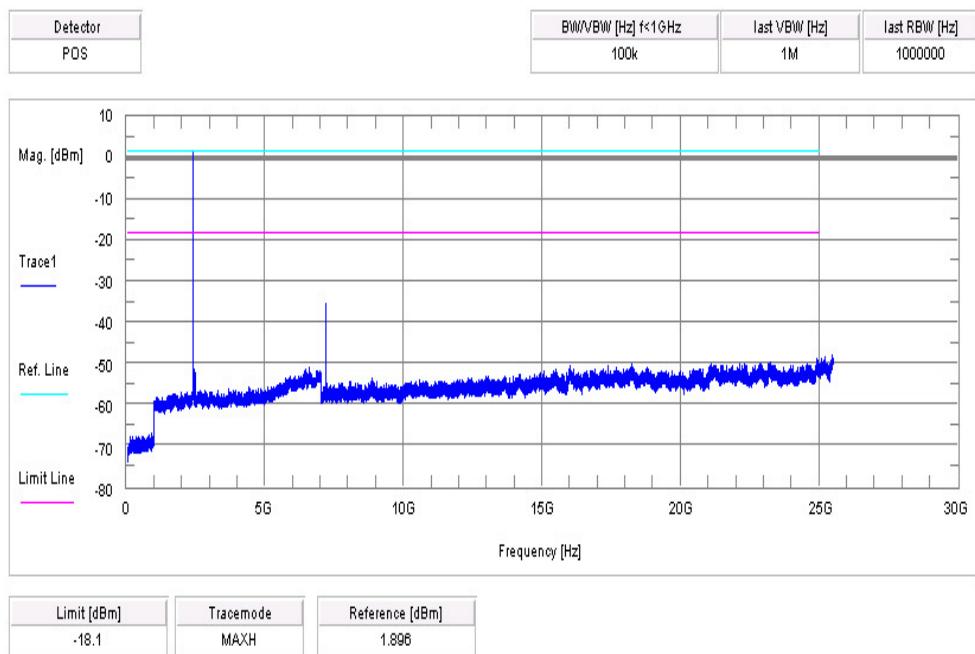

Plot 2 of 3: middle channel

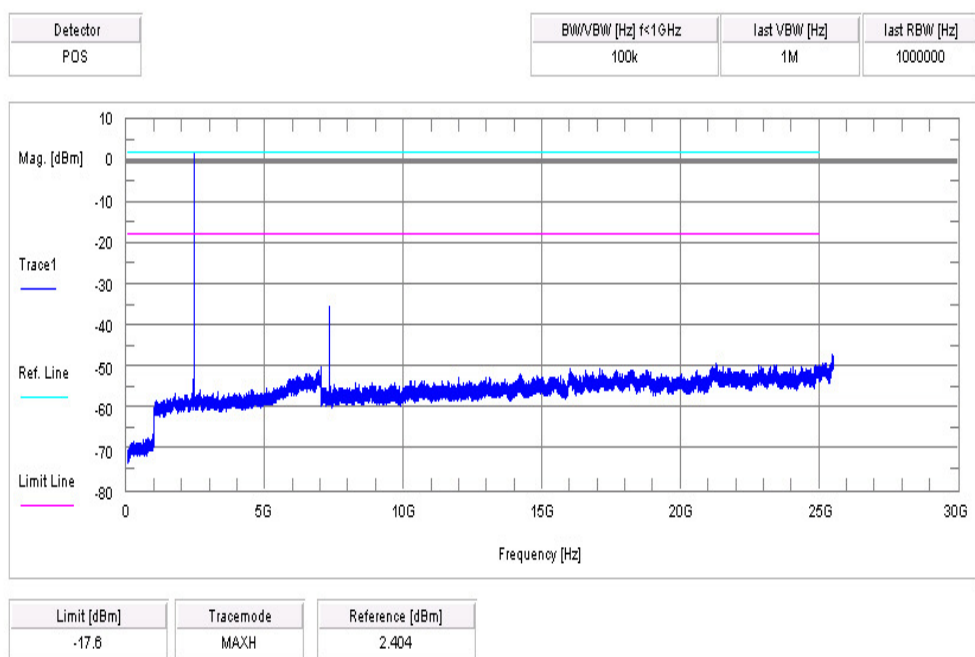

Plot 3 of 3: highest channel

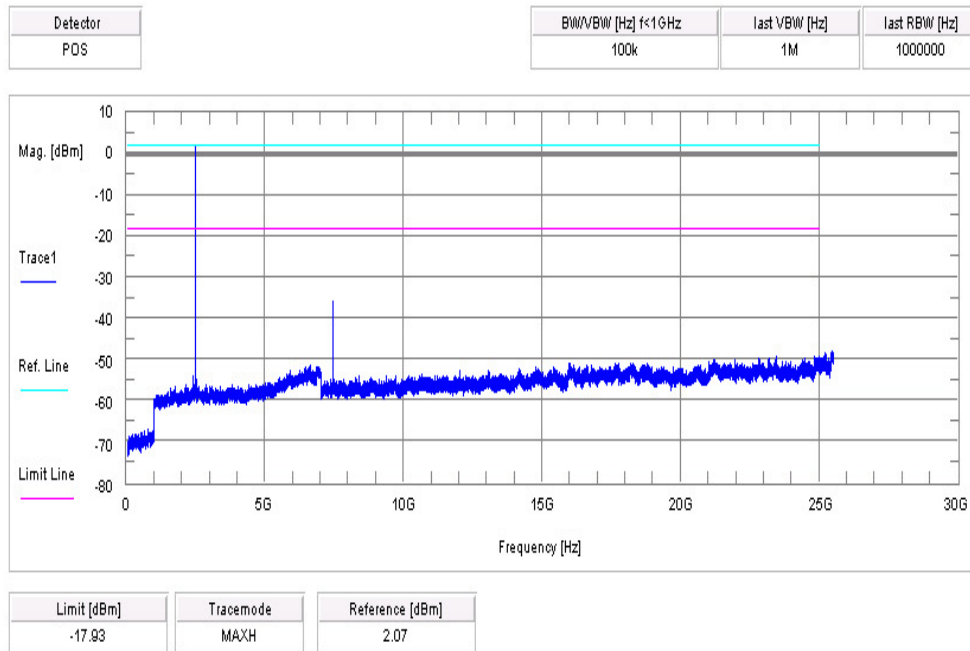

## Result & Limits:

| Emission Limitation                                               |  |                             |                                   |                                                      |                     |
|-------------------------------------------------------------------|--|-----------------------------|-----------------------------------|------------------------------------------------------|---------------------|
| f [MHz]                                                           |  | amplitude of emission [dBm] | limit max. allowed emission power | actual attenuation below frequency of operation [dB] | results             |
| 2402                                                              |  | 1.90                        | 30 dBm                            |                                                      | Operating frequency |
| No critical peaks detected!<br>All found peaks are below -30 dBm. |  |                             | -20 dBc                           |                                                      | complies            |
| 2441                                                              |  | 2.40                        | 30 dBm                            |                                                      | Operating frequency |
| No critical peaks detected!<br>All found peaks are below -30 dBm. |  |                             | -20 dBc                           |                                                      | complies            |
| 2480                                                              |  | 2.07                        | 30 dBm                            |                                                      | Operating frequency |
| No critical peaks detected!<br>All found peaks are below -30 dBm. |  |                             | -20 dBc                           |                                                      | complies            |
| Measurement uncertainty                                           |  | ± 3dB                       |                                   |                                                      |                     |


F < 1 GHz: RBW: 100 kHz VBW: 100 kHz  
F > 1 GHz: RBW: 1 MHz VBW: 1 MHz

|                                   |                                                                                                                                                                                                                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Under normal test conditions only | In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|


Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

Modulation: Pi/4 DQPSK


Plot 1 of 3: lowest channel

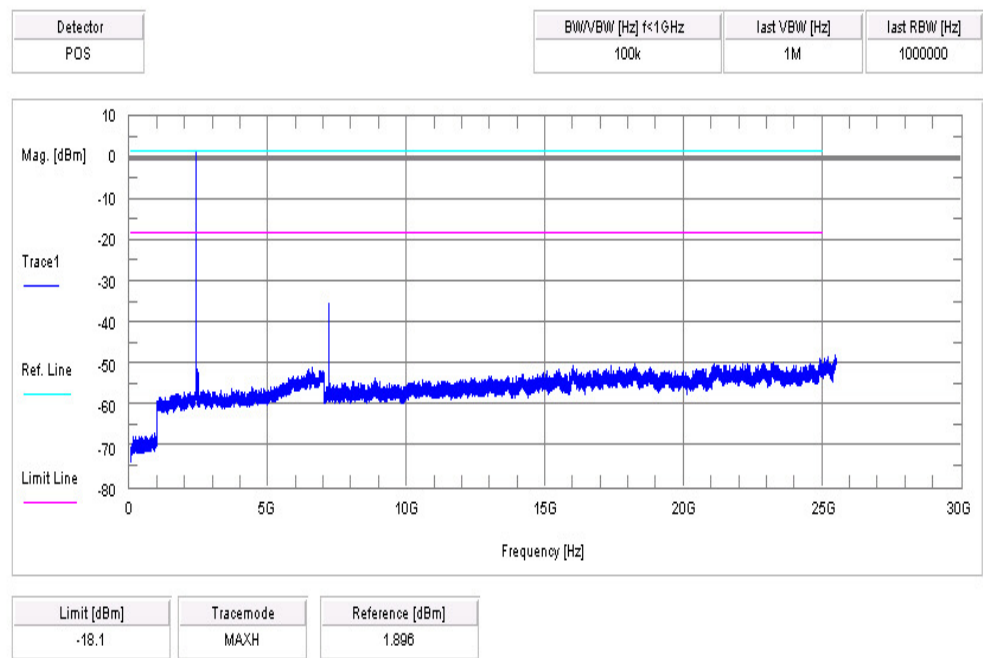

Plot 2 of 3: middle channel

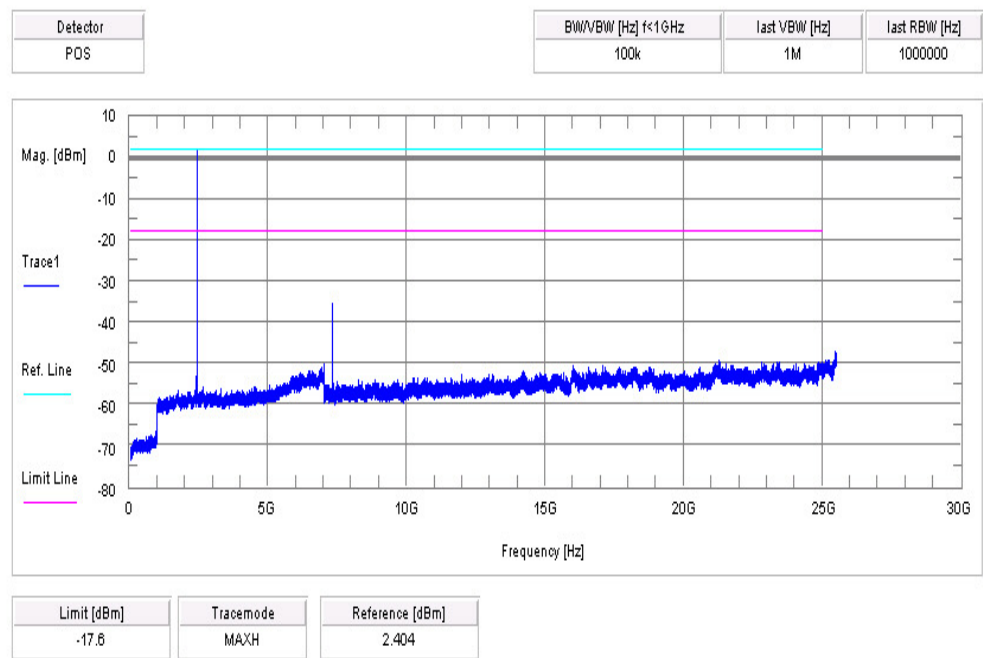

Plot 3 of 3: highest channel

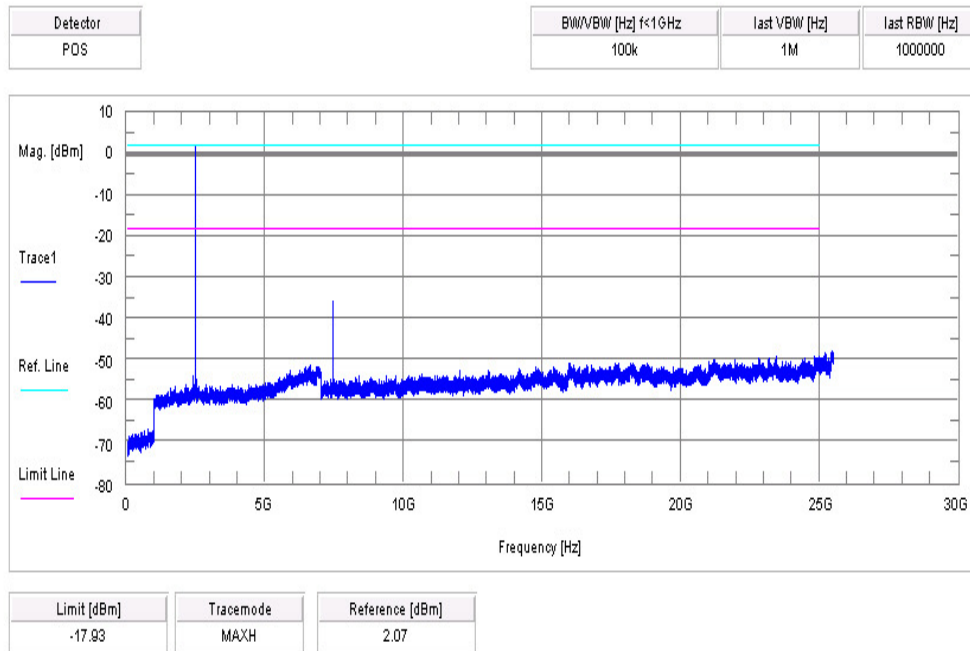

Result & Limits:

| Emission Limitation                                               |  |                             |                                   |                                                      |                     |
|-------------------------------------------------------------------|--|-----------------------------|-----------------------------------|------------------------------------------------------|---------------------|
| f [MHz]                                                           |  | amplitude of emission [dBm] | limit max. allowed emission power | actual attenuation below frequency of operation [dB] | results             |
| 2402                                                              |  | 1.90                        | 30 dBm                            |                                                      | Operating frequency |
| No critical peaks detected!<br>All found peaks are below -30 dBm. |  |                             | -20 dBc                           |                                                      | complies            |
| 2441                                                              |  | 2.40                        | 30 dBm                            |                                                      | Operating frequency |
| No critical peaks detected!<br>All found peaks are below -30 dBm. |  |                             | -20 dBc                           |                                                      | complies            |
| 2480                                                              |  | 2.07                        | 30 dBm                            |                                                      | Operating frequency |
| No critical peaks detected!<br>All found peaks are below -30 dBm. |  |                             | -20 dBc                           |                                                      | complies            |
| Measurement uncertainty                                           |  | ± 3dB                       |                                   |                                                      |                     |


F < 1 GHz: RBW: 100 kHz VBW: 100 kHz  
F > 1 GHz: RBW: 1 MHz VBW: 1 MHz

|                                   |                                                                                                                                                                                                                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Under normal test conditions only | In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|


Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

Modulation: 8 DPSK


Plot 1 of 3: lowest channel

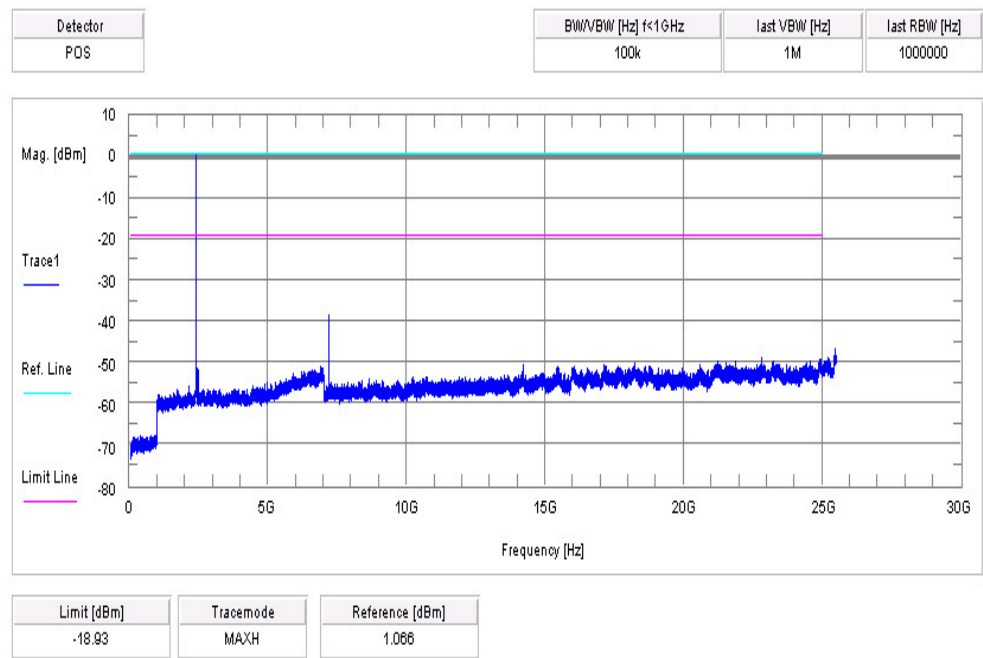

Plot 2 of 3: middle channel

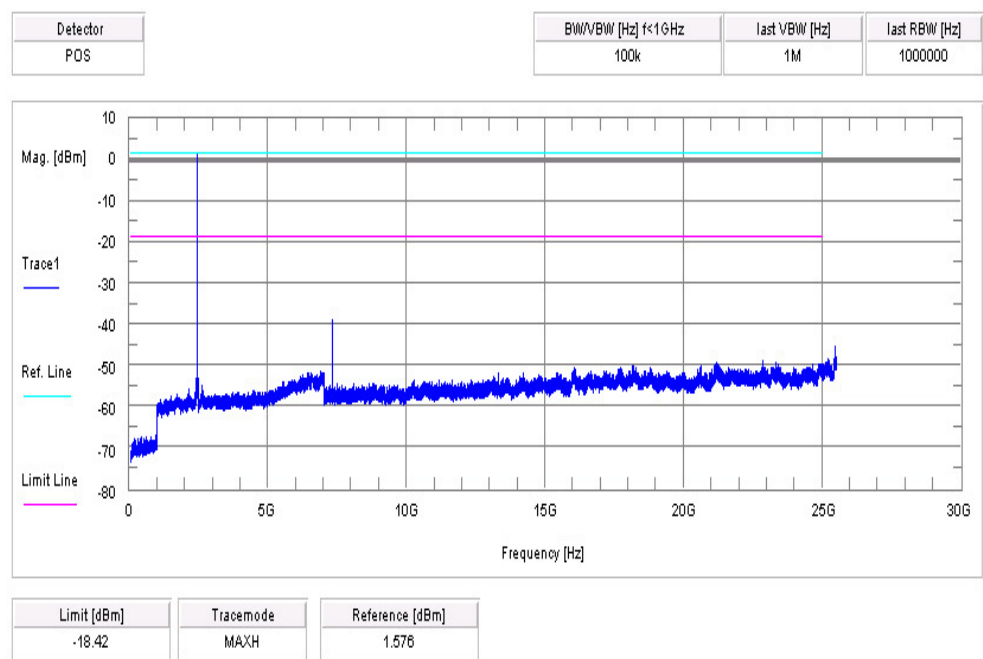

Plot 3 of 3: highest channel

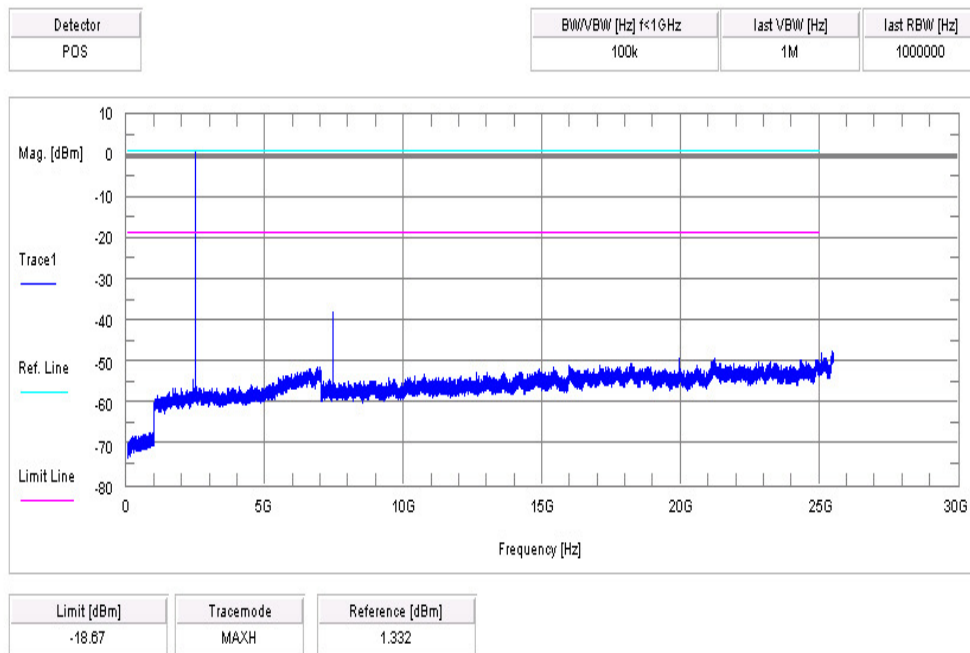

## Result & Limits:

| Emission Limitation                                               |  |                             |                                   |                                                      |                     |
|-------------------------------------------------------------------|--|-----------------------------|-----------------------------------|------------------------------------------------------|---------------------|
| f [MHz]                                                           |  | amplitude of emission [dBm] | limit max. allowed emission power | actual attenuation below frequency of operation [dB] | results             |
| 2402                                                              |  | 1.06                        | 30 dBm                            |                                                      | Operating frequency |
| No critical peaks detected!<br>All found peaks are below -30 dBm. |  |                             | -20 dBc                           |                                                      | complies            |
| 2441                                                              |  | 1.58                        | 30 dBm                            |                                                      | Operating frequency |
| No critical peaks detected!<br>All found peaks are below -30 dBm. |  |                             | -20 dBc                           |                                                      | complies            |
| 2480                                                              |  | 1.33                        | 30 dBm                            |                                                      | Operating frequency |
| No critical peaks detected!<br>All found peaks are below -30 dBm. |  |                             | -20 dBc                           |                                                      | complies            |
| Measurement uncertainty                                           |  | ± 3dB                       |                                   |                                                      |                     |

F < 1 GHz: RBW: 100 kHz VBW: 100 kHz  
F > 1 GHz: RBW: 1 MHz VBW: 1 MHz

|                                   |                                                                                                                                                                                                                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Under normal test conditions only | In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

## 5.15 Spurious Emissions > 30 MHz- radiated (Transmitter) § 15.247 (c)(1)

Modulation: GFSK

Plot 1: 0.03 - 1 GHz vertical/horizontal (lowest channel)

### Information


|                       |                               |
|-----------------------|-------------------------------|
| EUT:                  | EX2008P                       |
| Serial Number:        | 354680029500288               |
| Test Description:     | FCC part 15 class B @ 10m     |
| Operating Conditions: | BT Channel 00                 |
| Operator Name:        | Folz                          |
| Comment:              | Powered with: AC 115V / 60 Hz |

### Scan Setup: FCC\_Fin [EMI radiated]

|                 |                                   |
|-----------------|-----------------------------------|
| Hardware Setup: | EMI radiated\Electric Field (NOS) |
| Level Unit:     | dBμV/m                            |

| Subrange     | Detectors | IF Bandwidth | Meas. Time | Receiver |
|--------------|-----------|--------------|------------|----------|
| 30MHz - 1GHz | QuasiPeak | 120kHz       | 15s        | Receiver |

### FCC\_1 GHz

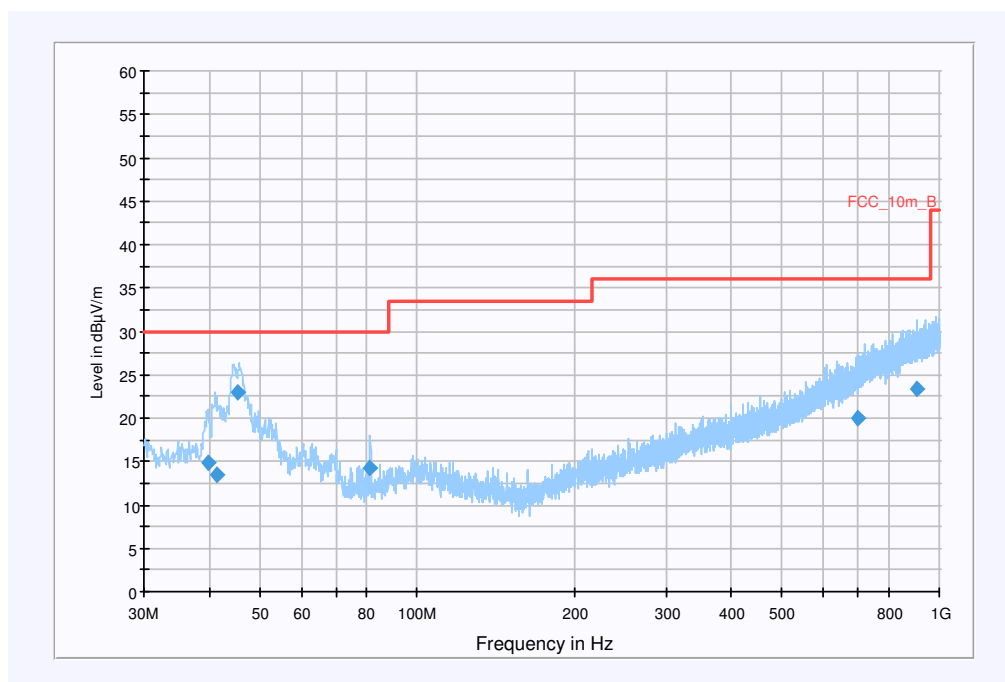

### Final Measurement Detector 1

| Frequency (MHz) | QuasiPeak (dBμV/m) | Meas. Time (ms) | Bandwidth (kHz) | Antenna height (cm) | Polarity | Turntable position (deg) | Corr. (dB) | Margin (dB) | Limit (dBμV/m) | Comment |
|-----------------|--------------------|-----------------|-----------------|---------------------|----------|--------------------------|------------|-------------|----------------|---------|
| 39.947450       | 14.8               | 15000.000       | 120.000         | 139.0               | V        | 61.0                     | 13.6       | 15.2        | 30.0           |         |
| 41.438050       | 13.4               | 15000.000       | 120.000         | 100.0               | V        | 146.0                    | 13.6       | 16.6        | 30.0           |         |
| 45.403400       | 23.0               | 15000.000       | 120.000         | 214.0               | V        | 126.0                    | 13.5       | 7.0         | 30.0           |         |
| 81.171950       | 14.3               | 15000.000       | 120.000         | 200.0               | V        | 240.0                    | 9.6        | 15.7        | 30.0           |         |
| 695.407550      | 19.9               | 15000.000       | 120.000         | 312.0               | V        | 132.0                    | 22.8       | 16.1        | 36.0           |         |
| 903.210250      | 23.3               | 15000.000       | 120.000         | 179.0               | H        | 36.0                     | 26.1       | 12.7        | 36.0           |         |

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

## Subrange 1

Frequency Range: 30MHz - 2GHz

Receiver: Receiver [ESCI 3]  
@ GPIB0 (ADR 20), SN 100083/003, FW 3.32, CAL 07.01.2009


Signal Path: without Notch  
FW 1.0

Antenna: VULB 9163  
SN 9163-295, FW ---, CAL 08.04.2010  
Correction Table (vertical): VULP6113  
Correction Table (horizontal): VULP6113  
Correction Table: Cabel with switch (0408)

Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.12


Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), FW REV 3.12

Plot 2: 1 - 4 GHz vertical/horizontal (lowest channel)

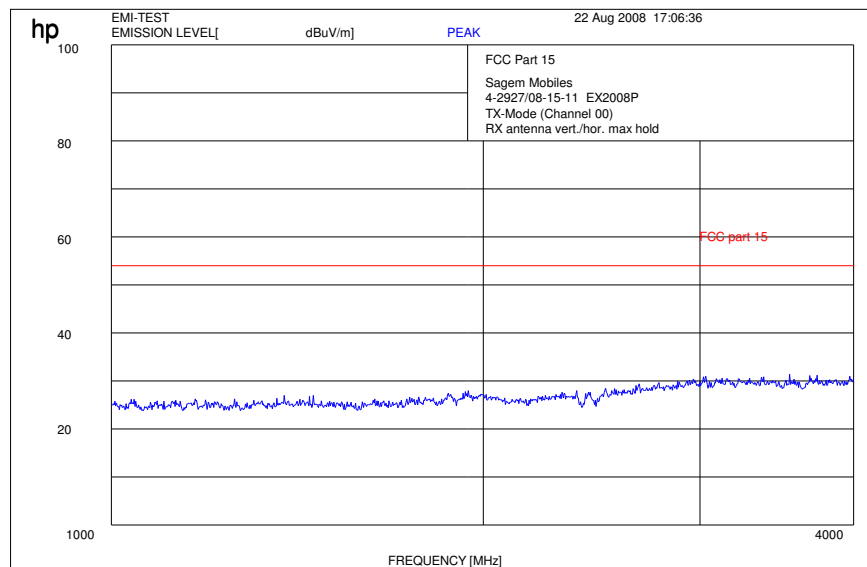


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 3: 4 - 12 GHz vertical/horizontal (lowest channel)

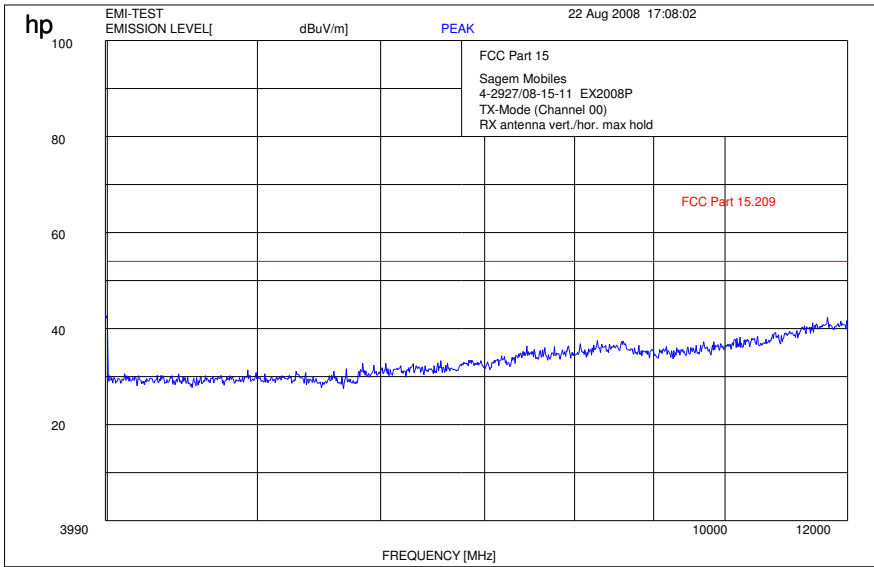

Plot 4: 12 - 25 GHz vertical/horizontal (valid for all channels)

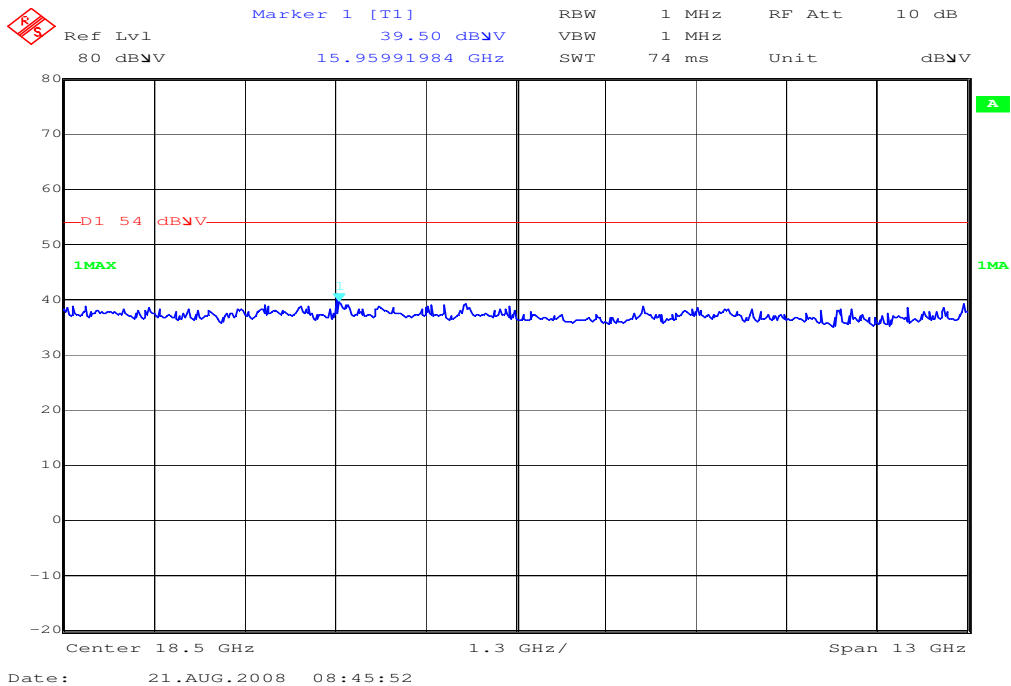

Plot 5: 0.03 - 1 GHz vertical/horizontal (middle channel)


**Information**

|                       |                              |
|-----------------------|------------------------------|
| EUT:                  | EX2008P                      |
| Serial Number:        | 354680029500288              |
| Test Description:     | FCC part 15 class B @ 10m    |
| Operating Conditions: | BT Channel 39                |
| Operator Name:        | Folz                         |
| Comment:              | Powered with AC 115V / 60 Hz |

**Scan Setup: FCC\_Fin [EMI radiated]**

|                 |                                   |
|-----------------|-----------------------------------|
| Hardware Setup: | EMI radiated\Electric Field (NOS) |
| Level Unit:     | dB $\mu$ V/m                      |

| Subrange     | Detectors | IF Bandwidth | Meas. Time | Receiver |
|--------------|-----------|--------------|------------|----------|
| 30MHz - 1GHz | QuasiPeak | 120kHz       | 15s        | Receiver |

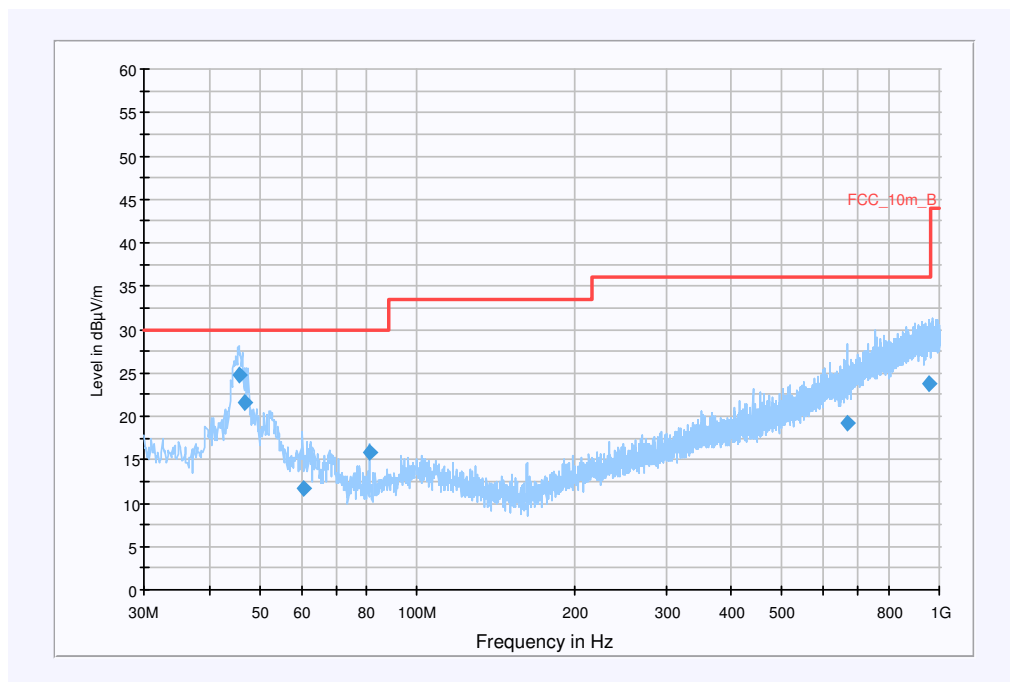**FCC\_1 GHz****Final Measurement Detector 1**

| Frequency (MHz) | QuasiPeak (dB $\mu$ V/m) | Meas. Time (ms) | Bandwidth (kHz) | Antenna height (cm) | Polarity | Turntable position (deg) | Corr. (dB) | Margin (dB) | Limit (dB $\mu$ V/m) | Comment |
|-----------------|--------------------------|-----------------|-----------------|---------------------|----------|--------------------------|------------|-------------|----------------------|---------|
| 45.640950       | 24.7                     | 15000.000       | 120.000         | 100.0               | V        | 105.0                    | 13.5       | 5.3         | 30.0                 |         |
| 46.646850       | 21.6                     | 15000.000       | 120.000         | 100.0               | V        | 40.0                     | 13.5       | 8.4         | 30.0                 |         |
| 60.811300       | 11.8                     | 15000.000       | 120.000         | 319.0               | V        | -1.0                     | 11.7       | 18.2        | 30.0                 |         |
| 81.153550       | 15.8                     | 15000.000       | 120.000         | 200.0               | V        | 113.0                    | 9.6        | 14.2        | 30.0                 |         |
| 668.544700      | 19.2                     | 15000.000       | 120.000         | 323.0               | H        | 323.0                    | 22.0       | 16.8        | 36.0                 |         |
| 954.487600      | 23.7                     | 15000.000       | 120.000         | 332.0               | V        | 178.0                    | 26.5       | 12.3        | 36.0                 |         |

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

## Subrange 1

Frequency Range: 30MHz - 2GHz

Receiver: Receiver [ESCI 3]  
@ GPIB0 (ADR 20), SN 100083/003, FW 3.32, CAL 07.01.2009


Signal Path: without Notch  
FW 1.0

Antenna: VULB 9163  
SN 9163-295, FW ---, CAL 08.04.2010  
Correction Table (vertical): VULP6113  
Correction Table (horizontal): VULP6113  
Correction Table: Cabel with switch (0408)

Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.12


Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), FW REV 3.12

Plot 6: 1 - 4 GHz vertical/horizontal (middle channel)

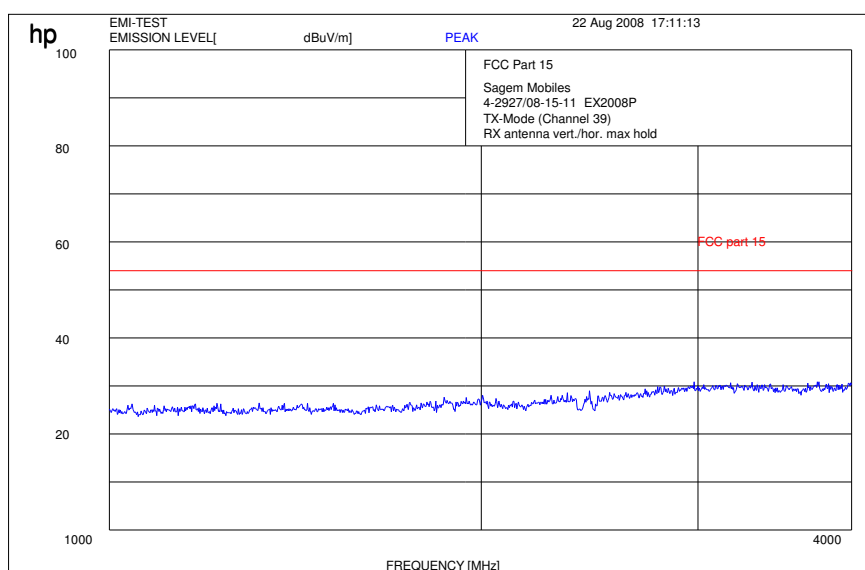

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 7: 4 - 12 GHz vertical/horizontal (middle channel)

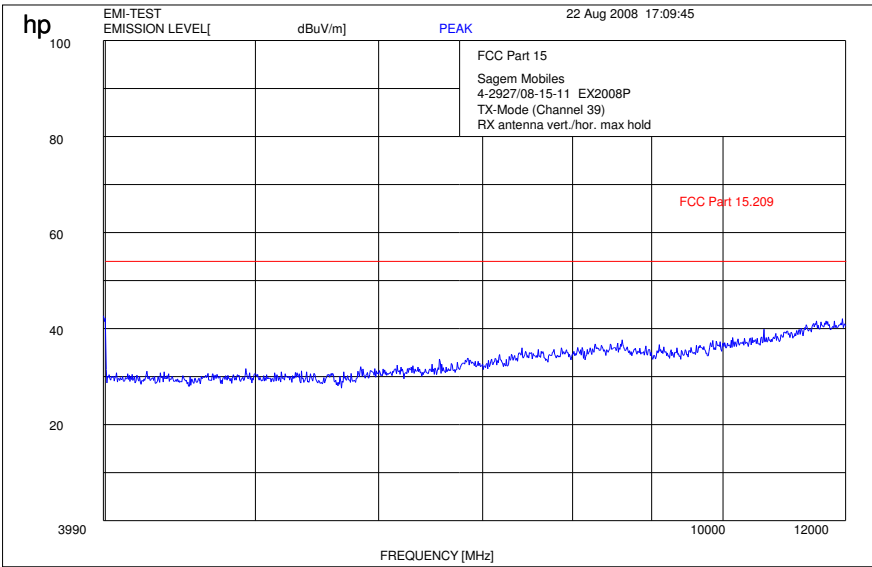

Plot 8: 0.03 - 1 GHz vertical/horizontal (highest channel)


**Information**

|                       |                              |
|-----------------------|------------------------------|
| EUT:                  | EX2008P                      |
| Serial Number:        | 354680029500288              |
| Test Description:     | FCC part 15 class B @ 10m    |
| Operating Conditions: | BT Channel 78                |
| Operator Name:        | Folz                         |
| Comment:              | Powered with AC 115V / 60 Hz |

**Scan Setup: FCC\_Fin [EMI radiated]**

|                 |                                   |
|-----------------|-----------------------------------|
| Hardware Setup: | EMI radiated\Electric Field (NOS) |
| Level Unit:     | dB $\mu$ V/m                      |

| Subrange     | Detectors | IF Bandwidth | Meas. Time | Receiver |
|--------------|-----------|--------------|------------|----------|
| 30MHz - 1GHz | QuasiPeak | 120kHz       | 15s        | Receiver |

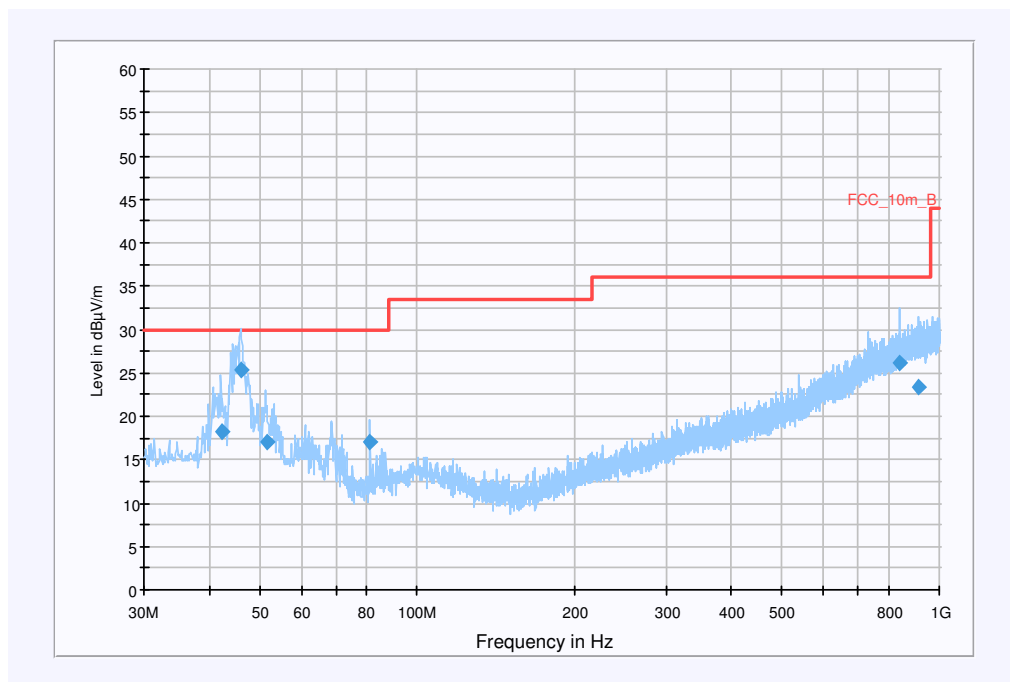**FCC\_1 GHz****Final Measurement Detector 1**

| Frequency (MHz) | QuasiPeak (dB $\mu$ V/m) | Meas. Time (ms) | Bandwidth (kHz) | Antenna height (cm) | Polarity | Turntable position (deg) | Corr. (dB) | Margin (dB) | Limit (dB $\mu$ V/m) | Comment |
|-----------------|--------------------------|-----------------|-----------------|---------------------|----------|--------------------------|------------|-------------|----------------------|---------|
| 42.203750       | 18.2                     | 15000.000       | 120.000         | 115.0               | V        | 109.0                    | 13.6       | 11.8        | 30.0                 |         |
| 46.010550       | 25.4                     | 15000.000       | 120.000         | 100.0               | V        | 145.0                    | 13.5       | 4.6         | 30.0                 |         |
| 51.512650       | 17.0                     | 15000.000       | 120.000         | 115.0               | V        | 141.0                    | 13.5       | 13.0        | 30.0                 |         |
| 81.367900       | 17.0                     | 15000.000       | 120.000         | 164.0               | V        | 90.0                     | 9.6        | 13.0        | 30.0                 |         |
| 836.950300      | 26.2                     | 15000.000       | 120.000         | 322.0               | V        | 275.0                    | 25.1       | 9.8         | 36.0                 |         |
| 909.463900      | 23.3                     | 15000.000       | 120.000         | 385.0               | H        | 18.0                     | 26.2       | 12.7        | 36.0                 |         |

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

## Subrange 1

Frequency Range: 30MHz - 2GHz

Receiver: Receiver [ESCI 3]  
@ GPIB0 (ADR 20), SN 100083/003, FW 3.32, CAL 07.01.2009


Signal Path: without Notch  
FW 1.0

Antenna: VULB 9163  
SN 9163-295, FW ---, CAL 08.04.2010  
Correction Table (vertical): VULP6113  
Correction Table (horizontal): VULP6113  
Correction Table: Cabel with switch (0408)

Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.12


Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), FW REV 3.12

Plot 9: 1 - 4 GHz vertical/horizontal (highest channel)

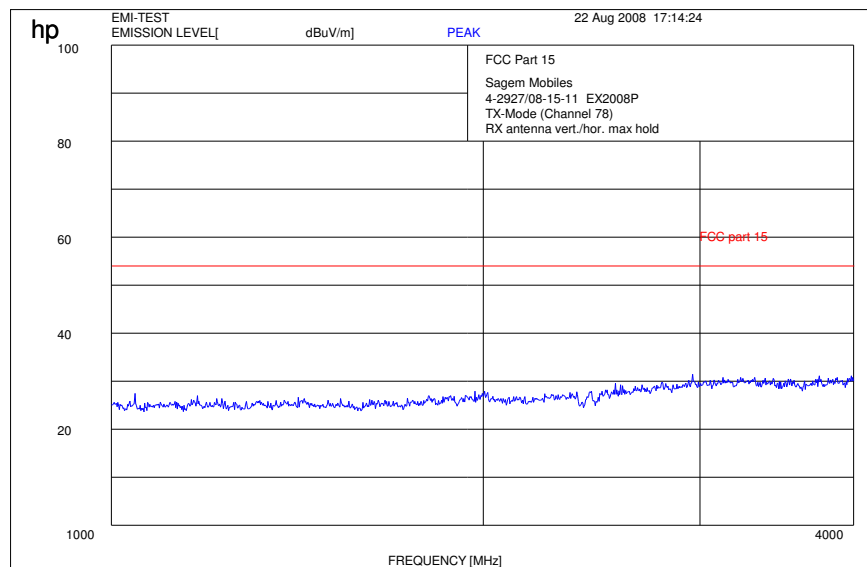

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 10: 4 - 12 GHz vertical/horizontal (highest channel)

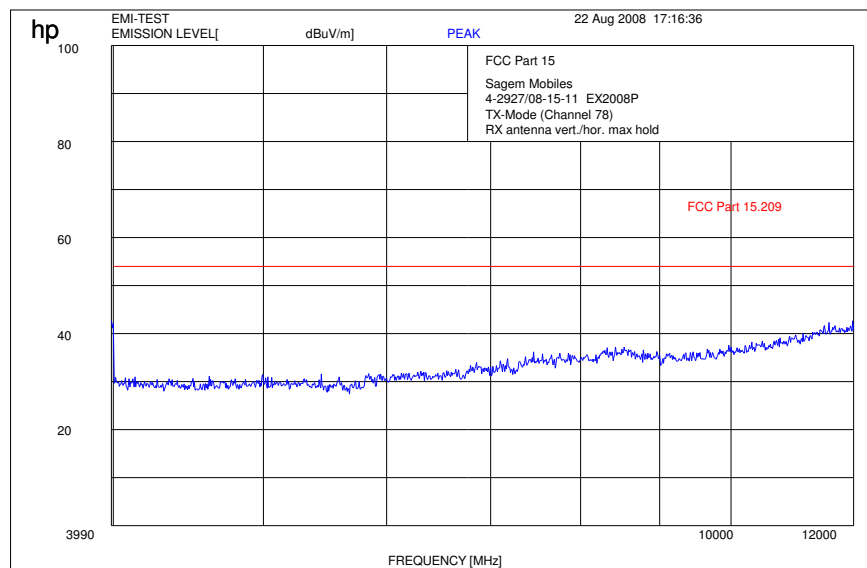

## Results:

| SPURIOUS EMISSIONS LEVEL (dB $\mu$ V/m) |          |                      |                              |          |                      |                              |          |                      |
|-----------------------------------------|----------|----------------------|------------------------------|----------|----------------------|------------------------------|----------|----------------------|
| 2402 MHz                                |          |                      | 2441 MHz                     |          |                      | 2480 MHz                     |          |                      |
| F [MHz]                                 | Detector | Level [dB $\mu$ V/m] | F [MHz]                      | Detector | Level [dB $\mu$ V/m] | F [MHz]                      | Detector | Level [dB $\mu$ V/m] |
| No critical peaks detected !            |          |                      | No critical peaks detected ! |          |                      | No critical peaks detected ! |          |                      |
|                                         |          |                      |                              |          |                      |                              |          |                      |
|                                         |          |                      |                              |          |                      |                              |          |                      |
|                                         |          |                      |                              |          |                      |                              |          |                      |
|                                         |          |                      |                              |          |                      |                              |          |                      |
| Measurement uncertainty                 |          |                      | $\pm 3$ dB                   |          |                      |                              |          |                      |

$f < 1$  GHz : RBW/VBW: 100 kHz

$f \geq 1$  GHz : RBW/VBW: 1 MHz

## Limits:

§ 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

## Limits:

§ 15.109

| Frequency (MHz) | Field strength (dB $\mu$ V/m) | Measurement distance (m) |
|-----------------|-------------------------------|--------------------------|
| 30 - 88         | 30.0                          | 10                       |
| 88 - 216        | 33.5                          | 10                       |
| 216 - 960       | 36.0                          | 10                       |
| above 960       | 54.0                          | 3                        |

**5.16 Spurious Emissions - radiated (Receiver) § 15.109**Modulation: GFSK

Plot 1: 0.03 - 1 GHz vertical/horizontal (receiver)


**Information**

|                       |                              |
|-----------------------|------------------------------|
| EUT:                  | EX2008P                      |
| Serial Number:        | 354680029500288              |
| Test Description:     | FCC part 15 class B @ 10m    |
| Operating Conditions: | BT RX-Mode                   |
| Operator Name:        | Folz                         |
| Comment:              | Powered with AC 115V / 60 Hz |

**Scan Setup: FCC\_Fin [EMI radiated]**

|                 |                                   |
|-----------------|-----------------------------------|
| Hardware Setup: | EMI radiated\Electric Field (NOS) |
| Level Unit:     | dBµV/m                            |

| Subrange     | Detectors | IF Bandwidth | Meas. Time | Receiver |
|--------------|-----------|--------------|------------|----------|
| 30MHz - 1GHz | QuasiPeak | 120kHz       | 15s        | Receiver |

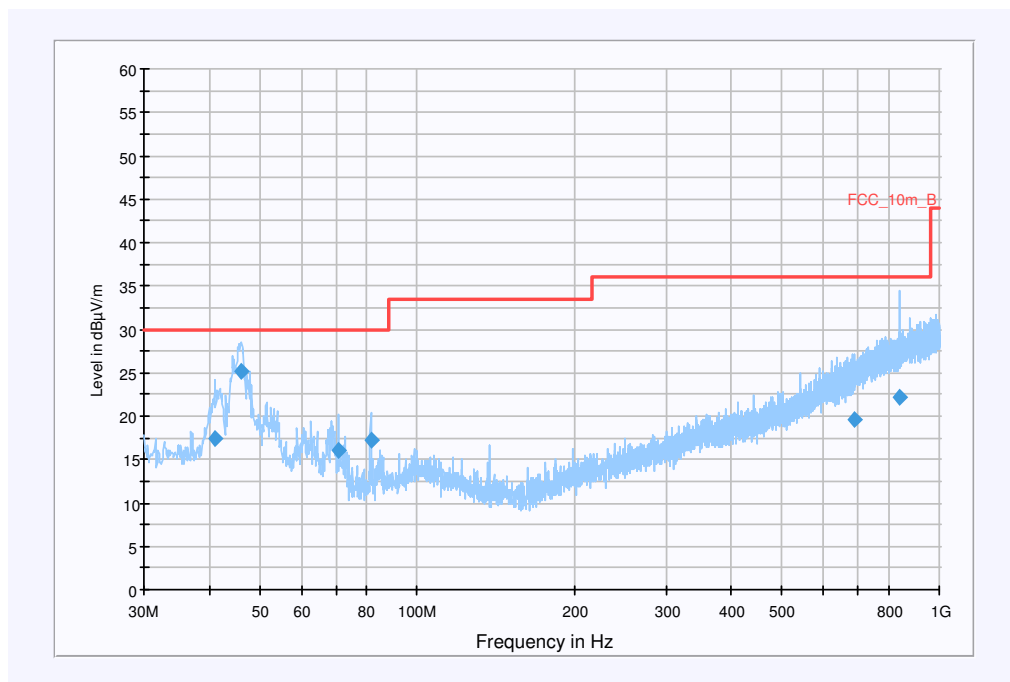**FCC\_1 GHz****Final Measurement Detector 1**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Antenna height (cm) | Polarity | Turntable position (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) | Comment |
|-----------------|--------------------|-----------------|-----------------|---------------------|----------|--------------------------|------------|-------------|----------------|---------|
| 41.118050       | 17.4               | 15000.000       | 120.000         | 127.0               | V        | 69.0                     | 13.6       | 12.6        | 30.0           |         |
| 46.226600       | 25.1               | 15000.000       | 120.000         | 100.0               | V        | 114.0                    | 13.5       | 4.9         | 30.0           |         |
| 70.696550       | 16.1               | 15000.000       | 120.000         | 299.0               | V        | 323.0                    | 9.6        | 13.9        | 30.0           |         |
| 81.532600       | 17.3               | 15000.000       | 120.000         | 238.0               | V        | 323.0                    | 9.7        | 12.7        | 30.0           |         |
| 686.196800      | 19.6               | 15000.000       | 120.000         | 278.0               | H        | 245.0                    | 22.5       | 16.4        | 36.0           |         |
| 836.977150      | 22.2               | 15000.000       | 120.000         | 100.0               | V        | 143.0                    | 25.1       | 13.8        | 36.0           |         |

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

## Subrange 1

Frequency Range: 30MHz - 2GHz

Receiver: Receiver [ESCI 3]  
@ GPIB0 (ADR 20), SN 100083/003, FW 3.32, CAL 07.01.2009


Signal Path: without Notch  
FW 1.0

Antenna: VULB 9163  
SN 9163-295, FW ---, CAL 08.04.2010  
Correction Table (vertical): VULP6113  
Correction Table (horizontal): VULP6113  
Correction Table: Cabel with switch (0408)


Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.12

Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), FW REV 3.12


Plot 2: 1 - 4 GHz vertical/horizontal (receiver)

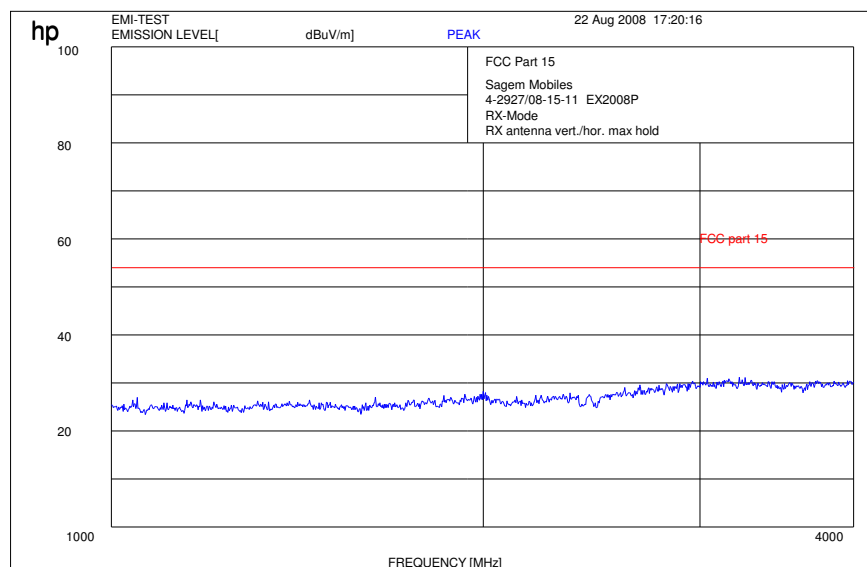

Plot 3: 4 - 12 GHz vertical/horizontal (receiver)

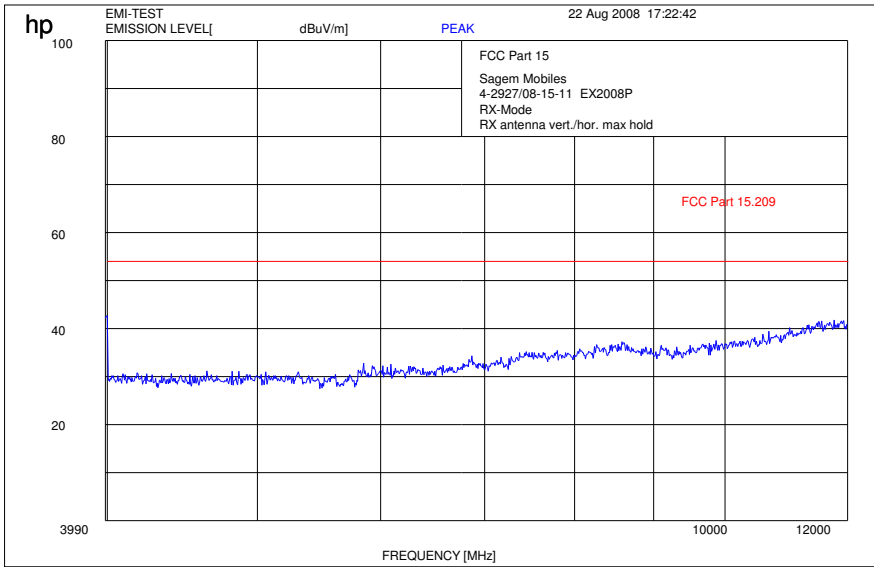

Plot 4: 12 - 25 GHz vertical/horizontal (receiver)

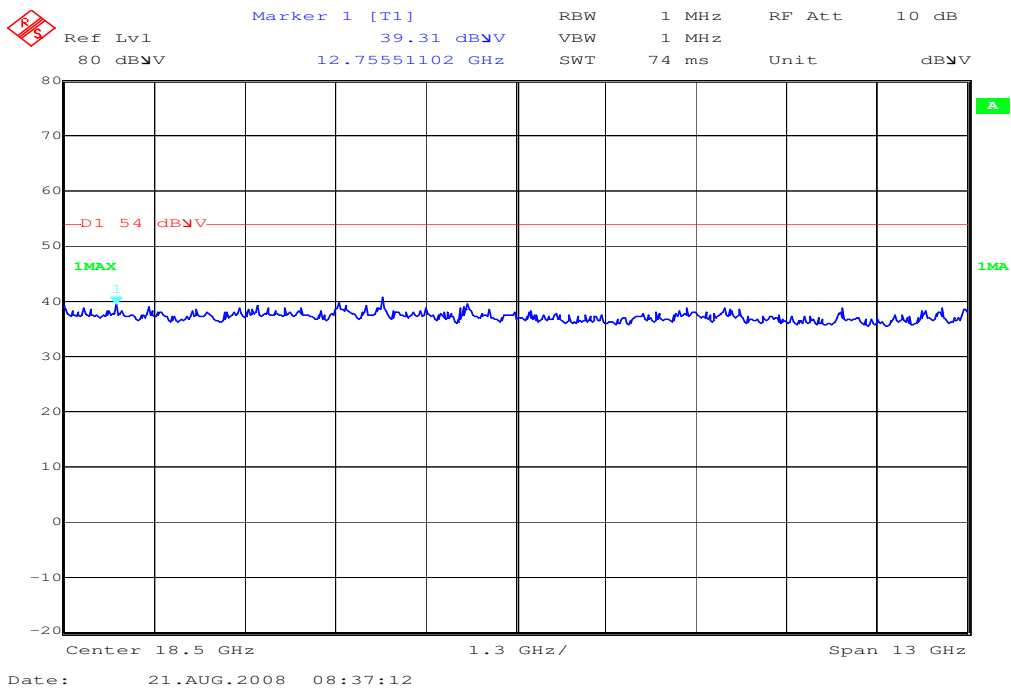

Results:

| Spurious Emissions level [dBμV/m] |          |                |
|-----------------------------------|----------|----------------|
| Frequency [MHz]                   | Detector | Level [dBμV/m] |
| No critical peaks detected !      |          |                |
|                                   |          |                |
|                                   |          |                |
|                                   |          |                |
|                                   |          |                |
|                                   |          |                |
|                                   |          |                |
|                                   |          |                |
|                                   |          |                |
|                                   |          |                |
| Measurement uncertainty           |          | ±3 dB          |

f < 1 GHz: RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

See above plots

Measurement distance see table

Limits:

§ 15.109

| Frequency (MHz) | Field strength (dBμV/m) | Measurement distance (m) |
|-----------------|-------------------------|--------------------------|
| 30 - 88         | 30.0                    | 10                       |
| 88 - 216        | 33.5                    | 10                       |
| 216 - 960       | 36.0                    | 10                       |
| above 960       | 54.0                    | 3                        |


## 5.17 Spurious Emissions < 30 MHz - Transmitter radiated § 15.209

Modulation: GFSK

Measured at 3 m distance.

Values recalculated with 40 dB/decade according to FCC rules.

Plot 1:

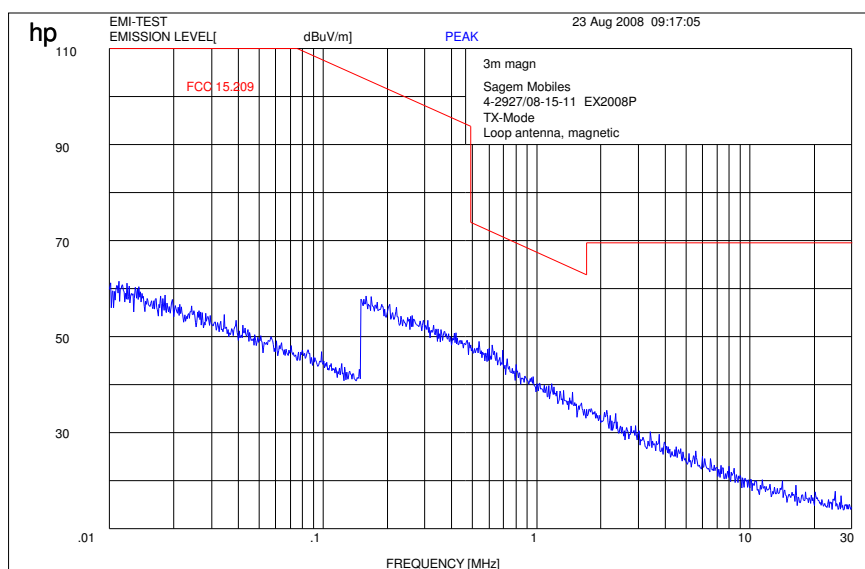


### Limits:

| Frequency (MHz) | Field strength ( $\mu$ V/m) | Measurement distance (m) |
|-----------------|-----------------------------|--------------------------|
| 0.009 – 0.490   | 2400/F(kHz)                 | 300                      |
| 0.490 – 1.705   | 24000/F(kHz)                | 30                       |
| 1.705 – 30.0    | 30 / 29.5 dB $\mu$ V/m      | 30                       |

## 5.18 Conducted Emissions <30 MHz § 15.107/207


Modulation: GFSK

Plot 1: TX-Mode (Phase Line)

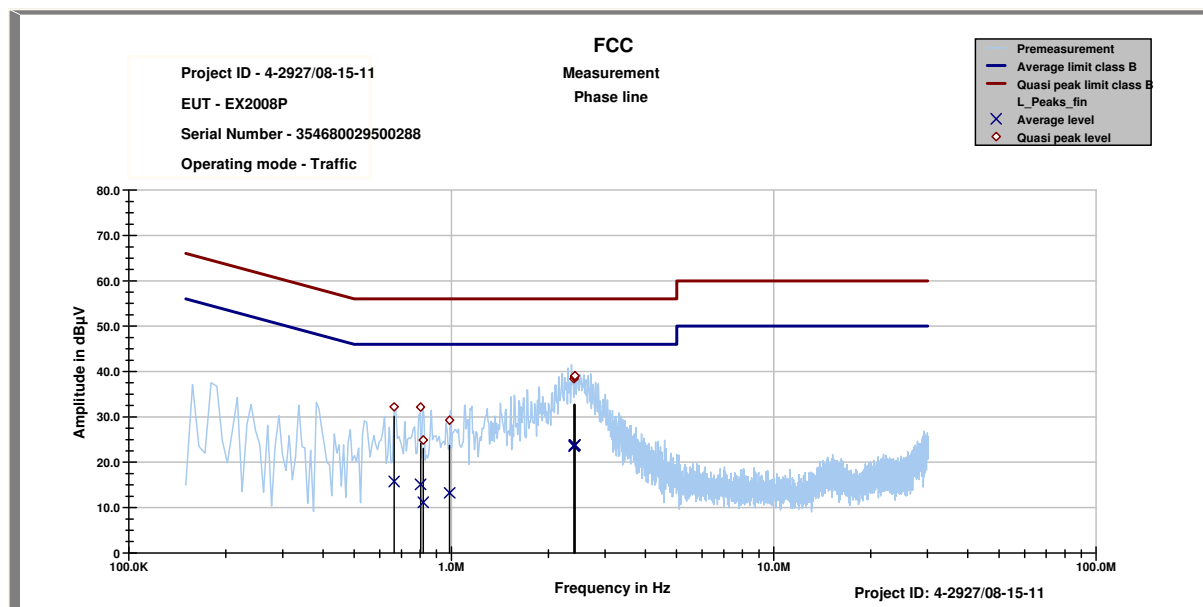

| Frequency<br>MHz | Quasi peak level<br>dBµV | Margin quasi peak<br>dBµV | Average level<br>dBµV | Margin average<br>dBµV |
|------------------|--------------------------|---------------------------|-----------------------|------------------------|
| 0.6647           | 32.19                    | 23.81                     | 15.74                 | 30.26                  |
| 0.8029           | 32.15                    | 23.85                     | 15.09                 | 30.91                  |
| 0.8188           | 24.87                    | 31.13                     | 11.16                 | 34.84                  |
| 0.9883           | 29.27                    | 26.73                     | 13.22                 | 32.78                  |
| 2.4030           | 38.38                    | 17.62                     | 23.50                 | 22.50                  |
| 2.4089           | 38.84                    | 17.16                     | 23.74                 | 22.26                  |
| 2.4112           | 38.87                    | 17.13                     | 23.75                 | 22.25                  |
| 2.4167           | 39.07                    | 16.93                     | 23.83                 | 22.17                  |

Plot 2: TX-Mode (Neutral Line)

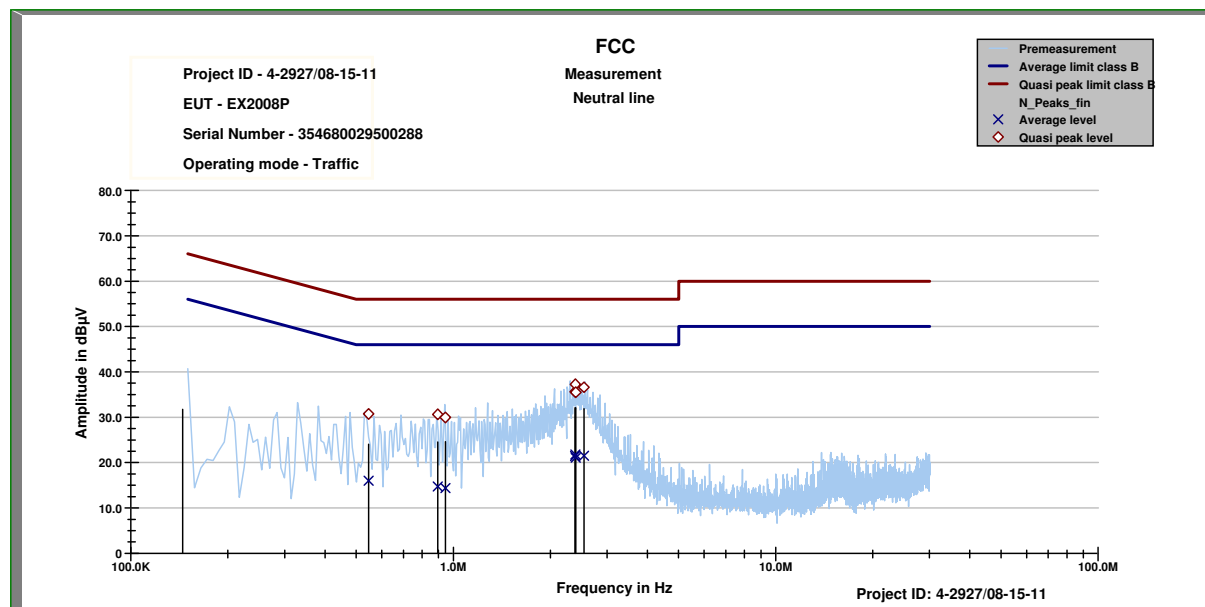


| Frequency | Quasi peak level | Margin quasi peak | Average level | Margin average |
|-----------|------------------|-------------------|---------------|----------------|
| MHz       | dBµV             | dBµV              | dBµV          | dBµV           |
| 0.5463    | 30.73            | 25.27             | 16.01         | 29.99          |
| 0.8946    | 30.61            | 25.39             | 14.72         | 31.28          |
| 0.9446    | 29.93            | 26.07             | 14.35         | 31.65          |
| 2.3847    | 35.65            | 20.35             | 21.42         | 24.58          |
| 2.3909    | 37.26            | 18.74             | 21.80         | 24.20          |
| 2.3983    | 35.49            | 20.51             | 21.03         | 24.97          |
| 2.5399    | 36.58            | 19.42             | 21.46         | 24.54          |

## Limits:


|                                   |           |
|-----------------------------------|-----------|
| Under normal test conditions only | See plots |
|-----------------------------------|-----------|

Plot 3: RX-Mode (Phase Line)

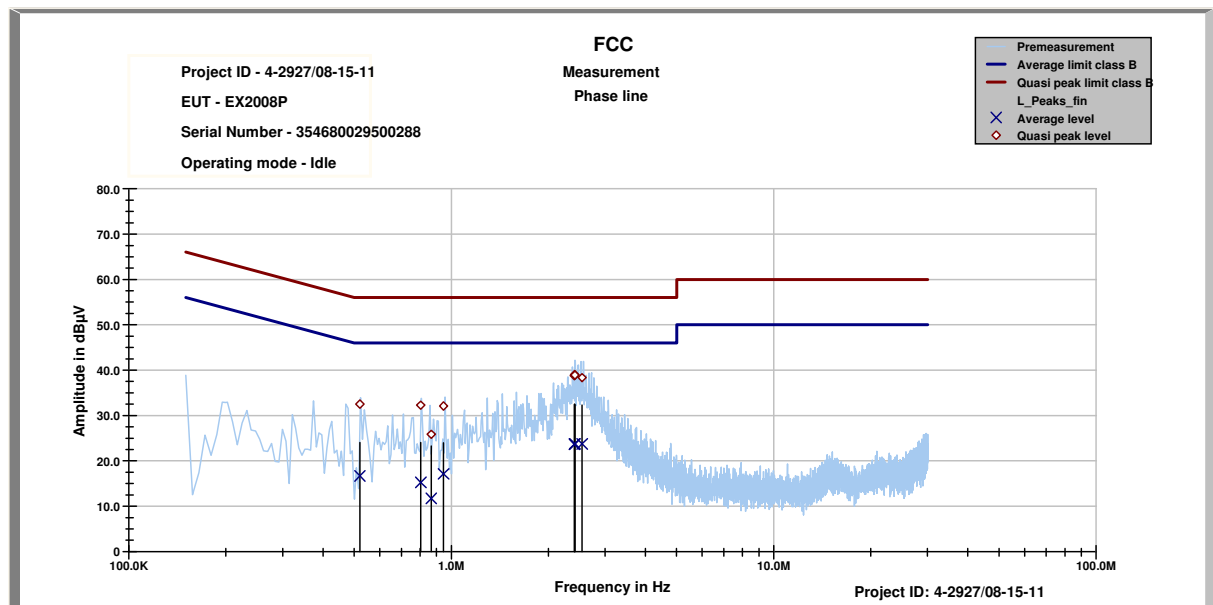

| Frequency | Quasi peak level | Margin quasi peak | Average level | Margin average |
|-----------|------------------|-------------------|---------------|----------------|
| MHz       | dBµV             | dBµV              | dBµV          | dBµV           |
| 0.5203    | 32.50            | 23.50             | 16.66         | 29.34          |
| 0.8039    | 32.25            | 23.75             | 15.22         | 30.78          |
| 0.8670    | 25.84            | 30.16             | 11.70         | 34.30          |
| 0.9466    | 32.07            | 23.93             | 17.12         | 28.88          |
| 2.4064    | 38.77            | 17.23             | 23.63         | 22.37          |
| 2.4127    | 38.98            | 17.02             | 23.68         | 22.32          |
| 2.4156    | 38.90            | 17.10             | 23.75         | 22.25          |
| 2.5459    | 38.32            | 17.68             | 23.73         | 22.27          |

Plot 4: RX-Mode (Neutral Line)

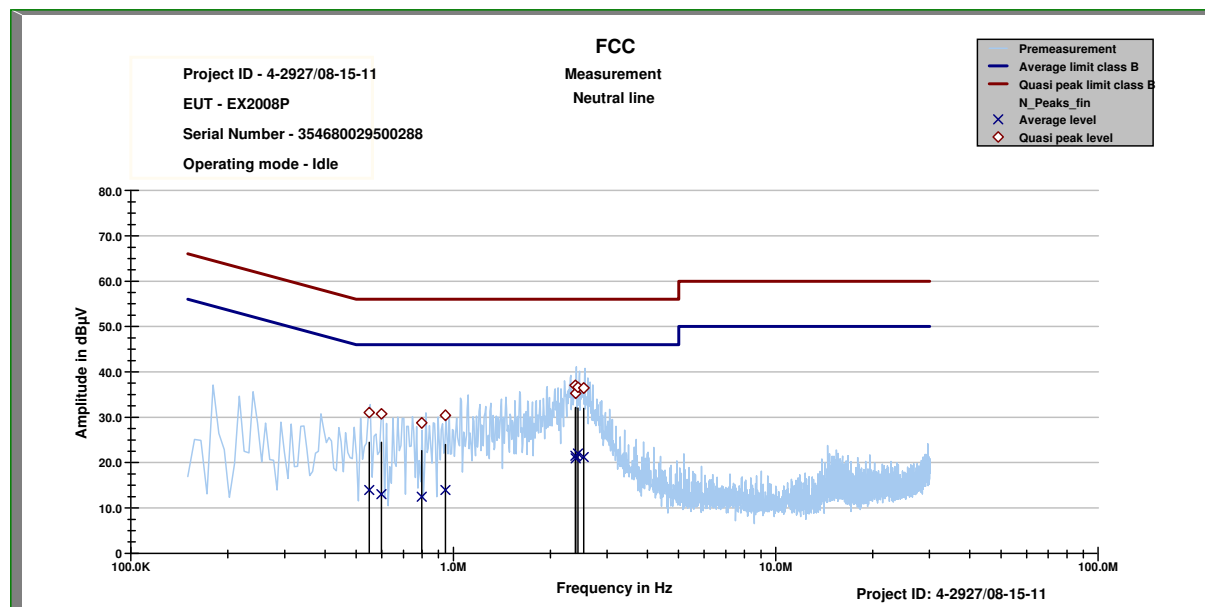

| Frequency | Quasi peak level | Margin quasi peak | Average level | Margin average |
|-----------|------------------|-------------------|---------------|----------------|
| MHz       | dBμV             | dBμV              | dBμV          | dBμV           |
| 0.5487    | 31.02            | 24.98             | 13.96         | 32.04          |
| 0.5987    | 30.74            | 25.26             | 13.00         | 33.00          |
| 0.7983    | 28.72            | 27.28             | 12.46         | 33.54          |
| 0.9456    | 30.42            | 25.58             | 13.96         | 32.04          |
| 2.3883    | 37.02            | 18.98             | 21.49         | 24.51          |
| 2.3963    | 35.25            | 20.75             | 20.96         | 25.04          |
| 2.4373    | 36.58            | 19.42             | 21.97         | 24.03          |
| 2.5393    | 36.41            | 19.59             | 21.20         | 24.80          |

## Limits:

|                                   |           |
|-----------------------------------|-----------|
| Under normal test conditions only | See plots |
|-----------------------------------|-----------|

## 6 Test equipment and ancillaries used for tests

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

### *Anechoic chamber C:*

| No | Equipment/Type                   | Manuf.     | Serial Nr.       | Inv. No. Cetecom | Last Calibration                   | Frequency (months) | Next Calibration |
|----|----------------------------------|------------|------------------|------------------|------------------------------------|--------------------|------------------|
| 1  | Anechoic chamber                 | MWB        | 87400/02         | 300000996        | Monthly verification               |                    |                  |
| 2  | System-Rack 85900                | HP I.V.    | *                | 300000222        | n.a.                               |                    |                  |
| 3  | Measurement System 1             |            |                  |                  |                                    |                    |                  |
| 4  | Spektrum Analyzer 8566B          | HP         | 2747A05306       | 300001000        | 05.10.2006                         | 24                 | 05.10.2008       |
| 5  | Spektrum Analyzer Display 85662A | HP         | 2816A16541       | 300002297        | 05.10.2006                         | 24                 | 05.10.2008       |
| 6  | Quasi-Peak-Adapter 85650A        | HP         | 2811A01131       | 300000999        | 05.10.2006                         | 24                 | 05.10.2008       |
| 7  | RF-Preselector 85685A            | HP         | 2837A00779       | 300000218        | 08.11.2006                         | 24                 | 08.11.2008       |
| 8  | PC Vectra VL                     | HP         |                  | 300001688        | n.a.                               |                    |                  |
| 9  | Software EMI                     | HP         |                  | 300000983        | n.a.                               |                    |                  |
| 10 | Measurement System 2             |            |                  |                  |                                    |                    |                  |
| 11 | FSP 30                           | R&S        | 100623           | ICT 300003464    | 05.10.2007                         | 24                 | 15.10.2009       |
| 12 | PC                               | F+W        |                  |                  | n.a.                               |                    |                  |
| 13 | TILE                             | TILE       |                  |                  | n.a.                               |                    |                  |
| 14 | Biconical antenna                | EMCO       | S/N: 860 942/003 |                  | Monthly verification (System cal.) |                    |                  |
| 15 | Log. Period. Antenna 3146        | EMCO       | 2130             | 300001603        | Monthly verification (System cal.) |                    |                  |
| 16 | Double Ridged Antenna HP 3115P   | EMCO       | 3088             | 300001032        | Monthly verification (System cal.) |                    |                  |
| 17 | Active Loop Antenna 6502         | EMCO       | 2210             | 300001015        | Monthly verification (System cal.) |                    |                  |
| 18 | Power Supply 6032A               | HP         | 2818A03450       | 300001040        | 12.05.2007                         | 36                 | 12.05.2010       |
| 19 | Busisolator                      | Kontron    |                  | 300001056        | n.a.                               |                    |                  |
| 20 | Leitungsteiler 11850C            | HP         |                  | 300000997        | Monthly verification (System cal.) |                    |                  |
| 21 | Power attenuator 8325            | Byrd       | 1530             | 300001595        | Monthly verification (System cal.) |                    |                  |
| 22 | Band reject filter WRCG1855/1910 | Wainwright | 7                | 300003350        | Monthly verification (System cal.) |                    |                  |
| 23 | Band reject filter WRCG2400/2483 | Wainwright | 11               | 300003351        | Monthly verification (System cal.) |                    |                  |
|    |                                  |            |                  |                  |                                    |                    |                  |

## *System Rack Room 005 :*

| No | Equipment/Type   | Manuf. | Serial Nr.  | Inv. No. Cetecom | Last Calibration | Frequency (months) | Next Calibration |
|----|------------------|--------|-------------|------------------|------------------|--------------------|------------------|
| 1  | FSP 30           | R&S    |             | 300003575        | 02.04.2007       | 24                 | 02.04.2009       |
| 2  | CBT              | R&S    | 100313      | 300003516        | 24.10.2006       | 24                 | 24.10.2008       |
| 3  | Switch Matrix    | HP     |             | 300000929        | n.a.             |                    |                  |
| 4  | Power Supply     | HP     | 3041A00544  | 300002270        | 13.05.2007       | 36                 | 13.05.2010       |
| 5  | Signal Generator | R&S    | 836206/0092 | 300002680        | 30.05.2007       | 36                 | 30.05.2010       |
|    |                  |        |             |                  |                  |                    |                  |
|    |                  |        |             |                  |                  |                    |                  |

## *Signalling Units:*

| No | Equipment/Type | Manuf. | Serial Nr. | Inv. No. Cetecom | Last Calibration | Frequency (months) | Next Calibration |
|----|----------------|--------|------------|------------------|------------------|--------------------|------------------|
| 1  | CBT            | R&S    | 100313     | 300003516        | 24.10.2006       | 24                 | 24.10.2008       |
| 2  | CBT            | R&S    | 100185     | 300003416        | 21.02.2006       | 24                 | 21.02.2008       |
| 3  | CMU-200        | R&S    | 103992     | 300003231        | 27.04.2007       | 12                 | 27.04.2008       |
| 4  | CMU-200        | R&S    | 106240     | 300003321        | 02.05.2006       | 24                 | 02.05.2008       |
|    |                |        |            |                  |                  |                    |                  |

## *SRD Laboratory Room 002:*

| No | Equipment/Type                  | Manuf. | Serial Nr.     | Inv. No. Cetecom | Last Calibration | Frequency (months) | Next Calibration |
|----|---------------------------------|--------|----------------|------------------|------------------|--------------------|------------------|
| 1  | System Controller PSM 12        | R&S    | 835259/007     | 3000002681-00xx  | n.a.             |                    |                  |
| 2  | Memory Extension PSM-K10        | R&S    | To 1           | 3000002681       | n.a.             |                    |                  |
| 3  | Operating Software PSM-B2       | R&S    | To 1           | 3000002681       | n.a.             |                    |                  |
| 4  | 19" Monitor                     |        | 22759020-ED    | 3000002681       | n.a.             |                    |                  |
| 5  | Mouse                           |        | LZE 0095/6639  | 3000002681       | n.a.             |                    |                  |
| 6  | Keyboard                        |        | G00013834L4 61 | 3000002681       | n.a.             |                    |                  |
| 7  | Spectrum Analyser FSIQ 26       | R&S    | 835540/018     | 3000002681-0005  | 01.08.2006       | 24                 | 01.08.2008       |
| 8  | Tracking Generator FSIQ-B10     | R&S    | 835107/015     | 3000002681       | s.No.7           |                    |                  |
| 10 | RF-Generator SMIQ03 (B1 Signal) | R&S    | 835541/056     | 3000002681-0002  | 01.08.2006       | 36                 | 01.08.2009       |
| 11 | Modulation Coder SMIQ-B20       | R&S    | To 10          | 3000002681       | s.No.10          |                    |                  |
| 12 | Data Generator SMIQ-B11         | R&S    | To 10          | 3000002681       | s.No.10          |                    |                  |
| 13 | RF Rear Connection SMIQ-B19     | R&S    | To 10          | 3000002681       | s.No.10          |                    |                  |
| 14 | Fast CPU SM-B50                 | R&S    | To 10          | 3000002681       | s.No.10          |                    |                  |
| 15 | FM Modulator SM-B5              | R&S    | 835676/033     | 3000002681       | s.No.10          |                    |                  |
| 16 | RF-Generator SMIQ03 (B2 Signal) | R&S    | 835541/055     | 3000002681-0001  | 01.08.2006       | 36                 | 01.08.2009       |
| 17 | Modulation Coder SMIQ-B20       | R&S    | To 16          | 3000002681       | s.No.16          |                    |                  |
| 18 | Data Generator SMIQ-B11         | R&S    | To 16          | 3000002681       | s.No.16          |                    |                  |
| 19 | RF Rear Connection SMIQ-B19     | R&S    | To 16          | 3000002681       | s.No.16          |                    |                  |
| 20 | Fast CPU SM-B50                 | R&S    | To 16          | 3000002681       | s.No.16          |                    |                  |
| 21 | FM Modulator SM-B5              | R&S    | 836061/022     | 3000002681       | s.No.16          |                    |                  |
| 22 | RF-Generator SMP03 (B3 Signal)  | R&S    | 835133/011     | 3000002681-0003  | 01.08.2006       | 36                 | 01.08.2009       |
| 23 | Attenuator SMP-B15              | R&S    | 835136/014     | 3000002681       | S.No.22          |                    |                  |

|    |                                             |                |                |                 |            |    |            |
|----|---------------------------------------------|----------------|----------------|-----------------|------------|----|------------|
| 24 | RF Rear Connection SMP-B19                  | R&S            | 834745/007     | 3000002681      | S.No.22    |    |            |
| 25 | Power Meter NRVD                            | R&S            | 835430/044     | 3000002681-0004 | 01.08.2006 | 24 | 01.08.2008 |
| 26 | Power Sensor NRVD-Z1                        | R&S            | 833894/012     | 3000002681-0013 | 01.08.2006 | 24 | 01.08.2008 |
| 27 | Power Sensor NRVD-Z1                        | R&S            | 833894/011     | 3000002681-0010 | 01.08.2006 | 24 | 01.08.2008 |
| 28 | Rubidium Standard RUB                       | R&S            |                | 3000002681-0009 | 01.08.2006 | 24 | 01.08.2008 |
| 29 | Switching and Signal Conditioning Unit SSCU | R&S            | 338864/003     | 3000002681-0006 | 01.08.2006 | 24 | 01.08.2008 |
| 30 | Laser Printer HP Deskjet 2100               | HP             | N/A            | 3000002681-0011 | n.a.       |    |            |
| 31 | 19" Rack                                    | R&S            | 11138363000004 | 3000002681      | n.a.       |    |            |
| 32 | RF-cable set                                | R&S            | N/A            | 3000002681      | n.a.       |    |            |
| 33 | IEEE-cables                                 | R&S            | N/A            | 3000002681      | n.a.       |    |            |
| 34 | Sampling System FSIQ-B70                    | R&S            | 835355/009     | 3000002681      | s.No.7     |    |            |
| 35 | RSP programmable attenuator                 | R&S            | 834500/010     | 3000002681-0007 | 01.08.2006 | 24 | 01.08.2008 |
| 36 | Signalling Unit                             | R&S            | 838312/011     | 3000002681      | n.a.       |    |            |
| 37 | NGPE programmable Power Supply for EUT      | R&S            | 192.033.41     | 3000002681      |            |    |            |
| 38 | Climatic box VT 4002                        | Heraeus Vötsch | 58566046820010 | 300003019       | 11.05.2007 | 24 | 11.05.2009 |
| 39 | Signaling Unit CMU200                       | R&S            | 832221/0055    | 300002862       | 12.01.2006 | 24 | 12.01.2008 |
| 40 | Power Splitter 6005-3                       | Inmet Corp.    | none           | 300002841       | 23.12.2006 | 24 | 23.12.2008 |
| 41 | SMA Cables SPS-1151-985-SPS                 | Insulated Wire | different      | different       | n.a.       |    |            |
| 42 | CBT32 with EDR Signaling Unit               | R&S            |                |                 |            |    |            |
| 43 | Coupling unit                               | Narda          | N/A            | --              | n.a.       |    |            |
| 44 | 2xSwitch Matrix PSU                         | R&S            | 872584/021     | 300001329       | n.a.       |    |            |
| 45 | RF-cable set                                | R&S            | N/A            | different       | n.a.       |    |            |
| 46 | IEEE-cables                                 | R&S            | N/A            | --              | n.a.       |    |            |
|    |                                             |                |                |                 |            |    |            |

Anmerkung: 3000002681-00xx als Systeme inventarisiert

## SRD Laboratory Room 005:

| No | Equipment/Type                   | Manuf. | Serial Nr. | Inv. No. Cetecom | Last Calibration | Frequency (months) | Next Calibration |
|----|----------------------------------|--------|------------|------------------|------------------|--------------------|------------------|
| 1  | Spektrum Analyzer 8566B          | HP     | 2747A05275 | 300000219        | 08.11.2006       | 24                 | 08.11.2008       |
| 2  | Spektrum Analyzer Display 85662A | HP     | 2816A16497 | 300001690        | 08.11.2006       | 24                 | 08.11.2008       |
| 3  | Quasi-Peak-Adapter 85650A        | HP     | 2811A01135 | 300000216        | 08.11.2006       | 24                 | 08.11.2008       |
| 4  | Power Supply                     | Heiden | 003202     | 300001187        | 12.05.2007       | 36                 | 12.05.2010       |
| 5  | Power Supply                     | Heiden | 1701       | 300001392        | 12.05.2007       | 36                 | 12.05.2010       |
|    |                                  |        |            |                  |                  |                    |                  |

## C.BER Bluetooth Rack Room AC2:

| No | Equipment/Type                                           | Manufact. | Inv. No.<br>Cetecom | Last<br>Calibration             | Frequency<br>(months) | Next<br>Calibration |
|----|----------------------------------------------------------|-----------|---------------------|---------------------------------|-----------------------|---------------------|
| 1  | System Controller with XP Prof. & C.BER Control Software | F&W       | 300003580           | na                              |                       |                     |
| 2  | GPIO to USB Converter                                    | Agilent   | 300003426           | na                              |                       |                     |
| 3  | Spectrum Analyser FSIQ26                                 | R&S       | 300002681-005       | 1.08.2006                       | 24                    | 1.08.2008           |
|    | Sampling System FSIQ-B70                                 | R&S       | 300002681-005       | 1.08.2006                       | 24                    | 1.08.2008           |
|    | Tracking Generator FSIQ-B10 for FSIQ26                   | R&S       | 300002681-005       | 1.08.2006                       | 24                    | 1.08.2008           |
| 4  | RF-Generator SMIQ03 (Interferer Signal)                  | R&S       | 300002681-001       | 1.08.2006                       | 24                    | 1.08.2008           |
|    | Modulation Coder SMIQ-B20                                | R&S       | 300002681-001       | 1.08.2006                       | 24                    | 1.08.2008           |
|    | Data Generator SMIQ-B11                                  | R&S       | 300002681-001       | 1.08.2006                       | 24                    | 1.08.2008           |
|    | RF Rear Connection SMIQ-B19                              | R&S       | 300002681-001       | 1.08.2006                       | 24                    | 1.08.2008           |
|    | Fast CPU SM-B50                                          | R&S       | 300002681-001       | 1.08.2006                       | 24                    | 1.08.2008           |
|    | FM Modulator SM-B5                                       | R&S       | 300002681-001       | 1.08.2006                       | 24                    | 1.08.2008           |
| 5  | Rubidium Standard RUB                                    | R&S       | 300002681-009       | 1.08.2006                       | 24                    | 1.08.2008           |
| 6  | Switching Unit 3488A including 2 44476A cards            | HP        | 300000926           | Verified with path compensation |                       |                     |
|    | 44472A VHF switch                                        | HP        | 300000926           | Verified with path compensation |                       |                     |
| 7  | Signalling Unit: CBT with EDR                            | R&S       | 300003416           | 24.06.2006                      | 24                    | 24.06.2008          |
| 8  | RF-cable set                                             | different | no                  | Verified with path compensation |                       |                     |
| 9  | IEEE-cables                                              | R&S       | no                  | na                              |                       |                     |
| 10 | NGPE programmable Power Supply for EUT                   | R&S       | 400000078           | 1.08.2006                       | 24                    | 1.08.2008           |
| 11 | Coupling Unit 4324-2                                     | Narda     | no                  | Verified with path compensation |                       |                     |
| 12 | Climatic Chamber VT4002                                  | Voetch    | 300003019           | 11.05.2207                      | 24                    | 11.05.2009          |
| 13 | 6 dB Attenuator 1W                                       | Narda     | no                  | Verified with path compensation |                       |                     |
| 14 | DCBlocker 30 MHz to 12.75 GHz 1W                         | Narda     | no                  | Verified with path compensation |                       |                     |