

Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 1 of 59

# ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART PART 24 SUBPART E

OF

**Product Name:** Mobile phone

**Brand Name:** SAGEM

**Model Name:** MC2006a

FCC ID: M9HMC06A

**Report No.:** EH/2007/20001

**Issue Date:** Apr. 4, 2007

**FCC Rule Part:** 2,24E

Prepared for **SAGEM Communication** 

2, rue du Petit Albi, BP 28250, 95801 CERGY

PONTOISE Cedex

Prepared by SGS Taiwan Ltd.

No. 134, Wu Kung Rd., Wuku Industrial Zone,

Taipei County, Taiwan.

**Note:** This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.



Report No.: EH/2007/20001 **Issue Date: Apr. 04, 2007** 

Page: 2

## VERIFICATION OF COMPLIANCE

**SAGEM Communication Applicant:** 

2, rue du Petit Albi, BP 28250, 95801 CERGY PONTOISE Cedex

**Equipment Under Test:** Mobile phone

**FCC ID Number:** M9HMC06A

**Brand Name: SAGEM** 

Model No.: MC2006a

**Model Difference:** N/A

File Number: EH/2007/20001

Date of test: Feb. 07, 2007 ~ Mar. 20, 2007

**Date of EUT Received:** Feb. 06, 2007

## We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA-603-1-1998 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rule PART 24 subpart E.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Alex Hsieh	Date	Apr. 4, 2007	
Prepared By:	Alex Hsish / Engineer Gigi Jeh	Date	Apr. 4, 2007	
Approved By:	Gigi Yeh/ Clerk  Tinulut Su  Vincent Su / Manager	Date 	Apr. 4, 2007	



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 3

## Version

Version No.	Date
00	Apr. 04, 2007



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 4

## **Table of Contents**

1.		NERAL INFORMATION	
	1.1	Product Description	
	1.2	Related Submittal(s) / Grant (s)	
	1.3	Test Methodology	7
	1.4	Test Facility	7
	1.5	Special Accessories	7
	1.6	Equipment Modifications	7
2.	SYS	TEM TEST CONFIGURATION	8
	2.1	EUT Configuration	8
	2.2	EUT Exercise	8
	2.3	Test Procedure	8
	2.4	Configuration of Tested System	9
3.	SUN	MARY OF TEST RESULTS	10
4.	DES	SCRIPTION OF TEST MODES	10
5.	RF I	POWER OUTPUT MEASUREMENT	11
	5.1	Standard Applicable	11
	5.2	Test Set-up:	11
	5.3	Measurement Procedure	11
	5.4	Measurement Equipment Used:	12
	5.5	Measurement Result	12
6.	ERF	P, EIRP MEASUREMENT	13
	6.1	Standard Applicable	13
	6.2	Test SET-UP (Block Diagram of Configuration)	13
	6.3	Measurement Procedure	15
	6.4	Measurement Equipment Used:	16
	6.5	Measurement Result	17
7.	99%	OCCUPIED BANDWIDTH MEASUREMENT	18
	7.1	Standard Applicable	
	7.2	Test Set-up:	18
	7.3	Measurement Procedure	18
	7.4	Measurement Equipment Used:	19
	7.5	Measurement Result:	19
8.	OUT	Γ OF BAND EMISSION AT ANTENNA TERMINALS	22



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 5

	8.1	Standard Applicable	22
	8.2	Test SET-UP	22
	8.3	Measurement Procedure	22
	8.4	Measurement Equipment Used:	23
	8.5	Measurement Result	24
9.	FIEI	D STRENGTH OF SPURIOUS RADIATION MEASUREMENT	28
	9.1	Standard Applicable	
	9.2	EUT Setup (Block Diagram of Configuration)	28
	9.3	Measurement Procedure	30
	9.4	Measurement Equipment Used:	31
	9.5	Measurement Result	31
10.	FRE	QUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	38
	10.1	Standard Applicable	
	10.2	Test Set-up:	38
	10.3	Measurement Procedure	38
	10.4	Measurement Equipment Used:	39
	10.5	Measurement Result	40
11.	FRE	QUENCY STABILITY V.S. VOLTAGE MEASUREMENT	41
	11.1	Standard Applicable	
	11.2	Test Set-up:	41
	11.3	Measurement Procedure	41
	11.4	Measurement Equipment Used:	42
	11.5	Measurement Result	43
12.	AC F	POWER LINE CONDUCTED EMISSION TEST	44
	12.1	Standard Applicable	
	12.2	EUT Setup	44
	12.3	Measurement Procedure	44
	12.4	Measurement Equipment Used:	45
	12.5	Measurement Result	
PН	OTO	GRAPHS OF SET UP	48
		EDADHS OF FUT	



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 6

## **GENERAL INFORMATION**

## 1.1 Product Description

11 Troduct Description					
Product	Mobile phone				
Model Name	MC2006a				
Model Difference:	N/A				
Brand Name	SAGEM				
Power Supply	3.7 Vdc re-chargeable battery, or 5Vdc by AC/DC power adapter SAGEM Model:DA2-3102USWR Reference: 188644046				
Simple Hands-Free (SHF)	One provide. Mode No.: N/A				
Data lead (USB)	1.2m USB shielded cable, Reference: 188672363				

#### GSM:

5014.						
Frequency Range and	GSM 850: 824MHz –849MHz	33 dBm				
Power	GSM 1900: 1850MHz –1910MHz	30 dBm				
Type of Emission	300KGXW					
Software Version	L 5,8G					
Hardware Version	V0x					
IMEI	01119300000005-9					



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 7

### 1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: M9HMC06A filing to comply with Section Part 24 subpart E of the FCC CFR 47 Rules.

## 1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on chapter 13 of ANSI C63.4 (2003) and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057.

## 1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 and CISPR 22/EN 55022 requirements. Site No. 1(3 &10 meters) Registration Number: 94644, Both OATS and Anechoic chamber (3 meters) was accredited by TAF (0513). Canada Registration Number: 4620A-1

## 1.5 Special Accessories

Not available for this EUT intended for grant.

## 1.6 Equipment Modifications

Not available for this EUT intended for grant.



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 8

### SYSTEM TEST CONFIGURATION

# 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.

#### 2.3 Test Procedure

#### 2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 1.0 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4-2003.




Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 9

# 2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System (Fixed Channel)



### **Remote Side**

**CMU200** 

**Table 2-1 Equipment Used in Tested System** 

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	Universal Radio Communication Tester	R&S	CMU200	102189	shielded	Un-shielded
2	Adaptor	SAGEM	DA2-3102USWR	188644046	Un-shielded	Un-shielded
3.	Battery	SAGEM	N/A	188973731	Un-shielded	Un-shielded



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

**Page: 10** 

## SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§2.1046(a) §24.232(a)	RF Power Output	Compliant
§24.232(a) §2.1046(a)	EDD/EIDD	Compliant
§24.232(a)	ERP/ EIRP measurement	Compliant
§2.1049(h)	99% Occupied Bandwidth	Compliant
§2.1051 §24.238(a)	Out of Band Emissions at Antenna Terminals and Band Edge	Compliant
§2.1053 §24.238(a)	Field Strength of Spurious Radiation	Compliant
§2.1055(a)(1)(b)	Frequency Stability vs. Temperature	Compliant
§2.1055(d)(1)(2)	Frequency Stability vs. Voltage	Compliant
§15.107;§15.207	AC Power Line Conducted Emission	Compliant

## **DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition.

EUT staying in continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing.

The field strength of spurious radiation emission was measured as EUT stand-up position (E1 mode) and lie down position (E1, E2 mode) for both GSM and GPRS with all power adaptors, earphone and Data cable. The worst-case E1 mode for GSM 1900 band with adaptor for channel Low, Mid and High at GSM mode was reported.



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 11


## RF POWER OUTPUT MEASUREMENT

# 5.1 Standard Applicable

According to FCC §2.1046.

FCC 24.232(b) Mobile station are limited to 2W.

## 5.2 Test Set-up:

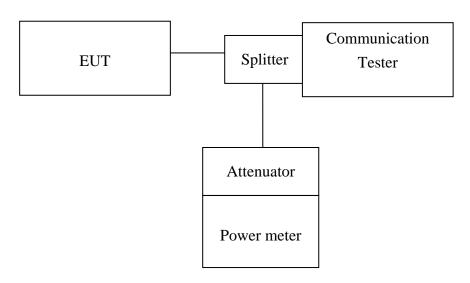

Note: Measurement setup for testing on Antenna connector

### **5.3** Measurement Procedure

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a power meter. Transmitter output was read off the power meter in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the power meter reading.



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 12

# 5.4 Measurement Equipment Used:

	Conducted Emission Test Site									
<b>EQUIPMENT</b>	MFR	MODEL	SERIAL	LAST	CAL DUE.					
TYPE		NUMBER	NUMBER	CAL.						
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2006	03/28/2007					
Spectrum Analyzer	Agilent	E7405A	US41160416	06/28/2006	06/29/2007					
Communication Test	R&S	SMU200	N/A	N/A	N/A					
Power Sensor	Anritsu	MA2490A 31431		06/28/2006	06/29/2007					
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2006	06/29/2007					
Temperature Chamber	TERCHY	MHG-120LF	911009	10/14/2006	10/13/2007					
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A					
Attenuator	Mini-Circult	BW-S10W5	N/A	09/23/2006	09/22/2007					
Attenuator	Mini-Circult	BW-S6W5	N/A	09/23/2006	09/22/2007					
Splitter	Agilent	11636B	51728	09/23/2006	09/22/2007					
DC Power Supply	TOPWARD	3303A	N/A	N/A	N/A					

### 5.5 Measurement Result

EUT Mode	Frequency (MHz)	СН	Power Meter Reading (dBm)	Path Loss (dB)	Peak Power (dBm)
	1850.20	512	4.19	26.50	30.69
PCS 1900	1880.00	661	3.84	26.50	30.34
1 02 1700	1909.80	810	3.68	26.50	30.18



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 13

# 6. ERP, EIRP MEASUREMENT


## 6.1 Standard Applicable

According to FCC §2.1046

FCC 24.232(b) Mobile station are limited to 2W EIRP.

## **6.2** Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

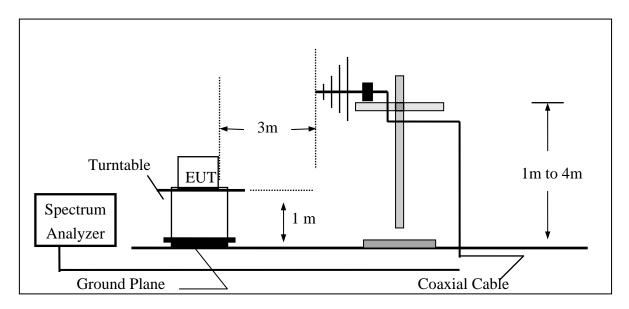





Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 14

## (B) Radiated Emission Test Set-UP Frequency Over 1 GHz

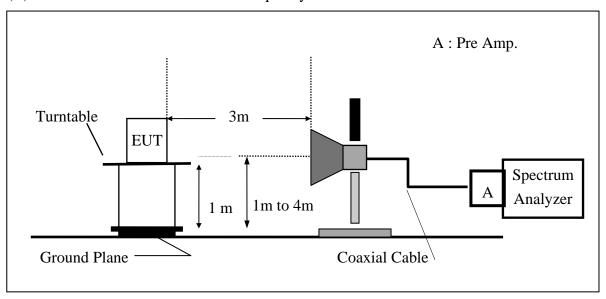

### (C) Substituted Method Test Set-UP

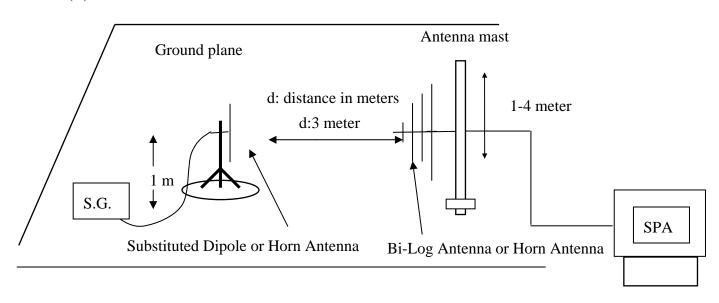



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

**Page: 15** 

### **6.3** Measurement Procedure

The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.

EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

ERP = S.G. output (dBm) + Antenna Gain (dBd) - Cable Loss (dB)

EIRP = S.G. output (dBm) + Antenna Gain (dBi) - Cable Loss (dB)



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

**Page: 16** 

**6.4** Measurement Equipment Used:

0.4 Measurement E	<del>quipment eseut</del>				1
<b>EQUIPMENT</b>	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2006	03/28/2007
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2006	06/29/2007
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2006	11/10/2007
Communication Test	R&S	SMU200	N/A	N/A	N/A
Bilog Antenna	SCHWAZBECK	VULB9163	152	06/03/2006	06/02/2007
Horn antenna	Schwarzbeck	BBHA 9120D	309/320	08/16/2006	08/15/2007
Pre-Amplifier	HP	8447D	2944A09469	07/19/2006	07/18/2007
Pre-Amplifier	HP	8494B	3008A00578	02/26/2006	02/25/2007
Signal Generator	R&S	SMR40	100210	02/09/2006	02/10/2007
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	10/09/2006	10/08/2007
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	10/09/2006	10/08/2007
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-0.5M	0.5m	10/09/2006	10/08/2007
Site NSA	SGS	966 chamber	N/A	11/17/2006	11/16/2007
Attenuator	Mini-Circult	BW-S10W5	N/A	09/23/2006	09/22/2007
Dipole Antenna	Schwarzbeck	VHAP	908/909	06/10/2006	06/11/2007
Dipole Antenna	Schwarzbeck	UHAP	891/892	06/10/2006	06/11/2007
Horn antenna	Schwarzbeck	BBHA 9120D	N/A	08/16/2006	08/15/2007



Report No.: EH/2007/20001 **Issue Date: Apr. 04, 2007** 

**Page: 17** 

### 6.5 Measurement Result

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
			**	V	122.45	18.06	9.90	5.56	22.40	33.00
			Н	Н	127.25	23.07	9.90	5.56	27.41	33.00
	1070.00		E1	V	128.09	23.70	9.90	5.56	28.04	33.00
	1850.20	512	El	Н	122.42	18.24	9.90	5.56	22.58	33.00
			E2	V	124.04	19.65	9.90	5.56	23.99	33.00
			E2	Н	126.84	22.66	9.90	5.84	26.72	33.00
				V	124.46	20.10	9.99	5.61	24.48	33.00
			Н	Н	128.00	23.86	9.99 5.0	5.61	28.23	33.00
	1880.00	661	E1	V	129.56	25.20	9.99	5.61	29.58	33.00
PCS 1900				Н	124.24	20.10	9.99	5.61	24.47	33.00
			E2	V	125.35	20.99	9.99	5.61	25.37	33.00
			E2	Н	127.78	23.64	9.99	5.61	28.01	33.00
			Н	V	123.53	19.20	10.08	5.66	23.62	33.00
			п	Н	127.40	23.29	10.08	5.66	27.71	33.00
	1909.80	810	E1	V	129.25	24.92	10.08	5.66	29.34	33.00
	1909.80	810	E1	Н	124.56	20.45	10.08	5.66	24.87	33.00
			E2	V	124.69	20.36	10.08	5.66	24.78	33.00
				Н	126.95	22.84	10.08	5.66	27.26	33.00

### Remark:

(1) The RBW, VBW of SPA for frequency

Below 1GHz was RBW=100 KHz, VBW=300KHz,

Above 1GHz was RBW= 1MHz, VBW= 3MHz



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007


**Page: 18** 

## 99% OCCUPIED BANDWIDTH MEASUREMENT

# 7.1 Standard Applicable

According to §FCC 2.1049.

## 7.2 Test Set-up:

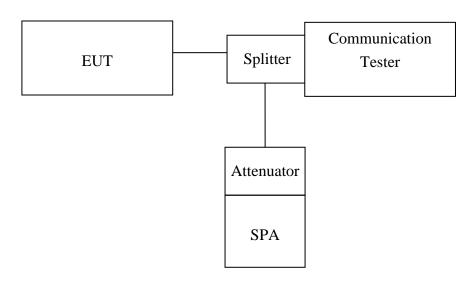

**Note:** Measurement setup for testing on Antenna connector

#### 7.3 Measurement Procedure

The EUT's output RF connector was connected with a short cable to the spectrum analyzer, RBW (10/30KHz) was set to about 1% of emission BW, VBW= 3 times RBW(30/100KHz), -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 19

# 7.4 Measurement Equipment Used:

	Conducted Emission Test Site						
<b>EQUIPMENT</b>	MFR	MODEL	MODEL SERIAL		CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2006	03/28/2007		
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2006	06/29/2007		
Power Sensor	Anritsu	MA2490A	31431	06/28/2006	06/29/2007		
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2006	06/29/2007		
Temperature Chamber	TERCHY	MHG-120LF	911009	11/11/2006	11/12/2007		
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A		
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2006	10/06/2007		
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2006	10/06/2007		
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2006	10/06/2007		
Signal Generator	R&S	SMR40	100210	11/09/2006	11/10/2007		
DC Power Supply	Agilent	6038A	2929A-07548	01/06/2007	01/05/2008		

### 7.5 Measurement Result:.

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
	1850.20	512	0.2491
PCS 1900	1880.00	661	0.2536
	1909.80	810	0.2487



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

**Page: 20** 

Figure 7-4: PCS Channel Low


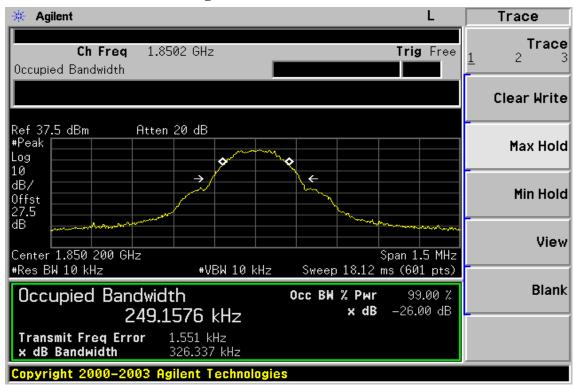


Figure 7-5 PCS Channel Mid



This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作 發放,請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告 未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。


SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博紀政工業區五工路134號 f (886-2) 2298-2698 www.sgs.com.tw

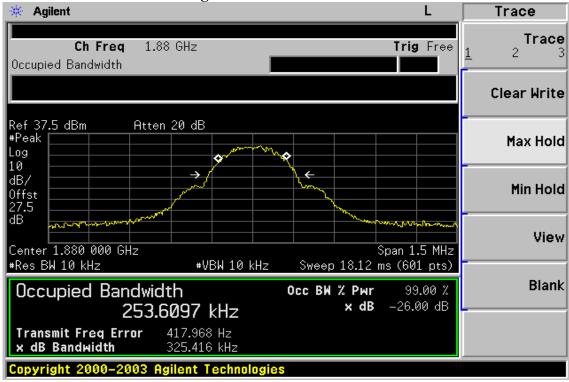

Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 21

Figure 7-6: PCS Channel High

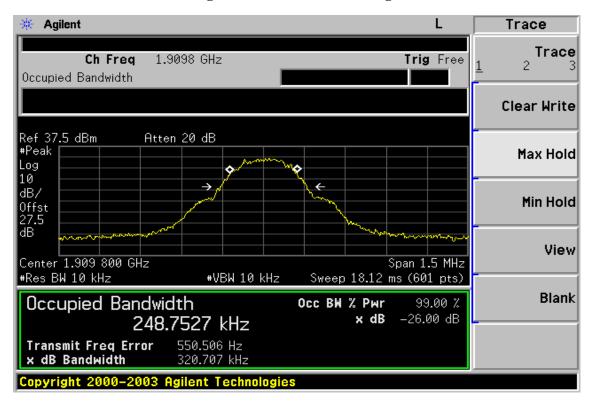



Report No.: EH/2007/20001 **Issue Date: Apr. 04, 2007** 

**Page: 22** 


### **OUT OF BAND EMISSION AT ANTENNA TERMINALS**

## 8.1 Standard Applicable

According to FCC §2.1051.

FCC §24.238(a), the magnitude of spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than 43 + 10 log (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

### 8.2 Test SET-UP

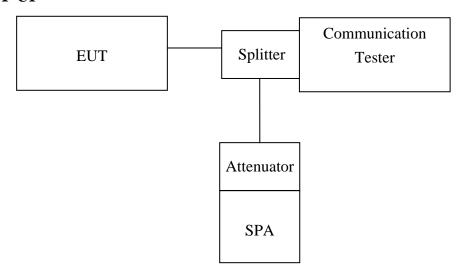

**Note:** Measurement setup for testing on Antenna connector

### **8.3** Measurement Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10th harmonic. Limit = -13dBm

Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 23

# 8.4 Measurement Equipment Used:

	Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	MODEL SERIAL		CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2006	03/28/2007		
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2006	06/29/2007		
Power Sensor	Anritsu	MA2490A	31431	06/28/2006	06/29/2007		
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2006	06/29/2007		
Temperature Chamber	TERCHY	MHG-120LF	911009	11/11/2006	11/12/2007		
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A		
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2006	10/06/2007		
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2006	10/06/2007		
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2006	10/06/2007		
Signal Generator	R&S	SMR40	100210	11/09/2006	11/10/2007		
DC Power Supply	Agilent	6038A	2929A-07548	01/06/2007	01/05/2008		





Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 24

#### 8.5 Measurement Result

Figure 8-1: Out of Band emission at antenna terminals- PCS Channel Lowest

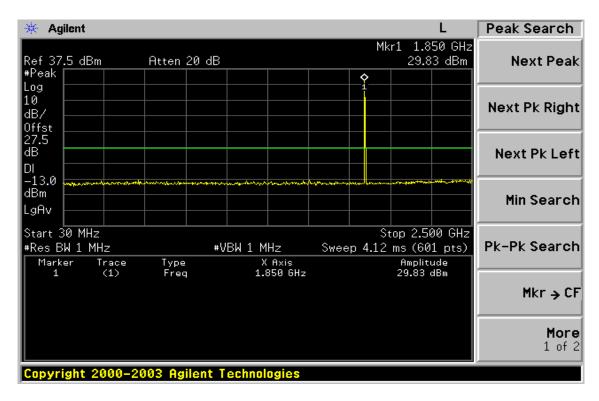

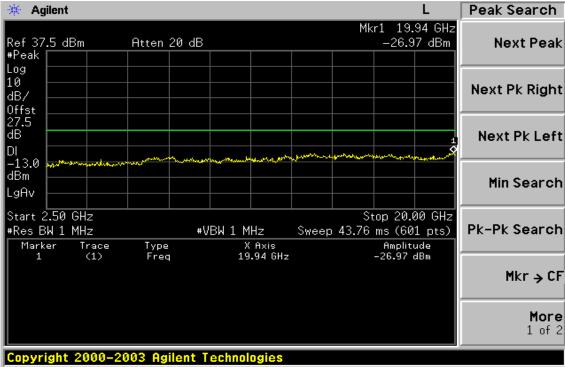





Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

**Page: 25** 

Figure 8-2: Out of Band emission at antenna terminals –PCS Channel Mid

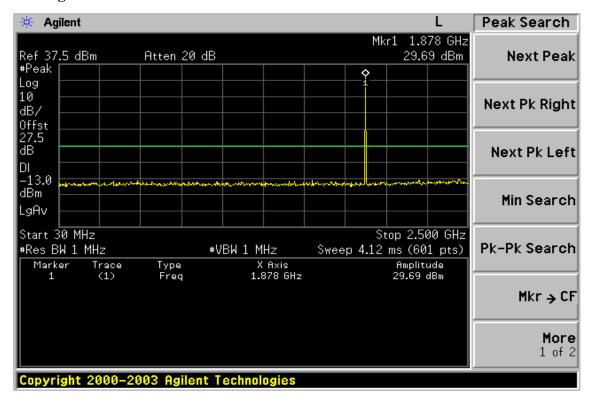

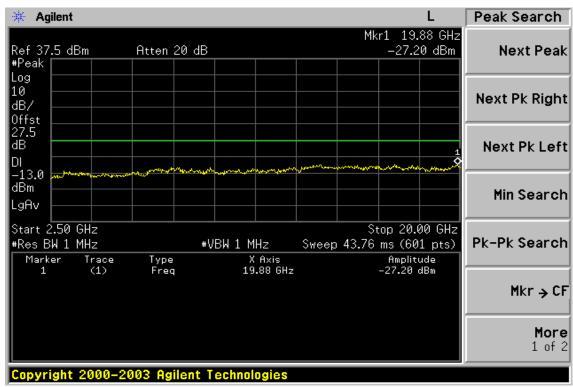





Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

**Page: 26** 

Figure 8-3: Out of Band emission at antenna terminals-PCS Channel Highest

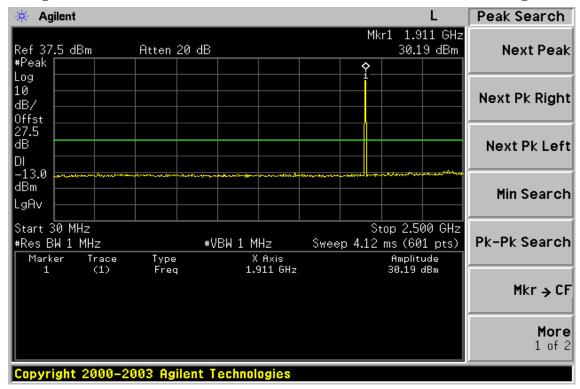

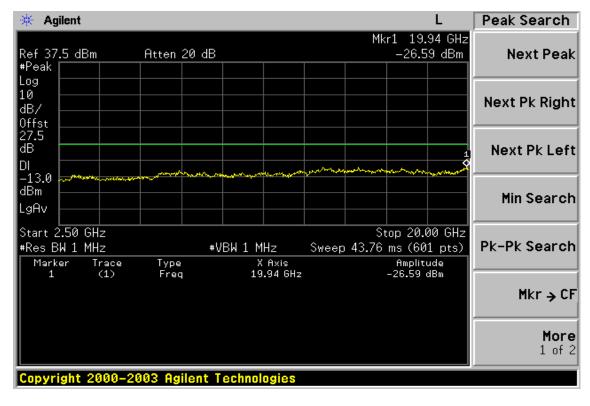



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 27

Figure 8-4: Bad edge emission at antenna terminals – PCS Channel Lowest


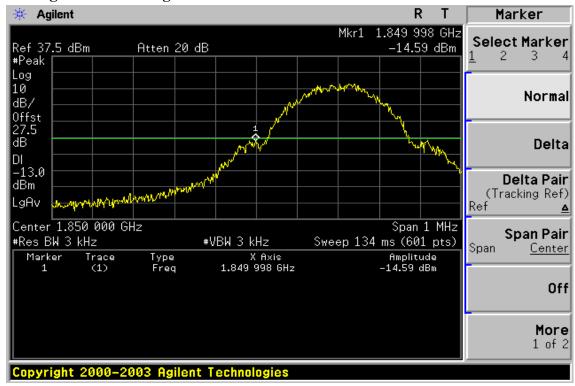


Figure 8-5: Band edge emission at antenna terminals – PCS Channel Highest



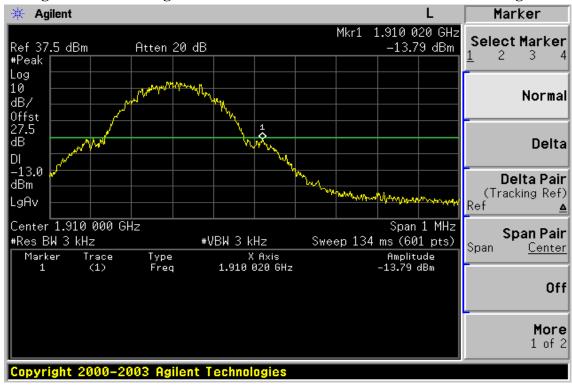

Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 28

## FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT


# 9.1 Standard Applicable

According to FCC §2.1053,

FCC §24.238(a), the magnitude of spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than 43 + 10 log (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

## 9.2 EUT Setup (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

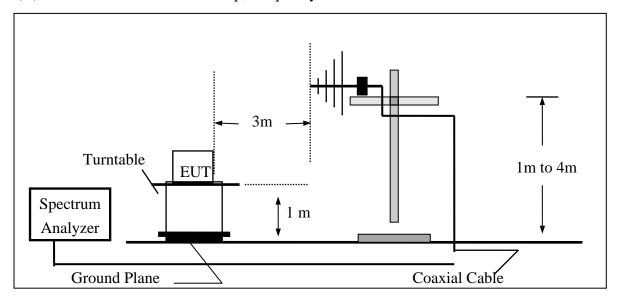





Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 29

## (B) Radiated Emission Test Set-UP Frequency Over 1 GHz

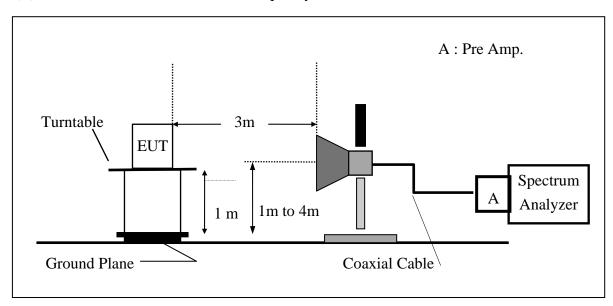

### (C) Substituted Method Test Set-UP

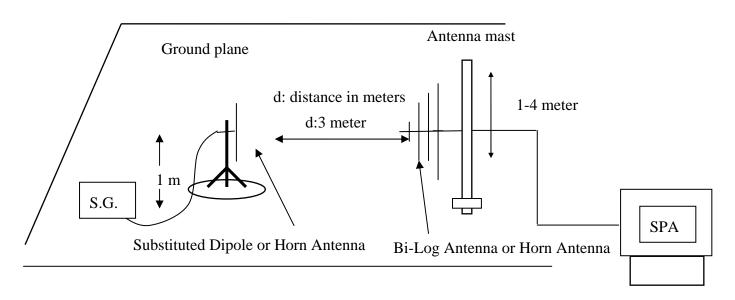



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

**Page: 30** 

## 9.3 Measurement Procedure

The EUT was placed on a non-conductive, The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission were identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

EIRP = S.G. output (dBm) + Antenna Gain(dBi) - Cable Loss <math>(dB)



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 31

# 9.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2006	03/28/2007
Spectrum Analyzer	Agilent	E7405A	US41160416	08/27/2006	08/26/2007
Bilog Antenna	SCHWAZBECK	VULB9163	152	06/03/2006	06/02/2007
Horn antenna	Schwarzbeck	BBHA 9120D	309/320	08/16/2006	08/15/2007
Pre-Amplifier	HP	8447D	2944A09469	07/19/2006	07/18/2007
Pre-Amplifier	HP	8494B	3008A00578	02/26/2006	02/25/2007
Signal Generator	R&S	SMR40	100210	02/09/2006	02/10/2007
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	10/09/2006	10/08/2007
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	10/09/2006	10/08/2007
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-0.5M	0.5m	10/09/2006	10/08/2007
Site NSA	SGS	966 chamber	N/A	11/17/2006	11/16/2007
Site NSA	SGS	10m Open-Site	N/A	10/02/2006	10/01/2007
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2006	10/06/2007
Temperature Chamber	TERCHY	MHG-120LF	911009	10/14/2006	10/13/2007
Dipole Antenna	Schwarzbeck	VHAP	908/909	06/10/2006	06/11/2007
Dipole Antenna	Schwarzbeck	UHAP	891/892	06/10/2006	06/11/2007
Horn antenna	Schwarzbeck	BBHA 9120D	N/A	08/16/2006	08/15/2007

### 9.5 Measurement Result

Refer to attach tabular data sheets.



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

**Page: 32** 

## Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Low E1 Mode **Test Date** Mar. 16, 2007

Fundamental Frequency: 1850.20MHz Test By: Alex Temperature Pol: Ver : 25

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
30.00	44.97	V	-59.73	-7.34	0.95	-68.02	-13.00	-55.02
58.18	43.67	V	-66.85	-0.49	1.08	-68.41	-13.00	-55.41
94.99	43.56	V	-59.00	-7.75	1.31	-68.07	-13.00	-55.07
1850.00	85.92	V	-18.47	9.90	5.56	-14.13	-13.00	-1.13
3700.40	45.39	V	-52.54	12.61	8.31	-48.24	-13.00	-35.24
5550.60		V		13.23	10.33		-13.00	
7400.80		V		11.50	12.08		-13.00	
9251.00		V		11.92	13.50		-13.00	
11101.20		V		11.66	15.11		-13.00	
12951.40		V		13.63	16.60		-13.00	
14801.60		V		12.76	17.95		-13.00	
16651.80		V		15.92	19.14		-13.00	
18502.00		V		18.75	10.40		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

## Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

**Page: 33** 

## Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Low E1 Mode **Test Date** Mar. 16, 2007

Fundamental Frequency: 1850.20MHz Test By: Alex Temperature Pol: Hor : 25

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
43.58	42.09	Н	-62.25	-1.92	0.98	-65.14	-13.00	-52.14
65.89	41.68	Н	-70.17	-0.83	1.12	-72.12	-13.00	-59.12
94.99	40.48	Н	-62.89	-7.75	1.31	-71.96	-13.00	-58.96
1850.00	76.84	Н	-27.34	9.90	5.56	-23.00	-13.00	-10.00
3700.40	47.96	Н	-50.08	12.61	8.31	-45.78	-13.00	-32.78
5550.60	43.76	Н	-47.29	13.23	10.33	-44.39	-13.00	-31.39
7400.80		Н		11.50	12.08		-13.00	
9251.00		Н		11.92	13.50		-13.00	
11101.20		Н		11.66	15.11		-13.00	
12951.40		Н		13.63	16.60		-13.00	
14801.60		Н		12.76	17.95		-13.00	
16651.80		Н		15.92	19.14		-13.00	
18502.00		Н		18.75	10.40		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

#### Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 34

## Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Mid E1 Mode **Test Date** Mar. 16, 2007

Fundamental Frequency: 1880MHz Test By Alex Pol Ver **Temperature** : 25

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
31.94	44.60	V	-59.54	-6.43	0.94	-66.91	-13.00	-53.91
58.13	42.91	V	-67.59	-0.49	1.08	-69.15	-13.00	-56.15
106.63	45.13	V	-56.18	-7.77	1.39	-65.33	-13.00	-52.33
3760.00	44.81	V	-52.85	12.60	8.39	-48.63	-13.00	-35.63
5640.00	40.19	V	-50.39	13.36	10.41	-47.44	-13.00	-34.44
7520.00		V		11.45	12.19		-13.00	
9400.00		V		11.93	13.61		-13.00	
11280.00		V		11.92	15.27		-13.00	
13160.00		V		13.33	16.71		-13.00	
15040.00		V		13.76	18.15		-13.00	
16920.00		V		15.27	19.32		-13.00	
18800.00		V		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

### Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 35

## Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Mar. 16, 2007 Operation Mode : TX CH Mid E1 Mode Test Date

Fundamental Frequency: 1880MHz Test By Alex Pol Hor Temperature : 25

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
46.49	42.72	Н	-62.87	-1.32	1.05	-65.24	-13.00	-52.24
67.83	41.82	Н	-70.24	-0.95	1.14	-72.33	-13.00	-59.33
94.99	41.08	Н	-62.29	-7.75	1.31	-71.36	-13.00	-58.36
1448.50	41.74	Н	-63.07	8.54	4.47	-58.99	-13.00	-45.99
3760.00	44.47	Н	-53.30	12.60	8.39	-49.09	-13.00	-36.09
5640.00	43.79	Н	-46.96	13.36	10.41	-44.01	-13.00	-31.01
7520.00		Н		11.45	12.19		-13.00	
9400.00		Н		11.93	13.61		-13.00	
11280.00		Н		11.92	15.27		-13.00	
13160.00		Н		13.33	16.71		-13.00	
15040.00		Н		13.76	18.15		-13.00	
16920.00		Н		15.27	19.32		-13.00	
18800.00		Н		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

#### Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- $4 \text{ ERP/EIRP } (dBm) = SG \text{ Setting}(dBm) + Antenna Gain } (dB/dBi) Cable loss } (dB)$



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

**Page: 36** 

## Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Mar. 16, 2007 Operation Mode : TX CH High E1 Mode **Test Date** 

Fundamental Frequency: 1909.8 MHz Test By Alex Ver **Temperature** Pol : 25

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
36.79	49.61	V	-53.12	-4.16	0.91	-58.19	-13.00	-45.19
51.34	49.07	V	-58.51	-0.58	1.12	-60.21	-13.00	-47.21
106.63	45.04	V	-56.27	-7.77	1.39	-65.42	-13.00	-52.42
1481.00	42.13	V	-62.68	8.73	4.79	-58.74	-13.00	-45.74
1910.00	84.53	V	-19.80	10.08	5.66	-15.38	-13.00	-2.38
3981.60		V		12.60	8.69		-13.00	
5972.40		V		13.86	10.73		-13.00	
7963.20		V		11.27	12.49		-13.00	
9954.00		V		12.08	14.24		-13.00	
11944.80		V		13.08	15.87		-13.00	
13935.60		V		11.82	17.21		-13.00	
15926.40		V		17.08	18.70		-13.00	
17917.20		V		9.63	19.97		-13.00	
19908.00		V		18.88	21.24		-13.00	

	30MHz - 80MHz: 5.04dB				
Measurement uncertainty	80MHz -1000MHz: 3.76dB				
	1GHz - 13GHz: 4.45dB				

## Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 37

#### Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Mar. 16, 2007 Operation Mode : TX CH High E1 Mode **Test Date** 

Fundamental Frequency: 1909.8 MHz Test By Alex Hor **Temperature** Pol : 25

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
30.00	45.15	Н	-60.75	-7.34	0.95	-69.04	-13.00	-56.04
65.89	42.31	Н	-69.54	-0.83	1.12	-71.49	-13.00	-58.49
94.99	40.73	Н	-62.64	-7.75	1.31	-71.71	-13.00	-58.71
1481.00	42.07	Н	-62.59	8.73	4.79	-58.65	-13.00	-45.65
1910.00	79.38	Н	-24.73	10.08	5.66	-20.31	-13.00	-7.31
3981.60	44.78	Н	-51.99	12.60	8.69	-48.09	-13.00	-35.09
5972.40		Н		13.86	10.73		-13.00	
7963.20		Н		11.27	12.49		-13.00	
9954.00		Н		12.08	14.24		-13.00	
11944.80		Н		13.08	15.87		-13.00	
13935.60		Н		11.82	17.21		-13.00	
15926.40		Н		17.08	18.70		-13.00	
17917.20		Н		9.63	19.97		-13.00	
17188.20		Н		14.47	19.52		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

## Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

**Page: 38** 

#### 10. FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT


## 10.1 Standard Applicable

According to FCC  $\S2.1055(a)(1)(b)$ .

Frequency Tolerance: 2.5 ppm

### 10.2 Test Set-up:

#### Temperature Chamber

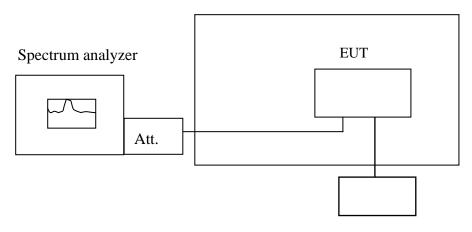

Variable Power Supply

Note: Measurement setup for testing on Antenna connector

#### **10.3 Measurement Procedure**

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to  $-30^{\circ}$ C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 39

## 10.4 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2006	03/28/2007	
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2006	06/29/2007	
Power Sensor	Anritsu	MA2490A	31431	06/28/2006	06/29/2007	
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2006	06/29/2007	
Temperature Chamber	TERCHY	MHG-120LF	911009	11/11/2006	11/12/2007	
Low Loss Cable	HUBER+SUHNE R	SUCOFLEX 104PEA	N/A	N/A	N/A	
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2006	10/06/2007	
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2006	10/06/2007	
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2006	10/06/2007	
Signal Generator	R&S	SMR40	100210	11/09/2006	11/10/2007	
DC Power Supply	Agilent	6038A	2929A-07548	01/06/2007	01/05/2008	



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 40

#### 10.5 Measurement Result

Reference Frequency: PCS Mid Channel 1880 MHz @ 25°C							
	Limit: +/- 2.5 ppm = 4700 Hz						
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)			
Vdc	Temperature ( $^{\circ}$ C)	(MHz)	Della (112)	Lillit (112)			
3.7	-30	1880.000037	-17.00	4700			
3.7	-20	1880.000029	-9.00	4700			
3.7	-10	1880.000022	-2.00	4700			
3.7	0	1880.000031	-11.00	4700			
3.7	10	1880.000019	1.00	4700			
3.7	20	1880.000020	0.00	4700			
3.7	30	1880.000027	-7.00	4700			
3.7	40	1880.000031	-11.00	4700			
3.7	50	1880.000036	-16.00	4700			

Note: The battery is rated 3.7V dc.



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

**Page: 41** 


## 11. FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT

## 11.1 Standard Applicable

According to FCC §2.1055(d)(1)(2)

Frequency Tolerance: 2.5 ppm

### 11.2 Test Set-up:

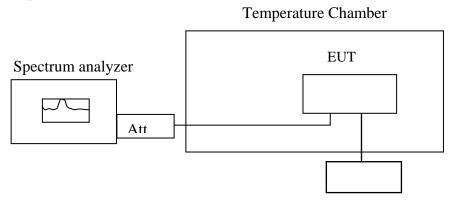

Variable DC Power Supply

*Note: Measurement setup for testing on Antenna connector* 

#### 11.3 Measurement Procedure

Set chamber temperature to 25°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 42

## 11.4 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2006	03/28/2007	
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2006	06/29/2007	
Power Sensor	Anritsu	MA2490A	31431	06/28/2006	06/29/2007	
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2006	06/29/2007	
Temperature Chamber	TERCHY	MHG-120LF	911009	11/11/2006	11/12/2007	
Low Loss Cable	HUBER+SUHNE R	SUCOFLEX 104PEA	N/A	N/A	N/A	
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2006	10/06/2007	
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2006	10/06/2007	
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2006	10/06/2007	
Signal Generator	R&S	SMR40	100210	11/09/2006	11/10/2007	
DC Power Supply	Agilent	6038A	2929A-07548	01/06/2007	01/05/2008	



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 43

#### 11.5 Measurement Result

Reference Frequency: PCS Mid Channel 1880 MHz @ 25°C						
	Limit: +/- 2.5 ppm = 4700 Hz					
Power Supply	Environment	Frequency	Dolto (Hz)	Limit (Ha)		
Vdc	Temperature (°C)	(MHz)	Delta (Hz)	Limit (Hz)		
3.70	25	1880.00002	0.00	4700		
3.60	25	1880.000033	-13.00	4700		
3.50	25	1879.999981	39.00	4700		
3.40	25	1070 000070	41.00	4700		
(Endpoint)	25	1879.999979	41.00	4700		

Note: The battery is rated 3.7V dc.



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

**Page: 44** 

#### AC POWER LINE CONDUCTED EMISSION TEST **12.**

## 12.1 Standard Applicable

According to §15.207. The emission value for frequency within 150KHz to 30MHz shall not exceed criteria of below chart.

Frequency range	Limits dB(uV)		
MHz	Quasi-peak	Average	
0.15 to 0.50	66 to 56	56 to 46	
0.50 to 5	56	46	
5 to 30	60	50	

#### Note

#### 12.2 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2001.
- 2. The EUT was plug-in DC power adaptort and was placed on the center of the back edge on the test table. The peripherals like earphone was placed on the side of the EUT. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The Power adaptor was connected with 110Vac/60Hz power source.

#### 12.3 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

<sup>1.</sup> The lower limit shall apply at the transition frequencies

<sup>2.</sup> The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

**Page: 45** 

## 12.4 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
EMC Analyzer	HP	8594EM	3624A00203	09/02/2006	09/03/2007	
EMI Test Receiver	R&S	ESCS30	828985/004	06/09/2006	06/10/2007	
Transient Limiter	HP	11947A	3107A02062	09/02/2006	09/03/2007	
LISN	Rolf-Heine	NNB-2/16Z	99012	12/31/2006	12/30/2007	
LISN	Rolf-Heine	NNB-2/16Z	99013	12/24/2006	12/23/2007	
Coaxial Cables	N/A	No. 3, 4	N/A	12/24/2006	12/23/2007	

#### 12.5 Measurement Result

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.




Report No.: EH/2007/20001 **Issue Date: Apr. 04, 2007** 

**Page: 46** 

#### AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	GSM 1900 LINK			Test Date:	Mar. 14 2007
Temperature:	25	Humidity:	Alex	Test By:	Denny

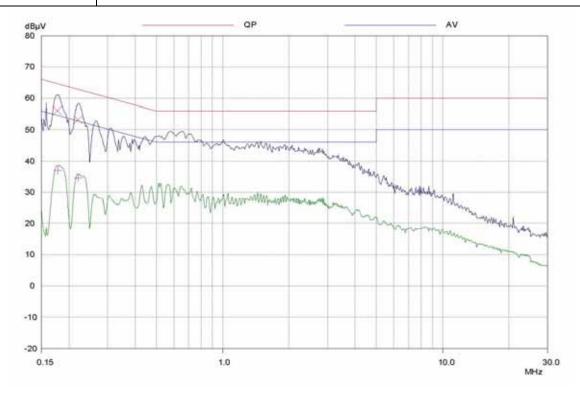


Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB
0.17732 0.21988	56.09 53.19	64.61 62.82	8.52 9.63
0.21986	55.19	02.82	9.03
Frequency	AV Level	AV Limit	AV Delta
MHz	dΒμV	dΒμV	dB
0.17732	36.93	54.61	17.68
0.21988	34.57	52.82	18.25



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

**Page: 47** 

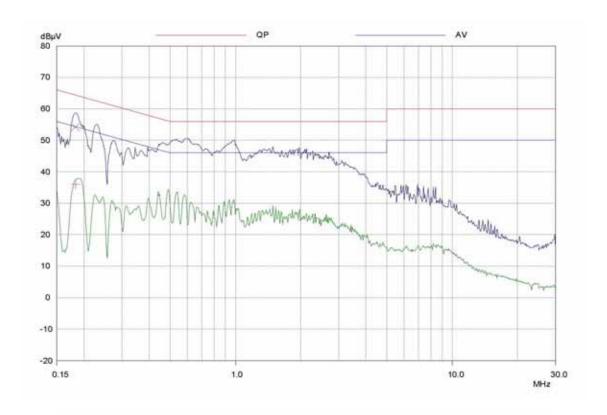

Frequency	QP Level	QP Limit	QP Delta
MHz	dΒμV	dΒμV	dB
0.18306	54.10	64.35	10.25
Frequency	AV Level	AV Limit	AV Delta
MHz	dΒμV	dΒμV	dB
0.18306	35.94	54.35	18.41



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 48


# APPENDIX 1 PHOTOGRAPHS OF SET UP



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 49

## **Radiated Emission Set up Photos**

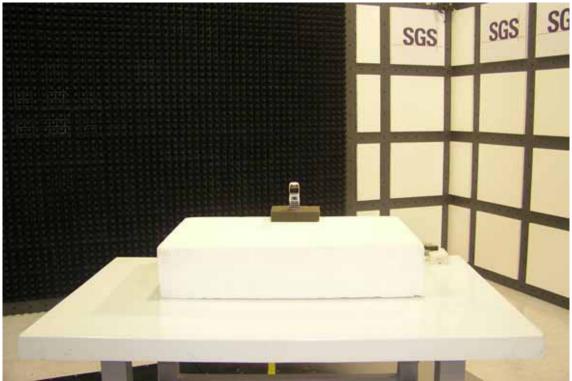





Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 50

## **Conducted Emission Set up Photo**







Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 51

# **APPENDIX 2**

# PHOTOGRAPHS OF EUT



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 52

## All View of EUT



Front View of EUT





Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 53

## Back View of EUT



Site View of EUT - 1



This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <a href="www.sgs.com">www.sgs.com</a>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。

SGS Taiwan Ltd.

No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台塊和股工業區五工路134號



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 54

## Site View of EUT – 2



Site View of EUT – 3





Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 55

## Site View of EUT – 4



*View of EUT – 5* 



This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <a href="www.sqs.com">www.sqs.com</a>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在www.sqs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。

SGS Taiwan Ltd.

No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台塊和股工業區五工路134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3939 f (886-2) 2298-2698 www.sgs.com.



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 56

Adaptor (*Reference:188644046*)



Open View of EUT



This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <a href="www.sqs.com">www.sqs.com</a>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在www.sqs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。

www.sgs.com.tw



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 57

## Open View of EUT



Internal of EUT – 1






Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 58

## Internal of EUT – 2



Internal of EUT – 3

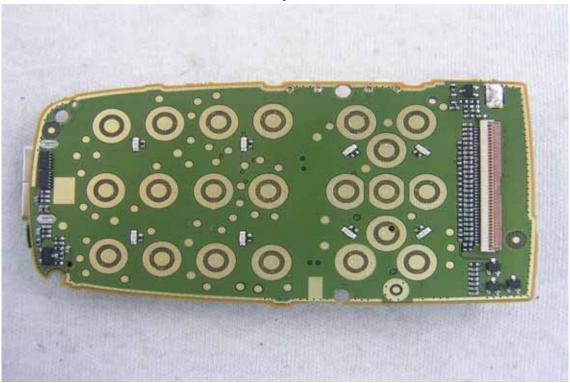

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <a href="www.sqs.com">www.sqs.com</a>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在www.sqs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。

 SGS Taiwan Ltd.
 No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台牌品股工業品五工路134號台灣檢驗科技股份有限公司


 t (886-2) 2299-3939
 f (886-2) 2298-2698
 www.sgs.com.tw



Report No.: EH/2007/20001 Issue Date: Apr. 04, 2007

Page: 59

## Internal of EUT – 4

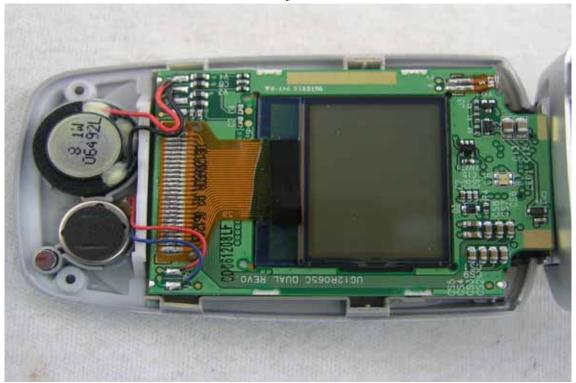

Internal of EUT – 5



This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <a href="www.sqs.com">www.sqs.com</a>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在www.sqs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、僞造、竄改皆屬非法,違犯者將會被依法追訴。

SGS Taiwan Ltd.

| No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博拓股工業區五工路134號

台灣檢驗科技股份有限公司 **t** (886-2) 2299-3939 **f** (886-2) 2298-2698 <u>www.sgs.com.tw</u>