



**SGS-CSTC Standards  
Technical Services(Shanghai)  
Co., Ltd.**

588 West Jindu Road, Songjiang District, Shanghai, China

Telephone: +86 (0) 21 6191 5666  
Fax: +86 (0) 21 6191 5655  
Tino.Pan@sgs.com

Report No.: SHEMO10010003902  
Page 1 of 59

## **TEST REPORT**

**Application No. :** SHEMO10010003902

**Applicant:** Sagem Wireless

**Address:** 2, rue du Petit Albi  
BP 28250  
95801 CERGY PONTOISE Cedex

**FCC ID:** M9HPM1

**Operating Frequency :** 2.402GHz to 2.480GHz

**Equipment Under Test (EUT):**

Product Name: P-Phone

Model Name: P-Phone

Brand Name : PUMA

**Standards:** FCC PART 15:2008 Subpart C

**Date of Receipt:** Jan 15, 2010

**Date of Test:** Jan 18, 2010 to Apr 19, 2010

**Date of Issue:** Apr 20, 2010

<b>Test Result :</b>	PASS *
----------------------	--------

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above. Please refer to section 2 of this report for further detail.

Tino Pan  
E&E Section Manager  
SGS-CSTC(Shanghai) Co., Ltd.

Bruce Zhan  
Project Engineer  
SGS-CSTC(Shanghai) Co., Ltd.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



## 2 Test Summary

Test items	Test Requirement	Standard Paragraph	Result
Occupied Bandwidth	FCC PART 15 :2008	Section 15.247 (a1)	PASS
Carrier Frequencies Separated	FCC PART 15 :2008	Section 15.247(a)	PASS
Hopping Channel Number	FCC PART 15 :2008	Section 15.247(a)(iii)	PASS
Dwell Time	FCC PART 15 :2008	Section 15.247(a)(iii)	PASS
Maximum Peak Output Power	FCC PART 15 :2008	Section 15.247(b)	PASS
Conducted Emission	FCC PART 15 :2008	Section 15.207	PASS
Conducted Spurious Emission (30MHz to 25GHz)	FCC PART 15 :2008	Section 15.209 &15.247(d)	PASS
Radiated Spurious Emission (30MHz to 25GHz)	FCC PART 15 :2008	Section 15.209 &15.247(d)	PASS
Band Edges Measurement	FCC PART 15 :2008	Section 15.247 (d) &15.205	PASS
Radiated Emissions (9k-30MHz)	FCC PART 15 :2008	Section 15.209	PASS



### **3 Contents**

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 GENERAL INFORMATION .....</b>	<b>4</b>
4.1 CLIENT INFORMATION.....	4
4.2 GENERAL DESCRIPTION OF E.U.T .....	4
4.3 DESCRIPTION OF SUPPORT UNITS .....	5
4.4 STANDARDS APPLICABLE FOR TESTING .....	5
4.5 TEST LOCATION .....	5
4.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	5
4.7 TEST FACILITY .....	6
<b>5 EQUIPMENTS USED DURING TEST.....</b>	<b>7</b>
<b>6 TEST RESULTS .....</b>	<b>9</b>
6.1 E.U.T. TEST CONDITIONS.....	9
6.2 CONDUCTED EMISSIONS AT MAINS TERMINALS.....	9
6.3 OCCUPIED BANDWIDTH.....	12
6.4 CARRIER FREQUENCIES SEPARATED .....	16
6.5 HOPPING CHANNEL NUMBER .....	19
6.6 DWELL TIME .....	20
6.7 MAXIMUM PEAK OUTPUT POWER .....	31
6.8 RF EXPOSURE COMPLIANCE REQUIREMENT .....	36
6.8.1 Standard requirement.....	36
6.8.2 EUT RF Exposure .....	36
6.9 CONDUCTED SPURIOUS EMISSIONS .....	37
6.10 RADIATED SPURIOUS EMISSIONS .....	44
6.10.1 Radiated Emissions which fall in the restricted bands.....	52
6.11 BAND EDGES REQUIREMENT.....	54
6.12 RADIATED EMISSIONS (9K-30MHz).....	57



## 4 General Information

### 4.1 Client Information

Applicant: Sagem Wireless  
Address of Applicant: 2, rue du Petit Albi  
BP 28250  
95801 CERGY PONTOISE Cedex

### 4.2 General Description of E.U.T.

Product Name:	P-Phone
Model Name:	P-Phone
Brand Name :	PUMA
Number of Channels	79 Channels
Channel Separation	1 MHz
Type of Modulation	FHSS (Frequency Hopping Spread Spectrum)
Dwell time	Per channel is less than 0.4s.
Antenna Type	integral/dedicated
Bluetooth Version:	Bluetooth 2.1+EDR
Battery Information:	Lishen ASG553443LA 880mAh, 3.7V, 3.2Wh Reference: 179134831(179134849)
Adapter information	Model: FS5GU Input: AC 100-240V, 50-60Hz, 75mA Output : DC 5V, 600mA Reference : 179136129
Headset:	Model: EMB-SGC901STRA Reference: 179136942&179136869
USB data cable:	Model: KF-U4PM5PM-1200 Reference: 179134906
IMEI:	357211030005666
Hardware Version:	V0x
Software Version:	RC,Q28
IMEI:	357211030005328
Hardware Version:	V0x
Software Version:	RC,Q28



#### **4.3 Description of Support Units**

None.

#### **4.4 Standards Applicable for Testing**

The customer requested FCC tests for the EUT.

The standard used was FCC PART 15 Subpart C, ANSI C63.4:2003.

#### **4.5 Test Location**

Radiated emissions(9k-30MHz) test was performed at:

SIMT EMC Laboratory, 1/F, Building No.1, No.716 Yi shan Road, Shanghai, P.R.China.

Tel: +86 21 64701390 Fax: +86 21 64514252

Other tests were performed at:

SGS-CSTC EMC Laboratory, No.588 West Jindu Road, Songjiang District, Shanghai, China

Tel: +86 21 6191 5666 Fax: +86 21 6191 5655

#### **4.6 Other Information Requested by the Customer**

None.



## 4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### **SIMT EMC Laboratory**

- **FCC – Registration No.: 142171**

SIMT EMC Laboratory has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 142171, Expiry Date: 2011-10-30.

### **SGS-CSTC EMC Laboratory**

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2011-07-29.

- **FCC – Registration No.: 402683**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2012-03-17.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A. Expiry Date: 2011-09-29.



## 5 Equipments Used during Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due date	
1	EMI test receiver	Rohde & Schwarz	ESU40	100109	2009-6-4	2010-6-3	
2	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-679	2009-6-4	2010-6-3	
3	Horn Antenna	Rohde & Schwarz	HF906	100284	2009-4-11	2010-4-10	
4	ANTENNA	SCHWARZBECK	VULB9168	9168-313	2009-6-4	2010-6-3	
5	Ultra broadband antenna	Rohde & Schwarz	HL562	100227	2009-10-9	2010-10-8	
6	Atmosphere pressure meter	Shanghai ZhongXuan Electronic Co;Ltd	BY-2003P	--	2009-10-15	2010-10-14	
7	CLAMP METER	FLUKE	316	86080010	2009-04-27	2010-04-26	
8	Thermo-Hygrometer	ZHICHEN	ZC1-2	01050033	2009-10-15	2010-10-14	
9	High-low temperature cabinet	Shanghai YuanZhen	GW2050	--	2009-6-18	2010-6-17	
10	DC power	KIKUSUI	PMC35-3	NF100260	2010-1-16	2011-1-15	
11	Line impedance stabilization network	SCHWARZBECK	NSLK8127	8127-490	2009-5-8	2010-5-7	
12	Power meter	Rohde & Schwarz	NRP	101641	2009-5-5	2010-5-4	
13	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2009-6-4	2010-6-3	
14	High pass Filter	FSCW	HP 12/2800-5AA2	19A45-02	2009-4-11	2010-4-10	
15	CBT	Rohde & Schwarz	10082	EMC0070	2009-12-23	2010-12-22	
16	Broadband ANTENNA	Horn	SCHWARZBECK	BBHA9170	9170-373	2009-6-4	2010-6-3



**SGS-CSTC Standards  
Technical Services(Shanghai)  
Co., Ltd.**

ReportNo.: SHEMO10010003902  
Page: 8 of 59

17	Loop Field Strength Measuring System	SCHWARZBECK	FMZB 1516	114	2009-12-2	2010-12-1
----	---	-------------	-----------	-----	-----------	-----------

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

## 6 Test Results

### 6.1 E.U.T. test conditions

Power supply:	AC adapter or battery inside.
Requirements:	15.31(e) For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.
Type of antenna:	integral/dedicated
Operating Environment:	
Temperature:	20.0 -25.0 °C
Humidity:	38-52% RH
Atmospheric Pressure:	992 -1010 mbar


### 6.2 Conducted Emissions at Mains Terminals

Test Requirement:	FCC Part 15.207
Test Method:	ANSI C63.4
Test Date:	Jan 18, 2010
Frequency Range:	150KHz to 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak if maximised peak within 6dB of Quasi-Peak limit
EUT Operation:	Test the EUT in Bluetooth mode.

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Test Setup:

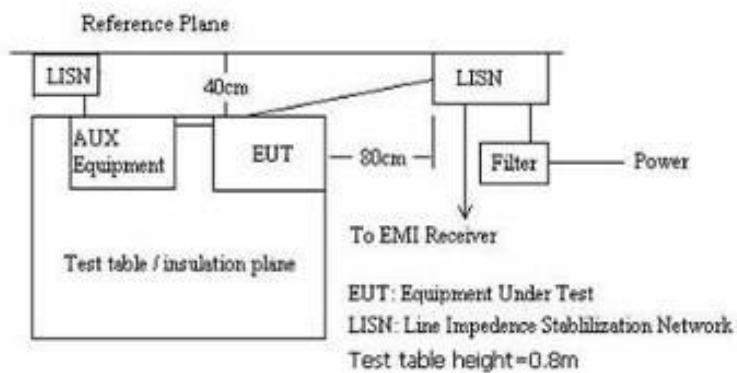

Live line:

dBuV

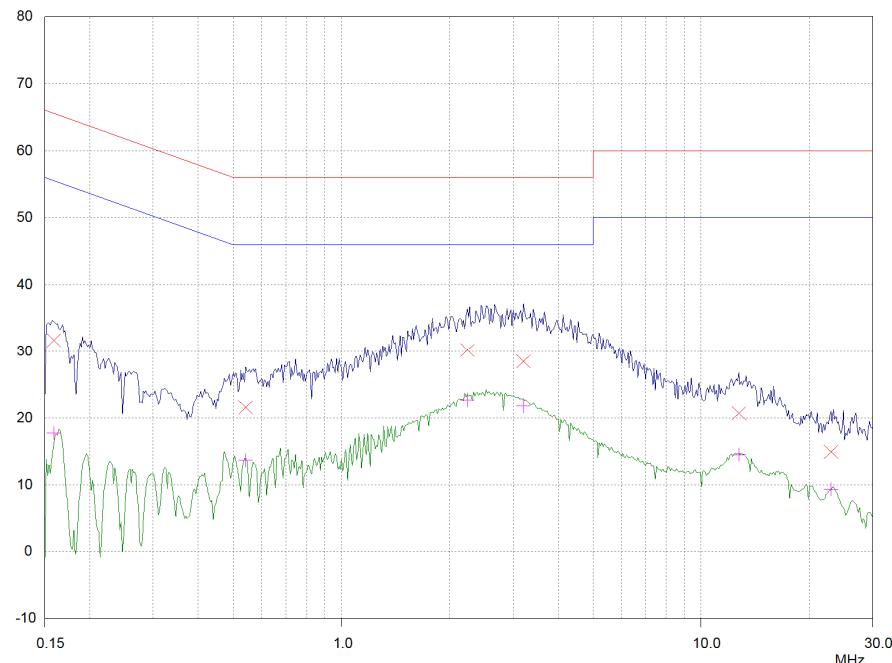


Frequency MHz	QP Level dB $\mu$ V	QP Limit dB $\mu$ V	QP Delta dB
0.1586	31.70	65.54	33.84
0.54104	21.57	56.00	34.43
2.23466	30.22	56.00	25.78
3.19842	28.50	56.00	27.50
12.69426	20.70	60.00	39.30
22.89217	14.93	60.00	45.07

Frequency MHz	AV Level dB $\mu$ V	AV Limit dB $\mu$ V	AV Delta dB
0.1586	17.72	55.54	37.82
0.54104	13.68	46.00	32.32
2.23466	22.67	46.00	23.33
3.19842	21.79	46.00	24.21
12.69426	14.48	50.00	35.52
22.89217	9.29	50.00	40.71

Neutral line:

dBuV

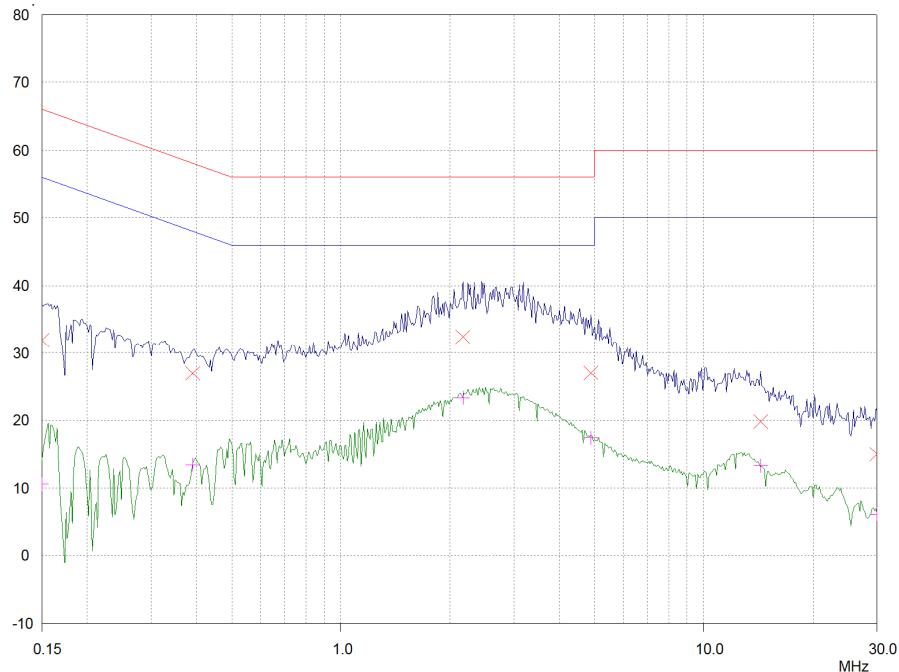

Frequency MHz	QP Level dB $\mu$ V	QP Limit dB $\mu$ V	QP Delta dB
0.15	31.92	66.00	34.08
0.39026	26.94	58.06	31.12
2.16455	32.48	56.00	23.52
4.87914	27.00	56.00	29.00
14.30591	19.81	60.00	40.19
30.0	14.98	60.00	45.02

Frequency MHz	AV Level dB $\mu$ V	AV Limit dB $\mu$ V	AV Delta dB
0.15	10.57	56.00	45.43
0.39026	13.39	48.06	34.67
2.16455	23.35	46.00	22.65
4.87914	17.40	46.00	28.60
14.30591	13.28	50.00	36.72
30.0	6.09	50.00	43.91

### 6.3 Occupied Bandwidth

Test Requirement: FCC Part 15 C  
Test Method: Based on FCC Part15 C Section 15.247  
Test Date: Feb 2, 2010  
Test Status: Test in fixing operating frequency at lowest, Middle, highest channel.  
Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: Span = approximately 2 to 3 times the 20dB bandwidth, centered on the hopping channel;
3. Set the spectrum analyzer: RBW  $\geq$  1% of the 20dB bandwidth (set 10kHz normal mode,100k EDR mode). VBW  $\geq$  RBW. Sweep = auto; Detector Function = Peak. Trace = Max Hold.
4. Mark the peak frequency and -20dB points.

#### Test result:

Normal mode:

Test Channel	Bandwidth(kHz)
Low	932.69
Middle	942.30
High	923.07


EDR mode:

Test Channel	Bandwidth(kHz)	2/3 Bandwidth(kHz)
Low	1356	906.70
Middle	1356	906.70
High	1364	909.30


Result plot as follows:

Normal mode:


Lowest Channel:

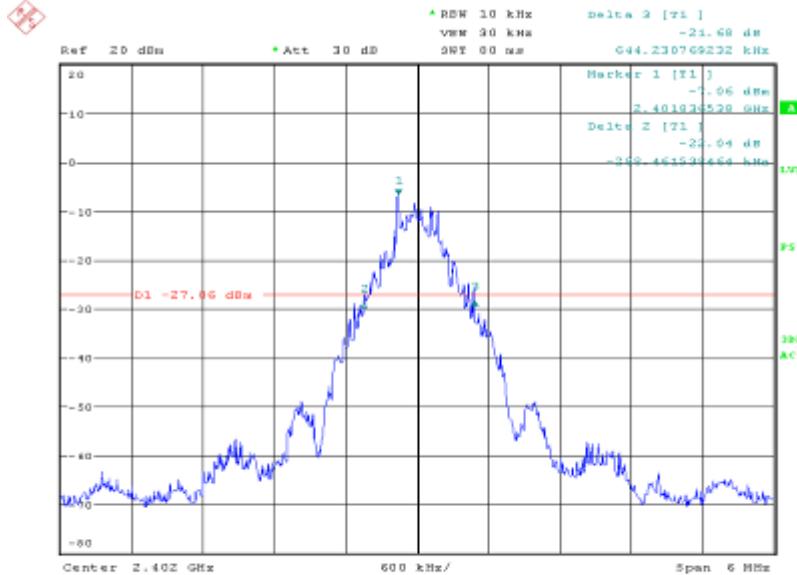

Middle Channel:

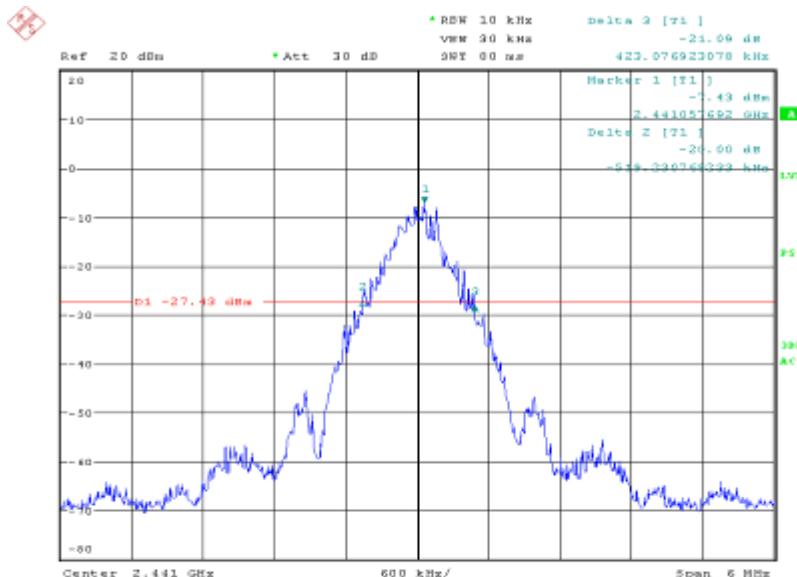


Highest Channel:

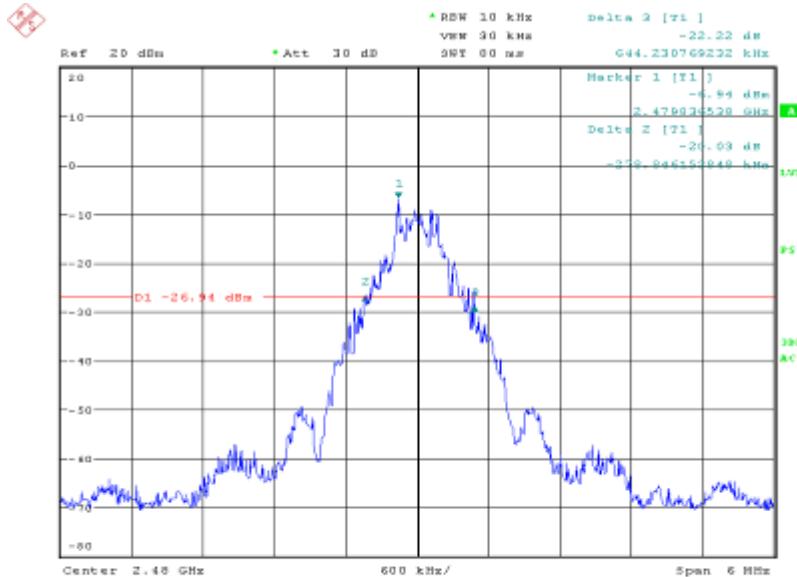


EDR mode:


Lowest Channel:

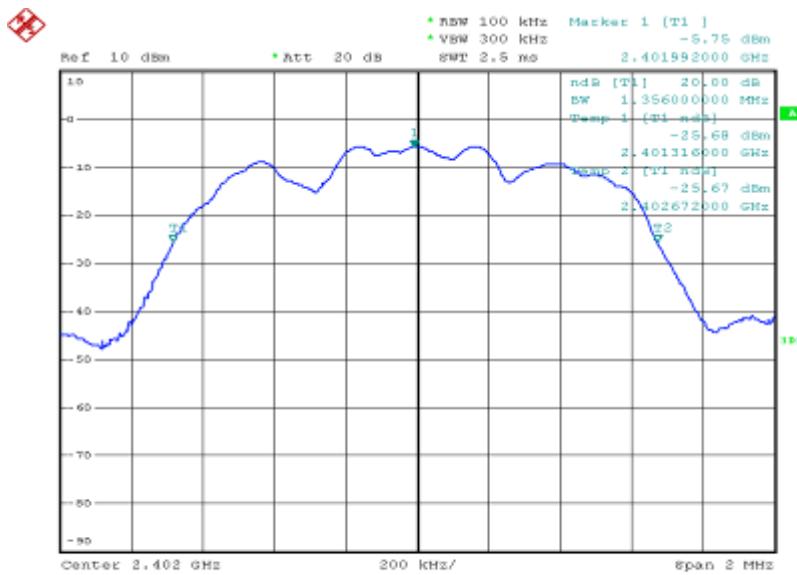

## Middle Cannel:

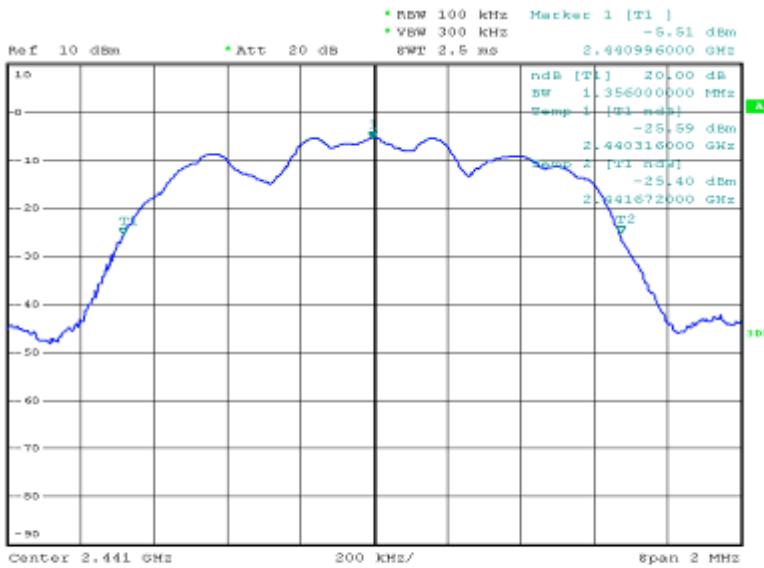

## Highest Channel:

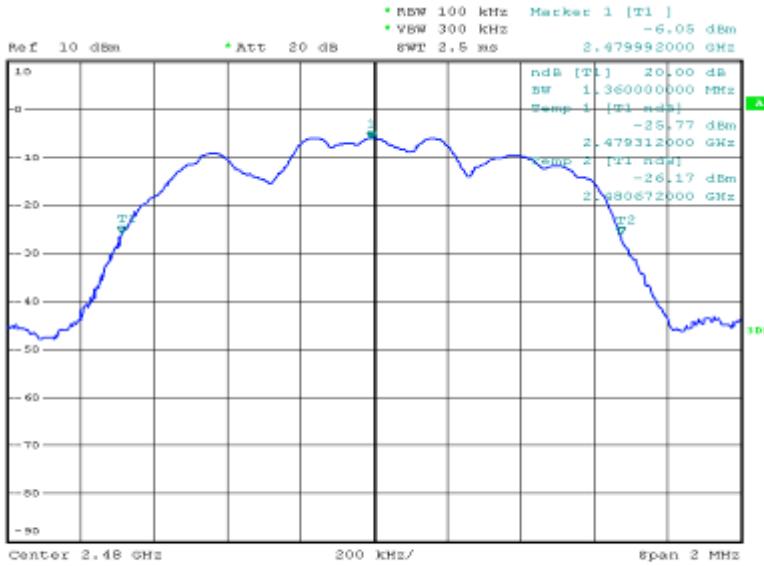

## 6.4 Carrier Frequencies Separated

Test Requirement: FCC Part 15 C

Test Method: Based on FCC Part15 C Section 15.247

Test Date: Feb 2, 2010

Test requirements: Regulation 15.247(a),(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Status: Test in hopping operating mode.


### Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW  $\geq$  1% of the span (set 100 kHz). VBW  $\geq$  RBW, Span = 6MHz. Sweep = auto; Detector Function = Peak. Trace = Max,hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


### Test result:


Test Channel	Carrier Frequencies Separated	PASS/FAIL
Lower Channels (channel 0 and channel 1)	1.0000MHz	PASS
Middle Channels (channel 39 and channel 40)	1.0000MHz	PASS
Upper Channels (channel 77 and channel 78)	1.0000MHz	PASS

## Low Channels:

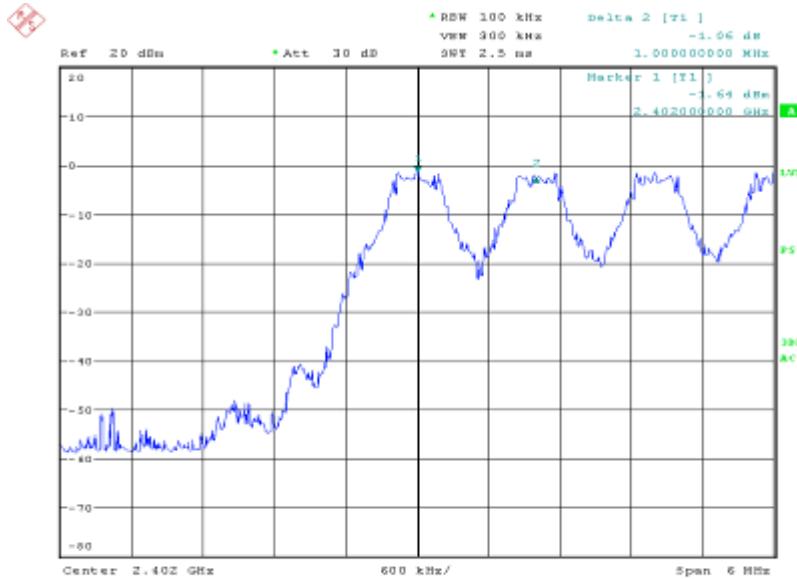

## Middle Channels:

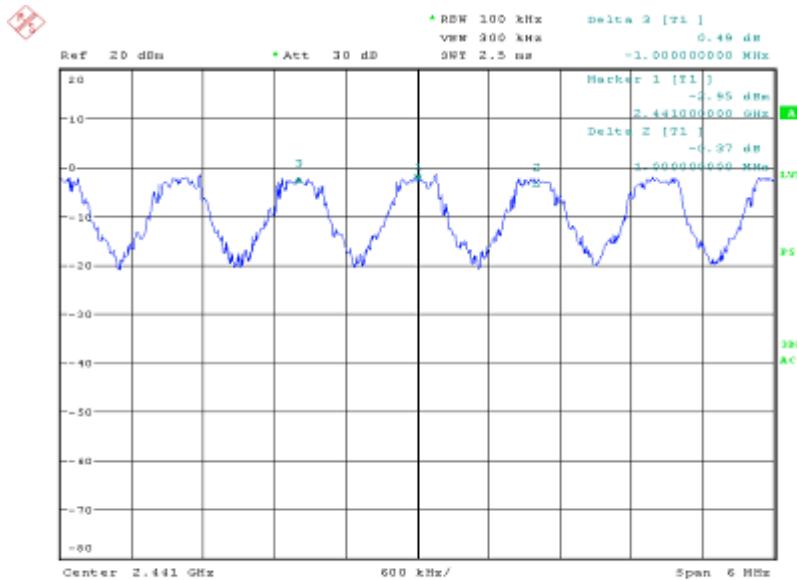

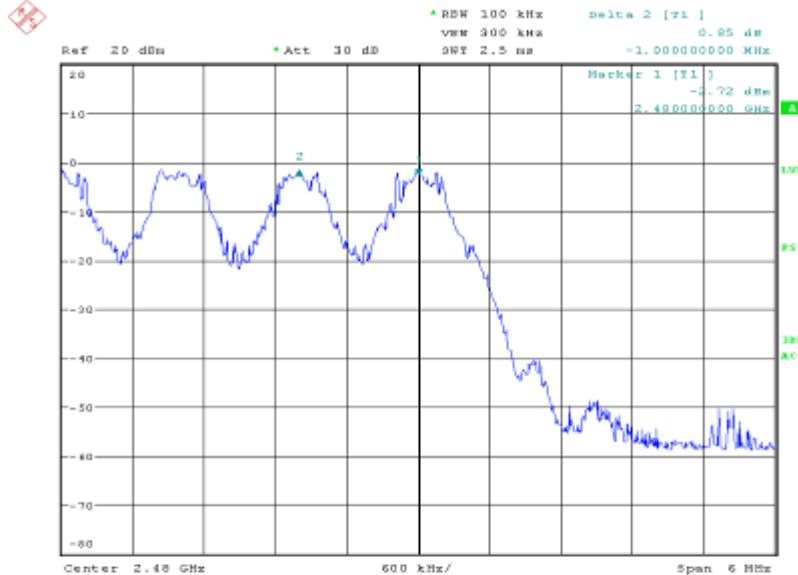**High Channels:**

## 6.5 Hopping Channel Number

Test Requirement: FCC Part15 C

Test Method: Based on FCC Part15 C Section 15.247

Test Date: Jan 21,2010


Requirements: Regulation 15.247 (a) (1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Test Status: Test in hopping operating mode.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 300 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: start frequency = 2400MHz. stop frequency = 2483.5MHz. Submit the test result graph.

Test result: Total channels are 79 channels.

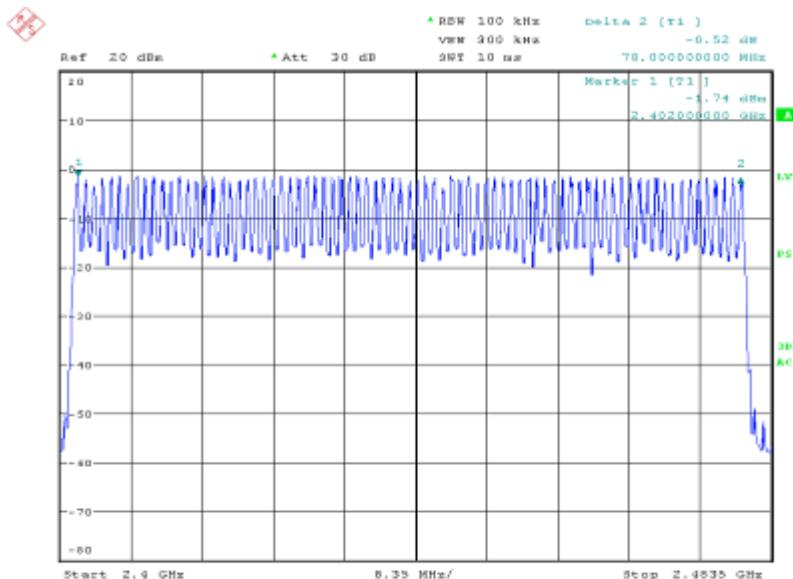

## 6.6 Dwell Time

Test Requirement:	FCC Part 15 C
Test Method:	Based on FCC Part15 C Section 15.247 & DA 00-705
Test Date:	Feb 2, 2010
Test requirements:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Status:	Test in fixed channel operating mode.
Test Procedure:	<ol style="list-style-type: none"><li>1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.</li><li>2.Set spectrum analyzer span = 0. centered on a hopping channel;</li><li>3.Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Detector Function = Peak. Trace = Max hold;</li><li>4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer.</li></ol>
Test Result:	Dwell time = Pulse width x (Hopping rate / Number of channels) x Period
Normal mode:	The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s
1. Channel 0: 2.402GHz	DH1 time slot = 0.392 (ms) * (1600/(2*79)) * 31.6 = 125 ms DH3 time slot = 1.655 (ms) * (1600/(4*79)) * 31.6 = 265 ms DH5 time slot = 2.9046 (ms) * (1600/(6*79)) * 31.6 = 310 ms
2. Channel 39: 2.441GHz	DH1 time slot = 0.392 (ms) * (1600/(2*79)) * 31.6 = 125 ms DH3 time slot = 1.642 (ms) * (1600/(4*79)) * 31.6 = 263 ms DH5 time slot = 2.9046 (ms) * (1600/(6*79)) * 31.6 = 310 ms
3. Channel 78: 2.480GHz	DH1 time slot = 0.392 (ms) * (1600/(2*79)) * 31.6 = 125 ms DH3 time slot = 1.655 (ms) * (1600/(4*79)) * 31.6 = 265 ms DH5 time slot = 2.9046 (ms) * (1600/(6*79)) * 31.6 = 310 ms



EDR mode:

4. Channel 0: 2.402GHz

DH1 time slot = 0.405 (ms) \* (1600/(2\*79)) \* 31.6 = 130 ms

DH3 time slot = 1.665 (ms) \* (1600/(4\*79)) \* 31.6 = 269 ms

DH5 time slot = 2.920 (ms) \* (1600/(6\*79)) \* 31.6 = 311 ms

5. Channel 39: 2.441GHz

DH1 time slot = 0.405 (ms) \* (1600/(2\*79)) \* 31.6 = 130 ms

DH3 time slot = 1.685 (ms) \* (1600/(4\*79)) \* 31.6 = 270 ms

DH5 time slot = 2.915 (ms) \* (1600/(6\*79)) \* 31.6 = 311 ms

6. Channel 78: 2.480GHz

DH1 time slot = 0.405 (ms) \* (1600/(2\*79)) \* 31.6 = 130 ms

DH3 time slot = 1.680 (ms) \* (1600/(4\*79)) \* 31.6 = 269 ms


DH5 time slot = 2.940 (ms) \* (1600/(6\*79)) \* 31.6 = 314 ms

The results are not greater than 0.4 seconds.


Please refer the graph as below:



Normal mode .Lowest channel (2.402 GHz):

DH 1

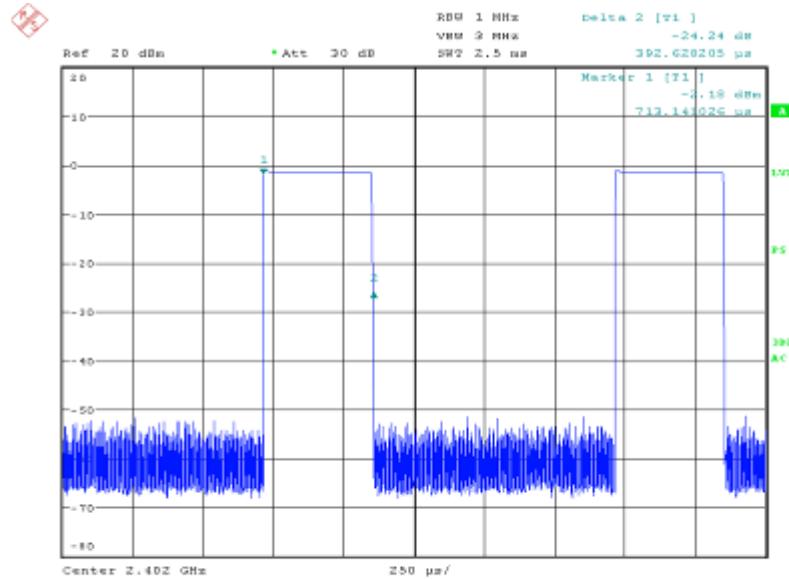


DH 3

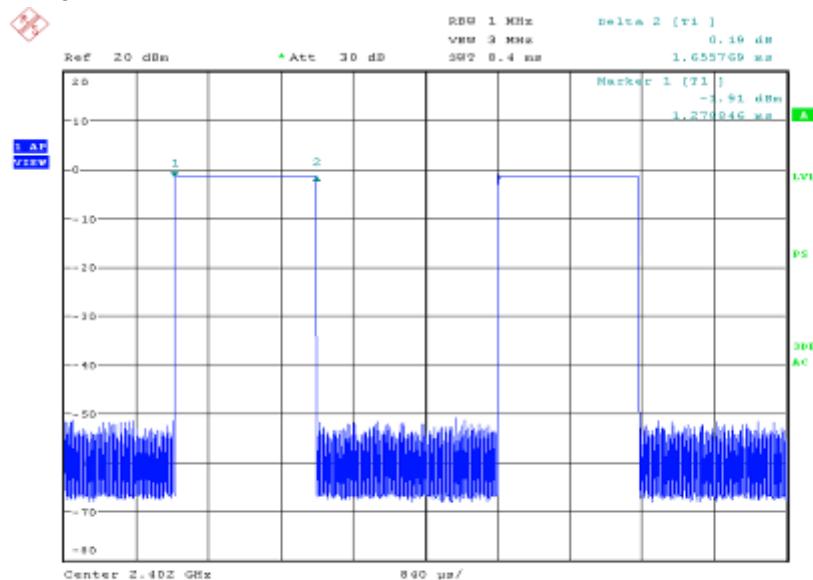


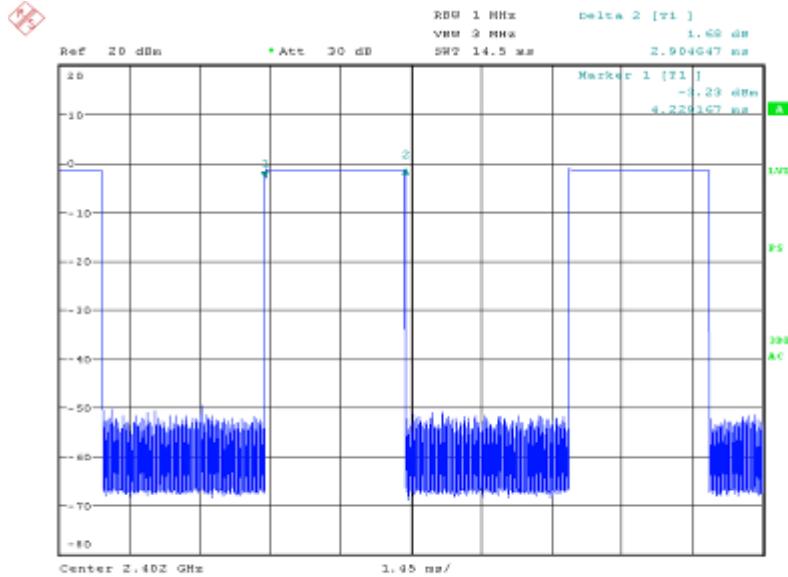
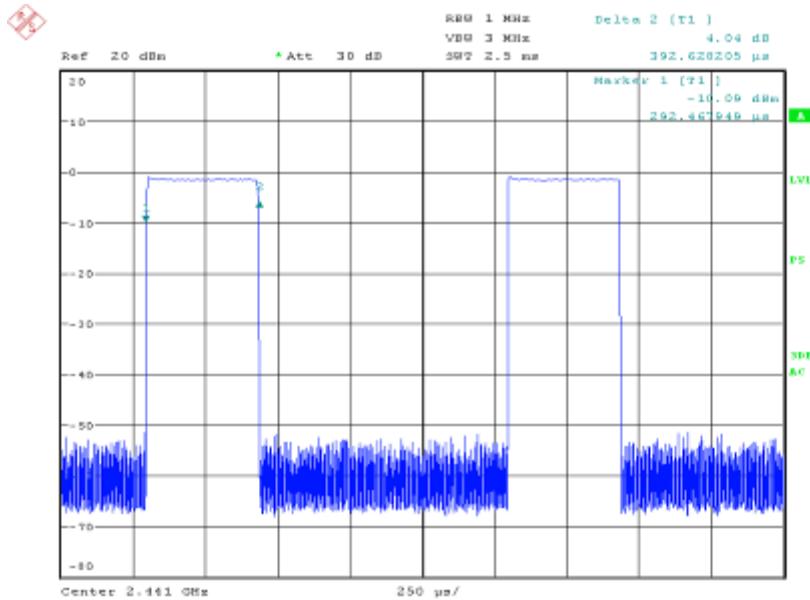
**DH5****Middle Channel (2.441GHz)****DH1**

DH3

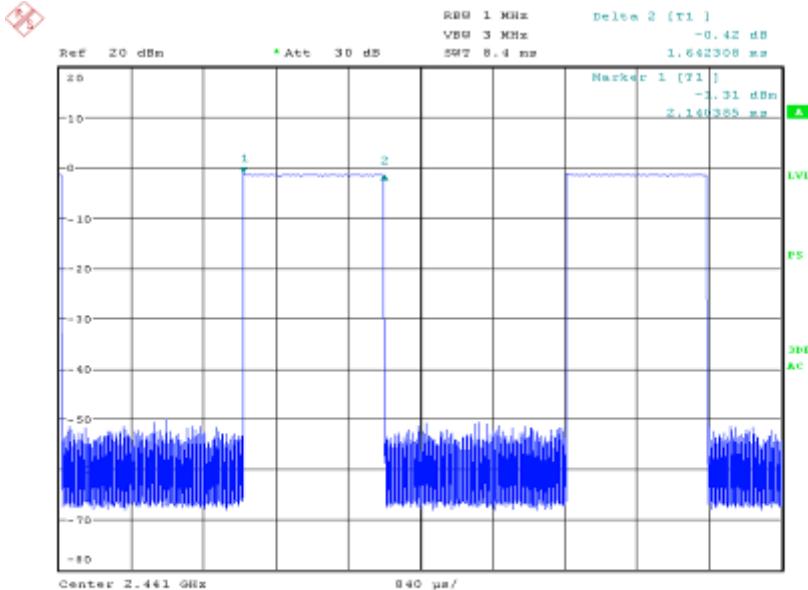


DH5

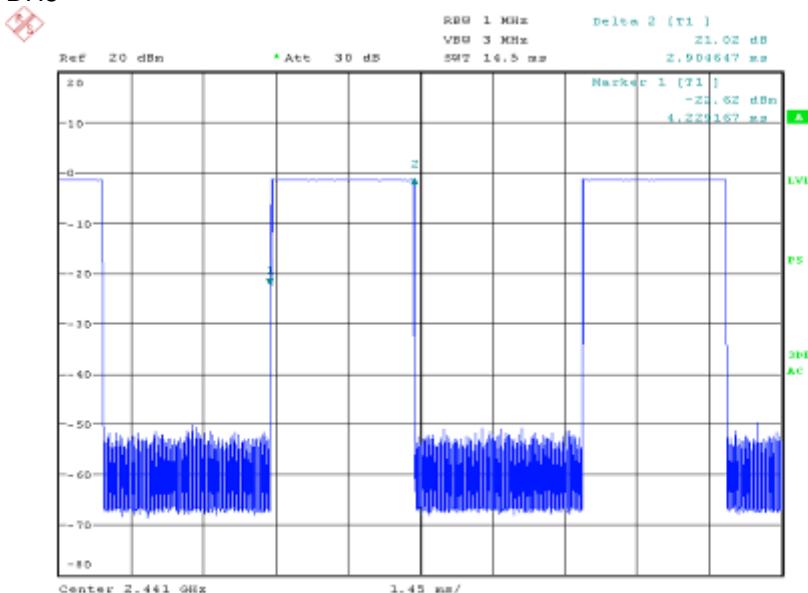

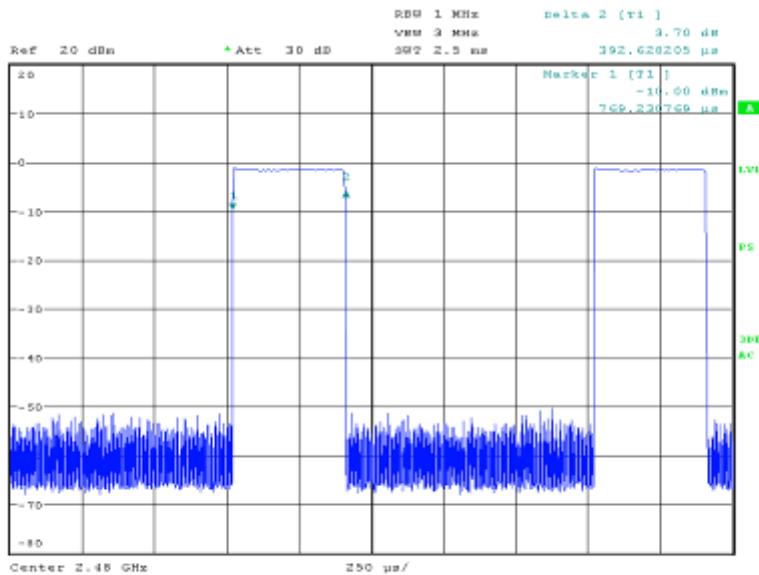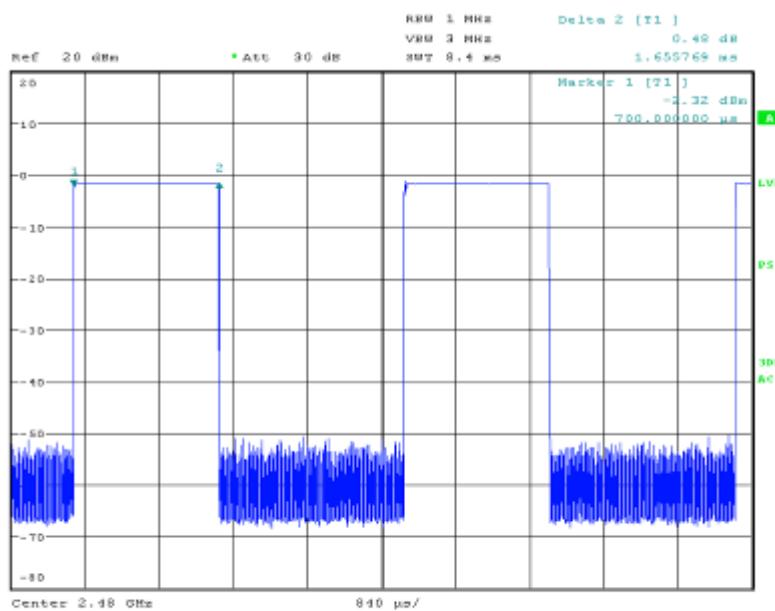**Highest Channel (2.480GHz)****DH1****DH3**


DH5

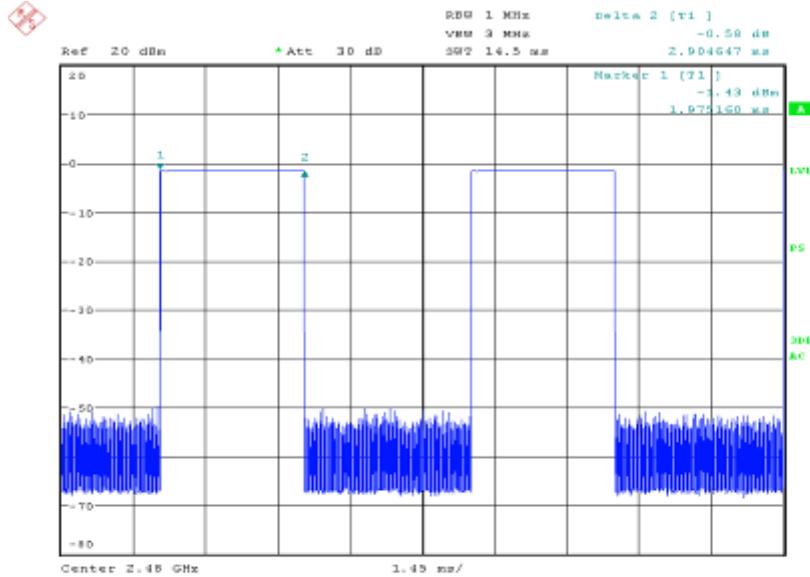


EDR mode

.Lowest channel (2.402 GHz):


DH1

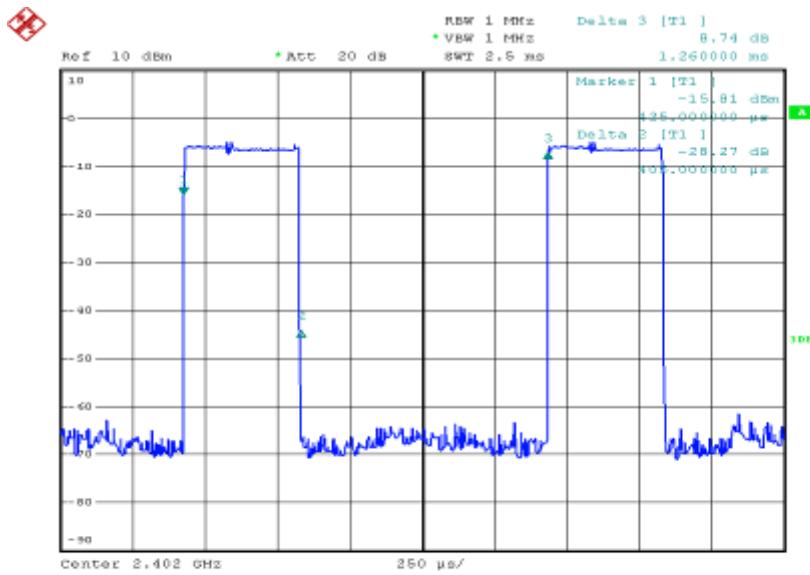

DH3

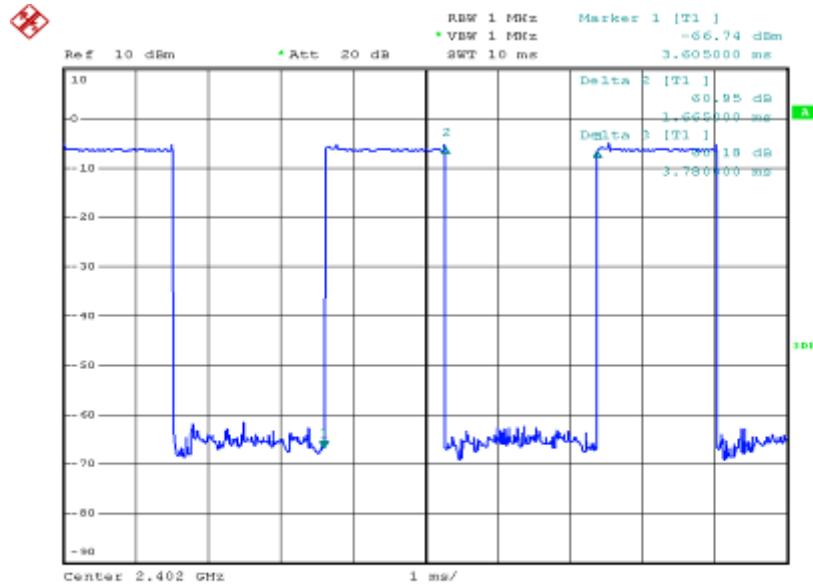


DH5

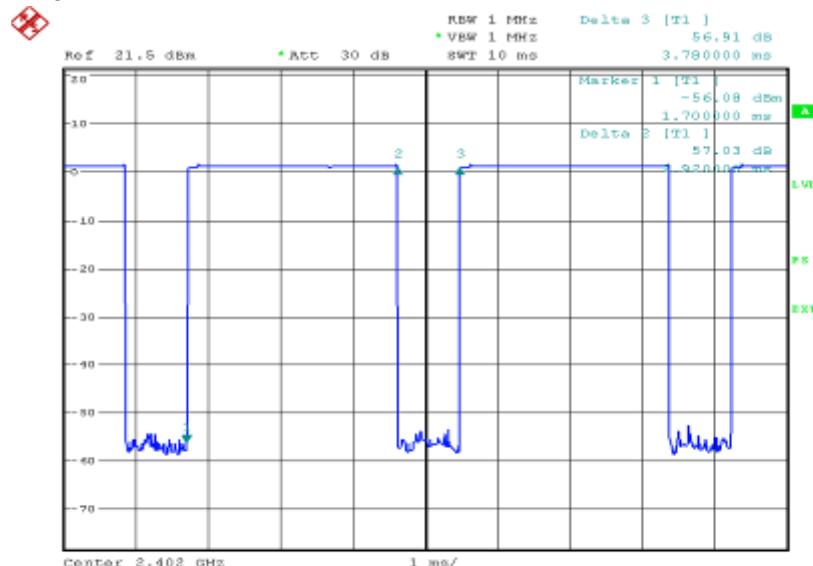


## Middle Channel (2.441GHz)


DH1

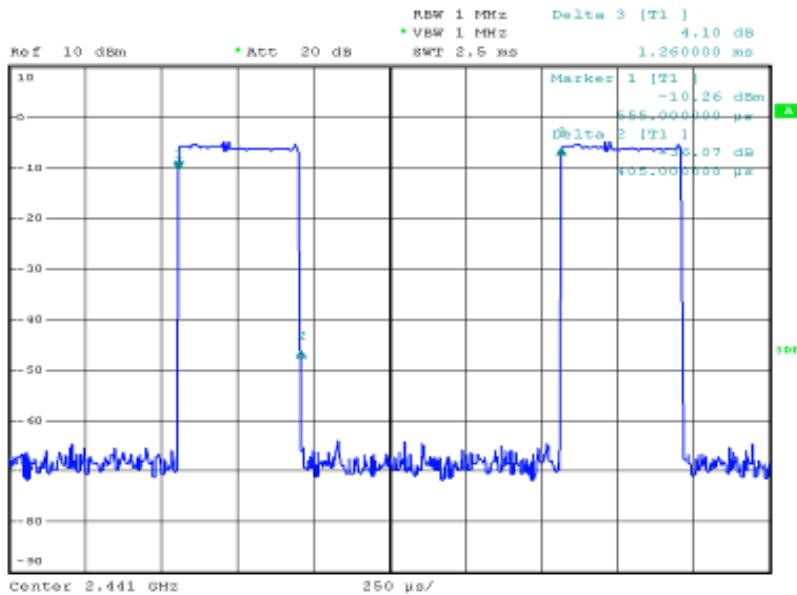

DH3

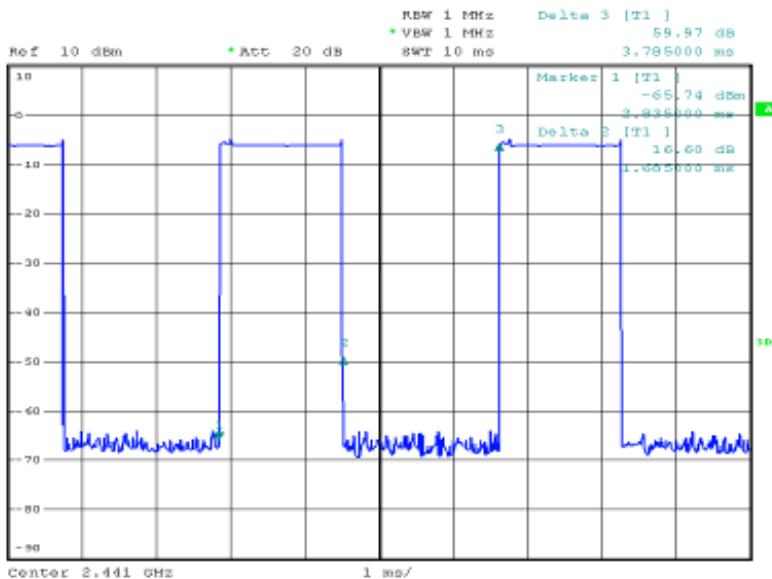




DH5

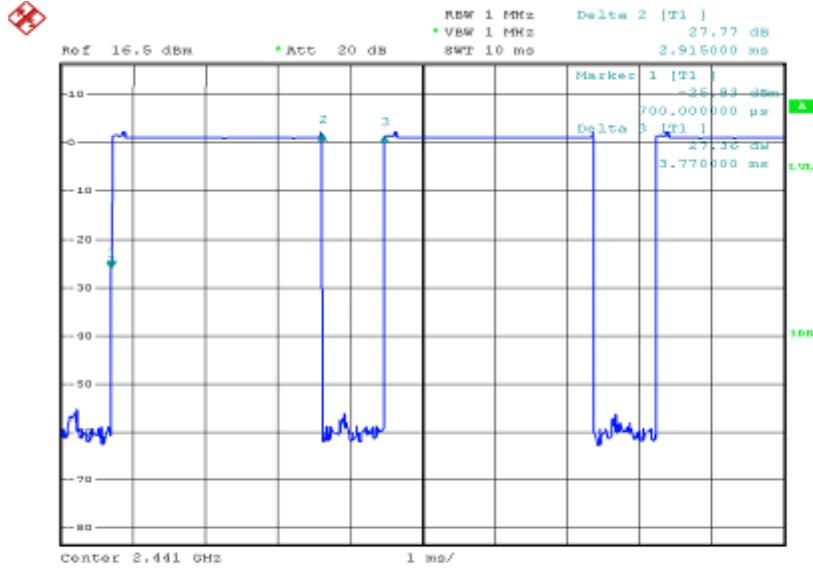

Highest Channel (2.480GHz)


DH1

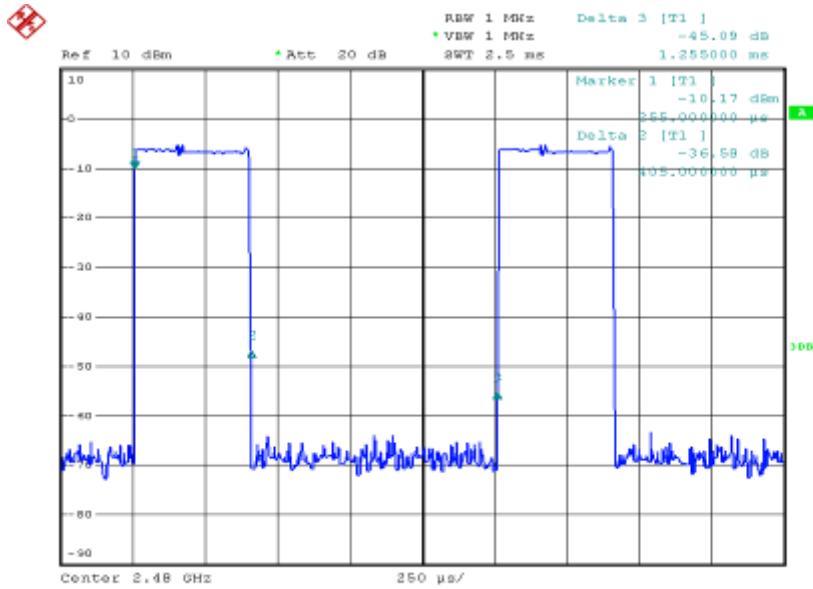

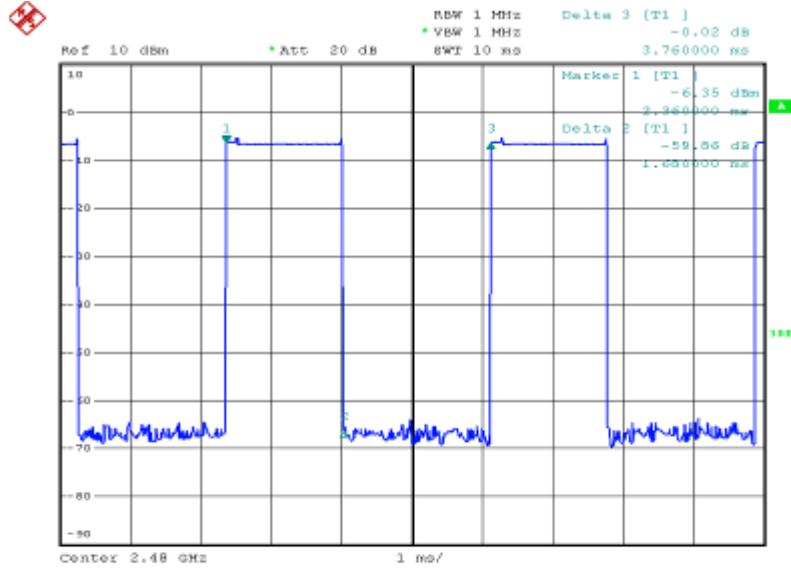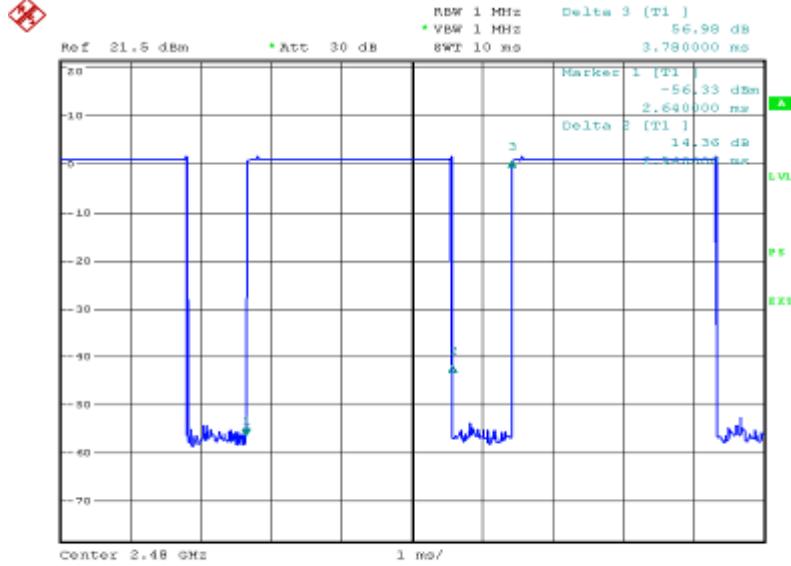**DH3****DH5**

## 6.7 Maximum Peak Output Power

Test Requirement: FCC Part 15.247  
Test Method: Base on ANSI 63.4.  
Test Date: Feb 2, 2010  
Test Limit: Regulation 15.247 (b)(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.  
Refer to the result "Hopping channel number" of this document. The 1 watt (30.0dBm) limit applies.  
Test mode: Test in fixing frequency transmitting mode.  
Test Configuration:

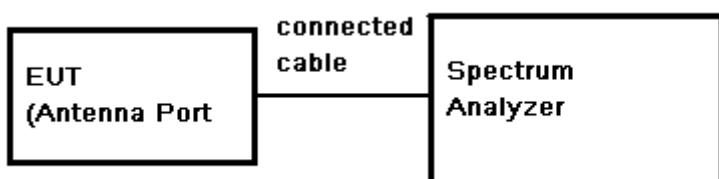

### Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW  $\geq$  1 MHz. VBW  $\geq$  RBW MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

### Test Result:

#### Normal mode:


Test Channel	Fundamental Frequency (MHz)	Reading Power (dBm)	Cable Loss (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2.402	-1.14	0.20	-0.94	30.0	30.94
Middle	2.441	-1.53	0.20	-1.33	30.0	31.33
High	2.480	-1.40	0.20	-1.20	30.0	31.20



EDR mode:

Test Channel	Fundamental Frequency (MHz)	Reading Power (dBm)	Cable Loss (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2.402	-4.65	0.20	-4.45	30.0	34.45
Middle	2.441	-4.25	0.20	-4.05	30.0	34.05
High	2.480	-4.76	0.20	-4.56	30.0	34.56

Test result plot as follows:


Low Channel:

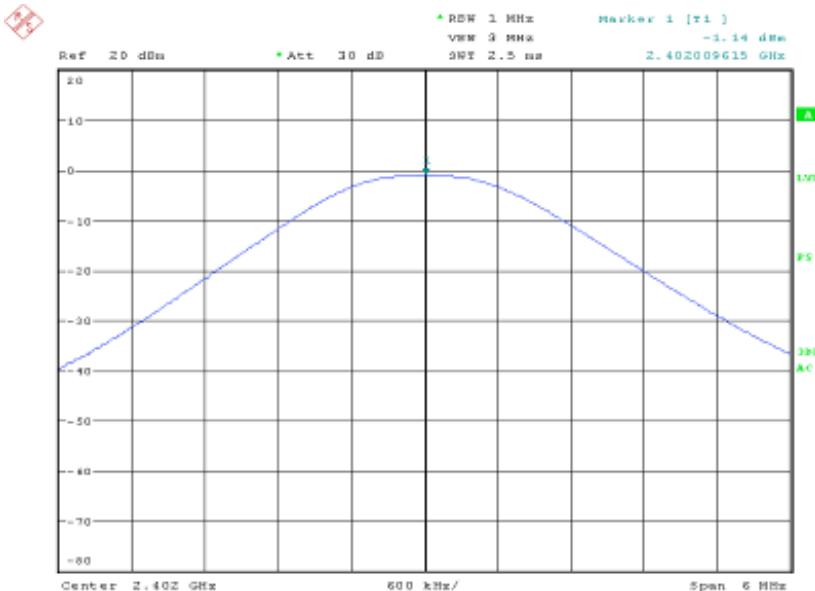

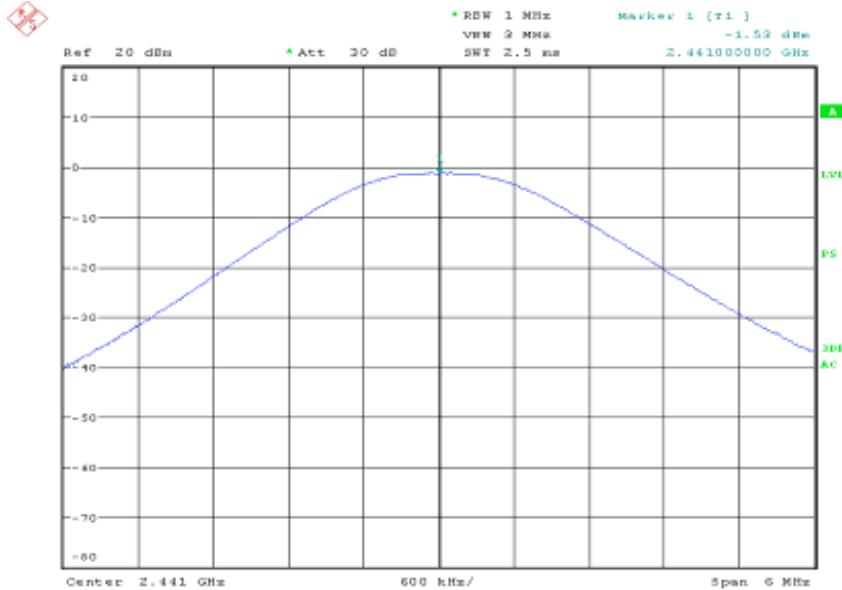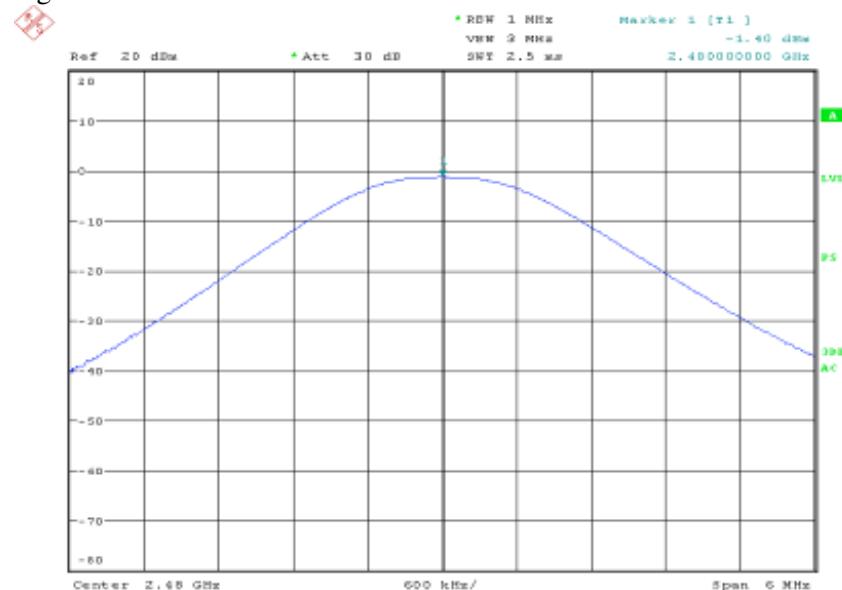
**Middle Channel:****High Channel:**

EDR mode:


Low Channel:

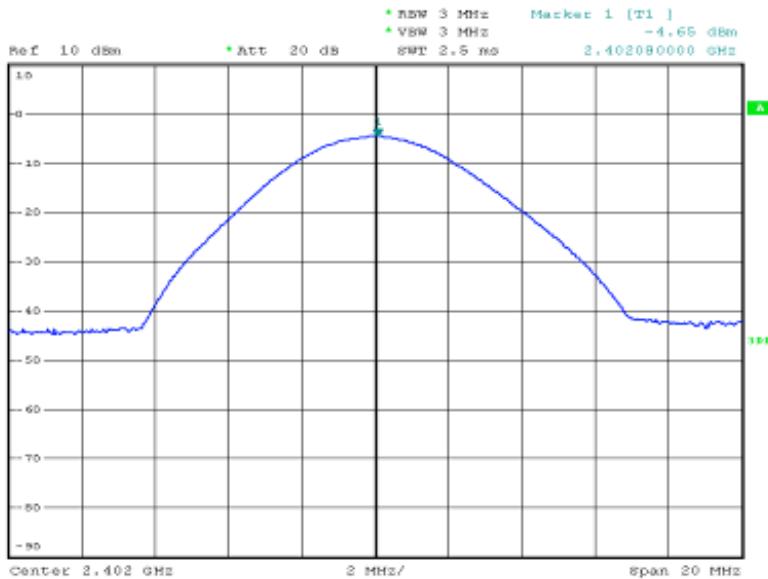

Middle Channel:

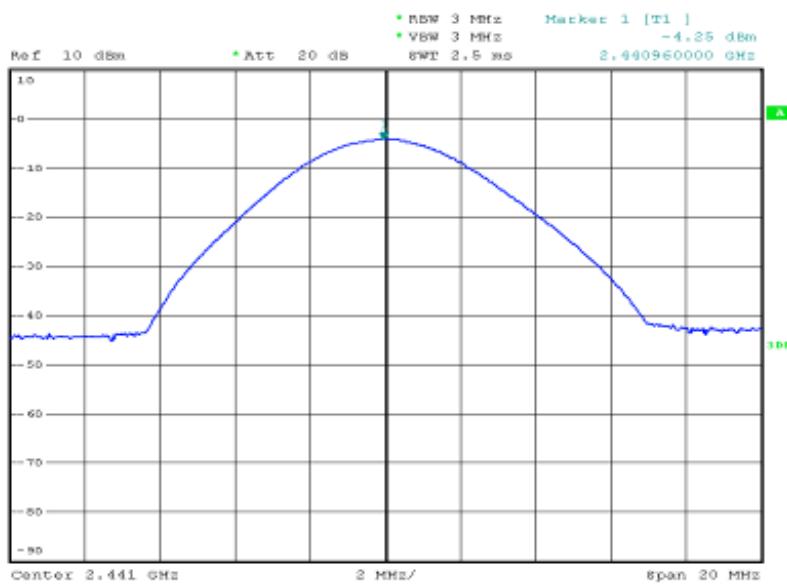

## High Channel:

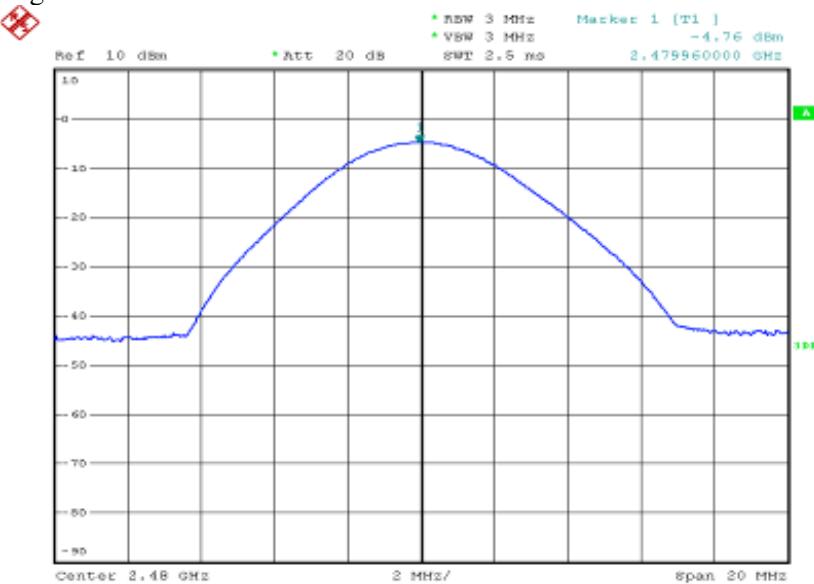

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

## 6.8 RF Exposure Compliance Requirement

### 6.8.1 Standard requirement

15.247(b)(4) requirement:

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TCB Exclusion List (7 July 2002)

Exposure category	low threshold	high threshold
general population	(60/fGHz) mW. d < 2.5 cm (120/fGHz) mW. d ≥ 2.5 cm	(900/fGHz) mW. d < 20 cm
occupational	(375/fGHz) mW. d < 2.5 cm (900/fGHz) mW. d ≥ 2.5 cm	(2250/fGHz) mW. d < 20 cm

### 6.8.2 EUT RF Exposure

The Max Conducted Peak Output Power is -0.94dBm;  
And the antenna is generally less than -8.0dBi PCB integrated in the actual used.  
According to the formula, calculate the EIRP test result:

$$\text{EIRP} = -0.94 + (-8.0) = -8.94 \text{ dBm} \text{ ①}$$

SAR requirement:

$$S = 60 / f(\text{GHz}) = 60 / 2.4 = 25 \text{ mW} = 14.0 \text{ dBm} \text{ ②} ;$$


$$\text{①} < \text{②}.$$

So the SAR report is not required.

## 6.9 Conducted Spurious Emissions

Test Requirement: FCC Part 15.247  
Test Method: Based on FCC Part15 C Section 15.247&15.209:  
Test Date: Feb 2, 2010  
Test requirements: (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. based on either an RF conducted or a radiated measurement. provided the transmitter demonstrates compliance with the peak conducted power limits.  
Test Status: Test the low, Middle, high channel transmitting mode.

Test Configuration:


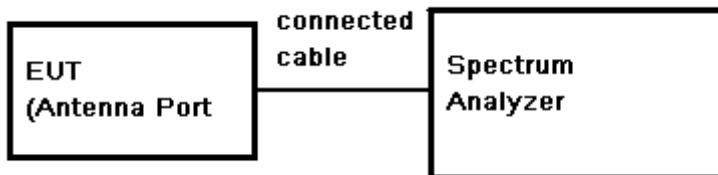


Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100KHz. VBW >= RBW. Sweep = auto; Detector Function = Peak (Max. hold).

Normal mode:

Low Channel:

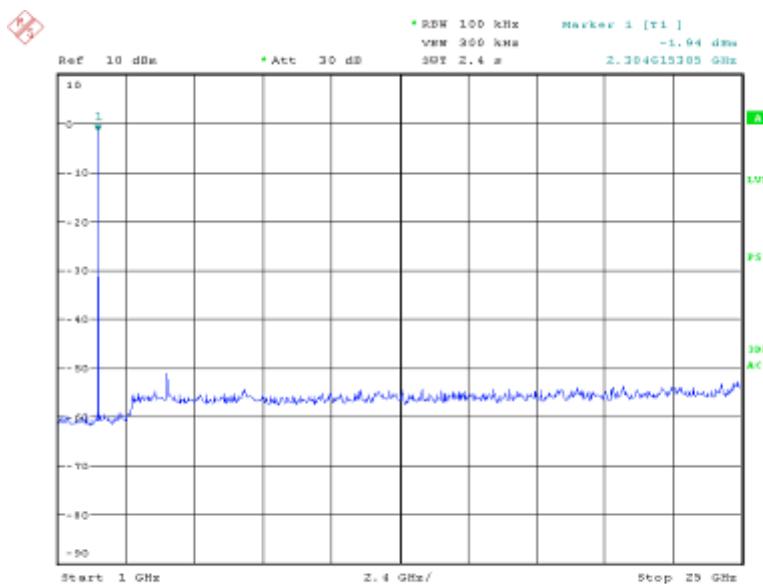
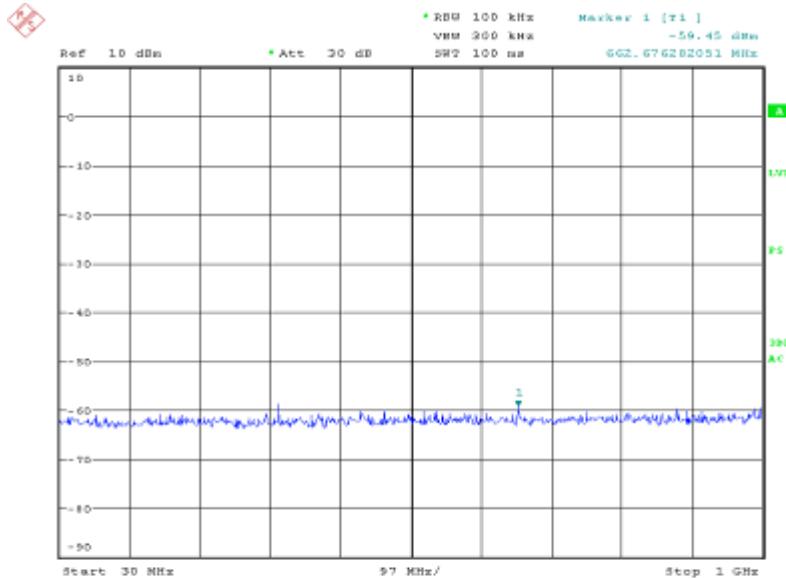


### Middle Channel:

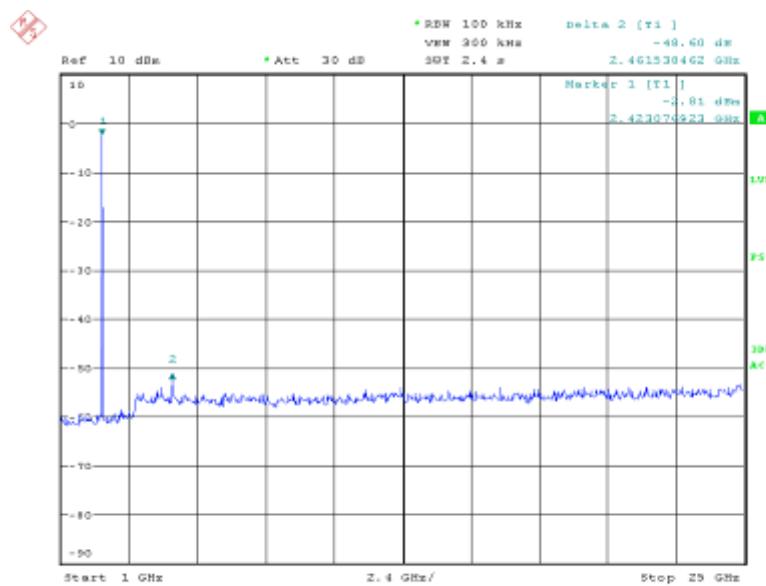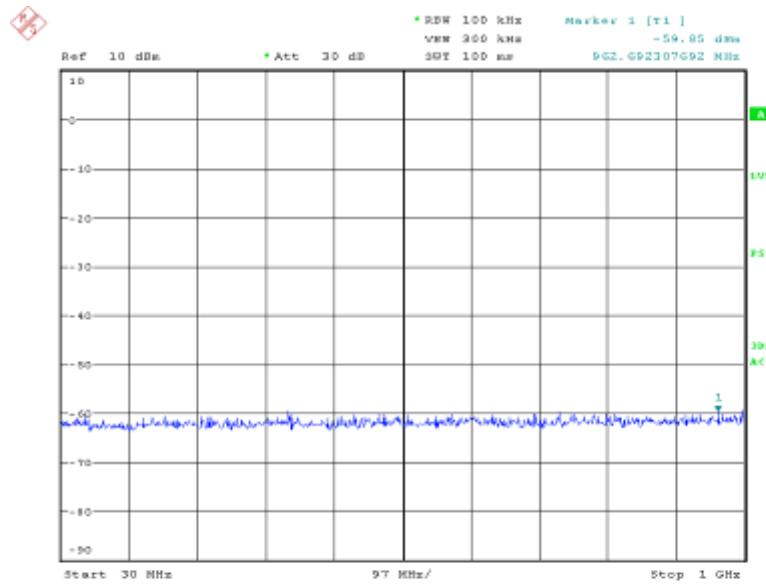



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

High Channel:

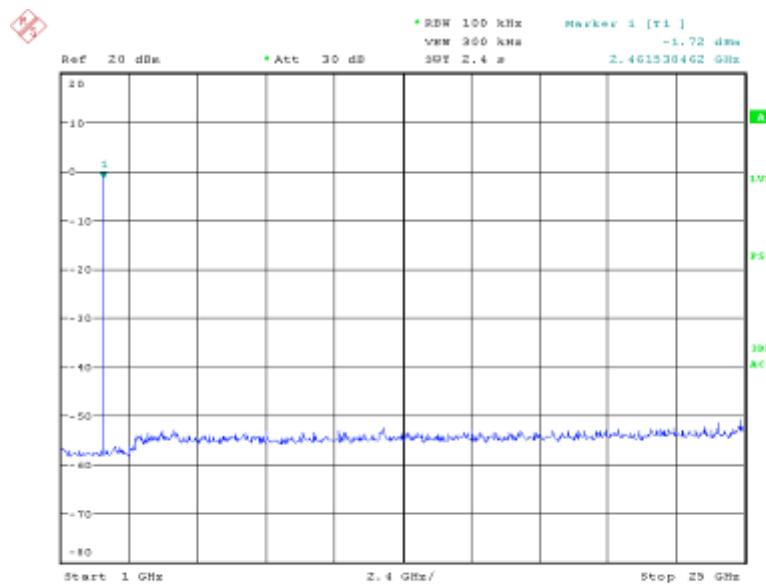
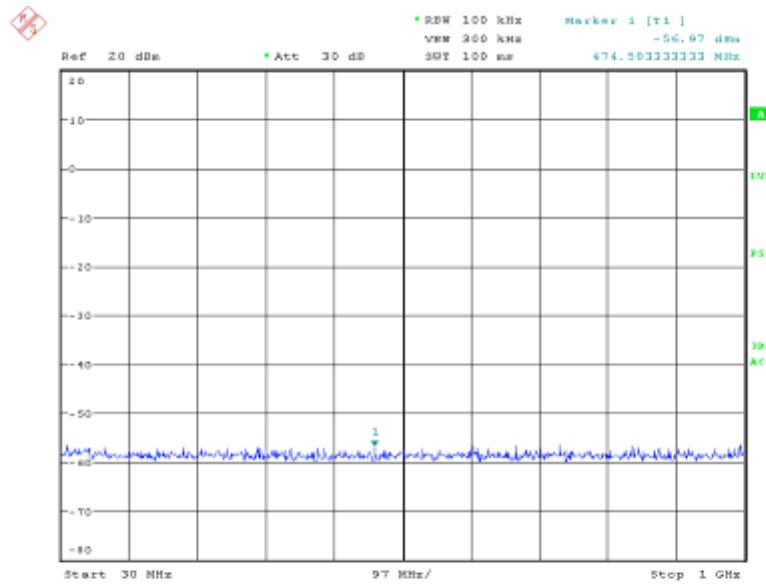


EDR mode:



Low Channel:

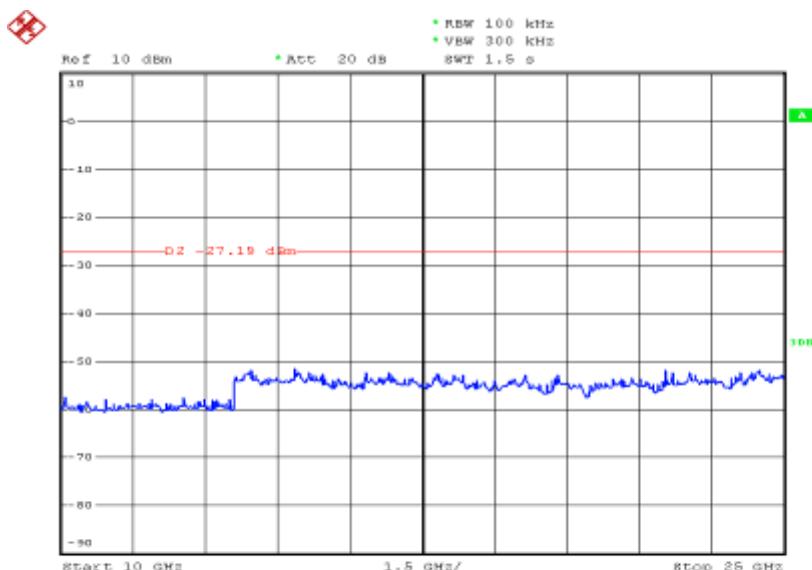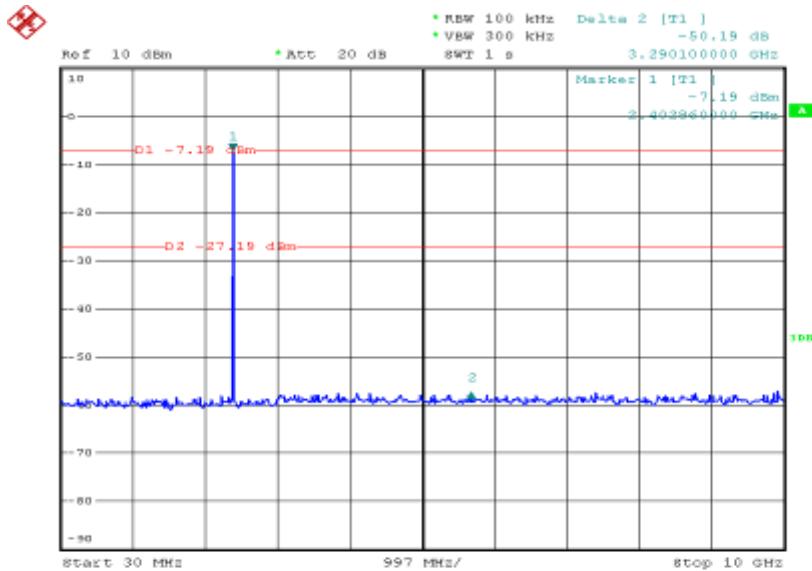

## Middle Channel:

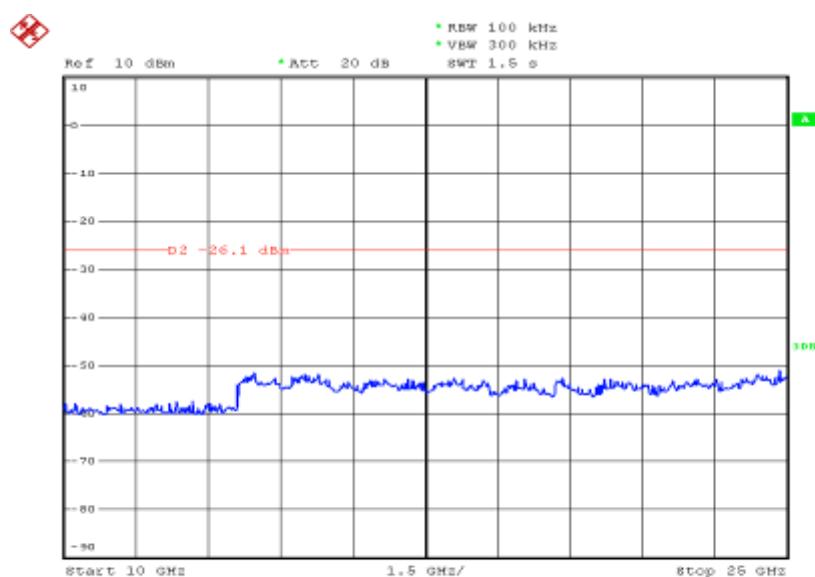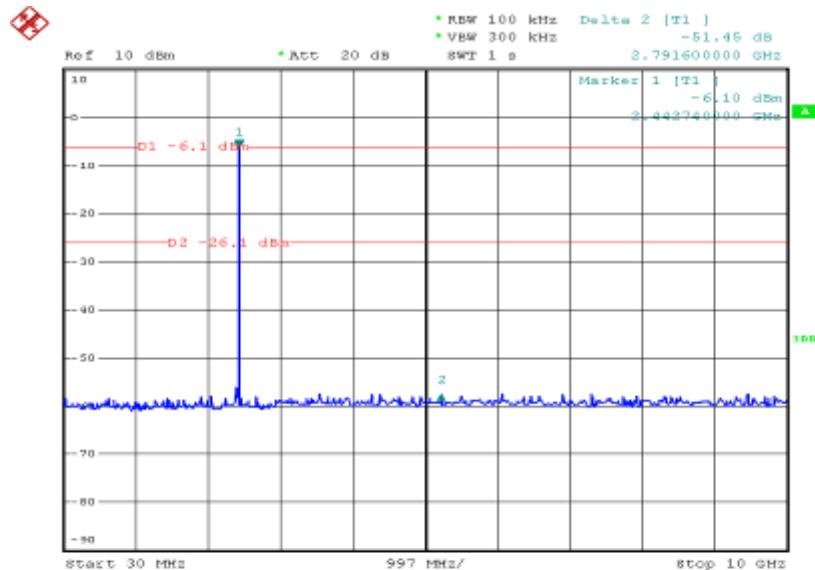


High Channel:

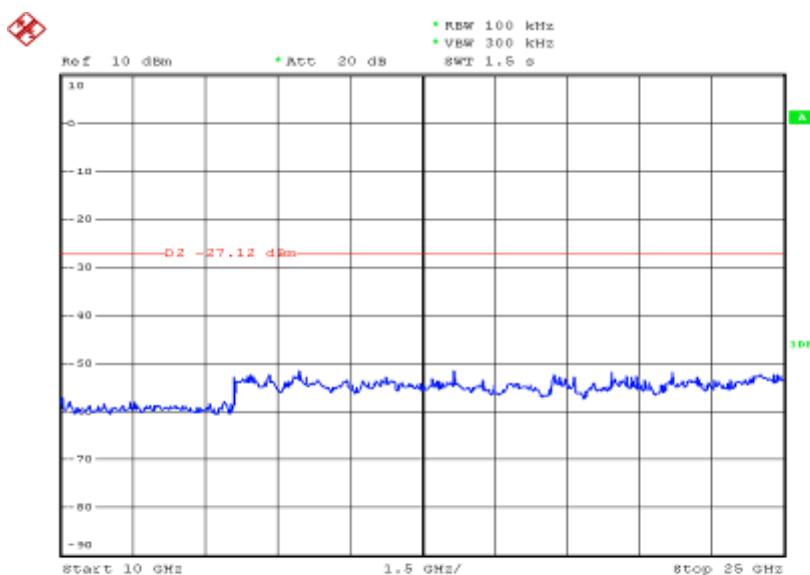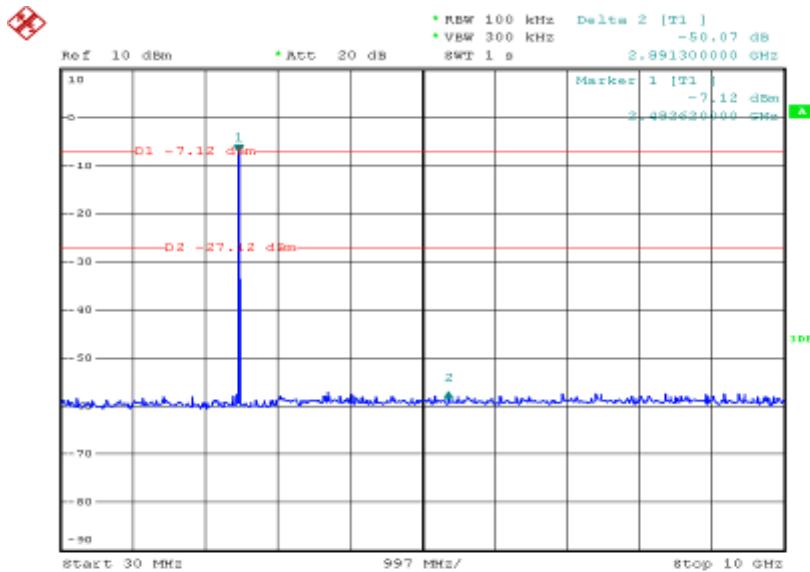


## **6.10 Radiated Spurious Emissions**

Test Requirement:	FCC 15.247(d) & 15.209
Test Method:	ANSI C63.4 section 8 & 13
Test Date:	Feb 2, 2010
Test Status:	Test low channel, Middle, high channel transmitting mode.
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)  Test instrumentation resolution bandwidth 120 kHz and Quasi-Peak detector applies (30 MHz - 1000 MHz).
	For PK value:  RBW = 1 MHz for $f \geq 1$ GHz VBW $\geq$ RBW; Sweep = auto Detector function = peak Trace = max hold
	For AV value:  RBW = 1 MHz for $f \geq 1$ GHz VBW = 10Hz; Sweep = auto Detector function = peak Trace = max hold  Receive antenna scan height 1 m - 4 m. polarization Vertical / Horizontal
15.209 Limit:	40.0 dB $\mu$ V/m between 30MHz & 88MHz  43.5 dB $\mu$ V/m between 88MHz & 216MHz  46.0 dB $\mu$ V/m between 216MHz & 960MHz  54.0 dB $\mu$ V/m above 960MHz
15.247(d) limit:	(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

## Test Configuration:

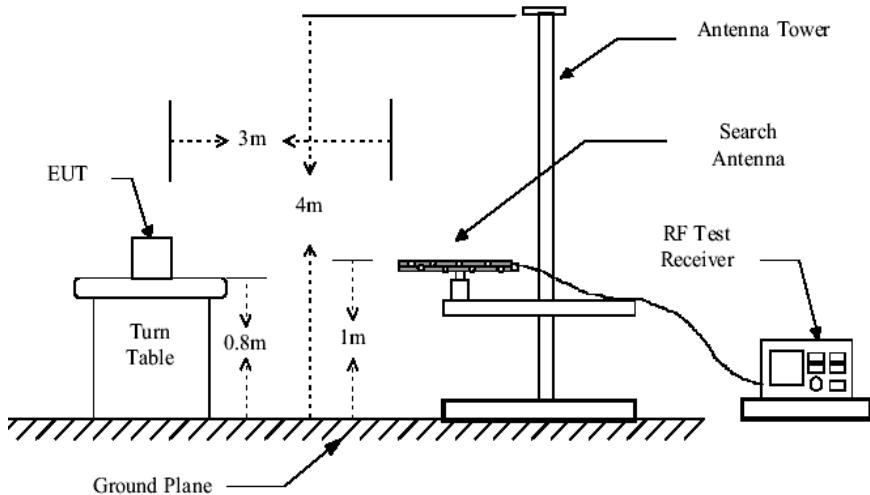

Below 1GHz radiated emissions test configuration

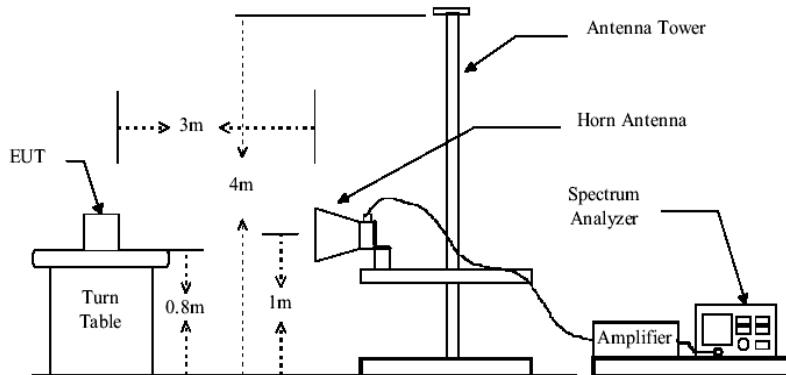

Above 1GHz radiated emissions test configuration

**Test Procedure:** The procedure used was ANSI Standard C63.4-2001. The receiver was scanned from 30MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

Pre-test was performed on Normal and EDR mode, Compliance test was performed on worse case (Normal mode). Pre-test were performed for three spatial orthogonal(X, Y, Z), the worst test data (X orthogonal) was submitted.



**SGS-CSTC Standards  
Technical Services(Shanghai)  
Co., Ltd.**

ReportNo.: SHEMO10010003902  
Page: 46 of 59

Transmitter:

Test in Channel Low in transmitting status- Vertical polarization

30MHz~1GHz Spurious Emissions ,Quasi-Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Preamp (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
30.0	14.2	0.18	24.6	25.70	15.48	40.0
200.0	10.9	0.25	24.5	26.45	13.10	43.5
830.0	22.8	0.42	24.0	28.50	27.72	46.0

1~25 GHz Harmonics & Spurious Emissions, Peak & Average Measurement

Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4804.00	30.8	1.2	0.5	43.4	58.0	47.1	74.0
7206.00	36.0	1.7	0.8	43.1	50.0	45.4	74.0
9608.00	37.8	2.2	0.9	43.9	53.6	50.6	74.0

Average Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4804.00	30.8	1.2	0.5	43.4	54.0	43.1	54.0
7206.00	36.0	1.7	0.8	43.1	48.0	43.4	54.0
9608.00	37.8	2.2	0.9	43.9	48.7	45.7	54.0

Remark: No other radiation has been found.



**SGS-CSTC Standards  
Technical Services(Shanghai)  
Co., Ltd.**

ReportNo.: SHEMO10010003902  
Page: 47 of 59

Test in Channel Low in transmitting status- Horizontal polarization

30MHz~1GHz Spurious Emissions,Quasi-Peak Measurement:

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Preamp (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
30.00	14.2	0.18	24.6	26.00	15.78	40.0
200.00	10.9	0.25	24.5	27.75	14.40	43.5
830.00	22.8	0.42	24.0	28.51	27.73	46.0

1~25 GHz Harmonics & Spurious Emissions, Peak & Average Measurement

Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4804.00	30.8	1.2	0.5	43.4	57.2	46.3	74.0
7206.00	36.0	1.7	0.8	43.1	48.3	43.7	74.0
9608.00	37.8	2.2	0.9	43.9	50.0	47.0	74.0

Average Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4804.00	30.8	1.2	0.5	43.4	56.	45.1	54.0
7206.00	36.0	1.7	0.8	43.1	44.6	40.0	54.0
9608.00	37.8	2.2	0.9	43.9	45.6	42.6	54.0

Remark: No other radiation has been found.



**SGS-CSTC Standards  
Technical Services(Shanghai)  
Co., Ltd.**

ReportNo.: SHEMO10010003902  
Page: 48 of 59

Test in Channel Middle in transmitting status- Vertical polarization

30MHz~1GHz Spurious Emissions ,Quasi-Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
30.00	14.2	0.18	24.6	25.20	14.98	40.0
200.00	10.9	0.25	24.5	26.58	13.23	43.5
830.00	22.8	0.42	24.0	27.23	26.45	46.0

1~25 GHz Harmonics & Spurious Emissions, Peak & Average Measurement

Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4882.00	30.9	1.3	0.5	43.3	56.3	45.4	74.0
7323.00	36.2	1.8	0.6	43.1	49.1	44.5	74.0
9764.00	38.1	2.3	0.9	43.9	50.0	47.0	74.0

Average Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4882.00	30.9	1.3	0.5	43.3	55.1	44.2	54.0
7323.00	36.2	1.8	0.6	43.1	46.5	41.9	54.0
9764.00	38.1	2.3	0.9	43.9	48.0	45.0	54.0

Remark: No other radiation has been found.



**SGS-CSTC Standards  
Technical Services(Shanghai)  
Co., Ltd.**

ReportNo.: SHEMO10010003902  
Page: 49 of 59

Test in Channel Middle in transmitting status- Horizontal polarization

30MHz~1GHz Spurious Emissions ,Quasi-Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
30.00	14.2	0.1	24.6	25.50	15.28	40.0
200.00	10.9	0.2	24.5	27.20	13.85	43.5
830.00	22.8	0.4	24.0	28.55	27.77	46.0

1~25 GHz Harmonics & Spurious Emissions, Peak & Average Measurement

Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4882.00	30.9	1.3	0.5	43.3	57.6	46.7	74.0
7323.00	36.2	1.8	0.6	43.1	47.5	42.9	74.0
9764.00	38.1	2.3	0.9	43.9	49.5	46.5	74.0

Average Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4882.00	30.9	1.3	0.5	43.3	55.3	44.4	54.0
7323.00	36.2	1.8	0.6	43.1	46.3	41.7	54.0
9764.00	38.1	2.3	0.9	43.9	48.8	45.8	54.0

Remark: No other radiation has been found.



**SGS-CSTC Standards  
Technical Services(Shanghai)  
Co., Ltd.**

ReportNo.: SHEMO10010003902  
Page: 50 of 59

Test in Channel High in transmitting status- Vertical polarization

30MHz~1GHz Spurious Emissions ,Quasi-Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
30.00	14.2	0.2	24.6	25.50	15.73	40.0
200.00	10.9	0.3	24.5	26.80	13.45	43.5
830.00	22.8	0.4	24.0	26.62	25.84	46.0

1~25 GHz Harmonics & Spurious Emissions, Peak & Average Measurement

Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4960.00	31.1	1.4	0.7	43.4	56.8	45.9	74.0
7440.00	36.4	2.0	0.7	43.2	48.5	43.9	74.0
9920.00	38.3	2.6	1.0	44.1	48.8	45.8	74.0

Average Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4960.00	31.1	1.4	0.7	43.4	54.1	43.2	54.0
7440.00	36.4	2.0	0.7	43.2	46.3	41.7	54.0
9920.00	38.3	2.6	1.0	44.1	48.1	45.1	54.0

Remark: No other radiation has been found.



**SGS-CSTC Standards  
Technical Services(Shanghai)  
Co., Ltd.**

ReportNo.: SHEMO10010003902  
Page: 51 of 59

Test in Channel High in transmitting status- Horizontal polarization

30MHz~1GHz Spurious Emissions ,Quasi-Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
30.00	14.2	0.2	24.6	24.40	14.18	40.0
200.00	10.9	0.3	24.5	27.40	14.05	43.5
830.00	22.8	0.4	24.0	27.24	26.46	46.0

1~25 GHz Harmonics & Spurious Emissions, Peak & Average Measurement

Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4960.00	31.1	1.4	0.7	43.4	58.4	47.5	74.0
7440.00	36.4	2.0	0.7	43.2	48.3	43.7	74.0
9920.00	38.3	2.6	1.0	44.1	49.0	46.0	74.0

Average Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
4960.00	31.1	1.4	0.7	43.4	54.3	43.4	54.0
7440.00	36.4	2.0	0.7	43.2	45.0	40.4	54.0
9920.00	38.3	2.6	1.0	44.1	44.3	41.3	54.0

Remark: No other radiation has been found.

Test Level =Receiver Reading + Antenna Factor + Cable Factor+ Filter –Preamplifier Factor.

Remark: No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part. Hence there no other emissions have been reported.

### **6.10.1 Radiated Emissions which fall in the restricted bands**

Test Requirement:

Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Method:

Base on ANSI 63.4

Test Date:

Feb 2, 2010

Measurement Distance:

3m (Semi-Anechoic Chamber)

Limit:

40.0 dB $\mu$ V/m between 30MHz & 88MHz;  
43.5 dB $\mu$ V/m between 88MHz & 216MHz;  
46.0 dB $\mu$ V/m between 216MHz & 960MHz;  
54.0 dB $\mu$ V/m above 960MHz.

Detector:

For PK value:  
RBW = 1 MHz for  $f \geq 1$  GHz  
VBW  $\geq$  RBW; Sweep = auto  
Detector function = peak  
Trace = max hold  
For AV value:  
RBW = 1 MHz for  $f \geq 1$  GHz  
VBW = 10Hz; Sweep = auto  
Detector function = peak  
Trace = max hold

Test Result:

Low Channel

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2390.000	27.88	4.65	14.27	9.37	46.8	41.9
2483.500	28.74	4.80	13.56	8.66	47.1	42.2

Middle Channel

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2390.000	27.88	4.65	14.87	9.47	47.4	42
2483.500	28.74	4.80	14.66	8.66	48.2	42.2



**SGS-CSTC Standards  
Technical Services(Shanghai)  
Co., Ltd.**

ReportNo.: SHEMO10010003902  
Page: 53 of 59

**High Channel**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Peak Reading Level (dB $\mu$ V)	Average Reading Level (dB $\mu$ V)	Peak Emission Level (dB $\mu$ V/m)	Average Emission Level (dB $\mu$ V/m)
2390.000	27.88	4.65	13.97	8.87	46.5	41.4
2483.500	28.74	4.80	13.56	8.36	47.1	41.9

Remark: No any other emission which fall in restricted bands can be detected and be reported.

**Section 15.205 Restricted bands of operation.**

(a) Except as shown in paragraph (d) of this section. only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
10.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	
13.36 - 13.41	322 - 335.4		

## **6.11 Band Edges Requirement**

Test Requirement: FCC Part 15 C

Test Method: Based on ANSI 63.4

Operation within the band 2400 – 2483.5 MHz

Test Date: Feb 2, 2010

Requirements: Section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Method of Measurement: Set RBW of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 300 kHz with suitable frequency span including 100 kHz bandwidth from band edge.

The band edges was measured and recorded.

The band edges was measured and recorded Result:


The Lower Edges attenuated more than 20dB.

The Upper Edges attenuated more than 20dB.


The graph as below. represents the emissions take for this device.

Normal model:

Low Channel:

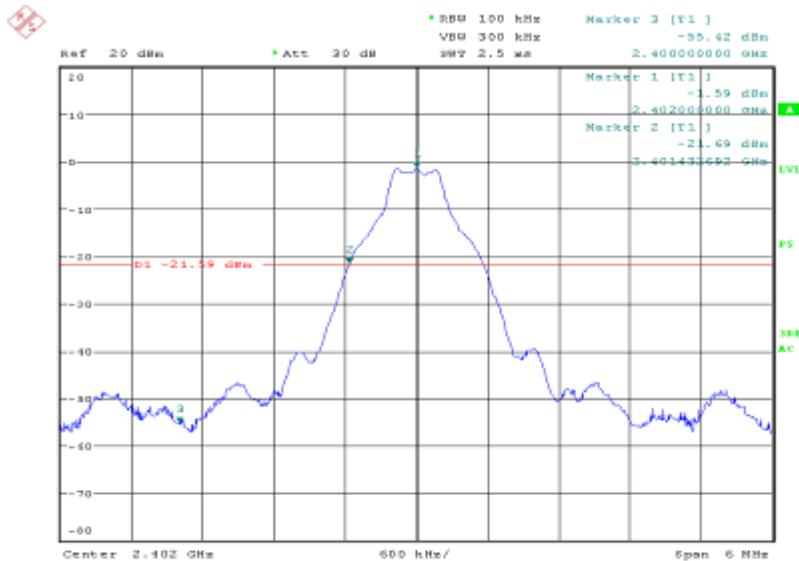


High Channel:

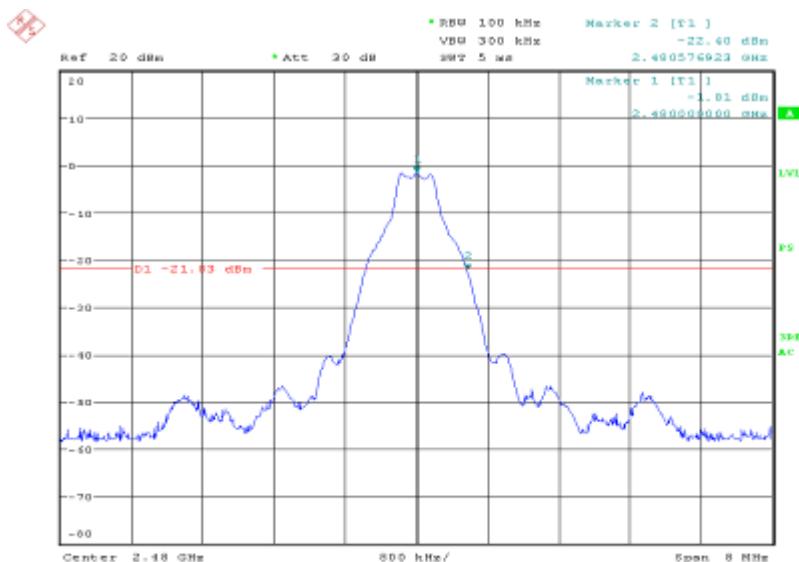


EDR mode:

Low Channel:

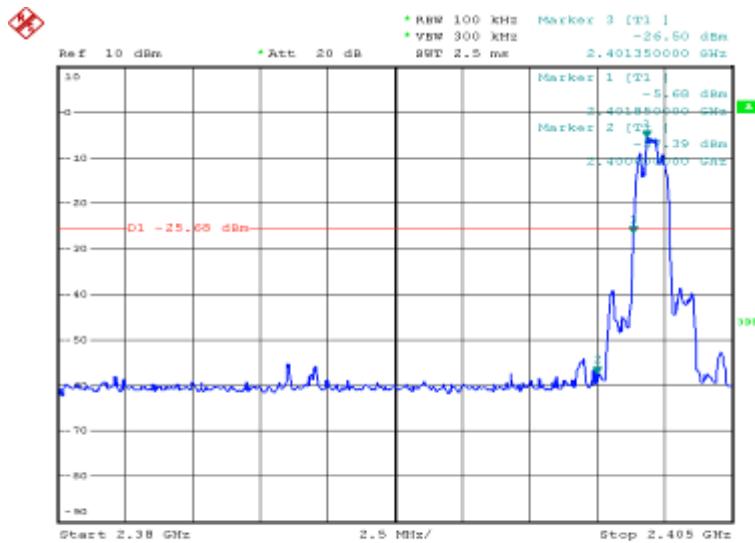

High Channel:

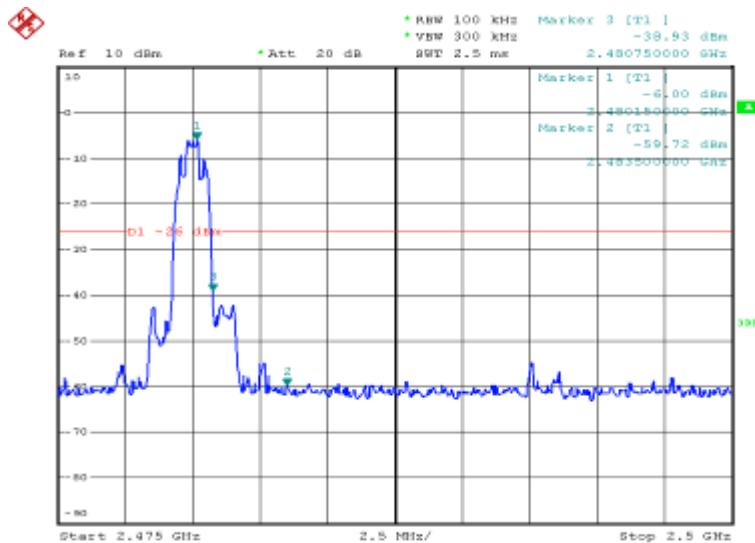

## **6.12 Radiated Emissions (9k-30MHz)**

Test Requirement:

15.209

Test Method:

ANSI C63.4:2003

Test Date:

Apr 19, 2010

Test Status:

Test in working mode.


Test site:

Measurement Distance: 10m

15.209 Limit:

	Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)		300
0.490 - 1.705	24000/F(kHz)		30
1.705 - 30.0	30		30

At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

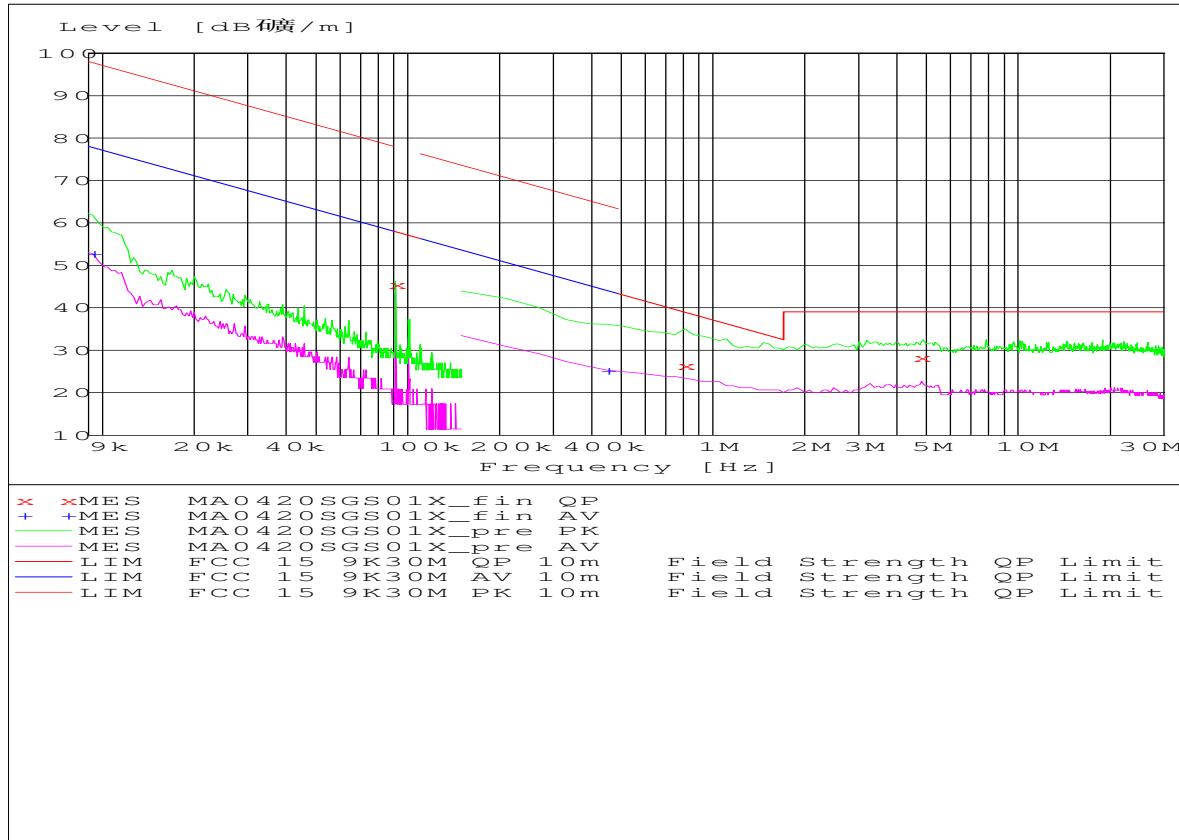
**Polarisation: X direction****MEASUREMENT RESULT: "MA0420SGS01X\_fin QP"**

Frequency	Level	Height	Azimuth	Limit
MHz	dB $\mu$ V/m	cm	deg	dB $\mu$ V/m
0.091226	45.38	0.0	0.00	87.50
0.808016	26.36	0.0	0.00	48.53
4.785752	28.24	0.0	0.00	48.62

**MEASUREMENT RESULT: "MA0420SGS01X\_fin AV"**

Frequency	Level	Height	Azimuth	Limit
MHz	dB $\mu$ V/m	cm	deg	dB $\mu$ V/m
0.009283	52.75	0.0	0.00	107.60
0.449098	25.30	0.0	0.00	53.63

Polarisation:Y

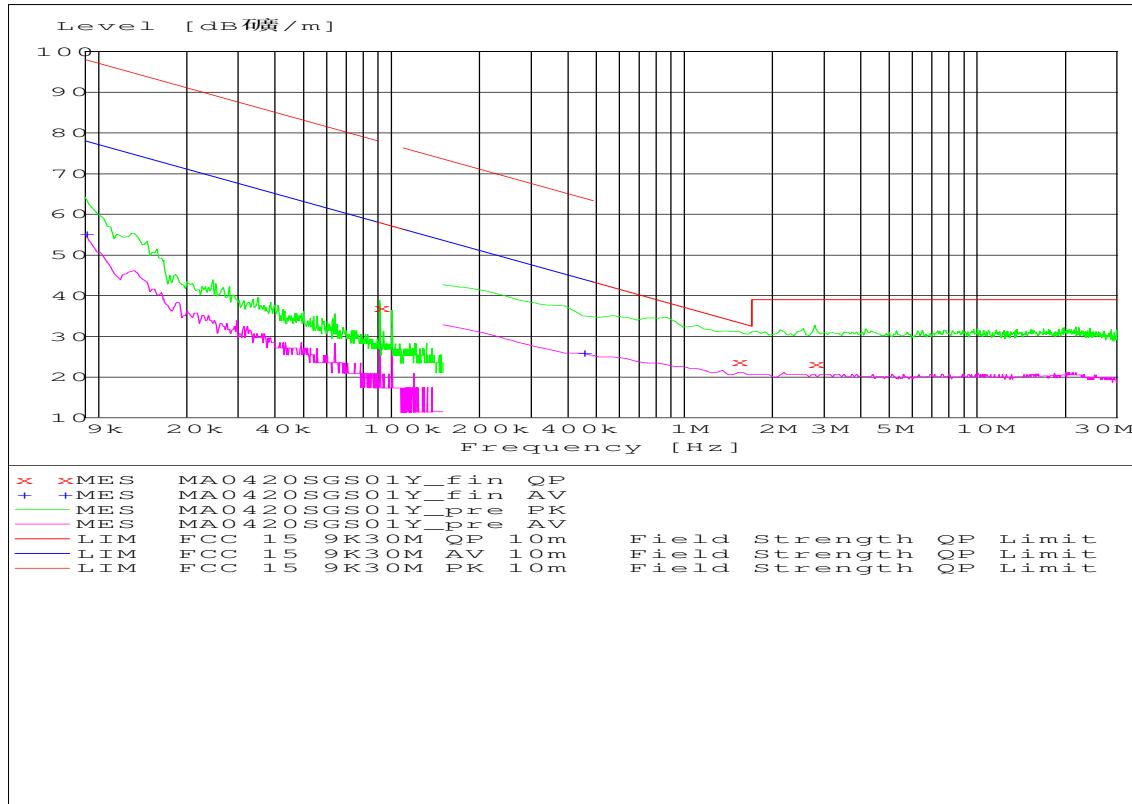

**MEASUREMENT RESULT: "MA0420SGS01Y\_fin QP"**

Frequency	Level	Height	Azimuth	Limit
MHz	dB $\mu$ V/m	cm	deg	dB $\mu$ V/m
0.091226	37.10	0.0	0.00	87.50
1.525852	23.81	0.0	0.00	43.01
2.782064	23.38	0.0	0.00	48.62

**MEASUREMENT RESULT: "MA0420SGS01Y\_fin AV"**

Frequency	Level	Height	Azimuth	Limit
MHz	dB $\mu$ V/m	cm	deg	dB $\mu$ V/m
0.009000	55.23	0.0	0.00	107.60
0.449098	25.92	0.0	0.00	53.63