



Electromagnetic Compatibility Test Report

Tests Performed on an RF IDEas, Inc.

Multi-Protocol RFID Readers, Model RDR-8008XAKU & RDR-8058XAKU

Radiometrics Document RP-8355A



Product Detail:

FCC ID: M9MLC8008U

IC: 6571A-LC8008U

Equipment type: Multi-Protocol RFID Reader

Test Standards:

US CFR Title 47, Chapter I, FCC Part 15 Subpart C

FCC Part 15 CFR Title 47: 2016

Innovation, Science, and Economic Development Canada RSS-210, Issue 8: 2010+A1:2015 as required for Category I Equipment

This report concerns: Original Equipment

FCC Part 15.225

Tests Performed For:

RF IDEas, Inc.

4020 Winnetka Av.

Rolling Meadows, IL 60008

Test Facility:

Radiometrics Midwest Corporation

12 East Devonwood

Romeoville, IL 60446

Test Date(s): (Month-Day-Year)

May 18 thru July 28, 2016

Document RP-8355A Revisions:

Rev.	Issue Date	Affected Sections	Revised By
0	July 29, 2016		
1	August 9, 2016	Cover, 5, 10.1, 10.3.1	Joseph Strzelecki

Table of Contents



1 ADMINISTRATIVE DATA	3
2 TEST SUMMARY AND RESULTS	3
2.1 RF Exposure Compliance Requirements	3
3 EQUIPMENT UNDER TEST (EUT) DETAILS	4
3.1 EUT Description	4
3.1.1 FCC Section 15.203 & RSS-GEN Antenna Requirements	4
3.2 Related Submittals	4
4 TESTED SYSTEM DETAILS	4
4.1 Tested System Configuration	4
4.2 Special Accessories	5
4.3 Equipment Modifications	5
5 TEST SPECIFICATIONS AND RELATED DOCUMENTS	5
6 RADIOMETRICS' TEST FACILITIES	5
7 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS	6
8 CERTIFICATION	6
9 TEST EQUIPMENT TABLE	6
10 TEST SECTIONS	6
10.1 AC Conducted Emissions	6
10.2 Radiated RF Emissions	24
10.2.1 Field Strength Calculation	25
10.2.2 Radiated Emissions Test Results	25
10.3 Magnetic Field Measurements and Decay Factor Calculations	34
10.3.1 Magnetic Field Radiated Emissions Results (0.009 to 30 MHz)	35
10.4 Occupied Bandwidth Data	36
10.5 Frequency Stability	38
10.5.1 Test Results for Frequency Stability	38
11 MEASUREMENT INSTRUMENTATION UNCERTAINTY	39

Notice: This report must not be reproduced (except in full) without the written approval of Radiometrics Midwest Corporation.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

1 ADMINISTRATIVE DATA

<i>Equipment Under Test:</i> An RF IDEas, Inc., Multi-Protocol RFID Reader Models: RDR-8008XAKU, RDR-8058XAKU Serial Numbers: LOIA000002LC, LC80511 These will be referred to as the EUT in this Report	
<i>Date EUT Received at Radiometrics: (Month-Day-Year)</i> May 18, 2016	<i>Test Date(s): (Month-Day-Year)</i> May 18 thru July 15, 2016
<i>Test Report Written By:</i> Joseph Strzelecki Senior EMC Engineer	<i>Test Witnessed By:</i> The tests were not witnessed by RF IDEas, Inc.
<i>Radiometrics' Personnel Responsible for Test:</i>  Joseph Strzelecki Senior EMC Engineer NARTE EMC-000877-NE	<i>Test Report Approved By</i>  Chris W. Carlson Director of Engineering NARTE EMC-000921-NE

2 TEST SUMMARY AND RESULTS

The EUT (Equipment Under Test) is a Multi-Protocol RFID Reader, Models RDR-8008XAKU and RDR-8058XAKU, manufactured by RF IDEas, Inc. The detailed test results are presented in a separate section. The following is a summary of the test results.

Emissions Tests Results

Environmental Phenomena	Frequency Range	Basic Standard	Test Result
RF Radiated Emissions	30-1000 MHz	RSS-210 & FCC Part 15	Pass
Conducted Emissions, AC Mains	0.15 - 30 MHz	RSS-210 & FCC Part 15	Pass
RF Radiated Emissions H-Field	0.009 – 30 MHz	RSS-210 & FCC Part 15	Pass

Note: The RSS-210 specification is not currently covered in Radiometrics' Scope of Accreditation. This is technically very similar to FCC, CFR 47 Part 15 which is on Radiometrics scope.

2.1 RF Exposure Compliance Requirements

Since the effective power output is less than 1 mW, the EUT meets the FCC requirement for RF exposure and is exempt from RSS-102. There are no power level adjustments and the antenna is permanently attached. The detailed calculations for RF Exposure are presented in a separate document.

3 EQUIPMENT UNDER TEST (EUT) DETAILS

3.1 EUT Description

The EUT is a Multi-Protocol RFID reader, Models RDR-8008XAKU and RDR-8058XAKU, manufactured by RF IDEas, Inc. The EUT was in good working condition during the tests, with no known defects.

3.1.1 FCC Section 15.203 & RSS-GEN Antenna Requirements

The antenna is permanently attached to the PCB. The antenna is internal to the EUT and it is not readily available to be modified by the end user.

3.2 Related Submittals

RF IDEas, Inc. is not submitting any other products simultaneously for equipment authorization related to the EUT.

4 TESTED SYSTEM DETAILS

4.1 Tested System Configuration

The system was configured for testing in a typical fashion. The EUT was placed on an 80-cm high, nonconductive test stand. The testing was performed in conditions as close as possible to installed conditions. Wiring was consistent with manufacturer's recommendations. Power was supplied at 115 VAC, 60 Hz single-phase to the host computer. The EUT was powered from either the USB or PS/2 port.

The identification for all equipment, plus descriptions of all cables used in the tested system, are:

Tested System Configuration List

Item	Description	Type*	Manufacturer	Model Number	Serial Number
1	RFID Card Reader	E	RF IDEas	RDR-8008XAKU	LOIA000002
2	RFID Card Reader	E	RF IDEas	RDR-8058XAKU	C05P100012
3	Notebook PC (NB7)	H	Dell	D620 (PP18L)	17171005069
4	Notebook Power Supply (NB7)	H	Dell	AA90PM111	CN-0MV2MM-70163-14G-0GC4-A01
5	Modem (MDM-01)	P	US Robotics	0701	22SBBAC9FPMN
6	Mouse (MS-01)	P	IBM	MO09KZ	23-001330

* Type: E = EUT, P = Peripheral, S = Support Equipment; H = Host Computer

List of Cables

QTY	Length (m)	Cable Description	Connected to (Item #)	Shielded?
1	1.85	USB Cable to Card Reader	# and #	Yes
	1.8	Serial Cable to Card Reader	# and #	Yes
1	1.1	Serial Cable from modem to computer	# and #	Yes
1	1.8	AC Cord to Computer	#4 Power input	No
1	1.5	DC Cord to Computer	#3 to #4	No

See previous table for Item #'s.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

4.2 Special Accessories

No special accessories were used during the tests in order to achieve compliance.

4.3 Equipment Modifications

No modifications were made at Radiometrics in order to meet the requirements listed in this report.

5 TEST SPECIFICATIONS AND RELATED DOCUMENTS

Document	Date	Title
FCC CFR Title 47	2016	Code of Federal Regulations Title 47, Chapter 1, Federal Communications Commission, Part 15 - Radio Frequency Devices
ANSI C63.10-2013	2013	American National Standard for Testing Unlicensed Wireless Devices
IC RSS-210 Issue 8	2010 +A1:2015	Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands) Category I Equipment
IC RSS-Gen Issue 4	2014	General Requirements and Information for the Certification of Radiocommunication Equipment (RSS-Gen)

The test procedures used are in accordance with the Industry Canada RSS-Gen and ANSI document C63.10-2013. The specific procedures are described herein.

6 RADIOMETRICS' TEST FACILITIES

The results of these tests were obtained at Radiometrics Midwest Corp. in Romeoville, Illinois, USA. Radiometrics is accredited by A2LA (American Association for Laboratory Accreditation) to conform to ISO/IEC 17025: 2005 "General Requirements for the Competence of Calibration and Testing Laboratories". Radiometrics' Lab Code is 121191 and Certification Number is 1495.01. Radiometrics' scope of accreditation includes all of the test methods listed herein. A copy of the accreditation can be accessed on our web site (www.radiomet.com). Radiometrics accreditation status can be verified at A2LA's web site (www.a2la2.org).

The following is a list of shielded enclosures located in Romeoville, Illinois used during the tests:

Chamber E: Is a custom made anechoic chamber that measures 52' L X 30' W X 18' H. The walls and ceiling are fully lined with RF absorber. Pro-shield of Collinsville, Oklahoma manufactured the chamber.

Test Station F: Is an area that measures 10' D X 12' W X 10' H. The floor and back wall are metal shielded. This area is used for conducted emissions measurements.

A separate ten-foot long, brass plated, steel ground rod attached via a 6 inch copper braid grounds each of the above chambers. Each enclosure is also equipped with low-pass power line filters.

The FCC has accepted these sites as test site number US1065. The FCC test site Registration Number is 732175. Details of the site characteristics are on file with the Industry Canada as site number IC8727A-1.

A complete list of the test equipment is provided herein. The calibration due dates are indicated on the equipment list. The equipment is calibrated in accordance to ANSI/NCSL Z540-1 with traceability to the National Institute of Standards and Technology (NIST).

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

7 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS

There were no deviations or exclusions from the test specifications.

8 CERTIFICATION

Radiometrics Midwest Corporation certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specification. The results relate only to the EUT listed herein. Any modifications made to the EUT subsequent to the indicated test date will invalidate the data and void this certification.

9 TEST EQUIPMENT TABLE

RMC ID	Manufacturer	Description	Model No.	Serial No.	Frequency Range	Cal Period	Cal Date
AMP-22	Anritsu	Pre-amplifier	MH648A	M23969	0.1-1200MHz	12 Mo.	01/05/16
ANT-03	Tensor	Biconical Antenna	4104	2231	20-250MHz	24 Mo.	12/07/15
ANT-04	Tensor	Biconical Antenna	4104	2246	20-250MHz	24 Mo.	05/16/16
ANT-06	EMCO	Log-Periodic Ant.	3146	1248	200-1000MHz	24 Mo.	11/25/15
ANT-08	RMC	Log-Periodic Ant.	LP1000	1002	200-1000MHz	24 Mo.	08/26/14
ANT-53	EMCO	Loop Antenna	6507	1453	1 kHz-30 MHz	24 Mo.	12/17/15
LSN-01	Electrometrics	50 uH LISN	FCC/VDE 50/2	1001	0.01-30MHz	24 Mo.	06/23/15
LSN-03	Farnell	50 uH LISN	1EXLSN30B	000314	0.15-30MHz	24 Mo.	06/23/15
REC-20	HP / Agilent	Spectrum Analyzer	85460A/84562A	33330A00135 3410A00178	30Hz-6GHz	24 Mo.	06/26/15
REC-21	Agilent	Spectrum Analyzer	E7405A	MY45118341	9kHz-26.5 GHz	12 Mo.	12/22/15
REC-43	Adventest	Spectrum Analyzer	U3772	150800305	9kHz-43GHz	12 Mo.	03/07/16
THM-03	Fluke	Temp/Humid Meter	971	95850465	N/A	12 Mo.	01/11/16
PSA-02	Calf. Instruments	AC Power/ Analyzer	5001ix--208-164-411	58403	DC-5kHz	24 Mo.	11/24/15

Note: All calibrated equipment is subject to periodic checks.

10 TEST SECTIONS

10.1 AC Conducted Emissions

The tests and limits are in accordance with FCC section 15.207 and RSS Gen section 8.8.

A computer-controlled analyzer was used to perform the conducted emissions measurements. The frequency range was divided into 500 subranges equally spaced on a logarithmic scale. The computer recorded the peak of each subrange. This data was then plotted on a semi-log graph generated by the computer. Adjusting the positions of the cables and orientation of the test system then maximizes the highest emissions.

Mains Conducted emission measurements were performed using a 50 Ohm/50 uH Line Impedance Stabilization Network (LISN) as the pick-up device. Measurements were repeated on both leads within the power cord. If the EUT power cord exceeded 80 cm in length, the excess length of the power cord was made into a 30 to 40 cm bundle near the center of the cord. The LISN was placed on the floor at the base of the test platform and electrically bonded to the ground plane.

FCC/IC Limits of Conducted Emissions at the AC Mains Ports

Frequency Range (MHz)	Class B Limits (dBuV)	
	Quasi-Peak	Average
0.150 - 0.50*	66 - 56	56 - 46
0.5 – 5.0	56	46
5.0 - 30	60	50
* The limit decreases linearly with the logarithm of the frequency in this range.		

The initial step in collecting conducted data is a peak detector scan and the plotting of the measurement range. Significant peaks are then marked as shown on the following table, and these signals are then measured with the quasi-peak detector. The following represents the worst case emissions from the host computer (with the EUT connected) power cord, after testing all modes of operation.

In accordance with the FCC rules regarding transmitters below 30 MHz.

The transmitter was tested with a dummy load under the following conditions:

- 1) First, the AC line conducted tests with the antenna attached were performed to determine if the EUT complies with the 15.207 limits outside of the transmitter's fundamental emission band.
- 2) The AC line conducted emissions were retested with a dummy load to make sure the device complies with the 15.207 limits inside the transmitter's fundamental emission band. Only the fundamental TX emission band needs to be retested. The load was 100 Ohm. This is the characteristic impedance of the antenna.

Test Date : June 10, 2016


QP readings are quasi-peak with a 9 kHz bandwidth and no video filter.

Judgment: Passed by 15 dB at 13.56 MHz with Resistive Load in place of standard Loop antenna.

Judgment: Passed by at least 8 dB at all frequencies except 13.56 MHz with standard Loop antenna installed.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

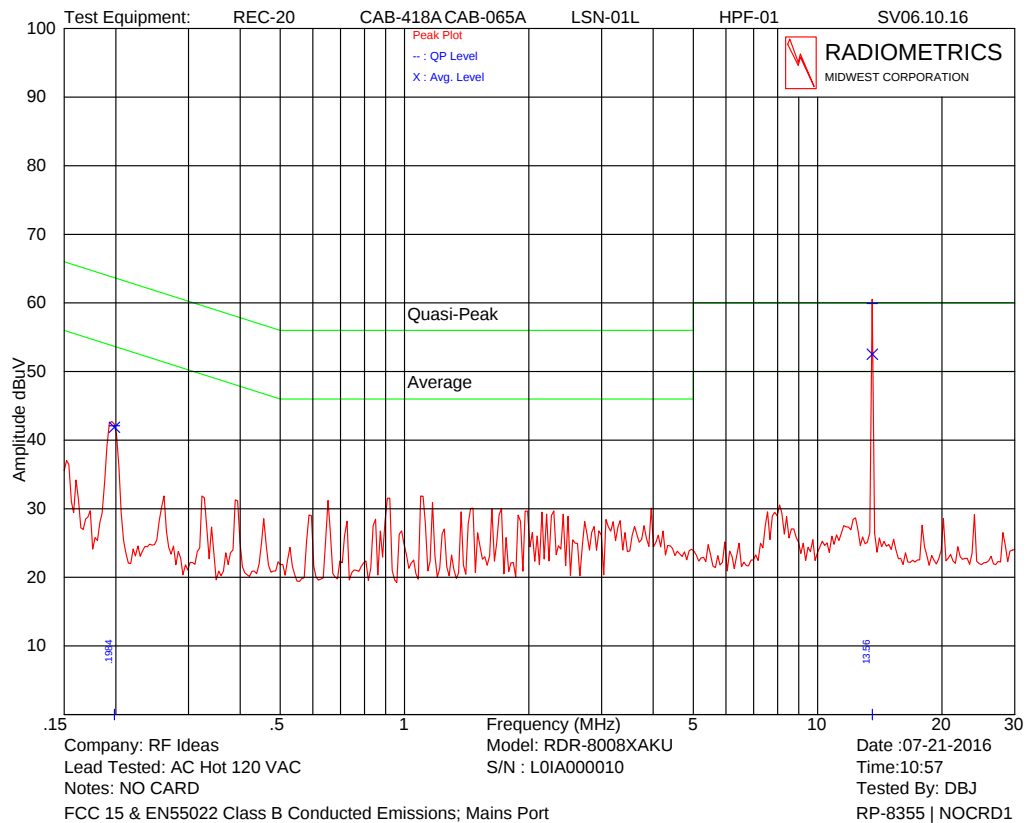


Model: RDR-8008XAKU; With standard antenna installed

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
0.198	42.1	63.7	41.9	53.7	11.8
13.562	59.9	60.0	52.5	50.0	-2.5

The emission at 13.56 MHz was re-measured with a resistive load in place of the antenna and was fully compliant.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

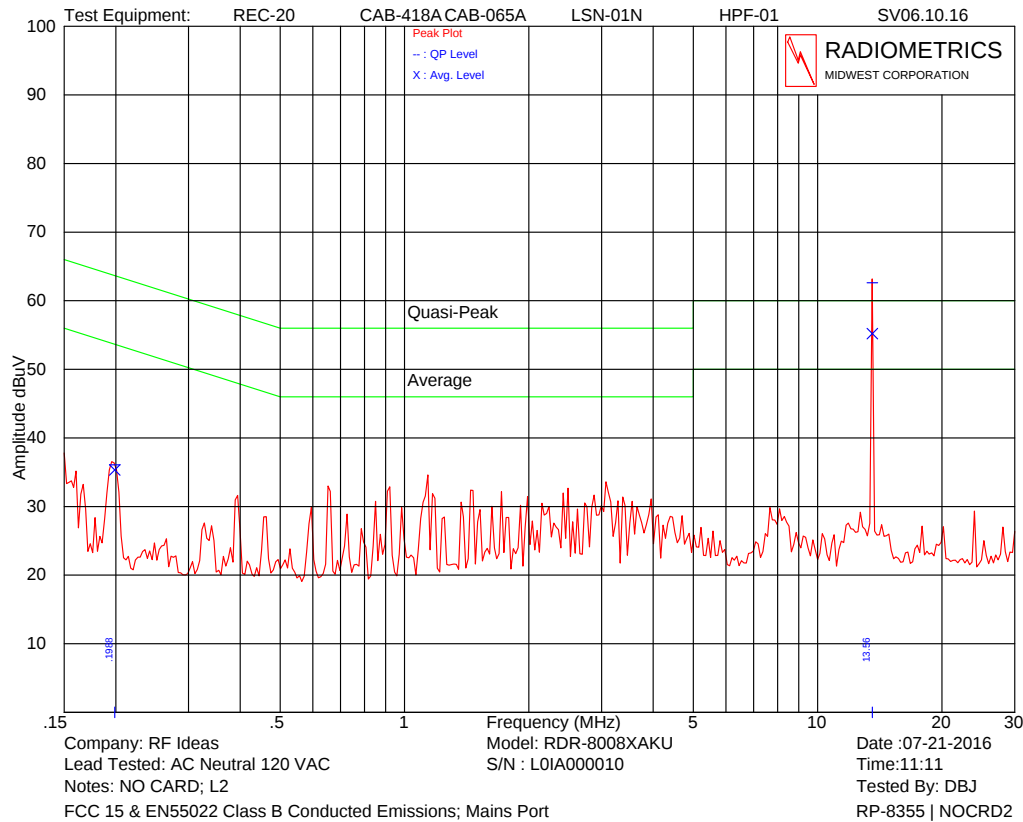


Model: RDR-8008XAKU; With standard antenna installed

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
0.199	36.1	63.7	35.3	53.7	18.3
13.560	62.6	60.0	55.2	50.0	-5.2

The emission at 13.56 MHz was re-measured with a resistive load in place of the antenna and was fully compliant.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

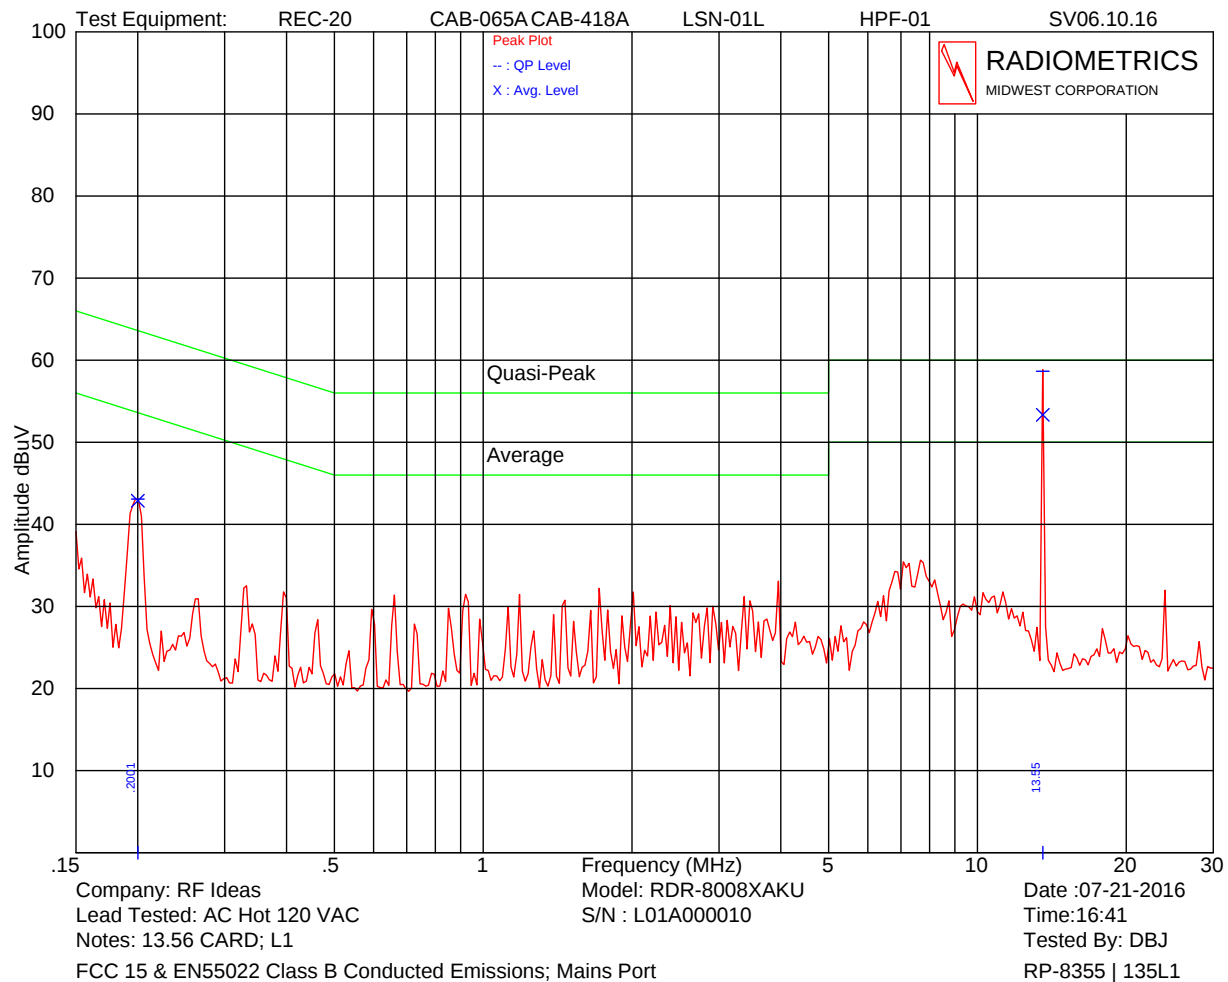


Model: RDR-8008XAKU; With standard antenna installed

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
0.200	43.1	63.6	42.9	53.6	10.7
13.559	58.7	60.0	53.3	50.0	-3.3

The emission at 13.56 MHz was re-measured with a resistive load in place of the antenna and was fully compliant.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

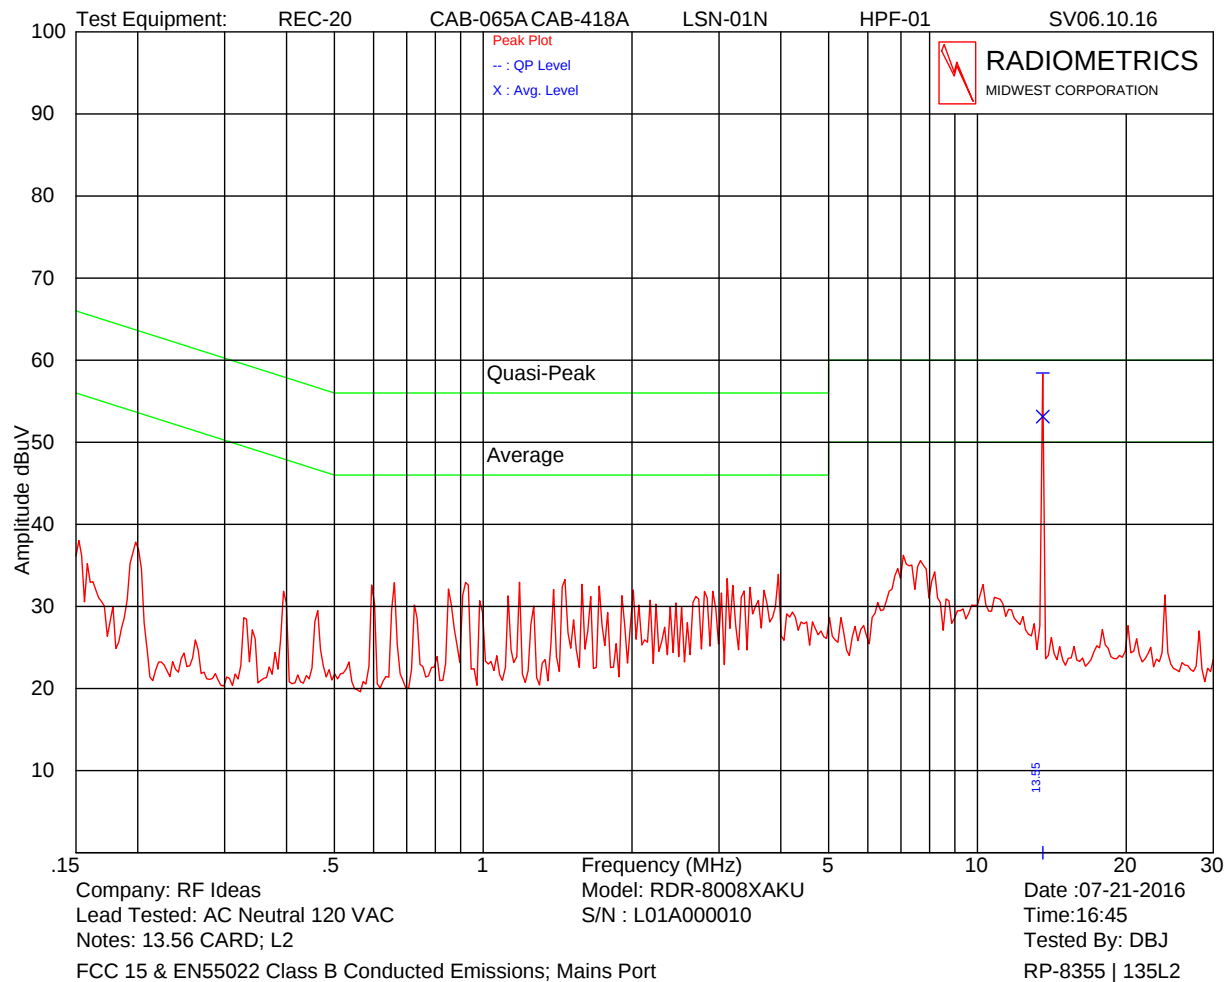


Model: RDR-8008XAKU; With standard antenna installed

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
13.560	58.5	60.0	53.1	50.0	-3.1

The emission at 13.56 MHz was re-measured with a resistive load in place of the antenna and was fully compliant.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report


Testing of RF Ideas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

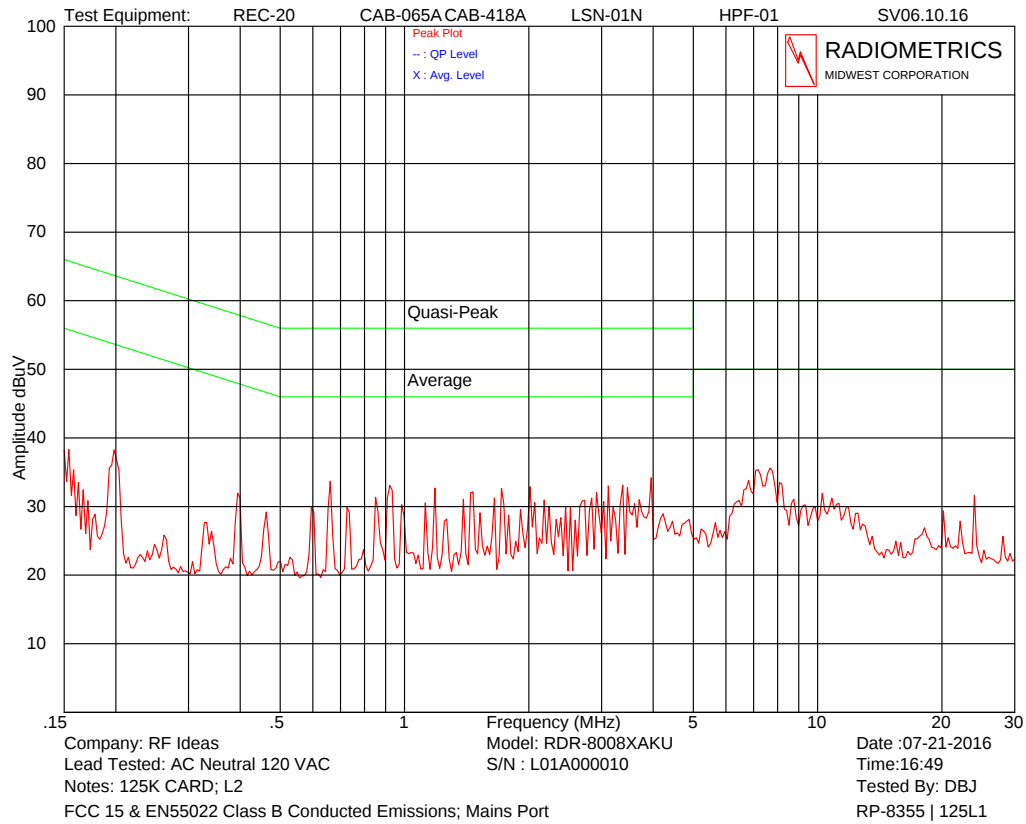

Model: RDR-8008XAKU; With standard antenna installed

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

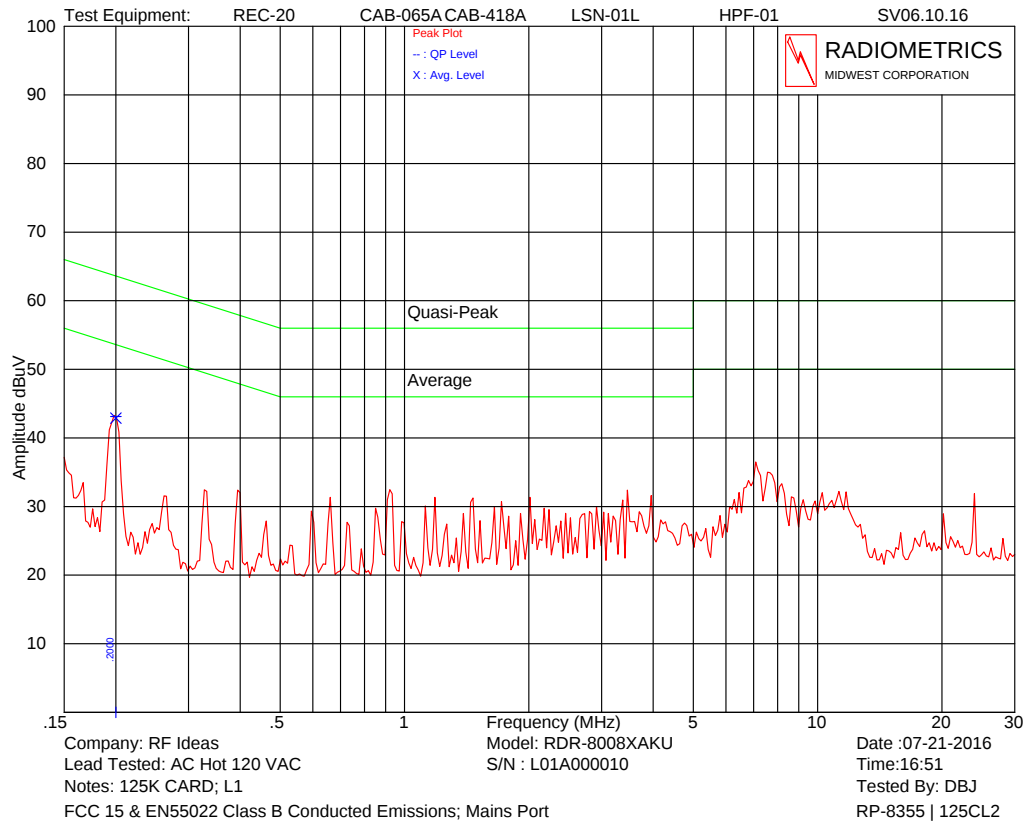


Model: RDR-8008XAKU; With standard antenna installed

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
0.200	43.1	63.6	42.9	53.6	10.7

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

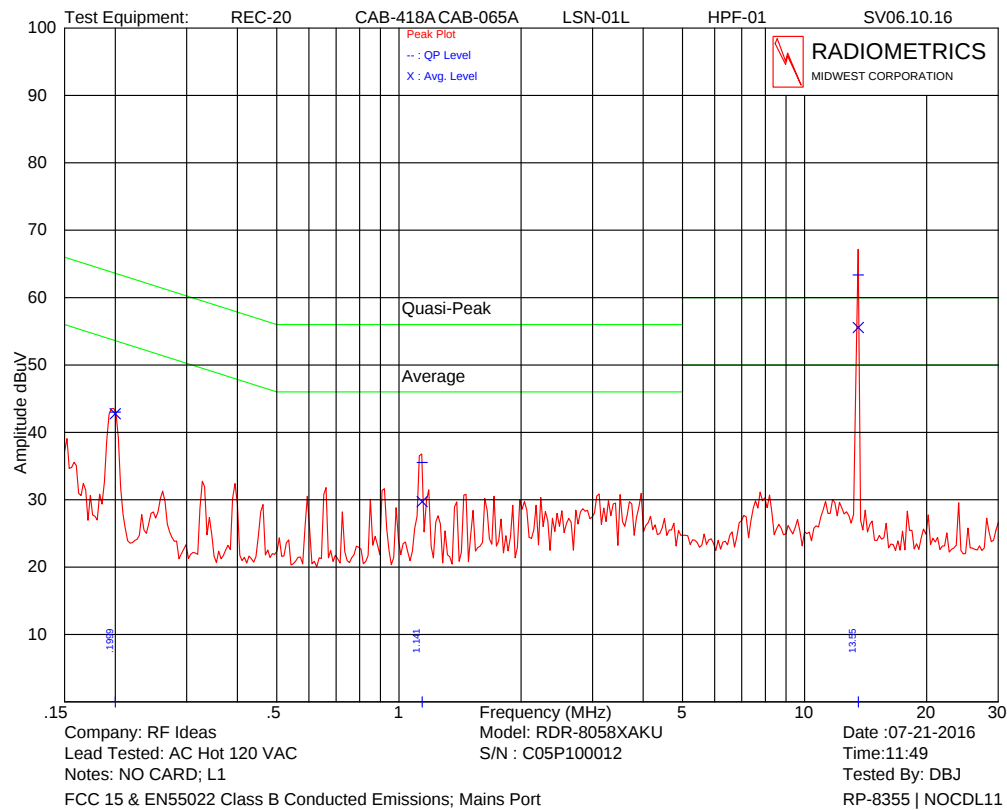


Model: RDR-8058XAKU; With standard antenna installed

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
0.200	43.0	63.6	42.8	53.6	10.9
1.141	35.5	56.0	29.7	46.0	16.3
13.558	63.3	60.0	55.6	50.0	-5.6

The emission at 13.56 MHz was re-measured with a resistive load in place of the antenna and was fully compliant.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

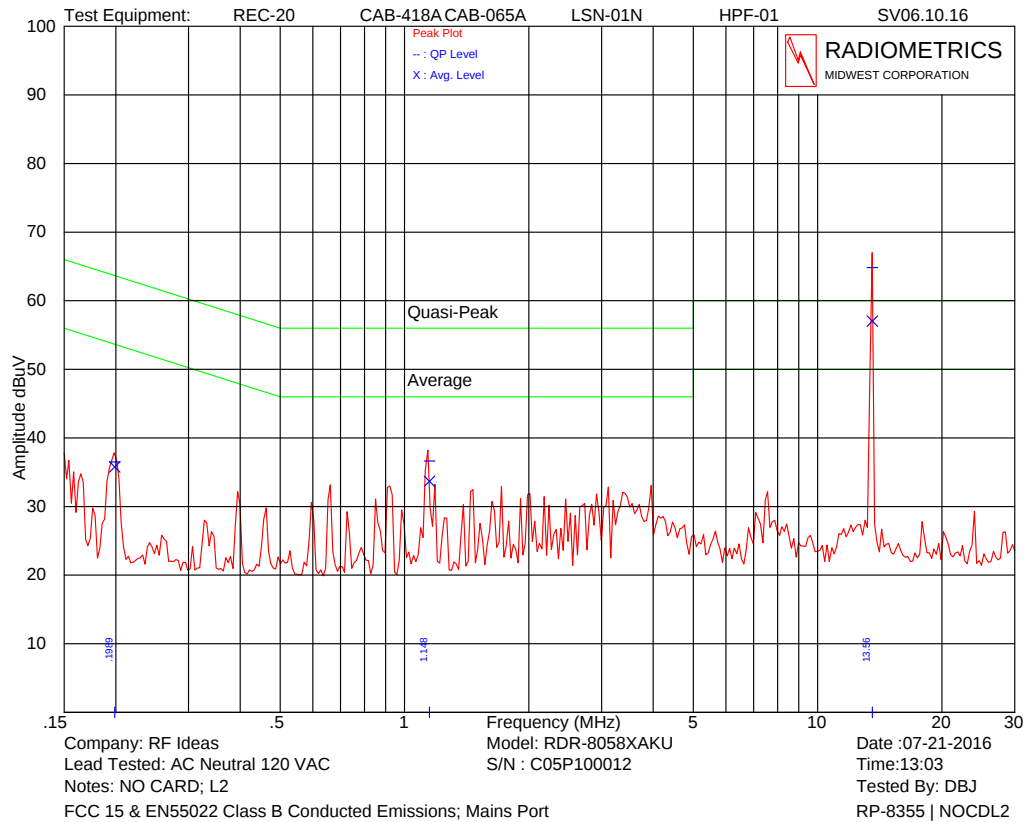


Model: RDR-8058XAKU; With standard antenna installed

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
0.199	36.5	63.7	35.8	53.7	17.9
1.149	36.6	56.0	33.7	46.0	12.3
13.560	64.8	60.0	57.0	50.0	-7.0

The emission at 13.56 MHz was re-measured with a resistive load in place of the antenna and it passed

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

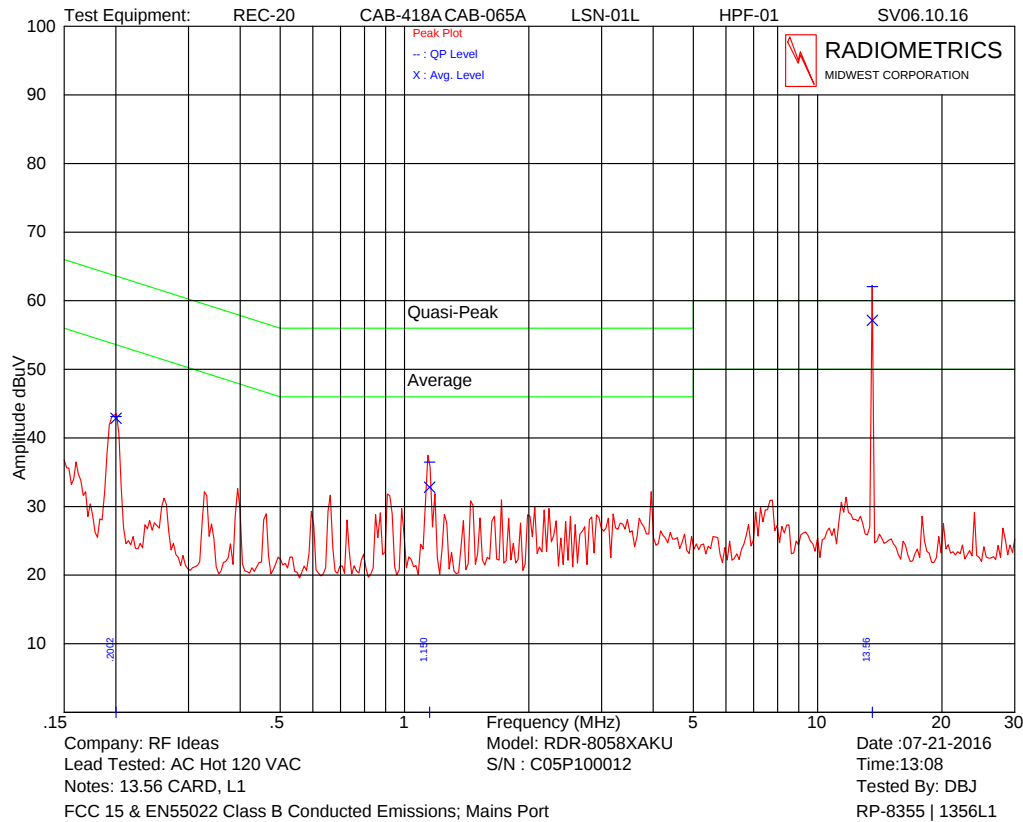


Model: RDR-8058XAKU; With standard antenna installed

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
0.200	43.1	63.6	42.9	53.6	10.7
1.150	36.5	56.0	32.8	46.0	13.2
13.560	62.1	60.0	57.1	50.0	-7.1

The emission at 13.56 MHz was re-measured with a resistive load in place of the antenna and was fully compliant.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

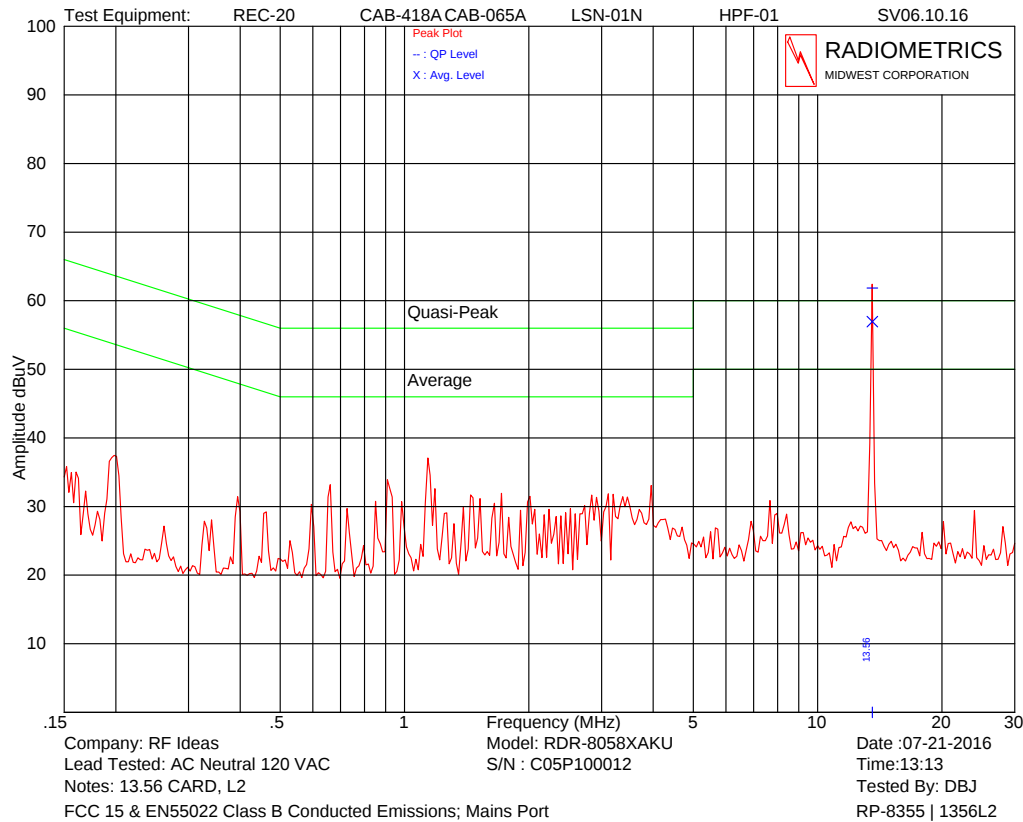


Model: RDR-8058XAKU; With standard antenna installed

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
13.561	61.9	60.0	57.0	50.0	-7.0

The emission at 13.56 MHz was re-measured with a resistive load in place of the antenna and was fully compliant.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

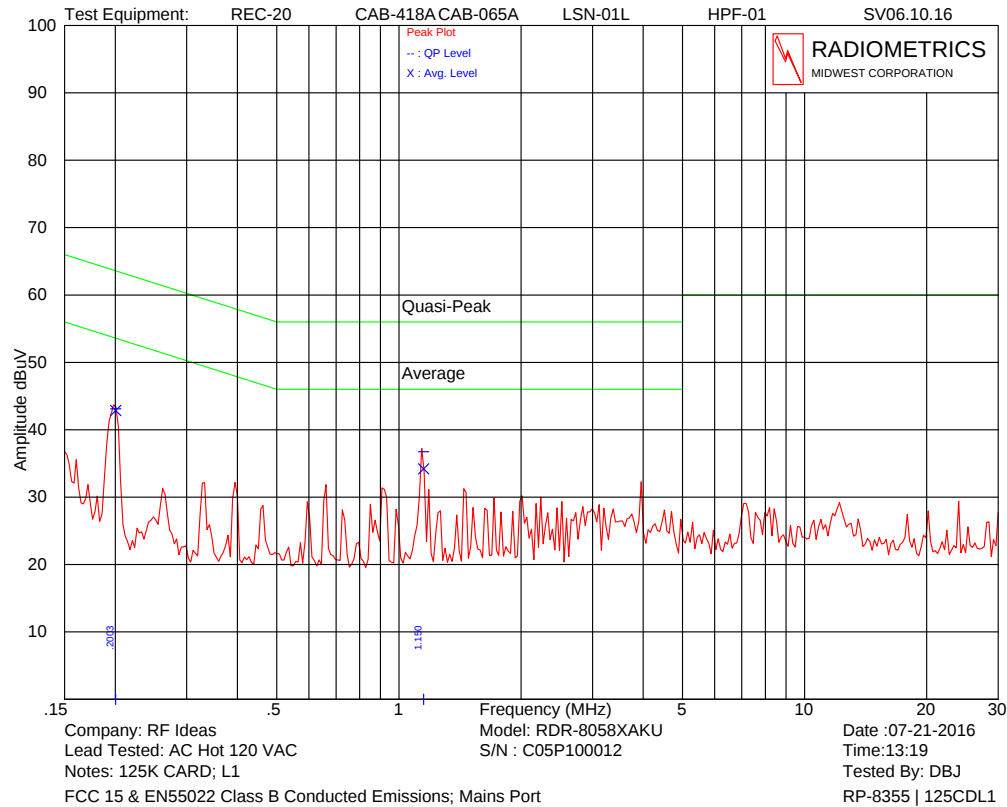


Model: RDR-8058XAKU; With standard antenna installed

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
0.200	43.1	63.6	42.9	53.6	10.7
1.151	36.7	56.0	34.2	46.0	11.8

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

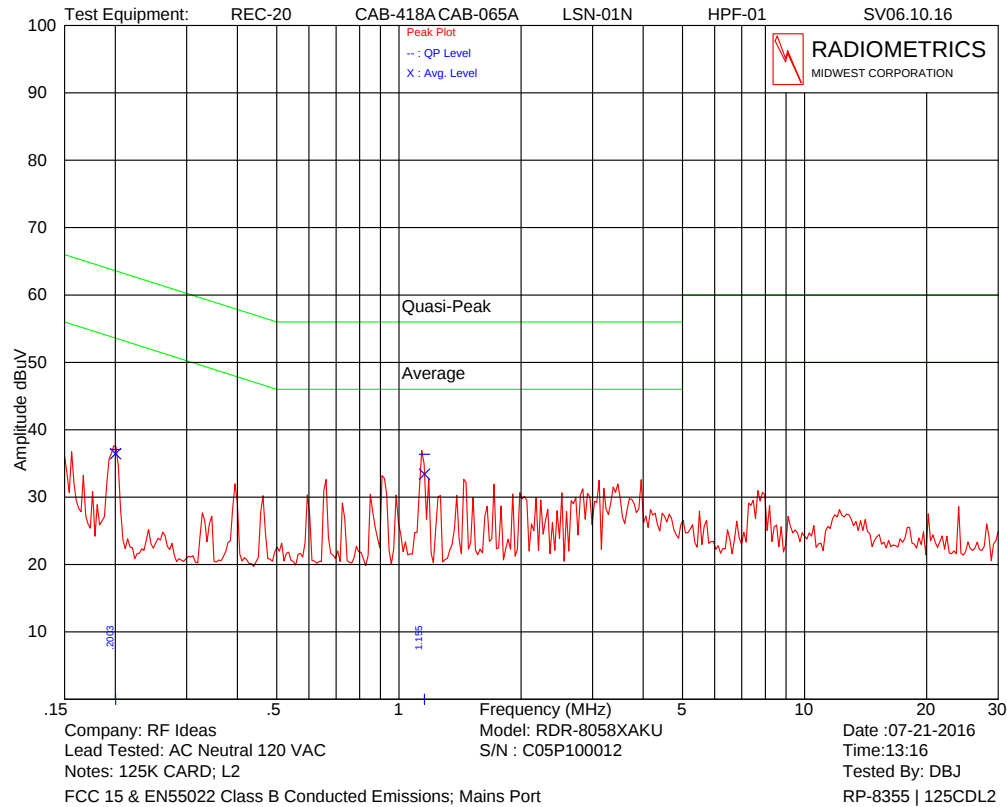


Model: RDR-8058XAKU; With standard antenna installed

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
0.200	37.1	63.6	36.4	53.6	17.2
1.156	36.4	56.0	33.4	46.0	12.6

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

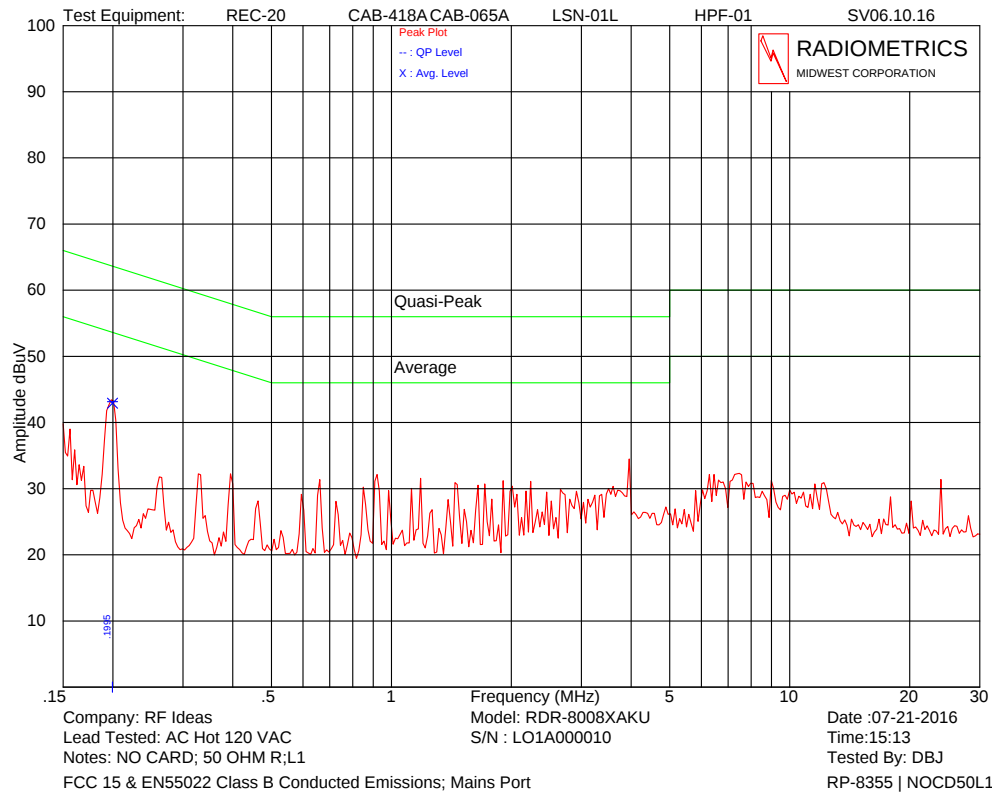


Model: RDR-8008XAKU; With Resistive load in place of 13.56 MHz antenna.

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
0.200	43.1	63.6	42.9	53.6	10.7

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

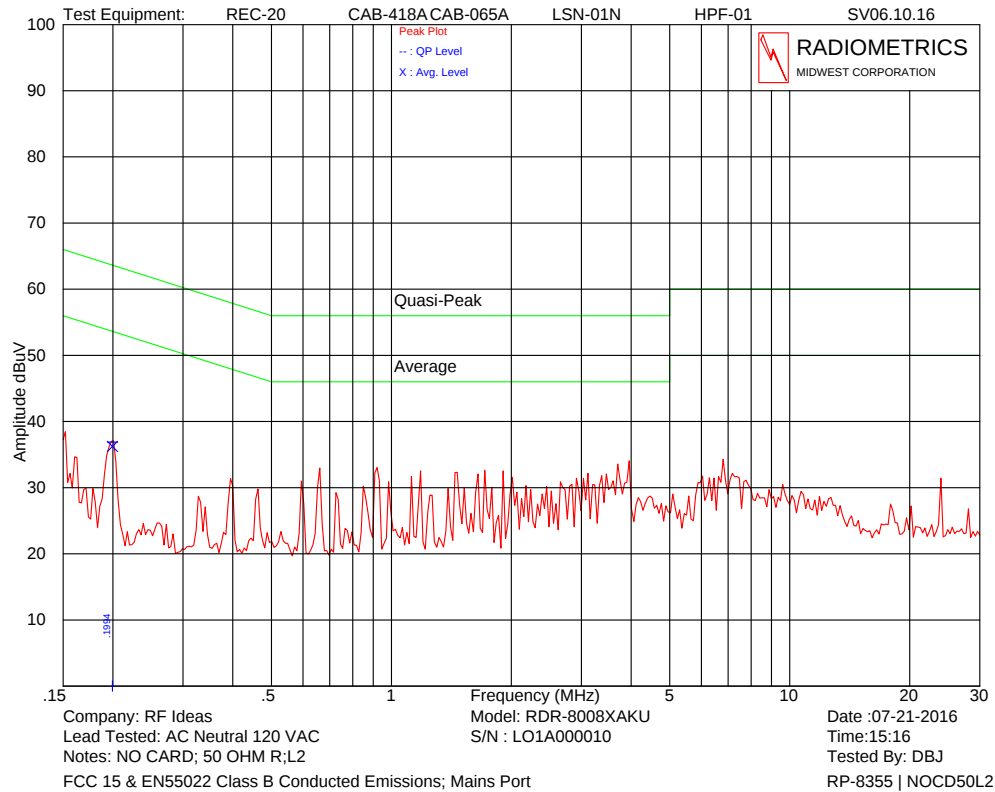


Model: RDR-8008XAKU; With Resistive load in place of 13.56 MHz antenna.

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
0.199	36.9	63.6	36.2	53.6	17.4

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

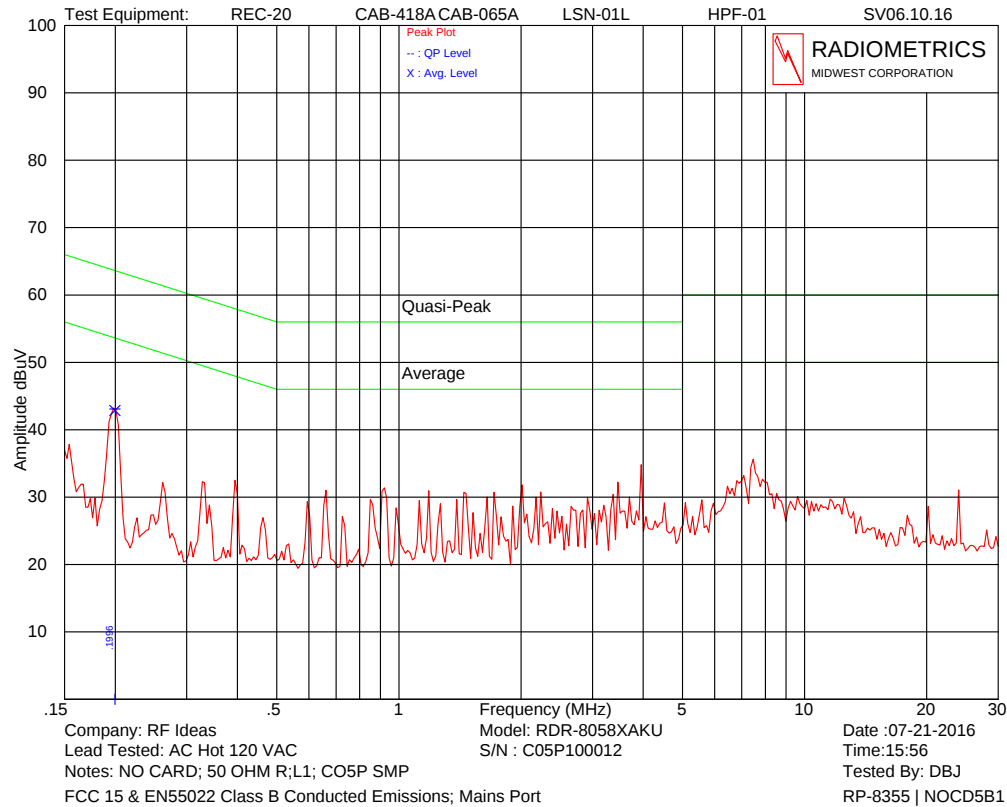


Model: RDR-8058XAKU; With Resistive load in place of 13.56 MHz antenna.


Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
0.200	43.1	63.6	42.9	53.6	10.8

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF Ideas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

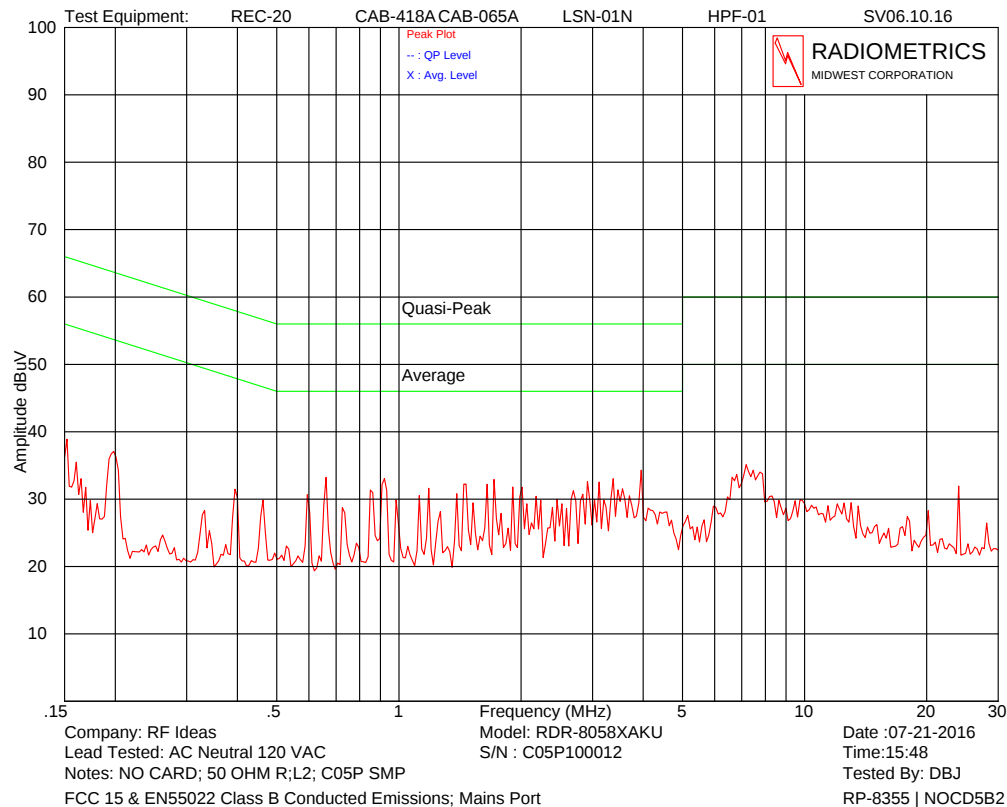

Model: RDR-8058XAKU; With Resistive load in place of 13.56 MHz antenna.

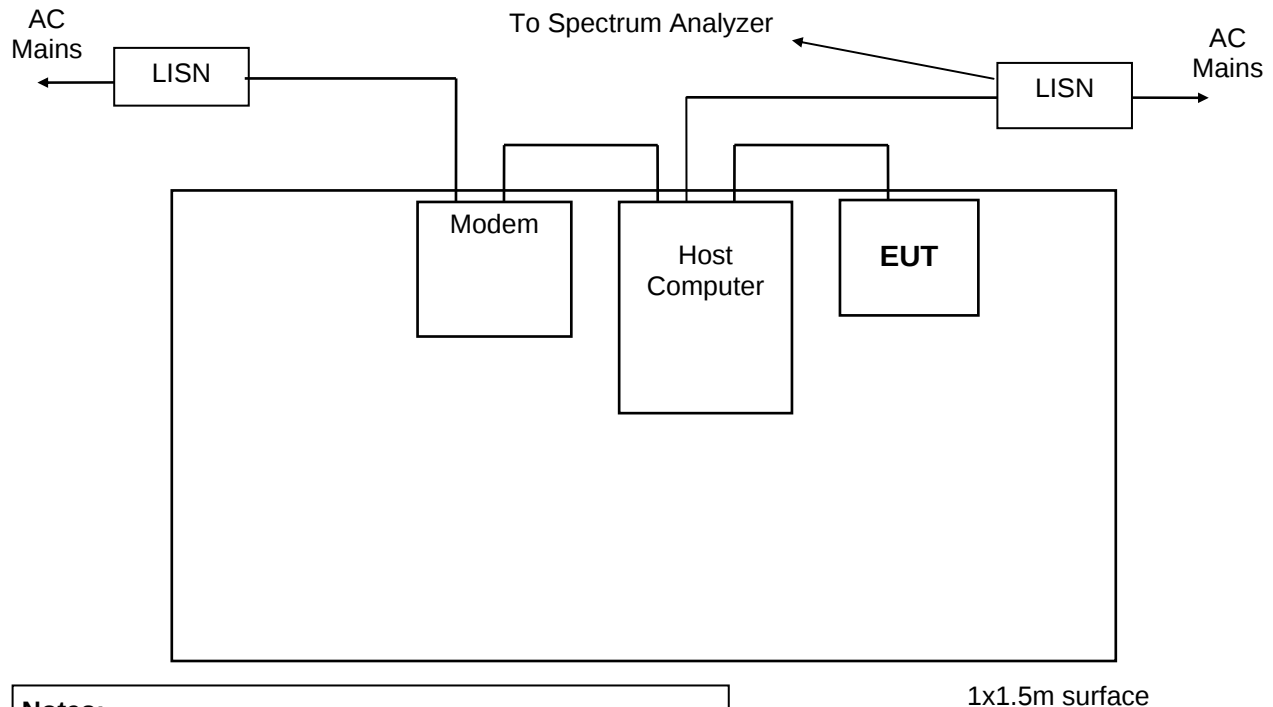Figure 1. Conducted Emissions Test Setup**Notes:**

- LISN's at least 80 cm from EUT chassis
- Vertical conductive plane 40 cm from rear of table top
- EUT power cord bundled

10.2 Radiated RF Emissions

Radiated emission measurements were performed with linearly polarized broadband antennas. The results obtained with these antennas can be correlated with results obtained with a tuned dipole antenna. The radiated emission measurements were performed with a spectrum analyzer. The bandwidth used from 150 kHz to 30 MHz is 9 or 10 kHz and the bandwidth from 30 MHz to 1000 MHz is 100 or 120 kHz. Above 1 GHz, a 1 MHz bandwidth is used. A 10 dB linearity check is performed prior to start of testing in order to determine if an overload condition exists. Figure 4 herein lists the details of the test equipment used during radiated emissions tests.

Final radiated emissions measurements were performed inside of an anechoic chamber at a test distance of 3 meters. The anechoic chamber is designated as Chamber E. This Chamber meets the Site Attenuation requirements of ANSI C63.4 and CISPR 16-1. Chamber E is located at 12 East Devonwood Ave. Romeoville, Illinois EMI test lab.

The entire frequency range from 30 to 1000 MHz was slowly scanned with particular attention paid to those frequency ranges which appeared high. Measurements were performed using two antenna polarizations, (vertical and horizontal). The worst case emissions were recorded. All measurements may be performed using either the peak, average or quasi-peak detector functions. If the peak detector data exceeds or is marginally close to the limits, the measurements are repeated using a quasi-peak detector or average function as required by the specification for final determination of compliance.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

The detected emission levels were maximized by rotating the EUT, adjusting the positions of all cables, and by scanning the measurement antenna from 1 to 4 meters above the ground.

Radiated Emissions Field Strength Limits

Frequency Range (MHz)	Test Distance (meters)	Class B Limits (uV/m)		
		QP	Average	Peak
0.009-0.490	300	2400/F(kHz)	N/A	N/A
0.490-1.705	30	24000/F(kHz)	N/A	N/A
1.705-30.0	30	30	N/A	N/A
30 - 230	10	30	N/A	N/A
230 - 1000	10	37	N/A	N/A
1000 - 3000	3	N/A	50	70
>3000	3	N/A	54	74

An Average detector can be used for 9-90 kHz and 110-490 kHz.

10.2.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and by subtracting the Amplifier Gain from the measured reading. The basic equation is as follows:

$$FS = RA + AF + CF - AG$$

Where: FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

10.2.2 Radiated Emissions Test Results

Company	RF IDEas	Specification	FCC Part 15 Subpart C & RSS-210
Model	RDR-8008XAKU	Test Date	07/14/2016
Serial Number	LOIA000010	Test Distance	3 Meters
Test Personnel	Chris Dalessio	Test Location	Chamber E
Abbreviations	Pol = Antenna Polarization; V = Vertical; H = Horizontal Det.= Detector setting; A = Average; P = peak; Q = QP;		
Notes	No Card on reader		

Note: The actual FCC limits are in uV/m. The data in the table below covered the limit to dBuV/m.

100 uV/m = 40.0 dBuV/m

150 uV/m = 43.5 dBuV/m

200 uV/m = 46.0 dBuV/m

500 uV/m = 54.0 dBuV/m

No Card on reader

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
62.5	49.0	P	H	8.5	-28.2	0.0	29.3	40.0	10.7	
100.9	46.8	P	H	11.8	-27.9	0.0	30.7	43.5	12.8	
143.9	44.6	P	H	12.2	-27.7	0.0	29.1	43.5	14.4	
163.1	43.1	P	H	15.3	-27.6	0.0	30.8	43.5	12.7	

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
181.3	37.8	Q	H	17.0	-27.5	0.0	27.3	43.5	16.2	
217.0	47.0	P	H	14.5	-27.5	0.0	34.0	46.0	12.0	
243.9	42.2	P	H	16.1	-27.3	0.0	31.0	46.0	15.0	
271.3	43.3	P	H	12.7	-27.3	0.0	28.7	46.0	17.3	
300.0	47.9	P	H	14.4	-27.2	0.0	35.1	46.0	10.9	
325.6	42.3	P	H	13.6	-27.3	0.0	28.6	46.0	17.4	
352.5	42.1	P	H	14.1	-27.1	0.0	29.1	46.0	16.9	
380.0	43.1	P	H	15.0	-27.2	0.0	30.9	46.0	15.1	
433.8	42.1	P	H	15.6	-27.0	0.0	30.7	46.0	15.3	
461.9	45.2	P	H	16.3	-27.0	0.0	34.5	46.0	11.5	
486.3	43.3	P	H	17.5	-26.8	0.0	34.0	46.0	12.0	
522.5	45.3	P	H	17.2	-26.7	0.0	35.8	46.0	10.2	
625.0	49.2	Q	H	18.8	-26.5	0.0	41.5	46.0	4.5	
687.5	38.9	P	H	21.4	-26.2	0.0	34.1	46.0	11.9	
761.3	40.6	P	H	20.4	-26.0	0.0	35.0	46.0	11.0	
793.8	40.7	P	H	20.4	-25.8	0.0	35.3	46.0	10.7	
927.5	40.8	Q	H	22.6	-24.8	0.0	38.6	46.0	7.4	
960.0	35.3	P	H	22.6	-24.4	0.0	33.5	46.0	12.5	
36.0	51.8	P	V	11.6	-28.3	0.0	35.1	40.0	4.9	
49.8	41.5	Q	V	11.2	-28.2	0.0	24.5	40.0	15.5	
71.8	55.9	P	V	6.5	-28.1	0.0	34.3	40.0	5.7	
105.3	45.4	Q	V	12.2	-27.8	0.0	29.8	43.5	13.7	
149.9	46.2	P	V	13.2	-27.7	0.0	31.7	43.5	11.8	
162.6	44.0	P	V	15.3	-27.6	0.0	31.7	43.5	11.8	
217.6	44.6	P	V	14.5	-27.5	0.0	31.6	46.0	14.4	
240.1	40.5	P	V	15.7	-27.4	0.0	28.8	46.0	17.2	
253.8	44.4	P	V	11.4	-27.3	0.0	28.5	46.0	17.5	
281.9	41.0	P	V	13.5	-27.3	0.0	27.2	46.0	18.8	
352.5	44.6	P	V	14.1	-27.1	0.0	31.6	46.0	14.4	
390.0	49.1	P	V	15.2	-27.2	0.0	37.1	46.0	8.9	
461.3	41.8	P	V	16.2	-27.0	0.0	31.0	46.0	15.0	
486.3	40.4	P	V	17.5	-26.8	0.0	31.1	46.0	14.9	
535.0	39.6	P	V	16.8	-26.4	0.0	30.0	46.0	16.0	
596.3	41.1	P	V	18.3	-26.2	0.0	33.2	46.0	12.8	
625.0	44.3	P	V	18.8	-26.5	0.0	36.6	46.0	9.4	
687.5	42.4	P	V	21.4	-26.2	0.0	37.6	46.0	8.4	
728.8	43.0	P	V	21.1	-26.0	0.0	38.1	46.0	7.9	
760.0	47.3	P	V	20.2	-26.1	0.0	41.4	46.0	4.6	
795.0	46.6	P	V	20.3	-25.8	0.0	41.1	46.0	4.9	
825.0	38.7	P	V	21.6	-25.6	0.0	34.7	46.0	11.3	
887.5	40.8	P	V	21.3	-25.2	0.0	36.9	46.0	9.1	
927.5	39.3	P	V	22.7	-24.8	0.0	37.2	46.0	8.8	
Notes		With 125 kHz Card								
36.6	48.1	P	H	11.7	-28.3	0.0	31.5	40.0	8.5	
37.2	41.0	P	H	11.7	-28.2	0.0	24.5	40.0	15.5	
54.2	44.6	P	H	10.6	-28.2	0.0	27.0	40.0	13.0	
60.3	54.1	P	H	9.0	-28.2	0.0	34.9	40.0	5.1	
61.9	45.1	P	H	8.6	-28.2	0.0	25.5	40.0	14.5	
99.8	48.1	P	H	11.7	-27.9	0.0	31.9	43.5	11.6	
100.4	48.1	P	H	11.7	-27.9	0.0	31.9	43.5	11.6	
104.3	47.0	P	H	12.1	-27.8	0.0	31.3	43.5	12.2	
143.9	47.2	P	H	12.2	-27.7	0.0	31.7	43.5	11.8	
163.1	43.9	P	H	15.3	-27.6	0.0	31.6	43.5	11.9	

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
180.1	41.7	Q	H	16.9	-27.5	0.0	31.1	43.5	12.4	
217.6	48.0	P	H	14.5	-27.5	0.0	35.0	46.0	11.0	
240.1	45.8	P	H	15.7	-27.4	0.0	34.1	46.0	11.9	
253.8	44.3	P	H	11.4	-27.3	0.0	28.4	46.0	17.6	
298.8	46.8	P	H	14.3	-27.2	0.0	33.9	46.0	12.1	
336.3	40.6	P	H	13.8	-27.3	0.0	27.1	46.0	18.9	
383.8	40.0	P	H	15.2	-27.2	0.0	28.0	46.0	18.0	
431.9	43.4	P	H	15.7	-26.9	0.0	32.2	46.0	13.8	
463.1	47.4	P	H	16.4	-26.9	0.0	36.9	46.0	9.1	
480.0	45.7	P	H	17.8	-26.7	0.0	36.8	46.0	9.2	
485.6	44.7	P	H	17.6	-26.7	0.0	35.6	46.0	10.4	
510.0	45.0	P	H	18.0	-26.9	0.0	36.1	46.0	9.9	
522.5	43.0	P	H	17.2	-26.7	0.0	33.5	46.0	12.5	
596.3	43.6	P	H	18.3	-26.2	0.0	35.7	46.0	10.3	
625.0	46.9	Q	H	18.8	-26.5	0.0	39.2	46.0	6.8	
728.8	41.1	P	H	21.1	-26.0	0.0	36.2	46.0	9.8	
760.0	42.9	P	H	20.2	-26.1	0.0	37.0	46.0	9.0	
793.8	41.2	P	H	20.4	-25.8	0.0	35.8	46.0	10.2	
887.5	43.5	P	H	21.3	-25.2	0.0	39.6	46.0	6.4	
921.3	41.8	P	H	22.8	-24.8	0.0	39.8	46.0	6.2	
927.5	41.4	P	H	22.7	-24.8	0.0	39.3	46.0	6.7	
956.3	34.3	P	H	22.9	-24.4	0.0	32.8	46.0	13.2	
957.5	35.1	P	H	22.8	-24.4	0.0	33.5	46.0	12.5	
36.0	51.3	P	V	11.6	-28.3	0.0	34.6	40.0	5.4	
37.7	48.1	P	V	11.8	-28.3	0.0	31.6	40.0	8.4	
54.2	51.3	Q	V	10.6	-28.2	0.0	33.7	40.0	6.3	
71.8	55.6	P	V	6.5	-28.1	0.0	34.0	40.0	6.0	
103.2	54.2	P	V	12.0	-27.9	0.0	38.3	43.5	5.2	
104.3	54.2	P	V	12.1	-27.8	0.0	38.5	43.5	5.0	
105.9	47.0	Q	V	12.2	-27.8	0.0	31.4	43.5	12.1	
106.4	47.3	Q	V	12.2	-27.8	0.0	31.7	43.5	11.8	
143.9	49.4	P	V	12.2	-27.7	0.0	33.9	43.5	9.6	
162.6	44.0	P	V	15.3	-27.6	0.0	31.7	43.5	11.8	
217.6	43.8	P	V	14.5	-27.5	0.0	30.8	46.0	15.2	
219.2	42.9	P	V	14.4	-27.4	0.0	29.9	46.0	16.1	
240.1	40.0	P	V	15.7	-27.4	0.0	28.3	46.0	17.7	
253.1	44.1	P	V	11.4	-27.3	0.0	28.2	46.0	17.8	
254.4	45.6	P	V	11.4	-27.3	0.0	29.7	46.0	16.3	
265.0	44.4	P	V	12.2	-27.3	0.0	29.3	46.0	16.7	
299.4	41.9	P	V	14.3	-27.2	0.0	29.0	46.0	17.0	
316.9	42.9	P	V	13.9	-27.2	0.0	29.6	46.0	16.4	
317.5	44.1	P	V	13.9	-27.3	0.0	30.7	46.0	15.3	
383.8	48.5	P	V	15.2	-27.2	0.0	36.5	46.0	9.5	
390.0	48.3	P	V	15.2	-27.2	0.0	36.3	46.0	9.7	
431.9	43.2	P	V	15.7	-26.9	0.0	32.0	46.0	14.0	
458.1	44.6	P	V	16.0	-27.0	0.0	33.6	46.0	12.4	
485.6	39.7	P	V	17.6	-26.7	0.0	30.6	46.0	15.4	
488.8	40.9	P	V	17.4	-26.8	0.0	31.5	46.0	14.5	
522.5	40.1	P	V	17.2	-26.7	0.0	30.6	46.0	15.4	
573.8	40.2	P	V	18.4	-26.7	0.0	31.9	46.0	14.1	
625.0	46.3	P	V	18.8	-26.5	0.0	38.6	46.0	7.4	
697.5	43.8	P	V	20.8	-26.2	0.0	38.4	46.0	7.6	
727.5	41.5	P	V	21.1	-26.0	0.0	36.6	46.0	9.4	

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
728.8	42.2	P	V	21.1	-26.0	0.0	37.3	46.0	8.7	
760.0	43.7	P	V	20.2	-26.1	0.0	37.8	46.0	8.2	
795.0	40.2	P	V	20.3	-25.8	0.0	34.7	46.0	11.3	
887.5	41.6	P	V	21.3	-25.2	0.0	37.7	46.0	8.3	
891.3	41.3	P	V	21.1	-25.1	0.0	37.3	46.0	8.7	
927.5	41.6	P	V	22.7	-24.8	0.0	39.5	46.0	6.5	
948.8	35.0	P	V	23.2	-24.6	0.0	33.6	46.0	12.4	
Notes		With 132 kHz Cotag Card								
37.2	45.4	P	H	11.7	-28.2	0.0	28.9	40.0	11.1	
60.3	48.1	P	H	9.0	-28.2	0.0	28.9	40.0	11.1	
102.6	48.5	P	H	12.0	-27.9	0.0	32.6	43.5	10.9	
143.9	44.4	P	H	12.2	-27.7	0.0	28.9	43.5	14.6	
162.6	43.3	P	H	15.3	-27.6	0.0	31.0	43.5	12.5	
182.9	43.7	P	H	17.1	-27.5	0.0	33.3	43.5	10.2	
217.0	47.3	P	H	14.5	-27.5	0.0	34.3	46.0	11.7	
240.1	43.8	P	H	15.7	-27.4	0.0	32.1	46.0	13.9	
263.1	41.5	P	H	12.1	-27.3	0.0	26.3	46.0	19.7	
298.8	46.8	P	H	14.3	-27.2	0.0	33.9	46.0	12.1	
351.3	41.3	P	H	14.1	-27.1	0.0	28.3	46.0	17.7	
383.8	39.3	P	H	15.2	-27.2	0.0	27.3	46.0	18.7	
431.9	45.2	P	H	15.7	-26.9	0.0	34.0	46.0	12.0	
463.1	46.3	P	H	16.4	-26.9	0.0	35.8	46.0	10.2	
485.6	44.1	P	H	17.6	-26.7	0.0	35.0	46.0	11.0	
510.0	44.7	P	H	18.0	-26.9	0.0	35.8	46.0	10.2	
600.0	46.3	P	H	18.2	-26.2	0.0	38.3	46.0	7.7	
625.0	45.2	Q	H	18.8	-26.5	0.0	37.5	46.0	8.5	
761.3	42.8	P	H	20.4	-26.0	0.0	37.2	46.0	8.8	
887.5	43.6	P	H	21.3	-25.2	0.0	39.7	46.0	6.3	
37.7	48.8	P	V	11.8	-28.3	0.0	32.3	40.0	7.7	
54.2	52.6	P	V	10.6	-28.2	0.0	35.0	40.0	5.0	
71.8	55.1	P	V	6.5	-28.1	0.0	33.5	40.0	6.5	
104.8	47.0	Q	V	12.2	-27.8	0.0	31.4	43.5	12.1	
143.9	48.5	P	V	12.2	-27.7	0.0	33.0	43.5	10.5	
162.6	45.3	P	V	15.3	-27.6	0.0	33.0	43.5	10.5	
217.0	43.8	P	V	14.5	-27.5	0.0	30.8	46.0	15.2	
253.8	44.8	P	V	11.4	-27.3	0.0	28.9	46.0	17.1	
282.5	43.5	P	V	13.6	-27.3	0.0	29.8	46.0	16.2	
298.8	42.3	P	V	14.3	-27.2	0.0	29.4	46.0	16.6	
330.6	42.8	P	V	13.7	-27.3	0.0	29.2	46.0	16.8	
388.8	48.0	P	V	15.2	-27.2	0.0	36.0	46.0	10.0	
463.1	41.5	P	V	16.4	-26.9	0.0	31.0	46.0	15.0	
485.6	38.7	P	V	17.6	-26.7	0.0	29.6	46.0	16.4	
535.0	38.9	P	V	16.8	-26.4	0.0	29.3	46.0	16.7	
625.0	45.9	P	V	18.8	-26.5	0.0	38.2	46.0	7.8	
697.5	43.0	P	V	20.8	-26.2	0.0	37.6	46.0	8.4	
760.0	43.3	P	V	20.2	-26.1	0.0	37.4	46.0	8.6	
815.0	36.2	P	V	21.0	-25.6	0.0	31.6	46.0	14.4	
833.8	35.5	P	V	22.0	-25.5	0.0	32.0	46.0	14.0	
891.3	40.5	P	V	21.1	-25.1	0.0	36.5	46.0	9.5	
927.5	41.0	P	V	22.7	-24.8	0.0	38.9	46.0	7.1	
960.0	36.2	P	V	22.6	-24.4	0.0	34.4	46.0	11.6	
Notes		With 13.56 MHz Card								
36.0	40.4	P	H	11.6	-28.3	0.0	23.7	40.0	16.3	

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
37.2	41.9	P	H	11.7	-28.2	0.0	25.4	40.0	14.6	
54.2	49.0	P	H	10.6	-28.2	0.0	31.4	40.0	8.6	
61.3	47.9	P	H	8.7	-28.2	0.0	28.4	40.0	11.6	
71.8	47.3	P	H	6.5	-28.1	0.0	25.7	40.0	14.3	
97.7	48.5	P	H	11.3	-27.9	0.0	31.9	43.5	11.6	
102.6	48.7	P	H	12.0	-27.9	0.0	32.8	43.5	10.7	
137.8	43.3	P	H	11.7	-27.7	0.0	27.3	43.5	16.2	
149.9	43.1	P	H	13.2	-27.7	0.0	28.6	43.5	14.9	
163.1	43.8	P	H	15.3	-27.6	0.0	31.5	43.5	12.0	
179.6	32.2	Q	H	16.9	-27.5	0.0	21.6	43.5	21.9	
181.8	35.4	Q	H	17.0	-27.5	0.0	24.9	43.5	18.6	
217.0	45.1	Q	H	14.5	-27.5	0.0	32.1	46.0	13.9	
240.1	42.8	P	H	15.7	-27.4	0.0	31.1	46.0	14.9	
244.5	42.8	P	H	16.2	-27.3	0.0	31.7	46.0	14.3	
271.3	44.2	P	H	12.7	-27.3	0.0	29.6	46.0	16.4	
299.4	45.8	P	H	14.3	-27.2	0.0	32.9	46.0	13.1	
300.0	47.0	P	H	14.4	-27.2	0.0	34.2	46.0	11.8	
321.3	40.8	P	H	13.7	-27.3	0.0	27.2	46.0	18.8	
325.6	43.0	P	H	13.6	-27.3	0.0	29.3	46.0	16.7	
352.5	42.3	P	H	14.1	-27.1	0.0	29.3	46.0	16.7	
380.0	42.7	P	H	15.0	-27.2	0.0	30.5	46.0	15.5	
420.0	39.4	P	H	15.5	-26.9	0.0	28.0	46.0	18.0	
443.8	45.8	P	H	16.0	-27.1	0.0	34.7	46.0	11.3	
445.0	43.3	P	H	16.1	-27.1	0.0	32.3	46.0	13.7	
461.9	47.1	P	H	16.3	-27.0	0.0	36.4	46.0	9.6	
485.6	45.8	P	H	17.6	-26.7	0.0	36.7	46.0	9.3	
505.0	41.4	P	H	17.7	-27.0	0.0	32.1	46.0	13.9	
510.0	45.8	P	H	18.0	-26.9	0.0	36.9	46.0	9.1	
596.3	42.3	P	H	18.3	-26.2	0.0	34.4	46.0	11.6	
598.8	47.7	P	H	18.2	-26.2	0.0	39.7	46.0	6.3	
633.8	41.6	P	H	19.1	-26.5	0.0	34.2	46.0	11.8	
728.8	39.2	P	H	21.1	-26.0	0.0	34.3	46.0	11.7	
761.3	44.7	P	H	20.4	-26.0	0.0	39.1	46.0	6.9	
793.8	41.4	P	H	20.4	-25.8	0.0	36.0	46.0	10.0	
795.0	42.3	P	H	20.3	-25.8	0.0	36.8	46.0	9.2	
831.3	36.1	P	H	22.1	-25.5	0.0	32.7	46.0	13.3	
891.3	42.0	P	H	21.1	-25.1	0.0	38.0	46.0	8.0	
923.8	42.5	P	H	22.7	-24.8	0.0	40.4	46.0	5.6	
927.5	41.4	Q	H	22.6	-24.8	0.0	39.2	46.0	6.8	
35.5	49.8	P	V	11.6	-28.3	0.0	33.1	40.0	6.9	
37.2	53.4	P	V	11.7	-28.2	0.0	36.9	40.0	3.1	
37.7	48.4	P	V	11.8	-28.3	0.0	31.9	40.0	8.1	
40.5	51.5	Q	V	12.0	-28.3	0.0	35.2	40.0	4.8	
54.2	54.8	Q	V	10.6	-28.2	0.0	37.2	40.0	2.8	
71.8	51.7	Q	V	6.5	-28.0	0.0	30.2	40.0	9.8	
103.7	54.5	P	V	12.1	-27.9	0.0	38.7	43.5	4.8	
104.3	49.8	Q	V	12.1	-27.9	0.0	34.0	43.5	9.5	
105.3	46.5	Q	V	12.3	-27.8	0.0	31.0	43.5	12.5	
105.9	48.1	Q	V	12.2	-27.8	0.0	32.5	43.5	11.0	
107.6	54.6	P	V	12.3	-27.8	0.0	39.1	43.5	4.4	
149.9	47.1	P	V	13.2	-27.7	0.0	32.6	43.5	10.9	
162.6	46.1	P	V	15.3	-27.6	0.0	33.8	43.5	9.7	
173.6	47.0	P	V	16.5	-27.6	0.0	35.9	43.5	7.6	

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
177.9	42.1	P	V	16.8	-27.5	0.0	31.4	43.5	12.1	
217.0	43.8	P	V	14.5	-27.5	0.0	30.8	46.0	15.2	
243.9	46.6	P	V	16.1	-27.3	0.0	35.4	46.0	10.6	
265.0	44.7	P	V	12.2	-27.3	0.0	29.6	46.0	16.4	
299.4	42.4	P	V	14.3	-27.2	0.0	29.5	46.0	16.5	
316.9	43.7	P	V	13.9	-27.2	0.0	30.4	46.0	15.6	
376.3	46.7	P	V	14.6	-27.1	0.0	34.2	46.0	11.8	
383.8	47.2	P	V	15.2	-27.2	0.0	35.2	46.0	10.8	
389.4	49.5	P	V	15.2	-27.2	0.0	37.5	46.0	8.5	
461.3	42.5	P	V	16.2	-27.0	0.0	31.7	46.0	14.3	
485.6	40.8	P	V	17.6	-26.7	0.0	31.7	46.0	14.3	
522.5	39.5	P	V	17.2	-26.7	0.0	30.0	46.0	16.0	
535.0	40.2	P	V	16.8	-26.4	0.0	30.6	46.0	15.4	
600.0	47.6	P	V	18.2	-26.2	0.0	39.6	46.0	6.4	
635.0	41.2	P	V	19.1	-26.5	0.0	33.8	46.0	12.2	
697.5	42.5	P	V	20.8	-26.2	0.0	37.1	46.0	8.9	
728.8	43.5	P	V	21.1	-26.0	0.0	38.6	46.0	7.4	
761.3	45.6	P	V	20.4	-26.0	0.0	40.0	46.0	6.0	
795.0	45.0	P	V	20.3	-25.8	0.0	39.5	46.0	6.5	
825.0	37.8	P	V	21.6	-25.6	0.0	33.8	46.0	12.2	
887.5	40.3	P	V	21.3	-25.2	0.0	36.4	46.0	9.6	
922.5	41.2	P	V	22.8	-24.8	0.0	39.2	46.0	6.8	
953.8	37.1	P	V	23.1	-24.5	0.0	35.7	46.0	10.3	
960.0	34.8	P	V	22.6	-24.4	0.0	33.0	46.0	13.0	
961.3	35.8	P	V	22.5	-24.4	0.0	33.9	54.0	20.1	

Model	RDR-8058XAKU	Serial Number	C05P100012
Notes	No Card on reader		

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
36.0	42.9	P	H	11.6	-28.3	0.0	26.2	40.0	13.8	
60.8	46.0	P	H	8.9	-28.2	0.0	26.7	40.0	13.3	
102.1	47.9	P	H	11.9	-27.9	0.0	31.9	43.5	11.6	
119.1	44.4	P	H	12.4	-27.8	0.0	29.0	43.5	14.5	
143.9	42.8	P	H	12.2	-27.7	0.0	27.3	43.5	16.2	
162.6	43.2	P	H	15.3	-27.6	0.0	30.9	43.5	12.6	
179.1	40.8	Q	H	16.8	-27.5	0.0	30.1	43.5	13.4	
217.0	46.7	Q	H	14.6	-27.5	0.0	33.8	46.0	12.2	
241.8	40.7	P	H	15.9	-27.3	0.0	29.3	46.0	16.7	
271.3	43.8	P	H	12.7	-27.3	0.0	29.2	46.0	16.8	
300.0	46.0	P	H	14.4	-27.2	0.0	33.2	46.0	12.8	
352.5	43.5	P	H	14.1	-27.1	0.0	30.5	46.0	15.5	
431.9	43.5	P	H	15.7	-26.9	0.0	32.3	46.0	13.7	
463.1	45.6	P	H	16.4	-26.9	0.0	35.1	46.0	10.9	
480.0	48.3	P	H	17.8	-26.7	0.0	39.4	46.0	6.6	
522.5	42.5	P	H	17.2	-26.7	0.0	33.0	46.0	13.0	
625.0	48.7	P	H	18.8	-26.5	0.0	41.0	46.0	5.0	
727.5	41.2	P	H	21.1	-26.0	0.0	36.3	46.0	9.7	
761.3	41.6	P	H	20.4	-26.0	0.0	36.0	46.0	10.0	
795.0	41.2	P	H	20.3	-25.8	0.0	35.7	46.0	10.3	

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
887.5	42.8	P	H	21.3	-25.2	0.0	38.9	46.0	7.1	
36.6	48.2	P	V	11.7	-28.3	0.0	31.6	40.0	8.4	
54.2	50.7	Q	V	10.6	-28.2	0.0	33.1	40.0	6.9	
71.8	55.7	P	V	6.5	-28.1	0.0	34.1	40.0	5.9	
103.2	54.7	P	V	12.0	-27.9	0.0	38.8	43.5	4.7	
105.9	47.3	Q	V	12.0	-27.9	0.0	31.4	43.5	12.1	
149.9	47.1	P	V	13.2	-27.7	0.0	32.6	43.5	10.9	
162.6	43.9	P	V	15.3	-27.6	0.0	31.6	43.5	11.9	
179.1	41.1	P	V	16.8	-27.5	0.0	30.4	43.5	13.1	
217.0	43.6	P	V	14.5	-27.5	0.0	30.6	46.0	15.4	
253.8	44.1	P	V	11.4	-27.3	0.0	28.2	46.0	17.8	
299.4	42.6	P	V	14.3	-27.2	0.0	29.7	46.0	16.3	
392.5	47.3	P	V	15.0	-27.2	0.0	35.1	46.0	10.9	
458.1	42.9	P	V	16.0	-27.0	0.0	31.9	46.0	14.1	
486.3	39.2	P	V	17.5	-26.8	0.0	29.9	46.0	16.1	
522.5	40.4	P	V	17.2	-26.7	0.0	30.9	46.0	15.1	
625.0	47.3	P	V	18.8	-26.5	0.0	39.6	46.0	6.4	
728.8	42.9	P	V	21.1	-26.0	0.0	38.0	46.0	8.0	
760.0	44.1	P	V	20.2	-26.1	0.0	38.2	46.0	7.8	
795.0	39.8	P	V	20.3	-25.8	0.0	34.3	46.0	11.7	
815.0	36.8	P	V	21.0	-25.6	0.0	32.2	46.0	13.8	
892.5	41.6	P	V	21.2	-25.1	0.0	37.7	46.0	8.3	
951.3	36.4	P	V	23.2	-24.5	0.0	35.1	46.0	10.9	
Notes		With 125 kHz HID Card								
36.6	42.0	P	H	11.7	-28.3	0.0	25.4	40.0	14.6	
54.2	42.8	P	H	10.6	-28.2	0.0	25.2	40.0	14.8	
60.8	45.2	P	H	8.9	-28.2	0.0	25.9	40.0	14.1	
100.4	49.1	P	H	11.7	-27.9	0.0	32.9	43.5	10.6	
102.6	49.1	P	H	12.0	-27.9	0.0	33.2	43.5	10.3	
135.1	46.4	P	H	11.6	-27.7	0.0	30.3	43.5	13.2	
143.9	44.3	P	H	12.2	-27.7	0.0	28.8	43.5	14.7	
162.0	44.5	P	H	15.2	-27.6	0.0	32.1	43.5	11.4	
180.1	38.4	Q	H	17.0	-27.5	0.0	27.9	43.5	15.6	
182.4	48.4	P	H	17.0	-27.5	0.0	37.9	43.5	5.6	
188.9	44.1	Q	H	17.0	-27.5	0.0	33.6	43.5	9.9	
216.4	47.7	P	H	14.6	-27.5	0.0	34.8	46.0	11.2	
239.0	42.1	P	H	15.6	-27.4	0.0	30.3	46.0	15.7	
262.5	42.7	P	H	12.0	-27.3	0.0	27.4	46.0	18.6	
270.6	43.0	P	H	12.7	-27.3	0.0	28.4	46.0	17.6	
298.8	45.8	P	H	14.3	-27.2	0.0	32.9	46.0	13.1	
336.3	41.6	P	H	13.8	-27.3	0.0	28.1	46.0	17.9	
399.4	39.3	P	H	14.8	-27.2	0.0	26.9	46.0	19.1	
431.9	43.3	P	H	15.7	-26.9	0.0	32.1	46.0	13.9	
443.1	43.4	P	H	16.0	-27.1	0.0	32.3	46.0	13.7	
461.9	46.7	P	H	16.3	-27.0	0.0	36.0	46.0	10.0	
480.0	45.4	P	H	17.8	-26.7	0.0	36.5	46.0	9.5	
485.6	43.2	P	H	17.6	-26.7	0.0	34.1	46.0	11.9	
510.0	42.0	P	H	18.0	-26.9	0.0	33.1	46.0	12.9	
566.3	47.7	P	H	18.3	-26.7	0.0	39.3	46.0	6.7	
598.8	33.7	Q	H	18.2	-26.2	0.0	25.7	46.0	20.3	
625.0	49.4	P	H	18.8	-26.5	0.0	41.7	46.0	4.3	
721.3	40.3	P	H	20.9	-26.0	0.0	35.2	46.0	10.8	
761.3	42.2	P	H	20.4	-26.0	0.0	36.6	46.0	9.4	

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
763.8	42.8	P	H	20.7	-26.0	0.0	37.5	46.0	8.5	
795.0	42.1	P	H	20.3	-25.8	0.0	36.6	46.0	9.4	
888.8	42.7	P	H	21.2	-25.2	0.0	38.7	46.0	7.3	
892.5	42.3	P	H	21.2	-25.1	0.0	38.4	46.0	7.6	
927.5	42.4	P	H	22.7	-24.8	0.0	40.3	46.0	5.7	
957.5	37.3	P	H	22.8	-24.4	0.0	35.7	46.0	10.3	
37.2	49.4	P	V	11.7	-28.2	0.0	32.9	40.0	7.1	
37.7	53.9	P	V	11.8	-28.3	0.0	37.4	40.0	2.6	
54.2	51.3	Q	V	10.6	-28.2	0.0	33.7	40.0	6.3	
54.2	51.5	Q	V	10.6	-28.2	0.0	33.9	40.0	6.1	
71.8	55.7	P	V	6.5	-28.1	0.0	34.1	40.0	5.9	
104.8	55.1	P	V	12.2	-27.8	0.0	39.5	43.5	4.0	
105.9	49.3	Q	V	12.2	-27.8	0.0	33.7	43.5	9.8	
106.4	47.2	Q	V	12.2	-27.8	0.0	31.6	43.5	11.9	
143.9	48.8	P	V	12.2	-27.7	0.0	33.3	43.5	10.2	
162.6	46.6	P	V	15.3	-27.6	0.0	34.3	43.5	9.2	
216.4	43.6	P	V	14.6	-27.5	0.0	30.7	46.0	15.3	
231.3	49.6	P	V	14.7	-27.4	0.0	36.9	46.0	9.1	
255.0	46.7	P	V	11.5	-27.3	0.0	30.9	46.0	15.1	
265.0	42.8	P	V	12.2	-27.3	0.0	27.7	46.0	18.3	
299.4	42.6	P	V	14.3	-27.2	0.0	29.7	46.0	16.3	
336.3	42.9	P	V	13.8	-27.3	0.0	29.4	46.0	16.6	
392.5	48.2	P	V	15.0	-27.2	0.0	36.0	46.0	10.0	
398.1	46.7	P	V	14.8	-27.2	0.0	34.3	46.0	11.7	
431.9	45.6	P	V	15.7	-26.9	0.0	34.4	46.0	11.6	
458.1	43.9	P	V	16.0	-27.0	0.0	32.9	46.0	13.1	
485.6	39.3	P	V	17.6	-26.7	0.0	30.2	46.0	15.8	
522.5	40.2	P	V	17.2	-26.7	0.0	30.7	46.0	15.3	
573.8	40.7	P	V	18.4	-26.7	0.0	32.4	46.0	13.6	
625.0	49.6	Q	V	18.8	-26.5	0.0	41.9	46.0	4.1	
697.5	43.0	P	V	20.8	-26.2	0.0	37.6	46.0	8.4	
760.0	46.6	P	V	20.2	-26.1	0.0	40.7	46.0	5.3	
795.0	43.7	P	V	20.3	-25.8	0.0	38.2	46.0	7.8	
918.8	38.0	P	V	22.9	-24.8	0.0	36.1	46.0	9.9	
926.3	38.1	P	V	22.6	-24.8	0.0	35.9	46.0	10.1	
960.0	36.5	P	V	22.6	-24.4	0.0	34.7	46.0	11.3	
Notes		With 13.56 MHz Mifare Card								
36.0	42.9	P	H	11.6	-28.3	0.0	26.2	40.0	13.8	
36.6	41.9	P	H	11.7	-28.3	0.0	25.3	40.0	14.7	
54.2	46.8	P	H	10.6	-28.2	0.0	29.2	40.0	10.8	
59.7	44.7	P	H	9.2	-28.2	0.0	25.7	40.0	14.3	
100.9	49.0	P	H	11.8	-27.9	0.0	32.9	43.5	10.6	
102.6	48.6	P	H	12.0	-27.9	0.0	32.7	43.5	10.8	
149.9	41.7	P	H	13.2	-27.7	0.0	27.2	43.5	16.3	
162.6	45.4	P	H	15.3	-27.6	0.0	33.1	43.5	10.4	
177.9	46.4	P	H	16.8	-27.5	0.0	35.7	43.5	7.8	
179.6	41.8	Q	H	16.9	-27.5	0.0	31.2	43.5	12.3	
184.0	42.3	Q	H	17.2	-27.5	0.0	32.0	43.5	11.5	
216.4	46.5	Q	H	14.6	-27.5	0.0	33.6	46.0	12.4	
239.0	42.9	P	H	15.6	-27.4	0.0	31.1	46.0	14.9	
298.8	45.9	P	H	14.3	-27.2	0.0	33.0	46.0	13.0	
352.5	42.2	P	H	14.1	-27.1	0.0	29.2	46.0	16.8	
443.1	43.7	P	H	16.0	-27.1	0.0	32.6	46.0	13.4	

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report


Testing of RF IDEas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
461.9	45.6	P	H	16.3	-27.0	0.0	34.9	46.0	11.1	
463.1	46.1	P	H	16.4	-26.9	0.0	35.6	46.0	10.4	
486.3	44.7	P	H	17.5	-26.8	0.0	35.4	46.0	10.6	
523.8	49.5	P	H	17.0	-26.7	0.0	39.8	46.0	6.2	
566.3	46.6	P	H	18.3	-26.7	0.0	38.2	46.0	7.8	
633.8	44.3	P	H	19.1	-26.5	0.0	36.9	46.0	9.1	
636.3	42.8	P	H	19.1	-26.5	0.0	35.4	46.0	10.6	
760.0	44.0	P	H	20.2	-26.1	0.0	38.1	46.0	7.9	
795.0	41.6	P	H	20.3	-25.8	0.0	36.1	46.0	9.9	
831.3	36.4	P	H	22.1	-25.5	0.0	33.0	46.0	13.0	
887.5	44.3	P	H	21.3	-25.2	0.0	40.4	46.0	5.6	
927.5	43.6	P	H	22.7	-24.8	0.0	41.5	46.0	4.5	
951.3	38.2	P	H	23.2	-24.5	0.0	36.9	46.0	9.1	
960.0	36.4	P	H	22.6	-24.4	0.0	34.6	46.0	11.4	
36.0	41.3	Q	V	11.6	-28.3	0.0	24.6	40.0	15.4	
40.5	48.5	P	V	12.0	-28.3	0.0	32.2	40.0	7.8	
54.2	53.8	Q	V	10.6	-28.2	0.0	36.2	40.0	3.8	
71.8	54.9	P	V	6.5	-28.1	0.0	33.3	40.0	6.7	
102.6	54.0	P	V	12.0	-27.9	0.0	38.1	43.5	5.4	
103.7	54.8	P	V	12.1	-27.9	0.0	39.0	43.5	4.5	
105.3	46.6	Q	V	12.2	-27.8	0.0	31.0	43.5	12.5	
105.9	48.1	Q	V	12.2	-27.8	0.0	32.5	43.5	11.0	
149.9	46.8	P	V	13.2	-27.7	0.0	32.3	43.5	11.2	
162.6	47.0	P	V	15.3	-27.6	0.0	34.7	43.5	8.8	
216.4	45.6	P	V	14.6	-27.5	0.0	32.7	46.0	13.3	
221.4	45.6	P	V	14.3	-27.4	0.0	32.5	46.0	13.5	
254.4	48.6	P	V	11.4	-27.3	0.0	32.7	46.0	13.3	
275.0	48.7	P	V	13.1	-27.3	0.0	34.5	46.0	11.5	
299.4	41.6	P	V	14.3	-27.2	0.0	28.7	46.0	17.3	
302.5	43.0	P	V	14.6	-27.2	0.0	30.4	46.0	15.6	
357.5	47.0	P	V	14.3	-27.1	0.0	34.2	46.0	11.8	
387.5	48.2	P	V	15.2	-27.2	0.0	36.2	46.0	9.8	
389.4	47.8	P	V	15.2	-27.2	0.0	35.8	46.0	10.2	
429.4	45.2	P	V	15.7	-26.9	0.0	34.0	46.0	12.0	
450.6	42.7	P	V	16.1	-27.1	0.0	31.7	46.0	14.3	
458.1	43.7	P	V	16.0	-27.0	0.0	32.7	46.0	13.3	
486.3	38.7	P	V	17.5	-26.8	0.0	29.4	46.0	16.6	
496.3	40.6	P	V	17.4	-26.9	0.0	31.1	46.0	14.9	
515.0	41.8	P	V	17.9	-26.9	0.0	32.8	46.0	13.2	
522.5	41.0	P	V	17.2	-26.7	0.0	31.5	46.0	14.5	
573.8	40.6	P	V	18.4	-26.7	0.0	32.3	46.0	13.7	
573.8	40.7	P	V	18.4	-26.7	0.0	32.4	46.0	13.6	
637.5	41.2	P	V	19.2	-26.4	0.0	34.0	46.0	12.0	
700.0	43.2	P	V	20.6	-26.2	0.0	37.6	46.0	8.4	
728.8	42.4	P	V	21.1	-26.0	0.0	37.5	46.0	8.5	
760.0	47.3	P	V	20.2	-26.1	0.0	41.4	46.0	4.6	
795.0	43.1	P	V	20.3	-25.8	0.0	37.6	46.0	8.4	
831.3	37.7	P	V	22.1	-25.5	0.0	34.3	46.0	11.7	
871.3	35.7	P	V	23.0	-25.3	0.0	33.4	46.0	12.6	
960.0	36.8	P	V	22.6	-24.4	0.0	35.0	46.0	11.0	

Judgment: Passed by 2.6 dB

Figure 2. Drawing of Radiated Emissions Test Setup

Chamber E, anechoic

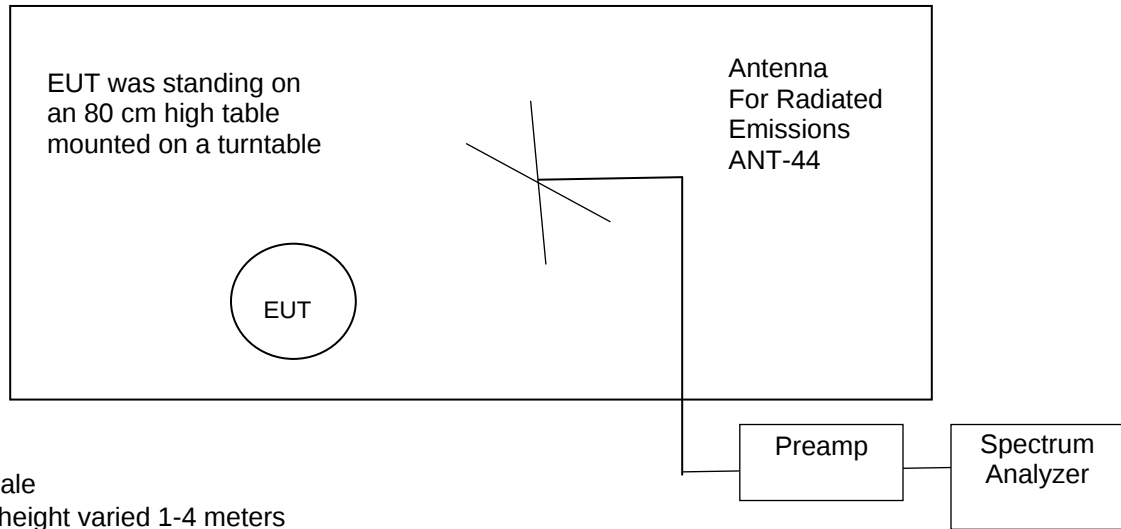**Notes:**

- Not to Scale
- Antenna height varied 1-4 meters
- Distance from antenna to tested system is 3 meters
- AC cords not shown. They are connected to AC outlet with low-pass filter on turntable

Frequency Range	Receive Antenna	Pre-Amplifier	Spectrum Analyzer
0.01 to 30 MHz	ANT-53	None	REC-21
30 to 200 MHz	ANT-04	AMP-22	REC-21
200 to 1000 MHz	ANT-06	AMP-22	REC-21

10.3 Magnetic Field Measurements and Decay Factor Calculations

Radiated emission measurements are performed with an EMCO shielded loop antenna. The antenna was rotated in order to find the maximize readings.

The distance correction factor is calculated as follows:

The distance factor in (dB) = $DE \cdot 20 \cdot \log(TD/SD)$

Where: DE = Decay Exponent (2.0 is used for this)

TD = Test distance in meters. This is 3 meters

SD = Specfication Distance in meters

From 9 kHz to 490 kHz, the Specfication Distance is 300m therefore the distance factor is $2 \cdot 20 \cdot \log(300/3) = 80$ dB.

From 490 kHz to 30 MHz, the Specfication Distance is 30m therefore the distance factor is $2 \cdot 20 \cdot \log(30/3) = 40$ dB.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

10.3.1 Magnetic Field Radiated Emissions Results (0.009 to 30 MHz)

Test Date	July 8 & 14, 2016
Test Distance	3 Meters
Tested by	Chris Dalessio
Specification	FCC 15.225 & RSS-210 A2.6 limit for 13.56 MHz FCC 15.209 & RSS-GEN limit for 125 kHz
Notes	A shielded Loop Antenna was used for this test.
Model	RDR-8008XAKU; Serial # 012 RDR-8058XAKU; Serial # 002

125 & 132 kHz Frequencies

Freq (kHz)	meter reading dBuV	Loop Ant Factor	Dist (m)	Decay exp	Cable Loss dB	FCC Distance factor dB	Field Strength dBuV/m	RSS-GEN & FCC 15.209 Limit dBuV/m	Margin under limit	EUT tested
125.0	65.3	19.1	3.0	3.0	0.1	-80.0	4.5	25.7	21.2	8058X
250.0	42.6	18.9	3.0	3.0	0.1	-80.0	-18.4	19.6	38.0	8058X
375.0	40.5	18.9	3.0	3.0	0.1	-80.0	-20.5	16.1	36.6	8058X
132.0	68.0	19.1	3.0	3.0	0.1	-80.0	7.2	25.2	18.0	8058X
264.0	46.7	18.9	3.0	3.0	0.1	-80.0	-14.4	19.2	33.5	8058X
396.0	43.5	18.9	3.0	3.0	0.2	-80.0	-17.4	15.7	33.1	8058X
125.0	64.1	19.1	3.0	3.0	0.1	-80.0	3.3	25.7	22.4	8008X
250.0	42.6	18.9	3.0	3.0	0.1	-80.0	-18.4	19.6	38.0	8008X
375.0	40.5	18.9	3.0	3.0	0.1	-80.0	-20.5	16.1	36.6	8008X
132.0	65.1	19.1	3.0	3.0	0.1	-80.0	4.3	25.2	20.9	8008X
264.0	46.7	18.9	3.0	3.0	0.1	-80.0	-14.4	19.2	33.5	8008X
396.0	43.5	18.9	3.0	3.0	0.1	-80.0	-17.5	15.7	33.2	8008X

13.56 MHz Frequencies

Freq (MHz)	meter reading dBuV	Loop Ant Factor	Dist (m)	Decay exp	Cable Loss dB	FCC Distance factor dB	Field Strength dBuV/m	RSS & FCC Limit dBuV/m	Margin under limit	EUT tested
13.560	54.2	16.8	3.0	2.0	0.4	-40.0	31.4	40.5	9.1	8058X
27.120	20.8	16.0	3.0	2.0	0.5	-40.0	-2.7	29.5	32.2	8058X
13.560	53.2	16.8	3.0	2.0	0.4	-40.0	30.4	40.5	10.1	8008X
27.120	24.1	16.0	3.0	2.0	0.5	-40.0	0.6	29.5	28.9	8008X

The limit shown at 13.56 MHz in the above table is the lowest limit from 15.225 sections (a), (b) and (c).

The limit from 13.553-13.567 MHz at 30 meters is 15,848 uV/m which = 84 dBuV/m in accordance with FCC 15.225 (c) and RSS-210 section A2.6 (c).

The limit drops to 334uV/m from 13.410-13.553 MHz and 13.567-13.710 MHz, and 106uV/m = 40.5 dBuV/m from the bands 13.110-13.410 MHz and 13.710-14.010 MHz.

All other limits are general limits of FCC 15.209 or the RSS-Gen.

The emissions were scanned from 10 kHz to 30 MHz, including 13.11 and 14.01 MHz.

No other emissions were detected from 10 kHz to 30 MHz within 10 dB of the 15.209 or the RSS-GEN limits.

Judgement: Passed by 9.1 dB.

10.4 Occupied Bandwidth Data

The occupied bandwidth of the RF output was measured using a spectrum analyzer. The bandwidth was measured using the peak detector function and a narrow resolution bandwidth.

A broadband antenna was used to receive the modulated signal. The spectrum analyzer was set to the MAX HOLD mode to record the worst case of the modulation. The spectrum analyzer display was digitized and plotted. A limit was drawn on the plots based on the level of the modulated carrier. The plots of the occupied bandwidth for the EUT are supplied on the following page.


99% EBW		
125 kHz signal	132 kHz Signal	13.56 MHz Signal
1.455 kHz	2.130 kHz	2.395 kHz

The 99% bandwidth was measured using the procedures of RSS-GEN section 6.6.

Judgement: Pass


The bandwidth test was performed only on the RDR-8008XAKU

Figure 3. Occupied Bandwidth Plot: 125 kHz

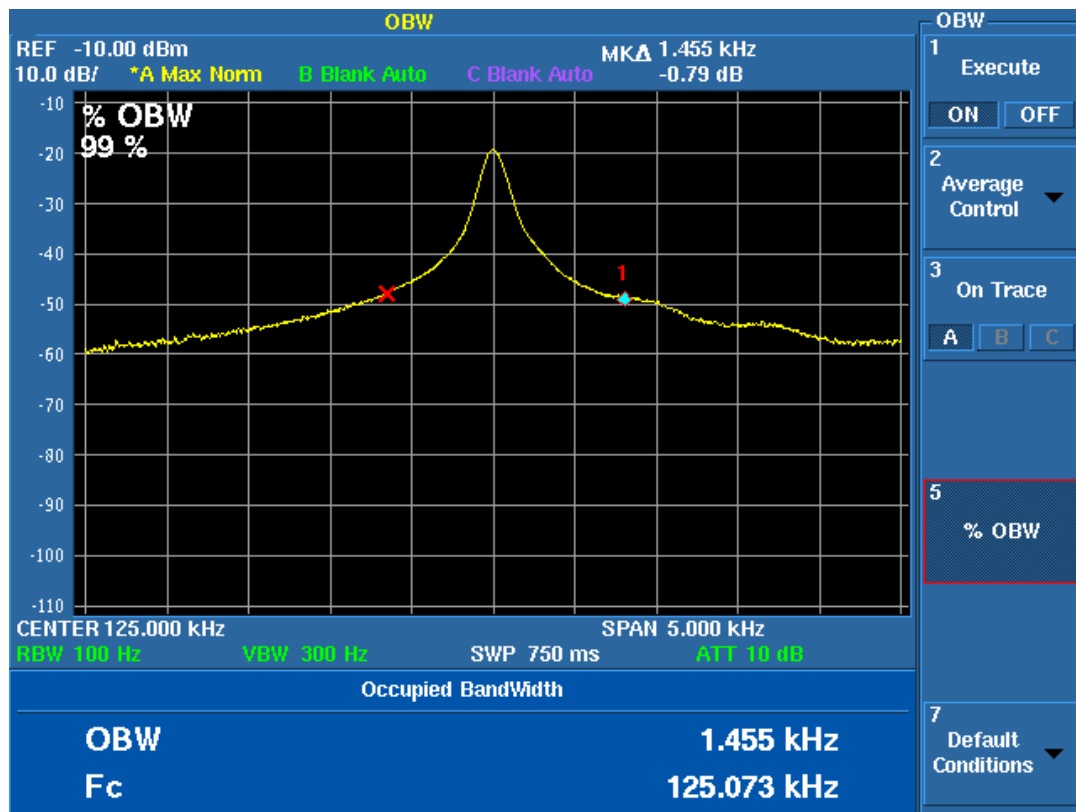


99% Bandwidth = 1.455 kHz

Figure 4. Occupied Bandwidth Plot: 132 kHz

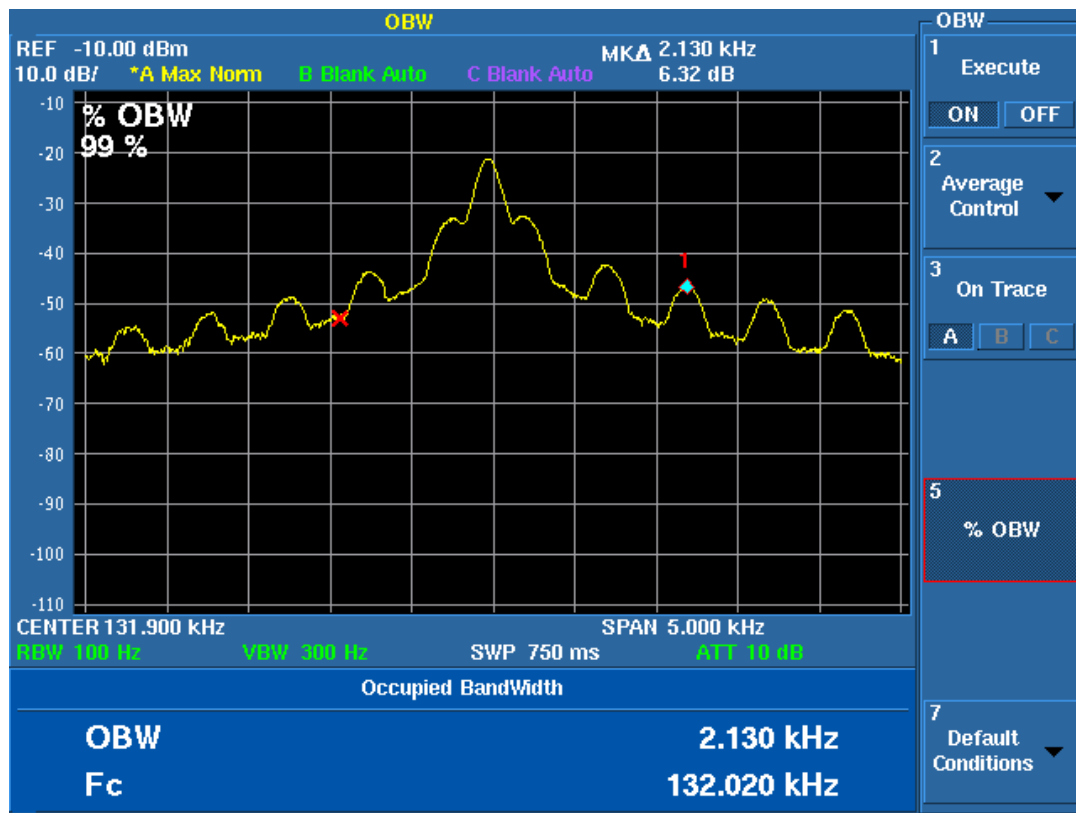

99% Bandwidth = 2.130 kHz

Figure 5. Occupied Bandwidth Plot: 13.56 MHz

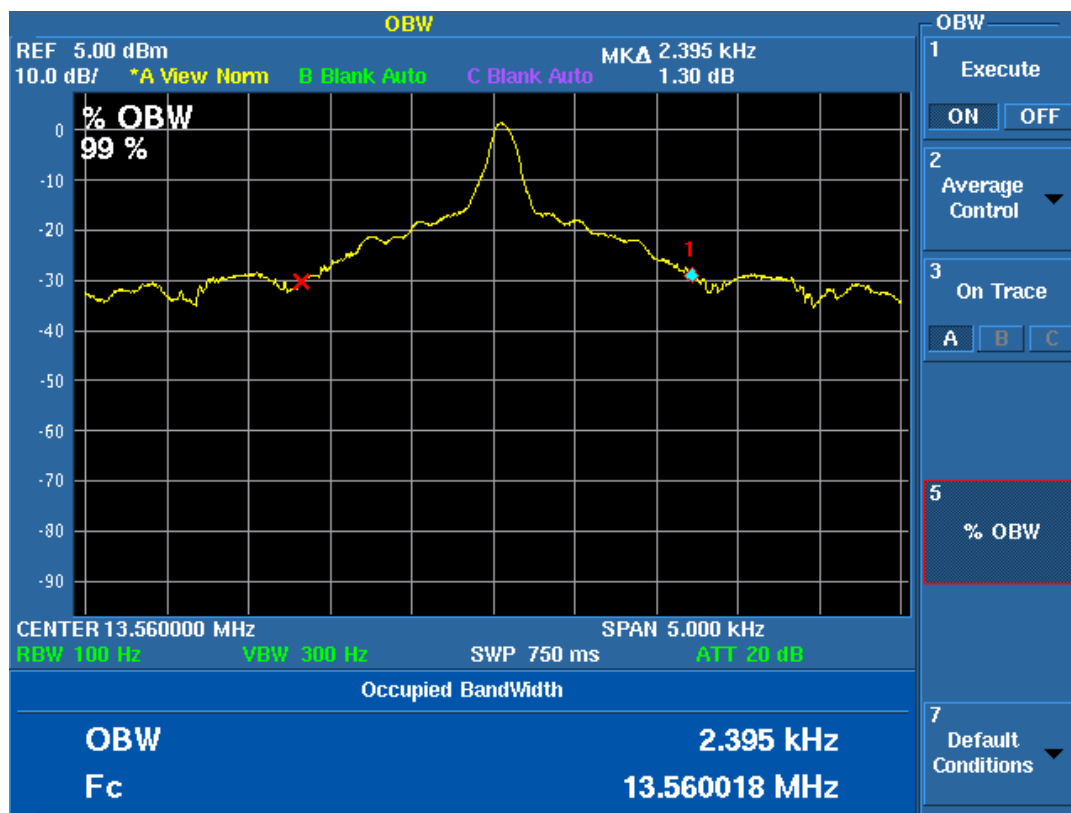

99% Bandwidth = 2.395 kHz

10.5 Frequency Stability

The tests were in accordance to FCC 15.225 and RSS-210 Section A2.6. Since the product is USB powered, a Desktop PC was used to power the device. The input power to the desktop PC was varied by 15%, using a variable AC supply.

10.5.1 Test Results for Frequency Stability

Model	RDR-8008XAKU	Specification	FCC Part 15.225 RSS-210 Section A2.6
Serial Number	LC80511	Test Date	07/15/2016
Test Personnel	Chris Dalessio	Test Location	Chamber B
Test Equipment	Spectrum Analyzer (REC-21); Temperature Chamber TC-01 Power Supply (PSA-02)		
Notes	10 minutes at each Temperature; 1 min at each voltage		
Nominal Frequency	13.560 MHz		

Volts VAC	Freq. (MHz)	Deviation %	PPM
102.0	13.560070	0.0005	5.16
120.0	13.560065	0.0005	4.79
138.0	13.560060	0.0004	4.42

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-8008XAKU and RDR-8058XAKU, Multi-Protocol RFID Reader

Temp.	Freq. (@2min.)	Freq. (@5min.)	Freq. (@10min.)	Change from Nominal		
Deg C	(MHz)	(MHz)	(MHz)	%	%	%
50	13.560052	13.560318	13.560278	0.0004	0.0023	0.0021
40	13.560248	13.560088	13.560208	0.0018	0.0006	0.0015
30	13.560217	13.560073	13.560253	0.0016	0.0005	0.0019
20	13.560177	13.560297	13.560252	0.0013	0.0022	0.0019
10	13.560265	13.560276	13.560310	0.0020	0.0020	0.0023
0	13.560299	13.560303	13.560277	0.0022	0.0022	0.0020
-10	13.560250	13.560233	13.560253	0.0018	0.0017	0.0019
-20	13.560229	13.560247	13.560250	0.0017	0.0018	0.0018

Test Requirements: Limit is 100 ppm or 0.01% deviation.

Judgement: Pass

11 MEASUREMENT INSTRUMENTATION UNCERTAINTY

The uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2 in accordance with CISPR 16-4-2.

Measurement	Uncertainty
Conducted Emissions, LISN method, 150 kHz to 30 MHz	2.7 dB
Radiated Emissions, H-field, 3 meters, 9 kHz to 30 MHz	2.7 dB
Radiated Emissions, E-field, 3 meters, 30 to 200 MHz	3.3 dB
Radiated Emissions, E-field, 3 meters, 200 to 1000 MHz	4.9 dB
Frequency counter at 13.56 MHz; REC-21	136 Hz
99% Occupied Bandwidth using REC-43	1% of frequency span
Temperature THM-03	0.6 Deg C