


## 10MHz-Chain 0


QPSK

### Channel 124400

Frequency Range : 9kHz~1GHz

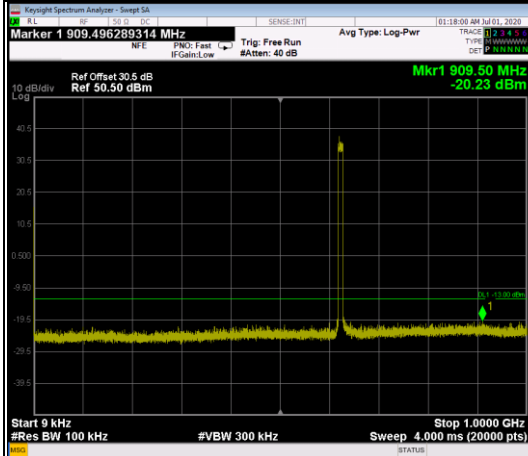


Frequency Range : 1GHz~10GHz

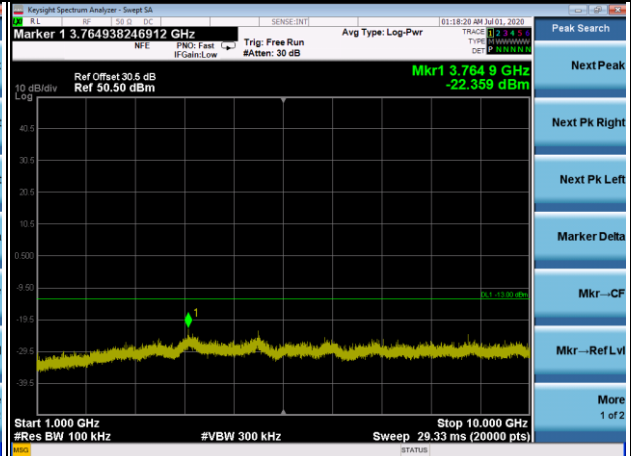


### Channel 126900

Frequency Range : 9kHz~1GHz

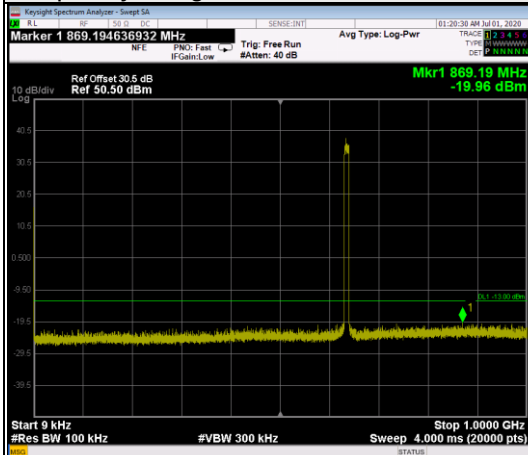


Frequency Range : 1GHz~10GHz

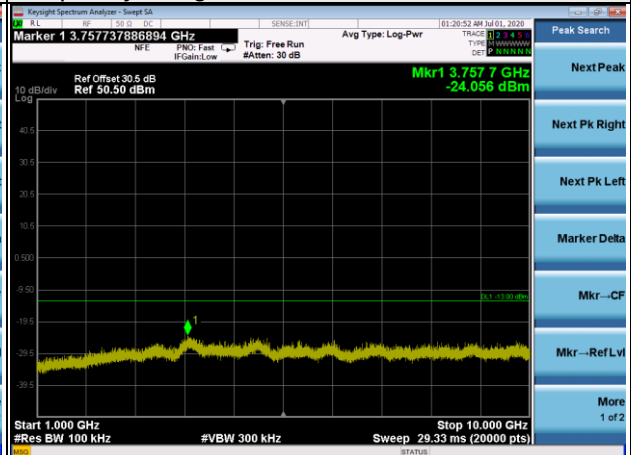


### Channel 129400

Frequency Range : 9kHz~1GHz

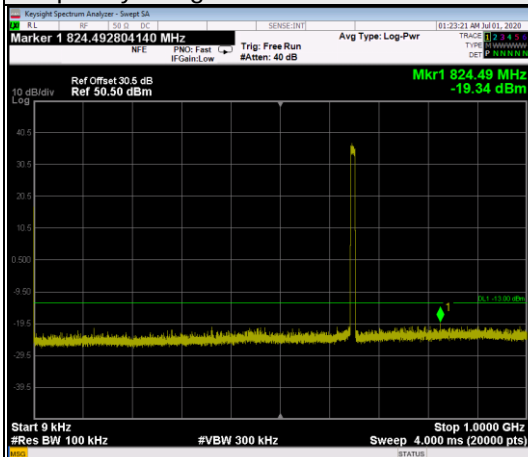

Frequency Range : 1GHz~10GHz

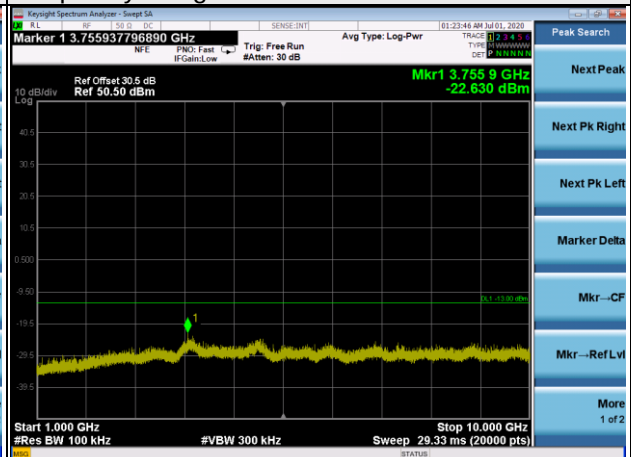


## 10MHz-Chain 1


QPSK

### Channel 124400

Frequency Range : 9kHz~1GHz

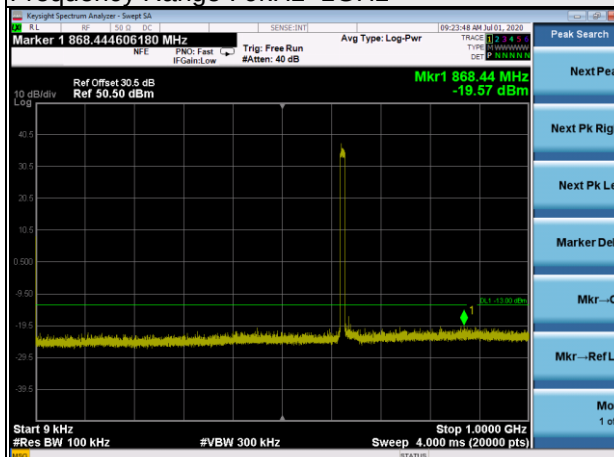


Frequency Range : 1GHz~10GHz

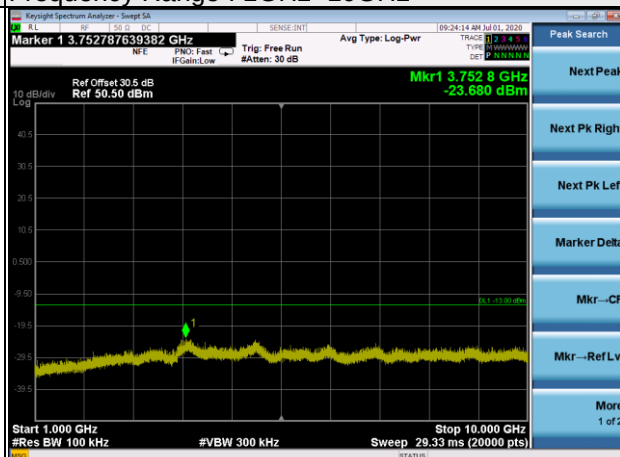


### Channel 126900

Frequency Range : 9kHz~1GHz

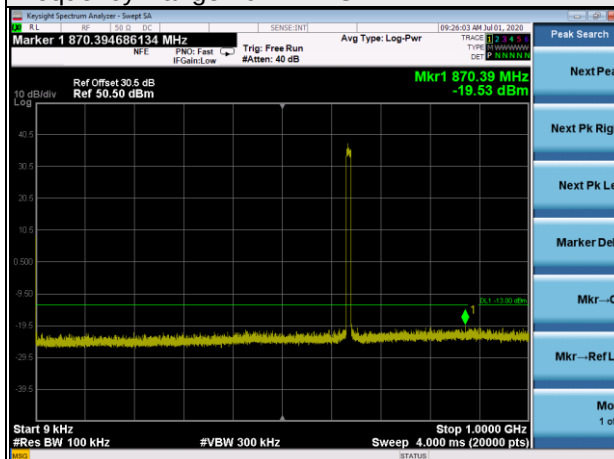


Frequency Range : 1GHz~10GHz

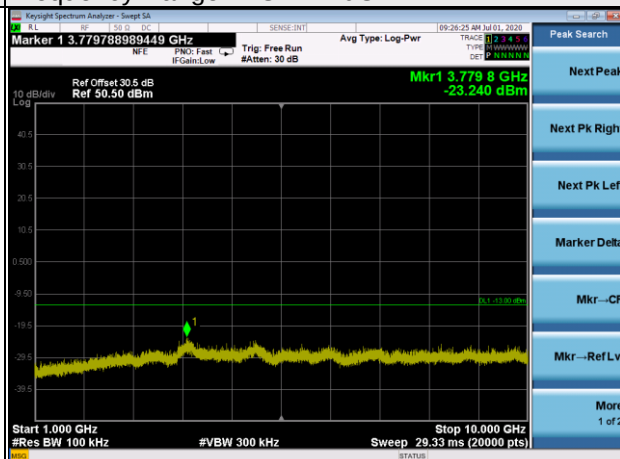


### Channel 129400

Frequency Range : 9kHz~1GHz

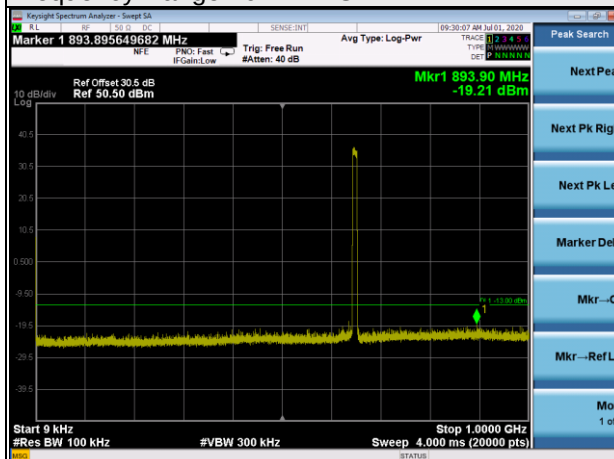

Frequency Range : 1GHz~10GHz

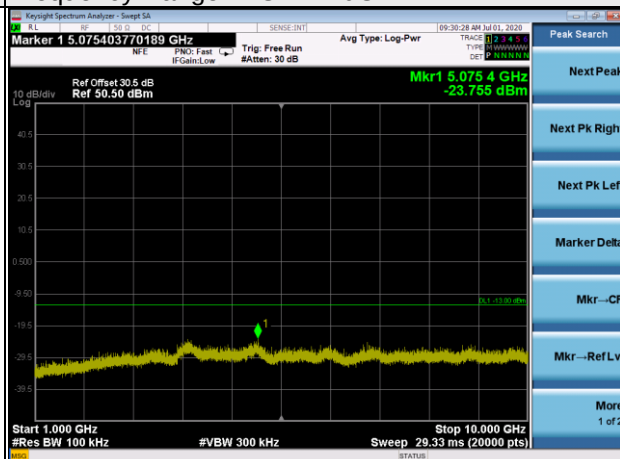


# 15MHz-Chain 0


QPSK

## Channel 124900

Frequency Range : 9kHz~1GHz

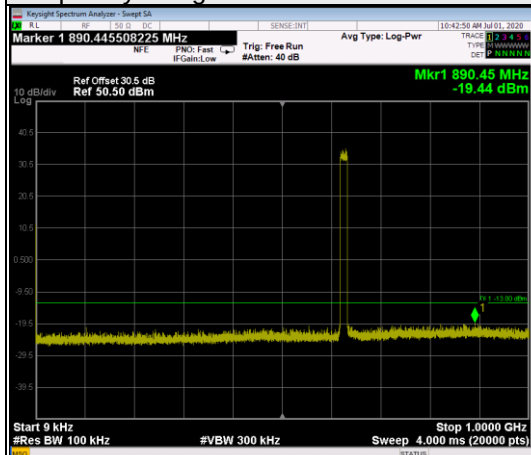


Frequency Range : 1GHz~10GHz

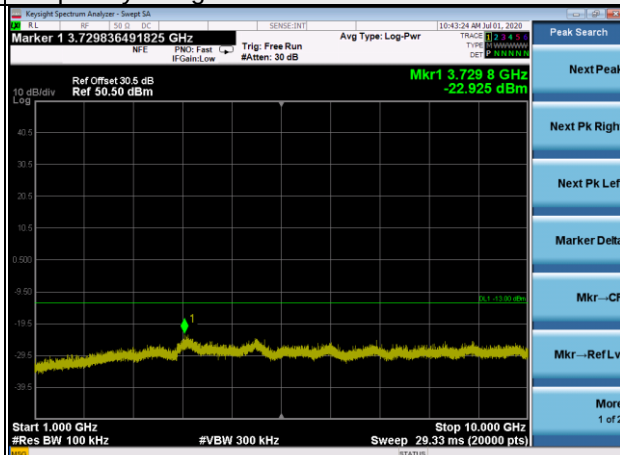


## Channel 126900

Frequency Range : 9kHz~1GHz

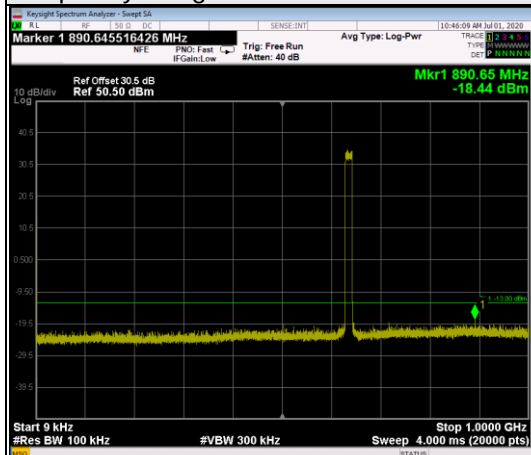


Frequency Range : 1GHz~10GHz

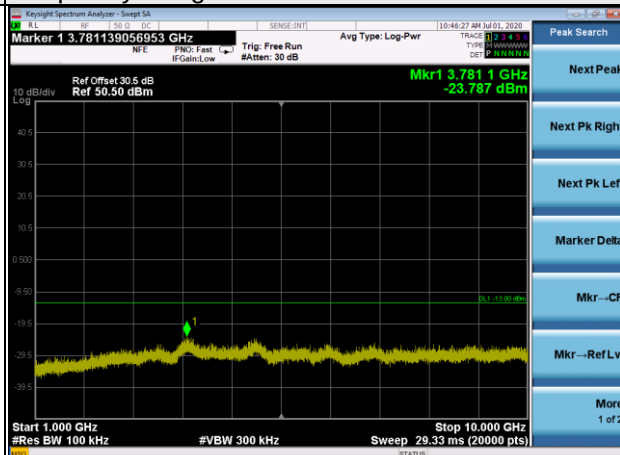


## Channel 128900

Frequency Range : 9kHz~1GHz

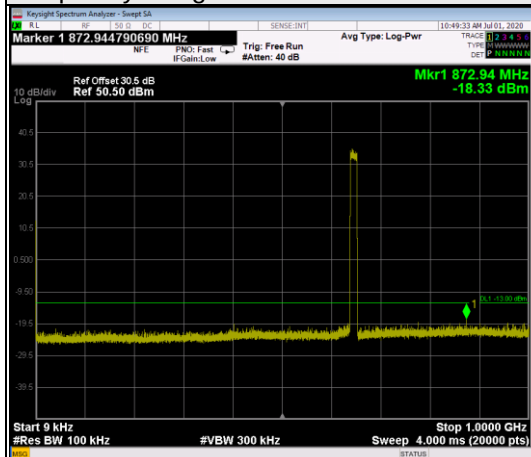

Frequency Range : 1GHz~10GHz

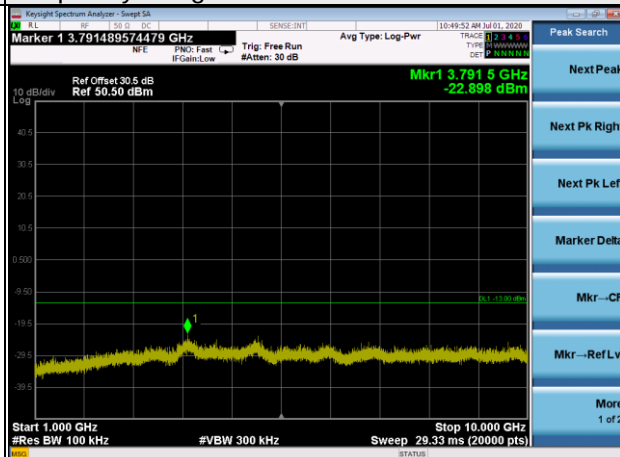


## 15MHz-Chain 1


QPSK

### Channel 124900

Frequency Range : 9kHz~1GHz

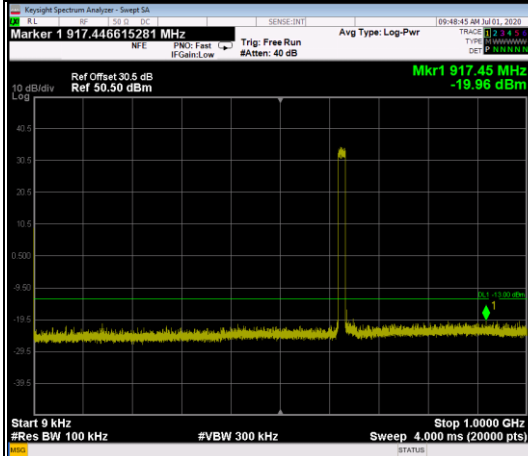


Frequency Range : 1GHz~10GHz

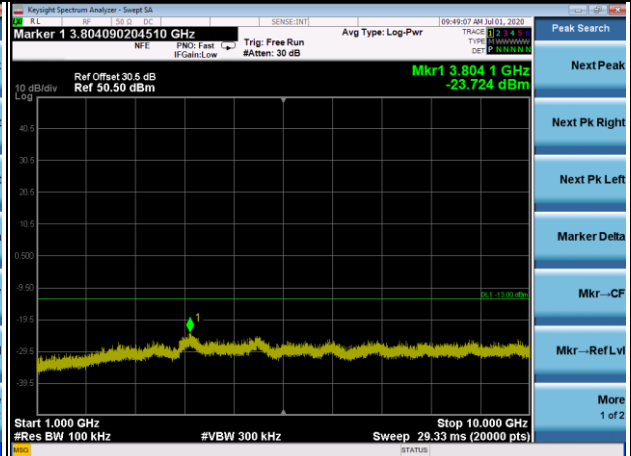


### Channel 126900

Frequency Range : 9kHz~1GHz

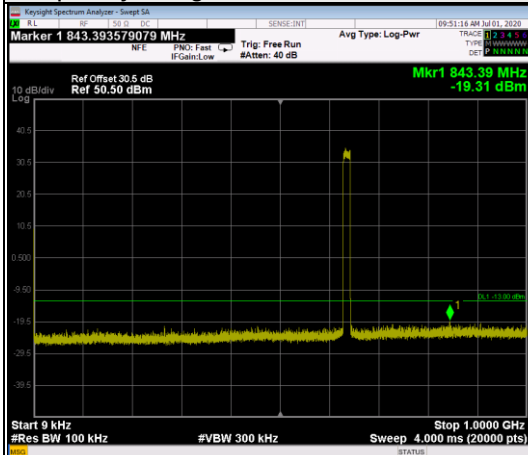


Frequency Range : 1GHz~10GHz

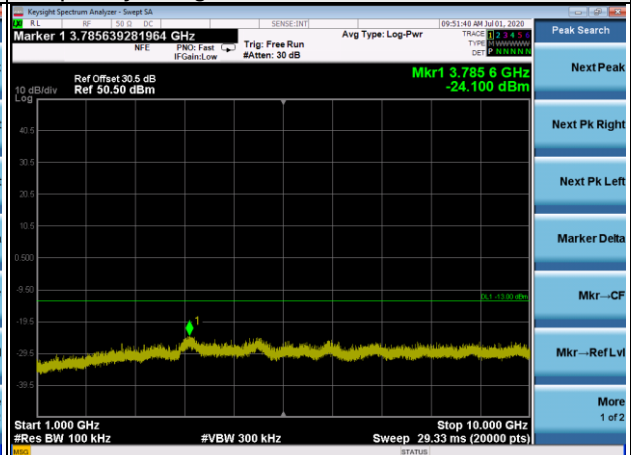


### Channel 128900

Frequency Range : 9kHz~1GHz

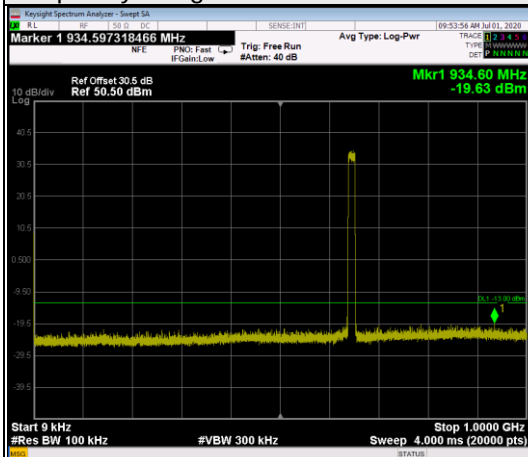

Frequency Range : 1GHz~10GHz

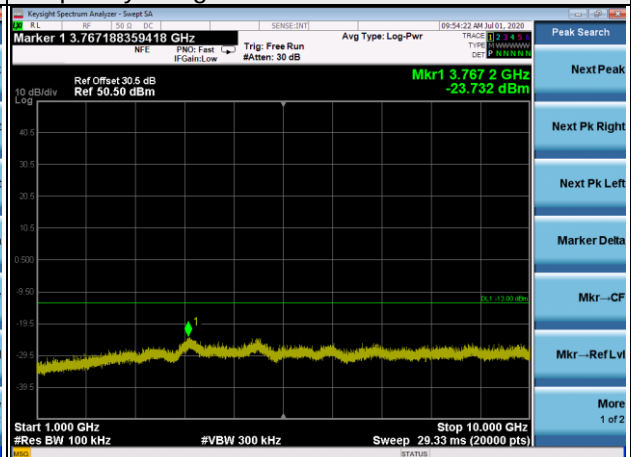


## 20MHz-Chain 0


QPSK

### Channel 125400

Frequency Range : 9kHz~1GHz

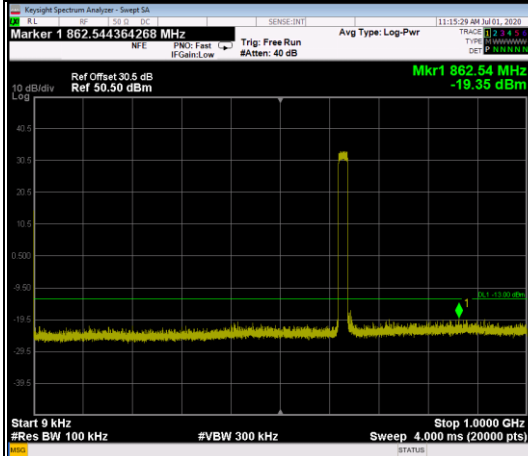


Frequency Range : 1GHz~10GHz

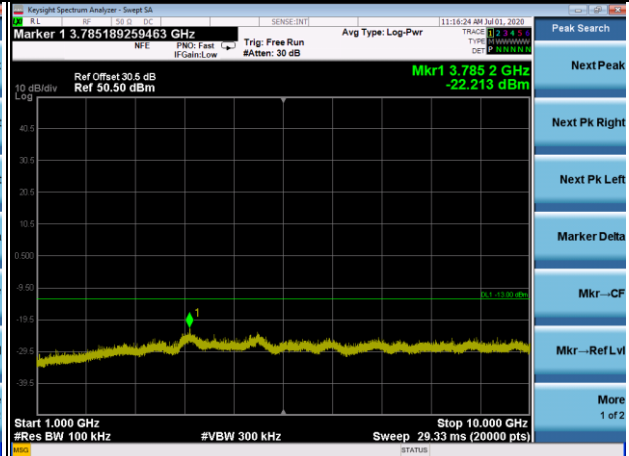


### Channel 126900

Frequency Range : 9kHz~1GHz

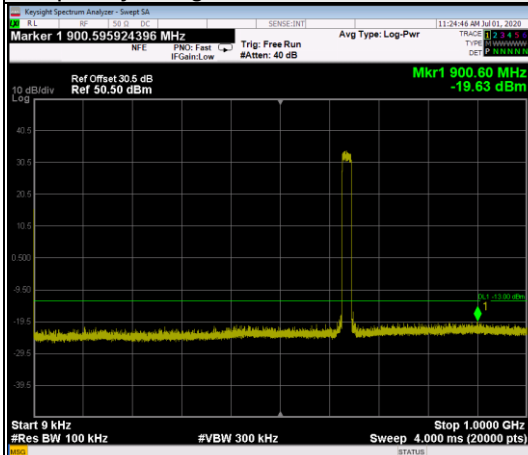


Frequency Range : 1GHz~10GHz

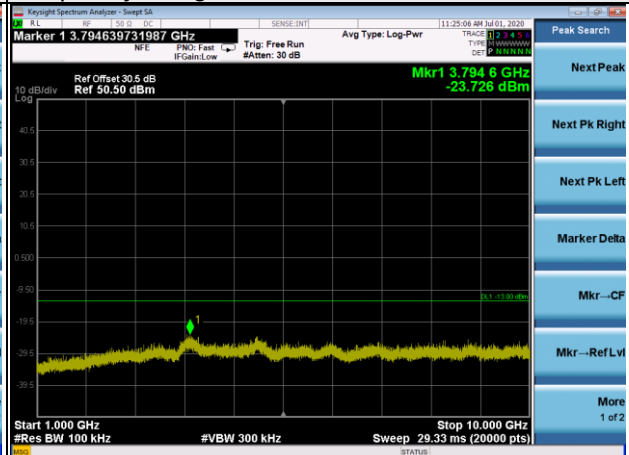


### Channel 128400

Frequency Range : 9kHz~1GHz

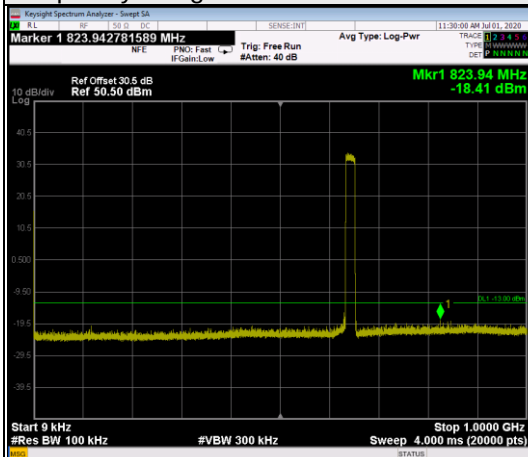

Frequency Range : 1GHz~10GHz

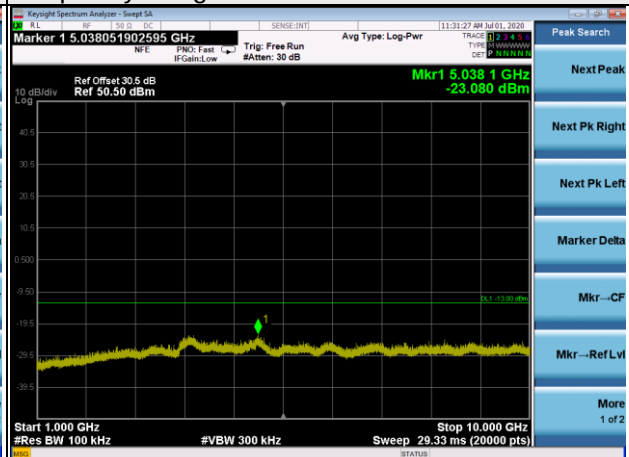


## 20MHz-Chain 1


QPSK

### Channel 125400

Frequency Range : 9kHz~1GHz

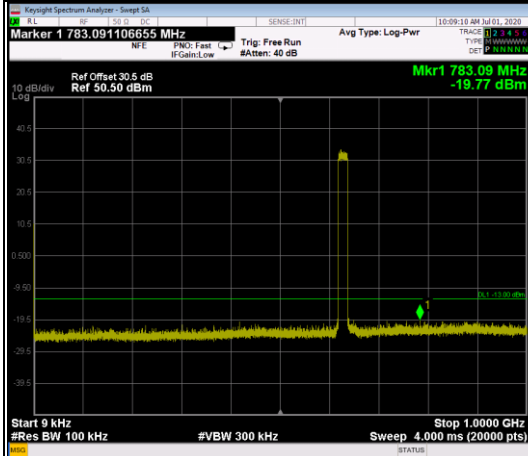


Frequency Range : 1GHz~10GHz

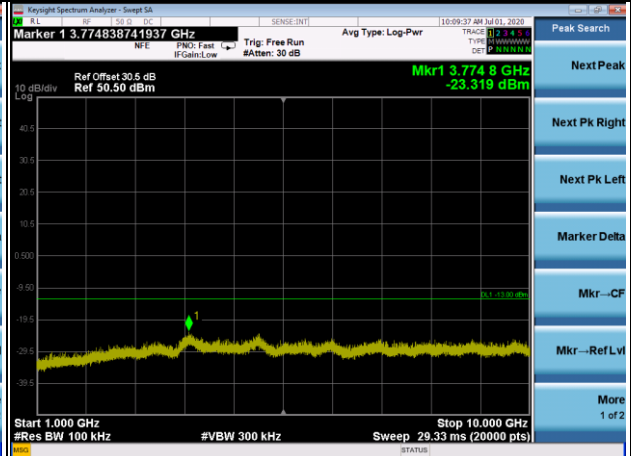


### Channel 126900

Frequency Range : 9kHz~1GHz

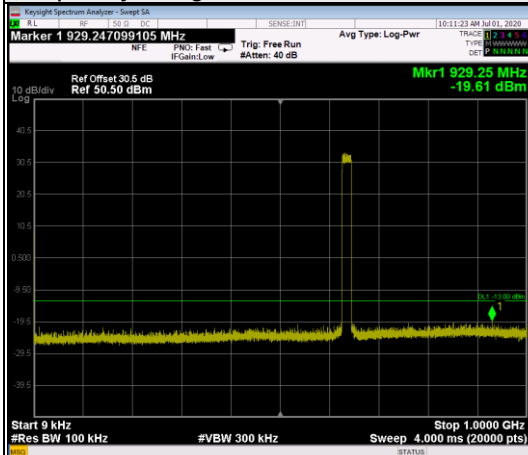


Frequency Range : 1GHz~10GHz

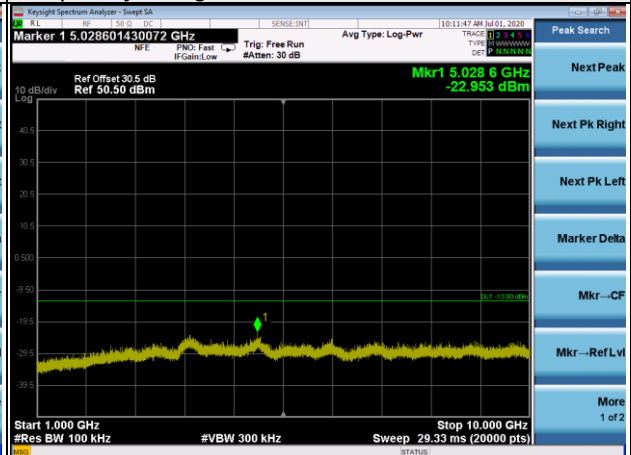


### Channel 128400

Frequency Range : 9kHz~1GHz

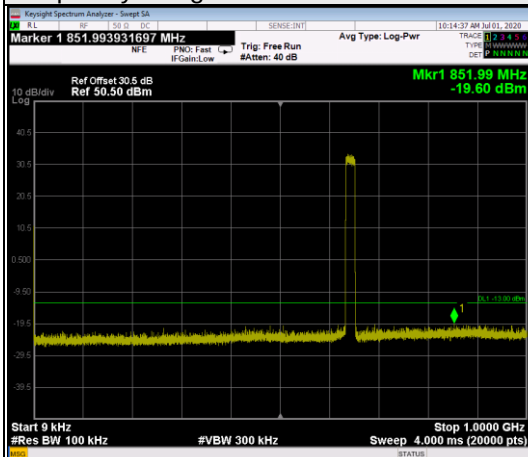

Frequency Range : 1GHz~10GHz

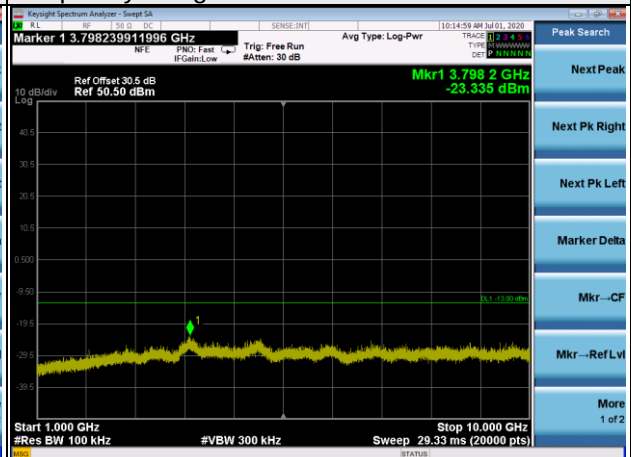

## 4.8 Radiated Emission Measurement

### 4.8.1 Limits of Radiated Emission Measurement

According to FCC 27.53(g) for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

### 4.8.2 Test Procedure

- a. All measurements were done at 3 channels (low, middle and high channel of operational frequency range.)
- b. EIRP measurement is made in the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. Follow ANSI 63.26 section 5.2.7 d), EIRP Value (dBm) = Read Value (dB $\mu$ V/m) - Correction Factor @ 3m
- d. Correction Factor (dB) @ 3m =  $20\log(D) - 104.8$ ; where D is the measurement distance @ 3m  
= -95.26dB


**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

### 4.8.3 Deviation from Test Standard


No deviation.

#### 4.8.4 Test Setup

##### <Frequency Range below 1GHz>

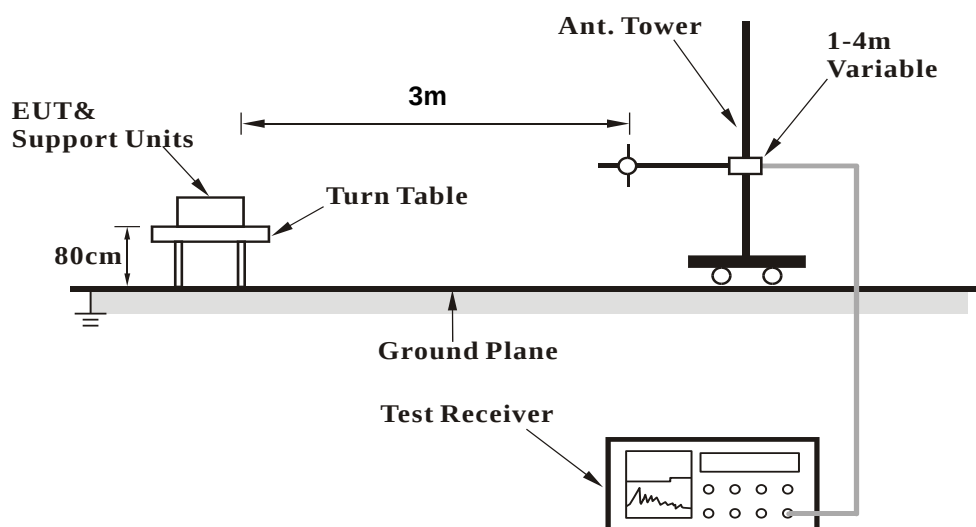

##### <Frequency Range above 1GHz>

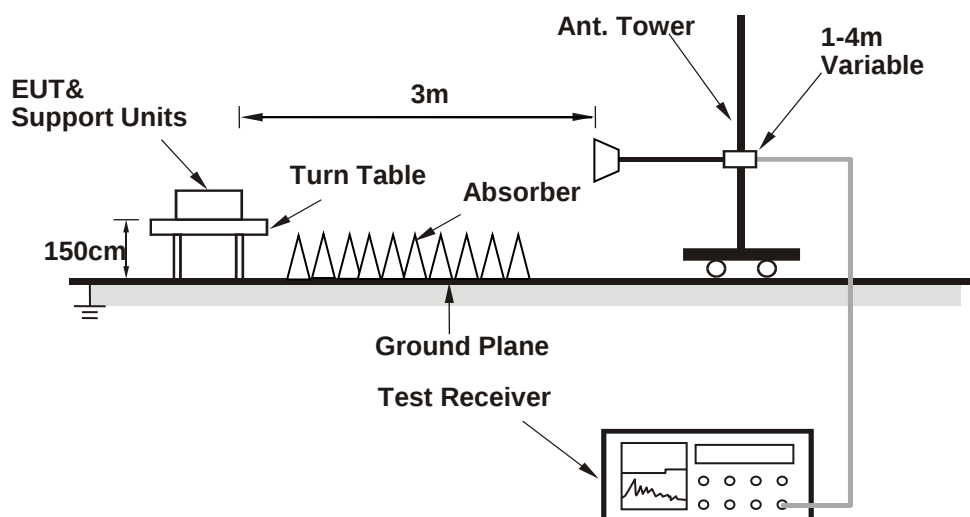

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.8.5 Test Results

##### Single Carrier

Below 1GHz

5MHz

|                |           |                 |                |
|----------------|-----------|-----------------|----------------|
| Test Frequency | 619.5 MHz | Frequency Range | Below 1000 MHz |
|----------------|-----------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 32.68       | 40.93                  | -95.26                 | -54.33               | -13         | -41.33      |
| 2                                                   | 58.61       | 38.08                  | -95.26                 | -57.18               | -13         | -44.18      |
| 3                                                   | 93.19       | 45.87                  | -95.26                 | -49.39               | -13         | -36.39      |
| 4                                                   | 243.77      | 34.77                  | -95.26                 | -60.49               | -13         | -47.49      |
| 5                                                   | 305.58      | 35.42                  | -95.26                 | -59.84               | -13         | -46.84      |
| 6                                                   | 982.59      | 33.49                  | -95.26                 | -61.77               | -13         | -48.77      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 33.43       | 41.31                  | -95.26                 | -53.95               | -13         | -40.95      |
| 2                                                   | 61.75       | 34.38                  | -95.26                 | -60.88               | -13         | -47.88      |
| 3                                                   | 80.17       | 34.66                  | -95.26                 | -60.60               | -13         | -47.60      |
| 4                                                   | 124.41      | 31.06                  | -95.26                 | -64.20               | -13         | -51.20      |
| 5                                                   | 736.72      | 34.78                  | -95.26                 | -60.48               | -13         | -47.48      |
| 6                                                   | 982.3       | 45.07                  | -95.26                 | -50.19               | -13         | -37.19      |

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

|                |           |                 |                |
|----------------|-----------|-----------------|----------------|
| Test Frequency | 634.5 MHz | Frequency Range | Below 1000 MHz |
|----------------|-----------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 32.34       | 41.41                  | -95.26                 | -53.85               | -13         | -40.85      |
| 2                                                   | 58.56       | 38.63                  | -95.26                 | -56.63               | -13         | -43.63      |
| 3                                                   | 92.75       | 46.17                  | -95.26                 | -49.09               | -13         | -36.09      |
| 4                                                   | 243.31      | 34.71                  | -95.26                 | -60.55               | -13         | -47.55      |
| 5                                                   | 305.35      | 35.35                  | -95.26                 | -59.91               | -13         | -46.91      |
| 6                                                   | 982.24      | 33.38                  | -95.26                 | -61.88               | -13         | -48.88      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 33.15       | 41.14                  | -95.26                 | -54.12               | -13         | -41.12      |
| 2                                                   | 61.37       | 34.31                  | -95.26                 | -60.95               | -13         | -47.95      |
| 3                                                   | 79.83       | 34.37                  | -95.26                 | -60.89               | -13         | -47.89      |
| 4                                                   | 124.07      | 30.77                  | -95.26                 | -64.49               | -13         | -51.49      |
| 5                                                   | 736.26      | 34.62                  | -95.26                 | -60.64               | -13         | -47.64      |
| 6                                                   | 982.04      | 44.74                  | -95.26                 | -50.52               | -13         | -37.52      |

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

|                |           |                 |                |
|----------------|-----------|-----------------|----------------|
| Test Frequency | 649.5 MHz | Frequency Range | Below 1000 MHz |
|----------------|-----------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 32.44       | 41.03                  | -95.26                 | -54.23               | -13         | -41.23      |
| 2                                                   | 58.17       | 37.97                  | -95.26                 | -57.29               | -13         | -44.29      |
| 3                                                   | 93.01       | 45.73                  | -95.26                 | -49.53               | -13         | -36.53      |
| 4                                                   | 243.68      | 35.18                  | -95.26                 | -60.08               | -13         | -47.08      |
| 5                                                   | 305.22      | 35.83                  | -95.26                 | -59.43               | -13         | -46.43      |
| 6                                                   | 982.11      | 33.41                  | -95.26                 | -61.85               | -13         | -48.85      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 33.14       | 40.9                   | -95.26                 | -54.36               | -13         | -41.36      |
| 2                                                   | 61.5        | 34.37                  | -95.26                 | -60.89               | -13         | -47.89      |
| 3                                                   | 80.13       | 34.54                  | -95.26                 | -60.72               | -13         | -47.72      |
| 4                                                   | 124.18      | 30.99                  | -95.26                 | -64.27               | -13         | -51.27      |
| 5                                                   | 736.56      | 34.67                  | -95.26                 | -60.59               | -13         | -47.59      |
| 6                                                   | 982.02      | 45.06                  | -95.26                 | -50.20               | -13         | -37.20      |

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

# 10MHz

|                |         |                 |                |
|----------------|---------|-----------------|----------------|
| Test Frequency | 622 MHz | Frequency Range | Below 1000 MHz |
|----------------|---------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 32.31       | 40.68                  | -95.26                 | -54.58               | -13         | -41.58      |
| 2                                                   | 58.38       | 37.86                  | -95.26                 | -57.40               | -13         | -44.40      |
| 3                                                   | 93.17       | 45.48                  | -95.26                 | -49.78               | -13         | -36.78      |
| 4                                                   | 243.48      | 34.27                  | -95.26                 | -60.99               | -13         | -47.99      |
| 5                                                   | 305.43      | 35.16                  | -95.26                 | -60.10               | -13         | -47.10      |
| 6                                                   | 982.24      | 33.12                  | -95.26                 | -62.14               | -13         | -49.14      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 32.99       | 40.94                  | -95.26                 | -54.32               | -13         | -41.32      |
| 2                                                   | 61.66       | 34.15                  | -95.26                 | -61.11               | -13         | -48.11      |
| 3                                                   | 79.96       | 34.48                  | -95.26                 | -60.78               | -13         | -47.78      |
| 4                                                   | 124.29      | 31                     | -95.26                 | -64.26               | -13         | -51.26      |
| 5                                                   | 736.65      | 34.77                  | -95.26                 | -60.49               | -13         | -47.49      |
| 6                                                   | 981.9       | 44.93                  | -95.26                 | -50.33               | -13         | -37.33      |

## Remarks:

- Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
- Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

|                |           |                 |                |
|----------------|-----------|-----------------|----------------|
| Test Frequency | 634.5 MHz | Frequency Range | Below 1000 MHz |
|----------------|-----------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 32.62       | 40.69                  | -95.26                 | -54.57               | -13         | -41.57      |
| 2                                                   | 58.16       | 38.01                  | -95.26                 | -57.25               | -13         | -44.25      |
| 3                                                   | 92.92       | 45.64                  | -95.26                 | -49.62               | -13         | -36.62      |
| 4                                                   | 243.46      | 34.7                   | -95.26                 | -60.56               | -13         | -47.56      |
| 5                                                   | 305.47      | 35.36                  | -95.26                 | -59.90               | -13         | -46.90      |
| 6                                                   | 982.23      | 33.27                  | -95.26                 | -61.99               | -13         | -48.99      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 33.1        | 41.17                  | -95.26                 | -54.09               | -13         | -41.09      |
| 2                                                   | 61.34       | 34.13                  | -95.26                 | -61.13               | -13         | -48.13      |
| 3                                                   | 80.02       | 34.34                  | -95.26                 | -60.92               | -13         | -47.92      |
| 4                                                   | 124.36      | 30.8                   | -95.26                 | -64.46               | -13         | -51.46      |
| 5                                                   | 736.35      | 34.45                  | -95.26                 | -60.81               | -13         | -47.81      |
| 6                                                   | 982.18      | 44.69                  | -95.26                 | -50.57               | -13         | -37.57      |

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

|                |        |                 |                |
|----------------|--------|-----------------|----------------|
| Test Frequency | 647MHz | Frequency Range | Below 1000 MHz |
|----------------|--------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 32.42       | 41.03                  | -95.26                 | -54.23               | -13         | -41.23      |
| 2                                                   | 58.23       | 37.95                  | -95.26                 | -57.31               | -13         | -44.31      |
| 3                                                   | 93.05       | 46.01                  | -95.26                 | -49.25               | -13         | -36.25      |
| 4                                                   | 243.48      | 34.74                  | -95.26                 | -60.52               | -13         | -47.52      |
| 5                                                   | 305.39      | 35.26                  | -95.26                 | -60.00               | -13         | -47.00      |
| 6                                                   | 982.53      | 33.29                  | -95.26                 | -61.97               | -13         | -48.97      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 32.99       | 41.19                  | -95.26                 | -54.07               | -13         | -41.07      |
| 2                                                   | 61.72       | 33.89                  | -95.26                 | -61.37               | -13         | -48.37      |
| 3                                                   | 79.83       | 34.39                  | -95.26                 | -60.87               | -13         | -47.87      |
| 4                                                   | 124.08      | 30.57                  | -95.26                 | -64.69               | -13         | -51.69      |
| 5                                                   | 736.53      | 34.61                  | -95.26                 | -60.65               | -13         | -47.65      |
| 6                                                   | 981.81      | 44.78                  | -95.26                 | -50.48               | -13         | -37.48      |

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

# 15MHz

|                |           |                 |                |
|----------------|-----------|-----------------|----------------|
| Test Frequency | 624.5 MHz | Frequency Range | Below 1000 MHz |
|----------------|-----------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 32.26       | 40.69                  | -95.26                 | -54.57               | -13         | -41.57      |
| 2                                                   | 58.51       | 37.69                  | -95.26                 | -57.57               | -13         | -44.57      |
| 3                                                   | 93.11       | 45.45                  | -95.26                 | -49.81               | -13         | -36.81      |
| 4                                                   | 243.34      | 34.61                  | -95.26                 | -60.65               | -13         | -47.65      |
| 5                                                   | 305.57      | 35.39                  | -95.26                 | -59.87               | -13         | -46.87      |
| 6                                                   | 982.22      | 33.46                  | -95.26                 | -61.80               | -13         | -48.80      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 33.26       | 41.18                  | -95.26                 | -54.08               | -13         | -41.08      |
| 2                                                   | 61.72       | 34.04                  | -95.26                 | -61.22               | -13         | -48.22      |
| 3                                                   | 79.78       | 34.52                  | -95.26                 | -60.74               | -13         | -47.74      |
| 4                                                   | 124.35      | 30.7                   | -95.26                 | -64.56               | -13         | -51.56      |
| 5                                                   | 736.53      | 34.65                  | -95.26                 | -60.61               | -13         | -47.61      |
| 6                                                   | 982.21      | 44.66                  | -95.26                 | -50.60               | -13         | -37.60      |

## Remarks:

- Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
- Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

|                |           |                 |                |
|----------------|-----------|-----------------|----------------|
| Test Frequency | 634.5 MHz | Frequency Range | Below 1000 MHz |
|----------------|-----------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 32.52       | 40.76                  | -95.26                 | -54.50               | -13         | -41.50      |
| 2                                                   | 58.55       | 37.66                  | -95.26                 | -57.60               | -13         | -44.60      |
| 3                                                   | 92.99       | 45.75                  | -95.26                 | -49.51               | -13         | -36.51      |
| 4                                                   | 243.41      | 34.37                  | -95.26                 | -60.89               | -13         | -47.89      |
| 5                                                   | 305.57      | 34.92                  | -95.26                 | -60.34               | -13         | -47.34      |
| 6                                                   | 982.58      | 33.1                   | -95.26                 | -62.16               | -13         | -49.16      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 33.38       | 41.22                  | -95.26                 | -54.04               | -13         | -41.04      |
| 2                                                   | 61.74       | 33.94                  | -95.26                 | -61.32               | -13         | -48.32      |
| 3                                                   | 79.84       | 34.19                  | -95.26                 | -61.07               | -13         | -48.07      |
| 4                                                   | 124.37      | 30.99                  | -95.26                 | -64.27               | -13         | -51.27      |
| 5                                                   | 736.63      | 34.73                  | -95.26                 | -60.53               | -13         | -47.53      |
| 6                                                   | 982         | 44.7                   | -95.26                 | -50.56               | -13         | -37.56      |

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

|                |           |                 |                |
|----------------|-----------|-----------------|----------------|
| Test Frequency | 644.5 MHz | Frequency Range | Below 1000 MHz |
|----------------|-----------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 32.51       | 40.76                  | -95.26                 | -54.50               | -13         | -41.50      |
| 2                                                   | 58.27       | 38                     | -95.26                 | -57.26               | -13         | -44.26      |
| 3                                                   | 92.8        | 45.7                   | -95.26                 | -49.56               | -13         | -36.56      |
| 4                                                   | 243.32      | 34.7                   | -95.26                 | -60.56               | -13         | -47.56      |
| 5                                                   | 305.35      | 35.35                  | -95.26                 | -59.91               | -13         | -46.91      |
| 6                                                   | 982.18      | 33.38                  | -95.26                 | -61.88               | -13         | -48.88      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 33.4        | 41.24                  | -95.26                 | -54.02               | -13         | -41.02      |
| 2                                                   | 61.37       | 34.1                   | -95.26                 | -61.16               | -13         | -48.16      |
| 3                                                   | 79.86       | 34.51                  | -95.26                 | -60.75               | -13         | -47.75      |
| 4                                                   | 124.31      | 30.66                  | -95.26                 | -64.60               | -13         | -51.60      |
| 5                                                   | 736.66      | 34.62                  | -95.26                 | -60.64               | -13         | -47.64      |
| 6                                                   | 981.89      | 44.73                  | -95.26                 | -50.53               | -13         | -37.53      |

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

## 20MHz

|                |         |                 |                |
|----------------|---------|-----------------|----------------|
| Test Frequency | 627 MHz | Frequency Range | Below 1000 MHz |
|----------------|---------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 32.48       | 40.69                  | -95.26                 | -54.57               | -13         | -41.57      |
| 2                                                   | 58.59       | 37.89                  | -95.26                 | -57.37               | -13         | -44.37      |
| 3                                                   | 93.18       | 45.56                  | -95.26                 | -49.70               | -13         | -36.70      |
| 4                                                   | 243.58      | 34.33                  | -95.26                 | -60.93               | -13         | -47.93      |
| 5                                                   | 305.2       | 35.11                  | -95.26                 | -60.15               | -13         | -47.15      |
| 6                                                   | 982.32      | 33.33                  | -95.26                 | -61.93               | -13         | -48.93      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 33.33       | 41.1                   | -95.26                 | -54.16               | -13         | -41.16      |
| 2                                                   | 61.32       | 34.17                  | -95.26                 | -61.09               | -13         | -48.09      |
| 3                                                   | 80.15       | 34.2                   | -95.26                 | -61.06               | -13         | -48.06      |
| 4                                                   | 123.95      | 30.93                  | -95.26                 | -64.33               | -13         | -51.33      |
| 5                                                   | 736.34      | 34.39                  | -95.26                 | -60.87               | -13         | -47.87      |
| 6                                                   | 982.02      | 44.57                  | -95.26                 | -50.69               | -13         | -37.69      |

### Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m

|                |           |                 |                |
|----------------|-----------|-----------------|----------------|
| Test Frequency | 634.5 MHz | Frequency Range | Below 1000 MHz |
|----------------|-----------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 32.63       | 40.93                  | -95.26                 | -54.33               | -13         | -41.33      |
| 2                                                   | 58.36       | 38                     | -95.26                 | -57.26               | -13         | -44.26      |
| 3                                                   | 93.18       | 45.47                  | -95.26                 | -49.79               | -13         | -36.79      |
| 4                                                   | 243.73      | 34.49                  | -95.26                 | -60.77               | -13         | -47.77      |
| 5                                                   | 305.3       | 35.22                  | -95.26                 | -60.04               | -13         | -47.04      |
| 6                                                   | 982.34      | 33.48                  | -95.26                 | -61.78               | -13         | -48.78      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 33.35       | 40.95                  | -95.26                 | -54.31               | -13         | -41.31      |
| 2                                                   | 61.29       | 34.04                  | -95.26                 | -61.22               | -13         | -48.22      |
| 3                                                   | 79.94       | 34.25                  | -95.26                 | -61.01               | -13         | -48.01      |
| 4                                                   | 124.31      | 30.77                  | -95.26                 | -64.49               | -13         | -51.49      |
| 5                                                   | 736.23      | 34.38                  | -95.26                 | -60.88               | -13         | -47.88      |
| 6                                                   | 981.83      | 44.99                  | -95.26                 | -50.27               | -13         | -37.27      |

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

|                |         |                 |                |
|----------------|---------|-----------------|----------------|
| Test Frequency | 642 MHz | Frequency Range | Below 1000 MHz |
|----------------|---------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 32.41       | 40.63                  | -95.26                 | -54.63               | -13         | -41.63      |
| 2                                                   | 58.42       | 37.68                  | -95.26                 | -57.58               | -13         | -44.58      |
| 3                                                   | 92.8        | 45.78                  | -95.26                 | -49.48               | -13         | -36.48      |
| 4                                                   | 243.75      | 34.4                   | -95.26                 | -60.86               | -13         | -47.86      |
| 5                                                   | 305.48      | 35.04                  | -95.26                 | -60.22               | -13         | -47.22      |
| 6                                                   | 982.13      | 33.47                  | -95.26                 | -61.79               | -13         | -48.79      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 33.43       | 41.09                  | -95.26                 | -54.17               | -13         | -41.17      |
| 2                                                   | 61.68       | 34.34                  | -95.26                 | -60.92               | -13         | -47.92      |
| 3                                                   | 79.79       | 34.48                  | -95.26                 | -60.78               | -13         | -47.78      |
| 4                                                   | 123.97      | 30.83                  | -95.26                 | -64.43               | -13         | -51.43      |
| 5                                                   | 736.55      | 34.62                  | -95.26                 | -60.64               | -13         | -47.64      |
| 6                                                   | 982.25      | 44.59                  | -95.26                 | -50.67               | -13         | -37.67      |

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

Above 1GHz  
**Single Carrier**  
**5MHz**

|                |           |                 |                |
|----------------|-----------|-----------------|----------------|
| Test Frequency | 619.5 MHz | Frequency Range | Above 1000 MHz |
|----------------|-----------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1239        | 31.84                  | -95.26                 | -63.42               | -13         | -50.42      |
| 2                                                   | 1858.5      | 31.89                  | -95.26                 | -63.37               | -13         | -50.37      |
| 3                                                   | 2478        | 33.82                  | -95.26                 | -61.44               | -13         | -48.44      |
| 4                                                   | 3097.5      | 35.28                  | -95.26                 | -59.98               | -13         | -46.98      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1239        | 35.83                  | -95.26                 | -59.43               | -13         | -46.43      |
| 2                                                   | 1858.5      | 31.79                  | -95.26                 | -63.47               | -13         | -50.47      |
| 3                                                   | 2478        | 34.79                  | -95.26                 | -60.47               | -13         | -47.47      |
| 4                                                   | 3097.5      | 34.56                  | -95.26                 | -60.70               | -13         | -47.70      |

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) =  $20\log(D) - 104.8$ ; where D is the measurement distance @3m

|                |           |                 |                |
|----------------|-----------|-----------------|----------------|
| Test Frequency | 634.5 MHz | Frequency Range | Above 1000 MHz |
|----------------|-----------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1269        | 31.6                   | -95.26                 | -63.66               | -13         | -50.66      |
| 2                                                   | 1903.5      | 31.9                   | -95.26                 | -63.36               | -13         | -50.36      |
| 3                                                   | 2538        | 33.92                  | -95.26                 | -61.34               | -13         | -48.34      |
| 4                                                   | 3172.5      | 35.18                  | -95.26                 | -60.08               | -13         | -47.08      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1269        | 35.36                  | -95.26                 | -59.90               | -13         | -46.90      |
| 2                                                   | 1903.5      | 31.52                  | -95.26                 | -63.74               | -13         | -50.74      |
| 3                                                   | 2538        | 34.42                  | -95.26                 | -60.84               | -13         | -47.84      |
| 4                                                   | 3172.5      | 34.52                  | -95.26                 | -60.74               | -13         | -47.74      |

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

|                |           |                 |                |
|----------------|-----------|-----------------|----------------|
| Test Frequency | 649.5 MHz | Frequency Range | Above 1000 MHz |
|----------------|-----------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1299        | 31.26                  | -95.26                 | -64.00               | -13         | -51.00      |
| 2                                                   | 1948.5      | 31.8                   | -95.26                 | -63.46               | -13         | -50.46      |
| 3                                                   | 2598        | 33.53                  | -95.26                 | -61.73               | -13         | -48.73      |
| 4                                                   | 3247.5      | 34.89                  | -95.26                 | -60.37               | -13         | -47.37      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1299        | 35.83                  | -95.26                 | -59.43               | -13         | -46.43      |
| 2                                                   | 1948.5      | 31.69                  | -95.26                 | -63.57               | -13         | -50.57      |
| 3                                                   | 2598        | 34.75                  | -95.26                 | -60.51               | -13         | -47.51      |
| 4                                                   | 3247.5      | 34.07                  | -95.26                 | -61.19               | -13         | -48.19      |

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

# 10MHz

|                |         |                 |                |
|----------------|---------|-----------------|----------------|
| Test Frequency | 622 MHz | Frequency Range | Above 1000 MHz |
|----------------|---------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1244        | 31.43                  | -95.26                 | -63.83               | -13         | -50.83      |
| 2                                                   | 1866        | 31.83                  | -95.26                 | -63.43               | -13         | -50.43      |
| 3                                                   | 2488        | 33.56                  | -95.26                 | -61.70               | -13         | -48.70      |
| 4                                                   | 3110        | 34.86                  | -95.26                 | -60.40               | -13         | -47.40      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1244        | 35.41                  | -95.26                 | -59.85               | -13         | -46.85      |
| 2                                                   | 1866        | 31.54                  | -95.26                 | -63.72               | -13         | -50.72      |
| 3                                                   | 2488        | 34.42                  | -95.26                 | -60.84               | -13         | -47.84      |
| 4                                                   | 3110        | 34.32                  | -95.26                 | -60.94               | -13         | -47.94      |

## Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

|                |           |                 |                |
|----------------|-----------|-----------------|----------------|
| Test Frequency | 634.5 MHz | Frequency Range | Above 1000 MHz |
|----------------|-----------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1269        | 31.6                   | -95.26                 | -63.66               | -13         | -50.66      |
| 2                                                   | 1903.5      | 31.87                  | -95.26                 | -63.39               | -13         | -50.39      |
| 3                                                   | 2538        | 33.34                  | -95.26                 | -61.92               | -13         | -48.92      |
| 4                                                   | 3172.5      | 35.03                  | -95.26                 | -60.23               | -13         | -47.23      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1269        | 35.79                  | -95.26                 | -59.47               | -13         | -46.47      |
| 2                                                   | 1903.5      | 31.6                   | -95.26                 | -63.66               | -13         | -50.66      |
| 3                                                   | 2538        | 34.64                  | -95.26                 | -60.62               | -13         | -47.62      |
| 4                                                   | 3172.5      | 34.51                  | -95.26                 | -60.75               | -13         | -47.75      |

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

|                |         |                 |                |
|----------------|---------|-----------------|----------------|
| Test Frequency | 647 MHz | Frequency Range | Above 1000 MHz |
|----------------|---------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1294        | 31.69                  | -95.26                 | -63.57               | -13         | -50.57      |
| 2                                                   | 1941        | 31.81                  | -95.26                 | -63.45               | -13         | -50.45      |
| 3                                                   | 2588        | 33.76                  | -95.26                 | -61.50               | -13         | -48.50      |
| 4                                                   | 3235        | 35.28                  | -95.26                 | -59.98               | -13         | -46.98      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1294        | 35.67                  | -95.26                 | -59.59               | -13         | -46.59      |
| 2                                                   | 1941        | 31.54                  | -95.26                 | -63.72               | -13         | -50.72      |
| 3                                                   | 2588        | 34.73                  | -95.26                 | -60.53               | -13         | -47.53      |
| 4                                                   | 3235        | 34.26                  | -95.26                 | -61.00               | -13         | -48.00      |

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

# 15MHz

|                |           |                 |                |
|----------------|-----------|-----------------|----------------|
| Test Frequency | 624.5 MHz | Frequency Range | Above 1000 MHz |
|----------------|-----------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1249        | 31.4                   | -95.26                 | -63.86               | -13         | -50.86      |
| 2                                                   | 1873.5      | 31.7                   | -95.26                 | -63.56               | -13         | -50.56      |
| 3                                                   | 2498        | 33.49                  | -95.26                 | -61.77               | -13         | -48.77      |
| 4                                                   | 3122.5      | 35.04                  | -95.26                 | -60.22               | -13         | -47.22      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1249        | 35.54                  | -95.26                 | -59.72               | -13         | -46.72      |
| 2                                                   | 1873.5      | 31.51                  | -95.26                 | -63.75               | -13         | -50.75      |
| 3                                                   | 2498        | 34.34                  | -95.26                 | -60.92               | -13         | -47.92      |
| 4                                                   | 3122.5      | 34.37                  | -95.26                 | -60.89               | -13         | -47.89      |

## Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

|                |           |                 |                |
|----------------|-----------|-----------------|----------------|
| Test Frequency | 634.5 MHz | Frequency Range | Above 1000 MHz |
|----------------|-----------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1269        | 31.72                  | -95.26                 | -63.54               | -13         | -50.54      |
| 2                                                   | 1903.5      | 31.72                  | -95.26                 | -63.54               | -13         | -50.54      |
| 3                                                   | 2538        | 33.64                  | -95.26                 | -61.62               | -13         | -48.62      |
| 4                                                   | 3172.5      | 35                     | -95.26                 | -60.26               | -13         | -47.26      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1269        | 35.68                  | -95.26                 | -59.58               | -13         | -46.58      |
| 2                                                   | 1903.5      | 31.46                  | -95.26                 | -63.80               | -13         | -50.80      |
| 3                                                   | 2538        | 34.64                  | -95.26                 | -60.62               | -13         | -47.62      |
| 4                                                   | 3172.5      | 34.2                   | -95.26                 | -61.06               | -13         | -48.06      |

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

|                |           |                 |                |
|----------------|-----------|-----------------|----------------|
| Test Frequency | 644.5 MHz | Frequency Range | Above 1000 MHz |
|----------------|-----------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1289        | 31.72                  | -95.26                 | -63.54               | -13         | -50.54      |
| 2                                                   | 1933.5      | 31.58                  | -95.26                 | -63.68               | -13         | -50.68      |
| 3                                                   | 2578        | 33.38                  | -95.26                 | -61.88               | -13         | -48.88      |
| 4                                                   | 3222.5      | 35.06                  | -95.26                 | -60.20               | -13         | -47.20      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1289        | 35.48                  | -95.26                 | -59.78               | -13         | -46.78      |
| 2                                                   | 1933.5      | 31.3                   | -95.26                 | -63.96               | -13         | -50.96      |
| 3                                                   | 2578        | 34.54                  | -95.26                 | -60.72               | -13         | -47.72      |
| 4                                                   | 3222.5      | 34.27                  | -95.26                 | -60.99               | -13         | -47.99      |

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

## 20MHz

|                |         |                 |                |
|----------------|---------|-----------------|----------------|
| Test Frequency | 627 MHz | Frequency Range | Above 1000 MHz |
|----------------|---------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1254        | 31.84                  | -95.26                 | -63.42               | -13         | -50.42      |
| 2                                                   | 1881        | 31.62                  | -95.26                 | -63.64               | -13         | -50.64      |
| 3                                                   | 2508        | 33.39                  | -95.26                 | -61.87               | -13         | -48.87      |
| 4                                                   | 3135        | 34.86                  | -95.26                 | -60.40               | -13         | -47.40      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1254        | 35.43                  | -95.26                 | -59.83               | -13         | -46.83      |
| 2                                                   | 1881        | 31.61                  | -95.26                 | -63.65               | -13         | -50.65      |
| 3                                                   | 2508        | 34.73                  | -95.26                 | -60.53               | -13         | -47.53      |
| 4                                                   | 3135        | 34.13                  | -95.26                 | -61.13               | -13         | -48.13      |

### Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

|                |           |                 |                |
|----------------|-----------|-----------------|----------------|
| Test Frequency | 634.5 MHz | Frequency Range | Above 1000 MHz |
|----------------|-----------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1269        | 31.72                  | -95.26                 | -63.54               | -13         | -50.54      |
| 2                                                   | 1903.5      | 31.75                  | -95.26                 | -63.51               | -13         | -50.51      |
| 3                                                   | 2538        | 33.62                  | -95.26                 | -61.64               | -13         | -48.64      |
| 4                                                   | 3172.5      | 34.84                  | -95.26                 | -60.42               | -13         | -47.42      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1269        | 35.72                  | -95.26                 | -59.54               | -13         | -46.54      |
| 2                                                   | 1903.5      | 31.77                  | -95.26                 | -63.49               | -13         | -50.49      |
| 3                                                   | 2538        | 34.68                  | -95.26                 | -60.58               | -13         | -47.58      |
| 4                                                   | 3172.5      | 34.54                  | -95.26                 | -60.72               | -13         | -47.72      |

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

|                |         |                 |                |
|----------------|---------|-----------------|----------------|
| Test Frequency | 642 MHz | Frequency Range | Above 1000 MHz |
|----------------|---------|-----------------|----------------|

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |                        |                        |                      |             |             |
|-----------------------------------------------------|-------------|------------------------|------------------------|----------------------|-------------|-------------|
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1284        | 31.69                  | -95.26                 | -63.57               | -13         | -50.57      |
| 2                                                   | 1926        | 31.61                  | -95.26                 | -63.65               | -13         | -50.65      |
| 3                                                   | 2568        | 33.56                  | -95.26                 | -61.70               | -13         | -48.70      |
| 4                                                   | 3210        | 34.79                  | -95.26                 | -60.47               | -13         | -47.47      |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |                        |                        |                      |             |             |
| No.                                                 | Freq. (MHz) | Reading (dB $\mu$ V/m) | Correction Factor (dB) | Emission Value (dBm) | Limit (dBm) | Margin (dB) |
| 1                                                   | 1284        | 35.34                  | -95.26                 | -59.92               | -13         | -46.92      |
| 2                                                   | 1926        | 31.43                  | -95.26                 | -63.83               | -13         | -50.83      |
| 3                                                   | 2568        | 34.67                  | -95.26                 | -60.59               | -13         | -47.59      |
| 4                                                   | 3210        | 34.21                  | -95.26                 | -61.05               | -13         | -48.05      |

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Reading (dB $\mu$ V/m) + Correction Factor @ 3m
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---