

FCC TEST REPORT

REPORT NO.: RF970130H02

MODEL NO.: RU-859

RECEIVED: Jan. 30, 2008

TESTED: Jan. 30 to Feb. 18, 2008

ISSUED: Feb. 19, 2008

APPLICANT: Microelectronics Technology Inc.

ADDRESS: 1, Innovation Road II, Hsinchu Science-based
Industrial Park, Hsinchu, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 58 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF, A2LA or any government agencies. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS.....	5
2.1	MEASUREMENT UNCERTAINTY	6
3	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	8
3.3	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	9
3.4	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.5	DESCRIPTION OF SUPPORT UNITS.....	12
3.6	CONFIGURATION OF SYSTEM UNDER TEST	12
4	TEST PROCEDURES AND RESULTS	13
4.0	GENERAL DESCRIPTION OF EUT	13
4.1	CONDUCTED EMISSION MEASUREMENT	13
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	13
4.1.2	TEST INSTRUMENTS.....	13
4.1.3	TEST PROCEDURES	14
4.1.4	DEVIATION FROM TEST STANDARD	14
4.1.5	TEST SETUP	15
4.1.6	EUT OPERATING CONDITIONS.....	15
4.1.7	TEST RESULTS	16
4.2	NUMBER OF HOPPING FREQUENCY USED.....	18
4.2.1	LIMIT OF HOPPING FREQUENCY USED	18
4.2.2	TEST INSTRUMENTS.....	18
4.2.3	TEST PROCEDURES	19
4.2.4	DEVIATION FROM TEST STANDARD	19
4.2.5	TEST SETUP	20
4.2.6	TEST RESULTS	20
4.3	DWELL TIME ON EACH CHANNEL	22
4.3.1	LIMIT OF DWELL TIME USED	22
4.3.2	TEST INSTRUMENTS.....	22
4.3.3	TEST PROCEDURES	23
4.3.4	DEVIATION FROM TEST STANDARD	23
4.3.5	TEST SETUP	23
4.3.6	TEST RESULTS	24
4.4	CHANNEL BANDWIDTH	26
4.4.1	TEST INSTRUMENTS.....	26
4.4.2	TEST PROCEDURE.....	27
4.4.3	DEVIATION FROM TEST STANDARD	27
4.4.4	TEST SETUP	27

4.4.5	EUT OPERATING CONDITION	27
4.4.6	TEST RESULTS	28
4.5	HOPPING CHANNEL SEPARATION	31
4.5.1	LIMIT OF HOPPING CHANNEL SEPARATION	31
4.5.2	TEST INSTRUMENTS	31
4.5.3	TEST PROCEDURES	32
4.5.4	DEVIATION FROM TEST STANDARD	32
4.5.5	TEST SETUP	32
4.5.6	TEST RESULTS	33
4.6	MAXIMUM PEAK OUTPUT POWER	36
4.6.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	36
4.6.2	INSTRUMENTS	36
4.6.3	TEST PROCEDURES	37
4.6.4	DEVIATION FROM TEST STANDARD	37
4.6.5	TEST SETUP	38
4.6.6	EUT OPERATING CONDITION	38
4.6.7	TEST RESULTS	39
4.7	RADIATED EMISSION MEASUREMENT	42
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT	42
4.7.2	TEST INSTRUMENTS	43
4.7.3	TEST PROCEDURES	44
4.7.4	DEVIATION FROM TEST STANDARD	44
4.7.5	TEST SETUP	45
4.7.6	TEST RESULTS	46
4.8	BAND EDGES MEASUREMENT	52
4.8.1	LIMITS OF BAND EDGES MEASUREMENT	52
4.8.2	TEST INSTRUMENTS	52
4.8.3	TEST PROCEDURE	52
4.8.4	DEVIATION FROM TEST STANDARD	52
4.8.5	EUT OPERATING CONDITION	52
4.8.6	TEST RESULTS	53
4.9	ANTENNA REQUIREMENT	56
4.9.1	STANDARD APPLICABLE	56
4.9.2	ANTENNA CONNECTED CONSTRUCTION	56
5	INFORMATION ON THE TESTING LABORATORIES	57
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	58

1 CERTIFICATION

PRODUCT : MTI RFID RF Module
BRAND NAME : MTI
MODEL NO. : RU-859
APPLICANT : Microelectronics Technology Inc.
TESTED DATE: Jan. 30 to Feb. 18, 2008
TEST SAMPLE : ENGINEERING SAMPLE
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: RU-859) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** Feb. 19, 2008
(Carol Liao, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** Feb. 19, 2008
Responsible for RF (Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** Feb. 19, 2008
(May Chen, Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -1.77dB at 12.003 MHz
15.247(a)(1)(I)	Number of Hopping Frequency Used Spec.:	PASS	Meet the requirement of limit
15.247(a)(1)(i)	Dwell Time on Each Channel Spec. : Max. 0.4 second	PASS	Meet the requirement of limit
15.247(a)(1)	Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth, which ever is greater	PASS	Meet the requirement of limit
15.247(a)(1)(i)	Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System Spec.: Max. 0.5 MHz	PASS	Meet the requirement of limit
15.247(b)(2)	Maximum Peak Output Power Spec.: max. 30dBm	PASS	Meet the requirement of limit
15.247(d)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.30dB at 9147.00MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.44 dB
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz ~18GHz)	2.33 dB
Radiated emissions (18GHz ~40GHz)	2.55 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	MTI RFID RF Module
MODEL NO.	RU-859
FCC ID	MAD-RU-859
POWER SUPPLY	DC 5V from DC POWER SUPPLY
MODULATION TYPE	ASK
MODULATION TECHNOLOGY	FHSS
FREQUENCY RANGE	902.75MHz ~ 927.25MHz
NUMBER OF CHANNEL	50
OUTPUT POWER	935.406mW
ANTENNA TYPE	Please see note 1
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. There is one antenna provided to this EUT:

Antenna Type	Connector Type	Gain (dBi)	Cable loss (dB)	Net Gain (dBi)
Patch Antenna	SMA Female	6	0.75	5.25

2. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Fifty channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	902.75	21	913.25	42	923.75
1	903.25	22	913.75	43	924.25
2	903.75	23	914.25	44	924.75
3	904.25	24	914.75	45	925.25
4	904.75	25	915.25	46	925.75
5	905.25	26	915.75	47	926.25
6	905.75	27	916.25	48	926.75
7	906.25	28	916.75	49	927.25
8	906.75	29	917.25		
9	907.25	30	917.75		
10	907.75	31	918.25		
11	908.25	32	918.75		
12	908.75	33	919.25		
13	909.25	34	919.75		
14	909.75	35	920.25		
15	910.25	36	920.75		
16	910.75	37	921.25		
17	911.25	38	921.75		
18	911.75	39	922.25		
19	912.25	40	922.75		
20	912.75	41	923.25		

3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE [≥] 1G	APCM	
-	√	√	√	√	NA

Where PLC: Power Line Conducted Emission

RE[≥]1G: Radiated Emission above 1GHz

RE<1G RE: Radiated Emission below 1GHz

APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission:

- ☒ Pre-Scan to determine the worst-case mode from all possible combinations between available modulations and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
0 to 49	49	FHSS	ASK

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
0 to 49	0, 24, 49	FHSS	ASK

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
0 to 49	0, 24, 49	FHSS	ASK

Bandedge Measurement:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
0 to 49	0, 49	FHSS	ASK

Antenna Port Conducted Measurement:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
0 to 49	0, 24, 49	FHSS	ASK

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a MTI RFID RF Module. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 2003

All test items have been performed and recorded as per the above standards.

3.5 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP19L	CN-OHC416-7016 6-5CA-0448	PIW632500516610
2	DC POWER SUPPLY	GOOD WILL INSTRUMENT CO., LTD.	GPC-3030D	7700087	NA
3	TEST TOOL	MTI	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

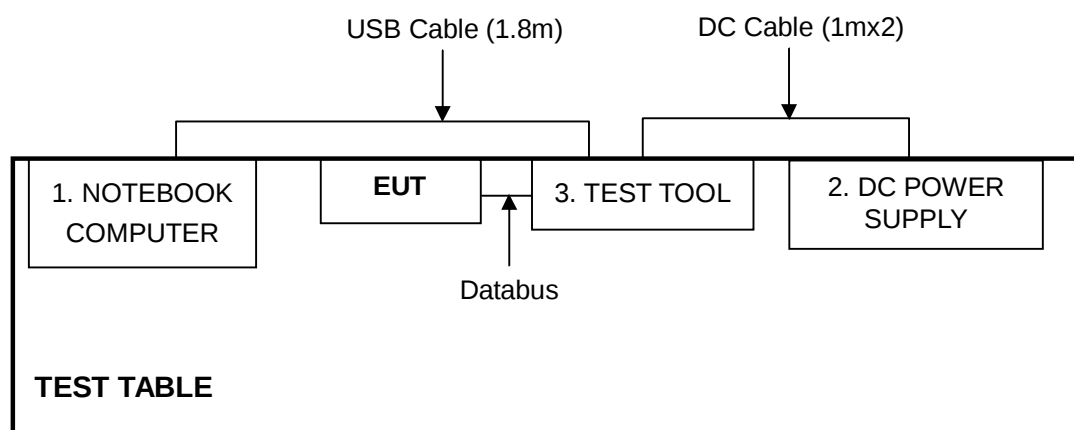

4 TEST PROCEDURES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
0.15-0.5 0.5-5 5-30	Quasi-peak	Average
	66 to 56	56 to 46
	56	46
	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver	ESCS 30	847124/029	Mar. 28, 2008
Line-Impedance Stabilization Network(for EUT)	ESH3-Z5	848773/004	Nov. 08, 2008
Line-Impedance Stabilization Network(for Peripheral)	ENV-216	100071	Nov. 26, 2008
RF Cable (JETBAO)	RG233/U	Cable_CB_01	Dec. 09, 2008
50 ohms Terminator	50	3	Nov. 15, 2008
Software	ADT_Cond_V7.3.2	NA	NA

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. B.
3. The VCCI Con B Registration No. is C-2193.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

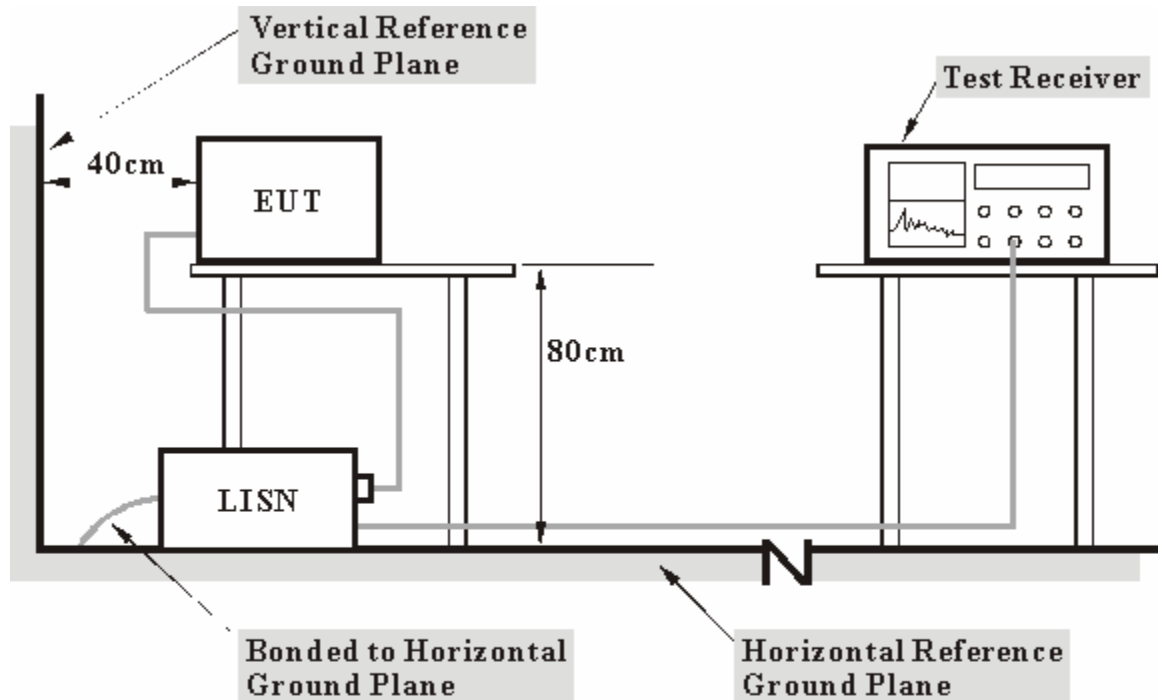

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


- a. Placed the EUT on the testing table.
- b. Connect the EUT with the support unit 1 (Notebook computer) which placed on a testing table.
- c. The support unit 1 (Notebook computer) run test program “RFID Tracer.exe” to enable EUT under transmission condition continuously at specific channel frequency.

4.1.7 TEST RESULTS

INPUT POWER (SYSTEM)	120Vac, 60 Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 66%RH, 971 hPa	PHASE	Line (L)
TESTED BY	Phoenix Huang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	8.719	0.74	45.40	-	46.14	-	60.00	50.00	-13.86	-
2	9.496	0.81	47.38	-	48.19	-	60.00	50.00	-11.81	-
3	10.256	0.87	54.63	41.85	55.50	42.72	60.00	50.00	-4.50	-7.28
4	10.626	0.90	54.84	43.69	55.74	44.59	60.00	50.00	-4.26	-5.41
5	12.003	1.00	53.90	47.23	54.90	48.23	60.00	50.00	-5.10	-1.77
6	12.623	1.04	46.43	-	47.47	-	60.00	50.00	-12.53	-
7	20.885	1.39	42.72	-	44.11	-	60.00	50.00	-15.89	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

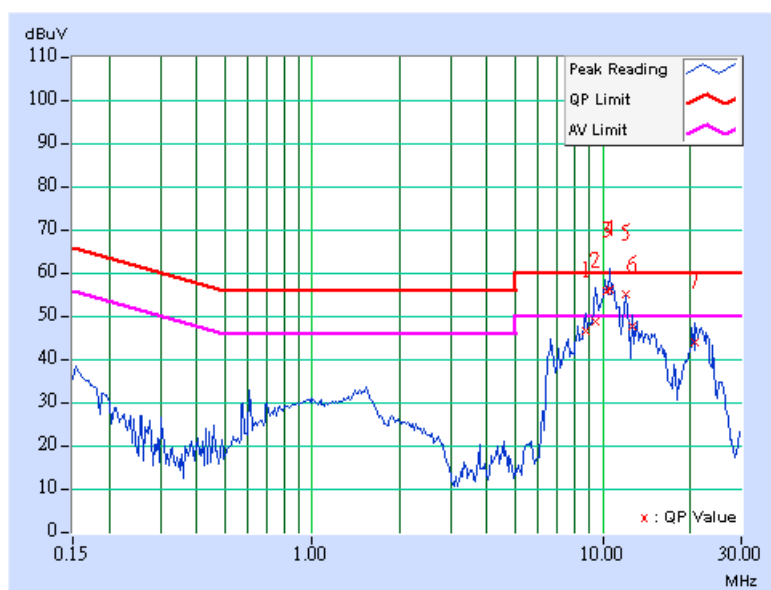

INPUT POWER (SYSTEM)	120Vac, 60 Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 66%RH, 971 hPa	PHASE	Neutral (N)
TESTED BY	Phoenix Huang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	8.755	0.68	47.66	-	48.34	-	60.00	50.00	-11.66	-
2	9.685	0.75	49.02	-	49.77	-	60.00	50.00	-10.23	-
3	10.513	0.82	54.92	44.59	55.74	45.41	60.00	50.00	-4.26	-4.59
4	10.884	0.84	52.80	42.90	53.64	43.74	60.00	50.00	-6.36	-6.26
5	12.126	0.93	51.90	44.60	52.83	45.53	60.00	50.00	-7.17	-4.47
6	12.992	0.99	46.49	-	47.48	-	60.00	50.00	-12.52	-
7	22.270	1.35	44.20	-	45.55	-	60.00	50.00	-14.45	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

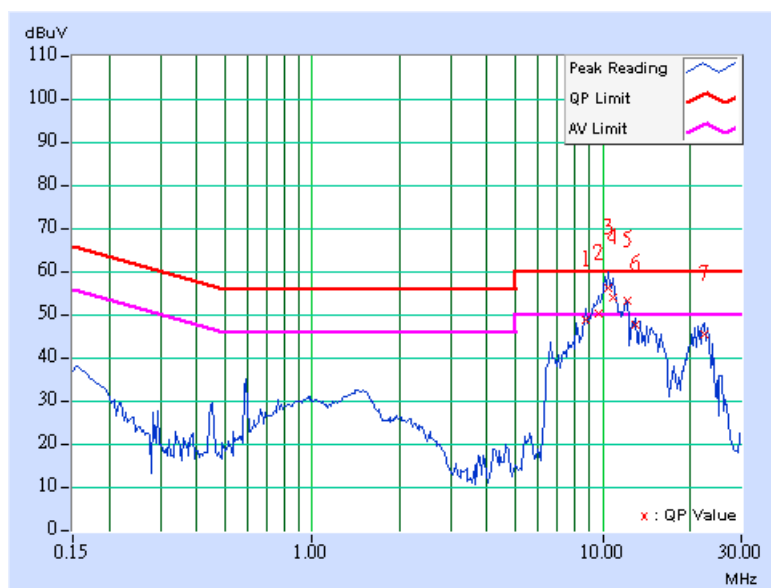

4.2 NUMBER OF HOPPING FREQUENCY USED

4.2.1 LIMIT OF HOPPING FREQUENCY USED

At least 25 hopping frequencies, and should be equally spaced.

4.2.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 12, 2008

Note:

1. The measurement uncertainty is 226Hz, which is calculated as per the document ETSI TR 100 028.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.2.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.2.4 DEVIATION FROM TEST STANDARD



No deviation

4.2.5 TEST SETUP



4.2.6 TEST RESULTS

There are 50 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

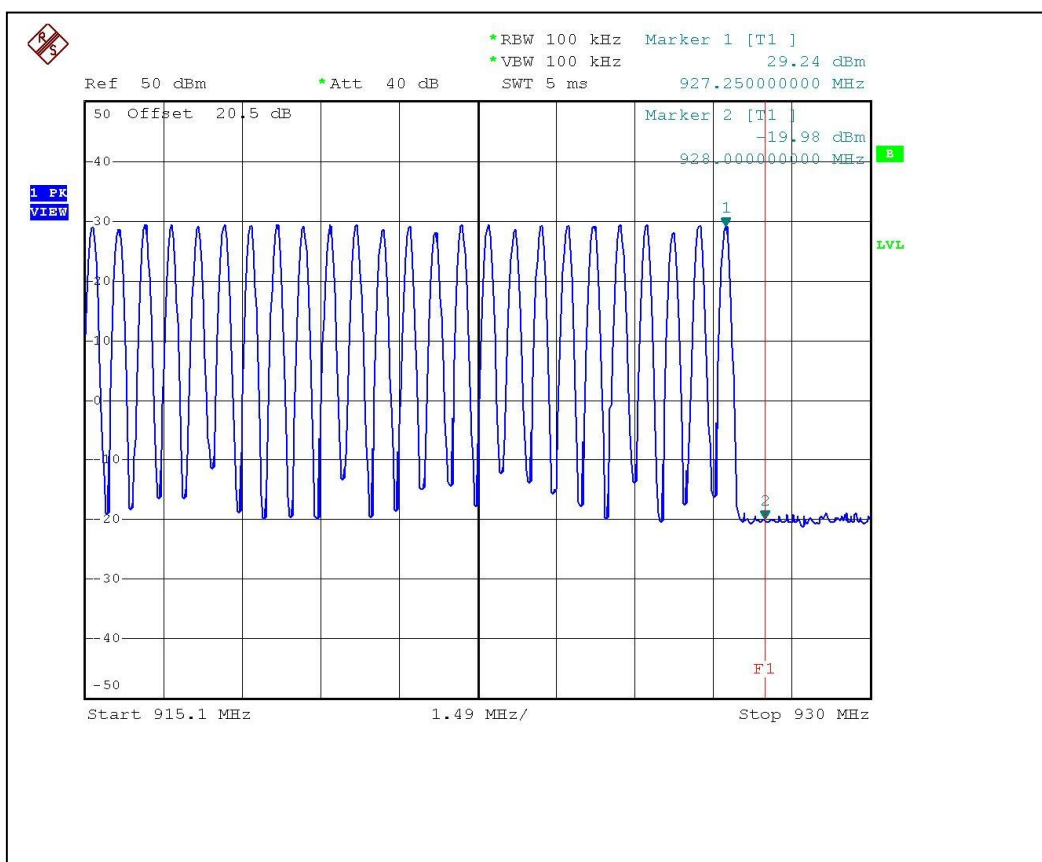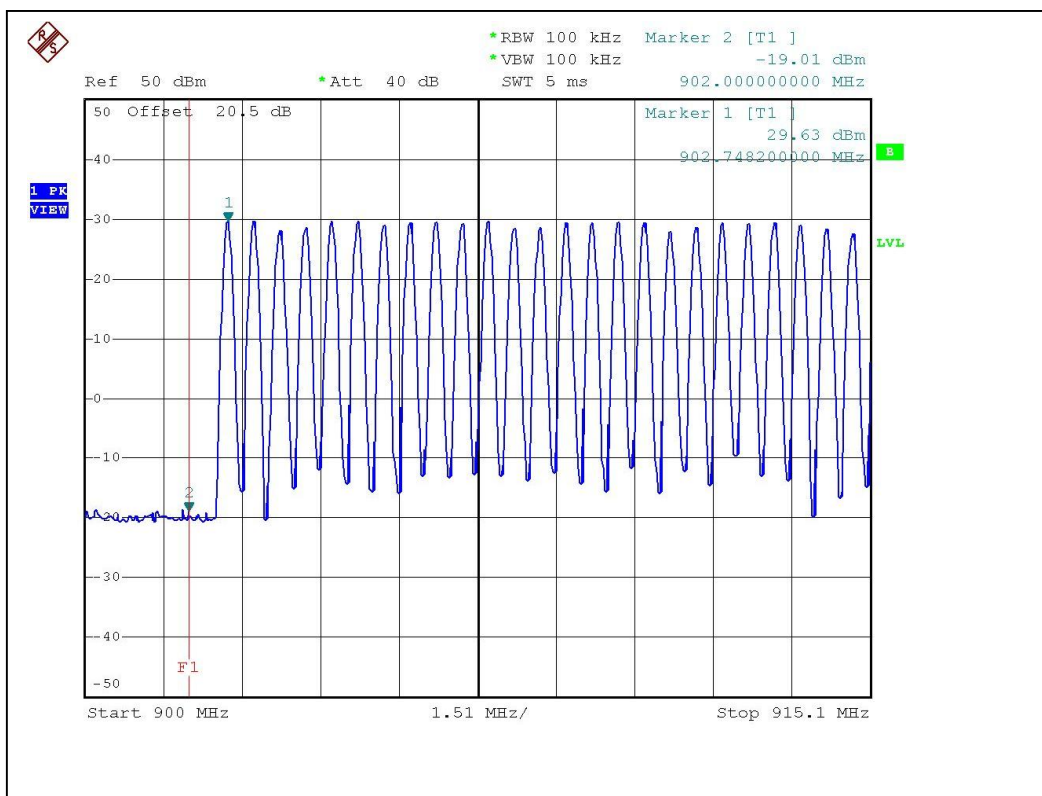

4.3 DWELL TIME ON EACH CHANNEL

4.3.1 LIMIT OF DWELL TIME USED

For FHSS, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. For hybrid systems, the average time of occupancy on any frequency should not exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 12, 2008

Note:

1. The measurement uncertainty is 226Hz, which is calculated as per the document ETSI TR 100 028.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation



4.3.5 TEST SETUP



4.3.6 TEST RESULTS

Number of transmission in a 20 s	Length of transmission time (msec)	Result (msec)	Limit (msec)
6 (times / 60 sec) *1/3=2 times	0.199	0.398	400

Test plots of the transmitting time slot are shown on next page.

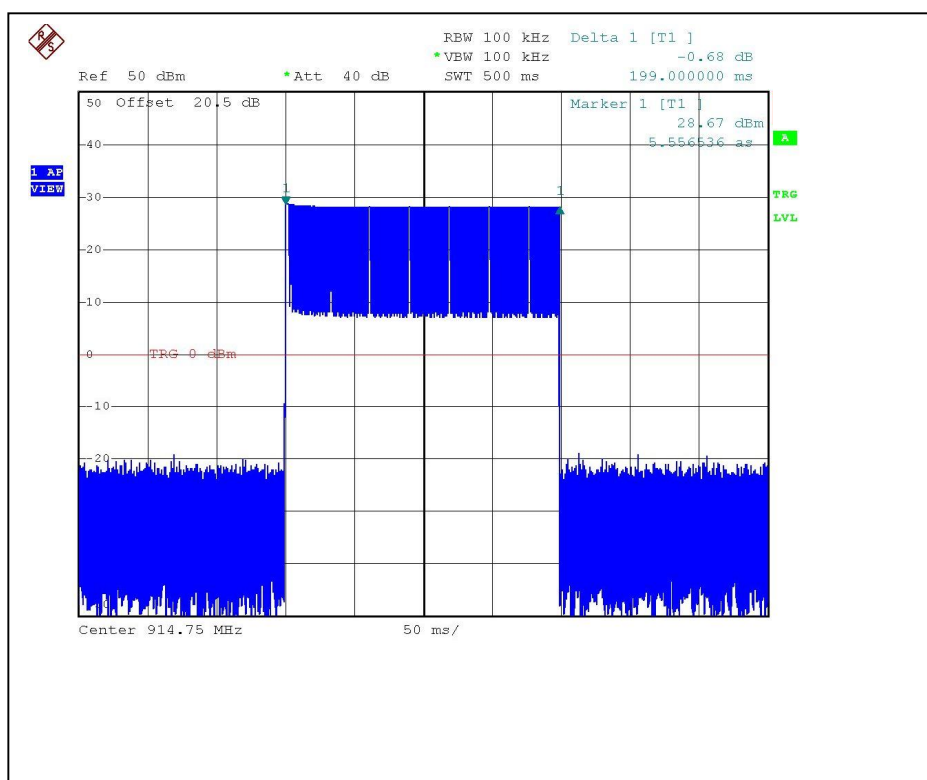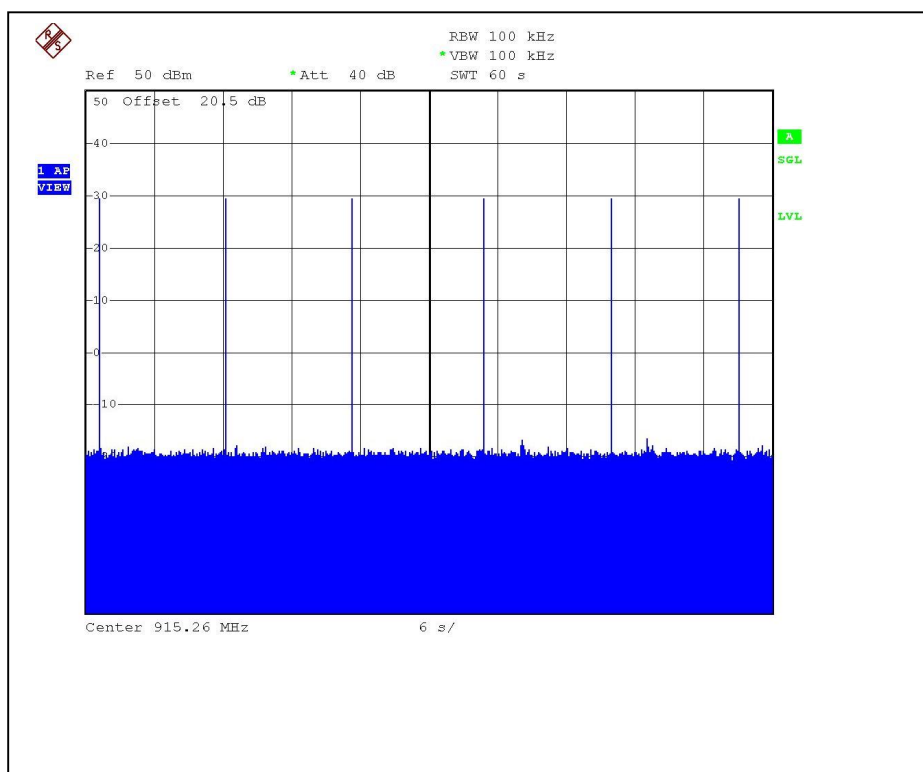

4.4 CHANNEL BANDWIDTH

4.4.1 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 12, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

4.4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.4.6 TEST RESULTS


ENVIRONMENTAL CONDITIONS	16deg. C, 62%RH, 971 hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Sky Liao		

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (kHz)
0	902.75	112
24	914.75	120
49	927.25	112


Channel 0

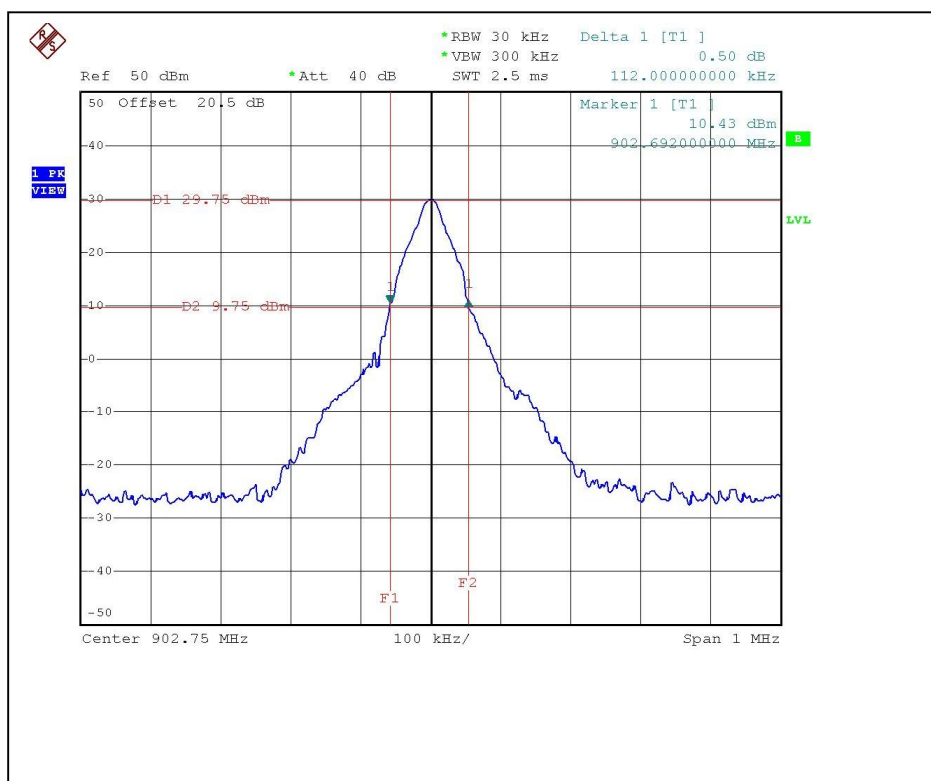

Channel 24

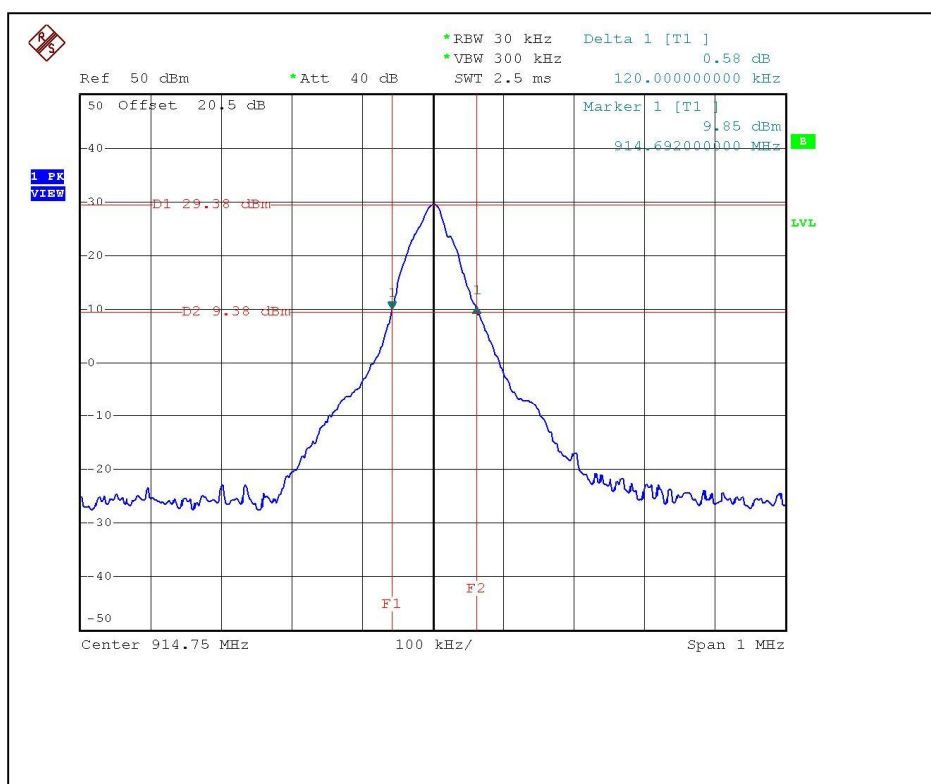

Channel 49

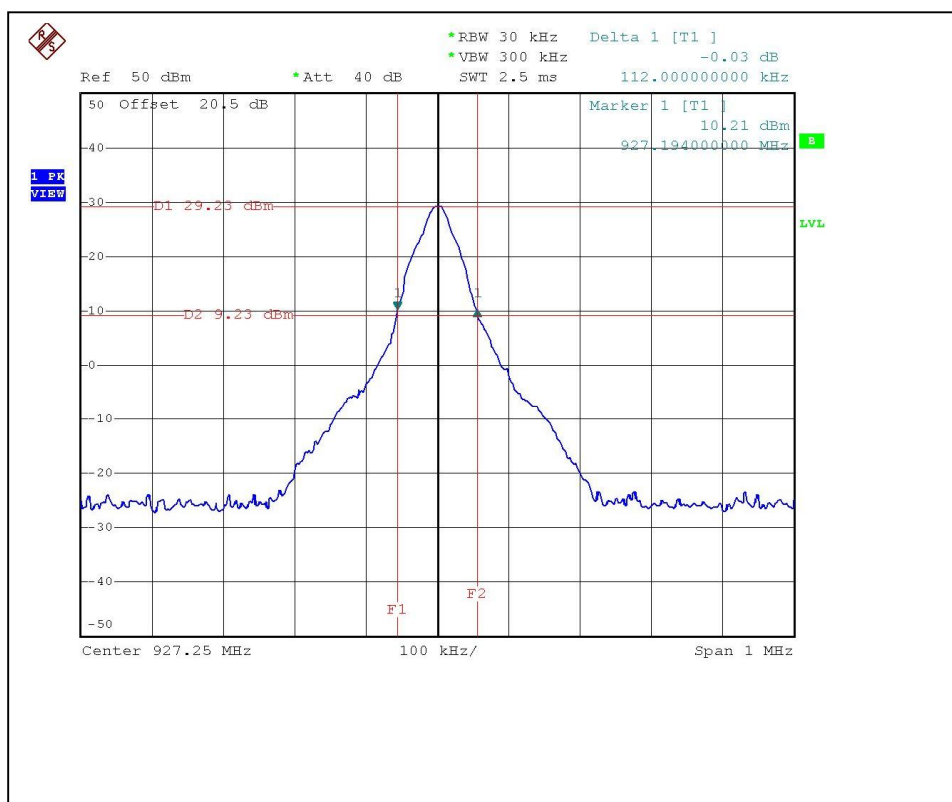

4.5 HOPPING CHANNEL SEPARATION

4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25 kHz or 20dB hopping channel bandwidth (whichever is greater).

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 12, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP




4.5.6 TEST RESULTS

ENVIRONMENTAL CONDITIONS	16deg. C, 62%RH, 971 hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Sky Liao		


Channel	Frequency (MHz)	Adjacent Channel Separation	Minimum Limit (kHz)	Pass / Fail
0	902.75	502kHz	112	PASS
24	914.75	500kHz	120	PASS
49	927.25	502kHz	112	PASS

The minimum limit is 20dB bandwidth. Test results please refer to next three pages.


Channel 0

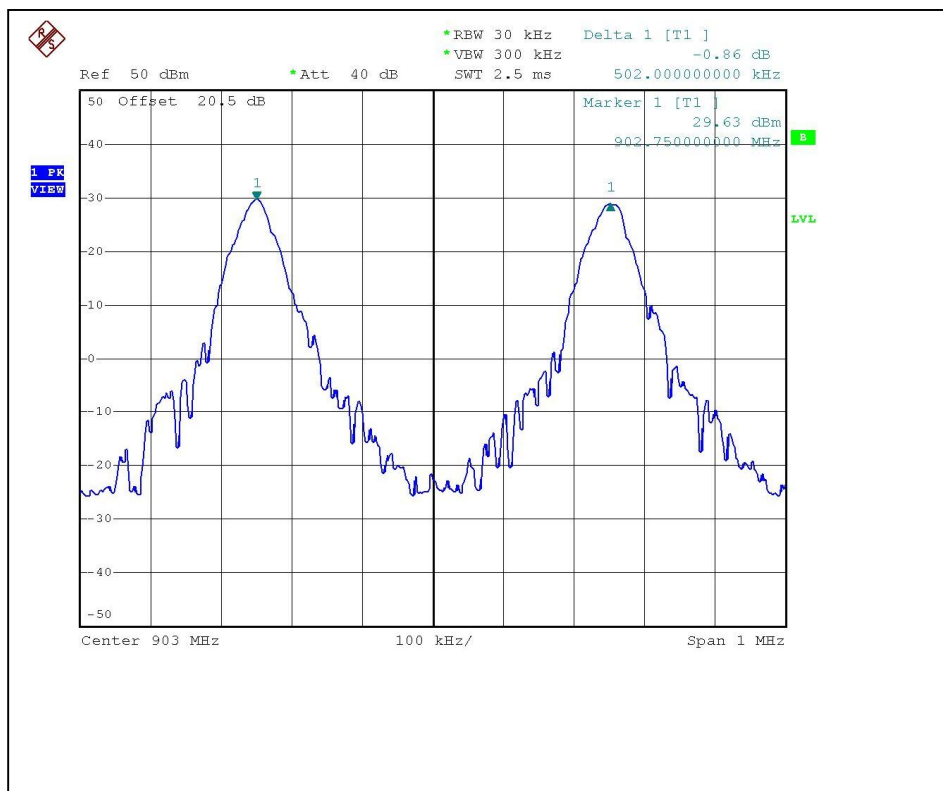

Channel 24

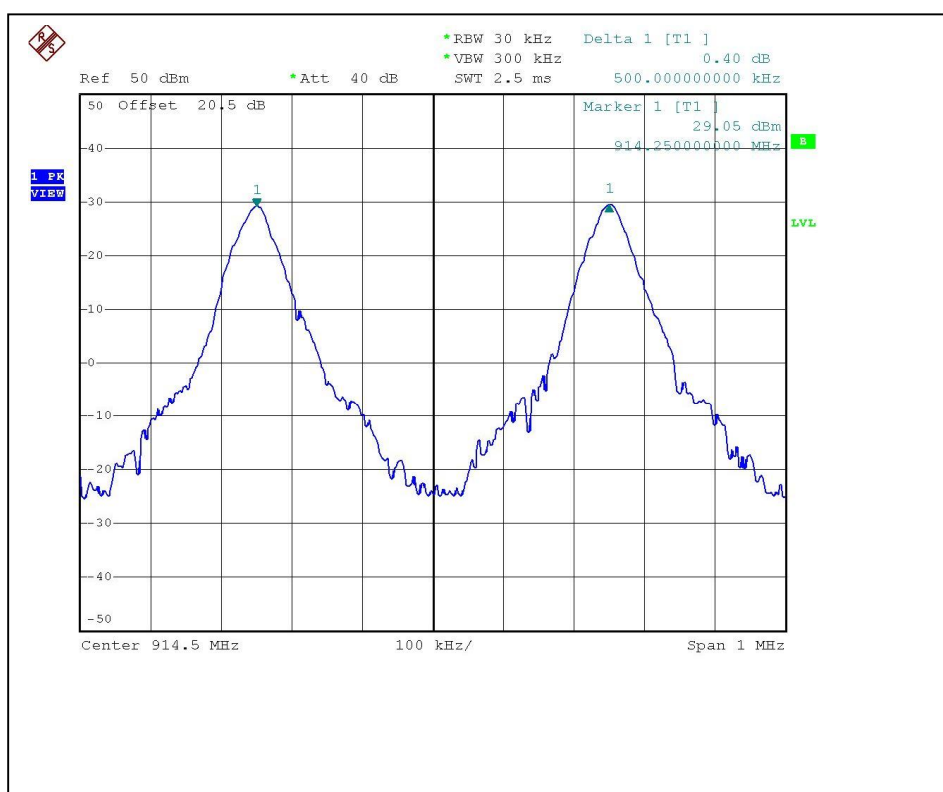

Channel 49

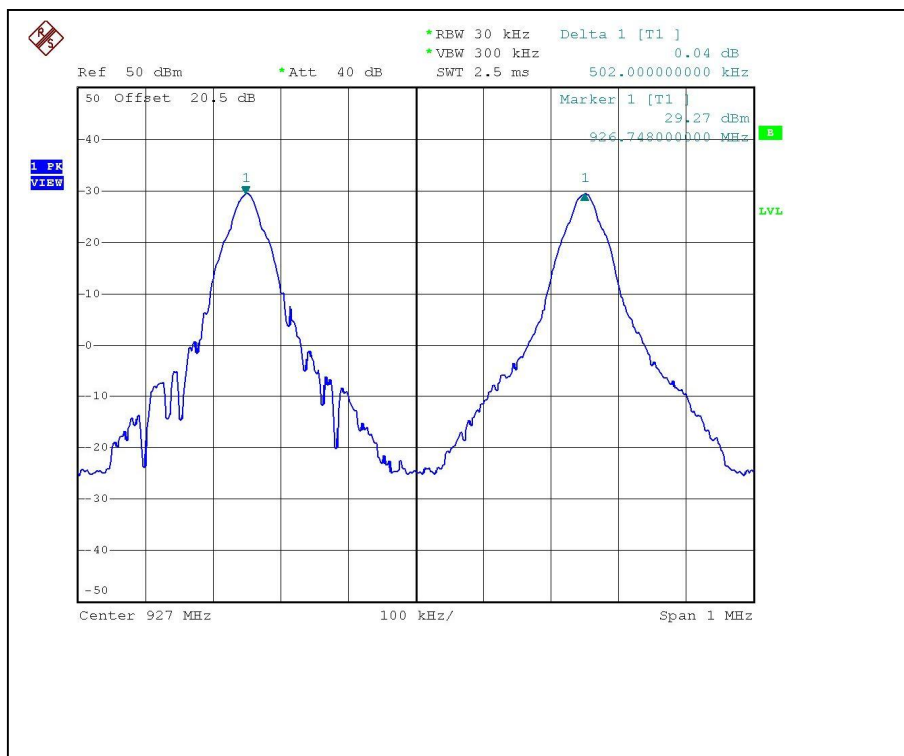

4.6 MAXIMUM PEAK OUTPUT POWER

4.6.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.6.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 12, 2008
Agilent SIGNAL GENERATOR	E8257C	MY43321031	Oct. 09, 2008
TEKTRONIX OSCILLOSCOPE	TDS380	B016335	Jul. 15, 2008
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

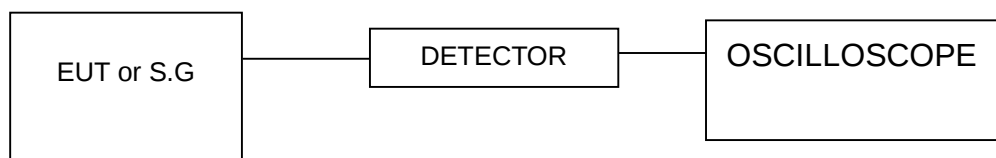

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.6.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.6.7 TEST RESULTS


ENVIRONMENTAL CONDITIONS	16deg. C, 62%RH, 971 hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Sky Liao		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
0	902.75	935.406	29.71	30	PASS
24	914.75	922.571	29.65	30	PASS
49	927.25	901.571	29.55	30	PASS


Channel 0

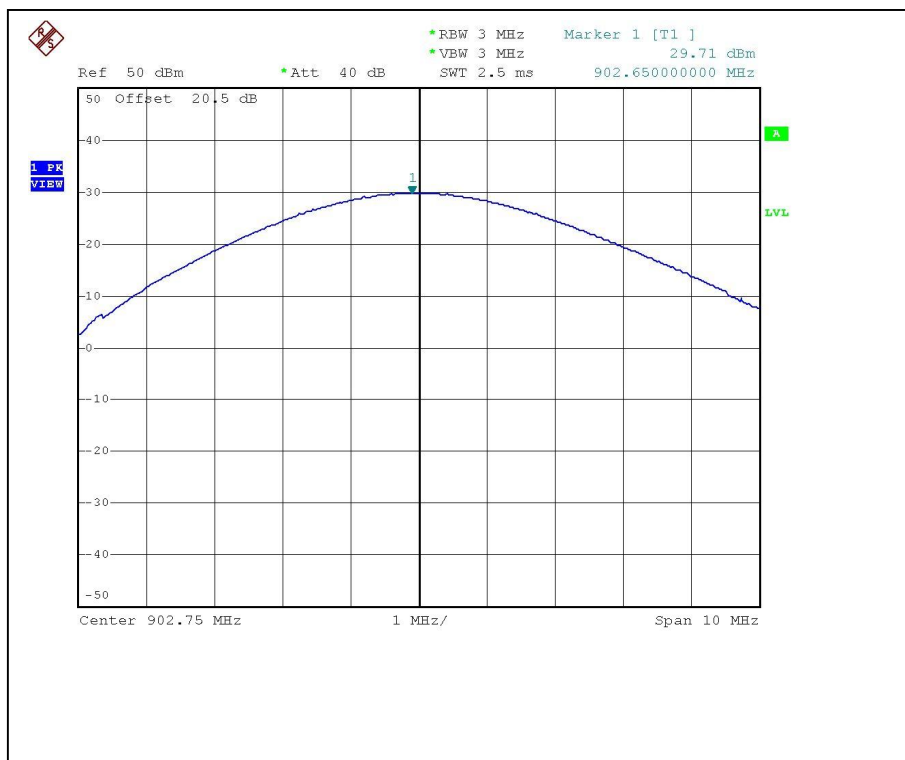

Channel 24

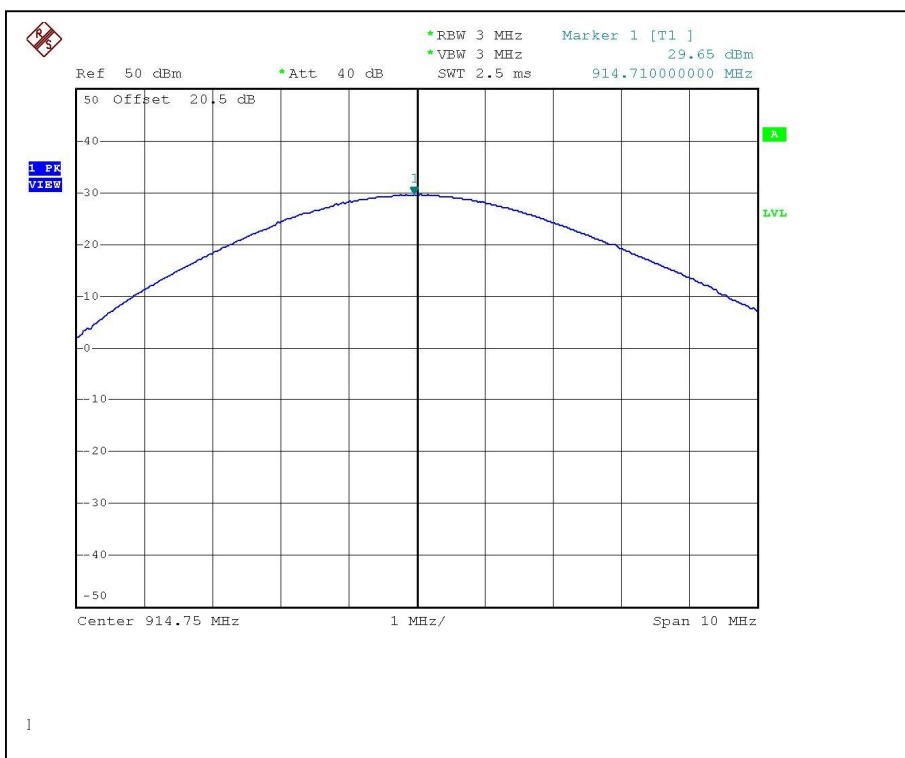

Channel 49

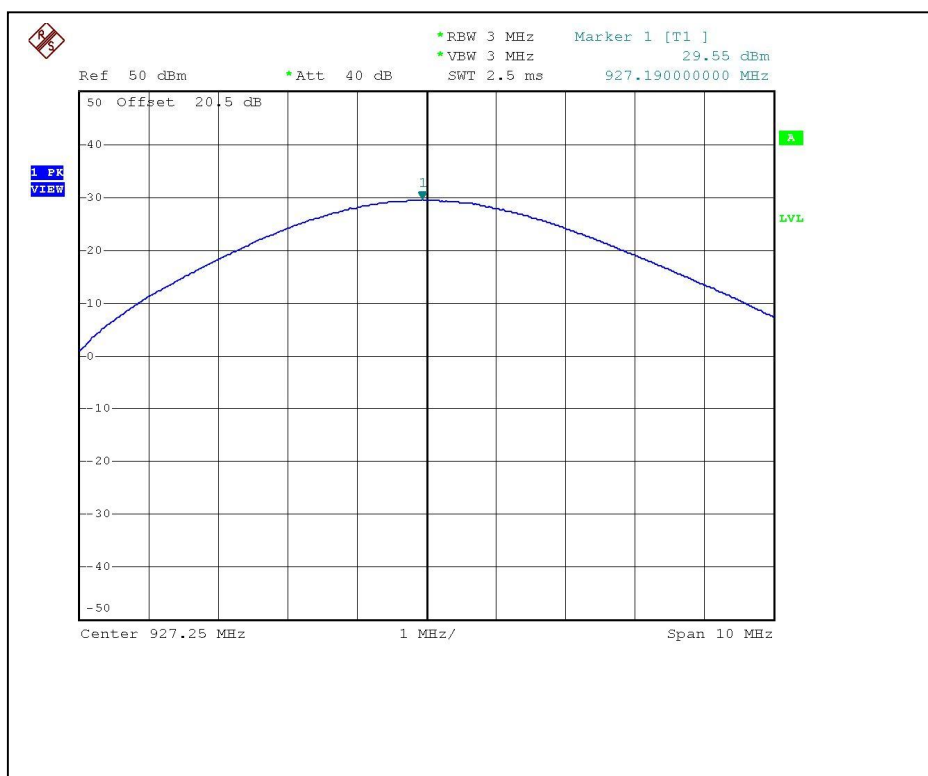

4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 15, 2008
HP Pre_Amplifier	8449B	3008A01922	Oct. 04, 2008
ROHDE & SCHWARZ Test Receiver	ESCS30	100375	Mar. 26, 2008
CHASE Broadband Antenna	VULB 9168	138	July 26, 2008
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 16, 2008
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 25, 2009
TRILOG Broad Band Antenna	VULB 9168	138	July 26, 2008
RF Switches (ARNITSU)	CS-201	1565157	Aug. 13, 2008
RF CABLE (Chaintek)	SF102	22054-2	Dec. 06, 2008
RF Cable(RICHTEC)	9913-30M N-N Cable	STCCAB-30M-1 GHz	Aug. 13, 2008
Software	ADT_Radiated_V 7.6.15.8	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824A-3.

4.7.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

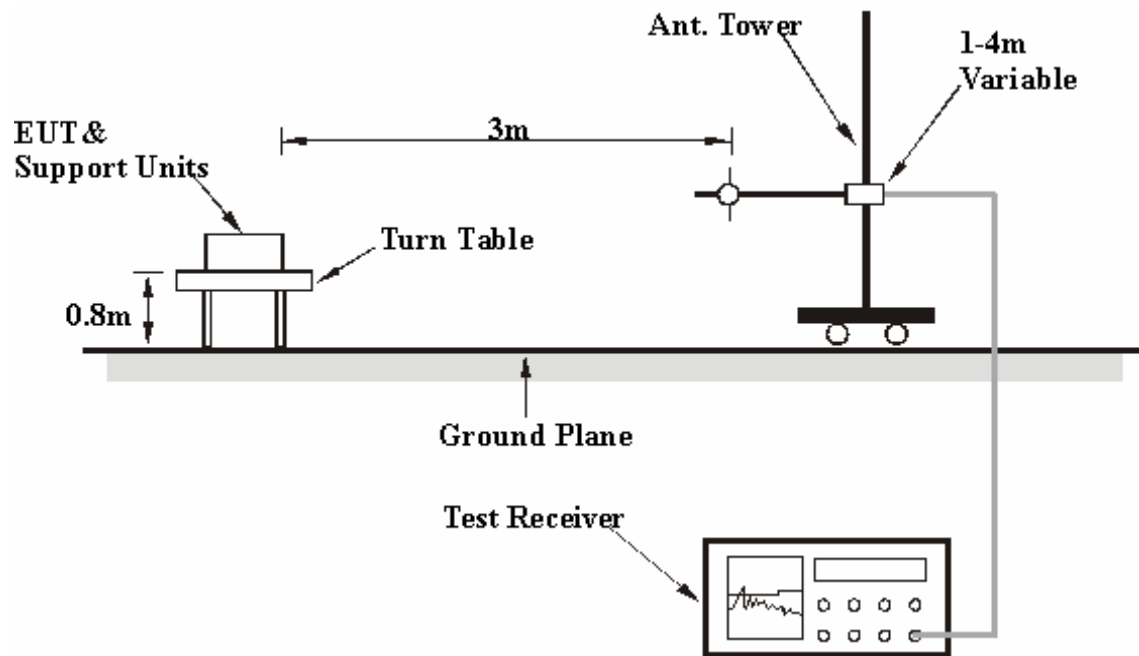

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.7.6 TEST RESULTS

CHANNEL	0	FREQUENCY RANGE	Below 1GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak Peak(PK)
ENVIRONMENTAL CONDITIONS	18deg. C, 74%RH, 971 hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.00	35.60 QP	43.50	-7.90	1.33 H	72	22.73	12.87
2	144.15	36.30 QP	43.50	-7.20	1.22 H	126	21.79	14.51
3	192.20	37.00 QP	43.50	-6.50	1.30 H	148	24.46	12.54
4	264.37	36.90 QP	46.00	-9.10	1.06 H	248	22.87	14.03
5	312.33	35.40 QP	46.00	-10.60	1.28 H	144	18.73	16.67
6	336.36	38.20 QP	46.00	-7.80	1.10 H	165	21.38	16.82
7	480.00	32.90 QP	46.00	-13.10	1.30 H	62	12.32	20.58
8	500.00	33.60 QP	46.00	-12.40	1.26 H	42	12.55	21.05
9	719.99	29.40 QP	46.00	-16.60	1.36 H	72	3.78	25.62
10	902.00	68.26 PK	108.06	-39.80	1.14 H	5	38.60	29.66
11	902.00	50.66 AV	103.76	-53.10	1.14 H	5	21.00	29.66
12	*902.75	128.06 PK			1.13 H	5	98.40	29.66
13	*902.75	123.76 AV			1.13 H	5	94.10	29.66
14	960.00	28.60 QP	46.00	-17.40	1.06 H	90	-1.07	29.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	60.12	30.42 QP	40.00	-9.58	1.00 V	254	16.65	13.77
2	84.09	35.90 QP	40.00	-4.10	1.40 V	86	26.20	9.70
3	120.00	30.20 QP	43.50	-13.30	1.02 V	262	17.33	12.87
4	320.00	27.20 QP	46.00	-18.80	1.00 V	344	10.48	16.72
5	440.00	27.70 QP	46.00	-18.30	1.00 V	308	8.19	19.51
6	480.00	28.20 QP	46.00	-17.80	1.28 V	285	7.62	20.58
7	500.00	32.20 QP	46.00	-13.80	1.36 V	298	11.15	21.05
8	640.00	27.00 QP	46.00	-19.00	1.36 V	5	2.72	24.28
9	720.00	27.60 QP	46.00	-18.40	1.26 V	162	1.98	25.62
10	902.00	69.66 PK	110.66	-41.00	1.30 V	352	40.00	29.66
11	902.00	52.96 AV	106.36	-53.40	1.30 V	352	23.30	29.66
12	*902.75	130.66 PK			1.30 V	350	101.00	29.66
13	*902.75	126.36 AV			1.30 V	350	96.70	29.66
14	960.00	31.60 QP	46.00	-14.40	1.14 V	26	1.93	29.67

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

CHANNEL	Channel 0	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 72%RH, 971 hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2708.25	53.65 PK	74.00	-20.35	1.85 H	79	22.29	31.36
2	2708.25	49.35 AV	54.00	-4.65	1.85 H	79	17.99	31.36
3	3611.00	46.92 PK	74.00	-27.08	1.87 H	69	14.19	32.73
4	3611.00	42.62 AV	54.00	-11.38	1.87 H	69	9.89	32.73
5	4513.75	49.89 PK	74.00	-24.11	1.85 H	32	14.84	35.05
6	4513.75	45.59 AV	54.00	-8.41	1.85 H	32	10.54	35.05
7	5416.50	48.28 PK	74.00	-25.72	1.72 H	47	11.72	36.56
8	5416.50	43.98 AV	54.00	-10.02	1.72 H	47	7.42	36.56
9	8124.75	55.71 PK	74.00	-18.29	1.35 H	325	11.40	44.31
10	8124.75	51.41 AV	54.00	-2.59	1.35 H	325	7.10	44.31
11	9027.00	56.00 PK	74.00	-18.00	1.04 H	88	11.32	44.68
12	9027.00	51.70 AV	54.00	-2.30	1.04 H	88	7.02	44.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2708.00	52.90 PK	74.00	-21.10	1.17 V	279	21.54	31.36
2	2708.00	48.60 AV	54.00	-5.40	1.17 V	279	17.24	31.36
3	3611.00	46.77 PK	74.00	-27.23	1.73 V	281	14.04	32.73
4	3611.00	42.47 AV	54.00	-11.53	1.73 V	281	9.74	32.73
5	4513.75	50.25 PK	74.00	-23.75	1.33 V	335	15.20	35.05
6	4513.75	45.95 AV	54.00	-8.05	1.33 V	335	10.90	35.05
7	5416.50	47.58 PK	74.00	-26.42	1.35 V	282	11.02	36.56
8	5416.50	43.28 AV	54.00	-10.72	1.35 V	282	6.72	36.56
9	8124.75	56.54 PK	74.00	-17.46	1.38 V	327	12.23	44.31
10	8124.75	52.24 AV	54.00	-1.76	1.38 V	327	7.93	44.31
11	9027.50	55.72 PK	74.00	-18.28	1.32 V	332	11.04	44.68
12	9027.50	51.42 AV	54.00	-2.58	1.32 V	332	6.74	44.68

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

CHANNEL	24	FREQUENCY RANGE	Below 1GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak Peak(PK)
ENVIRONMENTAL CONDITIONS	18deg. C, 74%RH, 971 hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.00	36.20 QP	43.50	-7.30	1.33 H	75	23.33	12.87
2	144.15	36.60 QP	43.50	-6.90	1.28 H	120	22.09	14.51
3	192.20	37.20 QP	43.50	-6.30	1.33 H	145	24.66	12.54
4	264.37	36.90 QP	46.00	-9.10	1.05 H	268	22.87	14.03
5	312.33	35.60 QP	46.00	-10.40	1.06 H	72	18.93	16.67
6	336.36	38.20 QP	46.00	-7.80	1.12 H	172	21.38	16.82
7	480.00	32.80 QP	46.00	-13.20	1.26 H	68	12.22	20.58
8	500.00	34.60 QP	46.00	-11.40	1.48 H	42	13.55	21.05
9	719.99	29.40 QP	46.00	-16.60	1.36 H	70	3.78	25.62
10	*914.75	127.81 PK			1.13 H	6	98.20	29.61
11	*914.75	123.51 AV			1.13 H	6	93.90	29.61
12	960.00	29.90 QP	46.00	-16.10	1.08 H	48	0.23	29.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	60.12	30.82 QP	40.00	-9.18	1.00 V	269	17.05	13.77
2	84.09	35.50 QP	40.00	-4.50	1.25 V	85	25.80	9.70
3	120.00	30.00 QP	43.50	-13.50	1.02 V	208	17.13	12.87
4	320.00	26.30 QP	46.00	-19.70	1.00 V	348	9.58	16.72
5	440.00	27.80 QP	46.00	-18.20	1.26 V	300	8.29	19.51
6	480.00	27.00 QP	46.00	-19.00	1.36 V	326	6.42	20.58
7	500.00	31.20 QP	46.00	-14.80	1.20 V	302	10.15	21.05
8	640.00	27.40 QP	46.00	-18.60	1.36 V	2	3.12	24.28
9	720.00	27.20 QP	46.00	-18.80	1.25 V	135	1.58	25.62
10	*914.75	130.31 PK			1.28 V	4	100.70	29.61
11	*914.75	126.01 AV			1.28 V	4	96.40	29.61
12	960.00	30.60 QP	46.00	-15.40	1.18 V	22	0.93	29.67

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.

CHANNEL	Channel 24	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 72%RH, 971 hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2744.25	51.26 PK	74.00	-22.74	1.81 H	75	19.82	31.44
2	2744.25	46.96 AV	54.00	-7.04	1.81 H	75	15.52	31.44
3	3659.00	46.70 PK	74.00	-27.30	1.51 H	213	13.87	32.83
4	3659.00	42.40 AV	54.00	-11.60	1.51 H	213	9.57	32.83
5	4573.00	50.00 PK	74.00	-24.00	2.06 H	204	14.83	35.17
6	4573.00	45.70 AV	54.00	-8.30	2.06 H	204	10.53	35.17
7	7318.00	55.40 PK	74.00	-18.60	1.69 H	54	12.86	42.54
8	7318.00	51.10 AV	54.00	-2.90	1.69 H	54	8.56	42.54
9	8232.00	55.10 PK	74.00	-18.90	1.35 H	231	10.85	44.25
10	8232.00	50.80 AV	54.00	-3.20	1.35 H	231	6.55	44.25
11	9147.00	57.00 PK	74.00	-17.00	1.73 H	269	12.24	44.76
12	9147.00	52.70 AV	54.00	-1.30	1.73 H	269	7.94	44.76

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2744.00	52.50 PK	74.00	-21.50	1.16 V	0	21.06	31.44
2	2744.00	48.20 AV	54.00	-5.80	1.16 V	0	16.76	31.44
3	3659.00	48.80 PK	74.00	-25.20	1.00 V	359	15.97	32.83
4	3659.00	44.50 AV	54.00	-9.50	1.00 V	359	11.67	32.83
5	4573.00	53.40 PK	74.00	-20.60	1.37 V	344	18.23	35.17
6	4573.00	49.10 AV	54.00	-4.90	1.37 V	344	13.93	35.17
7	7318.00	56.00 PK	74.00	-18.00	1.66 V	16	13.46	42.54
8	7318.00	51.70 AV	54.00	-2.30	1.66 V	16	9.16	42.54
9	8232.00	55.00 PK	74.00	-19.00	2.09 V	309	10.75	44.25
10	8232.00	50.70 AV	54.00	-3.30	2.09 V	309	6.45	44.25
11	9147.00	56.60 PK	74.00	-17.40	1.36 V	36	11.84	44.76
12	9147.00	52.30 AV	54.00	-1.70	1.36 V	36	7.54	44.76

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

CHANNEL	49	FREQUENCY RANGE	Below 1GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak Peak(PK)
ENVIRONMENTAL CONDITIONS	18deg. C, 74%RH, 971 hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.00	35.90 QP	43.50	-7.60	1.36 H	88	23.03	12.87
2	144.15	36.00 QP	43.50	-7.50	1.25 H	112	21.49	14.51
3	192.20	37.60 QP	43.50	-5.90	1.38 H	152	25.06	12.54
4	264.37	36.40 QP	46.00	-9.60	1.02 H	260	22.37	14.03
5	312.33	36.60 QP	46.00	-9.40	1.16 H	132	19.93	16.67
6	336.36	39.00 QP	46.00	-7.00	1.16 H	182	22.18	16.82
7	480.00	32.30 QP	46.00	-13.70	1.35 H	78	11.72	20.58
8	500.00	34.20 QP	46.00	-11.80	1.42 H	10	13.15	21.05
9	719.99	28.20 QP	46.00	-17.80	1.50 H	86	2.58	25.62
10	*927.25	128.05 PK			1.00 H	355	98.50	29.55
11	*927.25	123.75 AV			1.00 H	355	94.20	29.55
12	928.00	69.55 PK	108.05	-38.50	1.03 H	355	40.00	29.55
13	928.00	51.95 AV	103.75	-51.80	1.03 H	355	22.40	29.55
14	960.00	29.60 QP	46.00	-16.40	1.12 H	78	-0.07	29.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	60.12	30.68 QP	40.00	-9.32	1.00 V	262	16.91	13.77
2	84.09	35.80 QP	40.00	-4.20	1.36 V	96	26.10	9.70
3	120.00	30.60 QP	43.50	-12.90	1.00 V	223	17.73	12.87
4	320.00	26.90 QP	46.00	-19.10	1.00 V	332	10.18	16.72
5	440.00	27.20 QP	46.00	-18.80	1.00 V	330	7.69	19.51
6	480.00	27.40 QP	46.00	-18.60	1.22 V	318	6.82	20.58
7	500.00	31.70 QP	46.00	-14.30	1.33 V	282	10.65	21.05
8	640.00	27.80 QP	46.00	-18.20	1.42 V	352	3.52	24.28
9	720.00	27.50 QP	46.00	-18.50	1.33 V	148	1.88	25.62
10	*927.25	129.35 PK			1.28 V	3	99.80	29.55
11	*927.25	125.05 AV			1.28 V	3	95.50	29.55
12	928.00	69.75 PK	109.35	-39.60	1.28 V	5	40.20	29.55
13	928.00	52.55 AV	105.05	-52.50	1.28 V	5	23.00	29.55
14	960.00	30.20 QP	46.00	-15.80	1.06 V	18	0.53	29.67

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.

CHANNEL	Channel 49	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 72%RH, 971 hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2781.00	46.70 PK	74.00	-27.30	2.00 H	78	15.18	31.52
2	2781.00	42.40 AV	54.00	-11.60	2.00 H	78	10.88	31.52
3	3709.00	48.80 PK	74.00	-25.20	1.93 H	205	15.87	32.93
4	3709.00	44.50 AV	54.00	-9.50	1.93 H	205	11.57	32.93
5	4636.00	55.60 PK	74.00	-18.40	2.09 H	189	20.30	35.30
6	4636.00	51.30 AV	54.00	-2.70	2.09 H	189	16.00	35.30
7	7418.00	55.00 PK	74.00	-19.00	1.46 H	171	12.09	42.91
8	7418.00	50.70 AV	54.00	-3.30	1.46 H	171	7.79	42.91
9	8345.00	55.60 PK	74.00	-18.40	1.57 H	334	11.41	44.19
10	8345.00	51.30 AV	54.00	-2.70	1.57 H	334	7.11	44.19

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2781.75	49.67 PK	74.00	-24.33	1.14 V	359	18.15	31.52
2	2781.75	45.37 AV	54.00	-8.63	1.14 V	359	13.85	31.52
3	3709.00	48.45 PK	74.00	-25.55	1.00 V	359	15.52	32.93
4	3709.00	44.15 AV	54.00	-9.85	1.00 V	359	11.22	32.93
5	4636.00	48.60 PK	74.00	-25.40	1.55 V	348	13.30	35.30
6	4636.00	44.30 AV	54.00	-9.70	1.55 V	348	9.00	35.30
7	7418.00	55.30 PK	74.00	-18.70	1.73 V	16	12.39	42.91
8	7418.00	51.00 AV	54.00	-3.00	1.73 V	16	8.09	42.91
9	8345.00	55.40 PK	74.00	-18.60	1.42 V	312	11.21	44.19
10	8345.00	51.10 AV	54.00	-2.90	1.42 V	312	6.91	44.19

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 12, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 20 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation


4.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


4.8.6 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


CH0

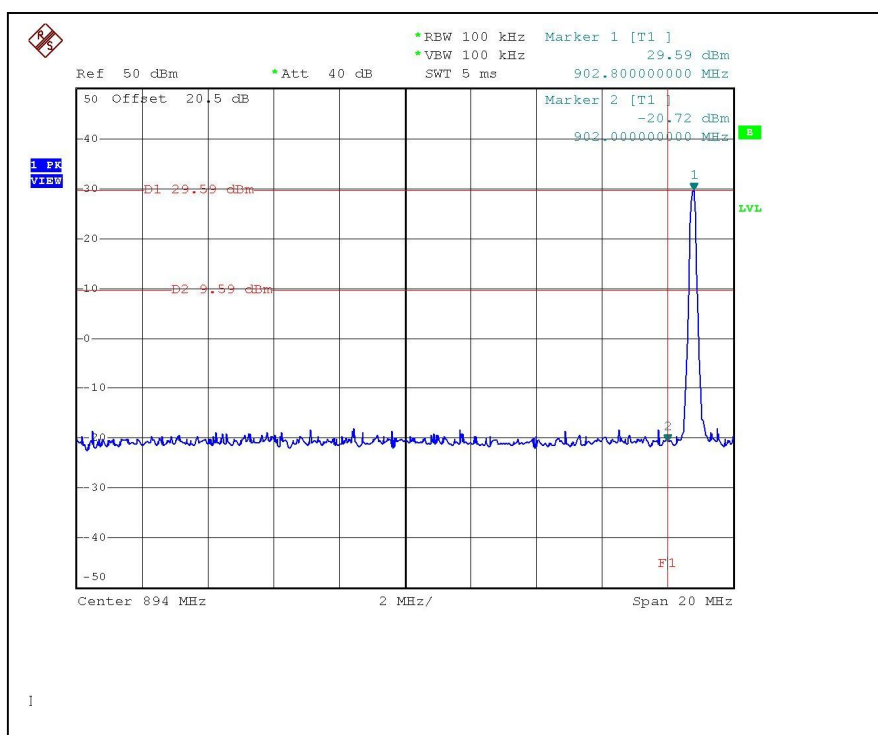


CH49

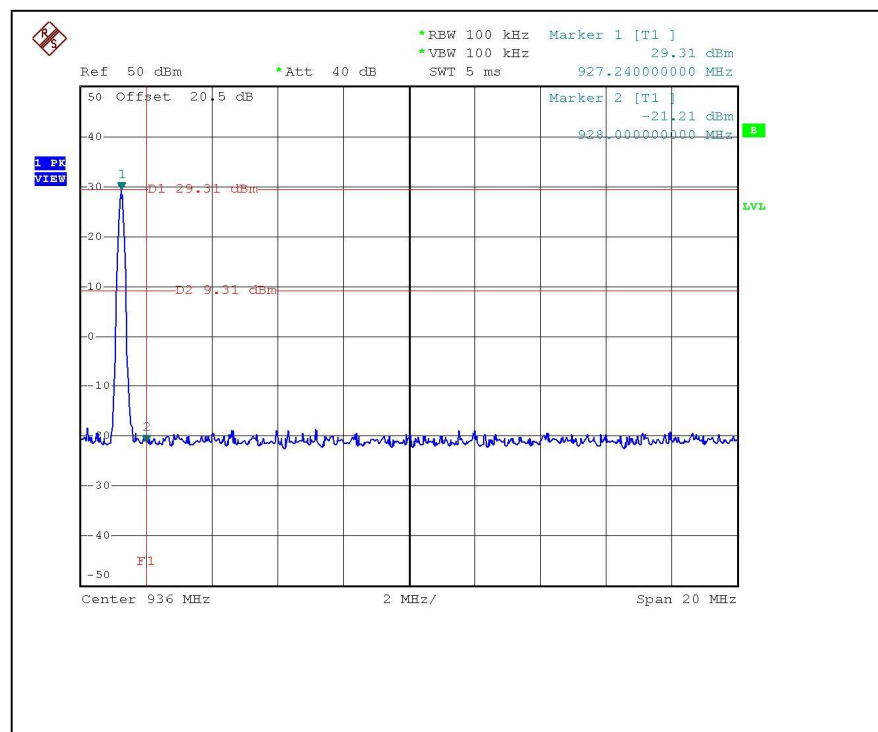

CH0

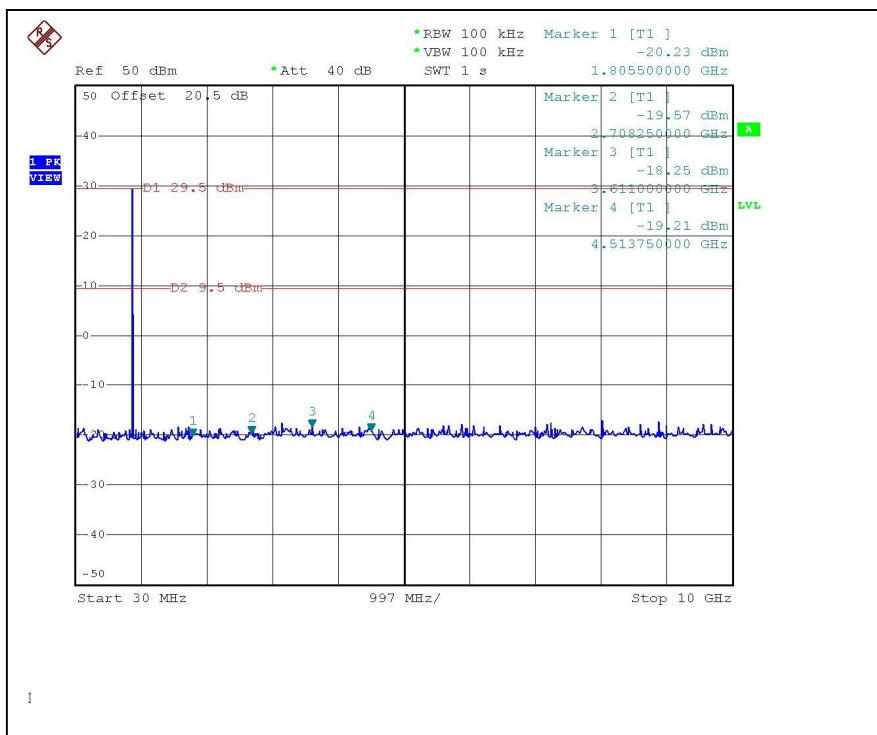

CH49

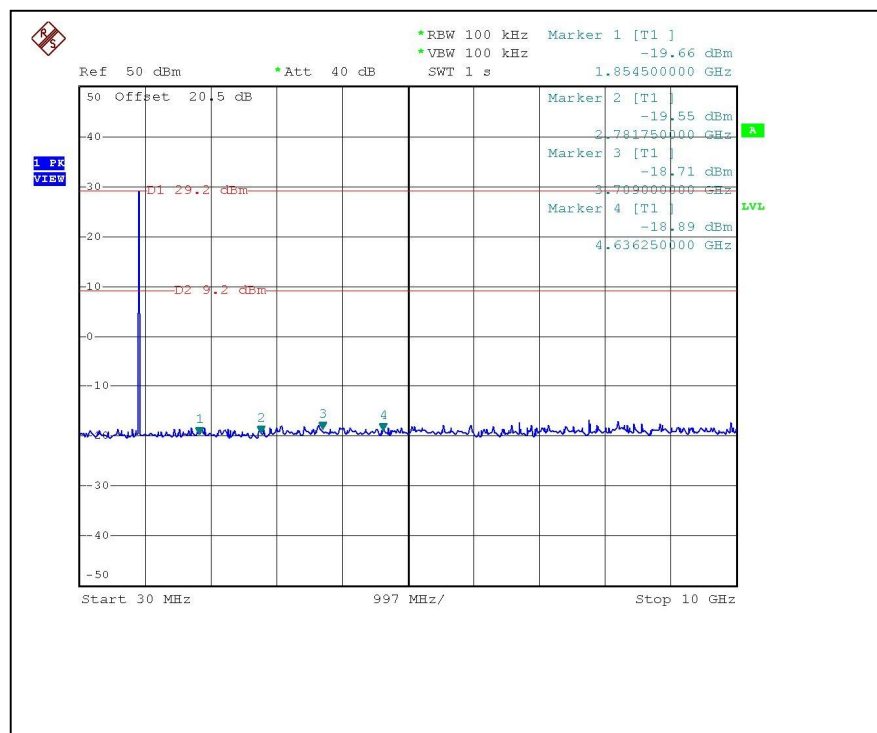

4.9 ANTENNA REQUIREMENT

4.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.9.2 ANTENNA CONNECTED CONSTRUCTION

There is one antenna provided to this EUT:

Antenna Type	Connector Type	Gain (dBi)	Cable loss (dB)	Net Gain (dBi)
Patch Antenna	SMA Female	6	0.75	5.25

5 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.