
							model name:TF041-LABLE;SAFETY/EMC,W130,MTC							
TOL ±		V											/ /	
RANGE	М1	M2	S1	S2	P1	P2	O	В					1 1	
0~6	.05	0.1	.15	0.2	.05	0.1	0.5	.15			+		1 1	
6~30	0.1	0.2	.15	.25	0.1	.15	1	.15			-		1 1	
30~80	.15	.25	0.2	0.3	0.2	0.4	2	.25			-		/ /	
80~180	.15	0.3	.25	.45	0.4	0.8	3	.25			10100		/ /	
180~315	0.2	0.5	0.4	0.6	0.6	1.2	3	0.3		Modify the characters	A0109 53478	JASON	95 <b>/</b> 5 <b>/</b> 11	
315~800	0.3	0.8	0.7	1.1	0.8	1.5	4	0.5	ITEM	CONTENTS OF CHANGE	RVS	APV	M/D/Y	

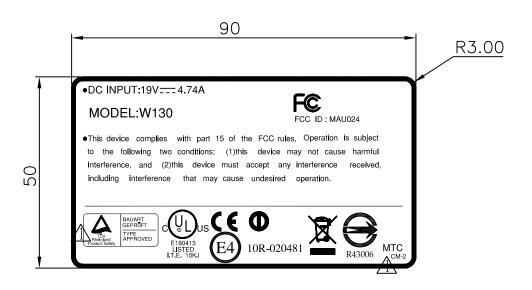

NOTE:

1.顏色:銀底黑色

2.材質: 反銀龍+上膜(POLYESTER),表面MATT, T=0.1MM

3.背膠:壓克力膠(耐溫-20°C~70°C)

DATE	09/16/0	5 MATERI	AL SEE NOTES		TREATMENT			REMARK	
UNIT	ММ	SCALE	1/1	DRAV	VING NAME	TFC	941-LABLE;SAF	FETY/EMC	,W130,MTC
DESIGNED	CHECKED	CHECKED	APPROVED	МАТ	ERIAL NO.	MF	796114	8780	01 R 01
2006.5.11 盈瑞				<b>7</b>	/iTA		Technolo	ogy C	`orp.

file name: TF041-LABLE; SAFETY/EMC, W130, MTC